

5 TEST CONDITIONS AND RESULTS

5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part **A 4**.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up



5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

5.2 EIRP

For test instruments and accessories used see section 6 Part **CPR 3**.

5.2.1 Description of the test location


Test location: Anechoic chamber 1
Test distance: 3 m

5.2.2 Applicable standard

According to FCC Part 15C, Section 15.255(c)(1)(i):

The average power of any emission shall not exceed 40 dBm and the peak power of any emission shall not exceed 43 dBm.

5.2.3 Photo documentation of the test set-up

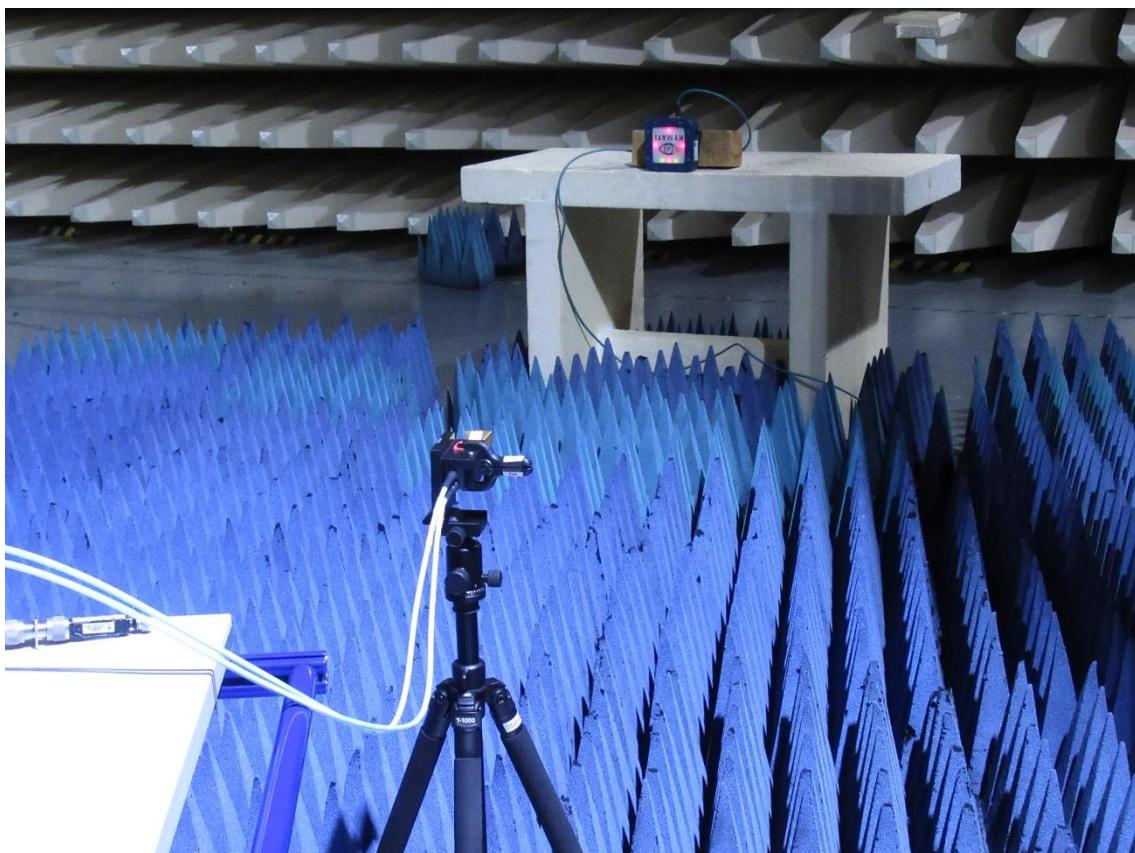

5.2.4 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 9.11. The EUT is measured in TX continuous unmodulated under normal conditions.

Analyser settings:

PK measurement:	RBW: 1 MHz	VBW: 3 MHz	Detector: PK	Trace. Max hold
AV measurement:	RBW: 1 MHz	VBW: 3 MHz	Detector: RMS	Trace. Max hold

5.3 Peak conducted output power

For test instruments and accessories used see section 6 Part **CPR 3**.

5.3.1 Description of the test location


Test location: Anechoic chamber 1
Test distance: 3 m

5.3.2 Applicable standard

According to FCC Part 15C, Section 15.255(e):

Except as specified paragraph (e)(1) of this section, the peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (c) of this section.

5.3.3 Photo documentation of the test set-up

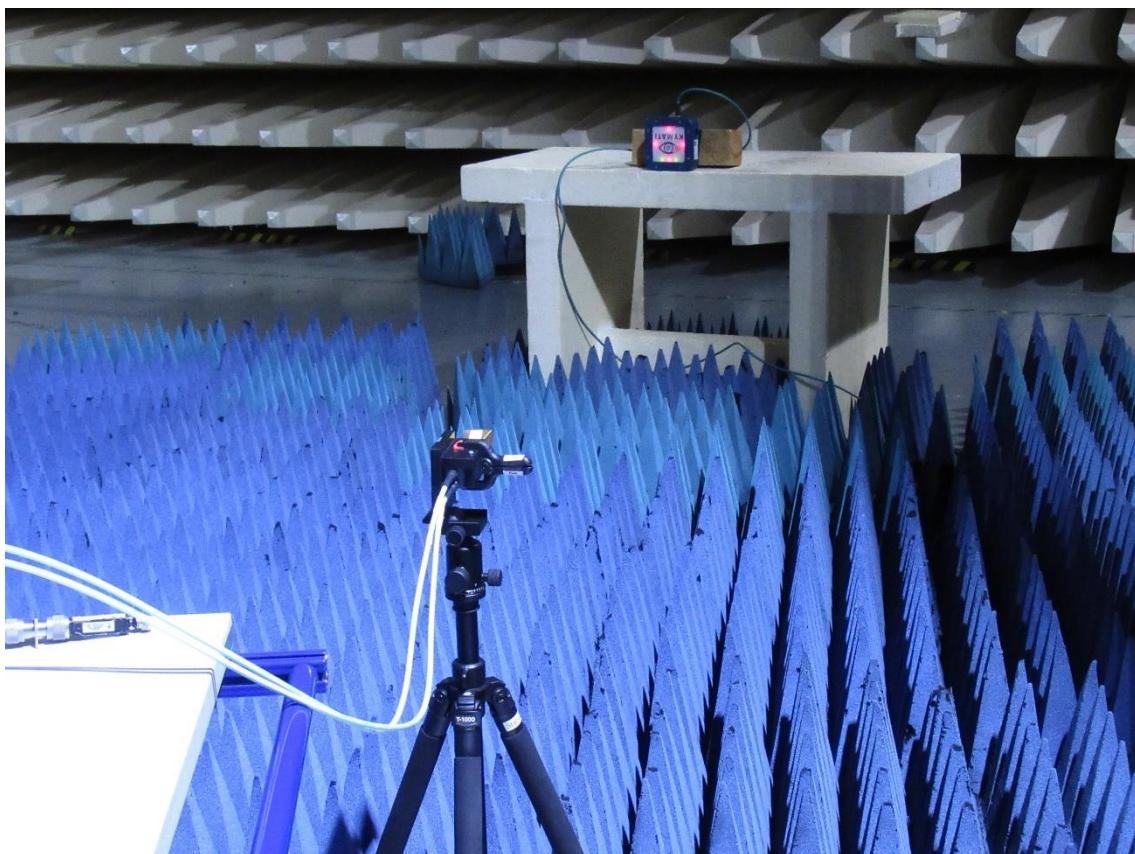

5.3.4 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 9.11. The EUT is measured in TX continuous unmodulated under normal conditions.

Analyser settings:

PK measurement: RBW: 1 MHz

VBW: 3 MHz

Detector: PK

Trace. Max hold

AV measurement: RBW: 1 MHz

VBW: 3 MHz

Detector: RMS

Trace. Max hold

5.4 Spurious emissions

For test instruments and accessories used see section 6 Part **SER 2, SER 3**.



5.4.1 Description of the test location



Test location: OATS 1
Test distance: 3 m

Test location: Anechoic chamber 1
Test distance: 3 m

5.4.2 Photo documentation of the test set-up



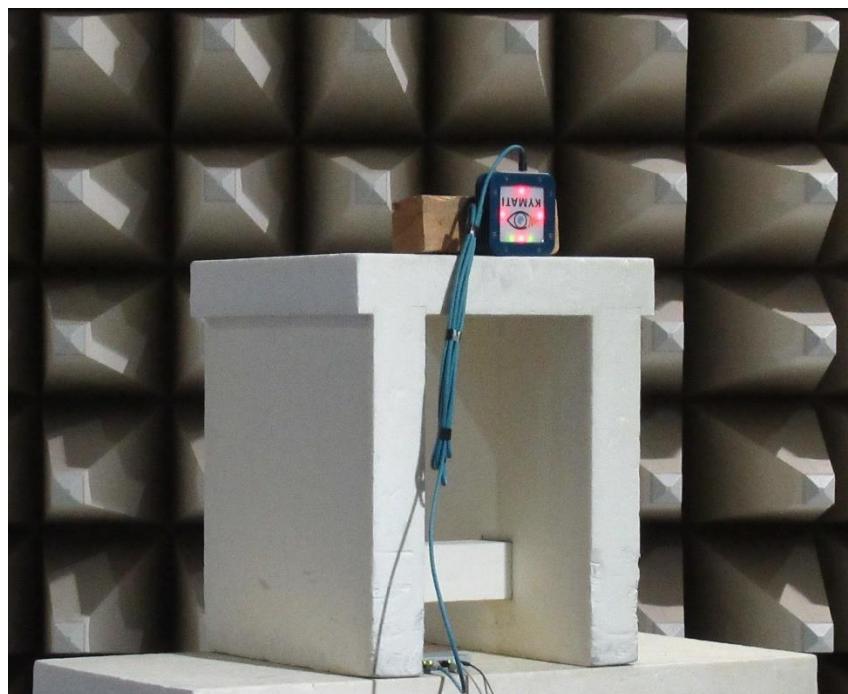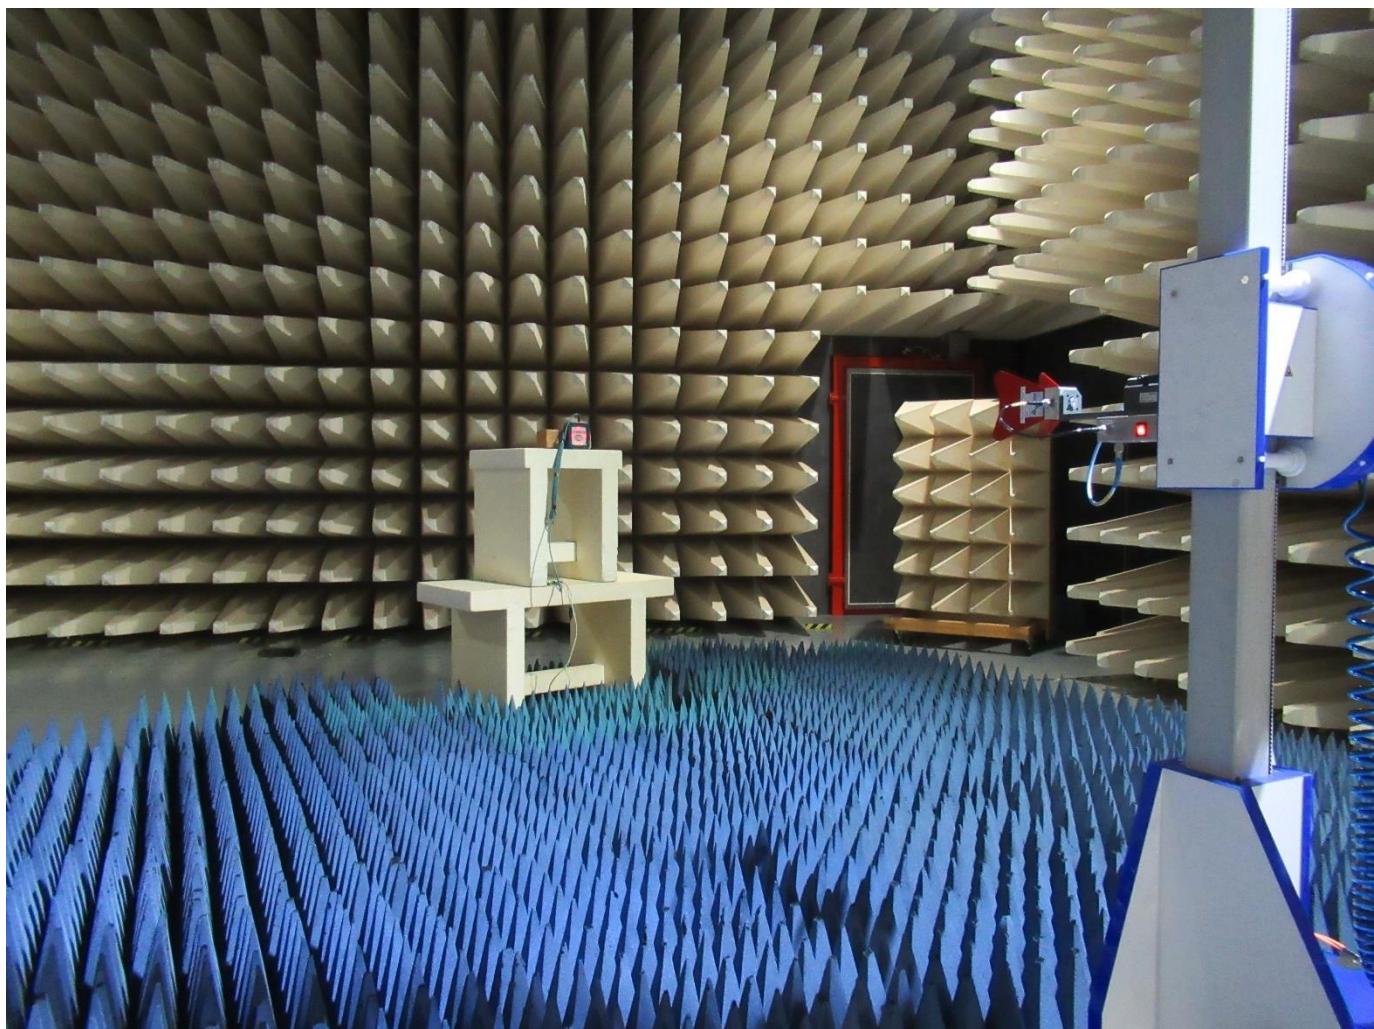

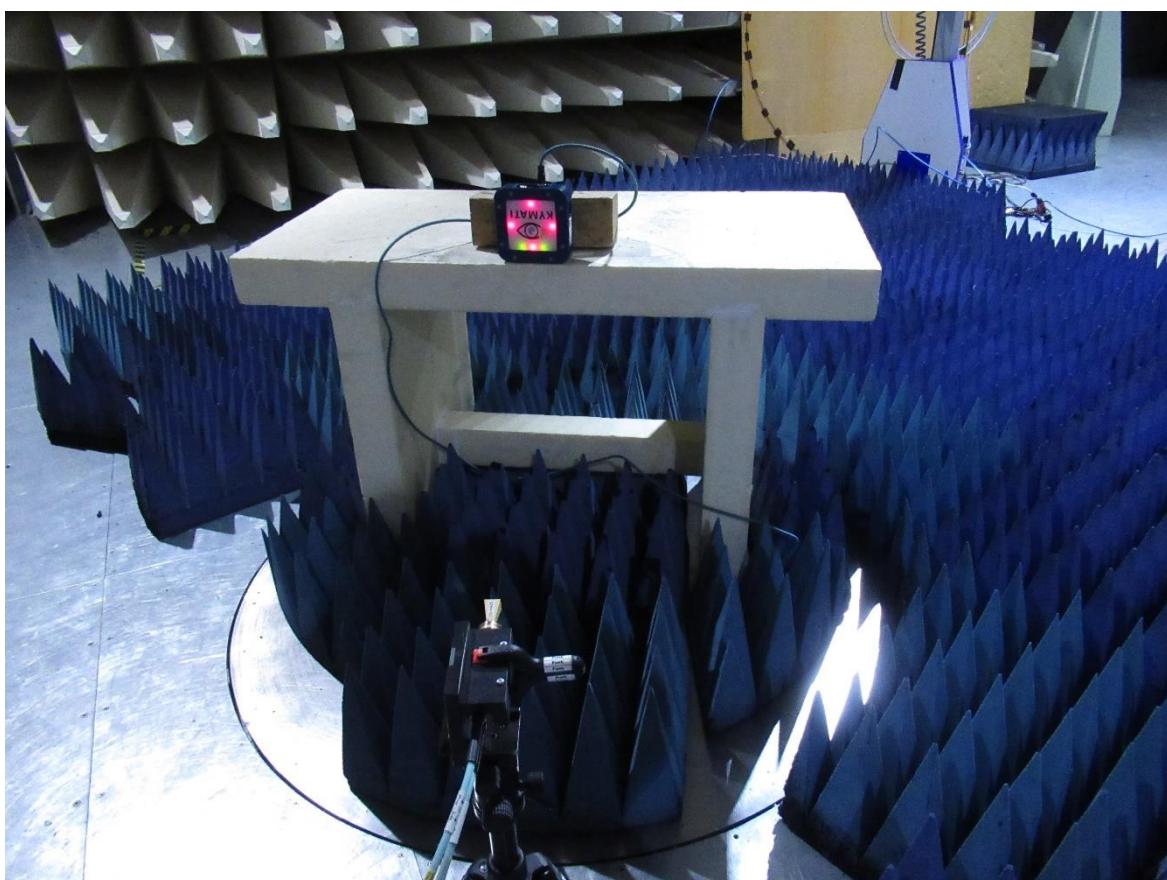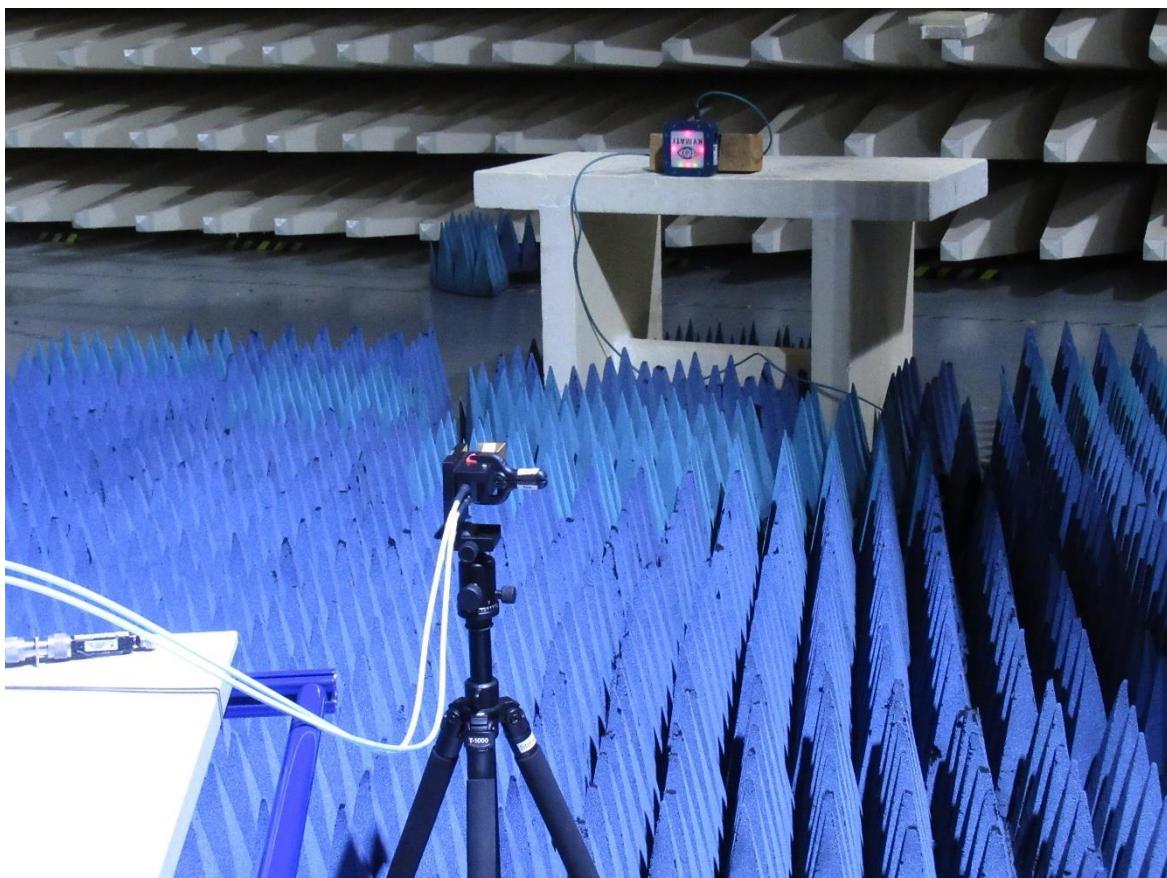


5.5 Frequency stability

For test instruments and accessories used see section 6 Part **MB**.

5.5.1 Description of the test location

Test location: AREA Metrology

5.5.2 Photo documentation of the test set-up

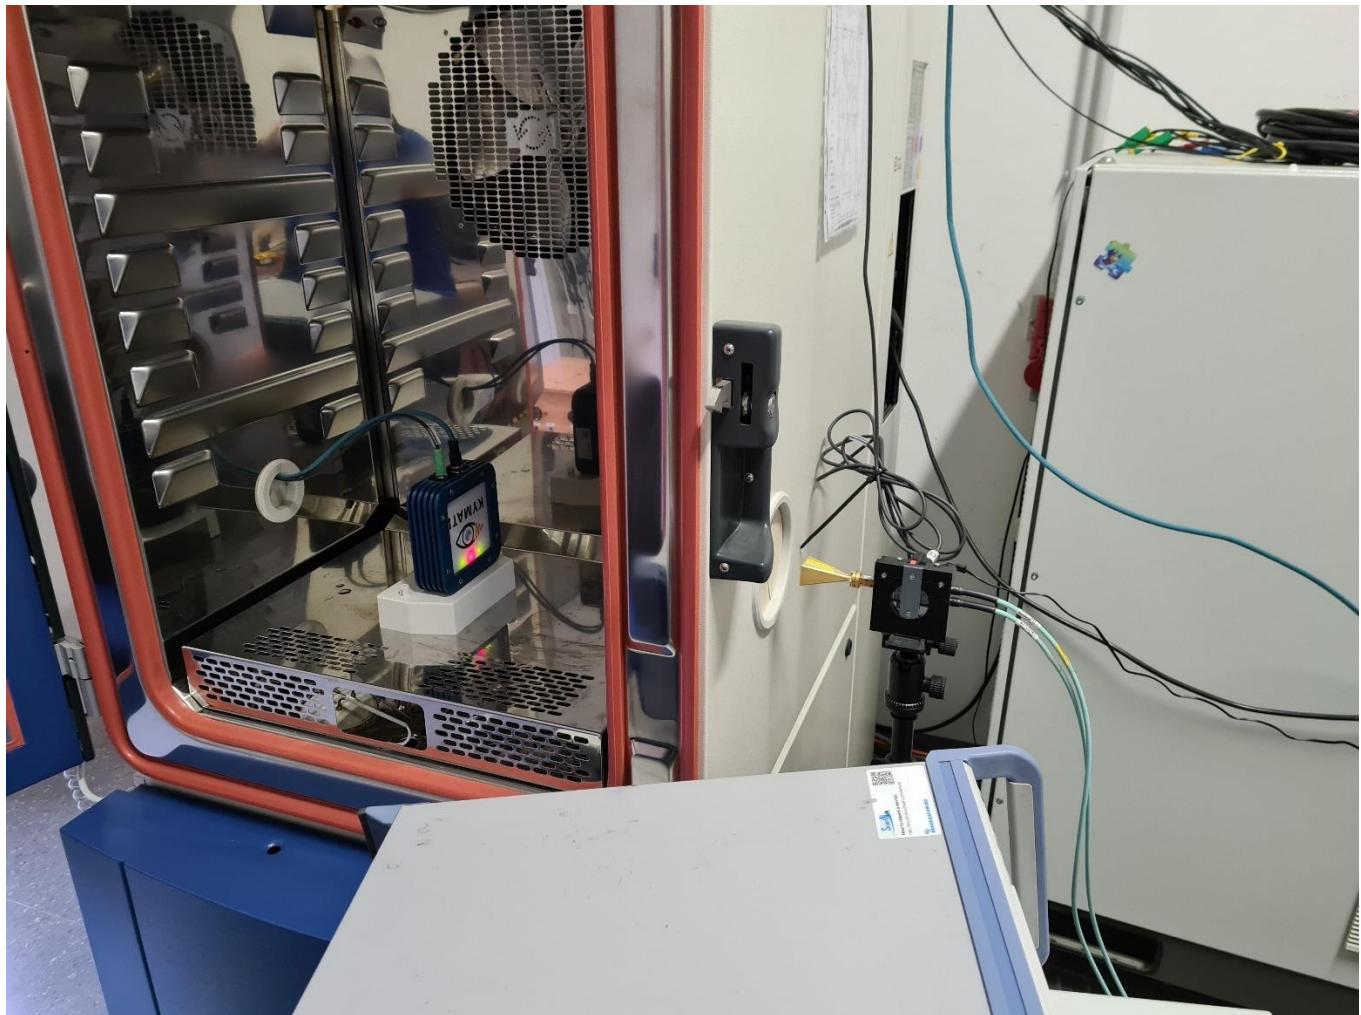

5.5.3 Applicable standard

According to FCC Part 15C, Section 15.255(f):

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.