



RF - TEST REPORT

- FCC Part 15.255, RSS-210 -

Type / Model Name : KY-LOC 1D.03.01

Product Description : Radar sensor

HVIN: 1.1.2.1.1

Applicant : Kymati GmbH

Address : Am Hochacker 5

85630 GRASBRUNN, GERMANY

Manufacturer : Kymati GmbH

Address : Am Hochacker 5

85630 GRASBRUNN, GERMANY

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------

Test Report No. : 80141961-05 Rev_1	26. April 2023 Date of issue
--	---------------------------------



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

Contents

1 TEST STANDARDS	3
2 EQUIPMENT UNDER TEST	4
2.1 Information provided by the Client	4
2.2 Sampling	4
2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.4 Equipment type	4
2.5 Short description of the equipment under test (EUT)	4
2.6 Variants of the EUT	4
2.7 Operation frequency and channel plan	4
2.8 Transmit operating modes	5
2.9 Antenna	5
2.10 Power supply system utilised	5
2.11 Peripheral devices and interface cables	5
2.12 Determination of worst-case conditions for final measurement	5
3 TEST RESULT SUMMARY	7
3.1 Revision history of test report	7
3.2 Final assessment	7
4 TEST ENVIRONMENT	8
4.1 Address of the test laboratory	8
4.2 Environmental conditions	8
4.3 Statement of the measurement uncertainty	8
4.4 Conformity Decision Rule	9
4.5 Measurement protocol for FCC and ISED	9
5 TEST CONDITIONS AND RESULTS	13
5.1 AC power line conducted emissions	13
5.2 EBW and OBW	19
5.3 EIRP	23
5.4 Peak conducted output power	31
5.5 Spurious emissions	34
5.6 Frequency stability	56
5.7 Antenna requirement	59
6 USED TEST EQUIPMENT AND ACCESSORIES	60

ATTACHMENTs A, B as separate supplements

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (September 2022)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September 2022)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.255	Operation within the band 57-71 GHz.
ANSI C63.10: 2013	Testing Unlicensed Wireless Devices

ISED Canada Rules and Regulations (October 2022)

RSS-Gen, Issue 5 + Amendment 1 + 2	General Requirements for Compliance of Radio Apparatus
RSS-210, Issue 10 + Amendment 1	Licence-Exempt Radio Apparatus: Category I Equipment
ANSI C63.10: 2013	Testing Unlicensed Wireless Devices

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

2.4 Equipment type

The EUT qualifies under 15.255 (a) (2) / RSS-210 2.1(a) as a field disturbance sensor for fixed operation.

2.5 Short description of the equipment under test (EUT)

The EUT is a radar sensor in the operating band 61.0 GHz to 61.5 GHz and 60 GHz to 64 GHz. It determines the distance in primary or secondary radar mode.

Number of tested samples: 1
Serial number: 00009
Firmware ID: 3D.02

2.6 Variants of the EUT

There are no variants.

2.7 Operation frequency and channel plan

Operating frequency range 1: 61.0 GHz to 61.5 GHz

Operating frequency range 2: 60.0 GHz to 64.0 GHz.

2.8 Transmit operating modes

Two operation modes with two operating frequency ranges are available:

Primary radar mode

0.5 GHz OBW for operating frequency range 1 or 4 GHz OBW for operating frequency range 2, FMCW, passive reflection

Secondary radar mode

0.5 GHz OBW for operating frequency range 1 or 4 GHz OBW for operating frequency range 2, FMCW and FSK (The communication link between device 1 and device 2 uses the FSK), two way ranging, active reflection

2.9 Antenna

The following antennas shall be used with the EUT:

- Antenna 0 Integrated patch antenna, 28 dBi.
- Antenna 1 Integrated patch antenna, 28 dBi.
- Antenna 2 Integrated patch antenna, 28 dBi.

The three TX antennas can be used alternating but can not transmit at the same time.

2.10 Power supply system utilised

Power supply voltage : 9 – 36 V/DC
 Alternative power supply PoE : 53.5 V/DC


2.11 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- <u>Notebook</u>	Model : <u>ThinkPad</u>
- <u>Switch with PoE+</u>	Model : <u>tp-link TL-SG1005P</u>
- <u>LAN cable</u>	Model : <u>CAT6 M12-RJ45</u>

2.12 Determination of worst-case conditions for final measurement

Exploratory measurements have been made in all three orthogonal axes and the settings of the EUT are changed to locate at which position and at what setting the EUT produces the maximum of the emissions. For the further measurement, the EUT is set in X position while the receiving antenna is in vertical polarisation (in co-polarisation with EUT antennas).

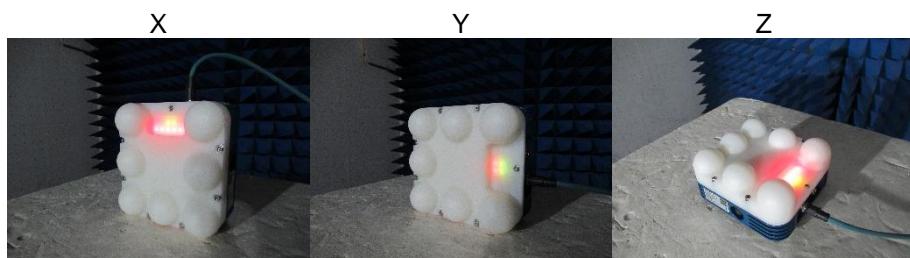

As worst case, the following channels and test modes are selected for the final test:

Due to the need of FCC 15.31 c), the sweep has to be stopped for measurement, 3 frequencies are selected for measurement.

Operating frequency range 1:

	Frequency (GHz)	Power setting	Used antenna	Modulation	Modulation type
Frequency "Low"	61.01	P0	0	Stopped	CW
Frequency "Mid"	61.235	P0	0	Stopped	CW
Frequency "High"	61.46	P0	0	Stopped	CW
Frequency "Low"	61.01	P0	1	Stopped	CW
Frequency "Mid"	61.235	P0	1	Stopped	CW
Frequency "High"	61.46	P0	1	Stopped	CW
Frequency "Low"	61.01	P0	2	Stopped	CW
Frequency "Mid"	61.235	P0	2	Stopped	CW
Frequency "High"	61.46	P0	2	Stopped	CW

Operating frequency range 2:

	Frequency (GHz)	Power setting	Used antenna	Modulation	Modulation type
Frequency "Low"	60.01	P17	0	Stopped	CW
Frequency "Mid"	61.965	P17	0	Stopped	CW
Frequency "High"	63.921	P17	0	Stopped	CW
Frequency "Low"	60.01	P19	1	Stopped	CW
Frequency "Mid"	61.965	P19	1	Stopped	CW
Frequency "High"	63.921	P19	1	Stopped	CW
Frequency "Low"	60.01	P17	2	Stopped	CW
Frequency "Mid"	61.965	P17	2	Stopped	CW
Frequency "High"	63.921	P17	2	Stopped	CW

P0 is the default maximum power setting. The power can be decreased in 1 dB steps, thus P17 is the maximum power setting minus 17 dB.

2.12.1 Test jig

No test jig is used.

2.12.2 Test software

For test mode TX CW, primary and secondary radar mode, the Kymati Commander Software provided by the customer is used.

3 TEST RESULT SUMMARY

Operating in the 61.0 - 61.5 GHz band and in the 57 - 71 GHz band:

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a)	RSS-Gen 8.8	AC power line conducted emissions	passed
15.255(c)(2)	RSS-210 J.2.2	EIRP	passed
15.255(d) 15.209(a)	RSS-210 J.3 RSS-Gen 8.9	Spurious emissions	passed
15.255(e)	RSS-210 J.4	Peak conducted output power	passed
15.255(c)(2) 15.255(e)(1)	RSS-210 J.4 RSS-Gen, 6.7	Emission bandwidth, 99% bandwidth	passed
15.255(f)	RSS-210 J.6	Frequency stability	passed
15.203	-	Antenna requirement	passed

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80141961-05	0	14 March 2023	Initial test report
80141961-05	1	26 April 2023	5.3 updated, 5.4 updated, 6 note updated

The test report with the highest revision number replaces the previous test reports.

3.2 Final assessment

The equipment under test fulfils the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 02 December 2022

Testing concluded on : 20 April 2023

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Sabine Kugler
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level	Calculated Uncertainty
AC power line conducted emissions	0.15 MHz to 30 MHz	95%	± 3.29 dB
Output power ERP, radiated	40000 MHz to 110000 MHz	95%	± 5.41 dB
Field strength of the fundamental	1000 MHz to 40000 MHz	95%	± 2.34 dB
Field strength of the fundamental	40000 MHz to 110000 MHz	95%	± 5.41 dB
Power spectral density	40000 MHz to 110000 MHz	95%	± 5.41 dB
Spurious Emissions, conducted	9 kHz to 10000 MHz	95%	± 2.15 dB
Spurious Emissions, conducted	10000 MHz to 40000 MHz	95%	± 3.47 dB
Spurious Emissions, radiated	9 kHz to 30 MHz	95%	± 3.53 dB
Spurious Emissions, radiated	30 MHz to 1000 MHz	95%	± 4.44 dB
Spurious Emissions, radiated	1000 MHz to 40000 MHz	95%	± 2.89 dB
Spurious Emissions, radiated	40000 MHz to 60000 MHz	95%	± 5.04 dB
Spurious Emissions, radiated	60000 MHz to 90000 MHz	95%	± 5.04 dB
Spurious Emissions, radiated	75000 MHz to 110000 MHz	95%	± 5.04 dB
Spurious Emissions, radiated	110000 MHz to 170000 MHz	95%	± 5.04 dB
Spurious Emissions, radiated	140000 MHz to 220000 MHz	95%	± 5.04 dB

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011
ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

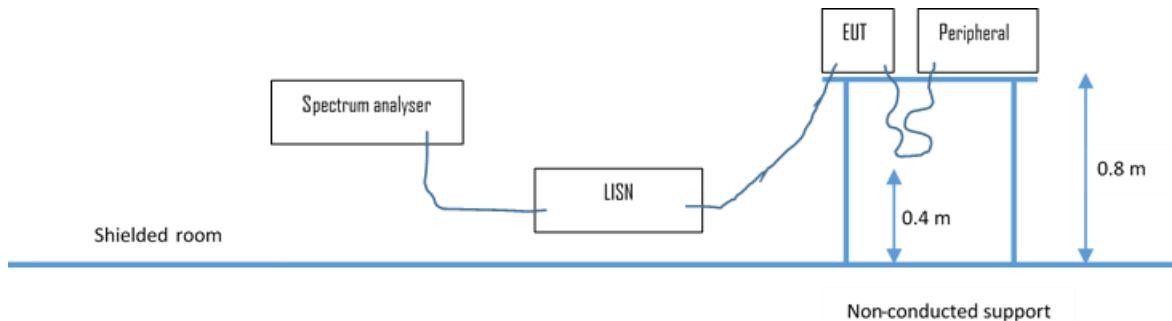

The final level, expressed in $\text{dB}\mu\text{V}$, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between $\text{dB}\mu\text{V}$ and μV , the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$


$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with $50 \Omega / 50 \mu\text{H}$ (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

4.5.3.2 Radiated emission

4.5.3.2.1 **OATS1 test site (9 kHz - 30 MHz):**


Test setup according ANSI C63.10

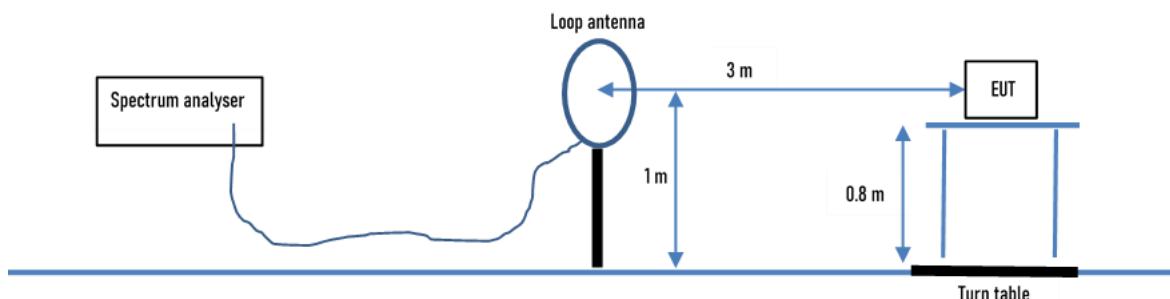

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a $1.0 \times 1.5 \text{ m}$ non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 OATS1 test site (30 MHz - 1 GHz):

Test setup according ANSI C63.10.

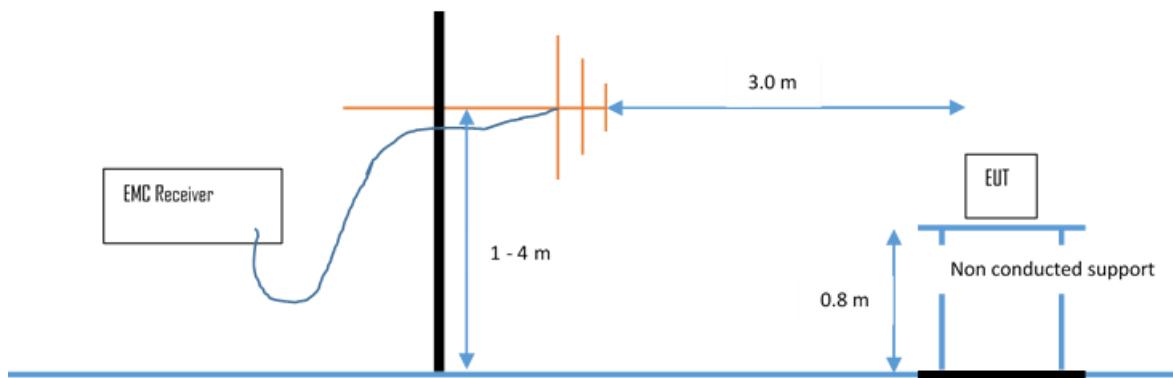

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dB μ V/m is calculated by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:


30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

4.5.3.2.3 Anechoic chamber 1 (1000 MHz – 18000 MHz)


Test setup according ANSI C63.10.

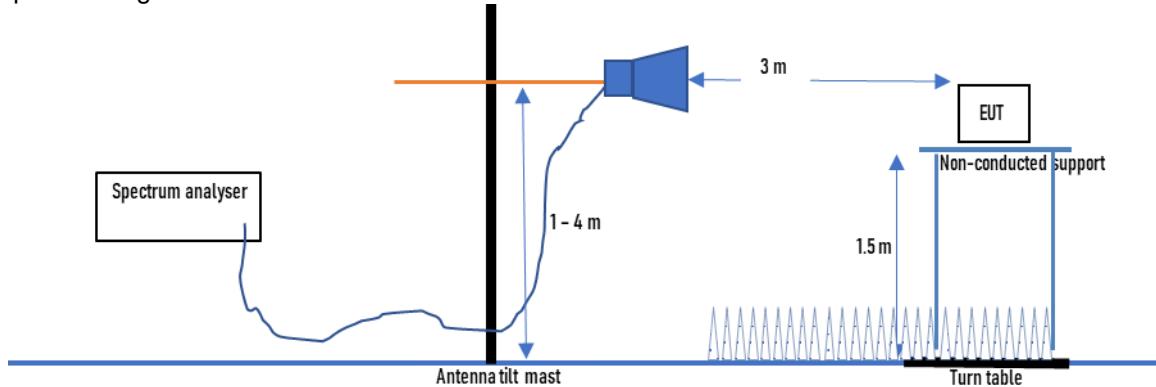

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The


measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

4.5.3.2.4 Anechoic chamber 1 (18 GHz – 40 GHz)

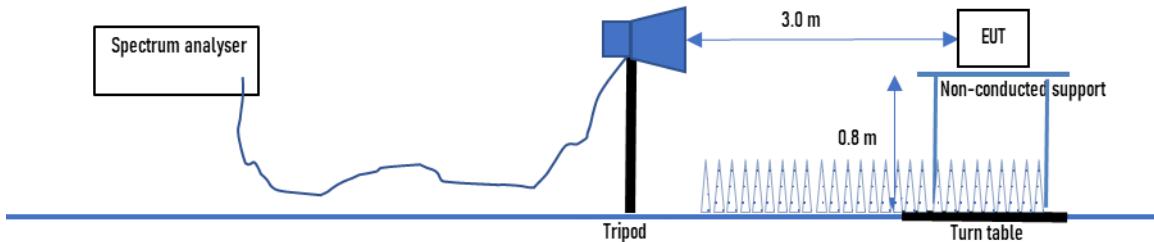

Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 0.8 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit are adopted.

4.5.3.2.1 Anechoic chamber 1 (40 GHz – 200 GHz)

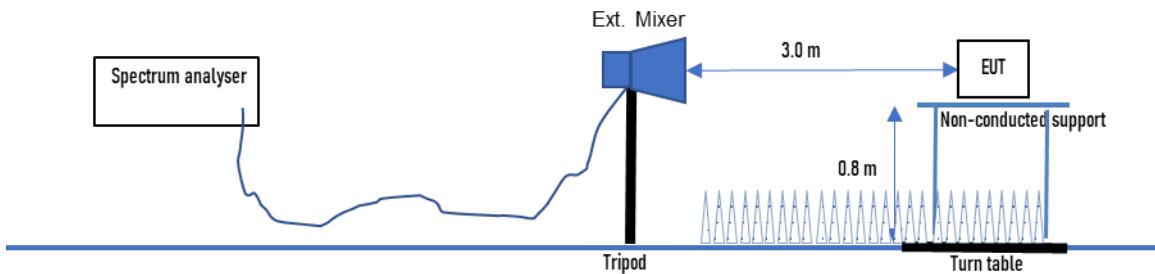

Emissions from the EUT are measured in the frequency range 40 GHz up to 200 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and external mixer with standard gain horn. Table top equipment is placed on a non-conducting table, 0.8 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit are adopted.

5 TEST CONDITIONS AND RESULTS

5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part **A 4**.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

According to RSS-Gen 8.8:

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

5.1.4 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.10 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin -2.6 dB at 0.503 MHz

Limit according to FCC Part 15, Section 15.207(a):

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Limit according to RSS-Gen 8.8:

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency


The requirements are **FULFILLED**.**Remarks:** For detailed test result please refer to following test protocols.PoE power supply: AC adapter TP-Link, model T535131-2-DTDC powered mode performed with commercially available laboratory DC power supply HM8143.

5.1.6 Test protocol

Test point: L1
 Operation mode: TX
 Remarks: PoE power supply

Result: passed



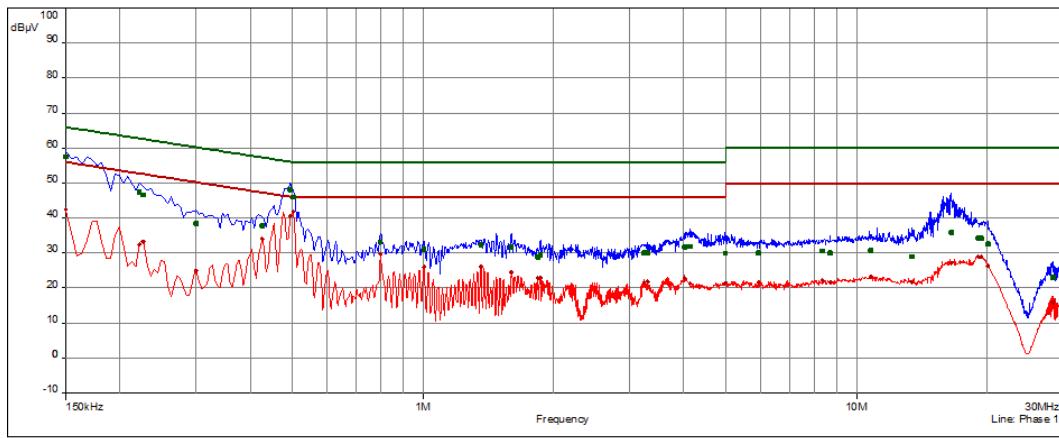

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line	corr dB
0.150	1	57.6	-8.4	66.0	42.5	-13.5	56.0	Phase 1	9.9
0.222	1	47.3	-15.4	62.7	32.5	-20.3	52.7	Phase 1	9.9
0.227	1	46.7	-15.9	62.6	33.3	-19.3	52.6	Phase 1	9.9
0.300	2	38.5	-21.8	60.2	25.0	-25.2	50.2	Phase 1	9.9
0.426	2	37.8	-19.5	57.3	34.1	-13.3	47.3	Phase 1	9.9
0.494	2	48.2	-8.0	56.1	40.6	-5.5	46.1	Phase 1	9.9
0.503	2	46.0	-10.0	56.0	41.9	-4.2	46.0	Phase 1	9.9
0.798	3	33.2	-22.8	56.0	29.8	-16.2	46.0	Phase 1	10.0
1.005	3	31.0	-25.0	56.0	26.0	-20.0	46.0	Phase 1	10.0
1.362	4	32.4	-23.6	56.0	26.1	-19.9	46.0	Phase 1	10.1
1.601	4	31.7	-24.3	56.0	24.5	-21.5	46.0	Phase 1	10.1
1.839	4	28.8	-27.2	56.0	22.9	-23.1	46.0	Phase 1	10.2
1.866	4	29.5	-26.5	56.0	23.0	-23.0	46.0	Phase 1	10.2
3.237	5	30.0	-26.0	56.0	21.6	-24.4	46.0	Phase 1	10.3
3.300	5	30.1	-25.9	56.0	21.8	-24.2	46.0	Phase 1	10.3
4.011	5	31.7	-24.3	56.0	22.8	-23.2	46.0	Phase 1	10.3
4.133	5	31.9	-24.1	56.0	21.3	-24.7	46.0	Phase 1	10.3
4.976	6	29.9	-26.1	56.0	21.3	-24.7	46.0	Phase 1	10.3
5.952	6	30.1	-29.9	60.0	21.6	-28.4	50.0	Phase 1	10.4
8.346	6	30.6	-29.4	60.0	22.2	-27.8	50.0	Phase 1	10.4
8.693	6	30.0	-30.0	60.0	21.7	-28.3	50.0	Phase 1	10.4
10.802	7	30.7	-29.3	60.0	23.3	-26.7	50.0	Phase 1	10.5
13.416	7	28.9	-31.1	60.0	21.7	-28.3	50.0	Phase 1	10.7
16.553	7	35.9	-24.1	60.0	27.1	-22.9	50.0	Phase 1	10.8
19.086	7	34.3	-25.7	60.0	28.9	-21.1	50.0	Phase 1	11.0
19.407	8	34.3	-25.7	60.0	28.9	-21.1	50.0	Phase 1	11.0
20.123	8	32.6	-27.4	60.0	26.3	-23.7	50.0	Phase 1	11.0
28.385	8	23.1	-37.0	60.0	16.0	-34.1	50.0	Phase 1	11.2
28.497	8	23.1	-36.9	60.0	15.8	-34.2	50.0	Phase 1	11.2


FCC ID: 2AXR5-1D-03-01
IC: 26556-1D0301

Test point:
Operation mode:
Remarks:

N
TX
PoE power supply

Result: passed

— FCC/FCC Part 15C (15.207) B - Avg/
— FCC/FCC Part 15C (15.207) B - Q-Peak/
— Peak (Neutral)
— CISPR.AVG (Neutral)
■ QuasiPeak (Finals) (Neutral)
● CISPR AV (Finals) (Neutral)

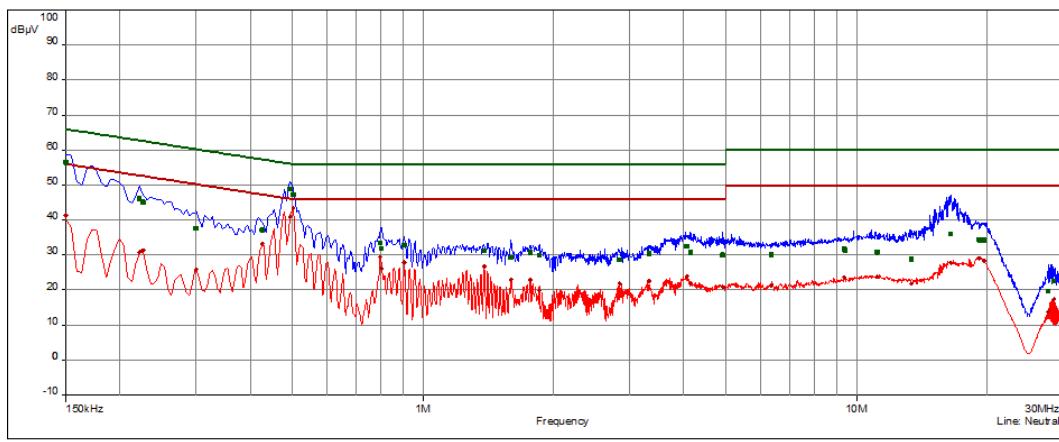


freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(µV)	dB	dB	dB(µV)	dB	dB		dB
0.150	9	56.5	-9.5	66.0	41.3	-14.7	56.0	Neutral	9.9
0.222	9	46.1	-16.6	62.7	30.8	-21.9	52.7	Neutral	9.9
0.227	9	45.1	-17.5	62.6	31.5	-21.1	52.6	Neutral	9.9
0.300	10	37.7	-22.6	60.2	25.9	-24.4	50.2	Neutral	9.9
0.426	10	37.2	-20.2	57.3	33.3	-14.0	47.3	Neutral	9.9
0.494	10	48.9	-7.2	56.1	40.9	-5.2	46.1	Neutral	10.0
0.503	10	47.2	-8.8	56.0	43.4	-2.6	46.0	Neutral	10.0
0.798	11	33.4	-22.6	56.0	29.5	-16.5	46.0	Neutral	10.0
0.803	11	31.9	-24.1	56.0	26.2	-19.8	46.0	Neutral	10.0
0.906	11	32.9	-23.1	56.0	28.0	-18.1	46.0	Neutral	10.0
1.385	12	31.1	-24.9	56.0	26.7	-19.3	46.0	Neutral	10.1
1.596	12	29.2	-26.8	56.0	23.0	-23.0	46.0	Neutral	10.2
1.767	12	30.8	-25.2	56.0	22.9	-23.1	46.0	Neutral	10.2
1.857	12	29.9	-26.1	56.0	19.8	-26.2	46.0	Neutral	10.2
2.846	13	28.7	-27.3	56.0	21.8	-24.2	46.0	Neutral	10.3
3.323	13	30.4	-25.6	56.0	22.6	-23.5	46.0	Neutral	10.3
4.065	13	32.5	-23.5	56.0	23.9	-22.1	46.0	Neutral	10.3
4.146	13	30.7	-25.3	56.0	21.8	-24.2	46.0	Neutral	10.3
4.922	14	30.0	-26.0	56.0	20.9	-25.1	46.0	Neutral	10.3
6.371	14	30.1	-29.9	60.0	21.3	-28.7	50.0	Neutral	10.4
9.390	14	31.7	-28.3	60.0	23.6	-26.4	50.0	Neutral	10.4
9.395	14	31.5	-28.6	60.0	23.5	-26.5	50.0	Neutral	10.4
11.153	15	30.8	-29.2	60.0	23.8	-26.2	50.0	Neutral	10.5
13.398	15	28.8	-31.2	60.0	21.8	-28.2	50.0	Neutral	10.6
16.490	15	36.1	-23.9	60.0	27.8	-22.2	50.0	Neutral	10.7
19.140	15	34.4	-25.6	60.0	29.1	-20.9	50.0	Neutral	10.8
19.214	16	34.4	-25.6	60.0	29.1	-20.9	50.0	Neutral	10.8
19.709	16	34.2	-25.8	60.0	28.3	-21.7	50.0	Neutral	10.9
27.723	16	19.8	-40.3	60.0	13.9	-36.1	50.0	Neutral	10.8
28.515	16	22.7	-37.3	60.0	17.4	-32.6	50.0	Neutral	10.7

FCC ID: 2AXR5-1D-03-01
IC: 26556-1D0301

Test point: L1
 Operation mode: TX
 Remarks: 24 V/DC power supply

Result: passed

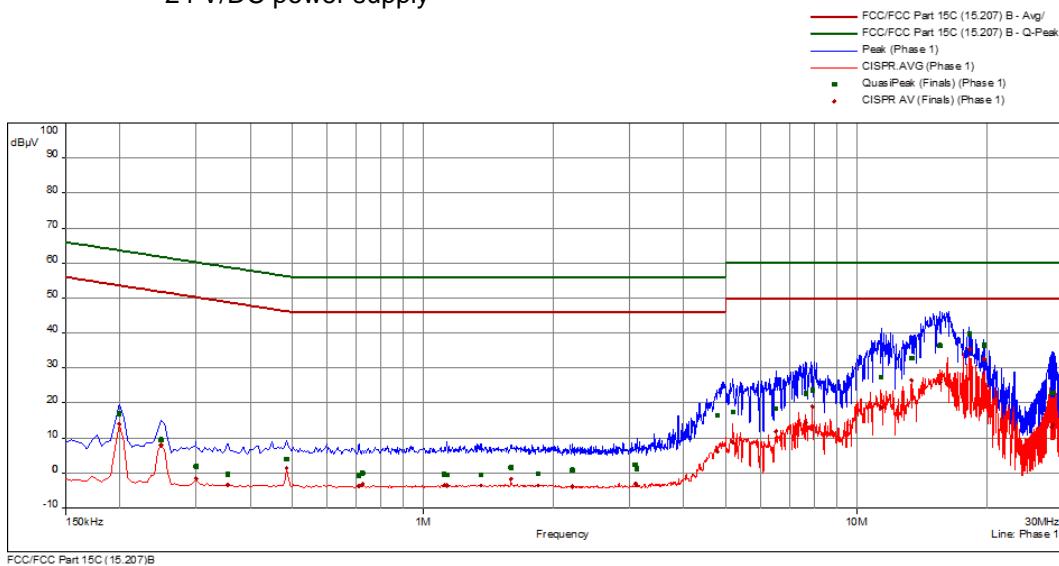


freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(µV)	dB	dB	dB(µV)	dB	dB		dB
0.200	1	17.0	-46.7	63.6	14.1	-39.6	53.6	Phase 1	9.9
0.249	1	9.6	-52.2	61.8	8.0	-43.8	51.8	Phase 1	9.9
0.300	2	1.9	-58.3	60.2	-1.6	-51.8	50.2	Phase 1	9.9
0.354	2	-0.3	-59.2	58.9	-3.3	-52.2	48.9	Phase 1	9.9
0.485	2	3.9	-52.4	56.3	1.4	-44.9	46.3	Phase 1	9.9
0.713	3	-0.6	-56.6	56.0	-3.7	-49.7	46.0	Phase 1	10.0
0.726	3	0.1	-55.9	56.0	-3.2	-49.2	46.0	Phase 1	10.0
1.122	3	-0.4	-56.4	56.0	-3.5	-49.5	46.0	Phase 1	10.1
1.136	3	-0.4	-56.4	56.0	-3.5	-49.5	46.0	Phase 1	10.1
1.362	4	-0.5	-56.5	56.0	-3.5	-49.5	46.0	Phase 1	10.1
1.596	4	1.6	-54.4	56.0	-1.7	-47.7	46.0	Phase 1	10.1
1.844	4	-0.2	-56.2	56.0	-3.5	-49.5	46.0	Phase 1	10.2
2.213	4	0.9	-55.1	56.0	-3.8	-49.8	46.0	Phase 1	10.2
3.093	5	2.3	-53.7	56.0	-3.0	-49.0	46.0	Phase 1	10.3
3.116	5	1.2	-54.8	56.0	-3.6	-49.6	46.0	Phase 1	10.3
4.772	5	16.4	-39.6	56.0	6.2	-39.8	46.0	Phase 1	10.3
5.187	6	17.4	-42.6	60.0	8.6	-41.4	50.0	Phase 1	10.3
6.519	6	18.5	-41.5	60.0	11.9	-38.1	50.0	Phase 1	10.4
7.640	6	22.8	-37.2	60.0	14.5	-35.6	50.0	Phase 1	10.4
7.923	6	23.7	-36.3	60.0	19.0	-31.0	50.0	Phase 1	10.4
11.432	7	27.5	-32.5	60.0	18.7	-31.3	50.0	Phase 1	10.5
13.421	7	32.8	-27.2	60.0	26.5	-23.5	50.0	Phase 1	10.7
15.608	7	36.5	-23.5	60.0	25.9	-24.1	50.0	Phase 1	10.8
18.245	7	39.7	-20.3	60.0	35.4	-14.6	50.0	Phase 1	10.9
19.709	8	36.4	-23.6	60.0	32.5	-17.5	50.0	Phase 1	11.0
28.245	8	23.0	-37.0	60.0	13.1	-36.9	50.0	Phase 1	11.2
28.470	8	23.0	-37.0	60.0	13.8	-36.2	50.0	Phase 1	11.2

Test point:
Operation mode:
Remarks:

N
TX
24 V/DC power supply

Result: passed

— FCC/FCC Part 15C (15.207) B - Avg/
— FCC/FCC Part 15C (15.207) B - Q-Peak/
— Peak (Neutral)
— CISPR.AVG (Neutral)
■ QuasiPeak (Finals) (Neutral)
● CISPR AV (Finals) (Neutral)

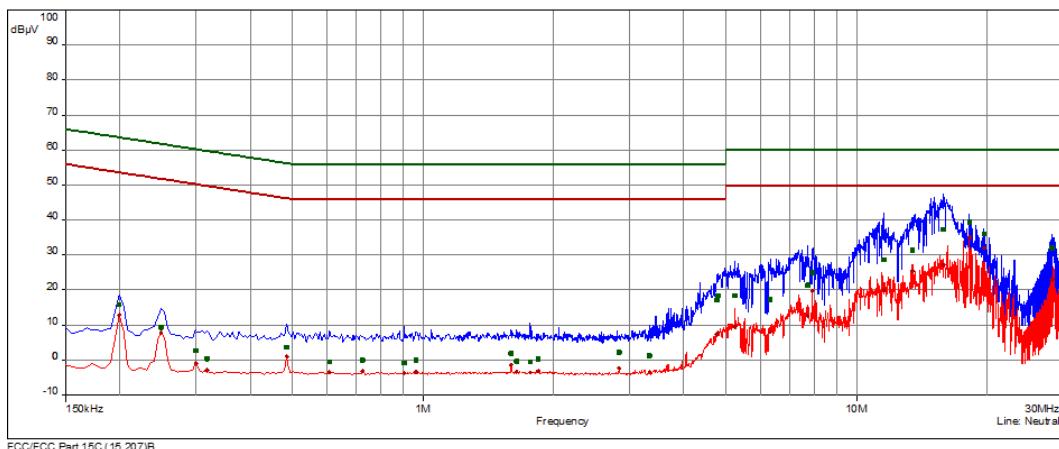

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(µV)	dB	dB	dB(µV)	dB	dB		dB
0.200	9	15.9	-47.8	63.6	12.9	-40.7	53.6	Neutral	9.9
0.249	9	9.4	-52.4	61.8	7.8	-44.0	51.8	Neutral	9.9
0.300	10	2.7	-57.5	60.2	-0.9	-51.2	50.2	Neutral	9.9
0.318	10	0.4	-59.4	59.8	-2.9	-52.7	49.8	Neutral	9.9
0.485	10	3.7	-52.5	56.3	1.0	-45.2	46.3	Neutral	10.0
0.609	11	-0.4	-56.4	56.0	-3.5	-49.5	46.0	Neutral	10.0
0.726	11	0.0	-56.0	56.0	-3.1	-49.1	46.0	Neutral	10.0
0.906	11	-0.8	-56.8	56.0	-3.7	-49.7	46.0	Neutral	10.0
0.965	11	0.1	-55.9	56.0	-3.4	-49.4	46.0	Neutral	10.0
1.596	12	2.0	-54.0	56.0	-1.4	-47.4	46.0	Neutral	10.2
1.646	12	-0.3	-56.3	56.0	-3.4	-49.4	46.0	Neutral	10.2
1.767	12	-0.6	-56.6	56.0	-3.5	-49.5	46.0	Neutral	10.2
1.844	12	0.2	-55.8	56.0	-3.1	-49.1	46.0	Neutral	10.2
2.837	13	2.3	-53.7	56.0	-2.4	-48.4	46.0	Neutral	10.3
3.332	13	1.3	-54.7	56.0	-3.3	-49.3	46.0	Neutral	10.3
4.767	13	17.3	-38.7	56.0	7.3	-38.7	46.0	Neutral	10.3
4.799	13	18.4	-37.6	56.0	7.8	-38.2	46.0	Neutral	10.3
5.246	14	18.4	-41.7	60.0	9.5	-40.5	50.0	Neutral	10.3
6.335	14	17.4	-42.6	60.0	8.0	-42.0	50.0	Neutral	10.4
7.730	14	21.4	-38.7	60.0	12.6	-37.4	50.0	Neutral	10.4
7.923	14	25.0	-35.0	60.0	19.8	-30.2	50.0	Neutral	10.4
11.594	15	28.7	-31.3	60.0	19.9	-30.1	50.0	Neutral	10.5
13.479	15	31.4	-28.7	60.0	25.4	-24.6	50.0	Neutral	10.6
15.855	15	37.3	-22.7	60.0	27.2	-22.8	50.0	Neutral	10.7
18.245	15	39.5	-20.5	60.0	35.1	-14.9	50.0	Neutral	10.8
19.709	16	36.0	-24.0	60.0	32.1	-17.9	50.0	Neutral	10.9
28.223	16	31.9	-28.1	60.0	23.1	-26.9	50.0	Neutral	10.7
28.335	16	32.1	-27.9	60.0	23.1	-26.9	50.0	Neutral	10.7

5.2 EBW and OBW

For test instruments and accessories used see section 6 Part **CPR3, MB**.

5.2.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 3 m

5.2.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.2.3 Applicable standard

According to FCC Part 15, Section 15.255(c)(2):

For fixed field disturbance sensors that occupy 500 MHz or less of bandwidth and that are contained wholly within the frequency band 61.0-61.5 GHz, the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm.

According to FCC Part 15, Section 15.255(e)(1):

Transmitters with an emission bandwidth of less than 100 MHz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 MHz.

According to RSS-210 J.4(c):

For the purpose of this standard, emission bandwidth is defined as the instantaneous frequency range occupied by a steady radiated signal with modulation, outside which the radiated power spectral density shall be 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth. The centre frequency must be stationary during the measurement interval, even if not stationary during normal operation.

According to RSS-Gen 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

5.2.4 Description of Measurement

According to FCC Part 15, Section 15.255(e)(1):

For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).

The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitter at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

According to RSS-Gen 6.7:

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Spectrum analyser settings for EBW:

RBW: 100 kHz, VBW: 3 x RBW, Detector: Max peak, Sweep time: auto, Span: > 2 EBW;

Spectrum analyser settings for OBW:

RBW: 5 MHz, VBW: 3 x RBW, Detector: Max peak, Sweep time: auto, Span: > 2 OBW;

5.2.5 Test result

6dB bandwidth			
operating range	f_{low}	f_{high}	EBW 6dB
	(GHz)	(GHz)	(GHz)
1	61.010	61.460	0.450
2	60.010	63.921	3.911

99% bandwidth				
operating range	Centre frequency	T_1	T_2	Measured OBW
	(GHz)	(GHz)	(GHz)	(GHz)
1	61.228	61.005	61.005	0.446
2	61.963	59.994	63.933	3.939


The requirements are **FULFILLED**.

Remarks: For detailed test results please refer to following test protocols. No limit defined for the occupied bandwidth!
Measurement of OBW99 for operation range 2: To avoid overlap of wanted signal with unwanted signal (image), LO of external mixer is tuned to appropriate frequency to obtain higher ZF. VBW reduced due to high dynamic for higher ZF. For test instruments see section 6, part MB.


5.2.6 Test protocols

Operating frequency range 1:


f_{low}

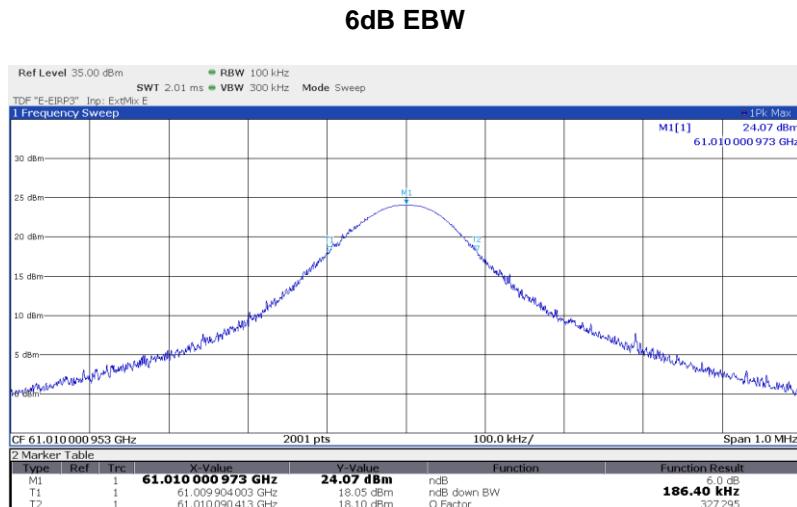

f_{high}

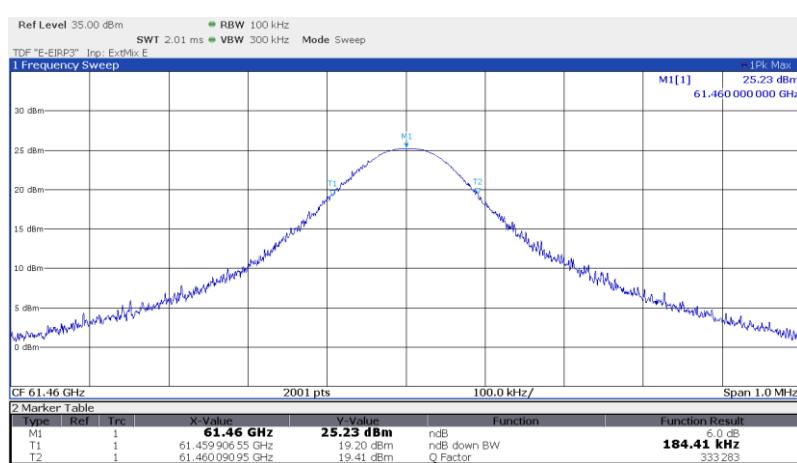


99% OBW

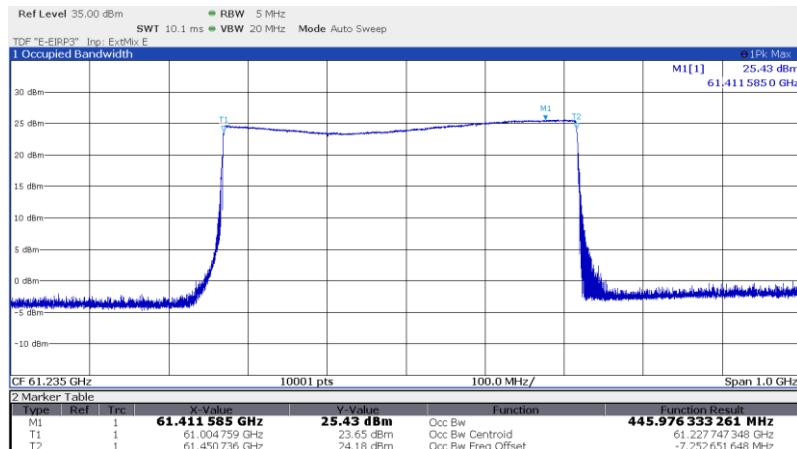


Operating frequency range 2:


f_{low}

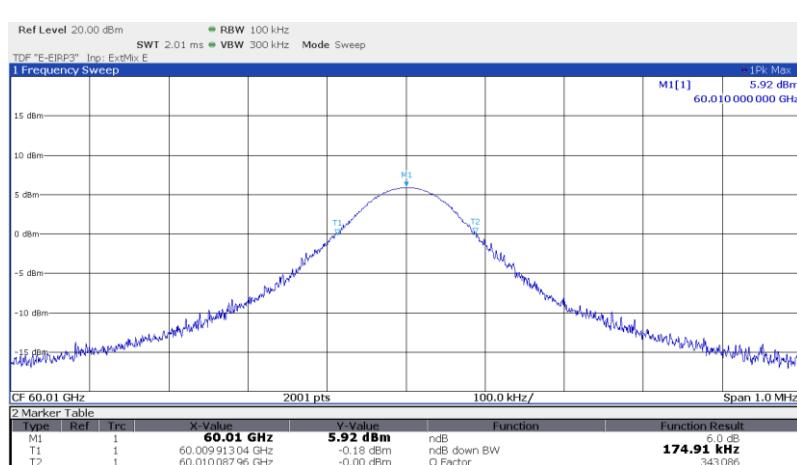

f_{high}

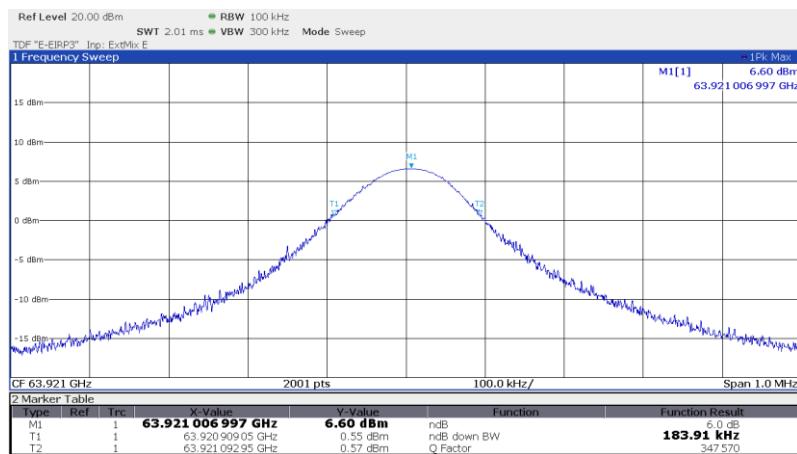

99% OBW

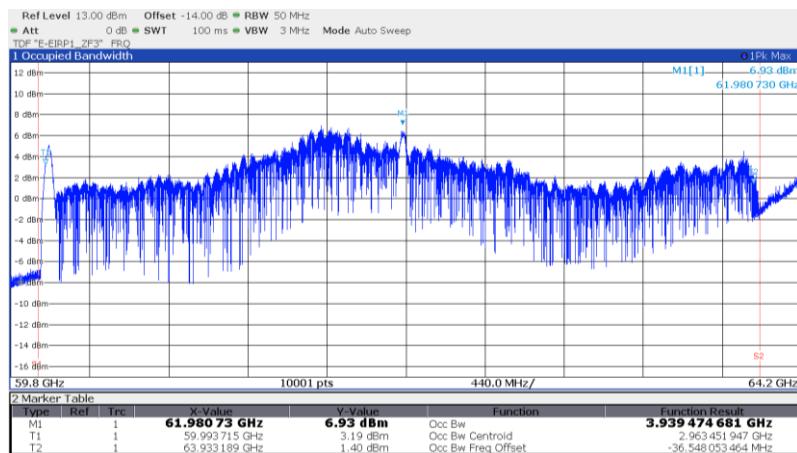

5.3 EIRP

For test instruments and accessories used see section 6 Part **CPR 3**.

5.3.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 1 m

5.3.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.255(c)(2):

For fixed field disturbance sensors that occupy 500 MHz or less of bandwidth and that are contained wholly within the frequency band 61.0-61.5 GHz, the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm. In addition, the average power of any emission outside of the 61.0-61.5 GHz band, measured during the transmit interval, but still within the 57-71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.

According to RSS-210 J.2.1:

For fixed field disturbance sensors that occupy a bandwidth of 500 MHz or less and for which the bandwidth is contained wholly within the frequency band 61.0-61.5 GHz, the equipment's average and peak e.i.r.p. in the channel bandwidth shall not exceed 40 dBm and 43 dBm respectively. In addition, the average and peak e.i.r.p. of any emission outside of the band 61.0-61.5 GHz, but still within the band 57-71 GHz, shall not exceed 10 dBm and 13 dBm respectively.

According to RSS-210 J.5(b):

Peak power density and peak transmitter output power shall be measured with a radio frequency (RF) detector that has a detection bandwidth encompassing the band 57-71 GHz and a video bandwidth of at least 10 MHz, or using an equivalent measurement method.

5.3.4 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 9.8 and 9.11. The EUT is measured in TX continuous unmodulated under normal conditions.

Analyser settings:

PK measurement:	RBW: 1 MHz	VBW: 10 MHz	Detector: PK	Trace. Max hold
AV measurement:	RBW: 1 MHz	VBW: 10 MHz	Detector: RMS	Trace. Max hold

5.3.5 Test result
Operating frequency range 1:

Channel	Frequency (GHz)	Antenna	Power setting	Level PK (dBm)	Limit PK (dBm)	Margin PK (dB)	Level AV (dBm)	Limit AV (dBm)	Margin AV (dB)
low	61.01	0	P0	25.4	43.0	-17.6	25.3	40.0	-14.7
mid	61.235	0	P0	24.2	43.0	-18.8	24.1	40.0	-15.9
high	61.46	0	P0	25.3	43.0	-17.7	25.3	40.0	-14.7
low	61.01	1	P0	25.1	43.0	-17.9	25.0	40.0	-15.0
mid	61.235	1	P0	24.8	43.0	-18.2	24.7	40.0	-15.3
high	61.46	1	P0	26.6	43.0	-16.4	26.6	40.0	-13.5
low	61.01	2	P0	24.3	43.0	-18.7	24.2	40.0	-15.8
mid	61.235	2	P0	23.9	43.0	-19.1	23.9	40.0	-16.1
high	61.46	2	P0	25.5	43.0	-17.5	25.5	40.0	-14.5

Operating frequency range 2:

Channel	Frequency (GHz)	Antenna	Power setting	Level PK (dBm)	Limit PK (dBm)	Margin PK (dB)	Level AV (dBm)	Limit AV (dBm)	Margin AV (dB)
low	60.01	0	P17	6.4	13.0	-6.6	6.0	10.0	-4.0
mid	61.965	0	P17	9.8	13.0	-3.2	9.5	10.0	-0.5
high	63.921	0	P17	6.6	13.0	-6.4	6.4	10.0	-3.6
low	60.01	1	P19	5.9	13.0	-7.1	5.4	10.0	-4.6
mid	61.965	1	P19	9.1	13.0	-3.9	8.7	10.0	-1.3
high	63.921	1	P19	5.2	13.0	-7.8	5.0	10.0	-5.0
low	60.01	2	P17	6.2	13.0	-6.8	5.7	10.0	-4.3
mid	61.965	2	P17	9.2	13.0	-3.8	8.9	10.0	-1.1
high	63.921	2	P17	6.1	13.0	-6.9	5.9	10.0	-4.1

EIRP limit according to FCC Part 15C, Section 15.255(c)(2):

For fixed field disturbance sensors that occupy 500 MHz or less of bandwidth and that are contained wholly within the frequency band 61.0-61.5 GHz, the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm. In addition, the average power of any emission outside of the 61.0-61.5 GHz band, measured during the transmit interval, but still within the 57-71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.

Limit according to RSS-210 J.2.1(a):

For fixed field disturbance sensors that occupy a bandwidth of 500 MHz or less and for which the bandwidth is contained wholly within the frequency band 61.0-61.5 GHz, the equipment's average and peak e.i.r.p. in the channel bandwidth shall not exceed 40 dBm and 43 dBm respectively. In addition, the average and peak e.i.r.p. of any emission outside of the band 61.0-61.5 GHz, but still within the band 57-71 GHz, shall not exceed 10 dBm and 13 dBm respectively.


The requirements are **FULFILLED.**
Remarks: For detailed test results please refer to following test protocols.

5.3.6 Test protocols


Operating frequency range 1:

Antenna 0


Low



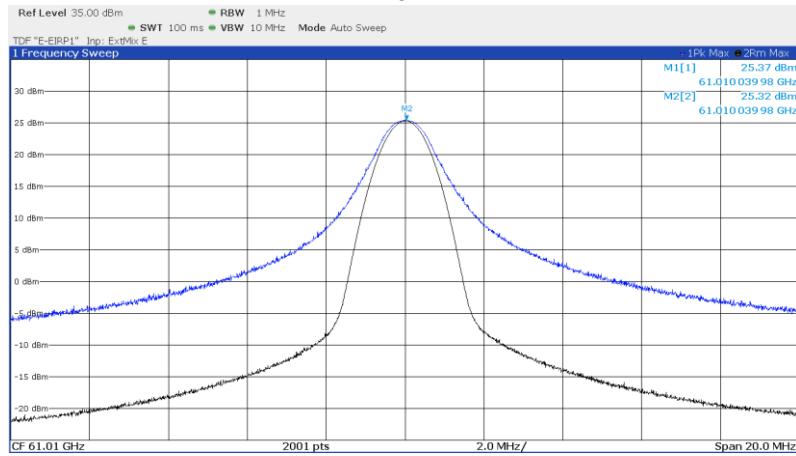





Mid

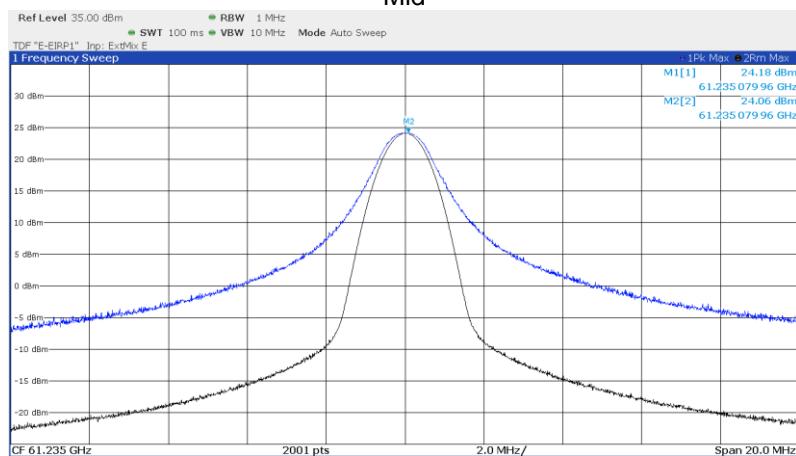

High

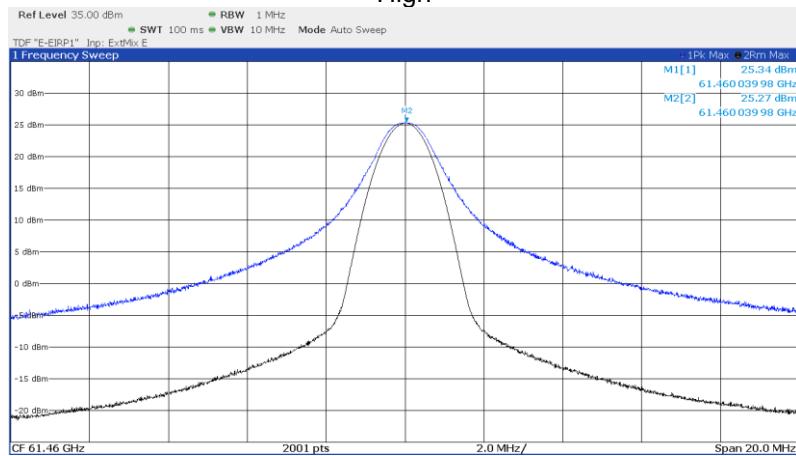

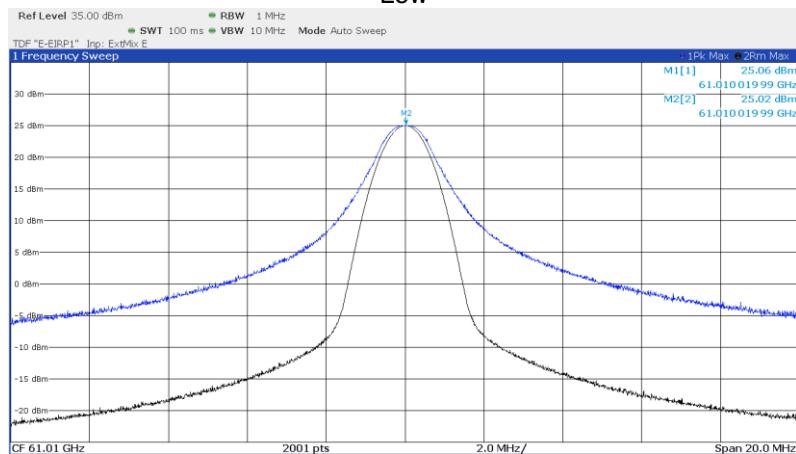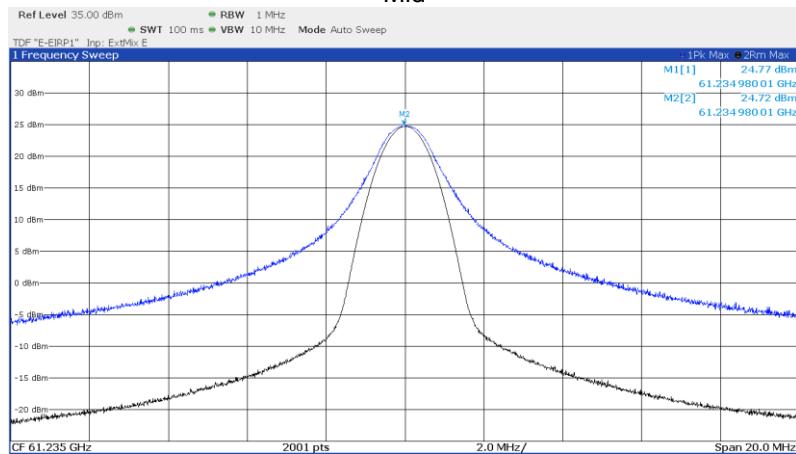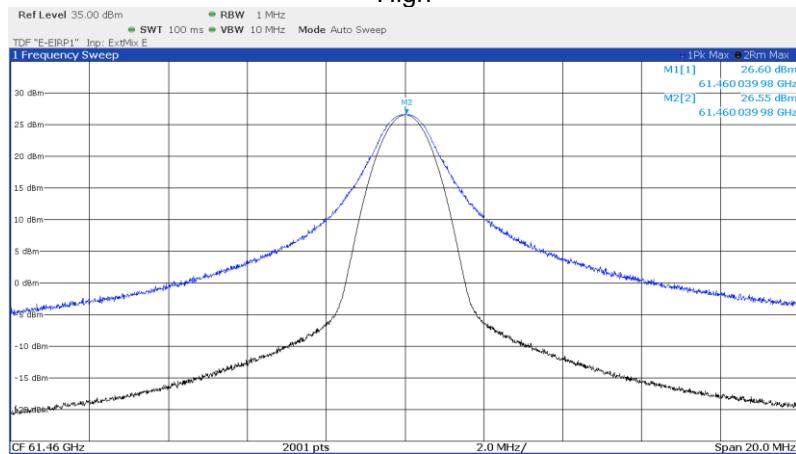
Antenna 1
Low

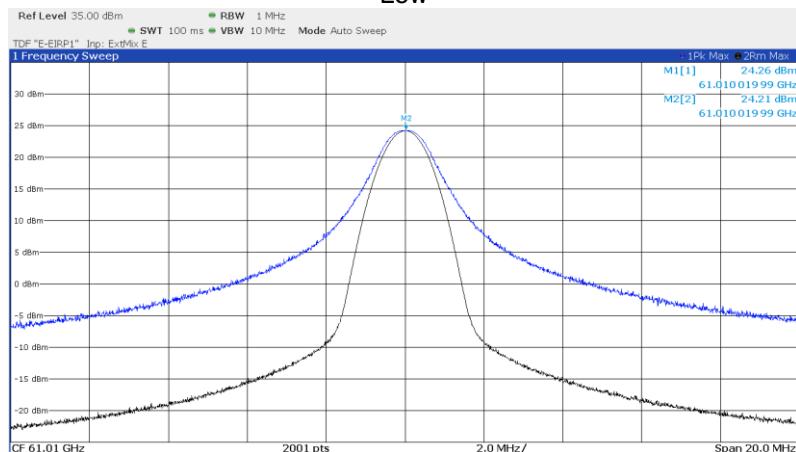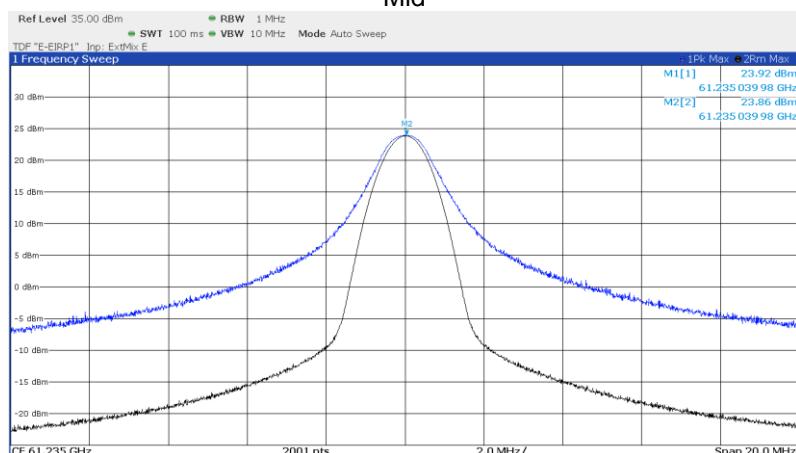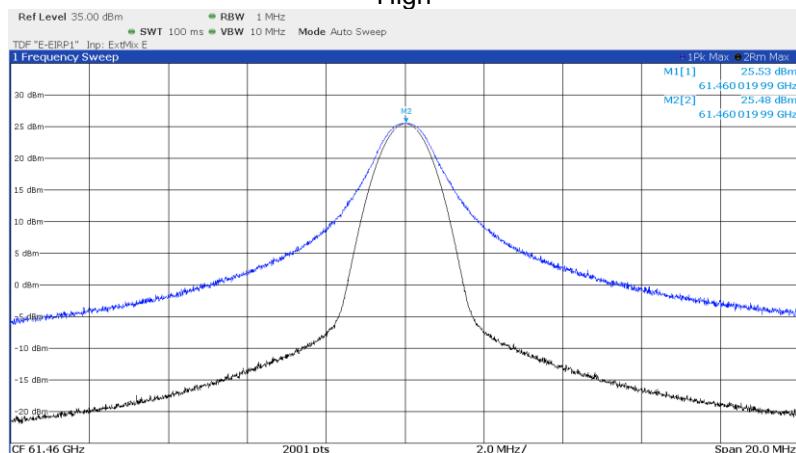Mid

High


Antenna 2
Low

Mid

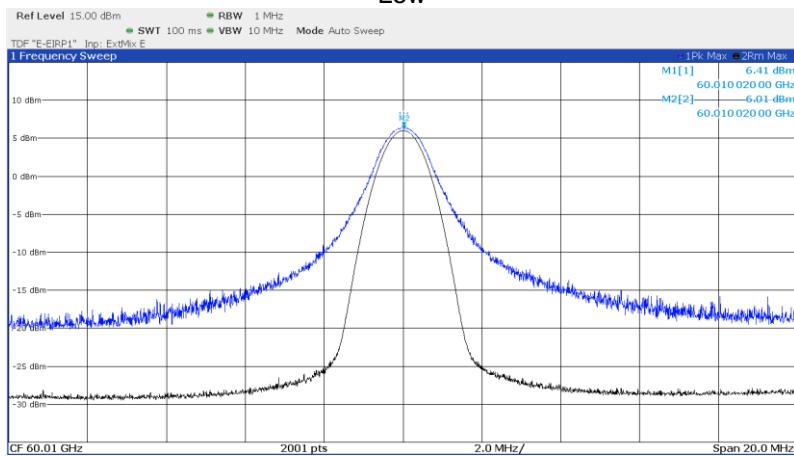High


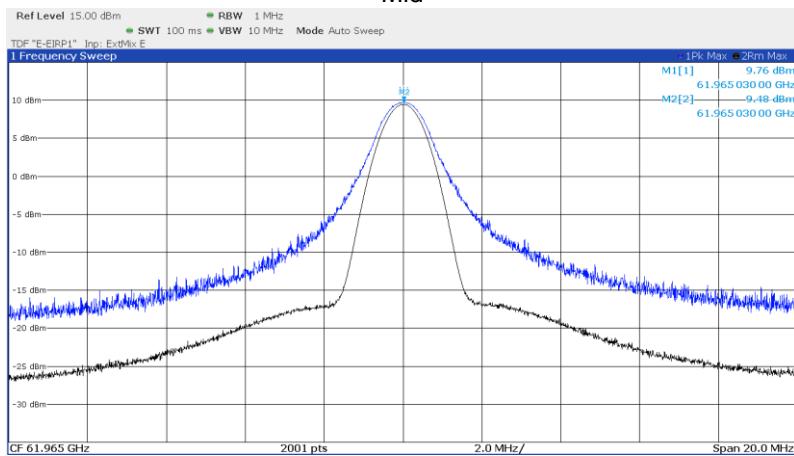
Operating frequency range 2:

Antenna 0


Low









Mid



High

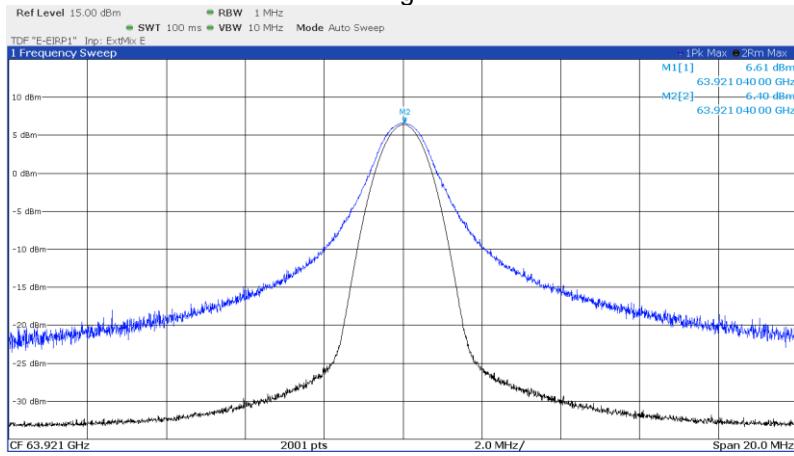

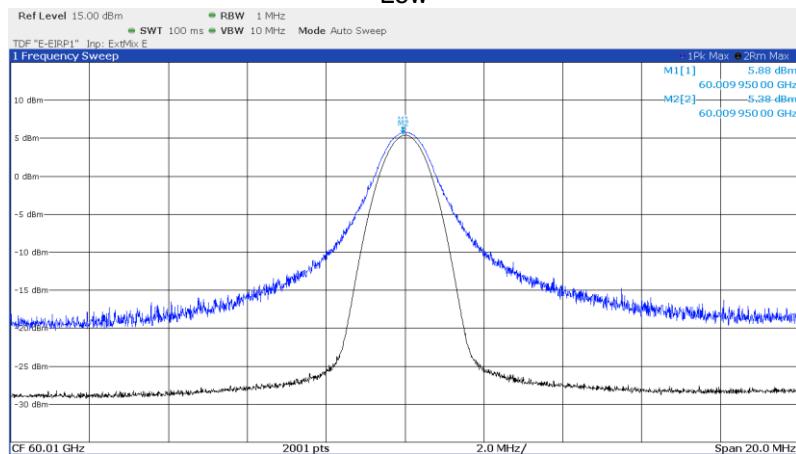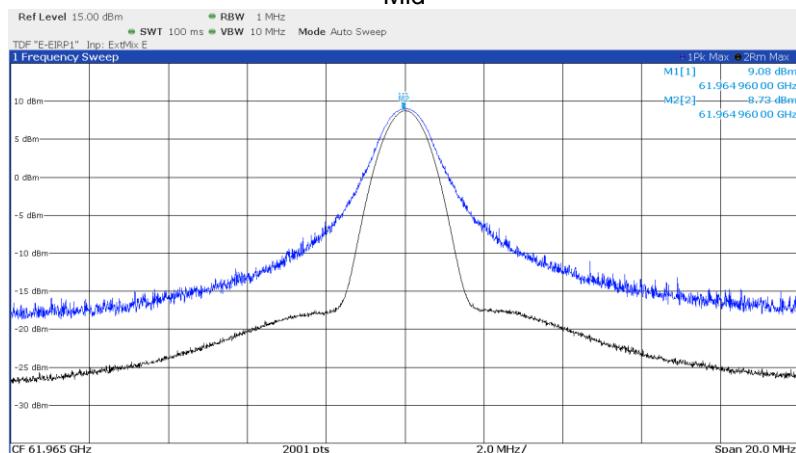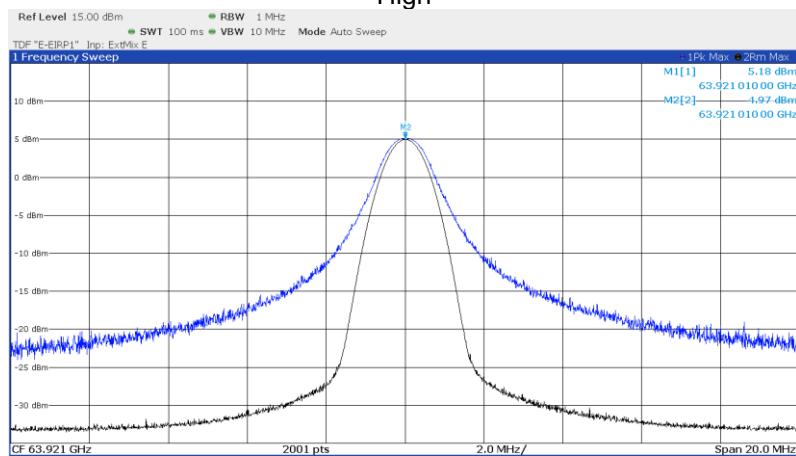Antenna 1
Low

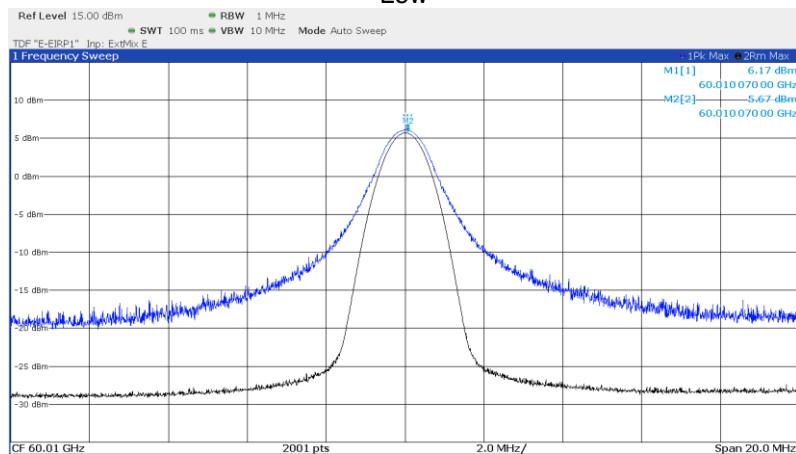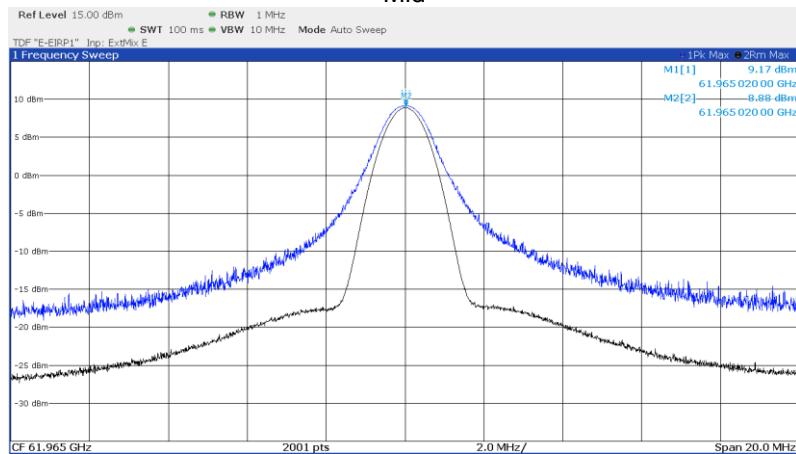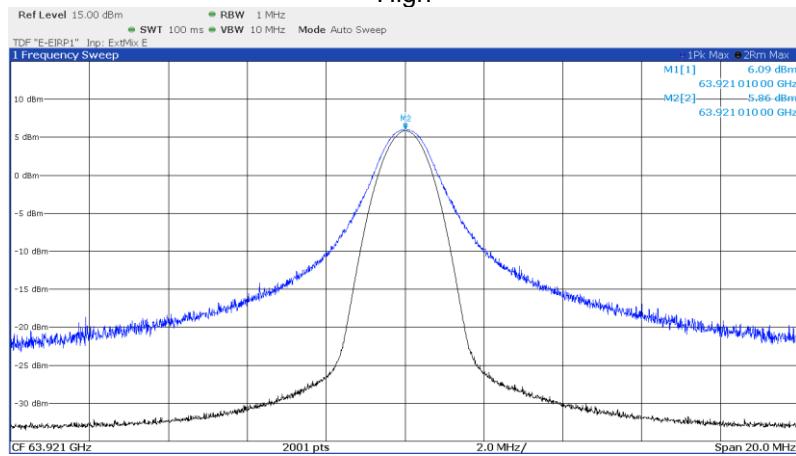Mid

High


Antenna 2
Low

Mid

High


5.4 Peak conducted output power

For test instruments and accessories used see section 6 Part **CPR 3**.

5.4.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 1 m

5.4.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.4.3 Applicable standard

According to FCC Part 15C, Section 15.255(e):

Except as specified paragraph (e)(1) of this section, the peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (c) of this section.

(2): Peak transmitter conducted output power shall be measured with an RF detector that has a detection bandwidth that encompasses the 57–71 GHz band and that has a video bandwidth of at least 10 MHz.

According to RSS-210 J.4(a):

For devices with an emission bandwidth greater than or equal to 100 MHz, the peak transmitter output power shall not exceed 500 mW. For devices with an emission bandwidth less than 100 MHz, the peak transmitter output power shall be less than the product of 500 mW and their emission bandwidth divided by 100 MHz.

According to RSS-210 J.5(b):

Peak power density and peak transmitter output power shall be measured with a radio frequency (RF) detector that has a detection bandwidth encompassing the band 57-71 GHz and a video bandwidth of at least 10 MHz, or using an equivalent measurement method.

5.4.4 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 9.8 and 9.11. The EUT is measured in TX continuous, FMCW stopped, under normal conditions.

Analyser settings:

PK measurement: RBW: 1 MHz VBW: 10 MHz Detector: Peak Trace. Max hold

5.4.5 Test result

Calculation of the peak transmitter output power:

Operating frequency range 1:

Channel	Frequency (GHz)	Antenna	Power setting	EIRP level PK (dBm)	Antenna gain (dBi)	Conducted level PK (dBm)	Conducted level PK (mW)	Limit (mW)	Margin (mW)
low	61.01	0	P0	25.4	28.0	-2.6	0.5	500	-499.5
mid	61.235	0	P0	24.2	28.0	-3.8	0.4	500	-499.6
high	61.46	0	P0	25.3	28.0	-2.7	0.5	500	-499.5
low	61.01	1	P0	25.1	28.0	-2.9	0.5	500	-499.5
mid	61.235	1	P0	24.8	28.0	-3.2	0.5	500	-499.5
high	61.46	1	P0	26.6	28.0	-1.4	0.7	500	-499.3
low	61.01	2	P0	24.3	28.0	-3.7	0.4	500	-499.6
mid	61.235	2	P0	23.9	28.0	-4.1	0.4	500	-499.6
high	61.46	2	P0	25.5	28.0	-2.5	0.6	500	-499.4

Operating frequency range 2:

Channel	Frequency (GHz)	Antenna	Power setting	EIRP level PK (dBm)	Antenna gain (dBi)	Conducted level PK (dBm)	Conducted level PK (mW)	Limit (mW)	Margin (mW)
low	60.01	0	P17	6.4	28.0	-21.6	0.007	500	-500.0
mid	61.965	0	P17	9.8	28.0	-18.2	0.015	500	-500.0
high	63.921	0	P17	6.6	28.0	-21.4	0.007	500	-500.0
low	60.01	1	P19	5.9	28.0	-22.1	0.006	500	-500.0
mid	61.965	1	P19	9.1	28.0	-18.9	0.013	500	-500.0
high	63.921	1	P19	5.2	28.0	-22.8	0.005	500	-500.0
low	60.01	2	P17	6.2	28.0	-21.8	0.007	500	-500.0
mid	61.965	2	P17	9.2	28.0	-18.8	0.013	500	-500.0
high	63.921	2	P17	6.1	28.0	-21.9	0.006	500	-500.0

EIRP limit according to FCC Part 15C, Section 15.255(e):

Except as specified paragraph (e)(1) of this section, the peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (c) of this section.

(1) Transmitters with an emission bandwidth of less than 100 MHz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).

EIRP limit according to RSS-210 J.4:

For devices with an emission bandwidth greater than or equal to 100 MHz, the peak transmitter output power shall not exceed 500 mW. For devices with an emission bandwidth less than 100 MHz, the peak transmitter output power shall be less than the product of 500 mW and their emission bandwidth divided by 100 MHz.

For the purposes of demonstrating compliance with this RSS, corrections to the transmitter output power may be made to compensate for antenna and circuit loss.

For the purpose of this standard, emission bandwidth is defined as the instantaneous frequency range occupied by a steady radiated signal with modulation, outside which the radiated power spectral density shall be 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth. The centre frequency must be stationary during the measurement interval, even if not stationary during normal operation.

Determination of the limit:

The limit is given as 500 mW (EBW 6 dB > 100 MHz)

The requirements are **FULFILLED**.

Remarks: For determination of emission bandwidth please refer to section 5.2.

5.5 Spurious emissions

For test instruments and accessories used see section 6 Part **SER1, SER 2, SER 3**.

5.5.1 Description of the test location

Test location: OATS 1
Test distance: 3 m

Test location: Anechoic chamber 1
Test distance: 3 m (1 GHz – 40 GHz)
Test distance: 1 m (40 GHz – 200 GHz)

5.5.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.5.3 Applicable standard

According to FCC Part 15C, Section 15.255 (d):

- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm² at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

According to RSS-210 J.3:

The power of any emissions outside the band 57-71 GHz shall consist solely of spurious emissions and shall not exceed:

- a) the fundamental emission levels
- b) the general field strength limits specified in RSS-Gen for emissions below 40 GHz
- c) 90 pW/cm² at a distance of 3 m for emissions between 40 GHz and 200 GHz

5.5.4 Description of Measurement

The radiated emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 9. In the frequency range above 1 GHz a spectrum analyser is used with appropriate linear polarized antennas. If the emission level in peak mode complies with the average limit testing is stopped and peak values will be reported, otherwise, the emission is measured in average mode again and reported. The EUT is measured in TX continuous mode under normal conditions.

Instrument settings:

9 kHz – 150 kHz:	RBW: 200 Hz,	Detector: Quasi peak, Mes. Time: 1 s,
150 kHz – 30 MHz:	RBW: 9 kHz,	Detector: Quasi peak, Mes. Time: 1 s,
30 MHz – 1 GHz:	RBW: 120 MHz,	Detector: Quasi peak, Mes. Time: 1 s,
1 GHz – 26 GHz:	RBW: 1 MHz, VBW: 3 MHz,	Detector: Max. peak, Trace: Max. hold, Sweep: Auto


5.5.5 Test result f < 1 GHz

FCC Part 15.209 Radiated emission limits; general requirements (< 30 MHz)									
Frequency (kHz)	PK reading (dB μ V)	QP reading (dB μ V)	AV reading (dB μ V)	Ant. factor (dB)	Distance corr. (dB)	AV level (dB μ V/m)	QP level (dB μ V/m)	Limit (dB μ V/m)	Dlimit (dB)
15.0	43.6	27.1	23.6	20.0	-80.0	-36.4	-32.9	44.1	-80.5
25.4	29.0	22.9	20.0	20.0	-80.0	-40.0	-37.1	39.5	-79.5
48.5	24.3	16.5	13.8	20.0	-80.0	-46.2	-43.5	33.9	-80.1
106.4	16.3	8.5	5.9	20.0	-80.0	-54.1	-51.5	27.1	-78.6
4380.5	23.2	6.9	0.5	20.0	-40.0	-19.5	-13.1	29.5	-42.6
7792.8	15.5	6.0	-0.2	20.0	-40.0	-4.5	-14.0	29.5	-43.5
10712.7	21.4	5.2	-0.6	20.0	-40.0	1.4	-14.8	29.5	-44.3
13155.0	21.8	5.4	-0.5	20.0	-40.0	1.8	-14.6	29.5	-44.1

Note: Frequencies in bold characters fall into AV ranges

RSS-Gen 8.9 Radiated emission limits; general requirements (< 30 MHz)							
Frequency (kHz)	QP reading (dB μ V)	QP calc. (dB μ A)	Ant. factor (dB)	Distance corr. (dB)	Corr. QP level (dB μ A/m)	Limit (dB μ A/m)	Dlimit (dB)
15.0	27.1	-24.4	20.0	-80.0	-84.4	12.6	-97.0
25.4	22.9	-28.6	20.0	-80.0	-88.6	8.0	-96.6
48.5	16.5	-35.0	20.0	-80.0	-95.0	2.4	-97.4
106.4	8.5	-43.0	20.0	-80.0	-103.0	-4.5	-98.5
4380.5	6.9	-44.6	20.0	-40.0	-64.6	-21.9	-42.7
7792.8	6.0	-45.5	20.0	-40.0	-65.5	-21.9	-43.6
10712.7	5.2	-46.3	20.0	-40.0	-66.3	-21.9	-44.4
13155.0	5.4	-46.1	20.0	-40.0	-66.1	-21.9	-44.2

Frequency (MHz)	Reading Vert. (dB μ V)	Reading Hor. (dB μ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB μ V/m)	Level Hor. (dB μ V/m)	Limit (dB μ V/m)	Dlimit (dB)
79.22	5.5	-4.2	14.3	14.7	19.8	10.5	40.0	-20.2
125.00	11.0	-2.4	17.9	17.2	28.9	14.8	43.5	-14.6
300.00	4.2	4.1	20.2	20.7	24.4	24.8	46.0	-21.2
375.00	-5.9	4.3	22.4	22.8	16.5	27.1	46.0	-18.9
450.00	-2.7	-0.5	24.4	24.8	21.7	24.3	46.0	-21.7
649.94	-2.8	-7.1	28.7	29.2	25.9	22.1	46.0	-20.1


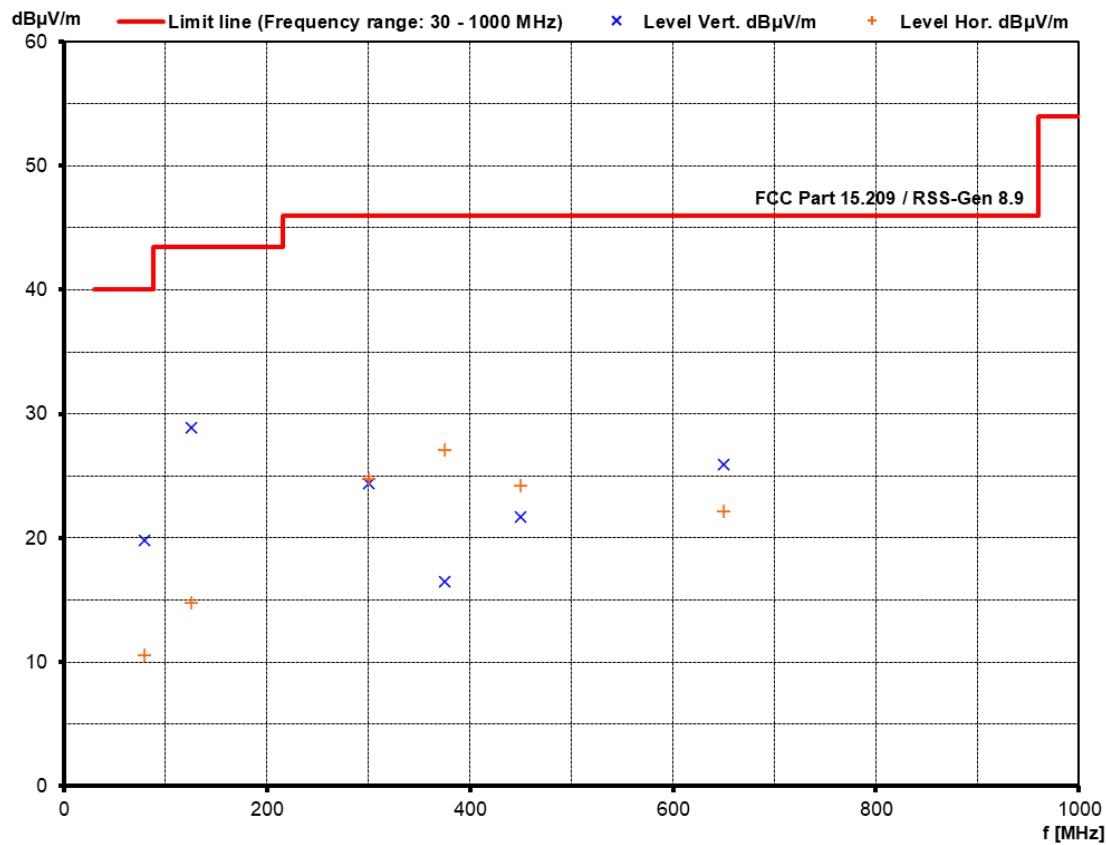




Note: For frequencies < 1 GHz the general radiated limit has been applied.



5.5.6 Test result 1 GHz < f < 40 GHz

Operating frequency range 1:

Low, 61.01 GHz:

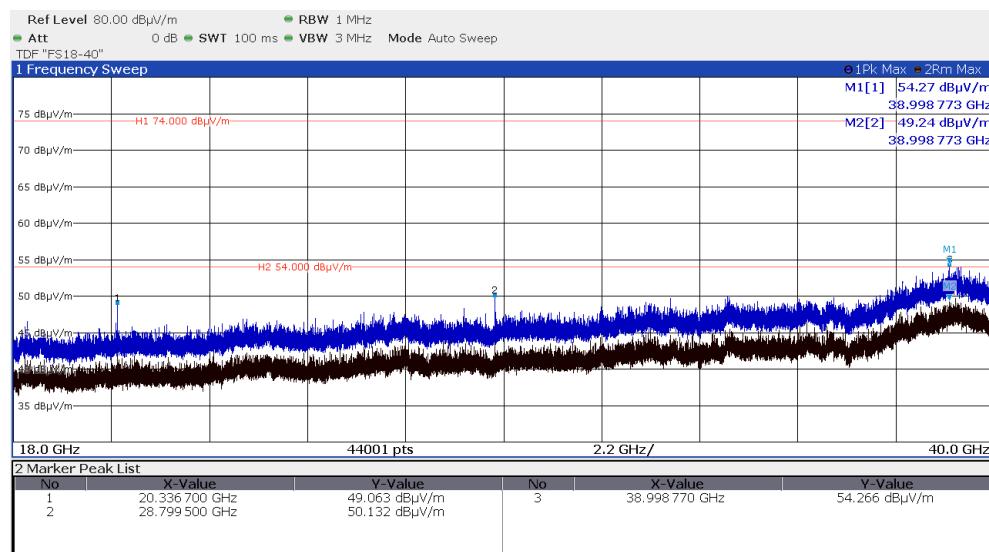
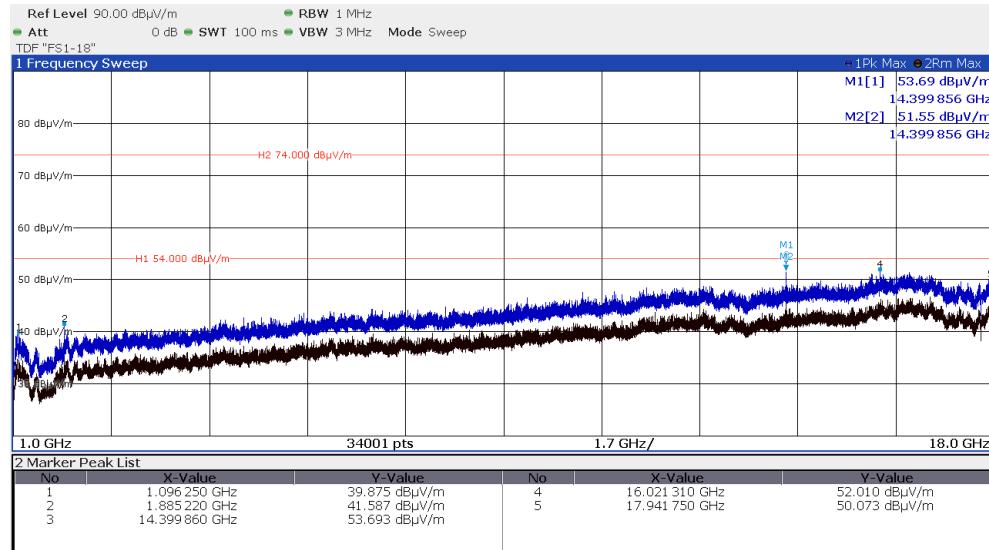


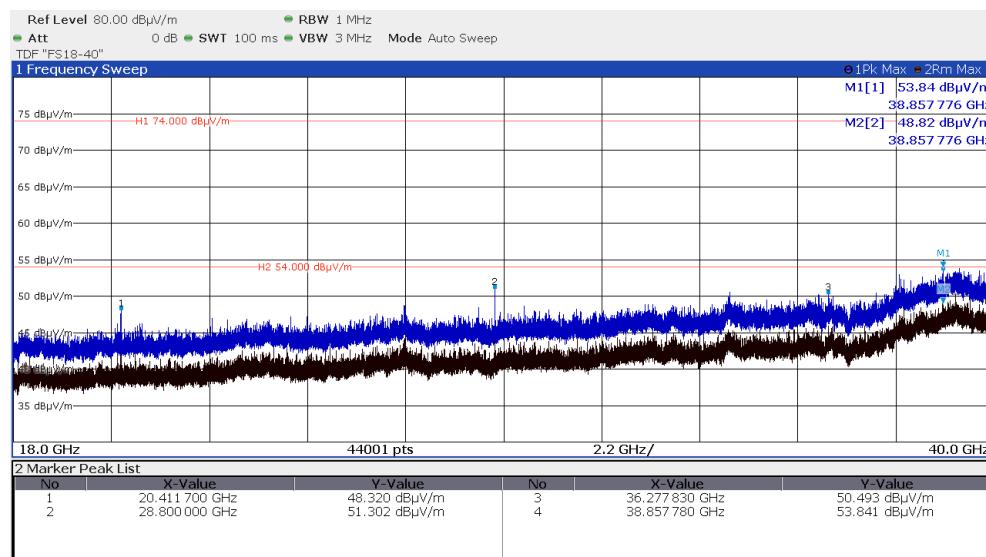
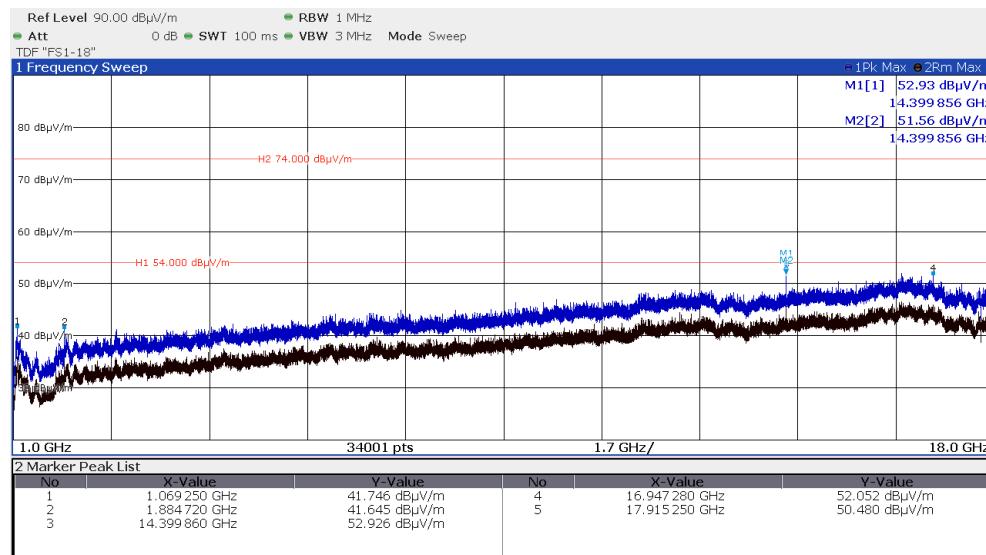
Mid, 61.235 GHz:

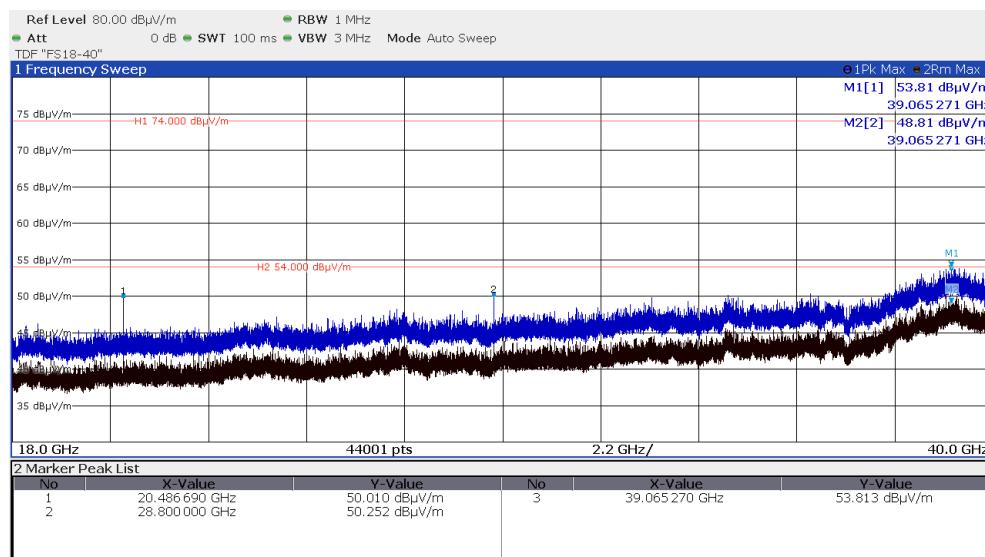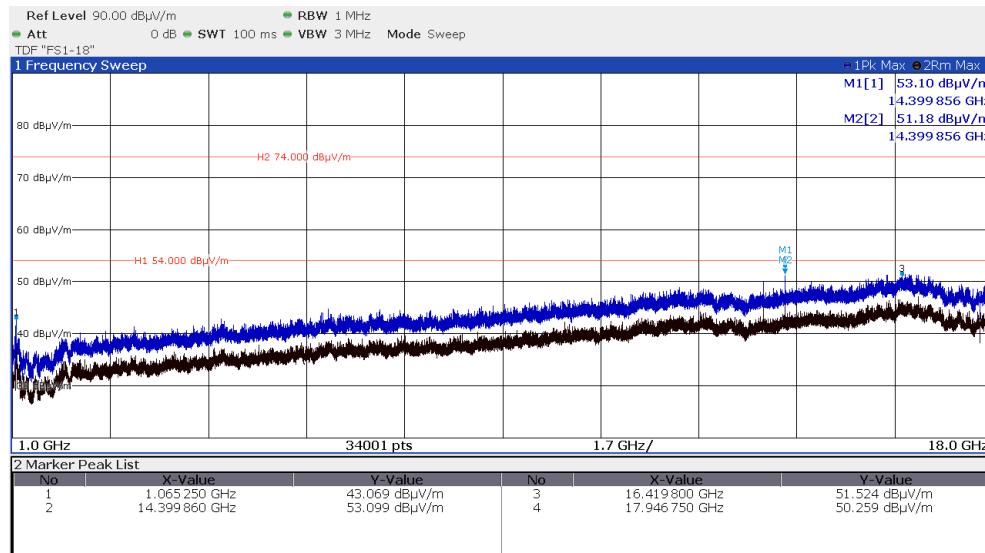
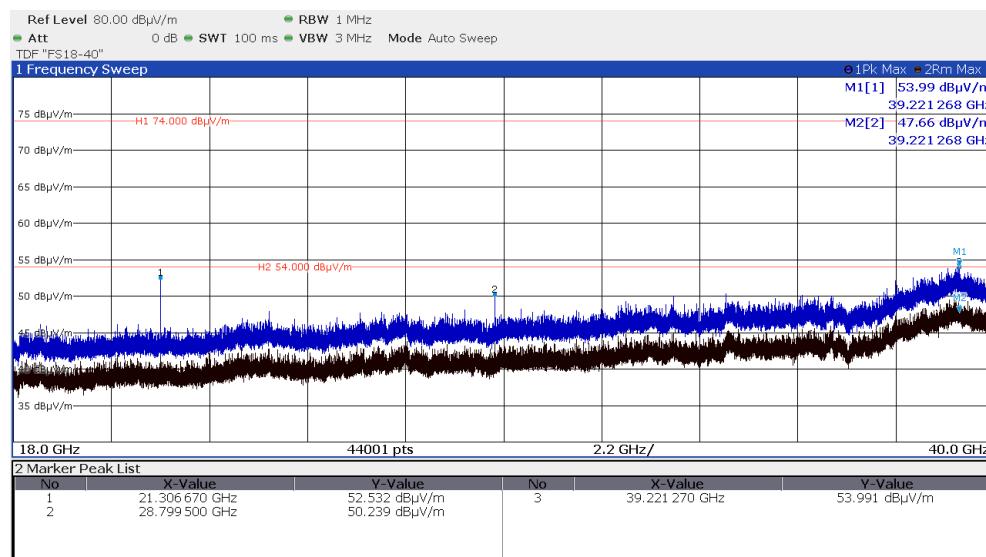
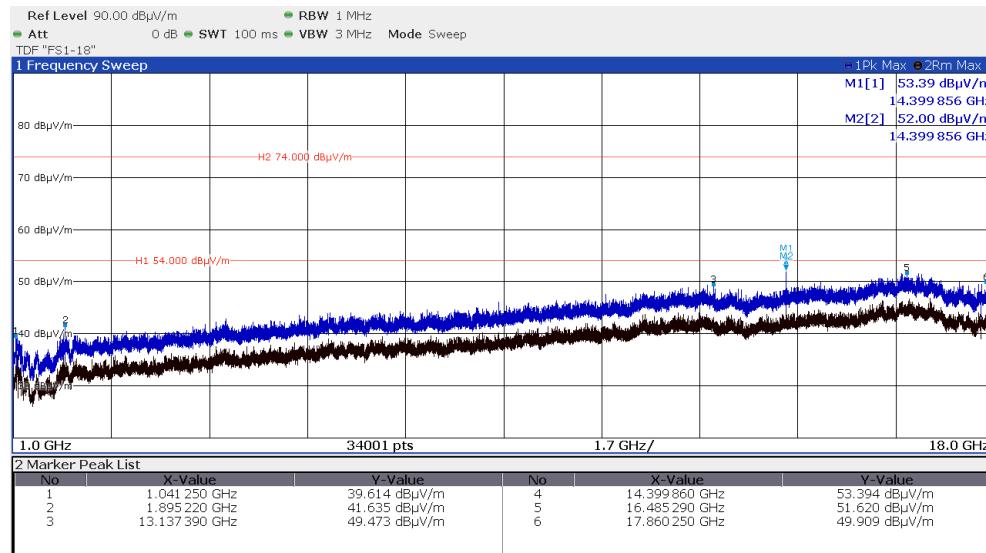
High, 61.46 GHz:


Operating frequency range 2:

Low, 60.01 GHz:

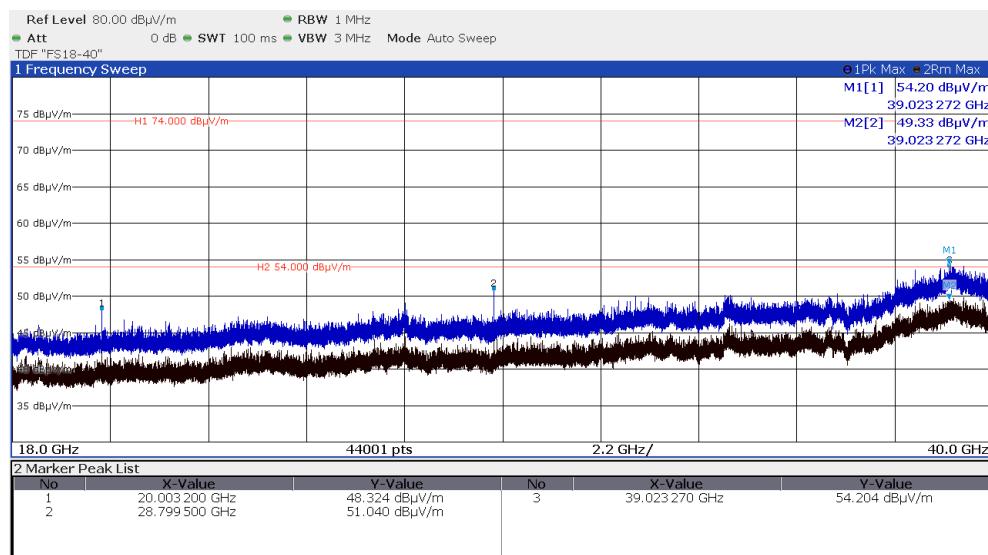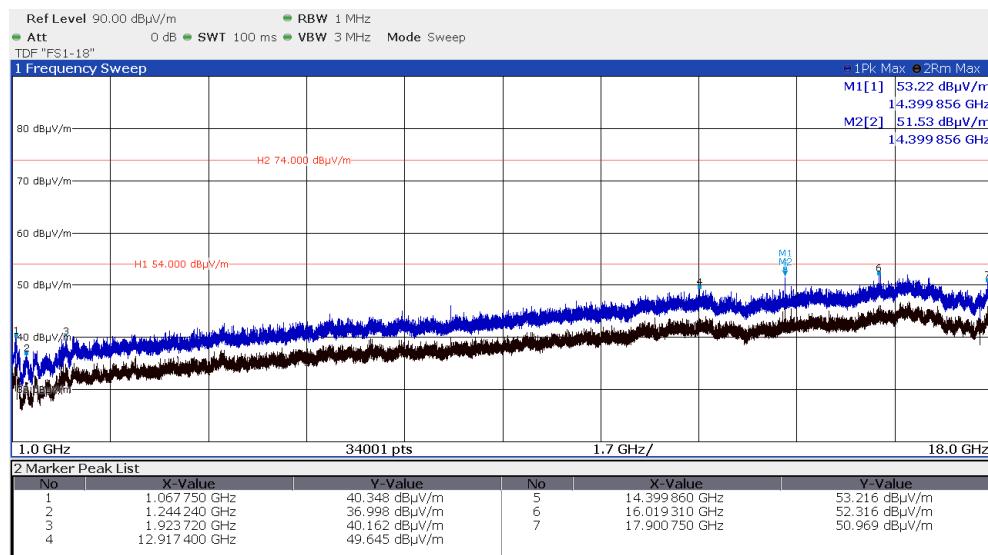

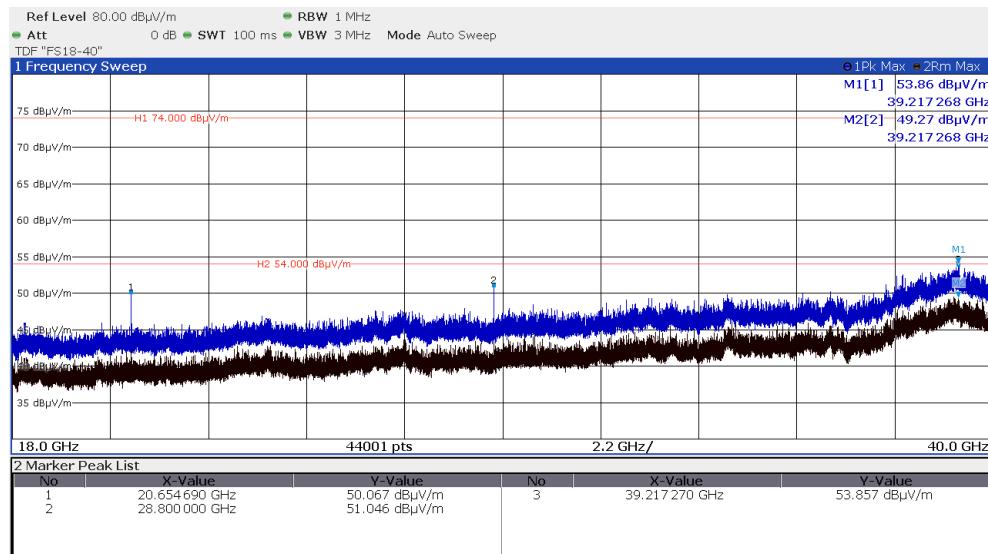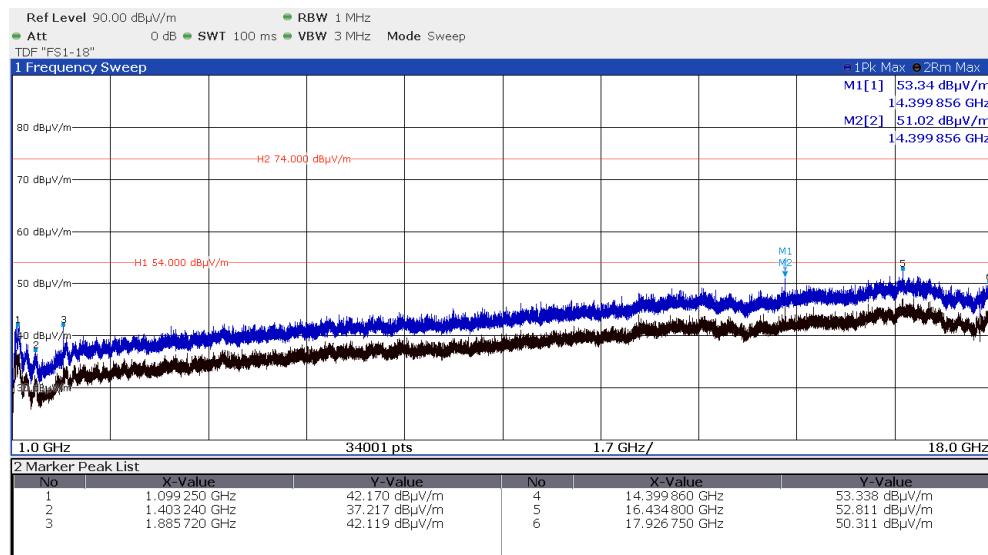Mid, 61.965 GHz:


High, 63.921 GHz:


Note: For frequencies < 40 GHz the general radiated limit has been applied.

5.5.7 Test result $f > 40$ GHz

Determination of the EIRP emission limit for $f > 40$ GHz:

For calculation of the limit the friis formula is used.

$$P_d = \frac{P_{out} * G}{4 * \pi * r^2}$$

$P_{out} * G = \text{EIRP}$;
Therefore

$$\text{EIRP} = P_d * 4 * \pi * r^2$$


$$\text{EIRP} = -9.9 \text{ dBm}$$

where


r is the measurement distance (3 m)
 P_d is the emission density (90 pW/cm²)

Operating frequency range 1:




Low, 61.01 GHz:

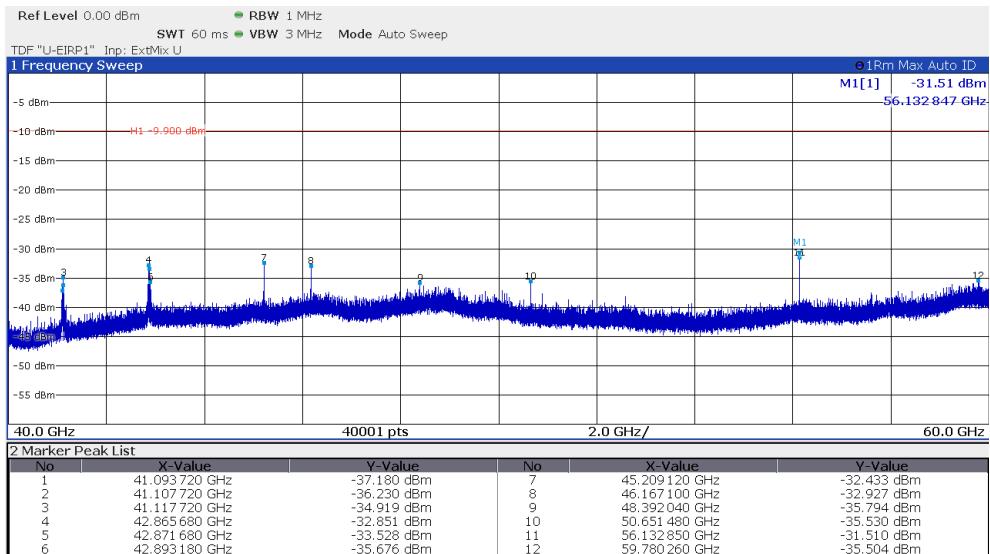


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

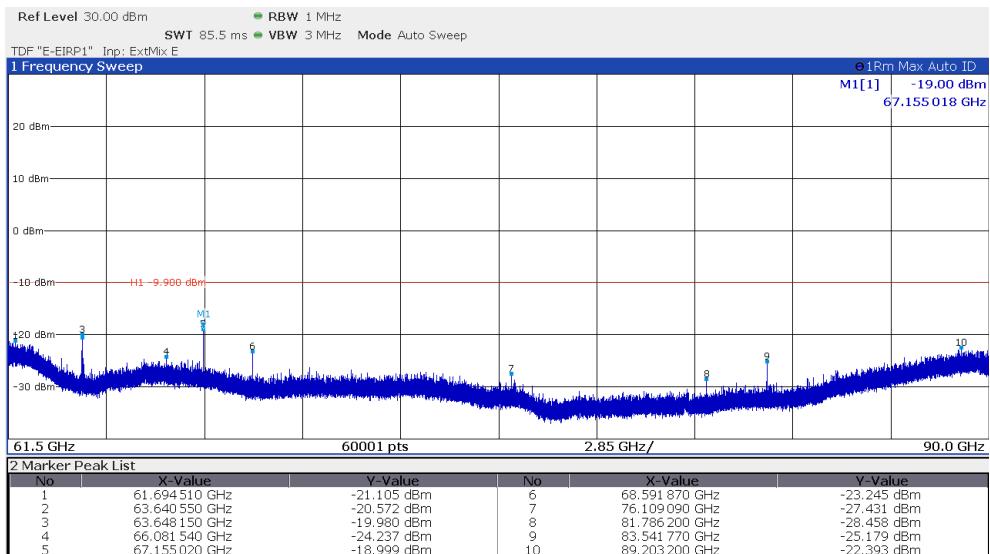


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

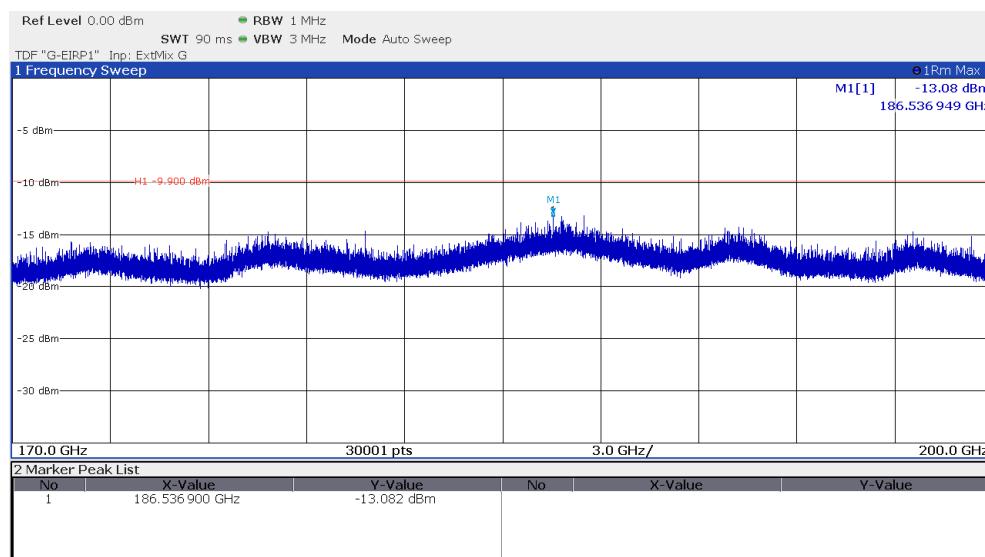
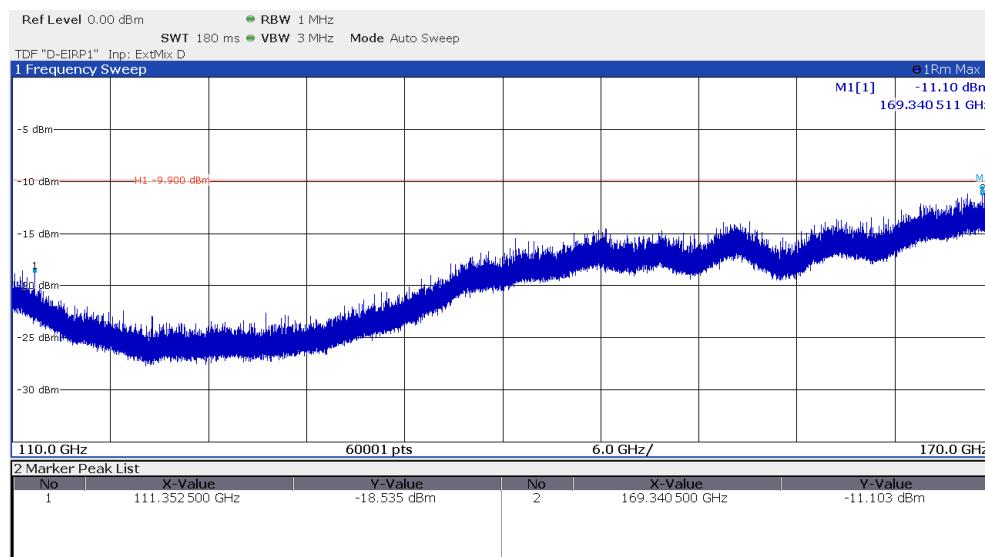
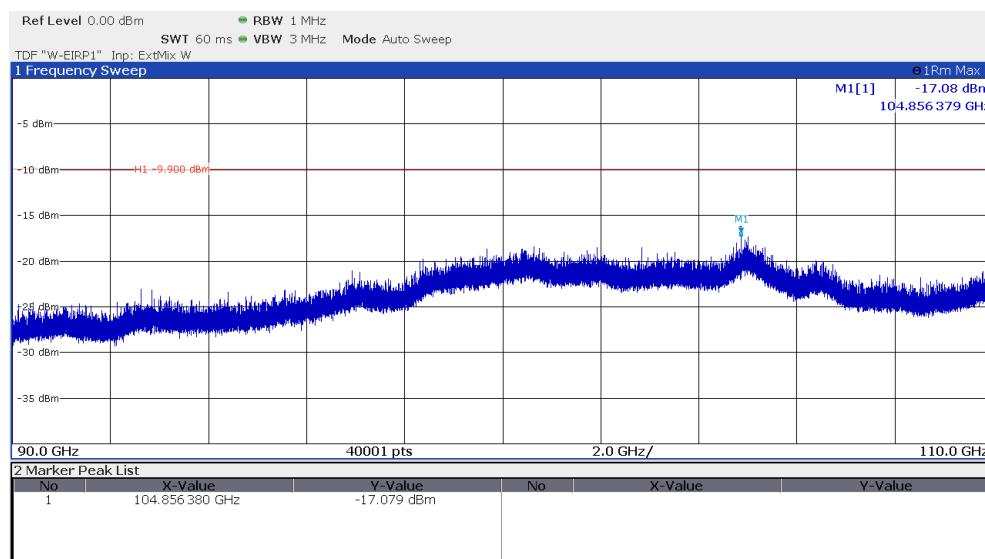


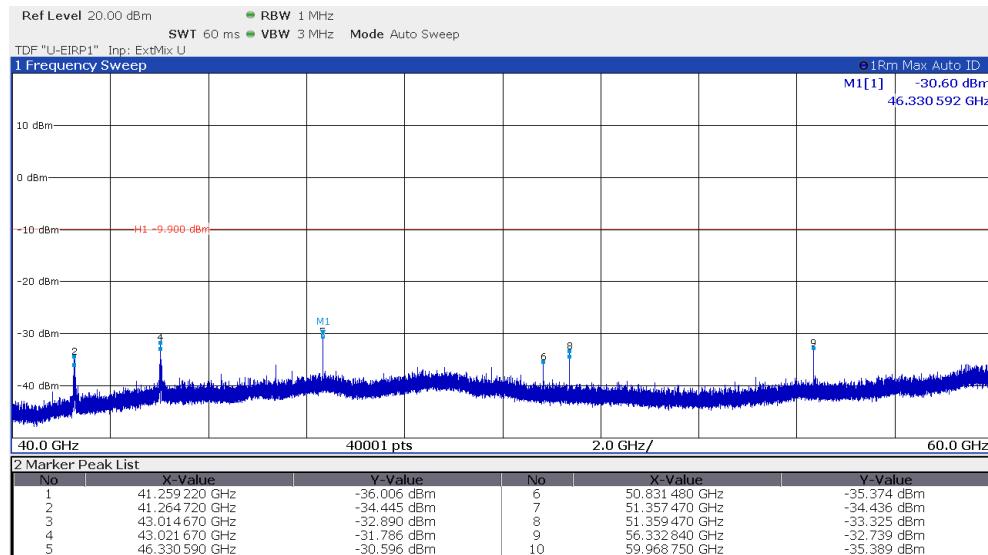
Mid, 61.235 GHz:


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

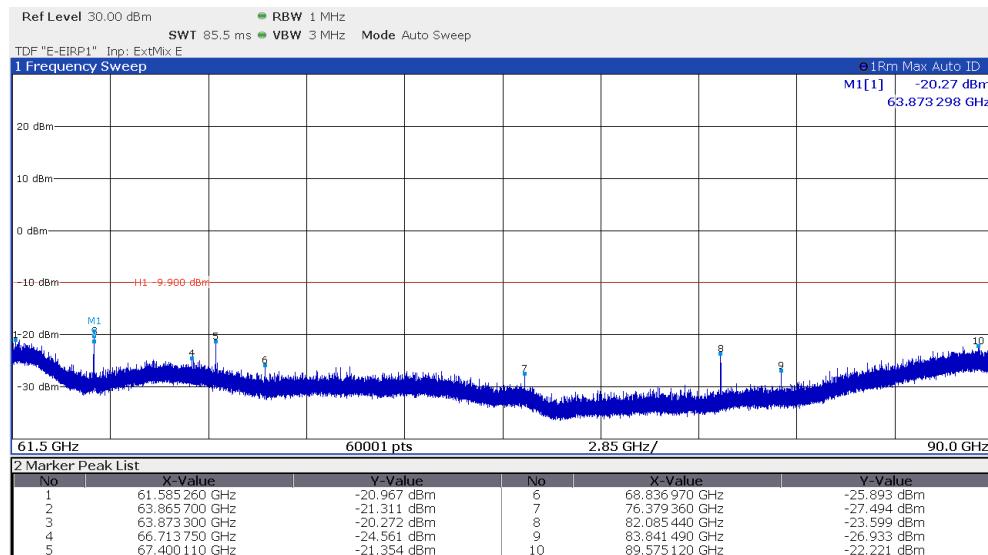


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

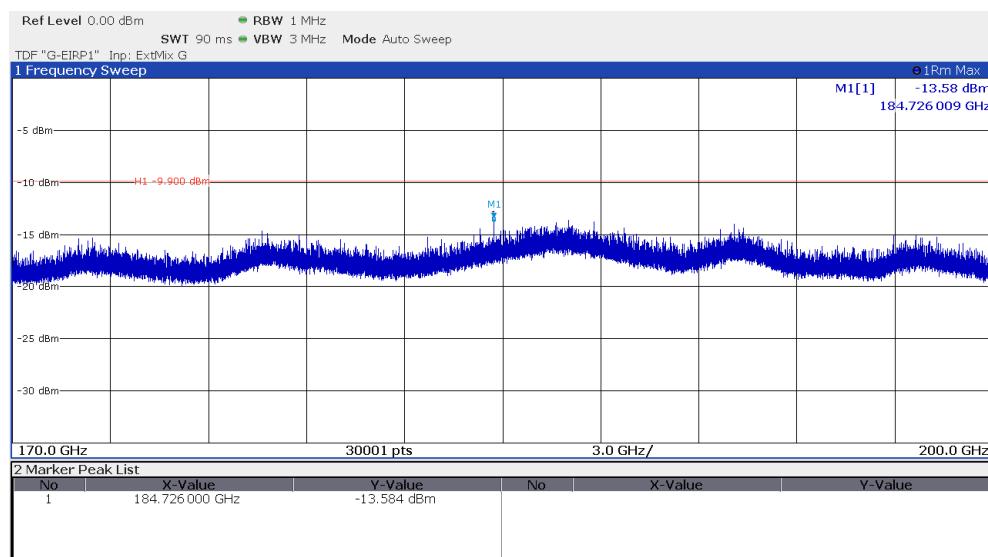
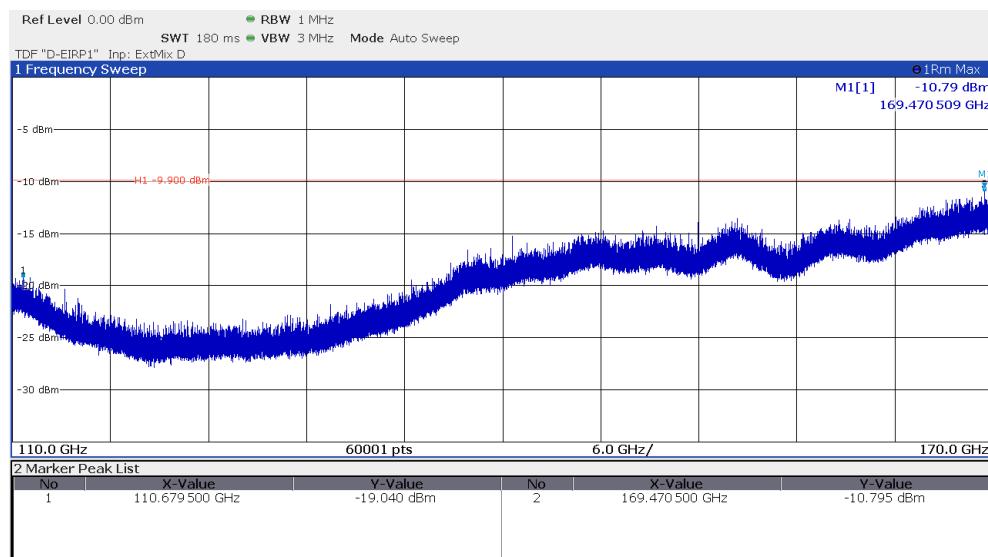
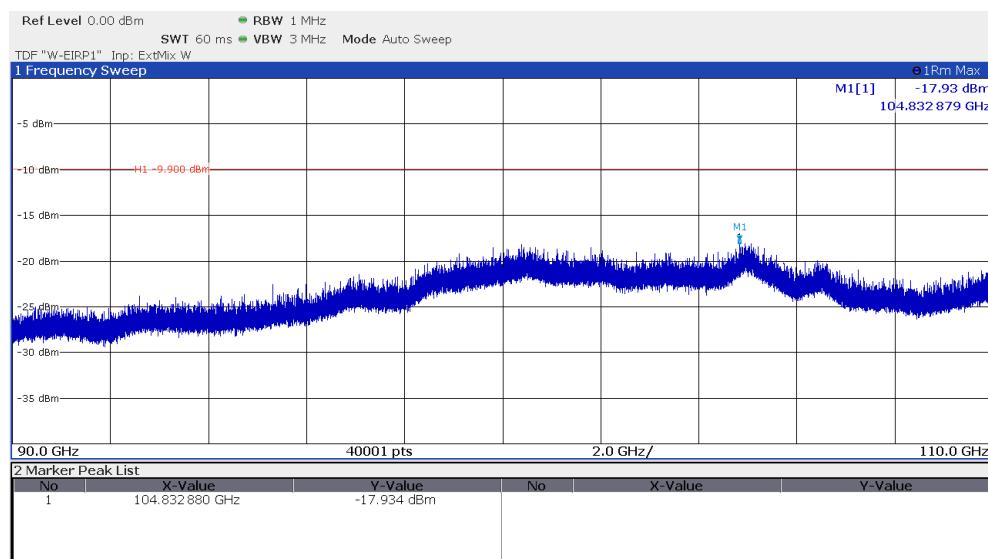


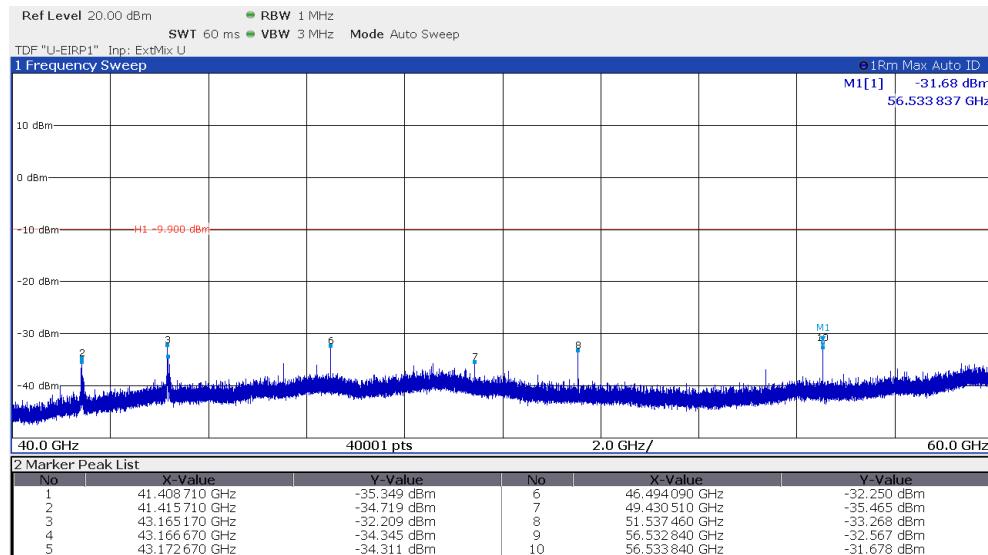
High, 61.46 GHz:


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

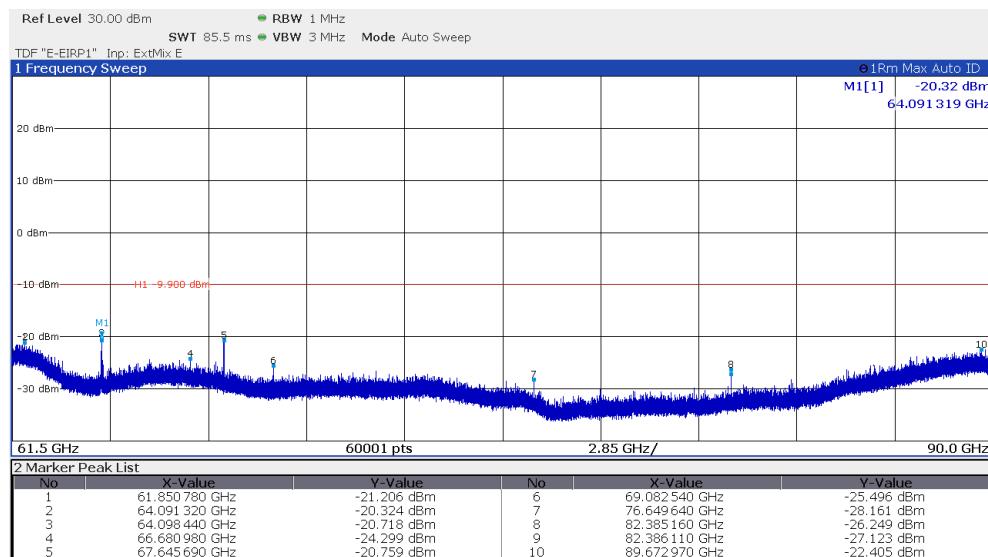


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

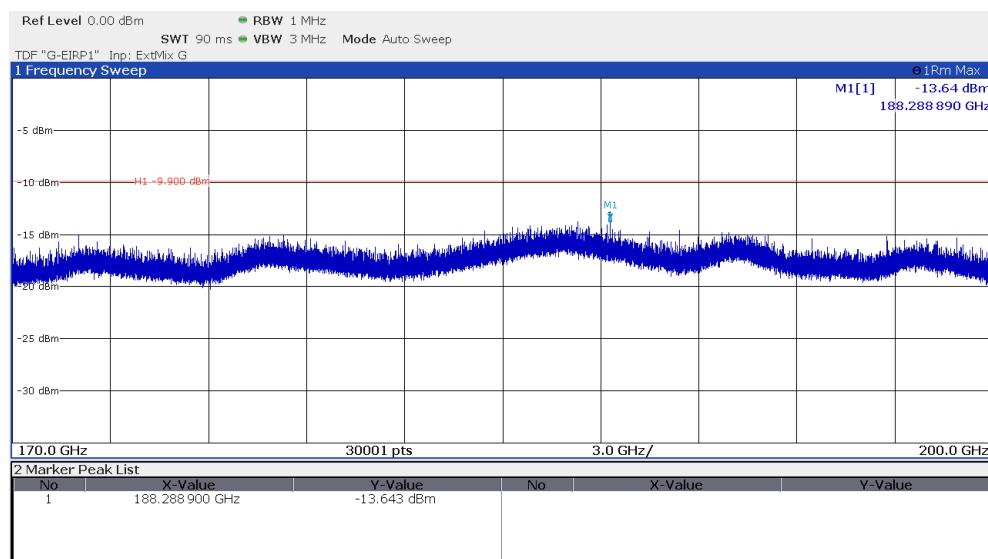
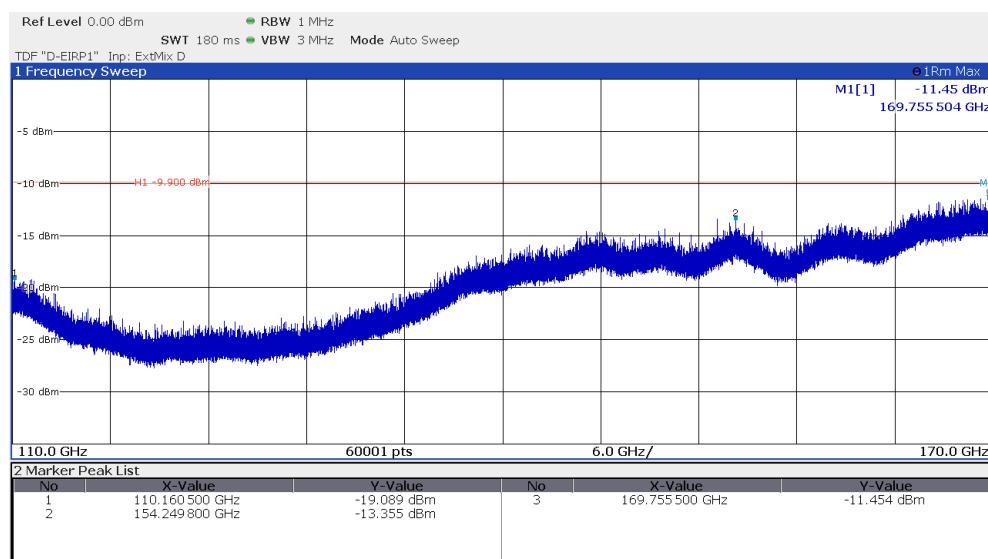
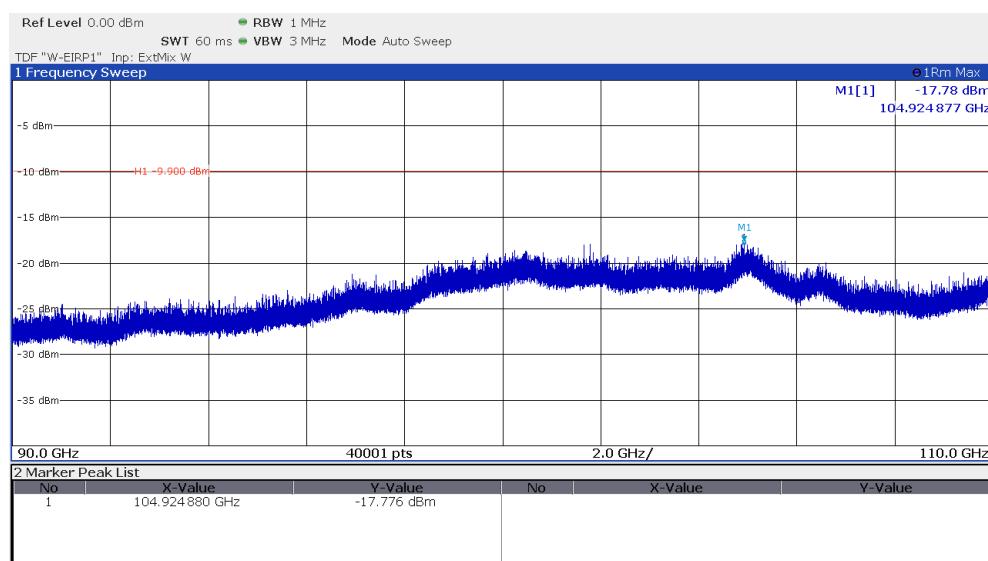


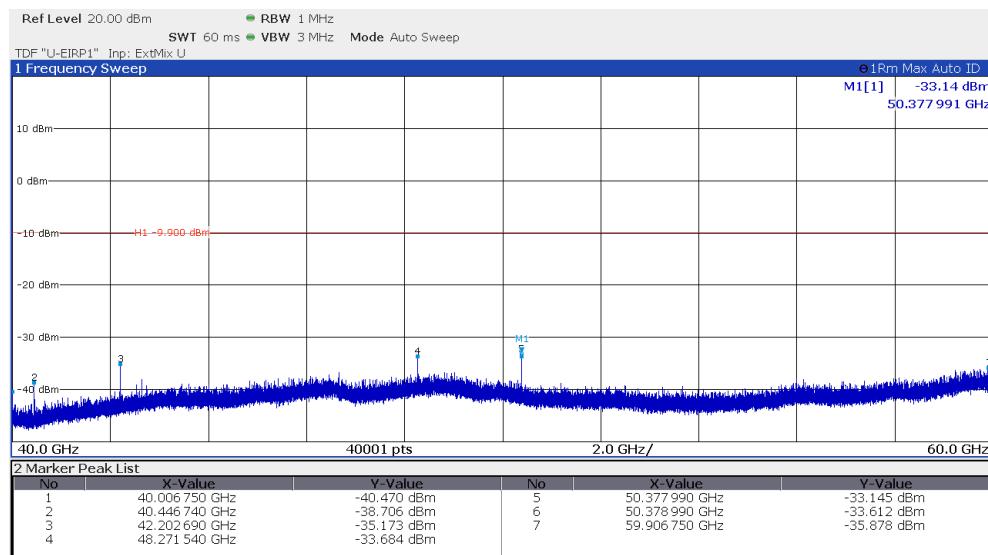
Operating frequency range 2:
Low, 60.01 GHz:


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

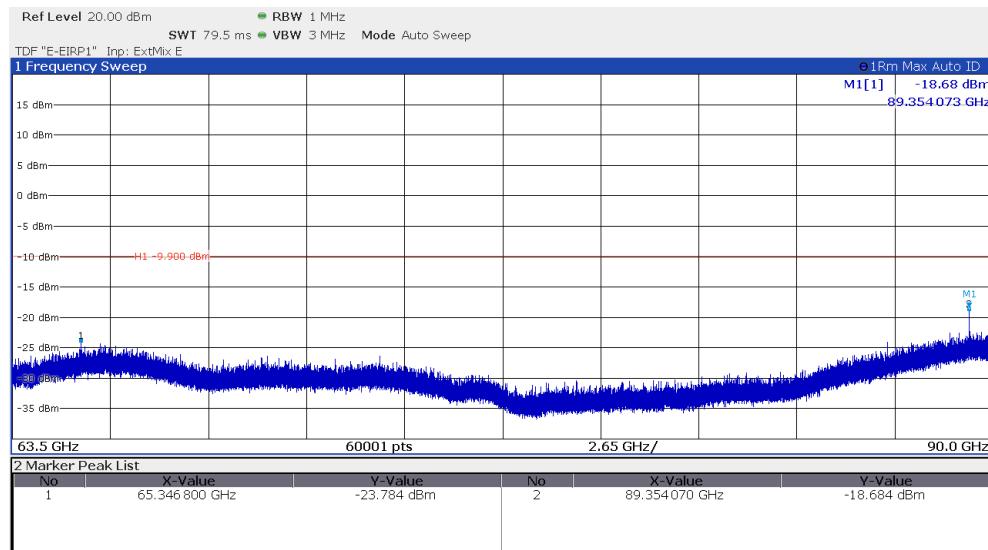


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

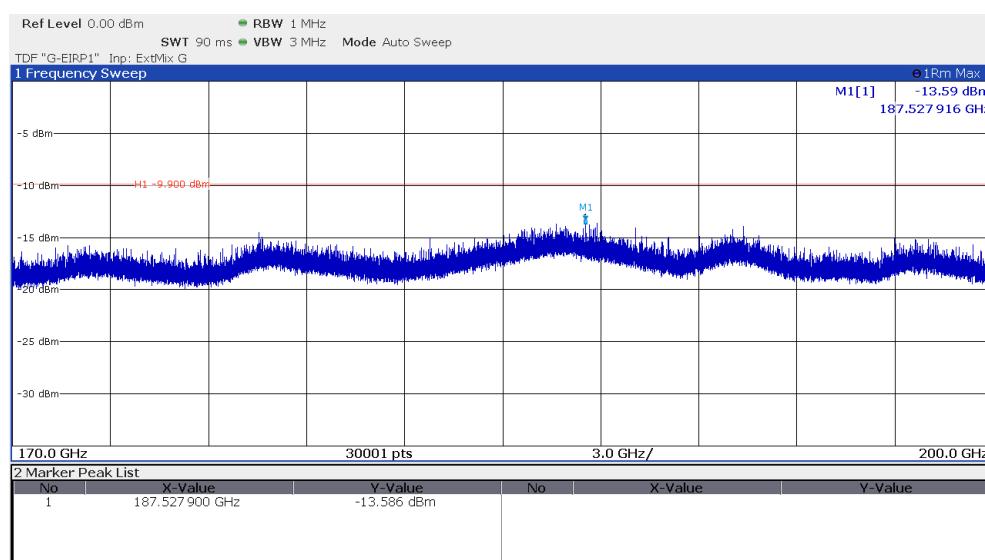
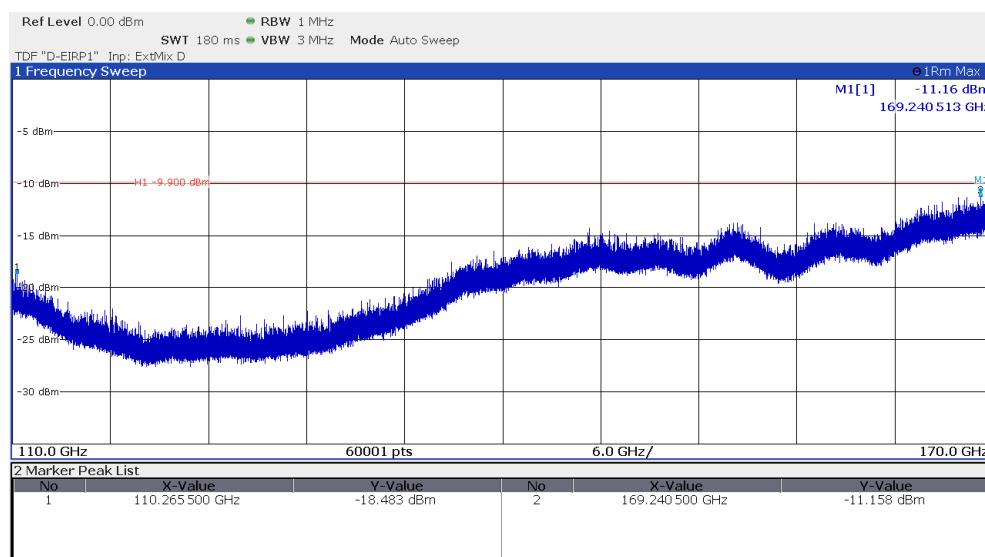
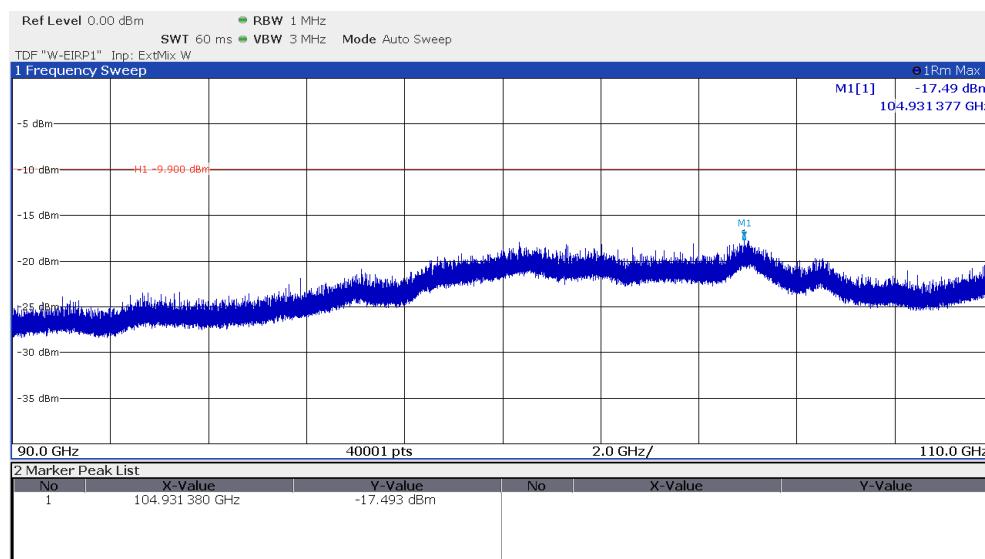


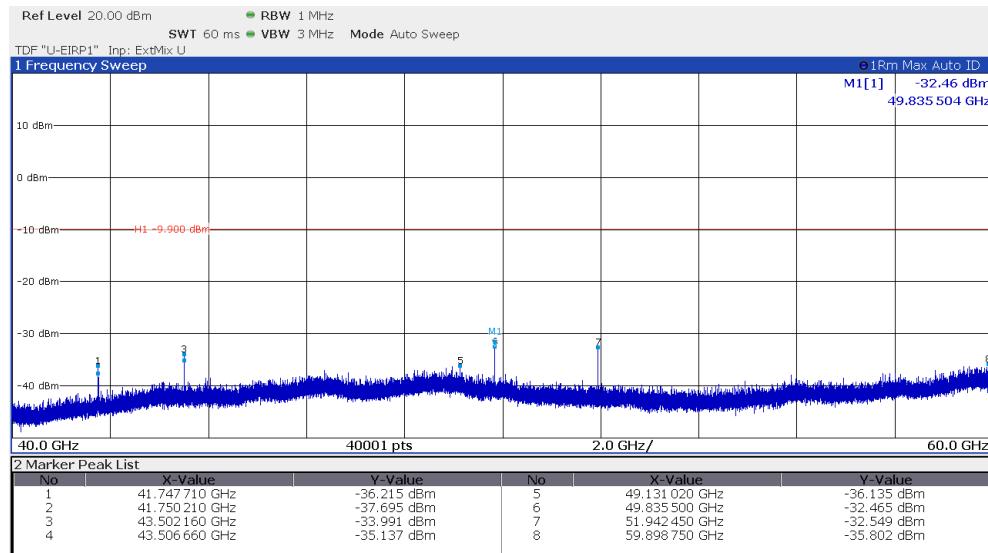
Mid, 61.965 GHz:


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

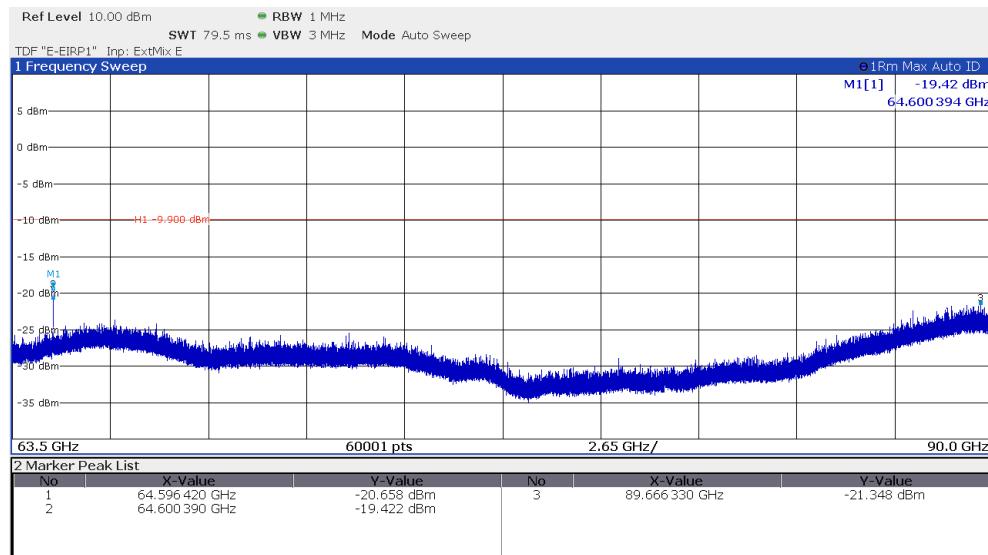


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

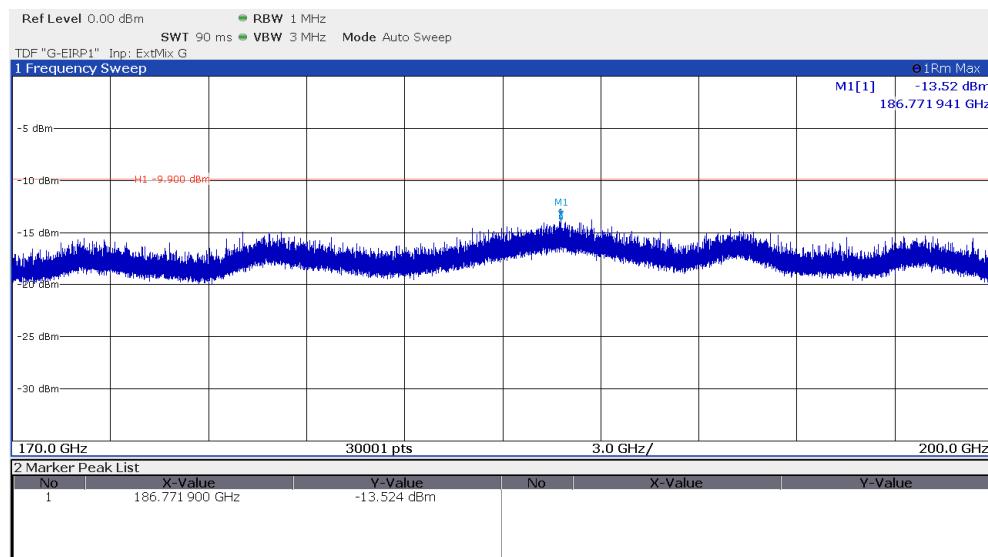
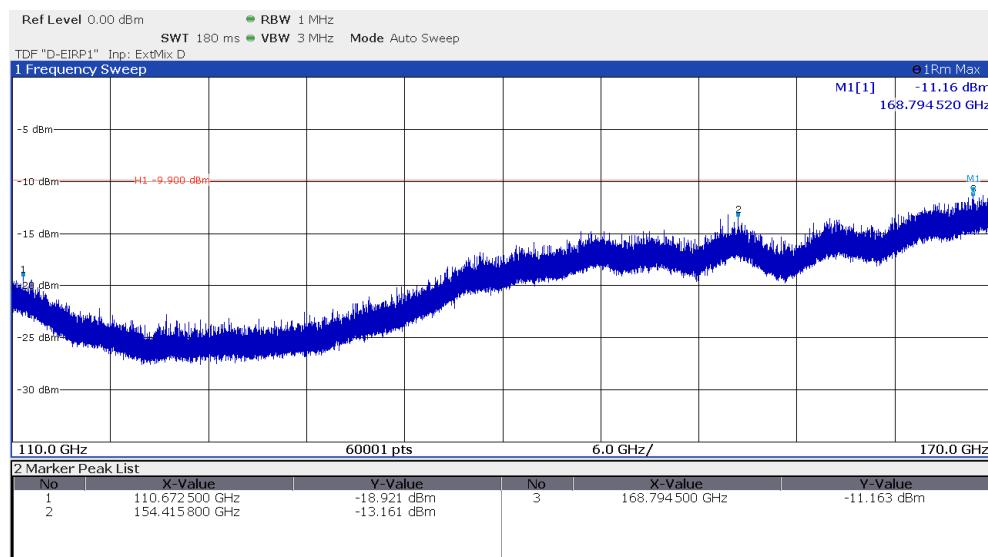
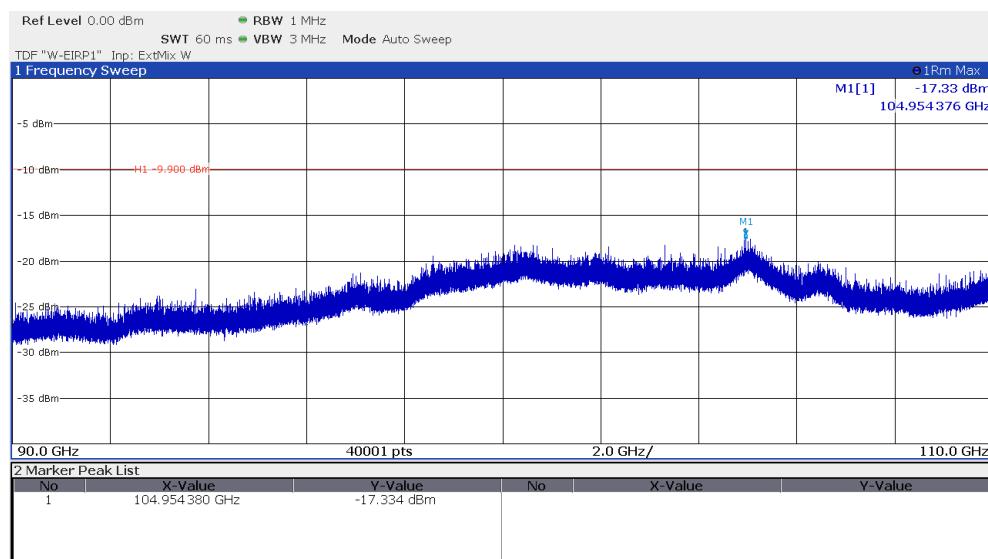


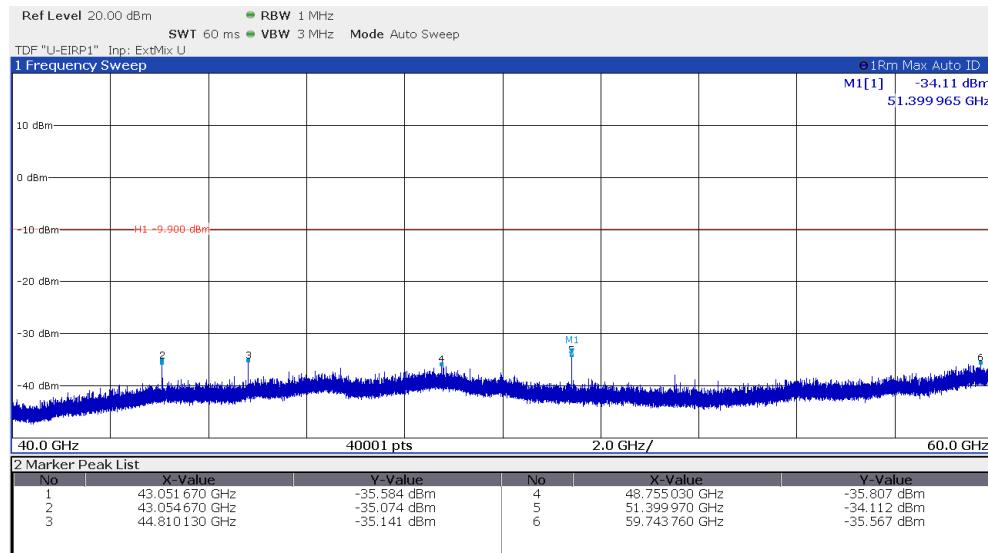High, 63.921 GHz:


Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

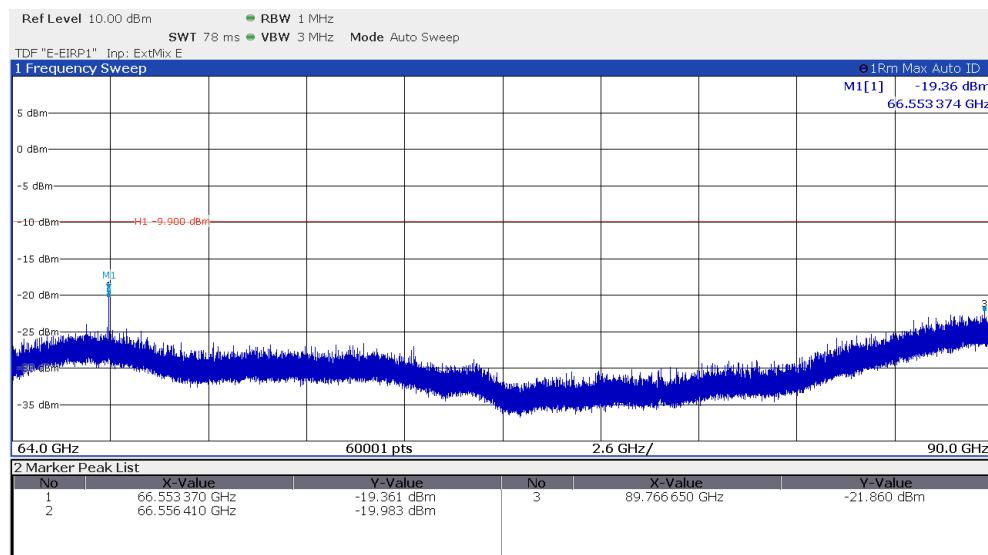

Note: To minimize unintended mixing products generated by the external mixer the AutoID function was used.

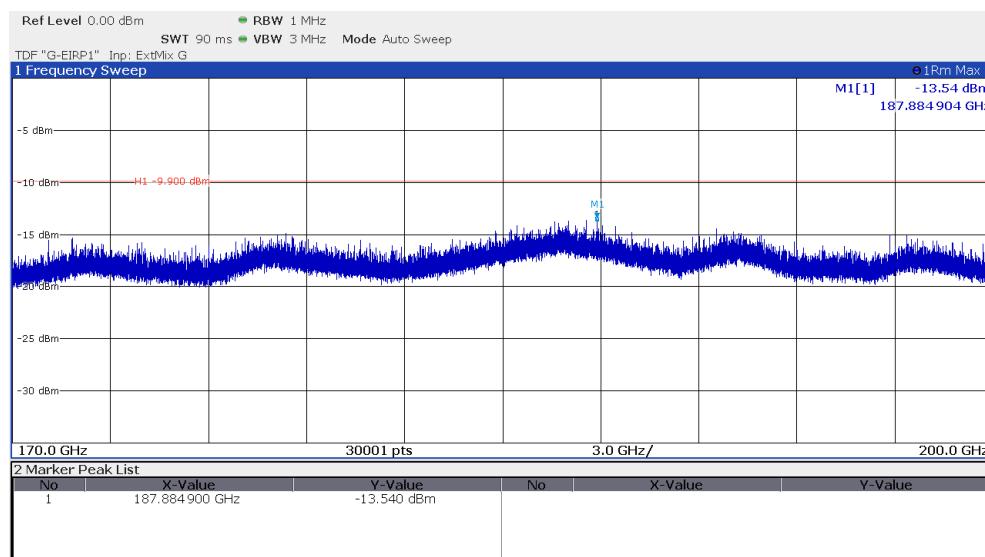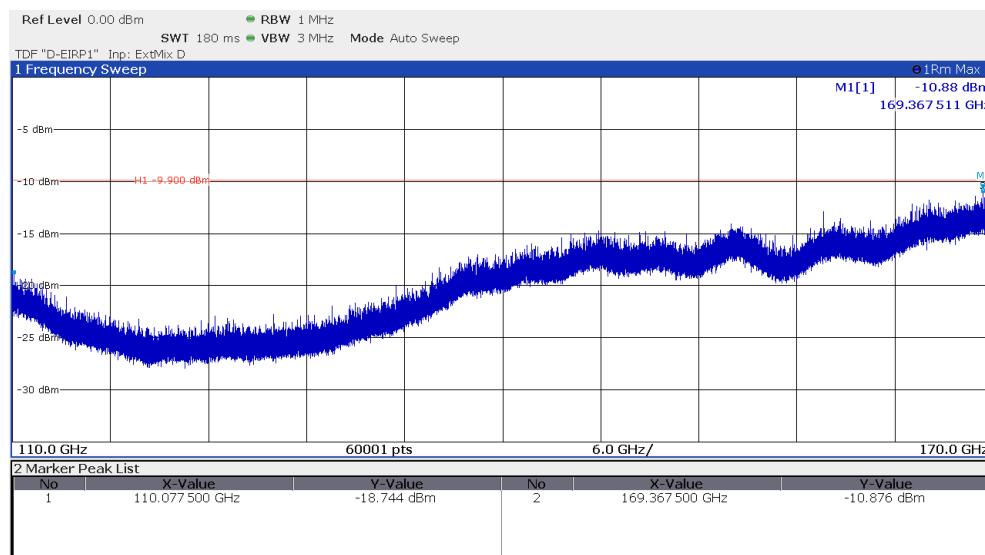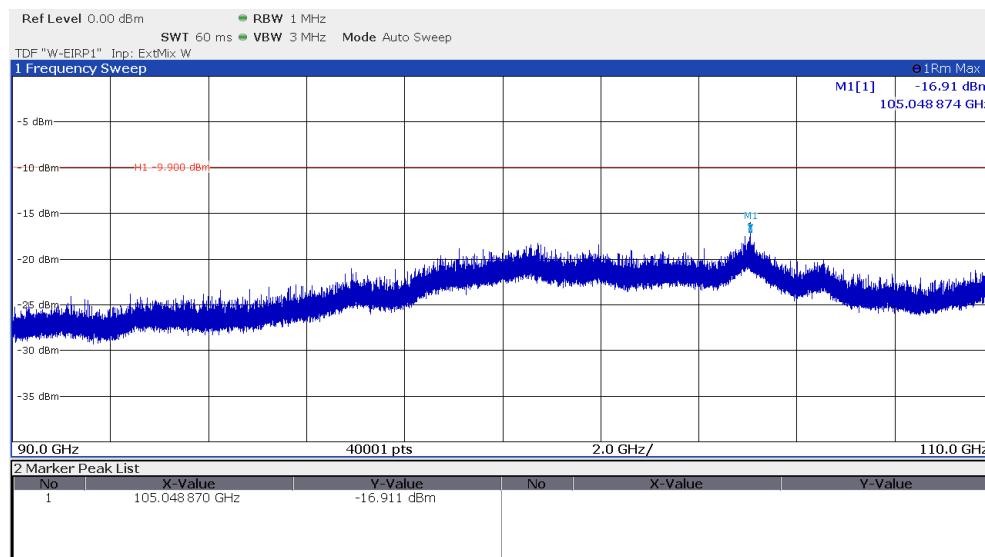

Average limit according to FCC Part 15C, Section 15.255(d):

- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm² at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

General radiated limit according to FCC Part 15C, Section 15.209:

Frequency (MHz)	15.209 Limits (μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/f(kHz)	300
0.49 - 1.705	24000/f(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Limit according to RSS-210 J.3:

The power of any emissions outside the band 57-71 GHz shall consist solely of spurious emissions and shall not exceed:

- a) the fundamental emission levels
- b) the general field strength limits specified in RSS-Gen for emissions below 40 GHz
- c) 90 pW/cm² at a distance of 3 m for emissions between 40 GHz and 200 GHz

General radiated limit according to RSS-Gen 8.9:

Frequency (MHz)	RSS-Gen Limits (μ A/m)	Measurement distance (m)
0.009 - 0.49	63.7/f(kHz)	300
0.49 - 1.705	63.7/f(kHz)	30
1.705 - 30.0	0.08	30

Frequency (MHz)	RSS-Gen Limits (μ V/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to 200 GHz.

For frequencies < 40 GHz the general radiated limit has been applied.

Only worst-case plots are listed.

5.6 Frequency stability

For test instruments and accessories used see section 6 Part **MB**.

5.6.1 Description of the test location

Test location: AREA4

5.6.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.6.3 Applicable standard

According to FCC Part 15C, Section 15.255(f):

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

According to RSS-210 J.6:

Fundamental emissions shall be contained within the 57-71 GHz frequency band during all conditions of operation when tested at the temperature and voltage variations specified for the frequency stability measurement in RSS-Gen.

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

5.6.4 Description of Measurement

The frequency stability is measured with the spectrum analyser. The sweep points are set to maximum for higher the frequency resolution or the function "frequency counter" is used. The signal is unmodulated; the marker of the analyser is set to maximum amplitude at normal temperature, the frequency is recorded. Then the maximum supply voltage is set and the marker of the analyser is set to maximum amplitude. This procedure is done again for the minimum supply voltage. The EUT is now driven at normal supply voltage but in the climatic chamber to range the temperature from -20 °C to +50 °C in steps of 10 degrees. The drifting carrier is measured by setting the marker at the analyser.

5.6.5 Result

Operating frequency range 1:

Test conditions		Test result	
		Frequency (GHz)	
		Low	High
T_{min} (-20)°C	V_{nom}	61.00997952	61.45997989
T (-10)°C	V_{nom}	61.00998512	61.45998612
T (0)°C	V_{nom}	61.00999347	61.45999409
T (10)°C	V_{nom}	61.00999920	61.45999994
T_{nom} (20)°C	V_{min} (7.65 V)	61.00999944	61.46000007
T_{nom} (20)°C	V_{nom} (24.0V)	61.00999932	61.45999994
T_{nom} (20)°C	V_{max} (41.4V)	61.01000617	61.46000704
T (30)°C	V_{nom}	61.01000829	61.46000928
T (40)°C	V_{nom}	61.01001377	61.46001464
T_{max} (50)°C	V_{nom}	61.00999446	61.45999508

61.0 - 61.5 GHz frequency band:

Highest frequency f_h	61.4600146 GHz
Lowest frequency f_l	61.0099795 GHz

Operating frequency range 2:

Test conditions		Test result	
		Frequency (GHz)	
		Low	High
T_{min} (-20)°C	V_{nom}	60.00997927	63.92098113
T (-10)°C	V_{nom}	60.00998512	63.92098724
T (0)°C	V_{nom}	60.00999322	63.92099608
T (10)°C	V_{nom}	60.00999894	63.92100193
T_{nom} (20)°C	V_{min} (7.65 V)	60.00999895	63.92100206
T_{nom} (20)°C	V_{nom} (24.0V)	60.00999882	63.92100206
T_{nom} (20)°C	V_{max} (41.4V)	60.01000579	63.92100941
T (30)°C	V_{nom}	60.01000804	63.92101177
T (40)°C	V_{nom}	60.01001327	63.92101750
T_{max} (50)°C	V_{nom}	60.00999434	63.92099733

57 - 71 GHz frequency band:

Highest frequency f_h	63.9210175 GHz
Lowest frequency f_l	60.0099793 GHz

FCC ID: 2AXR5-1D-03-01**IC: 26556-1D0301**

Limit according to FCC Part 15C, Section 15.255(f):

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Limit according to RSS-Gen 6.11:

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

The requirements are **FULFILLED**.

Remarks: The carrier is always inside of the operating frequency band.

5.7 Antenna requirement

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The EUT has integrated antennas. No other antenna can be used with the device.

The supplied antenna meets the requirements of part 15.203.

Remarks: None.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 2022.0.21.0	01-02/68-13-001				
	ESCI	02-02/03-15-001	17/06/2023	17/06/2022		
	ESH 2 - Z 5	02-02/20-05-004	13/10/2025	13/10/2022	13/04/2023	13/10/2022
	N-4000-BNC	02-02/50-05-138				
	ESH 3 - Z 2	02-02/50-05-185	27/10/2025	27/10/2022	27/04/2023	27/10/2022
	HM 8143	02-02/50-10-016				
	6430	02-02/50-13-014				
CPR 3	FS-Z90	02-02/11-14-003	22/04/2023	22/04/2022	22/04/2023	22/04/2022
	FSW43	02-02/11-15-001	22/04/2023	22/04/2022		
	QWH-EPRR00/WR-12/60-90	02-02/24-14-004				
	UFA210A (LU7-022-1000)	02-02/50-17-030				
	UFA210A (LU7-022-1000)	02-02/50-17-031				
FE	FS-Z90	02-02/11-14-003	22/04/2023	22/04/2022	22/04/2023	22/04/2022
	FSW43	02-02/11-15-001	22/04/2023	22/04/2022		
	QWH-EPRR00/WR-12/60-90	02-02/24-14-004				
	METRAHIT WORLD	02-02/32-15-001	11/11/2023	11/11/2022		
	WK-340/40	02-02/45-05-001	03/08/2023	03/08/2022		
	VLP-1602 PRO	02-02/50-10-015				
	UFA210A (LU7-022-1000)	02-02/50-17-030				
	UFA210A (LU7-022-1000)	02-02/50-17-031				
MB	FS-Z90	02-02/11-14-003	22/04/2023	22/04/2022	22/04/2023	22/04/2022
	FSW43	02-02/11-15-001	22/04/2023	22/04/2022		
	FSW43	02-02/11-21-001	16/05/2023	16/05/2022		
	QWH-EPRR00/WR-12/60-90	02-02/24-14-004				
	UFA210A (LU7-022-1000)	02-02/50-17-030				
	UFA210A (LU7-022-1000)	02-02/50-17-031				
SER 1	ESR 7	02-02/03-17-001	05/08/2023	05/08/2022		
	HFH 2 - Z 2	02-02/24-05-020	01/06/2025	01/06/2022	01/06/2023	01/06/2022
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
	ANT1010A	02-02/50-16-034				
SER 2	ESR 7	02-02/03-17-001	05/08/2023	05/08/2022		
	VULB 9168	02-02/24-05-005	20/12/2022	20/12/2021	03/07/2023	03/07/2022
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
	50F-003 N 3 dB	02-02/50-21-010				
SER 3	FS-Z110	02-02/11-14-002	22/04/2023	22/04/2022	22/04/2023	22/04/2022
	FS-Z90	02-02/11-14-003	22/04/2023	22/04/2022	22/04/2023	22/04/2022
	FSW43	02-02/11-15-001	22/04/2023	22/04/2022		
	RPG FS-Z170	02-02/11-17-001	06/04/2023	06/04/2022		
	RPG FS-Z220	02-02/11-17-002	06/04/2023	06/04/2022		
	FS-Z60	02-02/11-18-001	22/04/2023	22/04/2022	22/04/2023	22/04/2022
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	LNA-40-18004000-33-5P	02-02/17-20-002				
	3117	02-02/24-05-009	23/06/2023	23/06/2022		

FCC ID: 2AXR5-1D-03-01**IC: 26556-1D0301**

BBHA 9170	02-02/24-05-013	19/05/2023	19/05/2020	10/03/2023	10/03/2022
QWH-UPRR00/WR-19/40-60	02-02/24-14-001				
QWH-EPRR00/WR-12/60-90	02-02/24-14-004				
QWH-WPRR00/WR-10/75-11	02-02/24-14-006				
FH-SG-170/WR6/110-170	02-02/24-17-002				
05-HA25/WR5/140-220	02-02/24-17-004				
BAM 4.5-P	02-02/50-17-024				
NCD	02-02/50-17-025				
UFA210A (LU7-022-1000)	02-02/50-17-030				
UFA210A (LU7-022-1000)	02-02/50-17-031				
KK-SF106-2X11N-6,5M	02-02/50-18-016				
KMS116-GL140SE-KMS116-	02-02/50-20-026				

Note: MB performed on 07/02/2023, CPR performed in time period 02/12/2022 to 20/04/2023, all other measurements performed in the time period 02/12/2022 to 19/12/2022.

- End of test report -