

# TEST REPORT

Product Name : Speaker box  
Model Number : ELITE II  
FCC ID : 2AXSN-ELITE

Prepared for : ELECTRON-X LLC  
Address : 6005 Milwee st ste 911, Houston, Texas, US

Prepared by : EMTEK (SHENZHEN) CO., LTD.  
Address : Building 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

Report Number : ES200820035W  
Date(s) of Tests : August 20,2020 to October 19,2020  
Date of issue : November 11, 2020

## Table of Contents

|                                                 |           |
|-------------------------------------------------|-----------|
| <b>1 TEST RESULT CERTIFICATION</b>              | <b>3</b>  |
| <b>2 EUT TECHNICAL DESCRIPTION</b>              | <b>4</b>  |
| <b>3 SUMMARY OF TEST RESULT</b>                 | <b>5</b>  |
| <b>4 TEST METHODOLOGY</b>                       | <b>6</b>  |
| 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS    | 6         |
| 4.2 MEASUREMENT EQUIPMENT USED                  | 6         |
| 4.3 DESCRIPTION OF TEST MODES                   | 7         |
| <b>5 FACILITIES AND ACCREDITATIONS</b>          | <b>8</b>  |
| 5.1 FACILITIES                                  | 8         |
| 5.2 LABORATORY ACCREDITATIONS AND LISTINGS      | 8         |
| <b>6 TEST SYSTEM UNCERTAINTY</b>                | <b>8</b>  |
| <b>7 SETUP OF EQUIPMENT UNDER TEST</b>          | <b>9</b>  |
| 7.1 RADIO FREQUENCY TEST SETUP 1                | 9         |
| 7.2 RADIO FREQUENCY TEST SETUP 2                | 9         |
| 7.3 CONDUCTED EMISSION TEST SETUP               | 10        |
| 7.4 SUPPORT EQUIPMENT                           | 11        |
| <b>8 FREQUENCY HOPPING SYSTEM REQUIREMENTS</b>  | <b>12</b> |
| 8.1 STANDARD APPLICABLE                         | 12        |
| 8.2 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 12        |
| 8.3 EQUAL HOPPING FREQUENCY USE                 | 13        |
| 8.4 FREQUENCY HOPPING SYSTEM                    | 13        |
| <b>9 TEST REQUIREMENTS</b>                      | <b>14</b> |
| 9.1 20DB BANDWIDTH                              | 14        |
| 9.2 CARRIER FREQUENCY SEPARATION                | 18        |
| 9.3 NUMBER OF HOPPING FREQUENCIES               | 22        |
| 9.4 AVERAGE TIME OF OCCUPANCY (DWEIL TIME)      | 24        |
| 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER         | 27        |
| 9.6 CONDUCTED SUPRIOUS EMISSION                 | 31        |
| 9.7 RADIATED SPURIOUS EMISSION                  | 38        |
| 9.8 CONDUCTED EMISSION TEST                     | 51        |
| 9.9 ANTENNAAPPLICATION                          | 54        |

## 1 TEST RESULT CERTIFICATION

Applicant : ELECTRON-X LLC  
Address : 6005 Milwee st ste 911,Houston,Texas,US  
Manufacturer : NINGBO CENTRAL STAR ELECTRONIC TECHNOLOGY CO.,LTD  
Address : #1501 No.7 Building, Smart Park of Ningbo, China 315000  
EUT : Speaker box  
Model Name : ELITE II  
Trademark : N/A

Measurement Procedure Used:

| APPLICABLE STANDARDS                                          |             |
|---------------------------------------------------------------|-------------|
| STANDARD                                                      | TEST RESULT |
| FCC 47 CFR Part 2, Subpart J<br>FCC 47 CFR Part 15, Subpart C | PASS        |

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD.The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : August 20,2020 to October 19,2020

Prepared by :   
Sewen Guo /Editor

Reviewer :   
Joe Xia/Editor

Approve & Authorized Signer :   
Lisa Wang/Manager



## 2 EUT TECHNICAL DESCRIPTION

| Characteristics           | Description                                                  |
|---------------------------|--------------------------------------------------------------|
| Product Name              | Speaker box                                                  |
| Model number              | ELITE II                                                     |
| Sample Number             | 1#                                                           |
| Device Type               | Bluetooth V4.2                                               |
| Data Rate                 | 1Mbps for GFSK modulation<br>2Mbps for pi/4-DQPSK modulation |
| Modulation                | GFSK<br>pi/4-DQPSK                                           |
| Operating Frequency Range | 2402-2480MHz                                                 |
| Number of Channels        | 79 channels                                                  |
| Max Transmit Power        | 0.449 dBm                                                    |
| Antenna Type              | PCB Antenna                                                  |
| Gain                      | -0.58 dBi                                                    |
| Power supply              | AC 120V/60Hz                                                 |
| Temperature Range         | -40°C to +85°C                                               |

**Note:** for more details, please refer to the User's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

| FCC PartClause             | Test Parameter                         | Verdict | Remark |
|----------------------------|----------------------------------------|---------|--------|
| 15.247(a)(1)               | 20 dB Bandwidth                        | PASS    |        |
| 15.247(a)(1)               | Carrier Frequency Separation           | PASS    |        |
| 15.247(a)(1)               | Number of Hopping Frequencies          | PASS    |        |
| 15.247(a)(1)               | Average Time of Occupancy (Dwell Time) | PASS    |        |
| 15.247(b)(1)               | Maximum Peak Conducted Output Power    | PASS    |        |
| 15.247(c)                  | Conducted Spurious Emissions           | PASS    |        |
| 15.247(d)<br>15.209        | Radiated Spurious Emissions            | PASS    |        |
| 15.207                     | Conducted Emission                     | PASS    |        |
| 15.203                     | Antenna Application                    | PASS    |        |
| NOTE1:N/A (Not Applicable) |                                        |         |        |

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AXSN-ELITE filing to comply with Section 15.247 of the FCC Part 15, Subpart C.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

KDB 558074 D01 15.247 Meas Guidance V05r02

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Radiated Emission Test Equipment

| EQUIPMENT TYPE    | MFR             | MODEL NUMBER | SERIAL NUMBER | LAST CAL.    | DUE CAL.     |
|-------------------|-----------------|--------------|---------------|--------------|--------------|
| EMI Test Receiver | Rohde & Schwarz | ESU          | 1302.6005.26  | May 17, 2020 | May 16, 2021 |
| Pre-Amplifier     | HP              | 8447F        | 2944A07999    | May 17, 2020 | May 16, 2021 |
| Bilog Antenna     | Schwarzbeck     | VULB9163     | 142           | May 17, 2020 | May 16, 2021 |
| Loop Antenna      | ARA             | PLA-1030/B   | 1029          | May 17, 2020 | May 16, 2021 |
| Horn Antenna      | Schwarzbeck     | BBHA 9170    | BBHA9170399   | May 17, 2020 | May 16, 2021 |
| Horn Antenna      | Schwarzbeck     | BBHA 9120    | D143          | May 17, 2020 | May 16, 2021 |
| Cable             | Schwarzbeck     | AK9513       | ACRX1         | May 17, 2020 | May 16, 2021 |
| Cable             | Rosenberger     | N/A          | FP2RX2        | May 17, 2020 | May 16, 2021 |
| Cable             | Schwarzbeck     | AK9513       | CRPX1         | May 17, 2020 | May 16, 2021 |
| Cable             | Schwarzbeck     | AK9513       | CRRX2         | May 17, 2020 | May 16, 2021 |

#### 4.2.2 Radio Frequency Test Equipment

| EQUIPMENT TYPE    | MFR             | MODEL NUMBER | SERIAL NUMBER | LAST CAL.    | DUE CAL.     |
|-------------------|-----------------|--------------|---------------|--------------|--------------|
| Spectrum Analyzer | Agilent         | E4407B       | 88156318      | May 17, 2020 | May 16, 2021 |
| Signal Analyzer   | Agilent         | N9010A       | My53470879    | May 17, 2020 | May 16, 2021 |
| Power meter       | Anritsu         | ML2495A      | 0824006       | May 17, 2020 | May 16, 2021 |
| Power sensor      | Anritsu         | MA2411B      | 0738172       | May 17, 2020 | May 16, 2021 |
| Spectrum Analyzer | Rohde & Schwarz | FSV40        | 100967        | May 17, 2020 | May 16, 2021 |

#### 4.2.3 Conducted Emission Test Equipment

| EQUIPMENT TYPE     | MFR             | MODEL NUMBER | SERIAL NUMBER | LASTCAL.     | DUE CAL.     |
|--------------------|-----------------|--------------|---------------|--------------|--------------|
| Test Receiver      | Rohde & Schwarz | ESCS30       | 828985/018    | May 17, 2020 | May 16, 2021 |
| L.I.S.N.           | Schwarzbeck     | NNLK8129     | 8129203       | May 17, 2020 | May 16, 2021 |
| 50Ω Coaxial Switch | Anritsu         | MP59B        | M20531        | May 17, 2020 | May 16, 2021 |
| Pulse Limiter      | Rohde & Schwarz | ESH3-Z2      | 100006        | May 17, 2020 | May 16, 2021 |
| Voltage Probe      | Rohde & Schwarz | TK9416       | N/A           | May 17, 2020 | May 16, 2021 |
| I.S.N              | Rohde & Schwarz | ENY22        | 1109.9508.02  | May 17, 2020 | May 16, 2021 |

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for Bluetooth GFSK modulation; 2Mbps for Bluetooth pi/4-DQPSK modulation) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

#### Frequency and Channel list for Bluetooth V4.2

| Channel                                                               | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|-----------------------------------------------------------------------|-----------------|---------|-----------------|---------|-----------------|
| 0                                                                     | 2402            | 39      | 2441            | ...     | ...             |
| 1                                                                     | 2403            | 40      | 2442            | 76      | 2478            |
| 2                                                                     | 2404            | 41      | 2443            | 77      | 2479            |
| ...                                                                   | ...             | ...     | ...             | 78      | 2480            |
| Note: $f_c = 2402\text{MHz} + (k-1) \times 1\text{MHz}$ $k=1$ to $79$ |                 |         |                 |         |                 |

#### Test Frequency and Channel for Bluetooth V4.2

| Lowest Frequency |                 | Middle Frequency |                 | Highest Frequency |                 |
|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| Channel          | Frequency (MHz) | Channel          | Frequency (MHz) | Channel           | Frequency (MHz) |
| 0                | 2402            | 39               | 2441            | 78                | 2480            |

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 32.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2018.11.30  
The certificate is valid until 2022.10.28  
The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)  
The Certificate Registration Number is L2291

Accredited by FCC  
Designation Number: CN1204  
Test Firm Registration Number: 882943

Accredited by A2LA, August 25, 2020  
The Certificate Number is 4321.01

Accredited by Industry Canada  
The Conformity Assessment Body Identifier is CN0008.

Name of Firm : EMTEK (SHENZHEN) CO., LTD.  
Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                      | Uncertainty               |
|--------------------------------|---------------------------|
| Radio Frequency                | $\pm 1 \times 10^{-5}$    |
| Maximum Peak Output Power Test | $\pm 1.0\text{dB}$        |
| Conducted Emissions Test       | $\pm 2.0\text{dB}$        |
| Radiated Emission Test         | $\pm 2.0\text{dB}$        |
| Occupied Bandwidth Test        | $\pm 1.0\text{dB}$        |
| Band Edge Test                 | $\pm 3\text{dB}$          |
| All emission, radiated         | $\pm 3\text{dB}$          |
| Antenna Port Emission          | $\pm 3\text{dB}$          |
| Temperature                    | $\pm 0.5^{\circ}\text{C}$ |
| Humidity                       | $\pm 3\%$                 |


Measurement Uncertainty for a level of Confidence of 95%



## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 32.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

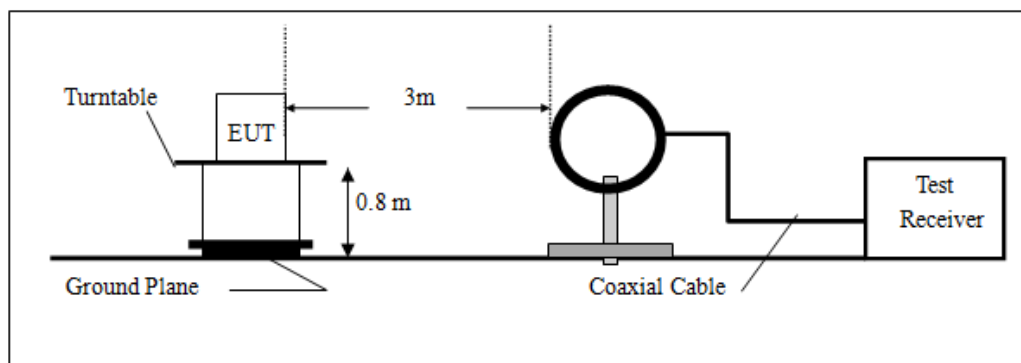

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

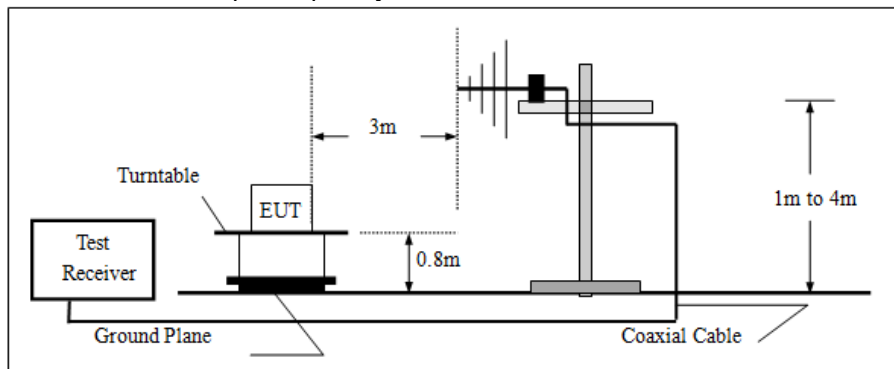

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

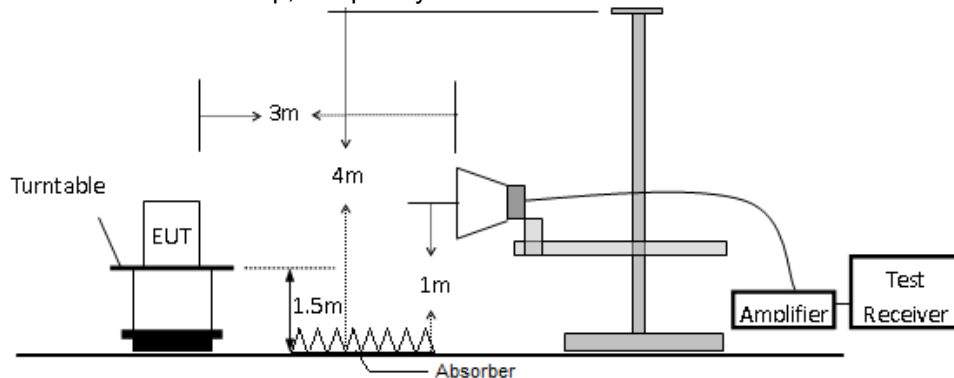


### 7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Game fitness board) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

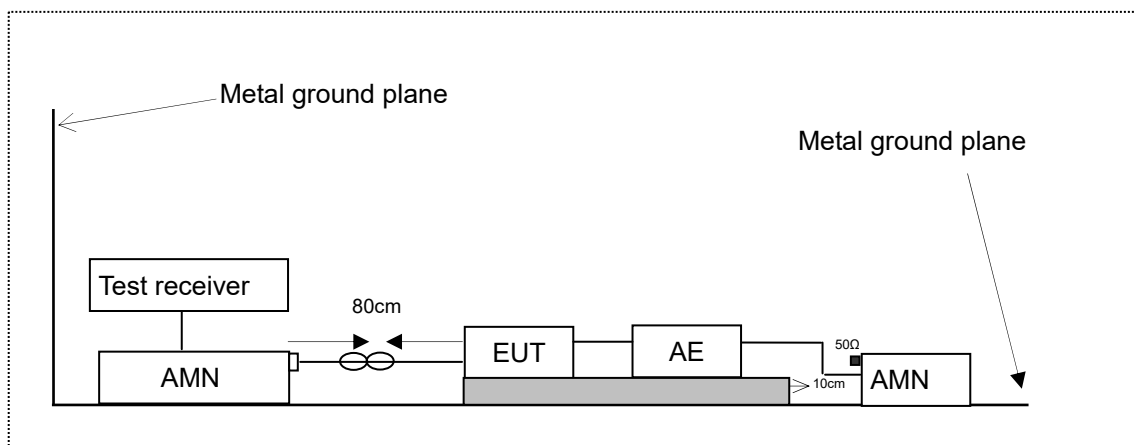

**7.4 SUPPORT EQUIPMENT**

| EUT Cable List and Details |            |                     |                        |
|----------------------------|------------|---------------------|------------------------|
| Cable Description          | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                          | /          | /                   | /                      |

| Auxiliary Cable List and Details |            |                     |                        |
|----------------------------------|------------|---------------------|------------------------|
| Cable Description                | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                                | /          | /                   | /                      |

| Auxiliary Equipment List and Details |              |       |               |
|--------------------------------------|--------------|-------|---------------|
| Description                          | Manufacturer | Model | Serial Number |
| /                                    | /            | /     | /             |

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

### 8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 8.2 EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels.

The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

Longest sequence of zeros: 8 (non-inverted signal)

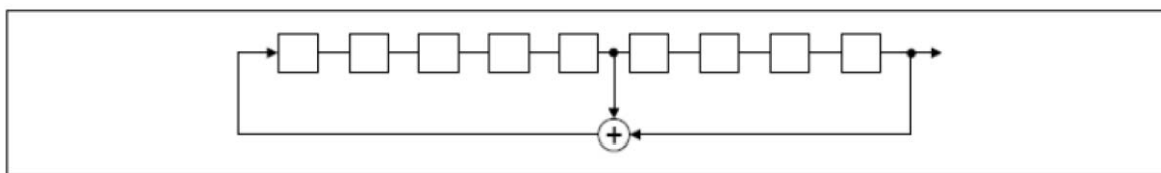

*Linear Feedback Shift Register for Generation of the PRBS sequence*

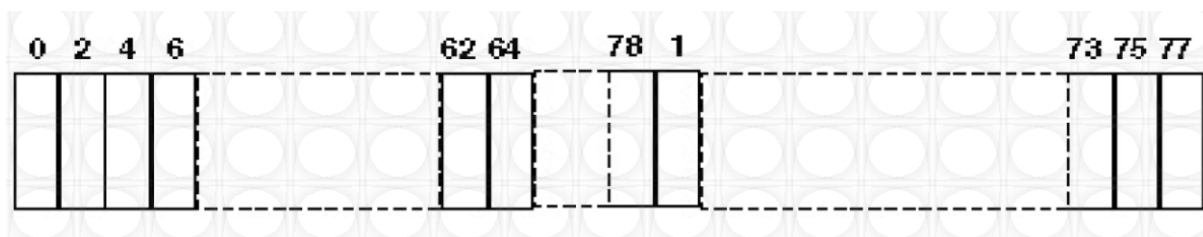

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

### 8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

## 9 TEST REQUIREMENTS

### 9.1 20DB BANDWIDTH

#### 9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and 558074 D01 15.247 Meas Guidance V05r02

#### 9.1.2 Conformance Limit

No limit requirement.

#### 9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 9.1.4 Test Procedure

The EUT was operating in Bluetooth V4.2 and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) = 100kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is as close as possible to even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.



### Test Results

Temperature: 25°C  
Humidity: 45%

Test Date: September 30, 2020  
Test By: XW

| Modulation Mode | Channel Number | Channel Frequency (MHz) | 20dB Bandwidth (kHz) |
|-----------------|----------------|-------------------------|----------------------|
| GFSK            | 0              | 2402                    | 851.673              |
|                 | 39             | 2441                    | 868.806              |
|                 | 78             | 2480                    | 951.042              |
| pi/4-DQPSK      | 0              | 2402                    | 1219.000             |
|                 | 39             | 2441                    | 1264.000             |
|                 | 78             | 2480                    | 1251.000             |

| Test Model | 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                 |
|            | Channel 0: 2402MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | GFSK Modulation |
|            | <div> <div> <div>Agilent</div> <div> <div>Ch Freq 2.402 GHz</div> <div>Trig Free</div> </div> <div>Occupied Bandwidth</div> <div>Center 2.402000000 GHz</div> <div> <div>Ref 10 dBm</div> <div>#Atten 20 dB</div> <div>Mkr1 2.4020075 GHz<br/>-0.932 dBm</div> </div> <div> <div>#Peak</div> <div>Log</div> <div>10</div> <div>dB/</div> <div>Offst</div> <div>1</div> <div>dB</div> </div> <div> </div> <div> <div>Center 2.402 GHz</div> <div>#Res BW 30 kHz</div> <div>#VBW 100 kHz</div> <div>Sweep 5 ms (401 pts)</div> <div>Span 3 MHz</div> </div> <div> <div>Occupied Bandwidth</div> <div>818.2810 kHz</div> <div>Occ BW % Pwr 99.00 %</div> <div>x dB -20.00 dB</div> <div>Transmit Freq Error -283.991 Hz</div> <div>x dB Bandwidth 851.673 kHz</div> </div> </div> <div> <div>Freq/Channel</div> <div>Center Freq 2.40200000 GHz</div> <div>Start Freq 2.40050000 GHz</div> <div>Stop Freq 2.40350000 GHz</div> <div>CF Step 300.000000 kHz<br/>Auto Man</div> <div>Freq Offset 0.00000000 Hz</div> <div>Signal Track On Off</div> <div>Scale Type Log Lin</div> </div> </div> |                 |
| Test Model | 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                 |
|            | Channel 39: 2441MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | GFSK Modulation |
|            | <div> <div> <div>Agilent</div> <div> <div>Ch Freq 2.441 GHz</div> <div>Trig Free</div> </div> <div>Occupied Bandwidth</div> <div>Center 2.441000000 GHz</div> <div> <div>Ref 10 dBm</div> <div>#Atten 20 dB</div> <div>Mkr1 2.4409925 GHz<br/>-3.141 dBm</div> </div> <div> <div>#Peak</div> <div>Log</div> <div>10</div> <div>dB/</div> <div>Offst</div> <div>1</div> <div>dB</div> </div> <div> </div> <div> <div>Center 2.441 GHz</div> <div>#Res BW 30 kHz</div> <div>#VBW 100 kHz</div> <div>Sweep 5 ms (401 pts)</div> <div>Span 3 MHz</div> </div> <div> <div>Occupied Bandwidth</div> <div>853.5495 kHz</div> <div>Occ BW % Pwr 99.00 %</div> <div>x dB -20.00 dB</div> <div>Transmit Freq Error 294.607 Hz</div> <div>x dB Bandwidth 868.806 kHz</div> </div> </div> <div> <div>Freq/Channel</div> <div>Center Freq 2.44100000 GHz</div> <div>Start Freq 2.43950000 GHz</div> <div>Stop Freq 2.44250000 GHz</div> <div>CF Step 300.000000 kHz<br/>Auto Man</div> <div>Freq Offset 0.00000000 Hz</div> <div>Signal Track On Off</div> <div>Scale Type Log Lin</div> </div> </div>  |                 |
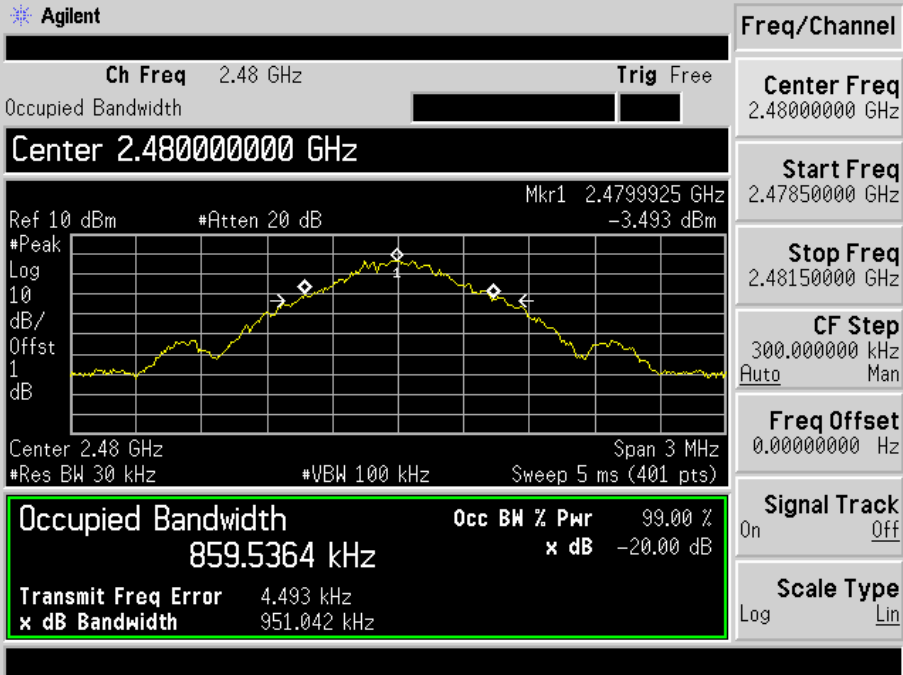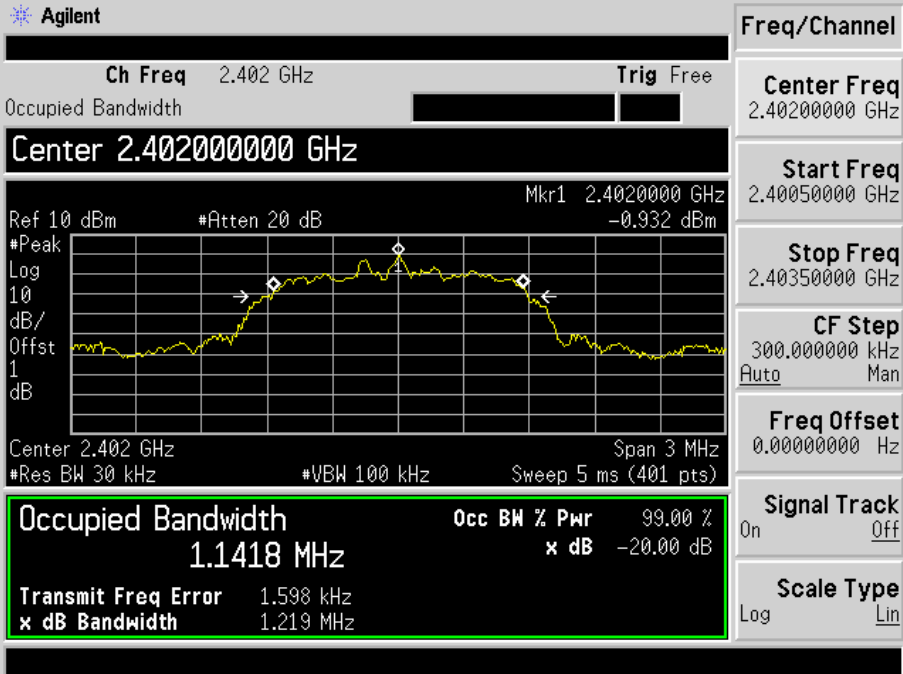
| Test Model | 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                       |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
|            | Channel 78: 2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | GFSK Modulation       |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |
|            | <p><b>Agilent</b></p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.480000000 GHz</b></p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4799925 GHz -3.493 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth 859.5364 kHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -20.00 dB</p> <p>Transmit Freq Error 4.493 kHz</p> <p>x dB Bandwidth 951.042 kHz</p> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.48000000 GHz</p> <p><b>Start Freq</b> 2.47850000 GHz</p> <p><b>Stop Freq</b> 2.48150000 GHz</p> <p><b>CF Step</b> 300.000000 kHz</p> <p>Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p> |                       |
| Test Model | 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                       |
|            | Channel 0: 2402MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | pi/4-DQPSK Modulation |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       |
|            | <p><b>Agilent</b></p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.402000000 GHz</b></p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4020000 GHz -0.932 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth 1.1418 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -20.00 dB</p> <p>Transmit Freq Error 1.598 kHz</p> <p>x dB Bandwidth 1.219 MHz</p> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40200000 GHz</p> <p><b>Start Freq</b> 2.40050000 GHz</p> <p><b>Stop Freq</b> 2.40350000 GHz</p> <p><b>CF Step</b> 300.000000 kHz</p> <p>Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>   |                       |



| Test Model | 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       |
|            | Channel 39: 2441MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | pi/4-DQPSK Modulation |
|            | <div> <div> <div>Agilent</div> <div> <div>Ch Freq 2.441 GHz</div> <div>Trig Free</div> </div> <div>Occupied Bandwidth</div> <div>Center 2.441000000 GHz</div> <div> <div>Ref 10 dBm</div> <div>#Atten 20 dB</div> <div>Mkr1 2.4410000 GHz</div> <div>-1.477 dBm</div> </div> <div> <div>#Peak</div> <div>Log</div> <div>10</div> <div>dB/</div> <div>Offst</div> <div>1</div> <div>dB</div> </div> <div> <div>Center 2.441 GHz</div> <div>Span 3 MHz</div> <div>#Res BW 30 kHz</div> <div>#VBW 100 kHz</div> <div>Sweep 5 ms (401 pts)</div> </div> <div> <div>Occupied Bandwidth</div> <div>1.1741 MHz</div> <div>Occ BW % Pwr 99.00 %</div> <div>x dB -20.00 dB</div> <div>Transmit Freq Error 2.229 kHz</div> <div>x dB Bandwidth 1.264 MHz</div> </div> </div> </div> <div> <div>Freq/Channel</div> <div>Center Freq 2.44100000 GHz</div> <div>Start Freq 2.43950000 GHz</div> <div>Stop Freq 2.44250000 GHz</div> <div>CF Step 300.000000 kHz</div> <div>Auto Man</div> <div>Freq Offset 0.00000000 Hz</div> <div>Signal Track On Off</div> <div>Scale Type Log Lin</div> </div> |                       |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       |
| Test Model | 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       |
|            | Channel 78: 2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | pi/4-DQPSK Modulation |
|            | <div> <div> <div>Agilent</div> <div> <div>Ch Freq 2.48 GHz</div> <div>Trig Free</div> </div> <div>Occupied Bandwidth</div> <div>Center 2.480000000 GHz</div> <div> <div>Ref 10 dBm</div> <div>#Atten 20 dB</div> <div>Mkr1 2.48000075 GHz</div> <div>-1.151 dBm</div> </div> <div> <div>#Peak</div> <div>Log</div> <div>10</div> <div>dB/</div> <div>Offst</div> <div>1</div> <div>dB</div> </div> <div> <div>Center 2.48 GHz</div> <div>Span 3 MHz</div> <div>#Res BW 30 kHz</div> <div>#VBW 100 kHz</div> <div>Sweep 5 ms (401 pts)</div> </div> <div> <div>Occupied Bandwidth</div> <div>1.1722 MHz</div> <div>Occ BW % Pwr 99.00 %</div> <div>x dB -20.00 dB</div> <div>Transmit Freq Error 1.631 kHz</div> <div>x dB Bandwidth 1.251 MHz</div> </div> </div> </div> <div> <div>Freq/Channel</div> <div>Center Freq 2.48000000 GHz</div> <div>Start Freq 2.47850000 GHz</div> <div>Stop Freq 2.48150000 GHz</div> <div>CF Step 300.000000 kHz</div> <div>Auto Man</div> <div>Freq Offset 0.00000000 Hz</div> <div>Signal Track On Off</div> <div>Scale Type Log Lin</div> </div>  |                       |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       |

## 9.2 CARRIER FREQUENCY SEPARATION

### 9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and 558074 D01 15.247 Meas Guidance V05r02

### 9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.2.4 Test Procedure

■ According to FCC Part 15.247(a)(1)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW = 100kHz. Set VBW = 300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

### Test Results

Temperature: 25°C

Humidity: 45%

Test Date:

September 30, 2020



Test By:

XW

| Modulation Mode                                                                                                  | Channel Number | Channel Frequency (MHz) | Measurement Bandwidth (kHz) | Limit (kHz) | Verdict |
|------------------------------------------------------------------------------------------------------------------|----------------|-------------------------|-----------------------------|-------------|---------|
| GFSK                                                                                                             | 0              | 2402                    | 997.5                       | >567.78     | PASS    |
|                                                                                                                  | 39             | 2441                    | 1012.5                      | >579.20     | PASS    |
|                                                                                                                  | 78             | 2480                    | 1005.0                      | >634.03     | PASS    |
| pi/4-DQPSK                                                                                                       | 0              | 2402                    | 1012.5                      | >812.67     | PASS    |
|                                                                                                                  | 39             | 2441                    | 1005.0                      | >842.67     | PASS    |
|                                                                                                                  | 78             | 2480                    | 997.5                       | >834.00     | PASS    |
| Note: Limit = 20dB bandwidth * 2/3, if it is greater than 25kHz and the output power is less than 125mW (21dBm). |                |                         |                             |             |         |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:[Http://www.emtek.com.cn](http://www.emtek.com.cn) 邮箱:[cs.rep@emtek.com.cn](mailto:cs.rep@emtek.com.cn)  
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China [Http://www.emtek.com.cn](http://www.emtek.com.cn) E-mail: [cs.rep@emtek.com.cn](mailto:cs.rep@emtek.com.cn)

| Test Model | Carrier Frequency Separation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                       |
|            | Channel 78: 2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | GFSK Modulation       |
|            | <p>Agilent</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 Δ 1.0050 MHz -0.606 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.479500000 GHz</p> <p>Center 2.479 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.479500000 GHz</p> <p><b>Start Freq</b> 2.478000000 GHz</p> <p><b>Stop Freq</b> 2.481000000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p> |                       |
| Test Model | Carrier Frequency Separation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                       |
|            | Channel 0: 2402MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | pi/4-DQPSK Modulation |
|            | <p>Agilent</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 Δ 1.0125 MHz 0.015 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402500000 GHz</p> <p>Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.402500000 GHz</p> <p><b>Start Freq</b> 2.401000000 GHz</p> <p><b>Stop Freq</b> 2.404000000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>  |                       |
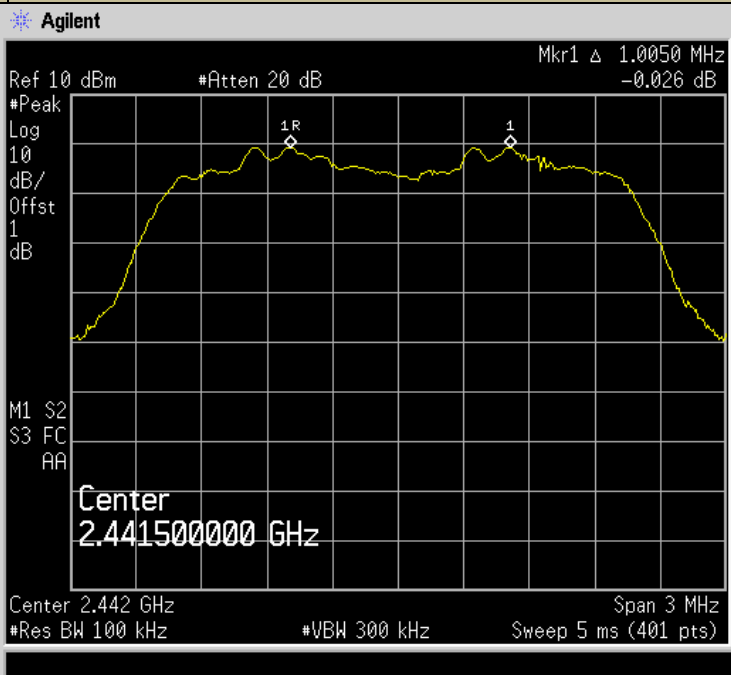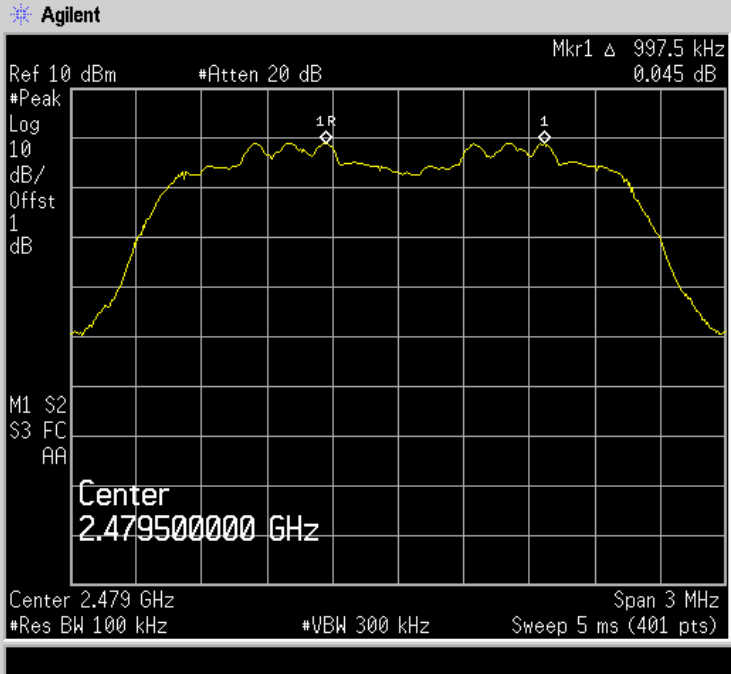
| Test Model | Carrier Frequency Separation                                                                                                                                                                                                                                                                                                                                                                                                                                            |                       |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |
|            | Channel 39: 2441MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                     | pi/4-DQPSK Modulation |
|            | <div> <div>  </div> <div> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b><br/>2.44150000 GHz</p> <p><b>Start Freq</b><br/>2.44000000 GHz</p> <p><b>Stop Freq</b><br/>2.44300000 GHz</p> <p><b>CF Step</b><br/>300.000000 kHz<br/>Auto Man</p> <p><b>Freq Offset</b><br/>0.00000000 Hz</p> <p><b>Signal Track</b><br/>On Off</p> <p><b>Scale Type</b><br/>Log Lin</p> </div> </div>  |                       |
| Test Model | Carrier Frequency Separation                                                                                                                                                                                                                                                                                                                                                                                                                                            |                       |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |
|            | Channel 78: 2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                     | pi/4-DQPSK Modulation |
|            | <div> <div>  </div> <div> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b><br/>2.47950000 GHz</p> <p><b>Start Freq</b><br/>2.47800000 GHz</p> <p><b>Stop Freq</b><br/>2.48100000 GHz</p> <p><b>CF Step</b><br/>300.000000 kHz<br/>Auto Man</p> <p><b>Freq Offset</b><br/>0.00000000 Hz</p> <p><b>Signal Track</b><br/>On Off</p> <p><b>Scale Type</b><br/>Log Lin</p> </div> </div> |                       |

### 9.3 NUMBER OF HOPPING FREQUENCIES

#### 9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii) and 558074 D01 15.247 Meas Guidance V05r02

#### 9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

#### 9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 9.3.4 Test Procedure

- According to FCC Part 15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

#### Test Results

Temperature: 25°C  
Humidity: 45 %

Test Date: September 30, 2020  
Test By: XW

| Hopping Channel Frequency Range                  | Quantity of Hopping Channel | Quantity of Hopping Channel limit |
|--------------------------------------------------|-----------------------------|-----------------------------------|
| 2402-2480 (GFSK)                                 | 79                          | > 15                              |
| Note: Note: Both BR & EDR mode has same result . |                             |                                   |

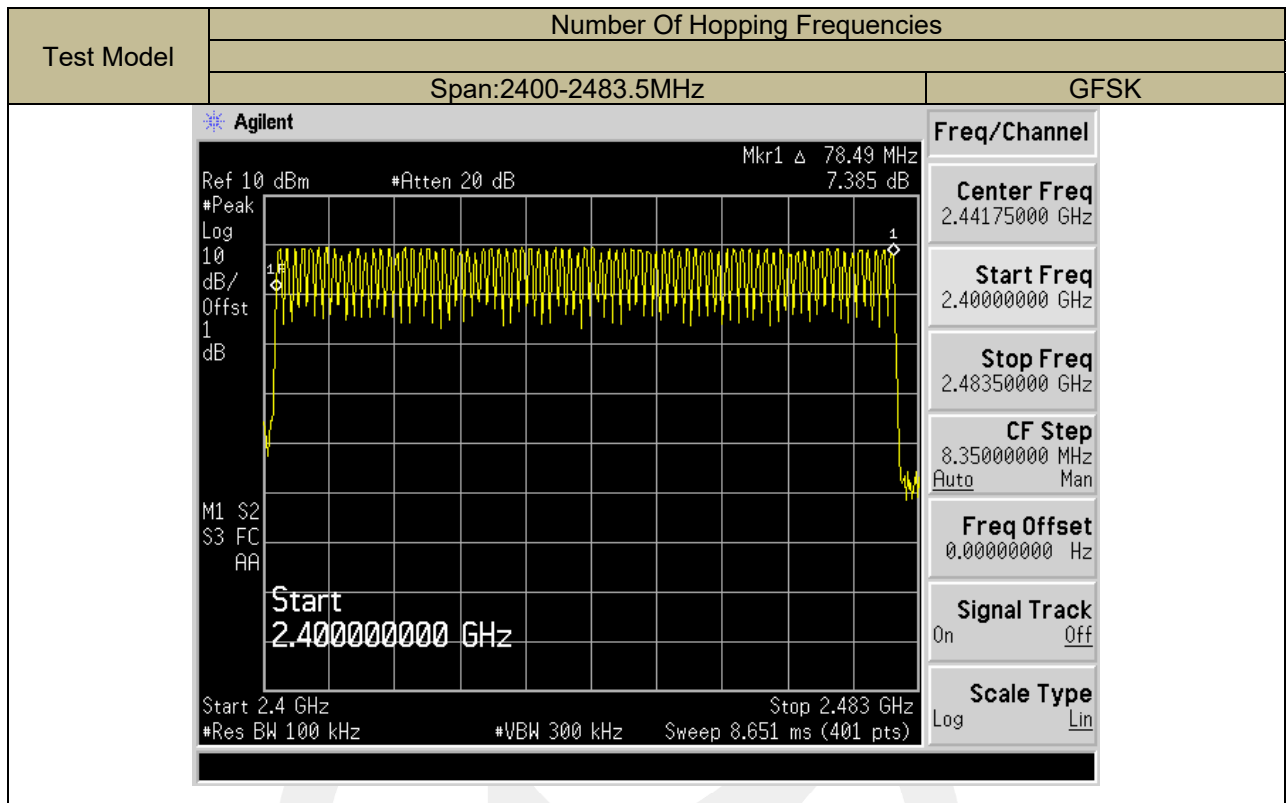

## 9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

### 9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and 558074 D01 15.247 Meas Guidance V05r02

### 9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the averagetime of occupancy on any channel shall not be greater than 0.4s within a period of 0.4smultiplied by the number of hopping channels employed.

### 9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.4.4 Test Procedure

■ According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzersettings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphsof this Section.

### 9.4.5 Test Results

Temperature: 25℃

Humidity: 45 %

Test Date:

September 30, 2020

Test By:

XW

| Modulation Mode | Channel Number | Packet type | Pluse width (ms) | DwellTime (ms) | Limit (ms) | Verdict |
|-----------------|----------------|-------------|------------------|----------------|------------|---------|
| GFSK            | 0              | DH1         | 0.41             | 131.20         | <400       | PASS    |
|                 | 0              | DH3         | 1.68             | 268.80         | <400       | PASS    |
|                 | 0              | DH5         | 2.95             | 314.67         | <400       | PASS    |



Note1: DwellTime(DH1)=PW\*(1600/2/79)\*31.6


DwellTime(DH3)=PW\*(1600/4/79)\*31.6

DwellTime(DH5)=PW\*(1600/6/79)\*31.6

Note2: Bluetooth (GFSK, pi/4-DQPSK)mode have been tested, and the worst results has been recorded on the follow page.

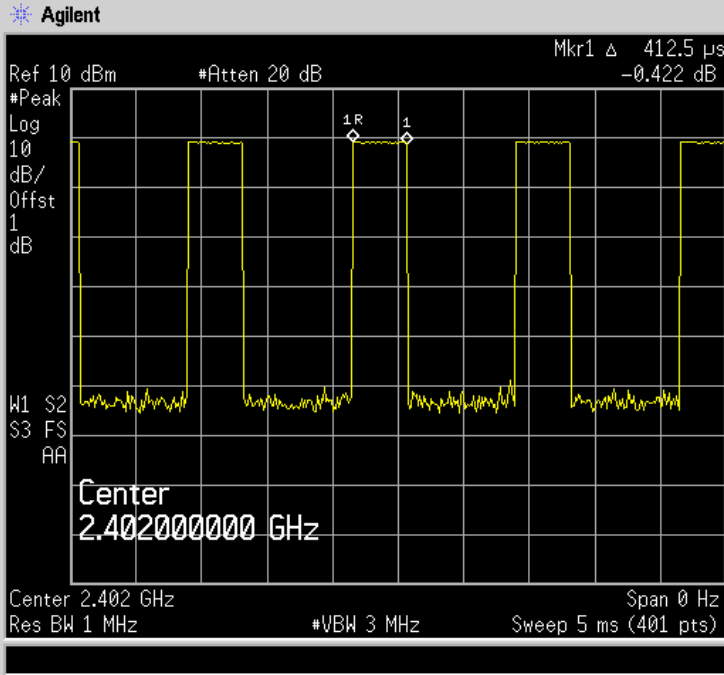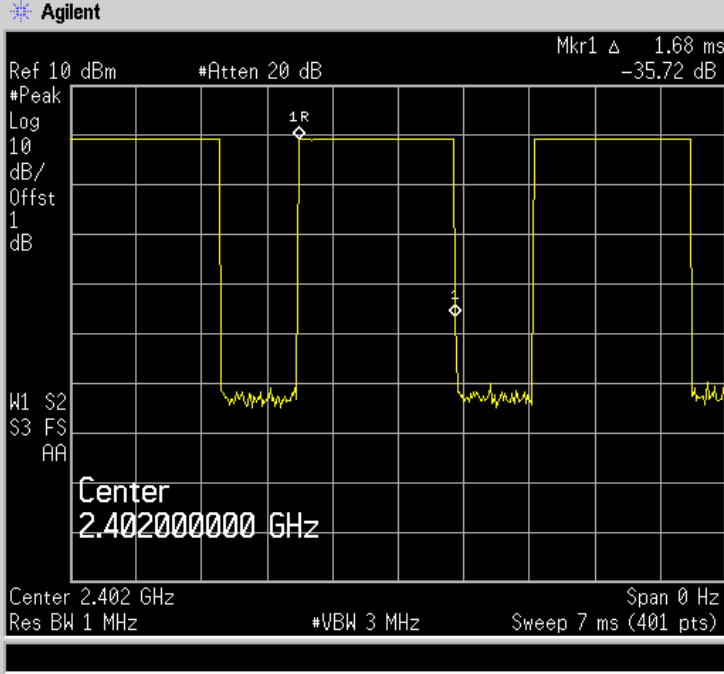

| Test Model | Average Time Of Occupancy (Dwell Time)                                                                                                                                                                                                                                                                                                                                                                                                                          |          |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |
|            | CH 0: 2402MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                   | GFSK DH1 |
|            | <div>  <div> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b><br/>2.402000000 GHz</p> <p><b>Start Freq</b><br/>2.402000000 GHz</p> <p><b>Stop Freq</b><br/>2.402000000 GHz</p> <p><b>CF Step</b><br/>1.000000000 MHz<br/>Auto Man</p> <p><b>Freq Offset</b><br/>0.000000000 Hz</p> <p><b>Signal Track</b><br/>On Off</p> <p><b>Scale Type</b><br/>Log Lin</p> </div> </div>  |          |
| Test Model | Average Time Of Occupancy (Dwell Time)                                                                                                                                                                                                                                                                                                                                                                                                                          |          |
|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |
|            | CH 0: 2402MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                   | GFSK DH3 |
|            | <div>  <div> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b><br/>2.402000000 GHz</p> <p><b>Start Freq</b><br/>2.402000000 GHz</p> <p><b>Stop Freq</b><br/>2.402000000 GHz</p> <p><b>CF Step</b><br/>1.000000000 MHz<br/>Auto Man</p> <p><b>Freq Offset</b><br/>0.000000000 Hz</p> <p><b>Signal Track</b><br/>On Off</p> <p><b>Scale Type</b><br/>Log Lin</p> </div> </div> |          |

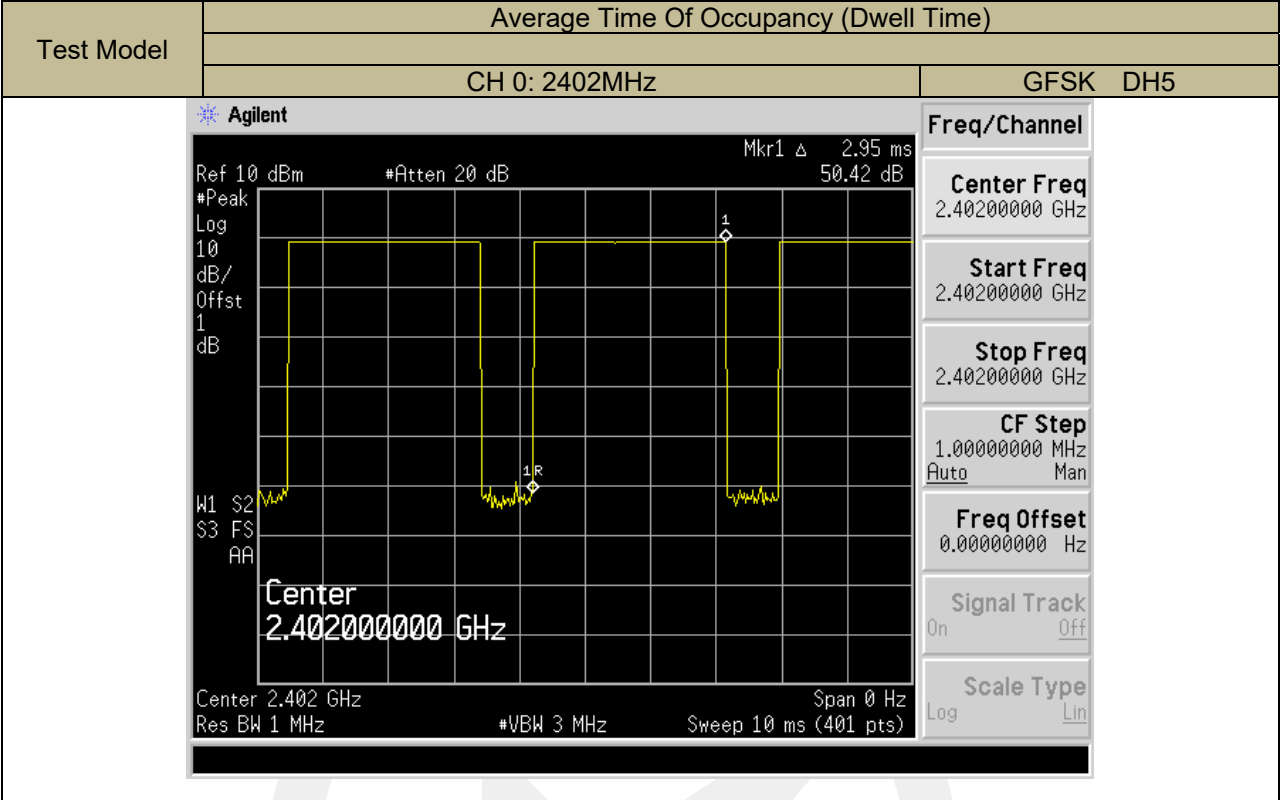

## 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and 558074 D01 15.247 Meas Guidance V05r02

### 9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.5.4 Test Procedure

■ According to FCC Part 15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 10 MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3 MHz)

Set VBW ≥ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

### Test Results

Temperature: 25°C


Humidity: 45 %


Test Date: September 30, 2020

Test By: XW

| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Level (dBm) | Limit (dBm) | Verdict |
|----------------|----------------|-------------------------|-------------------------|-------------|---------|
| GFSK           | 0              | 2402                    | -0.793                  | 21          | PASS    |
|                | 39             | 2441                    | -0.783                  | 21          | PASS    |
|                | 78             | 2480                    | -1.120                  | 21          | PASS    |
| pi/4-DQPSK     | 0              | 2402                    | 0.304                   | 21          | PASS    |
|                | 39             | 2441                    | 0.449                   | 21          | PASS    |
|                | 78             | 2480                    | 0.073                   | 21          | PASS    |
| Note: N/A      |                |                         |                         |             |         |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                    |      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------|
| Test Model                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Maximum PeakConducted Output Power |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                    |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Channel 0: 2402MHz                 | GFSK |
| <div><div><div>Agilent</div><div><div>Ref 10 dBm</div><div>#Atten 20 dB</div><div>Mkr1 2.402100 GHz</div><div>-0.793 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Center</div><div>2.402000000 GHz</div></div><div><div>Center 2.402 GHz</div><div>#Res BW 3 MHz</div><div>#VBW 3 MHz</div><div>Sweep 4 ms (401 pts)</div><div>Span 10 MHz</div></div></div><div><div>Freq/Channel</div><div>Center Freq</div><div>2.40200000 GHz</div><div>Start Freq</div><div>2.39700000 GHz</div><div>Stop Freq</div><div>2.40700000 GHz</div><div>CF Step</div><div>1.00000000 MHz</div><div>Auto</div><div>Man</div><div>Freq Offset</div><div>0.00000000 Hz</div><div>Signal Track</div><div>On</div><div>Off</div><div>Scale Type</div><div>Log</div><div>Lin</div></div></div> |                                    |      |
| Test Model                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Maximum PeakConducted Output Power |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                    |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Channel 39: 2441MHz                | GFSK |
| <div><div><div>Agilent</div><div><div>Ref 10 dBm</div><div>#Atten 20 dB</div><div>Mkr1 2.441225 GHz</div><div>-0.783 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Center</div><div>2.441000000 GHz</div></div><div><div>Center 2.441 GHz</div><div>#Res BW 3 MHz</div><div>#VBW 3 MHz</div><div>Sweep 4 ms (401 pts)</div><div>Span 10 MHz</div></div></div><div><div>Freq/Channel</div><div>Center Freq</div><div>2.44100000 GHz</div><div>Start Freq</div><div>2.43600000 GHz</div><div>Stop Freq</div><div>2.44600000 GHz</div><div>CF Step</div><div>1.00000000 MHz</div><div>Auto</div><div>Man</div><div>Freq Offset</div><div>0.00000000 Hz</div><div>Signal Track</div><div>On</div><div>Off</div><div>Scale Type</div><div>Log</div><div>Lin</div></div></div> |                                    |      |

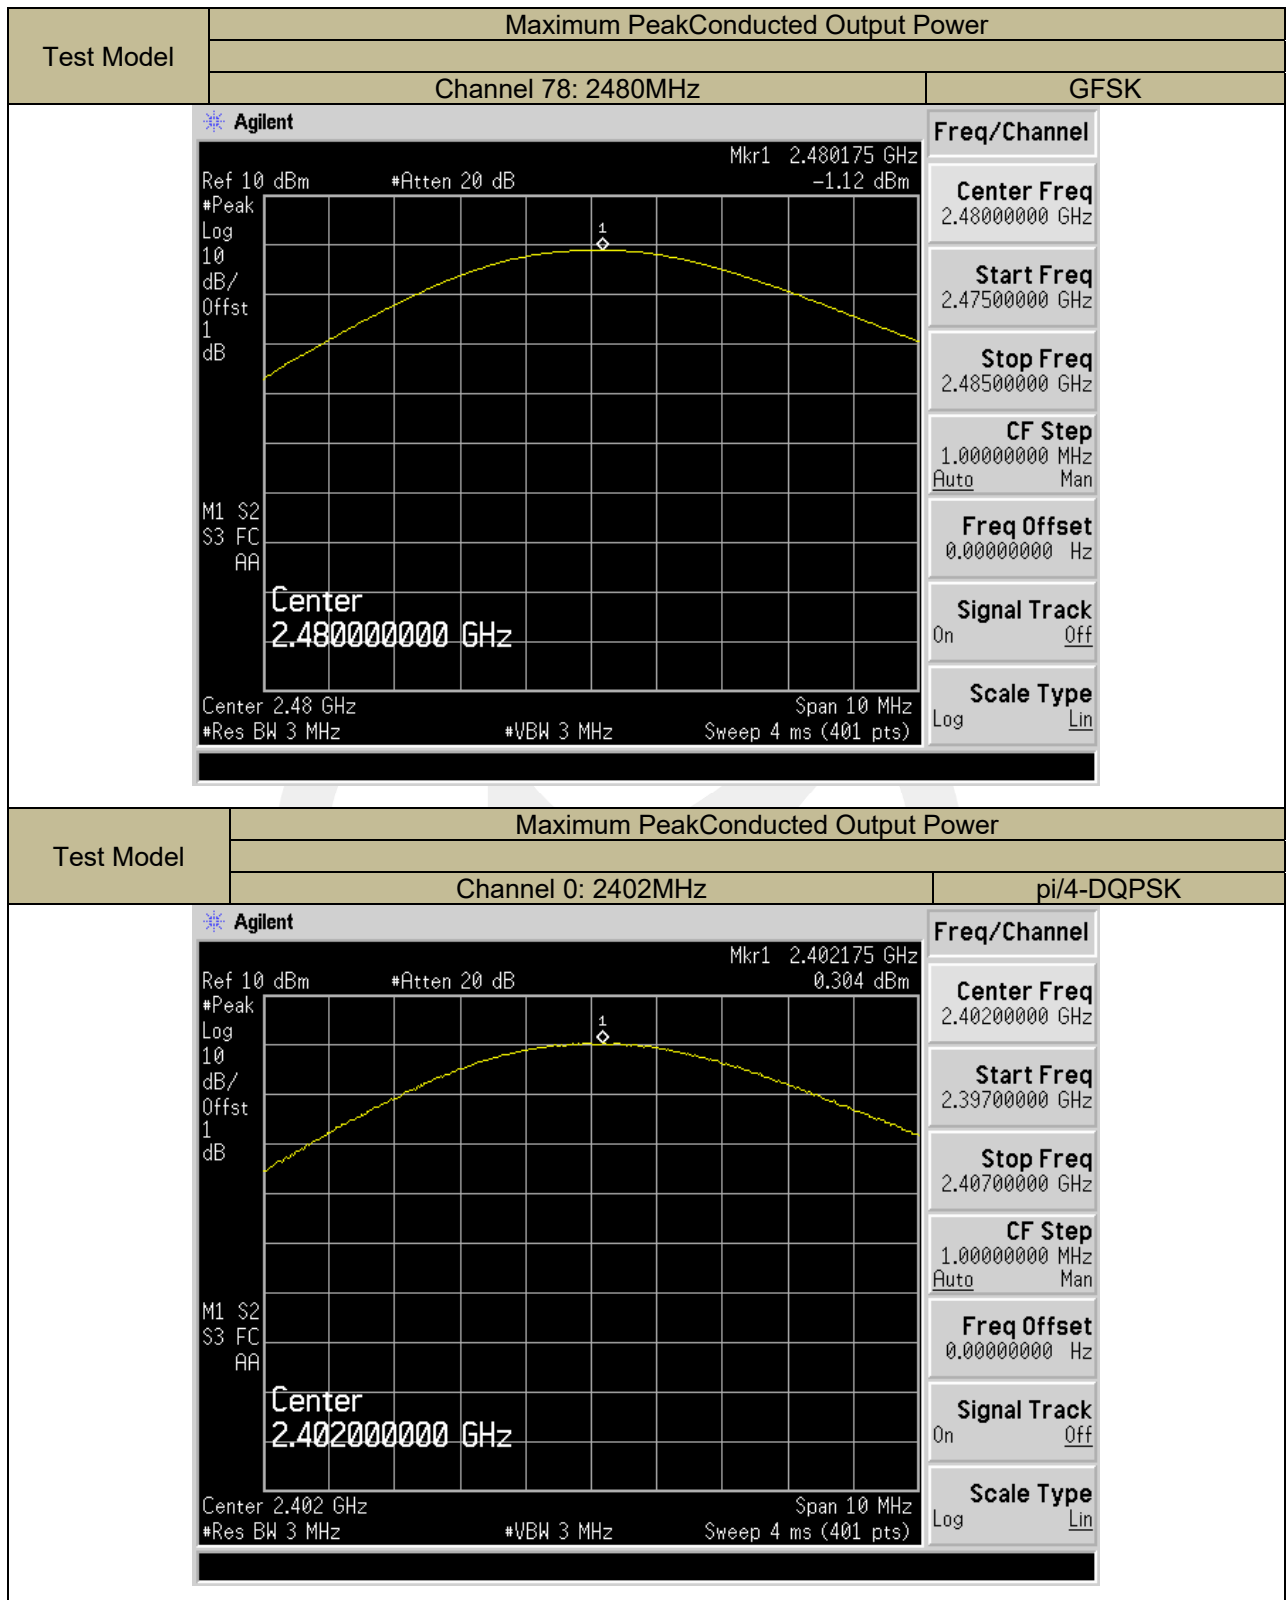

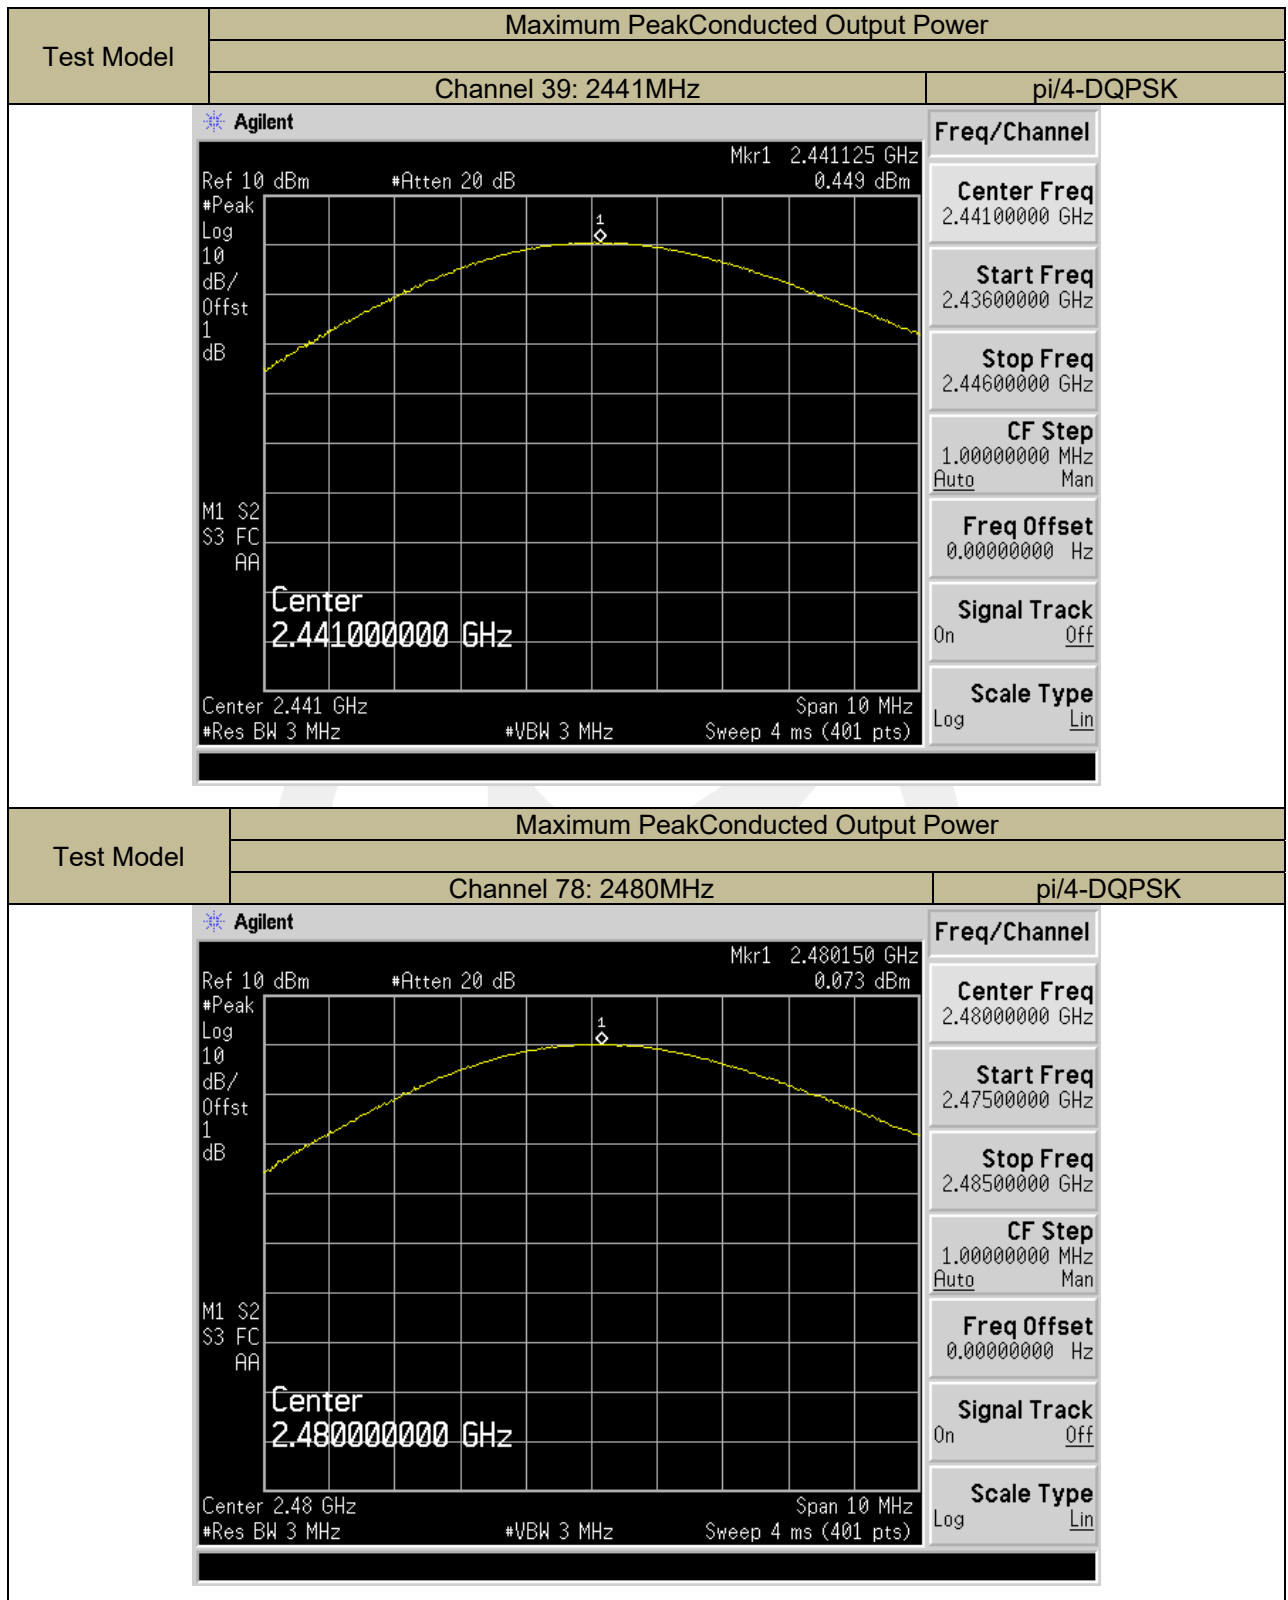

## 9.6 CONDUCTED SUPRIIOUS EMISSION

### 9.6.1 Applicable Standard

According to FCC Part 15.247(d) and 558074 D01 15.247 Meas Guidance V05r02

### 9.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconducetedlevel.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

#### ■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq 1\%$  of the span=100kHzSet VBW  $\geq$  RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### ■ ConducetedSpurious RF Conducted Emission

Use the following spectrum analyzer settings:


Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSetVBW $\geq$  RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold


Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.



### 9.6.5 Test Results

Bluetooth (GFSK, pi/4-DQPSK) mode have been tested, and the worst result(GFSK)was report as below:


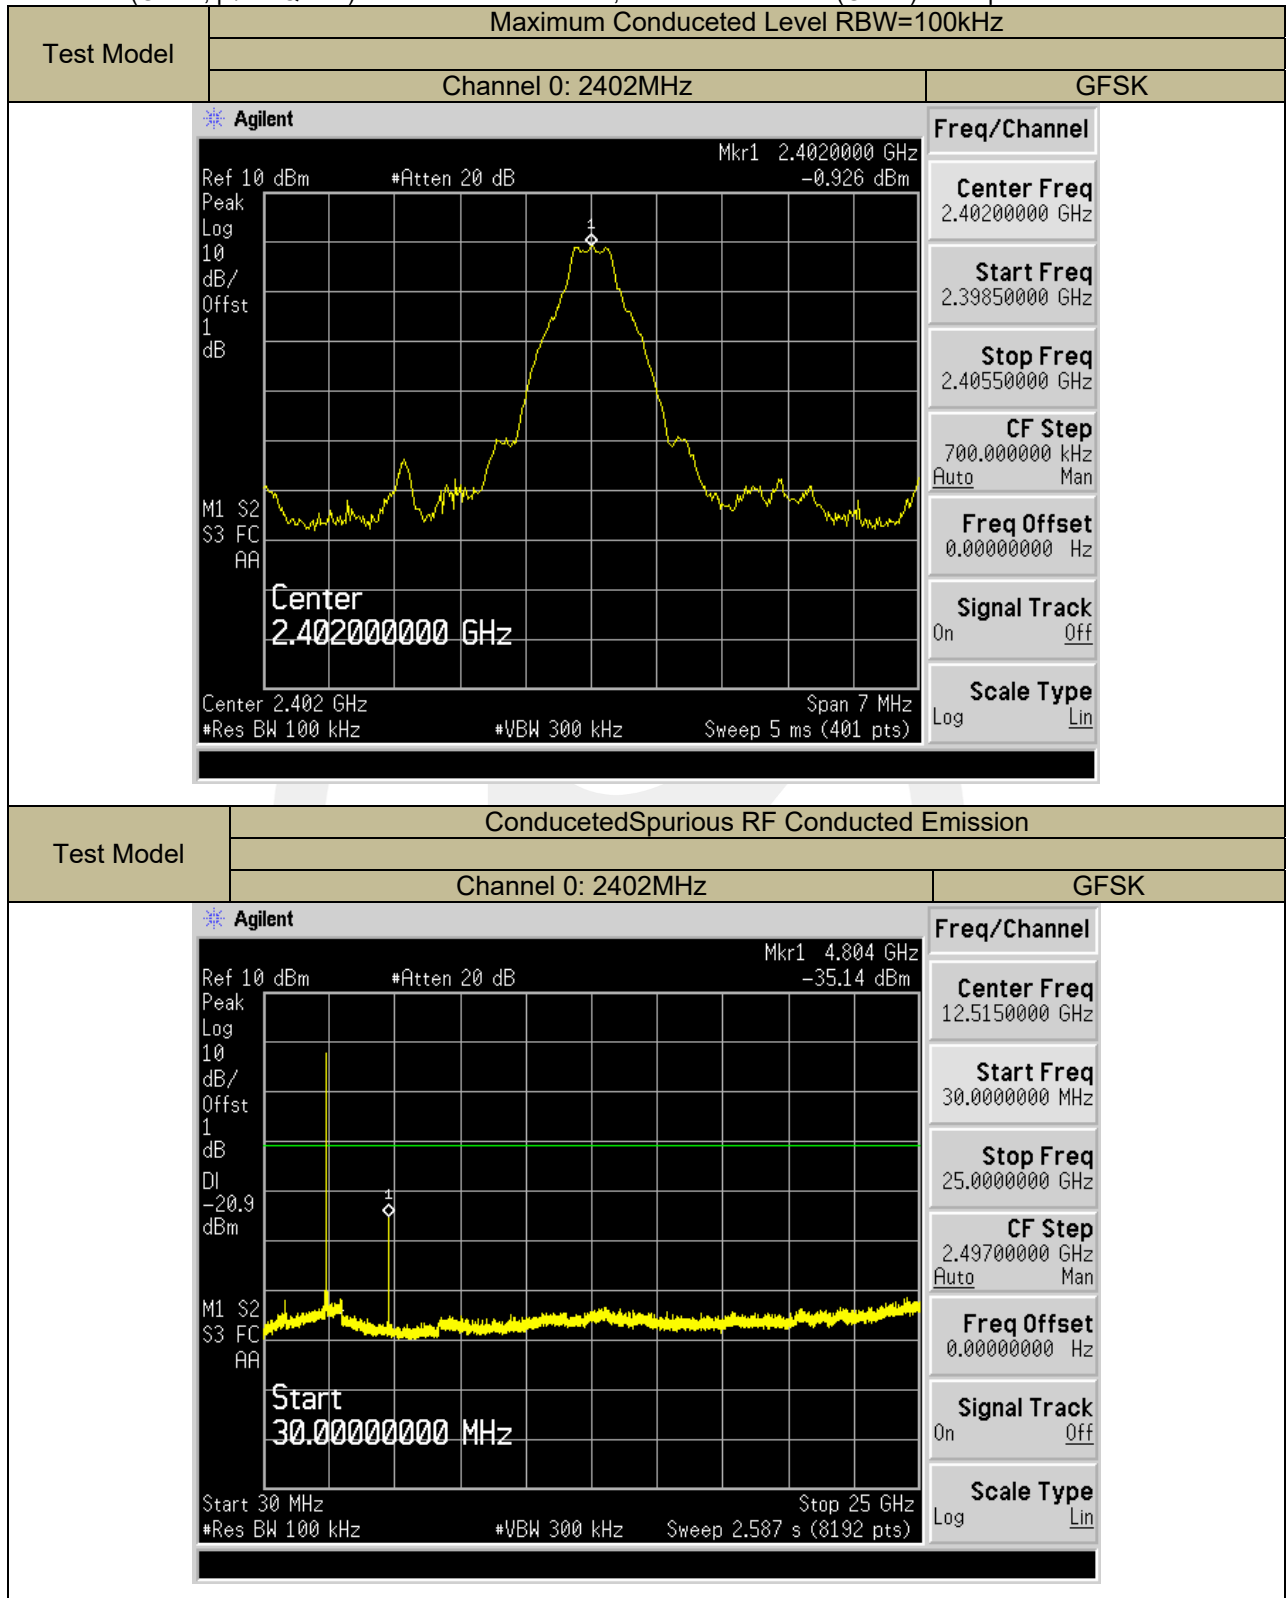





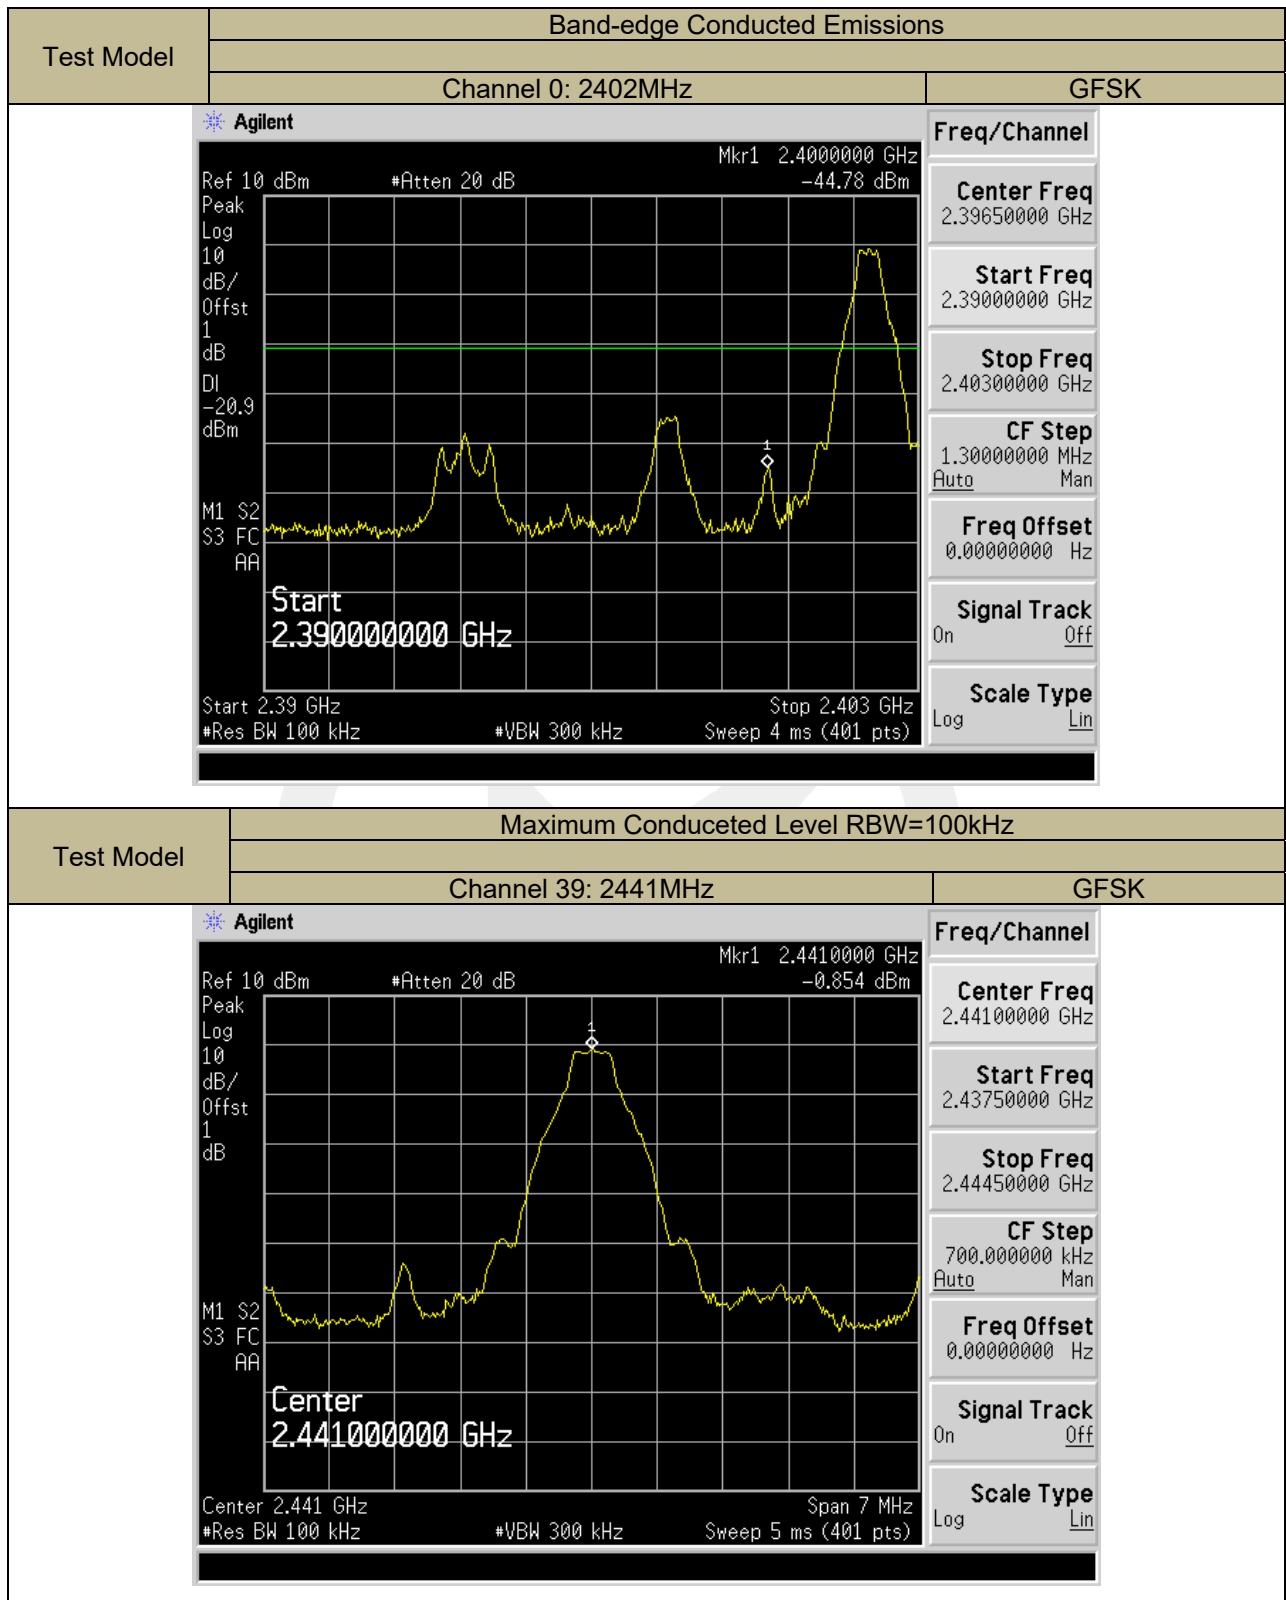
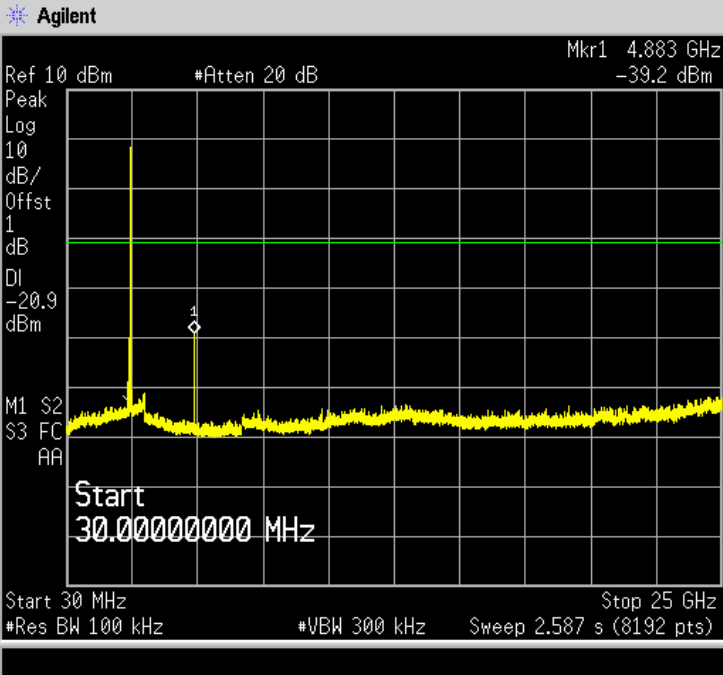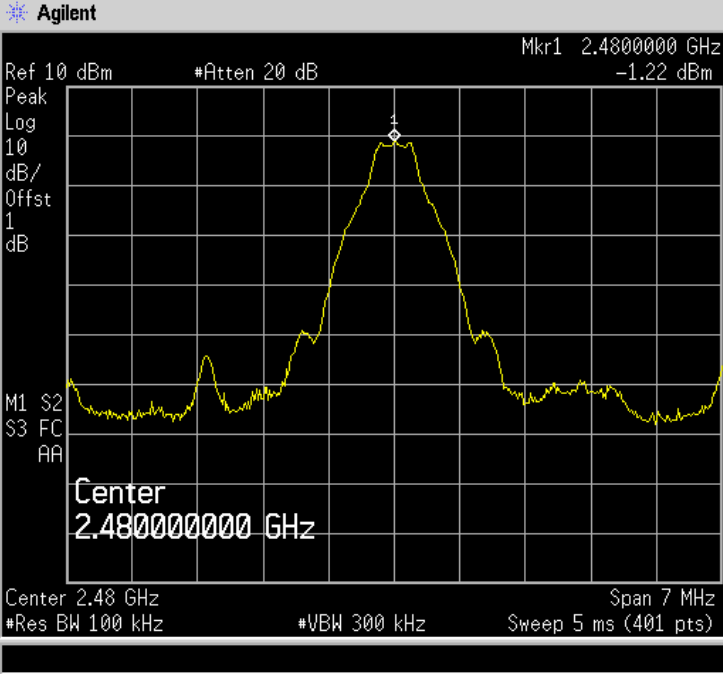
| Test Model | ConducetedSpurious RF Conducted Emission                                                                                                                                                                                                                                                                                                    |      |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
|            | Channel 39: 2441MHz                                                                                                                                                                                                                                                                                                                         | GFSK |
|            |                                                                                                                                                                                                                                                          |      |
|            | <p><b>Freq/Channel</b></p> <p><b>Center Freq</b><br/>12.5150000 GHz</p> <p><b>Start Freq</b><br/>30.0000000 MHz</p> <p><b>Stop Freq</b><br/>25.0000000 GHz</p> <p><b>CF Step</b><br/>2.49700000 GHz<br/>Auto Man</p> <p><b>Freq Offset</b><br/>0.00000000 Hz</p> <p><b>Signal Track</b><br/>On Off</p> <p><b>Scale Type</b><br/>Log Lin</p> |      |
| Test Model | Maximum Conduceted Level RBW=100kHz                                                                                                                                                                                                                                                                                                         |      |
|            | Channel 78: 2480MHz                                                                                                                                                                                                                                                                                                                         | GFSK |
|            |                                                                                                                                                                                                                                                         |      |
|            | <p><b>Freq/Channel</b></p> <p><b>Center Freq</b><br/>2.48000000 GHz</p> <p><b>Start Freq</b><br/>2.47650000 GHz</p> <p><b>Stop Freq</b><br/>2.48350000 GHz</p> <p><b>CF Step</b><br/>700.000000 kHz<br/>Auto Man</p> <p><b>Freq Offset</b><br/>0.00000000 Hz</p> <p><b>Signal Track</b><br/>On Off</p> <p><b>Scale Type</b><br/>Log Lin</p> |      |



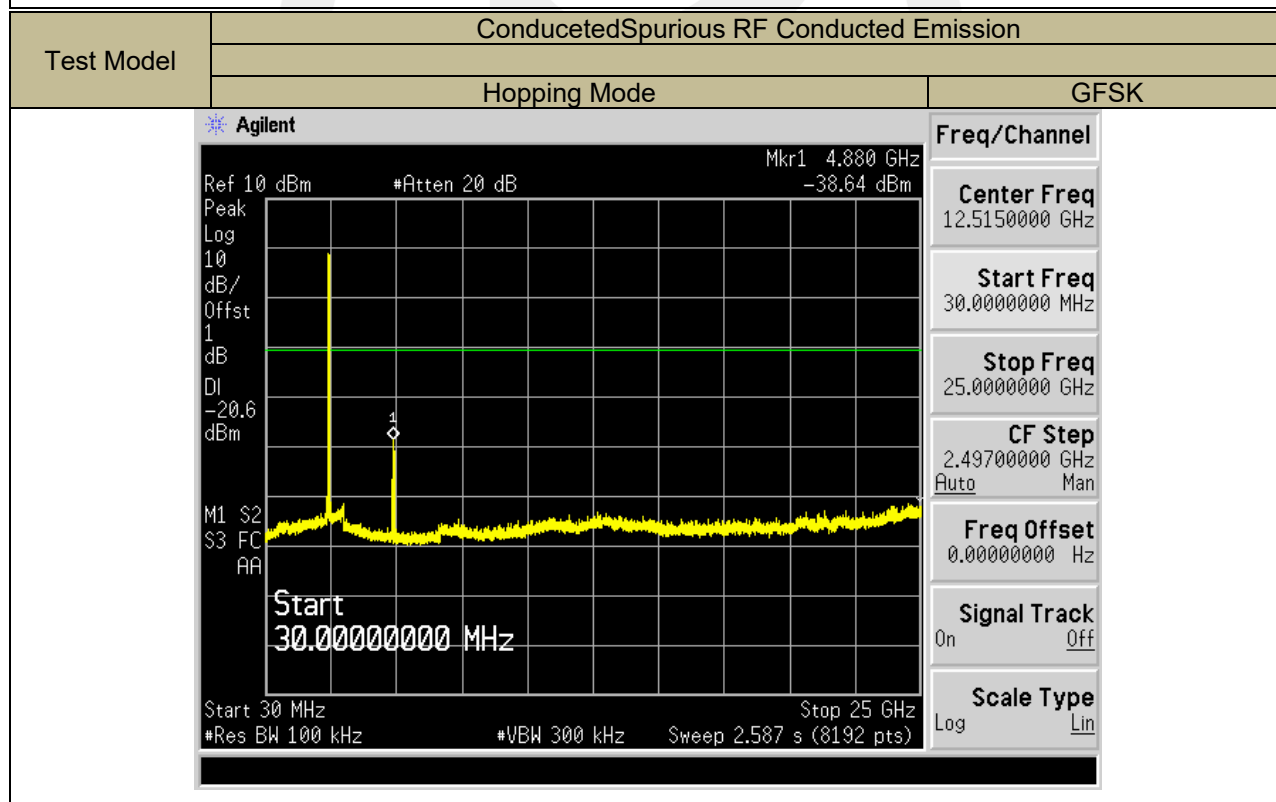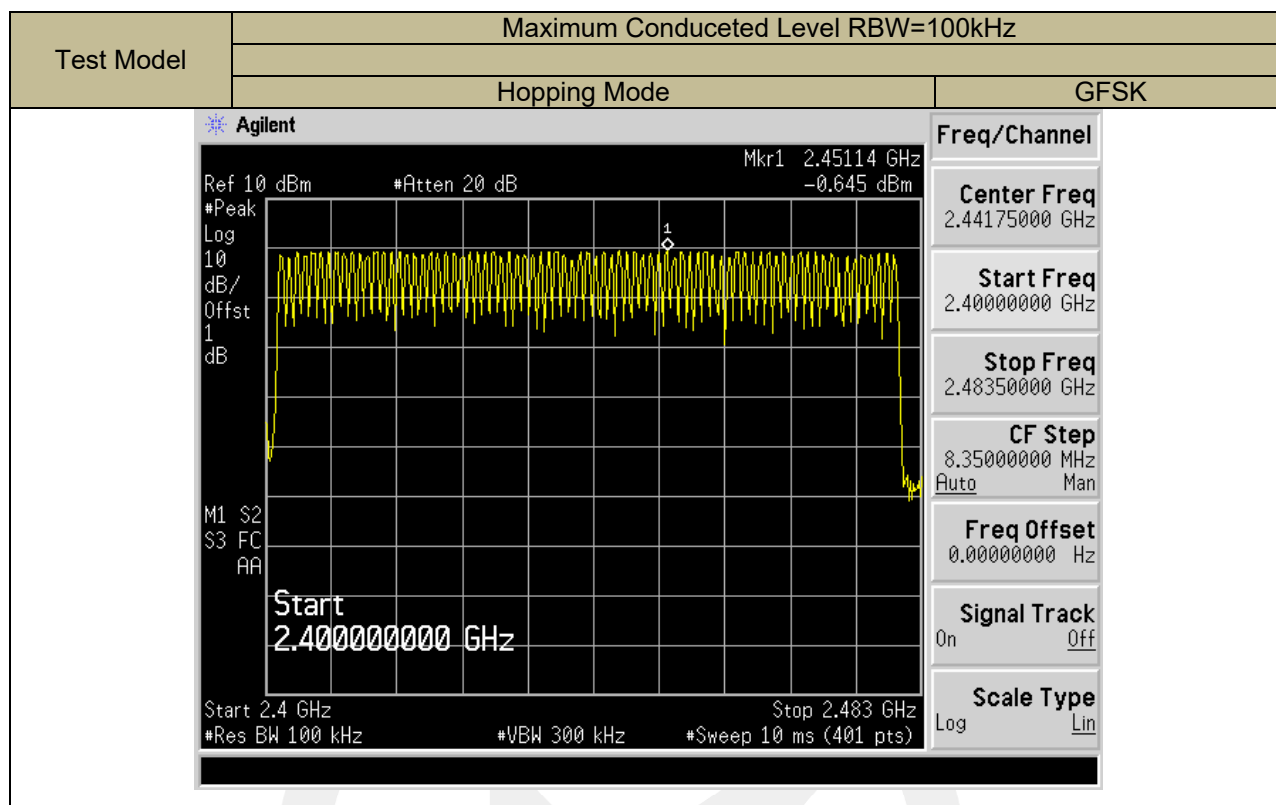

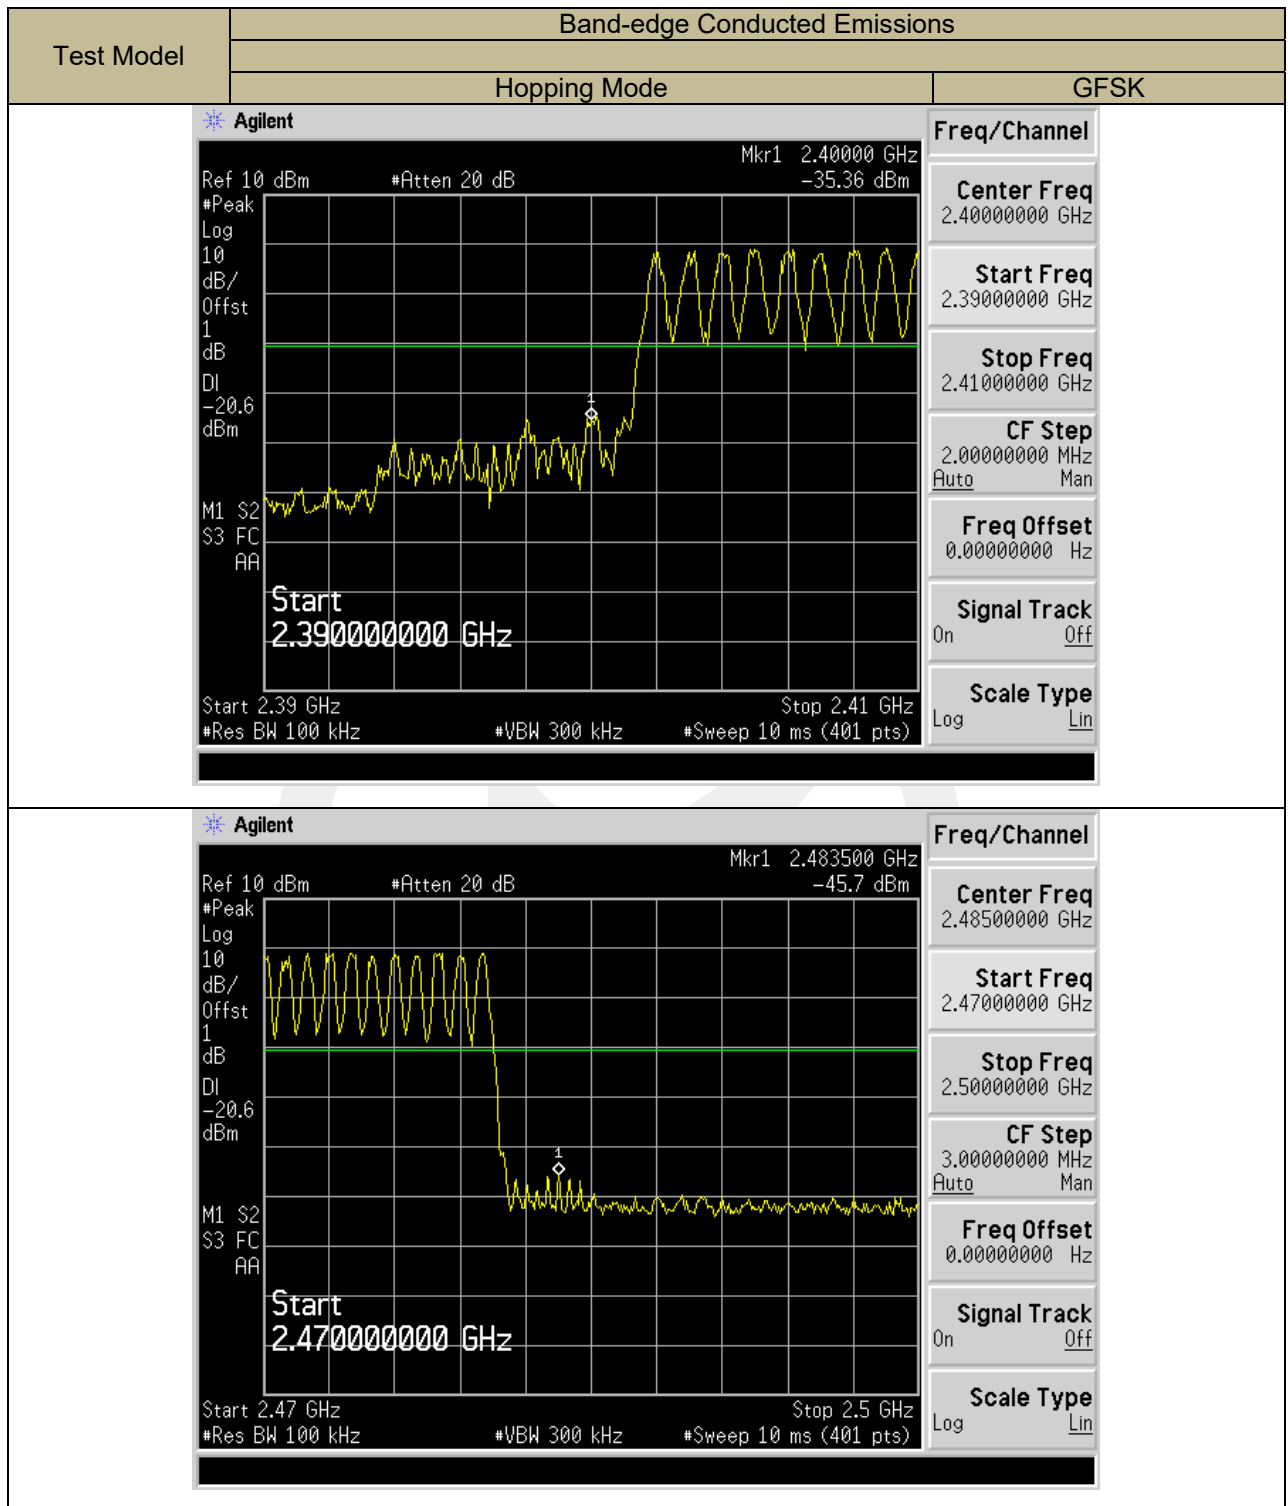

## 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and 558074 D01 15.247 Meas Guidance V05r02

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

According to FCC Part 15.209, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009-0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490-1.705               | 24000/F(KHz)          | 20 log (uV/m)           | 30                   |
| 1.705-30                  | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz (1GHz to 25GHz), 100 kHz for  $f < 1$  GHz (30MHz to 1GHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

## 9.7.5 Test Results

### ■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature: 24℃ Test Date: October 14, 2020  
Humidity: 55 % Test By: XW  
Test mode: TX Mode

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |    | Limit 3m(dBuV/m) |    | Over(dB) |    |
|----------------|-----------------|---------------------------|----|------------------|----|----------|----|
|                |                 | PK                        | AV | PK               | AV | PK       | AV |
| --             | --              | --                        | -- | --               | -- | --       | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance}/\text{test distance})$  (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

### ■ Spurious Emission Above 1GHz(1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, non hopping) mode have been tested, and the worst result(GFSK)was report as below:

Temperature: 24℃ Test Date: October 14, 2020  
Humidity: 55 % Test By: XW  
Test mode: GFSK Frequency: Channel 0: 2402MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |       | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|-------|----------|--------|
|                |                 | PK                        | AV    | PK               | AV    | PK       | AV     |
| 5195.955       | V               | 61.06                     | 50.65 | 74.00            | 54.00 | -12.94   | -3.35  |
| 10858.53       | V               | 52.92                     | 43.47 | 74.00            | 54.00 | -21.08   | -10.53 |
| 17905.48       | V               | 56.31                     | 47.31 | 74.00            | 54.00 | -17.69   | -6.69  |
| 5195.955       | H               | 60.04                     | 50.23 | 74.00            | 54.00 | -13.96   | -3.77  |
| 10356.02       | H               | 53.03                     | 45.38 | 74.00            | 54.00 | -20.97   | -8.60  |
| 17905.48       | H               | 56.14                     | 47.51 | 74.00            | 54.00 | -17.86   | -6.49  |

Temperature: 24℃  
Humidity: 55 %  
Test mode: GFSK

Test Date: October 14, 2020  
Test By: XW  
Frequency: Channel 39: 2441MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |       | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|-------|----------|--------|
|                |                 | PK                        | AV    | PK               | AV    | PK       | AV     |
| 5182.295       | V               | 60.25                     | 50.18 | 74.00            | 54.00 | -13.75   | -3.82  |
| 10548.62       | V               | 52.50                     | 44.63 | 74.00            | 54.00 | -21.50   | -9.37  |
| 15697.27       | V               | 52.72                     | 43.98 | 74.00            | 54.00 | -21.28   | -10.02 |
| 5168.671       | H               | 59.72                     | 49.98 | 74.00            | 54.00 | -14.28   | -4.02  |
| 8022.306       | H               | 50.65                     | 42.83 | 74.00            | 54.00 | -23.35   | -11.17 |
| 13439.19       | H               | 53.80                     | 44.27 | 74.00            | 54.00 | -20.20   | -9.73  |

Temperature: 24℃  
Humidity: 55 %  
Test mode: GFSK

Test Date: October 14, 2020  
Test By: XW  
Frequency: Channel 78: 2480MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |       | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|-------|----------|--------|
|                |                 | PK                        | AV    | PK               | AV    | PK       | AV     |
| 7070.073       | V               | 48.75                     | 40.91 | 74.00            | 54.00 | -25.25   | -13.09 |
| 11689.12       | V               | 53.31                     | 44.35 | 74.00            | 54.00 | -20.69   | -9.65  |
| 17952.67       | V               | 52.57                     | 43.68 | 74.00            | 54.00 | -21.43   | -10.32 |
| 4903.591       | H               | 48.44                     | 39.64 | 74.00            | 54.00 | -25.56   | -14.36 |
| 7651.049       | H               | 49.30                     | 40.21 | 74.00            | 54.00 | -24.70   | -13.79 |
| 13439.19       | H               | 52.38                     | 43.96 | 74.00            | 54.00 | -21.62   | -10.04 |

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
(3) Correct Factor= Ant\_F + Cab\_L - Preamp  
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz  
Bluetooth (GFSK, pi/4-DQPSK) mode have been tested, and the worst result(GFSK, Hopping)  
was report as below:

Temperature: 24°C Test Date: October 14, 2020  
Humidity: 55% Test By: XW  
Test mode: GFSK Frequency: Channel 0: 2402MHz

| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) | Over (dB) |
|-----------------|--------------|-----------------------|-------------------|----------|-----------------------|-------------------|-----------|
| 2371.725        | H            | 48.28                 | 74.00             | -25.72   | 40.25                 | 54.00             | -13.75    |
| 2376.722        | V            | 38.96                 | 74.00             | -35.04   | 32.49                 | 54.00             | -21.51    |


Temperature: 24°C Test Date: October 14, 2020  
Humidity: 55% Test By: XW  
Test mode: GFSK Frequency: Channel 78: 2480MHz


| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) | Over (dB) |
|-----------------|--------------|-----------------------|-------------------|----------|-----------------------|-------------------|-----------|
| 2483.500        | H            | 51.97                 | 74.00             | -22.03   | 43.56                 | 54.00             | -10.44    |
| 2483.575        | V            | 45.18                 | 74.00             | -28.82   | 38.97                 | 54.00             | -15.03    |


Temperature: 24°C Test Date: October 14, 2020  
Humidity: 55% Test By: XW  
Test mode: GFSK Frequency: Hopping

| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) | Over (dB) |
|-----------------|--------------|-----------------------|-------------------|----------|-----------------------|-------------------|-----------|
| 2390.000        | H            | 45.79                 | 74.00             | -28.21   | 38.97                 | 54.00             | -15.03    |
| 2483.500        | H            | 44.01                 | 74.00             | -29.99   | 36.58                 | 54.00             | -17.42    |
| 2390.000        | V            | 41.60                 | 74.00             | -32.40   | 33.25                 | 54.00             | -20.75    |
| 2483.500        | V            | 42.63                 | 74.00             | -31.37   | 36.98                 | 54.00             | -17.02    |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
(3) Correct Factor= Ant\_F + Cab\_L - Preamp  
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

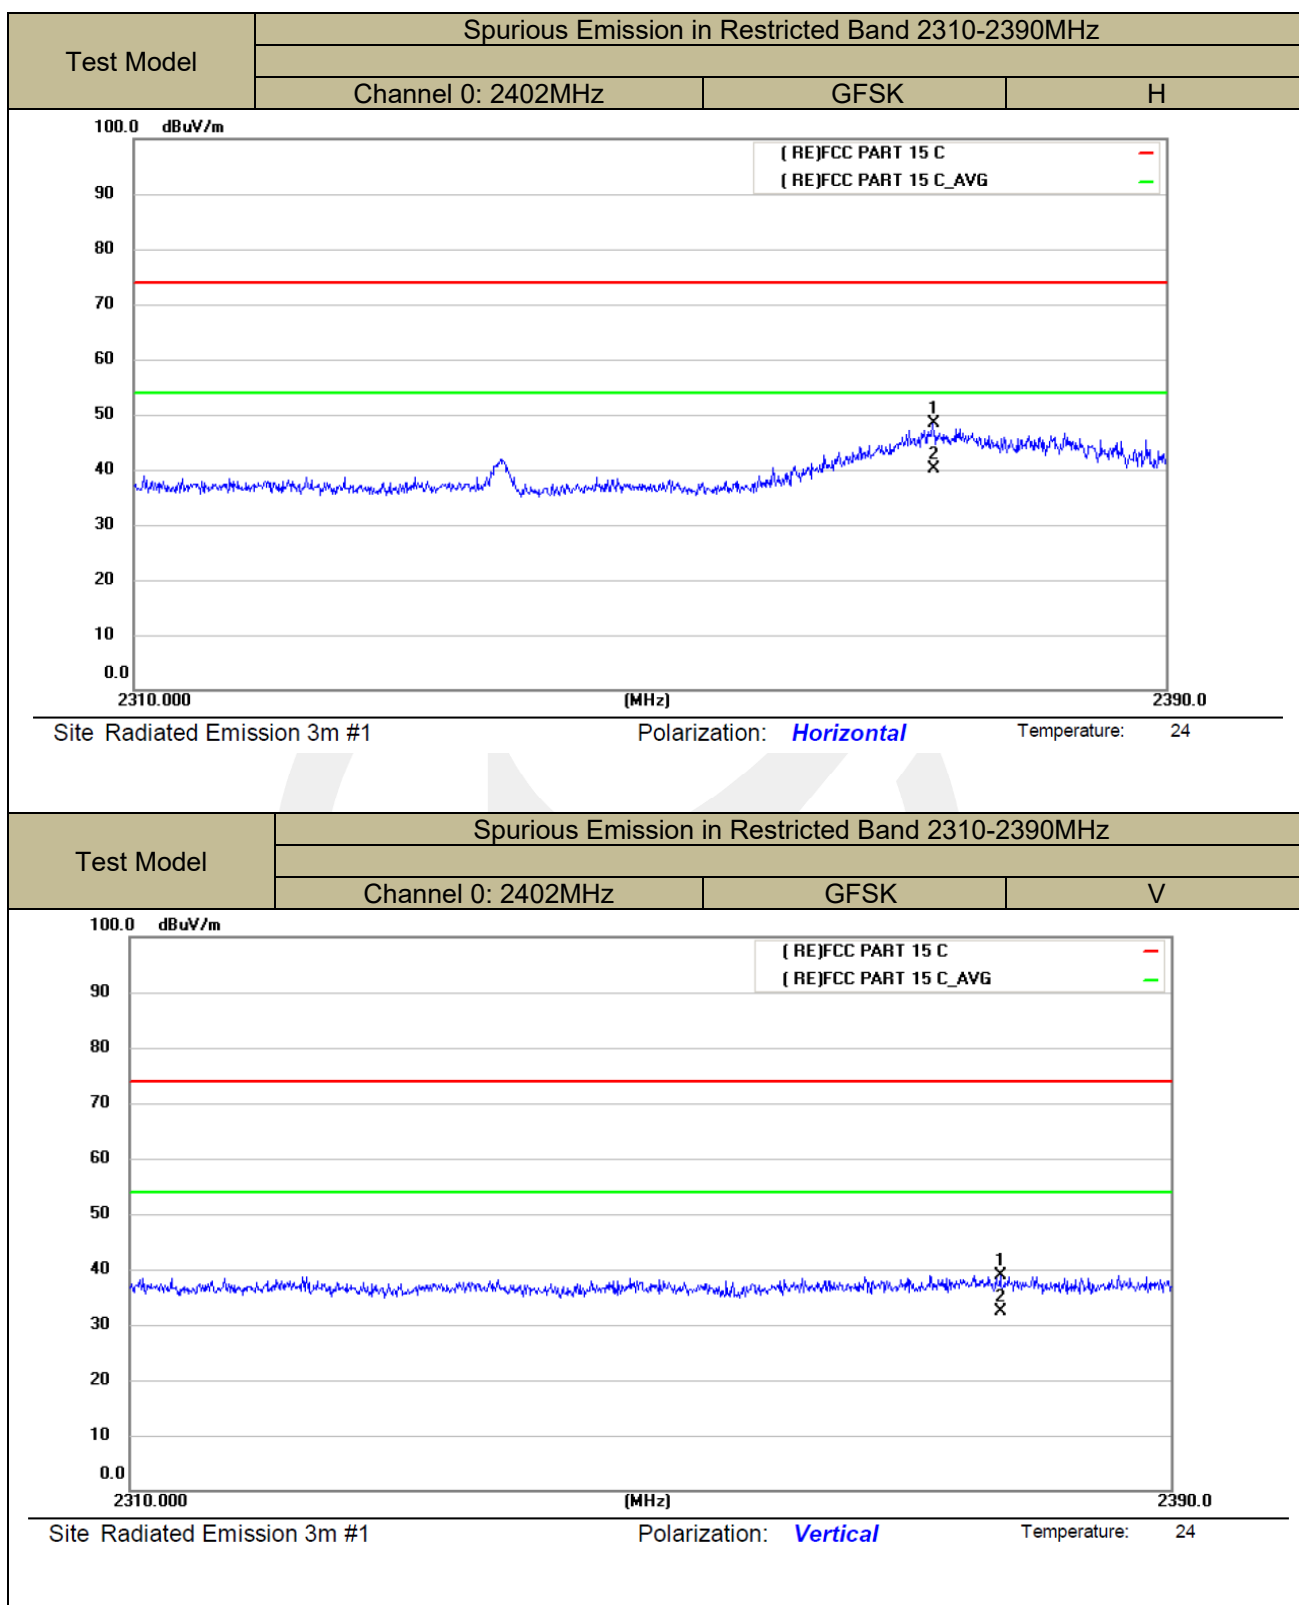


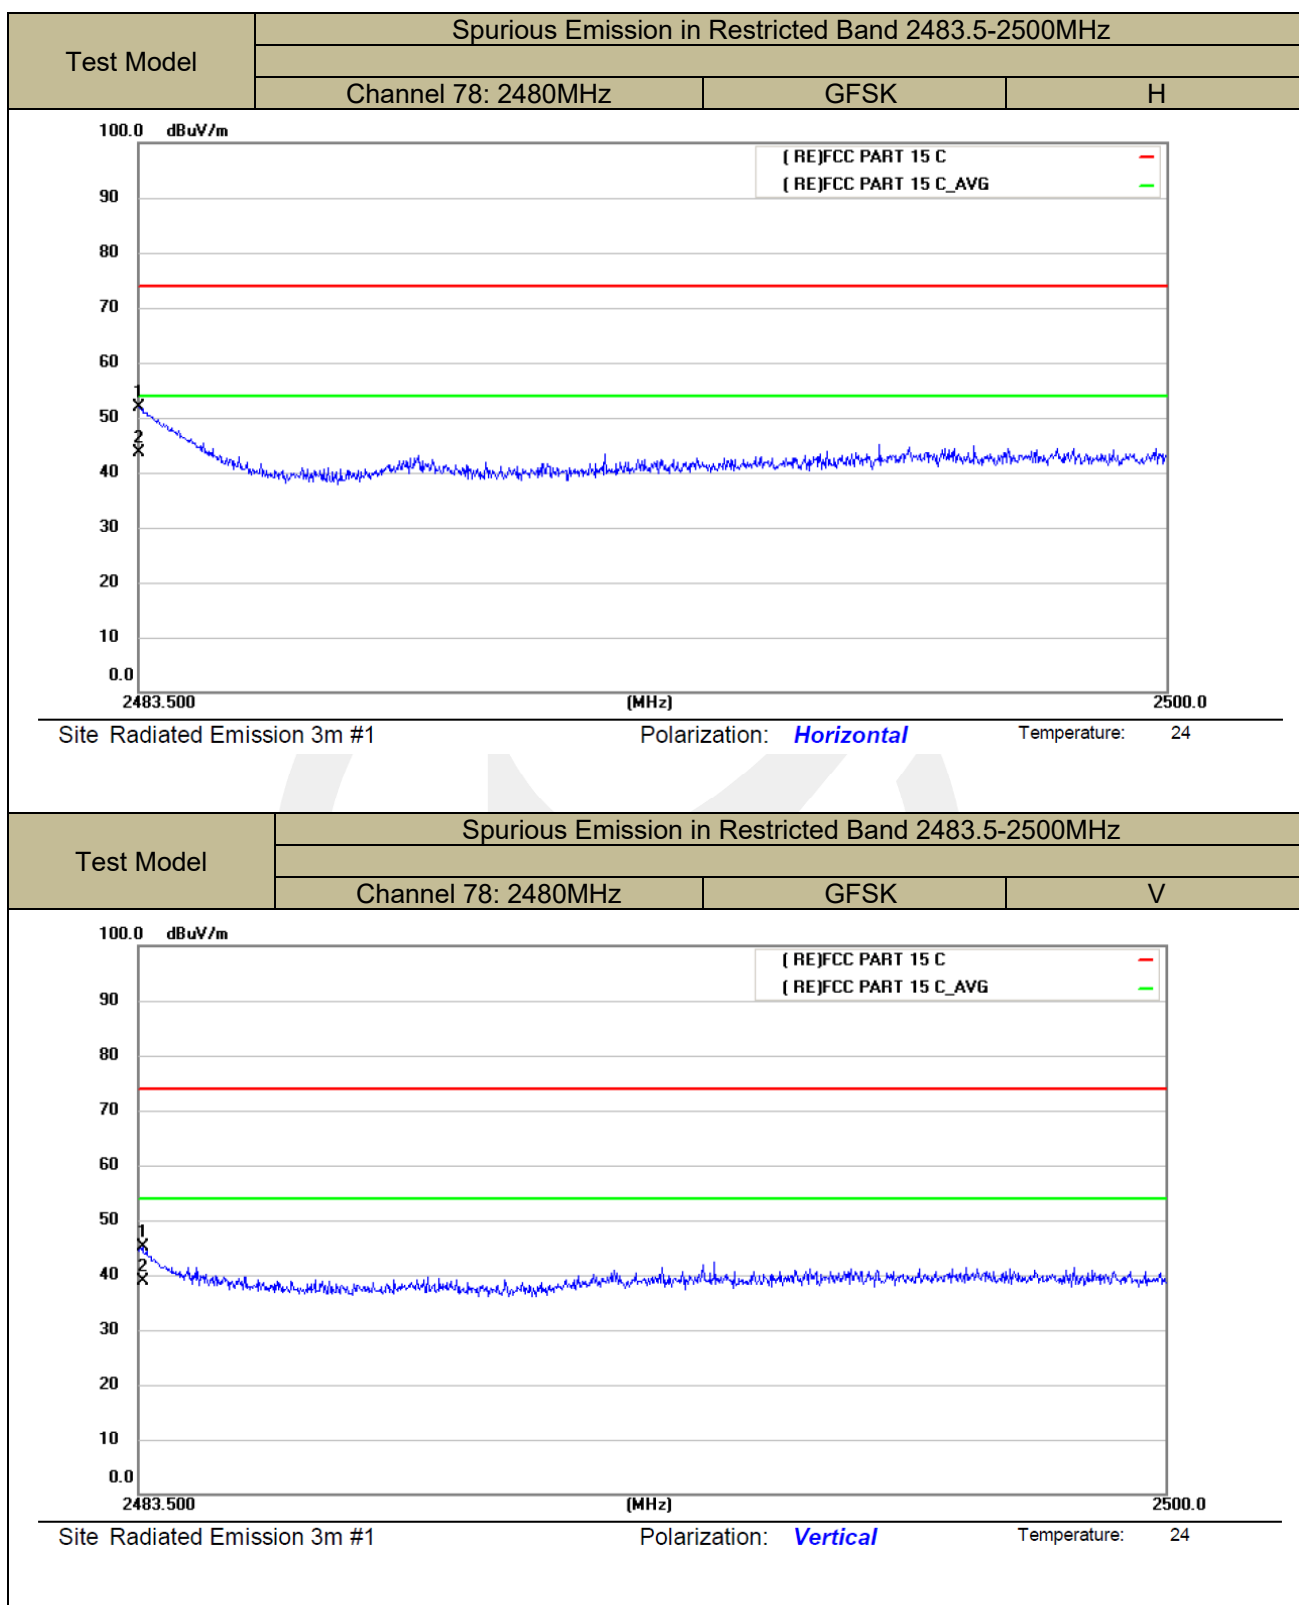

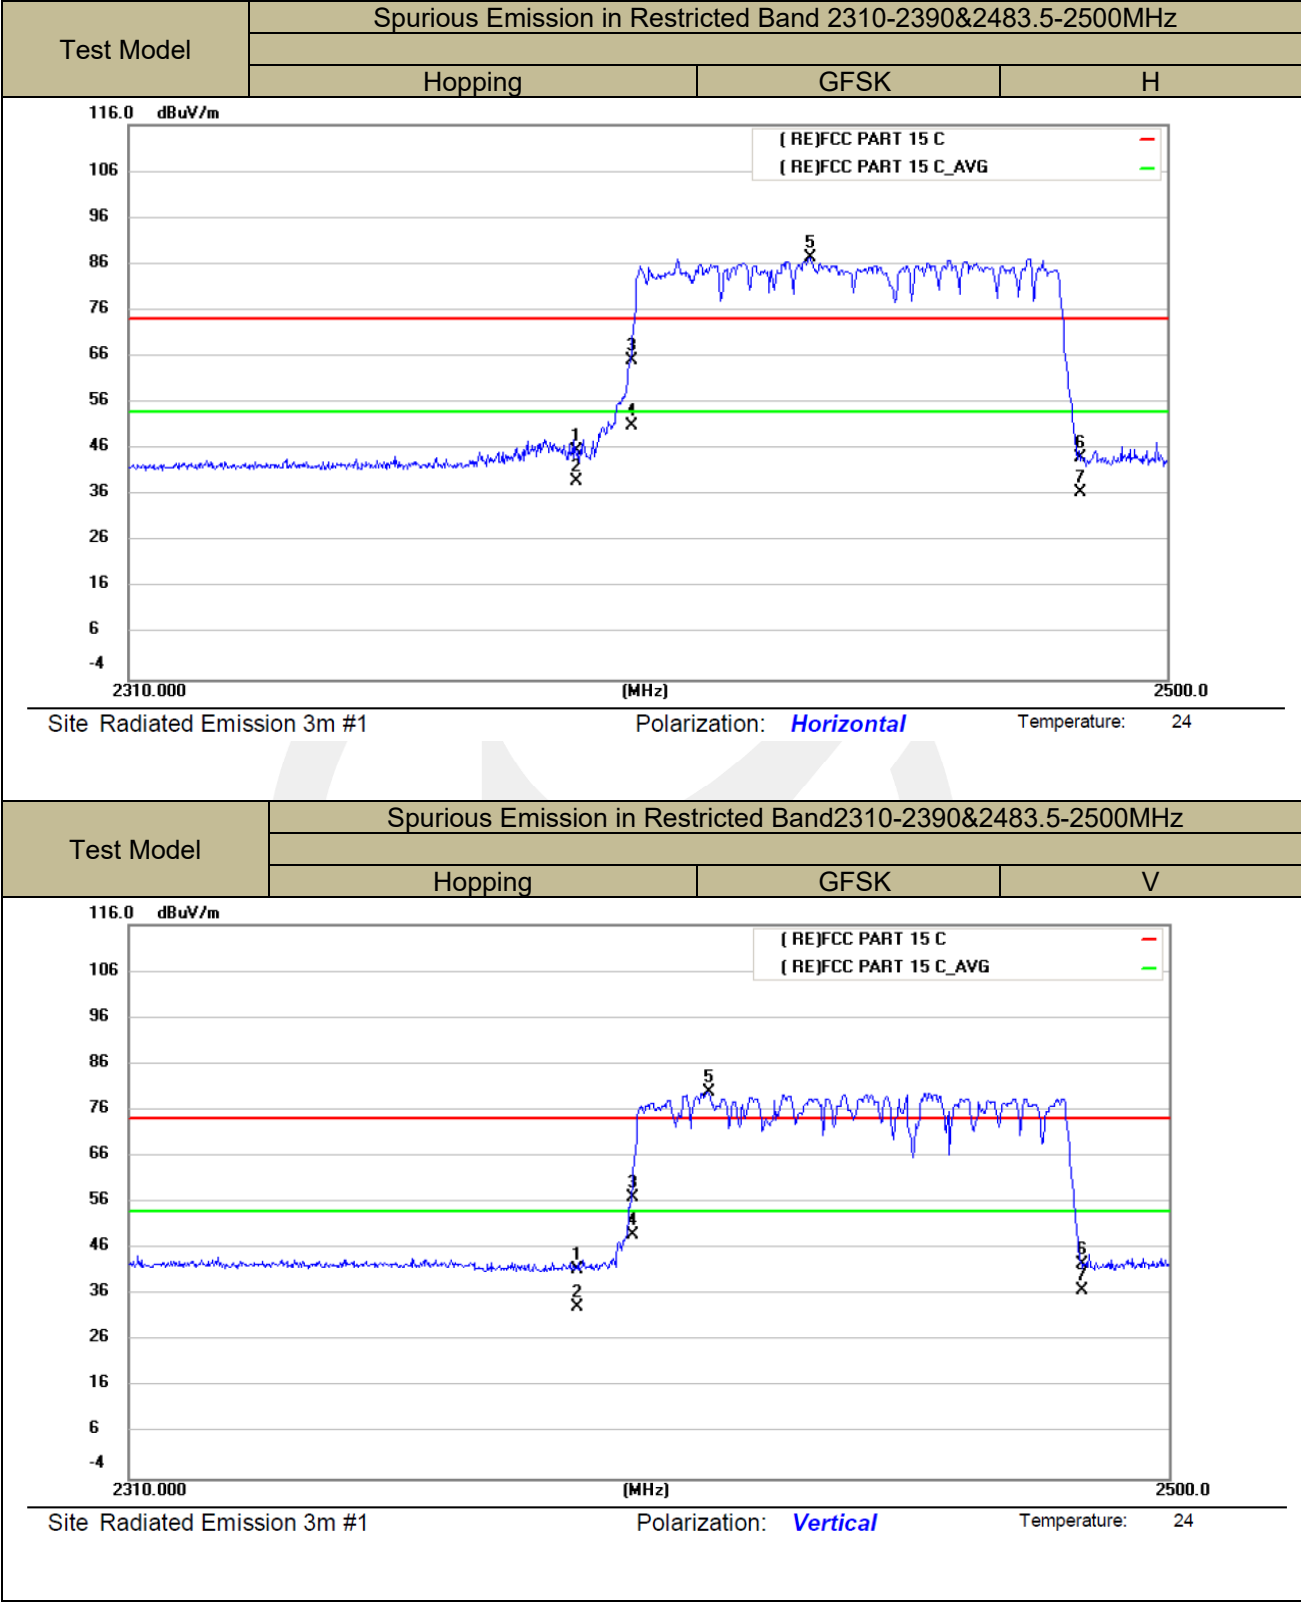


## ■ Spurious Emission below 1GHz(30MHz to 1GHz)

Bluetooth (GFSK, pi/4-DQPSK)modehave been tested, and the worst result(GFSK) recorded was report as below:

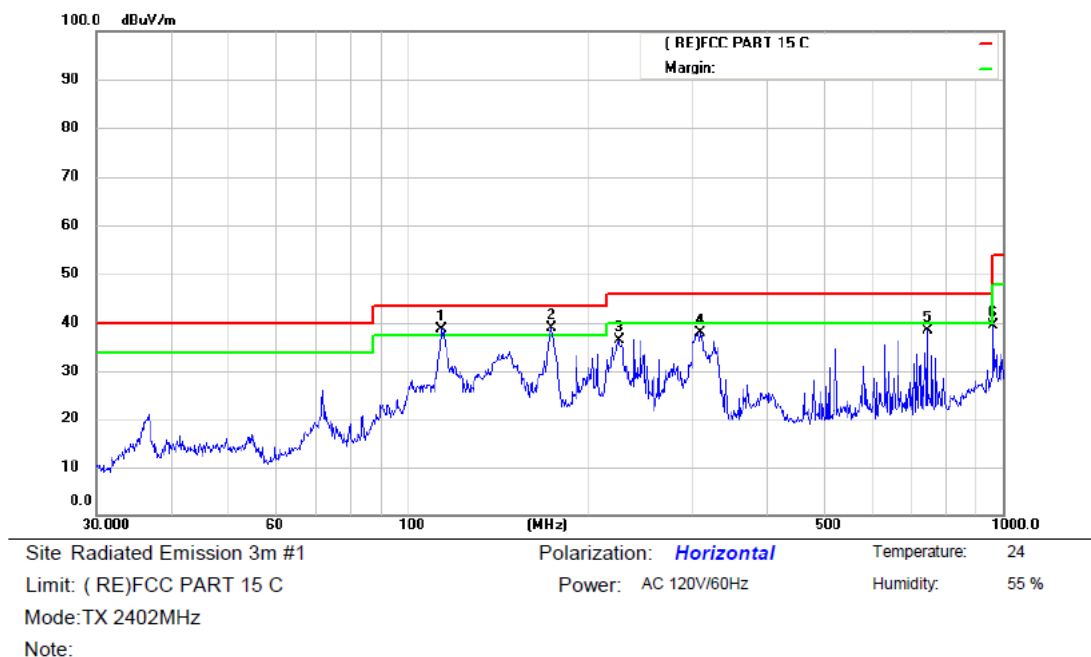

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|-----------------|---------|
| 1   | !   | 114.1136     | 62.68                    | -23.98                  | 38.70                      | 43.50           | -4.80      | QP                      |                 |         |
| 2   | *   | 174.4240     | 65.18                    | -26.28                  | 38.90                      | 43.50           | -4.60      | QP                      |                 |         |
| 3   |     | 226.0994     | 59.56                    | -23.16                  | 36.40                      | 46.00           | -9.60      | QP                      |                 |         |
| 4   |     | 309.9977     | 57.85                    | -20.05                  | 37.80                      | 46.00           | -8.20      | QP                      |                 |         |
| 5   |     | 744.8659     | 48.67                    | -10.37                  | 38.30                      | 46.00           | -7.70      | QP                      |                 |         |
| 6   |     | 962.1621     | 47.27                    | -7.87                   | 39.40                      | 54.00           | -14.60     | QP                      |                 |         |

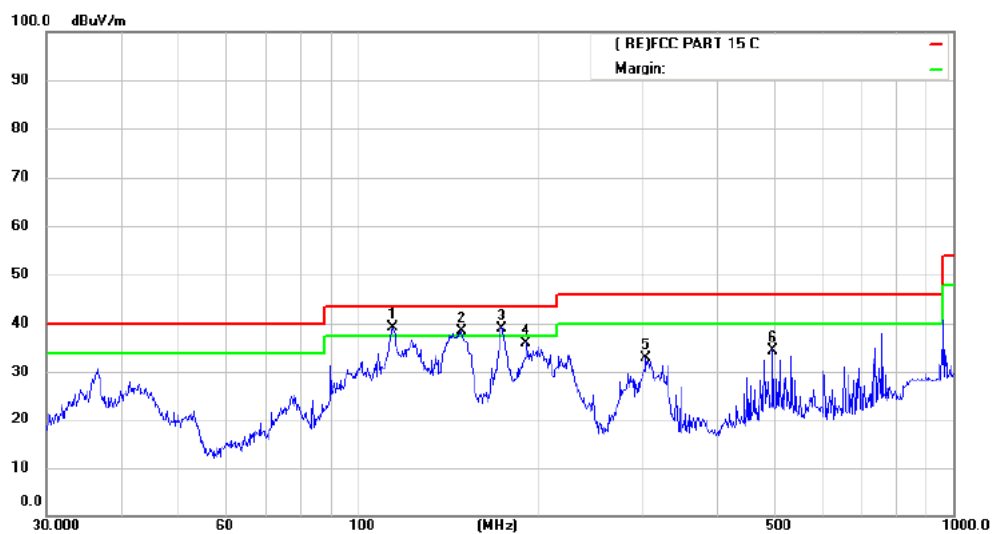

Site Radiated Emission 3m #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 C


Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX 2402MHz

Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   | *   | 114.5146     | 63.14                    | -24.04                  | 39.10                      | 43.50           | -4.40      | QP       |                         |                           |         |
| 2   | !   | 149.4857     | 64.66                    | -26.36                  | 38.30                      | 43.50           | -5.20      | QP       |                         |                           |         |
| 3   | !   | 174.4240     | 65.28                    | -26.28                  | 39.00                      | 43.50           | -4.50      | QP       |                         |                           |         |
| 4   |     | 191.7450     | 59.38                    | -23.38                  | 36.00                      | 43.50           | -7.50      | QP       |                         |                           |         |
| 5   |     | 304.6099     | 53.02                    | -20.12                  | 32.90                      | 46.00           | -13.10     | QP       |                         |                           |         |
| 6   |     | 497.6764     | 50.90                    | -16.40                  | 34.50                      | 46.00           | -11.50     | QP       |                         |                           |         |

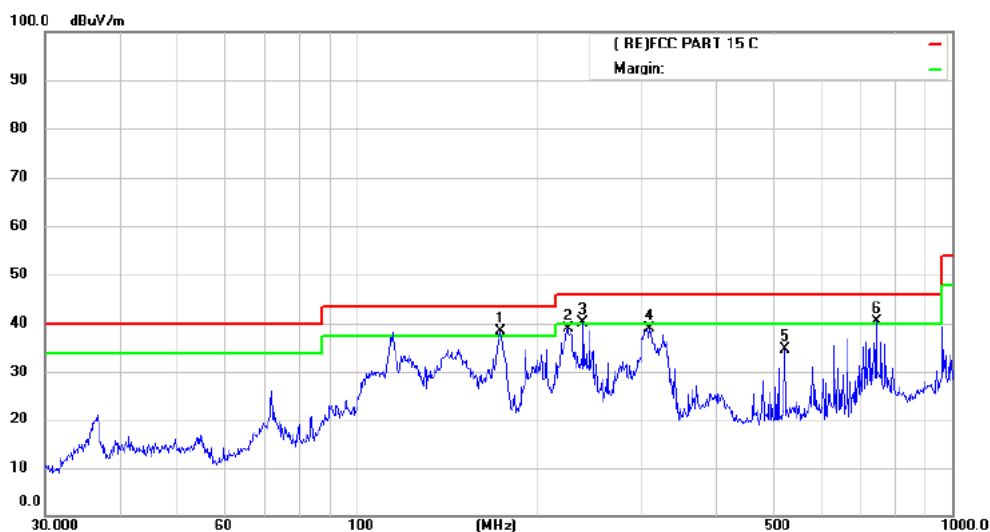

Site Radiated Emission 3m #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX 2441MHz

Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   | *   | 174.4240     | 64.68                    | -26.28                  | 38.40                      | 43.50           | -5.10      | QP                      |                           |         |
| 2   |     | 226.0994     | 62.06                    | -23.16                  | 38.90                      | 46.00           | -7.10      | QP                      |                           |         |
| 3   | !   | 239.9873     | 63.05                    | -22.95                  | 40.10                      | 46.00           | -5.90      | QP                      |                           |         |
| 4   |     | 309.9977     | 58.85                    | -20.05                  | 38.80                      | 46.00           | -7.20      | QP                      |                           |         |
| 5   |     | 522.7178     | 49.33                    | -14.73                  | 34.60                      | 46.00           | -11.40     | QP                      |                           |         |
| 6   | !   | 744.8659     | 50.67                    | -10.37                  | 40.30                      | 46.00           | -5.70      | QP                      |                           |         |



Site Radiated Emission 3m #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz


Humidity: 55 %

Mode: TX 2441MHz

Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   | *   | 114.1136     | 63.88                    | -23.98                  | 39.90                      | 43.50           | -3.60      | QP                      |                           |         |
| 2   | !   | 115.3204     | 62.87                    | -24.17                  | 38.70                      | 43.50           | -4.80      | QP                      |                           |         |
| 3   | !   | 149.4857     | 64.66                    | -26.36                  | 38.30                      | 43.50           | -5.20      | QP                      |                           |         |
| 4   |     | 174.4240     | 63.78                    | -26.28                  | 37.50                      | 43.50           | -6.00      | QP                      |                           |         |
| 5   |     | 758.0407     | 50.11                    | -10.21                  | 39.90                      | 46.00           | -6.10      | QP                      |                           |         |
| 6   |     | 962.1621     | 49.57                    | -7.87                   | 41.70                      | 54.00           | -12.30     | QP                      |                           |         |



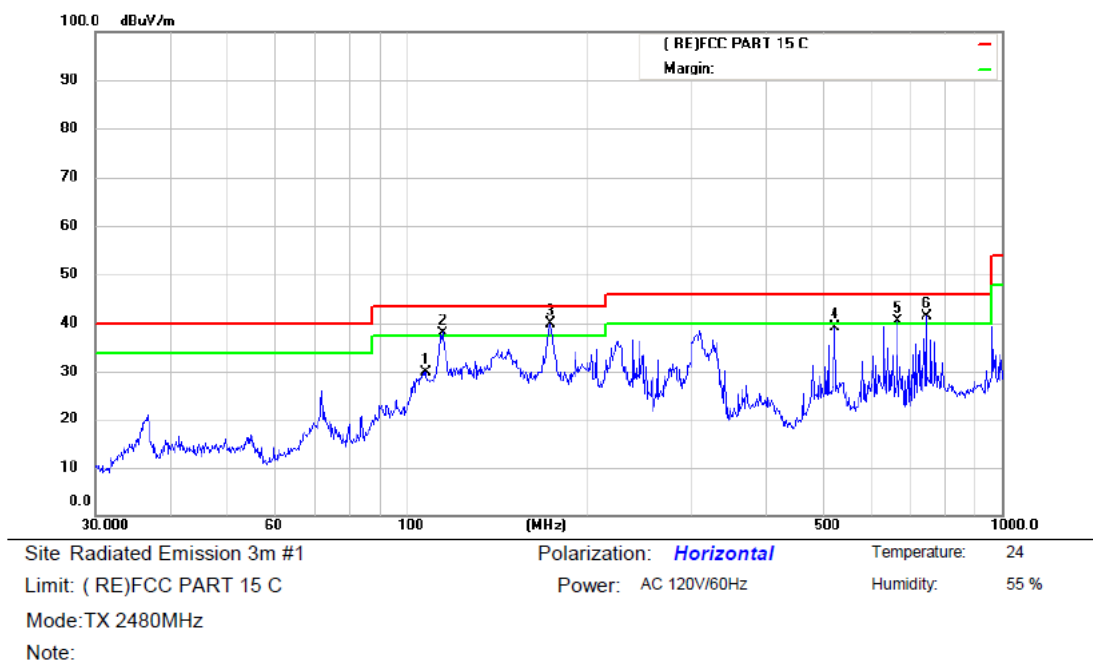

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   |     | 107.8876     | 52.90                    | -23.10                  | 29.80                      | 43.50           | -13.70     | QP       |                         |                           |         |
| 2   | !   | 114.9167     | 62.11                    | -24.11                  | 38.00                      | 43.50           | -5.50      | QP       |                         |                           |         |
| 3   | *   | 174.4240     | 66.18                    | -26.28                  | 39.90                      | 43.50           | -3.60      | QP       |                         |                           |         |
| 4   |     | 522.7178     | 53.83                    | -14.73                  | 39.10                      | 46.00           | -6.90      | QP       |                         |                           |         |
| 5   | !   | 665.8034     | 53.63                    | -13.33                  | 40.30                      | 46.00           | -5.70      | QP       |                         |                           |         |
| 6   | !   | 744.8659     | 51.67                    | -10.37                  | 41.30                      | 46.00           | -4.70      | QP       |                         |                           |         |



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   | *   | 114.5146     | 62.14                    | -24.04                  | 38.10                      | 43.50           | -5.40      | QP                      |                           |         |
| 2   | !   | 123.2651     | 63.43                    | -25.33                  | 38.10                      | 43.50           | -5.40      | QP                      |                           |         |
| 3   | !   | 147.9214     | 64.38                    | -26.78                  | 37.60                      | 43.50           | -5.90      | QP                      |                           |         |
| 4   | !   | 174.4240     | 64.28                    | -26.28                  | 38.00                      | 43.50           | -5.50      | QP                      |                           |         |
| 5   |     | 758.0407     | 48.11                    | -10.21                  | 37.90                      | 46.00           | -8.10      | QP                      |                           |         |
| 6   |     | 962.1621     | 51.57                    | -7.87                   | 43.70                      | 54.00           | -10.30     | QP                      |                           |         |

## 9.8 CONDUCTED EMISSION TEST

### 9.8.1 Applicable Standard

According to FCC Part 15.207(a)

### 9.8.2 Conformance Limit

| Frequency(MHz) | Conducted Emission Limit |         |
|----------------|--------------------------|---------|
|                | Quasi-peak               | Average |
| 0.15-0.5       | 66-56                    | 56-46   |
| 0.5-5.0        | 56                       | 46      |
| 5.0-30.0       | 60                       | 50      |

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 9.8.3 Test Configuration


Test according to clause 7.3 conducted emission test setup

### 9.8.4 Test Procedure


The EUT was placed on a table which is 0.1m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 9.8.5 Test Results

Pass.

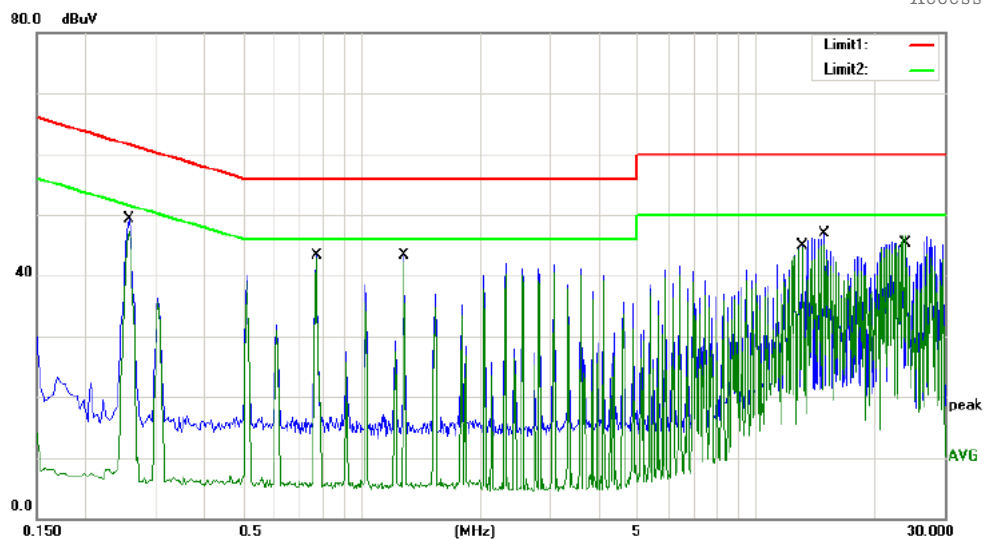

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1       | 0.2575       | 39.20                    | 10.09                   | 49.29                    | 61.51         | -12.22     | QP       |         |
| 2       | 0.2575       | 37.20                    | 10.09                   | 47.29                    | 51.51         | -4.22      | AVG      |         |
| 3       | 0.7670       | 33.30                    | 9.98                    | 43.28                    | 56.00         | -12.72     | QP       |         |
| 4 *     | 0.7670       | 32.80                    | 9.98                    | 42.78                    | 46.00         | -3.22      | AVG      |         |
| 5       | 1.2755       | 33.40                    | 9.88                    | 43.28                    | 56.00         | -12.72     | QP       |         |
| 6       | 1.2755       | 32.30                    | 9.88                    | 42.18                    | 46.00         | -3.82      | AVG      |         |
| 7       | 13.0573      | 34.31                    | 10.59                   | 44.90                    | 60.00         | -15.10     | QP       |         |
| 8       | 13.0573      | 34.00                    | 10.59                   | 44.59                    | 50.00         | -5.41      | AVG      |         |
| 9       | 14.8280      | 36.20                    | 10.61                   | 46.81                    | 60.00         | -13.19     | QP       |         |
| 10      | 14.8280      | 34.40                    | 10.61                   | 45.01                    | 50.00         | -4.99      | AVG      |         |
| 11      | 23.5111      | 38.80                    | 10.56                   | 46.36                    | 60.00         | -13.64     | QP       |         |
| 12      | 23.5111      | 34.70                    | 10.56                   | 35.26                    | 50.0          | -14.74     | AVG      |         |

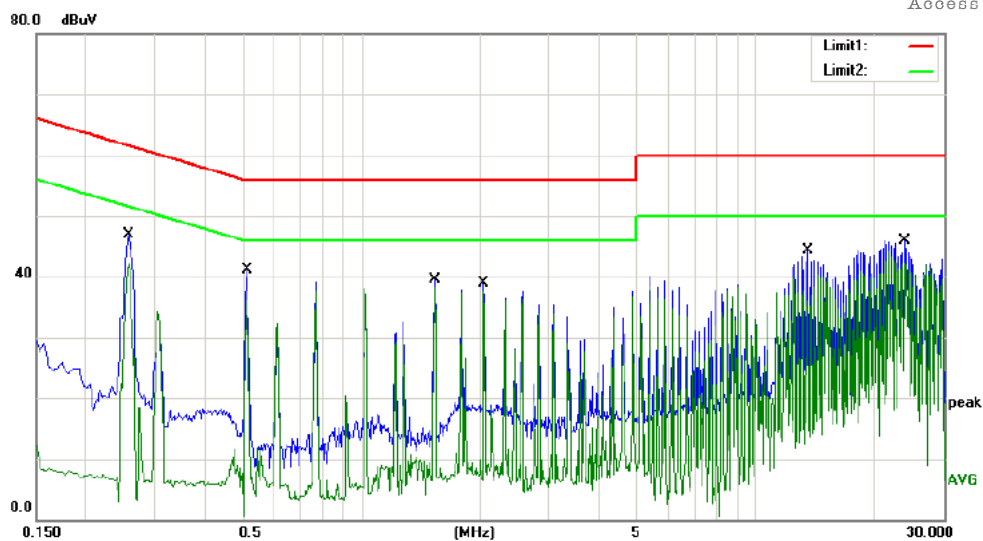

Site site #1

Phase: **N**

Temperature: 24

Limit: (CE)FCC PART 15.207\_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: Bluetooth Input

Note:

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.2575  | 36.80         | 10.09          | 46.89       | 61.51 | -14.62 | QP       |         |
| 2   |     | 0.2575  | 32.00         | 10.09          | 42.09       | 51.51 | -9.42  | AVG      |         |
| 3   |     | 0.5127  | 30.90         | 10.10          | 41.00       | 56.00 | -15.00 | QP       |         |
| 4   |     | 0.5127  | 21.20         | 10.10          | 31.30       | 46.00 | -14.70 | AVG      |         |
| 5   |     | 1.5354  | 29.60         | 9.89           | 39.49       | 56.00 | -16.51 | QP       |         |
| 6   | *   | 1.5354  | 28.40         | 9.89           | 38.29       | 46.00 | -7.71  | AVG      |         |
| 7   |     | 2.0440  | 28.90         | 9.93           | 38.83       | 56.00 | -17.17 | QP       |         |
| 8   |     | 2.0440  | 27.50         | 9.93           | 37.43       | 46.00 | -8.57  | AVG      |         |
| 9   |     | 13.5508 | 33.70         | 10.60          | 44.30       | 60.00 | -15.70 | QP       |         |
| 10  |     | 13.5508 | 25.50         | 10.60          | 36.10       | 50.00 | -13.90 | AVG      |         |
| 11  |     | 23.7615 | 35.00         | 10.55          | 45.55       | 60.00 | -14.45 | QP       |         |
| 12  |     | 23.7615 | 22.50         | 10.55          | 33.05       | 50.00 | -16.95 | AVG      |         |

## 9.9 ANTENNA APPLICATION

### 9.9.1 Antenna Requirement

| Standard           | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CRF Part15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.9.2 Result

Pass.

The EUT has 1 antenna: a PCB Antenna gain is -0.58 dBi;

Note: ☒ Antenna use a permanently attached antenna which is not replaceable.  
☐ Not using a standard antenna jack or electrical connector for antenna replacement  
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

\*\*\* End of Report \*\*\*

## 声 明 Statement

1. 本报告无授权批准人签字及“检验报告专用章”无效;

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制;

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效, 委托方对样品的代表性和资料的真实性负责;

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内, 仅作为客户委托、科研、教学或内部质量控制等目的使用;

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定, 未考虑不确定度所带来的风险, 本实验室不承担相关责任, 特别约定、标准或规范中有明确规定的除外;

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议, 请于收到报告之日起 20 日内提出;

Objections shall be raised within 20 days from the date receiving the report.