

RF Exposure Evaluation

FCC ID: 2AXTH-T7-22

1 Measuring Standard

KDB 680106 Wireless Power Transfer D01 V04

2 Requirements


All requirements refer to Section 3 of KDB 680106 D01V04:

1. The devices may be considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]")
2. Devices Operating at Frequencies Below 4 MHz.
3. For § 2.1091-Mobile devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively.

3 Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)
Limits for Maximum Permissible Exposure (MPE)

4 Test Setup

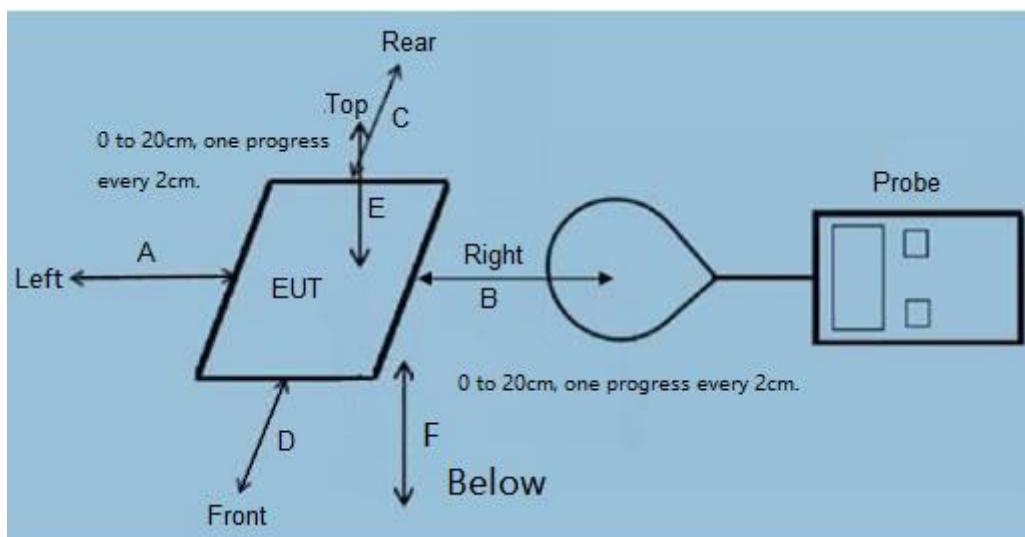

5 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed
- 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

6. Measurement Uncertainty


(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.36dB
Uncertainty for E-Field	2.42dB
Uncertainty for conducted RF Power	0.62dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1.1%
Uncertainty for DC and low frequency voltages	0.06%

7. Equipment list

Test Equipment	Manufacturer	Model No.	SN.	Last calibration	Calibrated until
Electric and Magnetic field probe-Analyzer	Narda	EHP-200A	N03565	Aug 25,2025	Aug 24,2025

7 Placement Mode 1 Photo

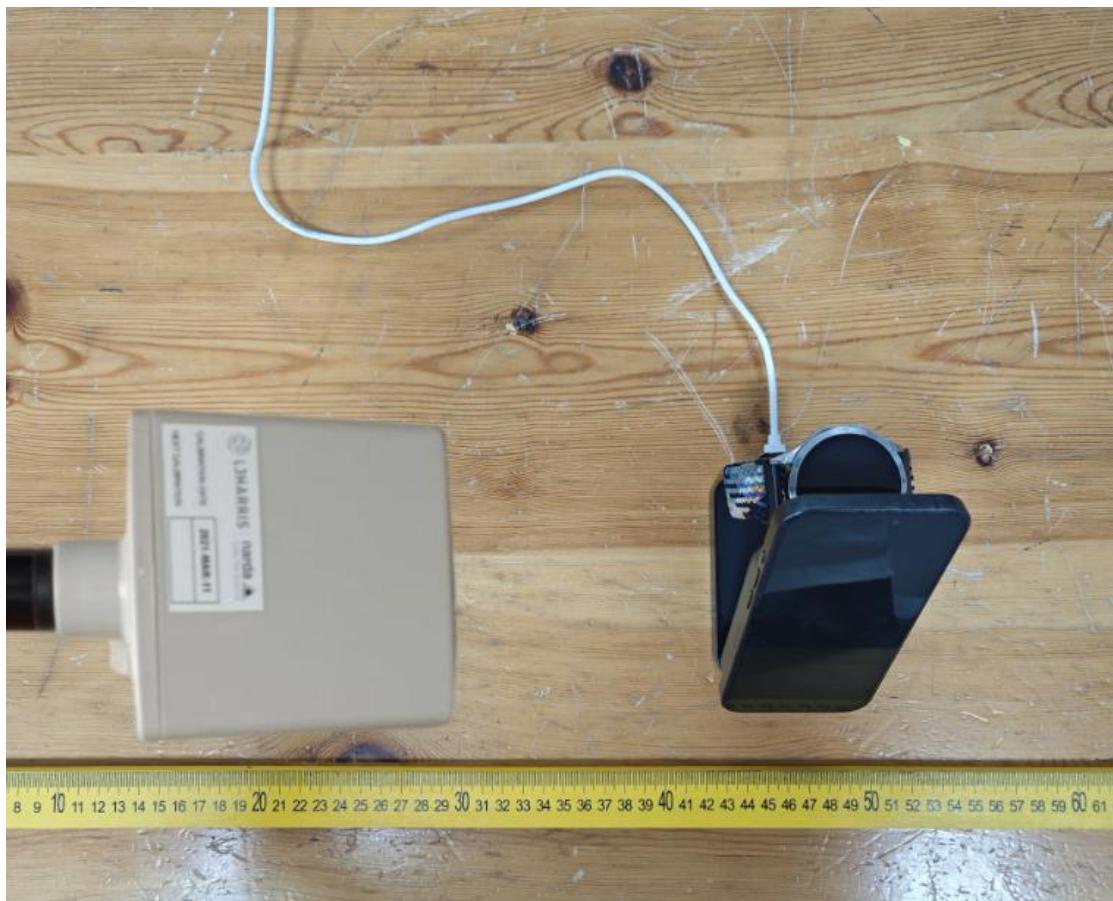

8 Test mode

Mode 1	Watch(5W)
Mode 2	Wireless Earbuds(5W)
Mode 3	Phone(5W)
Mode 4	Phone(7.5W)
Mode 5	Phone(10W)
Mode 6	Phone(15W)
Mode 7	Phone(25W)
Mode 8	Watch(5W)+Wireless Earbuds(5W)+Phone(5W)
Mode 9	Watch(5W)+Wireless Earbuds(5W)+Phone(7.5W)
Mode 10	Watch(5W)+Wireless Earbuds(5W)+Phone(10W)

Mode 11	Watch(5W)+Wireless Earbuds(5W)+Phone(15W)
Mode 12	Watch(5W)+Wireless Earbuds(5W)+Phone(25W)
Mode 10	Watch(5W)+Phone(5W)
Mode 14	Watch(5W)+Phone(7.5W)
Mode 15	Watch(5W)+Phone(10W)
Mode 16	Watch(5W)+Phone(15W)
Mode 17	Watch(5W)+Phone(25W)
Mode 18	Wireless Earbuds(5W)+Phone(5W)
Mode 19	Wireless Earbuds(5W)+Phone(7.5W)
Mode 20	Wireless Earbuds(5W)+Phone(10W)
Mode 21	Wireless Earbuds(5W)+Phone(15W)
Mode 22	Wireless Earbuds(5W)+Phone(25W)
Mode 23	Watch(5W)+Wireless Earbuds(5W)

9 Necessary accessories

	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Phone	Apple	iPhone 15	N/A	This is for testing only in report.
2	Earbuds	Apple AirPods	AirPods 2	N/A	This is for testing only in report.

3	Watch	Apple Watch	S7	N/A	This is for testing only in report.
4	Adapter	Xiaomi	MDY-11-EB	N/A	This is for testing only in report.

10 Test Result

Placement Mode 11(Worst)

E-Filed Strength at 20 cm from the edges surrounding the EUT (V/m)

Battery power	Frequency Range(MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (V/m)	Result
1%	0.115-0.205	1.43	1.48	0.60	0.49	614	PASS
50%	0.115-0.205	1.52	1.47	0.49	0.63	614	PASS
95%	0.115-0.205	1.28	1.52	0.46	0.61	614	PASS
Stand-by	0.115-0.205	1.48	1.42	0.64	0.66	614	PASS

E-Filed Strength at 20 cm from the top of the EUT (V/m)

Battery power	Frequency Range(MHz)	Test Position E	Limits (V/m)	Result
1%	0.115-0.205	1.27	614	PASS
50%	0.115-0.205	1.30	614	PASS
95%	0.115-0.205	1.37	614	PASS
Stand-by	0.115-0.205	1.50	614	PASS

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Battery power	Frequency Range(MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)	Result
1%	0.115-0.205	0.66	0.67	0.66	0.64	1.63	PASS
50%	0.115-0.205	0.61	0.59	0.60	0.68	1.63	PASS
95%	0.115-0.205	0.66	0.59	0.61	0.64	1.63	PASS
Stand-by	0.115-0.205	0.66	0.60	0.64	0.66	1.63	PASS

H-Filed Strength at 20 cm from the top of the EUT (A/m)

Battery power	Frequency Range(MHz)	Test Position E	Limits (A/m)	Result
1%	0.115-0.205	0.57	1.63	PASS
50%	0.115-0.205	0.50	1.63	PASS
95%	0.115-0.205	0.51	1.63	PASS
Stand-by	0.115-0.205	0.66	1.63	PASS

Placement Mode 12(Worst)

E-Filed Strength at 20 cm from the edges surrounding the EUT (V/m)

Battery power	Frequency Range(KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (V/m)	Result
1%	360	1.39	1.21	0.42	0.51	614	PASS
50%	360	1.28	1.35	0.35	0.52	614	PASS
95%	360	1.35	1.42	0.41	0.59	614	PASS

E-Filed Strength at 20 cm from the top of the EUT (V/m)

Battery power	Frequency Range(KHz)	Test Position E	Limits (V/m)	Result
1%	360	1.15	614	PASS
50%	360	1.19	614	PASS
95%	360	1.21	614	PASS

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Battery power	Frequency Range(KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)	Result
1%	360	0.55	0.54	0.52	0.57	1.63	PASS
50%	360	0.52	0.53	0.58	0.48	1.63	PASS
95%	360	0.58	0.50	0.51	0.55	1.63	PASS

H-Field Strength at 20 cm from the top of the EUT (A/m)

Battery power	Frequency Range(KHz)	Test Position E	Limits (A/m)	Result
1%	360	0.52	1.63	PASS
50%	360	0.51	1.63	PASS
95%	360	0.49	1.63	PASS

Tested by : Nels Wang
(Nels Wang)

Approved by : Jack Wang
(Jack Wang)

*****END OF THE REPORT*****