



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden No.98, Pingxin

North Road, Shangmugu, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

## TEST REPORT

Report Reference No.: GTS20200925004-1-2

FCC ID: 2AXU2TP-W20ENT

Compiled by

(position+printed name+signature): File administrators Peter Xiao

Supervised by

(position+printed name+signature): Test Engineer Moon Tan

Approved by

(position+printed name+signature): Manager Simon Hu



Date of issue: Oct.14, 2020

Representative Laboratory Name: Shenzhen Global Test Service Co.,Ltd.

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden No.98, Pingxin North Road, Shangmugu, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Applicant's name: DongGuan Tri-P Electronic Technology Co. Ltd

Address: Room 301, 25 Wusong 6th Road, Dongcheng Street, Dongguan City, Guangdong Province, China 523117

Test specification:

Standard: FCC KDB 680106 D01

**Shenzhen Global Test Service Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Wireless double charge

Trade Mark: N/A

Manufacturer: DongGuan Tri-P Electronic Technology Co. Ltd

Model/Type reference: TP-W20ENT

List Model: N/A

Modulation Type: Load modulation

Operation Frequency: 110-205KHz

Ratings: Input: DC 5.0V/2.0-3.0A or DC 9.0V/1.6-2.2A

Output(wireless): DC 5.0V/2A, DC 6.0V/1.63A, DC 9.0V/1A

Result: **PASS**

## TEST REPORT

<b>Test Report No. :</b>	<b>GTS20200925004-1-2</b>	<b>Oct.14, 2020</b>
		<b>Date of issue</b>

Equipment under Test : Wireless double charge

Model /Type : TP-W20ENT

Listed Models : N/A

**Applicant** : **DongGuan Tri-P Electronic Technology Co. Ltd**

Address : Room 301, 25 Wusong 6th Road, Dongcheng Street, Dongguan City, Guangdong Province, China 523117

**Manufacturer** : **DongGuan Tri-P Electronic Technology Co. Ltd**

Address : Room 301, 25 Wusong 6th Road, Dongcheng Street, Dongguan City, Guangdong Province, China 523117

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1. SUMMARY .....</u></b>	<b>4</b>
1.1. General Remarks .....	4
1.2. Product Description .....	4
1.3. Equipment Under Test .....	4
1.4. Modifications .....	5
1.5. Address of the test laboratory .....	5
1.6. Test Facility .....	5
1.7. TEST STANDARDS .....	5
1.8. Equipments Used during the Test .....	5
<b><u>2. TEST CONDITIONS AND RESULTS .....</u></b>	<b>6</b>
2.1. Evaluation Method .....	6
2.2. Limit .....	7
2.3. Test Setup Diagram .....	7
2.4. Measurement Procedure .....	8
2.5. Equipment Approval Considerations .....	8
2.6. Symbols .....	8
2.7. Test Results .....	9
2.8. Simultaneous E-Filed Strength and H-Filed Strength .....	10
<b><u>3. TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b>11</b>
<b><u>4. CONCLUSION .....</u></b>	<b>11</b>

## 1. SUMMARY

### 1.1. General Remarks

Date of receipt of test sample	:	Sep.26, 2020
Testing commenced on	:	Sep.26, 2020
Testing concluded on	:	Oct.14, 2020

### 1.2. Product Description

Product Name:	Wireless double charge
Trade Mark:	N/A
Model/Type reference:	TP-W20ENT
List Model:	N/A
Model Declaration	N/A
Power supply:	Input: DC 5.0V/2.0-3.0A or DC 9.0V/1.6-2.2A Output(wireless):DC 5.0V/2A, DC 6.0V/1.63A, DC 9.0V/1A
Hardware version	V1.0
Software version	V1.0
WPT	
Operation frequency	110-205KHz
Modulation Type	Load modulation
Antenna Type	Coil Antenna
Antenna Gain	0dBi

### 1.3. Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 9.0V

#### Description of the test mode

Operation Frequency each of channel	
Channel	Frequency
1	158.8KHz

#### Operating Mode

The mode is used: Transmitting mode

## 1.4. Modifications

No modifications were implemented to meet testing criteria.

## 1.5. Address of the test laboratory

### Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden No.98, Pingxin North Road, Shangmugu, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

## 1.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

### A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is 165725.

## 1.7. TEST STANDARDS

[ANSI C95.1-1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v03](#): RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

[FCC CFR 47 part1 1.1310](#): Radiofrequency radiation exposure limits.

[FCC CFR 47 part2 2.1091](#): Radiofrequency radiation exposure evaluation: mobile devices

[FCC CFR 47 part 18.107](#): Industrial, Scientific, and Medical Equipment

## 1.8. Equipments Used during the Test

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Magnetic Field Meter	NARDA	ELT-400	1 – 400kHz	Apr. 02, 2020	Apr. 01, 2021
E-Field Probe	NARDA	ELT-400	1 – 400kHz	Apr. 10, 2020	Apr. 09, 2021

NOTE: 1. The calibration interval of the above test instruments is 12 months .

## 2. TEST CONDITIONS AND RESULTS

### 2.1. Evaluation Method

Per KDB 680106 D01 Section 3. RF Exposure Requirements;

1. Consumer wireless power transfer devices approved under Part 18 in some cases have to demonstrate compliance with RF exposure requirements. The potential for exposure must be assessed according to the operating configurations of the wireless system and the exposure conditions of users and bystanders. RF exposure must be evaluated with the client device(s) being charged by the primary at maximum output power. The RF exposure requirements must be determined in conjunction with the device operating characteristics, according to the mobile and portable exposure requirements in Section 2.1091 and Section 2.1093 of the rules. SAR and MPE limits do not cover the frequency range for wireless power transfer applications which operate below 100 kHz and 300 kHz respectively; therefore, RF exposure compliance needs to be determined with respect to 1.1307 (c) and (d) of the FCC rules.

2. Based on the design and implementation of the power transfer application, it must be clearly identified if mobile or portable RF exposure conditions apply. Devices that are installed to provide separation of at least 20 cm from users and bystanders may qualify for mobile exposure conditions. For some conditions where users and bystanders may be exposed at closer than 20 cm, section 2.1091(d) (4) of the rules may apply.

3. For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

4. Portable exposure conditions from 100 kHz to 6 GHz are determined with respect to SAR requirements. Existing SAR systems and test procedures are generally intended for measurements above 100 MHz. While numerical modeling can be an alternative, the constraints of substantial computational resources at low frequencies could introduce further limitations. Under these circumstances, including operations below 100 kHz, the Commission may consider a combination of analytical analysis, field strength, radiated and conducted power measurements, in conjunction with some limited numerical modeling to assess compliance.

5. Depending on the operating frequency, existing SAR and MPE measurement procedures may be adapted to evaluate wireless power transfer devices for compliance with respect to mobile or portable exposure conditions. If the grantee or its test lab have any questions regarding RF exposure evaluation they should contact the FCC Laboratory with sufficient system operating configuration details to determine if RF exposure evaluation is necessary and, if required, how to apply specific test procedures. Below 100 MHz, when SAR testing is required and the device is operating at close proximity to persons, information on device design, implementation, operating configurations, exposure conditions of users and bystanders are needed to determine the evaluation and testing requirements. In addition, the influence of nearby objects may also need consideration according to the wireless power transfer system implementation; for example, the effects of placing the device, its coils or radiating elements on or near metallic surfaces

6. According to April 2018 TCB Workshop, No need to report E-field measurements. Only H-field required.

## 2.2. Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz


\*=Plane-wave equivalent power density

According to FCC KDB 680106 D01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-Field	*/*	B-Field
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.530MHz)	2.19/f (=0.07330MHz)	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

## 2.3. Test Setup Diagram

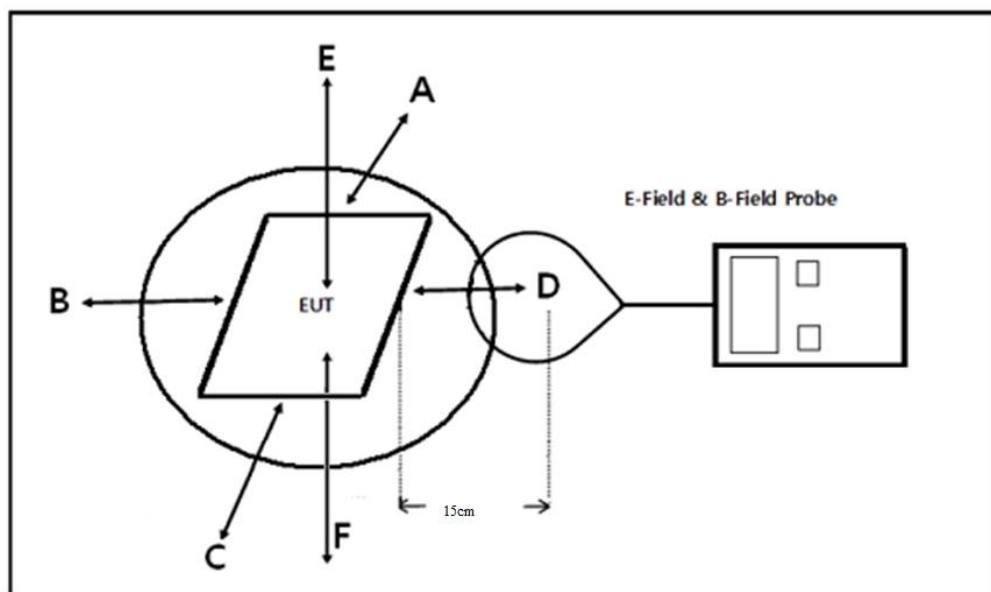

For mobile RF exposure condition, due to installation limitations no tests from the underside of the charging device are required.

## 2.4. Measurement Procedure

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (15cm and 20cm) which is between the edges of the charger and the geometric center of probe.
- c) The turn table was rotated 360d degree to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106D01v03.

## 2.5. Equipment Approval Considerations

The EUT does comply with item 5.2 of KDB 680106 D01v03 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110.0 KHz - 205 KHz
Output power from each primary coil is less than or equal to 15 watts.	Yes	The maximum output power of the each primary coil is 10W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes two primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

In all other cases, unless excluded above, an RF exposure evaluation report must be reviewed and accepted through a KDB or PBA inquiry to enable authorization of the equipment. When evaluation is required to show compliance; for example, using field strength, power density, SAR measurements or computational modeling etc., the specific authorization requirements will be determined based on the results of the RF exposure evaluation.

## 2.6. Symbols

For the purpose of the present document, the following symbols apply;

E: Filed strength

H: Magnetic field strength

EAVG = Spatial average of Filed strength

HAVG = Spatial average of Magnetic field strength

E1: Filed Strength of wireless charge port 1 (Galaxy S7)

H1: Magnetic field strength of wireless charge port 1 (Galaxy S7)

E2: Filed Strength of wireless charge port 1 (Galaxy S7 edge)

H2: Magnetic field strength of wireless charge port 1 (Galaxy S7 edge)

E1A: Filed strength of wireless charge port 1 at test position A

H1A: Magnetic field strength of wireless charge port 1 at test position A

## 2.7. Test Results

The three charge ports are same for rated power, tested at charge together and measure each five points;  
Test mode: Normal Operation (Charging mode)

E-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Charge Port	Chargin g Battery Level	Frequenc y Range (MHz)	Measured E-Field Strength Values (V/m)					FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
			Test Position A	Test Position B	Test Positio n C	Test Positio n D	Test Position E		
E1	1%	0.1588	5.787	5.792	5.797	5.785	5.796	307.0	614.0
	50%	0.1588	5.795	5.784	5.791	5.793	5.802	307.0	614.0
	99%	0.1588	5.798	5.800	5.794	5.784	5.784	307.0	614.0
E2	1%	0.1588	5.793	5.790	5.794	5.788	5.794	307.0	614.0
	50%	0.1588	5.788	5.796	5.798	5.798	5.785	307.0	614.0
	99%	0.1588	5.792	5.784	5.783	5.798	5.785	307.0	614.0

H-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Charge Port	Chargin g Battery Level	Frequen cy Range (MHz)	Measured H-Field Strength Values (A/m)					FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Positio n A	Test Positio n B	Test Positio n C	Test Positio n D	Test Positio n E		
H1	1%	0.1588	0.165	0.134	0.164	0.152	0.147	0.815	1.63
	50%	0.1588	0.152	0.123	0.160	0.135	0.135	0.815	1.63
	99%	0.1588	0.142	0.168	0.146	0.142	0.131	0.815	1.63
H2	1%	0.1588	0.160	0.168	0.131	0.134	0.165	0.815	1.63
	50%	0.1588	0.164	0.135	0.132	0.158	0.170	0.815	1.63
	99%	0.1588	0.169	0.149	0.160	0.168	0.145	0.815	1.63

H-Field Strength at 20cm from the top surface of the EUT

Charge Port	Charging Battery Level	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)		FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E			
H1	1%	0.1588	0.124		0.815	1.63
	50%	0.1588	0.133		0.815	1.63
	99%	0.1588	0.152		0.815	1.63
H2	1%	0.1588	0.123		0.815	1.63
	50%	0.1588	0.123		0.815	1.63
	99%	0.1588	0.138		0.815	1.63

## 2.8. Simultaneous E-Filed Strength and H-Filed Strength

KDB 447498 points for simultaneous transmission on far-filed measurement, while for below 30 MHz usually measured at near-filed. KDB680106 require aggregate leakage fields at 15 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit; KDB680106 can accept using field strength, power density, SAR measurements or computational modeling etc., the specific authorization requirements will be determined based on the results of the RF exposure evaluation.

Test labs suggest use Computational modelling to calculate Nerve Stimulation BRs;

Computational modelling, such as finite-difference time-domain (FDTD) may be used to demonstrate compliance with FCC § 1.1310 limits requirement,

Basic Calculations - The following calculations may be used to evaluate systems without consideration for the effects of phase resulting from multiple frequency and/or multiple antennas co-located in the measurement space, which may overestimate the actual result. If the result exceeds the limits, the advanced calculations described in follows may be used.

$$E_{AVG} = \frac{1}{n} \sum_{i=1}^n (E_{MaxRMS})_i$$

Where:

E-field measurements

$E_{AVG}$  = Spatial average

$E_{MaxRMS}$  = E-field at a measurement point

N = Number of spatially averaged points

And

$$H_{AVG} = \frac{1}{n} \sum_{i=1}^n (H_{MaxRMS})_i$$

Where:

H-field levels of magnetic field strength

$H_{AVG}$  = Spatial average

$H_{MaxRMS}$  = H-field at a measurement point

N = Number of spatially averaged points

E-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Spatial Average	Chargin g Battery Level	Frequenc y Range (MHz)	Measured E-Field Strength Values (V/m)					FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
$E_{AVG}$	1%	0.1588	5.796	5.796	5.796	5.787	5.795	307.0	614.0
	50%	0.1588	5.795	5.795	5.795	5.796	5.794	307.0	614.0
	99%	0.1588	5.789	5.789	5.789	5.791	5.785	307.0	614.0


H-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Spatial Average	Chargin g Battery Level	Frequen cy Range (MHz)	Measured H-Field Strength Values (A/m)					FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Positio n A	Test Positio n B	Test Positio n C	Test Positio n D	Test Positio n E		
$H_{AVG}$	1%	0.1588	0.163	0.151	0.148	0.143	0.156	0.815	1.63
	50%	0.1588	0.158	0.129	0.146	0.147	0.153	0.815	1.63
	99%	0.1588	0.156	0.159	0.153	0.155	0.138	0.815	1.63

H-Field Strength at 20cm from the top surface of the EUT

Charge Port	Charging Battery Level	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)		FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E			
$H_{AVG}$	1%	0.1588	0.124		0.815	1.63
	50%	0.1588	0.128		0.815	1.63
	99%	0.1588	0.145		0.815	1.63

### **3. Test Setup Photos of the EUT**

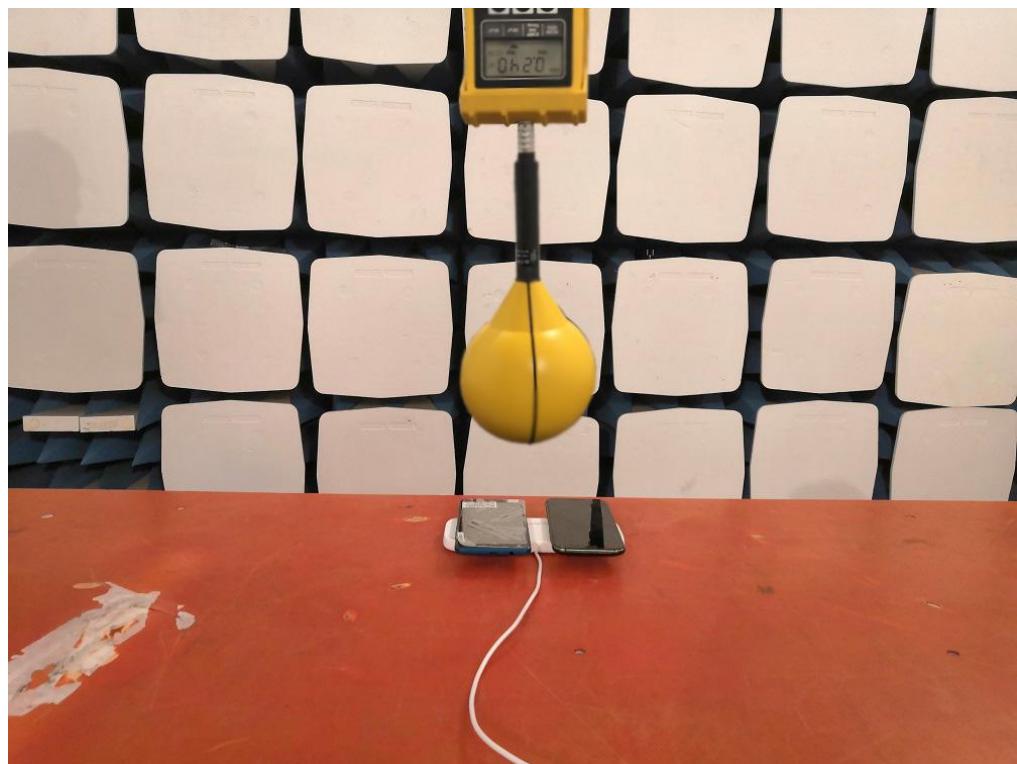

### **4. Conclusion**

A minimum safety distance of at 15 cm surrounding the device and 20 cm above the top surface of the device is required when the device is charging a smart phone. The detected emissions with a distance of 15 cm surrounding the device and 20 cm above the top surface of the device are below the limitations according to FCC KDB 680106 D01 Section 3. RF Exposure Requirement Clause 3.

.....End of Report.....