

Antenna specification

Antenna Sample Confirmation From

Name of supplier	ShenZhen Aihui Technology Co. , Ltd				
Customer name	Ji mo ke				
Sample name	Mini PC				
model					
Sample size	Main antenna: 55mm 4th generation terminal black Sub-antenna: 75mm 4th generation terminal grey				
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit		Business confirmation	

The following is to be completed by the client

Customer feedback	
Customer signature/seal	 date:

Antenna Test Report

Test Unit: Shenzhen Aihui Technology Co. , Ltd.			
Materials	FPC		
Antenna form	PIFA	Polarization mode	Linear

Shenzhen Aihui Technology Co. , Ltd.

Application scenario	2400Mhz-2500Mhz 5100Mhz-5850Mhz		
Working band	2400Mhz-2500Mhz 5100Mhz-5850Mhz	VSWR	≤2
Power	Max: 2W	Impedance	50Ω
Gain	2400 -2500 MHz: 1.65dBi 5100 -5850 MHz: 1.41dBi		
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable		
Antenna Description:: 1. Grounding processing and picture description: no 2. Need to change the motherboard to match: no ● Test voltage: 3.6V, check the antenna contact is good before testing. ● The RF cable of the integrated tester is kept in a natural state and can not be curled. Specification:test the specified power level, all indicators must conform to the specifications.			

1. Project Image
2. Test Fixture
3. Antenna matching circuit
4. S11 test
5. Antenna passive efficiency and gain
6. Darkroom test equipment and data
7. Schematic diagram of antenna assembly
8. Antenna environment handling
9. Antenna mass production index
10. Structural drawing


1.Project Image

The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment


2.Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making

Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole) , and the other end is connected to the SMA joint. The diagram is as follows:

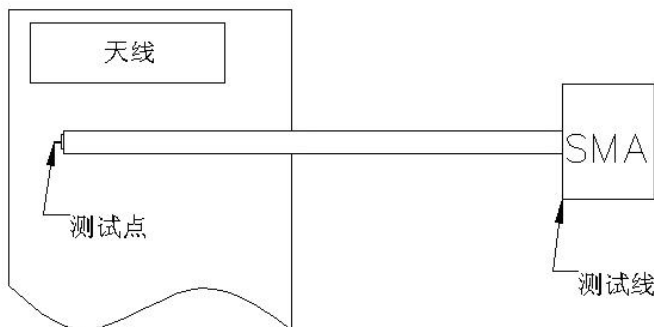

3、 Antenna matching circuit

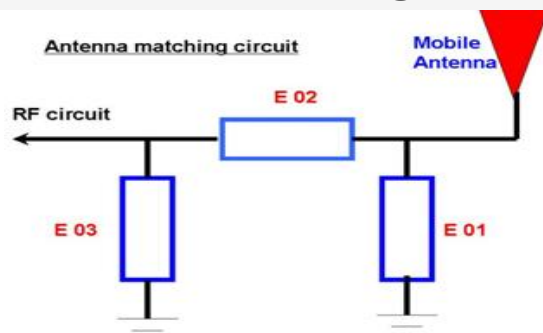


Modify

E01	E02	E03
No	No	No


Note: The match is unmodified.

4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

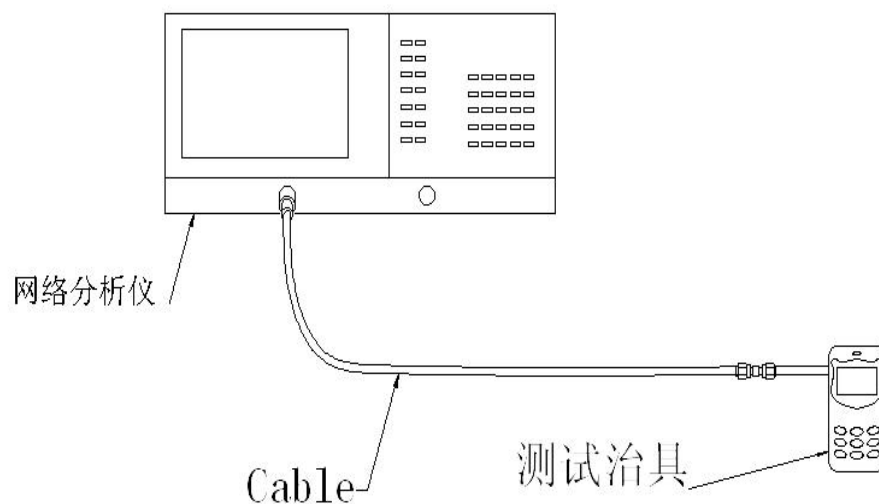

4.1 SWR

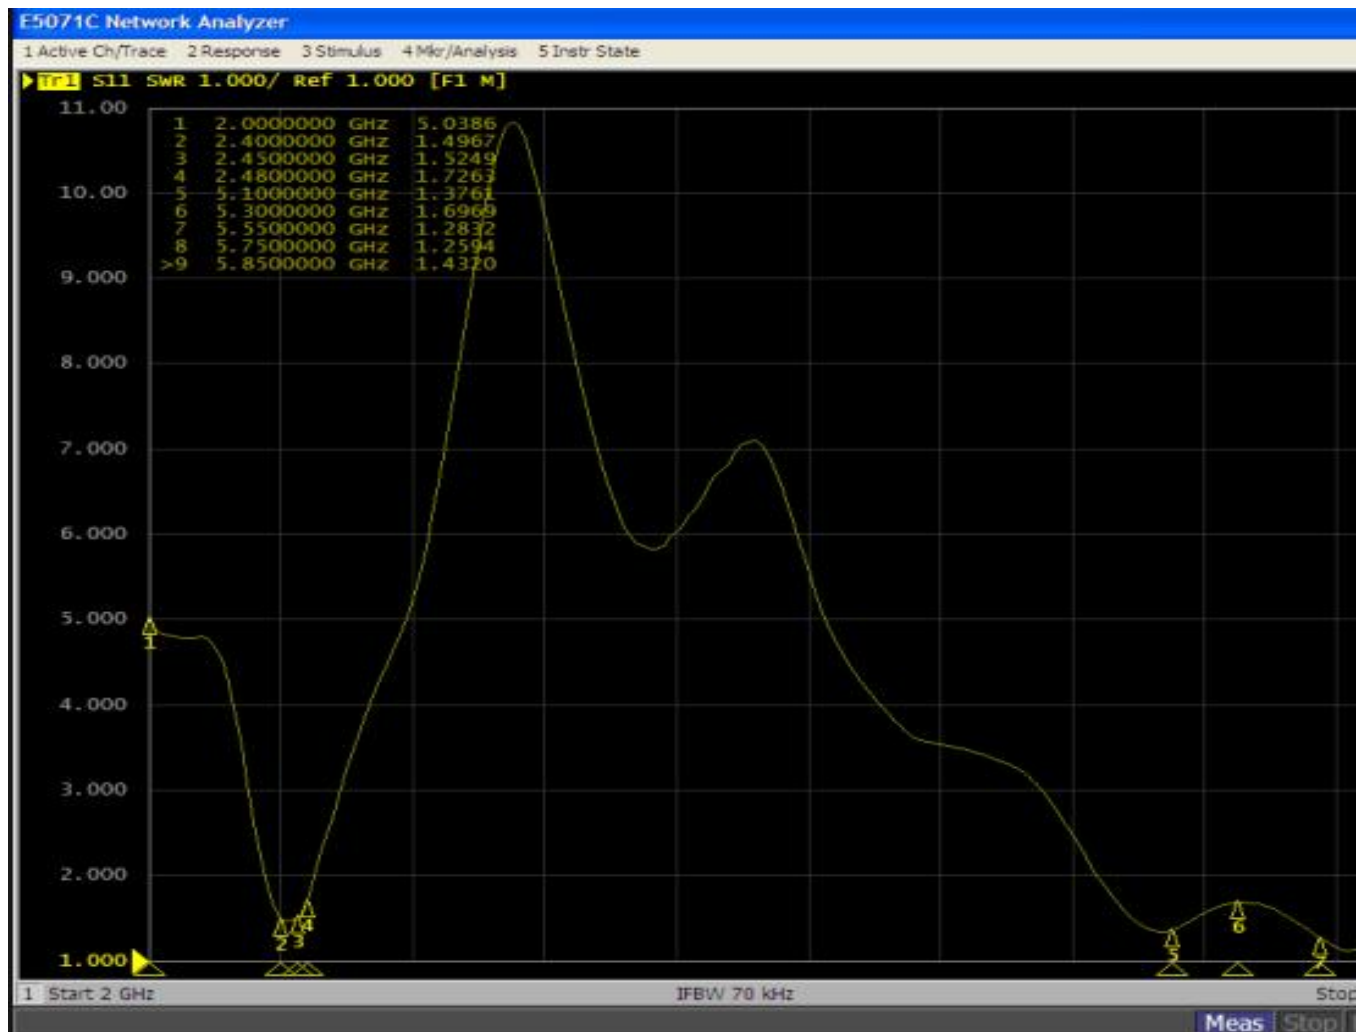


5. Test Equipment

Test system: shielded darkroom

The temperature was $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and the humidity was $50\% \pm 15\%$

Shenzhen Aihui Technology Co. , Ltd.

Test equipment: when testing passive data, use the Network analyzer AGILENTE5071C
to test active data, use the omnibus CMW500



6.Active antenna test data

Test data:


WIFI 2.4G

Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	55.25	1.25
2410	55.41	1.47
2420	57.65	1.35
2430	59.65	1.44
2440	61.41	1.54
2450	60.54	1.52

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and
Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen

Shenzhen Aihui Technology Co. , Ltd.



2460	62.63	1.44
2470	64.15	1.65
2480	59.64	1.23
2490	55.25	1.25
2500	55.41	1.47

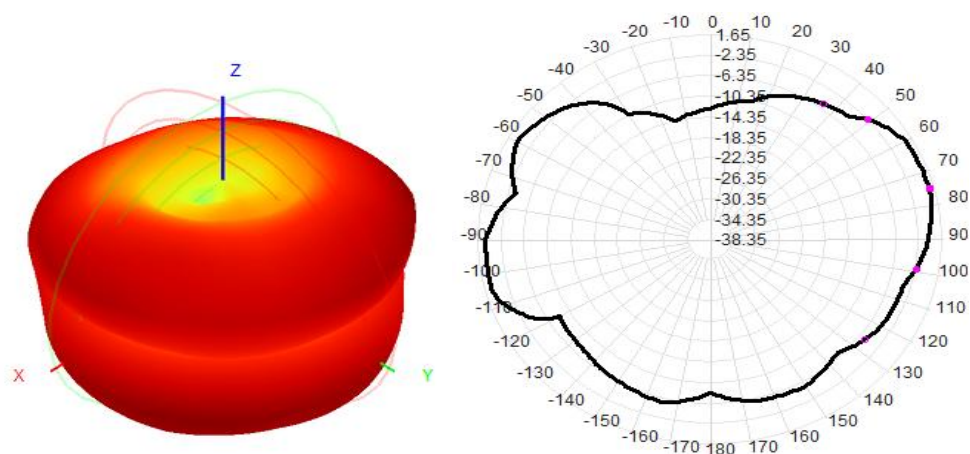

Test data:		
WIFI 5.8G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
5100	59.54	1.41
5200	57.85	1.30
5300	59.41	1.25
5400	54.71	1.40


Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen

5500	55.63	1.21
5600	57.15	1.31
5700	59.65	1.05
5800	60.22	1.30
5850	61.41	1.25

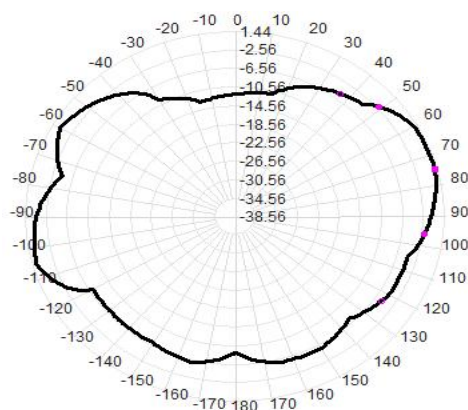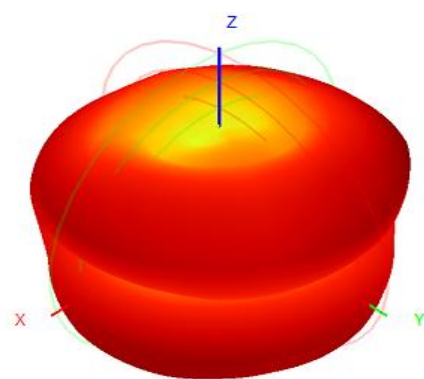

Frequency Band	2.4GWIFI-B 模			5GWIFI-A 模		
channel	L	M	H	L	M	H
TRP	12.52	13.44	13.65	12.63	12.44	10.52
TIS			-72.25			-68.14
Frequency Band	2.4WIFI-G 模			2.4WIFI-N 模		
channel	L	M	H	L	M	H
TRP	11.63	11.25	12.40	11.25	11.41	11.06
TIS			-68.52			-66.30

7. Antenna environment handling

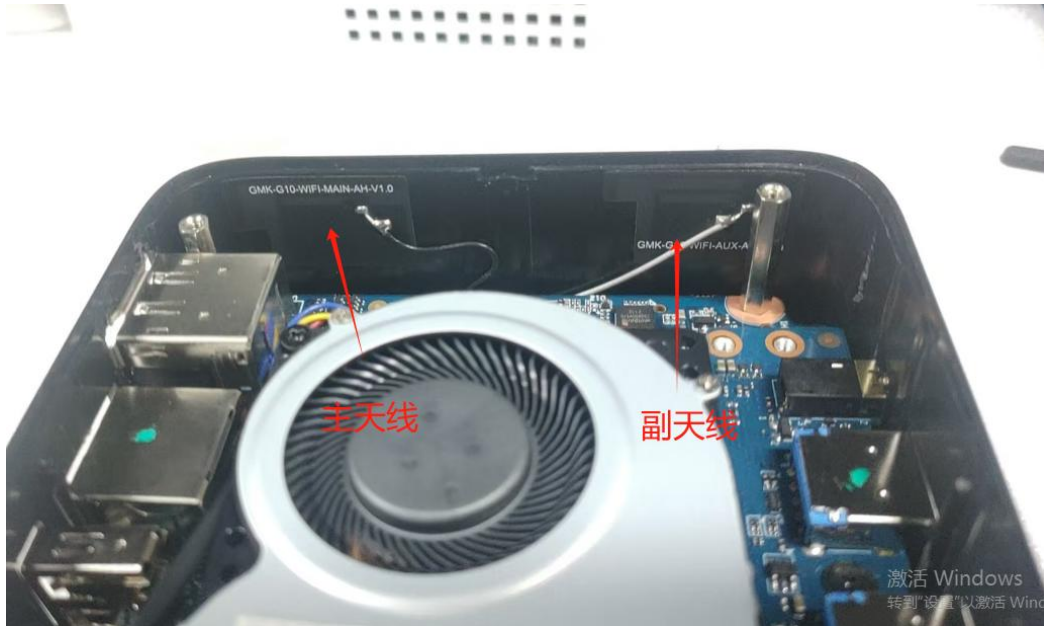

The original environment, we do not do processing


8. Antenna mass production index

When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard.

Based on the differences of the project itself, the following criteria are given:

Frequency	Standard for volume production
2400 MHZ -2500MHZ 5100 MHZ-7200 MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

10. Structural drawings

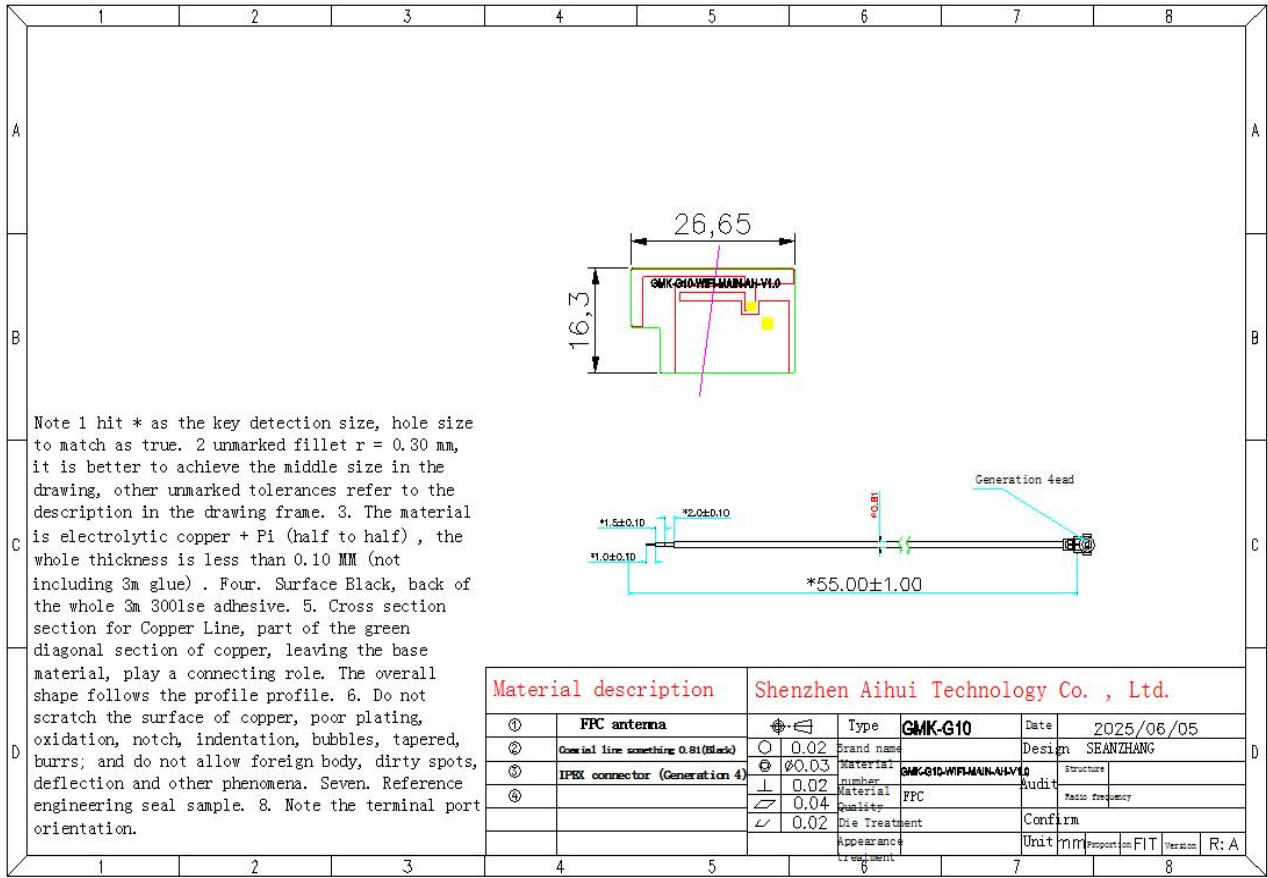

Shenzhen Aihui Technology Co. , Ltd.

