

1 Project Overview

This document is the specifications of the G5-T3 with WiFi antenna. The antenna solution is to make LDS wiring on the outside of the exterior surface bracket. The installation position is shown in Figure 1 :

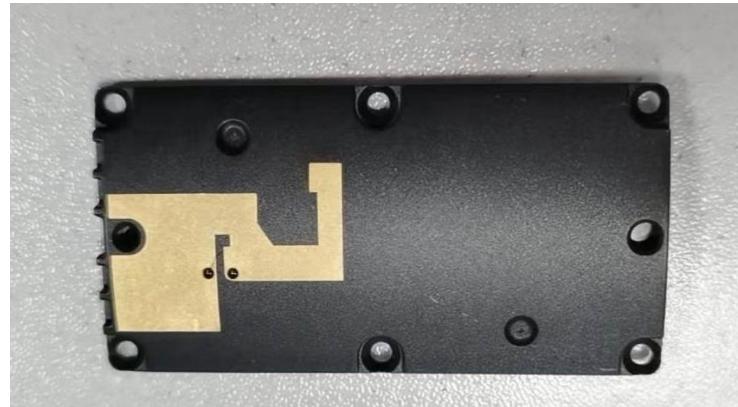


Figure 1 Antenna picture

2 Antenna Specification

Antenna Form	Plastic Stent+LDS
Working Bands	2400~2500MHz
Peak Gain	N/A
Efficency	>30%
VSWR	<2
Impedance	50ohm
Polarization	Linear polarization
A/R	N/A
Radiation Pattern	Omnidirectional
Feed Mode	Pin
power capacity	33dBm
Size(L*W*H)	58mm*30mm*4.3mm
Weight	N/A
Operating temperature	-30 °C to +80 °C
Storage temperature	-30 °C to +80 °C

3 Test Environment

The measuring equipment for antenna return loss, voltage standing wave ratio and isolation is Keysight E5071C vector network analyzer. As shown below:



Figure 2 Keysight E5071C vector network analyzer

The efficiency, gain, and pattern of the antenna are all tested in a dark room at Satimo, France. The darkroom uses 64 probes to electronically scan the antenna's radiation performance, collect data, and then analyze and organize it through a computer, which can provide antenna testing in the 400MHz to 8.5GHz frequency.



Figure3 Satimo Darkroom

4 Test Results

4.1 VSWR

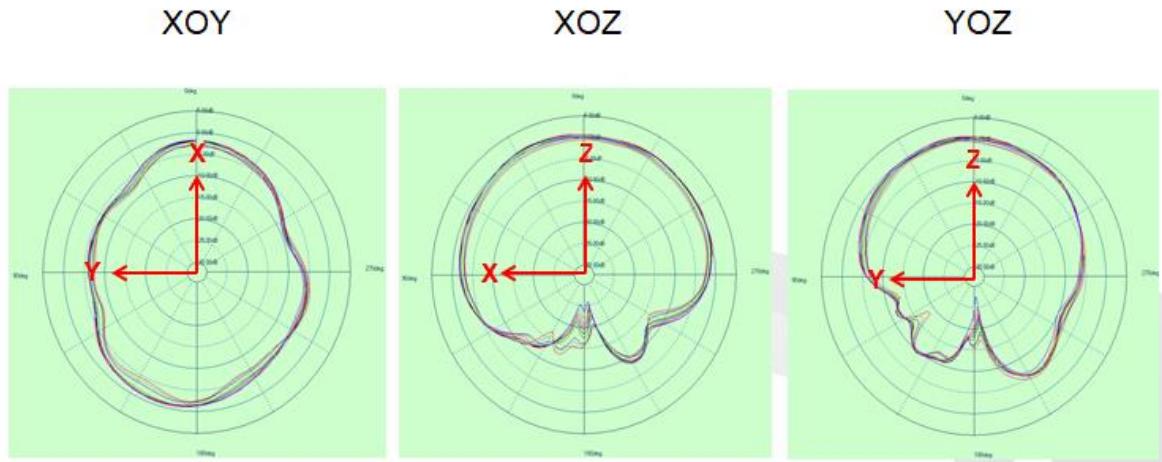


Figure 4 VSWR

4.2 Passive Efficiency and Gain

Frequency(MHz)	Efiiciency	Peak Gain (dBi)
2400	31. 94%	0. 29
2410	33. 49%	0. 32
2420	35. 42%	0. 48
2430	37. 95%	0. 60
2440	38. 93%	0. 77
2450	40. 50%	0. 95
2460	42. 24%	1. 04
2470	42. 73%	1. 15
2480	43. 12%	1. 25
2490	42. 53%	1. 40
2500	40. 94%	1. 11

4.3 Antenna 2D pattern



5 Structure Diagram

