



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: Sep 23, 2020 ~ Oct 23, 2020
 Test Report S/N: LR500112010L
 Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

2AXWQDUORESTON

APPLICANT

DUOBACK CO., LTD.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Smart cushion
Manufacturer	:	DUOBACK CO., LTD.
Model name	:	DUOREST ON
Variant Model name	:	jasealgo
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013
Frequency Range	:	2402 ~ 2480 MHz
Max. Output Power	:	Max -0.93 dBm - Conducted
Data of issue	:	October 27, 2020

This test report is issued under the authority of:

Ja-Beom Koo, Manager

The test was supervised by:

Jae-Hum Yeon, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6 dB BANDWIDTH	-----	6
3.2.2 PEAK OUTPUT POWER	-----	9
3.2.3 POWER SPECTRAL DENSITY	-----	12
3.2.4 BAND EDGE	-----	15
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	17
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	20
3.2.7 AC CONDUCTED EMISSION	-----	40
APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	41

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2021-09-30	ECT accredited Lab.
	KOREA		-	
RRA	U.S.A	KR0049	2021-04-11	RRA accredited Lab.
	CANADA		2021-06-16	
	VIETNAM		2021-04-12	
VCCI	JAPAN	C-4948, T-2416, R-4483(10 m), G-847	2021-09-10 2021-09-10 2021-10-15 2022-06-13	VCCI registration
KOLAS	KOREA	NO.551	2021-08-20	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Company name : DUOBACK CO., LTD.
 Address : 27, Gajaeul-ro 32beon-gil, Seo-gu, Incheon, Korea
 Tel / Fax : 82-32-585-2517 / 82-032-816-4817

Manufacturer : DUOBACK CO., LTD.
 Address : 27, Gajaeul-ro 32beon-gil, Seo-gu, Incheon, Korea
 Tel / Fax : 82-32-585-2517 / 82-032-816-4817

2-2 Equipment Under Test (EUT)

Model name : DUOREST ON
 Serial number : Identical prototype
 Date of receipt : Sep 23, 2020
 EUT condition : Pre-production, not damaged
 Antenna type : PCB Pattern Antenna (Max Gain : -5.07 dBi)
 Frequency Range : 2402 ~ 2480 MHz
 RF output power : Max -0.93 dBm – Conducted
 Type of Modulation : GFSK
 Power Source : DC 3.7 V

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz) – Bluetooth BLE	2402	2440	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	CR720	MS-1736	MSI

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	Conducted	C
15.247(b)	Transmitter Peak Output Power		C
15.247(e)	Transmitter Power Spectral Density		C
15.247(d)	Band Edge & Conducted Spurious emission		C
15.209	Transmitter emission	Radiated	C
15.207	AC Conducted Emissions	Conducted	N/A
15.203	Antenna requirement	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247. The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

→ Antenna Requirement

DUOBACK CO., LTD. FCC ID: 2AXWQDUORESTON unit complies with the requirement of §15.203. The antenna type is PCB Antenna

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 3 X RBW

VBW = 3 X RBW

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : **Complies**

Zigbee Mode

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2402	0.752	Complies
2440	0.752	Complies
2480	0.759	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth \geq 500 kHz

Measurement Setup



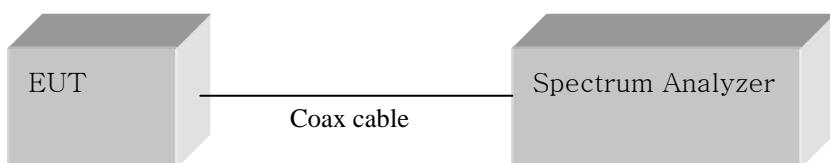


Figure 1: Measurement setup for the carrier frequency separation


Low Channel

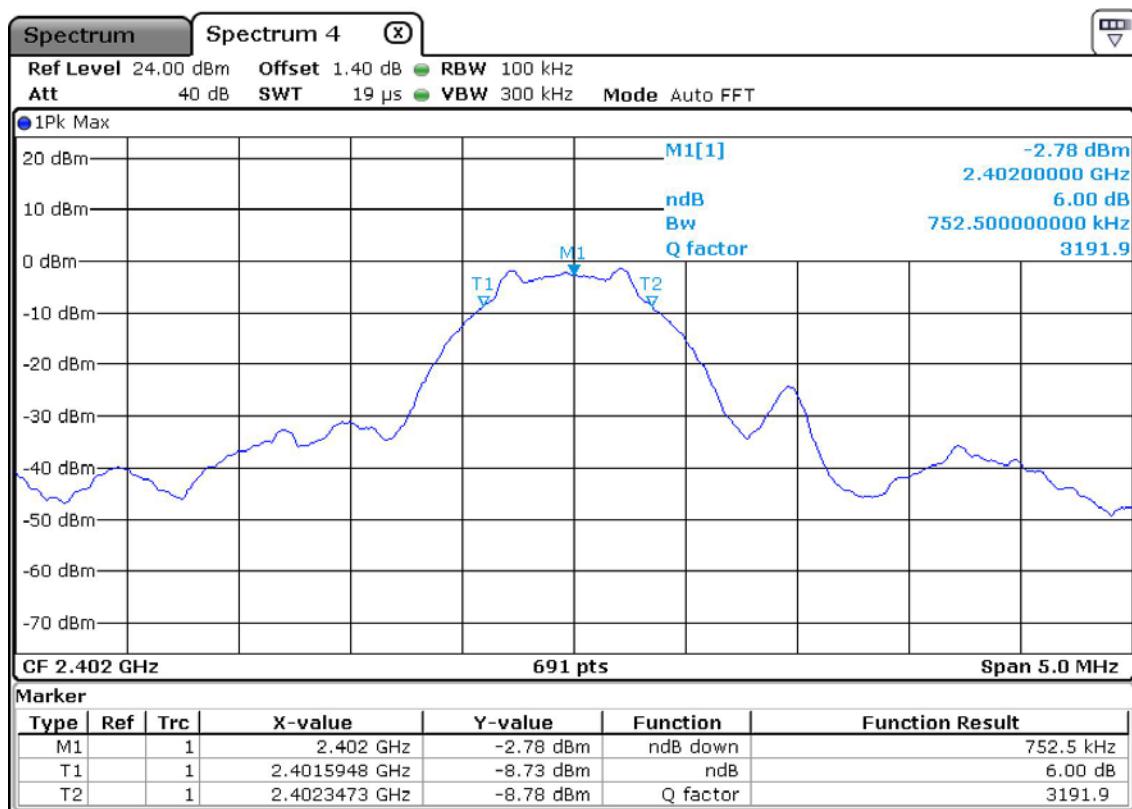

Middle Channel

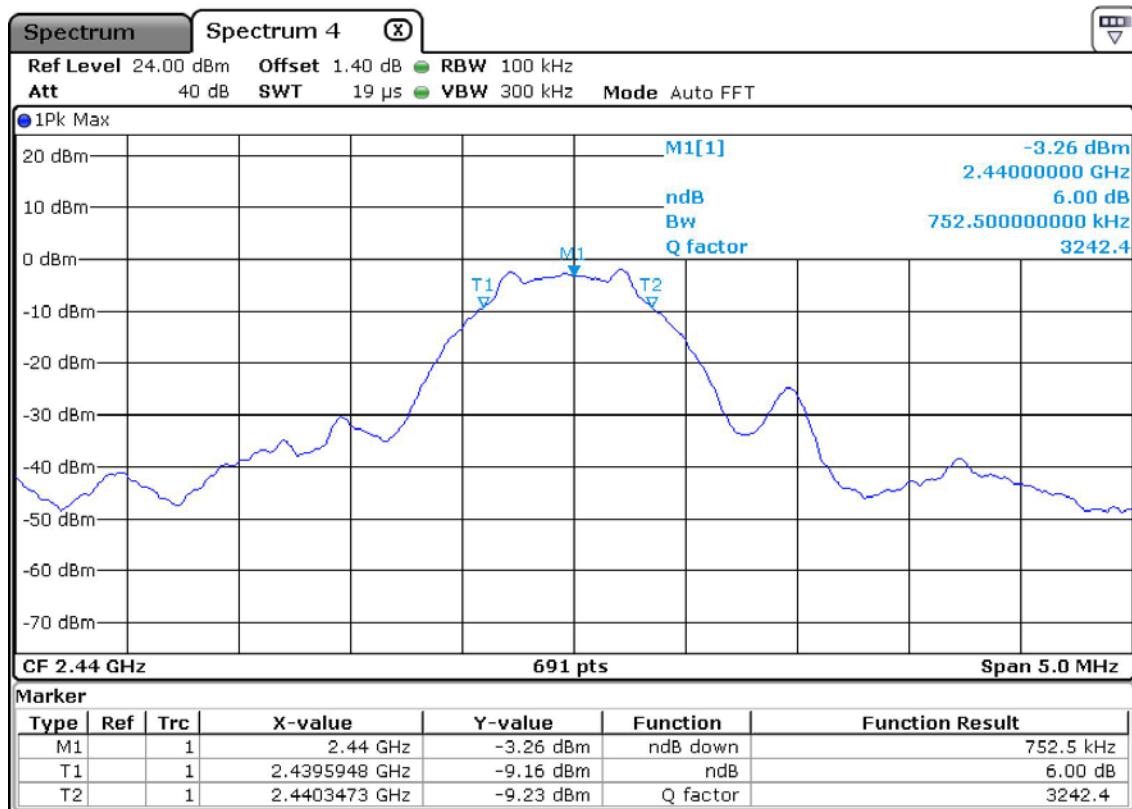

High Channel

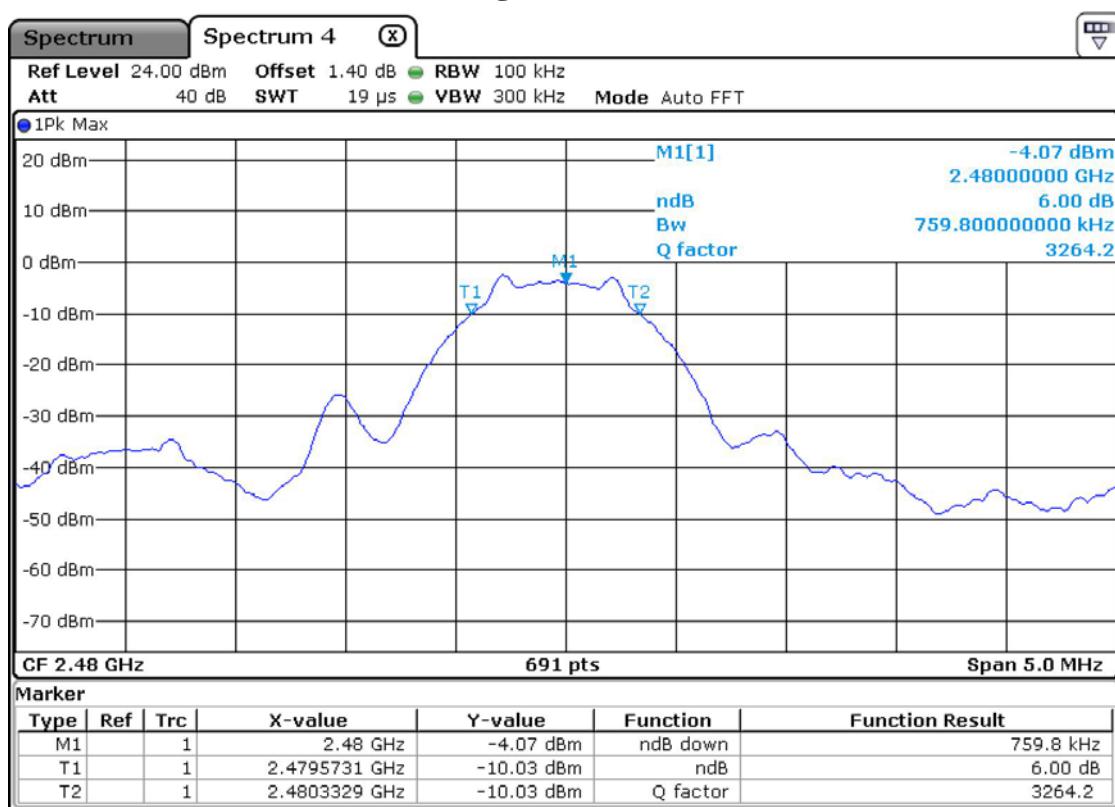

3.2.2 Peak Output Power Measurement

Procedure:

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth :

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

$$\text{RBW} \geq \text{DTS Bandwidth} \quad \text{Span} \geq 3 \times \text{RBW}$$

VBW = 3 X RBW Sweep = auto

Detector function = peak

Measurement Data : Complies

LoRa Mode

Frequency (MHz)	Test Results	
	Measured data (dBm)	Result
2402	-0.93	Complies
2440	-1.38	Complies
2480	-2.06	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	$\leq 1 \text{ W}(30 \text{ dBm})$
-------------------	------------------------------------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Low Channel

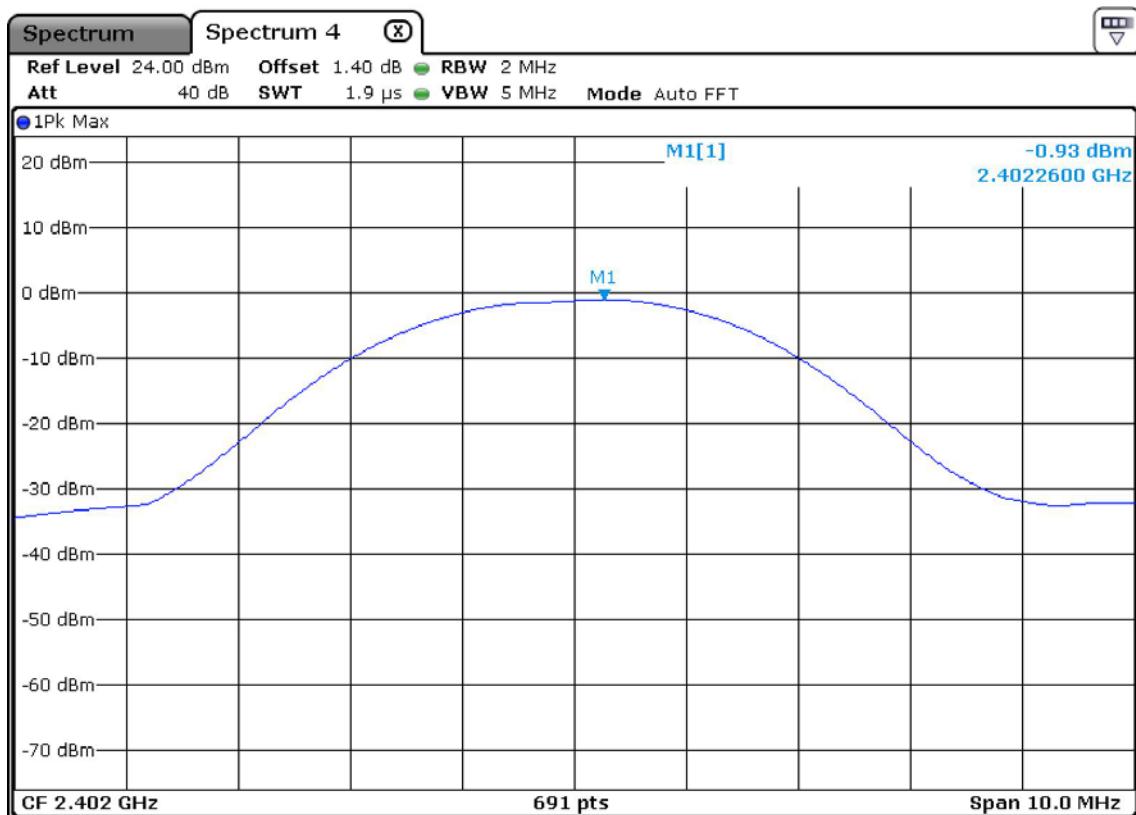

Middle Channel

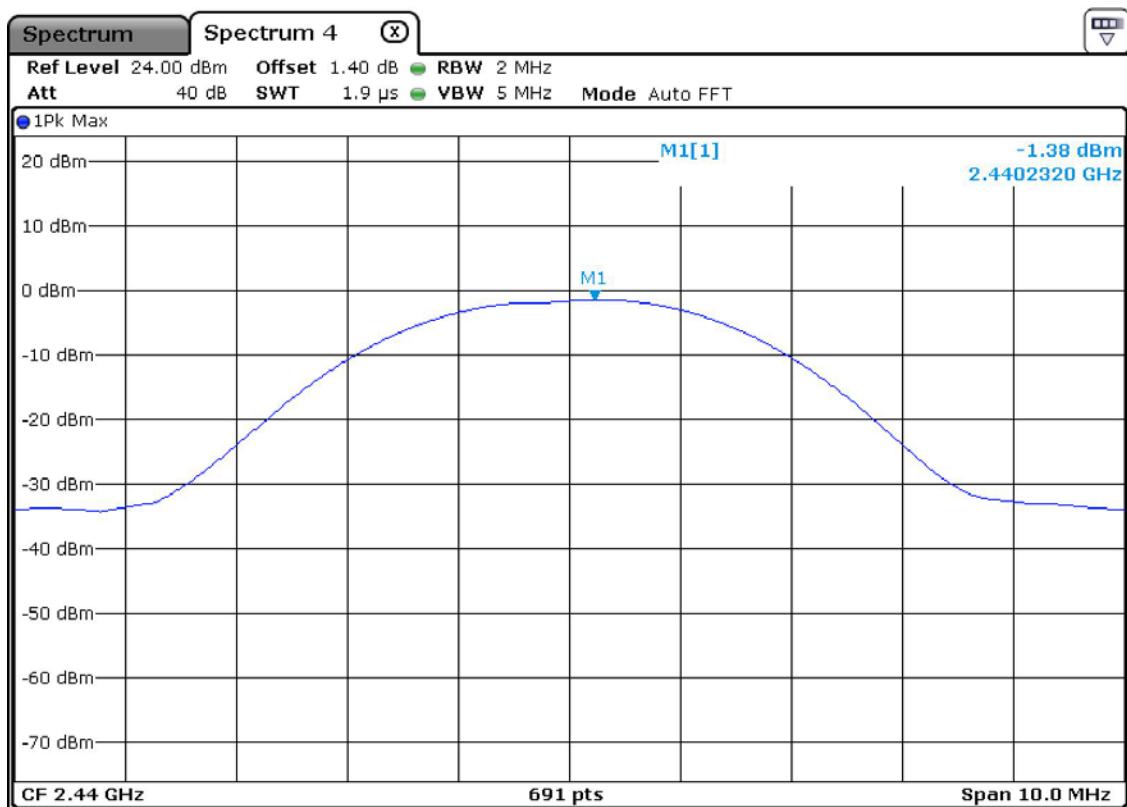

High Channel



3.2.3 Power Spectral Density

Procedure:

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The spectrum analyzer is set to:

RBW = 3 kHz (3 kHz \leq RBW \leq 100 kHz)	Span \geq 1.5 times the DTS bandwidth
VBW = 3 X RBW	Sweep = auto
Detector function = peak	Trace = max hold

Measurement Data : Complies

BLE Mode

Frequency (MHz)	Test Results	
	dBm / 3 kHz BW	Result
2402	-12.82	Complies
2440	-13.43	Complies
2480	-14.67	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	\leq 8 dBm @ 3 kHz BW
------------------------	-------------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Low Channel

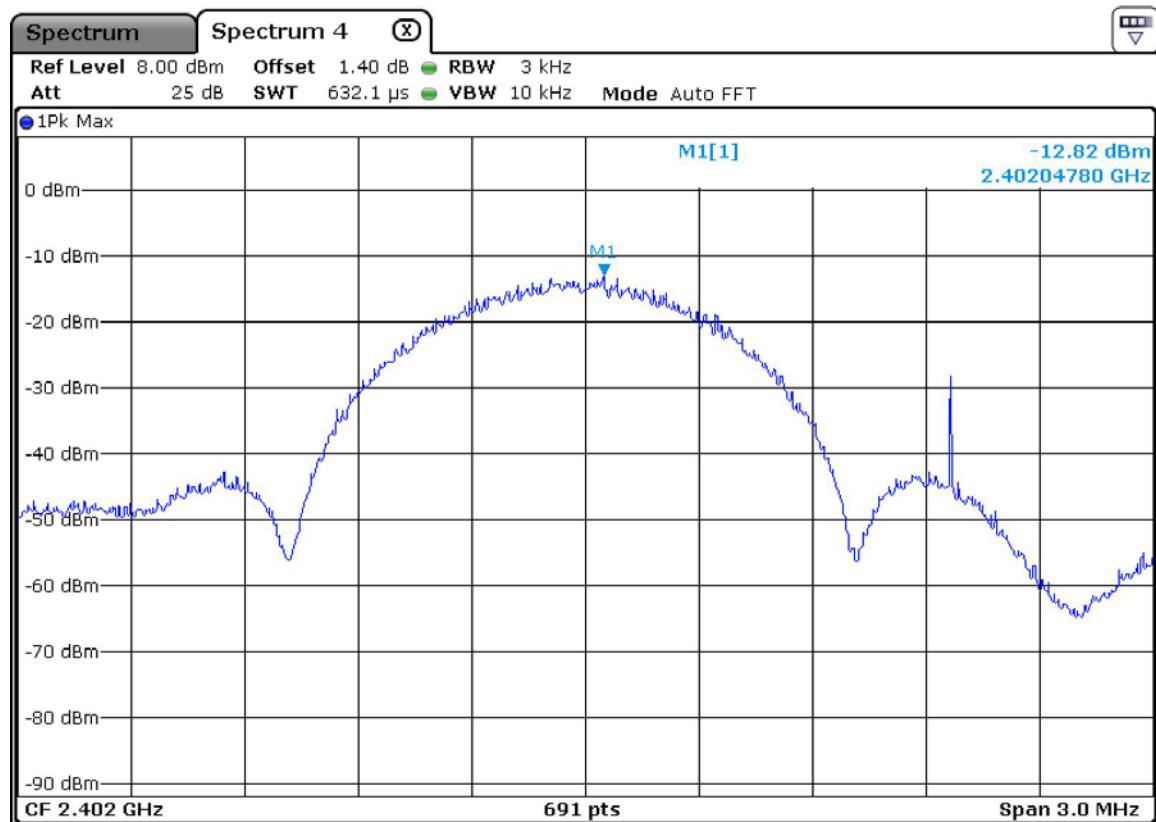

Middle Channel

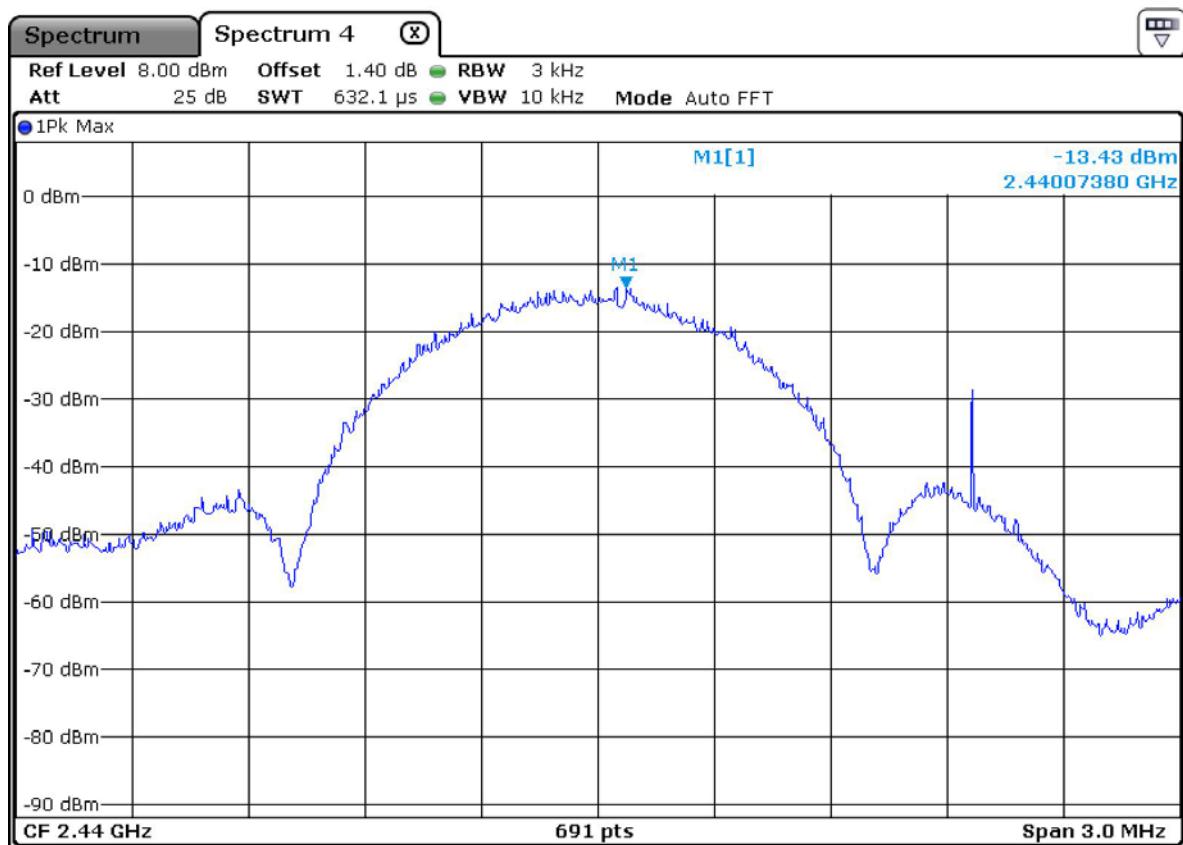

High Channel

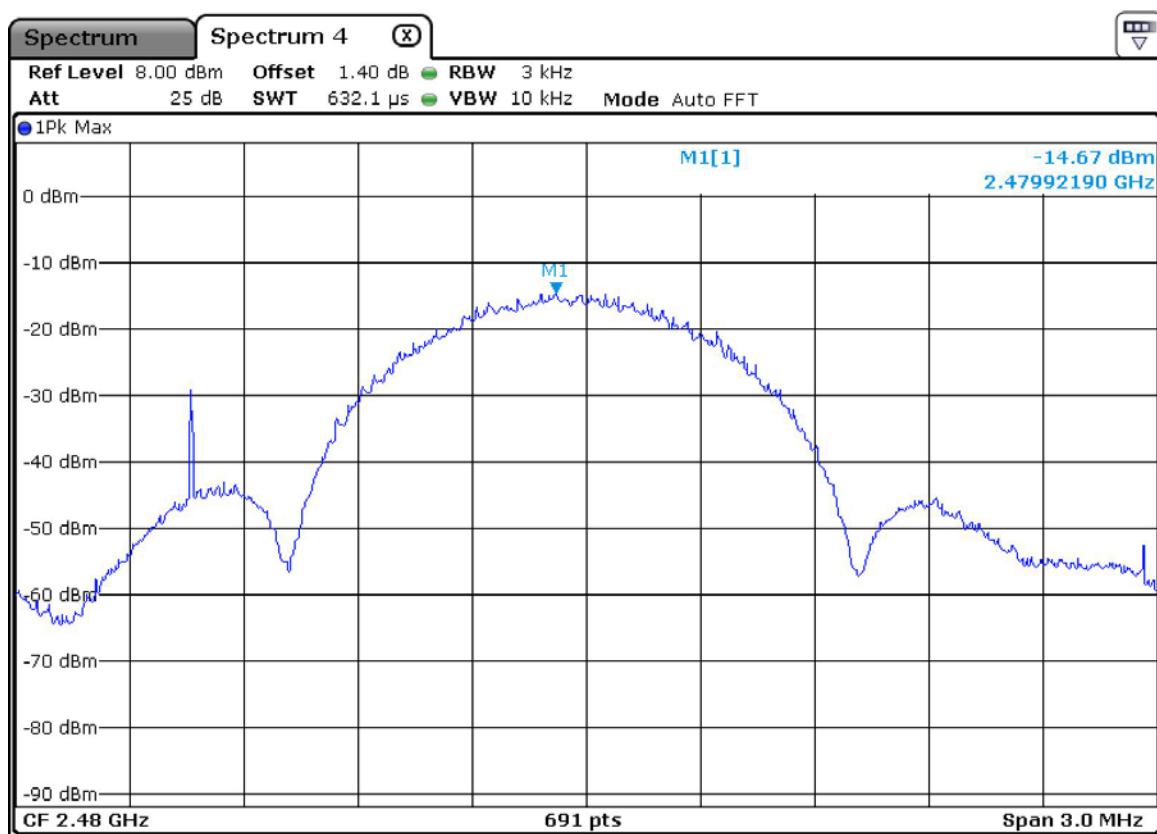

3.2.4 Band Edge

Procedure:

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB..

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels



Detector function = peak Trace = max hold

Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	$\leq 20 \text{ dBc}$
--------------------------	-----------------------

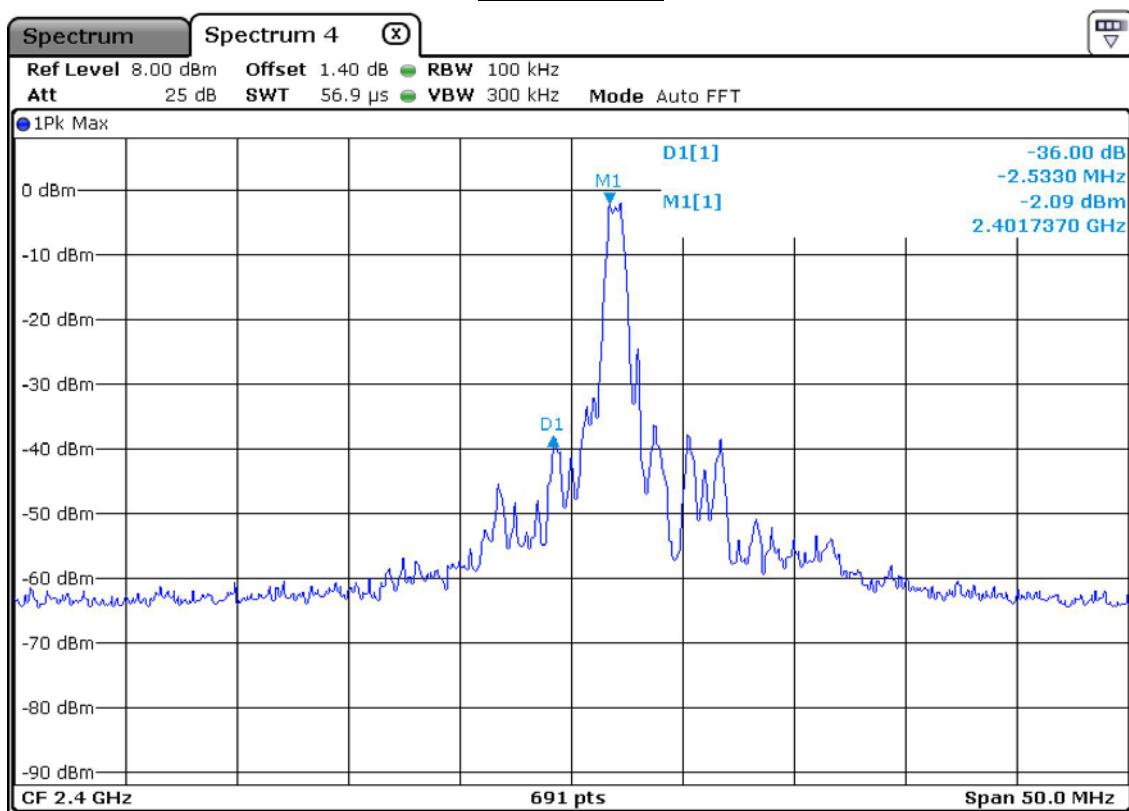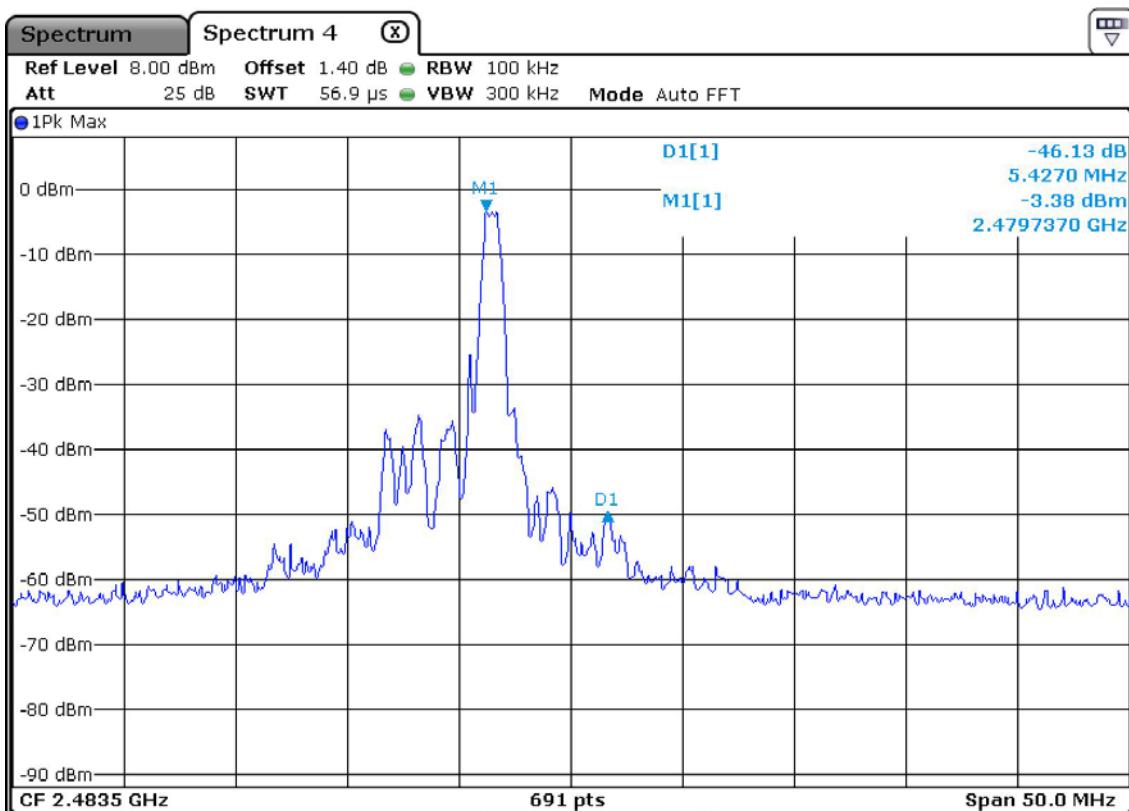Lower edgeUpper edge

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz Sweep = auto

VBW = 100 kHz Detector function = peak

Trace = max hold

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	≥ 20 dBc
--------------------------	---------------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Unwanted Emission – Low Channel
Frequency Range = 30 MHz ~ 26.5 GHz

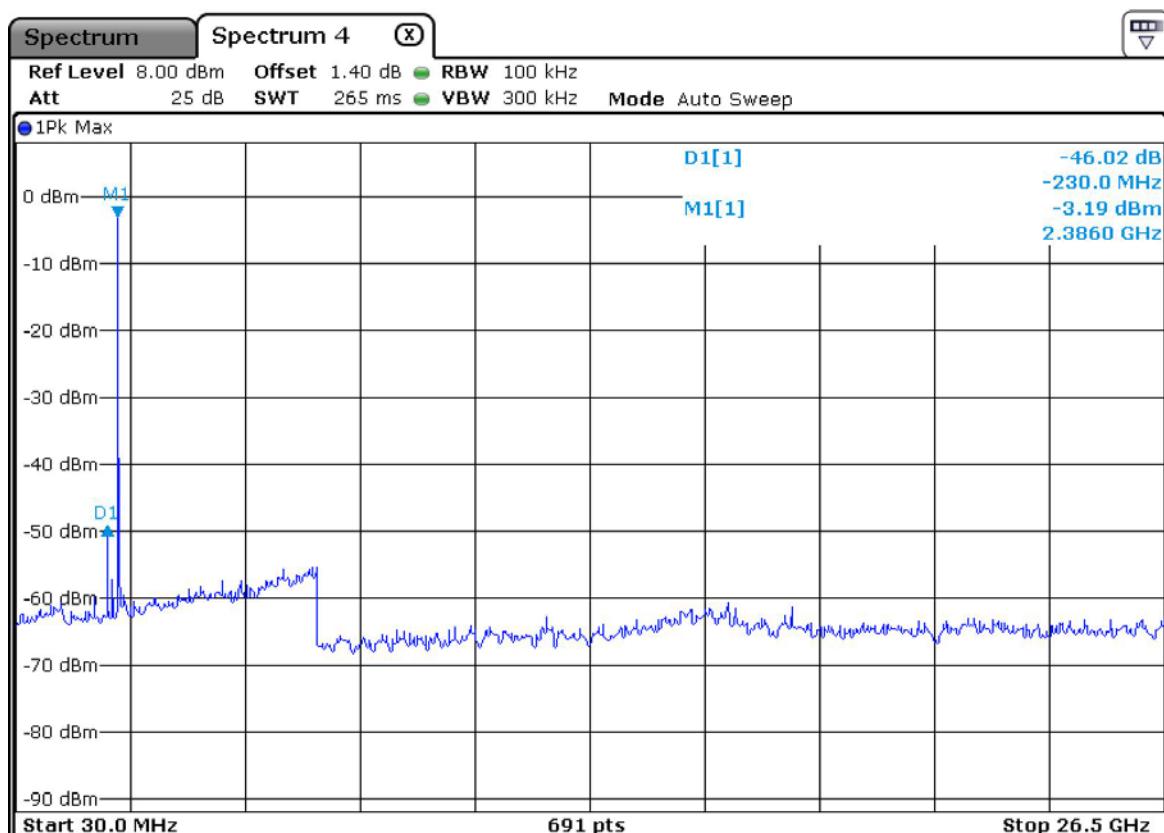

Unwanted Emission – Middle Channel
Frequency Range = 30 MHz ~ 26.5 GHz

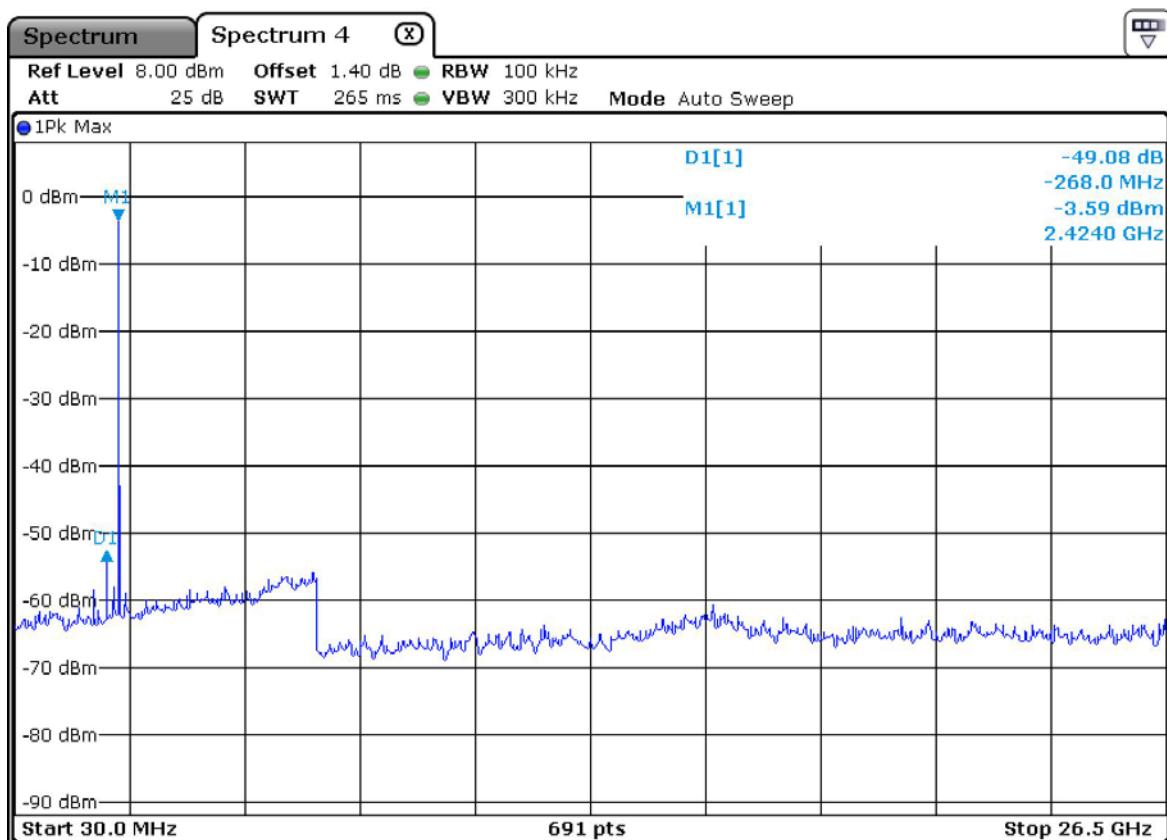

Unwanted Emission – High Channel
Frequency Range = 30 MHz ~ 26.5 GHz

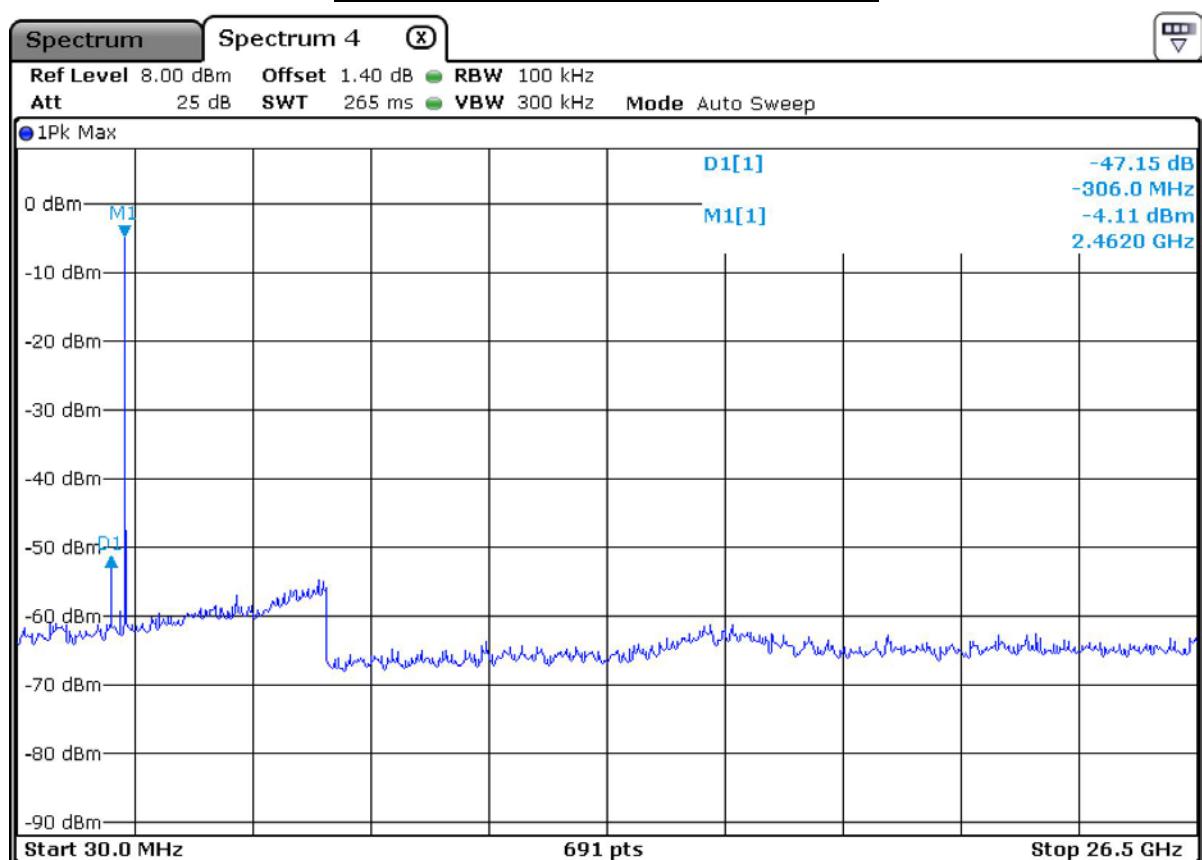

3.2.6 Radiated Spurious Emissions

Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defined in ANSI C63.10-2013.

The EUT is placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

$$\text{RBW} = 120 \text{ kHz} \text{ (} 30 \text{ MHz } \sim 1 \text{ GHz) } \quad \text{VBW} \geq \text{RBW}$$


$$= 1 \text{ MHz} \quad (1 \text{ GHz } \sim 10^{\text{th}} \text{ harmonic })$$



Trace = max hold

Detector function = peak

Sweep = auto

below 30 MHz

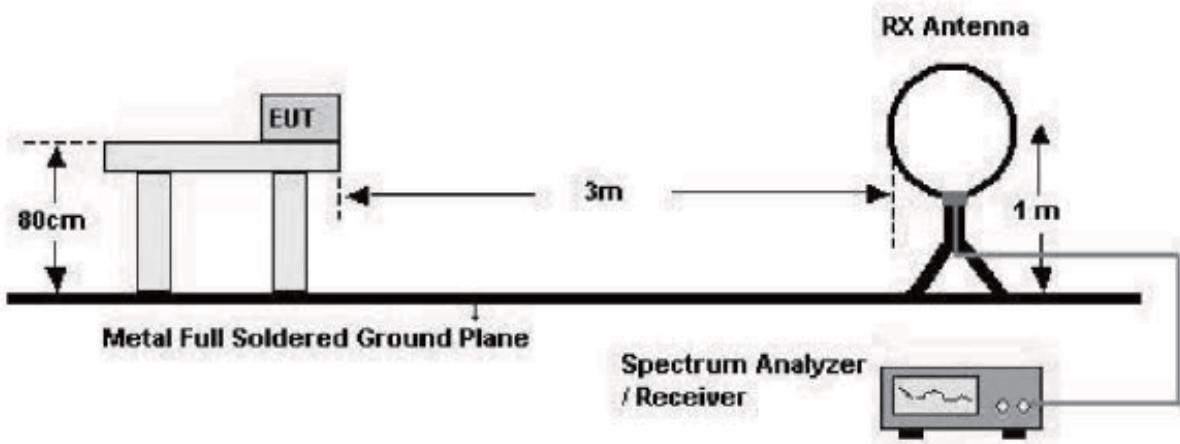

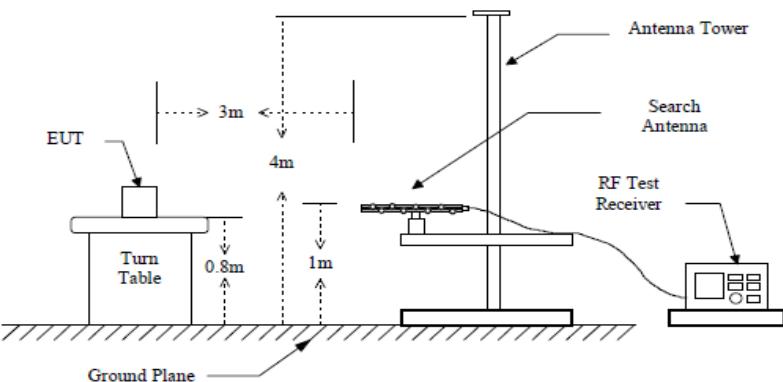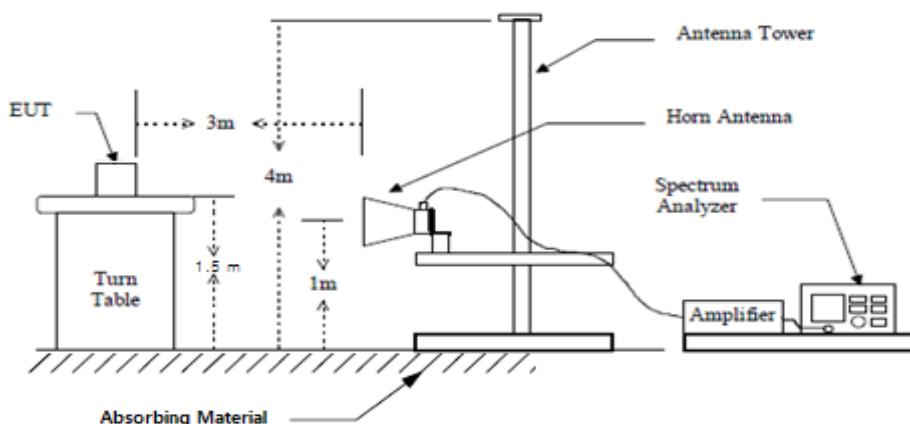below 1 GHz (30 MHz to 1 GHz)**above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	24000/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated Emissions (Below 1 GHz) – Operating mode

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: DUOREST ON

Temp/Humi: BLE HIGH

Test Mode : 20 °C / 42 % R.H.

Tested by: YEON J H

Power : 120 V / 60 Hz

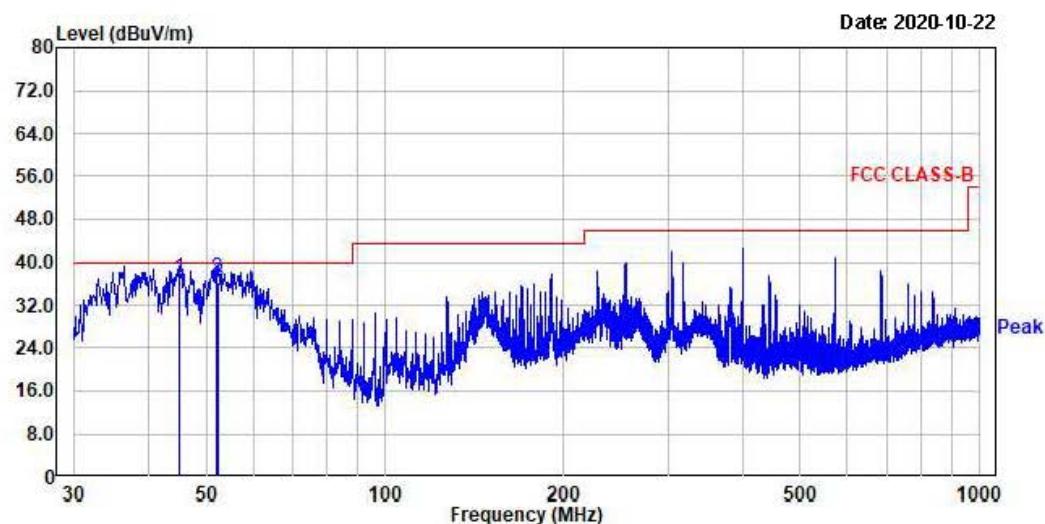

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	45.04	55.76	-18.54	37.22	40.00	2.78	117	14	vertical
2.	51.95	55.55	-18.38	37.17	40.00	2.83	100	327	vertical
3.	52.43	54.69	-18.41	36.28	40.00	3.72	100	327	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: DUOREST ON

Temp/Humi: BLE LOW

Test Mode : 20 °C / 42 % R.H.

Tested by: YEON J H

Power : 120 V / 60 Hz

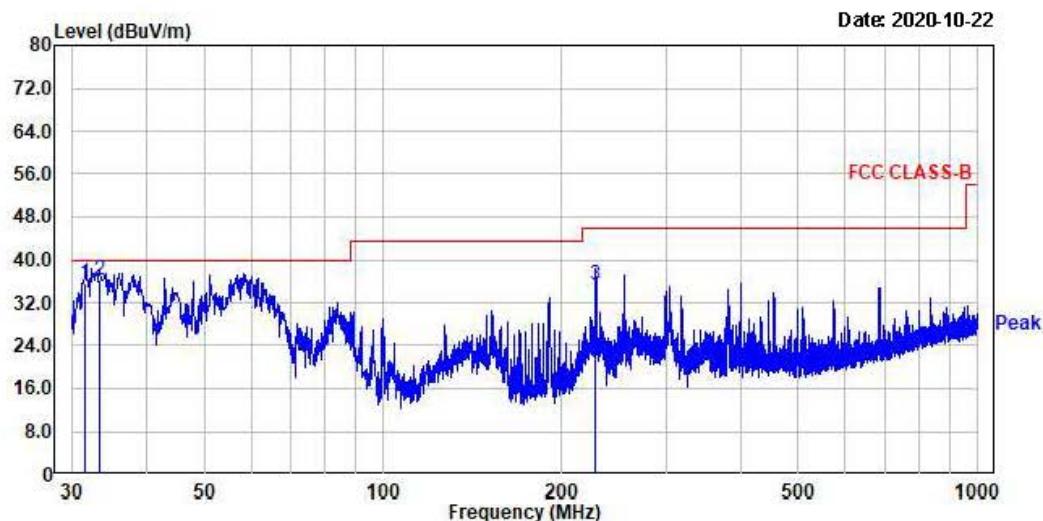

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	31.58	56.03	-20.51	35.52	40.00	4.48	100	0	vertical
2.	33.27	56.75	-20.43	36.32	40.00	3.68	100	198	vertical
3.	227.64	54.17	-18.88	35.29	46.00	10.71	100	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: DUOREST ON

Temp/Humi: BLE MID

Test Mode : 20 °C / 42 % R.H.

Tested by: YEON J H

Power : 120 V / 60 Hz

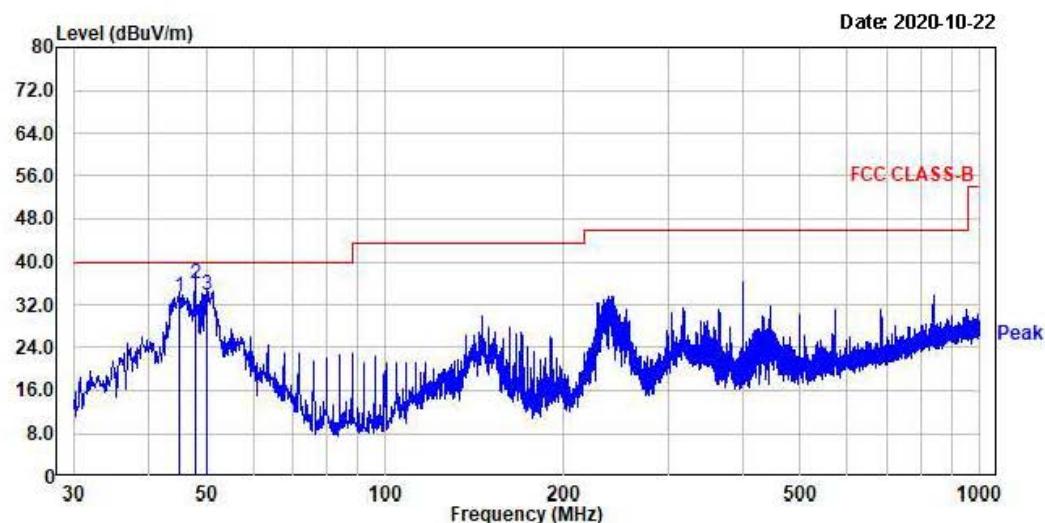

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	45.16	51.95	-18.53	33.42	40.00	6.58	400	100	horizontal
2.	47.95	54.18	-18.38	35.80	40.00	4.20	400	108	horizontal
3.	50.13	52.09	-18.28	33.81	40.00	6.19	400	82	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: DUOREST ON

Temp/Humi: BLE MID

Test Mode : 20 °C / 42 % R.H.

Tested by: YEON J H

Power : 120 V / 60 Hz

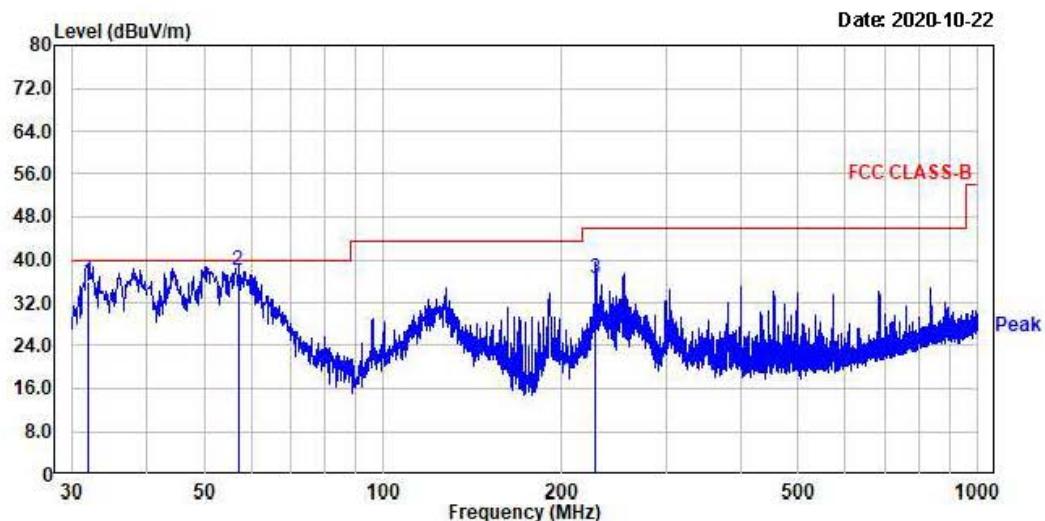

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	31.82	56.32	-20.50	35.82	40.00	4.18	100	266	vertical
2.	57.04	56.66	-18.66	38.00	40.00	2.00	100	348	vertical
3.	227.64	55.34	-18.88	36.46	46.00	9.54	100	28	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: DUOREST ON

Temp/Humi: BLE HIGH

Test Mode : 20 °C / 42 % R.H.

Tested by: YEON J H

Power : 120 V / 60 Hz

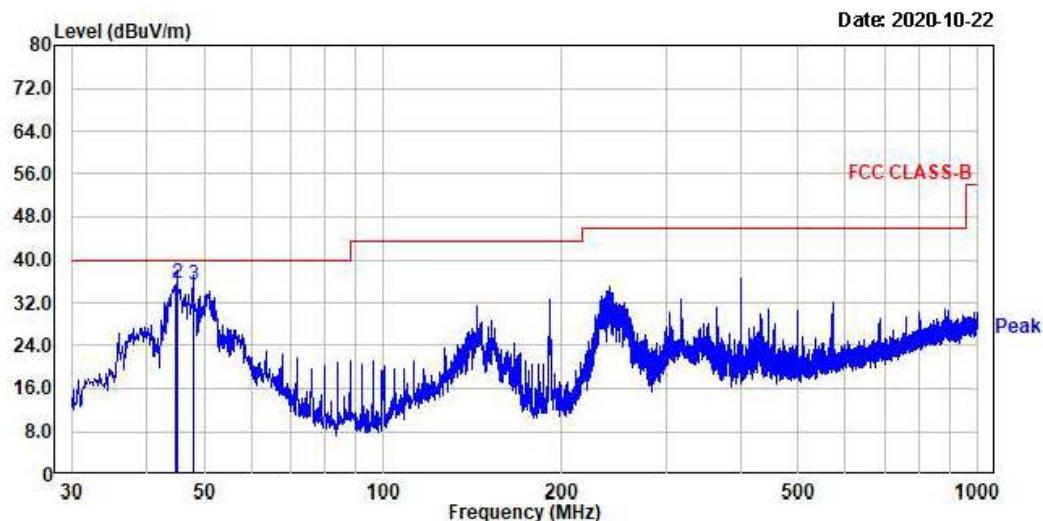

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	44.79	52.89	-18.57	34.32	40.00	5.68	100	118	horizontal
2.	45.04	54.20	-18.54	35.66	40.00	4.34	100	118	horizontal
3.	47.95	53.66	-18.38	35.28	40.00	4.72	159	360	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: DUOREST ON

Temp/Humi: BLE LOW

Test Mode : 20 °C / 42 % R.H.

Tested by: YEON J H

Power : 120 V / 60 Hz

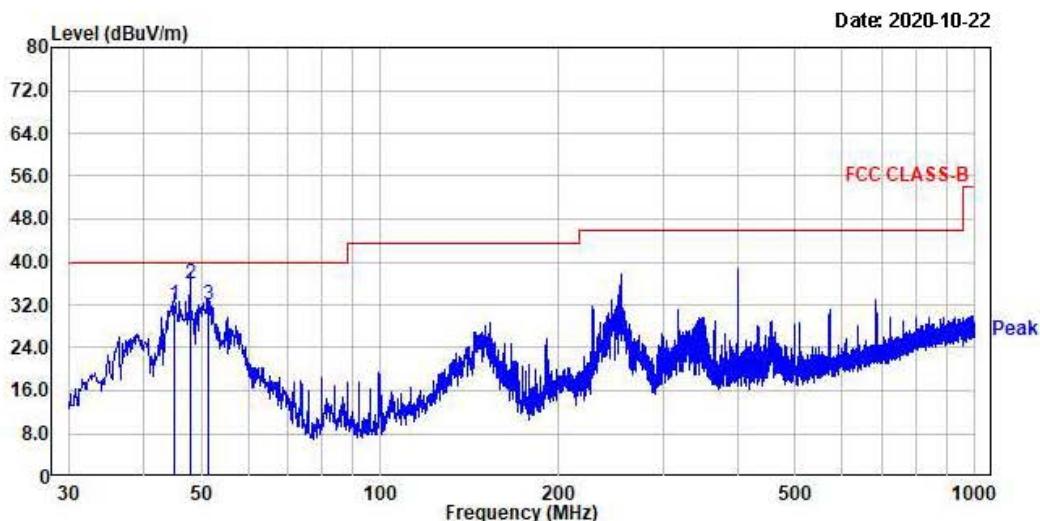

No.	Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Polarity
		PK	AV	PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
	MHz	dB μ V	dB μ V		dB	dB μ V	dB μ V	dB μ V		dB			
1.	45.16	-----	-----	-18.53	-----	-----	-----	-----	-----	-----	100	0	horizontal
2.	47.95	-----	-----	-18.38	-----	-----	-----	-----	-----	-----	100	0	horizontal
3.	51.34	-----	-----	-18.35	-----	-----	-----	-----	-----	-----	400	115	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Radiated Emissions (Above 1 GHz) – LOW mode

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: Temp/Humi: 23 °C / 38 % R.H.

Test Mode : BLE LOW Tested by:

Power :

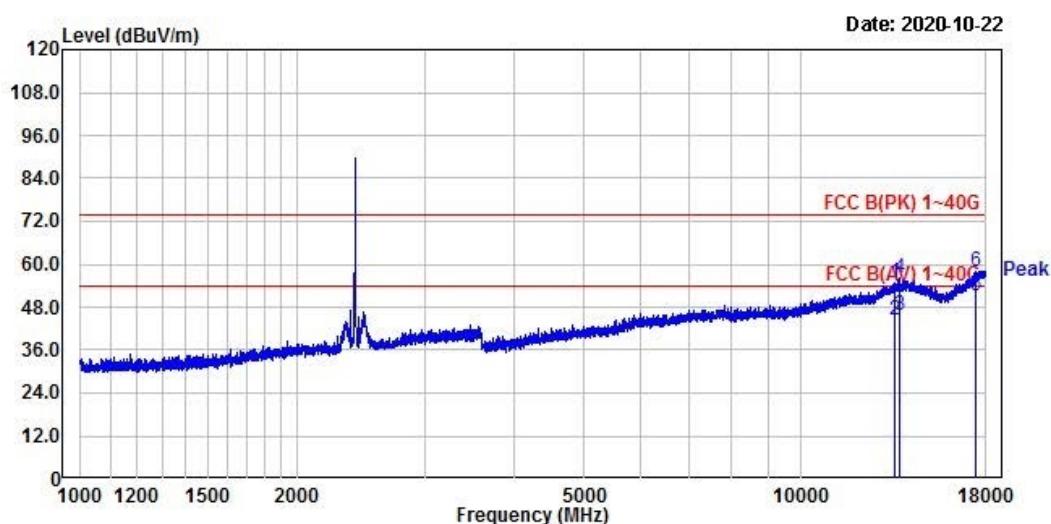


No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.13501.22	41.38	13.32	54.70	74.00	19.30	100	199	horizontal	
2.13501.22	30.88	13.32	44.20	54.00	9.80	100	199	horizontal	
3.13717.56	31.83	13.85	45.68	74.00	28.32	100	166	horizontal	
4.13717.56	42.15	13.85	56.00	74.00	18.00	100	166	horizontal	
5.17506.14	34.56	16.55	51.11	54.00	2.89	100	292	horizontal	
6.17506.14	41.60	16.55	58.15	74.00	15.85	100	292	horizontal	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: ----- Temp/Humi: 23 'C / 38 % R.H.
Test Mode : BLE LOW Tested by: -----
Power : -----

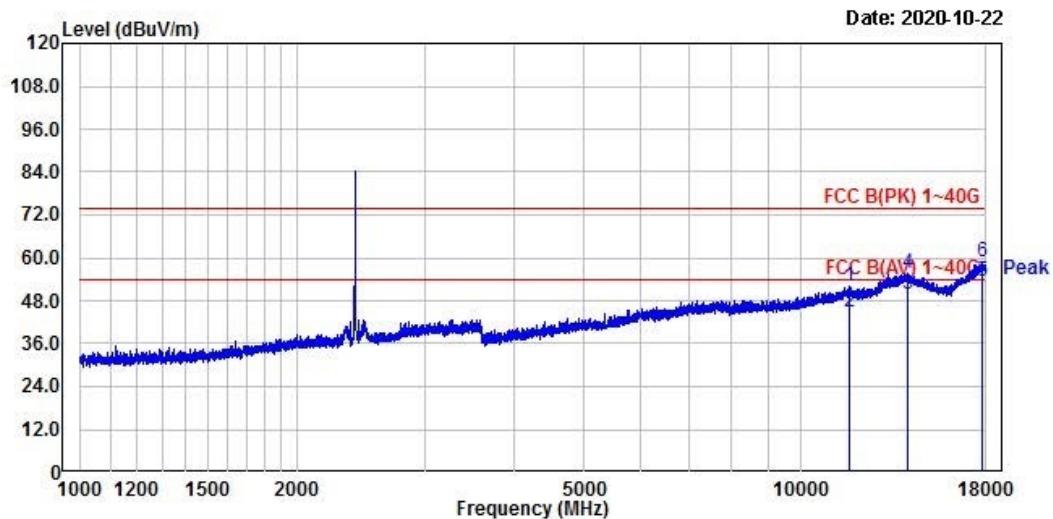

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	11676.04	41.85	10.30	52.15	74.00	21.85	100	360	vertical
2.	11676.04	34.47	10.30	44.77	54.00	9.23	100	360	vertical
3.	14063.83	35.22	14.37	49.59	54.00	4.41	100	89	vertical
4.	14063.83	41.25	14.37	55.62	74.00	18.38	100	89	vertical
5.	17805.95	36.27	17.05	53.32	54.00	0.68	100	360	vertical
6.	17805.95	41.92	17.05	58.97	74.00	15.03	100	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE MID

Tested by:

Power :

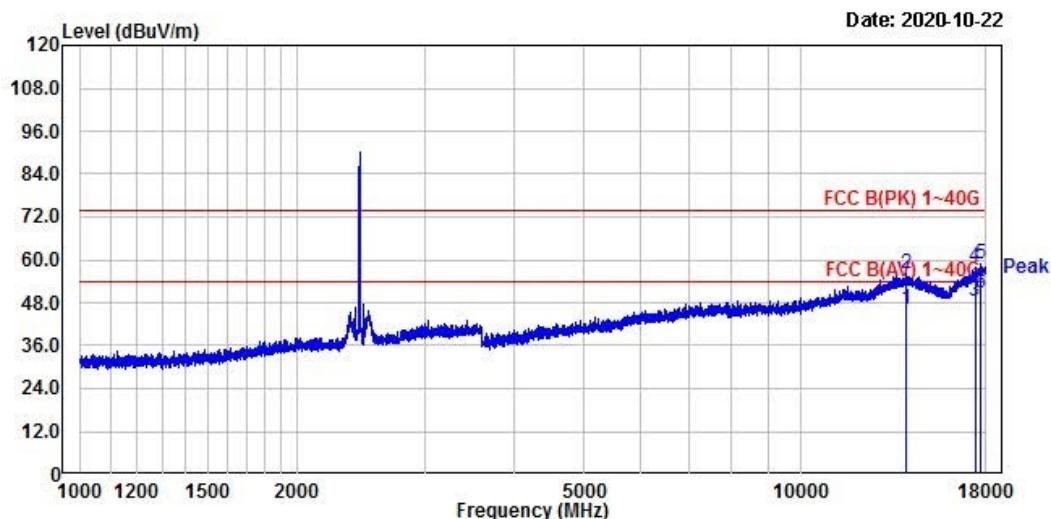

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	13997.93	31.75	14.53	46.28	54.00	7.72	100	133	horizontal
2.	13997.93	41.50	14.53	56.03	74.00	17.97	100	133	horizontal
3.	17424.11	32.28	16.20	48.48	54.00	5.52	100	178	horizontal
4.	17424.11	41.54	16.20	57.74	74.00	16.26	100	178	horizontal
5.	17735.33	41.85	16.93	58.78	74.00	15.22	100	328	horizontal
6.	17735.33	33.95	16.93	50.88	54.00	3.12	100	328	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE MID

Tested by:

Power :

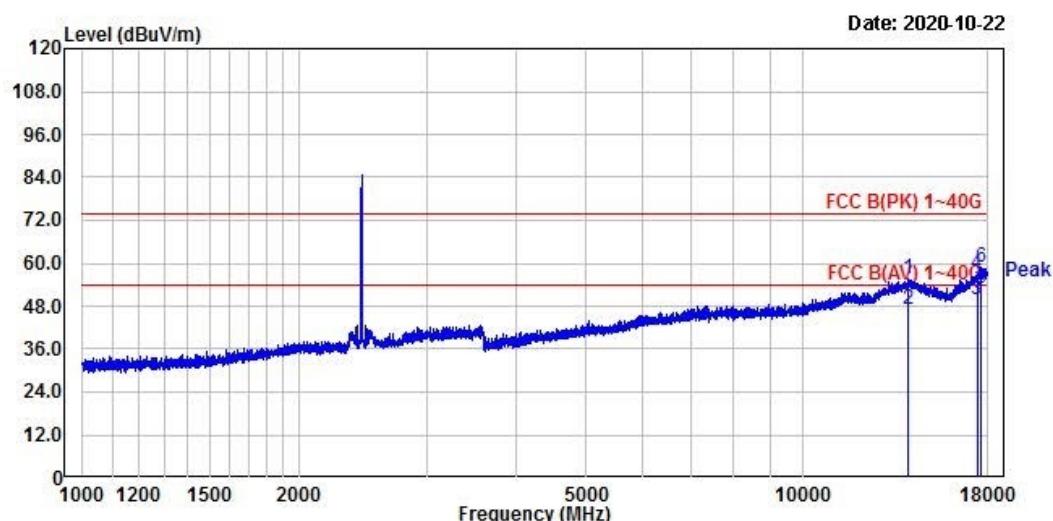

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.14013.11	41.21	14.49	55.70	74.00	18.30	100	86	vertical	
2.14013.11	32.71	14.49	47.20	54.00	6.80	100	86	vertical	
3.17424.11	33.74	16.20	49.94	54.00	4.06	100	360	vertical	
4.17424.11	40.93	16.20	57.13	74.00	16.87	100	360	vertical	
5.17690.53	36.08	16.87	52.95	54.00	1.05	100	147	vertical	
6.17690.53	42.19	16.87	59.06	74.00	14.94	100	147	vertical	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE HIGH

Tested by:

Power :

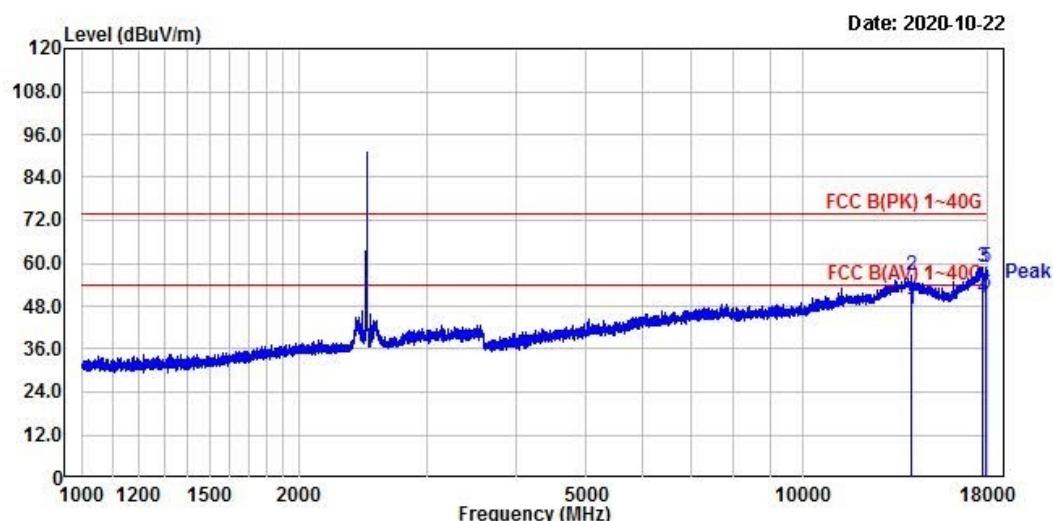

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	14155.59	32.91	14.14	47.05	54.00	6.95	100	274	horizontal
2.	14155.59	42.30	14.14	56.44	74.00	17.56	100	274	horizontal
3.	17741.74	42.01	16.94	58.95	74.00	15.05	100	142	horizontal
4.	17741.74	33.37	16.94	50.31	54.00	3.69	100	142	horizontal
5.	17896.25	41.84	17.21	59.05	74.00	14.95	100	284	horizontal
6.	17896.25	34.39	17.21	51.60	54.00	2.40	100	284	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE HIGH

Tested by:

Power :

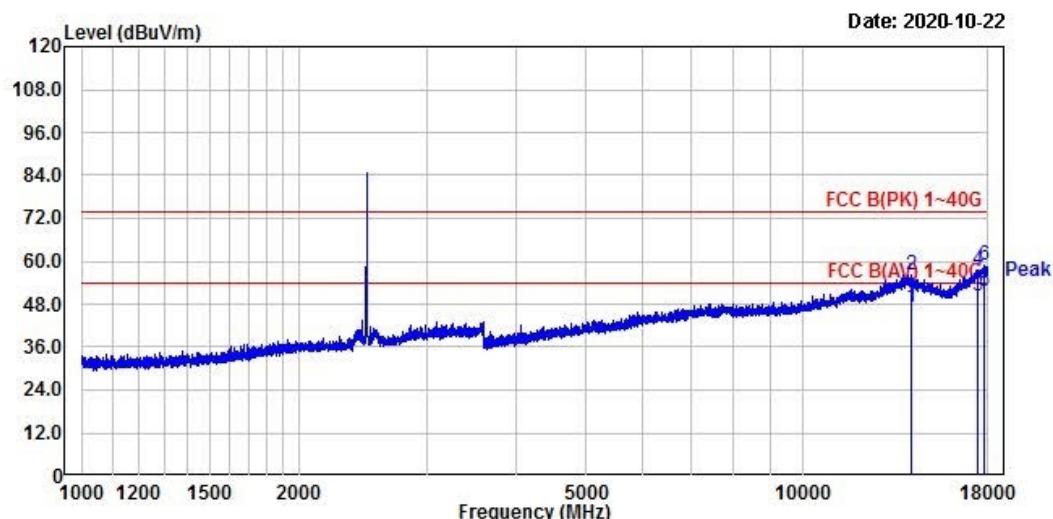

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	14155.59	32.86	14.14	47.00	54.00	7.00	100	360	vertical
2.	14155.59	42.08	14.14	56.22	74.00	17.78	100	360	vertical
3.	17506.14	33.77	16.55	50.32	54.00	3.68	100	313	vertical
4.	17506.14	40.80	16.55	57.35	74.00	16.65	100	313	vertical
5.	17793.09	34.38	17.04	51.42	54.00	2.58	100	181	vertical
6.	17793.09	41.61	17.04	58.65	74.00	15.35	100	181	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE LOW

Tested by:

Power :

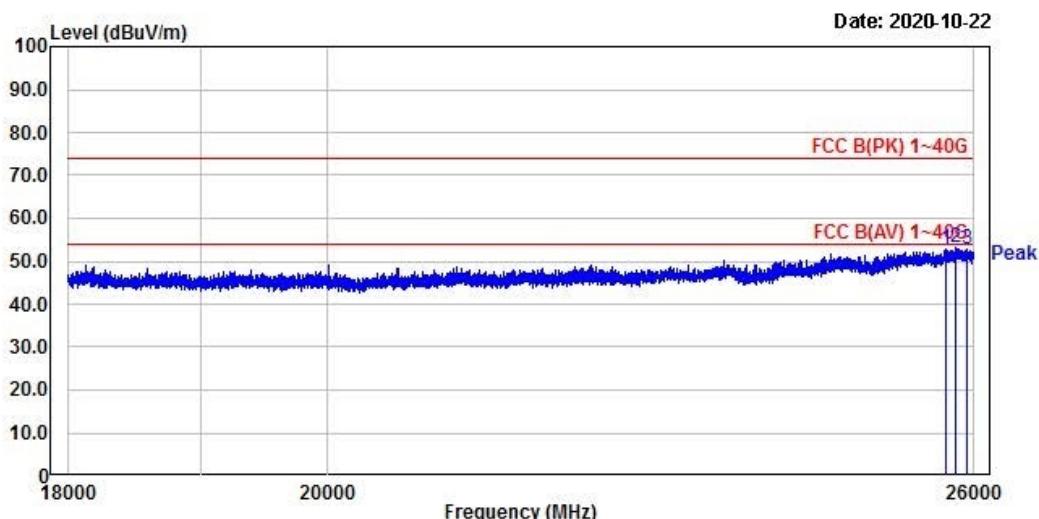

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.25713.57	34.72	18.20	52.92	74.00	21.08	100	201	horizontal	
2.25808.30	34.92	18.27	53.19	74.00	20.81	100	316	horizontal	
3.25929.58	34.84	18.18	53.02	74.00	20.98	100	352	horizontal	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE LOW

Tested by:

Power :

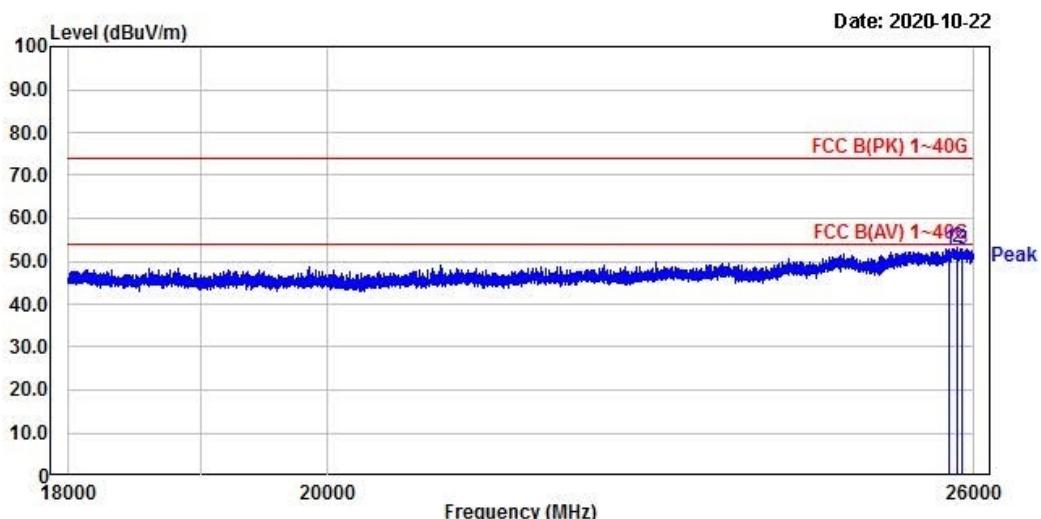

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	25740.77	34.55	18.23	52.78	74.00	21.22	100	280	vertical
2.	25840.35	34.89	18.25	53.14	74.00	20.86	100	187	vertical
3.	25887.90	34.76	18.20	52.96	74.00	21.04	100	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE MID

Tested by:

Power :

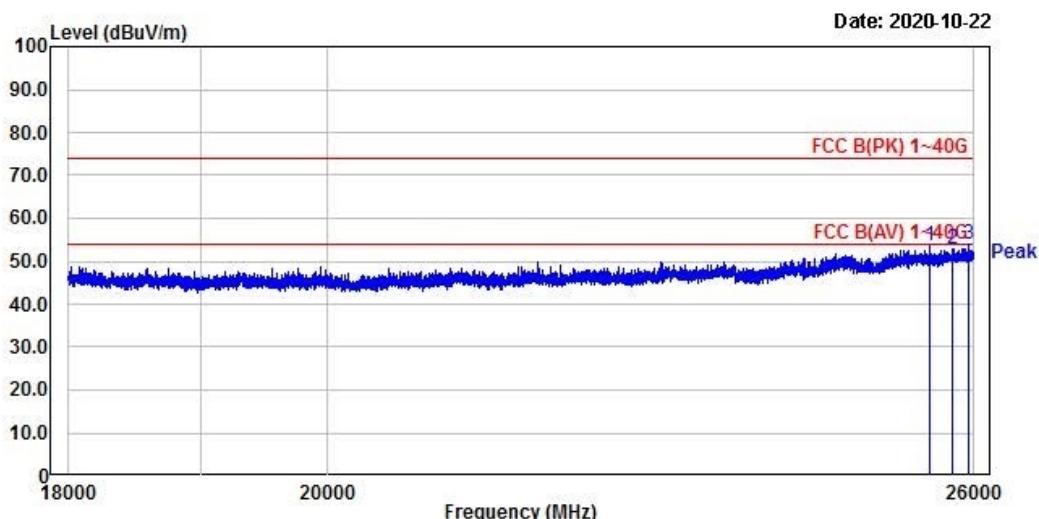

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.25538.06	35.35	18.14	53.49	74.00	20.51	100	351	horizontal	
2.25781.03	34.55	18.26	52.81	74.00	21.19	100	160	horizontal	
3.25959.40	35.76	18.19	53.95	74.00	20.05	100	74	horizontal	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE MID

Tested by:

Power :

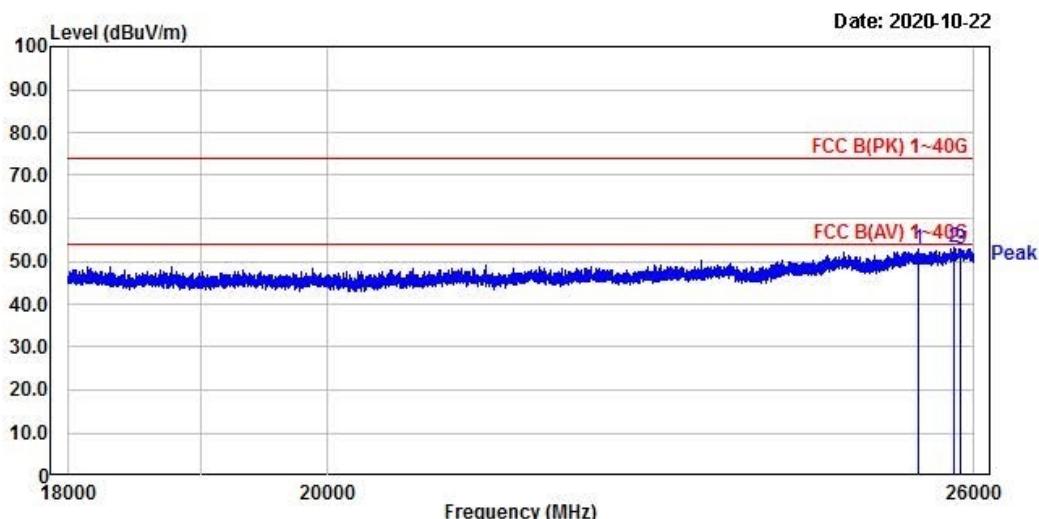

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.25423.28	34.90	17.90	52.80	74.00	21.20	100	360	vertical	
2.25804.74	34.81	18.28	53.09	74.00	20.91	100	360	vertical	
3.25867.68	34.72	18.22	52.94	74.00	21.06	100	326	vertical	

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE HIGH

Tested by:

Power :

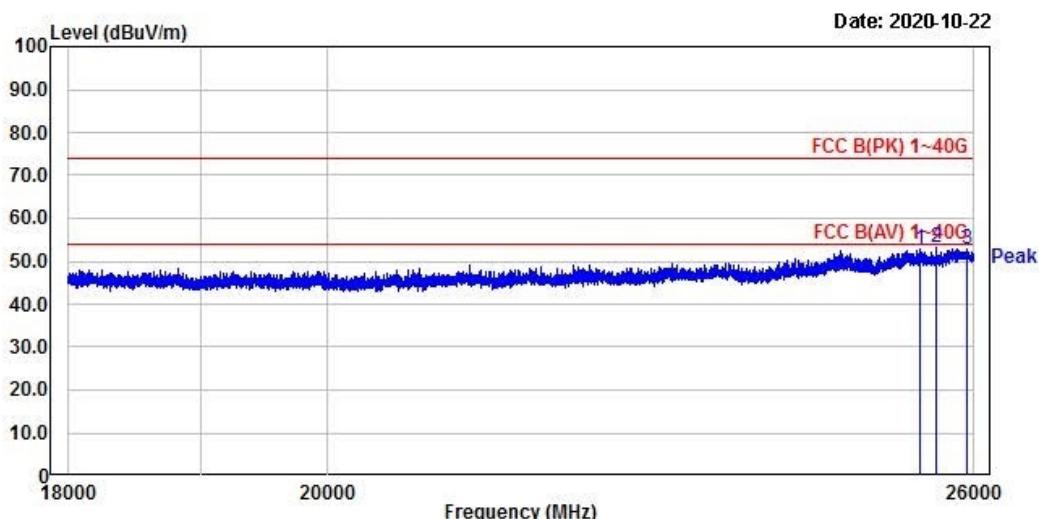

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	25445.49	34.92	17.99	52.91	74.00	21.09	100	0	horizontal
2.	25619.19	35.10	18.10	53.20	74.00	20.80	100	260	horizontal
3.	25942.70	34.83	18.19	53.02	74.00	20.98	100	12	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : BLE HIGH

Tested by:

Power :

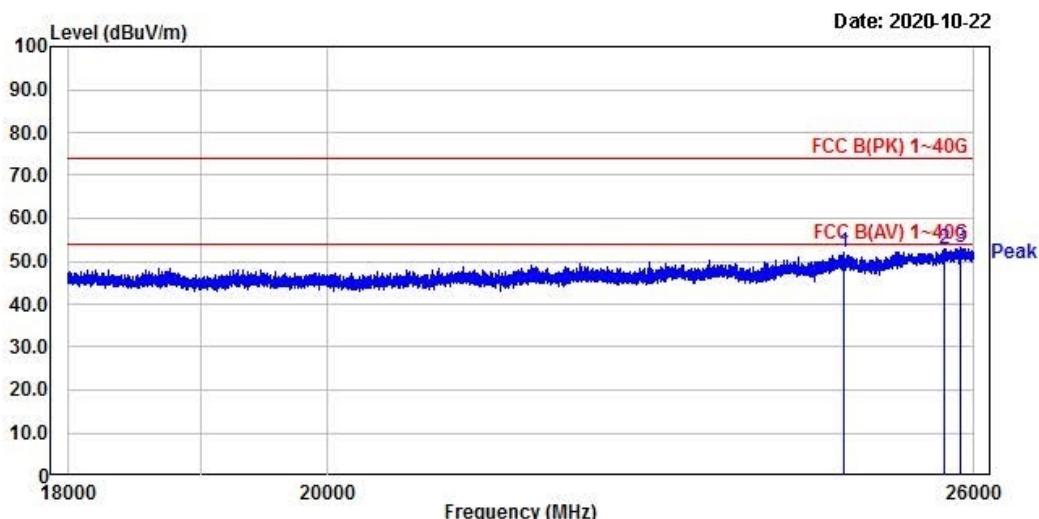

No.	Freq MHz	Reading dB μ V	C.F dB	Result dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	24673.79	35.00	17.10	52.10	74.00	21.90	100	141	vertical
2.	25689.94	34.59	18.18	52.77	74.00	21.23	100	3	vertical
3.	25867.68	35.15	18.22	53.37	74.00	20.63	100	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.7 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Minimum Standard: FCC Part 15.207(a) / EN 55022

Measurement Data: N/A

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

APPENDIX
TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2021-09-06
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2021-03-16
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2021-03-16
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2021-09-06
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2021-09-06
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2021-09-06
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2021-09-06
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2021-03-16
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2022-08-04
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2022-03-16
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2022-03-16
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2021-03-16
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2021-03-16
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2021-03-16
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2021-09-06
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2021-09-06
20		Modulation Analyzer	8901B	3749A05878	HP	1 year	2021-09-06
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2021-09-06
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2021-03-16
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2021-09-06
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2021-03-16
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2021-03-16
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2021-03-16
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2021-03-16
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2021-03-16
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2021-03-16
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2021-03-16
31		Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2021-02-26