




RADIO TEST REPORT

FCC ID : 2AXXQHNRM30
Equipment : Wi-Fi7 Tri-band AP Router
Brand Name : HUMAX NETWORKS
Model Name : HNRM30
Applicant : Humax Networks, INC
216, Hwangsaеul-ro, Bundang-gu, Seongnam-si, South Korea 13595
Manufacturer : Humax Networks, INC
216, Hwangsaеul-ro, Bundang-gu, Seongnam-si, South Korea 13595
Standard : 47 CFR FCC Part 15.247

The product was received on Aug. 06, 2024, and testing was started from Aug. 09, 2024 and completed on Feb. 13, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

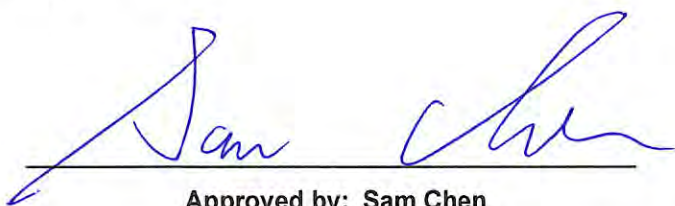

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration	12
2.3 EUT Operation during Test	13
2.4 Accessories	14
2.5 Support Equipment.....	14
2.6 Test Setup Diagram	15
3 Transmitter Test Result	18
3.1 AC Power-line Conducted Emissions	18
3.2 DTS Bandwidth.....	20
3.3 Maximum Conducted Output Power	21
3.4 Power Spectral Density	24
3.5 Emissions in Non-restricted Frequency Bands	26
3.6 Emissions in Restricted Frequency Bands.....	27
4 Test Equipment and Calibration Data	31
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Cathy Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax (HEW20), be (EHT20)	2412-2472	1-13 [13]
2400-2483.5	n (HT40), VHT40, ax (HEW40), be (EHT40)	2422-2457	3-10 [8]

Band	Mode	BWch	Nant
2.4-2.4835GHz	802.11b	20	4TX
2.4-2.4835GHz	802.11g	20	4TX
2.4-2.4835GHz	802.11n HT20	20	4TX
2.4-2.4835GHz	802.11n HT20-BF	20	4TX
2.4-2.4835GHz	VHT20	20	4TX
2.4-2.4835GHz	VHT20-BF	20	4TX
2.4-2.4835GHz	802.11ax HEW20	20	4TX
2.4-2.4835GHz	802.11ax HEW20-BF	20	4TX
2.4-2.4835GHz	802.11be EHT20	20	4TX
2.4-2.4835GHz	802.11be EHT20-BF	20	4TX
2.4-2.4835GHz	802.11n HT40	40	4TX
2.4-2.4835GHz	802.11n HT40-BF	40	4TX
2.4-2.4835GHz	VHT40	40	4TX
2.4-2.4835GHz	VHT40-BF	40	4TX
2.4-2.4835GHz	802.11ax HEW40	40	4TX
2.4-2.4835GHz	802.11ax HEW40-BF	40	4TX
2.4-2.4835GHz	802.11be EHT40	40	4TX
2.4-2.4835GHz	802.11be EHT40-BF	40	4TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.


1.1.2 Antenna Information

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth /Zigbee					
1	4	1	-	-	Galtronics	60-3693-03-2	PCB	I-PEX	Note 1
2	3	2	-	-	Galtronics	60-3693-03-2	PCB	I-PEX	
3	2	3	-	-	Galtronics	60-3693-03-1	PCB	I-PEX	
4	1	4	-	-	Galtronics	60-3693-03-1	PCB	I-PEX	
5	-	-	3	-	Galtronics	60-3695-03-2	PCB	I-PEX	
6	-	-	2	-	Galtronics	60-3610-03	PCB	I-PEX	
7	-	-	1	-	Galtronics	60-3695-03-2	PCB	I-PEX	
8	-	-	4	-	Galtronics	60-3610-03	PCB	I-PEX	
9	-	-	-	1	Galtronics	AT6901	Printed	N/A	

Note 1:

Notes 1:

Ant.	Antenna Gain (dBi)										GPS
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz				Bluetooth/ Zigbee	
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8		
1	3.68	3.73	3.25	3.77	3.16	-	-	-	-	-	-
2	2.53	3.43	3.21	3.82	3.85	-	-	-	-	-	-
3	3.76	5.24	5.15	5.05	4.94	-	-	-	-	-	-
4	4.06	4.80	4.41	3.96	3.87	-	-	-	-	-	-
5	-	-	-	-	-	4.67	4.16	4.37	4.01	-	-
6	-	-	-	-	-	3.76	3.24	4.42	4.17	-	-
7	-	-	-	-	-	4.63	5.06	4.31	4.58	-	-
8	-	-	-	-	-	3.75	3.58	3.93	4.38	-	-
9	-	-	-	-	-	-	-	-	-	3.83	-

Item	Directional Gain (dBi)				
	WLAN 2.4GHz	WLAN 5GHz			
		UNII 1	UNII 2A	UNII 2C	UNII 3
4T1S	4.75	5.35	5.86	5.30	5.17
4T2S	4.06	5.24	5.15	5.05	4.94
4T4S	4.06	5.24	5.15	5.05	4.94

Note 2: The above information (except gain of Ant. 1~4 and directional gain) was declared by the manufacturer.

Note 3: For 2.4GHz/5GHz, the antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.

**For 2.4GHz function:****For IEEE 802.11 b/g/n/VHT/ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11 a/n/ac/ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For 6GHz function:**For IEEE 802.11 ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For Bluetooth function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For Zigbee function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11b_Nss 1,(1D)	0.956	0.2	12.417m	100
802.11g_Nss 1,(6D)	0.948	0.23	2.065m	1k
802.11be EHT20_Nss 1,(M0)	0.977	0.1	1.496m	1k
802.11be EHT40_Nss 1,(M0)	0.958	0.19	780.937u	3k
802.11be EHT20-BF_Nss 1,(M0)	0.975	0.11	1.496m	1k
802.11be EHT40-BF_Nss 1,(M0)	0.958	0.19	781.875u	3k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.			
Function	☒	Point-to-multipoint	☐	Point-to-point
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	For RF Conducted test: accessMtool 3.3.0.8 For Radiated above 1GHz test: For Non-beamforming mode: accessMtool 3.3.0.8 For Beamforming mode: DOS[ver 6.1.7601]			

Note: The above information was declared by manufacturer.

**1.1.5 Table for EUT Support Function**

Function
AP
Mesh
Bridge

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Serway Lee	22.5~23.7 / 63~64	Aug. 20, 2024~Oct. 21, 2024
Radiated (Below 1GHz)	03CH04-CB	Ederson Huang	22.7-23.8 / 56-59	Jan. 21, 2025~Feb. 12, 2025
	03CH05-CB	Ederson Huang	21.6-22.7 / 56-59	Jan. 21, 2025~Feb. 12, 2025
Radiated (Above 1GHz)	03CH04-CB	Ederson Huang	22.7-23.8 / 56-59	Aug. 09, 2024~Oct. 14, 2024
Radiated (Co-location)	03CH05-CB	Ederson Huang	21.6-22.7 / 56-59	Oct. 21, 2024
AC Conduction	CO02-CB	Gray Lee	21~23 / 49~50	Feb. 13, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11b_Nss1,(1Mbps)_4TX
2412MHz
2437MHz
2462MHz
2467MHz
2472MHz
802.11g_Nss1,(6Mbps)_4TX
2412MHz
2437MHz
2462MHz
2467MHz
2472MHz
802.11be EHT20_Nss1,(MCS0)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
2467MHz
2472MHz
802.11be EHT40_Nss1,(MCS0)_4TX
2422MHz
2437MHz
2452MHz
2457MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
2467MHz
2472MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
2422MHz
2437MHz
2452MHz
2457MHz

Note:

- ♦ EHT20/EHT40 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/HEW20/HEW40 mode are the same or lower than EHT20/EHT40.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT + WLAN 2.4GHz
2	EUT + WLAN 5GHz
3	EUT + WLAN 6GHz
4	EUT + Bluetooth
5	EUT + Zigbee
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
After evaluating, and the worst case was found at Y-axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y-axis + WLAN 2.4GHz
2	EUT in Y-axis + WLAN 5GHz
3	EUT in Y-axis + WLAN 6GHz
4	EUT in Y-axis + Bluetooth
5	EUT in Y-axis + Zigbee
For operating mode 1 is the worst case and it was record in this test report.	



Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Y-axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y-axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
After evaluating, and the worst case was found at Y-axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y-axis + WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
2	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Zigbee
Refer to Sporton Test Report No.: FA470906 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Client and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	NetBit	NBS42D120333VU	INPUT: 100-120V~, 50/60Hz, 1.0A OUTPUT: 12.0V, 3.33A
Others			
RJ-45 cable*1, non-shielded, 1.53m			

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E6430	N/A
B	Flash disk3.0	Transcend	JetFlash-700	N/A


For Radiated (below 1GHz), Radiated (above 1GHz) / Non-beamforming mode and RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

For Radiated (above 1GHz) / Beamforming mode:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Client	gateway/router	HNRM30	N/A
C	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

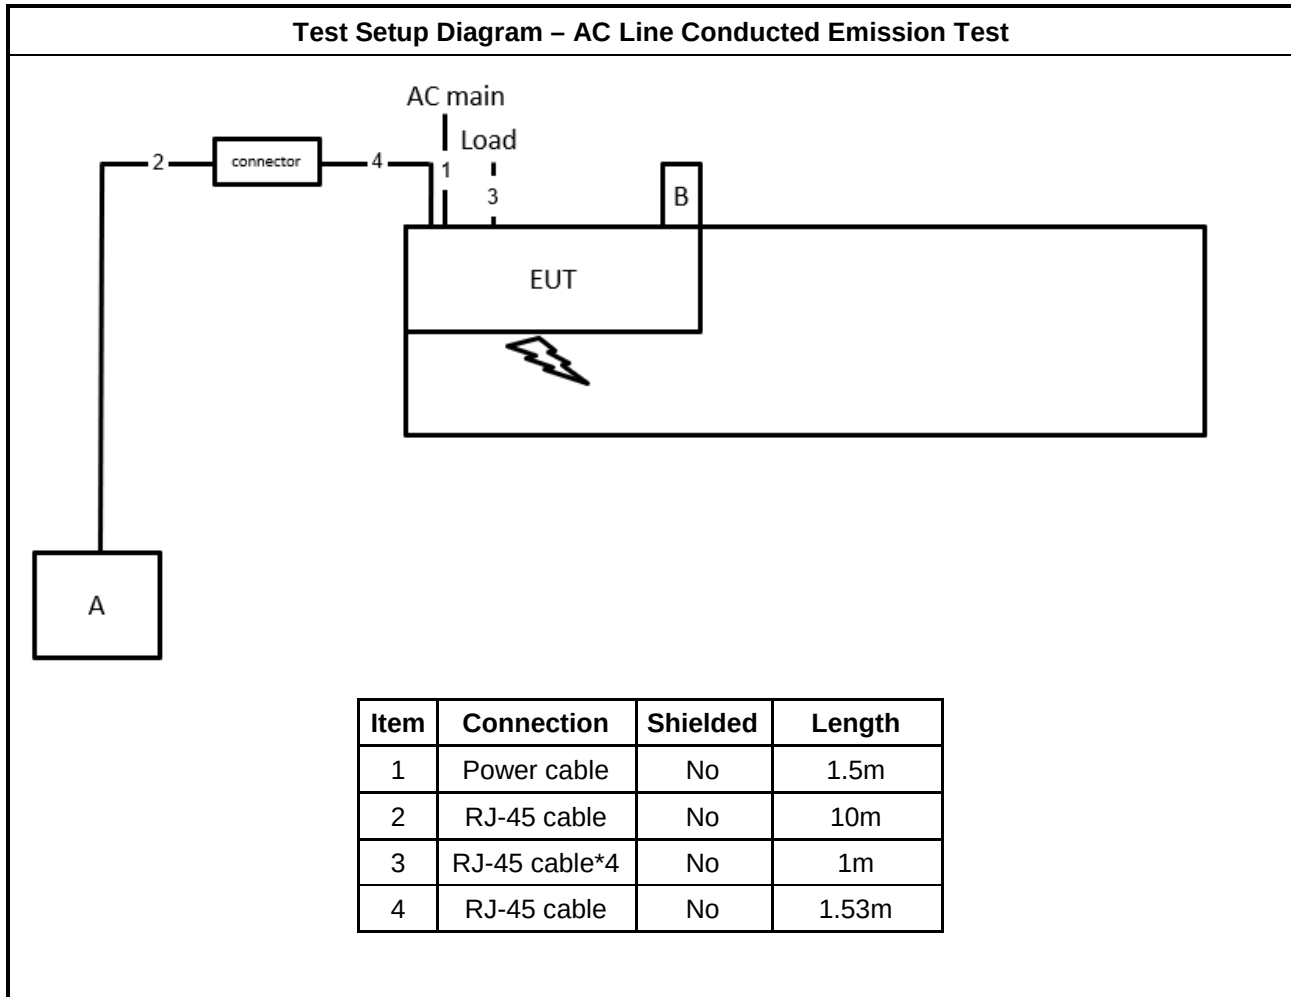

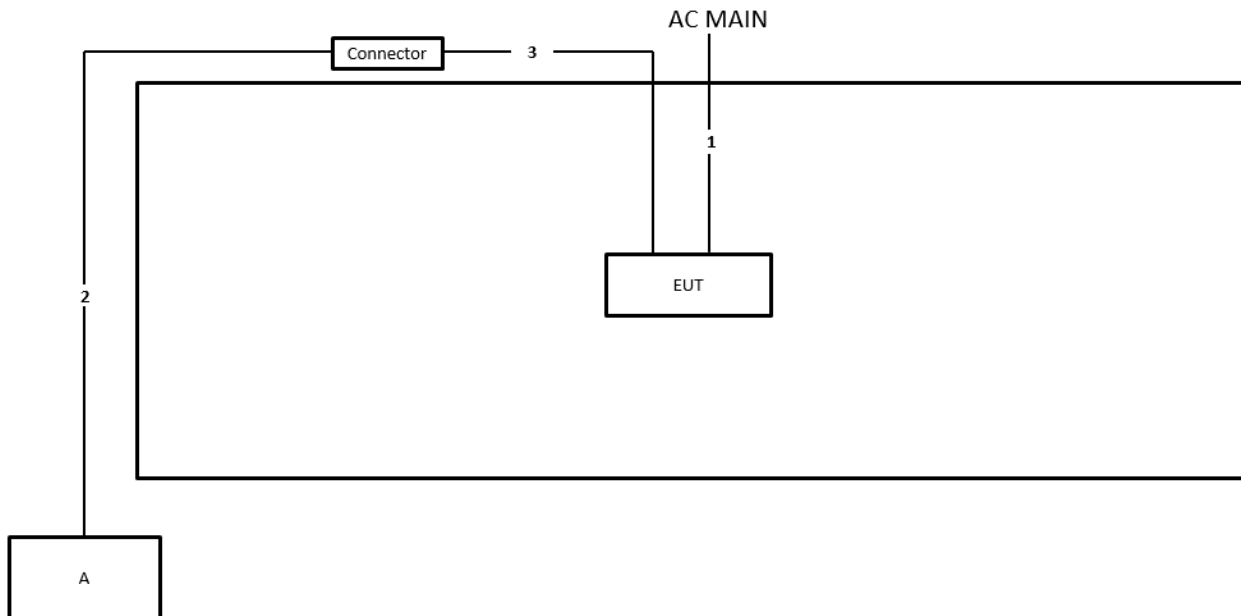Test Setup Diagram - Radiated Test < 1GHz and Radiated Test > 1GHz / Non-beamforming


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.53m

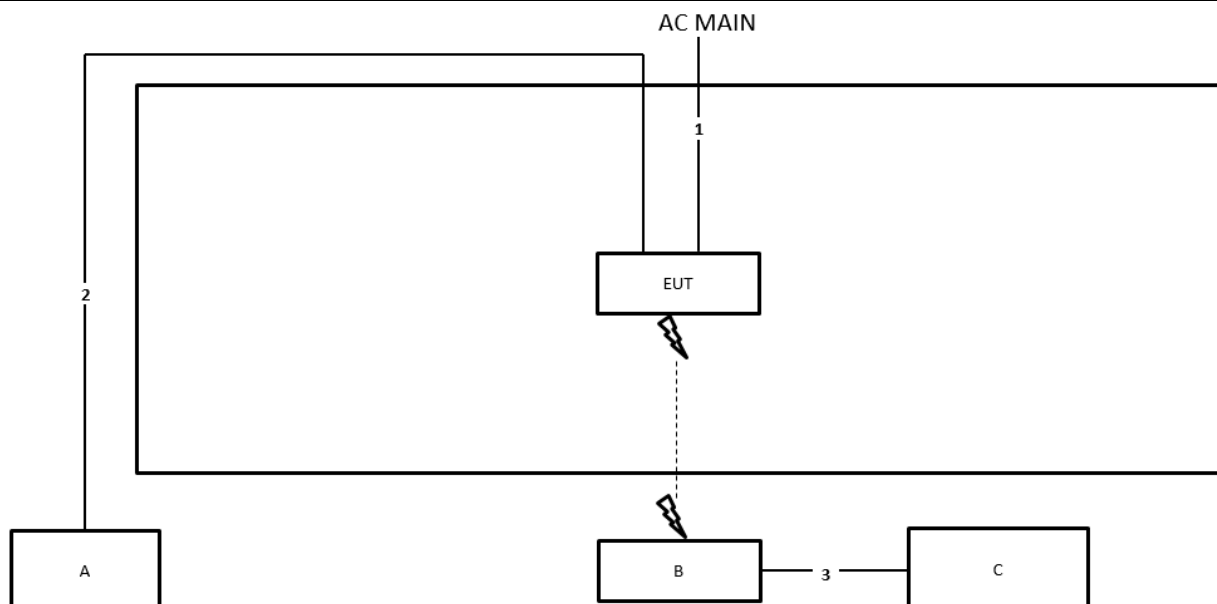Test Setup Diagram - Radiated Test > 1GHz / Beamforming mode


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

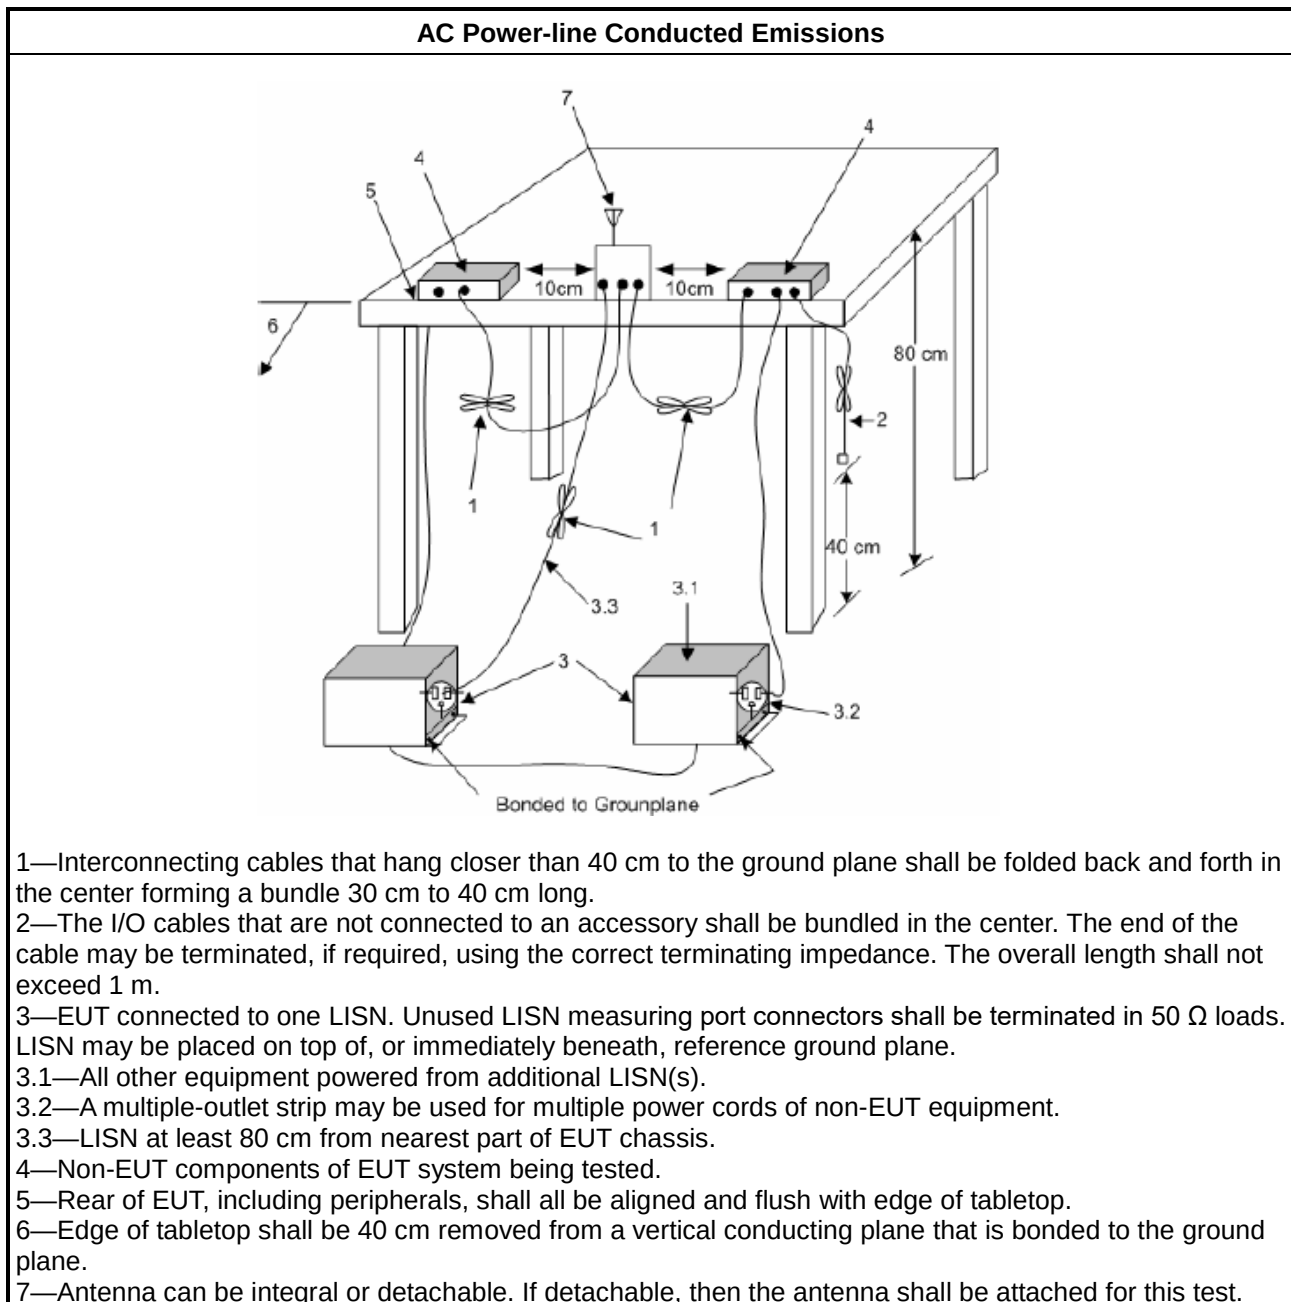

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

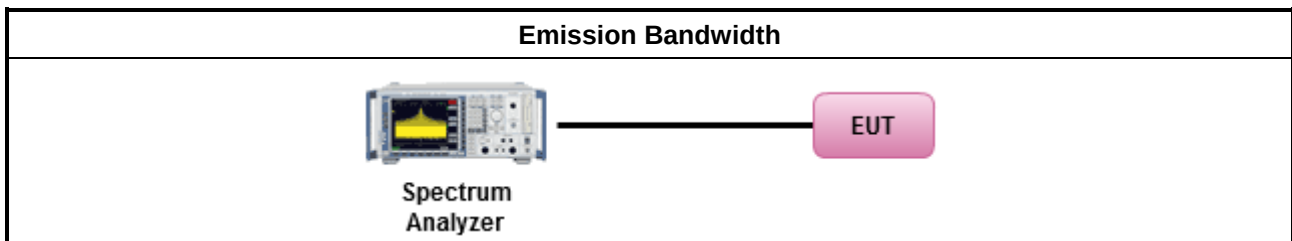

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

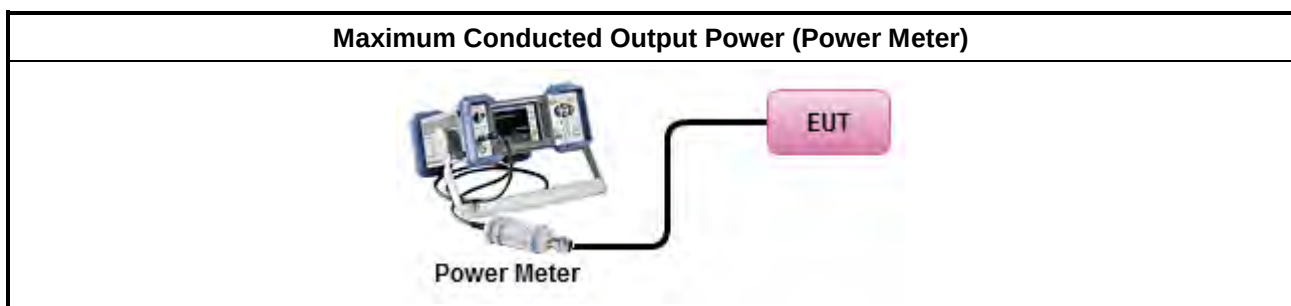



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

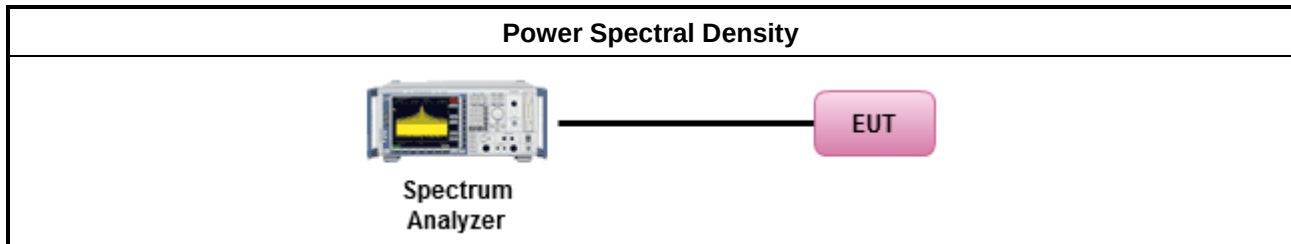

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

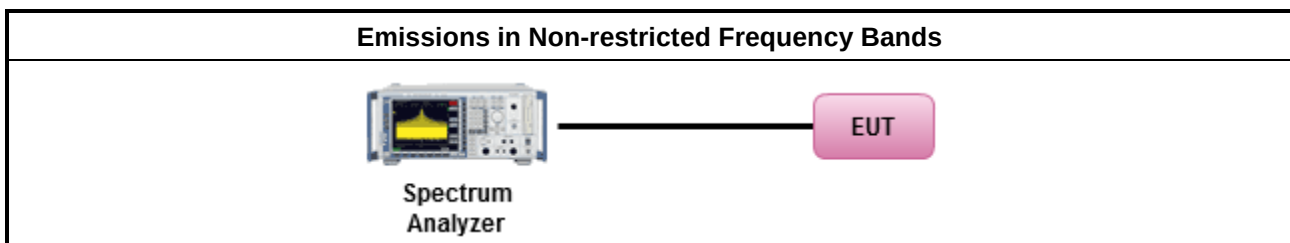

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

**3.6.3 Test Procedures**

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

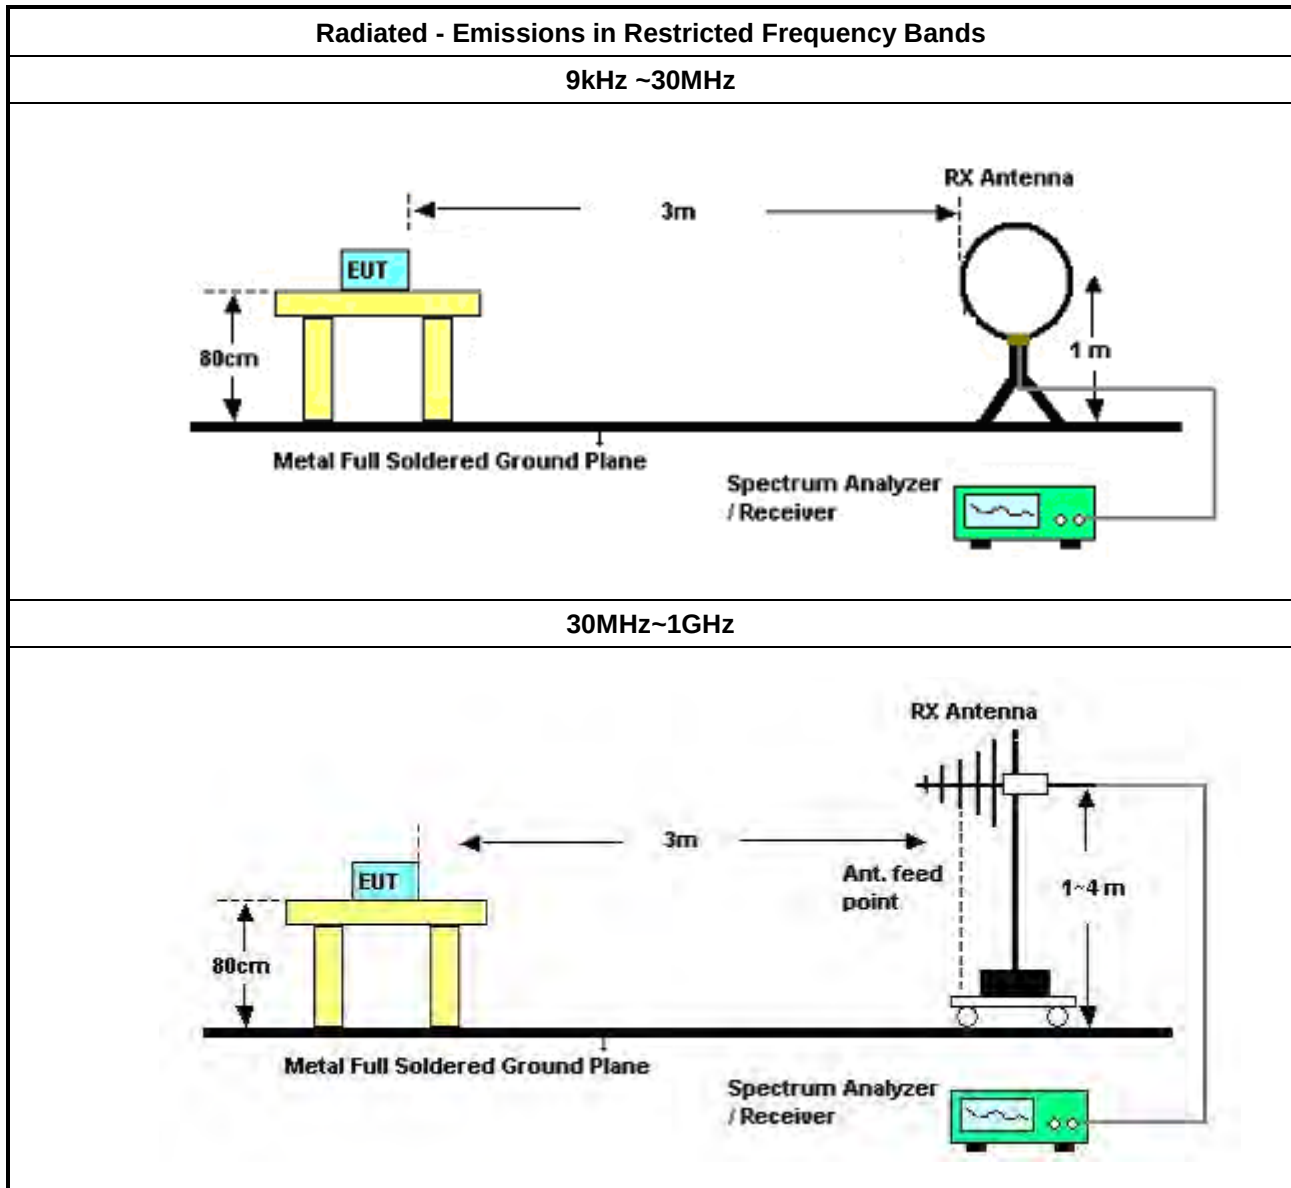

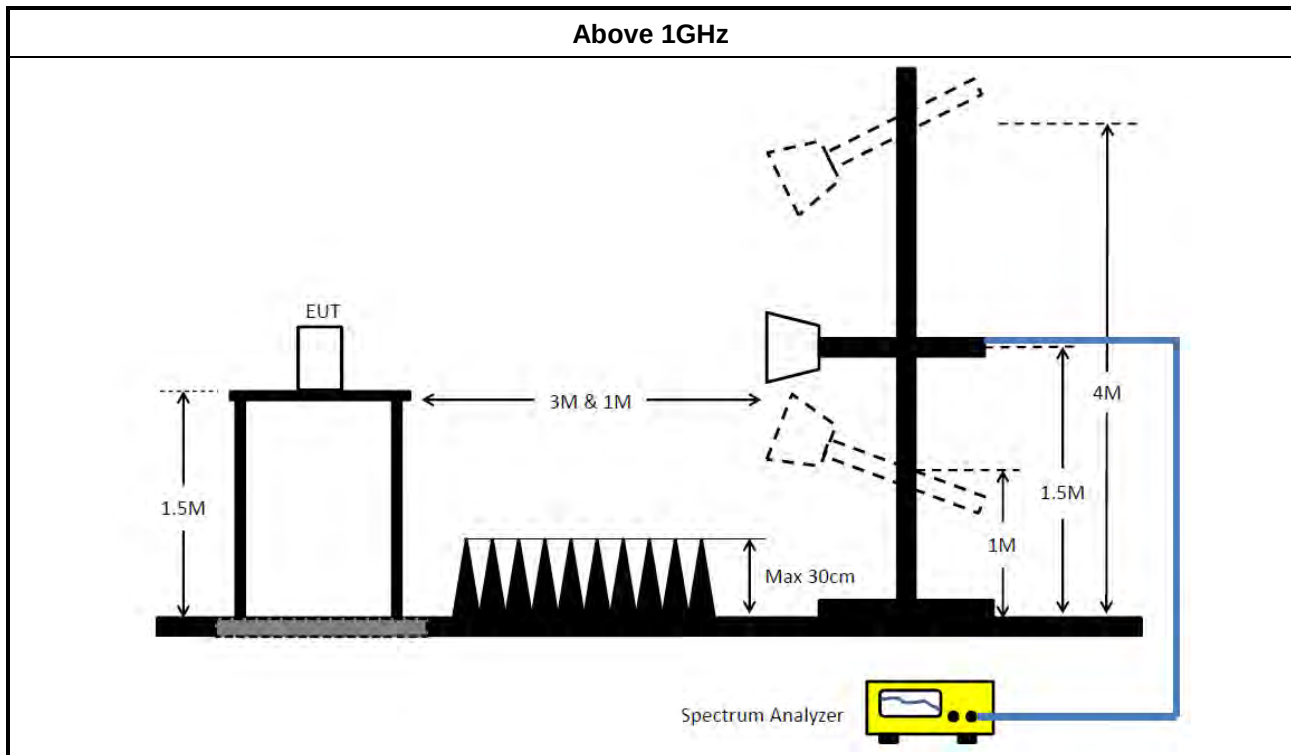

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Apr. 15, 2024	Apr. 14, 2025	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 24, 2024	Apr. 23, 2025	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 15, 2024	May 14, 2025	Conduction (CO02-CB)
COND Cable	Woken	Cable	02	0.15MHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 16, 2024	Oct. 15, 2025	Radiation (03CH04-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH04-CB	30 MHz ~ 1 GHz	Jul. 31, 2024	Jul. 30, 2025	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 22, 2024	Feb. 21, 2025	Radiation (03CH04-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N0 607	30MHz ~ 1GHz	Oct. 05, 2024	Oct. 04, 2025	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 20, 2023	Dec. 19, 2024	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jul. 09, 2024	Jul. 08, 2025	Radiation (03CH04-CB)
Pre-Amplifier	EMCI	EMC330N	980391	20MHz ~ 3GHz	May 22, 2024	May 21, 2025	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 17, 2024	Jan. 16, 2025	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 19, 2024	Mar. 18, 2025	Radiation (03CH04-CB)
EMI Test Receiver	R&S	ESR7	102171	9kHz ~ 7GHz	Aug. 02, 2024	Aug. 01, 2025	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+67	30MHz ~ 1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.18	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 16, 2024	Oct. 15, 2025	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 01, 2024	Jul. 31, 2025	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 28, 2024	Sep. 27, 2025	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 23, 2024	Mar. 22, 2025	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jul. 09, 2024	Jul. 08, 2025	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 02, 2024	May 01, 2025	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 17, 2024	Apr. 16, 2025	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESR7	102171	9kHz ~ 7GHz	Aug. 02, 2024	Aug. 01, 2025	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Jul. 27, 2024	Jul. 26, 2025	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2024	May 26, 2025	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~26.5 GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
Cable 9k-18G	Woken	RG402	Cable-95	9 kHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Mar. 01, 2024	Feb. 28, 2025	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 12, 2024	Jul. 11, 2025	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.18	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	159k	53.29	65.52	-12.23	Neutral

Mode 1

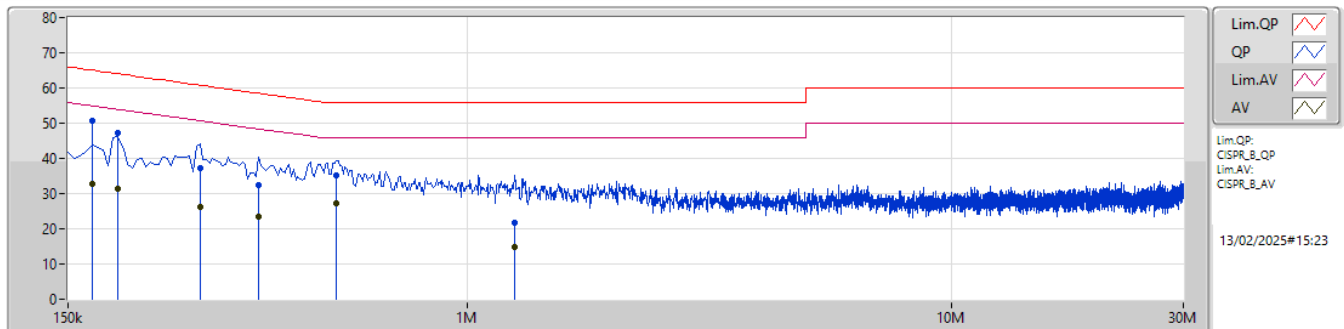

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	168k	50.59	65.06	-14.47	10.15	Line	"Worst"	40.44	0.05	0.08	10.02						
AV	168k	32.93	55.06	-22.13	10.15	Line	-	22.78	0.05	0.08	10.02						
QP	190.5k	47.26	64.01	-16.75	10.14	Line	-	37.12	0.05	0.07	10.02						
AV	190.5k	31.39	54.01	-22.62	10.14	Line	-	21.25	0.05	0.07	10.02						
QP	280.5k	37.11	60.80	-23.69	10.15	Line	-	26.96	0.05	0.08	10.02						
AV	280.5k	26.07	50.80	-24.73	10.15	Line	-	15.92	0.05	0.08	10.02						
QP	370.5k	32.42	58.49	-26.07	10.18	Line	-	22.24	0.05	0.10	10.03						
AV	370.5k	23.31	48.49	-25.18	10.18	Line	-	13.13	0.05	0.10	10.03						
QP	537k	35.31	56.00	-20.69	10.19	Line	-	25.12	0.06	0.10	10.03						
AV	537k	27.26	46.00	-18.74	10.19	Line	-	17.07	0.06	0.10	10.03						
QP	1.253M	21.82	56.00	-34.18	10.21	Line	-	11.61	0.08	0.11	10.02						
AV	1.253M	14.94	46.00	-31.06	10.21	Line	-	4.73	0.08	0.11	10.02						

Mode 1

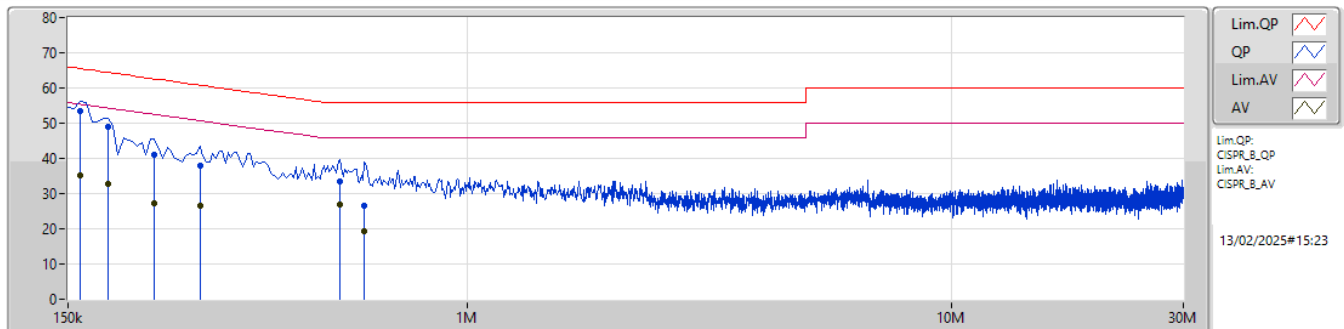

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	53.29	65.52	-12.23	10.15	Neutral	"Worst"	43.14	0.05	0.08	10.02						
AV	159k	35.22	55.52	-20.30	10.15	Neutral	-	25.07	0.05	0.08	10.02						
QP	181.5k	49.13	64.41	-15.28	10.14	Neutral	-	38.99	0.05	0.07	10.02						
AV	181.5k	32.77	54.41	-21.64	10.14	Neutral	-	22.63	0.05	0.07	10.02						
QP	226.5k	41.10	62.58	-21.48	10.15	Neutral	-	30.95	0.05	0.08	10.02						
AV	226.5k	27.20	52.58	-25.38	10.15	Neutral	-	17.05	0.05	0.08	10.02						
QP	280.5k	37.98	60.80	-22.82	10.15	Neutral	-	27.83	0.05	0.08	10.02						
AV	280.5k	26.45	50.80	-24.35	10.15	Neutral	-	16.30	0.05	0.08	10.02						
QP	546k	33.57	56.00	-22.43	10.18	Neutral	-	23.39	0.05	0.10	10.03						
AV	546k	26.74	46.00	-19.26	10.18	Neutral	-	16.56	0.05	0.10	10.03						
QP	613.5k	26.49	56.00	-29.51	10.18	Neutral	-	16.31	0.05	0.10	10.03						
AV	613.5k	19.22	46.00	-26.78	10.18	Neutral	-	9.04	0.05	0.10	10.03						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	8.025M	10.326M	10M3G1D	5.375M	10.245M
802.11g_Nss1,(6Mbps)_4TX	16.575M	17.014M	17M0D1D	16.05M	16.615M
802.11be EHT20_Nss1,(MCS0)_4TX	19.15M	19.133M	19M1D1D	17.225M	18.943M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.025M	19.135M	19M1D1D	17.275M	18.964M
802.11be EHT40_Nss1,(MCS0)_4TX	37.8M	37.875M	37M9D1D	35.4M	37.712M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	37.8M	37.864M	37M9D1D	35.1M	37.663M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	5.8M	10.321M	7.575M	10.326M	6.125M	10.302M	7.075M	10.301M
2437MHz	Pass	500k	6.325M	10.302M	5.575M	10.291M	5.375M	10.273M	7.075M	10.307M
2462MHz	Pass	500k	7.15M	10.272M	7.1M	10.29M	6.575M	10.294M	7.5M	10.319M
2467MHz	Pass	500k	6.575M	10.276M	7.575M	10.314M	6.55M	10.268M	6.525M	10.286M
2472MHz	Pass	500k	8.025M	10.286M	7.075M	10.267M	6.525M	10.267M	7.525M	10.245M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.3M	16.831M	16.325M	16.969M	16.3M	16.896M	16.5M	16.932M
2437MHz	Pass	500k	16.3M	16.897M	16.525M	16.811M	16.275M	16.811M	16.575M	16.788M
2462MHz	Pass	500k	16.1M	16.931M	16.35M	16.892M	16.325M	17.014M	16.05M	16.912M
2467MHz	Pass	500k	16.45M	16.941M	16.4M	16.928M	16.55M	16.984M	16.325M	16.919M
2472MHz	Pass	500k	16.4M	16.675M	16.35M	16.699M	16.325M	16.652M	16.55M	16.615M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.9M	19.056M	19.075M	19.106M	17.45M	19.107M	18.25M	19.043M
2437MHz	Pass	500k	17.925M	19.006M	19M	19.133M	17.825M	19.05M	19.1M	19.039M
2462MHz	Pass	500k	18.425M	19.075M	18.8M	19.102M	17.225M	19.043M	17.3M	19.079M
2467MHz	Pass	500k	19.15M	19.064M	18.075M	19.127M	19.05M	19.107M	19.15M	19.011M
2472MHz	Pass	500k	18.9M	18.943M	18.35M	19.004M	18.3M	19.023M	19.05M	19.063M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	36.4M	37.779M	37.05M	37.788M	37.4M	37.842M	36.2M	37.825M
2437MHz	Pass	500k	37.8M	37.763M	37.35M	37.759M	37.35M	37.783M	37.4M	37.712M
2452MHz	Pass	500k	36.55M	37.799M	37.1M	37.875M	35.95M	37.762M	35.9M	37.828M
2457MHz	Pass	500k	37.3M	37.859M	35.6M	37.771M	35.4M	37.816M	37.4M	37.724M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.025M	19.093M	18.3M	19.066M	18.6M	19.068M	18.975M	19.025M
2437MHz	Pass	500k	18.275M	19.117M	17.75M	19.079M	18.925M	19.101M	18.525M	19.032M
2462MHz	Pass	500k	18.4M	19.11M	17.625M	19.031M	17.425M	19.135M	17.65M	19.069M
2467MHz	Pass	500k	19.025M	19.053M	18.675M	19.089M	18.25M	19.117M	17.275M	19.08M
2472MHz	Pass	500k	18.4M	18.964M	18.625M	19.006M	18.225M	18.972M	18.725M	18.998M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	37.1M	37.864M	36.8M	37.812M	37.05M	37.784M	37.15M	37.716M
2437MHz	Pass	500k	37.7M	37.663M	37.3M	37.706M	37.8M	37.777M	36.9M	37.676M
2452MHz	Pass	500k	37.6M	37.829M	37.75M	37.83M	37.55M	37.864M	36.85M	37.851M
2457MHz	Pass	500k	36.95M	37.765M	35.1M	37.818M	37.65M	37.805M	37.2M	37.801M


Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2412MHz

04/10/2024

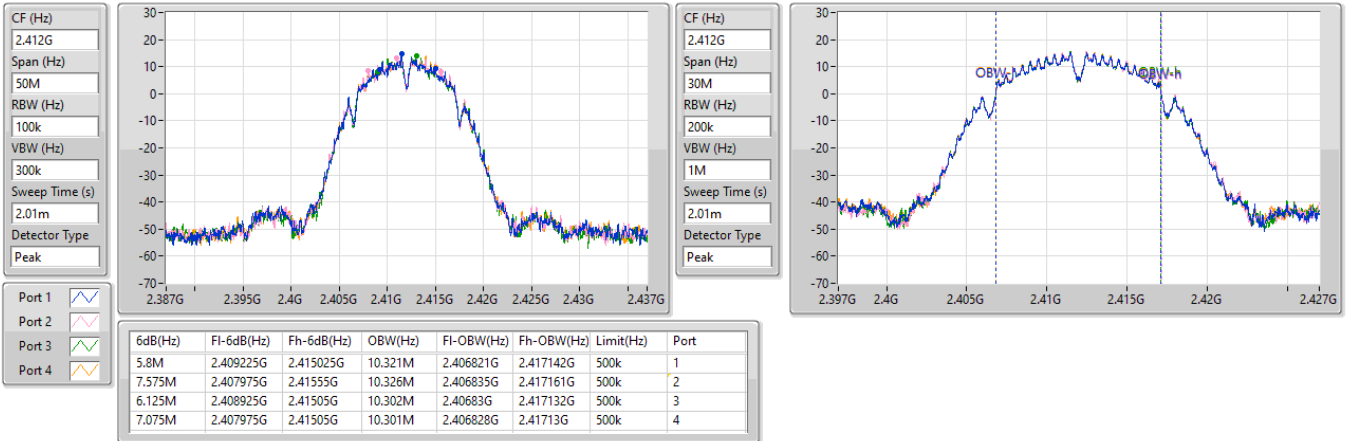


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2437MHz

04/10/2024

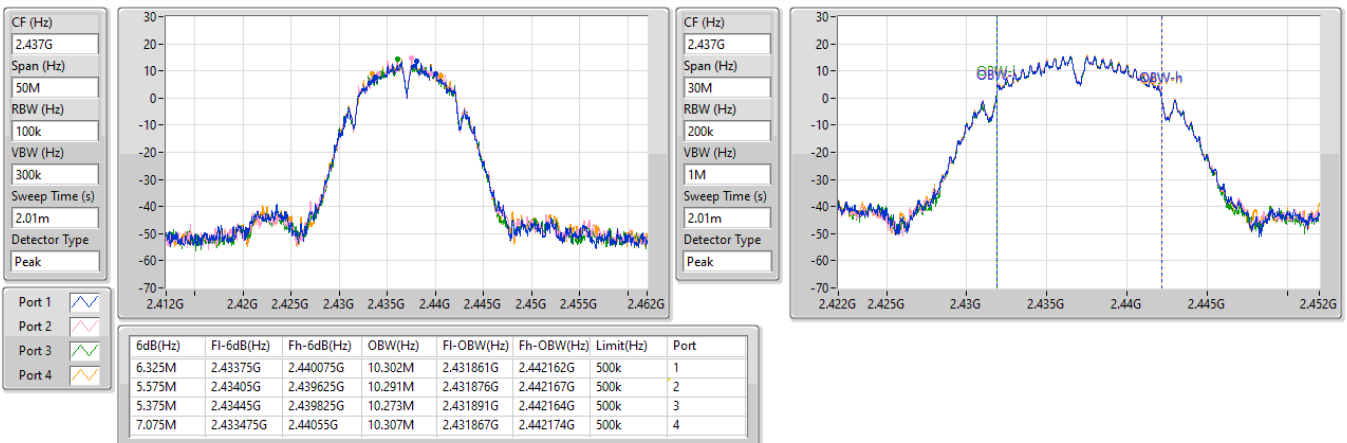


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2462MHz

04/10/2024

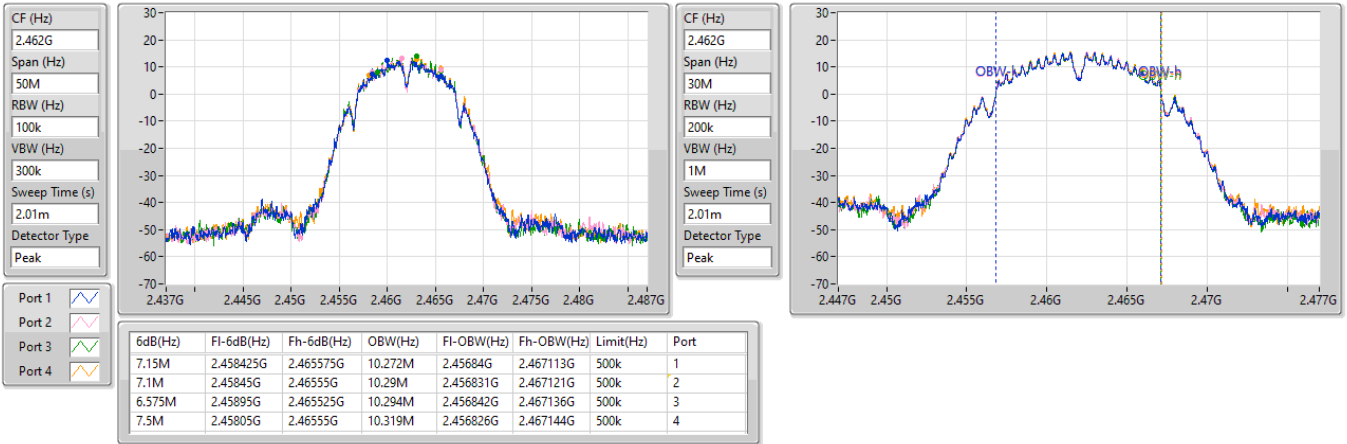


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW


2467MHz

04/10/2024

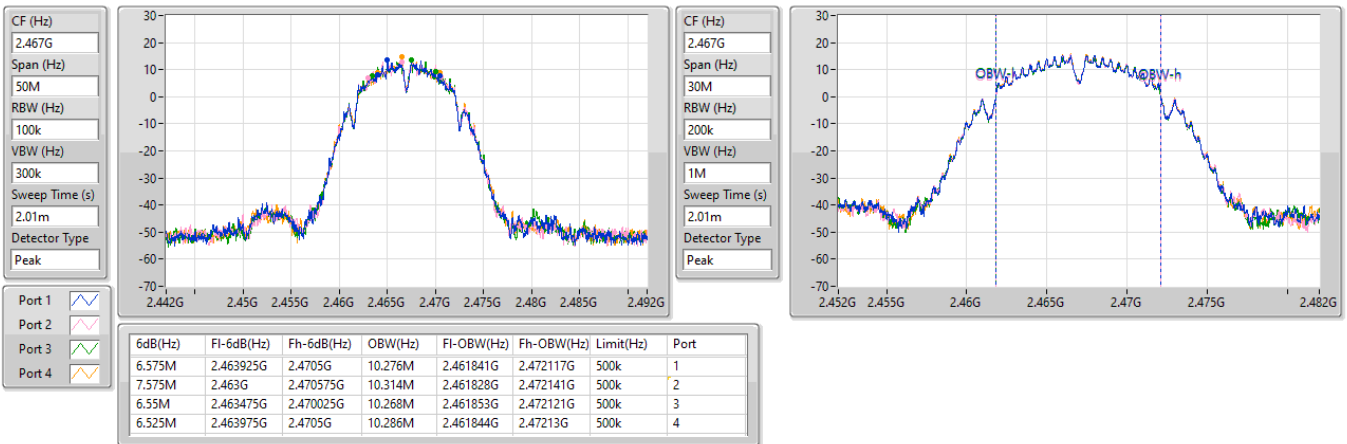


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX
EBW
2472MHz

04/10/2024

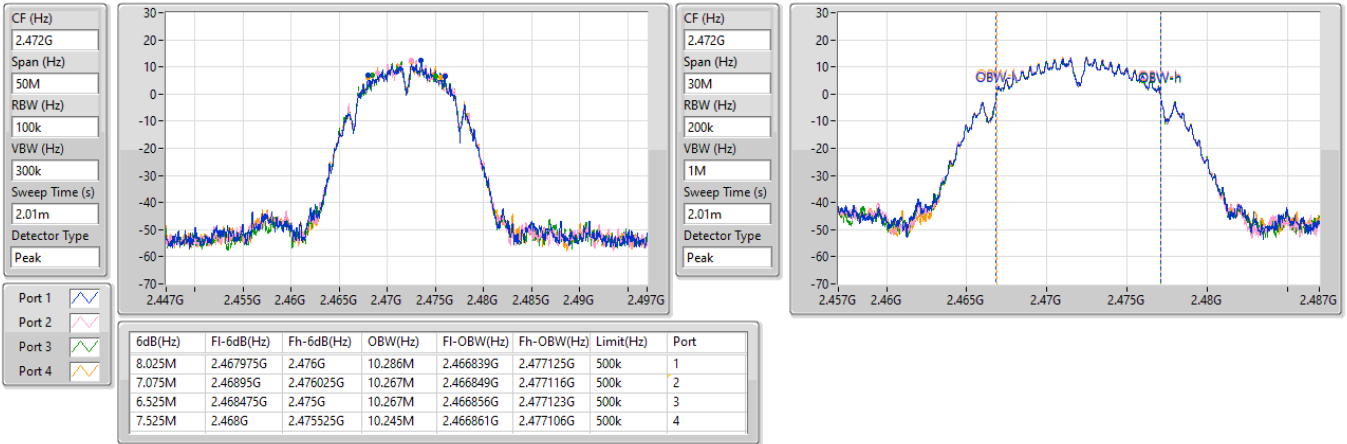
2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2412MHz

04/10/2024

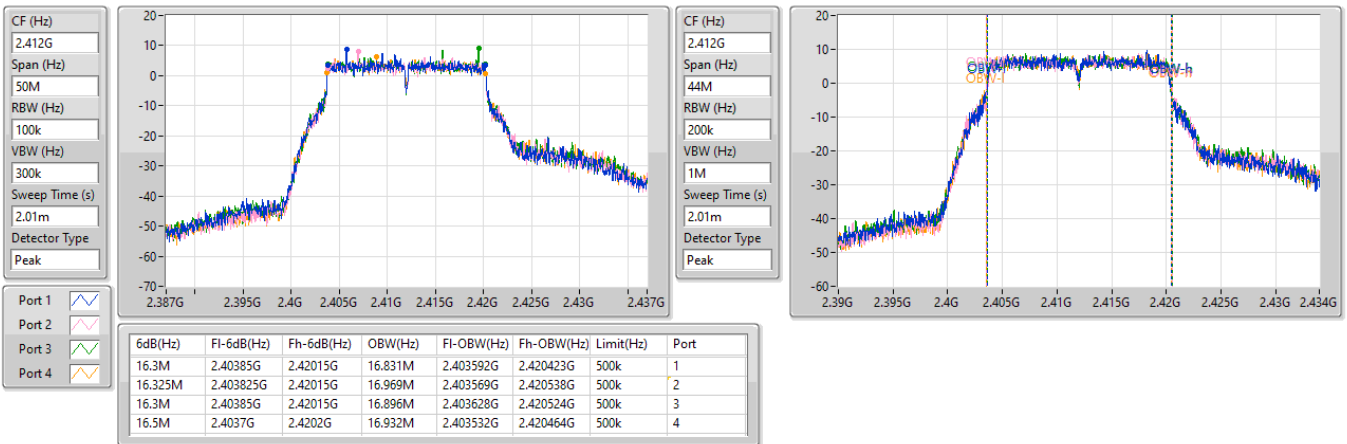


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

EBW

2437MHz

04/10/2024

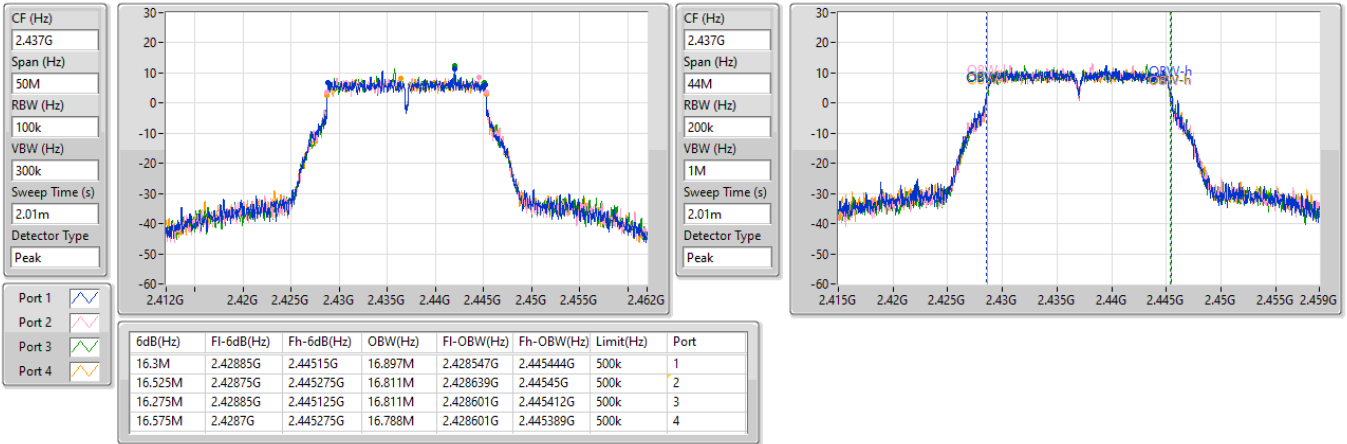


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

EBW


2462MHz

04/10/2024

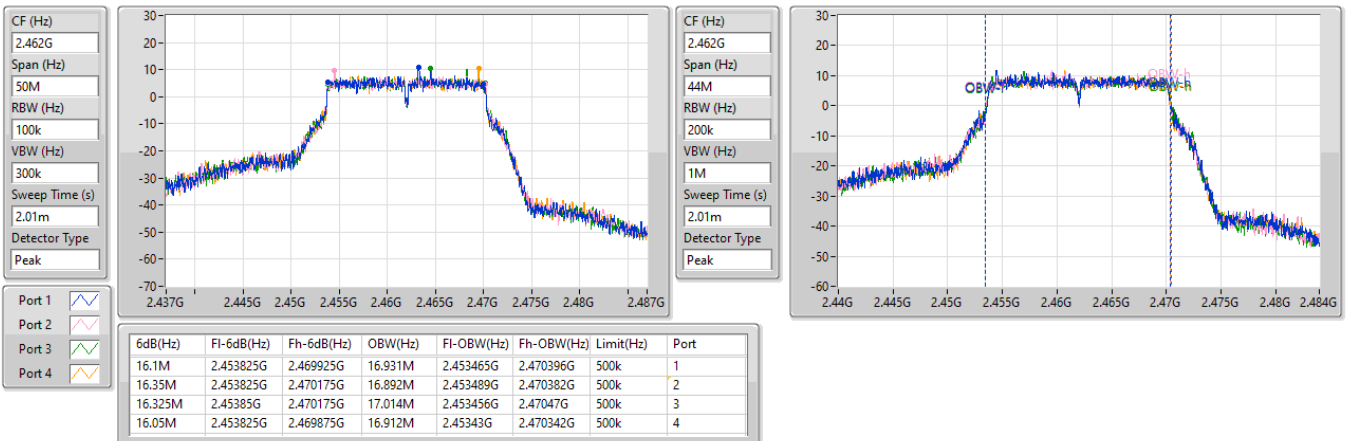


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2467MHz

04/10/2024

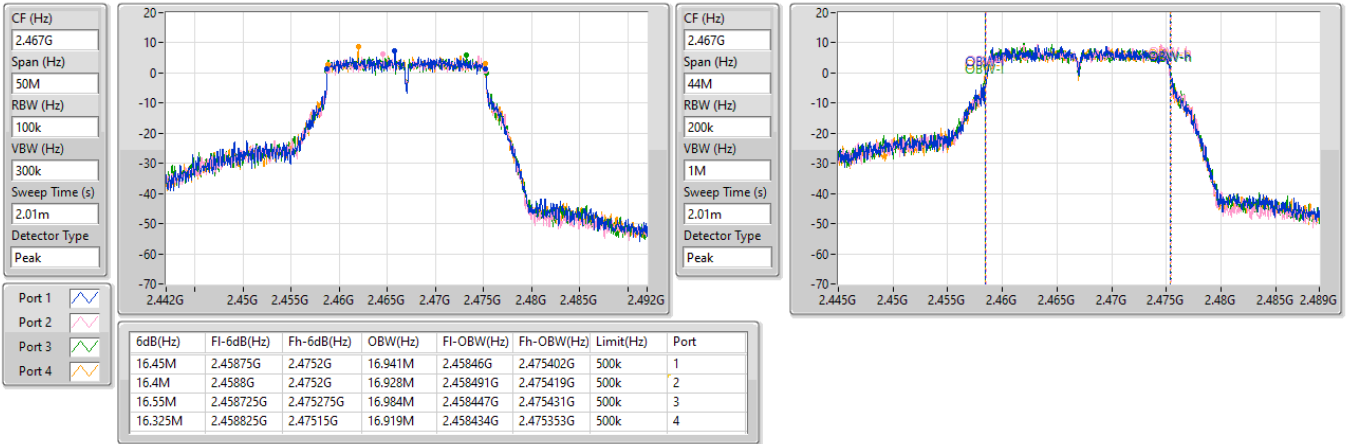

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2472MHz

04/10/2024

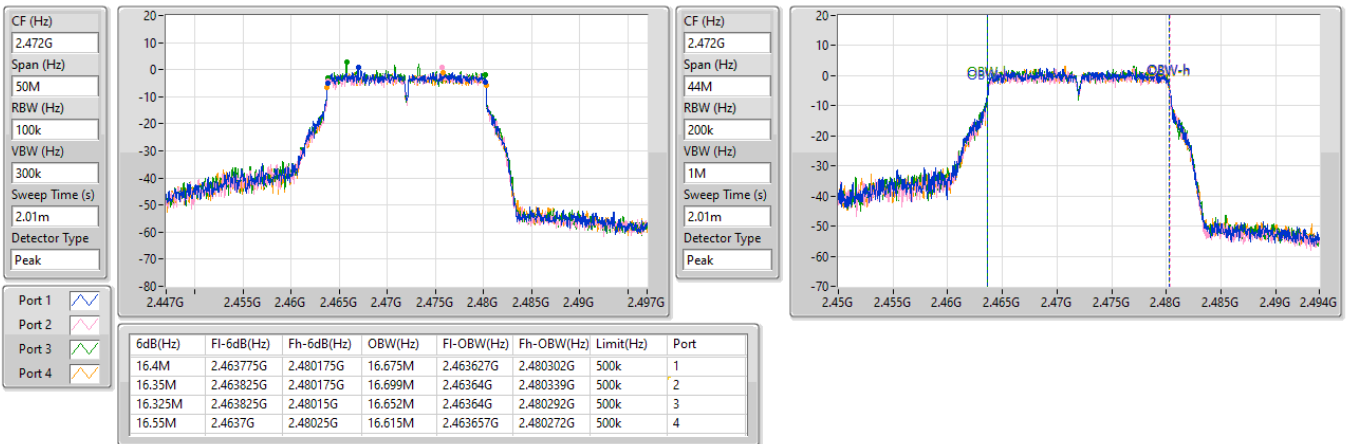


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
2412MHz

04/10/2024

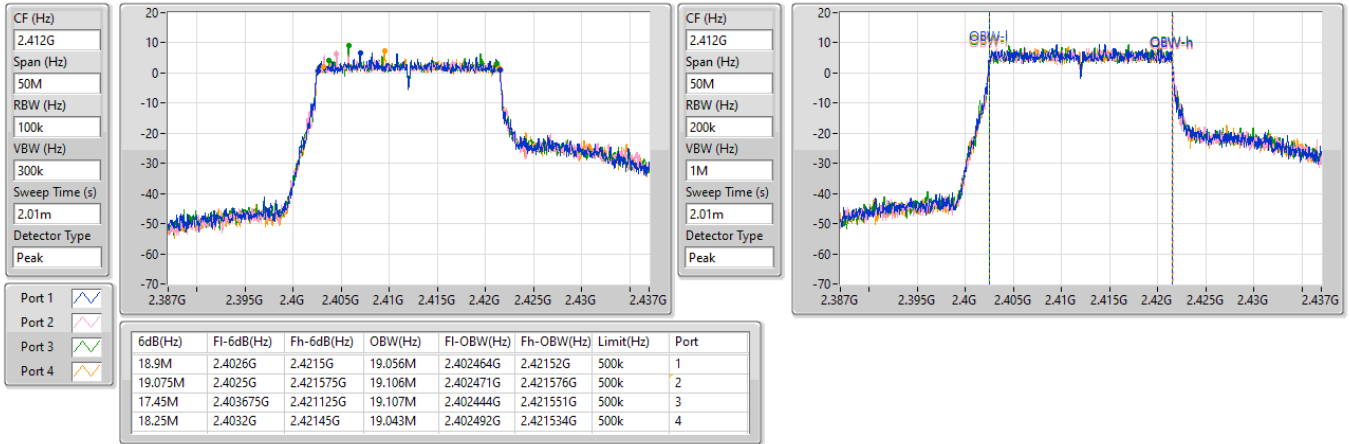
2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
2437MHz

04/10/2024

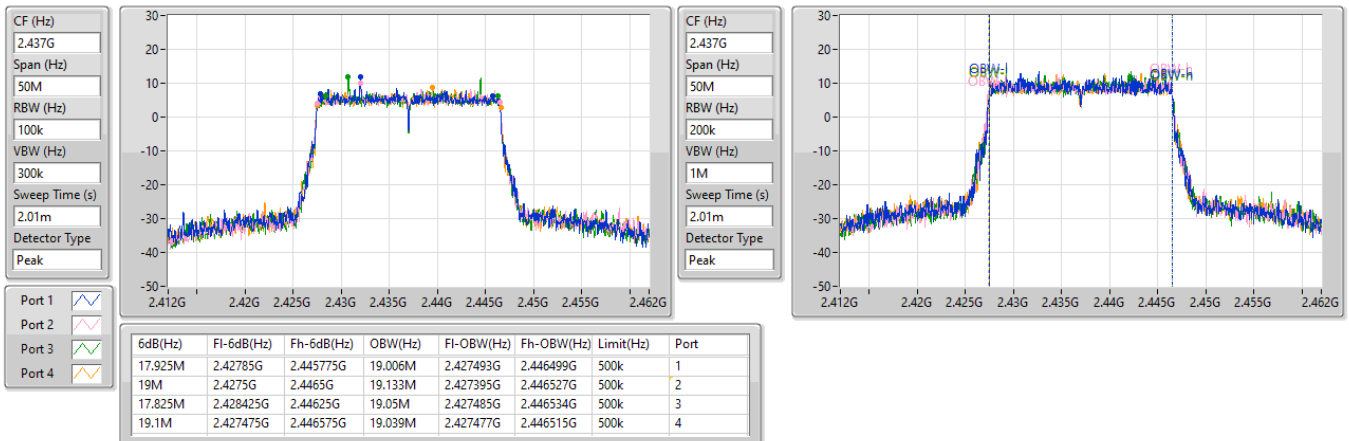


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2462MHz

04/10/2024

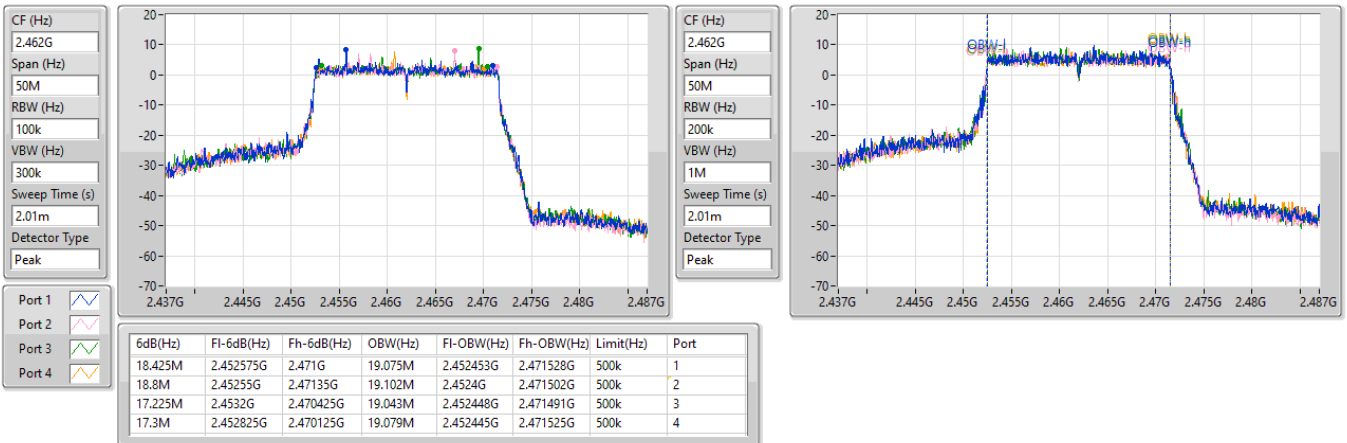


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2467MHz

04/10/2024

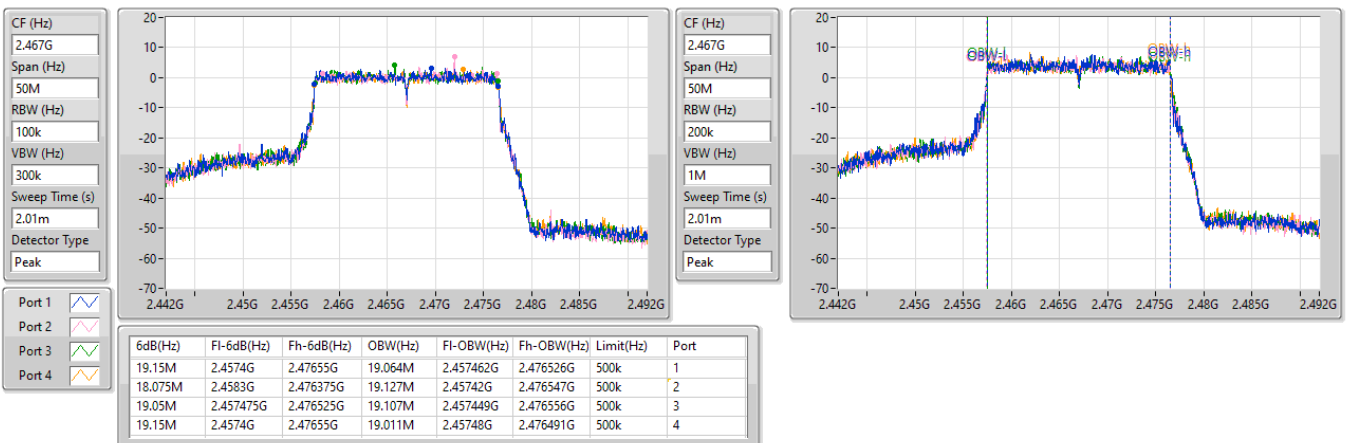


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2472MHz

04/10/2024

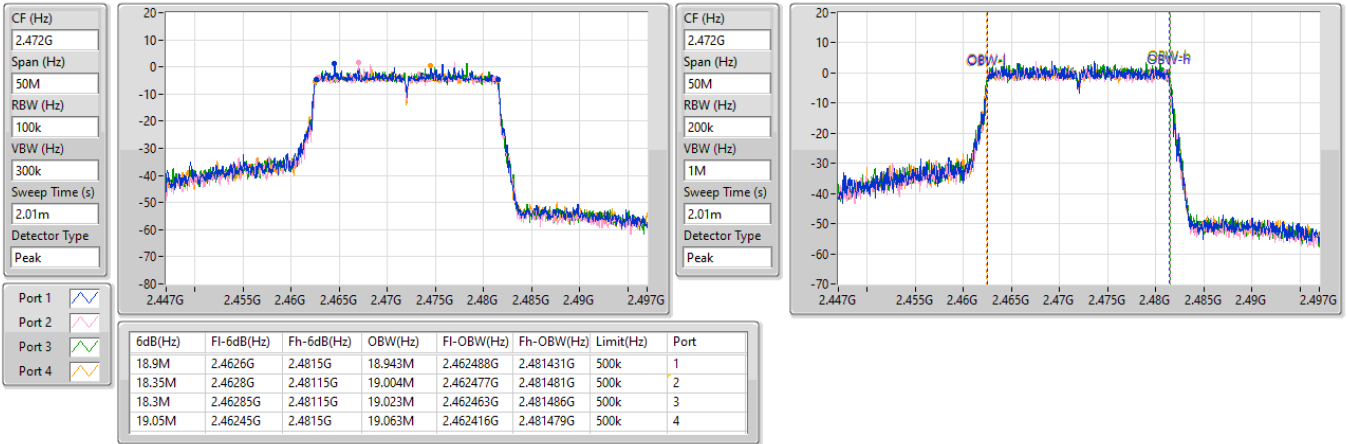


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

2422MHz

04/10/2024

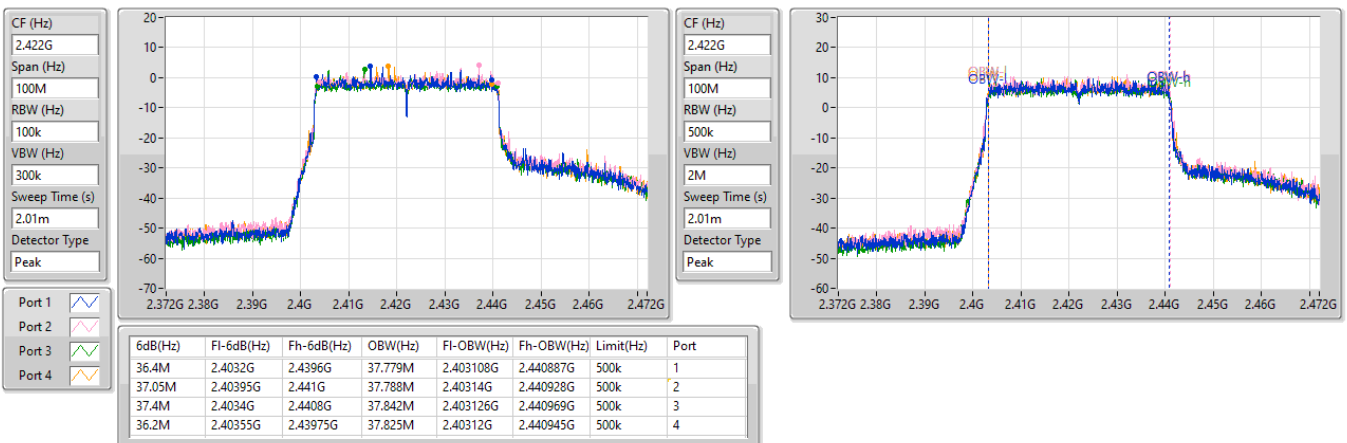


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

2437MHz

04/10/2024

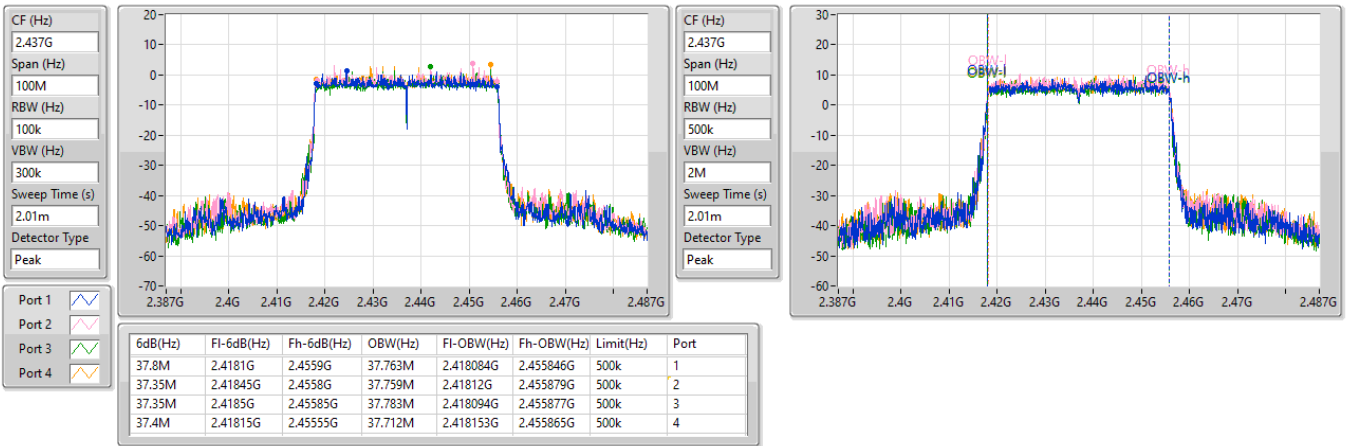


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

2452MHz

04/10/2024

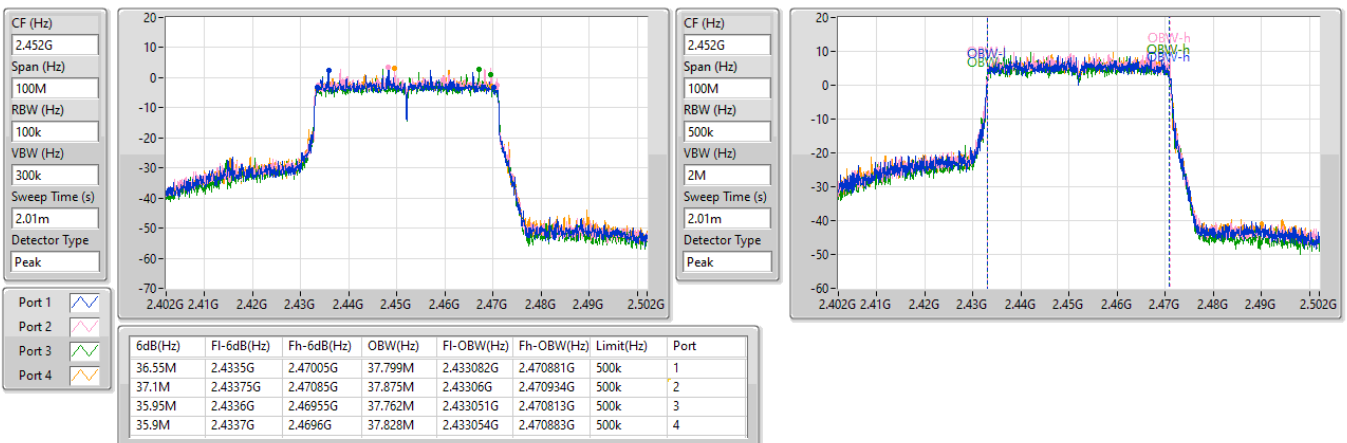


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

2457MHz

04/10/2024

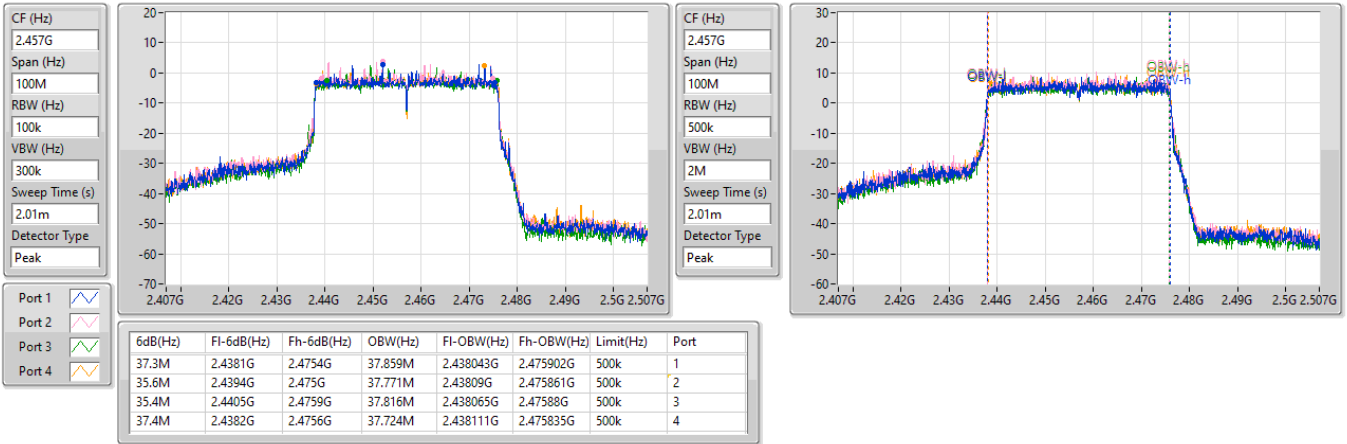


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW


2412MHz

21/10/2024

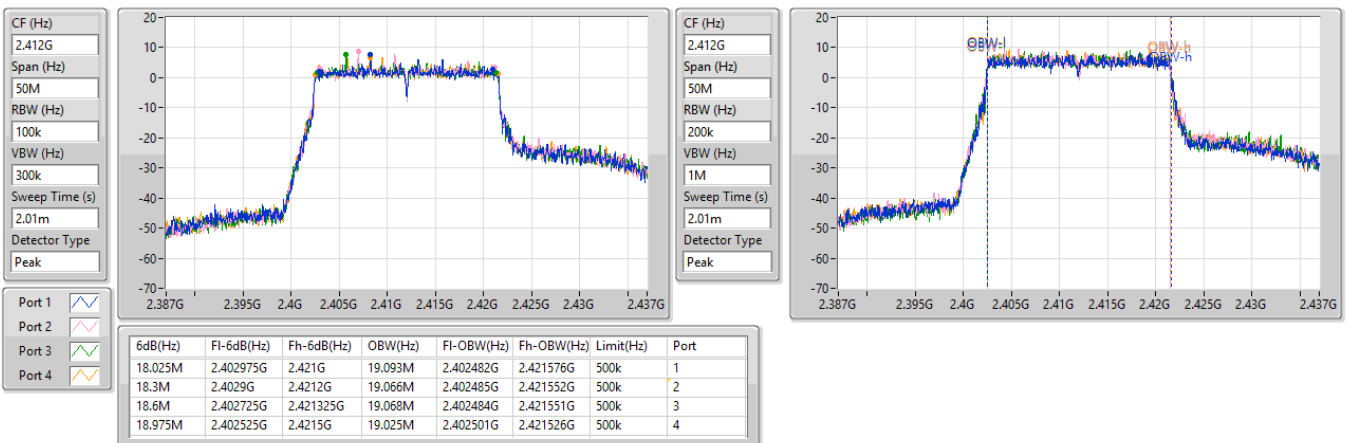


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
2437MHz

21/10/2024

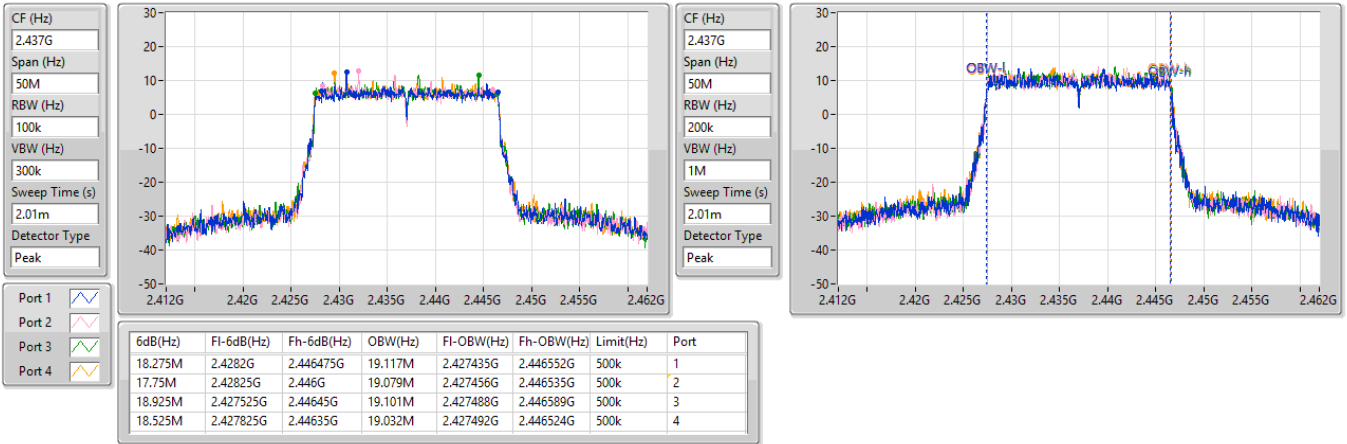
2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
2462MHz

21/10/2024

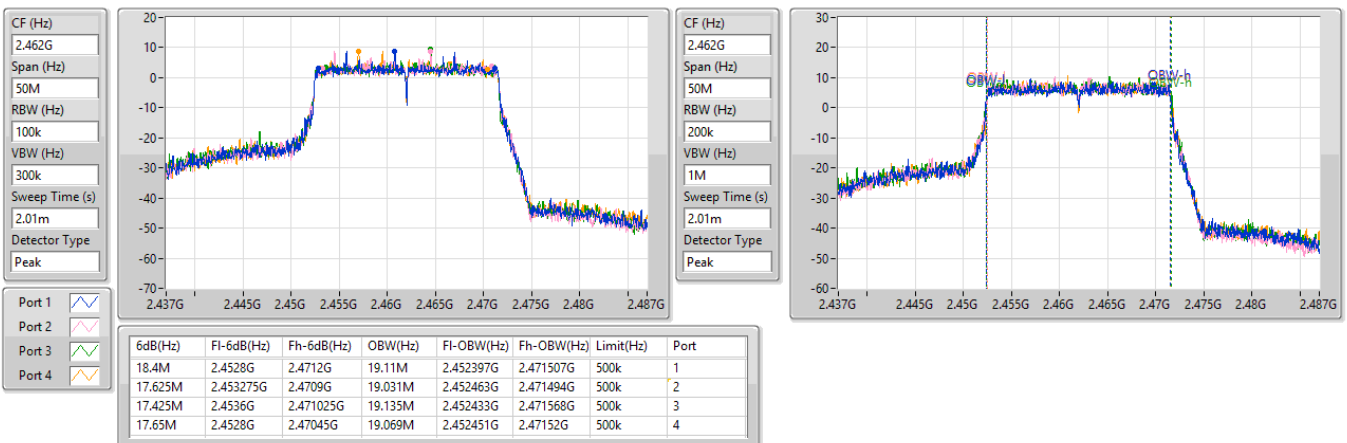


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

2467MHz

21/10/2024

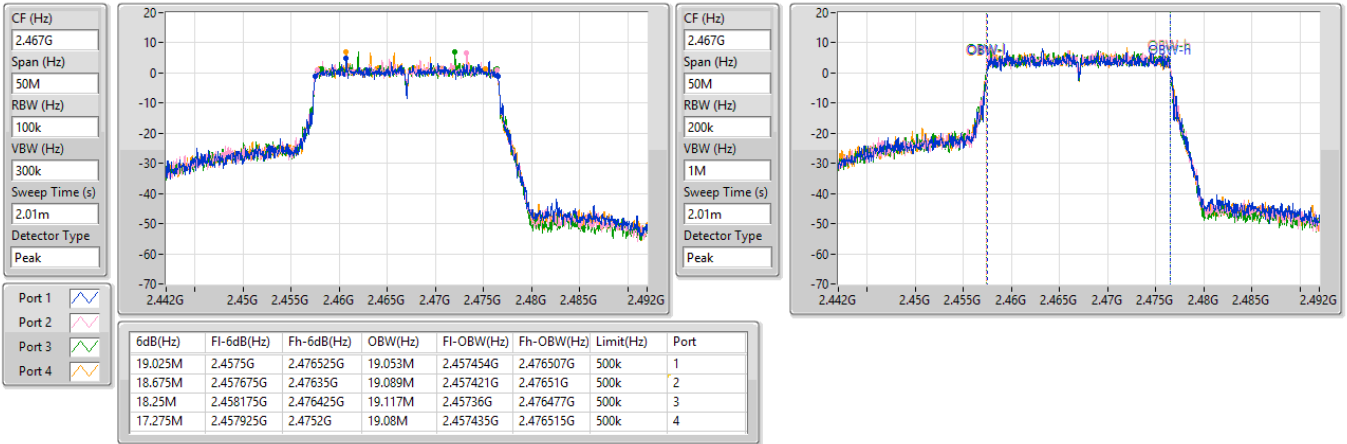


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW


2472MHz

21/10/2024

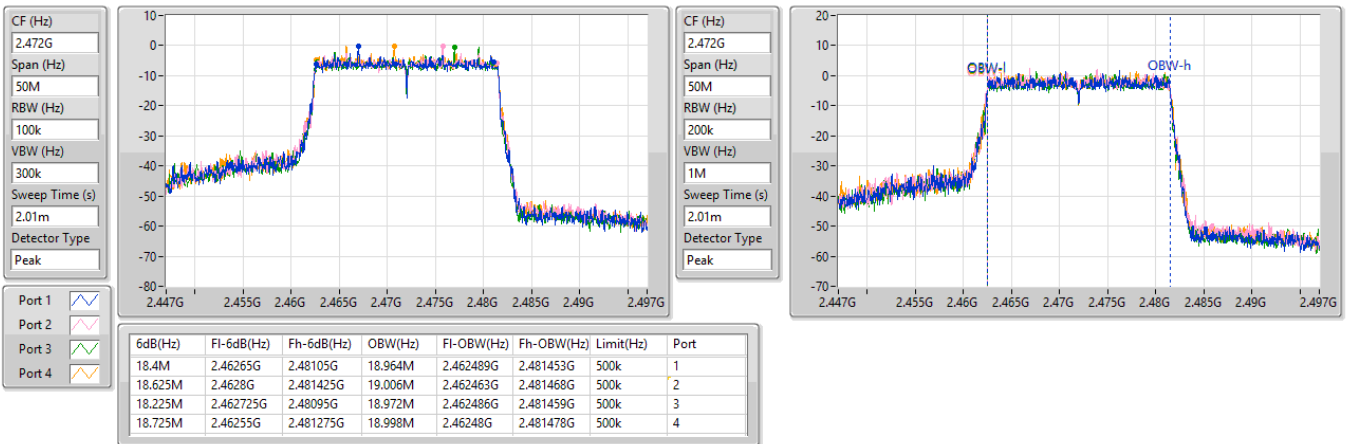


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
2422MHz

21/10/2024

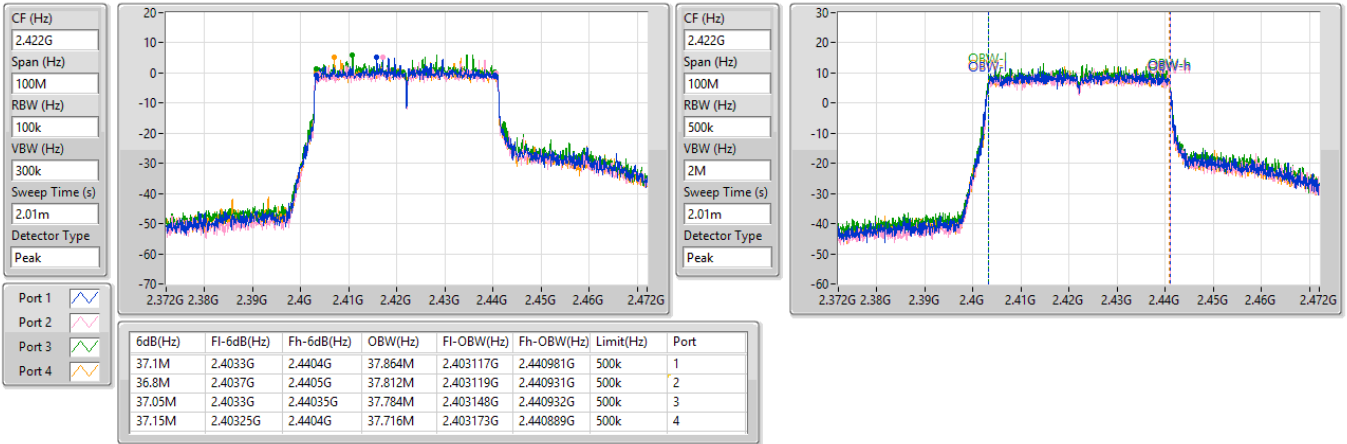
2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
2437MHz

21/10/2024

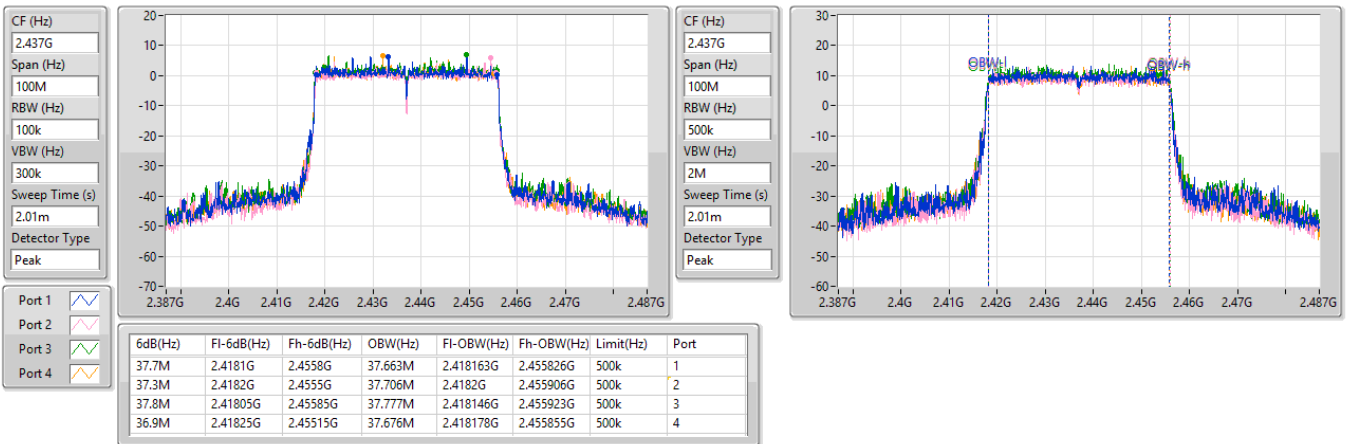


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

2452MHz

21/10/2024

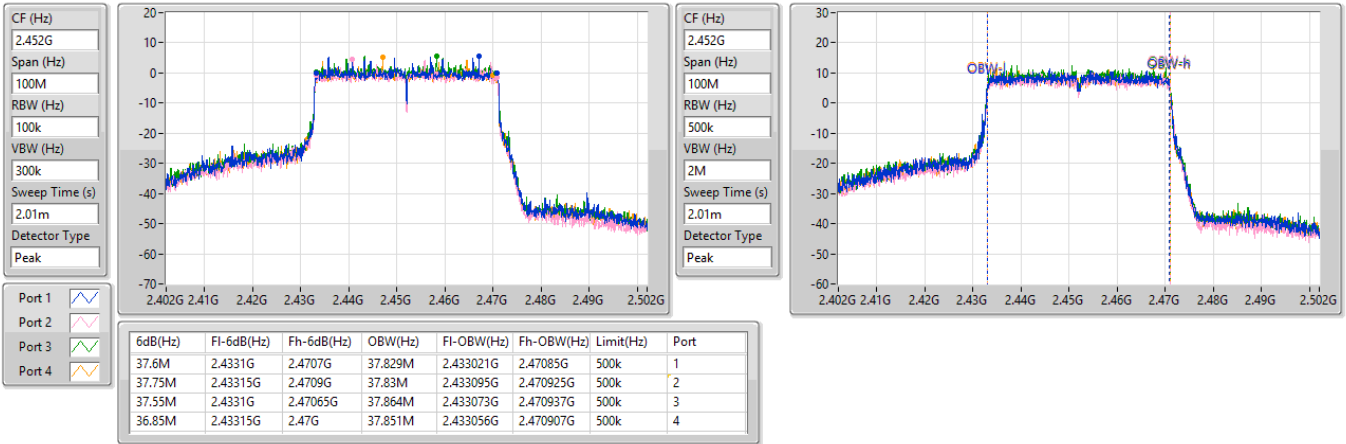


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

2457MHz

21/10/2024

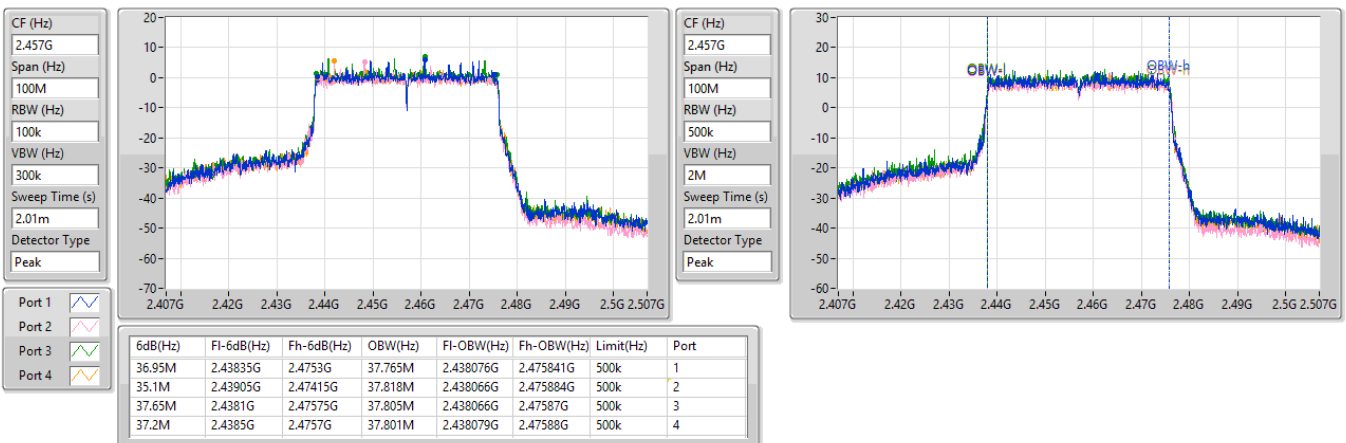



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_4TX	29.98	0.99541
802.11g_Nss1,(6Mbps)_4TX	29.95	0.98855
802.11be EHT20_Nss1,(MCS0)_4TX	29.97	0.99312
802.11be EHT20-BF_Nss1,(MCS0)_4TX	29.93	0.98401
802.11be EHT40_Nss1,(MCS0)_4TX	25.47	0.35237
802.11be EHT40-BF_Nss1,(MCS0)_4TX	28.25	0.66834

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.06	23.67	23.82	23.76	24.12	29.87	30.00
2437MHz	Pass	4.06	23.96	23.71	23.95	24.21	29.98	30.00
2462MHz	Pass	4.06	23.72	23.87	23.81	24.23	29.93	30.00
2467MHz	Pass	4.06	23.75	23.84	23.86	24.11	29.91	30.00
2472MHz	Pass	4.06	21.84	21.89	21.81	22.08	27.93	30.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.06	21.06	21.01	21.15	21.09	27.10	30.00
2437MHz	Pass	4.06	23.95	24.01	23.83	23.91	29.95	30.00
2462MHz	Pass	4.06	22.70	22.87	22.85	22.74	28.81	30.00
2467MHz	Pass	4.06	20.55	20.62	20.68	20.58	26.63	30.00
2472MHz	Pass	4.06	14.82	14.34	14.96	14.54	20.69	30.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.06	20.71	20.64	20.61	20.66	26.68	30.00
2417MHz	Pass	4.06	22.33	22.12	22.19	22.17	28.22	30.00
2437MHz	Pass	4.06	23.96	24.04	23.93	23.87	29.97	30.00
2457MHz	Pass	4.06	22.47	22.32	22.36	22.12	28.34	30.00
2462MHz	Pass	4.06	20.09	20.03	19.95	19.98	26.03	30.00
2467MHz	Pass	4.06	18.65	18.36	18.77	18.28	24.54	30.00
2472MHz	Pass	4.06	14.81	14.42	15.12	14.55	20.75	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.06	19.15	20.05	18.93	19.57	25.47	30.00
2437MHz	Pass	4.06	18.74	19.52	18.57	19.08	25.01	30.00
2452MHz	Pass	4.06	18.22	19.03	18.07	18.69	24.54	30.00
2457MHz	Pass	4.06	18.06	18.82	17.86	18.50	24.35	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.75	19.50	19.58	19.68	19.70	25.64	30.00
2417MHz	Pass	4.75	22.37	22.44	22.49	22.53	28.48	30.00
2437MHz	Pass	4.75	23.65	23.92	24.09	23.96	29.93	30.00
2457MHz	Pass	4.75	23.59	23.82	24.03	23.95	29.87	30.00
2462MHz	Pass	4.75	21.11	21.24	21.33	21.08	27.21	30.00
2467MHz	Pass	4.75	18.72	18.86	18.93	18.79	24.85	30.00
2472MHz	Pass	4.75	11.86	12.12	11.75	12.09	17.98	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.75	20.38	21.11	19.87	20.75	26.57	30.00
2437MHz	Pass	4.75	23.26	22.32	22.37	22.79	28.72	30.00
2452MHz	Pass	4.75	20.53	20.72	20.94	20.67	26.74	30.00
2457MHz	Pass	4.75	21.13	21.09	21.52	21.21	27.26	30.00

DG = Directional Gain; Port X = Port X output power

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_4TX	5.75
802.11g_Nss1,(6Mbps)_4TX	1.03
802.11be EHT20_Nss1,(MCS0)_4TX	0.63
802.11be EHT20-BF_Nss1,(MCS0)_4TX	1.25
802.11be EHT40_Nss1,(MCS0)_4TX	-6.17
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-2.96

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.75	-0.47	0.39	0.01	0.65	5.22	8.00
2437MHz	Pass	4.75	0.86	-0.01	0.20	0.75	5.75	8.00
2462MHz	Pass	4.75	0.60	0.30	-0.39	0.85	5.59	8.00
2467MHz	Pass	4.75	0.41	-0.11	-0.10	0.70	5.49	8.00
2472MHz	Pass	4.75	-1.93	-1.25	-1.85	-1.96	3.01	8.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.75	-5.37	-6.00	-5.56	-6.00	-1.99	8.00
2437MHz	Pass	4.75	-3.59	-3.00	-3.56	-3.34	1.03	8.00
2462MHz	Pass	4.75	-4.05	-4.09	-3.96	-3.97	-0.19	8.00
2467MHz	Pass	4.75	-6.41	-6.56	-5.10	-5.91	-1.18	8.00
2472MHz	Pass	4.75	-13.03	-12.95	-12.08	-12.78	-8.34	8.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.75	-6.24	-6.69	-7.26	-6.78	-3.02	8.00
2437MHz	Pass	4.75	-3.77	-2.84	-3.64	-4.61	0.63	8.00
2462MHz	Pass	4.75	-7.82	-6.27	-7.94	-7.48	-3.34	8.00
2467MHz	Pass	4.75	-8.12	-8.95	-9.62	-9.06	-5.21	8.00
2472MHz	Pass	4.75	-12.63	-13.18	-13.19	-13.33	-8.94	8.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.75	-10.70	-10.68	-11.70	-10.99	-6.17	8.00
2437MHz	Pass	4.75	-12.06	-9.29	-11.81	-11.48	-6.56	8.00
2452MHz	Pass	4.75	-11.73	-11.03	-13.21	-11.32	-7.85	8.00
2457MHz	Pass	4.75	-12.74	-11.46	-12.37	-11.81	-7.90	8.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.75	-7.95	-7.20	-7.42	-7.24	-2.96	8.00
2437MHz	Pass	4.75	-3.11	-2.95	-2.86	-3.21	1.25	8.00
2462MHz	Pass	4.75	-5.49	-6.47	-5.90	-6.30	-2.00	8.00
2467MHz	Pass	4.75	-7.95	-7.92	-7.63	-8.88	-4.47	8.00
2472MHz	Pass	4.75	-14.94	-15.34	-14.84	-14.43	-11.03	8.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.75	-7.41	-9.28	-8.32	-8.28	-4.43	8.00
2437MHz	Pass	4.75	-8.40	-7.82	-6.41	-8.37	-2.96	8.00
2452MHz	Pass	4.75	-9.07	-9.81	-8.61	-10.13	-4.89	8.00
2457MHz	Pass	4.75	-8.28	-10.27	-7.89	-9.32	-4.19	8.00


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2412MHz

04/10/2024

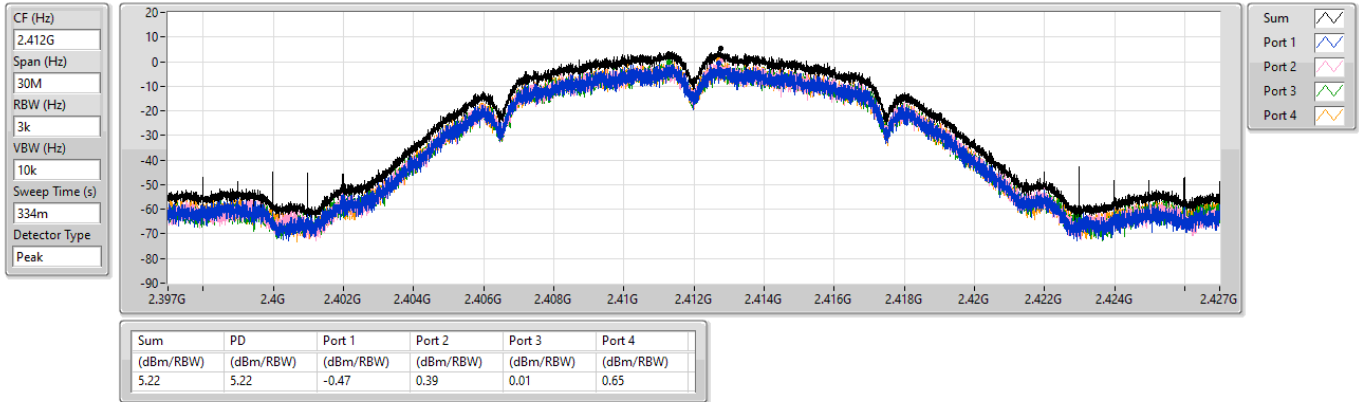


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2437MHz

04/10/2024

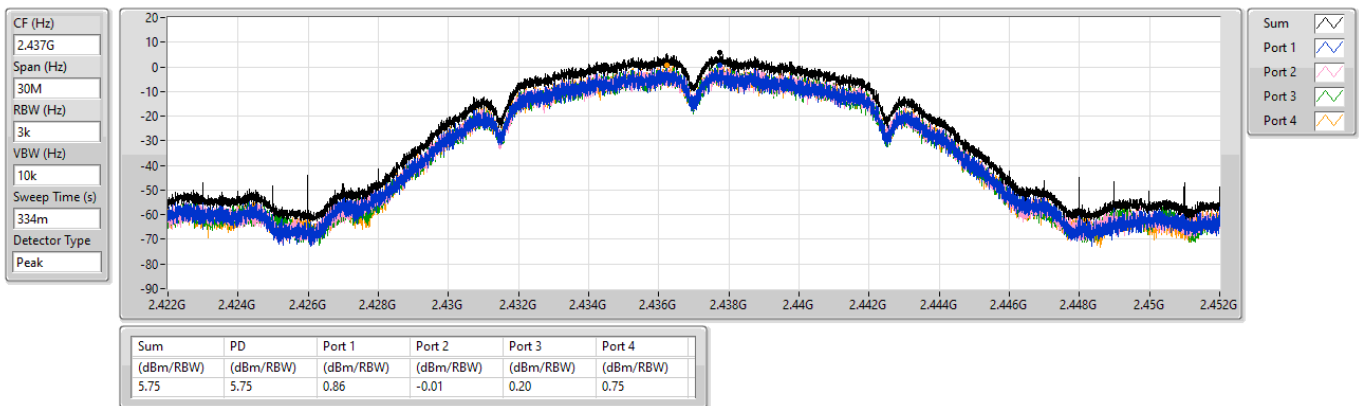


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2462MHz

04/10/2024

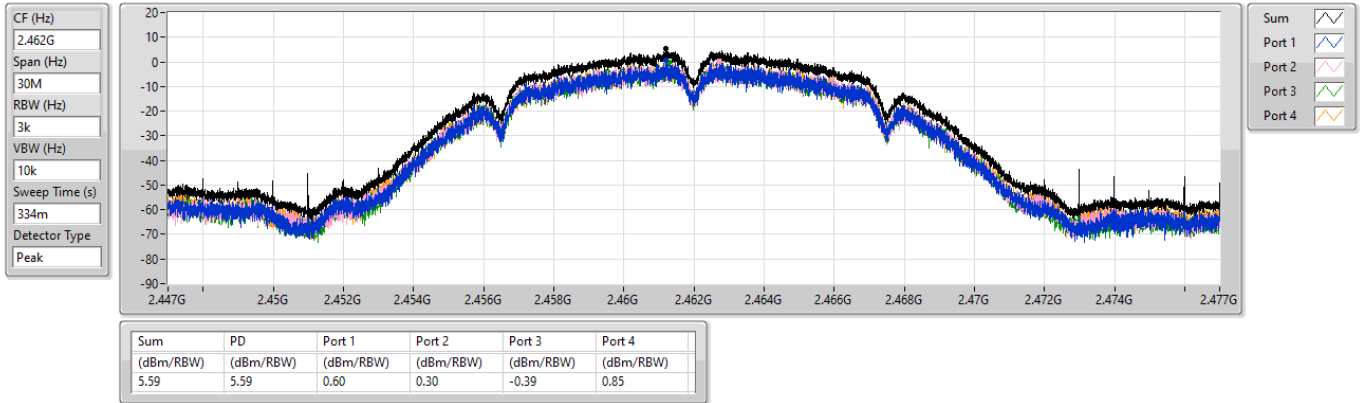


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2467MHz

04/10/2024

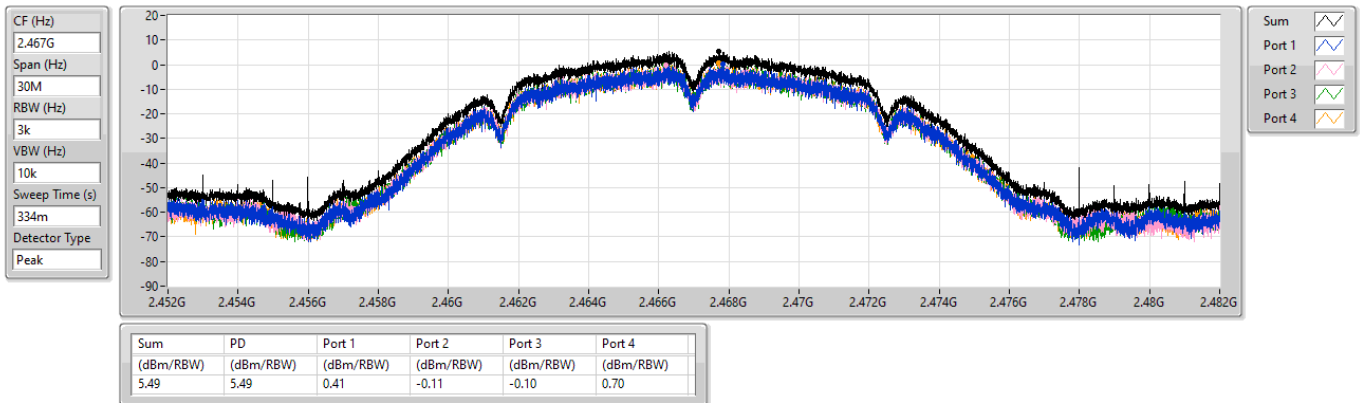


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2472MHz

04/10/2024

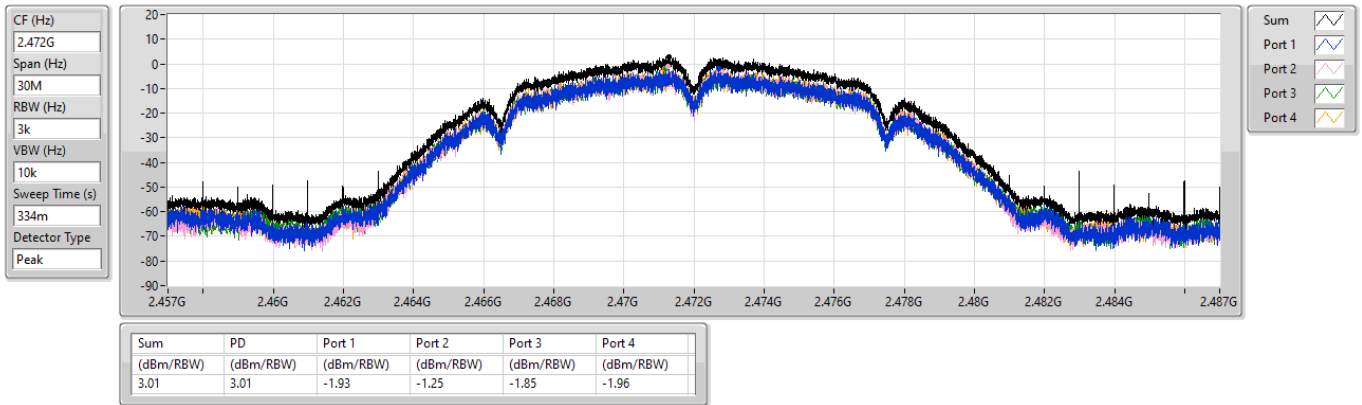


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2412MHz

04/10/2024

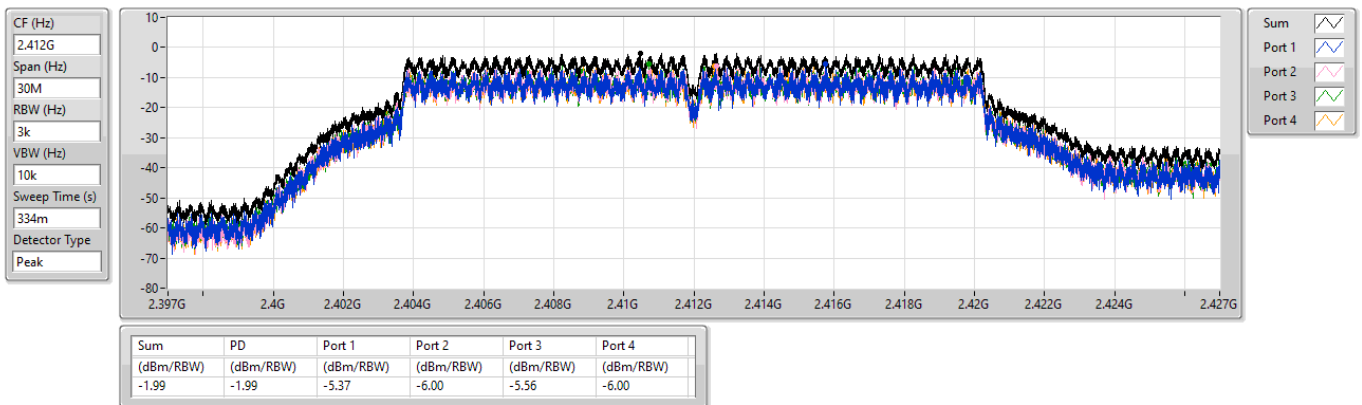


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2437MHz

04/10/2024

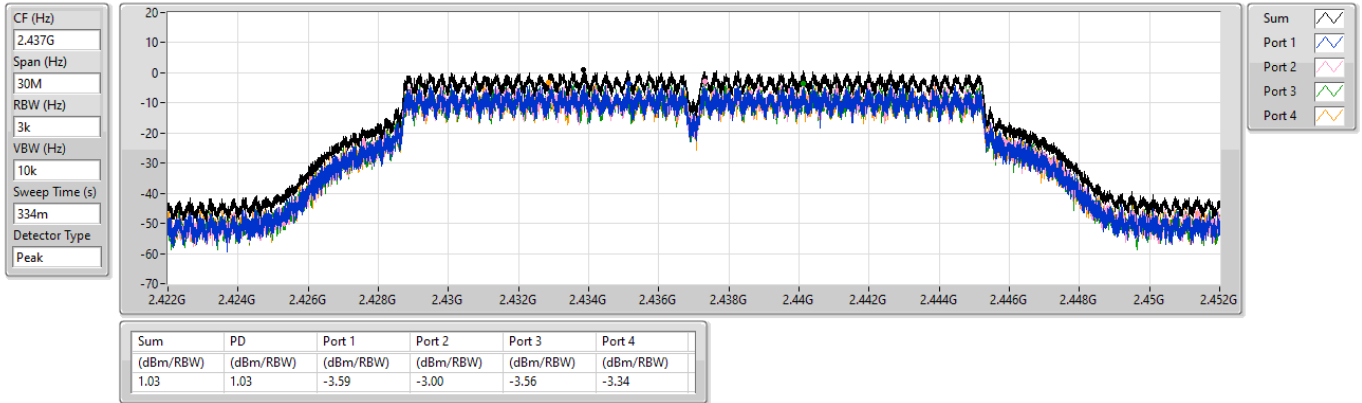


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2462MHz

04/10/2024

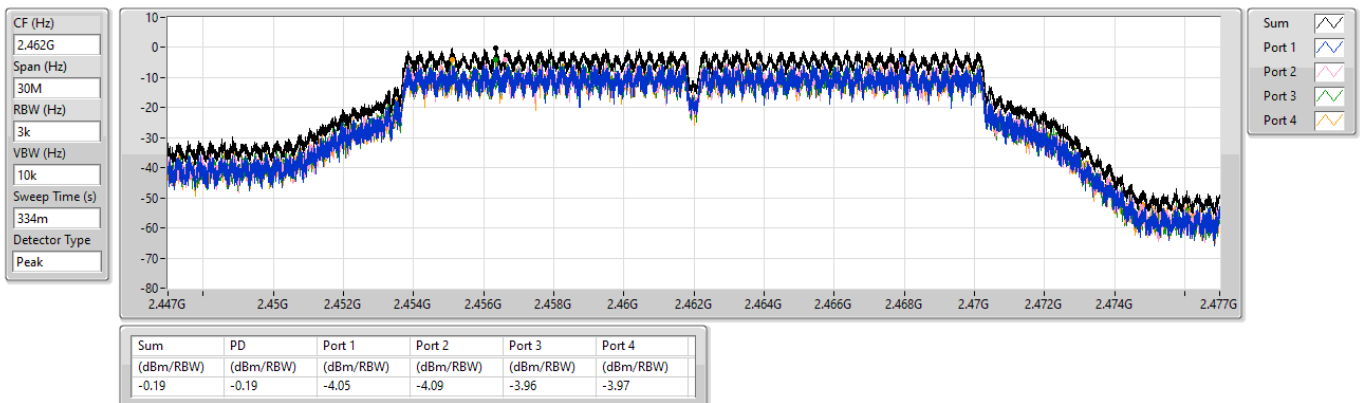


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2467MHz

04/10/2024

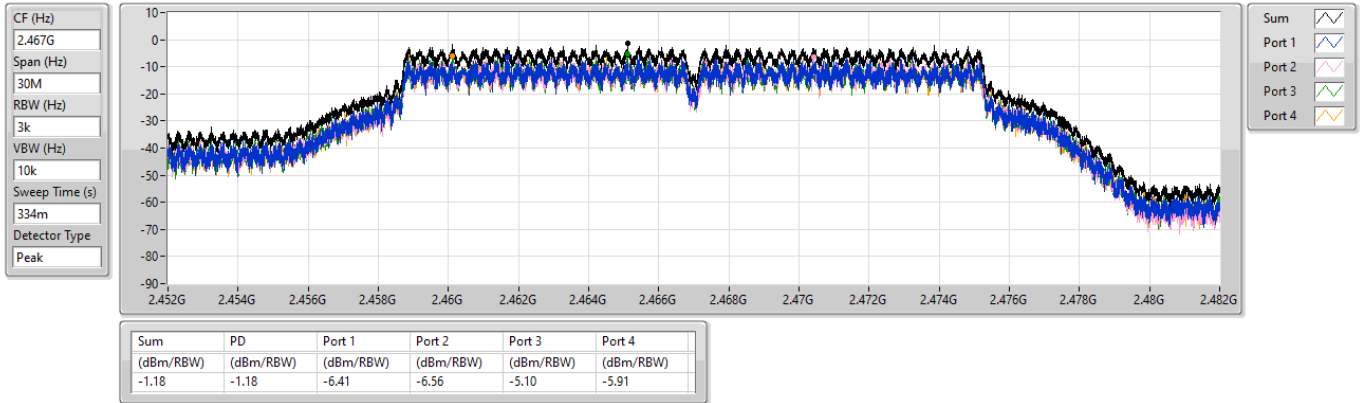


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2472MHz

04/10/2024

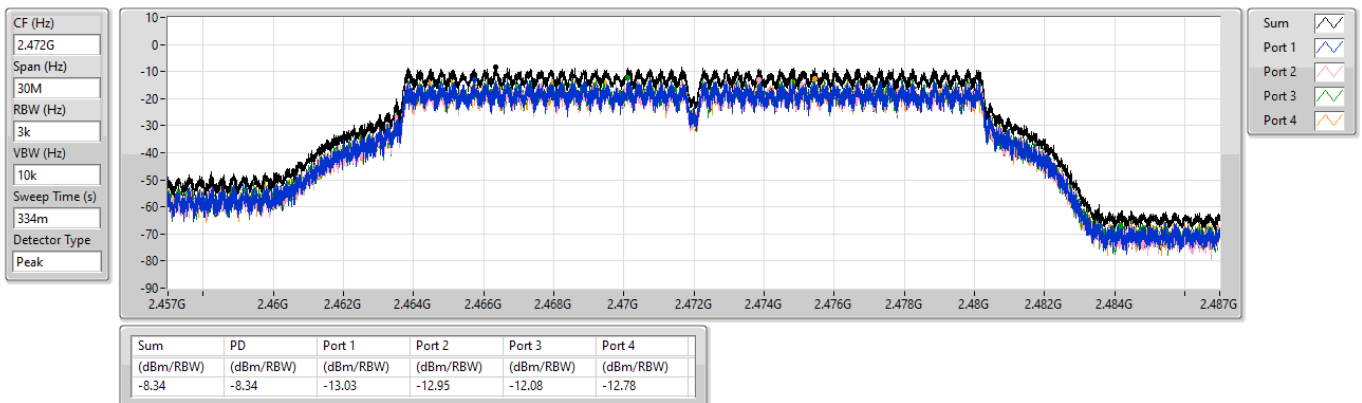


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2412MHz

04/10/2024

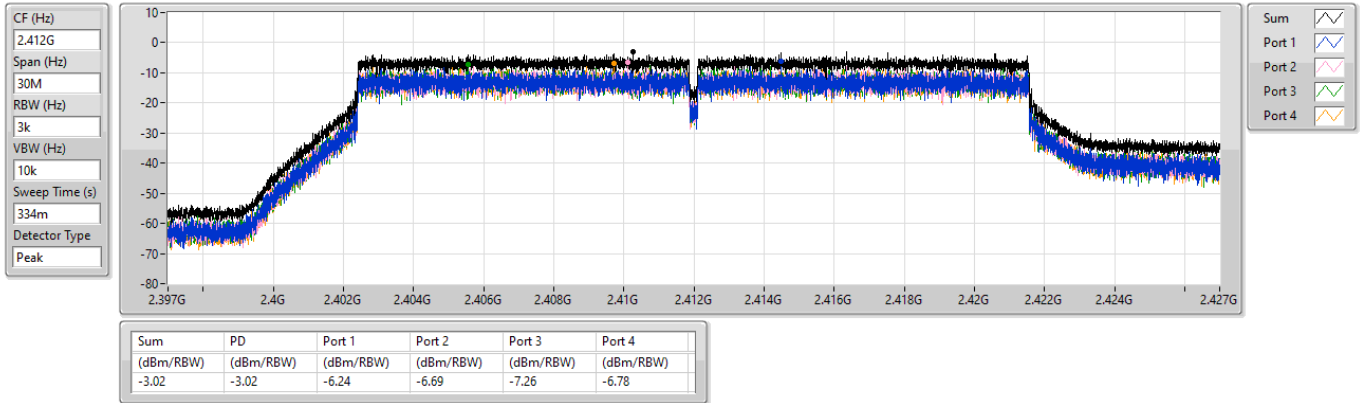


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2437MHz

04/10/2024

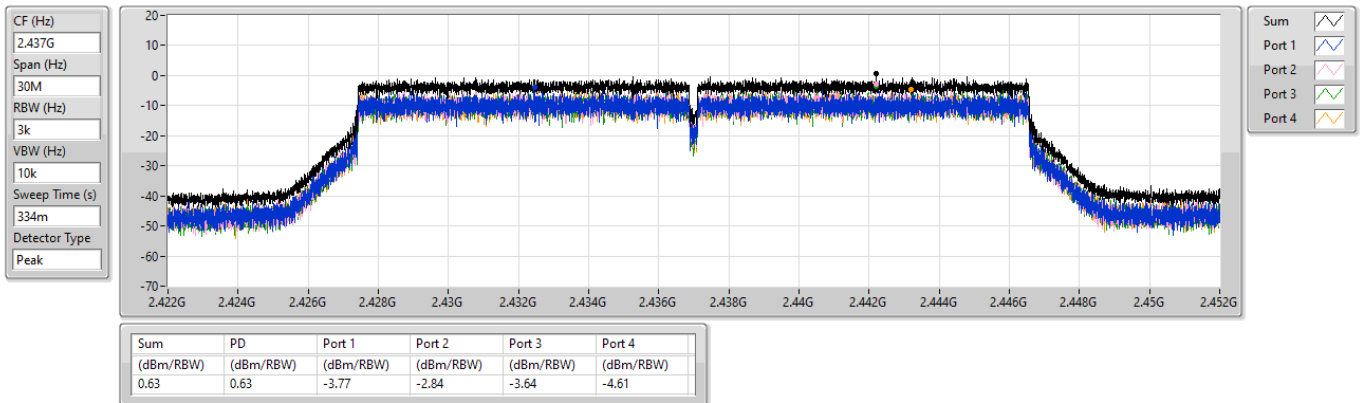


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2462MHz

04/10/2024

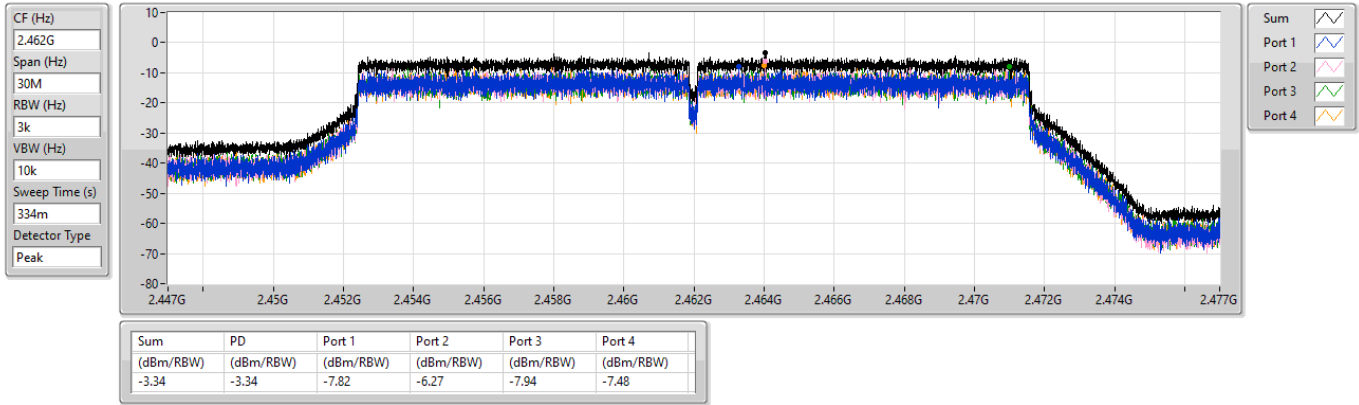


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2467MHz

04/10/2024

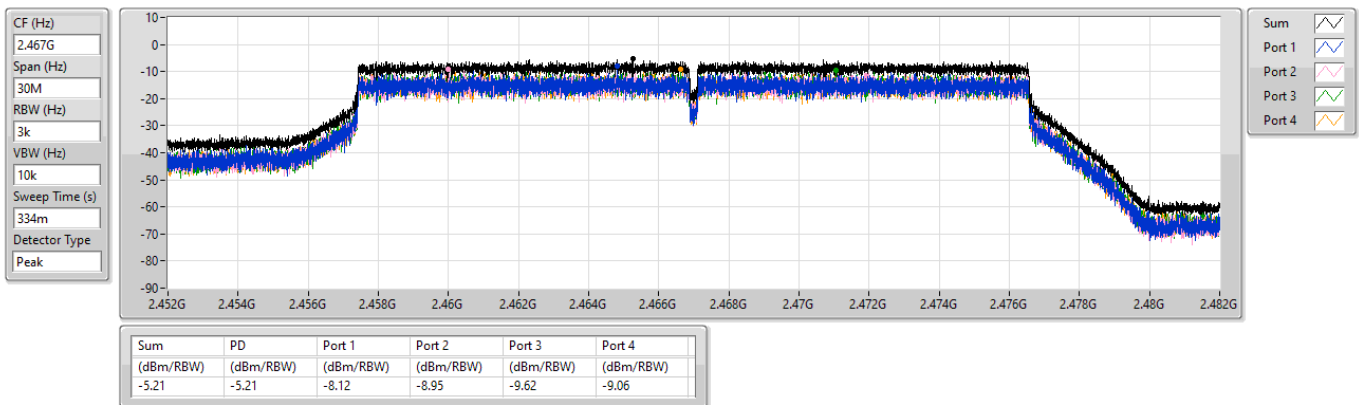


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2472MHz

04/10/2024

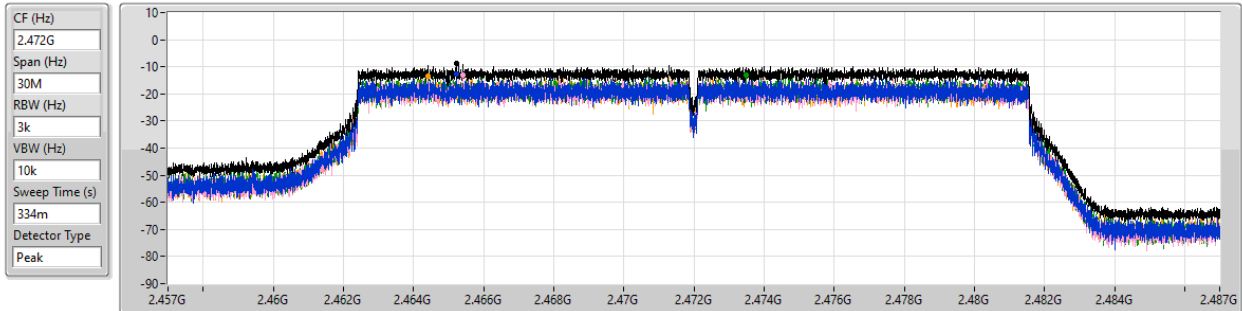


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.94	-8.94	-12.63	-13.18	-13.19	-13.33

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2422MHz

04/10/2024

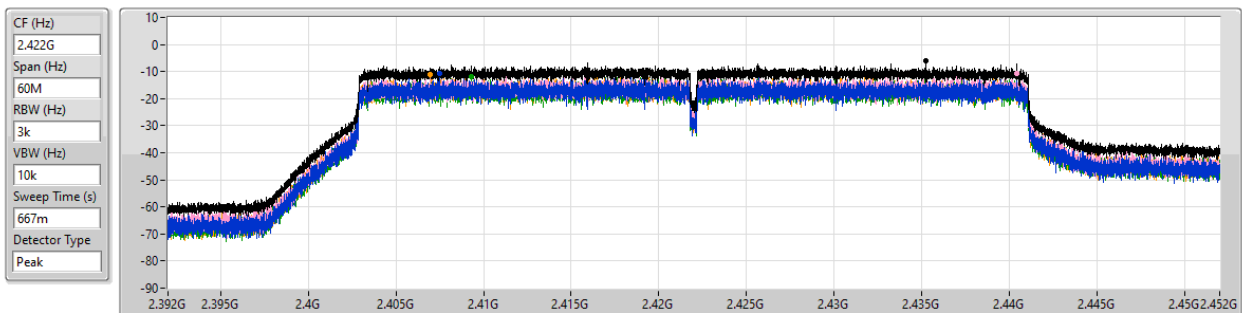

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.17	-6.17	-10.70	-10.68	-11.70	-10.99

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2437MHz

04/10/2024

CF (Hz)
2.437G


Span (Hz)
60M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
667m

Detector Type
Peak

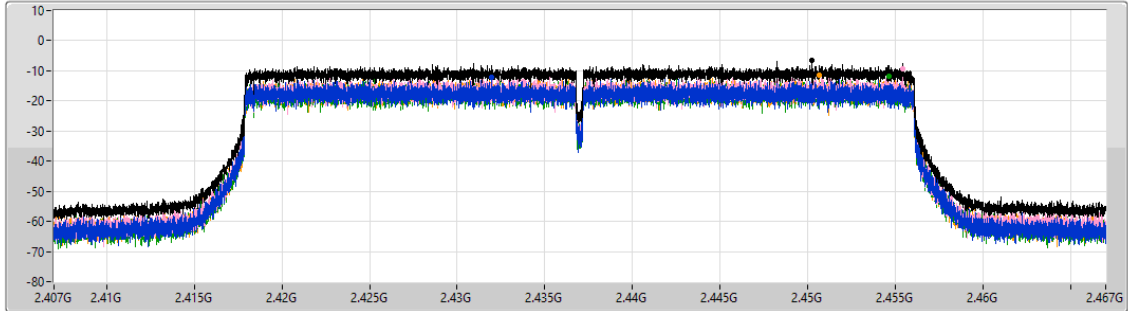

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.56	-6.56	-12.06	-9.29	-11.81	-11.48

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2452MHz

04/10/2024

CF (Hz)
2.452G


Span (Hz)
60M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
667m

Detector Type
Peak

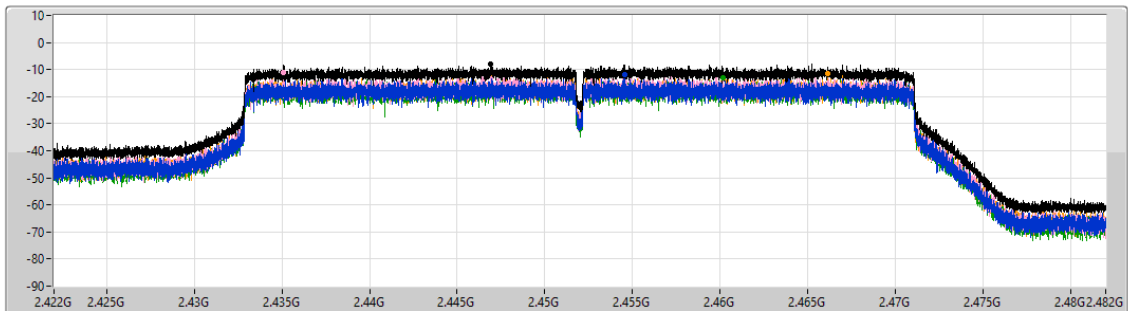

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.85	-7.85	-11.73	-11.03	-13.21	-11.32

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2457MHz

04/10/2024

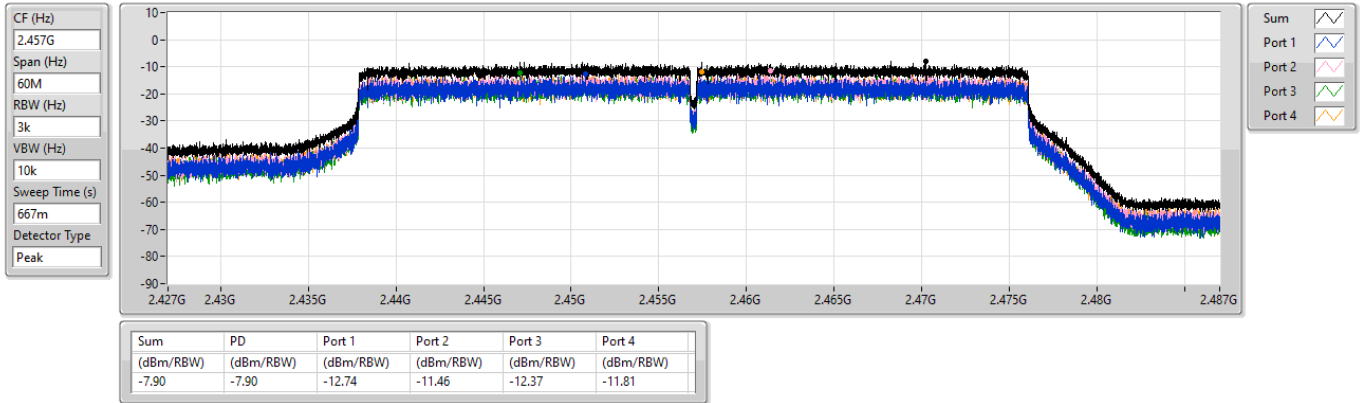


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2412MHz

21/10/2024

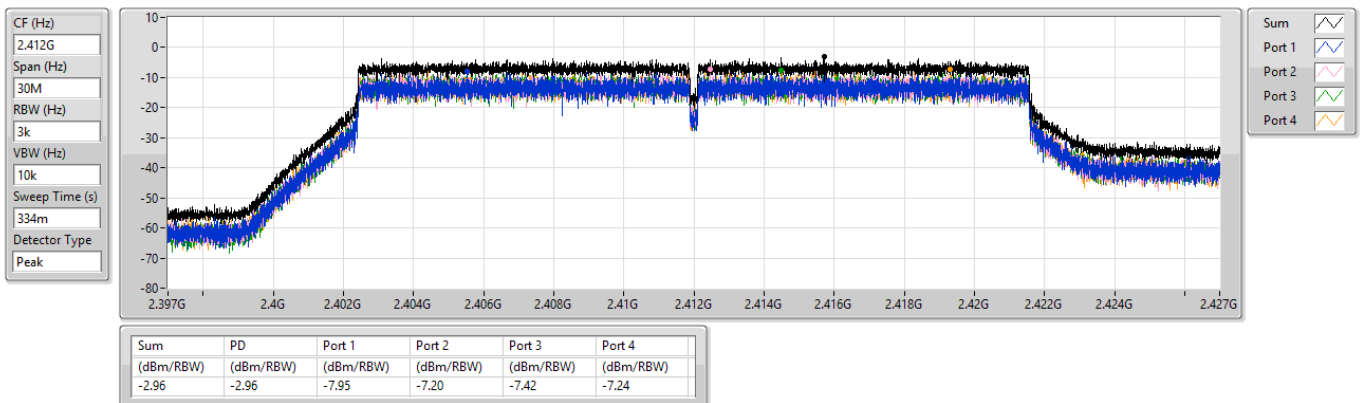


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

21/10/2024

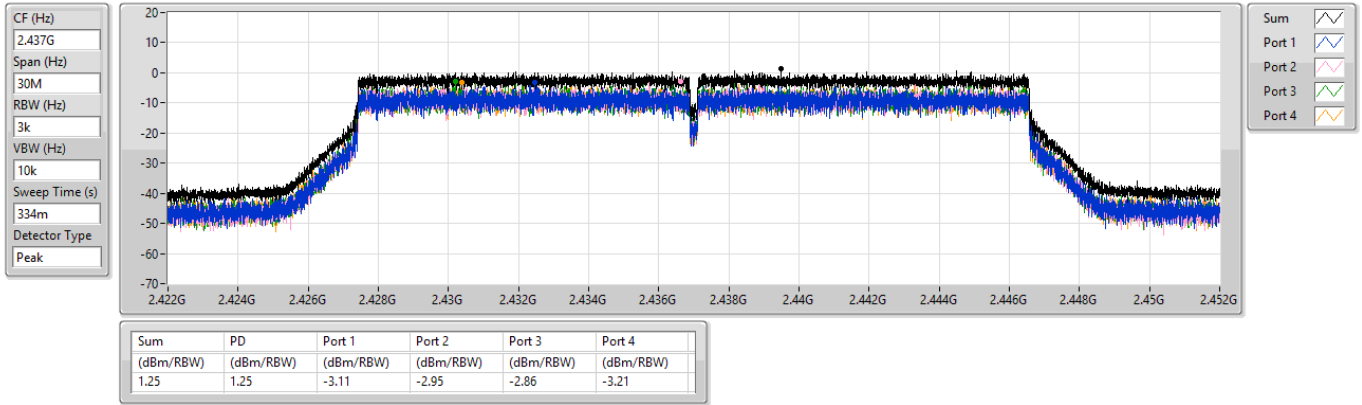


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2462MHz

21/10/2024

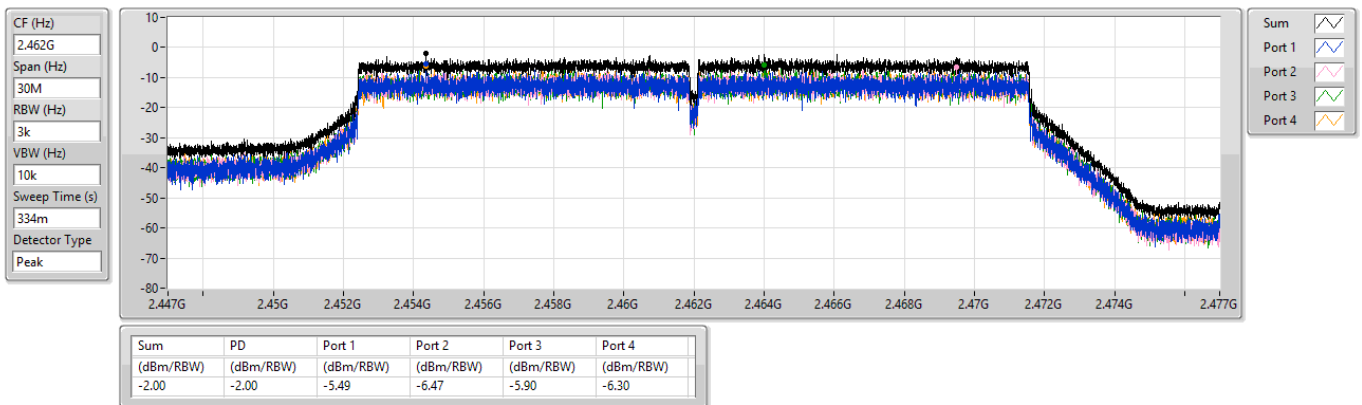


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2467MHz

21/10/2024

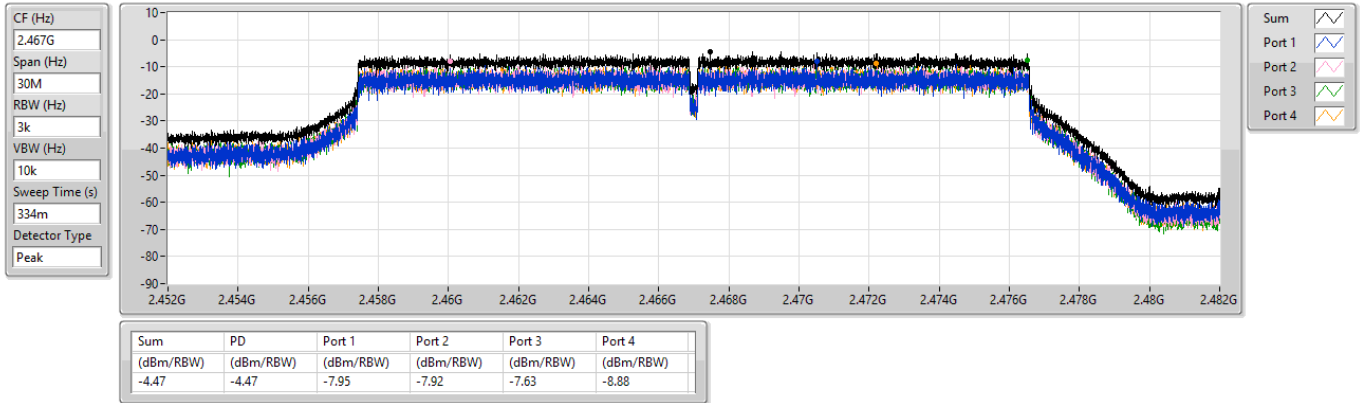


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2472MHz

21/10/2024

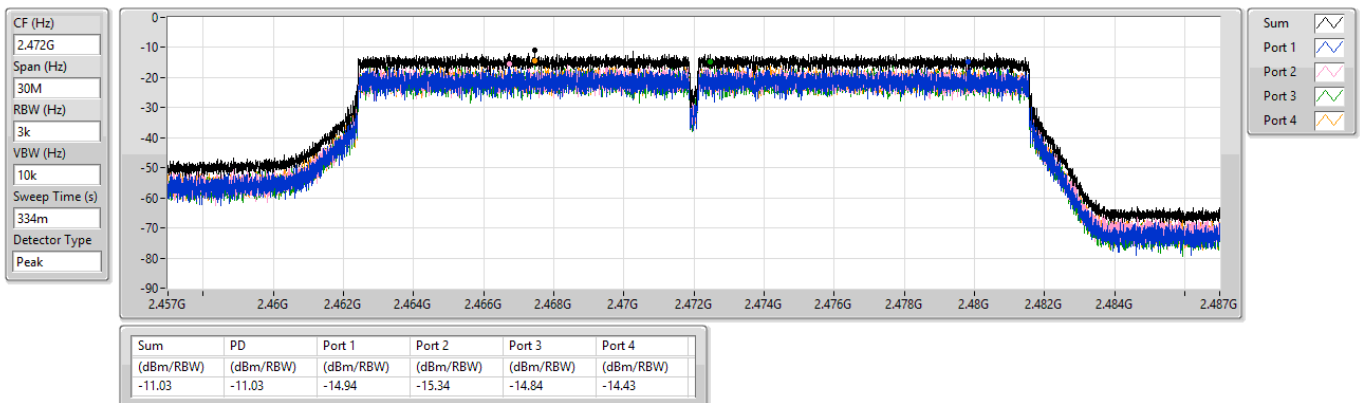


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2422MHz

21/10/2024

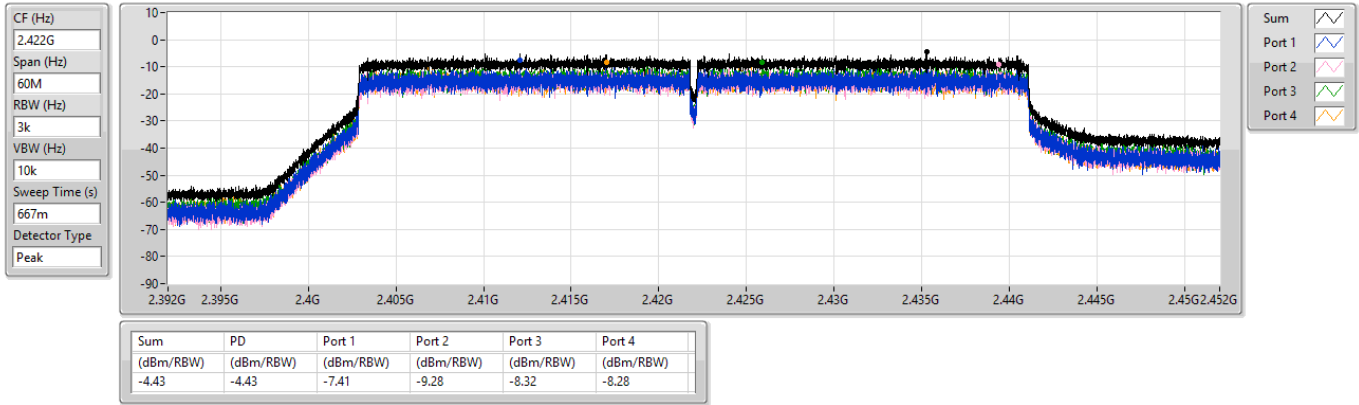


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

21/10/2024

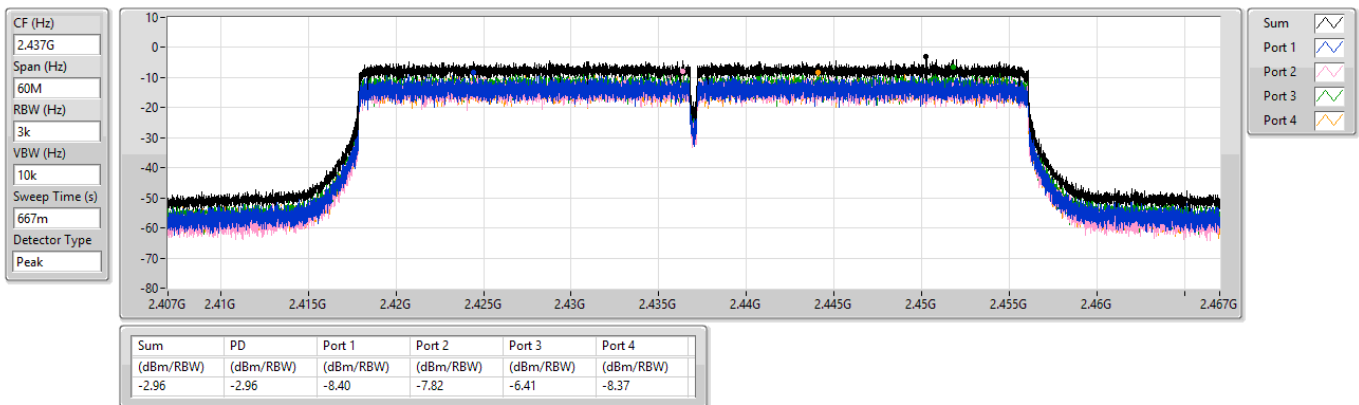


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2452MHz

21/10/2024

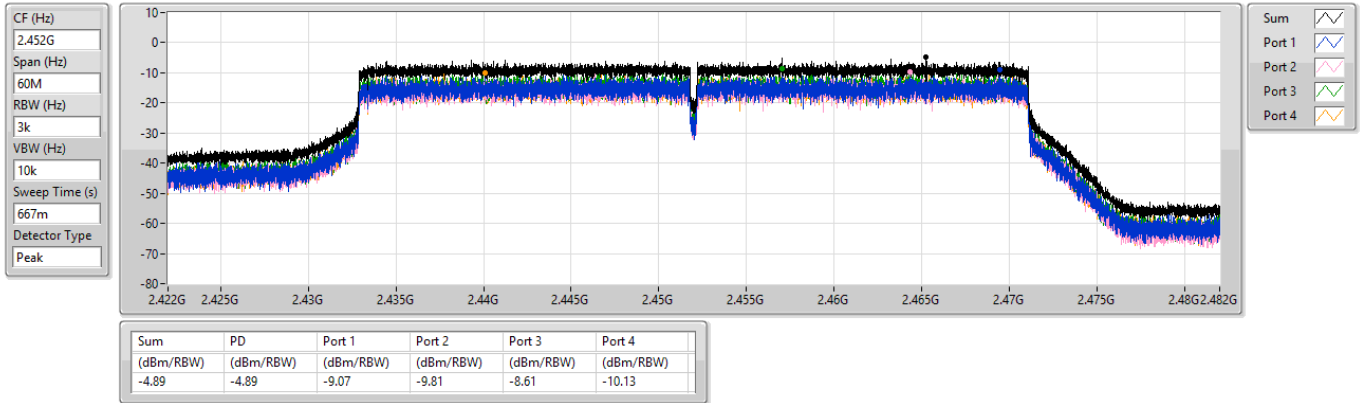


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2457MHz

21/10/2024

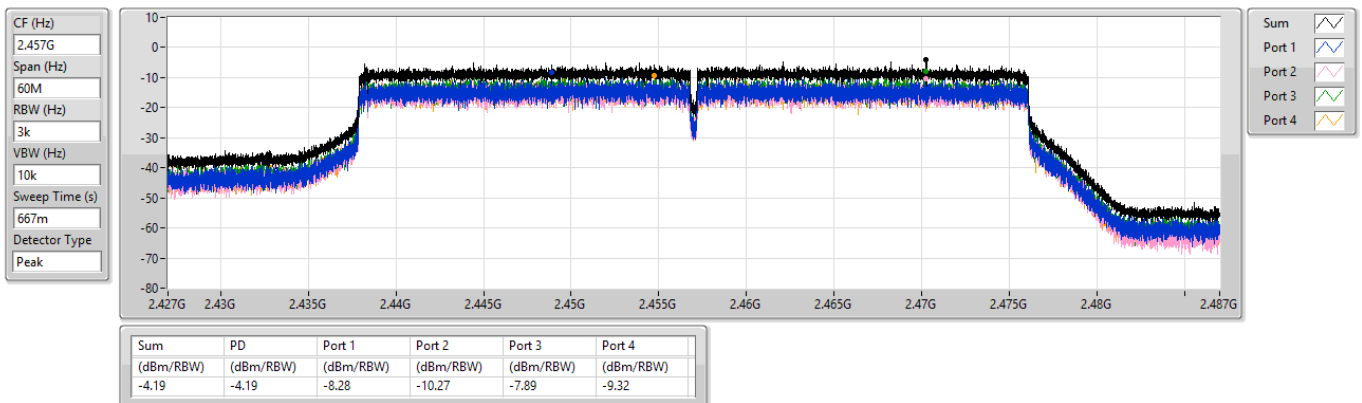

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	2.43741G	15.45	-14.55	2.30991G	-53.32	2.39952G	-38.64	2.4G	-44.37	2.50654G	-49.14	21.55829G	-43.92	2
802.11g_Nss1,(6Mbps)_4TX	Pass	2.44192G	12.27	-17.73	2.30641G	-53.90	2.39984G	-34.76	2.4G	-29.61	2.5095G	-50.48	21.57795G	-45.48	4
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	2.44192G	12.12	-17.88	2.18991G	-53.14	2.39992G	-32.46	2.4G	-29.40	2.50846G	-50.13	21.97691G	-45.14	3
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	2.44192G	13.07	-16.93	2.18409G	-53.41	2.39984G	-33.81	2.4G	-29.51	2.50006G	-49.60	21.77462G	-47.04	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	2.42572G	4.94	-25.06	2.30054G	-52.86	2.4G	-29.27	2.4G	-27.54	2.50702G	-50.88	21.60928G	-44.43	2
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	2.44192G	7.61	-22.39	2.30855G	-52.04	2.39984G	-30.40	2.4G	-27.01	2.51662G	-48.20	21.66538G	-47.01	3

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43741G	15.45	-14.55	2.17943G	-53.04	2.39904G	-39.89	2.4G	-44.72	2.5095G	-49.67	21.55829G	-45.26	1
2412MHz	Pass	2.43741G	15.45	-14.55	2.30991G	-53.32	2.39952G	-38.64	2.4G	-44.37	2.50654G	-49.14	21.55829G	-43.92	2
2412MHz	Pass	2.43741G	15.45	-14.55	2.30874G	-52.43	2.39752G	-41.70	2.4G	-44.48	2.52158G	-48.91	21.65943G	-44.57	3
2412MHz	Pass	2.43741G	15.45	-14.55	2.12817G	-53.10	2.39704G	-38.97	2.4G	-43.02	2.50166G	-49.06	21.55829G	-44.14	4
2437MHz	Pass	2.43741G	15.45	-14.55	2.30175G	-52.55	2.39616G	-46.87	2.4G	-48.66	2.50342G	-48.51	21.97129G	-44.17	1
2437MHz	Pass	2.43741G	15.45	-14.55	2.30758G	-53.64	2.39208G	-46.50	2.4G	-49.68	2.51094G	-48.57	21.65943G	-45.00	2
2437MHz	Pass	2.43741G	15.45	-14.55	1.75537G	-53.29	2.3996G	-47.46	2.4G	-49.59	2.52086G	-48.92	21.47119G	-45.67	3
2437MHz	Pass	2.43741G	15.45	-14.55	2.04196G	-53.11	2.3964G	-46.80	2.4G	-48.33	2.5191G	-48.86	21.96005G	-44.47	4
2462MHz	Pass	2.43741G	15.45	-14.55	2.30408G	-53.14	2.39192G	-48.86	2.4G	-50.61	2.50566G	-46.50	21.5049G	-44.58	1
2462MHz	Pass	2.43741G	15.45	-14.55	2.30641G	-52.66	2.3968G	-48.49	2.4G	-49.30	2.50214G	-47.83	21.48243G	-45.76	2
2462MHz	Pass	2.43741G	15.45	-14.55	2.04662G	-52.86	2.39176G	-48.71	2.4G	-51.52	2.51006G	-47.87	21.5611G	-44.80	3
2462MHz	Pass	2.43741G	15.45	-14.55	1.6412G	-50.84	2.39432G	-48.03	2.4G	-48.96	2.50326G	-47.04	21.5611G	-44.62	4
2467MHz	Pass	2.43741G	15.45	-14.55	2.30874G	-53.08	2.39384G	-48.45	2.4G	-51.15	2.50334G	-46.62	21.474G	-45.71	1
2467MHz	Pass	2.43741G	15.45	-14.55	2.17593G	-53.29	2.3976G	-48.79	2.4G	-49.69	2.5003G	-47.13	21.50771G	-45.01	2
2467MHz	Pass	2.43741G	15.45	-14.55	2.30991G	-50.58	2.39032G	-48.99	2.4G	-51.64	2.51598G	-47.38	21.59762G	-45.33	3
2467MHz	Pass	2.43741G	15.45	-14.55	1.64469G	-49.80	2.39584G	-47.72	2.4G	-49.60	2.50006G	-46.93	21.533G	-44.69	4
2472MHz	Pass	2.43741G	15.45	-14.55	2.30874G	-52.74	2.39968G	-50.15	2.4G	-51.03	2.50198G	-47.84	21.54705G	-44.90	1
2472MHz	Pass	2.43741G	15.45	-14.55	1.76236G	-53.25	2.39552G	-50.39	2.4G	-51.84	2.50294G	-48.02	21.96848G	-45.07	2
2472MHz	Pass	2.43741G	15.45	-14.55	1.84624G	-53.70	2.3968G	-49.71	2.4G	-49.97	2.50118G	-47.07	21.54705G	-45.00	3
2472MHz	Pass	2.43741G	15.45	-14.55	1.80546G	-53.23	2.39048G	-49.24	2.4G	-50.01	2.50494G	-47.82	21.61729G	-44.95	4
802.11g_Nss1(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44192G	12.27	-17.73	66.12M	-53.86	2.39992G	-33.69	2.4G	-30.65	2.50358G	-50.02	21.46557G	-45.52	1
2412MHz	Pass	2.44192G	12.27	-17.73	2.16778G	-53.45	2.39984G	-34.96	2.4G	-31.65	2.50326G	-49.85	21.57514G	-44.11	2
2412MHz	Pass	2.44192G	12.27	-17.73	2.12584G	-53.43	2.4G	-34.46	2.4G	-30.29	2.52198G	-50.12	21.57233G	-45.29	3
2412MHz	Pass	2.44192G	12.27	-17.73	2.30641G	-53.90	2.39984G	-34.76	2.4G	-29.61	2.5095G	-50.48	21.57795G	-45.48	4
2437MHz	Pass	2.44192G	12.27	-17.73	2.30292G	-51.68	2.39888G	-42.29	2.4G	-44.14	2.50502G	-48.30	21.51333G	-44.34	1
2437MHz	Pass	2.44192G	12.27	-17.73	2.30874G	-53.30	2.39928G	-44.17	2.4G	-43.26	2.50558G	-46.81	21.53862G	-44.14	2
2437MHz	Pass	2.44192G	12.27	-17.73	2.30408G	-53.18	2.39952G	-43.32	2.4G	-45.50	2.51302G	-47.66	21.52738G	-45.01	3
2437MHz	Pass	2.44192G	12.27	-17.73	2.30525G	-52.47	2.4G	-43.14	2.4G	-43.70	2.50286G	-47.22	21.52457G	-44.17	4
2462MHz	Pass	2.44192G	12.27	-17.73	2.15613G	-52.73	2.39056G	-47.56	2.4G	-50.27	2.50454G	-47.49	21.50771G	-44.68	1
2462MHz	Pass	2.44192G	12.27	-17.73	57.96M	-53.63	2.39904G	-48.09	2.4G	-50.77	2.50398G	-47.15	21.60605G	-45.47	2
2462MHz	Pass	2.44192G	12.27	-17.73	2.30292G	-53.00	2.39928G	-48.38	2.4G	-51.33	2.51174G	-47.57	21.47962G	-45.52	3
2462MHz	Pass	2.44192G	12.27	-17.73	2.30175G	-52.94	2.39776G	-48.49	2.4G	-49.19	2.50638G	-46.50	21.51614G	-45.96	4
2467MHz	Pass	2.44192G	12.27	-17.73	1.86721G	-53.37	2.4G	-49.24	2.4G	-51.91	2.50302G	-47.34	21.58076G	-44.10	1
2467MHz	Pass	2.44192G	12.27	-17.73	1.79614G	-53.35	2.4G	-50.26	2.4G	-51.09	2.5043G	-48.64	21.53581G	-43.54	2
2467MHz	Pass	2.44192G	12.27	-17.73	1.83109G	-52.67	2.4G	-49.97	2.4G	-51.10	2.50582G	-46.09	21.59481G	-45.68	3
2467MHz	Pass	2.44192G	12.27	-17.73	1.9674G	-53.52	2.39856G	-49.79	2.4G	-50.59	2.50526G	-48.31	21.5049G	-45.51	4
2472MHz	Pass	2.44192G	12.27	-17.73	2.06526G	-52.88	2.39512G	-51.43	2.4G	-52.49	2.5035G	-50.63	21.54143G	-44.98	1
2472MHz	Pass	2.44192G	12.27	-17.73	1.88468G	-52.48	2.3976G	-51.36	2.4G	-53.92	2.52046G	-50.01	21.59481G	-45.54	2
2472MHz	Pass	2.44192G	12.27	-17.73	46.31M	-53.19	2.39104G	-51.52	2.4G	-53.84	2.51142G	-50.32	21.63414G	-46.24	3
2472MHz	Pass	2.44192G	12.27	-17.73	1.90332G	-53.52	2.4G	-51.06	2.4G	-52.00	2.50734G	-49.75	21.55267G	-45.53	4
802.11be EHT20_Nss1(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44192G	12.12	-17.88	1.72624G	-53.37	2.4G	-32.25	2.4G	-31.75	2.50502G	-50.16	21.61448G	-45.32	1
2412MHz	Pass	2.44192G	12.12	-17.88	1.65401G	-53.67	2.4G	-34.56	2.4G	-31.07	2.5179G	-49.78	21.55548G	-44.66	2
2412MHz	Pass	2.44192G	12.12	-17.88	2.18991G	-53.14	2.39992G	-32.46	2.4G	-29.40	2.50846G	-50.13	21.97691G	-45.14	3
2412MHz	Pass	2.44192G	12.12	-17.88	2.1736G	-53.44	2.39992G	-33.71	2.4G	-30.03	2.5187G	-50.40	21.45995G	-45.33	4
2437MHz	Pass	2.44192G	12.12	-17.88	2.09555G	-53.67	2.39984G	-40.27	2.4G	-42.53	2.50166G	-48.72	21.51895G	-45.01	1
2437MHz	Pass	2.44192G	12.12	-17.88	2.30758G	-52.39	2.39984G	-40.03	2.4G	-42.54	2.50422G	-47.73	21.60605G	-44.56	2
2437MHz	Pass	2.44192G	12.12	-17.88	2.30641G	-52.62	2.4G	-41.50	2.4G	-43.07	2.50478G	-48.38	21.5049G	-45.42	3
2437MHz	Pass	2.44192G	12.12	-17.88	2.30059G	-52.34	2.39984G	-40.66	2.4G	-41.38	2.50182G	-48.61	21.533G	-45.39	4
2462MHz	Pass	2.44192G	12.12	-17.88	2.14914G	-52.78	2.39624G	-50.27	2.4G	-51.71	2.5007G	-48.87	21.474G	-45.11	1
2462MHz	Pass	2.44192G	12.12	-17.88	1.99419G	-53.74	2.3984G	-50.30	2.4G	-52.77	2.51398G	-48.99	21.66224G	-44.66	2
2462MHz	Pass	2.44192G	12.12	-17.88	1.91264G	-53.53	2.4G	-49.45	2.4G	-51.75	2.50918G	-49.16	21.60605G	-45.15	3
2462MHz	Pass	2.44192G	12.12	-17.88	1.9173G	-53.12	2.39696G	-49.75	2.4G	-51.18	2.50006G	-49.28	21.57514G	-45.63	4
2467MHz	Pass	2.44192G	12.12	-17.88	1.96973G	-53.23	2.39568G	-50.66	2.4G	-52.53	2.5215G	-49.43	21.50771G	-44.97	1
2467MHz	Pass	2.44192G	12.12	-17.88	2.09904G	-53.24	2.39544G	-50.03	2.4G	-53.39	2.50318G	-49.14	21.45995G	-45.41	2
2467MHz	Pass	2.44192G	12.12	-17.88	2.08506G	-53.37	2.3968G	-50.43	2.4G	-52.49	2.50614G	-49.25	21.49648G	-44.75	3
2467MHz	Pass	2.44192G	12.12	-17.88	1.65168G	-54.36	2.4G	-49.02	2.4G	-51.18	2.50062G	-49.64	21.45995G	-44.53	4
2472MHz	Pass	2.44192G	12.12	-17.88	1.75537G	-53.75	2.39504G	-51.65	2.4G	-54.85	2.51974G	-50.52	21.5611G	-45.80	1
2472MHz	Pass	2.44192G	12.12	-17.88	1.72624G	-53.77	2.4G	-51.82	2.4G	-54.44	2.51614G	-50.95	21.82238G	-44.93	2



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2472MHz	Pass	2.44192G	12.12	-17.88	2.15846G	-53.86	2.4G	-51.56	2.4G	-53.81	2.50518G	-49.90	21.63695G	-45.20	3
2472MHz	Pass	2.44192G	12.12	-17.88	2.13283G	-53.29	2.4G	-50.16	2.4G	-51.83	2.50686G	-50.58	21.52176G	-43.90	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.42572G	4.94	-25.06	2.17688G	-52.99	2.39984G	-30.79	2.4G	-30.11	2.50862G	-51.15	21.45503G	-44.78	1
2422MHz	Pass	2.42572G	4.94	-25.06	2.30054G	-52.86	2.4G	-29.27	2.4G	-27.54	2.50702G	-50.88	21.60928G	-44.43	2
2422MHz	Pass	2.42572G	4.94	-25.06	2.18947G	-54.09	2.4G	-32.81	2.4G	-30.53	2.50558G	-50.52	21.5588G	-44.67	3
2422MHz	Pass	2.42572G	4.94	-25.06	2.17917G	-51.83	2.4G	-31.28	2.4G	-30.38	2.51086G	-50.37	21.54478G	-45.00	4
2437MHz	Pass	2.42572G	4.94	-25.06	1.98108G	-53.35	2.4G	-40.33	2.4G	-42.47	2.50782G	-50.94	21.56161G	-45.18	1
2437MHz	Pass	2.42572G	4.94	-25.06	1.77956G	-53.00	2.4G	-37.19	2.4G	-38.64	2.50126G	-49.79	21.84767G	-45.12	2
2437MHz	Pass	2.42572G	4.94	-25.06	2.13795G	-54.01	2.3992G	-39.84	2.4G	-39.92	2.5019G	-50.98	21.58685G	-45.61	3
2437MHz	Pass	2.42572G	4.94	-25.06	2.30283G	-53.16	2.39792G	-38.39	2.4G	-38.22	2.50254G	-50.74	21.50271G	-45.60	4
2452MHz	Pass	2.42572G	4.94	-25.06	2.30168G	-53.24	2.39952G	-34.74	2.4G	-37.54	2.50942G	-48.71	21.60087G	-44.49	1
2452MHz	Pass	2.42572G	4.94	-25.06	2.30283G	-53.82	2.39952G	-33.43	2.4G	-35.98	2.50062G	-47.45	21.56441G	-44.57	2
2452MHz	Pass	2.42572G	4.94	-25.06	2.05551G	-53.51	2.39952G	-35.83	2.4G	-37.68	2.50494G	-50.03	21.60087G	-45.07	3
2452MHz	Pass	2.42572G	4.94	-25.06	1.98681G	-53.24	2.39968G	-35.30	2.4G	-36.23	2.50942G	-48.38	21.47466G	-45.15	4
2457MHz	Pass	2.42572G	4.94	-25.06	48.32M	-54.01	2.39952G	-39.60	2.4G	-41.84	2.50014G	-48.20	21.59246G	-45.30	1
2457MHz	Pass	2.42572G	4.94	-25.06	2.14482G	-53.11	2.39952G	-37.89	2.4G	-40.75	2.51326G	-47.03	21.41857G	-45.34	2
2457MHz	Pass	2.42572G	4.94	-25.06	35.73M	-52.91	2.39952G	-39.28	2.4G	-44.89	2.50718G	-49.30	21.51954G	-44.88	3
2457MHz	Pass	2.42572G	4.94	-25.06	1.93986G	-53.80	2.39952G	-38.18	2.4G	-42.20	2.50014G	-46.98	21.55039G	-45.07	4
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44192G	13.07	-16.93	2.09089G	-54.23	2.4G	-33.54	2.4G	-30.69	2.51054G	-49.26	21.67629G	-46.78	1
2412MHz	Pass	2.44192G	13.07	-16.93	2.07807G	-53.15	2.4G	-34.18	2.4G	-31.14	2.51374G	-49.17	21.57795G	-47.97	2
2412MHz	Pass	2.44192G	13.07	-16.93	1.77401G	-53.64	2.4G	-33.08	2.4G	-31.94	2.5007G	-48.23	21.79148G	-46.77	3
2412MHz	Pass	2.44192G	13.07	-16.93	2.18409G	-53.41	2.39984G	-33.81	2.4G	-29.51	2.50006G	-49.60	21.77462G	-47.04	4
2437MHz	Pass	2.44192G	13.07	-16.93	2.18525G	-51.77	2.39984G	-40.26	2.4G	-41.22	2.51062G	-47.48	21.84486G	-47.30	1
2437MHz	Pass	2.44192G	13.07	-16.93	2.30059G	-53.16	2.39976G	-40.46	2.4G	-40.75	2.50222G	-47.26	21.94039G	-47.43	2
2437MHz	Pass	2.44192G	13.07	-16.93	1.86138G	-53.38	2.39992G	-39.00	2.4G	-40.77	2.50014G	-46.06	21.9151G	-46.06	3
2437MHz	Pass	2.44192G	13.07	-16.93	2.30525G	-52.83	2.39976G	-40.37	2.4G	-41.72	2.5007G	-46.85	21.59762G	-47.12	4
2462MHz	Pass	2.44192G	13.07	-16.93	1.93944G	-52.96	2.4G	-49.20	2.4G	-50.44	2.50606G	-47.41	21.74934G	-47.41	1
2462MHz	Pass	2.44192G	13.07	-16.93	1.9406G	-53.43	2.39328G	-49.05	2.4G	-51.17	2.50558G	-46.92	21.78586G	-46.75	2
2462MHz	Pass	2.44192G	13.07	-16.93	2.30874G	-53.36	2.3952G	-49.30	2.4G	-50.87	2.51574G	-46.45	21.828G	-47.70	3
2462MHz	Pass	2.44192G	13.07	-16.93	2.30175G	-52.84	2.39256G	-48.71	2.4G	-52.07	2.5019G	-47.37	21.99096G	-46.79	4
2467MHz	Pass	2.44192G	13.07	-16.93	2.30991G	-53.67	2.3988G	-49.99	2.4G	-51.06	2.5047G	-48.70	21.93758G	-47.21	1
2467MHz	Pass	2.44192G	13.07	-16.93	1.89167G	-53.35	2.4G	-50.49	2.4G	-52.82	2.5031G	-48.60	21.63133G	-47.17	2
2467MHz	Pass	2.44192G	13.07	-16.93	1.72741G	-53.92	2.39008G	-49.96	2.4G	-52.08	2.52166G	-48.55	21.70719G	-47.16	3
2467MHz	Pass	2.44192G	13.07	-16.93	2.1037G	-53.19	2.39136G	-49.94	2.4G	-52.33	2.51246G	-48.61	21.88139G	-46.99	4
2472MHz	Pass	2.44192G	13.07	-16.93	2.1072G	-53.54	2.39352G	-50.58	2.4G	-51.96	2.50238G	-49.71	21.65943G	-47.62	1
2472MHz	Pass	2.44192G	13.07	-16.93	2.16312G	-53.64	2.4G	-51.28	2.4G	-54.25	2.5119G	-49.30	21.90667G	-47.65	2
2472MHz	Pass	2.44192G	13.07	-16.93	1.93128G	-53.54	2.39112G	-50.30	2.4G	-54.78	2.50998G	-50.23	21.63976G	-46.77	3
2472MHz	Pass	2.44192G	13.07	-16.93	2.11885G	-53.02	2.3992G	-51.09	2.4G	-53.10	2.50774G	-50.15	21.66224G	-47.54	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.44192G	7.61	-22.39	2.30626G	-53.06	2.4G	-30.25	2.4G	-28.85	2.50254G	-49.78	21.69342G	-46.08	1
2422MHz	Pass	2.44192G	7.61	-22.39	2.3097G	-53.63	2.4G	-30.68	2.4G	-29.44	2.50014G	-49.88	21.59526G	-46.34	2
2422MHz	Pass	2.44192G	7.61	-22.39	2.30855G	-52.04	2.39984G	-30.40	2.4G	-27.01	2.51662G	-48.20	21.66538G	-47.01	3
2422MHz	Pass	2.44192G	7.61	-22.39	2.16199G	-52.66	2.4G	-29.70	2.4G	-28.28	2.5139G	-49.73	21.59526G	-46.89	4
2437MHz	Pass	2.44192G	7.61	-22.39	2.13337G	-52.40	2.4G	-33.42	2.4G	-34.22	2.5043G	-47.61	21.70744G	-47.18	1
2437MHz	Pass	2.44192G	7.61	-22.39	2.3097G	-52.78	2.39824G	-36.24	2.4G	-37.60	2.50462G	-48.06	21.86169G	-46.66	2
2437MHz	Pass	2.44192G	7.61	-22.39	2.12879G	-51.97	2.4G	-34.77	2.4G	-35.32	2.5019G	-45.67	21.9879G	-47.50	3
2437MHz	Pass	2.44192G	7.61	-22.39	2.30397G	-52.05	2.4G	-35.23	2.4G	-37.13	2.50094G	-47.55	21.62892G	-46.53	4
2452MHz	Pass	2.44192G	7.61	-22.39	2.30397G	-53.55	2.39952G	-31.08	2.4G	-34.73	2.50046G	-46.02	21.62331G	-46.75	1
2452MHz	Pass	2.44192G	7.61	-22.39	2.16314G	-52.30	2.39952G	-33.24	2.4G	-35.76	2.50318G	-47.90	21.64294G	-47.12	2
2452MHz	Pass	2.44192G	7.61	-22.39	1.8288G	-53.02	2.39952G	-31.08	2.4G	-33.14	2.50814G	-44.13	21.92059G	-46.73	3
2452MHz	Pass	2.44192G	7.61	-22.39	2.30054G	-53.13	2.39952G	-32.82	2.4G	-35.47	2.50942G	-44.87	21.85048G	-47.09	4
2457MHz	Pass	2.44192G	7.61	-22.39	2.30397G	-53.98	2.39952G	-37.03	2.4G	-40.44	2.50494G	-43.92	21.63733G	-47.93	1
2457MHz	Pass	2.44192G	7.61	-22.39	32.29M	-53.79	2.39952G	-37.91	2.4G	-40.14	2.5035G	-46.57	21.96546G	-46.99	2
2457MHz	Pass	2.44192G	7.61	-22.39	1.90322G	-53.19	2.39952G	-38.93	2.4G	-38.82	2.51454G	-43.67	21.76353G	-47.59	3
2457MHz	Pass	2.44192G	7.61	-22.39	2.07268G	-52.48	2.39952G	-34.21	2.4G	-40.00	2.50126G	-43.34	21.69342G	-47.29	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2412MHz

04/10/2024

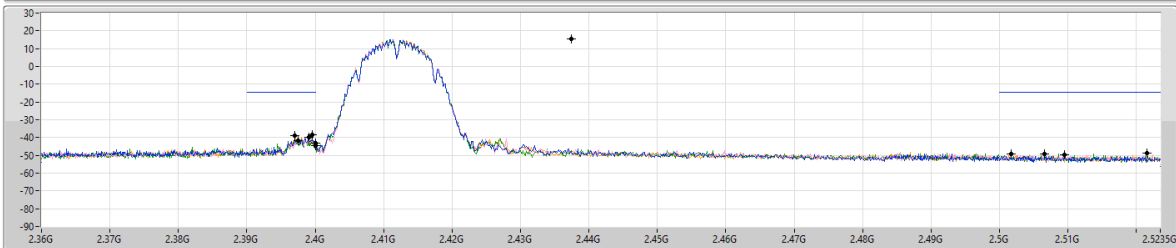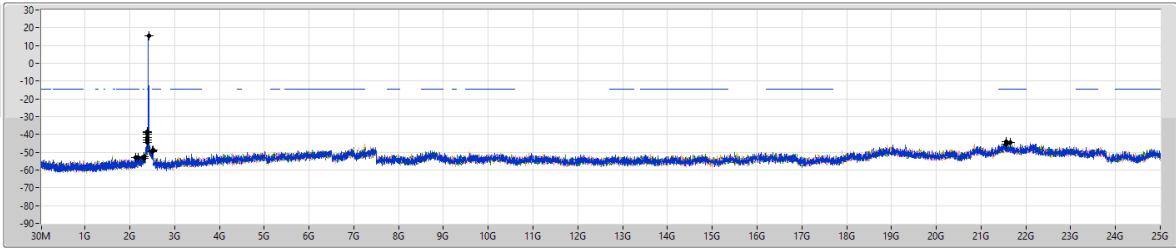RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	15.45	-14.55	2.17943G	-53.04	2.39904G	-39.89	2.4G	-44.72	2.5095G	-49.67	2.155829G	-45.26	1
2.43741G	15.45	-14.55	2.30991G	-53.32	2.39952G	-38.64	2.4G	-44.37	2.50654G	-49.14	2.155829G	-43.92	2
2.43741G	15.45	-14.55	2.30874G	-52.43	2.39752G	-41.70	2.4G	-44.48	2.52158G	-48.91	2.165943G	-44.57	3
2.43741G	15.45	-14.55	2.12817G	-53.10	2.39704G	-38.97	2.4G	-43.02	2.50166G	-49.06	2.155829G	-44.14	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2437MHz

04/10/2024

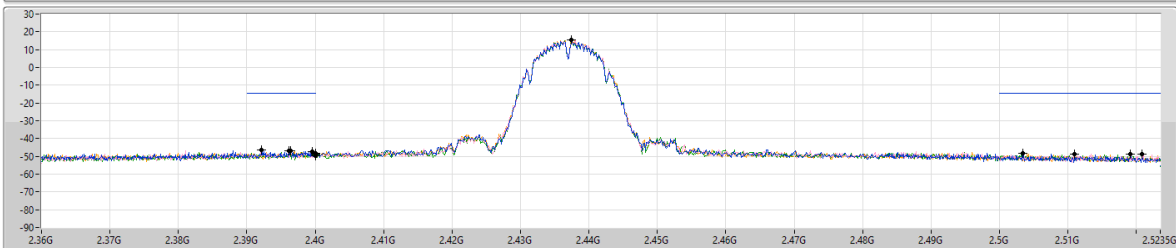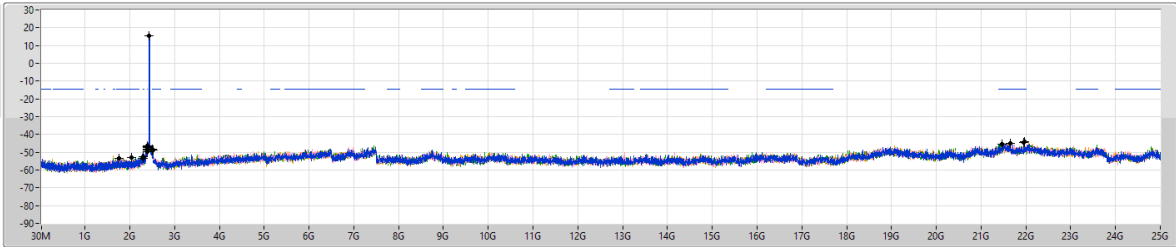RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	15.45	-14.55	2.30175G	-52.55	2.39616G	-46.87	2.4G	-48.66	2.50342G	-48.51	2.197129G	-44.17	1
2.43741G	15.45	-14.55	2.30758G	-53.64	2.39208G	-46.50	2.4G	-49.68	2.51094G	-48.57	2.165943G	-45.00	2
2.43741G	15.45	-14.55	1.75337G	-53.29	2.3996G	-47.46	2.4G	-49.59	2.52086G	-48.92	2.147119G	-45.67	3
2.43741G	15.45	-14.55	2.04196G	-53.11	2.3964G	-46.80	2.4G	-48.33	2.5191G	-48.86	2.196005G	-44.47	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2462MHz

04/10/2024

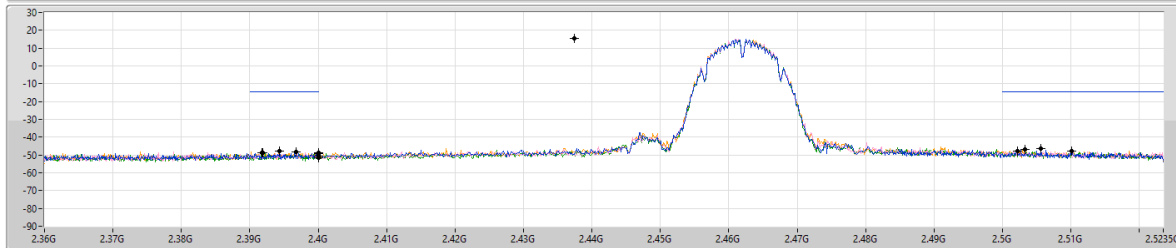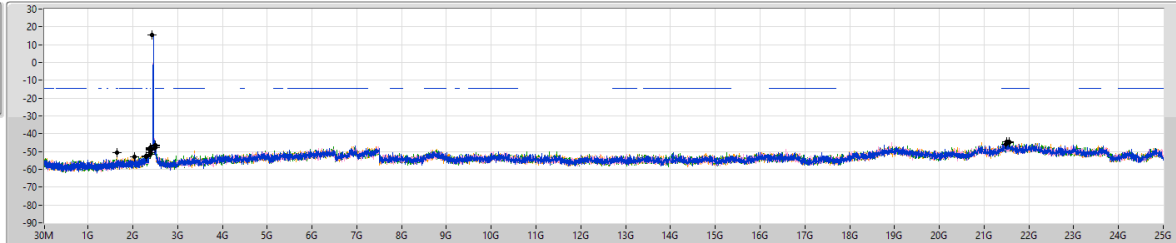RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	15.45	-14.55	2.30408G	-53.14	2.39192G	-48.86	2.4G	-50.61	2.50566G	-46.50	21.5049G	-44.58	1
2.43741G	15.45	-14.55	2.30641G	-52.66	2.3968G	-48.49	2.4G	-49.30	2.50214G	-47.83	21.48243G	-45.76	2
2.43741G	15.45	-14.55	2.04662G	-52.86	2.39176G	-48.71	2.4G	-51.52	2.51006G	-47.87	21.5611G	-44.80	3
2.43741G	15.45	-14.55	1.6412G	-50.84	2.39432G	-48.03	2.4G	-48.96	2.50326G	-47.04	21.5611G	-44.62	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2467MHz

04/10/2024

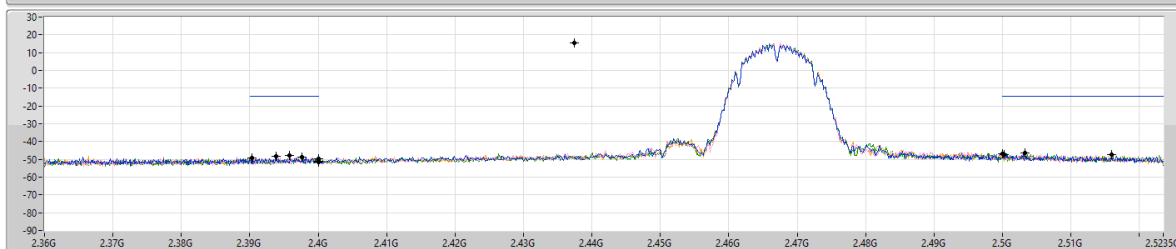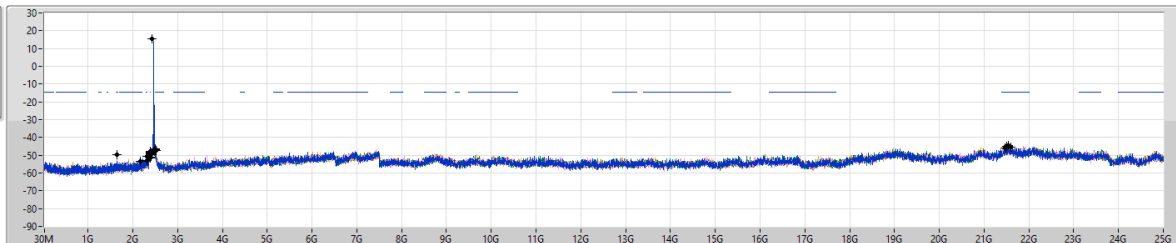RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	15.45	-14.55	2.30874G	-53.08	2.39384G	-48.45	2.4G	-51.15	2.50334G	-46.62	21.474G	-45.71	1
2.43741G	15.45	-14.55	2.17593G	-53.29	2.3976G	-48.79	2.4G	-49.69	2.5003G	-47.13	21.50771G	-45.01	2
2.43741G	15.45	-14.55	2.30991G	-50.58	2.39032G	-48.99	2.4G	-51.64	2.51598G	-47.38	21.59762G	-45.33	3
2.43741G	15.45	-14.55	1.64499G	-49.80	2.39584G	-47.72	2.4G	-49.60	2.50006G	-46.93	21.533G	-44.69	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2472MHz

04/10/2024

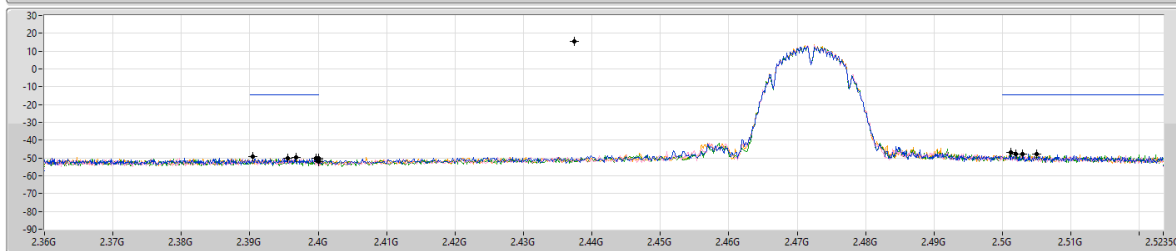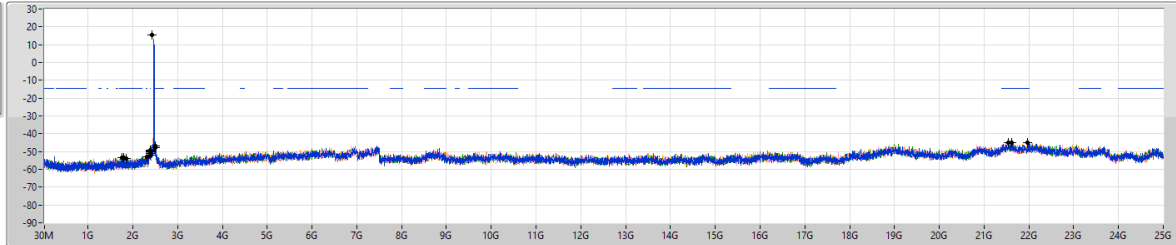RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	15.45	-14.55	2.30874G	-52.74	2.39968G	-50.15	2.4G	-51.03	2.50198G	-47.84	21.54705G	-44.90	1
2.43741G	15.45	-14.55	1.76236G	-53.25	2.39552G	-50.39	2.4G	-51.84	2.50294G	-48.02	21.96848G	-45.07	2
2.43741G	15.45	-14.55	1.84624G	-53.70	2.3968G	-49.71	2.4G	-49.97	2.50118G	-47.07	21.54705G	-45.00	3
2.43741G	15.45	-14.55	1.80546G	-53.23	2.39048G	-49.24	2.4G	-50.01	2.50494G	-47.82	21.61729G	-44.95	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2412MHz

04/10/2024

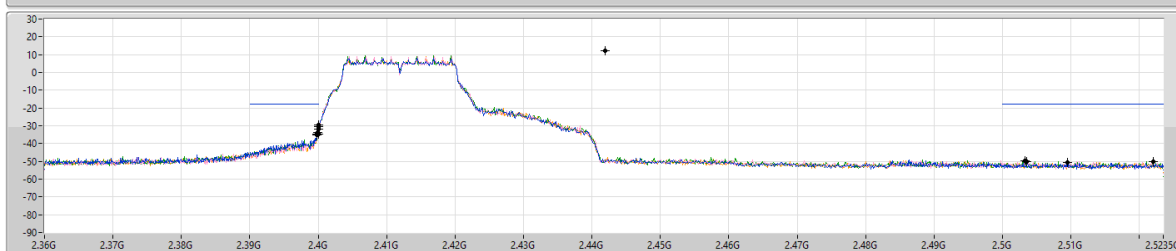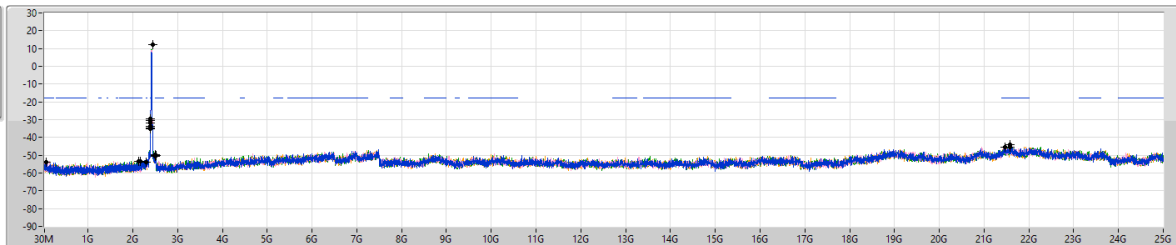RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.27	-17.73	66.12M	-53.86	2.39992G	-33.69	2.4G	-30.65	2.50398G	-50.02	21.46557G	-45.52	1
2.44192G	12.27	-17.73	2.16778G	-53.45	2.39984G	-34.96	2.4G	-31.65	2.50326G	-49.85	21.57514G	-44.11	2
2.44192G	12.27	-17.73	2.12584G	-53.43	2.4G	-34.46	2.4G	-30.29	2.52198G	-50.12	21.57233G	-45.29	3
2.44192G	12.27	-17.73	2.30641G	-53.90	2.39984G	-34.76	2.4G	-29.61	2.5095G	-50.48	21.57795G	-45.48	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2437MHz

04/10/2024

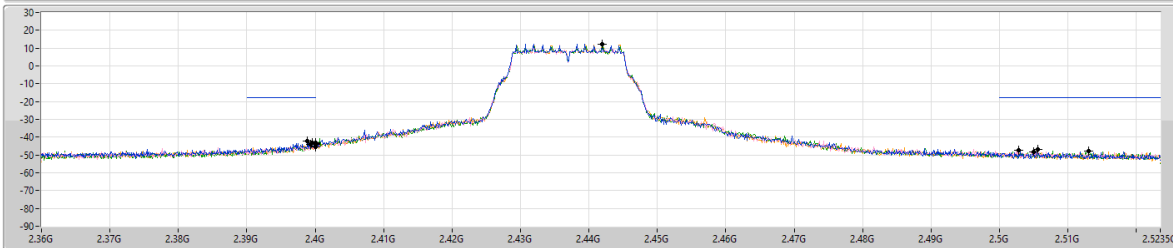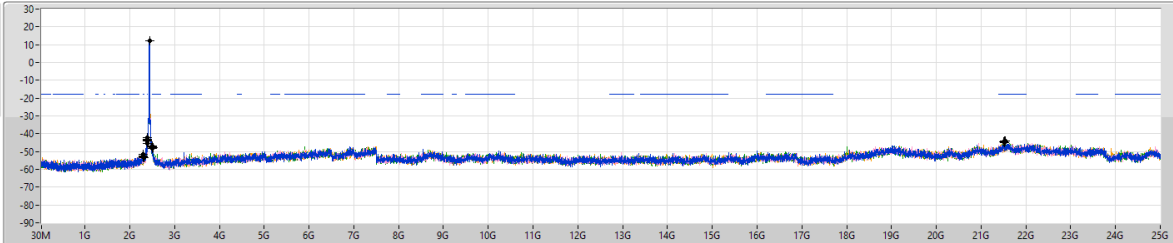RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.27	-17.73	2.30292G	-51.68	2.39888G	-42.29	2.4G	-44.14	2.50502G	-48.30	2.51333G	-44.34	1
2.44192G	12.27	-17.73	2.30874G	-53.30	2.39928G	-44.17	2.4G	-43.26	2.50558G	-46.81	2.51386G	-44.14	2
2.44192G	12.27	-17.73	2.30408G	-53.18	2.39952G	-43.32	2.4G	-45.50	2.51302G	-47.66	2.512738G	-45.01	3
2.44192G	12.27	-17.73	2.30525G	-52.47	2.4G	-43.14	2.4G	-43.70	2.50286G	-47.22	2.512457G	-44.17	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2462MHz

04/10/2024

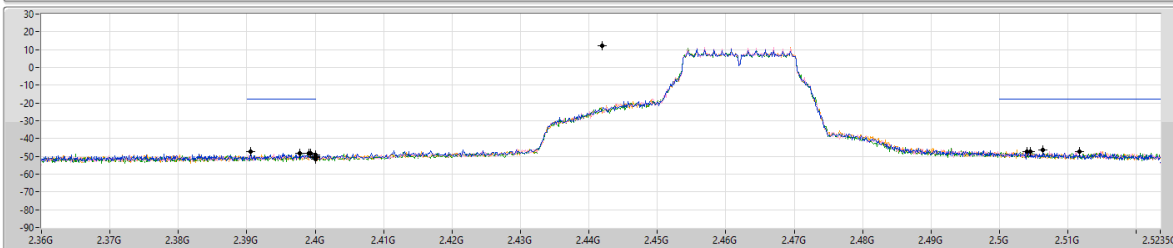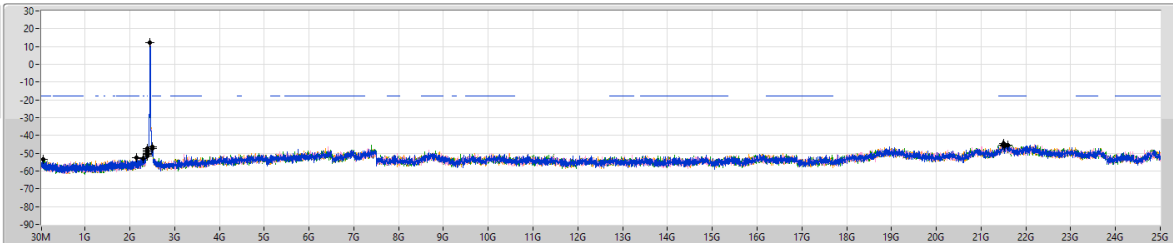RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.27	-17.73	2.15613G	-52.73	2.39056G	-47.56	2.4G	-50.27	2.50454G	-47.49	2.510771G	-44.68	1
2.44192G	12.27	-17.73	57.96M	-53.63	2.39904G	-48.09	2.4G	-50.77	2.50398G	-47.15	2.510805G	-45.47	2
2.44192G	12.27	-17.73	2.30292G	-53.00	2.39928G	-48.38	2.4G	-51.33	2.51174G	-47.57	2.514962G	-45.52	3
2.44192G	12.27	-17.73	2.30175G	-52.94	2.39776G	-48.49	2.4G	-49.19	2.50638G	-46.50	2.515161G	-45.96	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2467MHz

04/10/2024

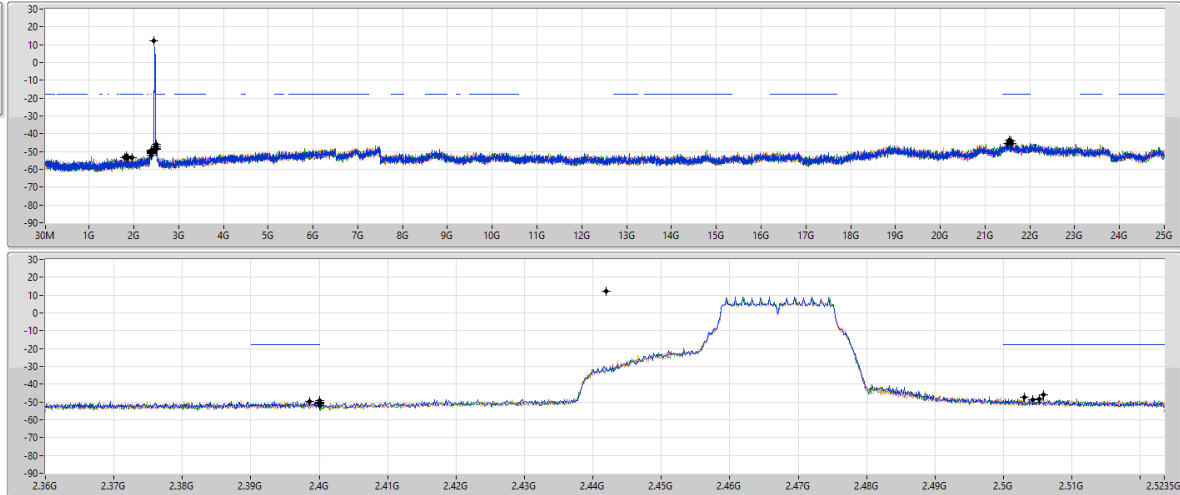RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.27	-17.73	1.86721G	-53.37	2.4G	-49.24	2.4G	-51.91	2.50302G	-47.34	21.58076G	-44.10	1
2.44192G	12.27	-17.73	1.79614G	-53.35	2.4G	-50.26	2.4G	-51.09	2.5043G	-48.64	21.53581G	-43.54	2
2.44192G	12.27	-17.73	1.83109G	-52.67	2.4G	-49.97	2.4G	-51.10	2.50582G	-46.09	21.59481G	-45.68	3
2.44192G	12.27	-17.73	1.9674G	-53.52	2.39656G	-49.79	2.4G	-50.59	2.50526G	-48.31	21.5049G	-45.51	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2472MHz

04/10/2024

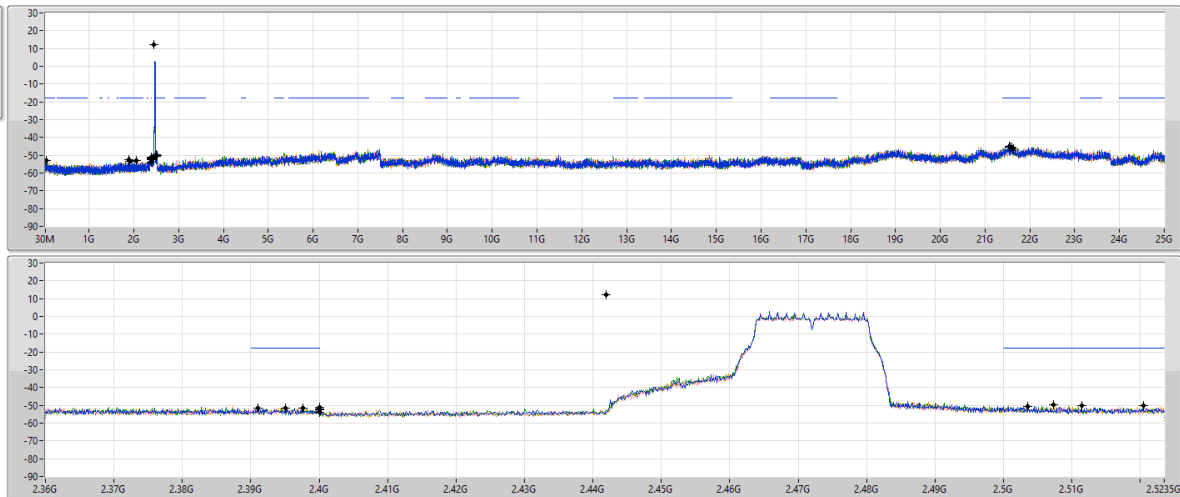RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.27	-17.73	2.06526G	-52.88	2.39512G	-51.43	2.4G	-52.49	2.5035G	-50.63	21.54143G	-44.98	1
2.44192G	12.27	-17.73	1.88468G	-52.48	2.3976G	-51.36	2.4G	-53.92	2.52046G	-50.01	21.59481G	-45.54	2
2.44192G	12.27	-17.73	46.31M	-53.19	2.39104G	-51.52	2.4G	-53.84	2.51142G	-50.32	21.63414G	-46.24	3
2.44192G	12.27	-17.73	1.90332G	-53.52	2.4G	-51.06	2.4G	-52.00	2.50734G	-49.75	21.55267G	-45.53	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2412MHz

04/10/2024

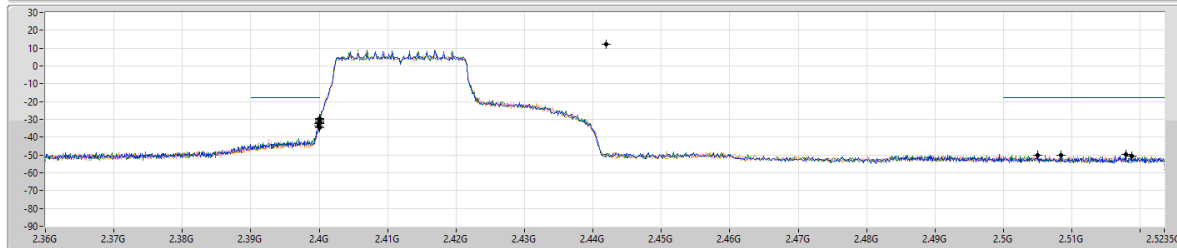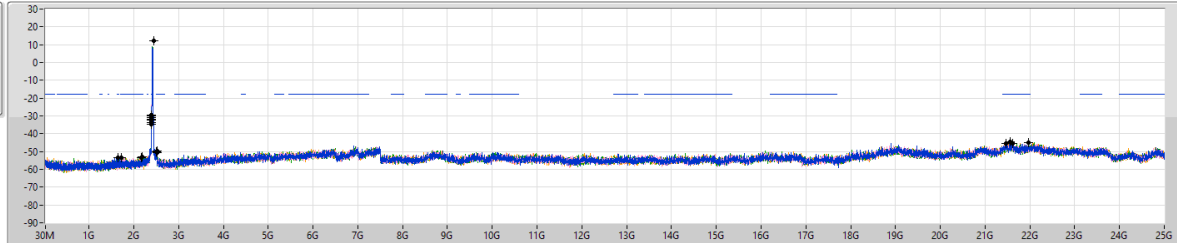RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.12	-17.88	1.72624G	-53.37	2.4G	-32.25	2.4G	-31.75	2.50502G	-50.16	21.61448G	-45.32	1
2.44192G	12.12	-17.88	1.65401G	-53.67	2.4G	-34.56	2.4G	-31.07	2.5179G	-49.78	21.55548G	-44.66	2
2.44192G	12.12	-17.88	2.18991G	-53.14	2.39992G	-32.46	2.4G	-29.40	2.50846G	-50.13	21.97891G	-45.14	3
2.44192G	12.12	-17.88	2.1736G	-53.44	2.39992G	-33.71	2.4G	-30.03	2.5187G	-50.40	21.49995G	-45.33	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2437MHz

04/10/2024

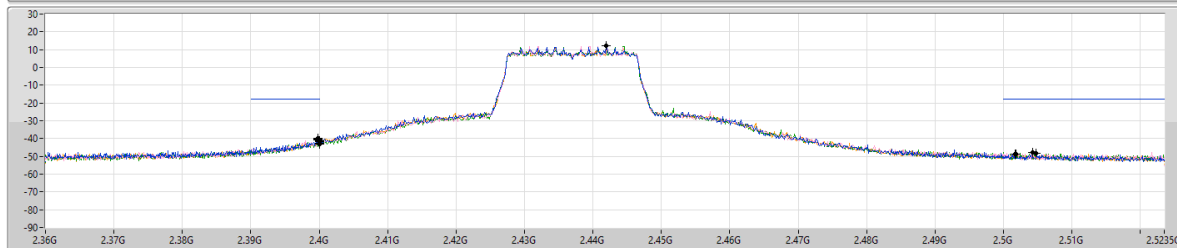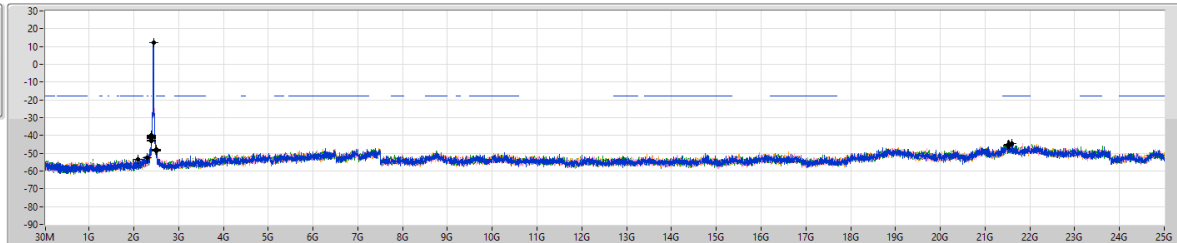RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.12	-17.88	2.09555G	-53.67	2.39984G	-40.27	2.4G	-42.53	2.50166G	-48.72	21.51895G	-45.01	1
2.44192G	12.12	-17.88	2.30758G	-52.39	2.39984G	-40.03	2.4G	-42.54	2.50422G	-47.73	21.60805G	-44.56	2
2.44192G	12.12	-17.88	2.30641G	-52.62	2.4G	-41.50	2.4G	-43.07	2.50478G	-48.38	21.5049G	-45.42	3
2.44192G	12.12	-17.88	2.30059G	-52.34	2.39984G	-40.66	2.4G	-41.38	2.50182G	-48.61	21.533G	-45.39	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2462MHz

04/10/2024

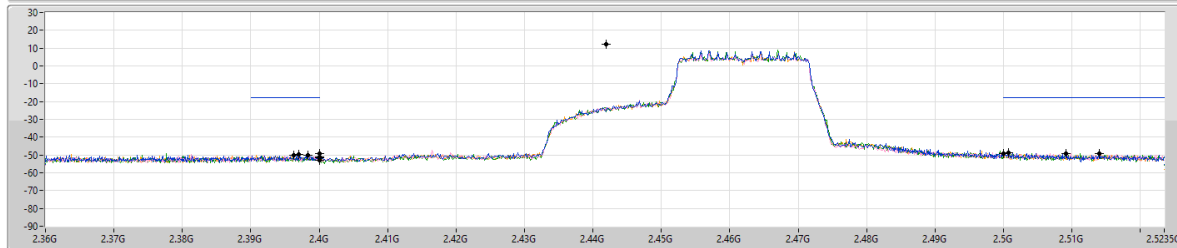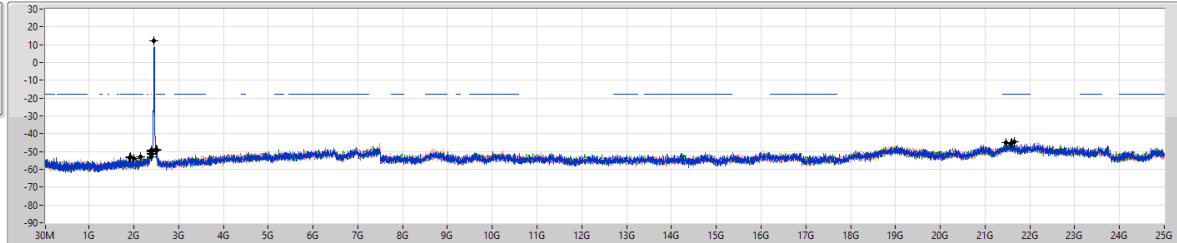RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.12	-17.88	2.14914G	-52.78	2.39624G	-50.27	2.4G	-51.71	2.5007G	-48.87	21.474G	-45.11	1
2.44192G	12.12	-17.88	1.99419G	-53.74	2.3984G	-50.30	2.4G	-52.77	2.51398G	-48.99	21.66224G	-44.66	2
2.44192G	12.12	-17.88	1.91264G	-53.53	2.4G	-49.45	2.4G	-51.75	2.50918G	-49.16	21.60605G	-45.15	3
2.44192G	12.12	-17.88	1.9173G	-53.12	2.39696G	-49.75	2.4G	-51.18	2.5006G	-49.28	21.57514G	-45.63	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2467MHz

04/10/2024

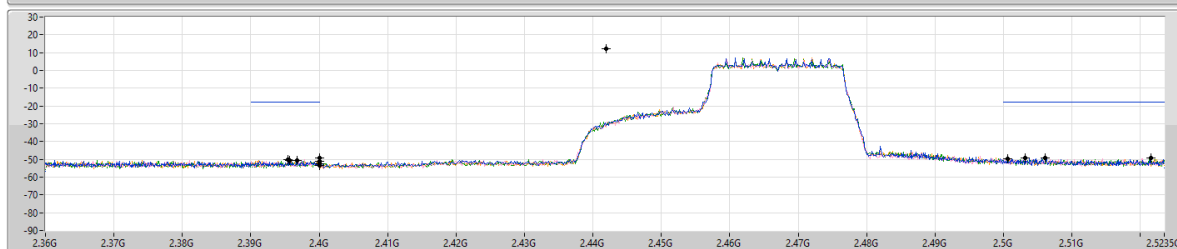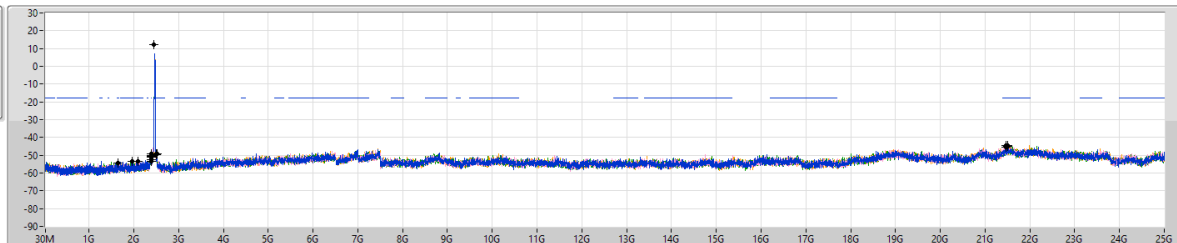RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.12	-17.88	1.96973G	-53.23	2.39568G	-50.66	2.4G	-52.53	2.5219G	-49.43	21.50771G	-44.97	1
2.44192G	12.12	-17.88	2.09904G	-53.24	2.39544G	-50.03	2.4G	-53.39	2.50318G	-49.14	21.49995G	-45.41	2
2.44192G	12.12	-17.88	2.08506G	-53.37	2.3968G	-50.43	2.4G	-52.49	2.50614G	-49.25	21.49648G	-44.75	3
2.44192G	12.12	-17.88	1.65168G	-54.36	2.4G	-49.02	2.4G	-51.18	2.50062G	-49.64	21.49995G	-44.53	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2472MHz

04/10/2024

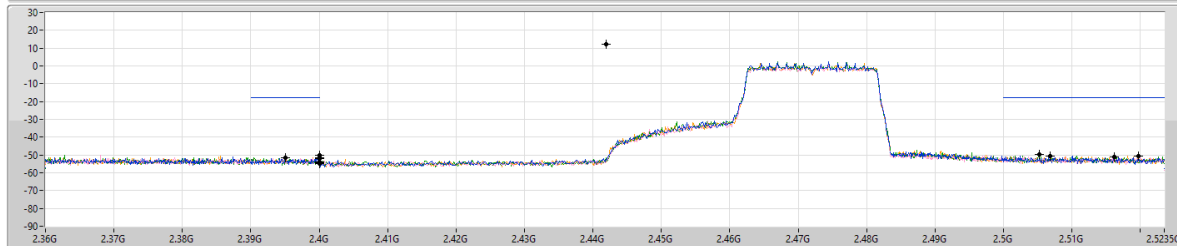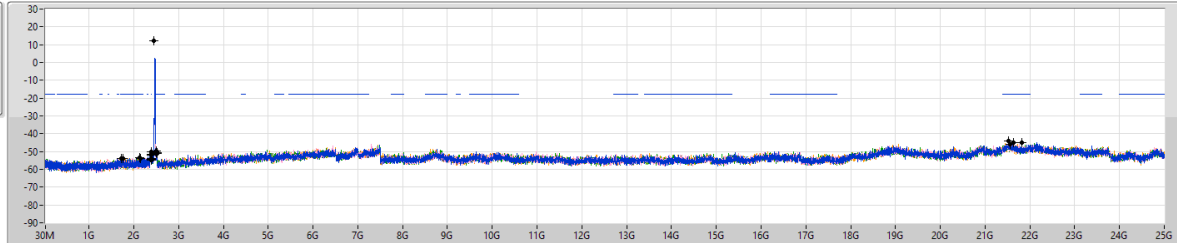RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	12.12	-17.88	1.75537G	-53.75	2.39504G	-51.65	2.4G	-54.85	2.51974G	-50.52	21.5611G	-45.80	1
2.44192G	12.12	-17.88	1.72624G	-53.77	2.4G	-51.82	2.4G	-54.44	2.51614G	-50.95	21.82238G	-44.93	2
2.44192G	12.12	-17.88	2.15846G	-53.86	2.4G	-51.56	2.4G	-53.81	2.50518G	-49.90	21.63695G	-45.20	3
2.44192G	12.12	-17.88	2.13283G	-53.29	2.4G	-50.16	2.4G	-51.83	2.50686G	-50.58	21.52176G	-43.90	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2422MHz

04/10/2024

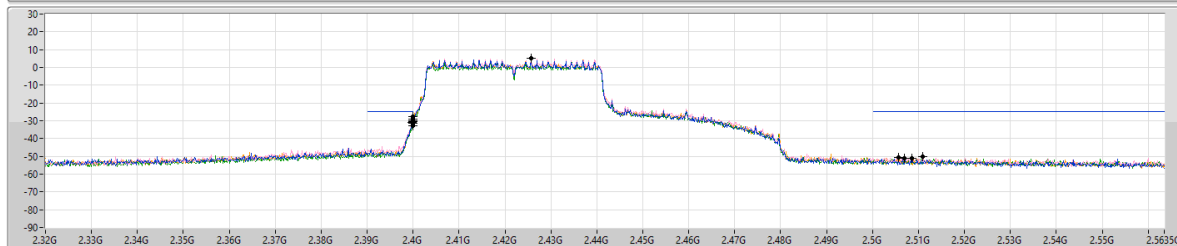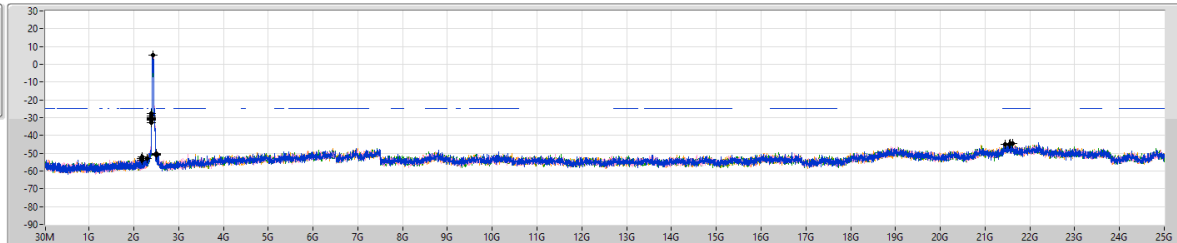RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.42572G	4.94	-25.06	2.17688G	-52.99	2.39984G	-30.79	2.4G	-30.11	2.50862G	-51.15	21.45503G	-44.78	1
2.42572G	4.94	-25.06	2.30054G	-52.86	2.4G	-29.27	2.4G	-27.54	2.50702G	-50.88	21.60928G	-44.43	2
2.42572G	4.94	-25.06	2.18947G	-54.09	2.4G	-32.81	2.4G	-30.53	2.50558G	-50.52	21.5588G	-44.67	3
2.42572G	4.94	-25.06	2.17917G	-51.83	2.4G	-31.28	2.4G	-30.38	2.51086G	-50.37	21.54478G	-45.00	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2437MHz

04/10/2024

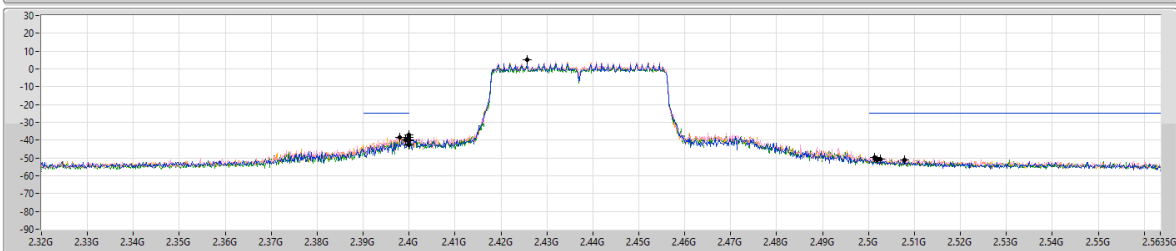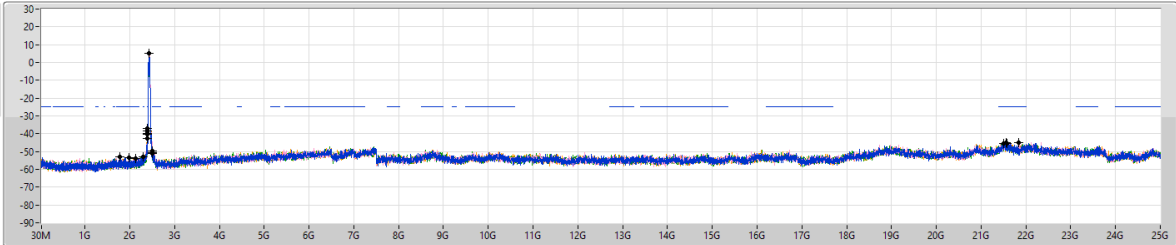RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.42572G	4.94	-25.06	1.98108G	-53.35	2.4G	-40.33	2.4G	-42.47	2.50782G	-50.94	21.56161G	-45.18	1
2.42572G	4.94	-25.06	1.77956G	-53.00	2.4G	-37.19	2.4G	-38.64	2.50126G	-49.79	21.84767G	-45.12	2
2.42572G	4.94	-25.06	2.13795G	-54.01	2.3992G	-39.84	2.4G	-39.92	2.5019G	-50.98	21.58885G	-45.61	3
2.42572G	4.94	-25.06	2.30283G	-53.16	2.39792G	-38.39	2.4G	-38.22	2.50254G	-50.74	21.50271G	-45.60	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2452MHz

04/10/2024

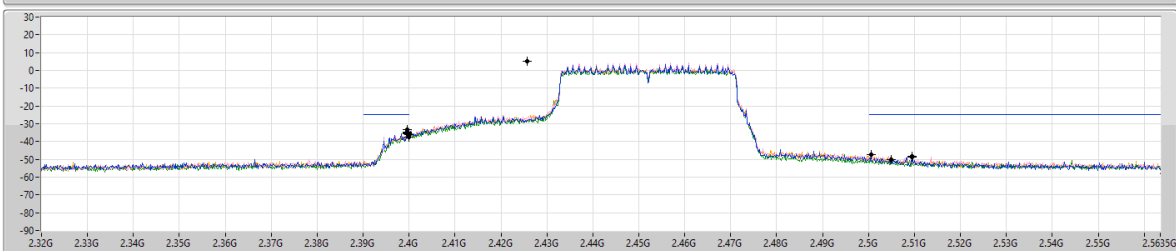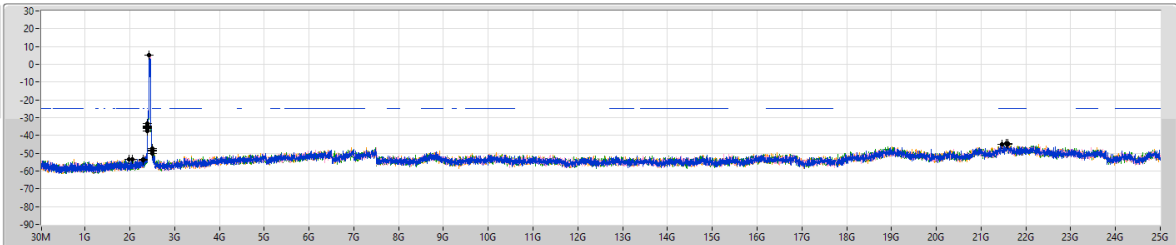RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.42572G	4.94	-25.06	2.30168G	-53.24	2.39952G	-34.74	2.4G	-37.54	2.50942G	-48.71	21.60087G	-44.49	1
2.42572G	4.94	-25.06	2.30283G	-53.82	2.39952G	-33.43	2.4G	-35.98	2.50062G	-47.45	21.56441G	-44.57	2
2.42572G	4.94	-25.06	2.05551G	-53.51	2.39952G	-35.83	2.4G	-37.68	2.50494G	-50.03	21.60087G	-45.07	3
2.42572G	4.94	-25.06	1.98811G	-53.24	2.39968G	-35.30	2.4G	-36.23	2.50942G	-48.38	21.47466G	-45.15	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSEndB

2457MHz

04/10/2024

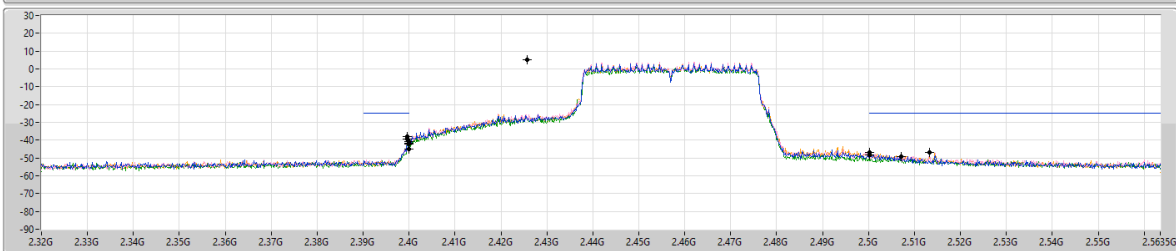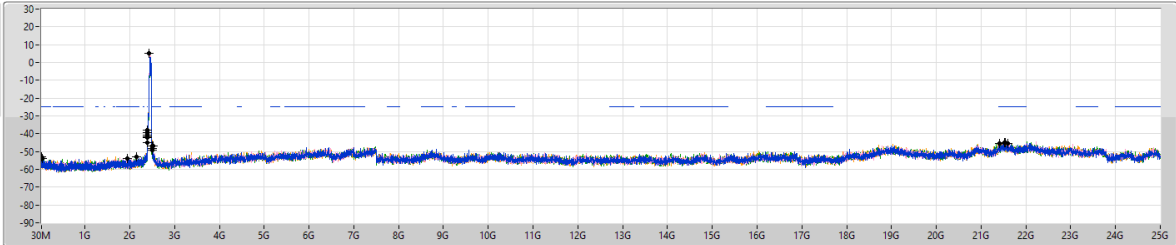RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.42572G	4.94	-25.06	48.32M	-54.01	2.39952G	-39.60	2.4G	-41.84	2.50014G	-48.20	21.59246G	-45.30	1
2.42572G	4.94	-25.06	2.14482G	-53.11	2.39952G	-37.89	2.4G	-40.75	2.51326G	-47.03	21.41857G	-45.34	2
2.42572G	4.94	-25.06	35.73M	-52.91	2.39952G	-39.28	2.4G	-44.89	2.50718G	-49.30	21.51954G	-44.88	3
2.42572G	4.94	-25.06	1.93986G	-53.80	2.39952G	-38.18	2.4G	-42.20	2.50014G	-46.98	21.55039G	-45.07	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2412MHz

21/10/2024

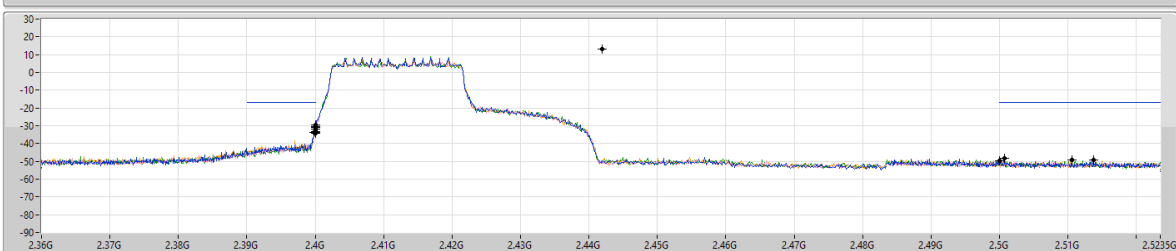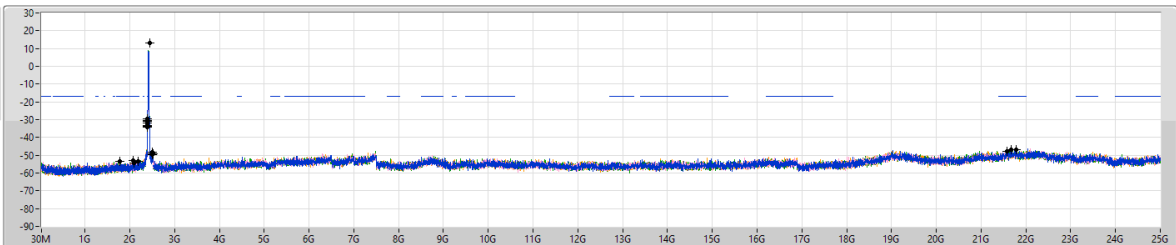RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.07	-16.93	2.09089G	-54.23	2.4G	-33.54	2.4G	-30.69	2.51054G	-49.26	21.67629G	-46.78	1
2.44192G	13.07	-16.93	2.07807G	-53.15	2.4G	-34.18	2.4G	-31.14	2.51374G	-49.17	21.57795G	-47.97	2
2.44192G	13.07	-16.93	1.77401G	-53.64	2.4G	-33.08	2.4G	-31.94	2.5007G	-48.23	21.79148G	-46.77	3
2.44192G	13.07	-16.93	2.18409G	-53.41	2.39984G	-33.81	2.4G	-29.51	2.50006G	-49.60	21.77462G	-47.04	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2437MHz

21/10/2024

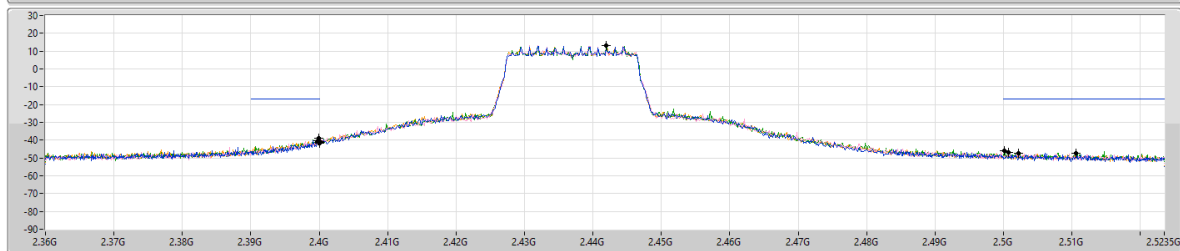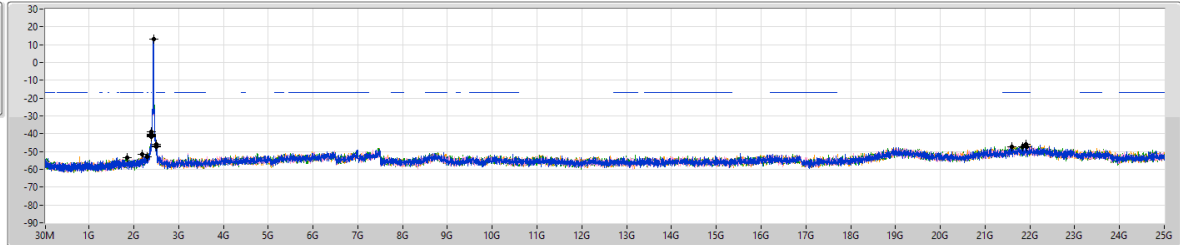RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.07	-16.93	2.18525G	-51.77	2.39984G	-40.26	2.4G	-41.22	2.51062G	-47.48	21.84486G	-47.30	1
2.44192G	13.07	-16.93	2.30059G	-53.16	2.39976G	-40.46	2.4G	-40.75	2.50222G	-47.26	21.94039G	-47.43	2
2.44192G	13.07	-16.93	1.86138G	-53.38	2.39992G	-39.00	2.4G	-40.77	2.50014G	-46.06	21.9151G	-46.06	3
2.44192G	13.07	-16.93	2.30525G	-52.83	2.39976G	-40.37	2.4G	-41.72	2.5007G	-46.85	21.99762G	-47.12	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2462MHz

21/10/2024

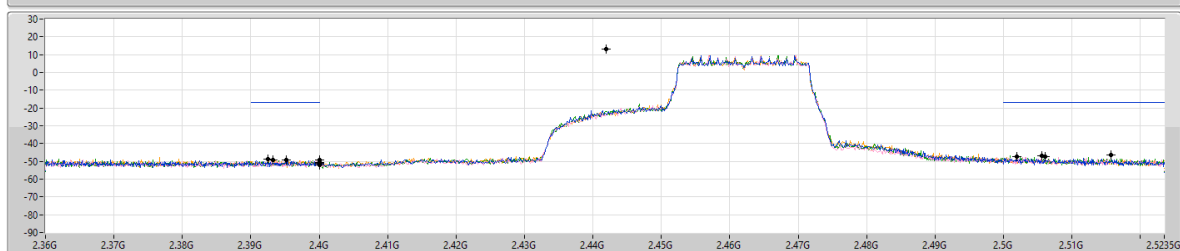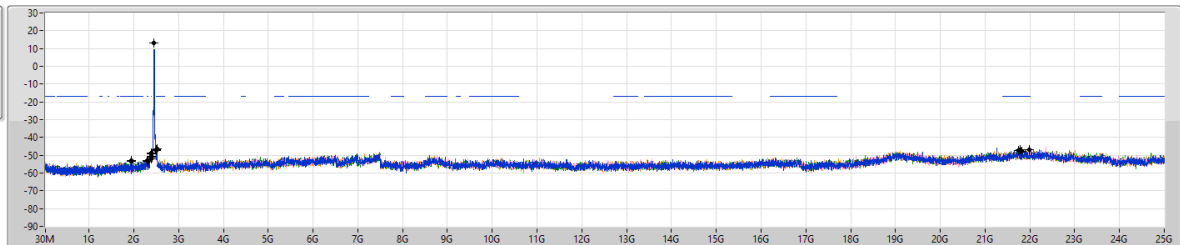RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.07	-16.93	1.93944G	-52.96	2.4G	-49.20	2.4G	-50.44	2.50606G	-47.41	21.74934G	-47.41	1
2.44192G	13.07	-16.93	1.9406G	-53.43	2.39328G	-49.05	2.4G	-51.17	2.50558G	-46.92	21.78586G	-46.75	2
2.44192G	13.07	-16.93	2.30874G	-53.36	2.3952G	-49.30	2.4G	-50.87	2.51574G	-46.45	21.828G	-47.70	3
2.44192G	13.07	-16.93	2.30175G	-52.84	2.39256G	-48.71	2.4G	-52.07	2.5019G	-47.37	21.99096G	-46.79	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2467MHz

21/10/2024

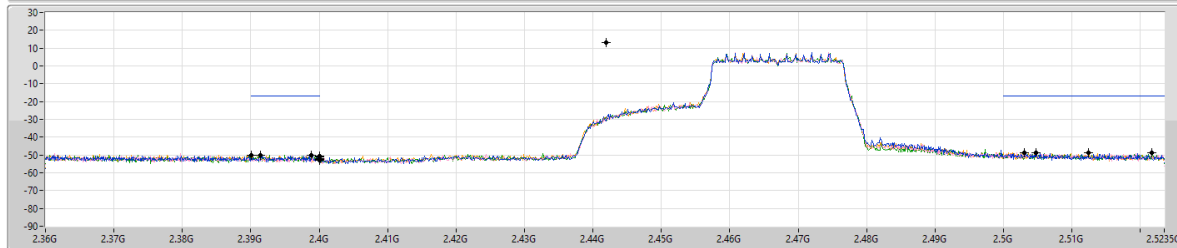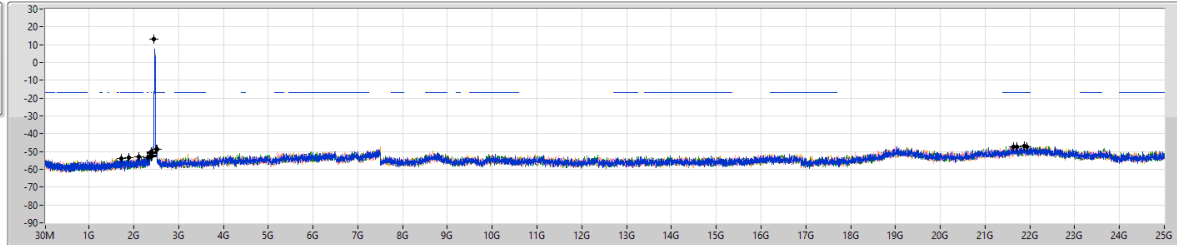RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.07	-16.93	2.30991G	-53.67	2.3988G	-49.99	2.4G	-51.06	2.5047G	-48.70	21.93758G	-47.21	1
2.44192G	13.07	-16.93	1.89167G	-53.35	2.4G	-50.49	2.4G	-52.82	2.5031G	-48.60	21.63133G	-47.17	2
2.44192G	13.07	-16.93	1.72741G	-53.92	2.39008G	-49.96	2.4G	-52.08	2.52166G	-48.55	21.70719G	-47.16	3
2.44192G	13.07	-16.93	2.1037G	-53.19	2.39136G	-49.94	2.4G	-52.33	2.51246G	-48.61	21.88139G	-46.99	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2472MHz

21/10/2024

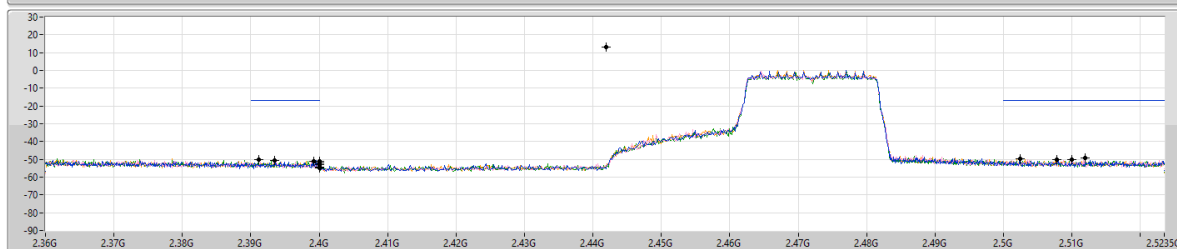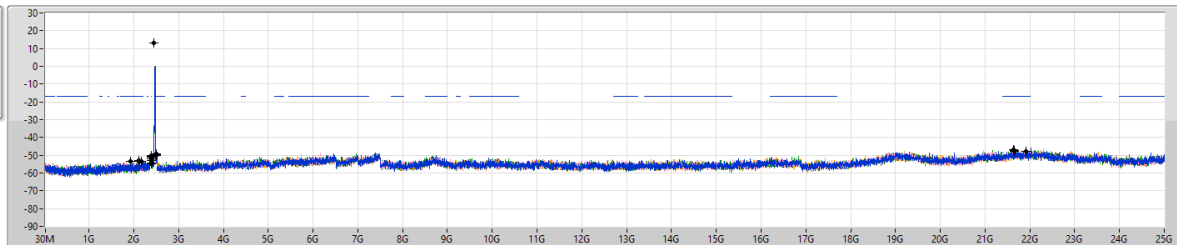RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.07	-16.93	2.1072G	-53.54	2.39352G	-50.38	2.4G	-51.96	2.50238G	-49.71	21.65943G	-47.62	1
2.44192G	13.07	-16.93	2.16312G	-53.64	2.4G	-51.28	2.4G	-54.25	2.5119G	-49.30	21.9067G	-47.65	2
2.44192G	13.07	-16.93	1.93128G	-53.54	2.39112G	-50.30	2.4G	-54.78	2.50998G	-50.23	21.63976G	-46.77	3
2.44192G	13.07	-16.93	2.11885G	-53.02	2.3992G	-51.09	2.4G	-53.10	2.50774G	-50.15	21.66224G	-47.54	4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSNdB

2422MHz

21/10/2024

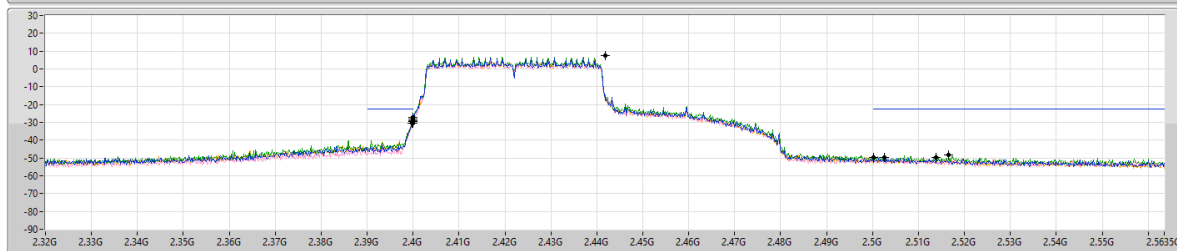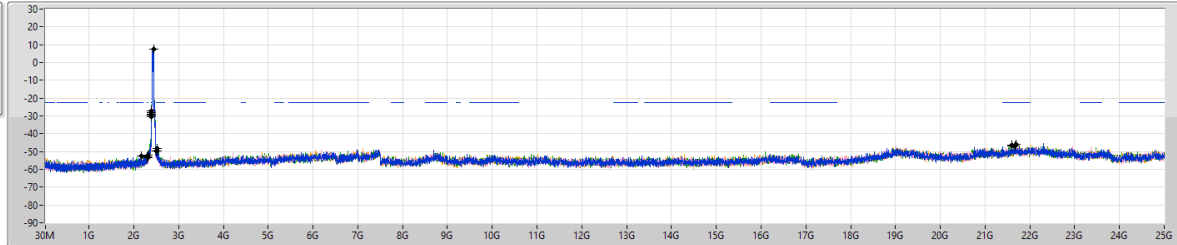RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	7.61	-22.39	2.30626G	-53.06	2.4G	-30.25	2.4G	-28.85	2.50254G	-49.78	21.69342G	-46.08	1
2.44192G	7.61	-22.39	2.3097G	-53.63	2.4G	-30.68	2.4G	-29.44	2.50014G	-49.88	21.59526G	-46.34	2
2.44192G	7.61	-22.39	2.30855G	-52.04	2.39984G	-30.40	2.4G	-27.01	2.51662G	-48.20	21.66538G	-47.01	3
2.44192G	7.61	-22.39	2.16199G	-52.66	2.4G	-29.70	2.4G	-28.28	2.5139G	-49.73	21.59526G	-46.89	4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSNdB

2437MHz

21/10/2024

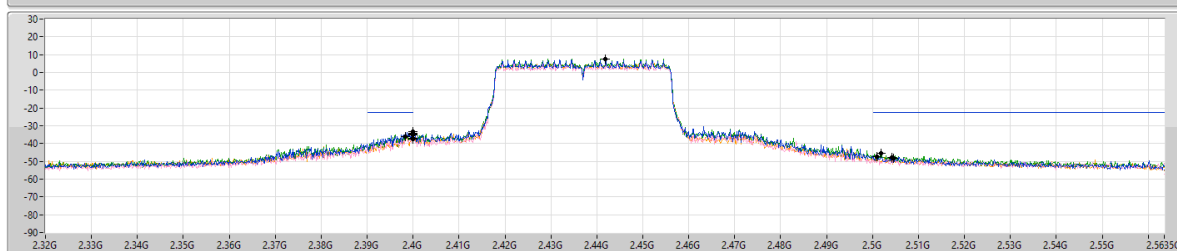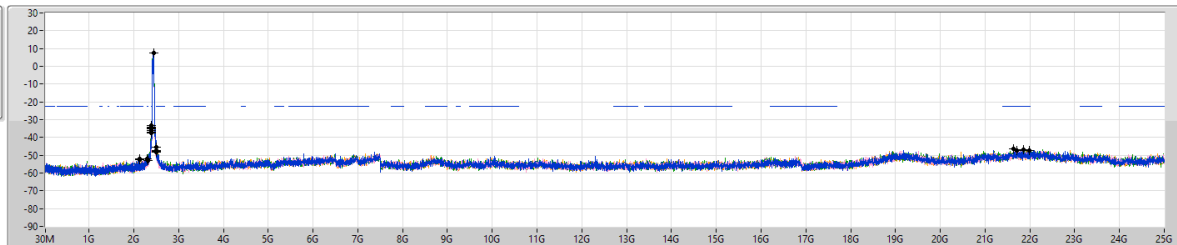RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	7.61	-22.39	2.13337G	-52.40	2.4G	-33.42	2.4G	-34.22	2.5043G	-47.61	21.70744G	-47.18	1
2.44192G	7.61	-22.39	2.3097G	-52.78	2.39824G	-36.24	2.4G	-37.60	2.50462G	-48.06	21.86169G	-46.66	2
2.44192G	7.61	-22.39	2.12879G	-51.97	2.4G	-34.77	2.4G	-35.32	2.5019G	-45.67	21.9879G	-47.50	3
2.44192G	7.61	-22.39	2.30397G	-52.05	2.4G	-35.23	2.4G	-37.13	2.50094G	-47.55	21.62892G	-46.53	4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSNdB

2452MHz

21/10/2024

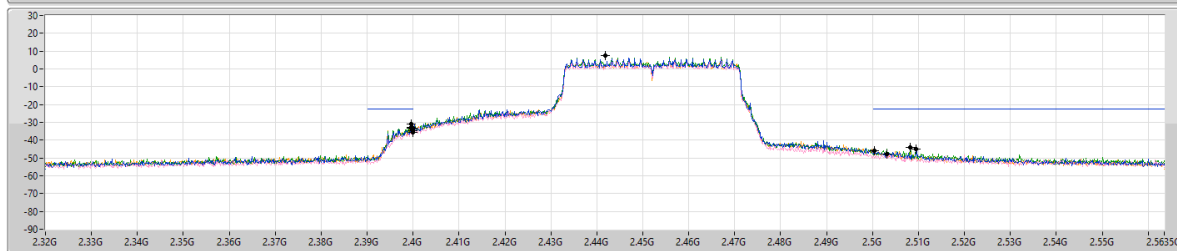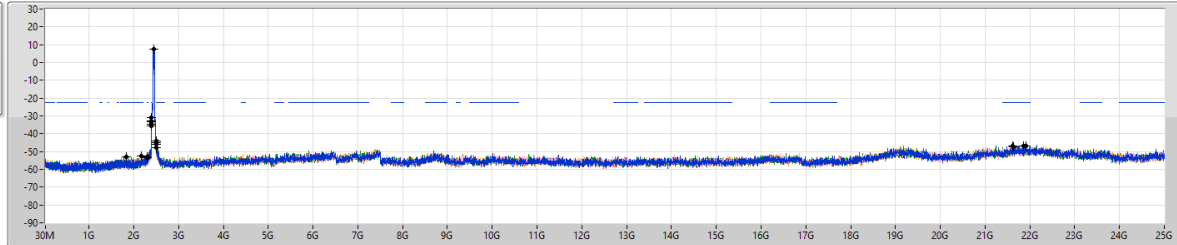RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	7.61	-22.39	2.30397G	-53.55	2.39952G	-31.08	2.4G	-34.73	2.50046G	-46.02	21.62331G	-46.75	1
2.44192G	7.61	-22.39	2.16314G	-52.30	2.39952G	-33.24	2.4G	-35.76	2.50318G	-47.90	21.64294G	-47.12	2
2.44192G	7.61	-22.39	1.8288G	-53.02	2.39952G	-31.08	2.4G	-33.14	2.50814G	-44.13	21.92059G	-46.73	3
2.44192G	7.61	-22.39	2.30054G	-53.13	2.39952G	-32.82	2.4G	-35.47	2.50942G	-44.87	21.85048G	-47.09	4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSNdB

2457MHz

21/10/2024

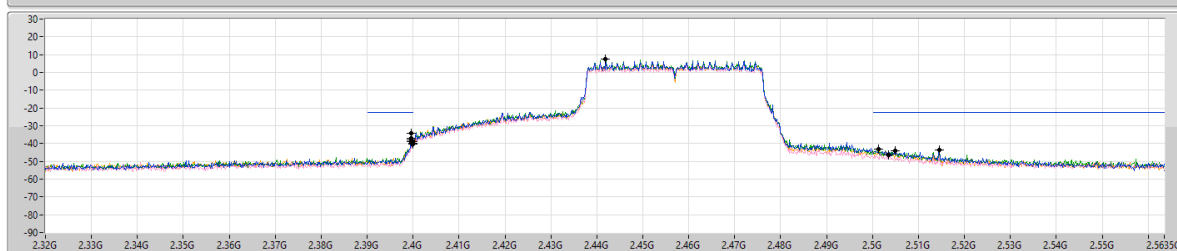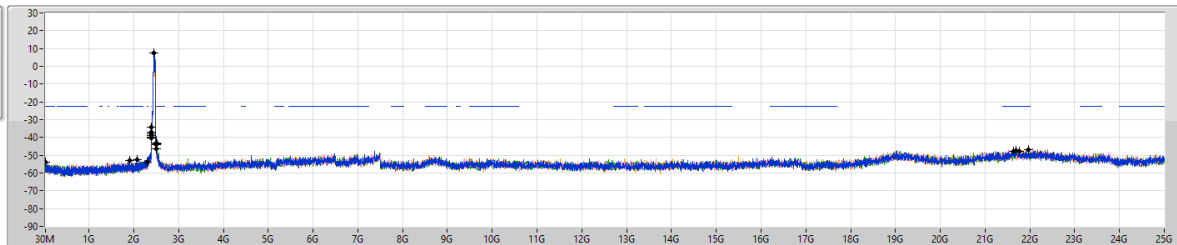RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	7.61	-22.39	2.30397G	-53.98	2.39952G	-37.03	2.4G	-40.44	2.50494G	-43.92	21.63733G	-47.93	1
2.44192G	7.61	-22.39	32.29M	-53.79	2.39952G	-37.91	2.4G	-40.14	2.5035G	-46.57	21.96546G	-46.99	2
2.44192G	7.61	-22.39	1.90322G	-53.19	2.39952G	-38.93	2.4G	-38.82	2.51454G	-43.67	21.76353G	-47.59	3
2.44192G	7.61	-22.39	2.07268G	-52.48	2.39952G	-34.21	2.4G	-40.00	2.50126G	-43.34	21.69342G	-47.29	4




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	37.76M	37.46	40.00	-2.54	Vertical

Mode 1

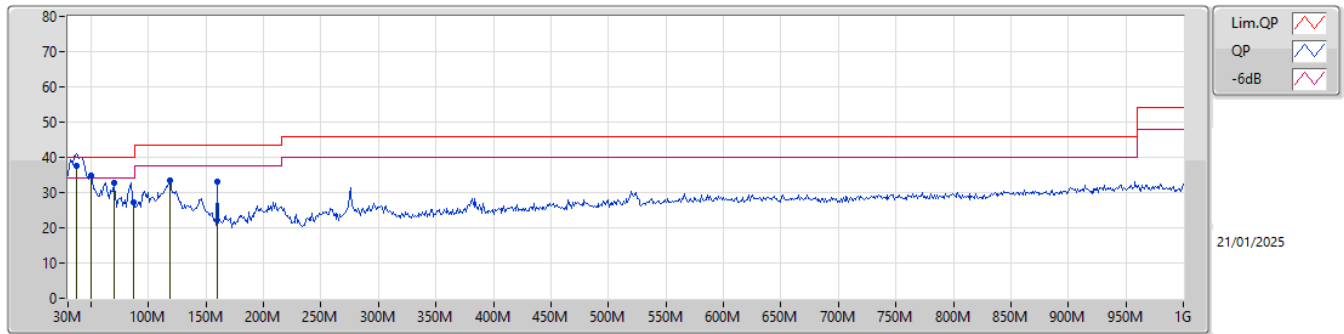

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	37.76M	37.46	40.00	-2.54	-10.04	3	Vertical	145	1.00	"Worst"	47.50	20.27	1.21	31.52		
PK	50.37M	34.78	40.00	-5.22	-16.04	3	Vertical	360	3.00	-	50.82	14.25	1.34	31.63		
PK	69.77M	32.87	40.00	-7.13	-17.57	3	Vertical	25	1.50	-	50.44	12.57	1.56	31.70		
PK	87.23M	27.38	40.00	-12.62	-15.72	3	Vertical	155	1.25	-	43.10	14.43	1.58	31.73		
PK	118.27M	33.31	43.50	-10.19	-11.67	3	Vertical	183	1.00	-	44.98	18.09	1.99	31.75		
PK	159.98M	32.94	43.50	-10.56	-13.41	3	Vertical	360	1.50	-	46.35	16.05	2.30	31.76		

Mode 1

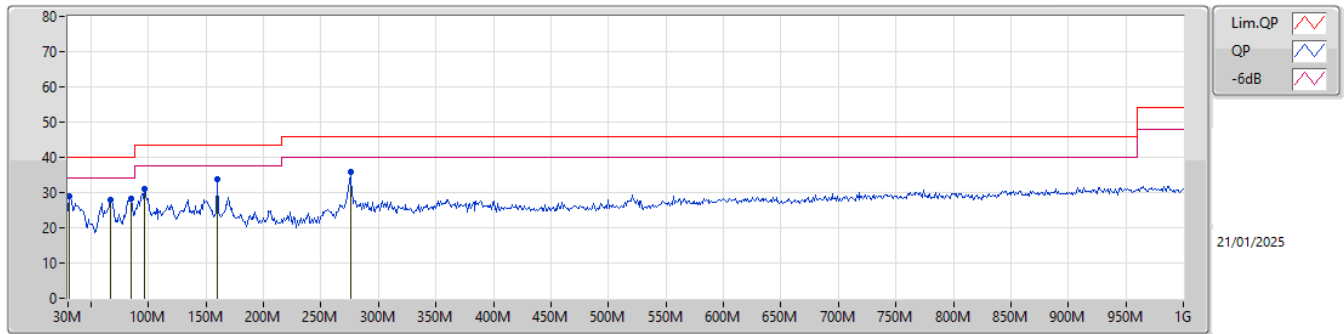

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30.97M	28.82	40.00	-11.18	-6.22	3	Horizontal	18	1.00	-	35.04	24.03	1.15	31.40		
PK	66.86M	27.82	40.00	-12.18	-17.65	3	Horizontal	77	3.00	-	45.47	12.49	1.55	31.69		
PK	85.29M	28.35	40.00	-11.65	-16.16	3	Horizontal	250	2.00	-	44.51	13.98	1.59	31.73		
PK	96.93M	31.16	43.50	-12.34	-13.77	3	Horizontal	84	2.00	-	44.93	16.27	1.71	31.75		
PK	159.98M	33.80	43.50	-9.70	-13.41	3	Horizontal	278	1.50	"Worst"	47.21	16.05	2.30	31.76		
PK	275.41M	35.83	46.00	-10.17	-10.12	3	Horizontal	233	1.00	-	45.95	18.73	2.98	31.83		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	AV	2.3898G	53.99	54.00	-0.01	3	Horizontal	155	2.11	-

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

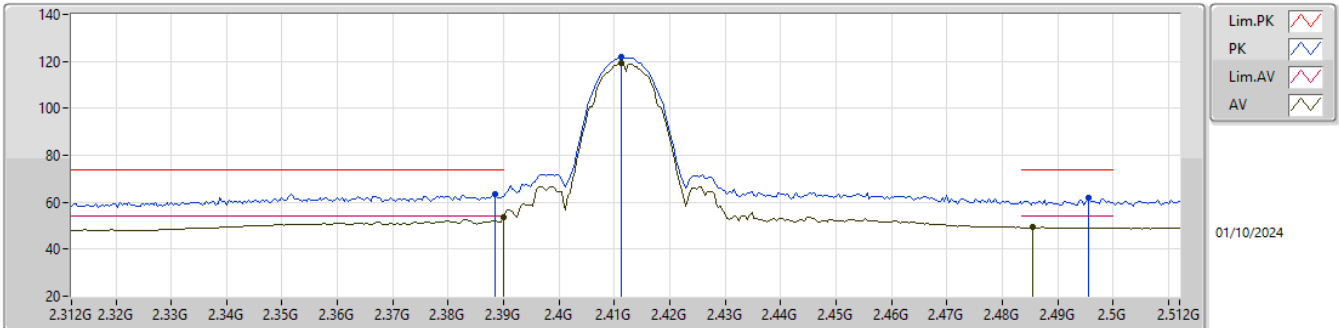


EUT_Y_4TX
Setting 102
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3884G	63.38	74.00	-10.62	32.19	3	Vertical	330	1.08	-	27.70	3.49	-			
AV	2.39G	53.42	54.00	-0.58	22.23	3	Vertical	330	1.08	-	27.70	3.49	-			
PK	2.4112G	121.79	Inf	-Inf	90.67	3	Vertical	330	1.08	-	27.61	3.51	-			
AV	2.4112G	119.28	Inf	-Inf	88.16	3	Vertical	330	1.08	-	27.61	3.51	-			
PK	2.4956G	62.02	74.00	-11.98	30.97	3	Vertical	330	1.08	-	27.50	3.55	-			
AV	2.4856G	49.39	54.00	-4.61	18.35	3	Vertical	330	1.08	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

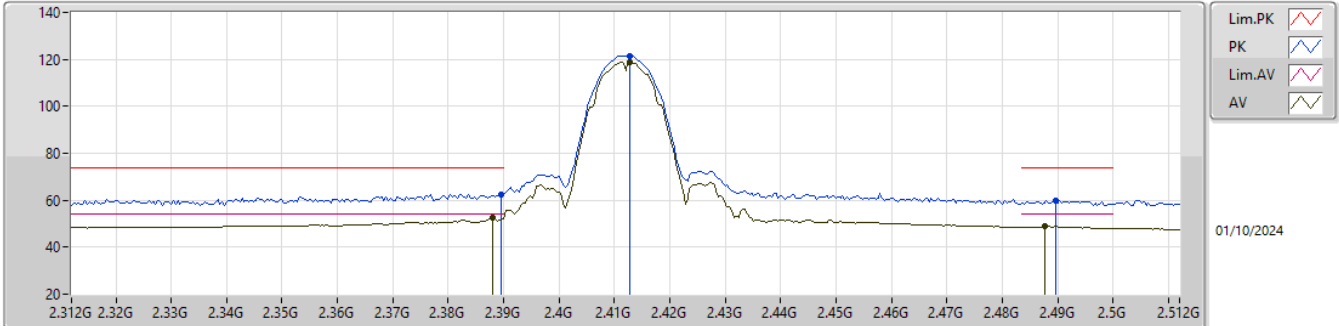


EUT_Y_4TX
Setting 102
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3896G	62.60	74.00	-11.40	31.41	3	Horizontal	17	1.86	-	27.70	3.49	-				
AV	2.388G	52.55	54.00	-1.45	21.36	3	Horizontal	17	1.86	-	27.70	3.49	-				
PK	2.4128G	121.32	Inf	-Inf	90.18	3	Horizontal	17	1.86	-	27.63	3.51	-				
AV	2.4128G	118.94	Inf	-Inf	87.80	3	Horizontal	17	1.86	-	27.63	3.51	-				
PK	2.4896G	59.80	74.00	-14.20	28.76	3	Horizontal	17	1.86	-	27.50	3.54	-				
AV	2.4876G	48.79	54.00	-5.21	17.75	3	Horizontal	17	1.86	-	27.50	3.54	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

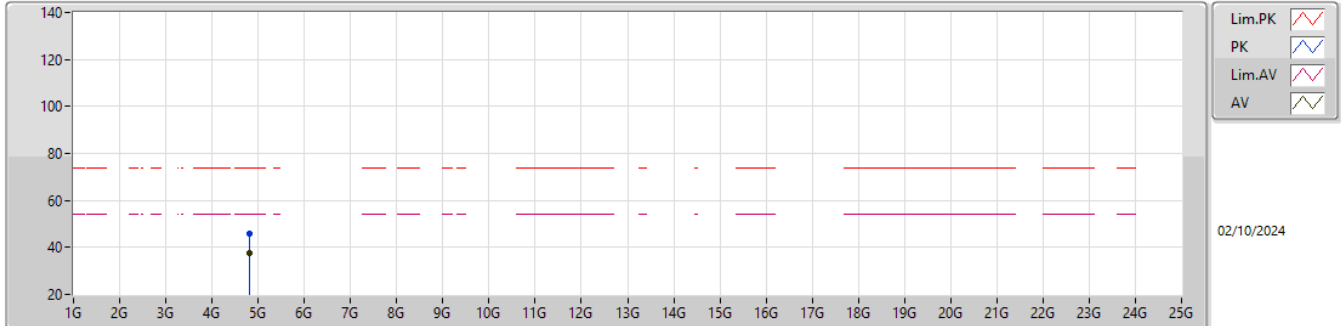


EUT_Y_4TX
Setting 102
04-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82394G	45.87	74.00	-28.13	52.98	3	Vertical	266	1.68	-	31.30	5.53	43.94			
AV	4.82394G	37.68	54.00	-16.32	44.79	3	Vertical	266	1.68	-	31.30	5.53	43.94			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

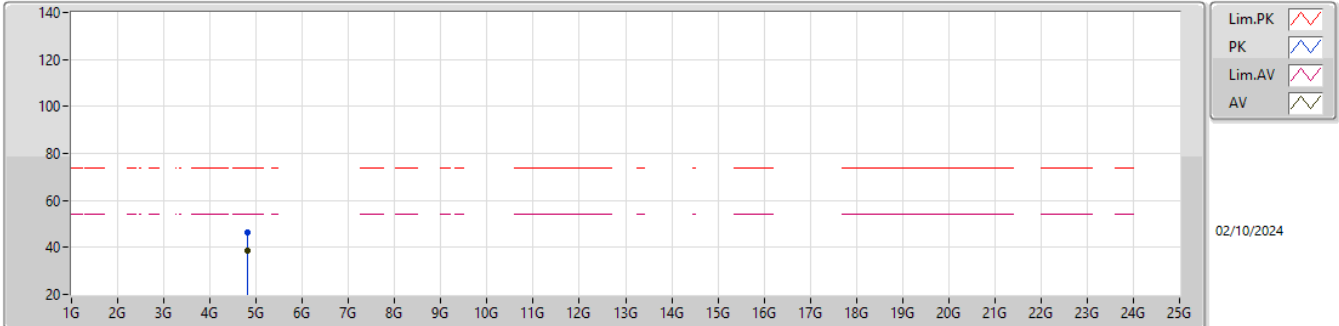


EUT_Y_4TX
Setting 102
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.823986	46.58	74.00	-27.42	53.69	3	Horizontal	88	2.06	-	31.30	5.53	43.94			
AV	4.823966	38.62	54.00	-15.38	45.73	3	Horizontal	88	2.06	-	31.30	5.53	43.94			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2417MHz_TX

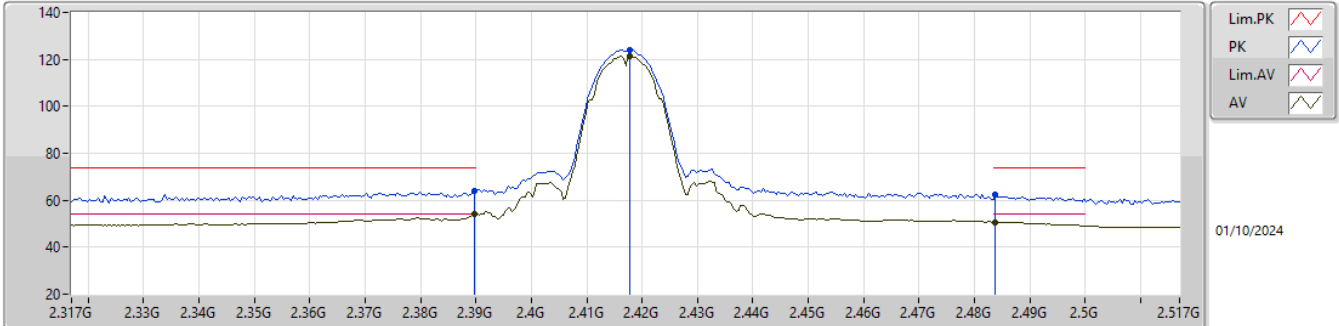


EUT_Y_4TX
Setting 104
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	64.20	74.00	-9.80	33.01	3	Vertical	96	3.00	-	27.70	3.49	-			
AV	2.3898G	53.88	54.00	-0.12	22.69	3	Vertical	96	3.00	-	27.70	3.49	-			
PK	2.4178G	123.97	Inf	-Inf	92.78	3	Vertical	96	3.00	-	27.68	3.51	-			
AV	2.4178G	121.40	Inf	-Inf	90.21	3	Vertical	96	3.00	-	27.68	3.51	-			
PK	2.4838G	62.31	74.00	-11.69	31.27	3	Vertical	96	3.00	-	27.50	3.54	-			
AV	2.4838G	50.65	54.00	-3.35	19.61	3	Vertical	96	3.00	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2417MHz_TX

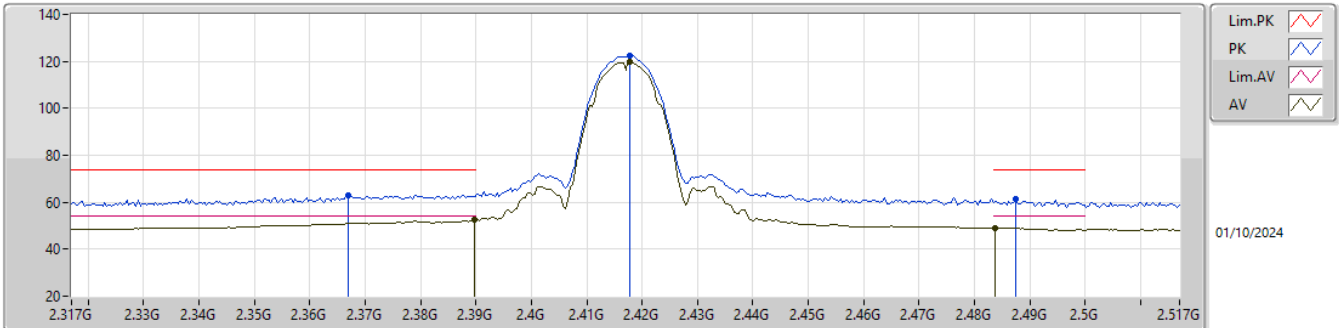


EUT_Y_4TX
Setting 104
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.367G	63.11	74.00	-10.89	31.81	3	Horizontal	16	2.14	-	27.83	3.47	-			
AV	2.3898G	52.42	54.00	-1.58	21.23	3	Horizontal	16	2.14	-	27.70	3.49	-			
PK	2.4178G	122.30	Inf	-Inf	91.11	3	Horizontal	16	2.14	-	27.68	3.51	-			
AV	2.4178G	119.70	Inf	-Inf	88.51	3	Horizontal	16	2.14	-	27.68	3.51	-			
PK	2.4874G	61.24	74.00	-12.76	30.20	3	Horizontal	16	2.14	-	27.50	3.54	-			
AV	2.4838G	48.80	54.00	-5.20	17.76	3	Horizontal	16	2.14	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

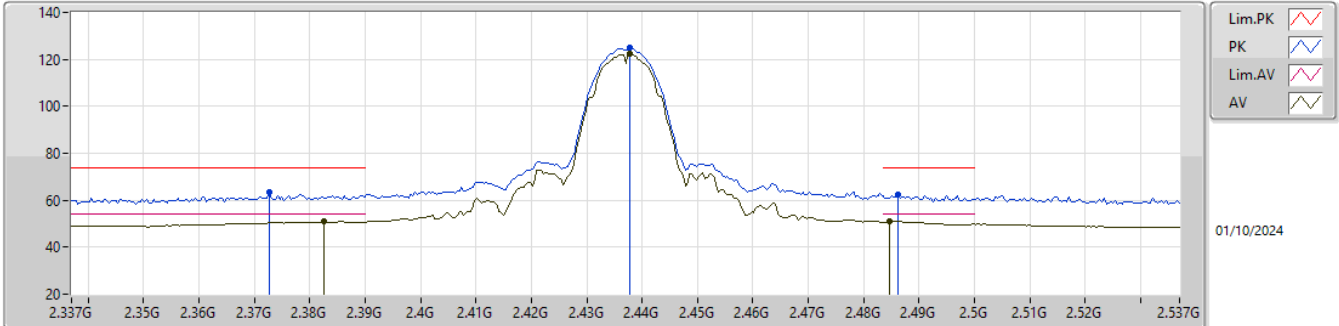


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3726G	63.37	74.00	-10.63	32.13	3	Vertical	92	2.73	-	27.77	3.47	-			
AV	2.3826G	50.83	54.00	-3.17	19.65	3	Vertical	92	2.73	-	27.70	3.48	-			
PK	2.4378G	124.81	Inf	-Inf	93.77	3	Vertical	92	2.73	-	27.52	3.52	-			
AV	2.4378G	122.21	Inf	-Inf	91.17	3	Vertical	92	2.73	-	27.52	3.52	-			
PK	2.4862G	62.40	74.00	-11.60	31.36	3	Vertical	92	2.73	-	27.50	3.54	-			
AV	2.4846G	50.98	54.00	-3.02	19.94	3	Vertical	92	2.73	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

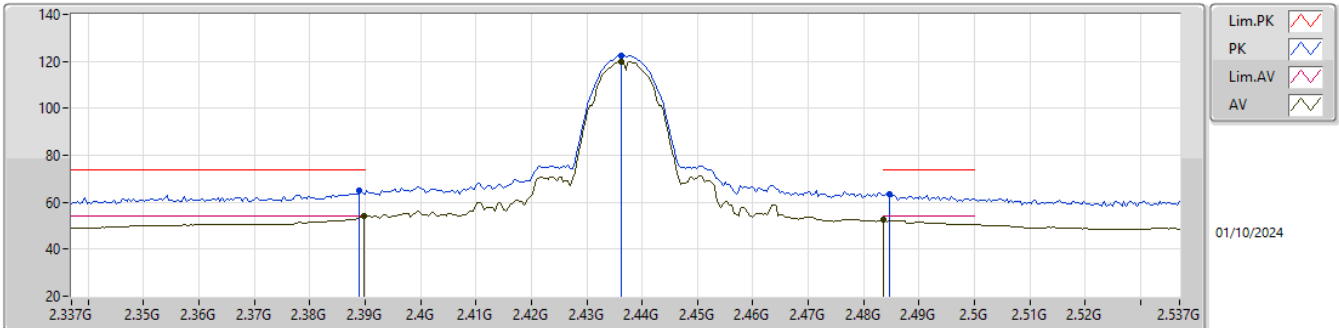


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	64.81	74.00	-9.19	33.62	3	Horizontal	155	2.11	-	27.70	3.49	-			
AV	2.3898G	53.99	54.00	-0.01	22.80	3	Horizontal	155	2.11	-	27.70	3.49	-			
PK	2.4362G	122.42	Inf	-Inf	91.36	3	Horizontal	155	2.11	-	27.54	3.52	-			
AV	2.4362G	120.04	Inf	-Inf	88.98	3	Horizontal	155	2.11	-	27.54	3.52	-			
PK	2.4846G	63.68	74.00	-10.32	32.64	3	Horizontal	155	2.11	-	27.50	3.54	-			
AV	2.4835G	52.45	54.00	-1.55	21.41	3	Horizontal	155	2.11	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

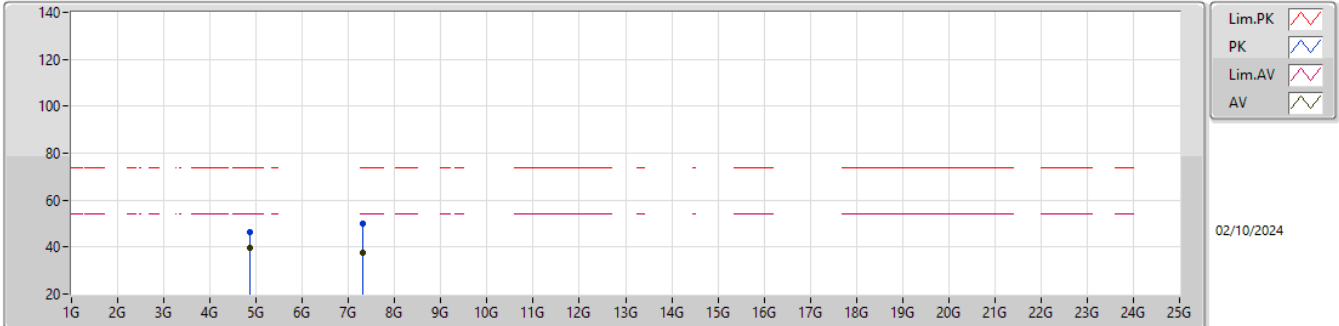


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87386G	46.24	74.00	-27.76	53.34	3	Vertical	67	1.79	-	31.30	5.52	43.92			
AV	4.87402G	39.65	54.00	-14.35	46.75	3	Vertical	67	1.79	-	31.30	5.52	43.92			
PK	7.30948G	50.00	74.00	-24.00	49.28	3	Vertical	80	1.80	-	36.26	7.22	42.76			
AV	7.30996G	37.63	54.00	-16.37	36.91	3	Vertical	80	1.80	-	36.26	7.22	42.76			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

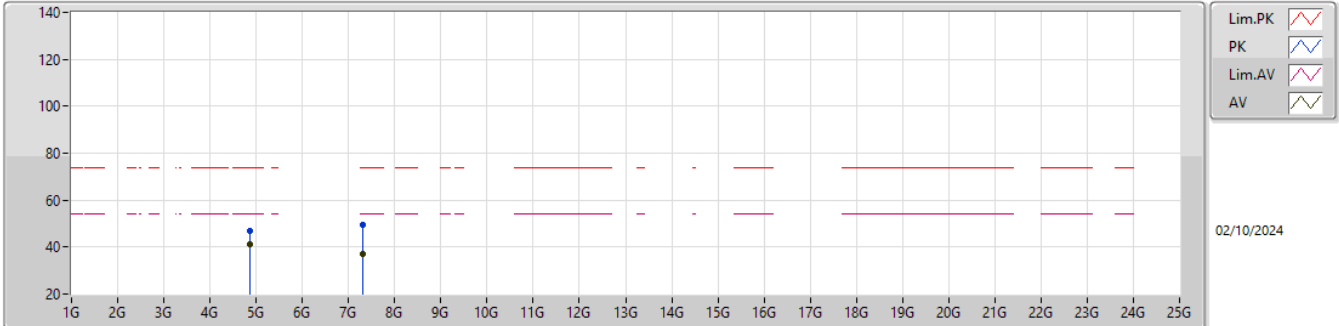


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87392G	46.88	74.00	-27.12	53.98	3	Horizontal	155	2.78	-	31.30	5.52	43.92			
AV	4.874G	41.27	54.00	-12.73	48.37	3	Horizontal	155	2.78	-	31.30	5.52	43.92			
PK	7.31198G	49.39	74.00	-24.61	48.69	3	Horizontal	55	1.80	-	36.25	7.22	42.77			
AV	7.30994G	37.26	54.00	-16.74	36.54	3	Horizontal	55	1.80	-	36.26	7.22	42.76			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX


2457MHz_TX

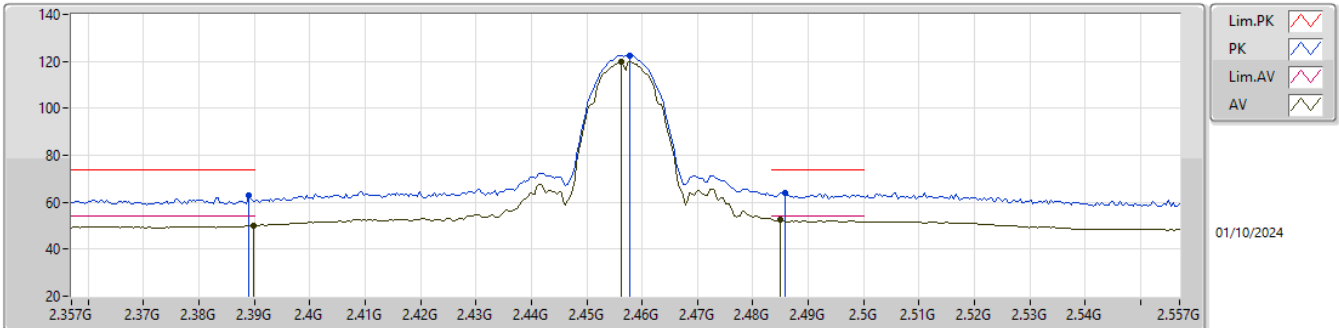
EUT Y_4TX
Setting 104
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	62.72	74.00	-11.28	31.53	3	Vertical	326	1.07	-	27.70	3.49	-			
AV	2.3898G	50.01	54.00	-3.99	18.82	3	Vertical	326	1.07	-	27.70	3.49	-			
PK	2.4578G	122.63	Inf	-Inf	91.68	3	Vertical	326	1.07	-	27.42	3.53	-			
AV	2.4562G	119.83	Inf	-Inf	88.86	3	Vertical	326	1.07	-	27.44	3.53	-			
PK	2.4858G	63.97	74.00	-10.03	32.93	3	Vertical	326	1.07	-	27.50	3.54	-			
AV	2.485G	52.72	54.00	-1.28	21.68	3	Vertical	326	1.07	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2457MHz_TX

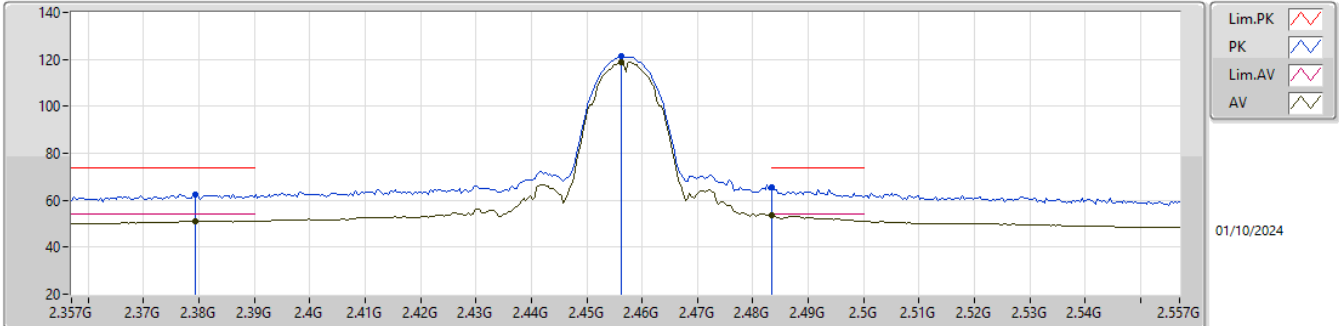


EUT_Y_4TX
Setting 104
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3794G	62.37	74.00	-11.63	31.18	3	Horizontal	143	1.88	-	27.71	3.48	-			
AV	2.3794G	51.17	54.00	-2.83	19.98	3	Horizontal	143	1.88	-	27.71	3.48	-			
PK	2.4562G	121.22	Inf	-Inf	90.25	3	Horizontal	143	1.88	-	27.44	3.53	-			
AV	2.4562G	118.68	Inf	-Inf	87.71	3	Horizontal	143	1.88	-	27.44	3.53	-			
PK	2.4835G	65.51	74.00	-8.49	34.47	3	Horizontal	143	1.88	-	27.50	3.54	-			
AV	2.4835G	53.71	54.00	-0.29	22.67	3	Horizontal	143	1.88	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

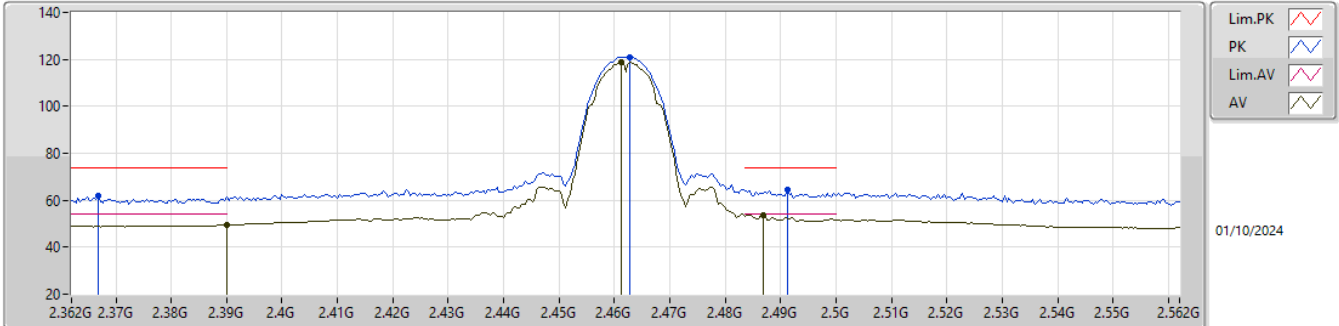


EUT Y_4TX
Setting 100
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3668G	61.85	74.00	-12.15	30.55	3	Vertical	326	1.03	-	27.83	3.47	-			
AV	2.39G	49.48	54.00	-4.52	18.29	3	Vertical	326	1.03	-	27.70	3.49	-			
PK	2.4628G	121.02	Inf	-Inf	90.09	3	Vertical	326	1.03	-	27.40	3.53	-			
AV	2.4612G	118.60	Inf	-Inf	87.67	3	Vertical	326	1.03	-	27.40	3.53	-			
PK	2.4912G	64.51	74.00	-9.49	33.46	3	Vertical	326	1.03	-	27.50	3.55	-			
AV	2.4868G	53.71	54.00	-0.29	22.67	3	Vertical	326	1.03	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

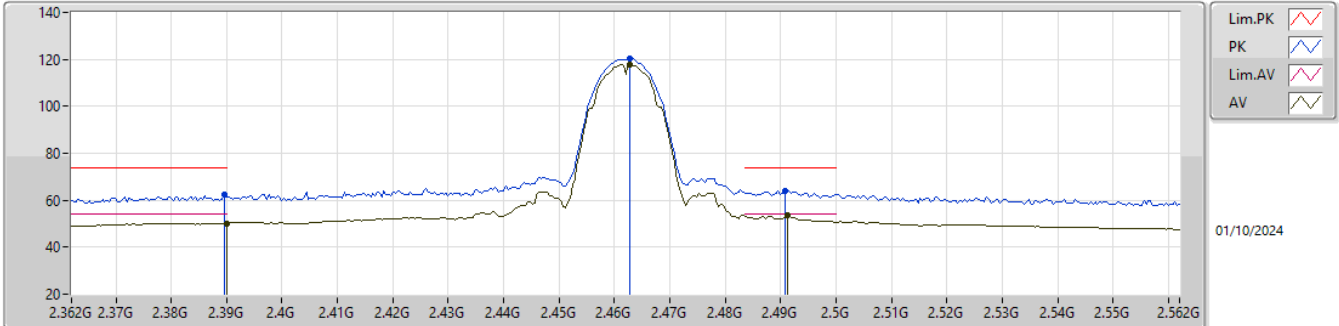


EUT_Y_4TX
Setting 100
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	62.19	74.00	-11.81	31.00	3	Horizontal	139	1.76	-	27.70	3.49	-			
AV	2.39G	50.19	54.00	-3.81	19.00	3	Horizontal	139	1.76	-	27.70	3.49	-			
PK	2.4628G	120.33	Inf	-Inf	89.40	3	Horizontal	139	1.76	-	27.40	3.53	-			
AV	2.4628G	117.73	Inf	-Inf	86.80	3	Horizontal	139	1.76	-	27.40	3.53	-			
PK	2.4908G	64.17	74.00	-9.83	33.12	3	Horizontal	139	1.76	-	27.50	3.55	-			
AV	2.4912G	53.70	54.00	-0.30	22.65	3	Horizontal	139	1.76	-	27.50	3.55	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

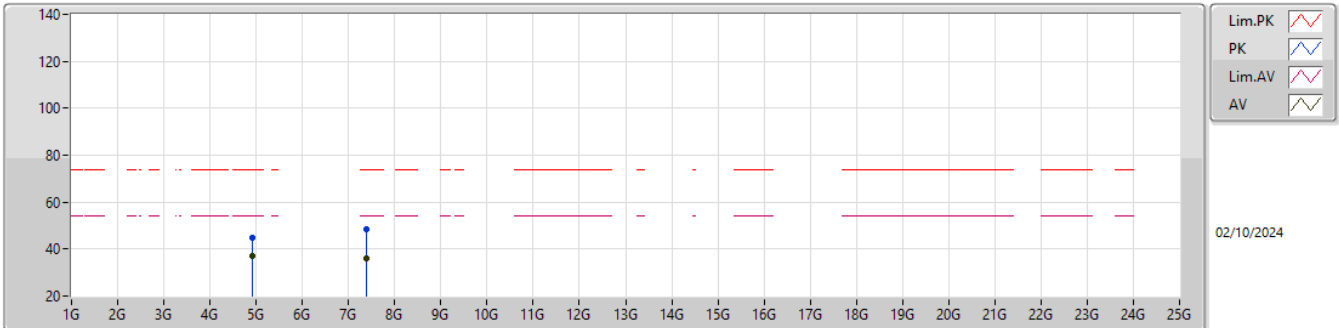


EUT_Y_4TX
Setting 100
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92404G	44.78	74.00	-29.22	51.78	3	Vertical	60	1.80	-	31.40	5.51	43.91			
AV	4.92396G	36.90	54.00	-17.10	43.90	3	Vertical	60	1.80	-	31.40	5.51	43.91			
PK	7.37788G	48.32	74.00	-25.68	47.85	3	Vertical	293	1.80	-	36.10	7.23	42.86			
AV	7.38304G	36.27	54.00	-17.73	35.81	3	Vertical	293	1.80	-	36.10	7.23	42.87			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

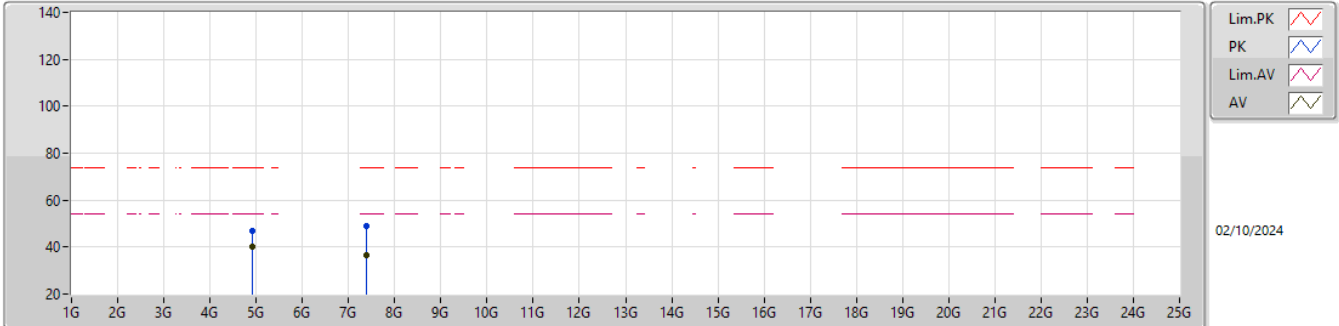


EUT_Y_4TX
Setting 100
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92406G	46.80	74.00	-27.20	53.80	3	Horizontal	88	1.80	-	31.40	5.51	43.91			
AV	4.92402G	40.08	54.00	-13.92	47.08	3	Horizontal	88	1.80	-	31.40	5.51	43.91			
PK	7.38738G	48.93	74.00	-25.07	48.48	3	Horizontal	193	1.78	-	36.10	7.23	42.88			
AV	7.38314G	36.41	54.00	-17.59	35.95	3	Horizontal	193	1.78	-	36.10	7.23	42.87			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2467MHz_TX

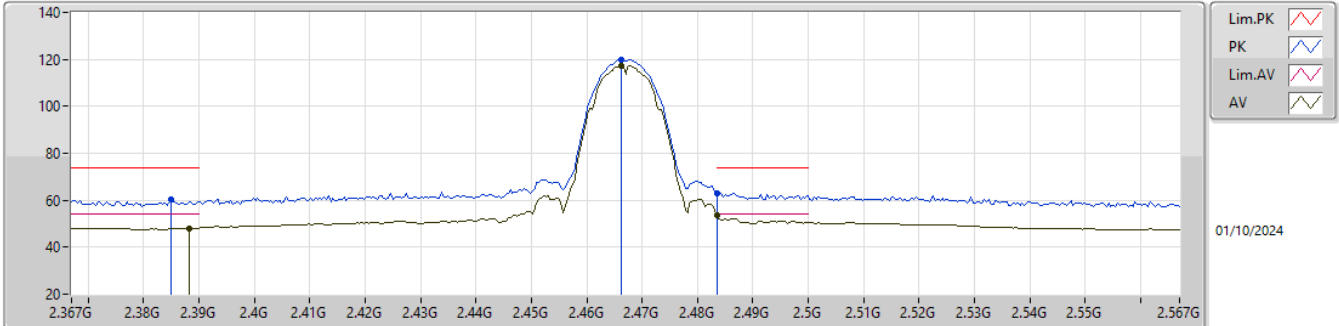


EUT_Y_4TX
Setting 94
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.385G	60.17	74.00	-13.83	28.99	3	Vertical	330	1.00	-	27.70	3.48	-			
AV	2.3882G	48.07	54.00	-5.93	16.88	3	Vertical	330	1.00	-	27.70	3.49	-			
PK	2.4662G	119.86	Inf	-Inf	88.93	3	Vertical	330	1.00	-	27.40	3.53	-			
AV	2.4662G	117.40	Inf	-Inf	86.47	3	Vertical	330	1.00	-	27.40	3.53	-			
PK	2.4835G	62.94	74.00	-11.06	31.90	3	Vertical	330	1.00	-	27.50	3.54	-			
AV	2.4835G	53.83	54.00	-0.17	22.79	3	Vertical	330	1.00	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2467MHz_TX

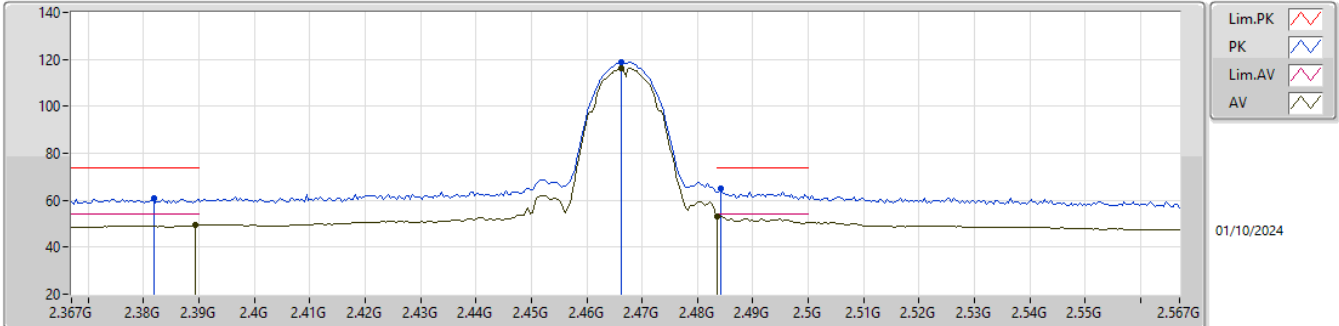


EUT Y_4TX
Setting 94
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3818G	60.80	74.00	-13.20	29.62	3	Horizontal	143	1.77	-	27.70	3.48	-			
AV	2.3894G	49.29	54.00	-4.71	18.10	3	Horizontal	143	1.77	-	27.70	3.49	-			
PK	2.4662G	118.82	Inf	-Inf	87.89	3	Horizontal	143	1.77	-	27.40	3.53	-			
AV	2.4662G	116.29	Inf	-Inf	85.36	3	Horizontal	143	1.77	-	27.40	3.53	-			
PK	2.4842G	64.99	74.00	-9.01	33.95	3	Horizontal	143	1.77	-	27.50	3.54	-			
AV	2.4835G	53.23	54.00	-0.77	22.19	3	Horizontal	143	1.77	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2467MHz_TX

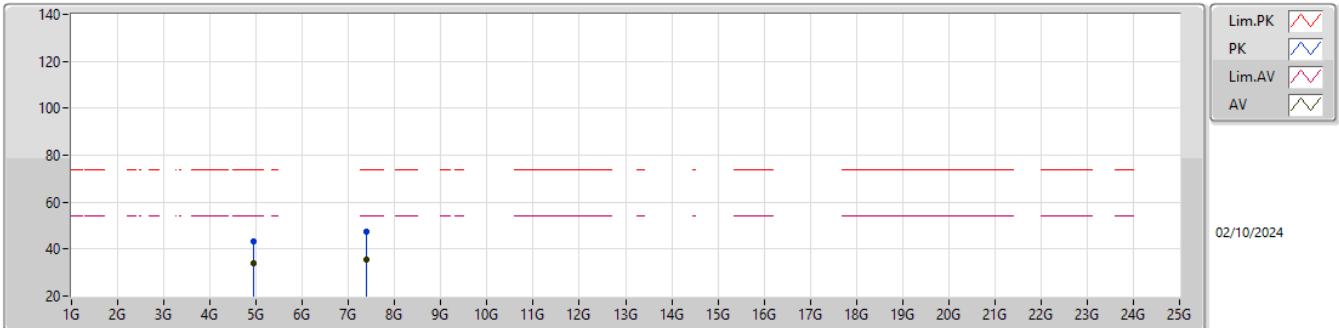


EUT_Y_4TX
Setting 94
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.934G	43.06	74.00	-30.94	50.02	3	Vertical	150	3.00	-	31.44	5.51	43.91			
AV	4.93396G	33.84	54.00	-20.16	40.80	3	Vertical	150	3.00	-	31.44	5.51	43.91			
PK	7.39772G	47.66	74.00	-26.34	47.22	3	Vertical	284	1.80	-	36.10	7.23	42.89			
AV	7.39424G	35.75	54.00	-18.25	35.31	3	Vertical	284	1.80	-	36.10	7.23	42.89			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2467MHz_TX

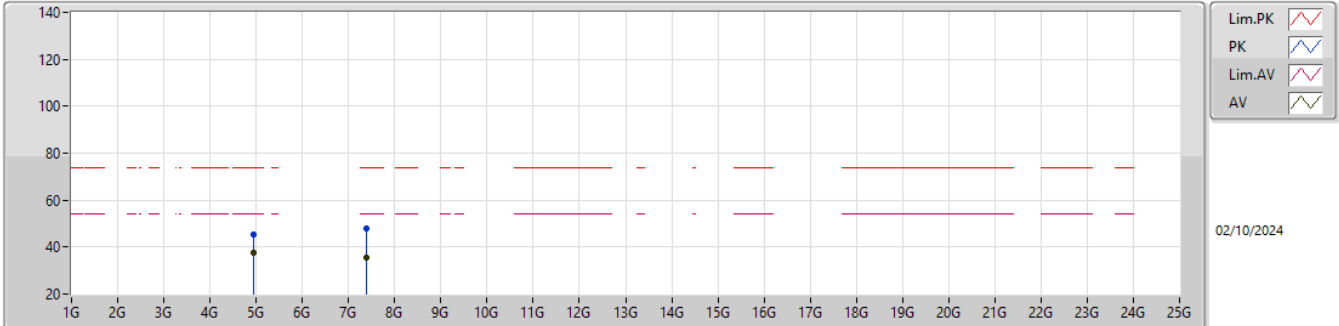


EUT_Y_4TX
Setting 94
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.934G	45.15	74.00	-28.85	52.11	3	Horizontal	87	1.96	-	31.44	5.51	43.91			
AV	4.93396G	37.47	54.00	-16.53	44.43	3	Horizontal	87	1.96	-	31.44	5.51	43.91			
PK	7.39104G	48.15	74.00	-25.85	47.70	3	Horizontal	21	1.80	-	36.10	7.23	42.88			
AV	7.39128G	35.73	54.00	-18.27	35.28	3	Horizontal	21	1.80	-	36.10	7.23	42.88			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2472MHz_TX

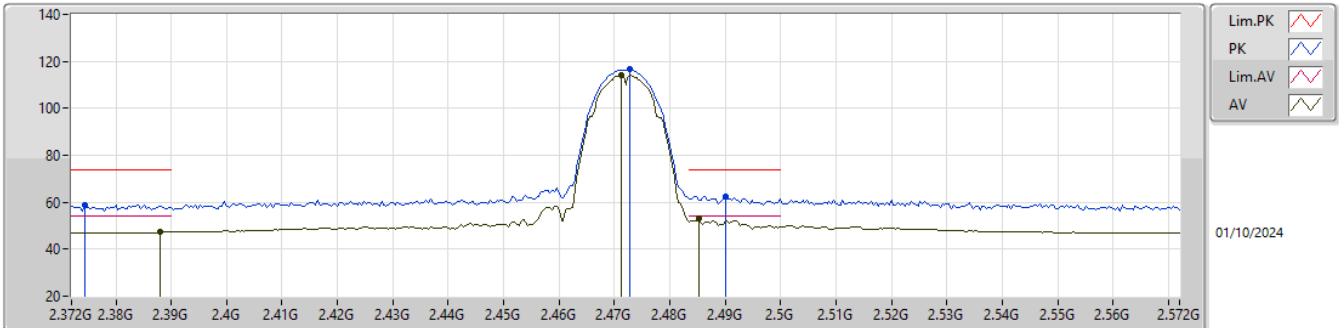


EUT_Y_4TX
Setting 82
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3744G	58.88	74.00	-15.12	27.65	3	Vertical	327	1.01	-	27.76	3.47	-			
AV	2.388G	47.16	54.00	-6.84	15.97	3	Vertical	327	1.01	-	27.70	3.49	-			
PK	2.4728G	116.52	Inf	-Inf	85.55	3	Vertical	327	1.01	-	27.43	3.54	-			
AV	2.4712G	114.09	Inf	-Inf	83.14	3	Vertical	327	1.01	-	27.41	3.54	-			
PK	2.49G	62.38	74.00	-11.62	31.34	3	Vertical	327	1.01	-	27.50	3.54	-			
AV	2.4852G	52.98	54.00	-1.02	21.94	3	Vertical	327	1.01	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2472MHz_TX

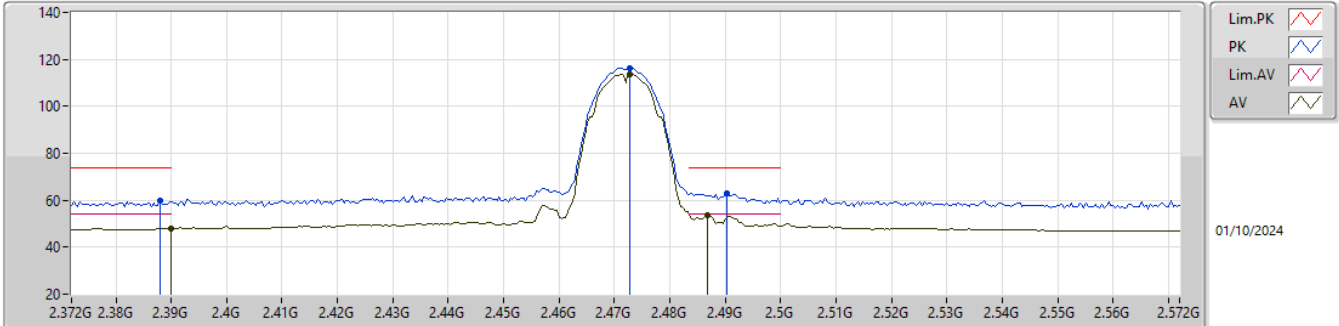


EUT Y_4TX
Setting 82
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.388G	59.97	74.00	-14.03	28.78	3	Horizontal	140	1.80	-	27.70	3.49	-			
AV	2.39G	47.86	54.00	-6.14	16.67	3	Horizontal	140	1.80	-	27.70	3.49	-			
PK	2.4728G	116.30	Inf	-Inf	85.33	3	Horizontal	140	1.80	-	27.43	3.54	-			
AV	2.4728G	113.80	Inf	-Inf	82.83	3	Horizontal	140	1.80	-	27.43	3.54	-			
PK	2.4904G	63.13	74.00	-10.87	32.08	3	Horizontal	140	1.80	-	27.50	3.55	-			
AV	2.4868G	53.71	54.00	-0.29	22.67	3	Horizontal	140	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2472MHz_TX

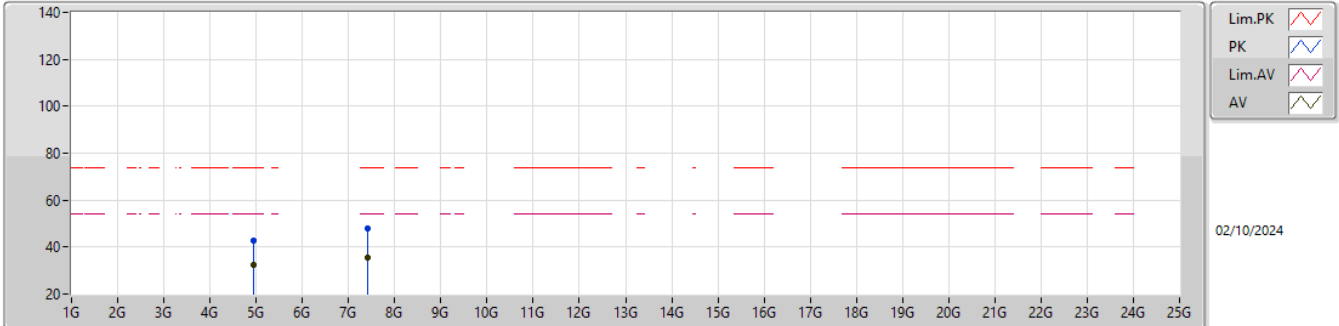


EUT_Y_4TX
Setting 82
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.94312G	42.80	74.00	-31.20	49.73	3	Vertical	148	2.80	-	31.47	5.50	43.90				
AV	4.94404G	32.16	54.00	-21.84	39.08	3	Vertical	148	2.80	-	31.48	5.50	43.90				
PK	7.41944G	47.99	74.00	-26.01	47.44	3	Vertical	280	2.27	-	36.22	7.25	42.92				
AV	7.42472G	35.59	54.00	-18.41	35.02	3	Vertical	280	2.27	-	36.25	7.25	42.93				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2472MHz_TX

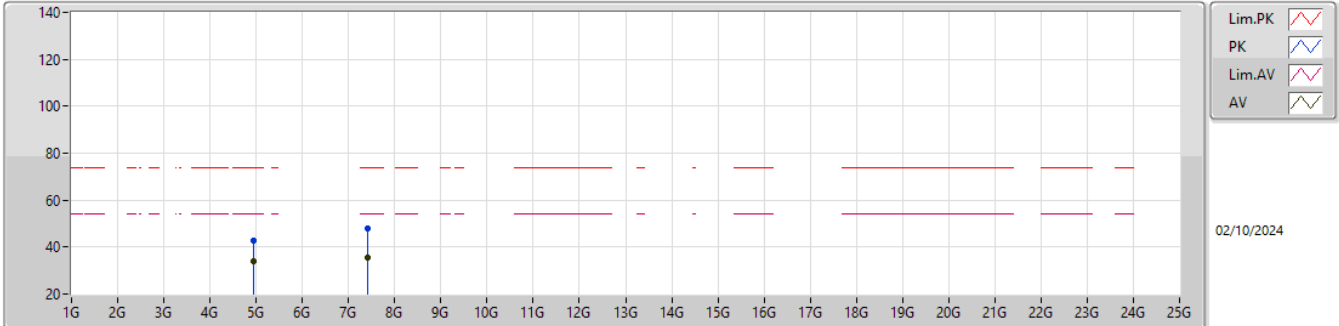


EUT_Y_4TX
Setting 82
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.94388G	42.99	74.00	-31.01	49.91	3	Horizontal	88	1.82	-	31.48	5.50	43.90			
AV	4.944G	34.09	54.00	-19.91	41.01	3	Horizontal	88	1.82	-	31.48	5.50	43.90			
PK	7.41556G	47.80	74.00	-26.20	47.29	3	Horizontal	194	1.00	-	36.19	7.24	42.92			
AV	7.41772G	35.68	54.00	-18.32	35.14	3	Horizontal	194	1.00	-	36.21	7.25	42.92			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

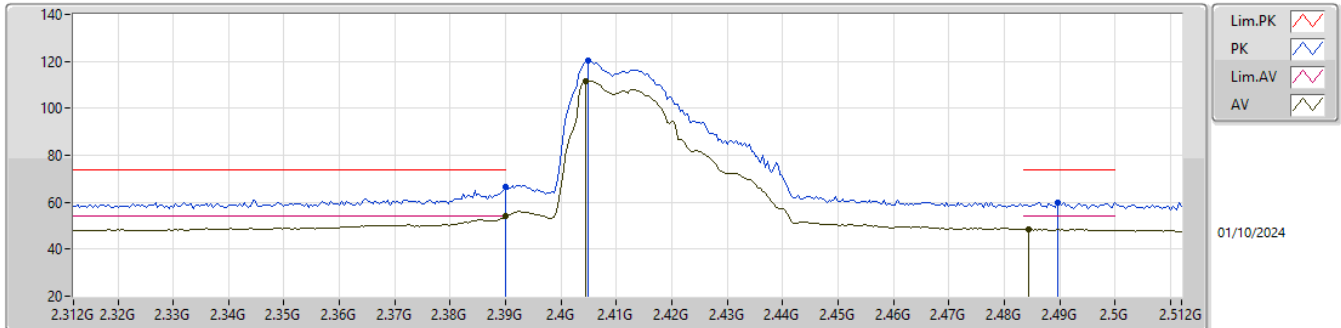


EUT_Y_4TX
Setting 81
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	66.73	74.00	-7.27	35.54	3	Vertical	53	2.85	-	27.70	3.49	-			
AV	2.39G	53.99	54.00	-0.01	22.80	3	Vertical	53	2.85	-	27.70	3.49	-			
PK	2.4048G	120.32	Inf	-Inf	89.17	3	Vertical	53	2.85	-	27.65	3.50	-			
AV	2.4044G	111.76	Inf	-Inf	80.60	3	Vertical	53	2.85	-	27.66	3.50	-			
PK	2.4896G	60.03	74.00	-13.97	28.99	3	Vertical	53	2.85	-	27.50	3.54	-			
AV	2.4844G	48.59	54.00	-5.41	17.55	3	Vertical	53	2.85	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

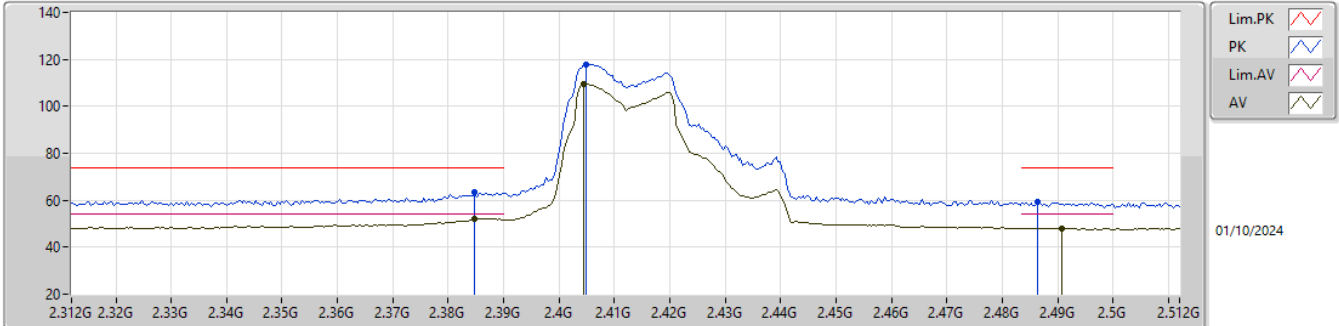


EUT_Y_4TX
Setting 81
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3848G	63.29	74.00	-10.71	32.11	3	Horizontal	335	1.67	-	27.70	3.48	-			
AV	2.3848G	52.14	54.00	-1.86	20.96	3	Horizontal	335	1.67	-	27.70	3.48	-			
PK	2.4048G	117.97	Inf	-Inf	86.82	3	Horizontal	335	1.67	-	27.65	3.50	-			
AV	2.4044G	109.36	Inf	-Inf	78.20	3	Horizontal	335	1.67	-	27.66	3.50	-			
PK	2.4864G	59.46	74.00	-14.54	28.42	3	Horizontal	335	1.67	-	27.50	3.54	-			
AV	2.4908G	48.14	54.00	-5.86	17.09	3	Horizontal	335	1.67	-	27.50	3.55	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

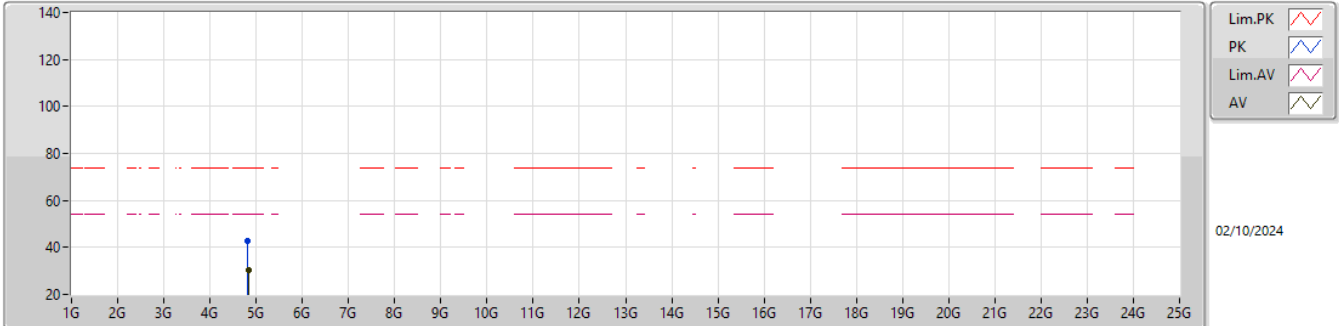


EUT_Y_4TX
Setting 81
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82032G	42.52	74.00	-31.48	49.63	3	Vertical	18	2.97	-	31.30	5.53	43.94			
AV	4.82764G	30.51	54.00	-23.49	37.61	3	Vertical	18	2.97	-	31.30	5.53	43.93			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

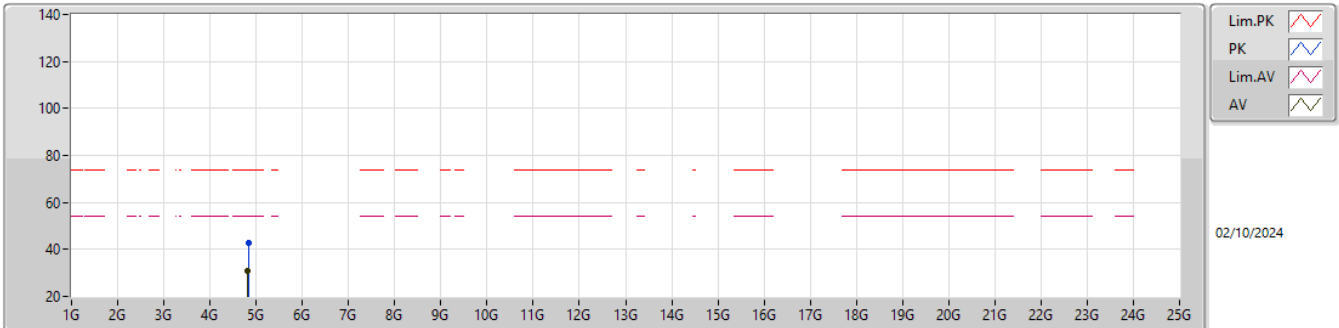


EUT_Y_4TX
Setting 81
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.83348G	42.84	74.00	-31.16	49.94	3	Horizontal	86	3.00	-	31.30	5.53	43.93			
AV	4.81548G	31.04	54.00	-22.96	38.14	3	Horizontal	86	3.00	-	31.30	5.54	43.94			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2417MHz_TX

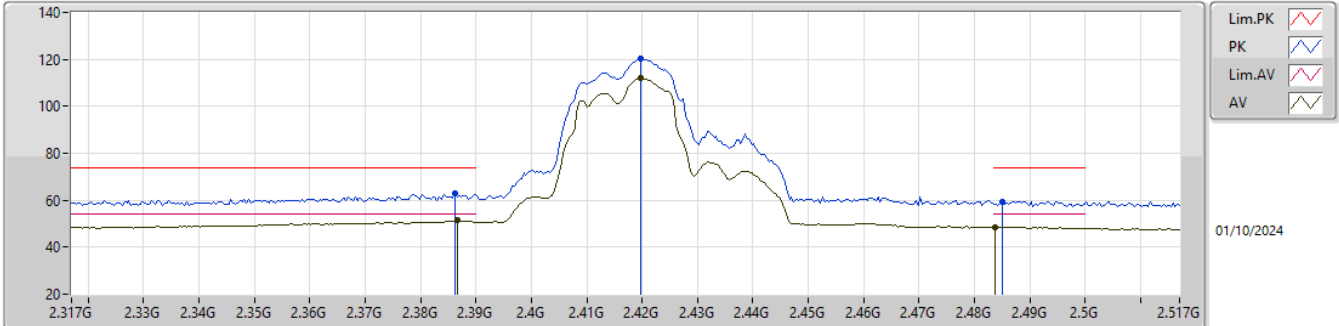


EUT Y_4TX
Setting 88
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3862G	63.00	74.00	-11.00	31.81	3	Vertical	106	1.37	-	27.70	3.49	-			
AV	2.3866G	51.30	54.00	-2.70	20.11	3	Vertical	106	1.37	-	27.70	3.49	-			
PK	2.4198G	120.19	Inf	-Inf	88.98	3	Vertical	106	1.37	-	27.70	3.51	-			
AV	2.4198G	111.84	Inf	-Inf	80.63	3	Vertical	106	1.37	-	27.70	3.51	-			
PK	2.485G	59.52	74.00	-14.48	28.48	3	Vertical	106	1.37	-	27.50	3.54	-			
AV	2.4838G	48.59	54.00	-5.41	17.55	3	Vertical	106	1.37	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2417MHz_TX

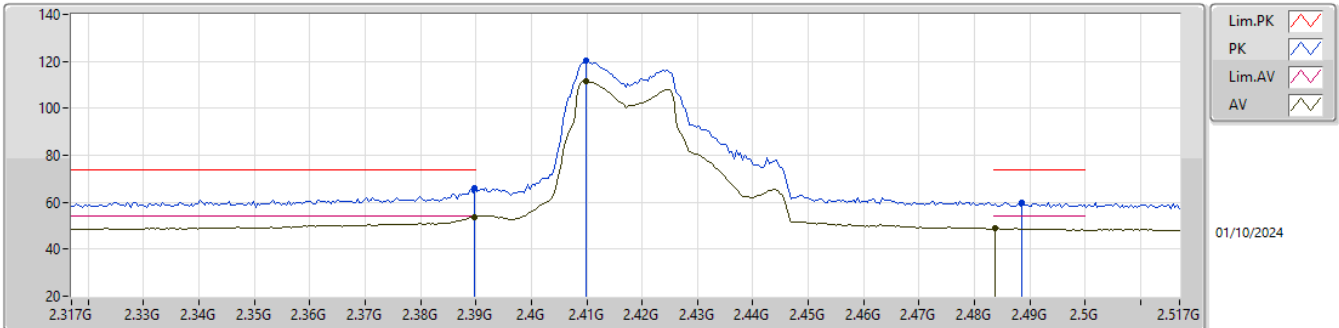


EUT_Y_4TX
Setting 88
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	66.07	74.00	-7.93	34.88	3	Horizontal	335	1.68	-	27.70	3.49	-			
AV	2.3898G	53.76	54.00	-0.24	22.57	3	Horizontal	335	1.68	-	27.70	3.49	-			
PK	2.4098G	120.09	Inf	-Inf	88.99	3	Horizontal	335	1.68	-	27.60	3.50	-			
AV	2.4098G	111.37	Inf	-Inf	80.27	3	Horizontal	335	1.68	-	27.60	3.50	-			
PK	2.4886G	59.74	74.00	-14.26	28.70	3	Horizontal	335	1.68	-	27.50	3.54	-			
AV	2.4838G	48.80	54.00	-5.20	17.76	3	Horizontal	335	1.68	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

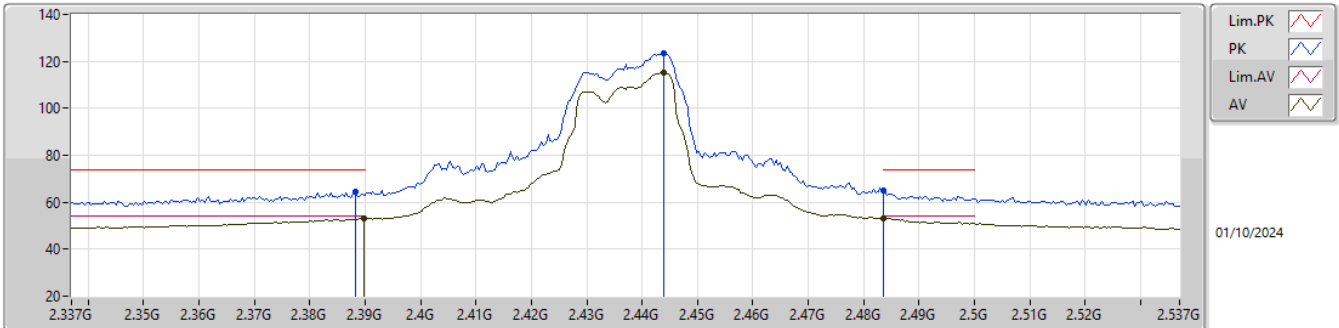


EUT Y_4TX
Setting 103
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3882G	64.26	74.00	-9.74	33.07	3	Vertical	11	1.16	-	27.70	3.49	-			
AV	2.3898G	53.06	54.00	-0.94	21.87	3	Vertical	11	1.16	-	27.70	3.49	-			
PK	2.4438G	123.37	Inf	-Inf	92.35	3	Vertical	11	1.16	-	27.50	3.52	-			
AV	2.4438G	115.06	Inf	-Inf	84.04	3	Vertical	11	1.16	-	27.50	3.52	-			
PK	2.4835G	65.05	74.00	-8.95	34.01	3	Vertical	11	1.16	-	27.50	3.54	-			
AV	2.4835G	53.35	54.00	-0.65	22.31	3	Vertical	11	1.16	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

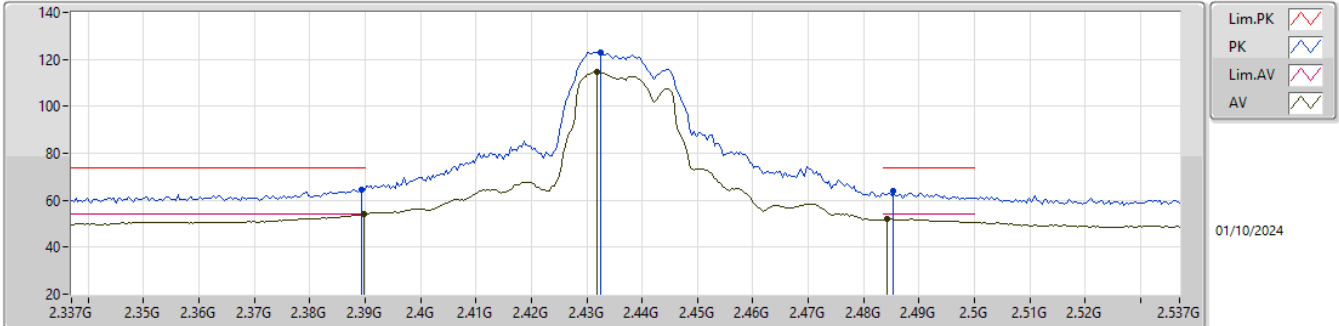


EUT_Y_4TX
Setting 103
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	64.53	74.00	-9.47	33.34	3	Horizontal	142	2.08	-	27.70	3.49	-			
AV	2.3898G	53.99	54.00	-0.01	22.80	3	Horizontal	142	2.08	-	27.70	3.49	-			
PK	2.4326G	123.12	Inf	-Inf	92.03	3	Horizontal	142	2.08	-	27.57	3.52	-			
AV	2.4318G	114.51	Inf	-Inf	83.41	3	Horizontal	142	2.08	-	27.58	3.52	-			
PK	2.4854G	63.75	74.00	-10.25	32.71	3	Horizontal	142	2.08	-	27.50	3.54	-			
AV	2.4842G	52.04	54.00	-1.96	21.00	3	Horizontal	142	2.08	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

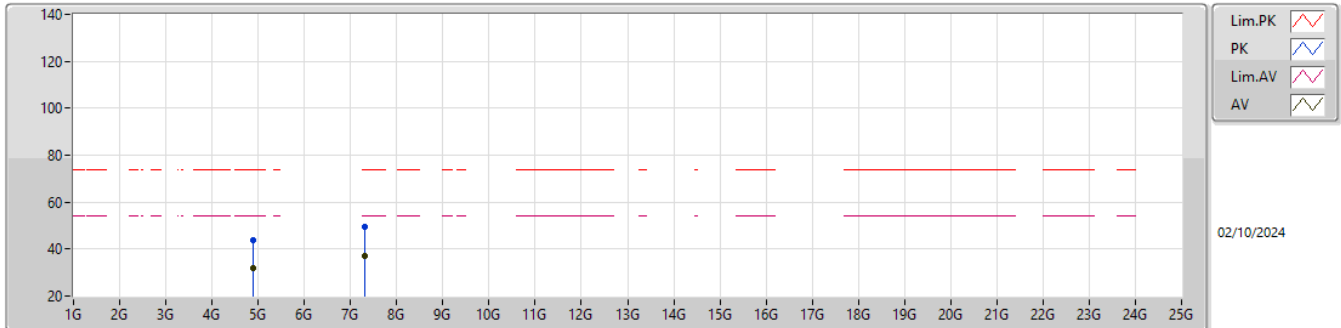


EUT_Y_4TX
Setting 103
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.88088G	43.81	74.00	-30.19	50.91	3	Vertical	134	1.52	-	31.30	5.52	43.92			
AV	4.87832G	31.80	54.00	-22.20	38.90	3	Vertical	134	1.52	-	31.30	5.52	43.92			
PK	7.304G	49.33	74.00	-24.67	48.58	3	Vertical	-0	1.80	-	36.28	7.22	42.75			
AV	7.30284G	37.31	54.00	-16.69	36.55	3	Vertical	-0	1.80	-	36.29	7.22	42.75			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

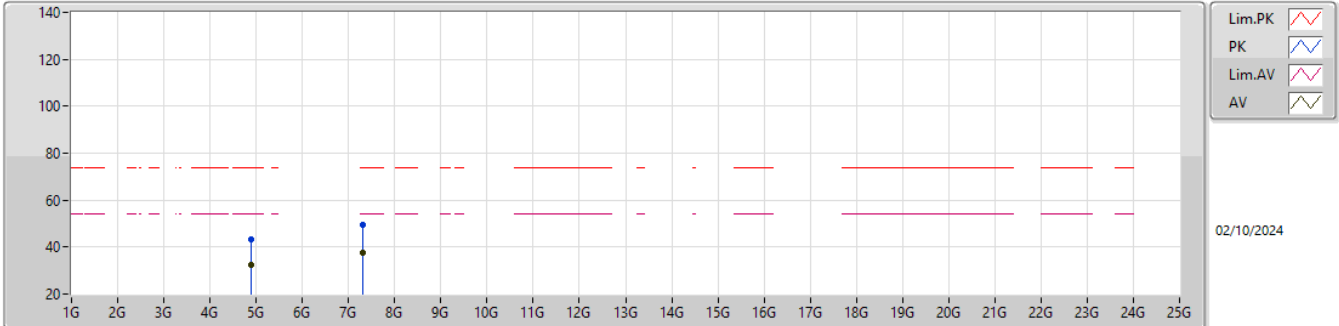


EUT_Y_4TX
Setting 103
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.88084G	43.47	74.00	-30.53	50.57	3	Horizontal	131	1.46	-	31.30	5.52	43.92			
AV	4.879G	32.29	54.00	-21.71	39.39	3	Horizontal	131	1.46	-	31.30	5.52	43.92			
PK	7.31008G	49.36	74.00	-24.64	48.64	3	Horizontal	41	1.80	-	36.26	7.22	42.76			
AV	7.31676G	37.40	54.00	-16.60	36.72	3	Horizontal	41	1.80	-	36.23	7.22	42.77			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2457MHz_TX

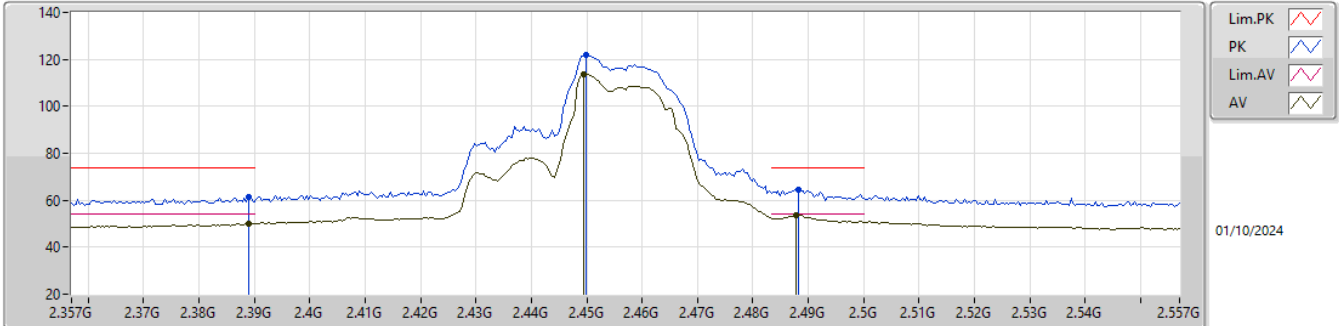


EUT Y_4TX
Setting 92
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	61.34	74.00	-12.66	30.15	3	Vertical	56	2.77	-	27.70	3.49	-			
AV	2.389G	50.01	54.00	-3.99	18.82	3	Vertical	56	2.77	-	27.70	3.49	-			
PK	2.4498G	121.64	Inf	-Inf	90.62	3	Vertical	56	2.77	-	27.50	3.52	-			
AV	2.4494G	113.57	Inf	-Inf	82.55	3	Vertical	56	2.77	-	27.50	3.52	-			
PK	2.4882G	64.48	74.00	-9.52	33.44	3	Vertical	56	2.77	-	27.50	3.54	-			
AV	2.4878G	53.59	54.00	-0.41	22.55	3	Vertical	56	2.77	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2457MHz_TX

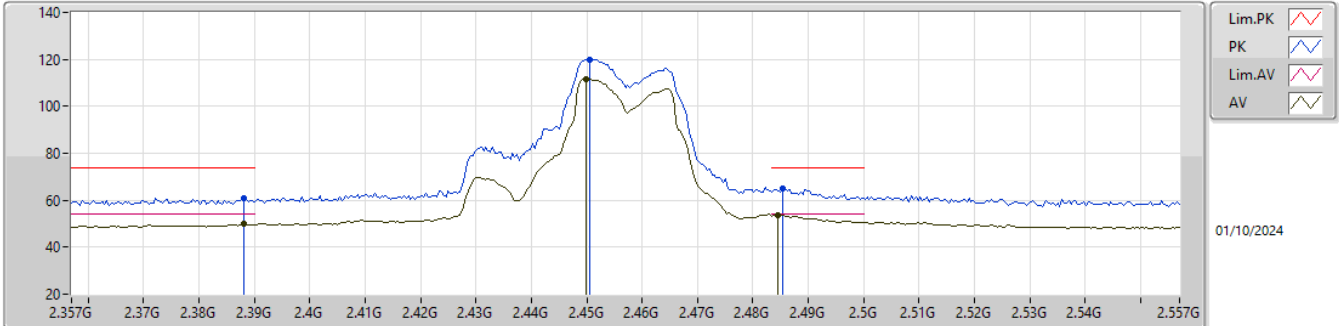


EUT Y_4TX
Setting 92
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3882G	60.90	74.00	-13.10	29.71	3	Horizontal	339	1.53	-	27.70	3.49	-			
AV	2.3882G	49.83	54.00	-4.17	18.64	3	Horizontal	339	1.53	-	27.70	3.49	-			
PK	2.4506G	119.98	Inf	-Inf	88.96	3	Horizontal	339	1.53	-	27.49	3.53	-			
AV	2.4498G	111.67	Inf	-Inf	80.65	3	Horizontal	339	1.53	-	27.50	3.52	-			
PK	2.4854G	65.05	74.00	-8.95	34.01	3	Horizontal	339	1.53	-	27.50	3.54	-			
AV	2.4846G	53.72	54.00	-0.28	22.68	3	Horizontal	339	1.53	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

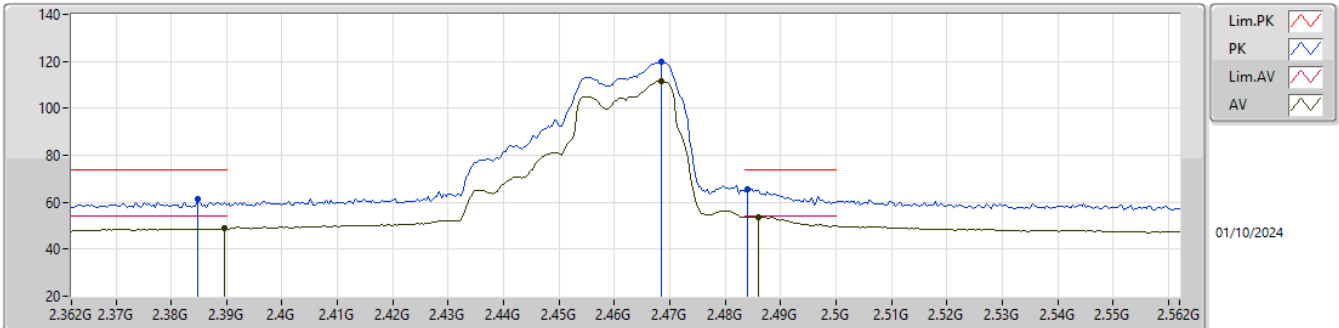


EUT_Y_4TX
Setting 89
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3848G	61.13	74.00	-12.87	29.95	3	Vertical	7	1.34	-	27.70	3.48	-			
AV	2.3896G	48.90	54.00	-5.10	17.71	3	Vertical	7	1.34	-	27.70	3.49	-			
PK	2.4684G	119.64	Inf	-Inf	88.71	3	Vertical	7	1.34	-	27.40	3.53	-			
AV	2.4684G	111.42	Inf	-Inf	80.49	3	Vertical	7	1.34	-	27.40	3.53	-			
PK	2.484G	65.42	74.00	-8.58	34.38	3	Vertical	7	1.34	-	27.50	3.54	-			
AV	2.486G	53.59	54.00	-0.41	22.55	3	Vertical	7	1.34	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

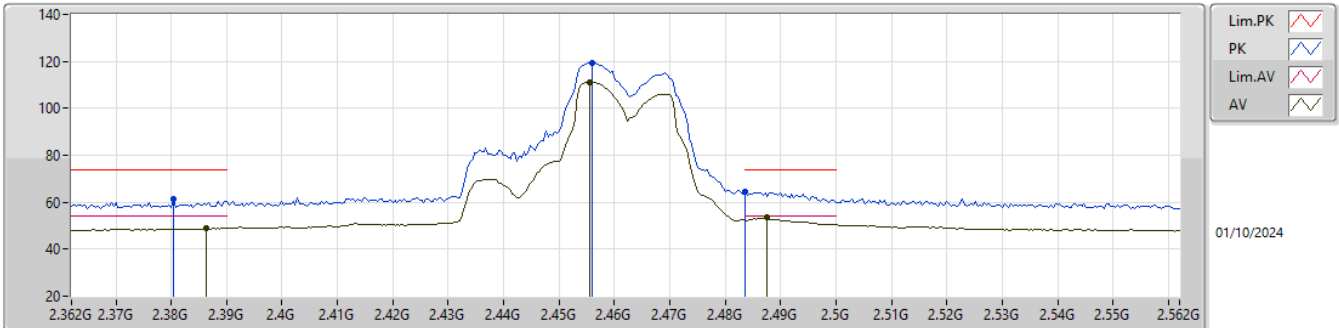


EUT_Y_4TX
Setting 89
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3804G	61.44	74.00	-12.56	30.26	3	Horizontal	343	1.49	-	27.70	3.48	-			
AV	2.3864G	48.90	54.00	-5.10	17.71	3	Horizontal	343	1.49	-	27.70	3.49	-			
PK	2.456G	119.44	Inf	-Inf	88.47	3	Horizontal	343	1.49	-	27.44	3.53	-			
AV	2.4556G	111.19	Inf	-Inf	80.22	3	Horizontal	343	1.49	-	27.44	3.53	-			
PK	2.4835G	64.29	74.00	-9.71	33.25	3	Horizontal	343	1.49	-	27.50	3.54	-			
AV	2.4876G	53.59	54.00	-0.41	22.55	3	Horizontal	343	1.49	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

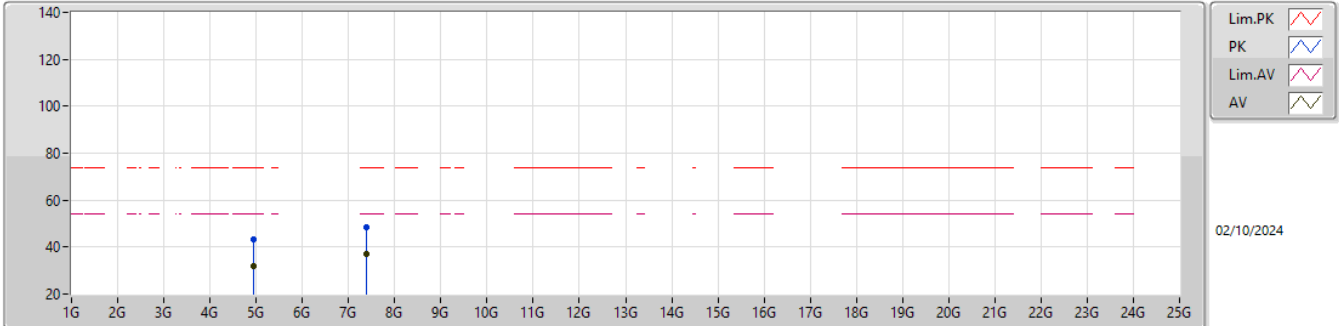


EUT_Y_4TX
Setting 89
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93176G	43.24	74.00	-30.76	50.21	3	Vertical	90	2.91	-	31.43	5.51	43.91				
AV	4.931G	31.77	54.00	-22.23	38.75	3	Vertical	90	2.91	-	31.42	5.51	43.91				
PK	7.37688G	48.58	74.00	-25.42	48.11	3	Vertical	20	1.80	-	36.10	7.23	42.86				
AV	7.37636G	37.06	54.00	-16.94	36.59	3	Vertical	20	1.80	-	36.10	7.23	42.86				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

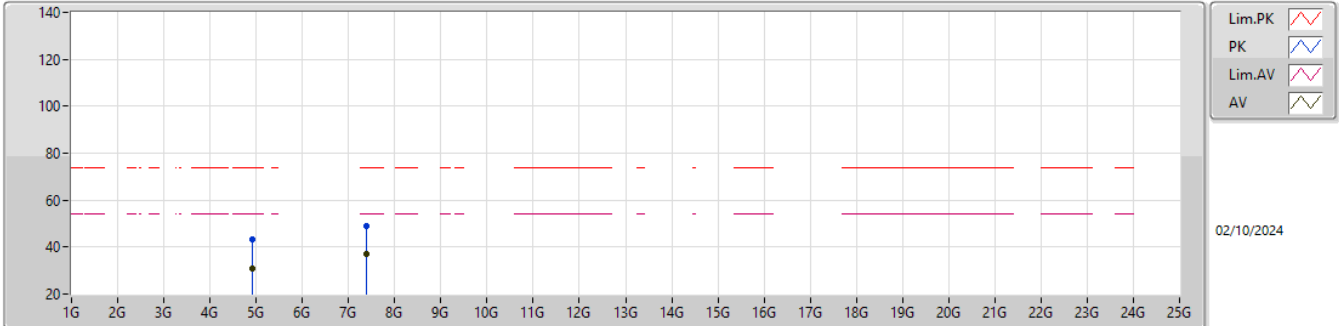


EUT_Y_4TX
Setting 89
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.925G	43.14	74.00	-30.86	50.14	3	Horizontal	84	1.80	-	31.40	5.51	43.91				
AV	4.92516G	30.98	54.00	-23.02	37.98	3	Horizontal	84	1.80	-	31.40	5.51	43.91				
PK	7.37744G	48.77	74.00	-25.23	48.30	3	Horizontal	318	1.80	-	36.10	7.23	42.86				
AV	7.38328G	36.95	54.00	-17.05	36.49	3	Horizontal	318	1.80	-	36.10	7.23	42.87				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2467MHz_TX

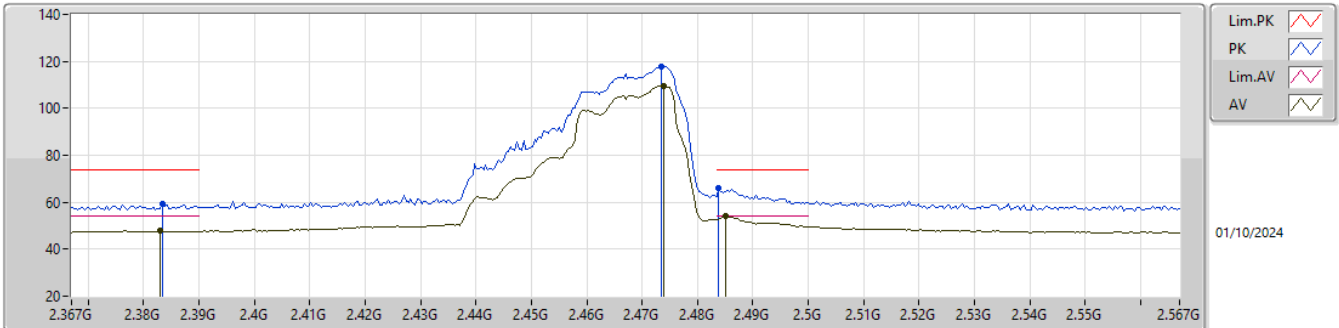


EUT Y_4TX
Setting 79
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3834G	59.27	74.00	-14.73	28.09	3	Vertical	10	1.06	-	27.70	3.48	-			
AV	2.383G	47.84	54.00	-6.16	16.66	3	Vertical	10	1.06	-	27.70	3.48	-			
PK	2.4734G	117.76	Inf	-Inf	86.79	3	Vertical	10	1.06	-	27.43	3.54	-			
AV	2.4738G	109.44	Inf	-Inf	78.46	3	Vertical	10	1.06	-	27.44	3.54	-			
PK	2.4838G	65.84	74.00	-8.16	34.80	3	Vertical	10	1.06	-	27.50	3.54	-			
AV	2.485G	53.95	54.00	-0.05	22.91	3	Vertical	10	1.06	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2467MHz_TX

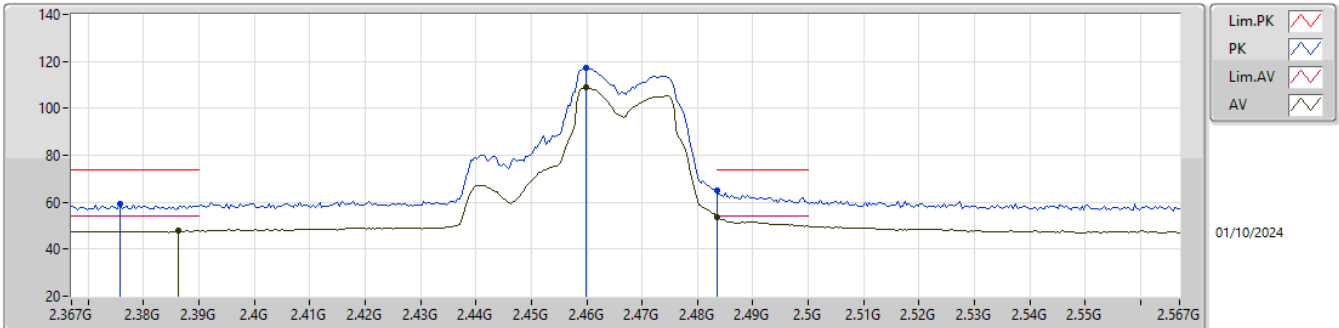


EUT Y_4TX
Setting 79
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3758G	59.22	74.00	-14.78	28.01	3	Horizontal	340	1.80	-	27.74	3.47	-			
AV	2.3862G	47.85	54.00	-6.15	16.66	3	Horizontal	340	1.80	-	27.70	3.49	-			
PK	2.4598G	117.11	Inf	-Inf	86.18	3	Horizontal	340	1.80	-	27.40	3.53	-			
AV	2.4598G	108.75	Inf	-Inf	77.82	3	Horizontal	340	1.80	-	27.40	3.53	-			
PK	2.4835G	64.79	74.00	-9.21	33.75	3	Horizontal	340	1.80	-	27.50	3.54	-			
AV	2.4835G	53.71	54.00	-0.29	22.67	3	Horizontal	340	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2467MHz_TX

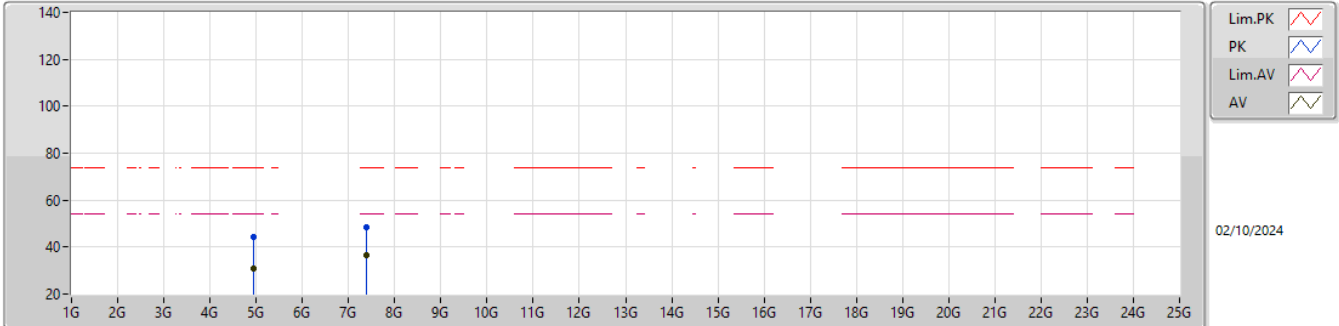


EUT_Y_4TX
Setting 79
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.93904G	44.07	74.00	-29.93	51.01	3	Vertical	90	2.66	-	31.46	5.51	43.91			
AV	4.94048G	30.96	54.00	-23.04	37.91	3	Vertical	90	2.66	-	31.46	5.50	43.91			
PK	7.39324G	48.61	74.00	-25.39	48.16	3	Vertical	14	1.80	-	36.10	7.23	42.88			
AV	7.39124G	36.65	54.00	-17.35	36.20	3	Vertical	14	1.80	-	36.10	7.23	42.88			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2467MHz_TX

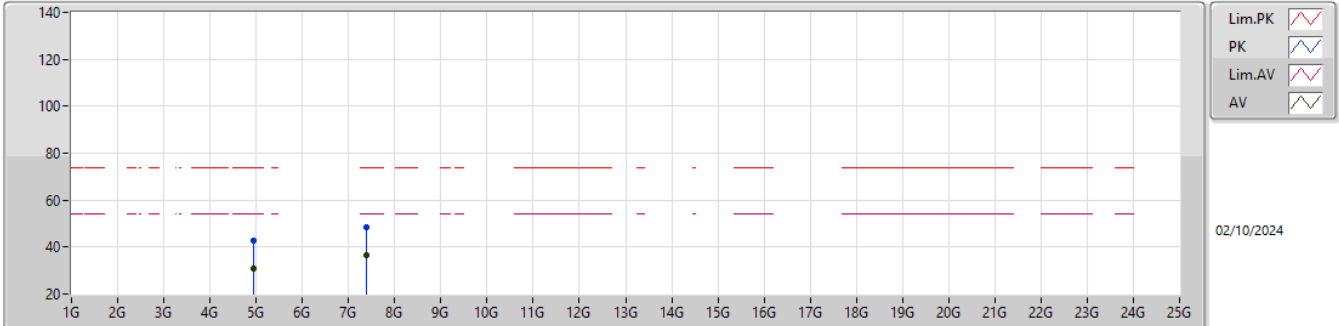


EUT_Y_4TX
Setting 79
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.93796G	42.62	74.00	-31.38	49.57	3	Horizontal	85	3.00	-	31.45	5.51	43.91			
AV	4.94032G	31.09	54.00	-22.91	38.04	3	Horizontal	85	3.00	-	31.46	5.50	43.91			
PK	7.39352G	48.56	74.00	-25.44	48.11	3	Horizontal	104	1.80	-	36.10	7.23	42.88			
AV	7.39432G	36.59	54.00	-17.41	36.15	3	Horizontal	104	1.80	-	36.10	7.23	42.89			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2472MHz_TX

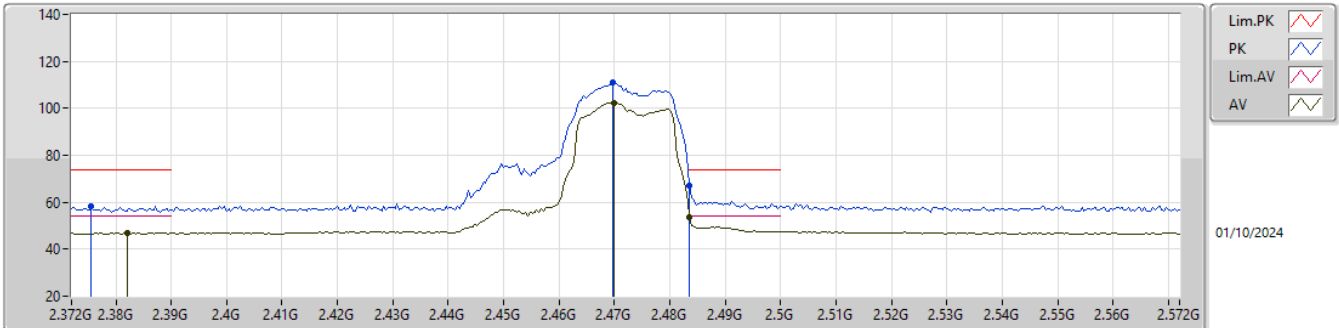


EUT_Y_4TX
Setting 45
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3756G	58.53	74.00	-15.47	27.32	3	Vertical	38	1.00	-	27.74	3.47	-			
AV	2.382G	46.91	54.00	-7.09	15.73	3	Vertical	38	1.00	-	27.70	3.48	-			
PK	2.4696G	111.04	Inf	-Inf	80.11	3	Vertical	38	1.00	-	27.40	3.53	-			
AV	2.47G	102.17	Inf	-Inf	71.23	3	Vertical	38	1.00	-	27.40	3.54	-			
PK	2.4835G	67.12	74.00	-6.88	36.08	3	Vertical	38	1.00	-	27.50	3.54	-			
AV	2.4835G	53.48	54.00	-0.52	22.44	3	Vertical	38	1.00	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2472MHz_TX

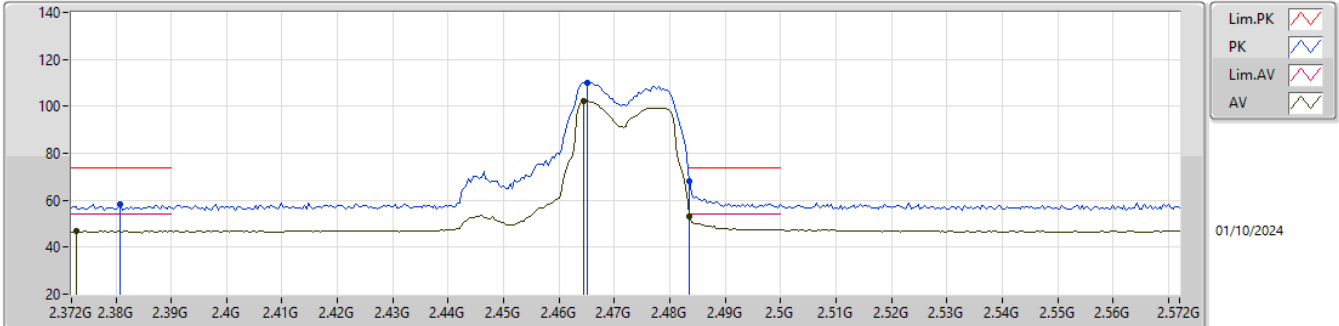


EUT_Y_4TX
Setting 45
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3808G	58.41	74.00	-15.59	27.23	3	Horizontal	339	1.80	-	27.70	3.48	-			
AV	2.3728G	46.76	54.00	-7.24	15.52	3	Horizontal	339	1.80	-	27.77	3.47	-			
PK	2.4652G	110.22	Inf	-Inf	79.29	3	Horizontal	339	1.80	-	27.40	3.53	-			
AV	2.4644G	102.21	Inf	-Inf	71.28	3	Horizontal	339	1.80	-	27.40	3.53	-			
PK	2.4835G	68.05	74.00	-5.95	37.01	3	Horizontal	339	1.80	-	27.50	3.54	-			
AV	2.4835G	53.23	54.00	-0.77	22.19	3	Horizontal	339	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2472MHz_TX

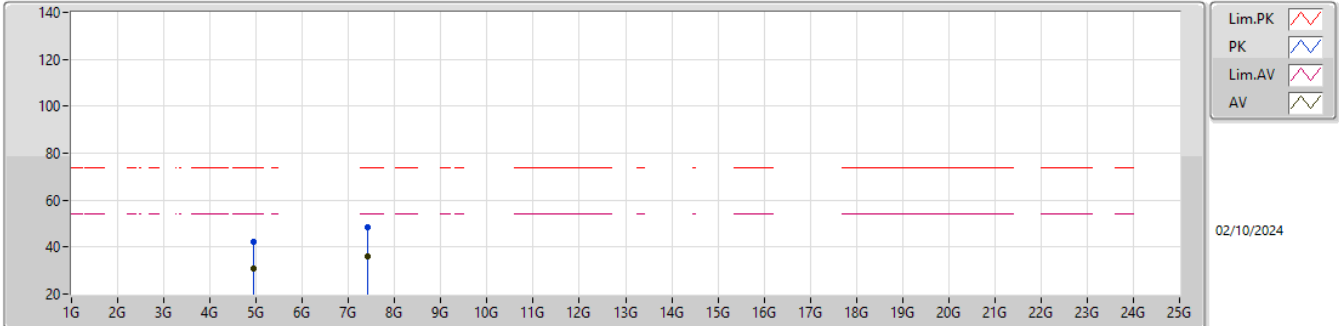


EUT_Y_4TX
Setting 45
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.9476G	42.41	74.00	-31.59	49.32	3	Vertical	48	1.75	-	31.49	5.50	43.90				
AV	4.94664G	30.69	54.00	-23.31	37.60	3	Vertical	48	1.75	-	31.49	5.50	43.90				
PK	7.42052G	48.34	74.00	-25.66	47.79	3	Vertical	136	1.86	-	36.22	7.25	42.92				
AV	7.415G	36.22	54.00	-17.78	35.71	3	Vertical	136	1.86	-	36.19	7.24	42.92				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX


2472MHz_TX

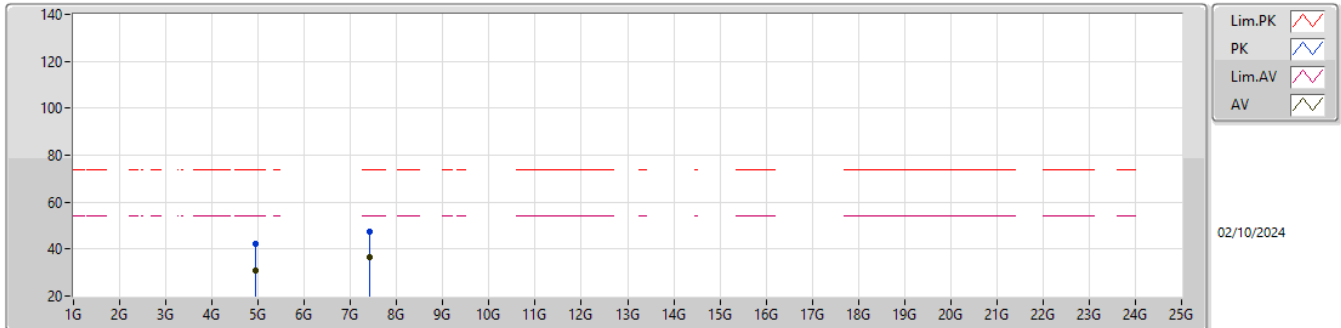
EUT_Y_4TX
Setting 45
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.9474G	42.48	74.00	-31.52	49.39	3	Horizontal	204	2.37	-	31.49	5.50	43.90			
AV	4.9482G	30.68	54.00	-23.32	37.59	3	Horizontal	204	2.37	-	31.49	5.50	43.90			
PK	7.41556G	47.67	74.00	-26.33	47.16	3	Horizontal	339	1.90	-	36.19	7.24	42.92			
AV	7.41808G	36.41	54.00	-17.59	35.87	3	Horizontal	339	1.90	-	36.21	7.25	42.92			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

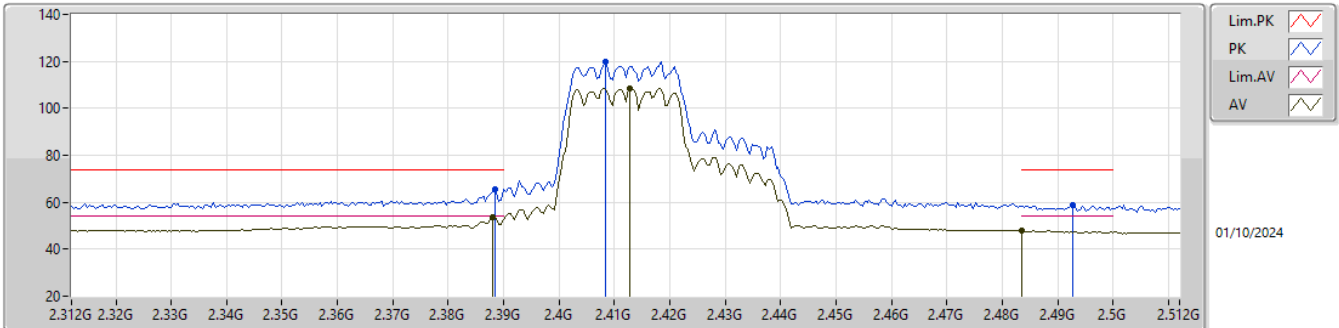


EUT_Y_4TX
Setting 79
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3884G	65.51	74.00	-8.49	34.32	3	Vertical	125	1.01	-	27.70	3.49	-			
AV	2.388G	53.53	54.00	-0.47	22.34	3	Vertical	125	1.01	-	27.70	3.49	-			
PK	2.4084G	119.88	Inf	-Inf	88.76	3	Vertical	125	1.01	-	27.62	3.50	-			
AV	2.4128G	108.37	Inf	-Inf	77.23	3	Vertical	125	1.01	-	27.63	3.51	-			
PK	2.4928G	58.75	74.00	-15.25	27.70	3	Vertical	125	1.01	-	27.50	3.55	-			
AV	2.4835G	47.69	54.00	-6.31	16.65	3	Vertical	125	1.01	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

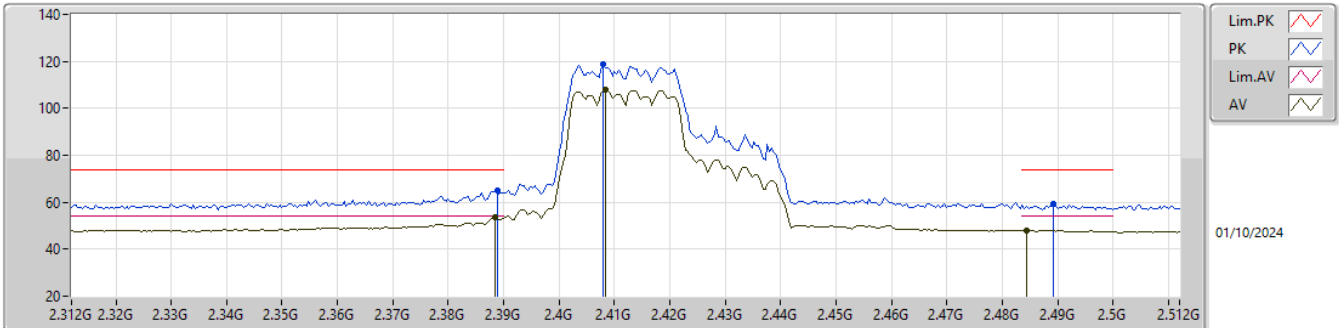


EUT_Y_4TX
Setting 79
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3888G	64.78	74.00	-9.22	33.59	3	Horizontal	340	1.68	-	27.70	3.49	-			
AV	2.3884G	53.76	54.00	-0.24	22.57	3	Horizontal	340	1.68	-	27.70	3.49	-			
PK	2.408G	118.82	Inf	-Inf	87.70	3	Horizontal	340	1.68	-	27.62	3.50	-			
AV	2.4084G	107.81	Inf	-Inf	76.69	3	Horizontal	340	1.68	-	27.62	3.50	-			
PK	2.4892G	59.08	74.00	-14.92	28.04	3	Horizontal	340	1.68	-	27.50	3.54	-			
AV	2.4844G	47.93	54.00	-6.07	16.89	3	Horizontal	340	1.68	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

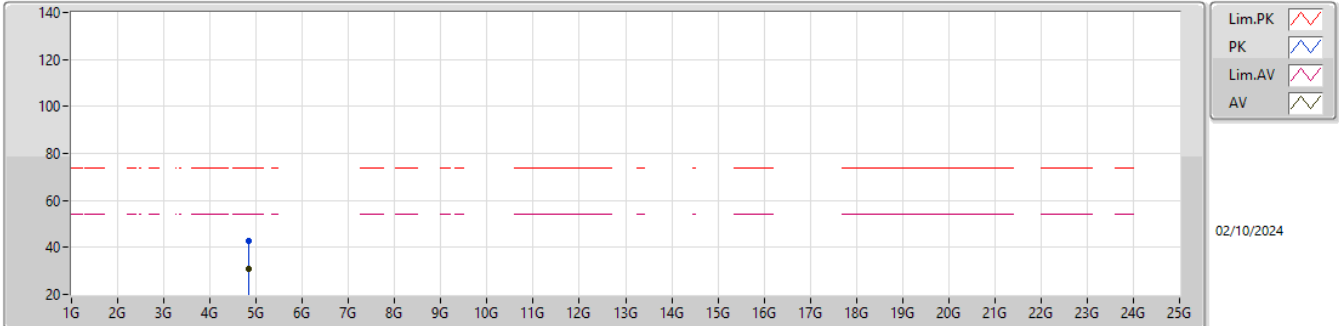


EUT_Y_4TX
Setting 79
04-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82712G	42.69	74.00	-31.31	49.79	3	Vertical	108	2.35	-	31.30	5.53	43.93			
AV	4.82712G	31.12	54.00	-22.88	38.22	3	Vertical	108	2.35	-	31.30	5.53	43.93			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

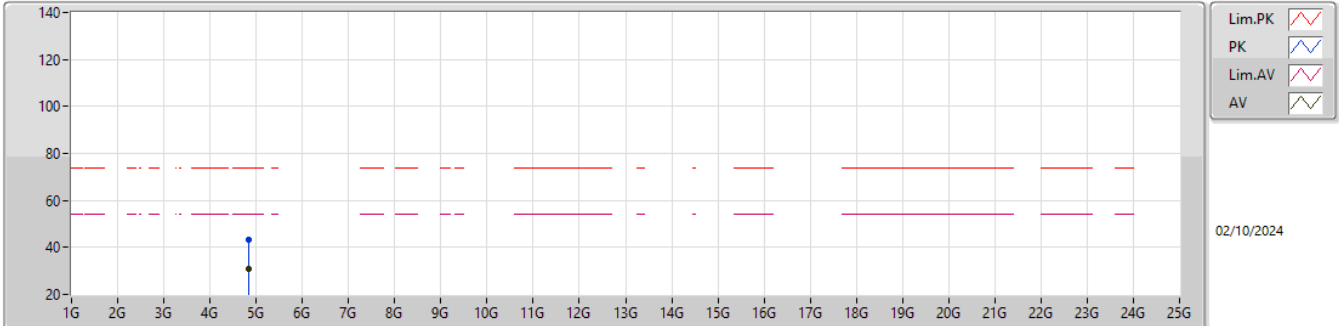


EUT_Y_4TX
Setting 79
04-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8258G	43.03	74.00	-30.97	50.14	3	Horizontal	198	2.86	-	31.30	5.53	43.94			
AV	4.8264G	30.78	54.00	-23.22	37.89	3	Horizontal	198	2.86	-	31.30	5.53	43.94			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2417MHz_TX

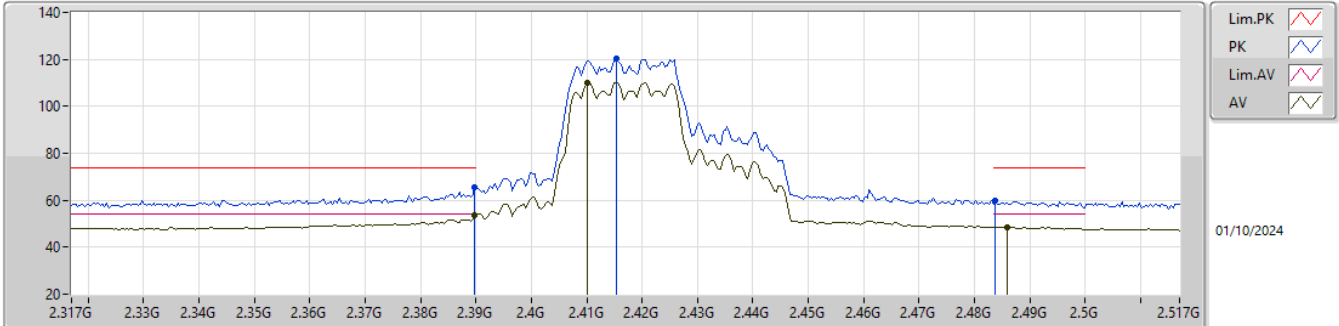


EUT_Y_4TX
Setting 86
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	65.27	74.00	-8.73	34.08	3	Vertical	11	1.16	-	27.70	3.49	-			
AV	2.3898G	53.42	54.00	-0.58	22.23	3	Vertical	11	1.16	-	27.70	3.49	-			
PK	2.4154G	120.40	Inf	-Inf	89.24	3	Vertical	11	1.16	-	27.65	3.51	-			
AV	2.4102G	110.07	Inf	-Inf	78.96	3	Vertical	11	1.16	-	27.60	3.51	-			
PK	2.4838G	59.58	74.00	-14.42	28.54	3	Vertical	11	1.16	-	27.50	3.54	-			
AV	2.4858G	48.58	54.00	-5.42	17.54	3	Vertical	11	1.16	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2417MHz_TX

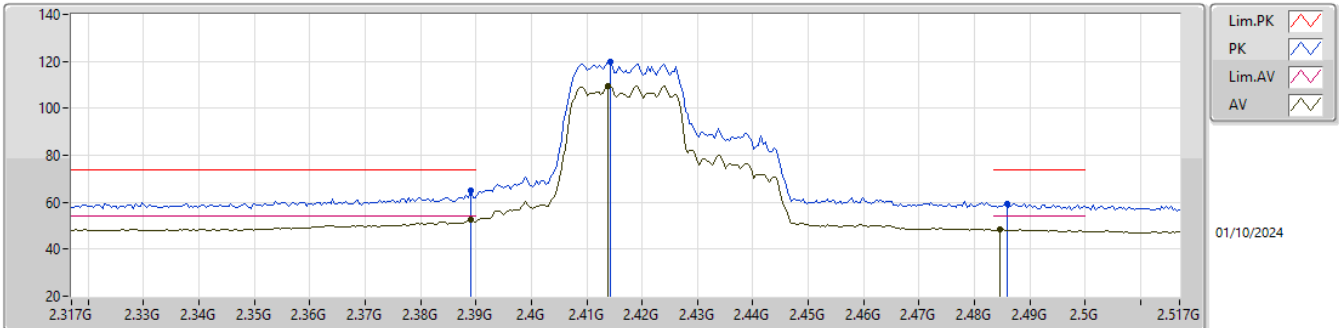


EUT_Y_4TX
Setting 86
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	64.94	74.00	-9.06	33.75	3	Horizontal	140	1.87	-	27.70	3.49	-			
AV	2.389G	52.68	54.00	-1.32	21.49	3	Horizontal	140	1.87	-	27.70	3.49	-			
PK	2.4142G	120.02	Inf	-Inf	88.87	3	Horizontal	140	1.87	-	27.64	3.51	-			
AV	2.4138G	109.60	Inf	-Inf	78.45	3	Horizontal	140	1.87	-	27.64	3.51	-			
PK	2.4858G	59.21	74.00	-14.79	28.17	3	Horizontal	140	1.87	-	27.50	3.54	-			
AV	2.4846G	48.37	54.00	-5.63	17.33	3	Horizontal	140	1.87	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

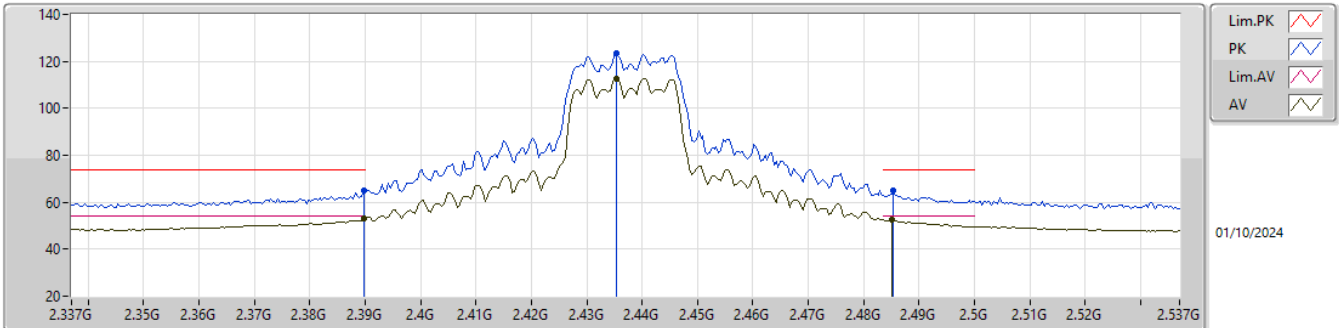


EUT_Y_4TX
Setting 100
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	65.15	74.00	-8.85	33.96	3	Vertical	7	1.32	-	27.70	3.49	-			
AV	2.3898G	53.18	54.00	-0.82	21.99	3	Vertical	7	1.32	-	27.70	3.49	-			
PK	2.4354G	123.38	Inf	-Inf	92.31	3	Vertical	7	1.32	-	27.55	3.52	-			
AV	2.4354G	112.63	Inf	-Inf	81.56	3	Vertical	7	1.32	-	27.55	3.52	-			
PK	2.4854G	65.14	74.00	-8.86	34.10	3	Vertical	7	1.32	-	27.50	3.54	-			
AV	2.485G	52.59	54.00	-1.41	21.55	3	Vertical	7	1.32	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

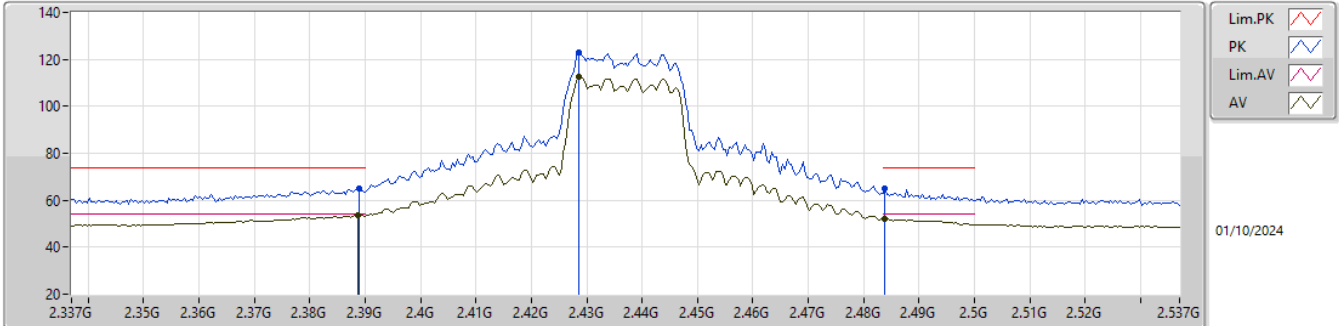


EUT_Y_4TX
Setting 100
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	65.09	74.00	-8.91	33.90	3	Horizontal	148	1.89	-	27.70	3.49	-			
AV	2.3886G	53.87	54.00	-0.13	22.68	3	Horizontal	148	1.89	-	27.70	3.49	-			
PK	2.4286G	122.80	Inf	-Inf	91.68	3	Horizontal	148	1.89	-	27.61	3.51	-			
AV	2.4286G	112.38	Inf	-Inf	81.26	3	Horizontal	148	1.89	-	27.61	3.51	-			
PK	2.4838G	64.79	74.00	-9.21	33.75	3	Horizontal	148	1.89	-	27.50	3.54	-			
AV	2.4838G	52.32	54.00	-1.68	21.28	3	Horizontal	148	1.89	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

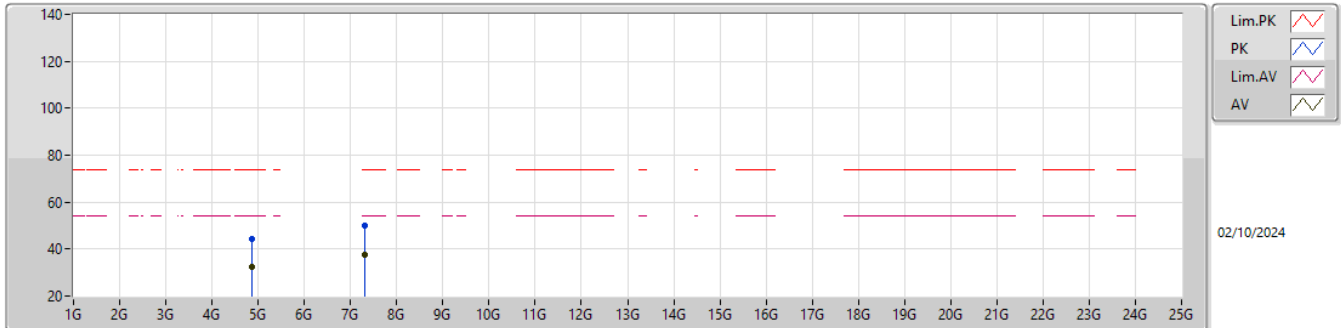


EUT_Y_4TX
Setting 100
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87688G	44.21	74.00	-29.79	51.31	3	Vertical	106	2.24	-	31.30	5.52	43.92			
AV	4.87176G	32.43	54.00	-21.57	39.53	3	Vertical	106	2.24	-	31.30	5.52	43.92			
PK	7.3118G	49.78	74.00	-24.22	49.08	3	Vertical	85	1.80	-	36.25	7.22	42.77			
AV	7.30284G	37.57	54.00	-16.43	36.81	3	Vertical	85	1.80	-	36.29	7.22	42.75			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

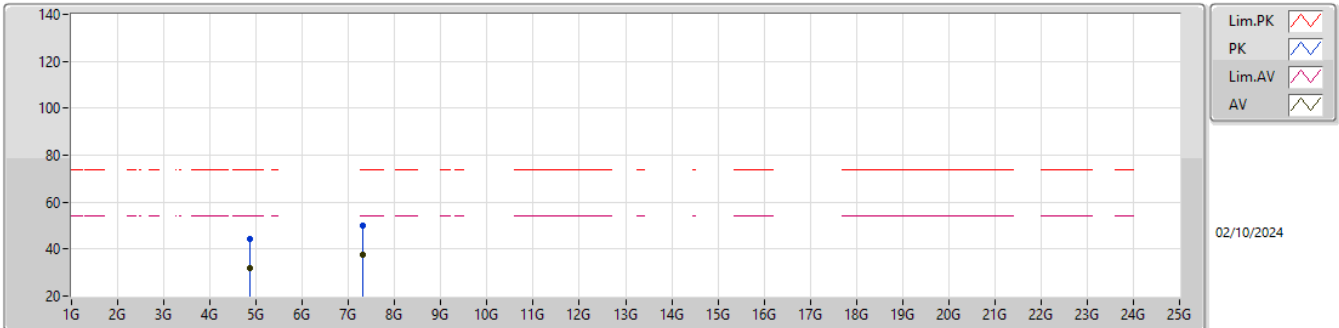


EUT_Y_4TX
Setting 100
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87732G	44.32	74.00	-29.68	51.42	3	Horizontal	86	2.94	-	31.30	5.52	43.92			
AV	4.87512G	31.90	54.00	-22.10	39.00	3	Horizontal	86	2.94	-	31.30	5.52	43.92			
PK	7.31488G	49.76	74.00	-24.24	49.07	3	Horizontal	108	2.27	-	36.24	7.22	42.77			
AV	7.31464G	37.37	54.00	-16.63	36.68	3	Horizontal	108	2.27	-	36.24	7.22	42.77			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2457MHz_TX

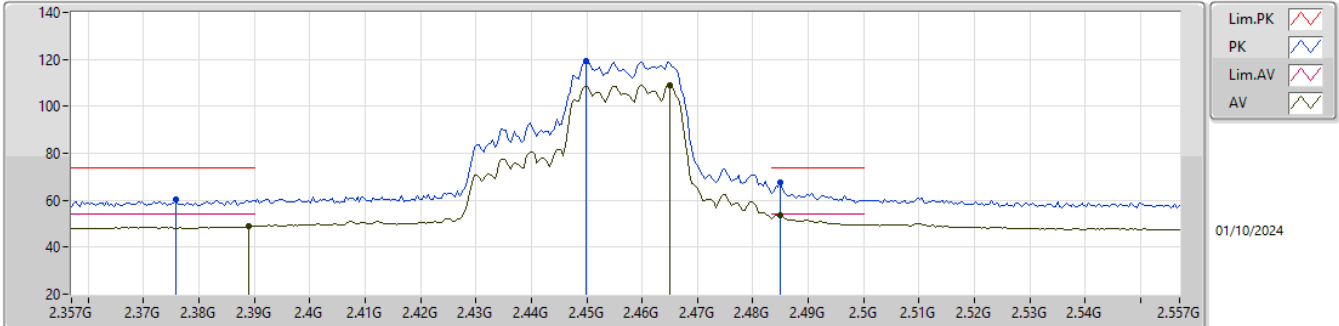


EUT_Y_4TX
Setting 87
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3758G	60.24	74.00	-13.76	29.03	3	Vertical	25	1.32	-	27.74	3.47	-			
AV	2.389G	48.90	54.00	-5.10	17.71	3	Vertical	25	1.32	-	27.70	3.49	-			
PK	2.4498G	119.16	Inf	-Inf	88.14	3	Vertical	25	1.32	-	27.50	3.52	-			
AV	2.465G	108.99	Inf	-Inf	78.06	3	Vertical	25	1.32	-	27.40	3.53	-			
PK	2.485G	67.47	74.00	-6.53	36.43	3	Vertical	25	1.32	-	27.50	3.54	-			
AV	2.485G	53.83	54.00	-0.17	22.79	3	Vertical	25	1.32	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2457MHz_TX

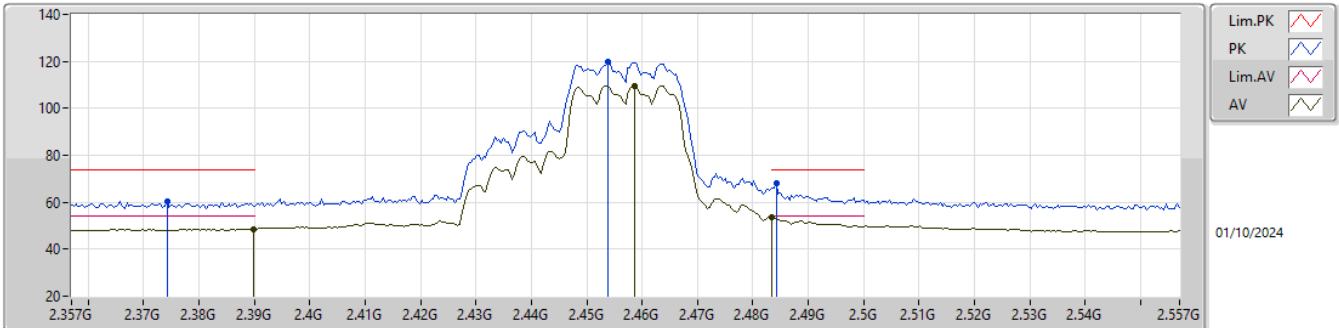


EUT_Y_4TX
Setting 87
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3742G	60.38	74.00	-13.62	29.15	3	Horizontal	342	1.80	-	27.76	3.47	-			
AV	2.3898G	48.70	54.00	-5.30	17.51	3	Horizontal	342	1.80	-	27.70	3.49	-			
PK	2.4538G	119.59	Inf	-Inf	88.60	3	Horizontal	342	1.80	-	27.46	3.53	-			
AV	2.4586G	109.61	Inf	-Inf	78.67	3	Horizontal	342	1.80	-	27.41	3.53	-			
PK	2.4842G	68.05	74.00	-5.95	37.01	3	Horizontal	342	1.80	-	27.50	3.54	-			
AV	2.4835G	53.60	54.00	-0.40	22.56	3	Horizontal	342	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

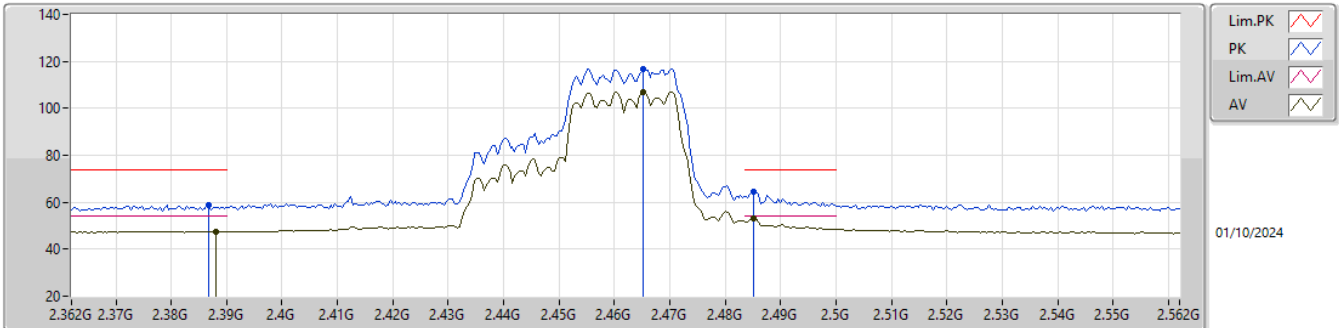


EUT_Y_4TX
Setting 76
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3868G	58.85	74.00	-15.15	27.66	3	Vertical	6	1.36	-	27.70	3.49	-			
AV	2.388G	47.63	54.00	-6.37	16.44	3	Vertical	6	1.36	-	27.70	3.49	-			
PK	2.4652G	116.96	Inf	-Inf	86.03	3	Vertical	6	1.36	-	27.40	3.53	-			
AV	2.4652G	107.06	Inf	-Inf	76.13	3	Vertical	6	1.36	-	27.40	3.53	-			
PK	2.4852G	64.39	74.00	-9.61	33.35	3	Vertical	6	1.36	-	27.50	3.54	-			
AV	2.4852G	53.36	54.00	-0.64	22.32	3	Vertical	6	1.36	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

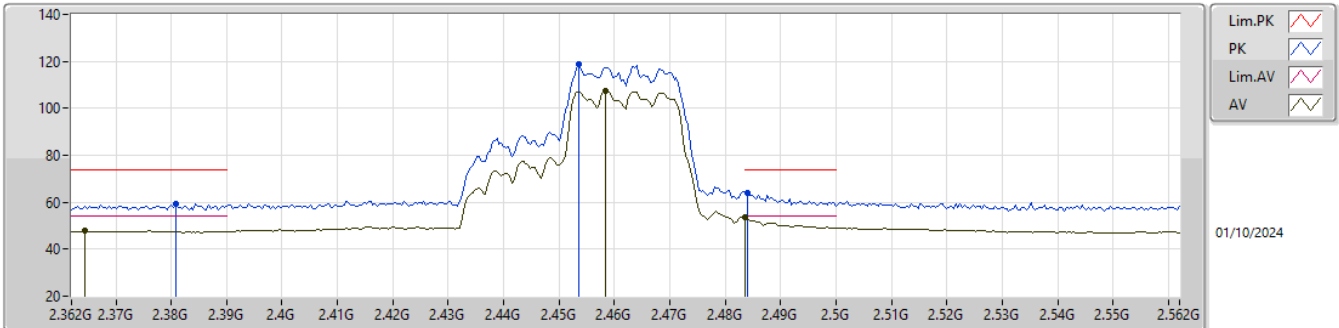


EUT_Y_4TX
Setting 76
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3808G	59.46	74.00	-14.54	28.28	3	Horizontal	342	1.80	-	27.70	3.48	-			
AV	2.3644G	47.85	54.00	-6.15	16.53	3	Horizontal	342	1.80	-	27.86	3.46	-			
PK	2.4536G	118.78	Inf	-Inf	87.79	3	Horizontal	342	1.80	-	27.46	3.53	-			
AV	2.4584G	107.32	Inf	-Inf	76.37	3	Horizontal	342	1.80	-	27.42	3.53	-			
PK	2.484G	63.83	74.00	-10.17	32.79	3	Horizontal	342	1.80	-	27.50	3.54	-			
AV	2.4835G	53.60	54.00	-0.40	22.56	3	Horizontal	342	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

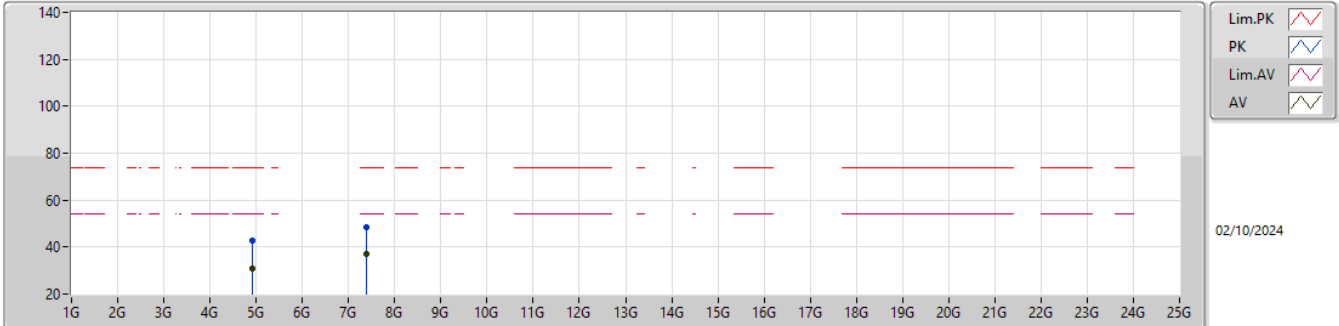


EUT_Y_4TX
Setting 76
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91688G	42.99	74.00	-31.01	50.02	3	Vertical	107	2.33	-	31.37	5.51	43.91				
AV	4.92244G	30.62	54.00	-23.38	37.63	3	Vertical	107	2.33	-	31.39	5.51	43.91				
PK	7.37612G	48.37	74.00	-25.63	47.90	3	Vertical	198	1.80	-	36.10	7.23	42.86				
AV	7.38312G	36.92	54.00	-17.08	36.46	3	Vertical	198	1.80	-	36.10	7.23	42.87				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

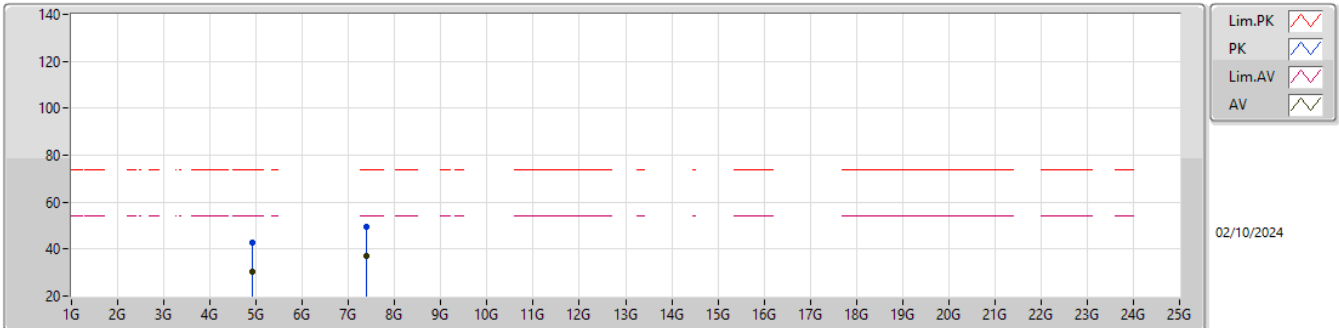


EUT_Y_4TX
Setting 76
04-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.92776G	42.91	74.00	-31.09	49.90	3	Horizontal	178	1.80	-	31.41	5.51	43.91				
AV	4.91876G	30.44	54.00	-23.56	37.46	3	Horizontal	178	1.80	-	31.38	5.51	43.91				
PK	7.39088G	49.33	74.00	-24.67	48.88	3	Horizontal	68	1.78	-	36.10	7.23	42.88				
AV	7.38312G	36.82	54.00	-17.18	36.36	3	Horizontal	68	1.78	-	36.10	7.23	42.87				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2467MHz_TX

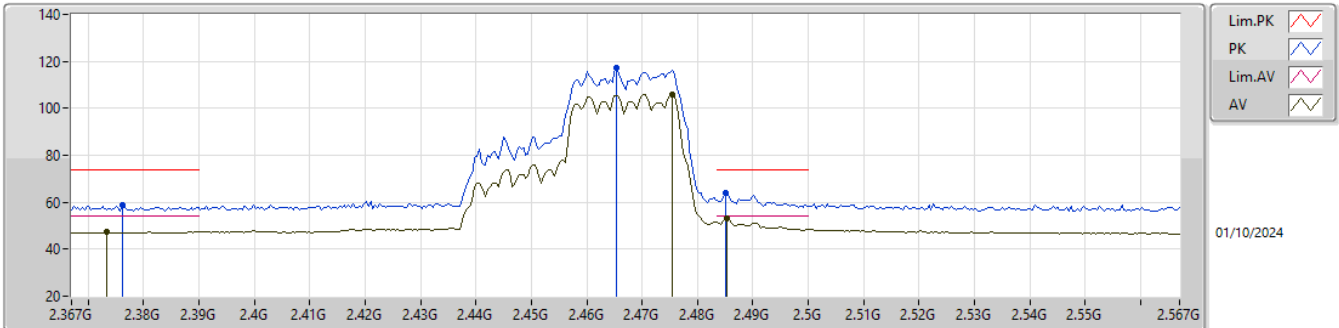


EUT_Y_4TX
Setting 69
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3762G	58.92	74.00	-15.08	27.70	3	Vertical	3	1.33	-	27.74	3.48	-			
AV	2.3734G	47.26	54.00	-6.74	16.02	3	Vertical	3	1.33	-	27.77	3.47	-			
PK	2.4654G	117.10	Inf	-Inf	86.17	3	Vertical	3	1.33	-	27.40	3.53	-			
AV	2.4754G	105.90	Inf	-Inf	74.91	3	Vertical	3	1.33	-	27.45	3.54	-			
PK	2.485G	64.08	74.00	-9.92	33.04	3	Vertical	3	1.33	-	27.50	3.54	-			
AV	2.4854G	53.35	54.00	-0.65	22.31	3	Vertical	3	1.33	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2467MHz_TX

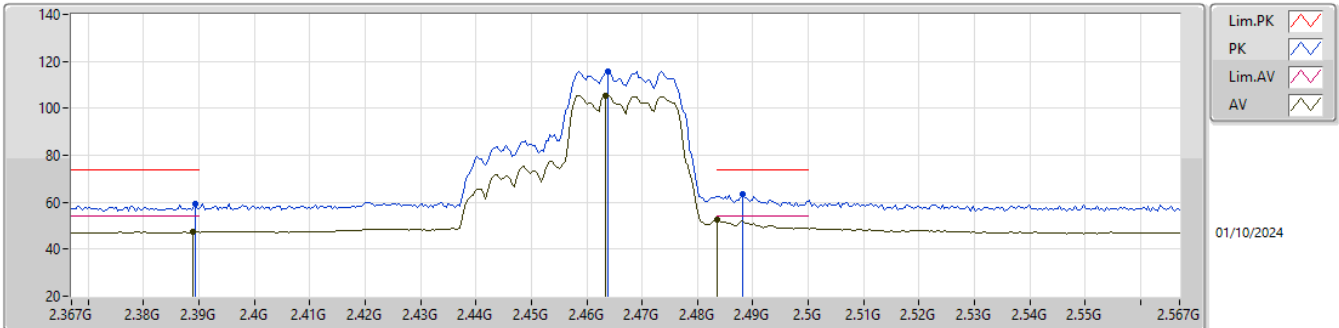


EUT_Y_4TX
Setting 69
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	59.16	74.00	-14.84	27.97	3	Horizontal	339	1.80	-	27.70	3.49	-			
AV	2.389G	47.40	54.00	-6.60	16.21	3	Horizontal	339	1.80	-	27.70	3.49	-			
PK	2.4638G	115.76	Inf	-Inf	84.83	3	Horizontal	339	1.80	-	27.40	3.53	-			
AV	2.4634G	105.46	Inf	-Inf	74.53	3	Horizontal	339	1.80	-	27.40	3.53	-			
PK	2.4882G	63.48	74.00	-10.52	32.44	3	Horizontal	339	1.80	-	27.50	3.54	-			
AV	2.4835G	52.59	54.00	-1.41	21.55	3	Horizontal	339	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2467MHz_TX

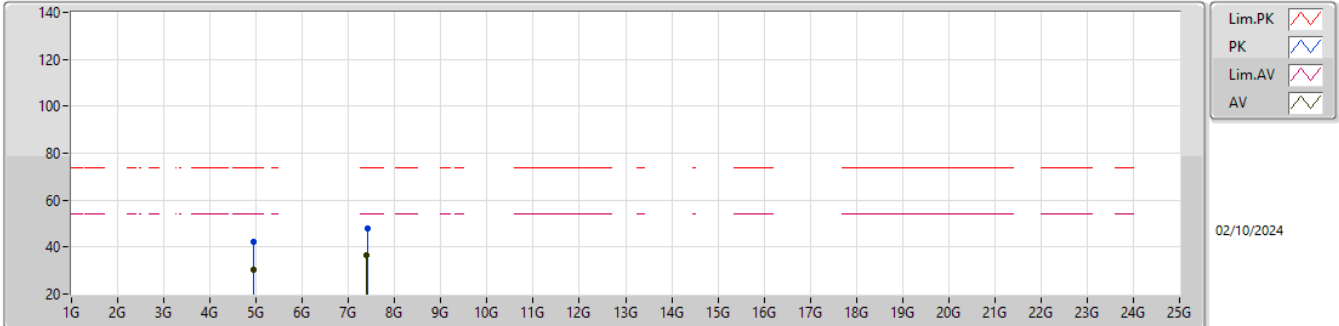


EUT_Y_4TX
Setting 69
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.93772G	42.38	74.00	-31.62	49.33	3	Vertical	18	1.80	-	31.45	5.51	43.91			
AV	4.93736G	30.48	54.00	-23.52	37.43	3	Vertical	18	1.80	-	31.45	5.51	43.91			
PK	7.40832G	48.00	74.00	-26.00	47.52	3	Vertical	190	1.80	-	36.15	7.24	42.91			
AV	7.39408G	36.61	54.00	-17.39	36.17	3	Vertical	190	1.80	-	36.10	7.23	42.89			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2467MHz_TX

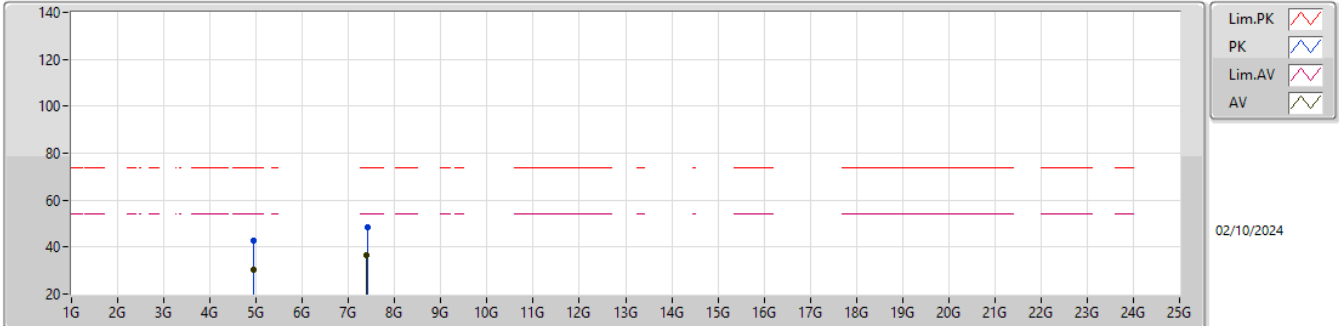


EUT_Y_4TX
Setting 69
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.93176G	42.53	74.00	-31.47	49.50	3	Horizontal	46	1.80	-	31.43	5.51	43.91			
AV	4.94348G	30.46	54.00	-23.54	37.39	3	Horizontal	46	1.80	-	31.47	5.50	43.90			
PK	7.41052G	48.31	74.00	-25.69	47.82	3	Horizontal	26	1.80	-	36.16	7.24	42.91			
AV	7.39408G	36.45	54.00	-17.55	36.01	3	Horizontal	26	1.80	-	36.10	7.23	42.89			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2472MHz_TX

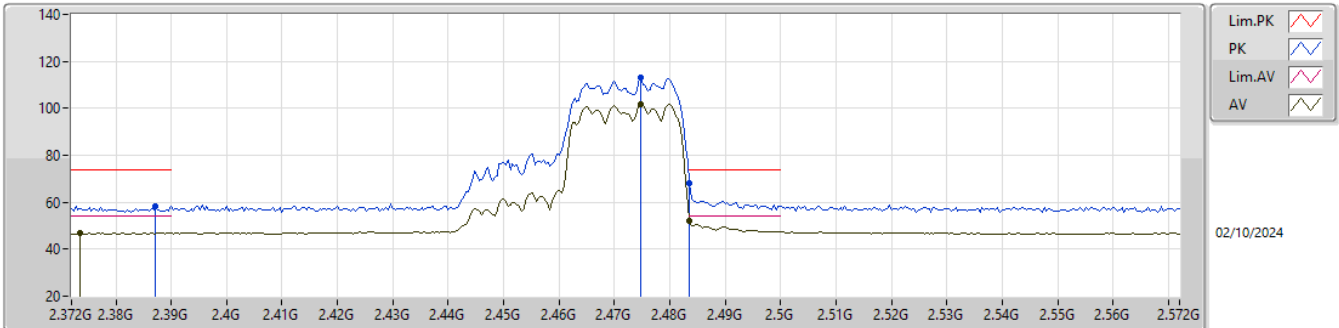


EUT_Y_4TX
Setting 44
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3872G	58.47	74.00	-15.53	27.28	3	Vertical	26	1.25	-	27.70	3.49	-			
AV	2.3736G	46.75	54.00	-7.25	15.52	3	Vertical	26	1.25	-	27.76	3.47	-			
PK	2.4748G	113.14	Inf	-Inf	82.15	3	Vertical	26	1.25	-	27.45	3.54	-			
AV	2.4748G	101.54	Inf	-Inf	70.55	3	Vertical	26	1.25	-	27.45	3.54	-			
PK	2.4835G	67.91	74.00	-6.09	36.87	3	Vertical	26	1.25	-	27.50	3.54	-			
AV	2.4835G	51.89	54.00	-2.11	20.85	3	Vertical	26	1.25	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2472MHz_TX

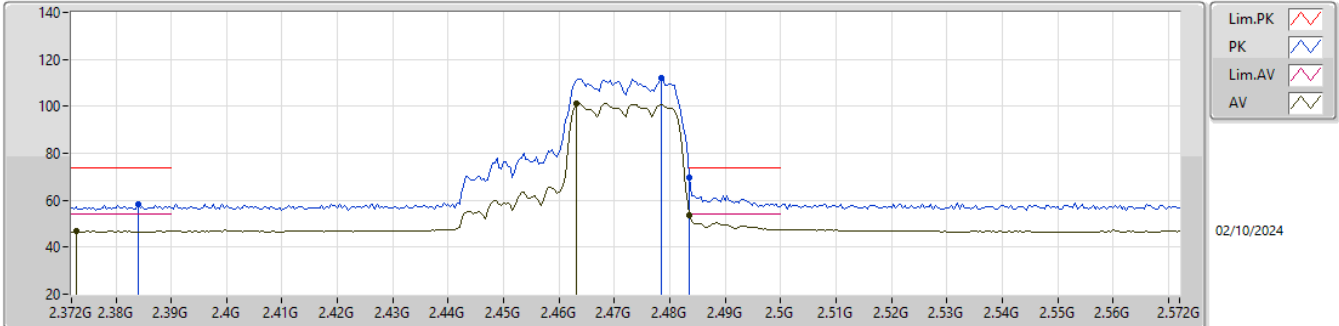


EUT_Y_4TX
Setting 44
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.384G	58.06	74.00	-15.94	26.88	3	Horizontal	344	1.80	-	27.70	3.48	-			
AV	2.3728G	46.76	54.00	-7.24	15.52	3	Horizontal	344	1.80	-	27.77	3.47	-			
PK	2.4784G	111.99	Inf	-Inf	80.97	3	Horizontal	344	1.80	-	27.48	3.54	-			
AV	2.4632G	101.38	Inf	-Inf	70.45	3	Horizontal	344	1.80	-	27.40	3.53	-			
PK	2.4835G	69.40	74.00	-4.60	38.36	3	Horizontal	344	1.80	-	27.50	3.54	-			
AV	2.4835G	53.83	54.00	-0.17	22.79	3	Horizontal	344	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2472MHz_TX

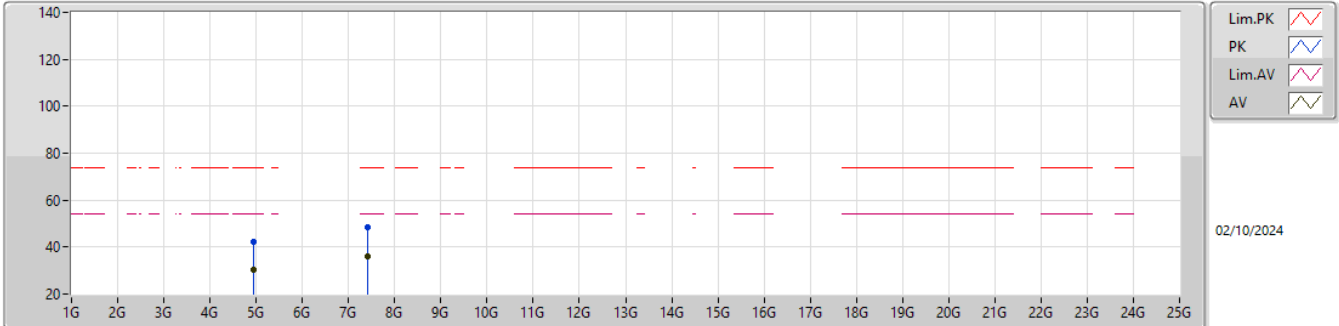


EUT_Y_4TX
Setting 44
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.9394G	42.20	74.00	-31.80	49.14	3	Vertical	265	1.61	-	31.46	5.51	43.91			
AV	4.95004G	30.56	54.00	-23.44	37.46	3	Vertical	265	1.61	-	31.50	5.50	43.90			
PK	7.41508G	48.21	74.00	-25.79	47.70	3	Vertical	133	3.00	-	36.19	7.24	42.92			
AV	7.40816G	36.20	54.00	-17.80	35.72	3	Vertical	133	3.00	-	36.15	7.24	42.91			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2472MHz_TX

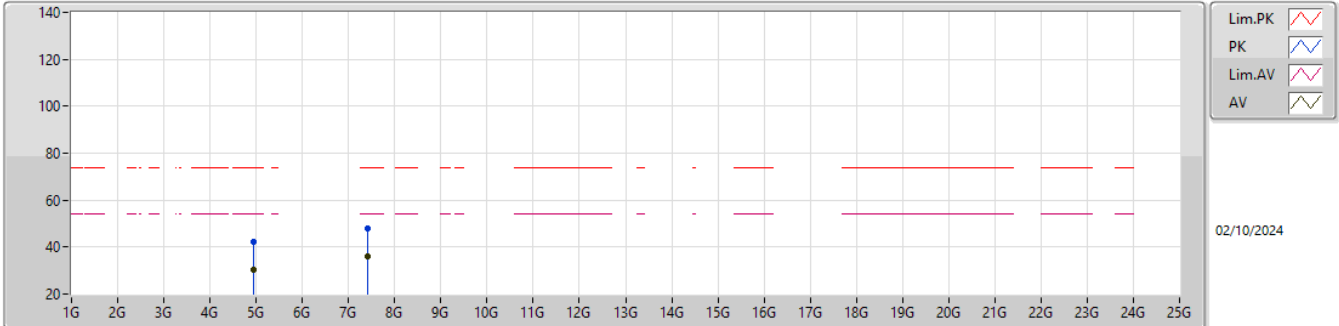


EUT_Y_4TX
Setting 44
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.95104G	42.04	74.00	-31.96	48.94	3	Horizontal	196	2.47	-	31.50	5.50	43.90			
AV	4.9488G	30.57	54.00	-23.43	37.47	3	Horizontal	196	2.47	-	31.50	5.50	43.90			
PK	7.4154G	48.14	74.00	-25.86	47.63	3	Horizontal	230	2.03	-	36.19	7.24	42.92			
AV	7.42556G	36.03	54.00	-17.97	35.46	3	Horizontal	230	2.03	-	36.25	7.25	42.93			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

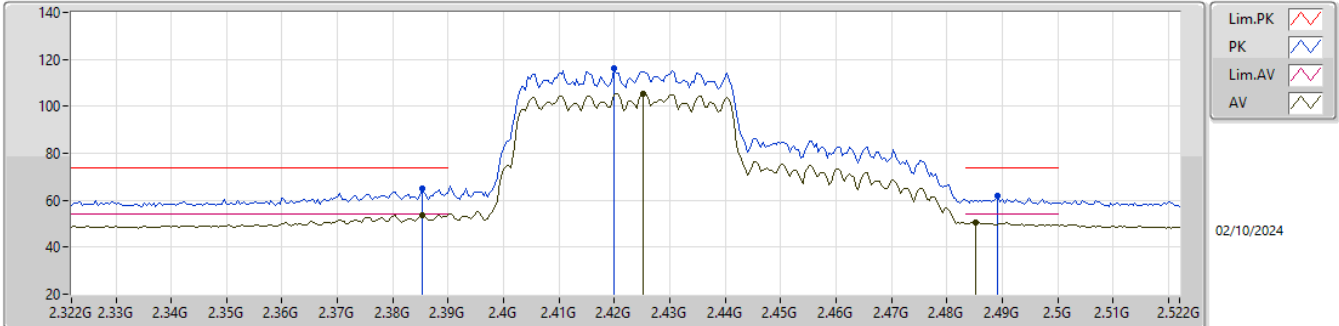


EUT_Y_4TX
Setting 70
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3852G	65.08	74.00	-8.92	33.90	3	Vertical	12	1.07	-	27.70	3.48	-			
AV	2.3852G	53.86	54.00	-0.14	22.68	3	Vertical	12	1.07	-	27.70	3.48	-			
PK	2.42G	116.02	Inf	-Inf	84.81	3	Vertical	12	1.07	-	27.70	3.51	-			
AV	2.4252G	105.52	Inf	-Inf	74.36	3	Vertical	12	1.07	-	27.65	3.51	-			
PK	2.4892G	61.76	74.00	-12.24	30.72	3	Vertical	12	1.07	-	27.50	3.54	-			
AV	2.4852G	50.48	54.00	-3.52	19.44	3	Vertical	12	1.07	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

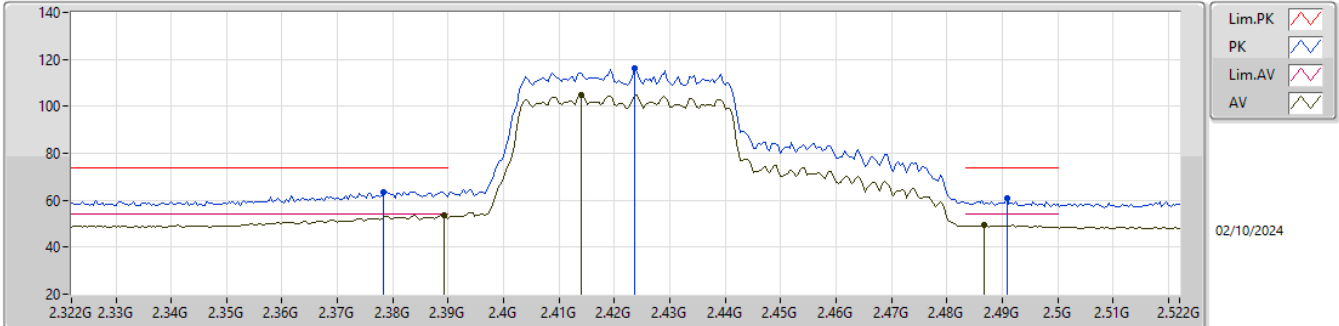


EUT_Y_4TX
Setting 70
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3784G	63.49	74.00	-10.51	32.29	3	Horizontal	139	1.86	-	27.72	3.48	-			
AV	2.3892G	53.65	54.00	-0.35	22.46	3	Horizontal	139	1.86	-	27.70	3.49	-			
PK	2.4236G	116.15	Inf	-Inf	84.98	3	Horizontal	139	1.86	-	27.66	3.51	-			
AV	2.414G	104.61	Inf	-Inf	73.46	3	Horizontal	139	1.86	-	27.64	3.51	-			
PK	2.4908G	60.74	74.00	-13.26	29.69	3	Horizontal	139	1.86	-	27.50	3.55	-			
AV	2.4868G	49.39	54.00	-4.61	18.35	3	Horizontal	139	1.86	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

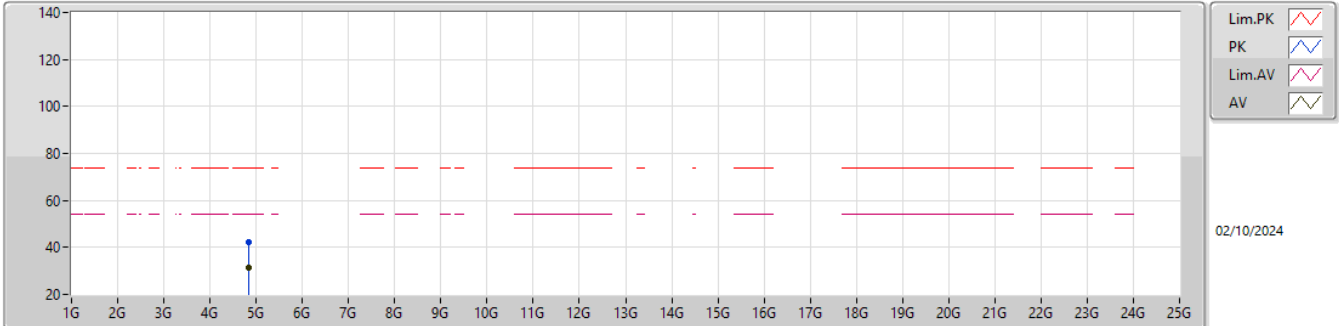


EUT_V_4TX
Setting 70
04-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.83912G	42.14	74.00	-31.86	49.24	3	Vertical	123	2.83	-	31.30	5.53	43.93			
AV	4.83684G	31.22	54.00	-22.78	38.32	3	Vertical	123	2.83	-	31.30	5.53	43.93			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

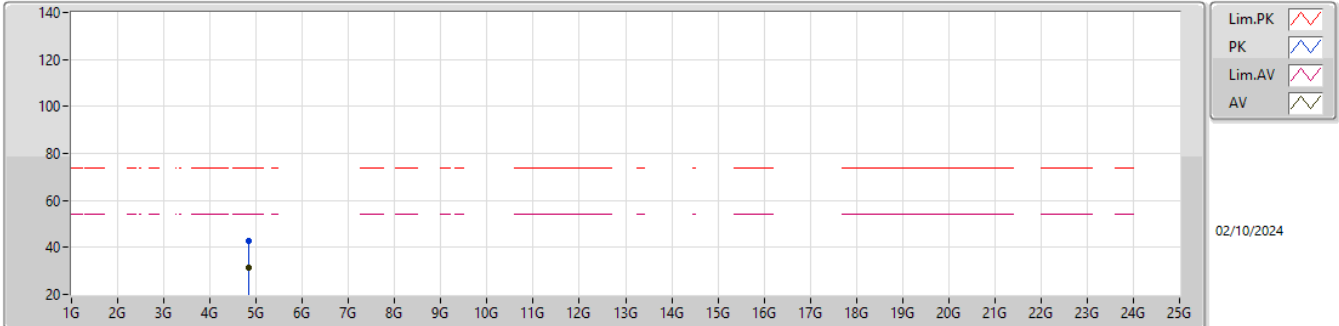


EUT_V_4TX
Setting 70
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.84376G	42.95	74.00	-31.05	50.05	3	Horizontal	221	2.95	-	31.30	5.53	43.93			
AV	4.83408G	31.40	54.00	-22.60	38.50	3	Horizontal	221	2.95	-	31.30	5.53	43.93			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2427MHz_TX

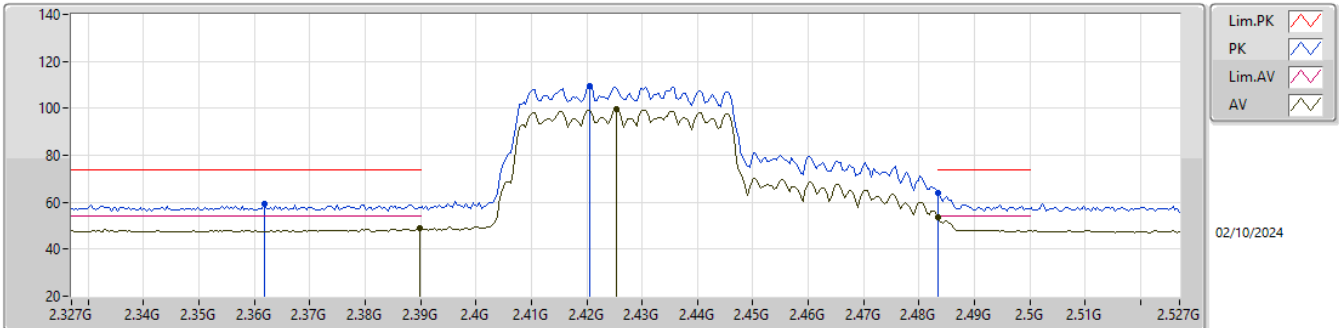


EUT_Y_4TX
Setting 42
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3618G	59.23	74.00	-14.77	27.89	3	Vertical	12	1.05	-	27.88	3.46	-			
AV	2.3898G	48.90	54.00	-5.10	17.71	3	Vertical	12	1.05	-	27.70	3.49	-			
PK	2.4206G	109.64	Inf	-Inf	78.44	3	Vertical	12	1.05	-	27.69	3.51	-			
AV	2.4254G	99.74	Inf	-Inf	68.58	3	Vertical	12	1.05	-	27.65	3.51	-			
PK	2.4835G	64.00	74.00	-10.00	32.96	3	Vertical	12	1.05	-	27.50	3.54	-			
AV	2.4835G	53.71	54.00	-0.29	22.67	3	Vertical	12	1.05	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2427MHz_TX

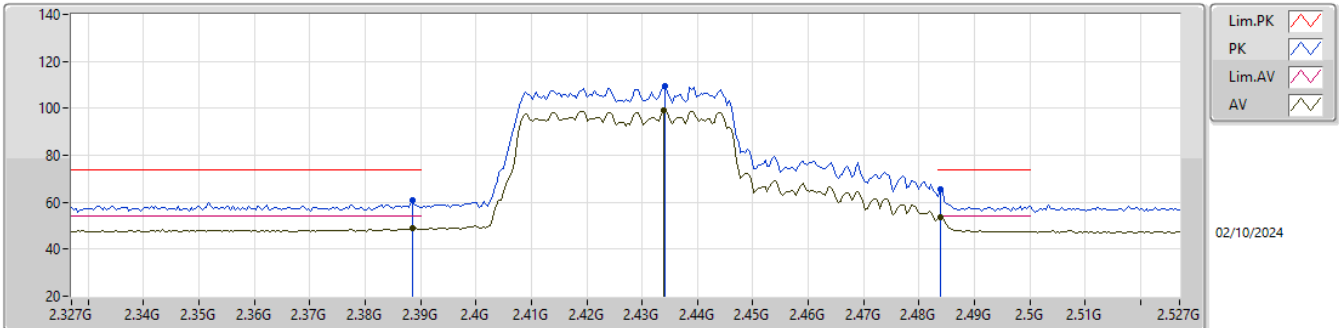


EUT Y_4TX
Setting 42
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3886G	60.71	74.00	-13.29	29.52	3	Horizontal	139	2.07	-	27.70	3.49	-			
AV	2.3886G	48.90	54.00	-5.10	17.71	3	Horizontal	139	2.07	-	27.70	3.49	-			
PK	2.4342G	109.60	Inf	-Inf	78.52	3	Horizontal	139	2.07	-	27.56	3.52	-			
AV	2.4338G	99.14	Inf	-Inf	68.06	3	Horizontal	139	2.07	-	27.56	3.52	-			
PK	2.4838G	65.36	74.00	-8.64	34.32	3	Horizontal	139	2.07	-	27.50	3.54	-			
AV	2.4838G	53.83	54.00	-0.17	22.79	3	Horizontal	139	2.07	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

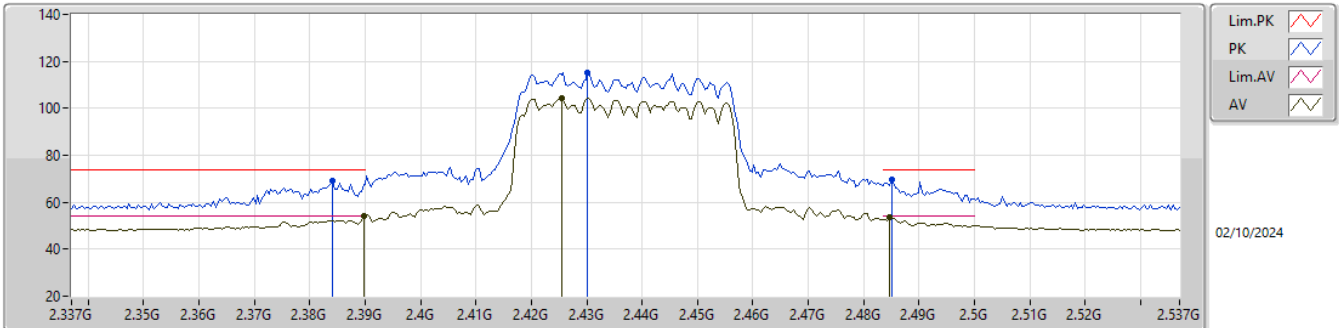


EUT_Y_4TX
Setting 65
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3842G	69.24	74.00	-4.76	38.06	3	Vertical	15	1.04	-	27.70	3.48	-			
AV	2.3898G	53.88	54.00	-0.12	22.69	3	Vertical	15	1.04	-	27.70	3.49	-			
PK	2.4302G	115.05	Inf	-Inf	83.93	3	Vertical	15	1.04	-	27.60	3.52	-			
AV	2.4254G	104.50	Inf	-Inf	73.34	3	Vertical	15	1.04	-	27.65	3.51	-			
PK	2.485G	69.59	74.00	-4.41	38.55	3	Vertical	15	1.04	-	27.50	3.54	-			
AV	2.4846G	53.72	54.00	-0.28	22.68	3	Vertical	15	1.04	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

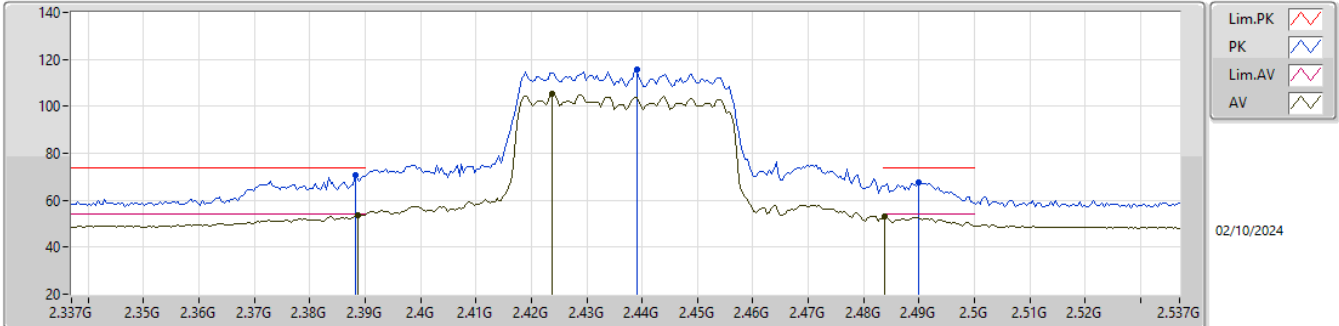


EUT_Y_4TX
Setting 65
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3882G	70.86	74.00	-3.14	39.67	3	Horizontal	149	1.88	-	27.70	3.49	-			
AV	2.3886G	53.76	54.00	-0.24	22.57	3	Horizontal	149	1.88	-	27.70	3.49	-			
PK	2.439G	115.79	Inf	-Inf	84.76	3	Horizontal	149	1.88	-	27.51	3.52	-			
AV	2.4238G	105.10	Inf	-Inf	73.93	3	Horizontal	149	1.88	-	27.66	3.51	-			
PK	2.4898G	67.62	74.00	-6.38	36.58	3	Horizontal	149	1.88	-	27.50	3.54	-			
AV	2.4838G	53.23	54.00	-0.77	22.19	3	Horizontal	149	1.88	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

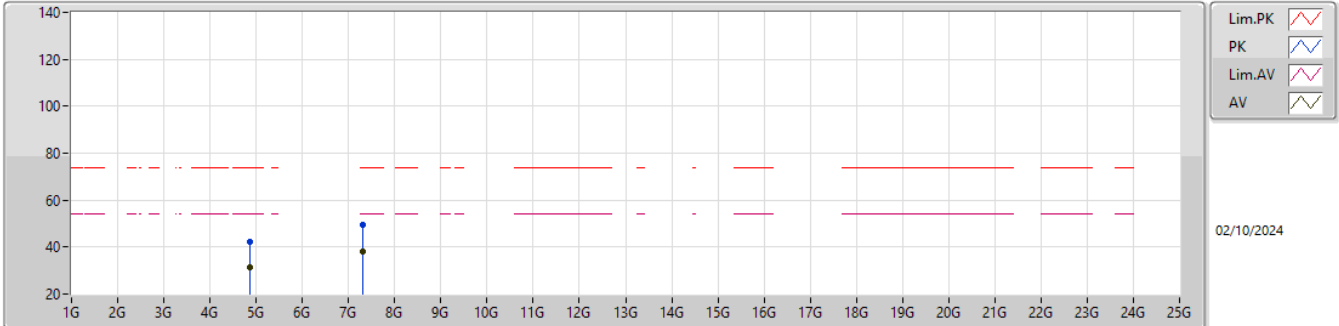


EUT_Y_4TX
Setting 65
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87104G	42.41	74.00	-31.59	49.51	3	Vertical	108	2.41	-	31.30	5.52	43.92			
AV	4.8768G	31.13	54.00	-22.87	38.23	3	Vertical	108	2.41	-	31.30	5.52	43.92			
PK	7.30408G	49.42	74.00	-24.58	48.67	3	Vertical	295	1.80	-	36.28	7.22	42.75			
AV	7.30292G	38.02	54.00	-15.98	37.26	3	Vertical	295	1.80	-	36.29	7.22	42.75			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

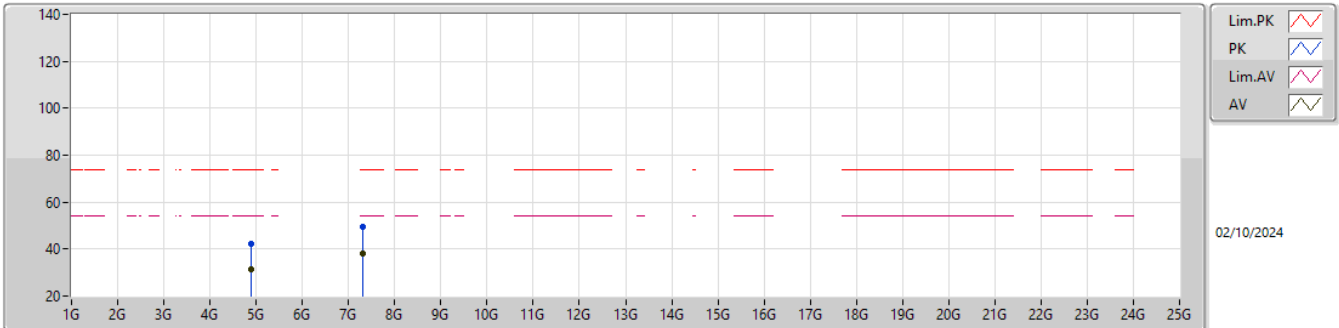


EUT_Y_4TX
Setting 65
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87876G	42.23	74.00	-31.77	49.33	3	Horizontal	41	1.00	-	31.30	5.52	43.92			
AV	4.87776G	31.16	54.00	-22.84	38.26	3	Horizontal	41	1.00	-	31.30	5.52	43.92			
PK	7.31604G	49.40	74.00	-24.60	48.71	3	Horizontal	-0	1.12	-	36.24	7.22	42.77			
AV	7.30992G	37.98	54.00	-16.02	37.26	3	Horizontal	-0	1.12	-	36.26	7.22	42.76			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2447MHz_TX

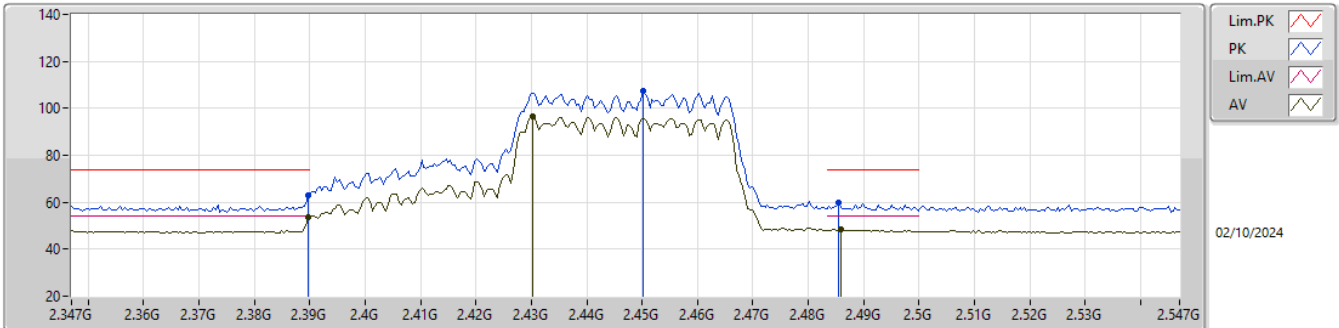


EUT Y_4TX
Setting 35
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	62.96	74.00	-11.04	31.77	3	Vertical	14	1.06	-	27.70	3.49	-			
AV	2.3898G	53.65	54.00	-0.35	22.46	3	Vertical	14	1.06	-	27.70	3.49	-			
PK	2.4502G	107.30	Inf	-Inf	76.27	3	Vertical	14	1.06	-	27.50	3.53	-			
AV	2.4302G	96.51	Inf	-Inf	65.39	3	Vertical	14	1.06	-	27.60	3.52	-			
PK	2.4854G	59.87	74.00	-14.13	28.83	3	Vertical	14	1.06	-	27.50	3.54	-			
AV	2.4858G	48.58	54.00	-5.42	17.54	3	Vertical	14	1.06	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2447MHz_TX

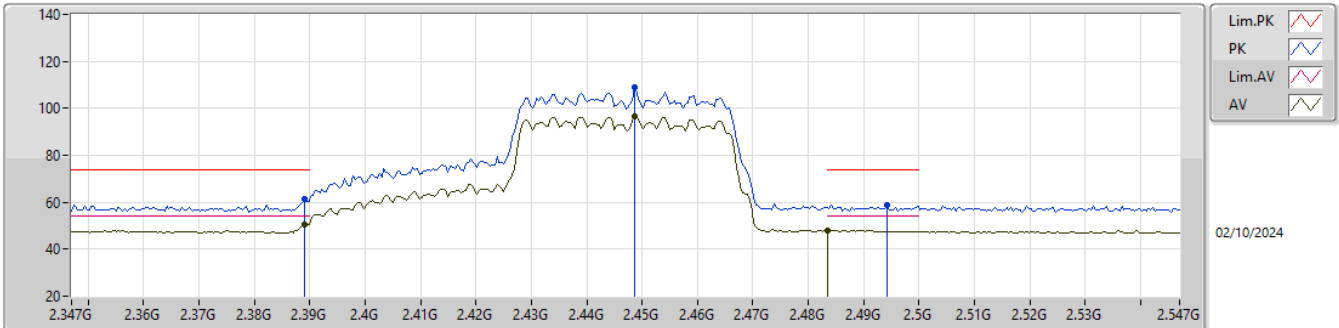


EUT_Y_4TX
Setting 35
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	61.43	74.00	-12.57	30.24	3	Horizontal	143	2.05	-	27.70	3.49	-			
AV	2.389G	50.68	54.00	-3.32	19.49	3	Horizontal	143	2.05	-	27.70	3.49	-			
PK	2.4486G	108.72	Inf	-Inf	77.70	3	Horizontal	143	2.05	-	27.50	3.52	-			
AV	2.4486G	96.54	Inf	-Inf	65.52	3	Horizontal	143	2.05	-	27.50	3.52	-			
PK	2.4942G	58.61	74.00	-15.39	27.56	3	Horizontal	143	2.05	-	27.50	3.55	-			
AV	2.4835G	48.15	54.00	-5.85	17.11	3	Horizontal	143	2.05	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

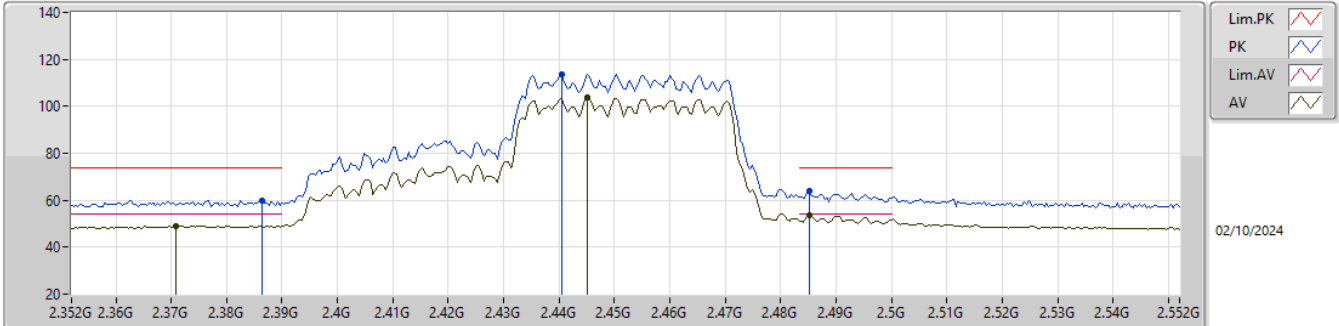


EUT_Y_4TX
Setting 65
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3864G	60.02	74.00	-13.98	28.83	3	Vertical	11	1.19	-	27.70	3.49	-			
AV	2.3708G	49.03	54.00	-4.97	17.77	3	Vertical	11	1.19	-	27.79	3.47	-			
PK	2.4404G	113.66	Inf	-Inf	82.64	3	Vertical	11	1.19	-	27.50	3.52	-			
AV	2.4452G	103.54	Inf	-Inf	72.52	3	Vertical	11	1.19	-	27.50	3.52	-			
PK	2.4852G	63.79	74.00	-10.21	32.75	3	Vertical	11	1.19	-	27.50	3.54	-			
AV	2.4852G	53.60	54.00	-0.40	22.56	3	Vertical	11	1.19	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

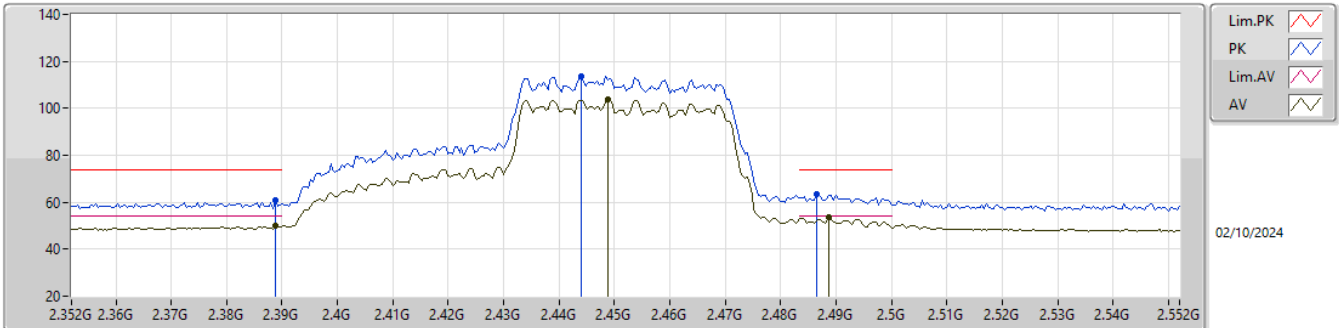


EUT_Y_4TX
Setting 65
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3888G	60.76	74.00	-13.24	29.57	3	Horizontal	140	2.05	-	27.70	3.49	-			
AV	2.3888G	50.01	54.00	-3.99	18.82	3	Horizontal	140	2.05	-	27.70	3.49	-			
PK	2.444G	113.41	Inf	-Inf	82.39	3	Horizontal	140	2.05	-	27.50	3.52	-			
AV	2.4488G	103.76	Inf	-Inf	72.74	3	Horizontal	140	2.05	-	27.50	3.52	-			
PK	2.4864G	63.49	74.00	-10.51	32.45	3	Horizontal	140	2.05	-	27.50	3.54	-			
AV	2.4888G	53.46	54.00	-0.54	22.42	3	Horizontal	140	2.05	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

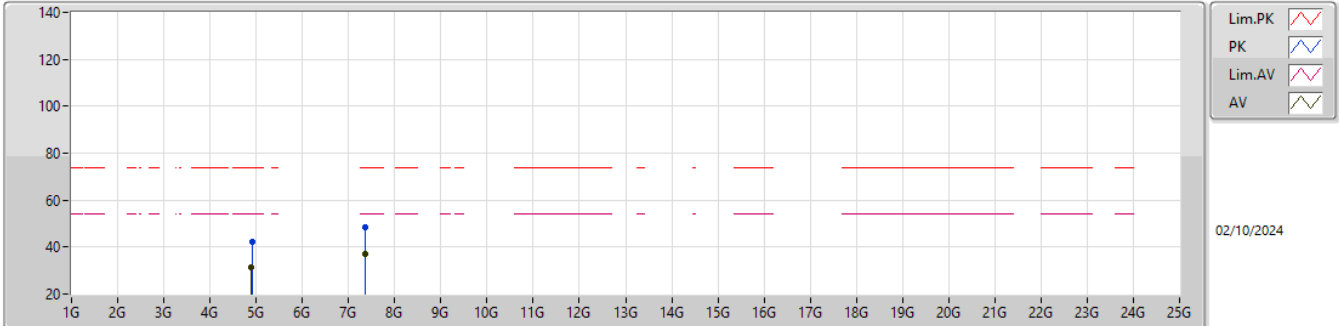


EUT_Y_4TX
Setting 65
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.9076G	42.40	74.00	-31.60	49.47	3	Vertical	108	1.80	-	31.33	5.51	43.91			
AV	4.89472G	31.41	54.00	-22.59	38.51	3	Vertical	108	1.80	-	31.30	5.52	43.92			
PK	7.35364G	48.28	74.00	-25.72	47.78	3	Vertical	321	1.36	-	36.10	7.23	42.83			
AV	7.36328G	37.30	54.00	-16.70	36.81	3	Vertical	321	1.36	-	36.10	7.23	42.84			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

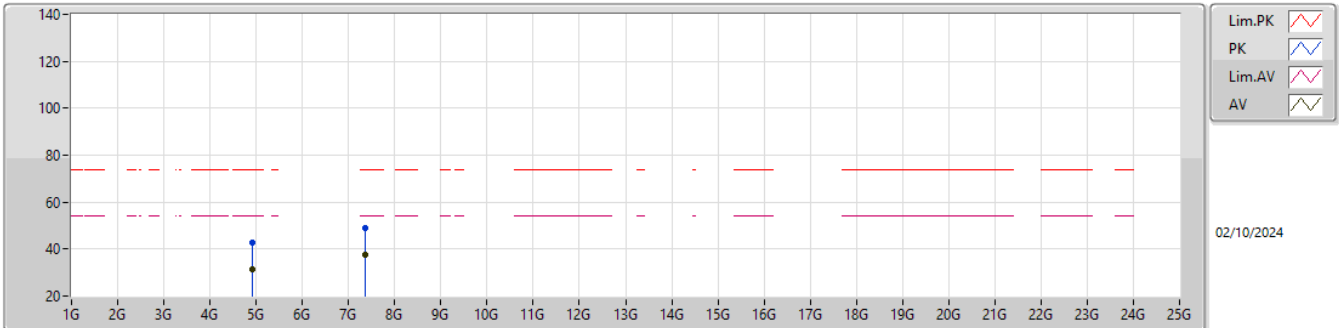


EUT_Y_4TX
Setting 65
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.90684G	42.89	74.00	-31.11	49.96	3	Horizontal	65	1.80	-	31.33	5.51	43.91			
AV	4.91136G	31.28	54.00	-22.72	38.33	3	Horizontal	65	1.80	-	31.35	5.51	43.91			
PK	7.34876G	48.91	74.00	-25.09	48.41	3	Horizontal	158	1.80	-	36.10	7.22	42.82			
AV	7.35564G	37.71	54.00	-16.29	37.21	3	Horizontal	158	1.80	-	36.10	7.23	42.83			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2457MHz_TX

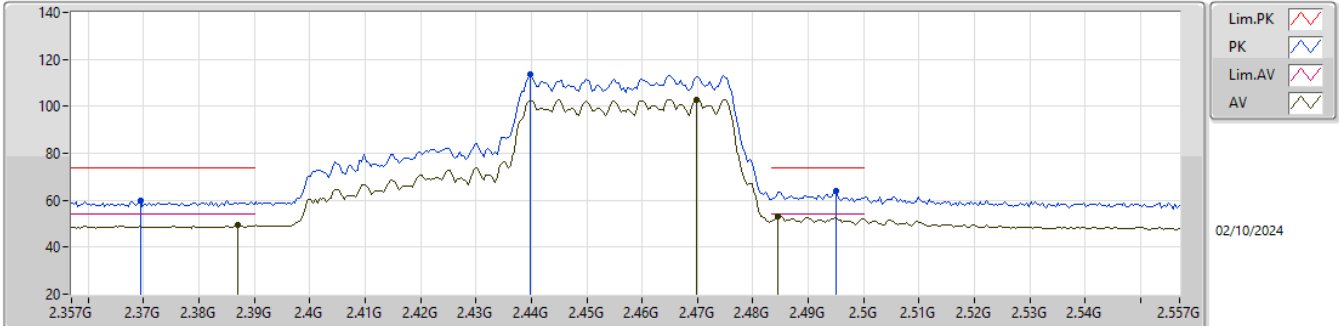


EUT Y_4TX
Setting 64
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3694G	59.67	74.00	-14.33	28.39	3	Vertical	23	1.34	-	27.81	3.47	-			
AV	2.387G	49.28	54.00	-4.72	18.09	3	Vertical	23	1.34	-	27.70	3.49	-			
PK	2.4398G	113.61	Inf	-Inf	82.59	3	Vertical	23	1.34	-	27.50	3.52	-			
AV	2.4698G	102.94	Inf	-Inf	72.01	3	Vertical	23	1.34	-	27.40	3.53	-			
PK	2.495G	64.22	74.00	-9.78	33.17	3	Vertical	23	1.34	-	27.50	3.55	-			
AV	2.4846G	53.23	54.00	-0.77	22.19	3	Vertical	23	1.34	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2457MHz_TX

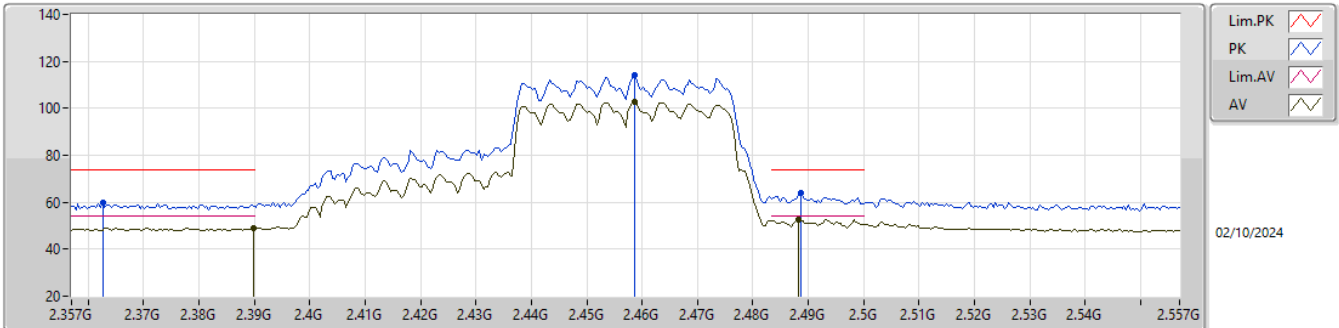


EUT Y_4TX
Setting 64
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3626G	59.58	74.00	-14.42	28.25	3	Horizontal	342	1.80	-	27.87	3.46	-			
AV	2.3898G	49.10	54.00	-4.90	17.91	3	Horizontal	342	1.80	-	27.70	3.49	-			
PK	2.4586G	114.29	Inf	-Inf	83.35	3	Horizontal	342	1.80	-	27.41	3.53	-			
AV	2.4586G	102.78	Inf	-Inf	71.84	3	Horizontal	342	1.80	-	27.41	3.53	-			
PK	2.4886G	63.96	74.00	-10.04	32.92	3	Horizontal	342	1.80	-	27.50	3.54	-			
AV	2.4882G	52.71	54.00	-1.29	21.67	3	Horizontal	342	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2457MHz_TX

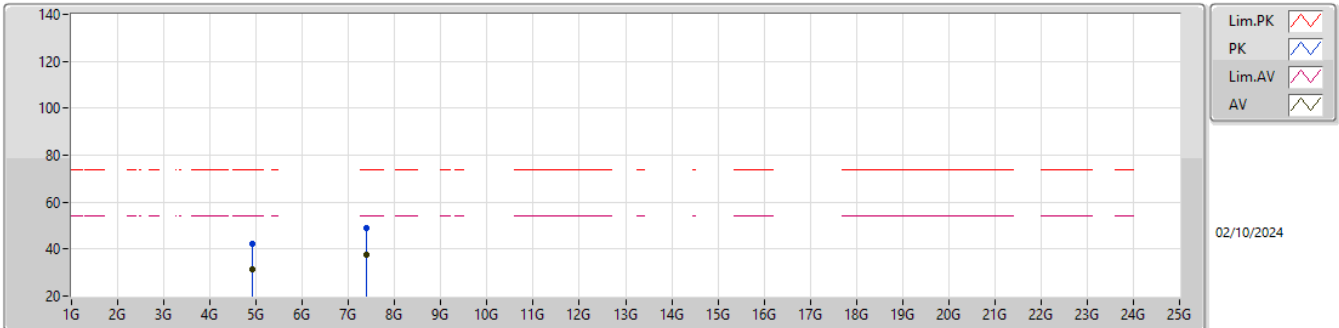


EUT_Y_4TX
Setting 64
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.906G	42.07	74.00	-31.93	49.15	3	Vertical	205	1.80	-	31.32	5.51	43.91			
AV	4.92012G	31.24	54.00	-22.76	38.26	3	Vertical	205	1.80	-	31.38	5.51	43.91			
PK	7.38084G	49.21	74.00	-24.79	48.75	3	Vertical	13	1.80	-	36.10	7.23	42.87			
AV	7.38008G	37.81	54.00	-16.19	37.34	3	Vertical	13	1.80	-	36.10	7.23	42.86			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2457MHz_TX

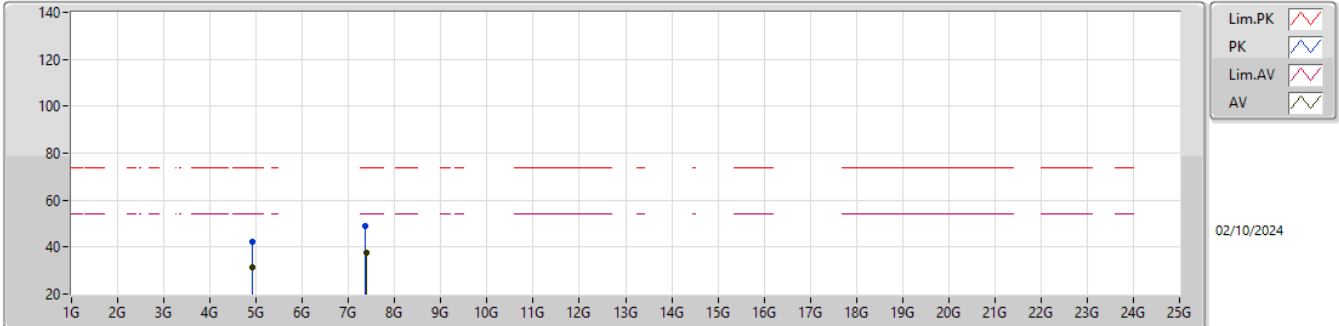


EUT_Y_4TX
Setting 64
04-H-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.90988G	42.42	74.00	-31.58	49.48	3	Horizontal	346	2.59	-	31.34	5.51	43.91			
AV	4.90884G	31.44	54.00	-22.56	38.50	3	Horizontal	346	2.59	-	31.34	5.51	43.91			
PK	7.36528G	48.83	74.00	-25.17	48.34	3	Horizontal	3	1.80	-	36.10	7.23	42.84			
AV	7.3772G	37.76	54.00	-16.24	37.29	3	Horizontal	3	1.80	-	36.10	7.23	42.86			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

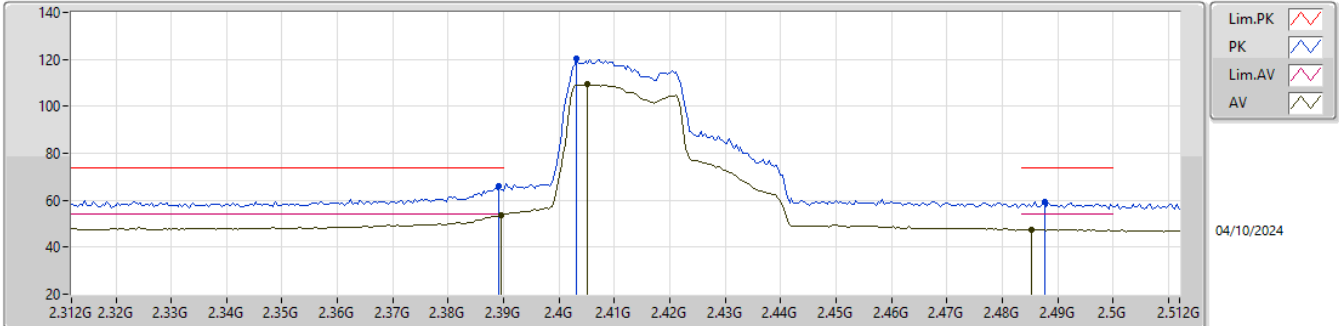


EUT_Y_4TX
Setting 76
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3892G	65.90	74.00	-8.10	34.71	3	Vertical	134	1.30	-	27.70	3.49	-			
AV	2.3896G	53.79	54.00	-0.21	22.60	3	Vertical	134	1.30	-	27.70	3.49	-			
PK	2.4032G	120.33	Inf	-Inf	89.16	3	Vertical	134	1.30	-	27.67	3.50	-			
AV	2.4052G	109.28	Inf	-Inf	78.13	3	Vertical	134	1.30	-	27.65	3.50	-			
PK	2.4876G	59.36	74.00	-14.64	28.32	3	Vertical	134	1.30	-	27.50	3.54	-			
AV	2.4852G	47.61	54.00	-6.39	16.57	3	Vertical	134	1.30	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

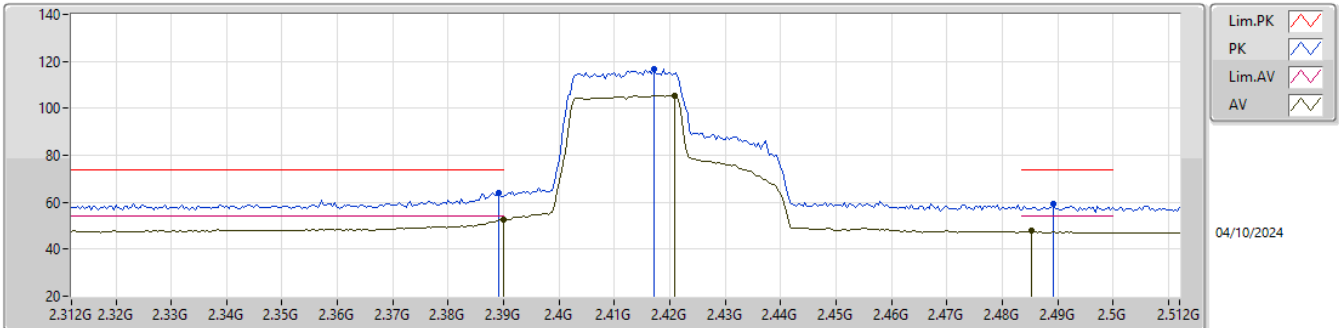


EUT_Y_4TX
Setting 76
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3892G	64.04	74.00	-9.96	32.85	3	Horizontal	137	1.89	-	27.70	3.49	-			
AV	2.39G	52.72	54.00	-1.28	21.53	3	Horizontal	137	1.89	-	27.70	3.49	-			
PK	2.4172G	116.77	Inf	-Inf	85.59	3	Horizontal	137	1.89	-	27.67	3.51	-			
AV	2.4208G	105.40	Inf	-Inf	74.20	3	Horizontal	137	1.89	-	27.69	3.51	-			
PK	2.4892G	59.30	74.00	-14.70	28.26	3	Horizontal	137	1.89	-	27.50	3.54	-			
AV	2.4852G	47.84	54.00	-6.16	16.80	3	Horizontal	137	1.89	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

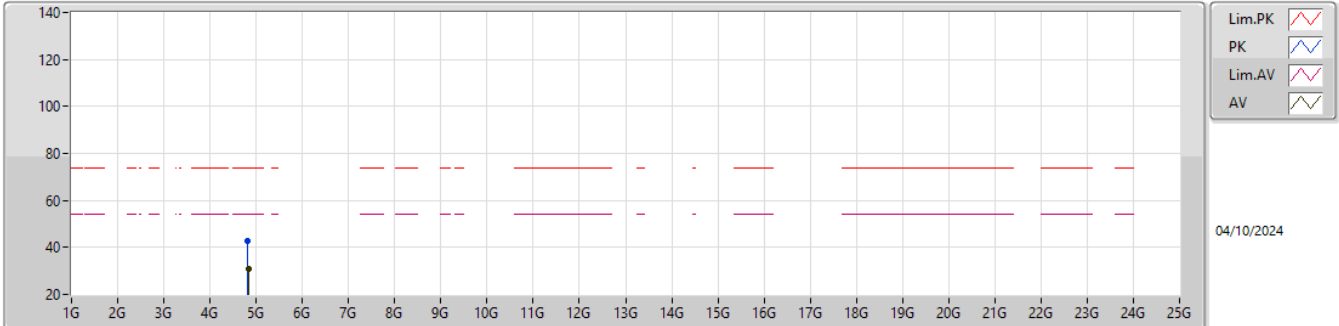


EUT_V_4TX
Setting 76
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82084G	42.87	74.00	-31.13	49.98	3	Vertical	128	2.42	-	31.30	5.53	43.94			
AV	4.82548G	31.01	54.00	-22.99	38.12	3	Vertical	128	2.42	-	31.30	5.53	43.94			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

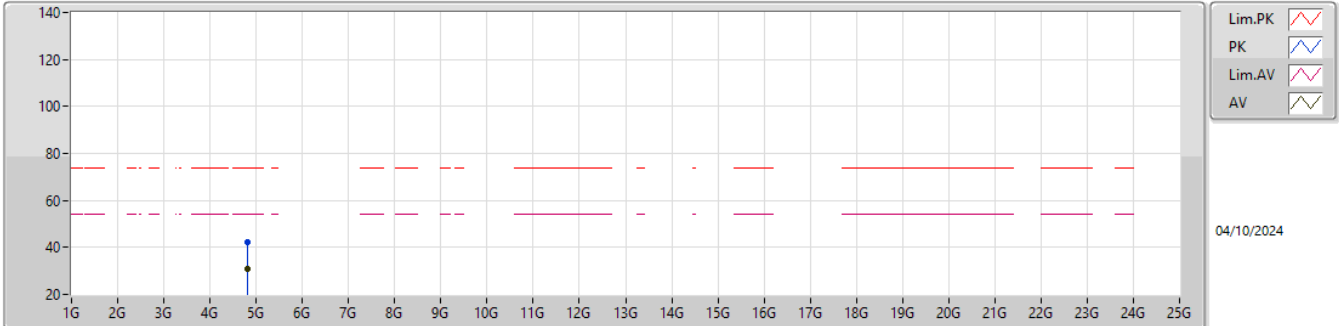


EUT_Y_4TX
Setting 76
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.81432G	42.43	74.00	-31.57	49.53	3	Horizontal	96	2.51	-	31.30	5.54	43.94			
AV	4.82384G	30.99	54.00	-23.01	38.10	3	Horizontal	96	2.51	-	31.30	5.53	43.94			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2417MHz_TX

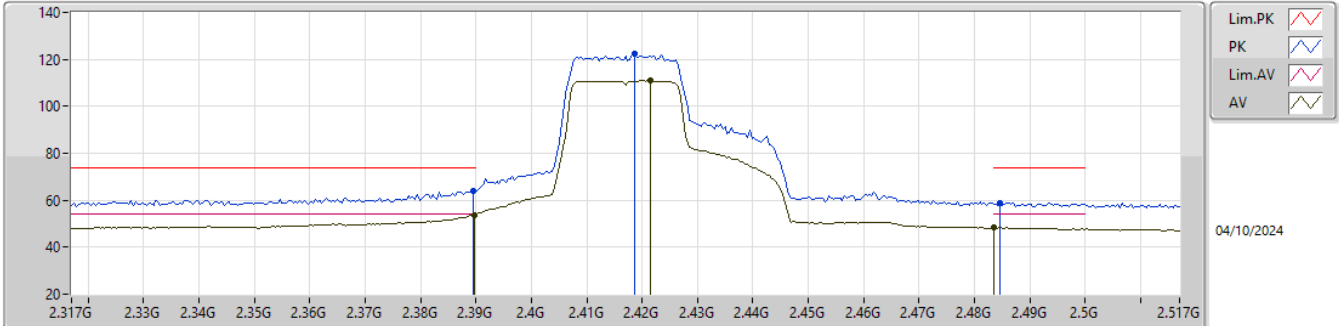


EUT Y_4TX
Setting 87
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	64.07	74.00	-9.93	32.88	3	Vertical	140	1.58	-	27.70	3.49	-			
AV	2.3898G	53.79	54.00	-0.21	22.60	3	Vertical	140	1.58	-	27.70	3.49	-			
PK	2.4186G	122.61	Inf	-Inf	91.41	3	Vertical	140	1.58	-	27.69	3.51	-			
AV	2.4214G	110.93	Inf	-Inf	79.73	3	Vertical	140	1.58	-	27.69	3.51	-			
PK	2.4846G	58.94	74.00	-15.06	27.90	3	Vertical	140	1.58	-	27.50	3.54	-			
AV	2.4835G	48.28	54.00	-5.72	17.24	3	Vertical	140	1.58	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2417MHz_TX

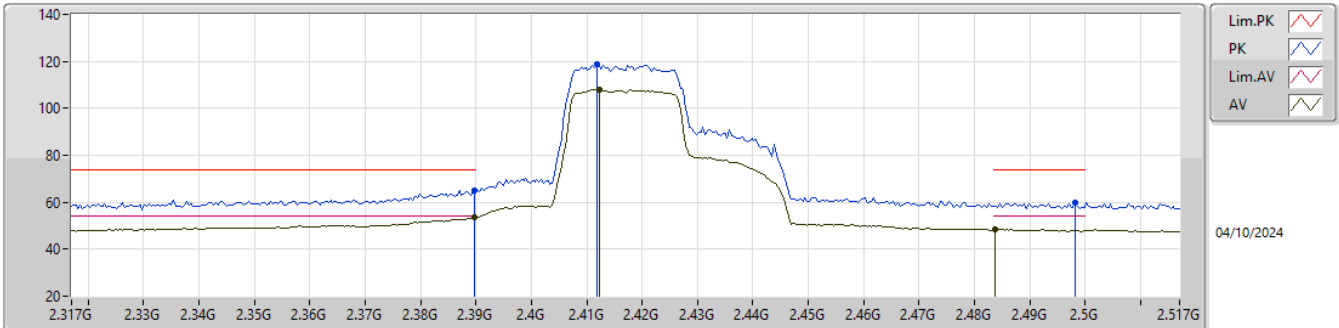


EUT_Y_4TX
Setting 87
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	65.04	74.00	-8.96	33.85	3	Horizontal	156	1.88	-	27.70	3.49	-			
AV	2.3898G	53.79	54.00	-0.21	22.60	3	Horizontal	156	1.88	-	27.70	3.49	-			
PK	2.4118G	118.75	Inf	-Inf	87.62	3	Horizontal	156	1.88	-	27.62	3.51	-			
AV	2.4122G	107.80	Inf	-Inf	76.67	3	Horizontal	156	1.88	-	27.62	3.51	-			
PK	2.4982G	59.63	74.00	-14.37	28.58	3	Horizontal	156	1.88	-	27.50	3.55	-			
AV	2.4838G	48.50	54.00	-5.50	17.46	3	Horizontal	156	1.88	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

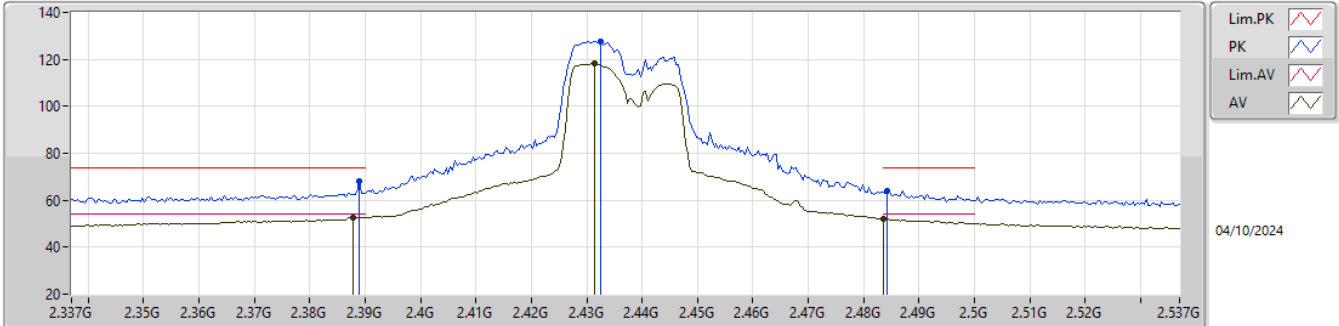


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	68.29	74.00	-5.71	37.10	3	Vertical	295	1.28	-	27.70	3.49	-			
AV	2.3878G	52.59	54.00	-1.41	21.40	3	Vertical	295	1.28	-	27.70	3.49	-			
PK	2.4326G	127.51	Inf	-Inf	96.42	3	Vertical	295	1.28	-	27.57	3.52	-			
AV	2.4314G	118.09	Inf	-Inf	86.98	3	Vertical	295	1.28	-	27.59	3.52	-			
PK	2.4842G	63.99	74.00	-10.01	32.95	3	Vertical	295	1.28	-	27.50	3.54	-			
AV	2.4835G	52.09	54.00	-1.91	21.05	3	Vertical	295	1.28	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

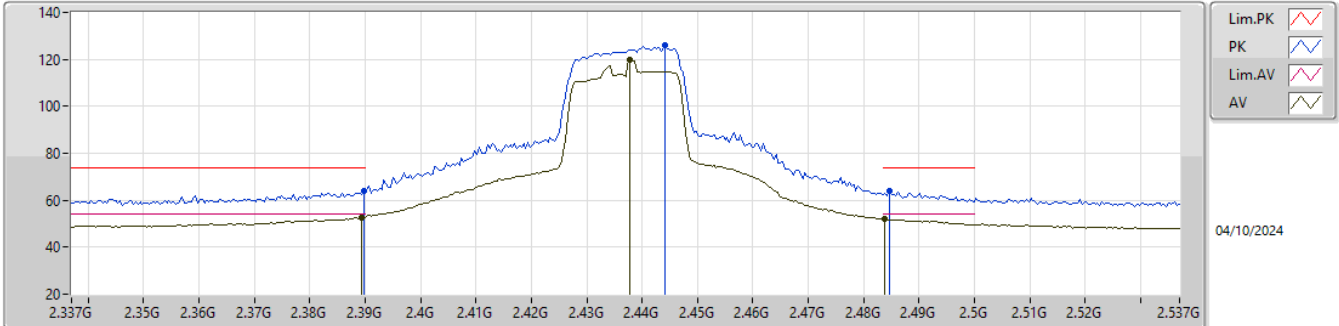


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	64.14	74.00	-9.86	32.95	3	Horizontal	17	1.24	-	27.70	3.49	-			
AV	2.3894G	52.60	54.00	-1.40	21.41	3	Horizontal	17	1.24	-	27.70	3.49	-			
PK	2.4442G	126.16	Inf	-Inf	95.14	3	Horizontal	17	1.24	-	27.50	3.52	-			
AV	2.4378G	119.96	Inf	-Inf	88.92	3	Horizontal	17	1.24	-	27.52	3.52	-			
PK	2.4846G	64.06	74.00	-9.94	33.02	3	Horizontal	17	1.24	-	27.50	3.54	-			
AV	2.4838G	51.95	54.00	-2.05	20.91	3	Horizontal	17	1.24	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

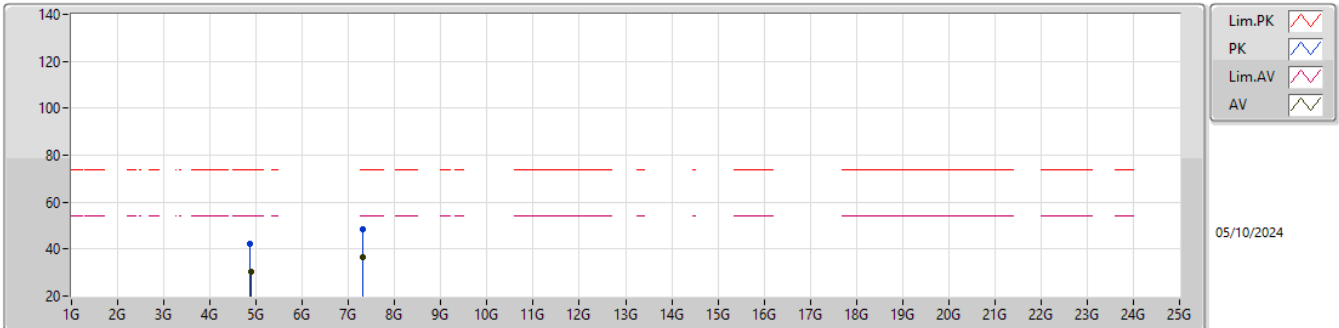


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87656G	42.20	74.00	-31.80	49.30	3	Vertical	202	2.93	-	31.30	5.52	43.92			
AV	4.87768G	30.30	54.00	-23.70	37.40	3	Vertical	202	2.93	-	31.30	5.52	43.92			
PK	7.30904G	48.50	74.00	-25.50	47.78	3	Vertical	127	1.37	-	36.26	7.22	42.76			
AV	7.301G	36.71	54.00	-17.29	35.94	3	Vertical	127	1.37	-	36.30	7.22	42.75			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

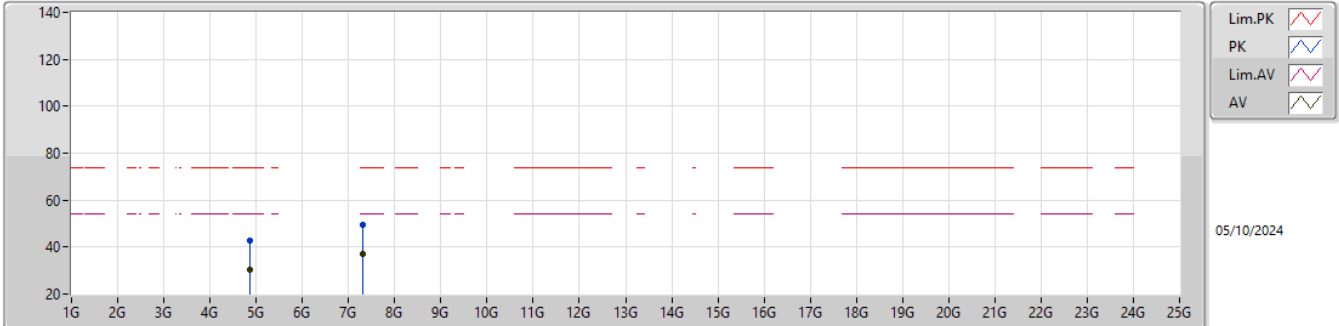


EUT_Y_4TX
Setting 108
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87652G	42.76	74.00	-31.24	49.86	3	Horizontal	220	1.80	-	31.30	5.52	43.92				
AV	4.86824G	30.42	54.00	-23.58	37.52	3	Horizontal	220	1.80	-	31.30	5.52	43.92				
PK	7.31308G	49.23	74.00	-24.77	48.53	3	Horizontal	352	1.80	-	36.25	7.22	42.77				
AV	7.31132G	36.97	54.00	-17.03	36.26	3	Horizontal	352	1.80	-	36.25	7.22	42.76				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2457MHz_TX

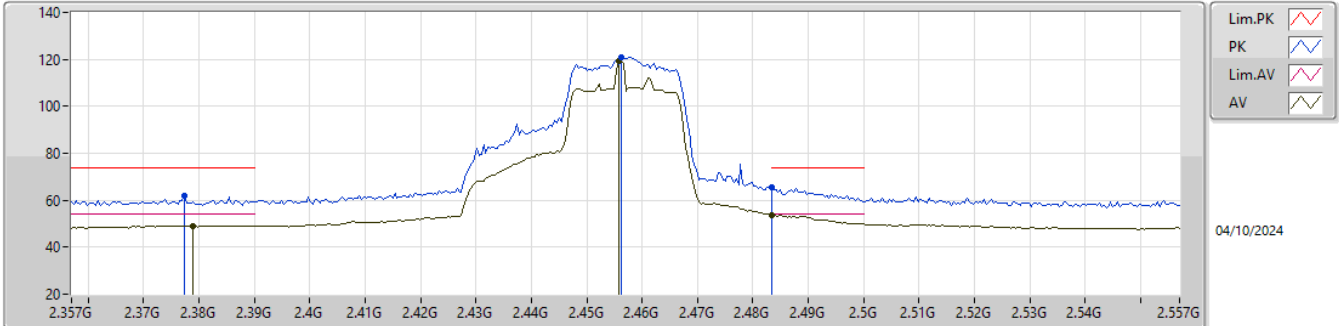


EUT Y_4TX
Setting 97
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3774G	61.89	74.00	-12.11	30.68	3	Vertical	94	2.40	-	27.73	3.48	-				
AV	2.379G	49.22	54.00	-4.78	18.03	3	Vertical	94	2.40	-	27.71	3.48	-				
PK	2.4562G	121.03	Inf	-Inf	90.06	3	Vertical	94	2.40	-	27.44	3.53	-				
AV	2.4558G	119.18	Inf	-Inf	88.21	3	Vertical	94	2.40	-	27.44	3.53	-				
PK	2.4835G	65.60	74.00	-8.40	34.56	3	Vertical	94	2.40	-	27.50	3.54	-				
AV	2.4835G	53.63	54.00	-0.37	22.59	3	Vertical	94	2.40	-	27.50	3.54	-				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2457MHz_TX

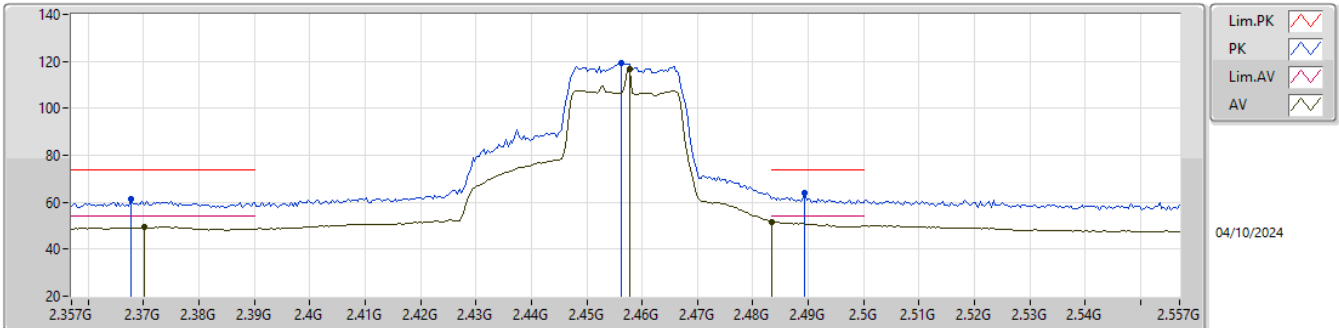


EUT_Y_4TX
Setting 97
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3678G	61.24	74.00	-12.76	29.95	3	Horizontal	137	2.42	-	27.82	3.47	-				
AV	2.3702G	49.53	54.00	-4.47	18.26	3	Horizontal	137	2.42	-	27.80	3.47	-				
PK	2.4562G	119.10	Inf	-Inf	88.13	3	Horizontal	137	2.42	-	27.44	3.53	-				
AV	2.4578G	116.83	Inf	-Inf	85.88	3	Horizontal	137	2.42	-	27.42	3.53	-				
PK	2.4894G	64.18	74.00	-9.82	33.14	3	Horizontal	137	2.42	-	27.50	3.54	-				
AV	2.4835G	51.80	54.00	-2.20	20.76	3	Horizontal	137	2.42	-	27.50	3.54	-				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

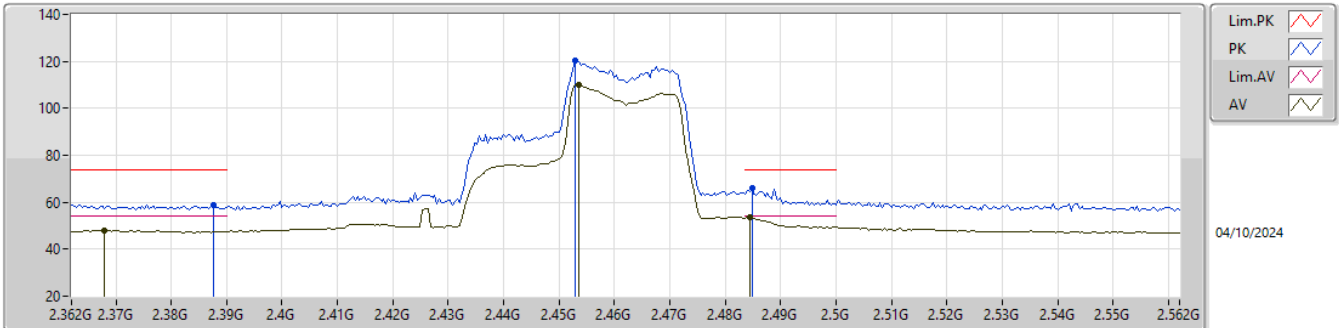


EUT Y_4TX
Setting 80
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3876G	58.95	74.00	-15.05	27.76	3	Vertical	7	1.80	-	27.70	3.49	-			
AV	2.368G	47.94	54.00	-6.06	16.65	3	Vertical	7	1.80	-	27.82	3.47	-			
PK	2.4528G	120.26	Inf	-Inf	89.26	3	Vertical	7	1.80	-	27.47	3.53	-			
AV	2.4536G	109.98	Inf	-Inf	78.99	3	Vertical	7	1.80	-	27.46	3.53	-			
PK	2.4848G	66.17	74.00	-7.83	35.13	3	Vertical	7	1.80	-	27.50	3.54	-			
AV	2.4844G	53.74	54.00	-0.26	22.70	3	Vertical	7	1.80	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

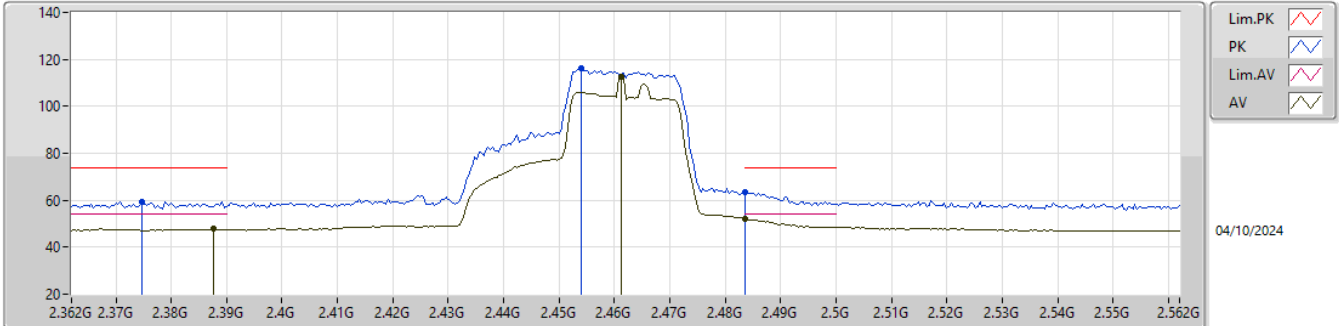


EUT Y_4TX
Setting 80
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3748G	59.38	74.00	-14.62	28.16	3	Horizontal	132	2.19	-	27.75	3.47	-			
AV	2.3876G	47.76	54.00	-6.24	16.57	3	Horizontal	132	2.19	-	27.70	3.49	-			
PK	2.454G	116.38	Inf	-Inf	85.39	3	Horizontal	132	2.19	-	27.46	3.53	-			
AV	2.4612G	112.54	Inf	-Inf	81.61	3	Horizontal	132	2.19	-	27.40	3.53	-			
PK	2.4835G	63.44	74.00	-10.56	32.40	3	Horizontal	132	2.19	-	27.50	3.54	-			
AV	2.4835G	51.95	54.00	-2.05	20.91	3	Horizontal	132	2.19	-	27.50	3.54	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

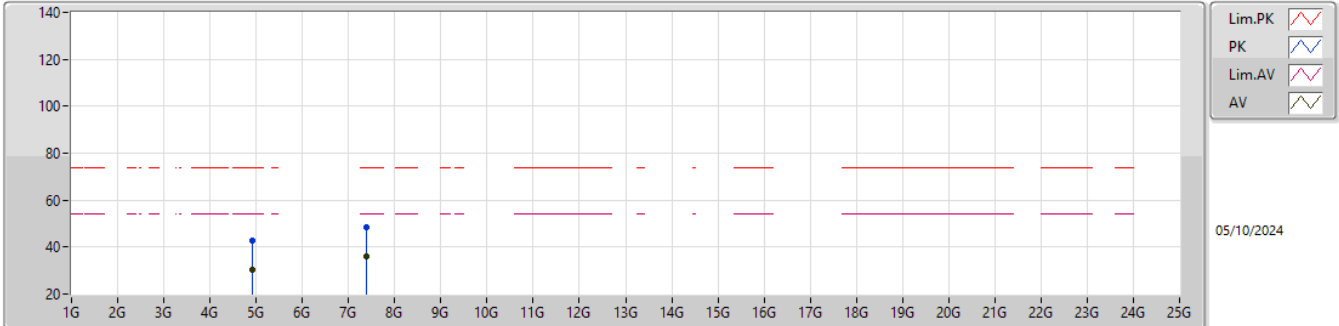


EUT_Y_4TX
Setting 80
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.91492G	42.58	74.00	-31.42	49.62	3	Vertical	62	1.58	-	31.36	5.51	43.91			
AV	4.9268G	30.55	54.00	-23.45	37.54	3	Vertical	62	1.58	-	31.41	5.51	43.91			
PK	7.39588G	48.50	74.00	-25.50	48.06	3	Vertical	240	1.80	-	36.10	7.23	42.89			
AV	7.37888G	36.04	54.00	-17.96	35.57	3	Vertical	240	1.80	-	36.10	7.23	42.86			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

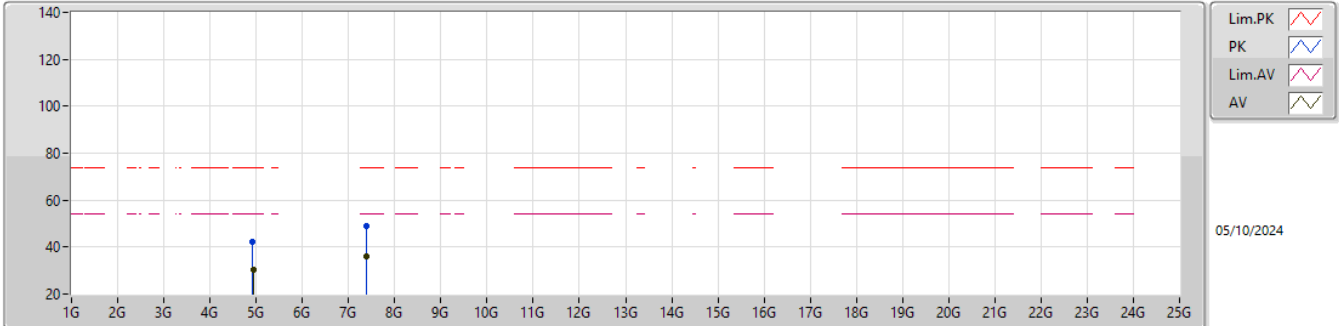

EUT_Y_4TX
Setting 80
04-H-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.91696G	42.39	74.00	-31.61	49.42	3	Horizontal	69	1.92	-	31.37	5.51	43.91			
AV	4.93184G	30.32	54.00	-23.68	37.29	3	Horizontal	69	1.92	-	31.43	5.51	43.91			
PK	7.37692G	48.83	74.00	-25.17	48.36	3	Horizontal	277	2.25	-	36.10	7.23	42.86			
AV	7.383G	35.92	54.00	-18.08	35.46	3	Horizontal	277	2.25	-	36.10	7.23	42.87			