

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Mobile phone

Trademark : Digicel

Model Name : DL241

Family Model : N/A

Report No. : STR201023001007E

FCC ID : 2AXY3DL241

Prepared for

JOSH COMMUNICATION TECHNOLOGY CO.,LIMITED
RM./FLAT B.13/F,GOLD SHINE TOWER,346-348 QUEEN'S RD CENTRAL,SHEUNG
WAN,HONG KONG

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.
Tel.: 400-800-6106, 0755-3699 5508
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name**.....: JOSH COMMUNICATION TECHNOLOGY CO.,LIMITEDAddress.....: RM./FLAT B.13/F,GOLD SHINE TOWER,346-348 QUEEN'S RD
CENTRAL,SHEUNG WAN,HONG KONG**Manufacturer's Name**.....: JOSH COMMUNICATION TECHNOLOGY CO.,LIMITEDAddress.....: RM./FLAT B.13/F,GOLD SHINE TOWER,346-348 QUEEN'S RD
CENTRAL,SHEUNG WAN,HONG KONG**Product description**

Product name.....: Mobile phone

Trademark: Digicel

Model Name: DL241

Family Model.....: N/A

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards.....: IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests.....: Oct. 23, 2020 ~ Nov. 04, 2020

Date of Issue: Nov. 20, 2020

Test Result: **Pass**Prepared By
(Test Engineer): 
(Cheng Jiawen)Approved By
(Lab Manager): 
(Alex Li)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Nov. 20, 2020	Cheng Jiawen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	9
1.5. Ambient Condition.....	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe.....	12
2.3.1. E-Field Probe Calibration	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan.....	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability.....	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Ear and handset reference point	26
6.2. Definition of the cheek position	26
6.3. Definition of the tilt position	28
6.4. Body Worn Accessory	28
6.5. Wireless Router Devices	29
7. RF Output Power	30
7.1. GSM Conducted Power	30
7.2. WCDMA Conducted Power	31
7.3. LTE Conducted Power	31

7.4. WLAN & Bluetooth Output Power	38
7.4.1. Output Power Results Of WLAN	38
7.4.2. Output Power Results Of Bluetooth.....	38
8. Antenna Location.....	39
9. Stand-alone SAR test exclusion.....	40
10. SAR Results	40
10.1. SAR measurement results	40
10.1.1. SAR measurement Result of GSM850.....	40
10.1.2. SAR measurement Result of GSM1900.....	41
10.1.3. SAR measurement Result of WCDMA Band 2.....	42
10.1.4. SAR measurement Result of WCDMA Band 5.....	43
10.1.5. SAR measurement Result of LTE Band 2	44
10.1.6. SAR measurement Result of LTE Band 4	46
10.1.7. SAR measurement Result of LTE Band 12	48
10.1.8. SAR measurement Result of LTE Band 17	50
10.1.9. SAR measurement Result of WLAN 2.4G	52
10.2. SAR Summation Scenario.....	53
11. Appendix A. Photo documentation	60
12. Appendix B. System Check Plots.....	60
13. Appendix C. Plots of High SAR Measurement.....	81
14. Appendix D. Calibration Certificate	118

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD AND TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for DL241 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		0.653	0.420	N/A	N/A
1-g Body-Worn (Separation distance of 10mm)		0.813	0.401	N/A	N/A
1-g Hotspot (Separation distance of 10mm)		0.813	0.401	N/A	N/A
Max Simultaneous Tx	Head	1.073	1.073	N/A	0.786
	Body-Worn	1.214	1.214	N/A	0.879
	Hotspot	1.214	1.214	N/A	0.879

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	Mobile phone		
Trade Name	Digicel		
Model Name	DL241		
Family Model	N/A		
FCC ID	2AXY3DL241		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna	PIFA Antenna		
Battery Information	DC 3.7V, 1000mAh, 3.7Wh		
Device Operating Configurations			
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/5, LTE Band 2/4/12/17, WLAN 2.4G, Bluetooth		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990

	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	WLAN 2.4G	2412-2462	
	Bluetooth	2402-2480	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 17)		
Test Channels (low-mid-high)	128-189-251(GSM 850)		
	512-661-810(GSM 1900)		
	9262-9400-9538(WCDMA Band 2)		
	4132-4182-4233(WCDMA Band 5)		
	18607-18900-19193(LTE Band 2 BW=1.4MHz)		
	18615-18900-19185(LTE Band 2 BW=3MHz)		
	18625-18900-19175(LTE Band 2 BW=5MHz)		
	18650-18900-19150(LTE Band 2 BW=10MHz)		
	18675-18900-19125(LTE Band 2 BW=15MHz)		
	18700-18900-19100(LTE Band 2 BW=20MHz)		
	19957-20175-20393(LTE Band 4 BW=1.4MHz)		
	19965-20175-20385(LTE Band 4 BW=3MHz)		
	19975-20175-20375(LTE Band 4 BW=5MHz)		
	20000-20175-20350(LTE Band 4 BW=10MHz)		
	20025-20175-20325(LTE Band 4 BW=15MHz)		
	20050-20175-20300(LTE Band 4 BW=20MHz)		
	23017-23095-23173 (LTE Band 12 BW=1.4MHz)		
	23025-23095-23165 (LTE Band 12 BW=3MHz)		

	23035-23095-23155 (LTE Band 12 BW=5MHz)
	23060-23095-23130 (LTE Band 12 BW=10MHz)
	23755-23790-23825(LTE Band 17 BW=5MHz)
	23780-23790-23800(LTE Band 17 BW=10MHz)
	1-6-11(WLAN 2.4G)

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

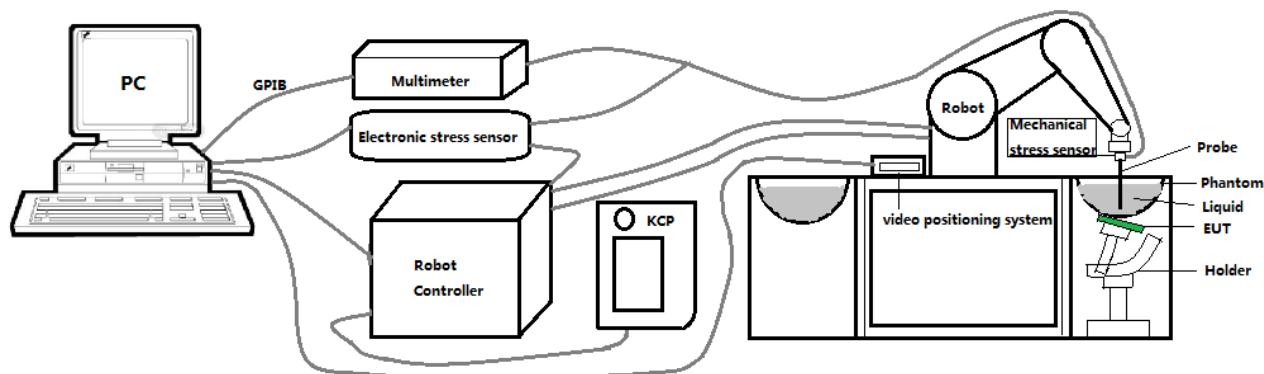

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter: 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: 0.06 dB
 - Hemispherical Isotropy: 0.08 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 7mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

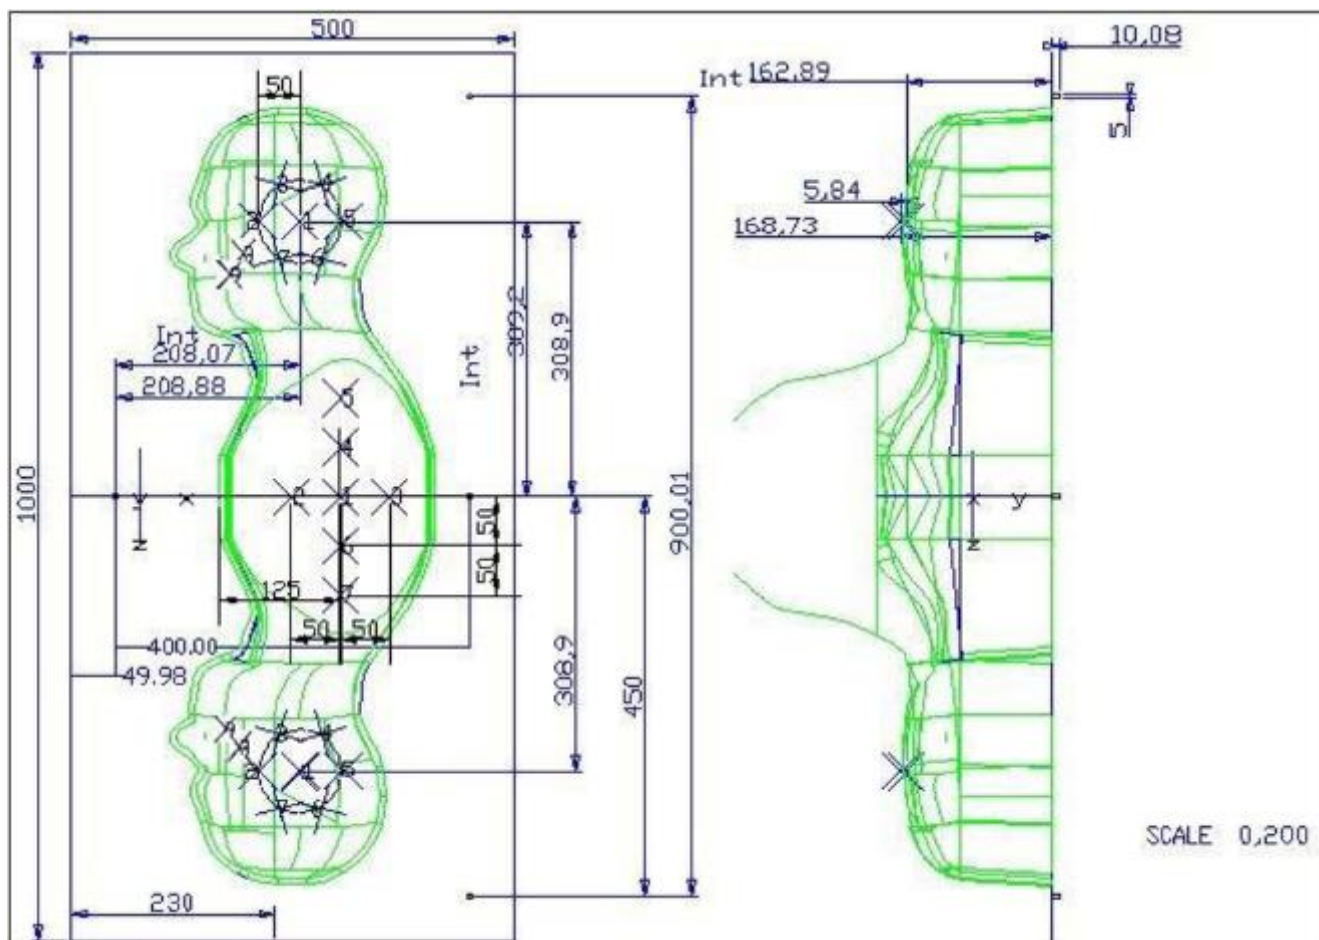


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

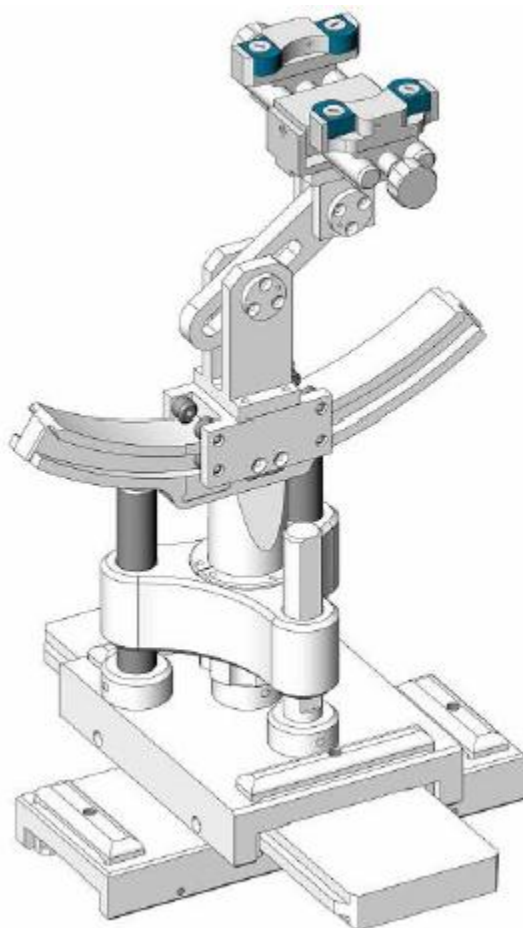

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Dec. 27, 2019	Dec. 26, 2020
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Jul. 13, 2020	Jul. 12, 2021
☒	R&S	Wideband radio communication tester	CMW500	103917	Jul. 13, 2020	Jul. 12, 2021
☒	HP	Network Analyzer	8753D	3410J01136	Jul. 13, 2020	Jul. 12, 2021
☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 13, 2020	Jul. 12, 2021

☒	Agilent	Power meter	E4419B	MY45102538	Jul. 13, 2020	Jul. 12, 2021
☒	Agilent	Power sensor	E9301A	MY41495644	Jul. 13, 2020	Jul. 12, 2021
☒	Agilent	Power sensor	E9301A	US39212148	Jul. 13, 2020	Jul. 12, 2021
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23
Ingredients (% of weight)	Body Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	50.30	50.30	50.30	69.91	69.91	71.88	71.88	71.88	79.54	79.54
NaCl	0.60	0.60	0.60	0.13	0.13	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	49.10	49.10	49.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	9.99	9.99	19.97	19.97	19.97	11.24	11.24
DGBE	0.00	0.00	0.00	19.97	19.97	7.99	7.99	7.99	9.22	9.22

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	41.87	0.91	21.2 °C	Nov. 02, 2020
Body 750	750	55.55 (52.77~58.33)	0.96 (0.91~1.01)	55.60	0.97	21.1 °C	Nov. 02, 2020
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.93	0.92	21.3 °C	Nov. 03, 2020
Body 850	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.66	0.98	21.5 °C	Nov. 03, 2020
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.79	1.37	21.7 °C	Nov. 04, 2020
Body 1800	1800	53.30 (50.64~55.97)	1.52 (1.44~1.60)	54.16	1.51	21.5 °C	Oct. 23, 2020
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.80	1.43	21.5 °C	Oct. 25, 2020
Body 1900	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	54.37	1.52	21.5 °C	Oct. 23, 2020
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.69	1.84	21.4 °C	Oct. 25, 2020
Body 2450	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	51.65	1.88	21.5 °C	Oct. 24, 2020

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

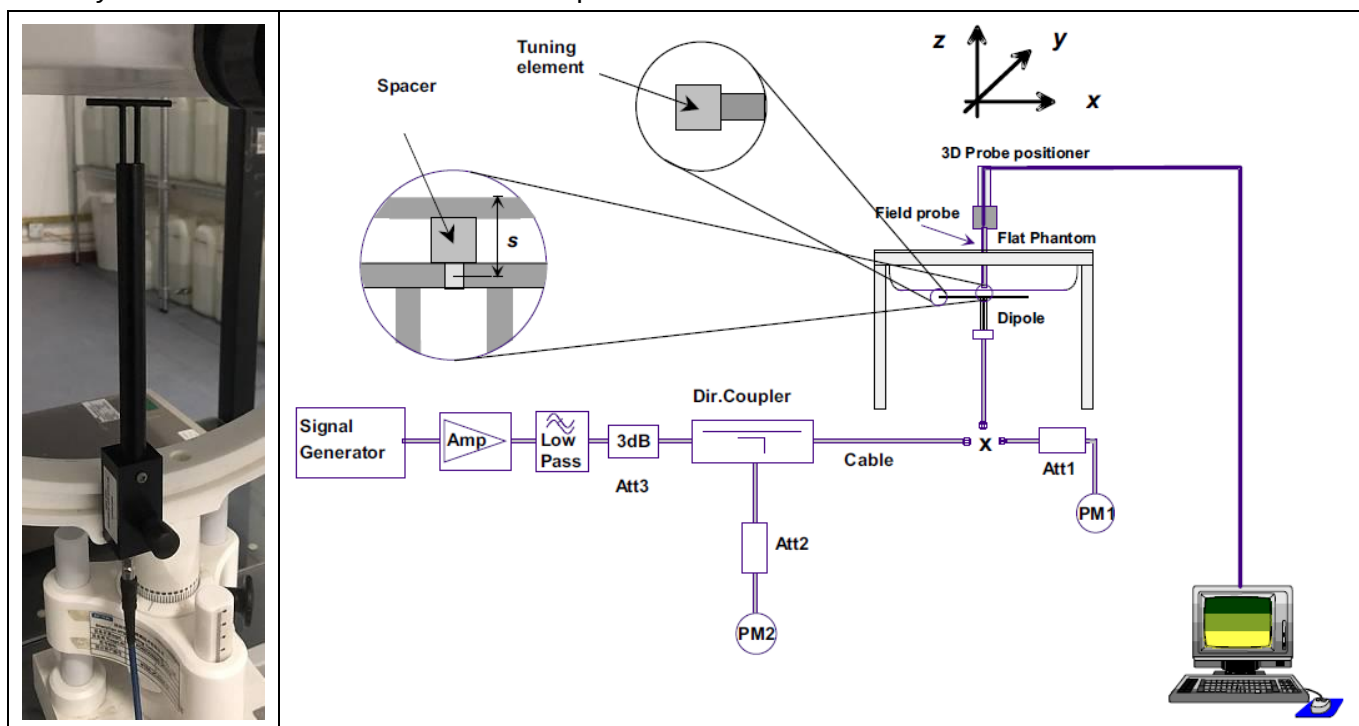

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz Head	8.56 (7.70~9.42)	5.55 (5.00~6.11)	8.54	5.47	21.2 °C	Nov. 02, 2020
750MHz Body	8.85 (7.97~9.74)	5.91 (5.32~6.50)	8.27	5.77	21.1 °C	Nov. 02, 2020
835MHz Head	9.55 (8.60~10.51)	6.10 (5.49~6.71)	9.80	6.19	21.3 °C	Nov. 03, 2020
835MHz Body	9.83 (8.85~10.81)	6.45 (5.81~7.10)	9.65	6.68	21.5 °C	Nov. 03, 2020
1800MHz Head	38.11 (34.30~41.92)	20.05 (18.05~22.06)	36.70	19.27	21.7 °C	Nov. 04, 2020
1800MHz Body	38.13 (34.32~41.94)	20.65 (18.59~22.72)	39.43	21.64	21.5 °C	Oct. 23, 2020
1900MHz Head	38.92 (35.03~42.81)	20.09 (18.08~22.10)	40.65	19.44	21.5 °C	Oct. 25, 2020
1900MHz Body	39.02 (35.12~42.92)	20.57 (18.51~22.63)	37.71	20.61	21.5 °C	Oct. 23, 2020
2450MHz Head	53.76 (48.38~59.14)	24.12 (21.71~26.53)	53.15	24.05	21.4 °C	Oct. 25, 2020
2450MHz Body	52.90 (47.61~58.19)	24.09 (21.68~26.50)	50.63	23.80	21.5 °C	Oct. 24, 2020

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

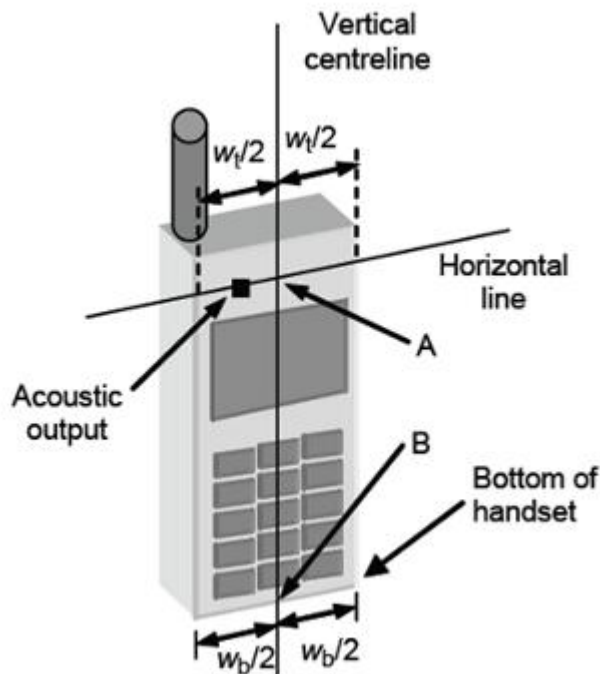


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

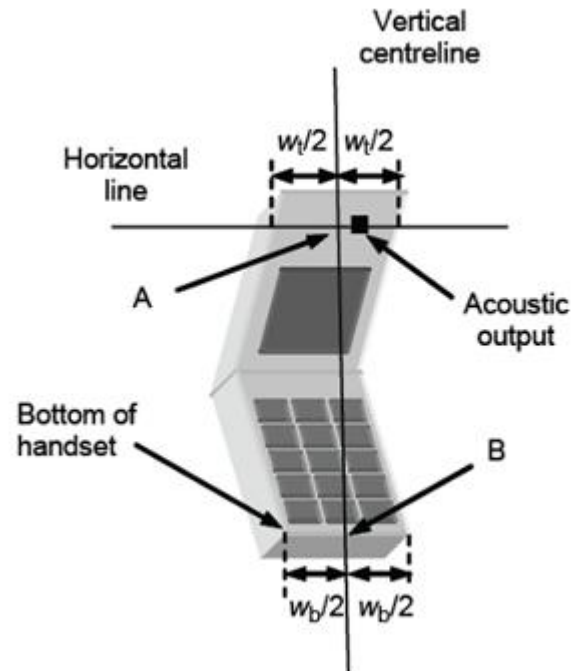


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

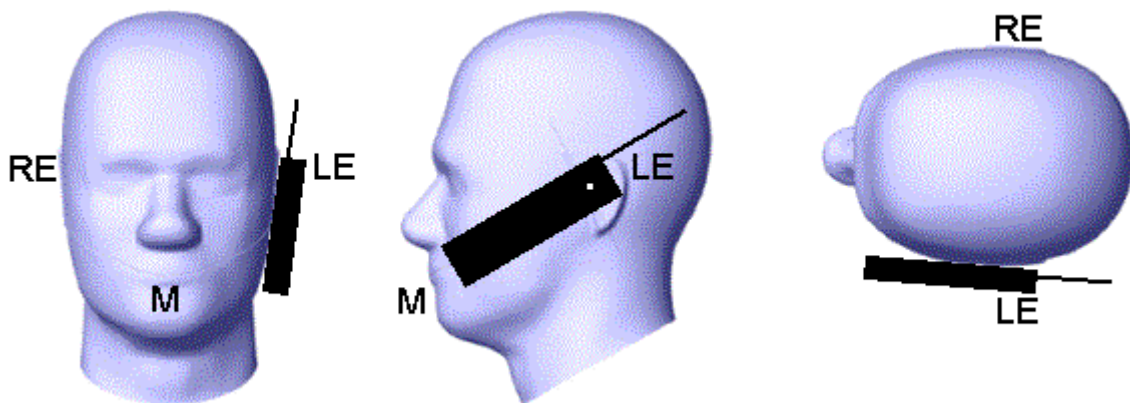


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

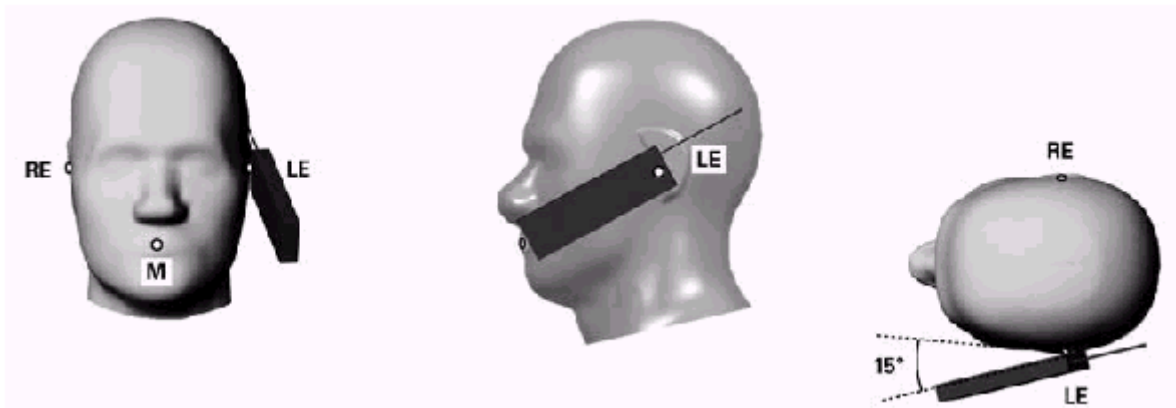


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

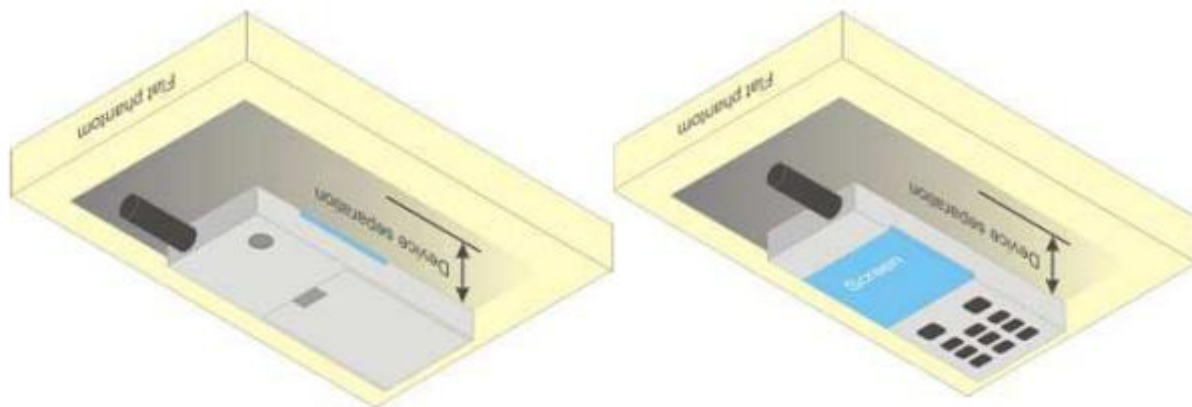


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	29.00	28.15	28.01	27.63	19.97	19.12	18.98	18.60
GPRS(GMSK, 1 TS)	29.00	28.00	28.02	27.67	19.97	18.97	18.99	18.64
GPRS(GMSK, 2 TS)	27.00	26.23	26.12	25.75	20.98	20.21	20.10	19.73
GPRS(GMSK, 3 TS)	25.00	24.43	24.29	23.93	20.74	20.17	20.03	19.67
GPRS(GMSK, 4 TS)	23.00	22.42	22.28	21.91	19.99	19.41	19.27	18.90
EDGE(GMSK, 1 TS)	25.00	24.07	24.07	23.17	15.97	15.04	15.04	14.14
EDGE(GMSK, 2 TS)	23.00	22.98	22.90	22.28	16.98	16.96	16.88	16.26
EDGE(GMSK, 3 TS)	21.00	20.23	20.19	19.50	16.74	15.97	15.93	15.24
EDGE(GMSK, 4 TS)	19.00	17.89	18.03	17.31	15.99	14.88	15.02	14.30
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	29.00	28.10	28.40	28.48	19.97	19.07	19.37	19.45
GPRS(GMSK, 1 TS)	29.00	27.79	28.25	28.52	19.97	18.76	19.22	19.49
GPRS(GMSK, 2 TS)	27.00	25.89	26.12	26.22	20.98	19.87	20.10	20.20
GPRS(GMSK, 3 TS)	25.00	24.13	24.34	24.42	20.74	19.87	20.08	20.16
GPRS(GMSK, 4 TS)	23.00	22.03	22.21	22.27	19.99	19.02	19.20	19.26
EDGE(GMSK, 1 TS)	25.00	23.51	24.37	24.31	15.97	14.48	15.34	15.28
EDGE(GMSK, 2 TS)	23.00	21.98	22.80	22.63	16.98	15.96	16.78	16.61
EDGE(GMSK, 3 TS)	21.00	19.78	20.66	20.46	16.74	15.52	16.40	16.20
EDGE(GMSK, 4 TS)	19.00	17.31	18.19	17.95	15.99	14.30	15.18	14.94

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	21.50	19.89	20.59	21.18
HSDPA Subtest-1	20.50	18.50	20.28	20.47
HSDPA Subtest-2	20.50	18.95	20.12	20.24
HSDPA Subtest-3	20.00	18.00	19.42	19.90
HSDPA Subtest-4	20.00	18.00	19.41	19.65
HSUPA Subtest-1	20.50	18.53	20.16	20.47
HSUPA Subtest-2	20.50	18.58	20.22	20.43
HSUPA Subtest-3	20.50	18.81	19.89	20.15
HSUPA Subtest-4	20.50	18.52	20.23	20.41
HSUPA Subtest-5	20.50	18.52	19.77	20.17
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	19.00	18.49	18.98	18.97
HSDPA Subtest-1	21.00	19.56	19.39	20.18
HSDPA Subtest-2	20.00	19.70	19.29	19.86
HSDPA Subtest-3	20.00	19.06	19.18	19.79
HSDPA Subtest-4	20.00	19.13	19.05	19.33
HSUPA Subtest-1	21.00	19.72	19.27	20.09
HSUPA Subtest-2	21.00	19.78	19.26	20.15
HSUPA Subtest-3	20.00	19.53	19.08	19.93
HSUPA Subtest-4	21.00	19.77	19.39	20.21
HSUPA Subtest-5	20.00	19.79	19.32	19.96

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	22.00	20.69	21.18	21.58
			1	2	22.00	20.66	21.08	21.62
			1	5	22.00	20.72	21.26	21.62
			3	0	22.00	20.56	21.23	21.69
			3	1	22.00	20.67	21.27	21.69
			3	2	22.00	20.59	21.32	21.71
			6	0	21.00	19.63	20.17	20.53
		16QAM	1	0	22.00	20.69	20.52	21.53

			1	2	22.00	20.65	20.53	21.49
			1	5	22.00	20.78	20.55	21.46
			3	0	21.00	19.84	20.14	20.76
			3	1	21.00	19.90	20.19	20.71
			3	2	21.00	19.84	20.22	20.71
			6	0	20.00	18.90	19.26	19.64
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	22.00	20.88	21.33	21.64
			1	7	22.00	20.97	21.32	21.69
			1	14	22.00	20.98	21.39	21.64
			8	0	21.00	19.55	20.24	20.45
			8	4	21.00	19.63	20.27	20.41
			8	7	21.00	19.63	20.19	20.55
			15	0	21.00	19.62	20.24	20.48
		16QAM	1	0	21.00	20.81	20.36	20.87
			1	7	21.00	20.81	20.33	20.85
			1	14	21.00	20.85	20.38	20.80
			8	0	20.00	18.64	19.35	19.74
			8	4	20.00	18.65	19.36	19.67
			8	7	20.00	18.73	19.40	19.63
			15	0	20.00	18.87	19.17	19.73
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	22.00	20.66	21.31	21.34
			1	12	22.00	20.73	21.23	21.31
			1	24	22.00	20.77	21.36	21.32
			12	0	21.00	19.59	20.25	20.51
			12	6	21.00	19.65	20.12	20.39
			12	11	21.00	19.73	20.29	20.44
			25	0	21.00	19.65	20.09	20.55
		16QAM	1	0	21.00	19.70	20.43	20.50
			1	12	21.00	19.85	20.33	20.54
			1	24	21.00	19.88	20.45	20.50
			12	0	20.00	18.69	19.16	19.67
			12	6	20.00	18.68	19.12	19.60
			12	11	20.00	18.76	19.25	19.57
			25	0	20.00	18.90	19.28	19.58
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	22.00	20.87	21.17	21.78
			1	24	22.00	21.00	21.17	21.81
			1	49	22.00	21.10	21.40	21.81
			25	0	21.00	19.76	20.27	20.54
			25	12	21.00	19.69	20.26	20.63

			25	24	21.00	19.76	20.30	20.56
			50	0	21.00	19.87	20.24	20.59
		16QAM	1	0	22.00	20.75	20.82	20.63
			1	24	22.00	20.99	20.94	20.64
			1	49	22.00	21.03	20.70	20.55
			25	0	20.00	18.85	19.31	19.65
			25	12	20.00	18.96	19.30	19.61
			25	24	20.00	19.01	19.48	19.60
			50	0	20.00	18.85	19.37	19.58
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	22.00	20.93	21.23	21.44
			1	37	22.00	21.12	21.38	21.42
			1	74	22.00	21.23	21.41	21.37
			36	0	21.00	19.82	20.09	20.48
			36	18	21.00	19.82	20.20	20.46
			36	37	21.00	19.90	20.20	20.48
			75	0	21.00	19.74	20.14	20.48
		16QAM	1	0	22.00	20.82	20.34	21.35
			1	37	22.00	20.95	20.29	21.38
			1	74	22.00	21.16	20.48	21.34
			36	0	20.00	18.98	19.37	19.55
			36	18	20.00	19.00	19.49	19.57
			36	37	20.00	19.16	19.57	19.59
			75	0	20.00	19.00	19.29	19.66
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	22.00	20.72	21.07	21.58
			1	49	22.00	20.90	21.15	21.60
			1	99	22.00	21.09	21.40	21.76
			50	0	21.00	19.84	20.23	20.53
			50	24	21.00	19.87	20.11	20.59
			50	49	21.00	20.11	20.43	20.51
			100	0	21.00	19.97	20.13	20.41
		16QAM	1	0	21.00	19.77	19.91	20.47
			1	49	21.00	19.57	19.94	20.43
			1	99	21.00	19.79	20.18	20.43
			50	0	20.00	19.00	19.24	19.61
			50	24	20.00	19.06	19.28	19.56
			50	49	20.00	19.17	19.47	19.62
			100	0	20.00	18.98	19.34	19.68

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band	1.4MHz	QPSK	1	0	20.00	20.00	19.77	19.61
			1	2	20.00	19.97	19.67	19.53

4				1	5	20.00	19.92	19.72	19.58
				3	0	20.00	20.00	19.73	19.64
				3	1	20.00	19.87	19.77	19.75
				3	2	20.00	19.84	19.86	19.71
				6	0	19.00	18.85	18.57	18.61
			16QAM	1	0	20.00	19.91	19.69	19.27
				1	2	20.00	19.94	19.65	19.26
				1	5	20.00	19.91	19.65	19.27
				3	0	20.00	19.09	18.83	18.65
				3	1	20.00	19.07	18.82	18.61
				3	2	20.00	19.07	18.85	18.60
				6	0	19.00	18.12	17.69	17.55
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)			
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5	
LTE Band 4	3MHz	QPSK	1	0	20.00	20.00	19.72	19.82	
			1	7	20.00	20.00	19.67	19.85	
			1	14	20.00	19.97	19.57	19.82	
			8	0	19.00	18.73	18.58	18.54	
			8	4	19.00	18.81	18.65	18.48	
			8	7	19.00	18.84	18.65	18.51	
			15	0	19.00	18.81	18.60	18.51	
		16QAM	1	0	20.00	20.00	19.35	18.09	
			1	7	20.00	19.86	19.25	18.01	
			1	14	20.00	19.97	19.23	18.02	
			8	0	18.00	17.79	17.96	17.76	
			8	4	18.00	17.72	17.94	17.68	
			8	7	18.00	17.73	17.92	17.71	
			15	0	18.00	18.00	17.74	17.57	
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)			
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5	
LTE Band 4	5MHz	QPSK	1	0	20.00	19.88	19.80	19.42	
			1	12	20.00	19.86	19.77	19.45	
			1	24	20.00	19.87	19.64	19.50	
			12	0	19.00	18.87	18.75	18.52	
			12	6	19.00	18.88	18.58	18.42	
			12	11	19.00	18.76	18.53	18.57	
			25	0	19.00	18.83	18.68	18.50	
		16QAM	1	0	19.00	18.98	18.41	18.76	
			1	12	19.00	18.91	18.29	18.83	
			1	24	19.00	18.89	18.34	18.82	
			12	0	18.00	17.88	17.60	17.64	
			12	6	18.00	17.82	17.54	17.69	
			12	11	18.00	17.82	17.50	17.62	
			25	0	19.00	18.04	17.74	17.59	
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)			
			RB	RB		20000/1715	20175/1732.5	20350/1750	

Band	Band Width	Modulation	Size	Offset				
LTE Band 4	10MHz	QPSK	1	0	20.00	20.00	19.77	19.71
			1	24	20.00	20.00	19.71	19.76
			1	49	20.00	20.00	19.61	19.84
			25	0	19.00	18.78	18.67	18.52
			25	12	19.00	18.81	18.70	18.42
			25	24	19.00	18.82	18.67	18.55
			50	0	19.00	18.82	18.70	18.49
		16QAM	1	0	20.00	19.94	18.82	18.71
			1	24	20.00	19.94	18.71	18.83
			1	49	20.00	19.92	18.67	18.88
			25	0	18.00	17.94	17.83	17.55
			25	12	18.00	17.93	17.77	17.64
			25	24	18.00	17.90	17.63	17.64
			50	0	18.00	17.98	17.75	17.61
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	20.00	20.00	19.84	19.43
			1	37	20.00	20.00	19.67	19.48
			1	74	20.00	20.00	19.53	19.50
			36	0	19.00	18.83	18.78	18.47
			36	18	19.00	18.92	18.61	18.52
			36	37	19.00	18.88	18.69	18.46
			75	0	19.00	18.79	18.67	18.44
		16QAM	1	0	20.00	20.00	18.94	19.23
			1	37	20.00	20.00	18.67	19.20
			1	74	20.00	20.00	18.62	19.27
			36	0	18.00	17.90	18.00	17.61
			36	18	18.00	17.93	17.81	17.66
			36	37	18.00	17.91	17.79	17.62
			75	0	18.00	17.93	17.74	17.57
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	20.00	19.92	19.66	19.40
			1	49	20.00	19.81	19.54	19.40
			1	99	20.00	19.80	19.43	19.56
			50	0	19.00	18.86	18.75	18.45
			50	24	19.00	18.89	18.59	18.48
			50	49	19.00	18.86	18.62	18.54
			100	0	19.00	18.88	18.56	18.45
		16QAM	1	0	20.00	18.98	19.08	18.70
			1	49	20.00	18.97	18.84	18.54
			1	99	20.00	18.87	18.82	18.71
			50	0	18.00	17.99	17.90	17.57
			50	24	18.00	17.99	17.79	17.60
			50	49	18.00	17.98	17.64	17.62
			100	0	18.00	17.83	17.72	17.59

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	22.00	21.90	21.68	21.41
			1	2	22.00	21.89	21.55	21.57
			1	5	22.00	21.87	21.52	21.44
			3	0	22.00	21.78	21.63	21.39
			3	1	22.00	21.82	21.61	21.41
			3	2	22.00	21.76	21.62	21.50
			6	0	21.00	20.73	20.56	20.39
		16QAM	1	0	22.00	22.00	21.53	21.49
			1	2	22.00	22.00	21.56	21.43
			1	5	22.00	22.00	21.66	21.38
			3	0	22.00	21.10	20.86	20.61
			3	1	22.00	21.18	20.70	20.59
			3	2	22.00	21.12	20.77	20.50
			6	0	20.00	19.97	19.86	19.37
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	22.00	21.94	21.59	21.79
			1	7	22.00	21.88	21.62	21.73
			1	14	22.00	21.91	21.57	21.72
			8	0	21.00	20.73	20.61	20.51
			8	4	21.00	20.79	20.61	20.47
			8	7	21.00	20.73	20.62	20.39
			15	0	21.00	20.79	20.65	20.53
		16QAM	1	0	22.00	21.78	21.15	21.47
			1	7	22.00	21.71	21.11	21.47
			1	14	22.00	21.67	21.11	21.36
			8	0	20.00	19.75	19.89	19.46
			8	4	20.00	19.76	19.86	19.42
			8	7	20.00	19.71	19.87	19.43
			15	0	20.00	19.97	19.70	19.45
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	22.00	21.79	21.58	21.39
			1	12	22.00	21.70	21.61	21.33
			1	24	22.00	21.70	21.55	21.27
			12	0	21.00	20.69	20.56	20.41
			12	6	21.00	20.76	20.59	20.54
			12	11	21.00	20.71	20.52	20.45
			25	0	21.00	20.69	20.61	20.49
		16QAM	1	0	21.00	20.87	20.27	20.46
			1	12	21.00	20.81	20.25	20.46
			1	24	21.00	20.78	20.25	20.29
			12	0	20.00	19.69	19.60	19.39

			12	6	20.00	19.58	19.58	19.31
			12	11	20.00	19.57	19.51	19.30
			25	0	20.00	19.80	19.72	19.38
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	22.00	21.99	21.77	21.81
			1	24	22.00	21.88	21.68	21.76
			1	49	22.00	21.73	21.61	21.67
			25	0	21.00	20.72	20.59	20.50
			25	12	21.00	20.68	20.52	20.55
			25	24	21.00	20.59	20.56	20.47
			50	0	21.00	20.67	20.54	20.57
		16QAM	1	0	22.00	21.58	20.74	20.61
			1	24	22.00	21.36	20.61	20.53
			1	49	22.00	21.39	20.49	20.39
			25	0	20.00	19.69	19.84	19.67
			25	12	20.00	19.72	19.69	19.53
			25	24	20.00	19.78	19.57	19.44
			50	0	20.00	19.70	19.73	19.61

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	22.00	21.60	21.55	21.58
			1	12	22.00	21.49	21.58	21.50
			1	24	22.00	21.48	21.54	21.46
			12	0	21.00	20.69	20.49	20.45
			12	6	21.00	20.65	20.55	20.54
			12	11	21.00	20.59	20.47	20.41
			25	0	21.00	20.60	20.60	20.43
		16QAM	1	0	22.00	21.31	20.64	20.11
			1	12	22.00	21.22	20.64	20.12
			1	24	22.00	21.14	20.48	20.30
			12	0	20.00	19.69	19.53	19.34
			12	6	20.00	19.68	19.47	19.29
			12	11	20.00	19.68	19.38	19.30
			25	0	20.00	19.75	19.73	19.53

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	22.00	21.91	21.74	21.77
			1	24	22.00	21.74	21.63	21.71
			1	49	22.00	21.72	21.55	21.67
			25	0	21.00	20.52	20.53	20.54
			25	12	21.00	20.44	20.60	20.48
			25	24	21.00	20.53	20.51	20.54
			50	0	21.00	20.46	20.51	20.51
		16QAM	1	0	22.00	21.39	20.60	20.59

			1	24	22.00	21.30	20.55	20.60
			1	49	22.00	21.35	20.54	20.39
			25	0	20.00	19.66	19.65	19.61
			25	12	20.00	19.59	19.56	19.62
			25	24	20.00	19.52	19.48	19.49
			50	0	20.00	19.58	19.70	19.56

7.4. WLAN & Bluetooth Output Power

7.4.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	14.00	12.68
	6	2437	14.00	13.71
	11	2462	14.00	12.01
802.11g	1	2412	12.00	10.58
	6	2437	12.00	11.25
	11	2462	12.00	10.14
802.11n HT20	1	2412	12.45	10.87
	6	2437	12.45	12.43
	11	2462	12.45	10.48


NOTE: Power measurement results of WLAN 2.4G.

7.4.2. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
	0CH	5.000	3.681	3.780	3.709
	39CH	5.000	4.925	4.959	4.732
	78CH	5.000	3.898	3.899	3.681

BLE	Channel	Tune-up	Data Rates	Output Power (dBm)
	0CH	-2.000	1M	-3.079
	19CH	-2.000	1M	-2.292
	39CH	-2.000	1M	-2.324

8. Antenna Location

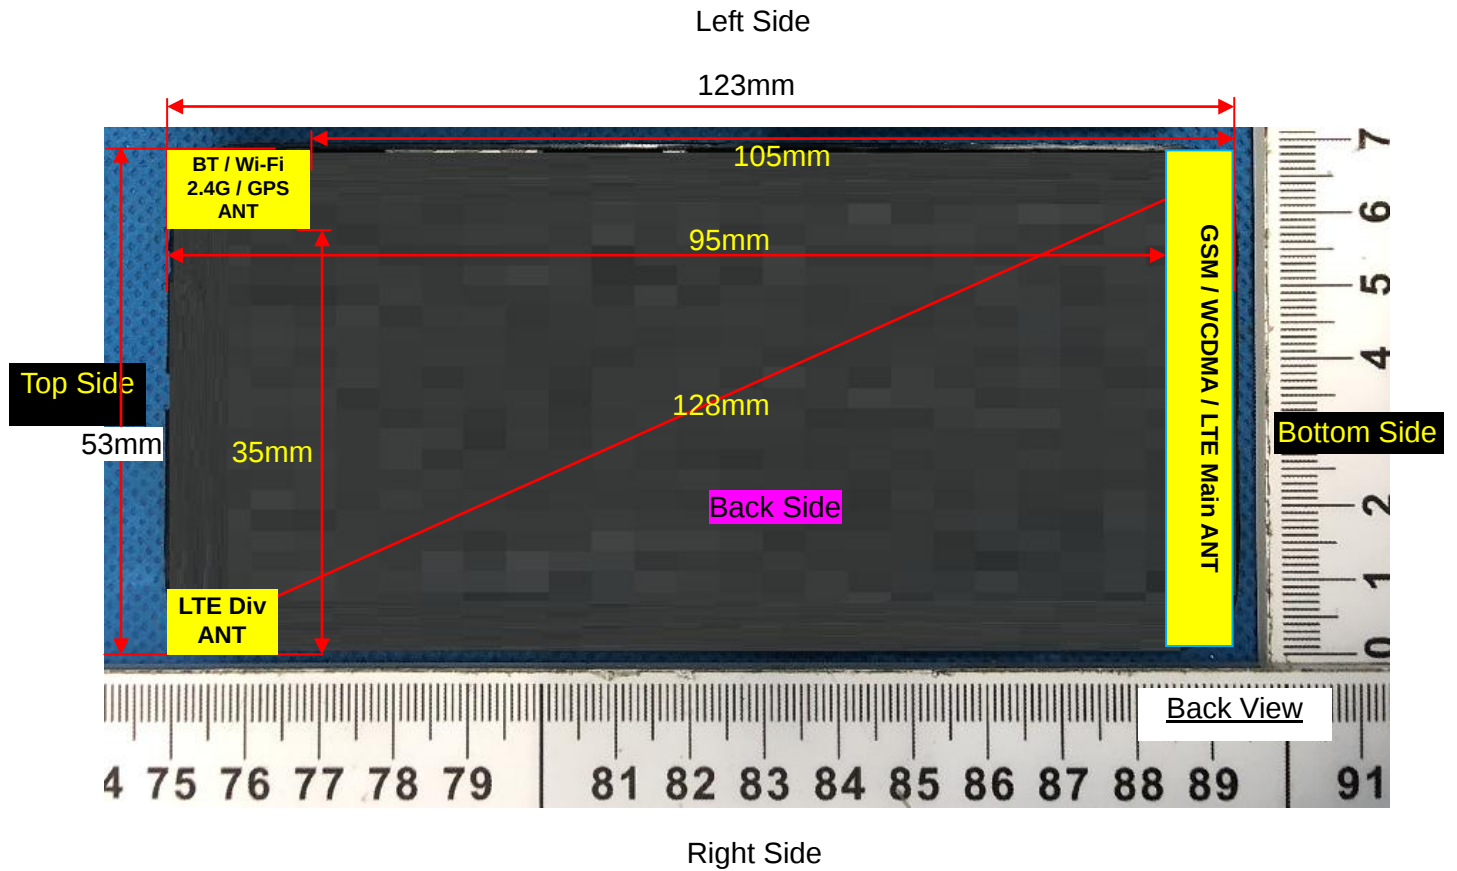

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	Yes	NO	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	5.00	3.16	5	2.480	1.00	3.0	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	5.00	3.16	5	2.480	7.5	0.133
Bluetooth	Body	5.00	3.16	10	2.480	7.5	0.066
Bluetooth	Hotspot	5.00	3.16	10	2.480	7.5	0.066

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.164	0.116	1.75	26.12	27.00	0.201	2020/11/03
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.086	0.060	-1.12	26.12	27.00	0.105	2020/11/03
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.154	0.111	-4.05	26.12	27.00	0.189	2020/11/03
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.082	0.062	0.48	26.12	27.00	0.100	2020/11/03

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 2TS)	0.229	0.159	4.97	26.12	27.00	0.280	2020/11/03
Back Side	189/836.4	GPRS(GMSK 2TS)	0.295	0.207	-0.67	26.12	27.00	0.361	2020/11/03

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 2TS)	0.229	0.159	4.97	26.12	27.00	0.280	2020/11/03
Back Side	189/836.4	GPRS(GMSK 2TS)	0.295	0.207	-0.67	26.12	27.00	0.361	2020/11/03
Left Side	189/836.4	GPRS(GMSK 2TS)	0.129	0.093	-4.70	26.12	27.00	0.158	2020/11/03
Right Side	189/836.4	GPRS(GMSK 2TS)	0.113	0.075	4.31	26.12	27.00	0.138	2020/11/03
Bottom Side	189/836.4	GPRS(GMSK 2TS)	0.219	0.155	0.37	26.12	27.00	0.268	2020/11/03

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

Left Cheek	661/1880	GPRS(GMSK 2TS)	0.356	0.191	-0.54	26.12	27.00	0.436	2020/10/25
Left Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.189	0.104	-1.34	26.12	27.00	0.231	2020/10/25
Right Cheek	661/1880	GPRS(GMSK 2TS)	0.330	0.177	3.11	26.12	27.00	0.404	2020/10/25
Right Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.162	0.088	4.08	26.12	27.00	0.198	2020/10/25

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 2TS)	0.298	0.154	1.26	26.12	27.00	0.365	2020/10/23
Back Side	661/1880	GPRS(GMSK 2TS)	0.375	0.190	-3.89	26.12	27.00	0.459	2020/10/23

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 2TS)	0.298	0.154	1.26	26.12	27.00	0.365	2020/10/23
Back Side	661/1880	GPRS(GMSK 2TS)	0.375	0.190	-3.89	26.12	27.00	0.459	2020/10/23
Left Side	661/1880	GPRS(GMSK 2TS)	0.176	0.089	2.46	26.12	27.00	0.216	2020/10/23
Right Side	661/1880	GPRS(GMSK 2TS)	0.132	0.071	2.99	26.12	27.00	0.162	2020/10/23
Bottom Side	661/1880	GPRS(GMSK 2TS)	0.282	0.138	-3.22	26.12	27.00	0.345	2020/10/23

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g	Date
			1g	10g					

								(W/Kg)	
Left Cheek	9400/1880	RMC12.2K	0.471	0.263	-1.29	20.59	21.50	0.581	2020/10/25
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.266	0.145	2.46	20.59	21.50	0.328	2020/10/25
Right Cheek	9400/1880	RMC12.2K	0.401	0.227	3.64	20.59	21.50	0.494	2020/10/25
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.198	0.111	1.40	20.59	21.50	0.244	2020/10/25

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.488	0.247	1.40	20.59	21.50	0.602	2020/10/23
Back Side	9400/1880	RMC12.2K	0.625	0.322	-0.20	20.59	21.50	0.771	2020/10/23

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.488	0.247	1.40	20.59	21.50	0.602	2020/10/23
Back Side	9400/1880	RMC12.2K	0.625	0.322	-0.20	20.59	21.50	0.771	2020/10/23
Left Side	9400/1880	RMC12.2K	0.269	0.136	-4.16	20.59	21.50	0.332	2020/10/23
Right Side	9400/1880	RMC12.2K	0.223	0.112	-0.72	20.59	21.50	0.275	2020/10/23
Bottom Side	9400/1880	RMC12.2K	0.458	0.237	-1.98	20.59	21.50	0.565	2020/10/23

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	4182/836.4	HSDPA Sub 1	0.172	0.124	1.04	19.39	21.00	0.249	2020/11/03
Left Tilt 15 Degree	4182/836.4	HSDPA Sub 1	0.092	0.067	2.71	19.39	21.00	0.133	2020/11/03
Right Cheek	4182/836.4	HSDPA Sub 1	0.159	0.111	-3.76	19.39	21.00	0.230	2020/11/03
Right Tilt 15	4182/836.4	HSDPA	0.085	0.062	-3.87	19.39	21.00	0.123	2020/11/03

Degree		Sub 1							
--------	--	-------	--	--	--	--	--	--	--

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	HSDPA Sub 1	0.265	0.191	4.23	19.39	21.00	0.384	2020/11/03
Back Side	4182/836.4	HSDPA Sub 1	0.324	0.234	-0.51	19.39	21.00	0.469	2020/11/03

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	HSDPA Sub 1	0.265	0.191	4.23	19.39	21.00	0.384	2020/11/03
Back Side	4182/836.4	HSDPA Sub 1	0.324	0.234	-0.51	19.39	21.00	0.469	2020/11/03
Left Side	4182/836.4	HSDPA Sub 1	0.159	0.115	-2.85	19.39	21.00	0.230	2020/11/03
Right Side	4182/836.4	HSDPA Sub 1	0.129	0.092	2.47	19.39	21.00	0.187	2020/11/03
Bottom Side	4182/836.4	HSDPA Sub 1	0.242	0.172	3.49	19.39	21.00	0.351	2020/11/03

NOTE: Hotspot SAR test results of WCDMA Band 5

10.1.5. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	18900/1880	20M QPSK(1,99)	0.566	0.313	0.32	21.40	22.00	0.650	2020/10/25
Left Tilt 15 Degree	18900/1880	20M QPSK(1,99)	0.328	0.183	0.92	21.40	22.00	0.377	2020/10/25

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									

NOTE: Hotspot SAR test results of LTE Band 2

Left Cheek	20175/1732.5	1.4M QPSK(3,0)	0.312	0.201	-0.11	19.73	20.00	0.332	2020/11/04
Left Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,0)	0.171	0.108	-3.99	19.73	20.00	0.182	2020/11/04
Right Cheek	20175/1732.5	1.4M QPSK(3,0)	0.298	0.166	-3.17	19.73	20.00	0.317	2020/11/04
Right Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,0)	0.134	0.092	-2.43	19.73	20.00	0.143	2020/11/04

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,0)	0.612	0.341	-4.39	19.66	20.00	0.662	2020/10/23
Back Side	20175/1732.5	20M QPSK(1,0)	0.752	0.422	0.56	19.66	20.00	0.813	2020/10/23
Back Side	20050/1720	20M QPSK(1,0)	0.705	0.368	0.87	19.92	20.00	0.718	2020/10/23
Back Side	20300/1745	20M QPSK(1,0)	0.701	0.366	1.25	19.40	20.00	0.805	2020/10/23
50%RB									
Front Side	20175/1732.5	1.4M QPSK(3,0)	0.546	0.313	3.80	19.73	20.00	0.581	2020/10/23
Back Side	20175/1732.5	1.4M QPSK(3,0)	0.645	0.383	1.36	19.73	20.00	0.686	2020/10/23
100%RB									
Back Side	20175/1732.5	20M QPSK (100,0)	0.318	0.158	-1.77	18.56	19.00	0.352	2020/10/23

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

10mm									
1RB									
Front Side	20175/1732.5	20M QPSK(1,0)	0.612	0.341	-4.39	19.66	20.00	0.662	2020/10/23
Back Side	20175/1732.5	20M QPSK(1,0)	0.752	0.422	0.56	19.66	20.00	0.813	2020/10/23
Left Side	20175/1732.5	20M QPSK(1,0)	0.344	0.198	1.54	19.66	20.00	0.372	2020/10/23
Right Side	20175/1732.5	20M QPSK(1,0)	0.296	0.164	1.67	19.66	20.00	0.320	2020/10/23
Bottom Side	20175/1732.5	20M QPSK(1,0)	0.564	0.312	2.94	19.66	20.00	0.610	2020/10/23
Back Side	20050/1720	20M QPSK(1,0)	0.705	0.368	0.87	19.92	20.00	0.718	2020/10/23
Back Side	20300/1745	20M QPSK(1,0)	0.701	0.366	1.25	19.40	20.00	0.805	2020/10/23
50%RB									
Front Side	20175/1732.5	1.4M QPSK(3,0)	0.546	0.313	3.80	19.73	20.00	0.581	2020/10/23
Back Side	20175/1732.5	1.4M QPSK(3,0)	0.645	0.383	1.36	19.73	20.00	0.686	2020/10/23
Left Side	20175/1732.5	1.4M QPSK(3,0)	0.309	0.185	-3.68	19.73	20.00	0.329	2020/10/23
Right Side	20175/1732.5	1.4M QPSK(3,0)	0.259	0.143	-0.18	19.73	20.00	0.276	2020/10/23
Bottom Side	20175/1732.5	1.4M QPSK(3,0)	0.504	0.270	-3.84	19.73	20.00	0.536	2020/10/23
100%RB									
Back Side	20175/1732.5	20M QPSK(100,0)	0.318	0.158	-1.77	18.56	19.00	0.352	2020/10/23

NOTE: Hotspot SAR test results of LTE Band 4

10.1.7. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	23095/707.5	10M QPSK(1,0)	0.321	0.238	-1.19	21.77	22.00	0.338	2020/11/02

Left Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.176	0.133	-2.94	21.77	22.00	0.186	2020/11/02
Right Cheek	23095/707.5	10M QPSK(1,0)	0.284	0.207	-1.39	21.77	22.00	0.299	2020/11/02
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.130	0.098	1.80	21.77	22.00	0.137	2020/11/02
50%RB									
Left Cheek	23095/707.5	1.4M QPSK(3,1)	0.301	0.207	-1.19	21.61	22.00	0.329	2020/11/02
Left Tilt 15 Degree	23095/707.5	1.4M QPSK(3,1)	0.159	0.119	0.13	21.61	22.00	0.174	2020/11/02
Right Cheek	23095/707.5	1.4M QPSK(3,1)	0.255	0.179	-0.43	21.61	22.00	0.279	2020/11/02
Right Tilt 15 Degree	23095/707.5	1.4M QPSK(3,1)	0.113	0.091	3.19	21.61	22.00	0.124	2020/11/02

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23095/707.5	10M QPSK(1,0)	0.374	0.282	-1.80	21.77	22.00	0.394	2020/11/02
Back Side	23095/707.5	10M QPSK(1,0)	0.491	0.367	0.12	21.77	22.00	0.518	2020/11/02
50%RB									
Front Side	23095/707.5	1.4M QPSK(3,1)	0.329	0.248	-3.79	21.61	22.00	0.360	2020/11/02
Back Side	23095/707.5	1.4M QPSK(3,1)	0.429	0.338	3.33	21.61	22.00	0.469	2020/11/02

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

with 10mm									
1RB									
Front Side	23095/707.5	10M QPSK(1,0)	0.374	0.282	-1.80	21.77	22.00	0.394	2020/11/02
Back Side	23095/707.5	10M QPSK(1,0)	0.491	0.367	0.12	21.77	22.00	0.518	2020/11/02
Left Side	23095/707.5	10M QPSK(1,0)	0.234	0.178	-4.48	21.77	22.00	0.247	2020/11/02
Right Side	23095/707.5	10M QPSK(1,0)	0.192	0.140	-4.43	21.77	22.00	0.202	2020/11/02
Bottom Side	23095/707.5	10M QPSK(1,0)	0.346	0.258	2.88	21.77	22.00	0.365	2020/11/02
50%RB									
Front Side	23095/707.5	1.4M QPSK(3,1)	0.329	0.248	-3.79	21.61	22.00	0.360	2020/11/02
Back Side	23095/707.5	1.4M QPSK(3,1)	0.429	0.338	3.33	21.61	22.00	0.469	2020/11/02
Left Side	23095/707.5	1.4M QPSK(3,1)	0.220	0.153	-3.36	21.61	22.00	0.241	2020/11/02
Right Side	23095/707.5	1.4M QPSK(3,1)	0.170	0.128	-2.19	21.61	22.00	0.186	2020/11/02
Bottom Side	23095/707.5	1.4M QPSK(3,1)	0.327	0.229	3.56	21.61	22.00	0.358	2020/11/02

NOTE: Hotspot SAR test results of LTE Band 12

10.1.8. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	23790/710	10M QPSK(1,0)	0.328	0.249	0.13	21.74	22.00	0.348	2020/11/02
Left Tilt 15 Degree	23790/710	10M QPSK(1,0)	0.183	0.141	-1.54	21.74	22.00	0.194	2020/11/02
Right Cheek	23790/710	10M QPSK(1,0)	0.311	0.237	-1.33	21.74	22.00	0.330	2020/11/02
Right	23790/710	10M QPSK(1,0)	0.167	0.126	2.03	21.74	22.00	0.177	2020/11/02

Tilt 15 Degree									
50%RB									
Left Cheek	23790/710	10M QPSK(25,12)	0.299	0.227	1.09	20.60	21.00	0.328	2020/11/02
Left Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.167	0.126	-3.83	20.60	21.00	0.183	2020/11/02
Right Cheek	23790/710	10M QPSK(25,12)	0.266	0.206	-2.24	20.60	21.00	0.292	2020/11/02
Right Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.153	0.108	-3.71	20.60	21.00	0.168	2020/11/02

NOTE: Head SAR test results of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,0)	0.432	0.327	-1.35	21.74	22.00	0.459	2020/11/02
Back Side	23790/710	10M QPSK(1,0)	0.521	0.389	-0.52	21.74	22.00	0.553	2020/11/02
50%RB									
Front Side	23790/710	10M QPSK(25,12)	0.372	0.296	-0.75	20.60	21.00	0.408	2020/11/02
Back Side	23790/710	10M QPSK(25,12)	0.449	0.343	4.94	20.60	21.00	0.492	2020/11/02

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,0)	0.432	0.327	-1.35	21.74	22.00	0.459	2020/11/02
Back	23790/710	10M QPSK(1,0)	0.521	0.389	-0.52	21.74	22.00	0.553	2020/11/02

Side									
Left Side	23790/710	10M QPSK(1,0)	0.226	0.170	3.58	21.74	22.00	0.240	2020/11/02
Right Side	23790/710	10M QPSK(1,0)	0.199	0.152	-1.93	21.74	22.00	0.211	2020/11/02
Bottom Side	23790/710	10M QPSK(1,0)	0.401	0.304	-3.45	21.74	22.00	0.426	2020/11/02
50%RB									
Front Side	23790/710	10M QPSK(25,12)	0.372	0.296	-0.75	20.60	21.00	0.408	2020/11/02
Back Side	23790/710	10M QPSK(25,12)	0.449	0.343	4.94	20.60	21.00	0.492	2020/11/02
Left Side	23790/710	10M QPSK(25,12)	0.211	0.145	-3.78	20.60	21.00	0.231	2020/11/02
Right Side	23790/710	10M QPSK(25,12)	0.182	0.133	-0.86	20.60	21.00	0.200	2020/11/02
Bottom Side	23790/710	10M QPSK(25,12)	0.370	0.285	3.25	20.60	21.00	0.406	2020/11/02

NOTE: Hotspot SAR test results of LTE Band 17

10.1.9. SAR measurement Result of WLAN 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	6/2437	802.11 b	0.393	0.217	0.41	13.71	14.00	0.420	2020/10/25
Left Tilt 15 Degree	6/2437	802.11 b	0.210	0.119	0.62	13.71	14.00	0.225	2020/10/25
Right Cheek	6/2437	802.11 b	0.341	0.185	2.31	13.71	14.00	0.365	2020/10/25
Right Tilt 15 Degree	6/2437	802.11 b	0.185	0.101	-1.98	13.71	14.00	0.198	2020/10/25

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11 b	0.227	0.117	1.75	13.71	14.00	0.243	2020/10/24
Back Side	6/2437	802.11 b	0.375	0.183	-2.44	13.71	14.00	0.401	2020/10/24

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11 b	0.227	0.117	1.75	13.71	14.00	0.243	2020/10/24
Back Side	6/2437	802.11 b	0.375	0.183	-2.44	13.71	14.00	0.401	2020/10/24
Left Side	6/2437	802.11 b	0.079	0.037	-2.91	13.71	14.00	0.084	2020/10/24
Top Side	6/2437	802.11 b	0.119	0.055	2.08	13.71	14.00	0.127	2020/10/24

NOTE: Hotspot SAR test results of WLAN 2.4G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation < 1.6W/kg.
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 2.4G			
Head	Left Cheek	0.201	0.420	0.621	N/A	N/A
	Left Tilt 15 Degree	0.105	0.225	0.330	N/A	N/A
	Right Cheek	0.189	0.365	0.554	N/A	N/A
	Right Tilt 15 Degree	0.100	0.198	0.298	N/A	N/A
Body-Worn	Front Side	0.280	0.243	0.523	N/A	N/A
	Back Side	0.361	0.401	0.762	N/A	N/A
Hotspot	Front Side	0.280	0.243	0.523	N/A	N/A
	Back Side	0.361	0.401	0.762	N/A	N/A
	Left Side	0.158	0.084	0.242	N/A	N/A
	Right Side	0.138	N/A	0.138	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.268	N/A	0.268	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 2.4G			
Head	Left Cheek	0.436	0.420	0.856	N/A	N/A
	Left Tilt 15 Degree	0.231	0.225	0.456	N/A	N/A
	Right Cheek	0.404	0.365	0.769	N/A	N/A

	Right Tilt 15 Degree	0.198	0.198	0.396	N/A	N/A
Body-Worn	Front Side	0.365	0.243	0.608	N/A	N/A
	Back Side	0.459	0.401	0.860	N/A	N/A
Hotspot	Front Side	0.365	0.243	0.608	N/A	N/A
	Back Side	0.459	0.401	0.860	N/A	N/A
	Left Side	0.216	0.084	0.300	N/A	N/A
	Right Side	0.162	N/A	0.162	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.345	N/A	0.345	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	WLAN 2.4G			
Head	Left Cheek	0.581	0.420	1.001	N/A	N/A
	Left Tilt 15 Degree	0.328	0.225	0.553	N/A	N/A
	Right Cheek	0.494	0.365	0.859	N/A	N/A
	Right Tilt 15 Degree	0.244	0.198	0.442	N/A	N/A
Body-Worn	Front Side	0.602	0.243	0.845	N/A	N/A
	Back Side	0.771	0.401	1.172	N/A	N/A
Hotspot	Front Side	0.602	0.243	0.845	N/A	N/A
	Back Side	0.771	0.401	1.172	N/A	N/A
	Left Side	0.332	0.084	0.416	N/A	N/A
	Right Side	0.275	N/A	0.275	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.565	N/A	0.565	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 2.4G			
Head	Left Cheek	0.249	0.420	0.669	N/A	N/A
	Left Tilt 15 Degree	0.133	0.225	0.358	N/A	N/A
	Right Cheek	0.230	0.365	0.595	N/A	N/A
	Right Tilt 15 Degree	0.123	0.198	0.321	N/A	N/A
Body-Worn	Front Side	0.384	0.243	0.627	N/A	N/A
	Back Side	0.469	0.401	0.870	N/A	N/A
Hotspot	Front Side	0.384	0.243	0.627	N/A	N/A
	Back Side	0.469	0.401	0.870	N/A	N/A

	Left Side	0.230	0.084	0.314	N/A	N/A
	Right Side	0.187	N/A	0.187	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.351	N/A	0.351	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 2	WLAN 2.4G			
Head	Left Cheek	0.650	0.420	1.070	N/A	N/A
	Left Tilt 15 Degree	0.377	0.225	0.602	N/A	N/A
	Right Cheek	0.602	0.365	0.967	N/A	N/A
	Right Tilt 15 Degree	0.310	0.198	0.508	N/A	N/A
Body-Worn	Front Side	0.677	0.243	0.920	N/A	N/A
	Back Side	0.798	0.401	1.199	N/A	N/A
Hotspot	Front Side	0.677	0.243	0.920	N/A	N/A
	Back Side	0.798	0.401	1.199	N/A	N/A
	Left Side	0.401	0.084	0.485	N/A	N/A
	Right Side	0.305	N/A	0.305	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.591	N/A	0.591	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	WLAN 2.4G			
Head	Left Cheek	0.653	0.420	1.073	N/A	N/A
	Left Tilt 15 Degree	0.359	0.225	0.584	N/A	N/A
	Right Cheek	0.576	0.365	0.941	N/A	N/A
	Right Tilt 15 Degree	0.284	0.198	0.482	N/A	N/A
Body-Worn	Front Side	0.662	0.243	0.905	N/A	N/A
	Back Side	0.813	0.401	1.214	N/A	N/A
Hotspot	Front Side	0.662	0.243	0.905	N/A	N/A
	Back Side	0.813	0.401	1.214	N/A	N/A
	Left Side	0.372	0.084	0.456	N/A	N/A
	Right Side	0.320	N/A	0.320	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.610	N/A	0.610	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and WLAN 2.4G.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR	SPLSR	Remark
---------------	---------------------------	--	------------------	-------	--------

		LTE Band 12	WLAN 2.4G	(W/Kg)		
Head	Left Cheek	0.338	0.420	0.758	N/A	N/A
	Left Tilt 15 Degree	0.186	0.225	0.411	N/A	N/A
	Right Cheek	0.299	0.365	0.664	N/A	N/A
	Right Tilt 15 Degree	0.137	0.198	0.335	N/A	N/A
Body-Worn	Front Side	0.394	0.243	0.637	N/A	N/A
	Back Side	0.518	0.401	0.919	N/A	N/A
Hotspot	Front Side	0.394	0.243	0.637	N/A	N/A
	Back Side	0.518	0.401	0.919	N/A	N/A
	Left Side	0.247	0.084	0.331	N/A	N/A
	Right Side	0.202	N/A	0.202	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.365	N/A	0.365	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	WLAN 2.4G			
Head	Left Cheek	0.348	0.420	0.768	N/A	N/A
	Left Tilt 15 Degree	0.194	0.225	0.419	N/A	N/A
	Right Cheek	0.330	0.365	0.695	N/A	N/A
	Right Tilt 15 Degree	0.177	0.198	0.375	N/A	N/A
Body-Worn	Front Side	0.459	0.243	0.702	N/A	N/A
	Back Side	0.553	0.401	0.954	N/A	N/A
Hotspot	Front Side	0.459	0.243	0.702	N/A	N/A
	Back Side	0.553	0.401	0.954	N/A	N/A
	Left Side	0.240	0.084	0.324	N/A	N/A
	Right Side	0.211	N/A	0.211	N/A	N/A
	Top Side	N/A	0.127	0.127	N/A	N/A
	Bottom Side	0.426	N/A	0.426	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	Bluetooth			
Head	Left Cheek	0.201	0.133	0.334	N/A	N/A
	Left Tilt 15 Degree	0.105	0.133	0.238	N/A	N/A
	Right Cheek	0.189	0.133	0.322	N/A	N/A

	Right Tilt 15 Degree	0.100	0.133	0.233	N/A	N/A
Body-Worn	Front Side	0.280	0.066	0.346	N/A	N/A
	Back Side	0.361	0.066	0.427	N/A	N/A
Hotspot	Front Side	0.280	0.066	0.346	N/A	N/A
	Back Side	0.361	0.066	0.427	N/A	N/A
	Left Side	0.158	0.066	0.224	N/A	N/A
	Right Side	0.138	N/A	0.138	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.268	N/A	0.268	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	Bluetooth			
Head	Left Cheek	0.436	0.133	0.569	N/A	N/A
	Left Tilt 15 Degree	0.231	0.133	0.364	N/A	N/A
	Right Cheek	0.404	0.133	0.537	N/A	N/A
	Right Tilt 15 Degree	0.198	0.133	0.331	N/A	N/A
Body-Worn	Front Side	0.365	0.066	0.431	N/A	N/A
	Back Side	0.459	0.066	0.525	N/A	N/A
Hotspot	Front Side	0.365	0.066	0.431	N/A	N/A
	Back Side	0.459	0.066	0.525	N/A	N/A
	Left Side	0.216	0.066	0.282	N/A	N/A
	Right Side	0.162	N/A	0.162	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.345	N/A	0.345	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	Bluetooth			
Head	Left Cheek	0.581	0.133	0.714	N/A	N/A
	Left Tilt 15 Degree	0.328	0.133	0.461	N/A	N/A
	Right Cheek	0.494	0.133	0.627	N/A	N/A
	Right Tilt 15 Degree	0.244	0.133	0.377	N/A	N/A
Body-Worn	Front Side	0.602	0.066	0.668	N/A	N/A
	Back Side	0.771	0.066	0.837	N/A	N/A
Hotspot	Front Side	0.602	0.066	0.668	N/A	N/A
	Back Side	0.771	0.066	0.837	N/A	N/A
	Left Side	0.332	0.066	0.398	N/A	N/A

	Right Side	0.275	N/A	0.275	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.565	N/A	0.565	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	Bluetooth			
Head	Left Cheek	0.249	0.133	0.382	N/A	N/A
	Left Tilt 15 Degree	0.133	0.133	0.266	N/A	N/A
	Right Cheek	0.230	0.133	0.363	N/A	N/A
	Right Tilt 15 Degree	0.123	0.133	0.256	N/A	N/A
Body-Worn	Front Side	0.384	0.066	0.450	N/A	N/A
	Back Side	0.469	0.066	0.535	N/A	N/A
Hotspot	Front Side	0.384	0.066	0.450	N/A	N/A
	Back Side	0.469	0.066	0.535	N/A	N/A
	Left Side	0.230	0.066	0.296	N/A	N/A
	Right Side	0.187	N/A	0.187	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.351	N/A	0.351	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 2	Bluetooth			
Head	Left Cheek	0.650	0.133	0.783	N/A	N/A
	Left Tilt 15 Degree	0.377	0.133	0.510	N/A	N/A
	Right Cheek	0.602	0.133	0.735	N/A	N/A
	Right Tilt 15 Degree	0.310	0.133	0.443	N/A	N/A
Body-Worn	Front Side	0.677	0.066	0.743	N/A	N/A
	Back Side	0.798	0.066	0.864	N/A	N/A
Hotspot	Front Side	0.677	0.066	0.743	N/A	N/A
	Back Side	0.798	0.066	0.864	N/A	N/A
	Left Side	0.401	0.066	0.467	N/A	N/A
	Right Side	0.305	N/A	0.305	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.591	N/A	0.591	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	Bluetooth			

Head	Left Cheek	0.653	0.133	0.786	N/A	N/A
	Left Tilt 15 Degree	0.359	0.133	0.492	N/A	N/A
	Right Cheek	0.576	0.133	0.709	N/A	N/A
	Right Tilt 15 Degree	0.284	0.133	0.417	N/A	N/A
Body-Worn	Front Side	0.662	0.066	0.728	N/A	N/A
	Back Side	0.813	0.066	0.879	N/A	N/A
Hotspot	Front Side	0.662	0.066	0.728	N/A	N/A
	Back Side	0.813	0.066	0.879	N/A	N/A
	Left Side	0.372	0.066	0.438	N/A	N/A
	Right Side	0.320	N/A	0.320	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.610	N/A	0.610	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 12	Bluetooth			
Head	Left Cheek	0.338	0.133	0.471	N/A	N/A
	Left Tilt 15 Degree	0.186	0.133	0.319	N/A	N/A
	Right Cheek	0.299	0.133	0.432	N/A	N/A
	Right Tilt 15 Degree	0.137	0.133	0.270	N/A	N/A
Body-Worn	Front Side	0.394	0.066	0.460	N/A	N/A
	Back Side	0.518	0.066	0.584	N/A	N/A
Hotspot	Front Side	0.394	0.066	0.460	N/A	N/A
	Back Side	0.518	0.066	0.584	N/A	N/A
	Left Side	0.247	0.066	0.313	N/A	N/A
	Right Side	0.202	N/A	0.202	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.365	N/A	0.365	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	Bluetooth			
Head	Left Cheek	0.348	0.133	0.481	N/A	N/A
	Left Tilt 15 Degree	0.194	0.133	0.327	N/A	N/A
	Right Cheek	0.330	0.133	0.463	N/A	N/A
	Right Tilt 15 Degree	0.177	0.133	0.310	N/A	N/A

Body-Worn	Front Side	0.459	0.066	0.525	N/A	N/A
	Back Side	0.553	0.066	0.619	N/A	N/A
Hotspot	Front Side	0.459	0.066	0.525	N/A	N/A
	Back Side	0.553	0.066	0.619	N/A	N/A
	Left Side	0.240	0.066	0.306	N/A	N/A
	Right Side	0.211	N/A	0.211	N/A	N/A
	Top Side	N/A	0.066	0.066	N/A	N/A
	Bottom Side	0.426	N/A	0.426	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and Bluetooth.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - SID750 - Head
MEASUREMENT 2 System Performance Check - SID750 - Body
MEASUREMENT 3 System Performance Check - SID835 - Head
MEASUREMENT 4 System Performance Check - SID835 - Body
MEASUREMENT 5 System Performance Check - SID1800 - Head
MEASUREMENT 6 System Performance Check - SID1800 - Body
MEASUREMENT 7 System Performance Check - SID1900 - Head
MEASUREMENT 8 System Performance Check - SID1900 - Body
MEASUREMENT 9 System Performance Check - SID2450 - Head
MEASUREMENT 10 System Performance Check - SID2450 - Body

MEASUREMENT 1

Date of measurement: 2/11/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	41.867441
Relative permittivity (imaginary part)	21.769251
Conductivity (S/m)	0.910362
Variation (%)	-1.810000

SURFACE SAR

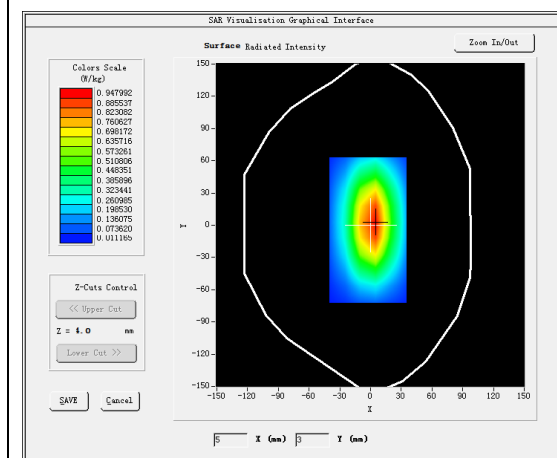



VOLUME SAR

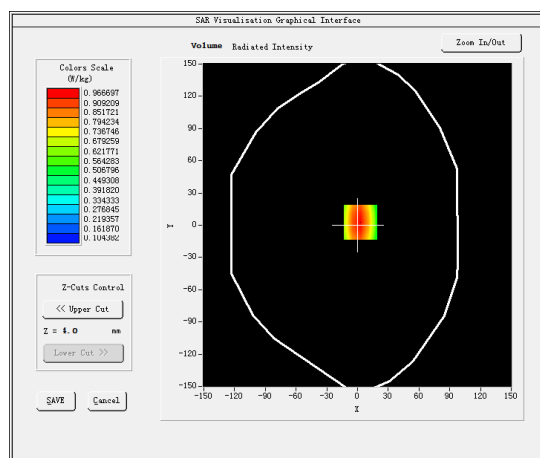

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.547218
SAR 1g (W/Kg)	0.854062

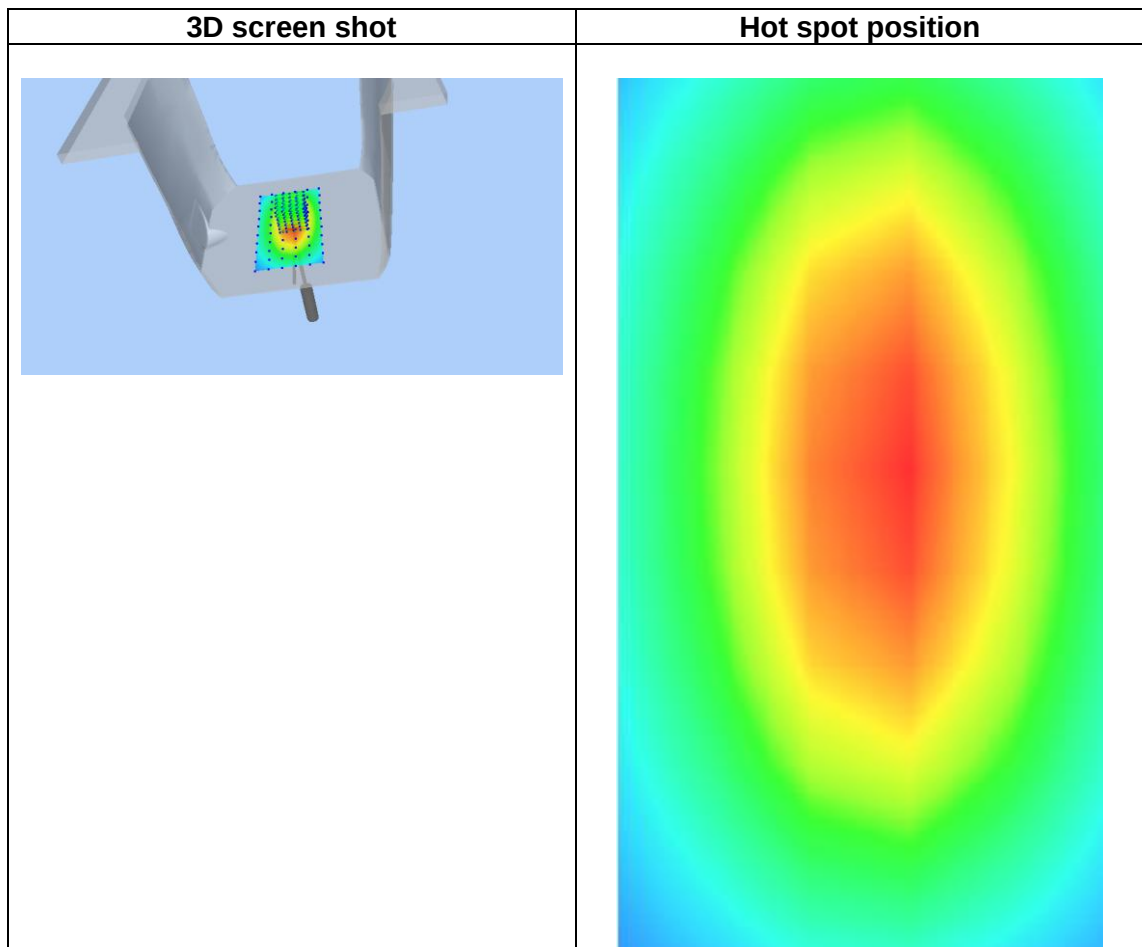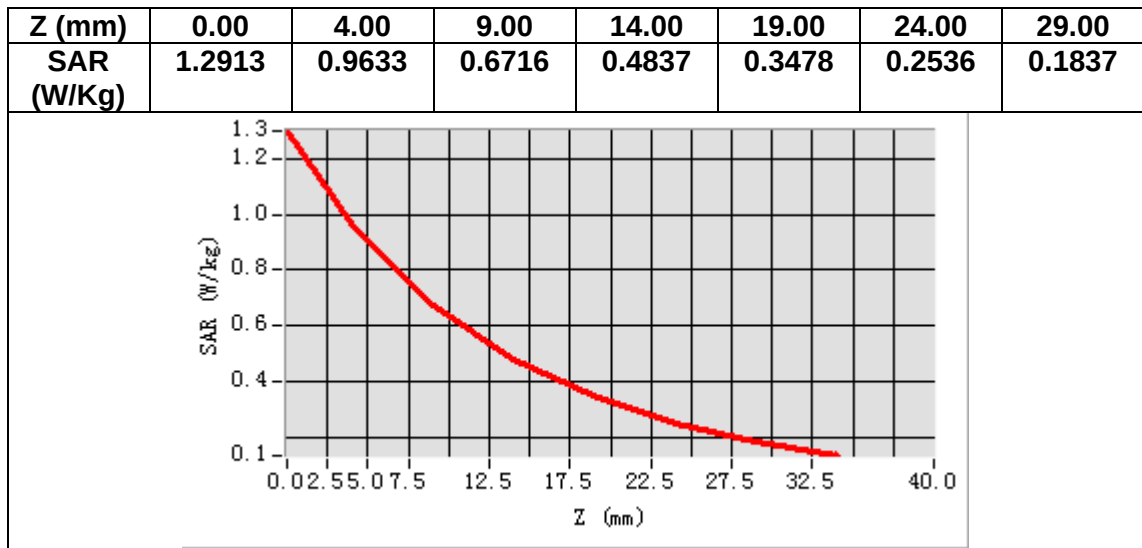

MEASUREMENT 2

Date of measurement: 2/11/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	55.597360
Relative permittivity (imaginary part)	23.351000
Conductivity (S/m)	0.970318
Variation (%)	-0.490000

SURFACE SAR

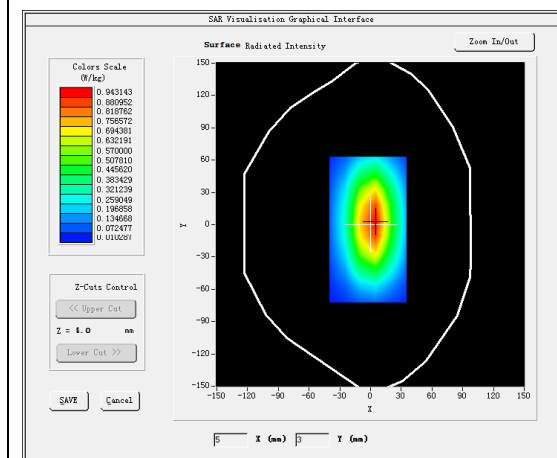



VOLUME SAR

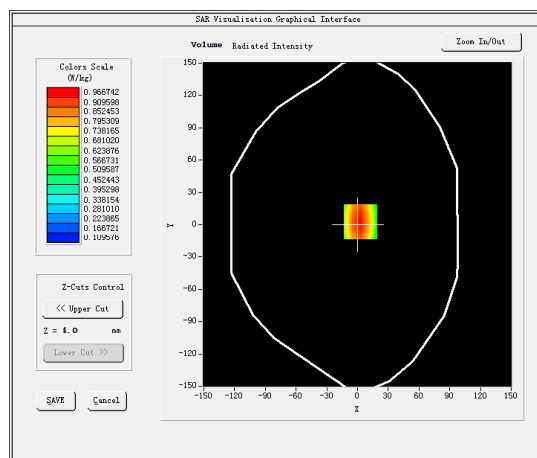

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.577281
SAR 1g (W/Kg)	0.827263

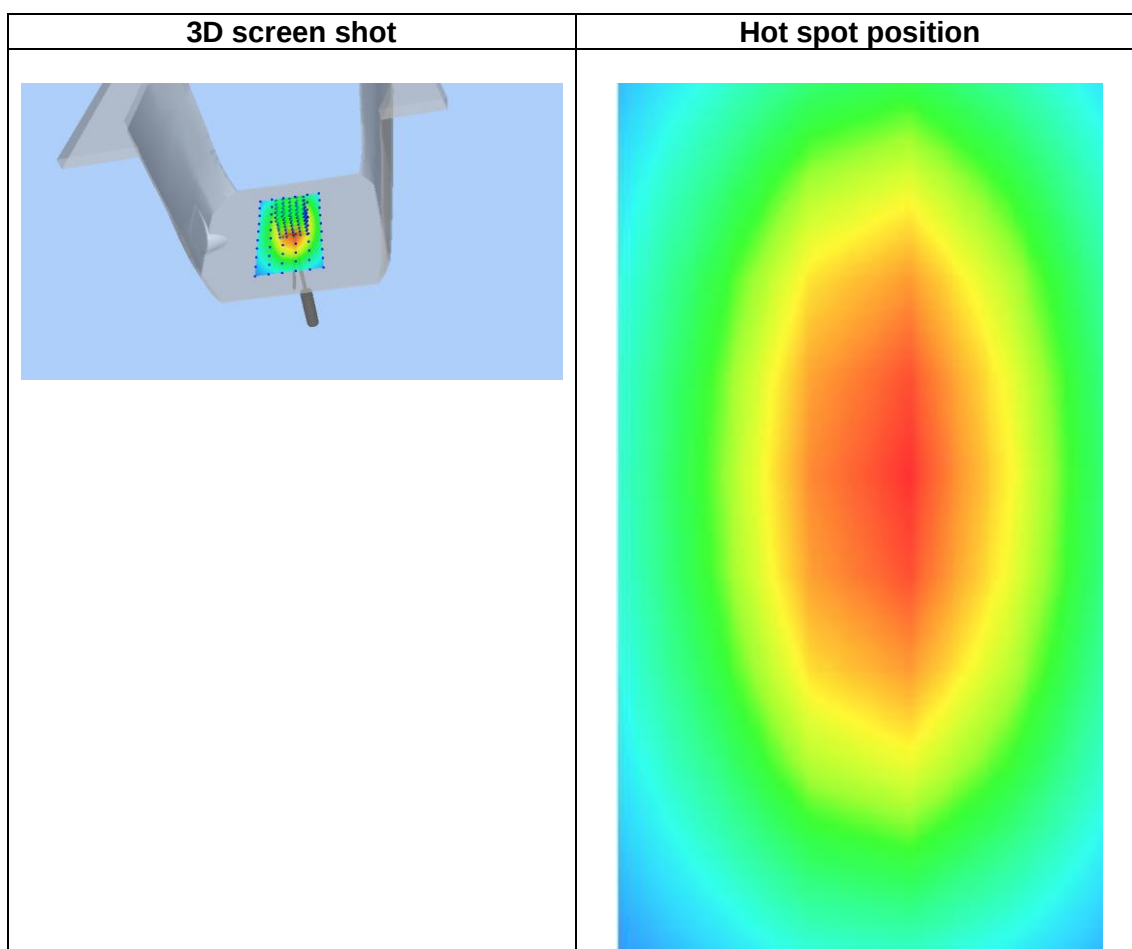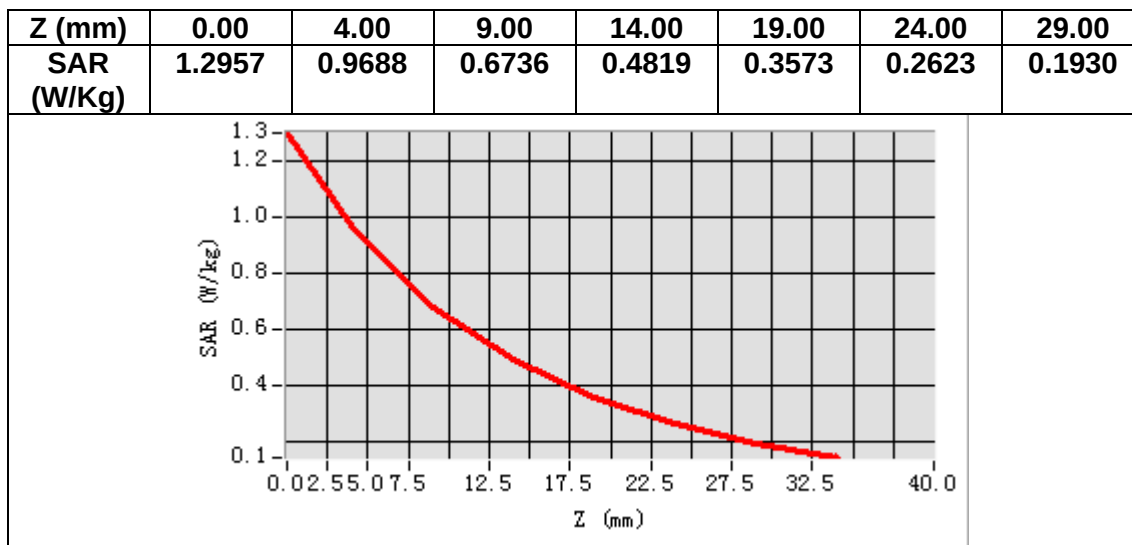

MEASUREMENT 3

Date of measurement: 3/11/2020


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW835</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.925300
Relative permittivity (imaginary part)	19.875700
Conductivity (S/m)	0.920502
Variation (%)	1.870000

SURFACE SAR

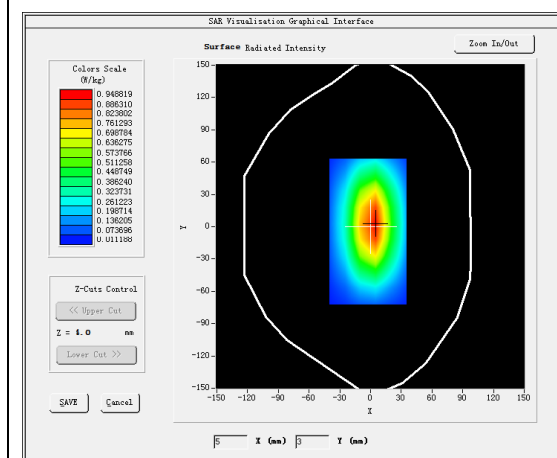



VOLUME SAR

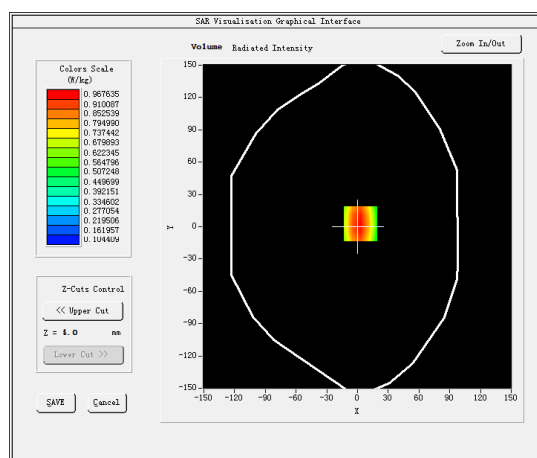

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.619433
SAR 1g (W/Kg)	0.980035

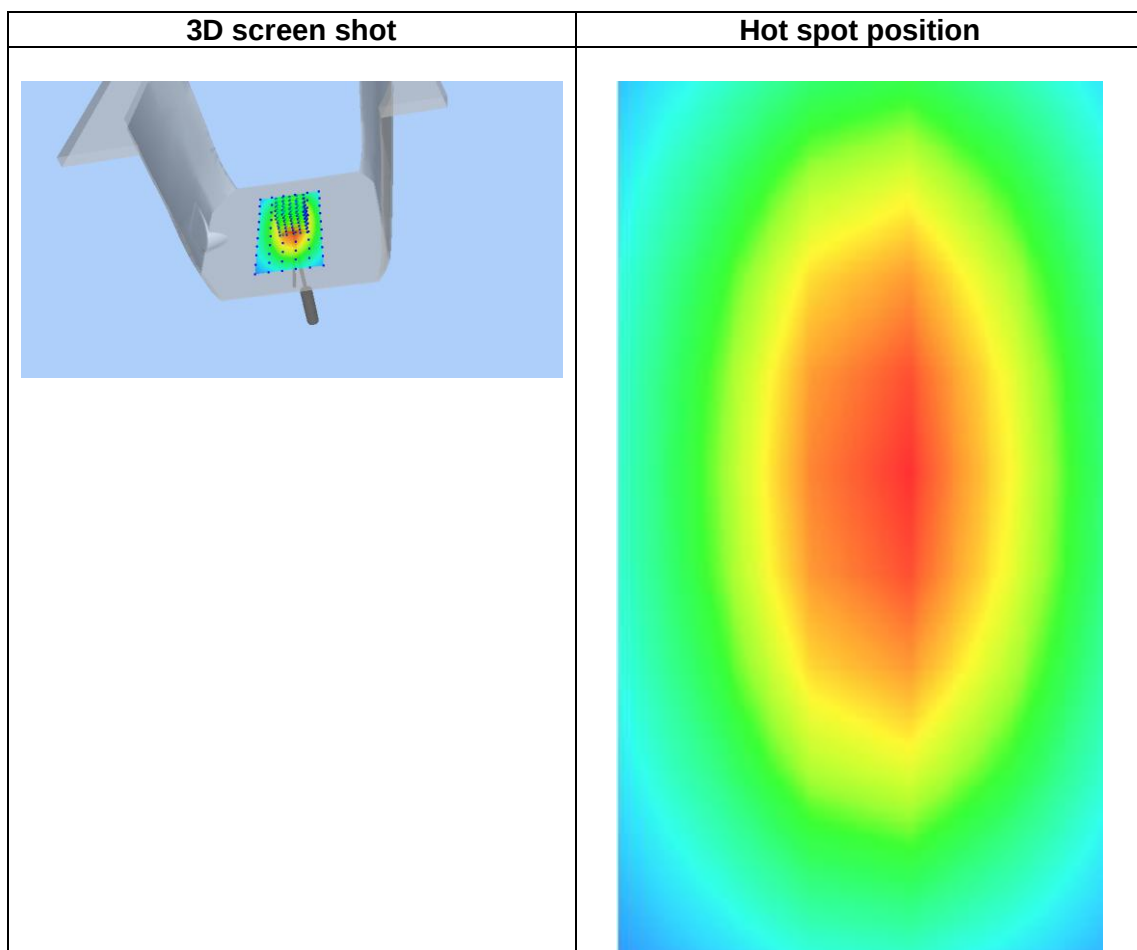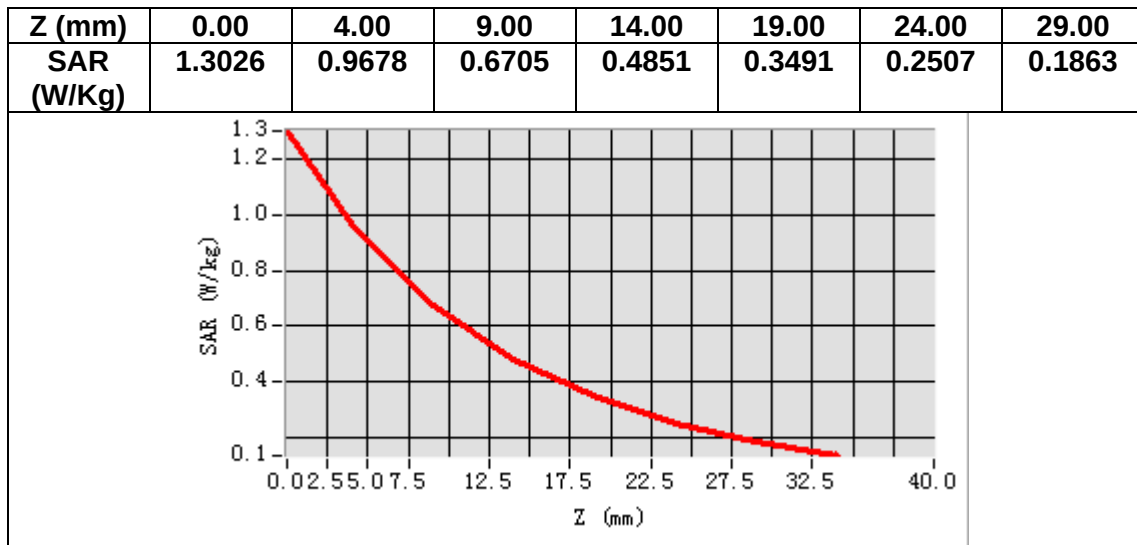

MEASUREMENT 4

Date of measurement: 3/11/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	54.655700
Relative permittivity (imaginary part)	21.115100
Conductivity (S/m)	0.980836
Variation (%)	-1.210000

SURFACE SAR

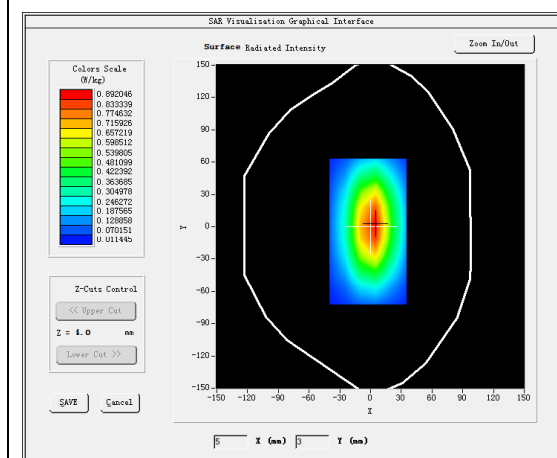



VOLUME SAR

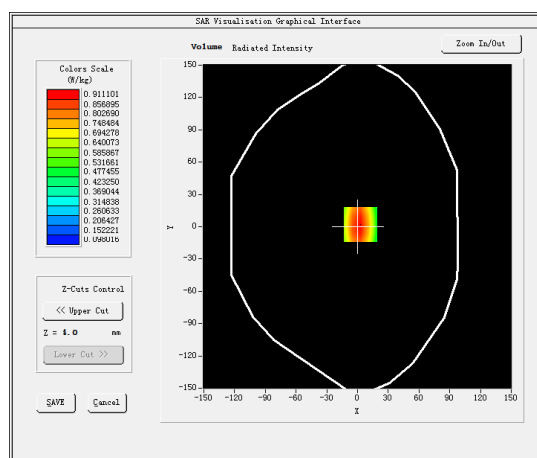

Maximum location: X=3.00, Y=2.00

SAR Peak: 1.23 W/kg

SAR 10g (W/Kg)	0.668023
SAR 1g (W/Kg)	0.965356

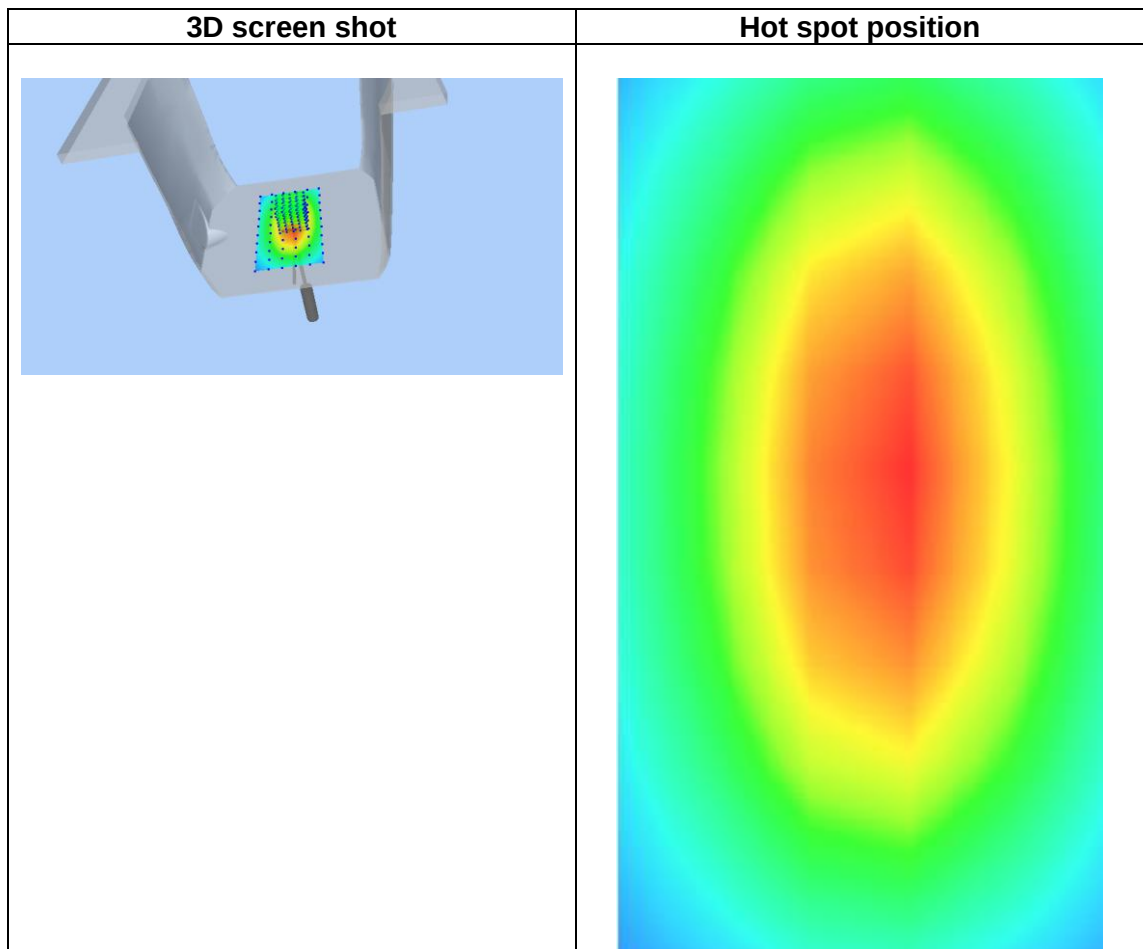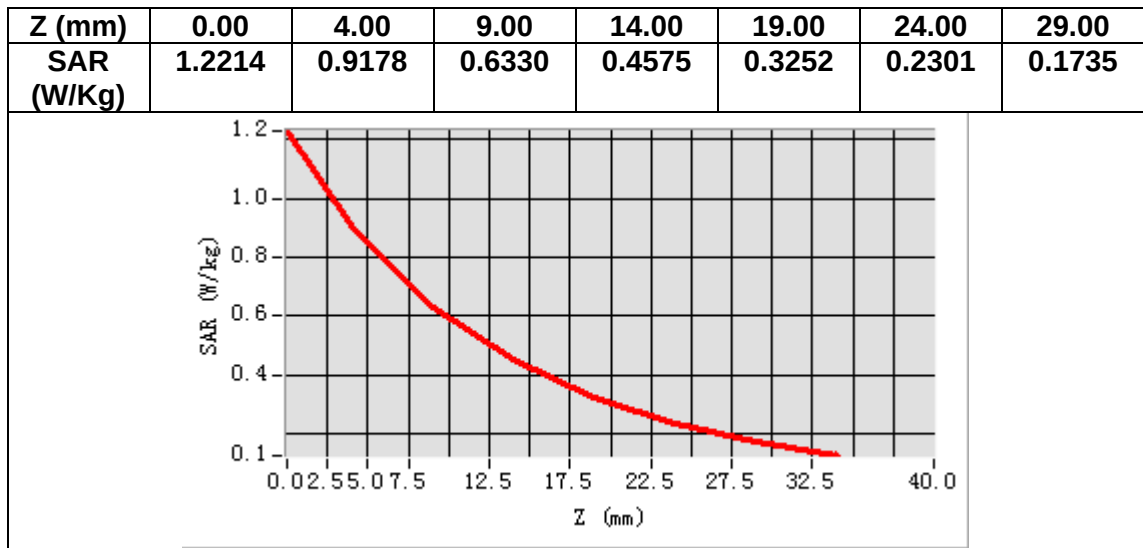

MEASUREMENT 5


Date of measurement: 4/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.787690
Relative permittivity (imaginary part)	13.733442
Conductivity (S/m)	1.370365
Variation (%)	-2.113000

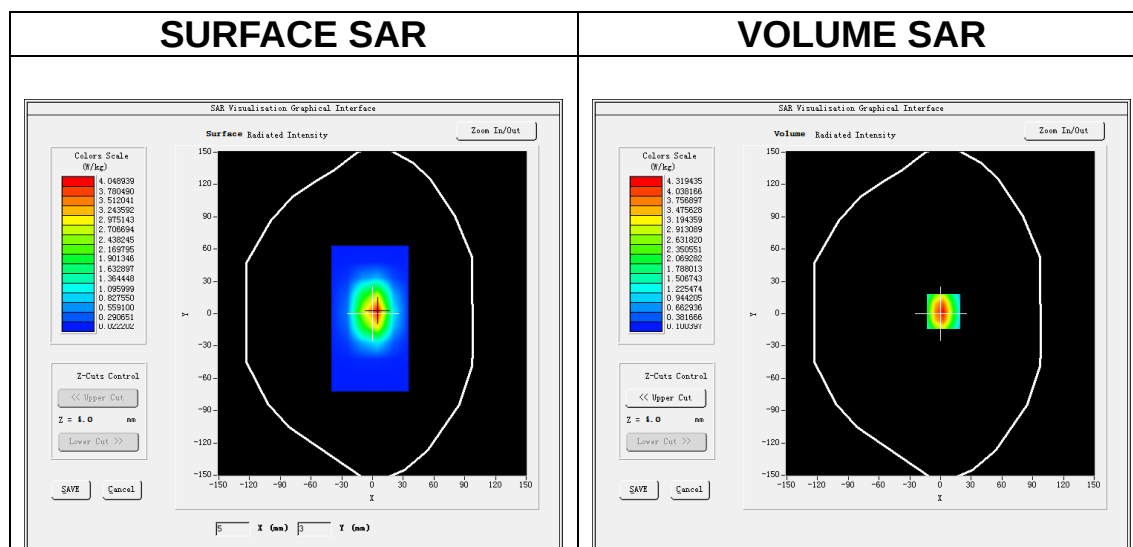

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	1.927397
SAR 1g (W/Kg)	3.670451

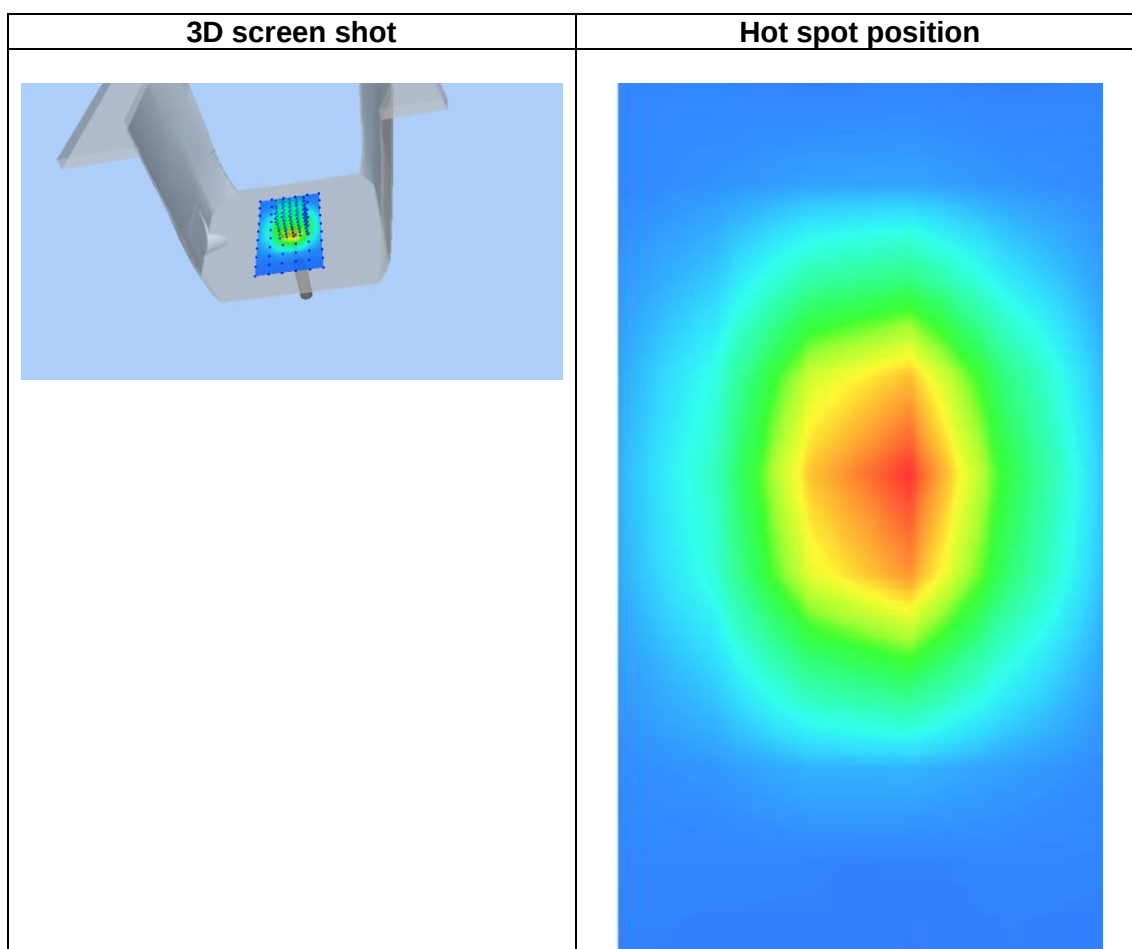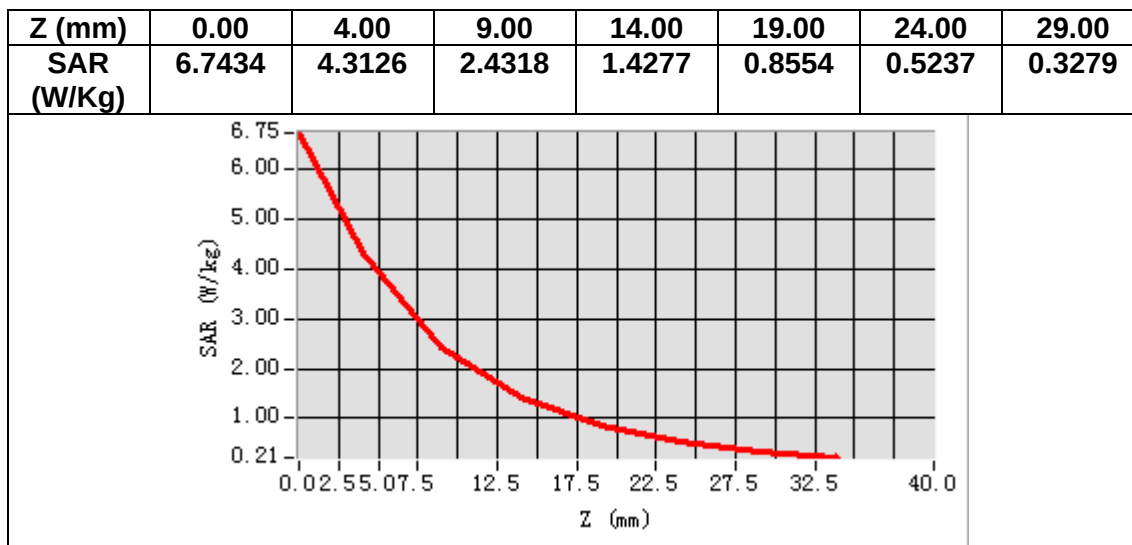

MEASUREMENT 6

Date of measurement: 23/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	54.160066
Relative permittivity (imaginary part)	15.081470
Conductivity (S/m)	1.513096
Variation (%)	1.510000

SURFACE SAR

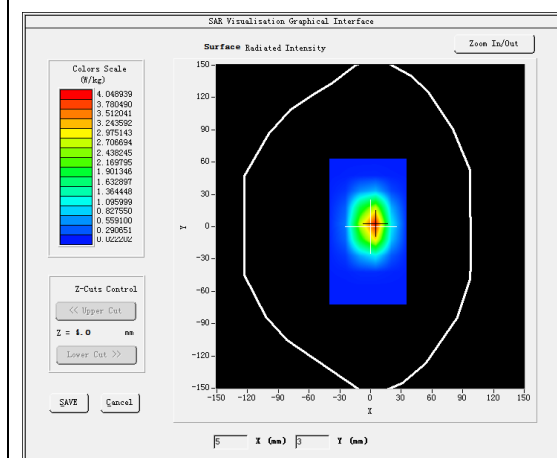



VOLUME SAR

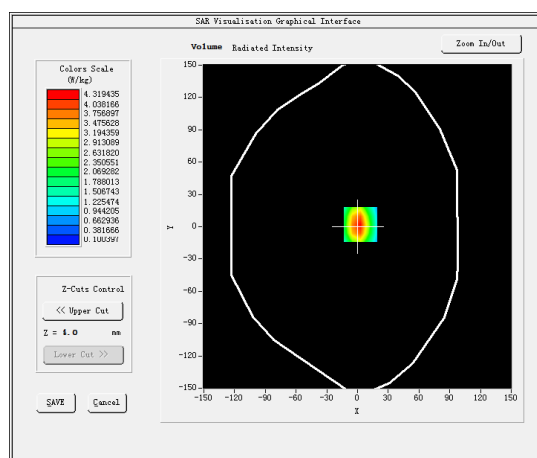

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.164239
SAR 1g (W/Kg)	3.943268

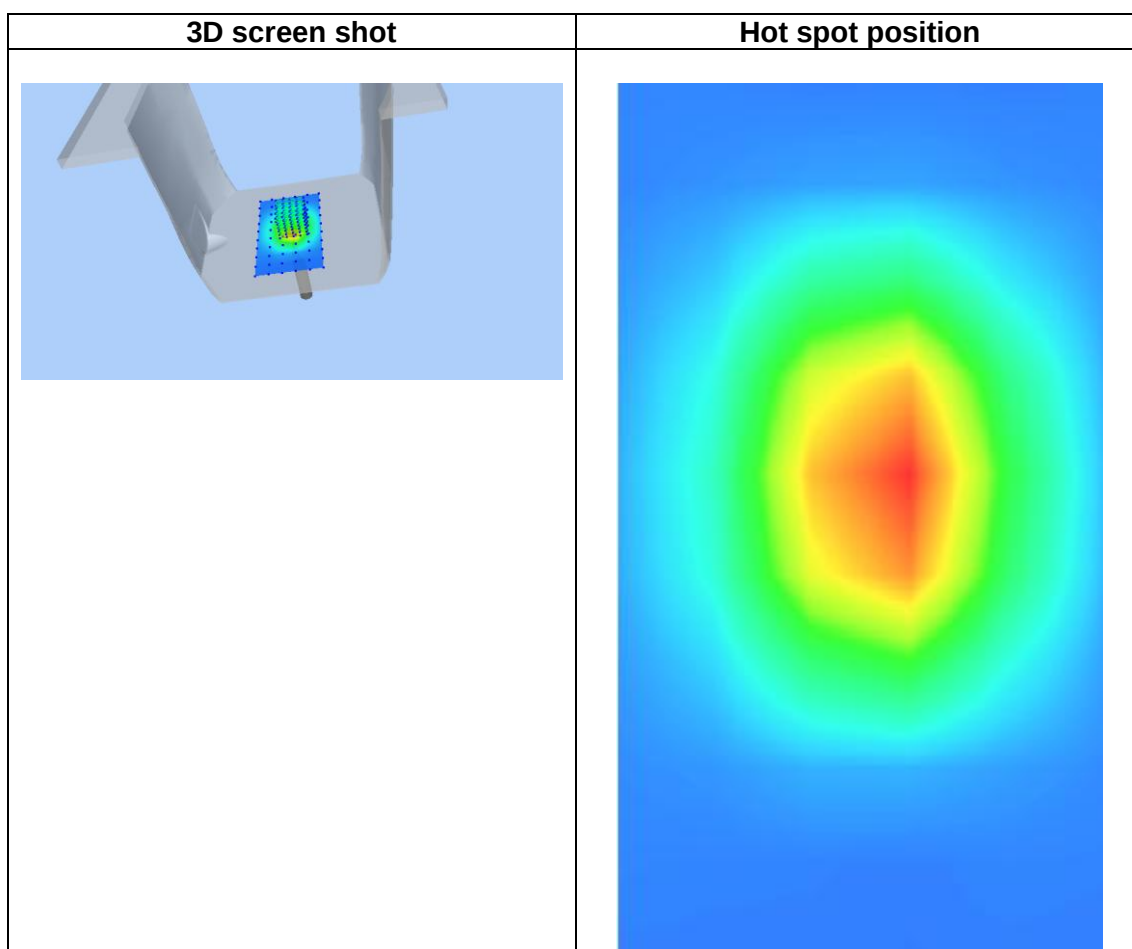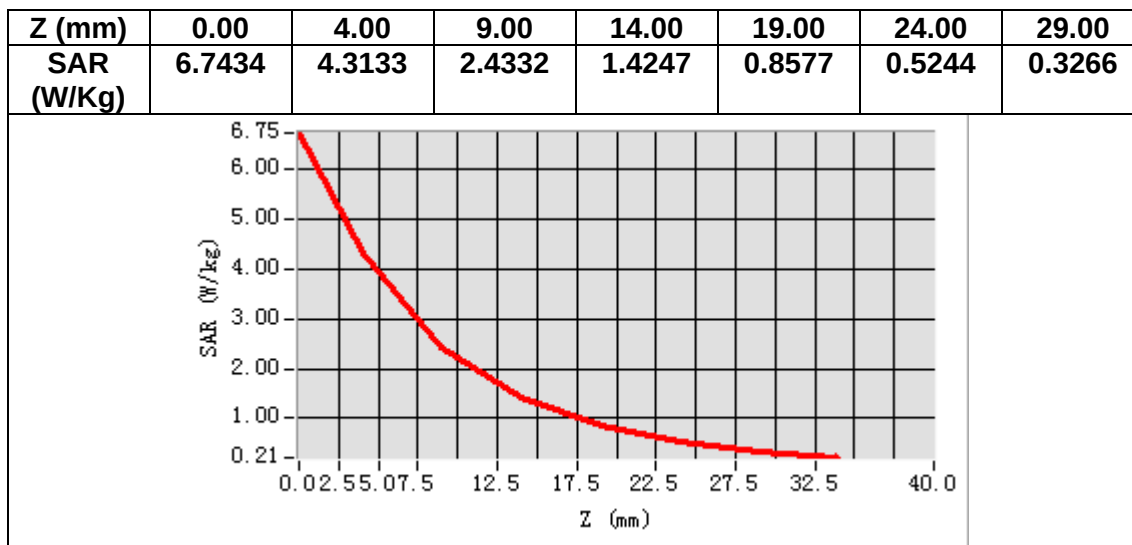

MEASUREMENT 7

Date of measurement: 25/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.804700
Relative permittivity (imaginary part)	13.532600
Conductivity (S/m)	1.430302
Variation (%)	-1.430000

SURFACE SAR

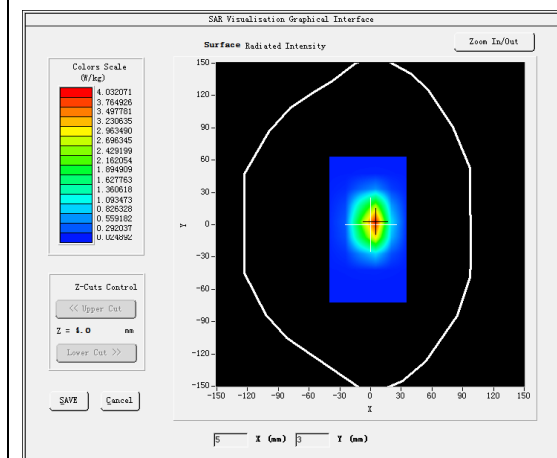



VOLUME SAR

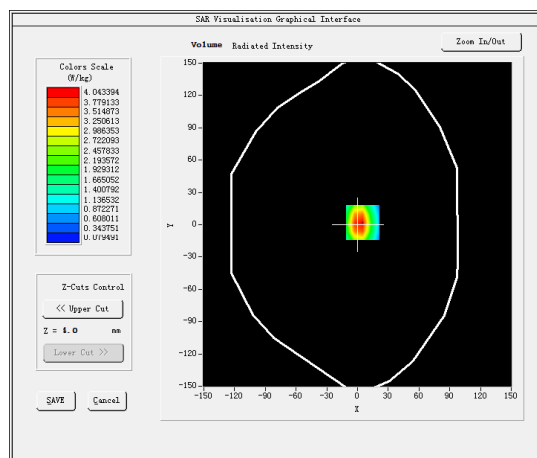

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	1.944452
SAR 1g (W/Kg)	4.065361

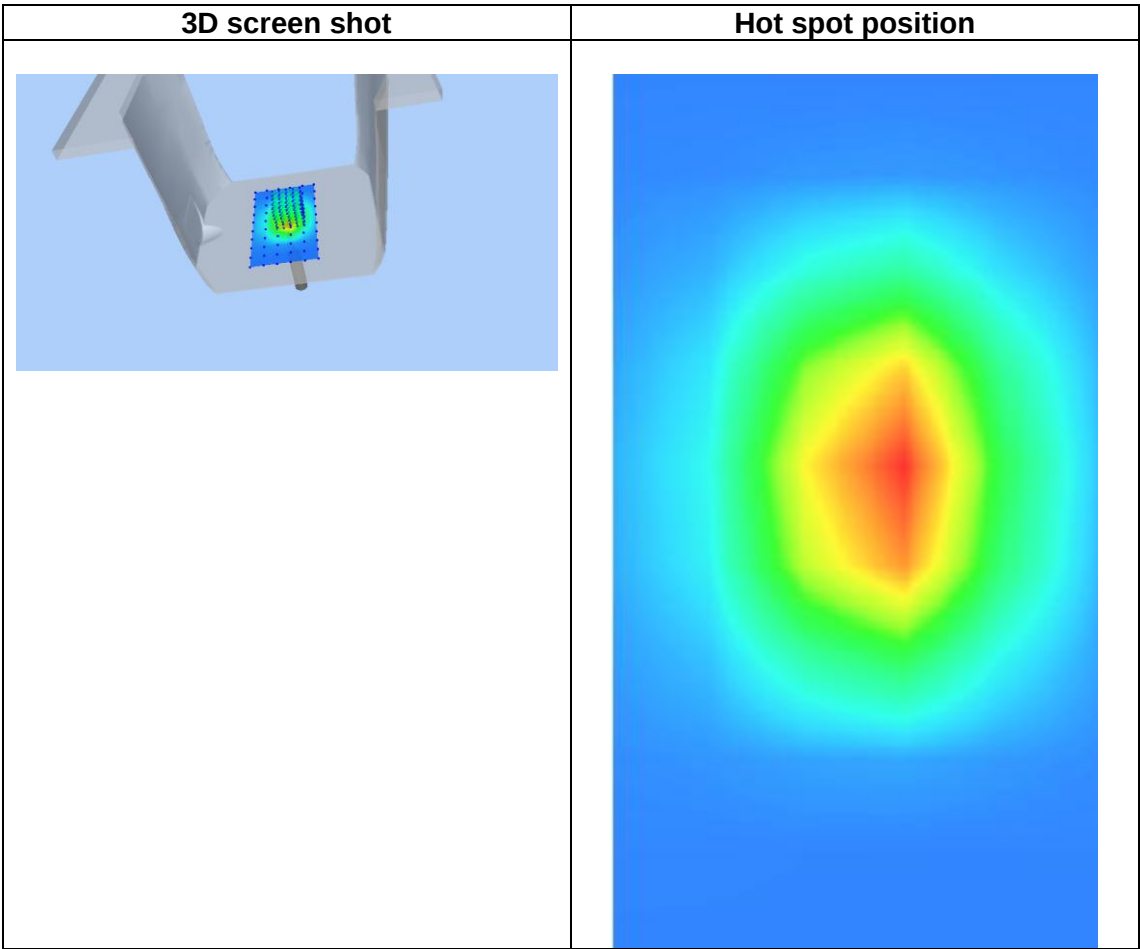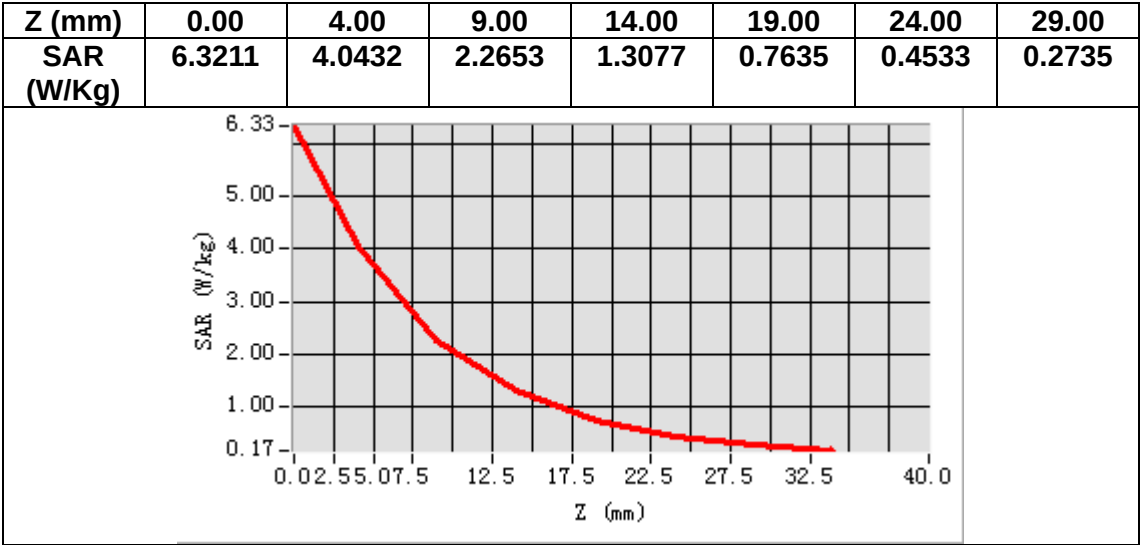

MEASUREMENT 8

Date of measurement: 23/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	54.367800
Relative permittivity (imaginary part)	14.429500
Conductivity (S/m)	1.520066
Variation (%)	0.120000

SURFACE SAR

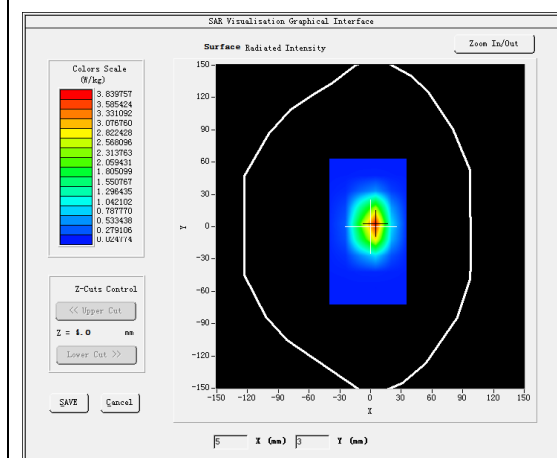



VOLUME SAR

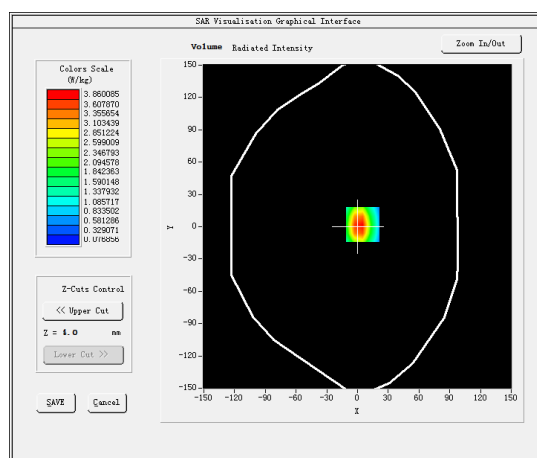

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.39 W/kg

SAR 10g (W/Kg)	2.061329
SAR 1g (W/Kg)	3.771402

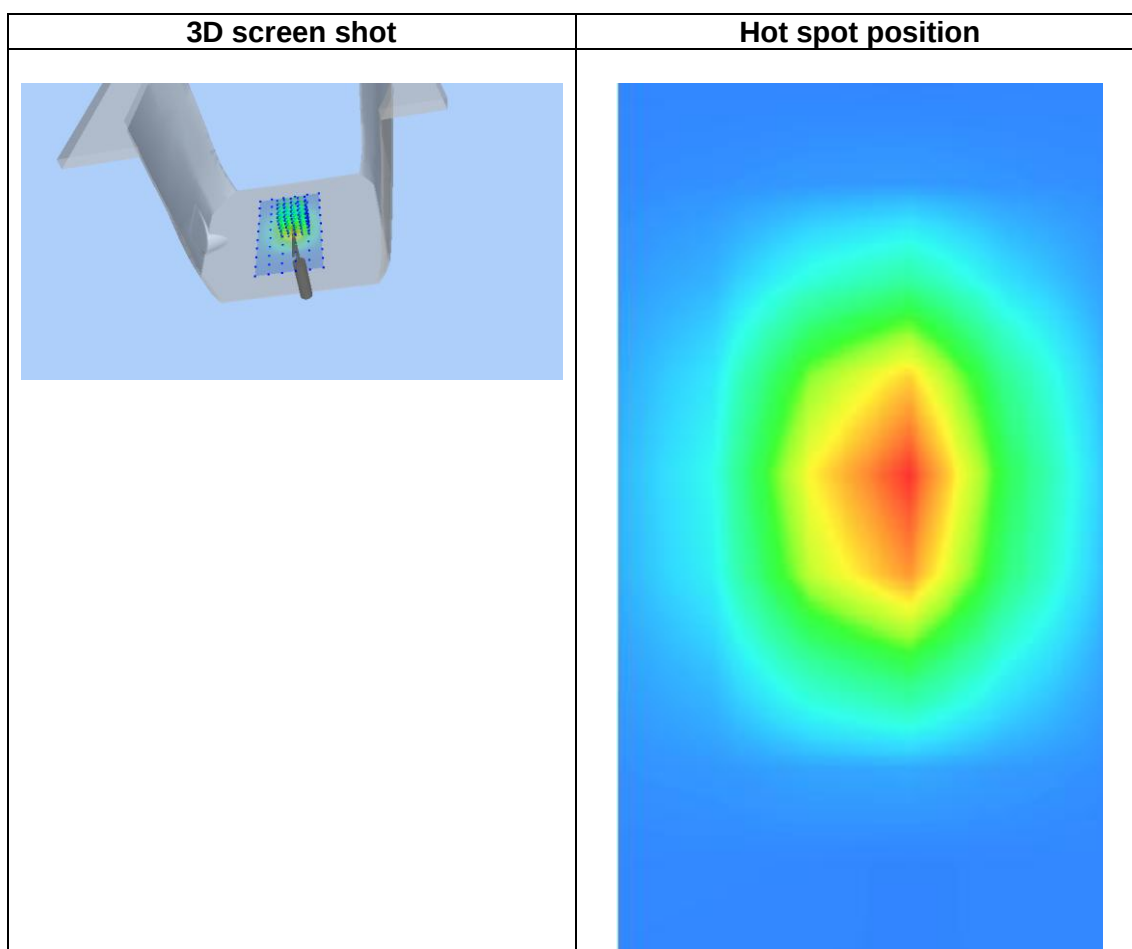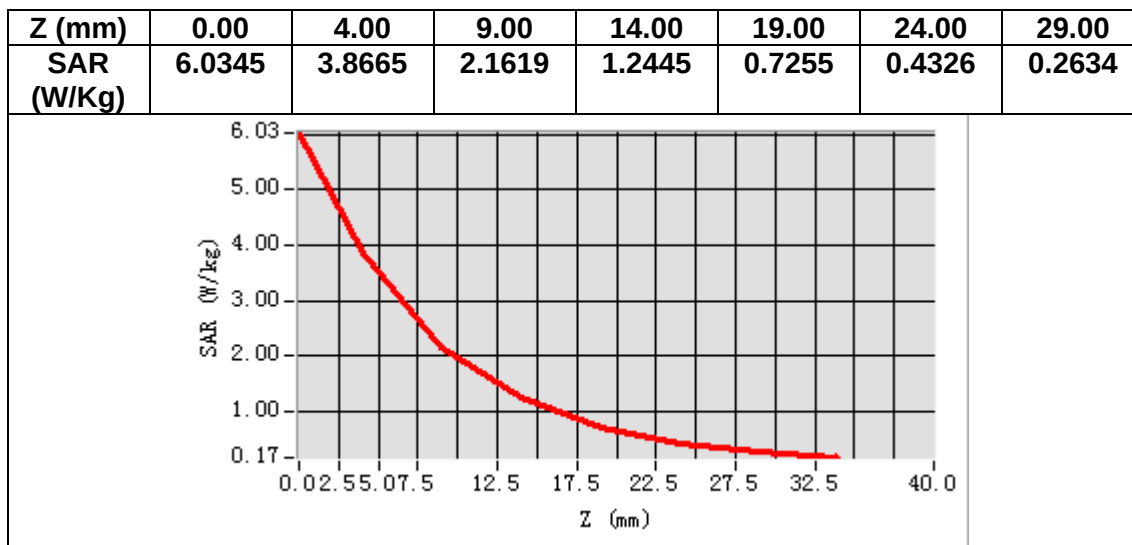

MEASUREMENT 9

Date of measurement: 25/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.685900
Relative permittivity (imaginary part)	13.481800
Conductivity (S/m)	1.840463
Variation (%)	-3.350000

SURFACE SAR

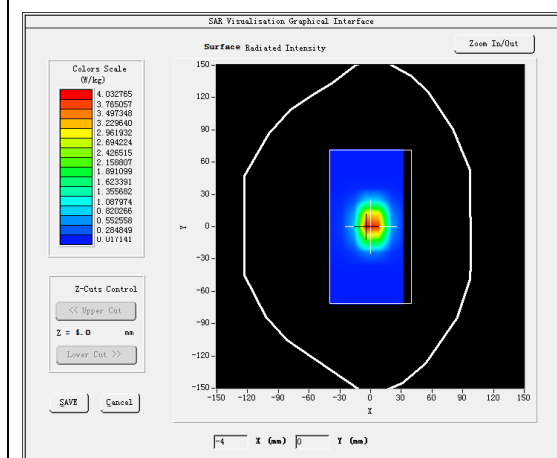



VOLUME SAR

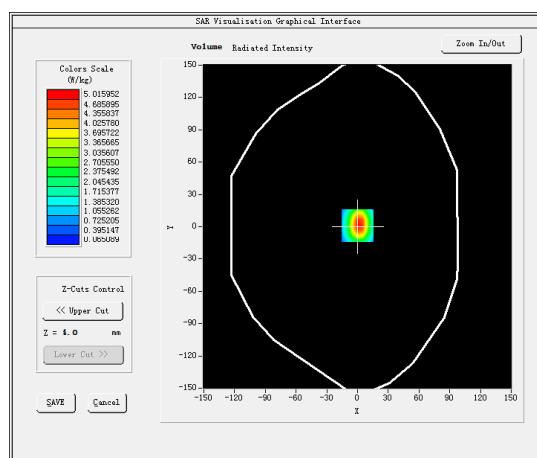

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.405175
SAR 1g (W/Kg)	5.315435

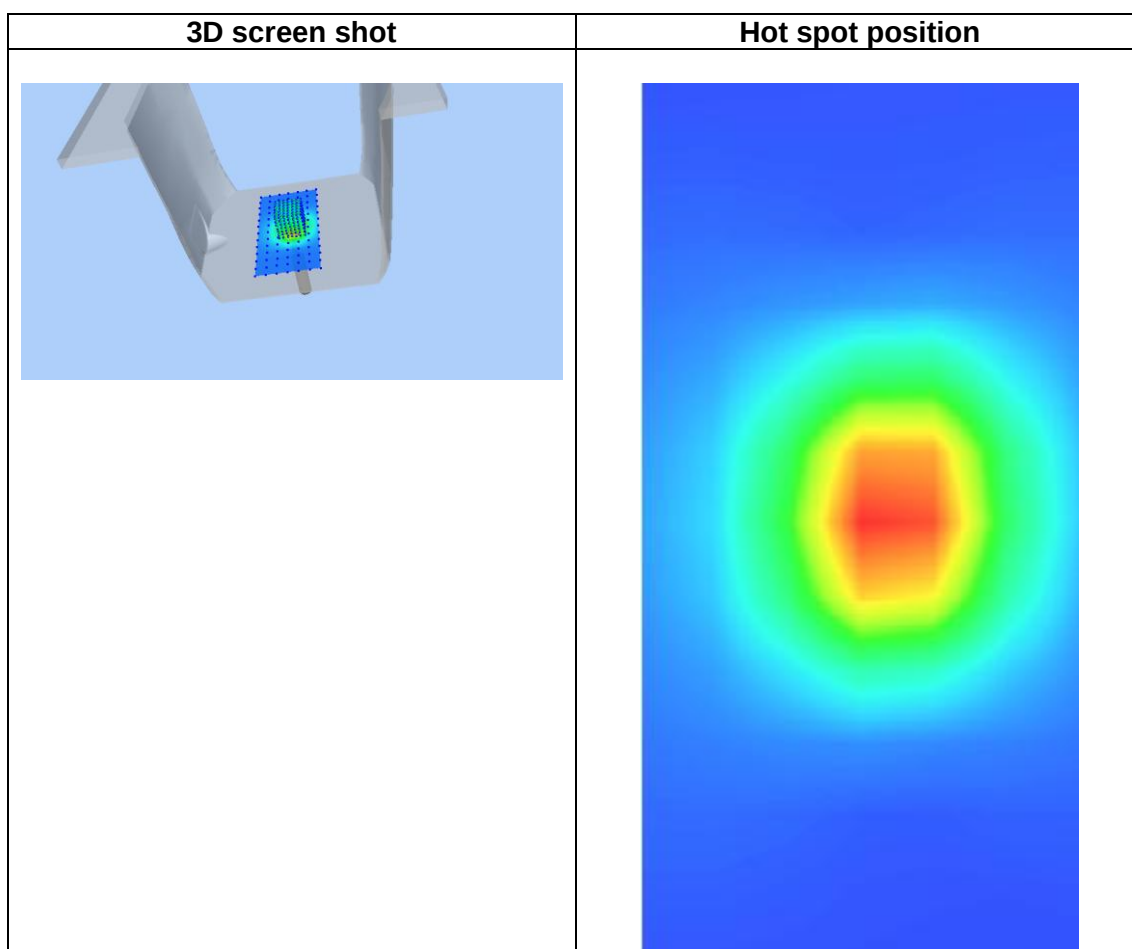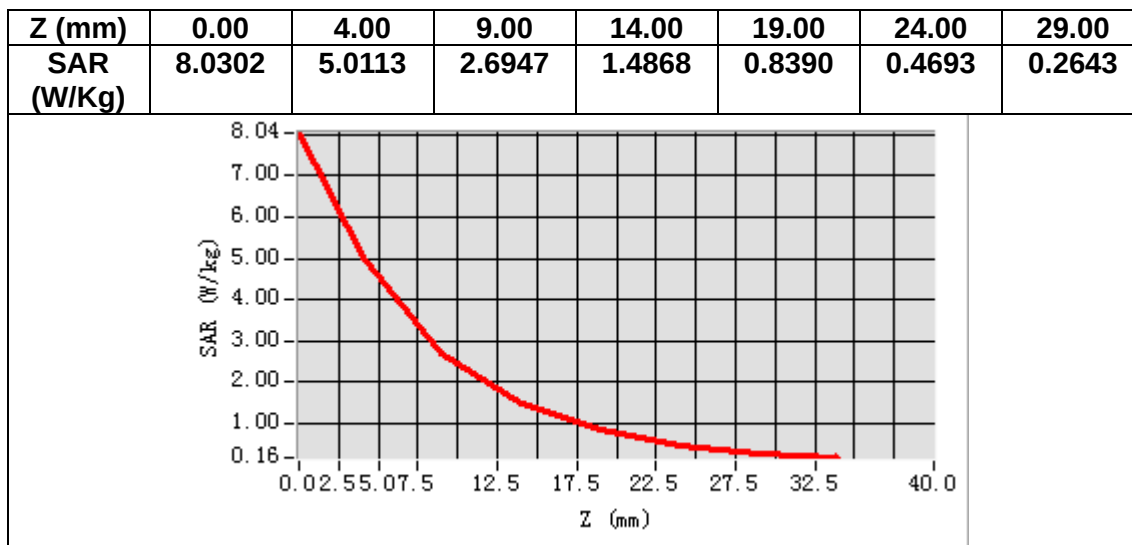

MEASUREMENT 10

Date of measurement: 24/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	51.652800
Relative permittivity (imaginary part)	13.802800
Conductivity (S/m)	1.882816
Variation (%)	0.420000

SURFACE SAR

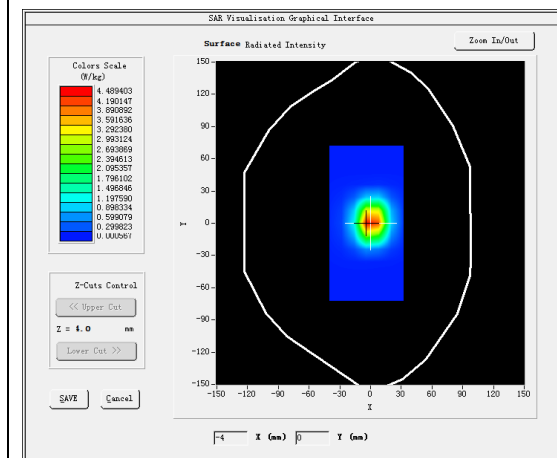



VOLUME SAR

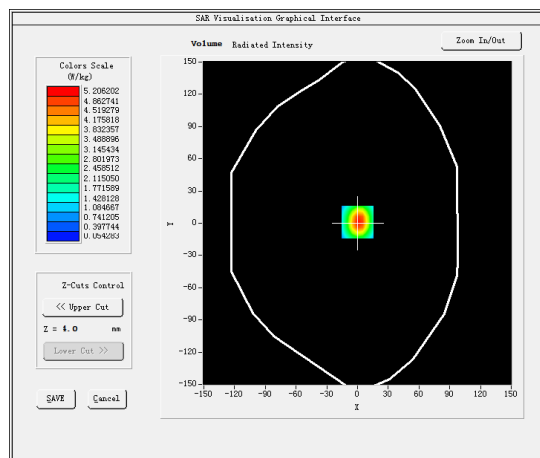

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.46 W/kg

SAR 10g (W/Kg)	2.380285
SAR 1g (W/Kg)	5.063270

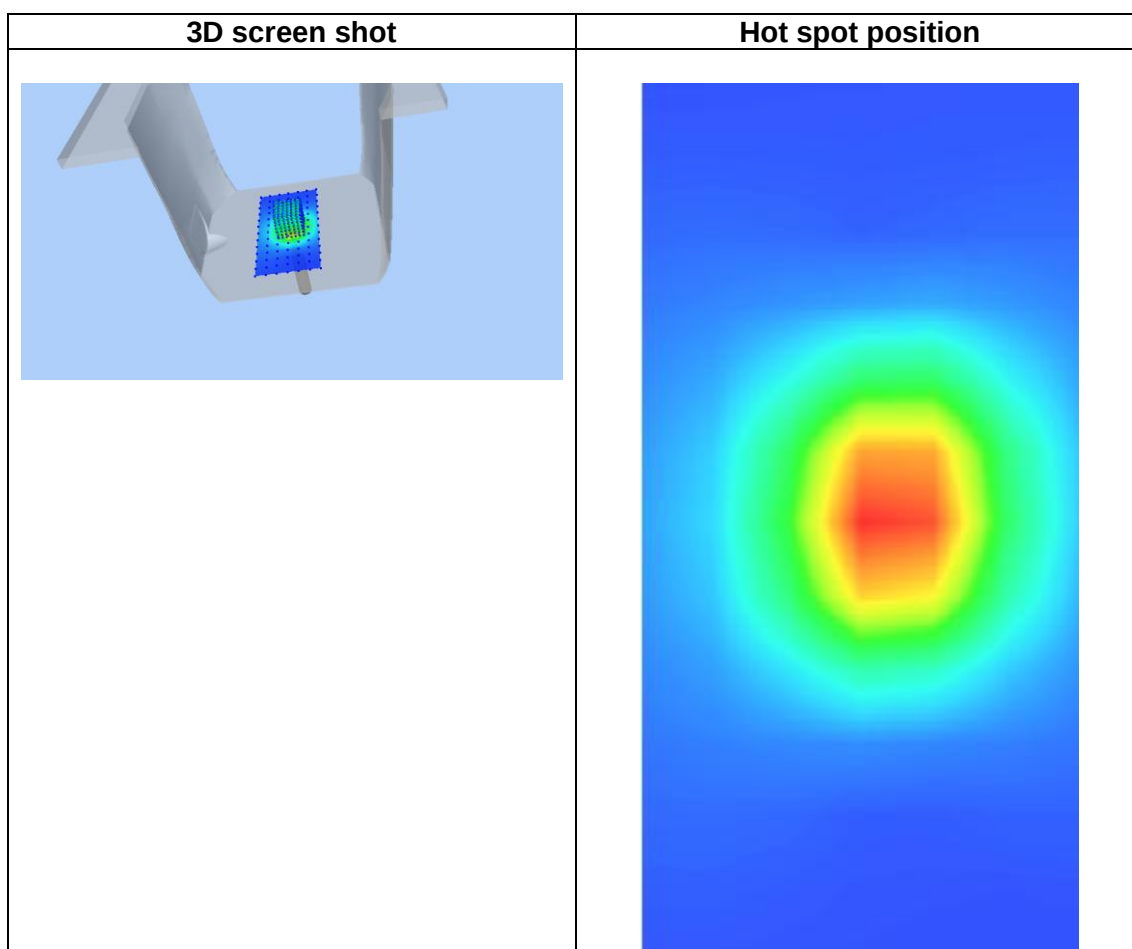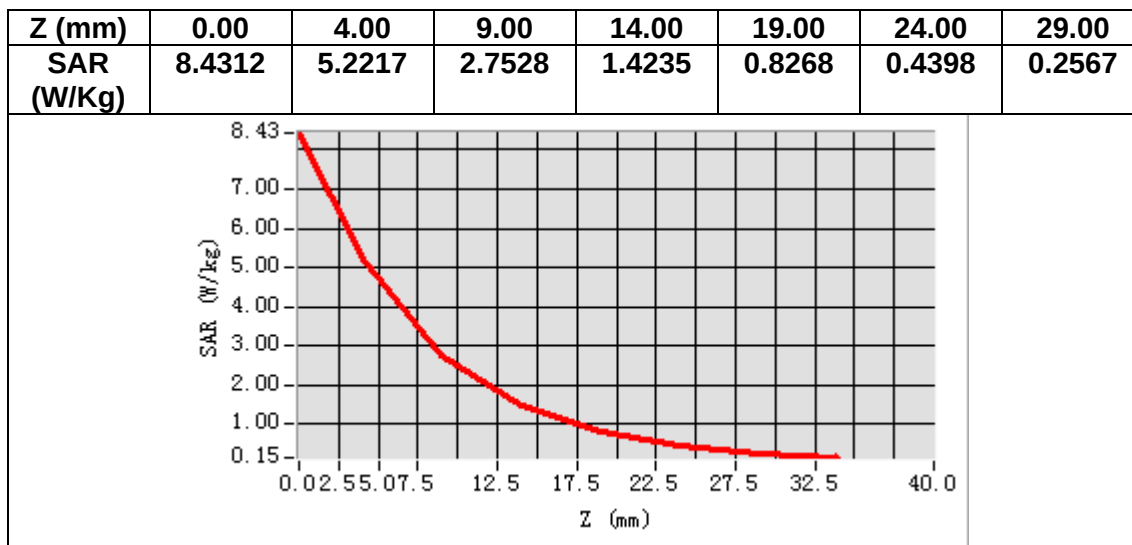

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 5 Head
MEASUREMENT 8 WCDMA Band 5 Body
MEASUREMENT 9 WLAN 2.4G Head
MEASUREMENT 10 WLAN 2.4G Body
MEASUREMENT 11 LTE Band 2 Head
MEASUREMENT 12 LTE Band 2 Body
MEASUREMENT 13 LTE Band 4 Head
MEASUREMENT 14 LTE Band 4 Body
MEASUREMENT 15 LTE Band 12 Head
MEASUREMENT 16 LTE Band 12 Body
MEASUREMENT 17 LTE Band 17 Head
MEASUREMENT 18 LTE Band 17 Body

MEASUREMENT 1

Date of measurement: 3/11/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>

B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.840961
Relative permittivity (imaginary part)	19.901541
Conductivity (S/m)	0.924758
Variation (%)	1.750000

SURFACE SAR

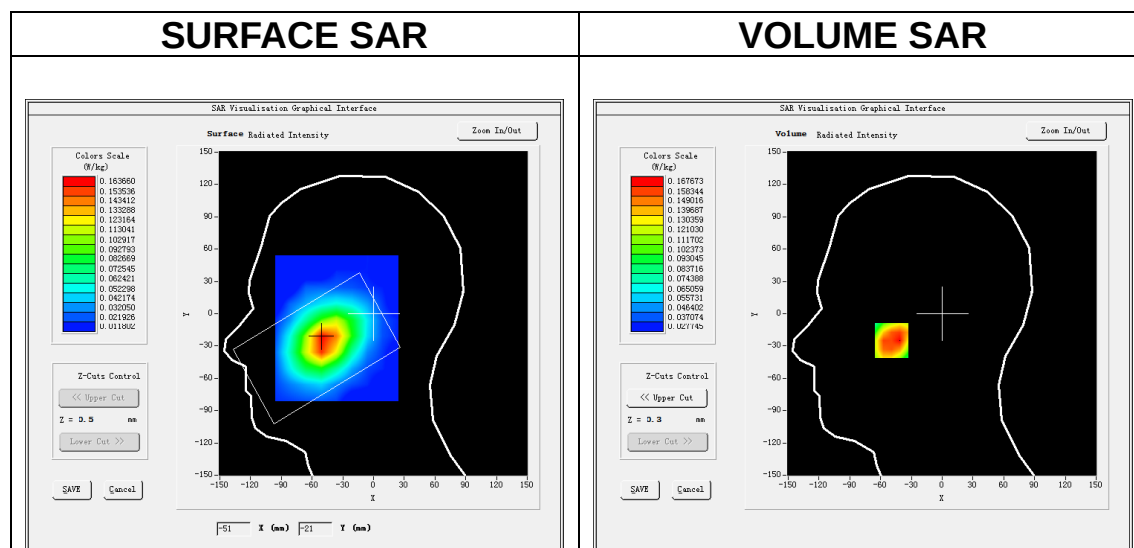

Maximum location: X=-49.00, Y=-25.00


SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.116482
SAR 1g (W/Kg)	0.164007

A line graph showing the relationship between SAR (W/kg) and Z (mm). The y-axis is labeled 'SAR (W/kg)' and ranges from 0.038 to 0.214 with major grid lines every 0.025 units. The x-axis is labeled 'Z (mm)' and ranges from 0.02 to 40.0 with major grid lines every 5.0 units. A red curve starts at approximately (0.02, 0.214) and decreases monotonically, passing through points like (0.55, 0.175), (1.1, 0.150), (2.2, 0.125), (4.4, 0.100), (8.8, 0.075), and ending at approximately (32.5, 0.038).

Z (mm)	SAR (W/kg)
0.02	0.214
0.55	0.175
1.1	0.150
2.2	0.125
4.4	0.100
8.8	0.075
32.5	0.038

Hot spot position

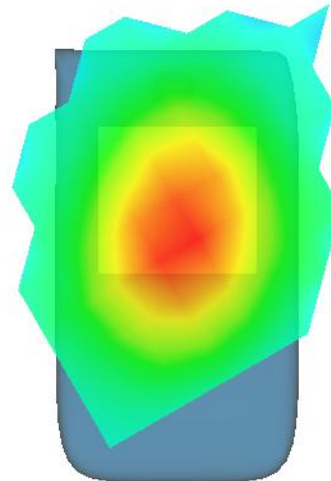

MEASUREMENT 2


Date of measurement: 3/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	54.669579
Relative permittivity (imaginary part)	21.102739
Conductivity (S/m)	0.980574
Variation (%)	-0.670000

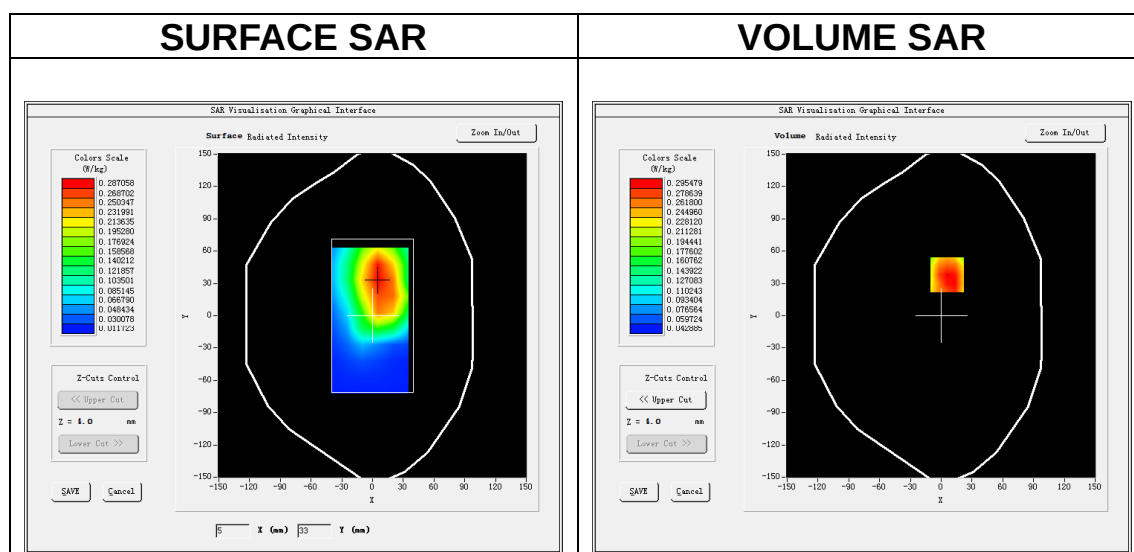

Maximum location: X=6.00, Y=38.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.207079
SAR 1g (W/Kg)	0.295218

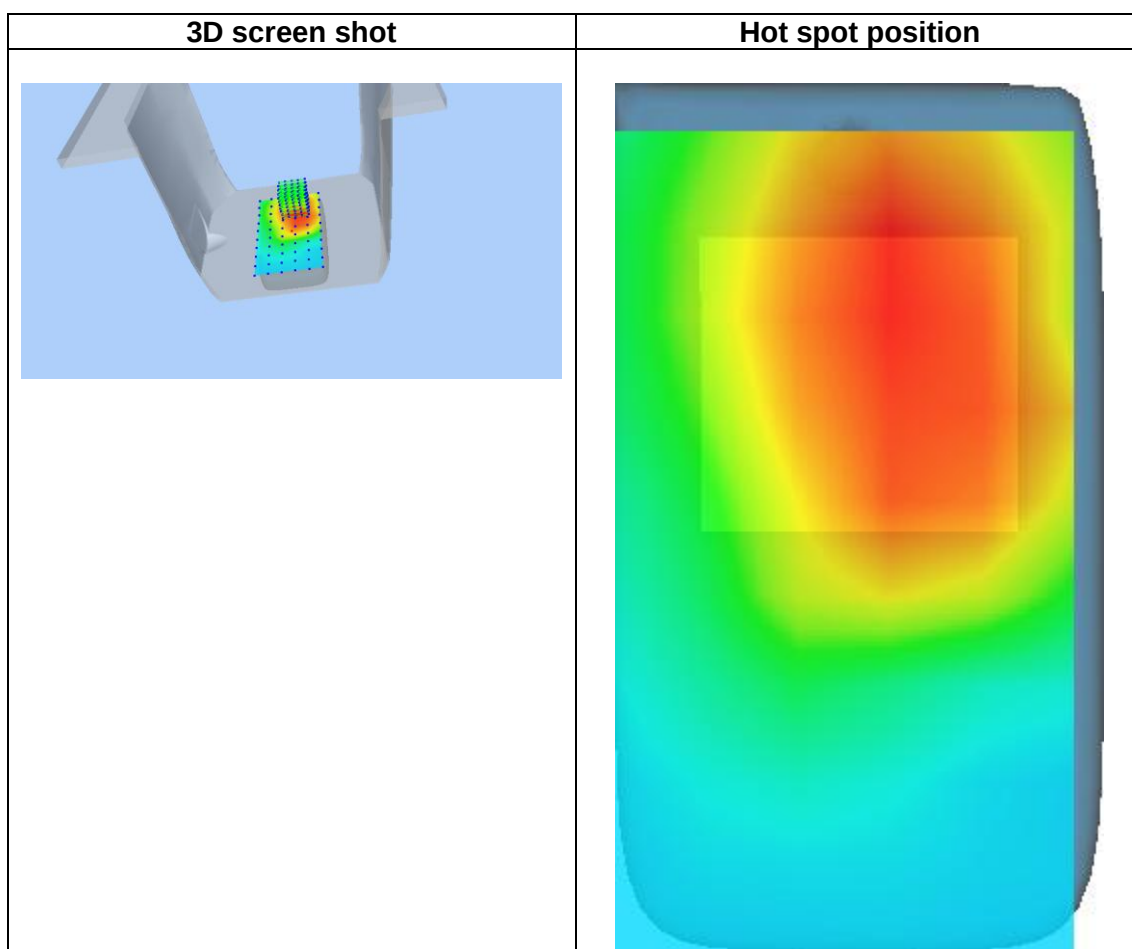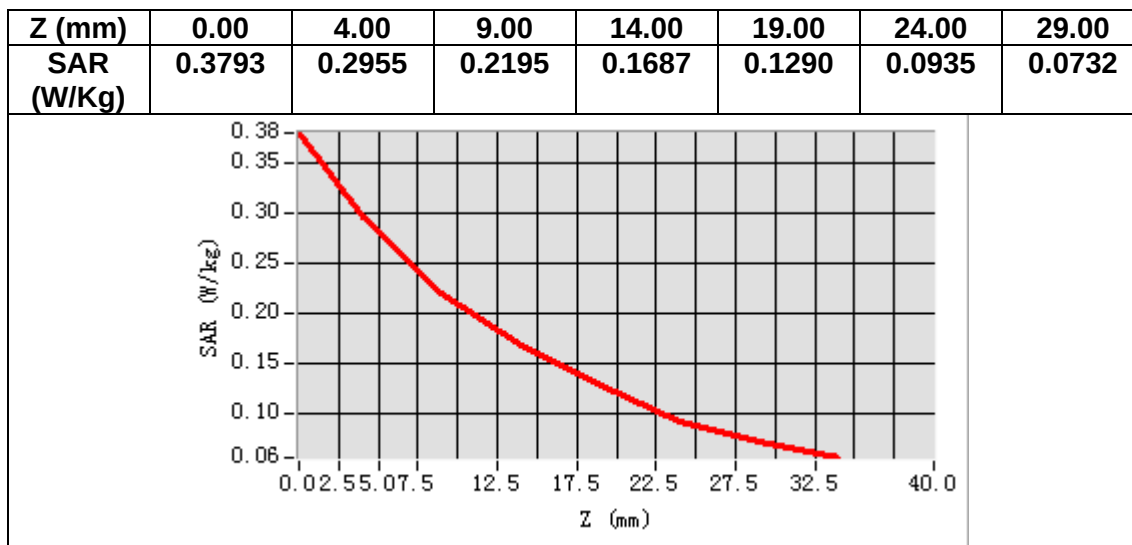

MEASUREMENT 3


Date of measurement: 25/10/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.176998
Relative permittivity (imaginary part)	13.180200
Conductivity (S/m)	1.376599
Variation (%)	-0.540000

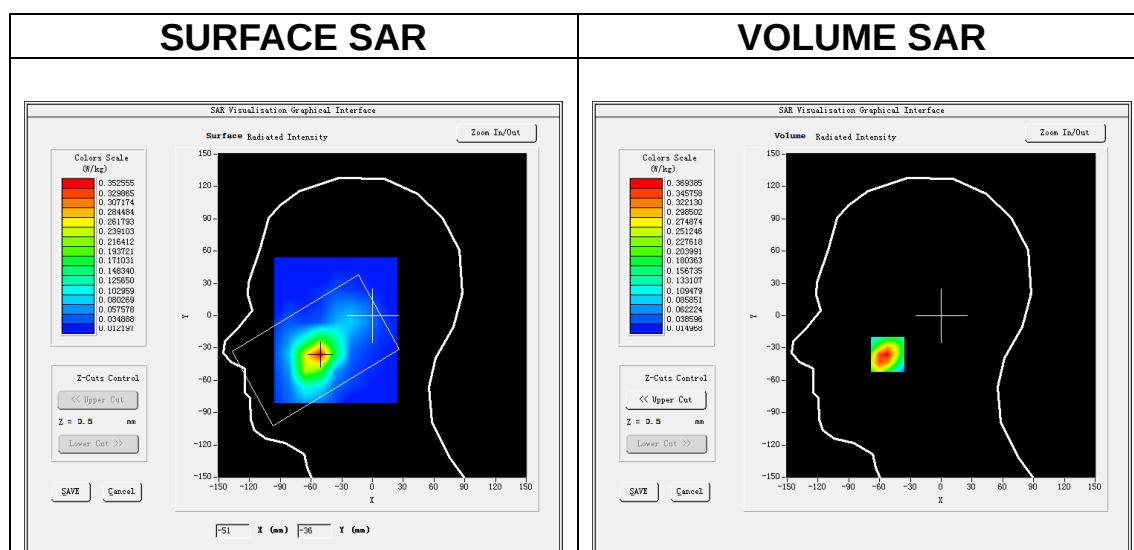



Maximum location: X=-52.00, Y=-36.00

SAR Peak: 0.59 W/kg

SAR 10g (W/Kg)	0.191181
SAR 1g (W/Kg)	0.356307

The graph shows the SAR distribution along the Z-axis. The y-axis is labeled 'SAR (W/kg)' and ranges from 0.0 to 0.6. The x-axis is labeled 'Z (mm)' and ranges from 0.0 to 40.0. A red curve starts at approximately (0, 0.6) and decreases monotonically, reaching near zero at Z=35 mm.

Z (mm)	SAR (W/kg)
0.0	0.60
2.5	0.45
5.0	0.35
7.5	0.28
10.0	0.22
12.5	0.18
15.0	0.14
17.5	0.10
20.0	0.08
22.5	0.06
25.0	0.04
27.5	0.03
30.0	0.02
32.5	0.01
35.0	0.01

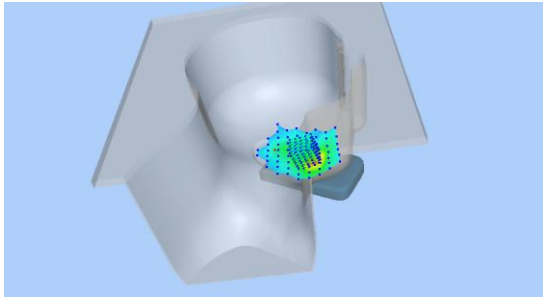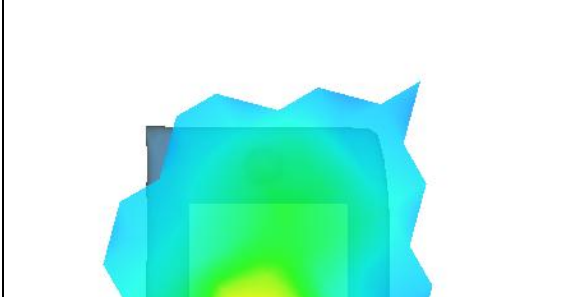3D screen shot	Hot spot position
 A 3D rendering of a human head model in a light blue color. The head is positioned on a grey base. A small, irregularly shaped region on the side of the head is highlighted with a dense grid of blue dots, indicating a specific area of interest or measurement.	 A 3D rendering of a human head model, similar to the one in the first panel. The head is colored in a gradient of blue and green, with a prominent red and yellow hot spot located on the side of the head, indicating a region of high intensity or activity.

MEASUREMENT 4


Date of measurement: 23/10/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	54.443901
Relative permittivity (imaginary part)	14.517700
Conductivity (S/m)	1.516293
Variation (%)	-3.890000

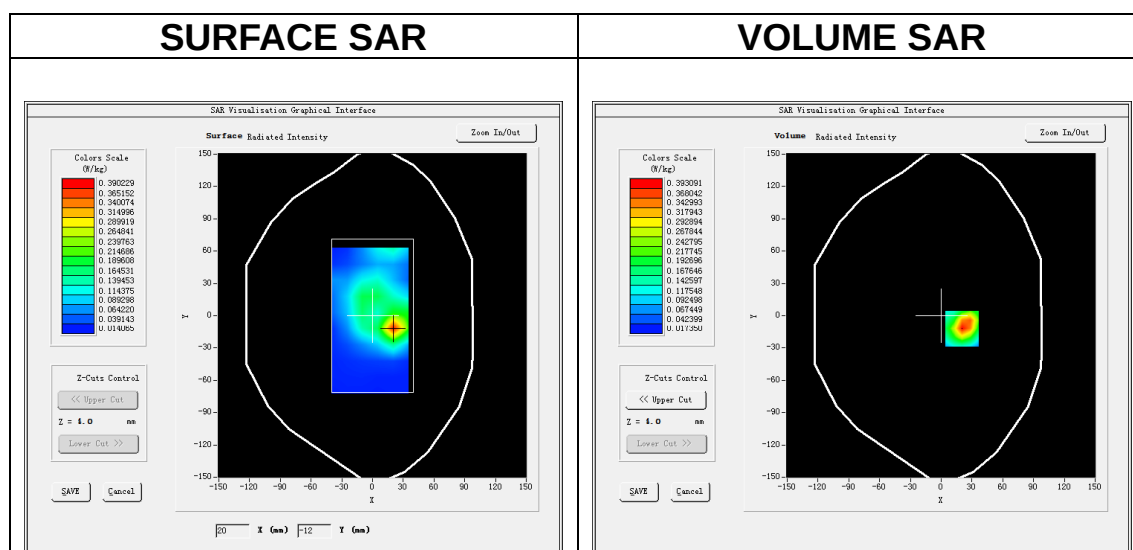

Maximum location: X=20.00, Y=-12.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.190393
SAR 1g (W/Kg)	0.375408

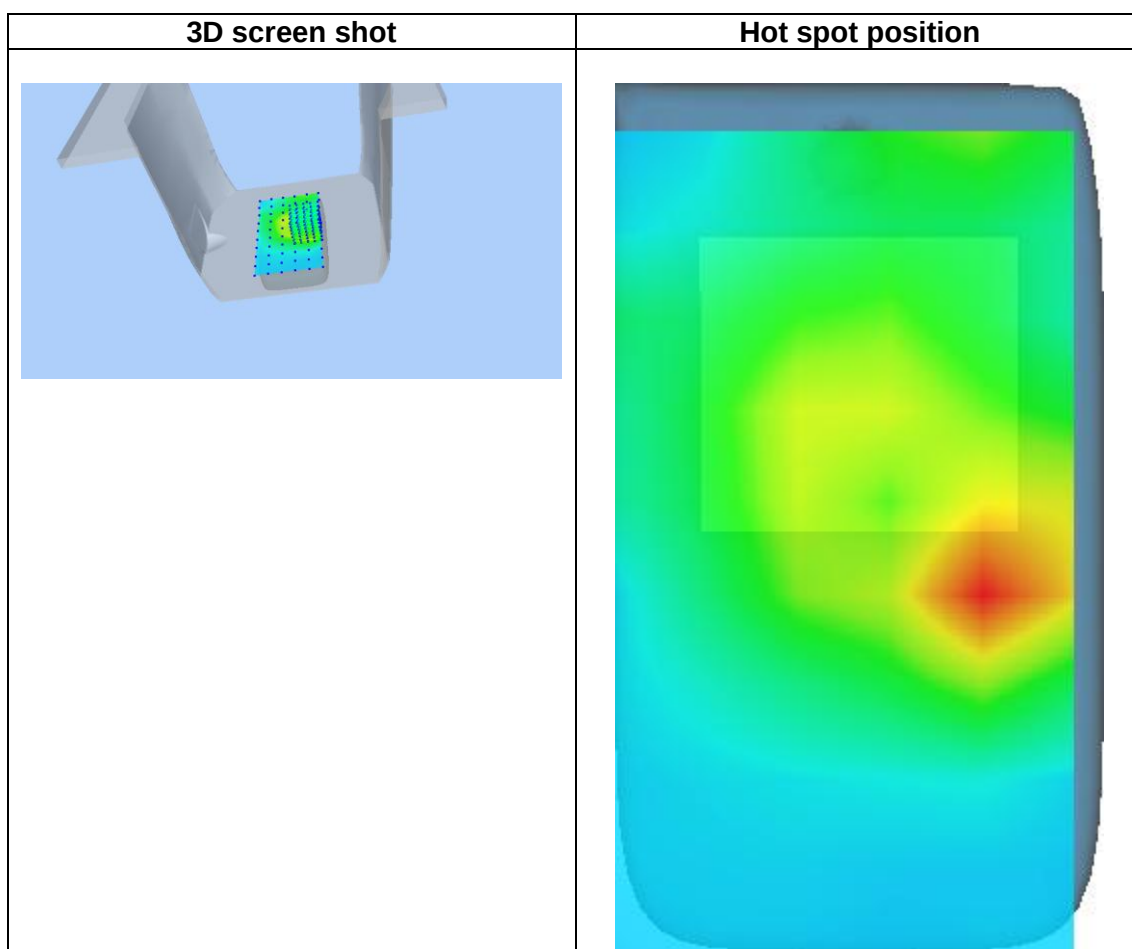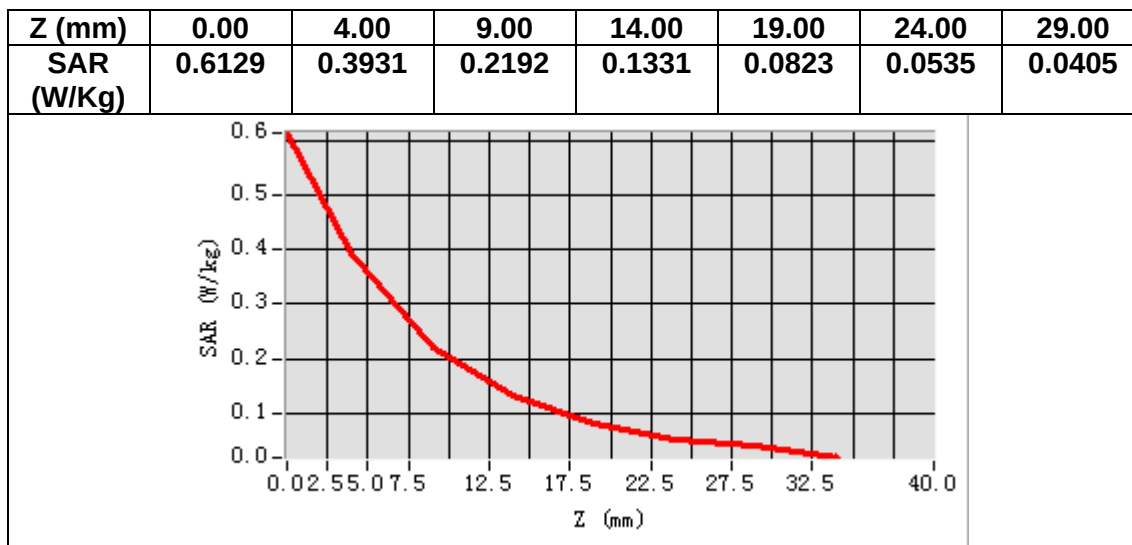

MEASUREMENT 5

Date of measurement: 25/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.176998
Relative permittivity (imaginary part)	13.180200
Conductivity (S/m)	1.376599
Variation (%)	-1.290000

SURFACE SAR

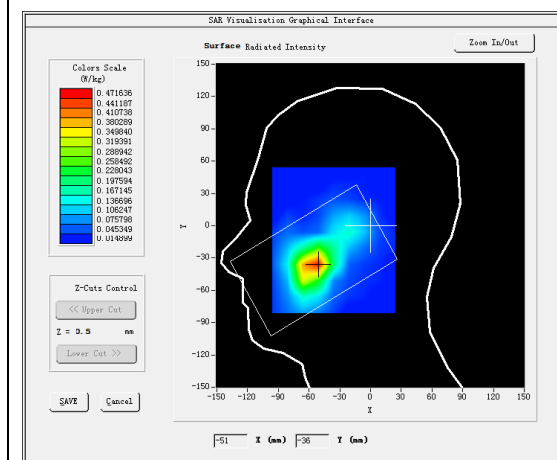



VOLUME SAR

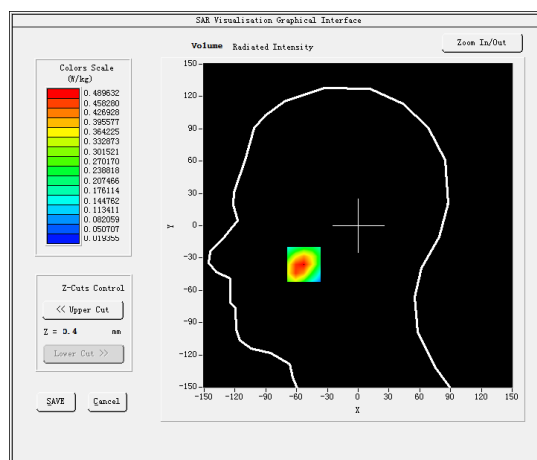

Maximum location: X=-53.00, Y=-36.00

SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.262662
SAR 1g (W/Kg)	0.470625

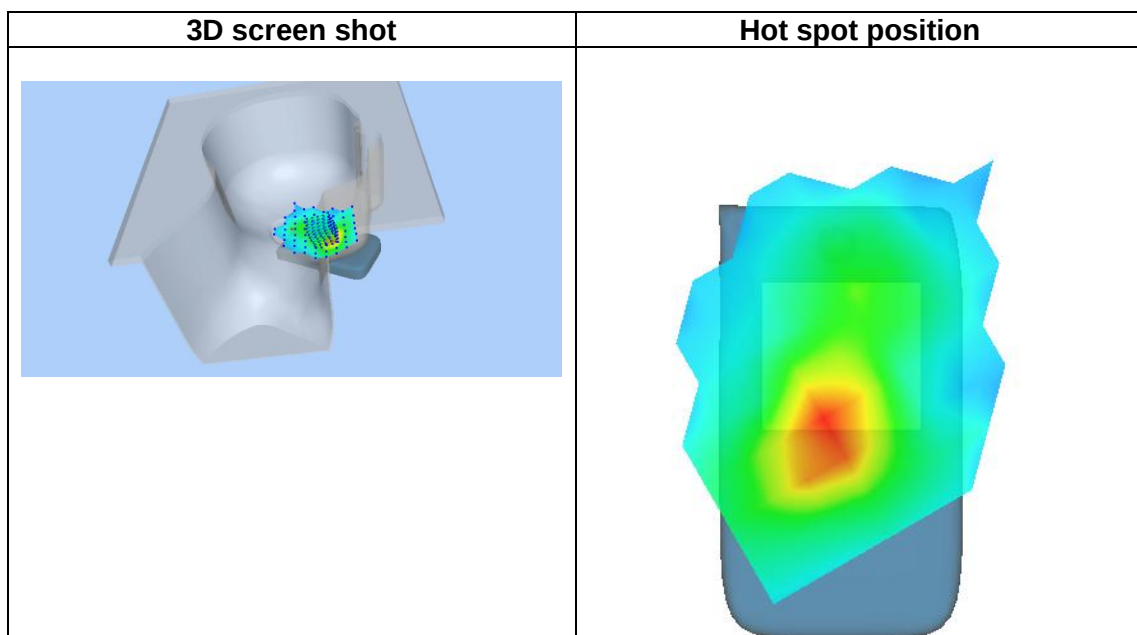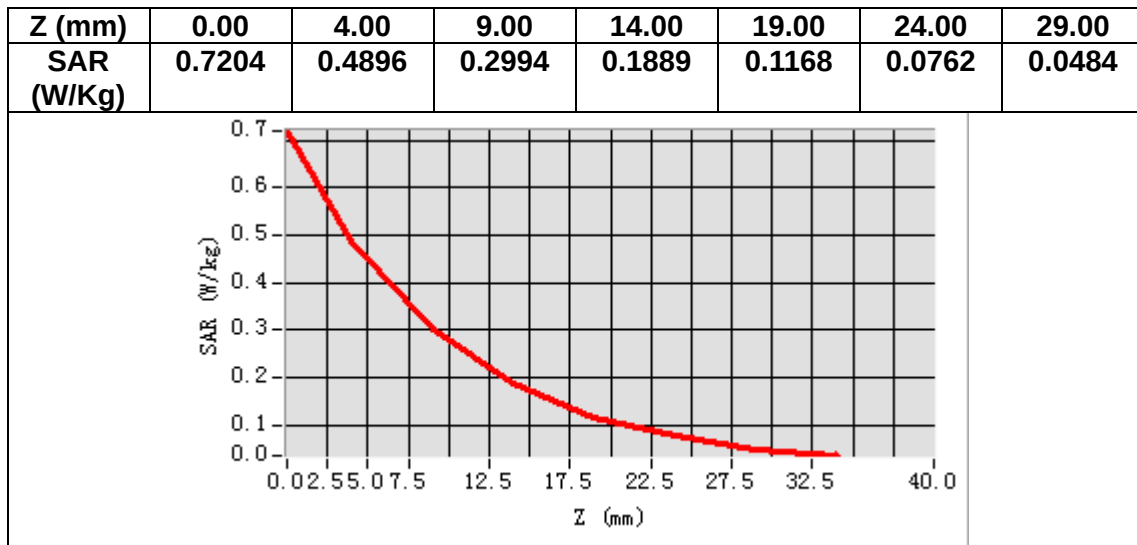

MEASUREMENT 6


Date of measurement: 23/10/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	54.443901
Relative permittivity (imaginary part)	14.517700
Conductivity (S/m)	1.516293
Variation (%)	-0.200000

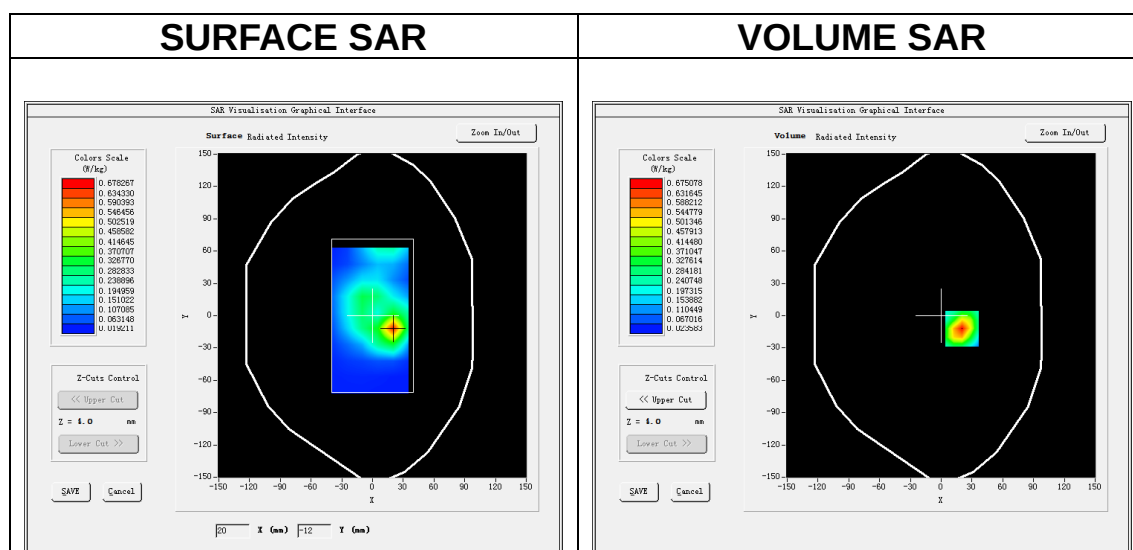

Maximum location: X=20.00, Y=-12.00

SAR Peak: 1.05 W/kg

SAR 10g (W/Kg)	0.321917
SAR 1g (W/Kg)	0.625450

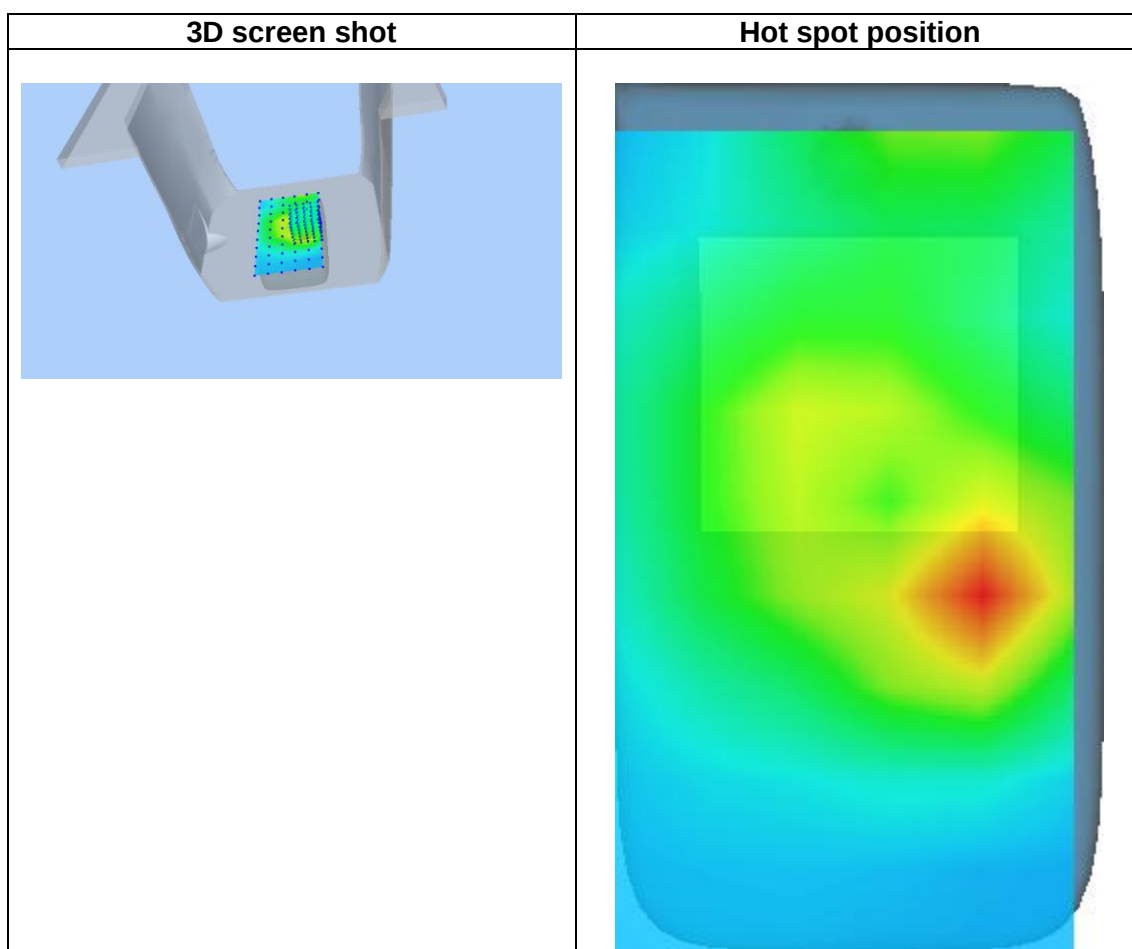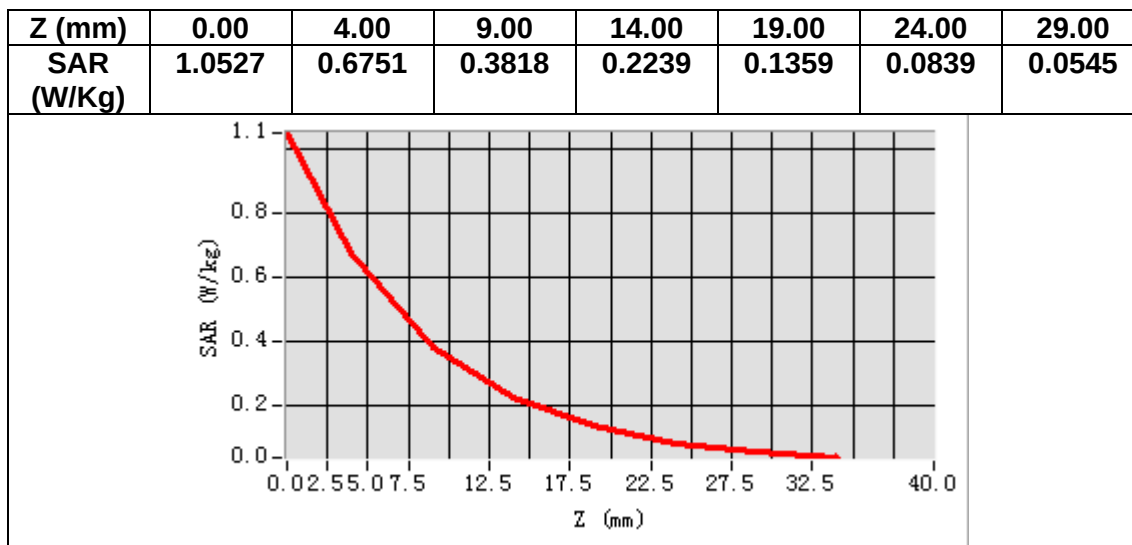

MEASUREMENT 7


Date of measurement: 3/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.840961
Relative permittivity (imaginary part)	19.901541
Conductivity (S/m)	0.924758
Variation (%)	1.040000

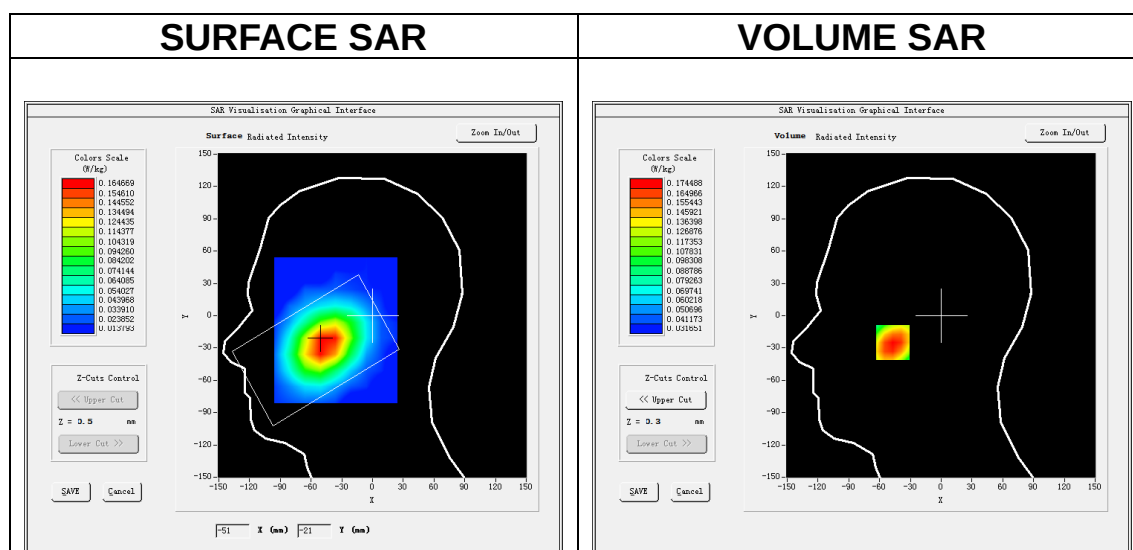



Maximum location: X=-47.00, Y=-25.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.124499
SAR 1g (W/Kg)	0.172087

A line graph showing the Specific Absorption Rate (SAR) in W/kg as a function of distance Z in mm for a 100 W CW antenna. The y-axis is labeled 'SAR (W/kg)' and ranges from 0.04 to 0.21 with major grid lines every 0.02 units. The x-axis is labeled 'Z (mm)' and ranges from 0.0 to 40.0 with major grid lines every 5.0 units. A red curve starts at approximately (0.0, 0.21) and decreases monotonically, passing through points such as (5.0, 0.16), (10.0, 0.12), (15.0, 0.09), (20.0, 0.07), (25.0, 0.05), and ending at approximately (32.5, 0.04).

Z (mm)	SAR (W/kg)
0.0	0.21
2.5	0.18
5.0	0.16
7.5	0.14
10.0	0.12
12.5	0.10
15.0	0.09
17.5	0.08
20.0	0.07
22.5	0.06
25.0	0.05
27.5	0.045
30.0	0.042
32.5	0.04

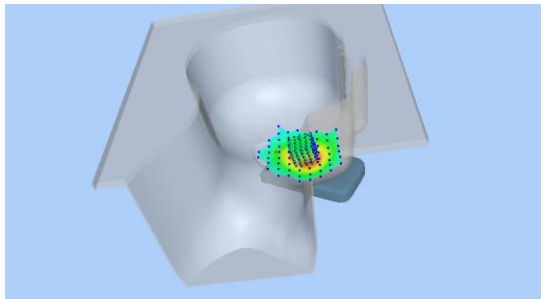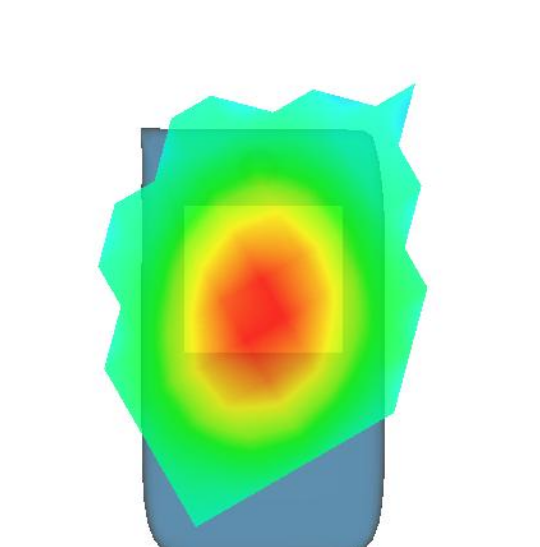3D screen shot	Hot spot position
 A 3D visualization of a human head model. A small, localized area on the side of the head is highlighted with a color gradient from blue to red, indicating a hot spot. The rest of the head and the background are light blue.	 A 3D visualization of a human head model. A large, irregularly shaped area on the side of the head is highlighted with a color gradient from blue to red, indicating a hot spot. The rest of the head and the background are light blue.

MEASUREMENT 8


Date of measurement: 3/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	54.669579
Relative permittivity (imaginary part)	21.102739
Conductivity (S/m)	0.980574
Variation (%)	-0.510000

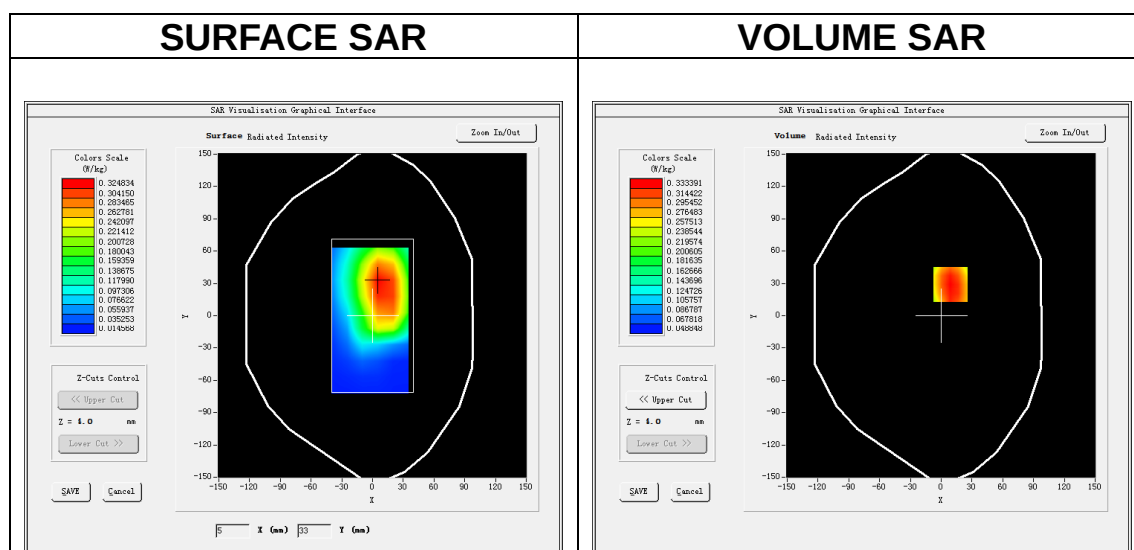

Maximum location: X=9.00, Y=29.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.234055
SAR 1g (W/Kg)	0.323972

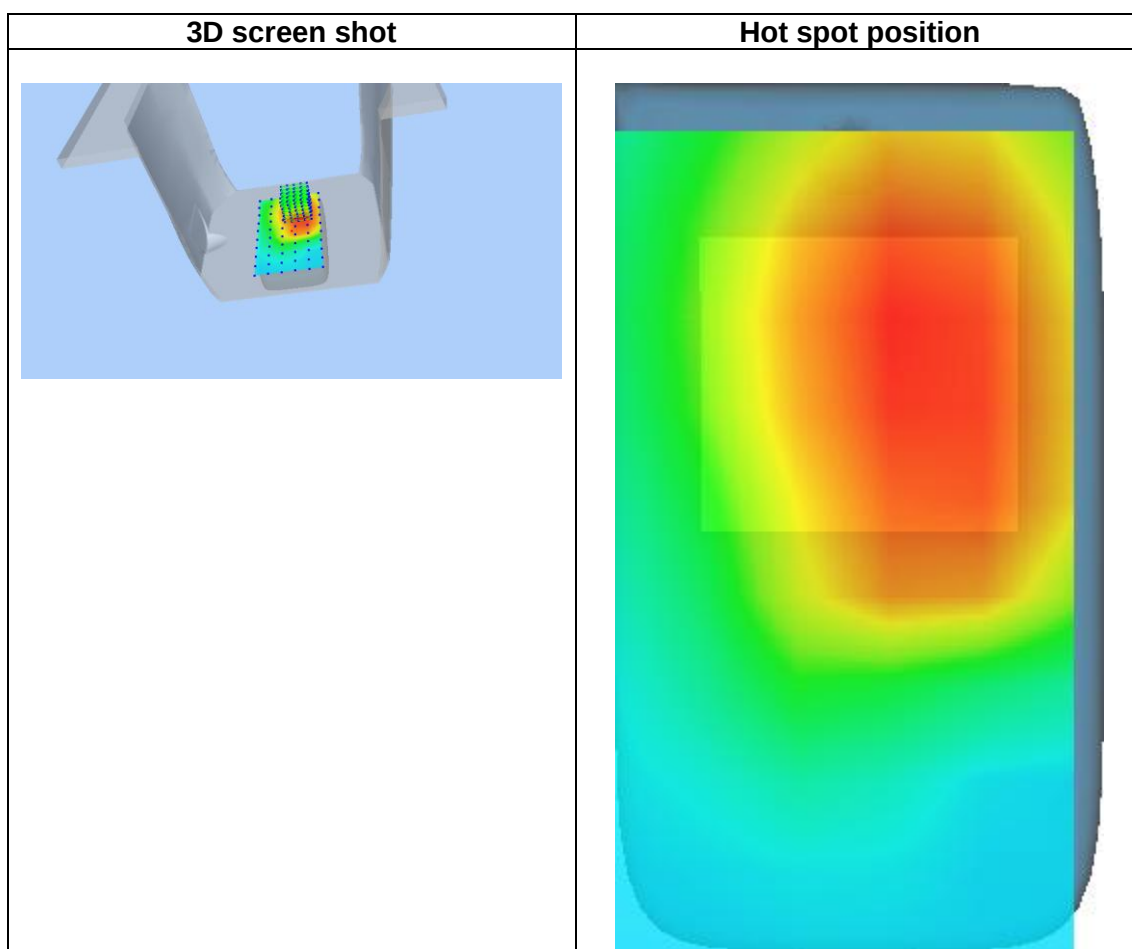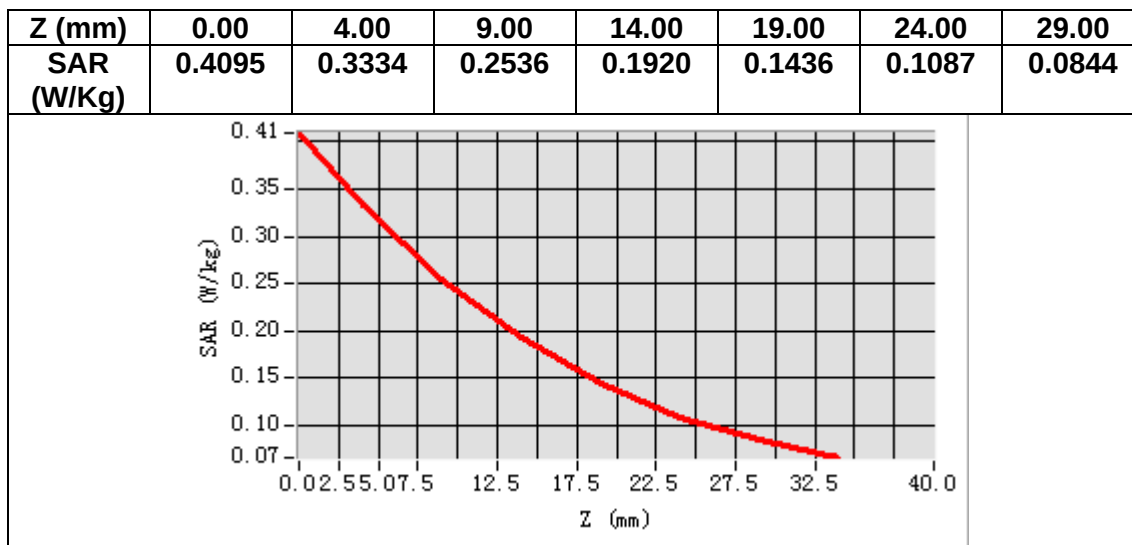

MEASUREMENT 9

Date of measurement: 25/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.738000
Relative permittivity (imaginary part)	13.400300
Conductivity (S/m)	1.814252
Variation (%)	0.410000

SURFACE SAR

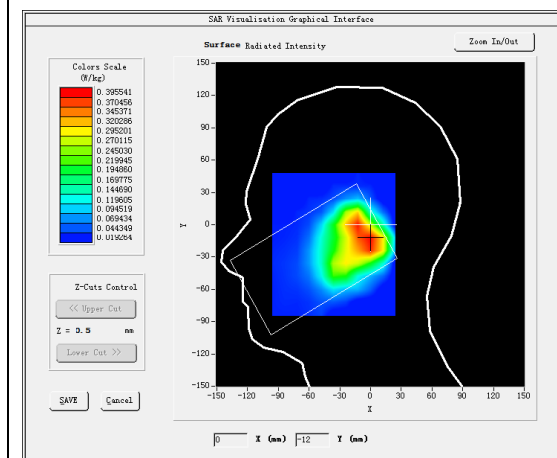

VOLUME SAR

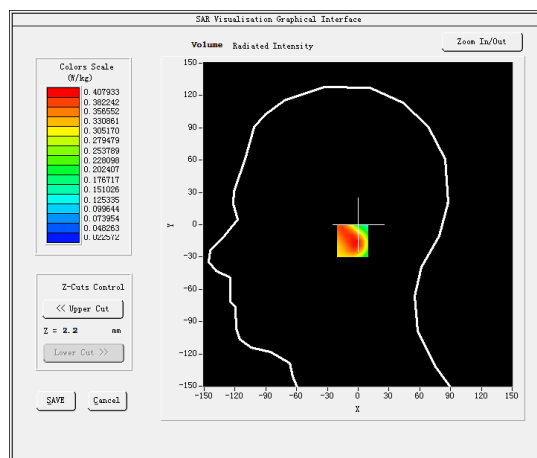



Maximum location: X=0.00, Y=-15.00

SAR Peak: 0.69 W/kg

SAR 10g (W/Kg)	0.216948
SAR 1g (W/Kg)	0.392755

The graph shows the SAR distribution for a 100 MHz plane wave. The y-axis represents SAR in W/kg, ranging from 0.0 to 0.7. The x-axis represents the distance Z in mm, ranging from 0.0 to 40.0. The SAR starts at approximately 0.7 W/kg at Z=0 and decreases rapidly, reaching near zero by Z=30 mm.

Z (mm)	SAR (W/kg)
0.0	0.70
2.5	0.50
5.0	0.40
7.5	0.30
10.0	0.22
12.5	0.15
15.0	0.10
17.5	0.08
20.0	0.06
22.5	0.04
25.0	0.03
27.5	0.02
30.0	0.01
32.5	0.01
35.0	0.01
37.5	0.01
40.0	0.01

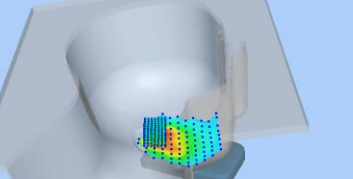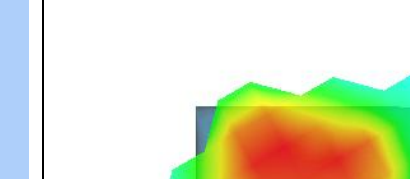3D screen shot	Hot spot position
 A 3D model of a human head and neck, rendered in light blue. A grid of small, colored squares (red, orange, yellow, green, blue) is overlaid on the neck area, representing the hot spot position.	 A 3D model of a human head and neck, rendered in light blue. A large, irregularly shaped area of the neck is highlighted with a color gradient from red (hot) to blue (cold), representing the hot spot position.

MEASUREMENT 10

Date of measurement: 24/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	51.783700
Relative permittivity (imaginary part)	13.874400
Conductivity (S/m)	1.878440
Variation (%)	-2.440000

SURFACE SAR

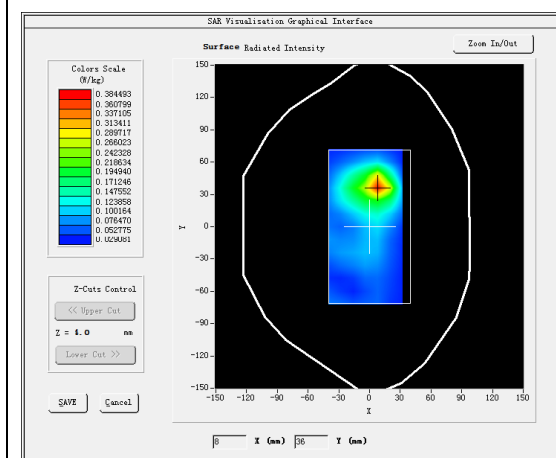



VOLUME SAR

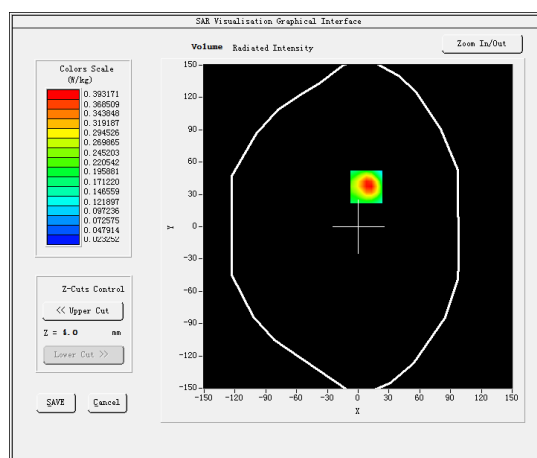

Maximum location: X=8.00, Y=37.00

SAR Peak: 0.67 W/kg

SAR 10g (W/Kg)	0.182963
SAR 1g (W/Kg)	0.374593

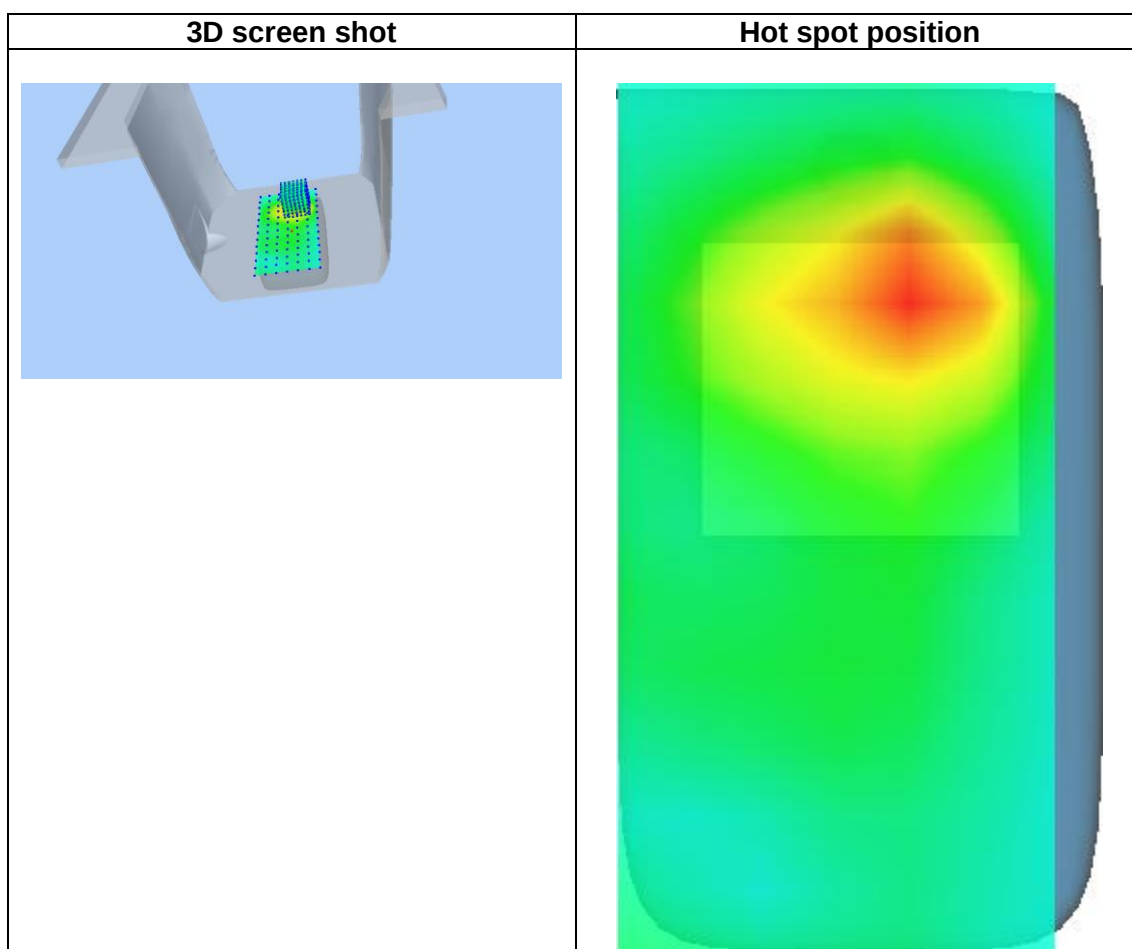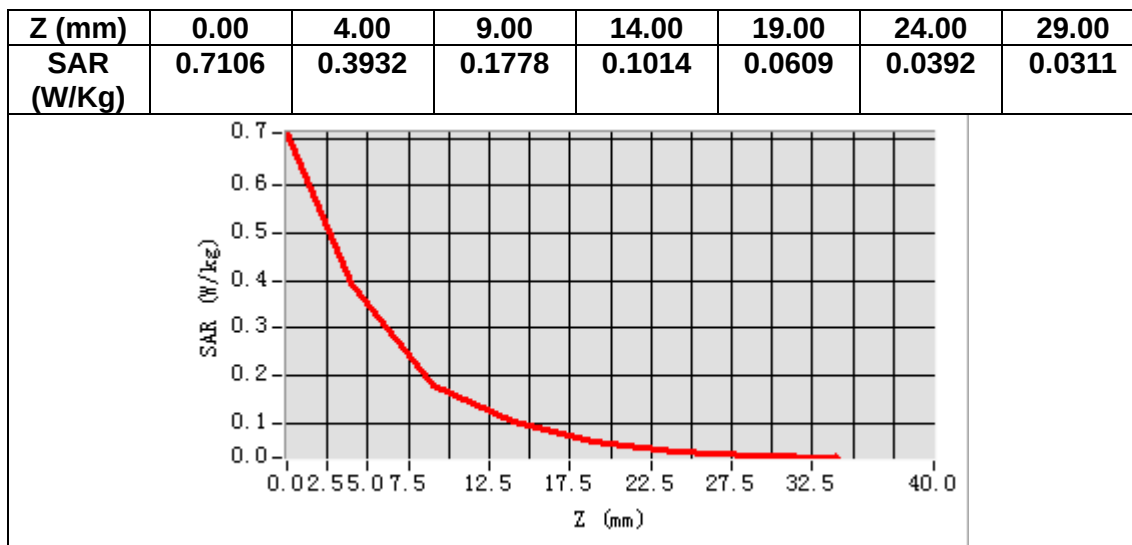

MEASUREMENT 11

Date of measurement: 25/10/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.176998
Relative permittivity (imaginary part)	13.180200
Conductivity (S/m)	1.376599
Variation (%)	0.320000

SURFACE SAR

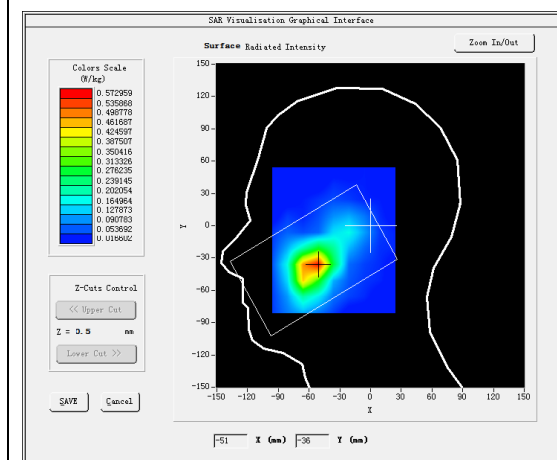



VOLUME SAR

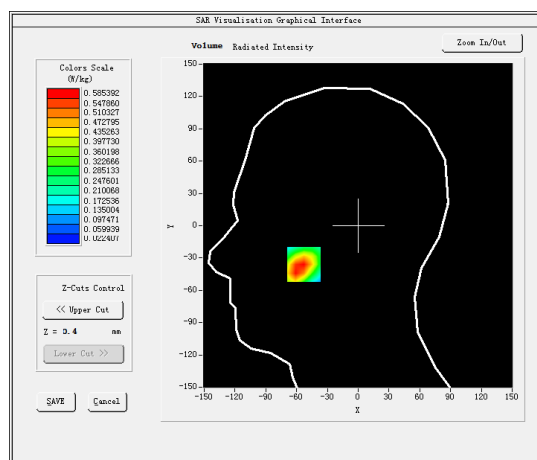

Maximum location: X=-53.00, Y=-36.00

SAR Peak: 0.90 W/kg

SAR 10g (W/Kg)	0.312517
SAR 1g (W/Kg)	0.565617

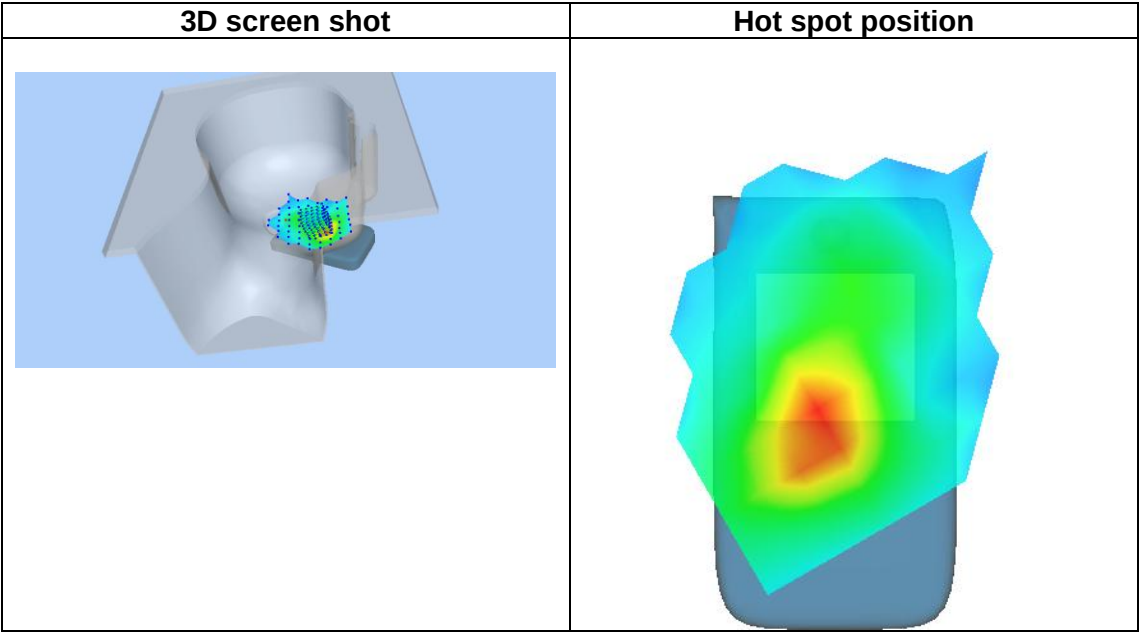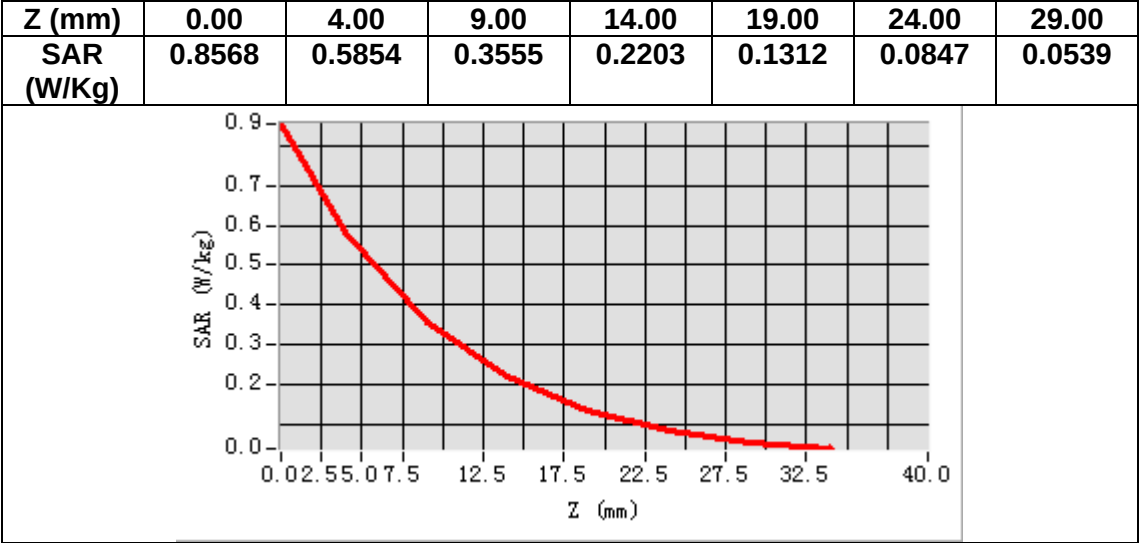

MEASUREMENT 12


Date of measurement: 23/10/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	54.443901
Relative permittivity (imaginary part)	14.517700
Conductivity (S/m)	1.516293
Variation (%)	0.570000

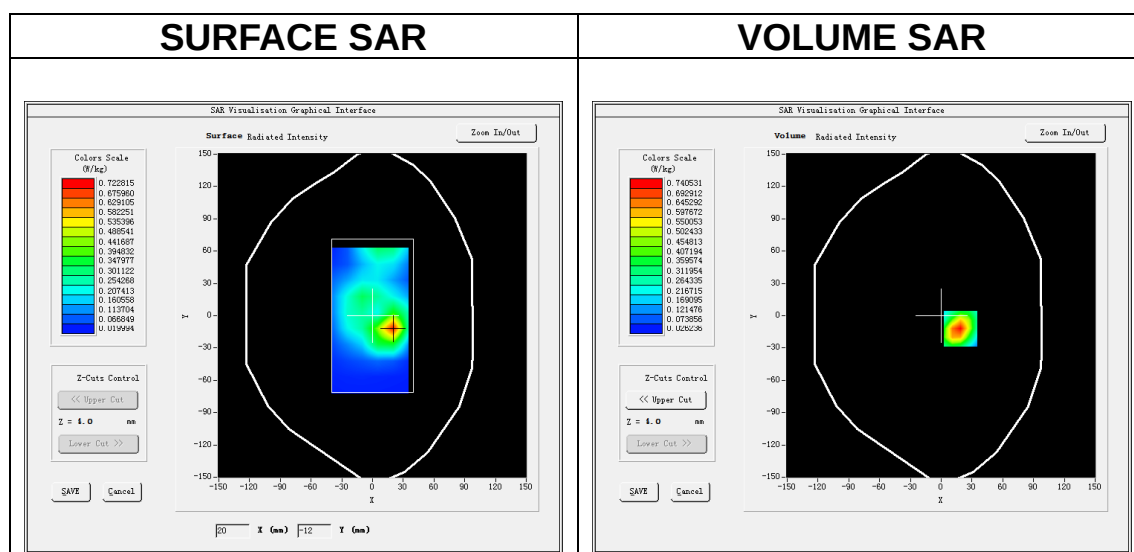

Maximum location: X=19.00, Y=-12.00

SAR Peak: 1.18 W/kg

SAR 10g (W/Kg)	0.356065
SAR 1g (W/Kg)	0.695127

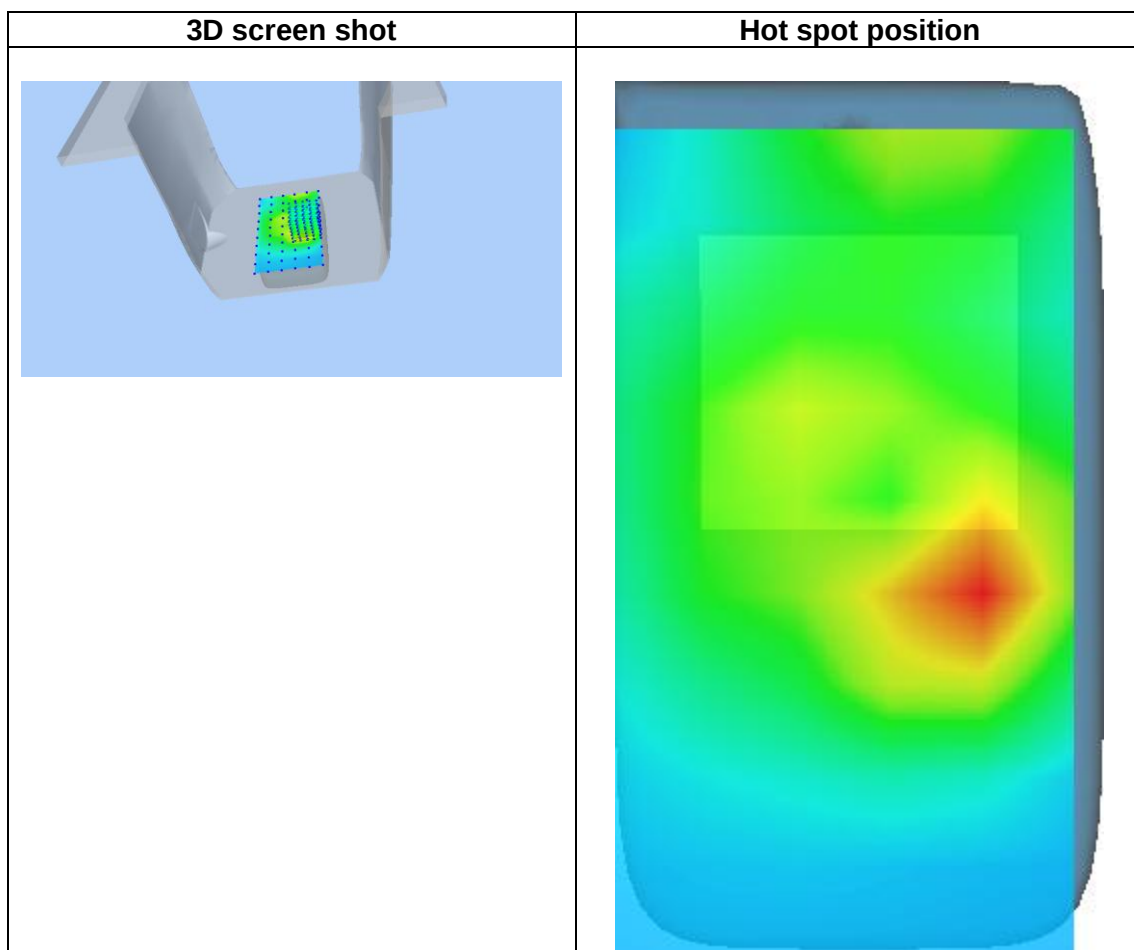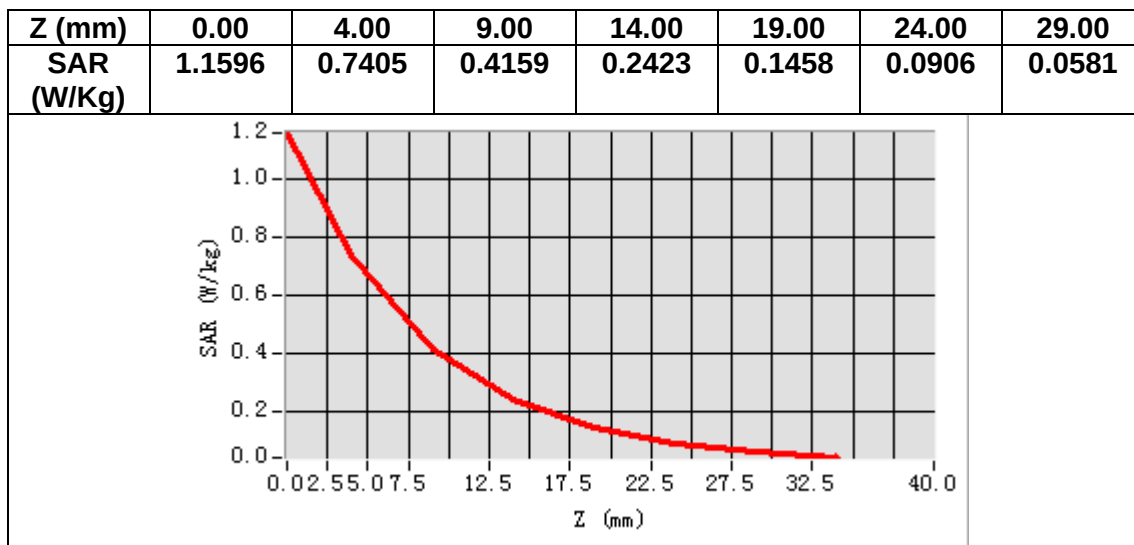

MEASUREMENT 13


Date of measurement: 4/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.255291
Relative permittivity (imaginary part)	13.670592
Conductivity (S/m)	1.315794
Variation (%)	-2.810000

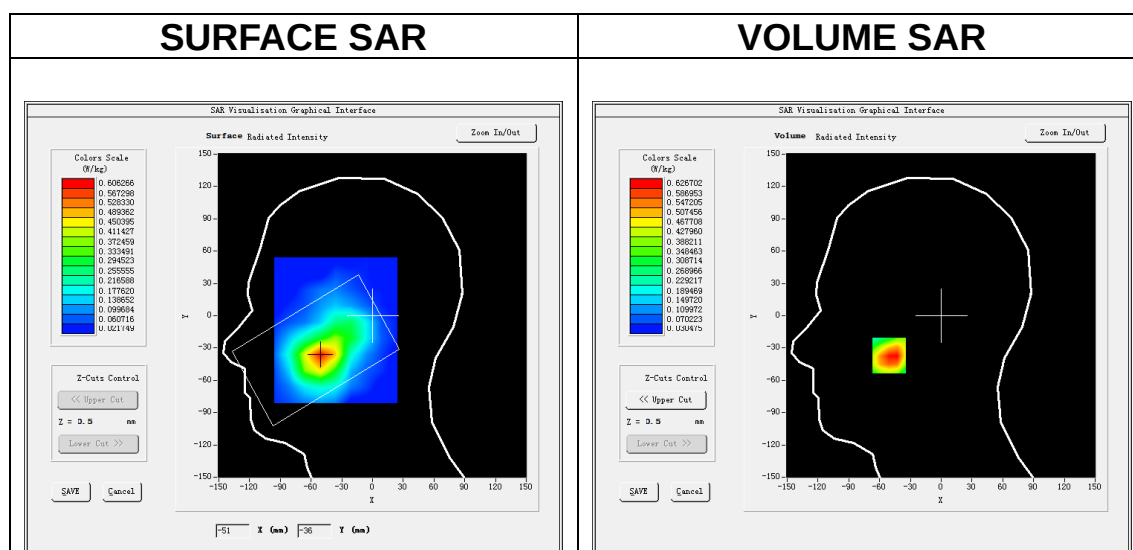

Maximum location: X=-51.00, Y=-37.00

SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.356439
SAR 1g (W/Kg)	0.603864

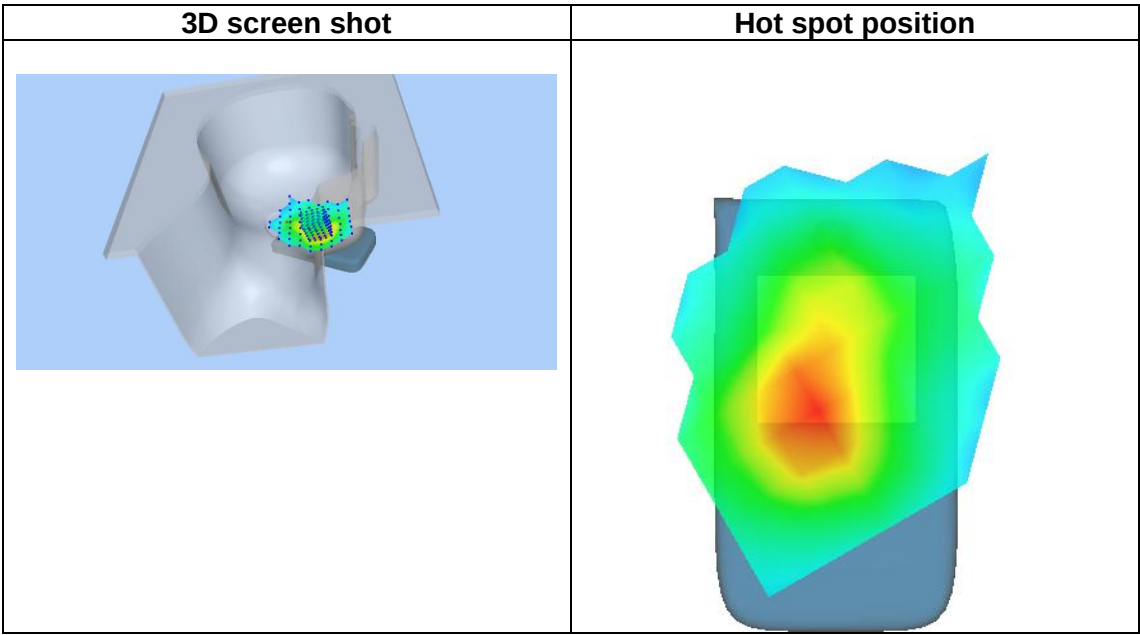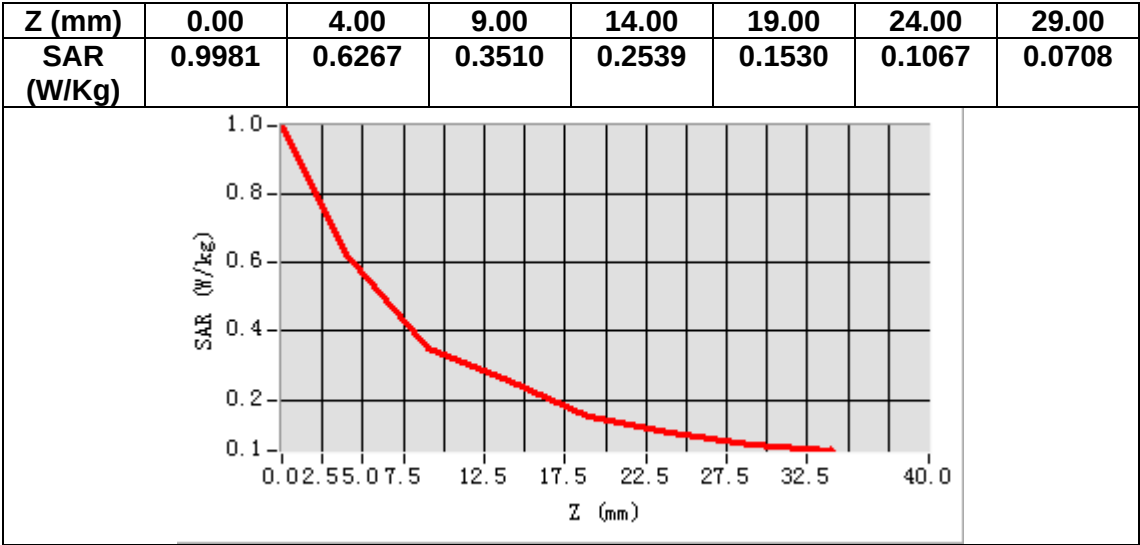

MEASUREMENT 14


Date of measurement: 23/10/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative permittivity (real part)	54.548367
Relative permittivity (imaginary part)	15.108220
Conductivity (S/m)	1.454166
Variation (%)	0.560000

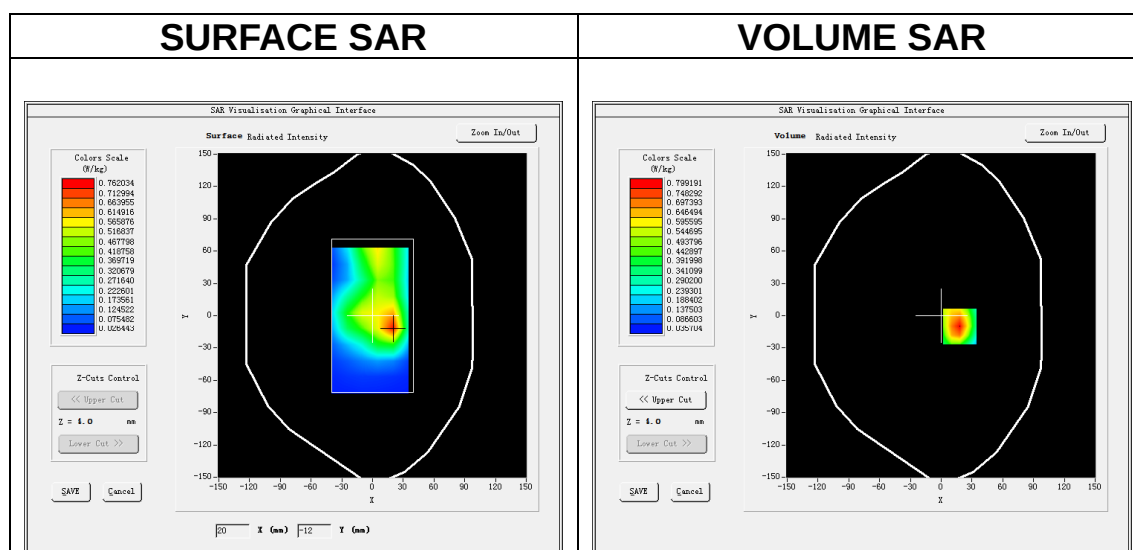

Maximum location: X=18.00, Y=-10.00

SAR Peak: 1.20 W/kg

SAR 10g (W/Kg)	0.422131
SAR 1g (W/Kg)	0.751881

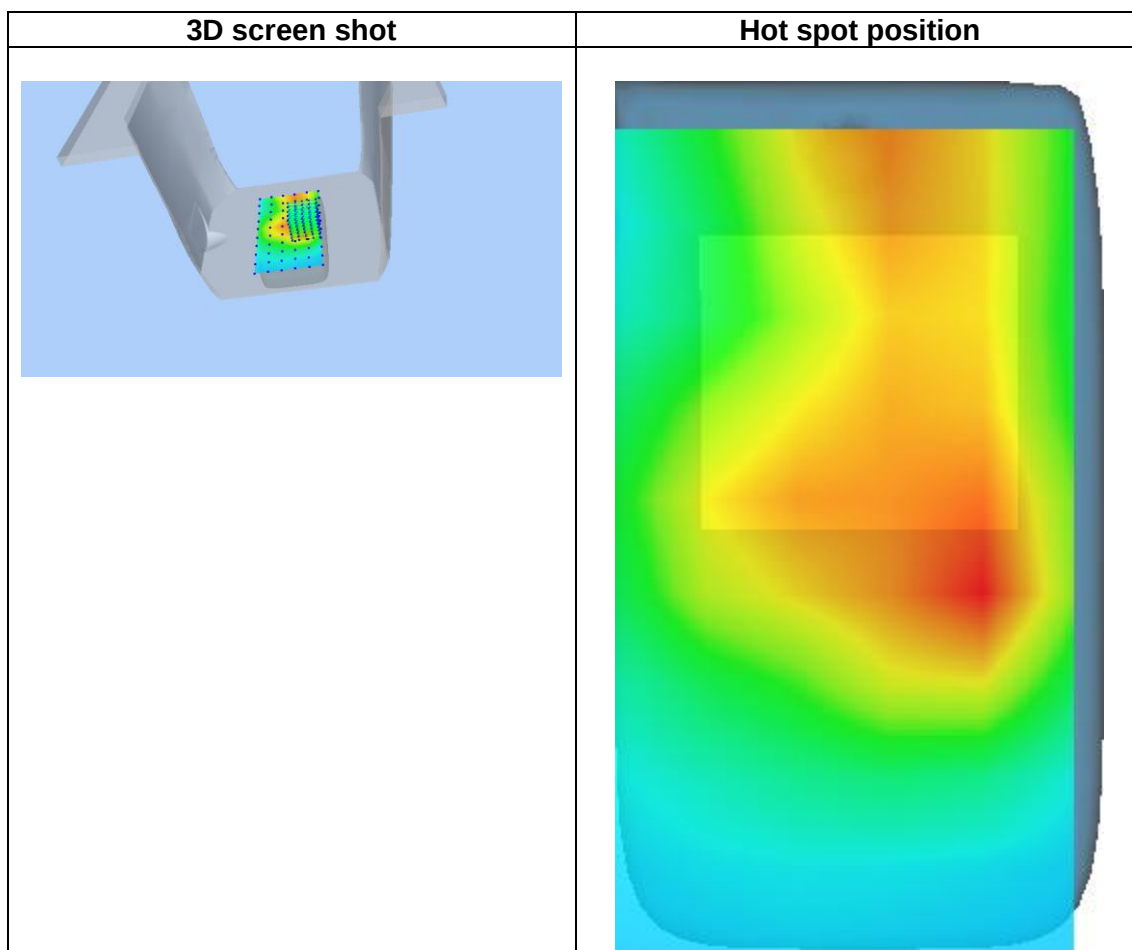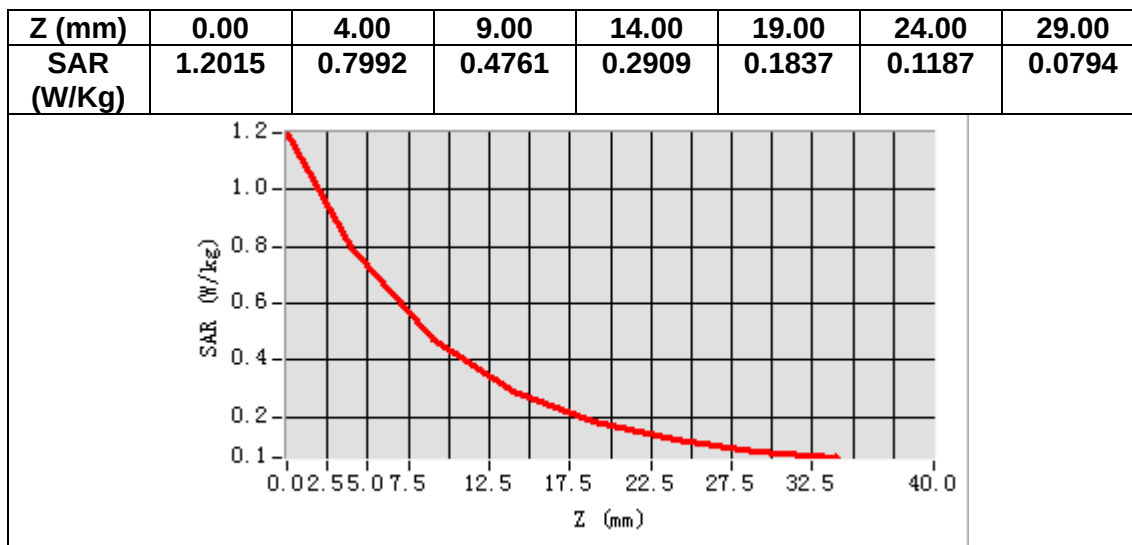

MEASUREMENT 15


Date of measurement: 2/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	42.380192
Relative permittivity (imaginary part)	21.573252
Conductivity (S/m)	0.847949
Variation (%)	-1.190000

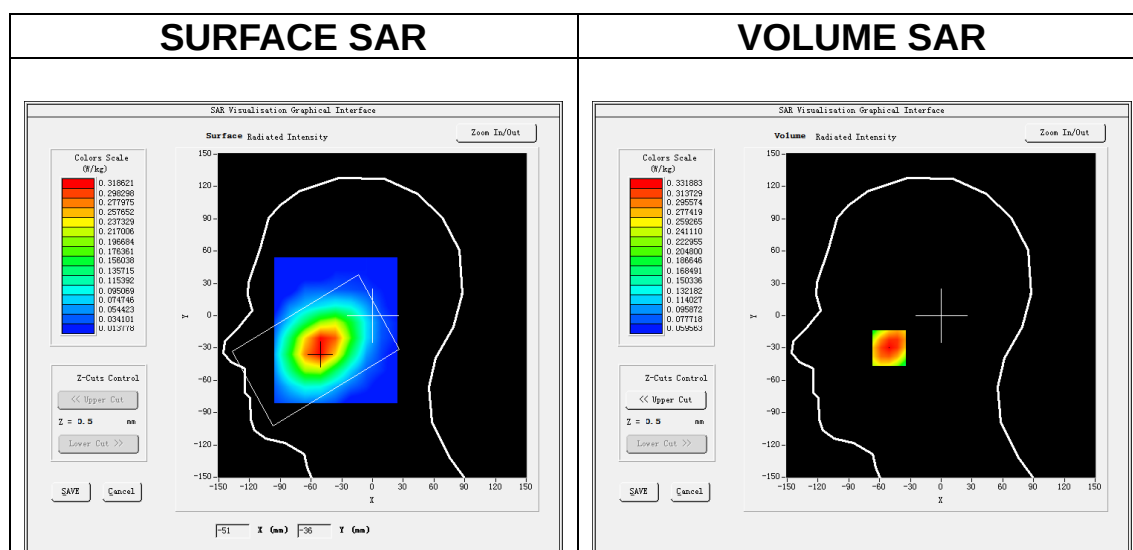

Maximum location: X=-51.00, Y=-30.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.238136
SAR 1g (W/Kg)	0.321477

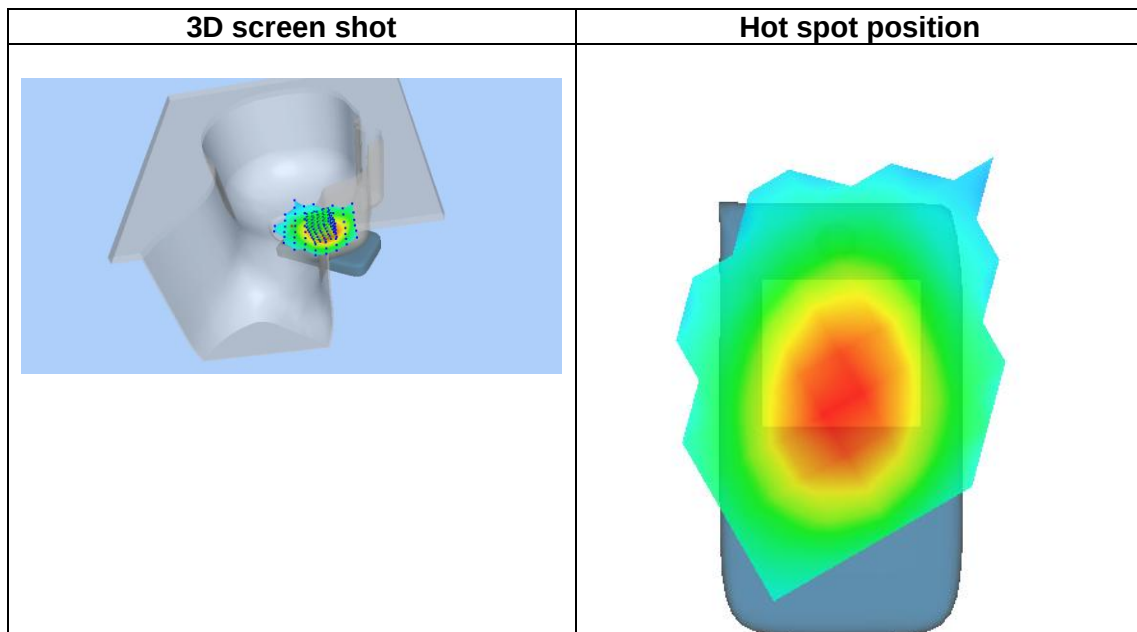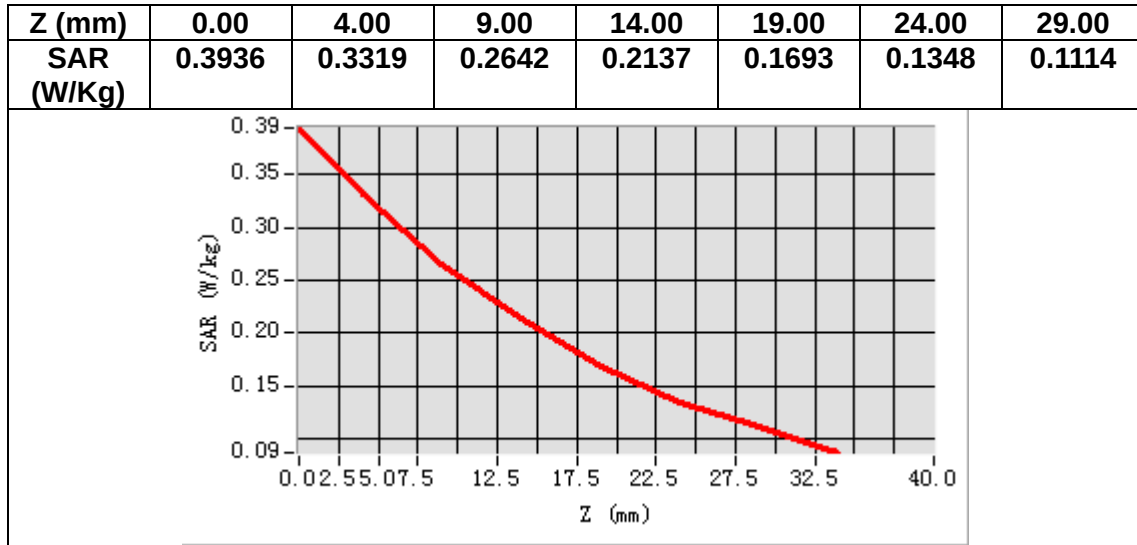

MEASUREMENT 16


Date of measurement: 2/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	55.751659
Relative permittivity (imaginary part)	23.480850
Conductivity (S/m)	0.922928
Variation (%)	0.120000

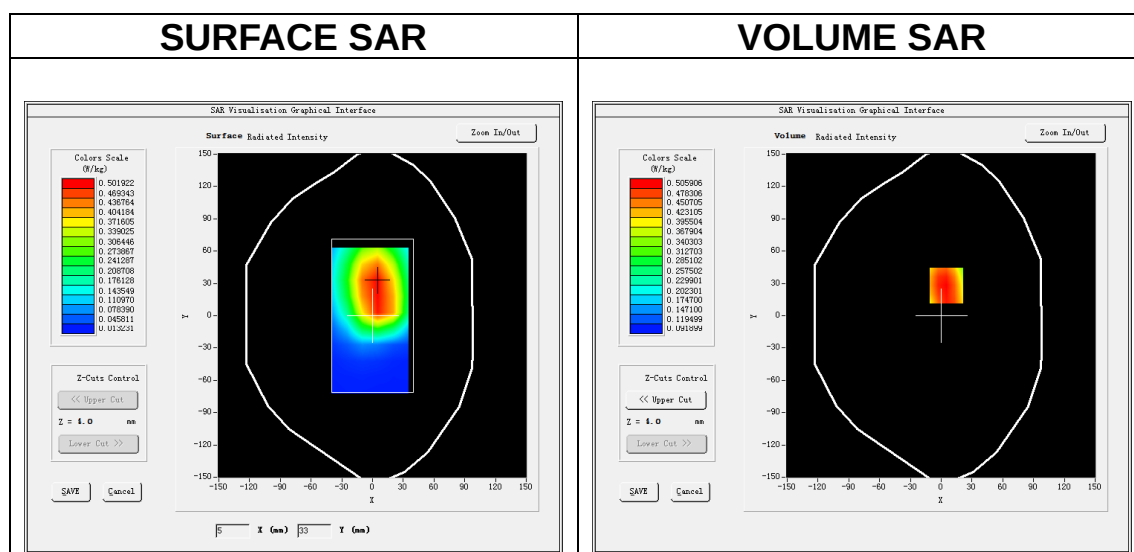

Maximum location: X=5.00, Y=28.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.366923
SAR 1g (W/Kg)	0.490781

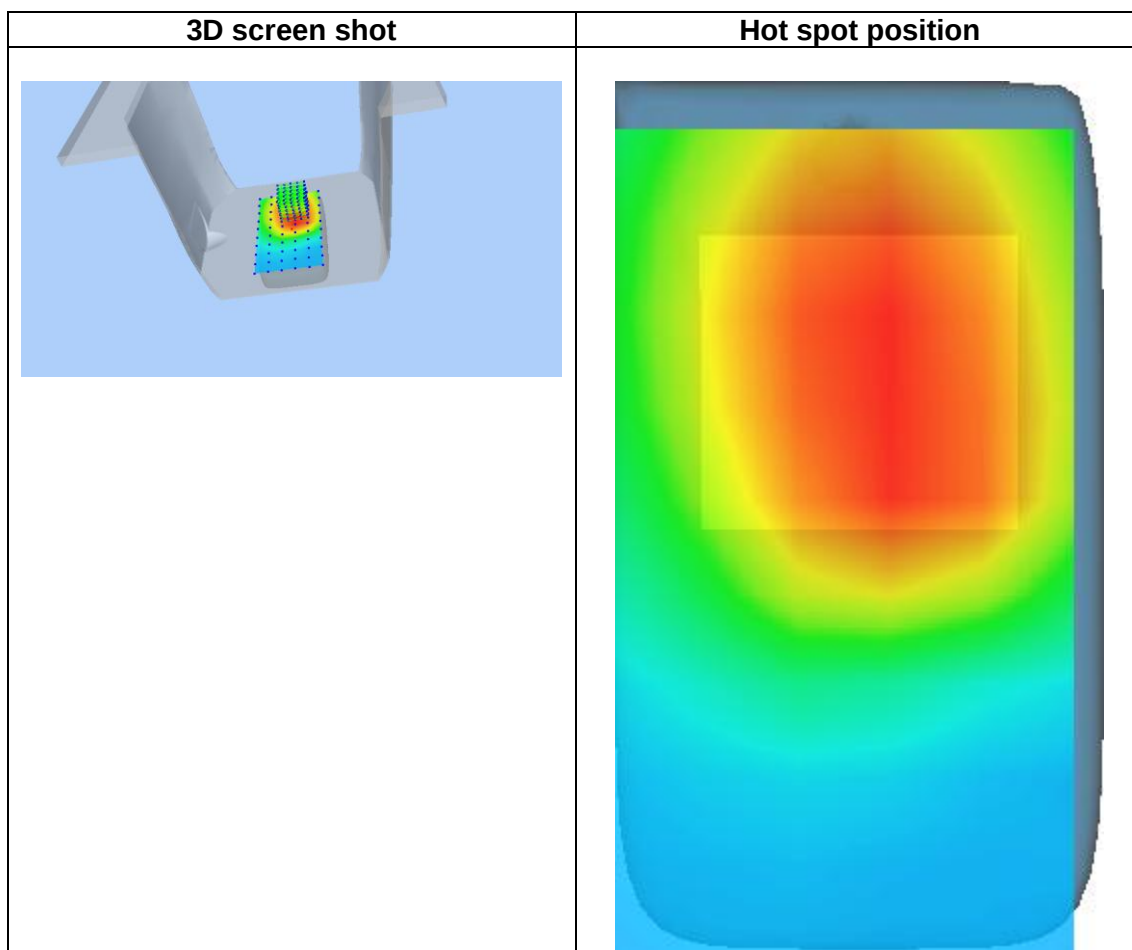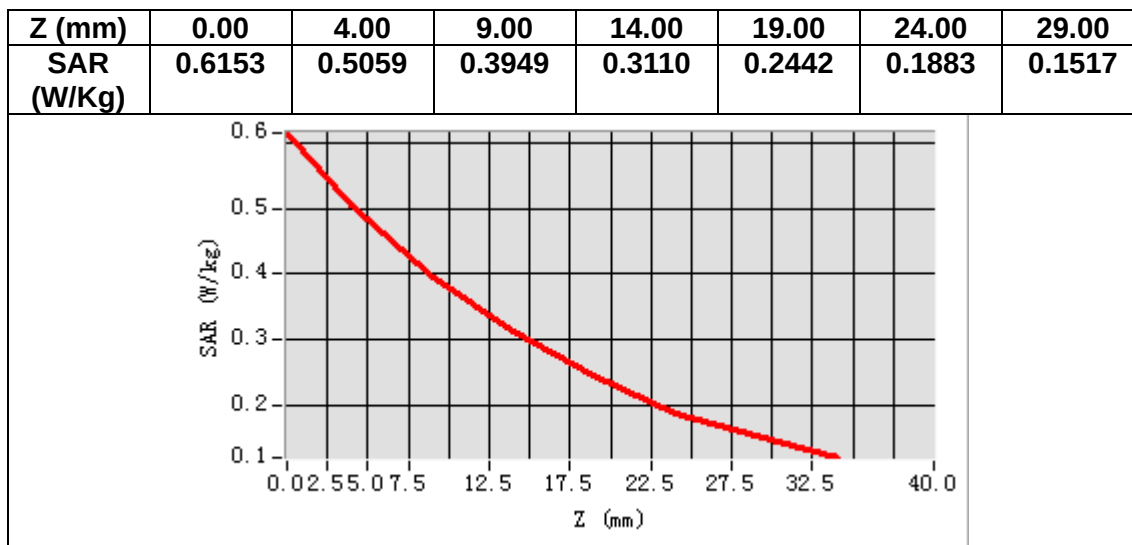

MEASUREMENT 17


Date of measurement: 2/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	710.000000
Relative permittivity (real part)	42.358940
Relative permittivity (imaginary part)	21.601650
Conductivity (S/m)	0.852065
Variation (%)	0.130000

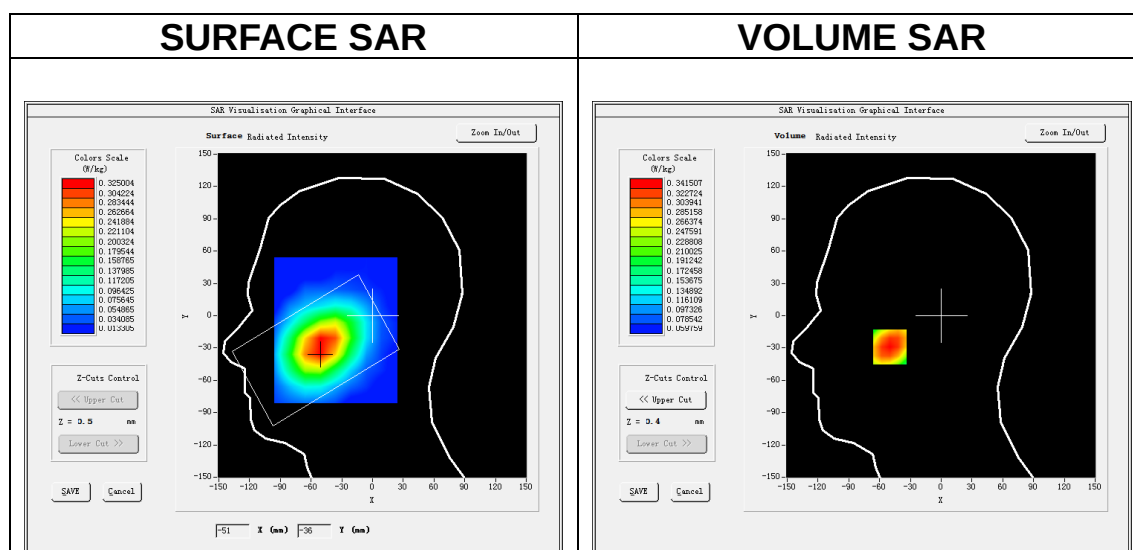

Maximum location: X=-50.00, Y=-29.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.248565
SAR 1g (W/Kg)	0.328356

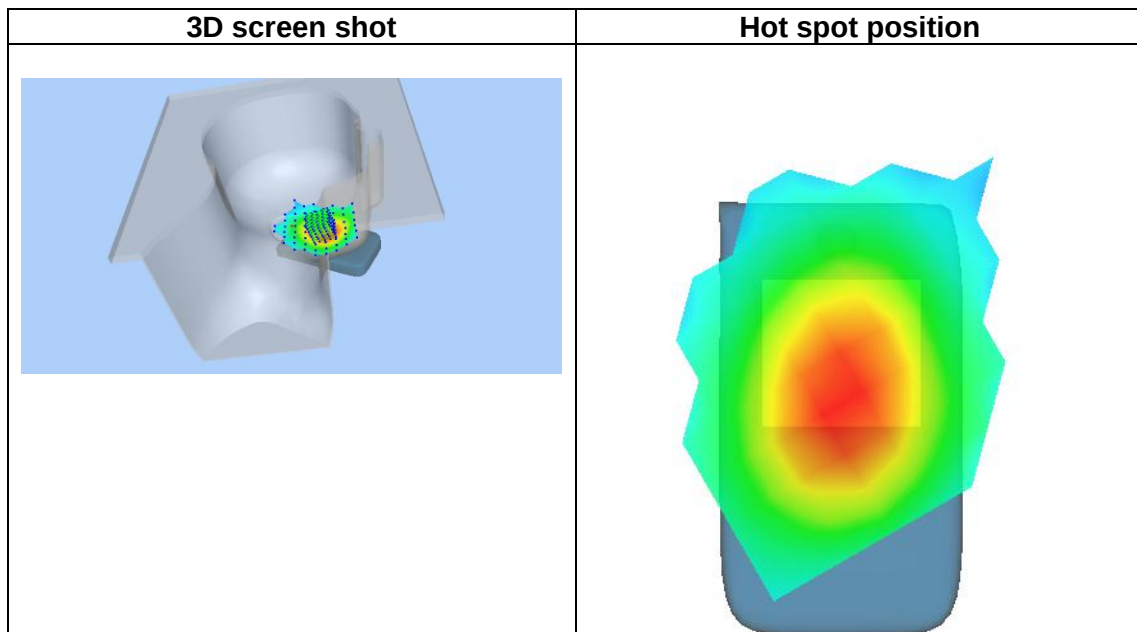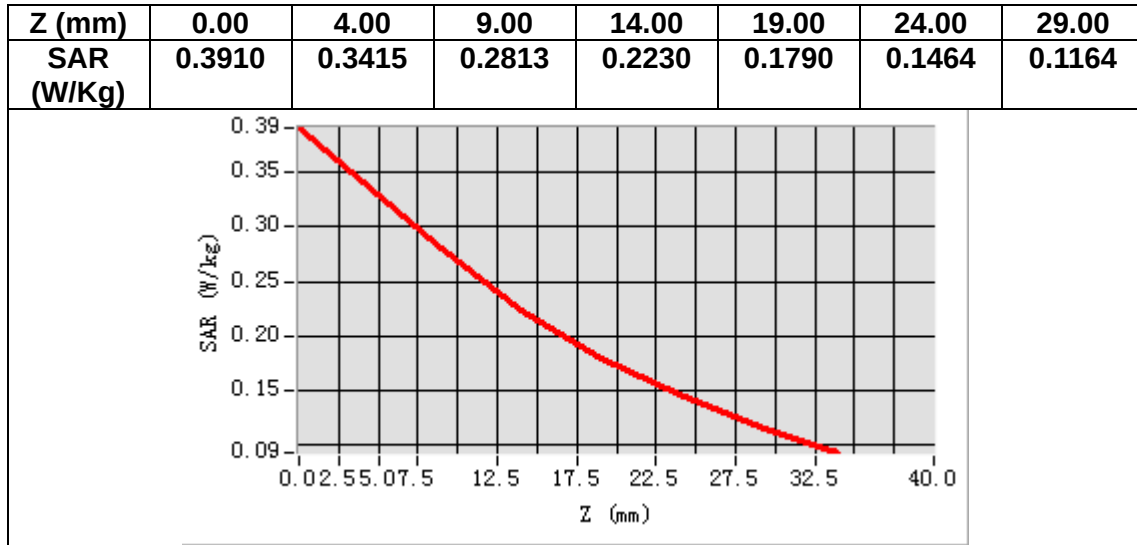

MEASUREMENT 18


Date of measurement: 2/11/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	710.000000
Relative permittivity (real part)	55.773762
Relative permittivity (imaginary part)	23.409500
Conductivity (S/m)	0.923375
Variation (%)	-0.520000

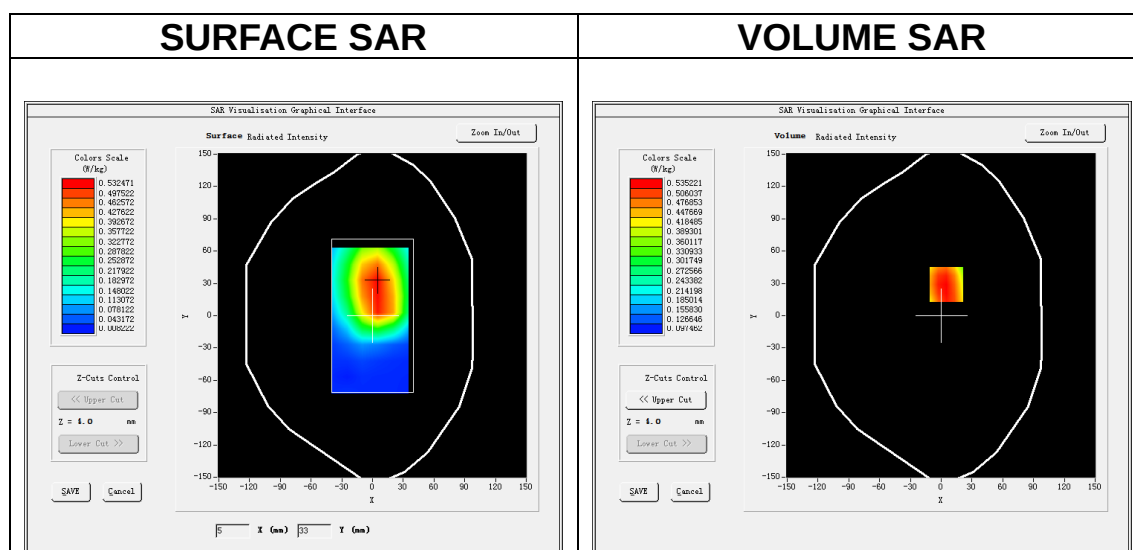

Maximum location: X=5.00, Y=29.00

SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.389026
SAR 1g (W/Kg)	0.521036

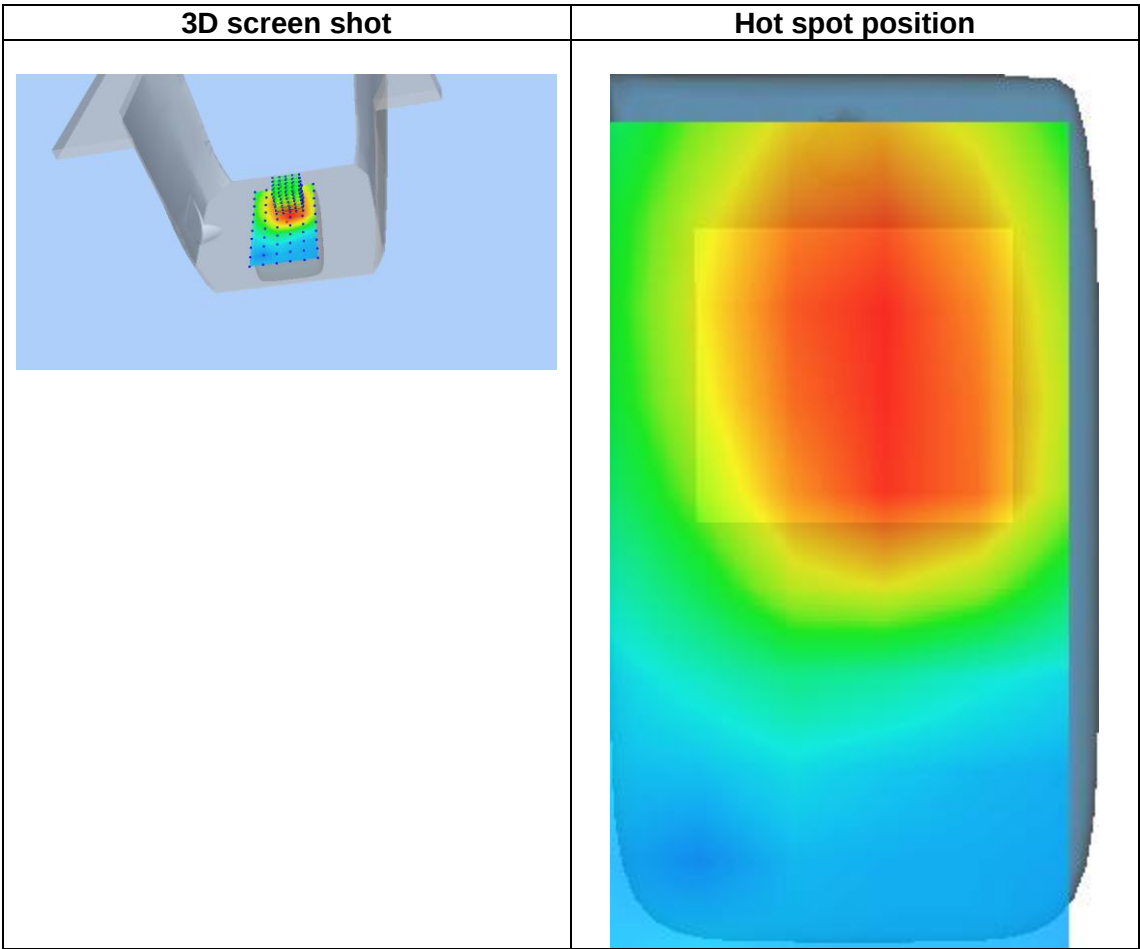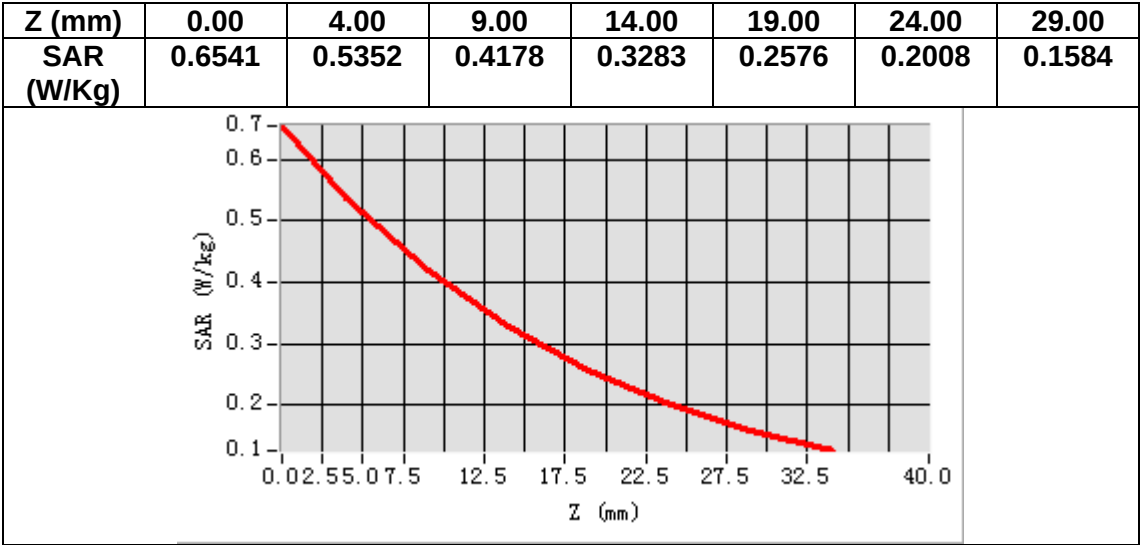

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 08/16 EPGO287
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
Extended Calibration Certificate



COMOSAR E-Field Probe Calibration Report

Ref : ACR.260.1.18.SATU.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 08/16 EPGO287

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 12/27/2019

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	12/27/2019	
<i>Checked by :</i>	Jérôme LUC	Product Manager	12/27/2019	
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	12/27/2019	

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	12/27/2019	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty	5
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.209 MΩ Dipole 2: R2=0.196 MΩ Dipole 3: R3=0.197 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Combined standard uncertainty					5.831%
Expanded uncertainty 95 % confidence level $k = 2$					12.0%

Page: 5/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.66	0.75	0.58

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
93	93	98

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

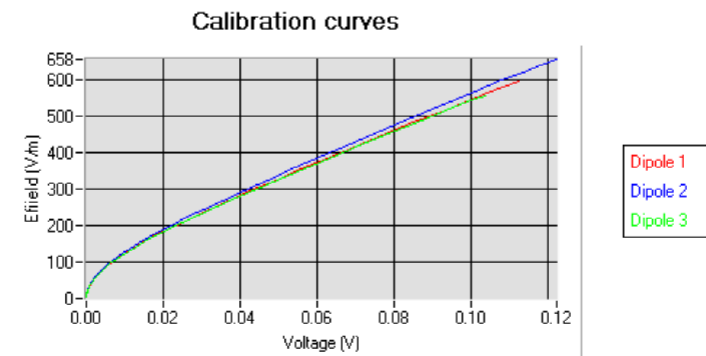




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5.2 LINEARITY

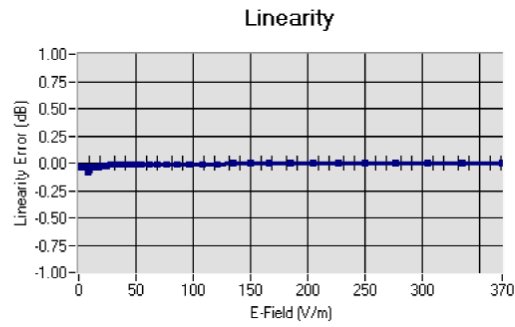Linearity: $\pm 1.89\%$ ($\pm 0.08\text{dB}$)

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz $\pm$ 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL750	750	40.03	0.93	1.45
BL750	750	56.83	1.00	1.49
HL850	835	42.19	0.90	1.50
BL850	835	54.67	1.01	1.56
HL900	900	42.08	1.01	1.51
HL1800	1800	41.68	1.46	1.71
BL1800	1800	53.86	1.46	1.77
HL1900	1900	38.45	1.45	2.03
BL1900	1900	53.32	1.56	2.07
HL2000	2000	38.26	1.38	1.76
HL2450	2450	37.50	1.80	2.00
BL2450	2450	53.22	1.89	2.08
HL2600	2600	39.80	1.99	2.12
BL2600	2600	52.52	2.23	2.19
HL5200	5200	35.64	4.67	2.55
BL5200	5200	48.64	5.51	2.62
HL5400	5400	36.44	4.87	2.53
BL5400	5400	46.52	5.77	2.59
HL5600	5600	36.66	5.17	2.64
BL5600	5600	46.79	5.77	2.73
HL5800	5800	35.31	5.31	2.72
BL5800	5800	47.04	6.10	2.81

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5.4 ISOTROPY


HL900 MHz

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.07 dB

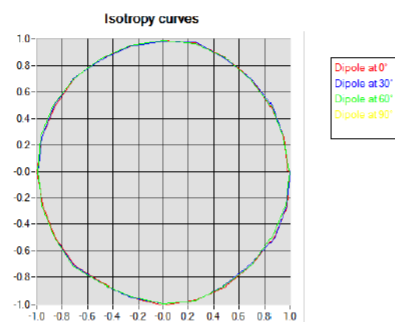

HL1800 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB

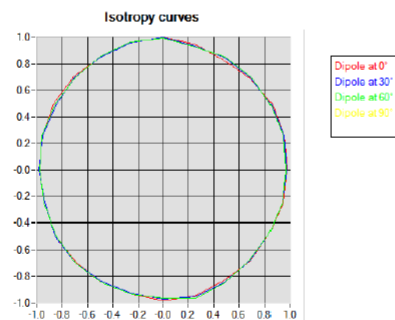




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

HL5600 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB

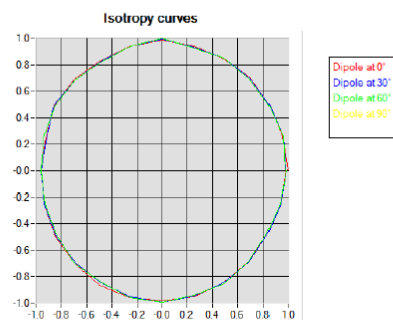



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2019	02/2022
Reference Probe	MVG	EP 94 SN 37/08	10/2019	10/2020
Multimeter	Keithley 2000	1188656	01/2017	01/2020
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2017	01/2020
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Control Company	150798832	11/2017	11/2020



SAR Reference Dipole Calibration Report

Ref : ACR.109.1.18.SATU.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 750 MHZ

SERIAL NO.: SN 03/15 DIP 0G750-355

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 04/19/2018

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.1.18.SATU.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	4/19/2018	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	4/19/2018	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	4/19/2018	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	4/19/2018	Initial release