

SPECIFICATION FOR APPROVAL

CUSTOMER: J011

CUST P/N:

FINE P/N:

DESC: FYJ0112025041401

DATE: 2025/04/16

Version: A.0

CUSTOMER AUTHORIZED SIGNATURE

PREPARED BY	CHECKED BY	APPROVED BY
Peng Tingyin	Wei Bingfu	Hu Wei

DONGGUAN Fine Electronic CO.. LTD.

Address: Dongguan City, Shijie Town, Liuwu Science and Technology East Road, No. 194

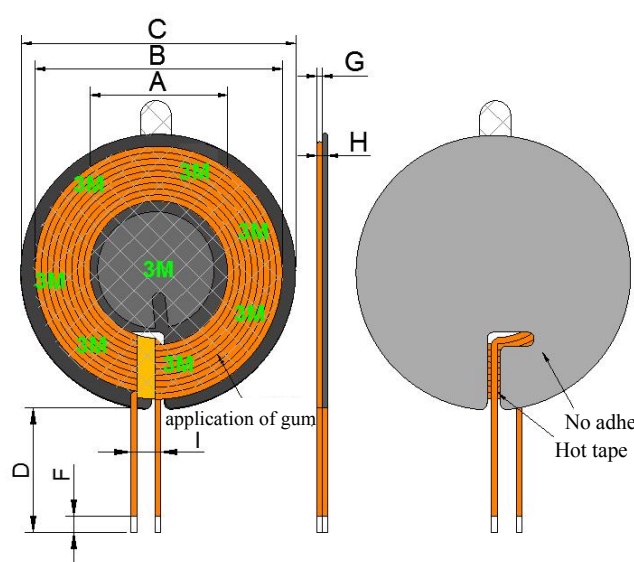
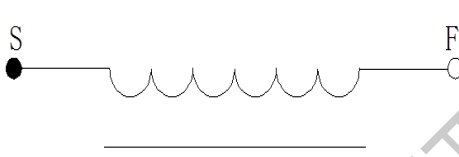
TEL: 0769-22490287 / 22452492

FAX: 0769-22499451

E-mail: admin@fineelec.com

[illegible]

SPECIFICATION

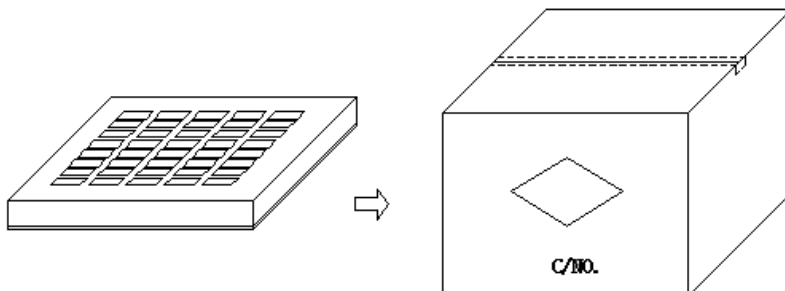
DESC	FYJ0112025041401	Rev: A.0	CUST:		J011																														
			Fine P/N:																																
			CUST P/N:																																
一、 DIMENSION:(mm)			A	21.8±0.5																															
			B	39±0.5																															
			C	42.4+0.5/-1.5																															
			D	8±2																															
			F	2-4																															
			G	0.8±0.1																															
			H	1.55 MAX (Without release liner)																															
			I	5.5Max (Wire diameter periphery)																															
			二、 SCHEMATIC DIAGRAM:																																
			三、 Winding Specification:			<table><tr><th>NO.</th><th colspan="2">TERMINAL</th><th>WIRE</th><th>Turns</th><th>Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>multi-folded yarn</td><td>11Ts</td><td>CCW</td></tr></table>			NO.	TERMINAL		WIRE	Turns	Winding Direction	1	S	F	multi-folded yarn	11Ts	CCW															
NO.	TERMINAL		WIRE	Turns	Winding Direction																														
1	S	F	multi-folded yarn	11Ts	CCW																														
四、 ELECTRICAL CHARACTERISTICS:			TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%																																
			<table><tr><th>NO.</th><th>ITEM</th><th>TERMINAL</th><th>SPECIFICATION</th><th>TEST FREQUENCY</th><th>TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>4.8uH ±5% uncoil</td><td>100KHz/1.0V</td><td>TH2810</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>8.1uH ±5% Add nanocrystals</td><td>100KHz/1.0V</td><td>TH2810</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>90m Ω Max</td><td>100KHz/1.0V</td><td>TH2810</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>			NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS	1	IND.	S-F	4.8uH ±5% uncoil	100KHz/1.0V	TH2810	2	IND.	S-F	8.1uH ±5% Add nanocrystals	100KHz/1.0V	TH2810	3	DCR	S-F	90m Ω Max	100KHz/1.0V	TH2810						
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS																														
1	IND.	S-F	4.8uH ±5% uncoil	100KHz/1.0V	TH2810																														
2	IND.	S-F	8.1uH ±5% Add nanocrystals	100KHz/1.0V	TH2810																														
3	DCR	S-F	90m Ω Max	100KHz/1.0V	TH2810																														
PREPARED BY/DATE		CHECKED BY/DATE		APPROVED BY/DATE																															
Peng Tingyin2025/04/16		Wei Bingfu2025/04/16																																	

SPECIFICATION

DESC	FYJ0112025041401	Rev: A.0	CUST:	J011
			Fine P/N:	
			CUST P/N:	

五、PACKONG:

5.1Packing pictures:



5.2Packing Quantity:

Item	Quantity	Material
Box	240 Pcs	370*265*55mm
Big Carton	1200 Pcs	420*270*310mm

5.3The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

PREPARED BY/DATE	CHECKED BY/DATE	APPROVED BY/DATE
Peng Tingyin2025/04/16	Wei Bingfu2025/04/16	Hu Wei2025/04/16

SPECIFICATION

DESC	FYJ0112025041401	Rev: A.0	CUST:	J011
			Fine P/N:	
			CUST P/N:	

六、Material list:

number	Material name	Description	Manufacturer
1	wire stock	multi-folded yarn	
2	Lead free tin strips	Lead free tin strips	
3	10-layer nanocrystalline (bordure)	Φ42.4*0.30mm, The front of the order L slot has adhesive on one side and no adhesive on the other side	
4	Small magnetic disc	Φ20*1.0mm (PC40) Slot size:1.5*4.0mm	
5	Green 3M adhesive	Φ38*0.05mm,Green 3M adhesive tape with tear-off tabs	
6	Hot tape	3mm wide	

PREPARED BY/DATE	CHECKED BY/DATE	APPROVED BY/DATE
Peng Tingyin2025/04/16	Wei Bingfu2025/04/16	Hu Wei2025/04/16