


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst




Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

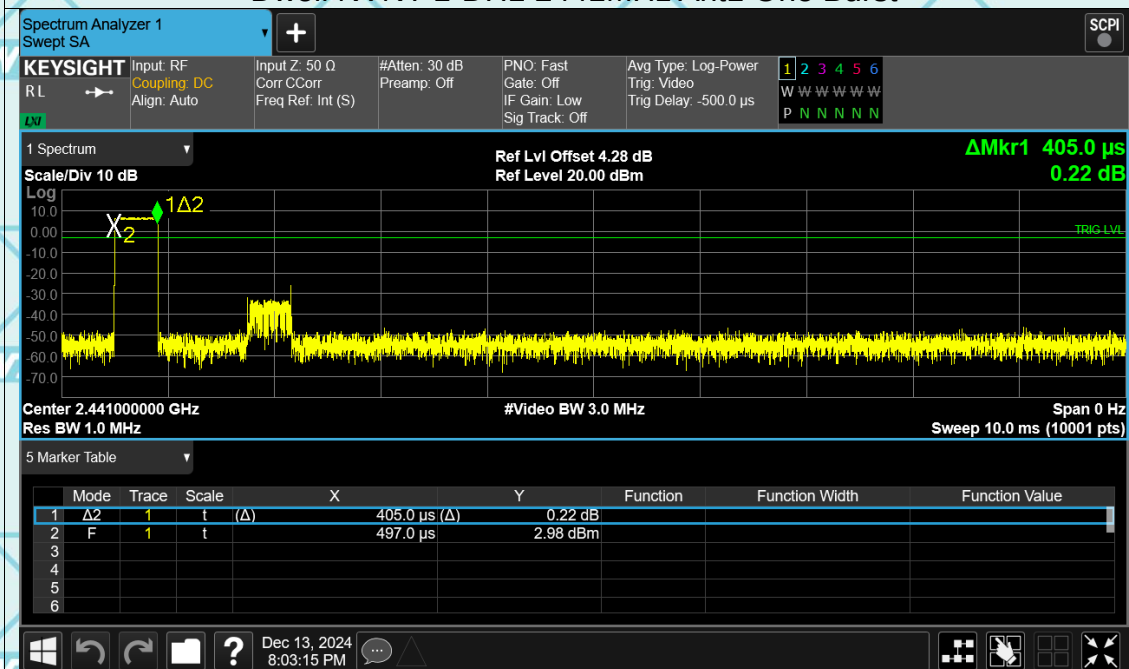


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH1 2480MHz Ant1 One Burst

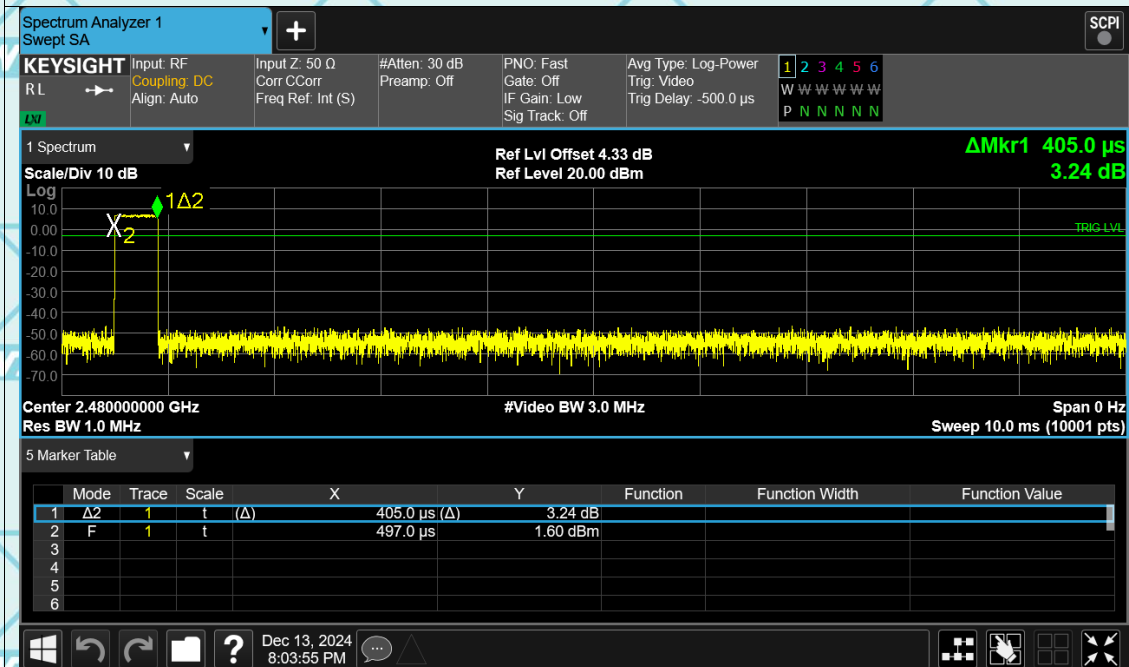


Dwell NVNT 1-DH1 2480MHz Ant1 Accumulated

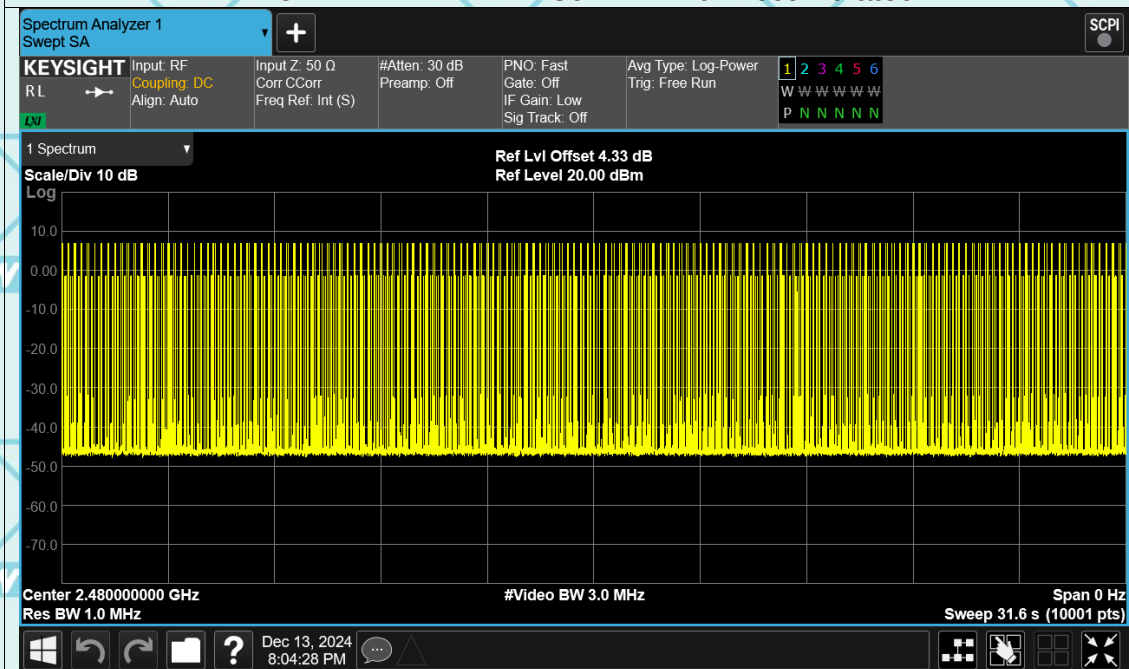


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH3 2402MHz Ant1 One Burst

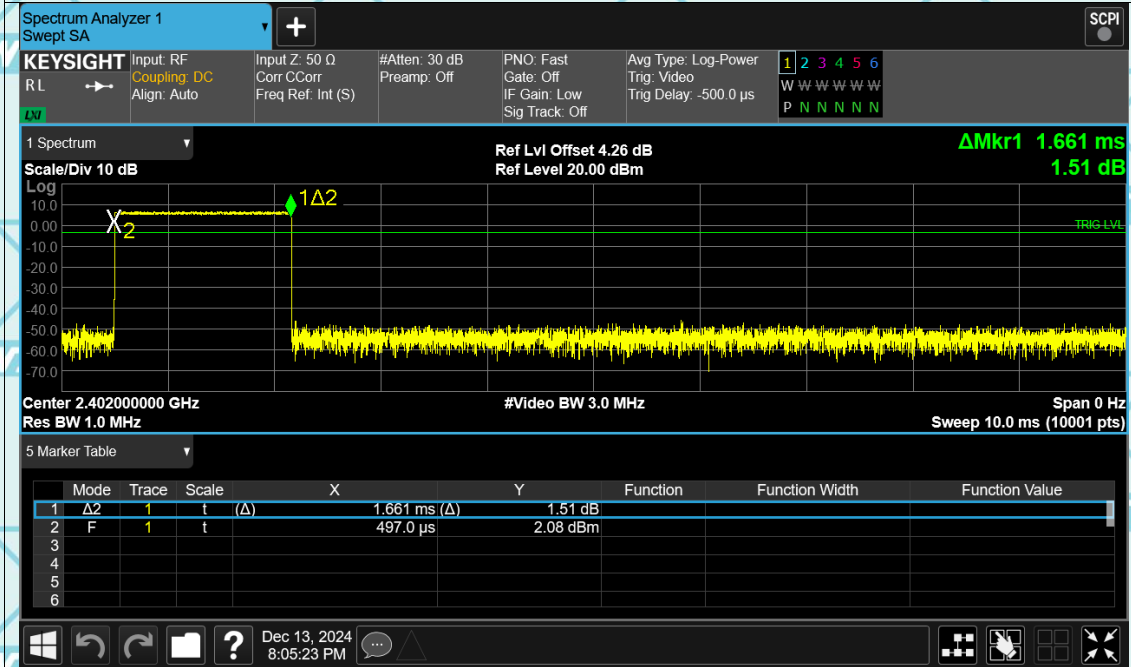


Dwell NVNT 1-DH3 2402MHz Ant1 Accumulated

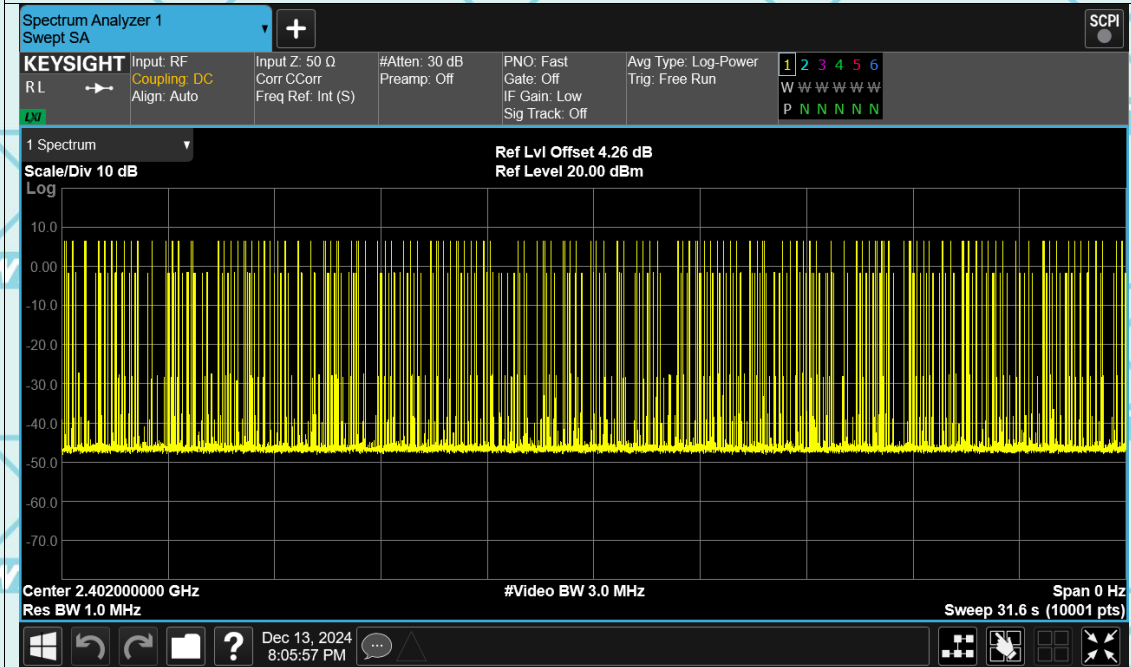


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

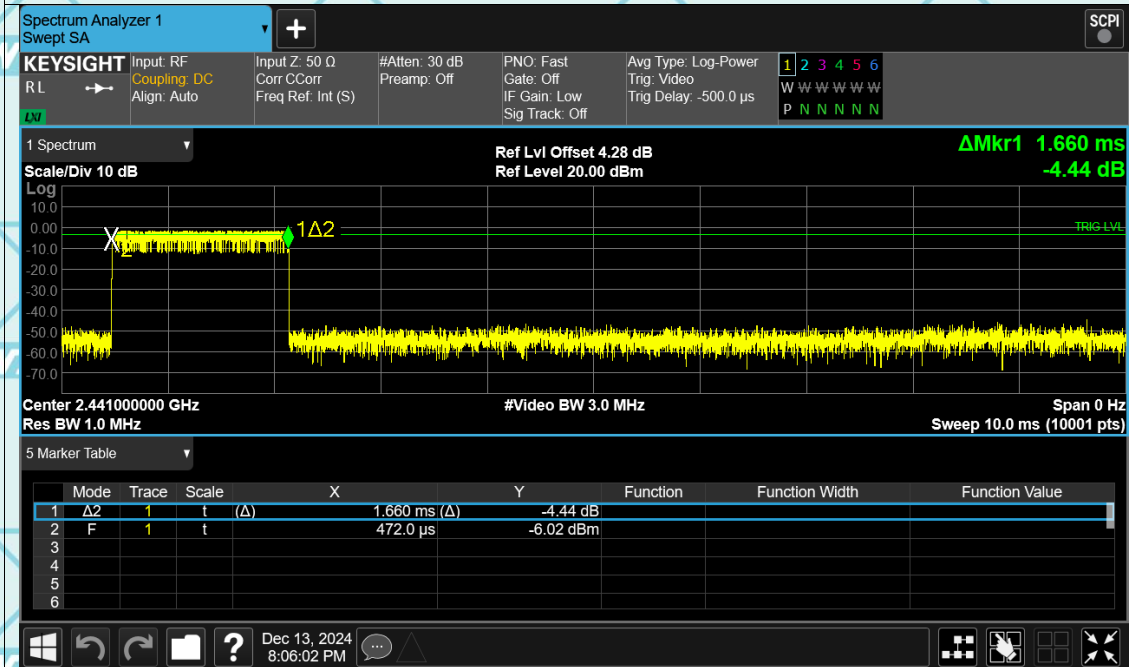


Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

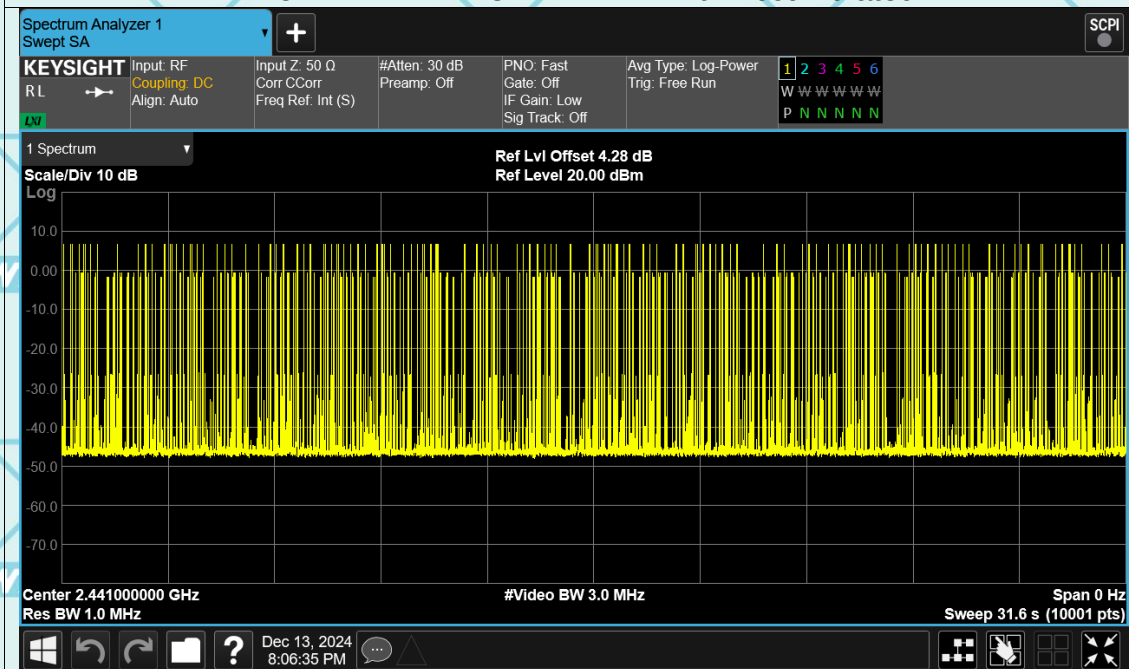


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH3 2480MHz Ant1 One Burst

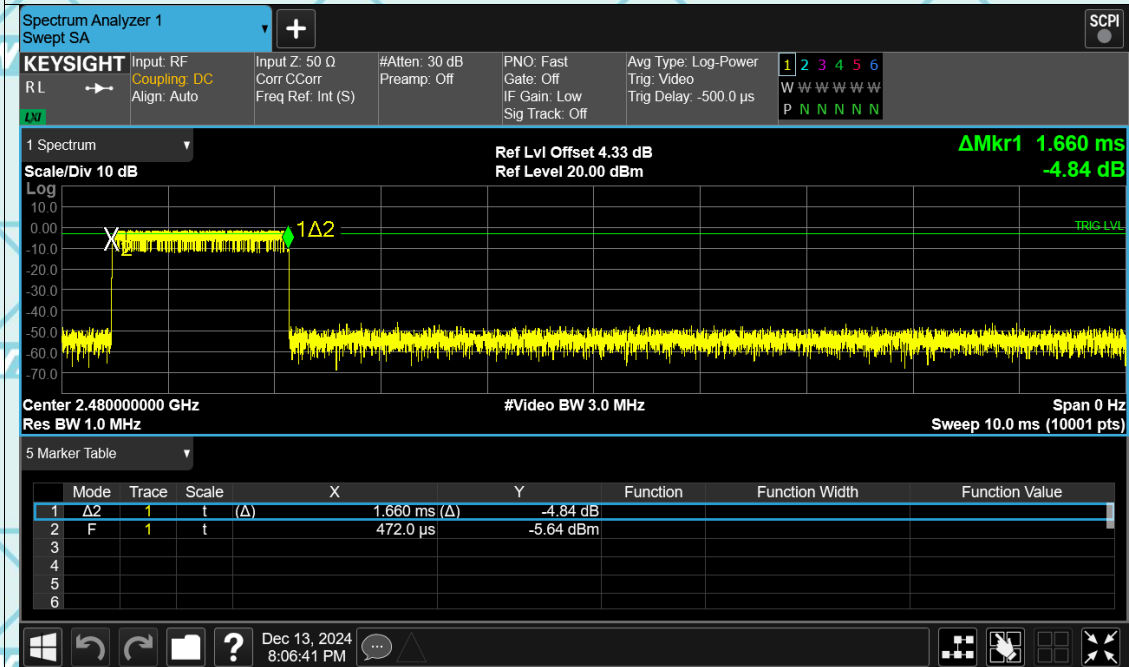


Dwell NVNT 1-DH3 2480MHz Ant1 Accumulated

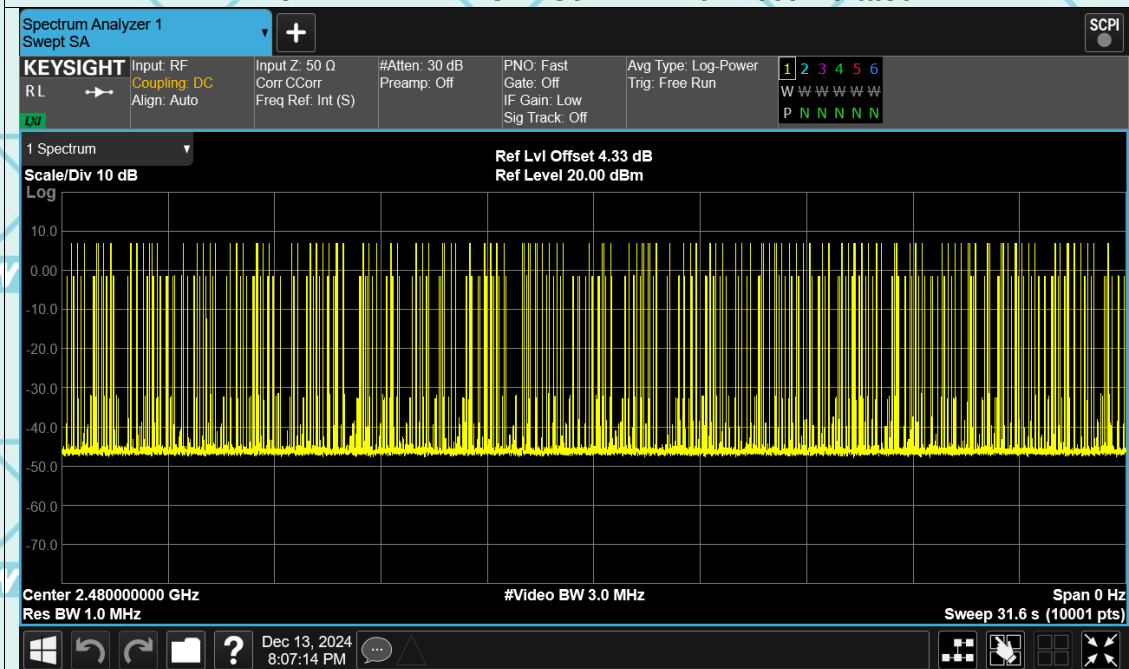


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

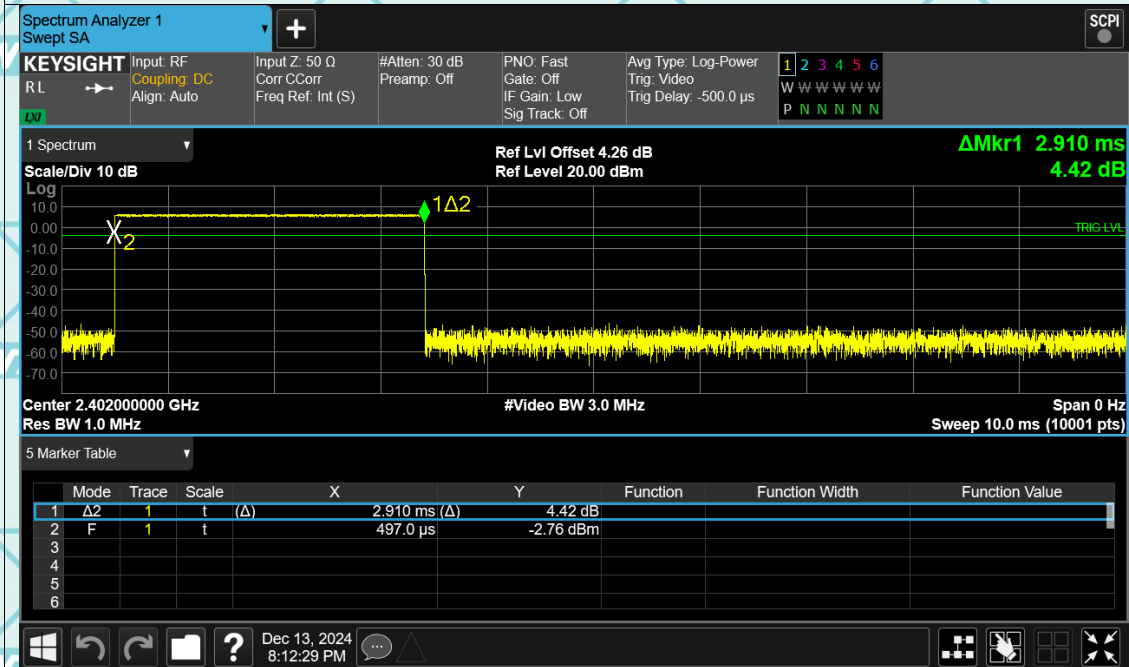


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

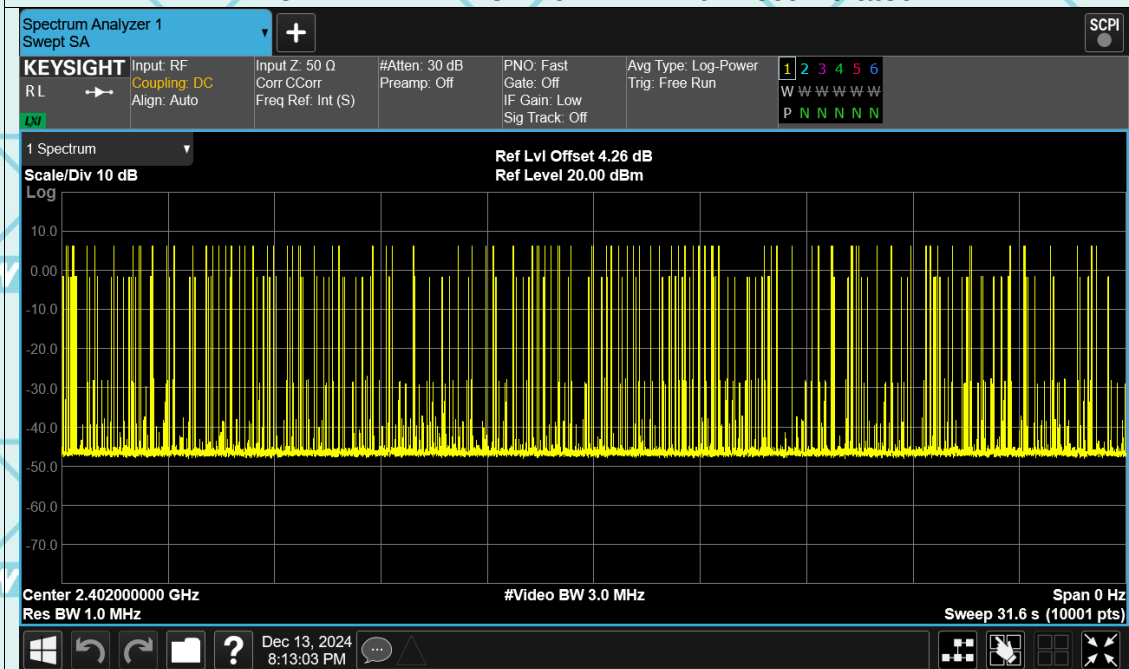


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

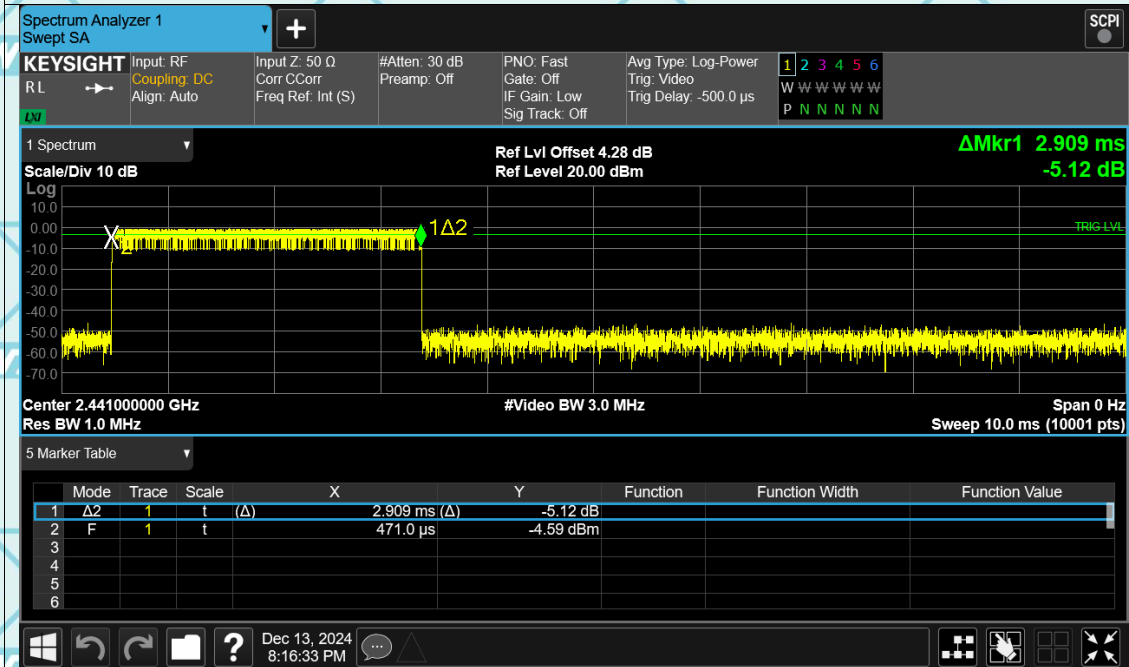


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

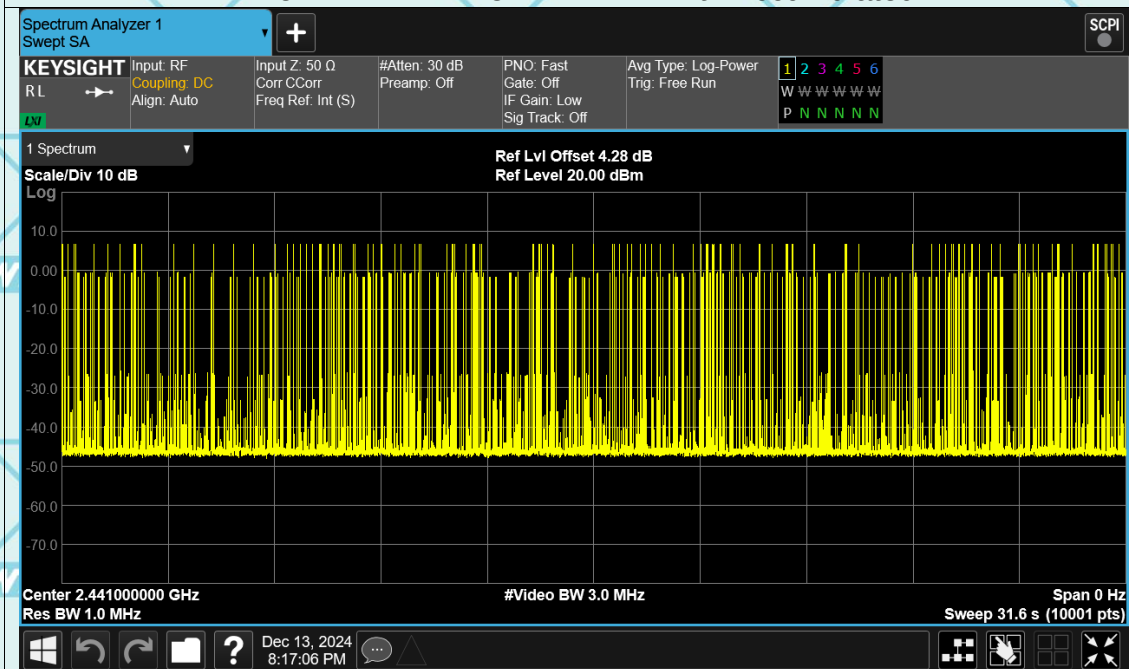


Report No.: WSCT-ANAB-R&E241200069A-BT

Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

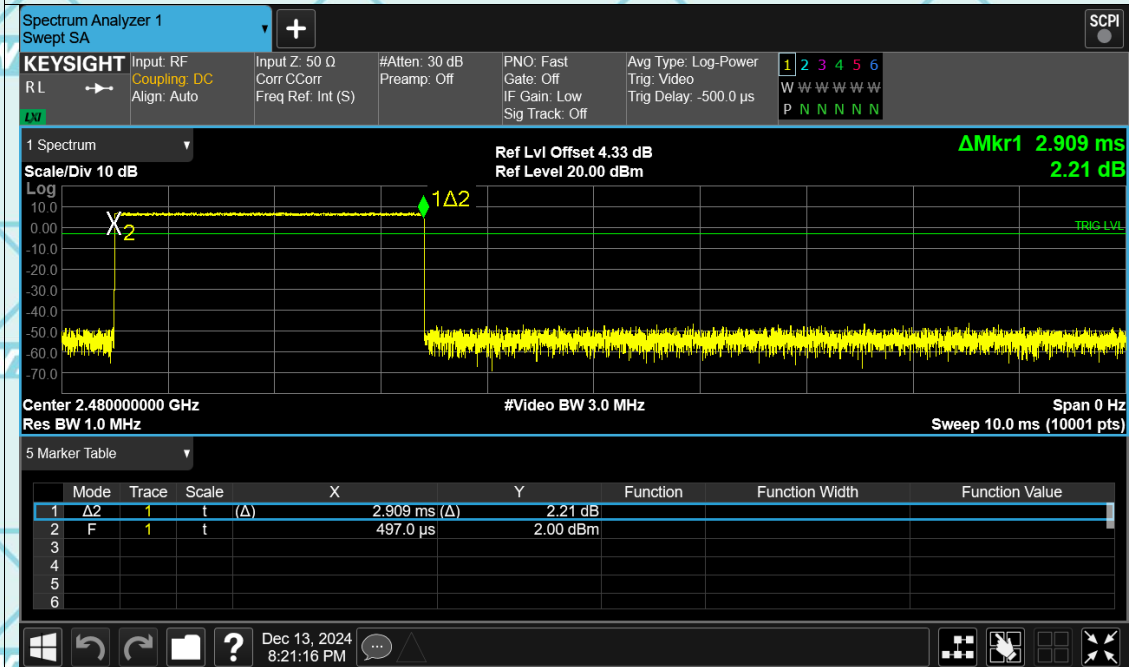

Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

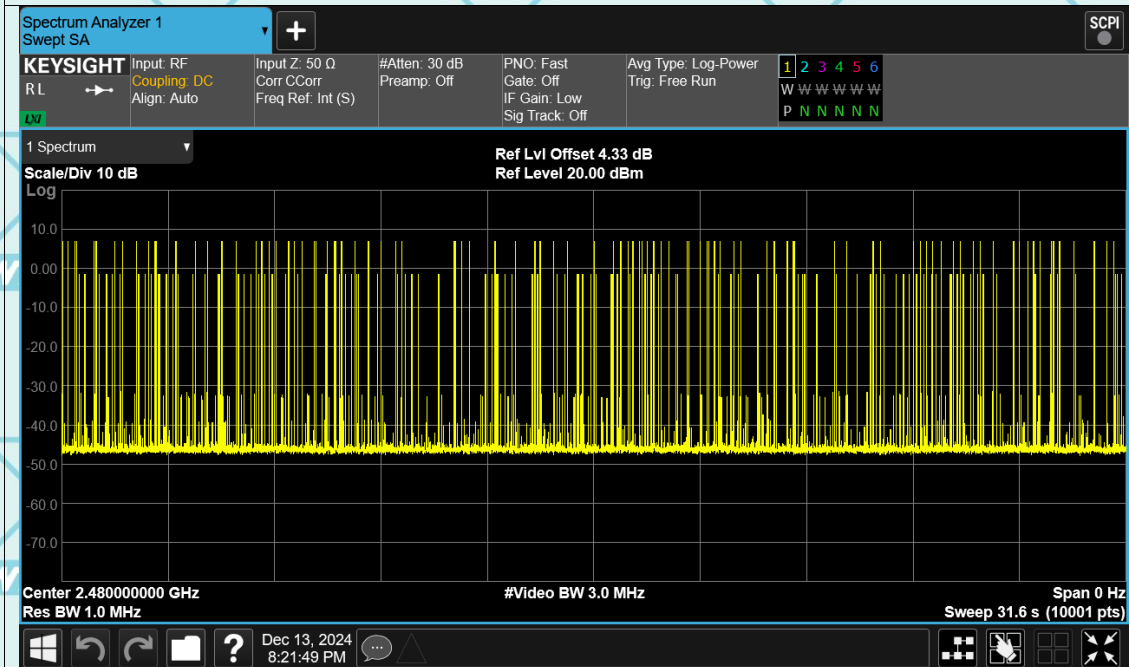

6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

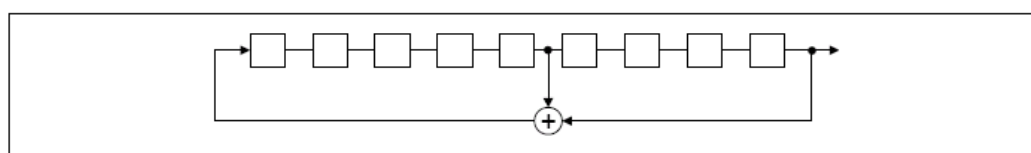

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

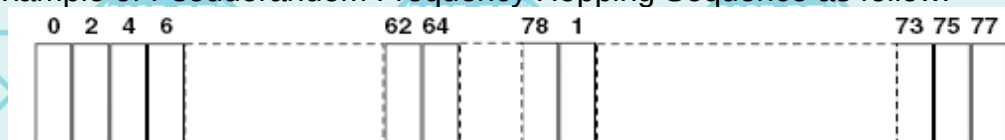

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 The diagram shows a Spectrum Analyzer (green box) connected via a cable to an EUT (yellow box). Below the Spectrum Analyzer is the label 'Spectrum Analyzer' and below the EUT is the label 'EUT'.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E241200069A-BT

Test Data

GFSK Modulation (the worst case)




Report No.: WSCT-ANAB-R&E241200069A-BT

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

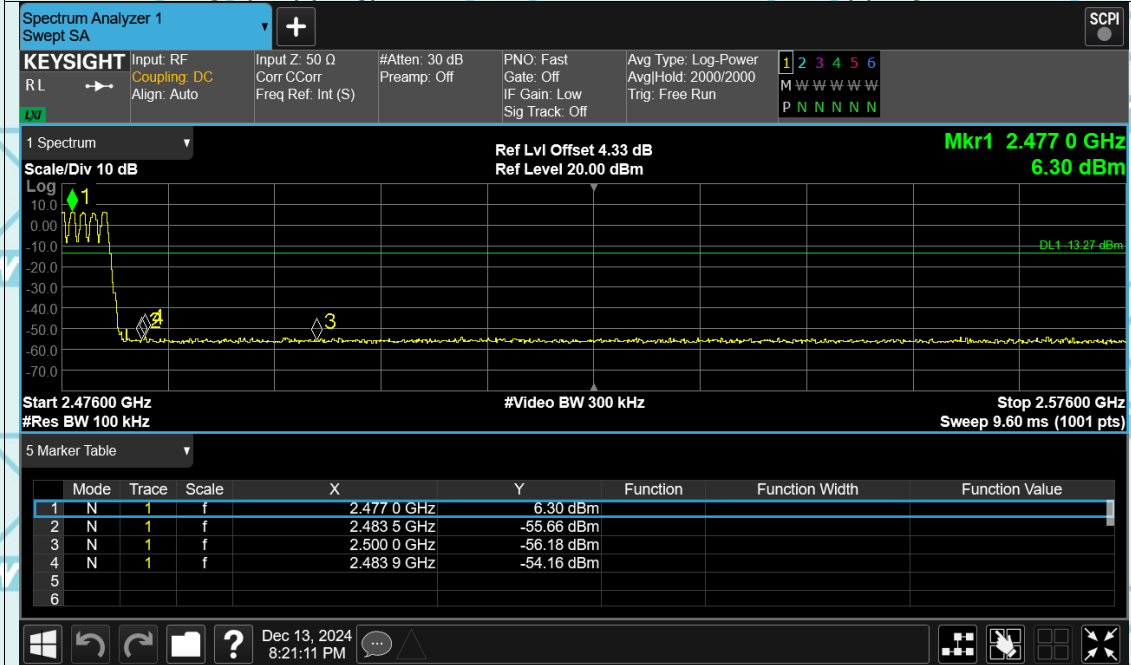


6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an EUT (Equipment Under Test) through an attenuator. The Spectrum Analyzer is represented by a green box with a screen and controls. The EUT is represented by a yellow box. The attenuator is represented by a small white box between them.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

Test Graphs



Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

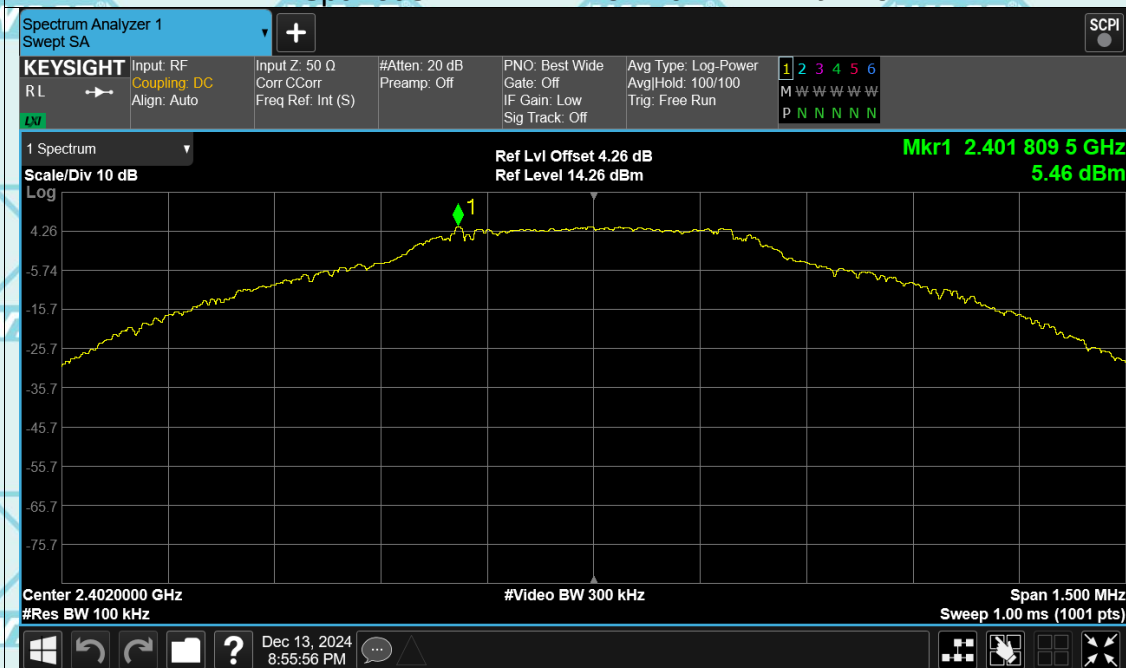



Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

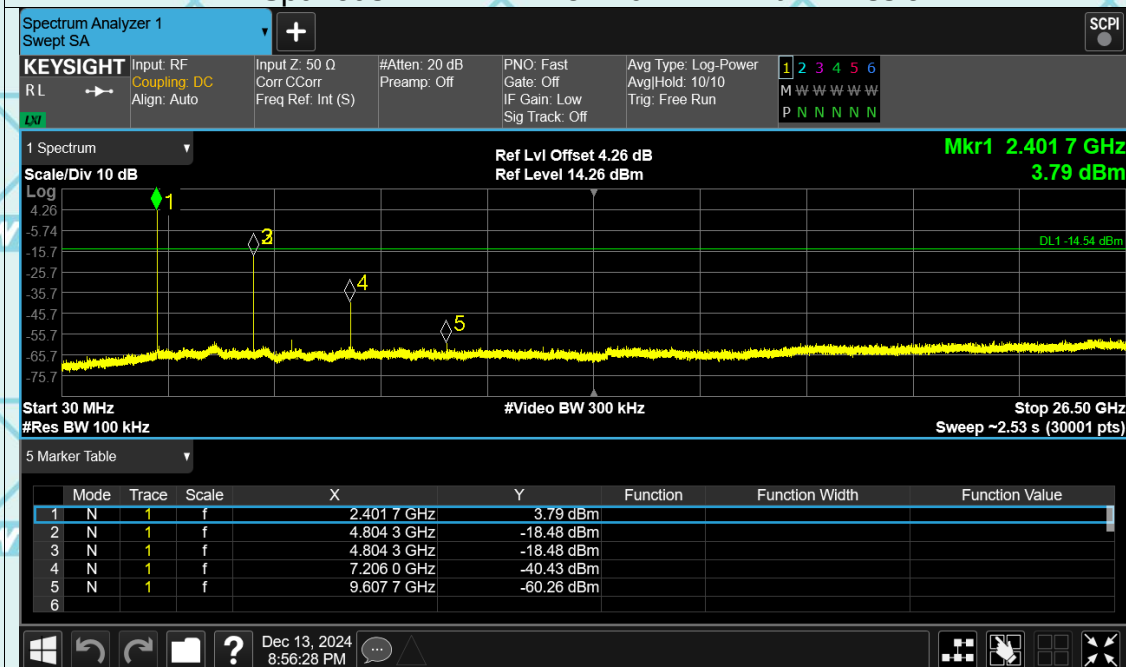



Report No.: WSCT-ANAB-R&E241200069A-BT

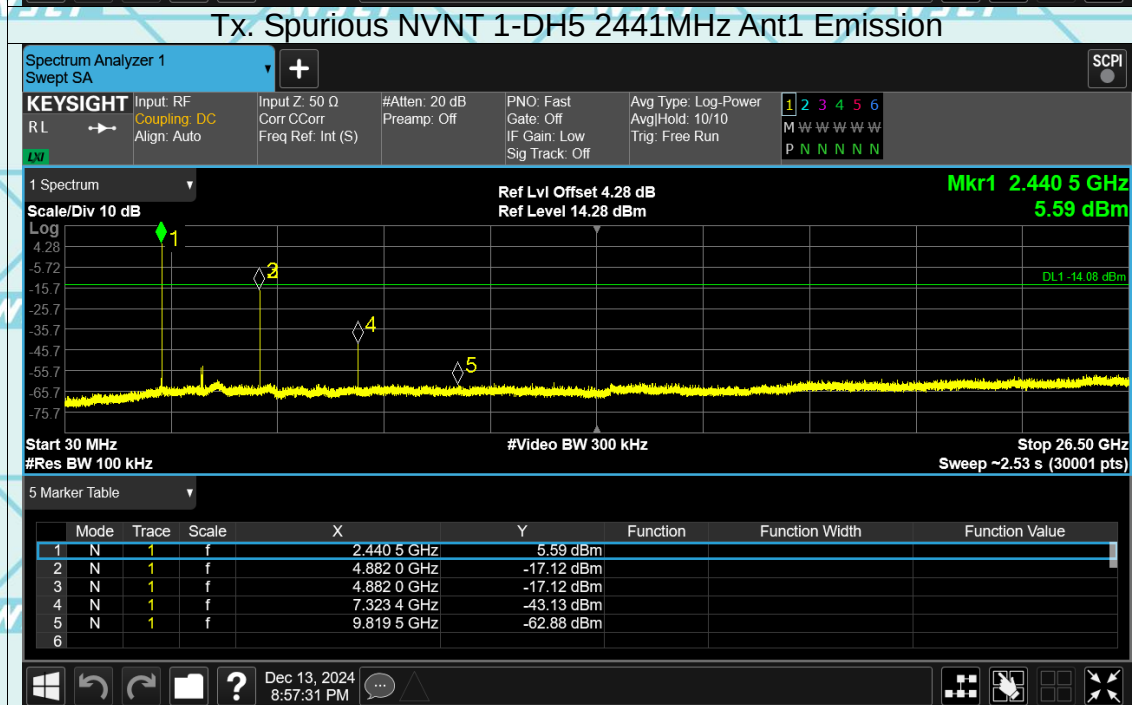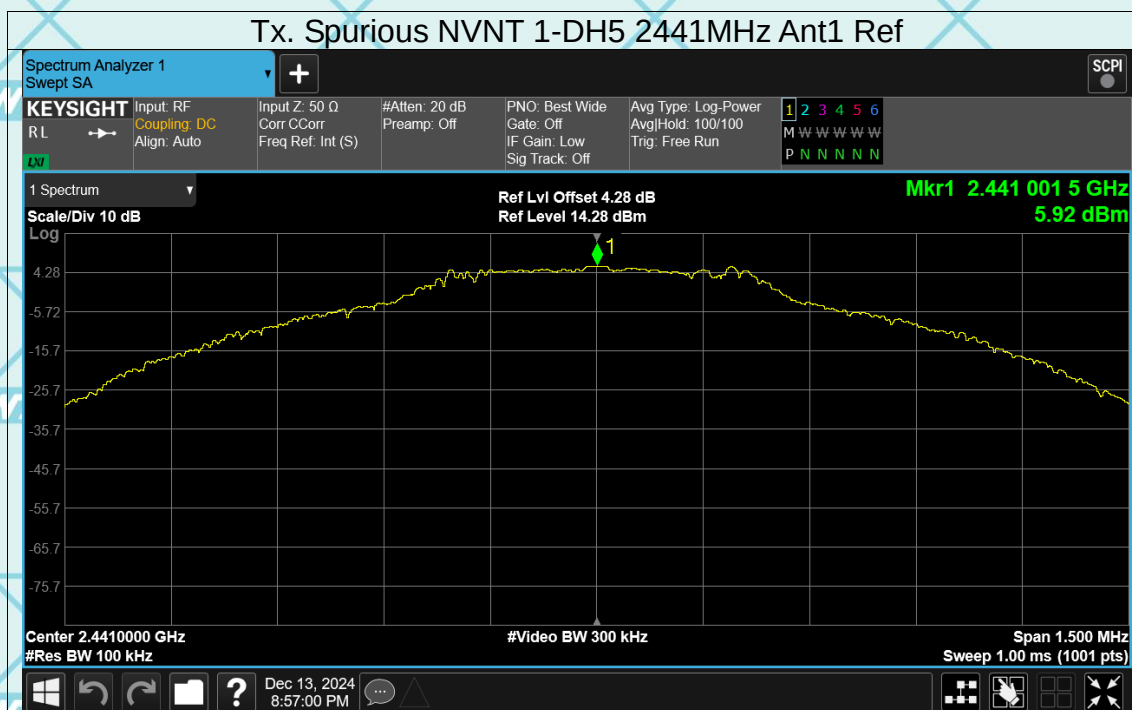

Report No.: WSCT-ANAB-R&E241200069A-BT

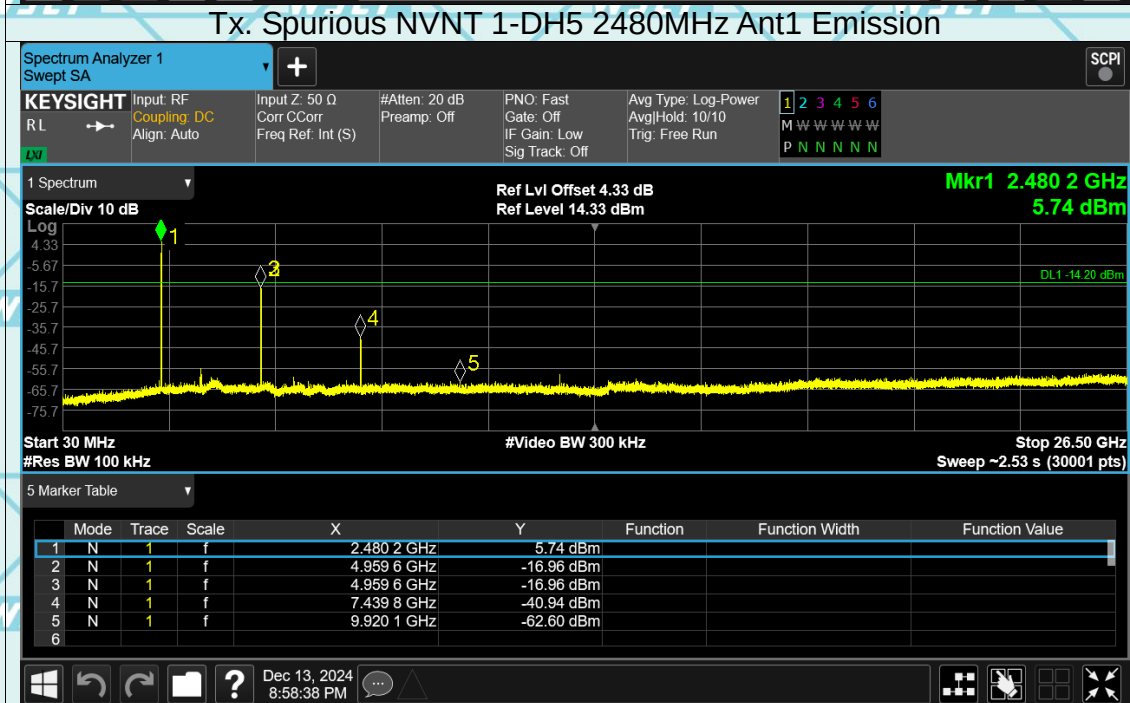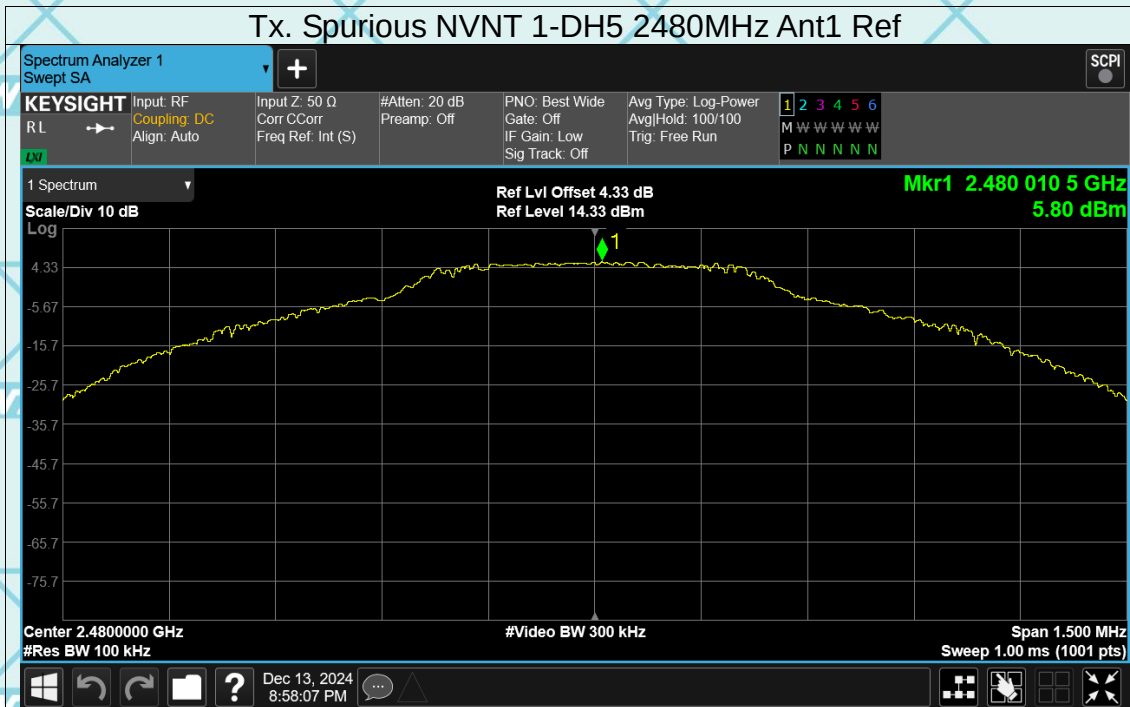


Report No.: WSCT-ANAB-R&E241200069A-BT

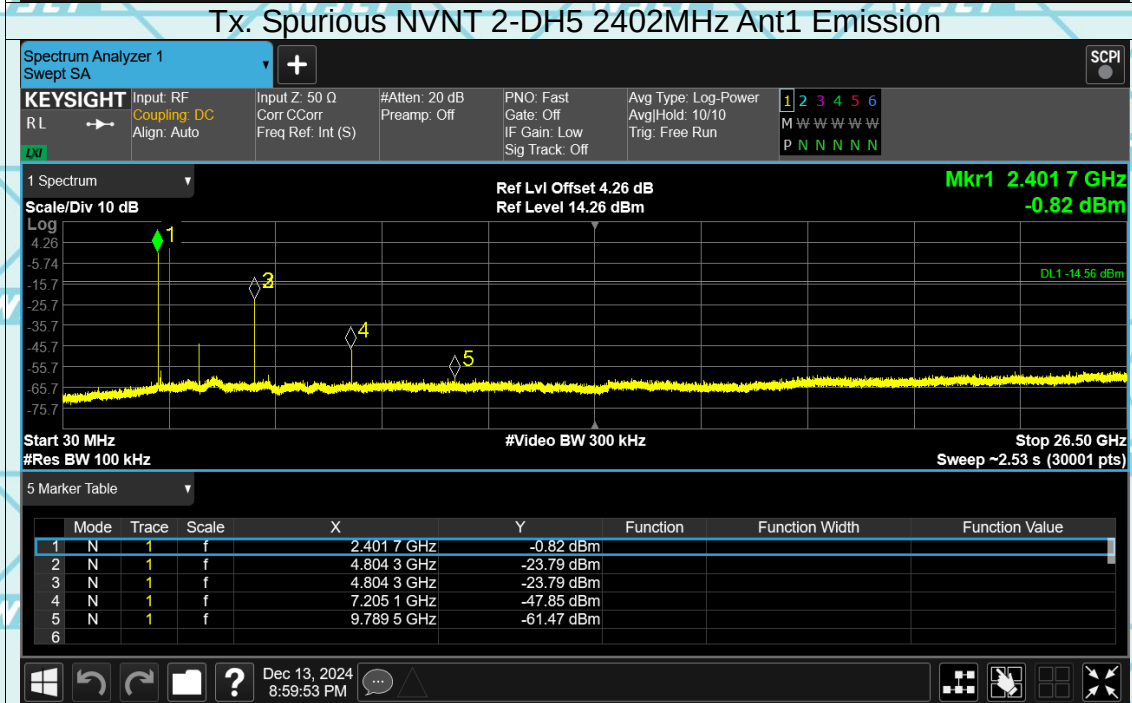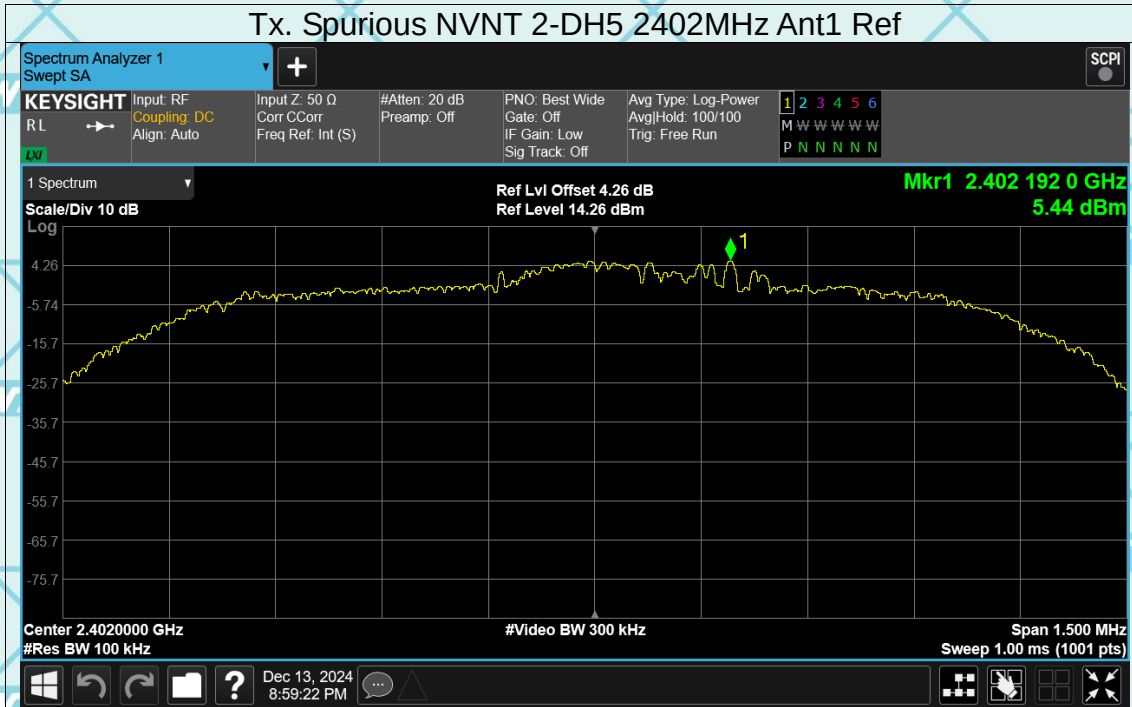


Report No.: WSCT-ANAB-R&E241200069A-BT

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

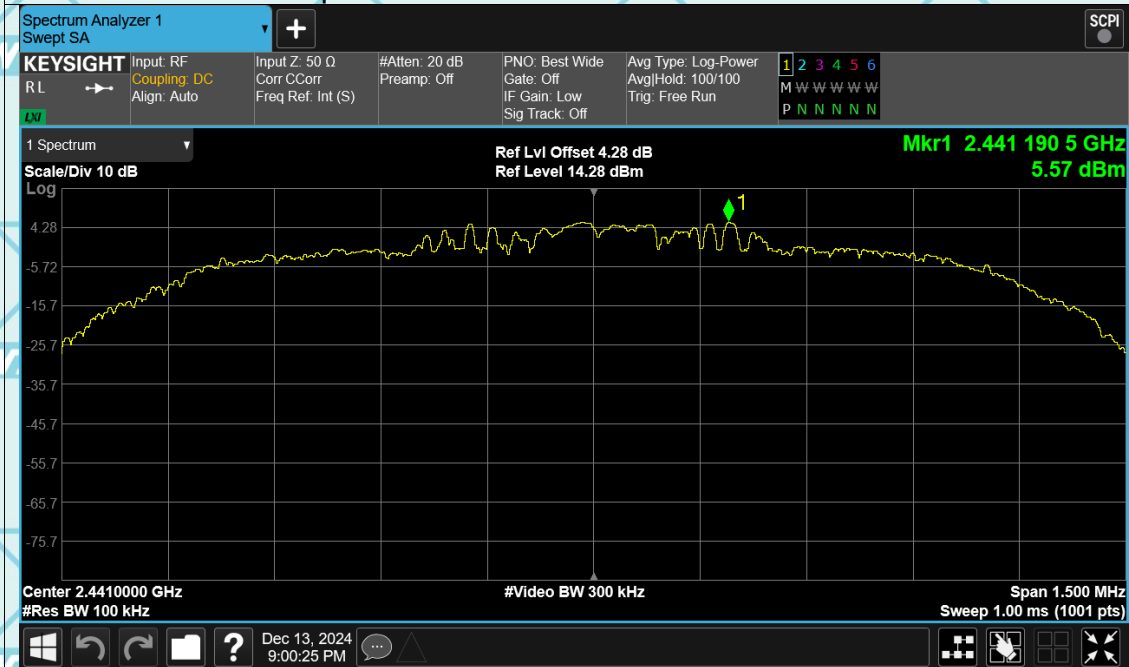


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

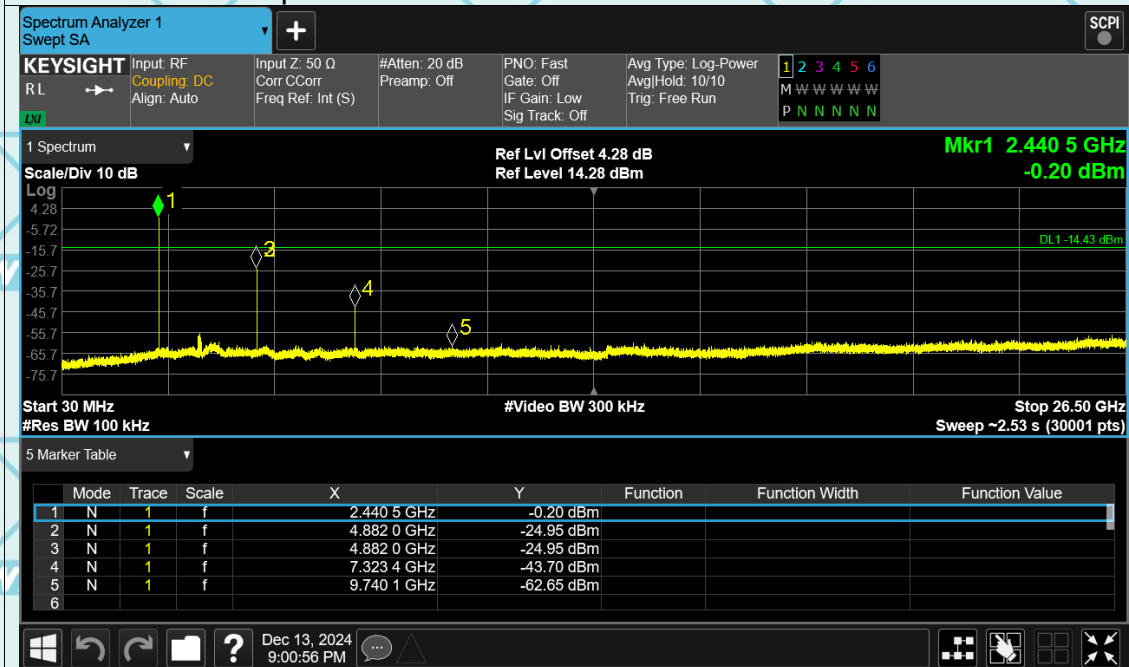


Report No.: WSCT-ANAB-R&E241200069A-BT

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

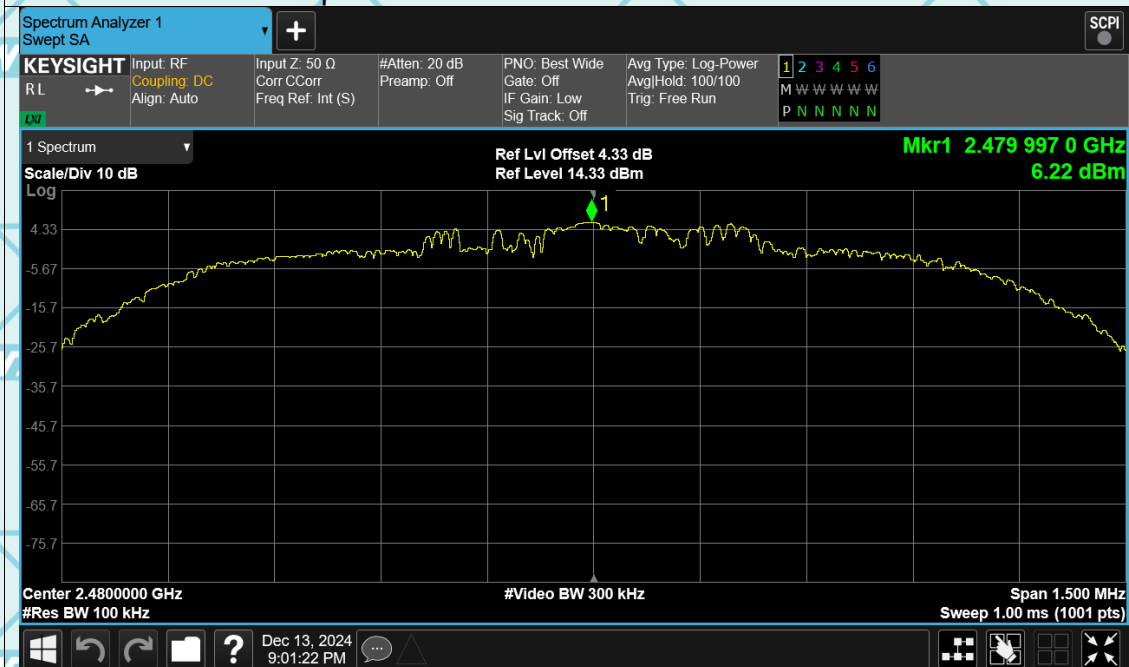


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

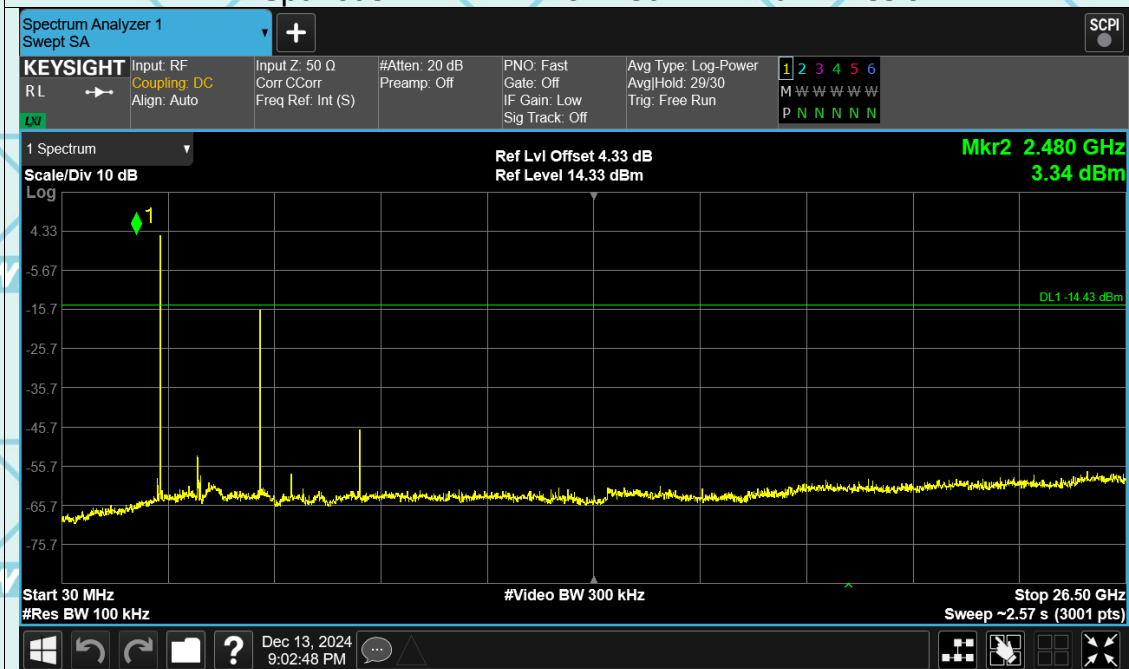


Report No.: WSCT-ANAB-R&E241200069A-BT

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

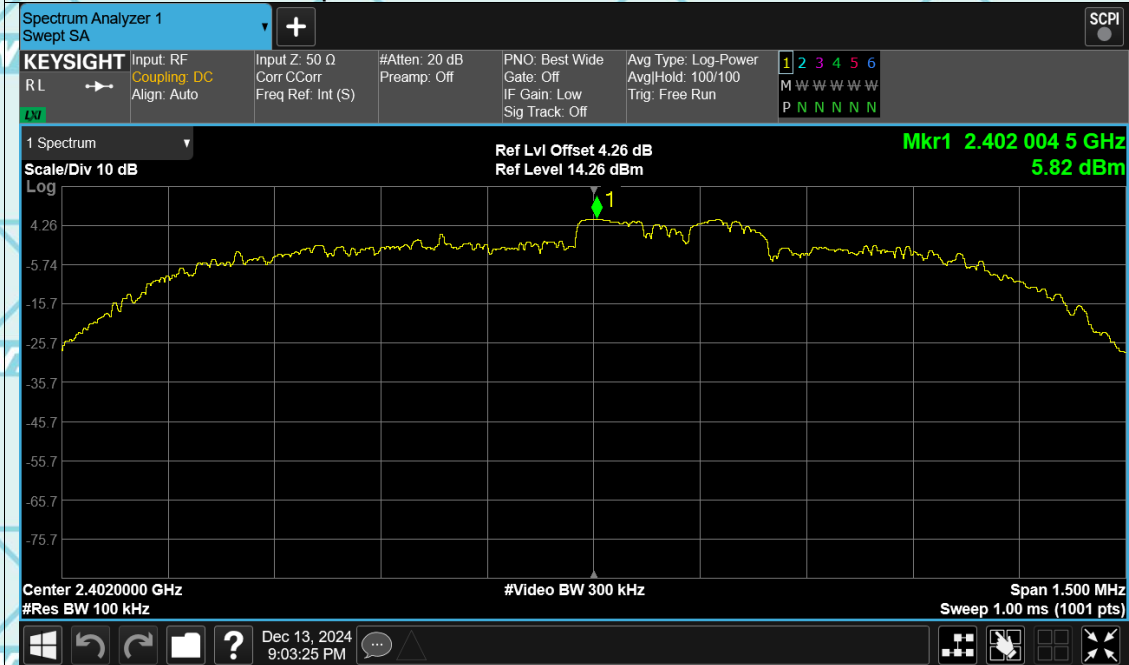

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

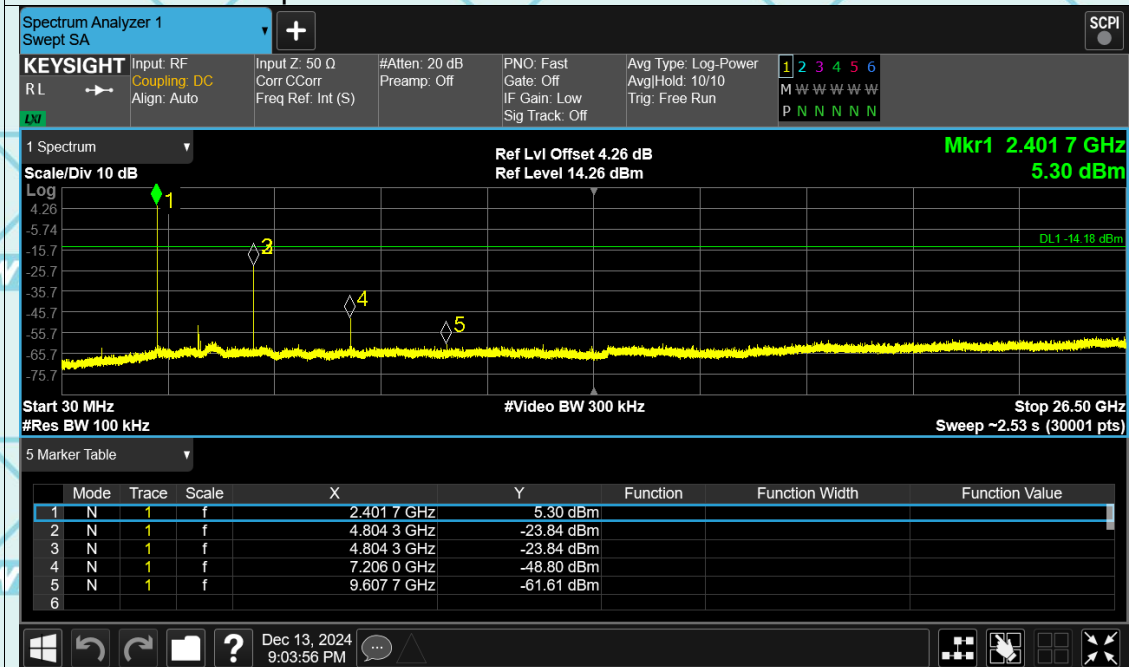


Report No.: WSCT-ANAB-R&E241200069A-BT

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

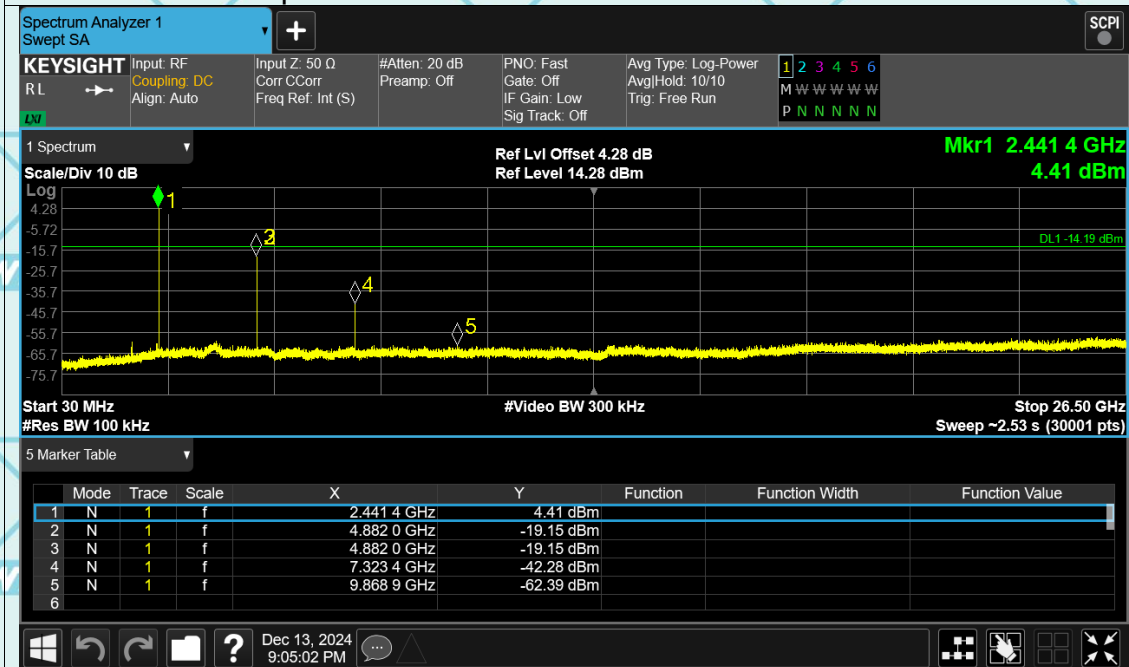


Report No.: WSCT-ANAB-R&E241200069A-BT

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

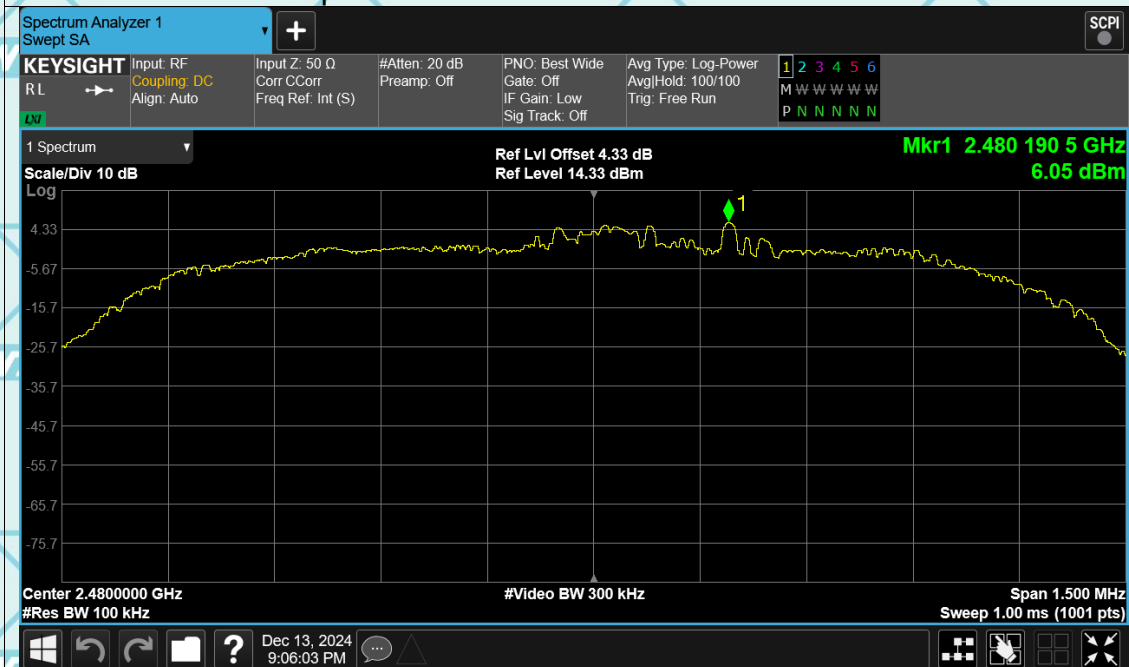


Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission


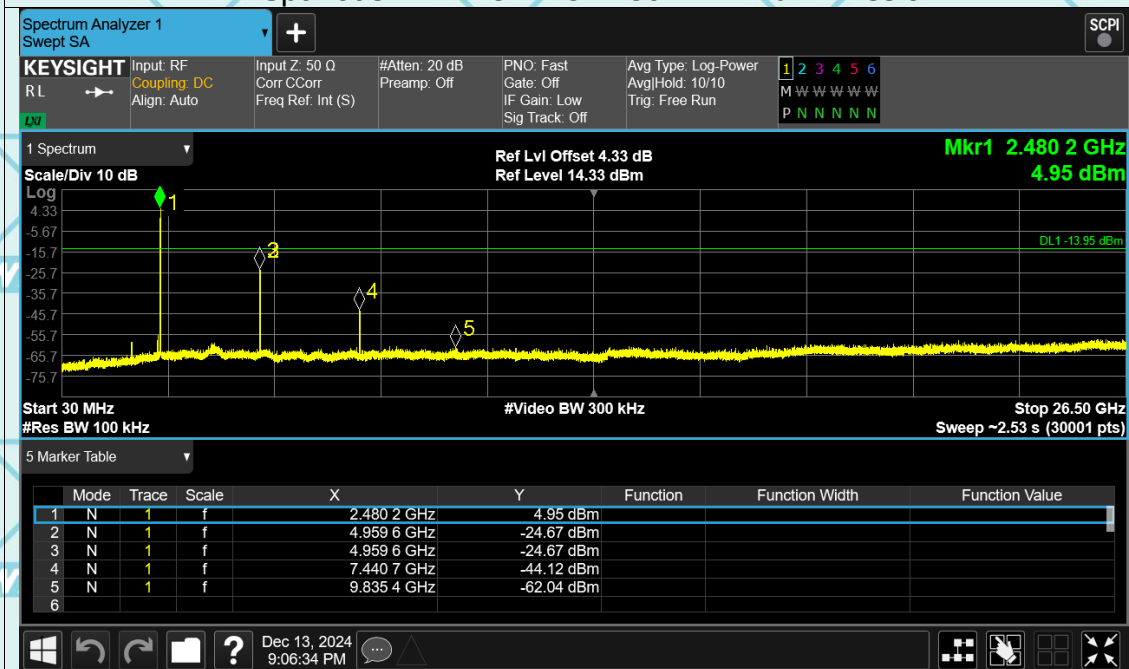


Report No.: WSCT-ANAB-R&E241200069A-BT

6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

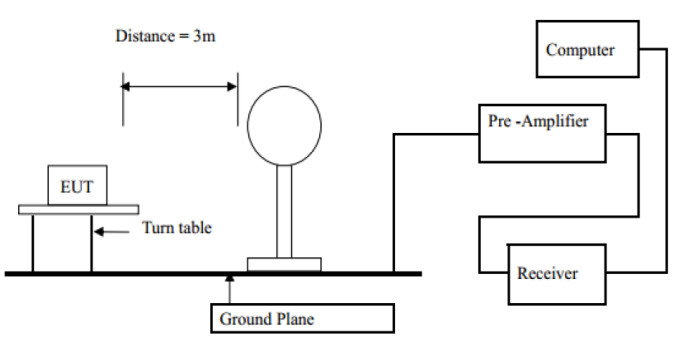Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10:2014			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:				Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
		Peak	1MHz	10Hz
				Average Value
Test setup:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)	300	
	0.490-1.705	24000/F(KHz)	30	
	1.705-30	30	30	
	30-88	100	3	
	88-216	150	3	
	216-960	200	3	
	Above 960	500	3	
Test setup:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
For radiated emissions below 30MHz				
				
30MHz to 1GHz				

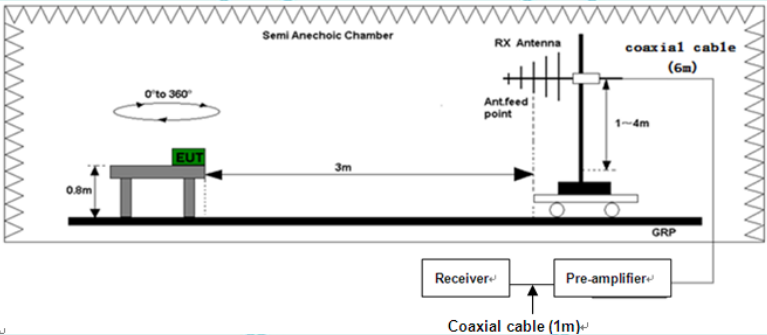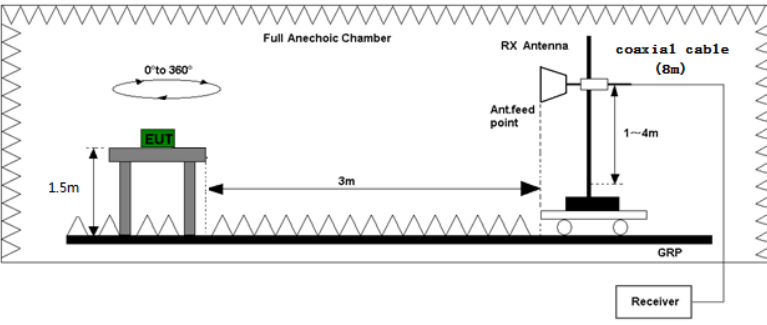	 Above 1GHz 
Test Mode:	Transmitting mode with modulation
Test Procedure:	- The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2014 Measurement Guidelines. - For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which

Report No.: WSCT-ANAB-R&E241200069A-BT

	maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS


Report No.: WSCT-ANAB-R&E241200069A-BT

6.11.2. Test Data

Please refer to following diagram for individual

Below 1GHz


Horizontal:

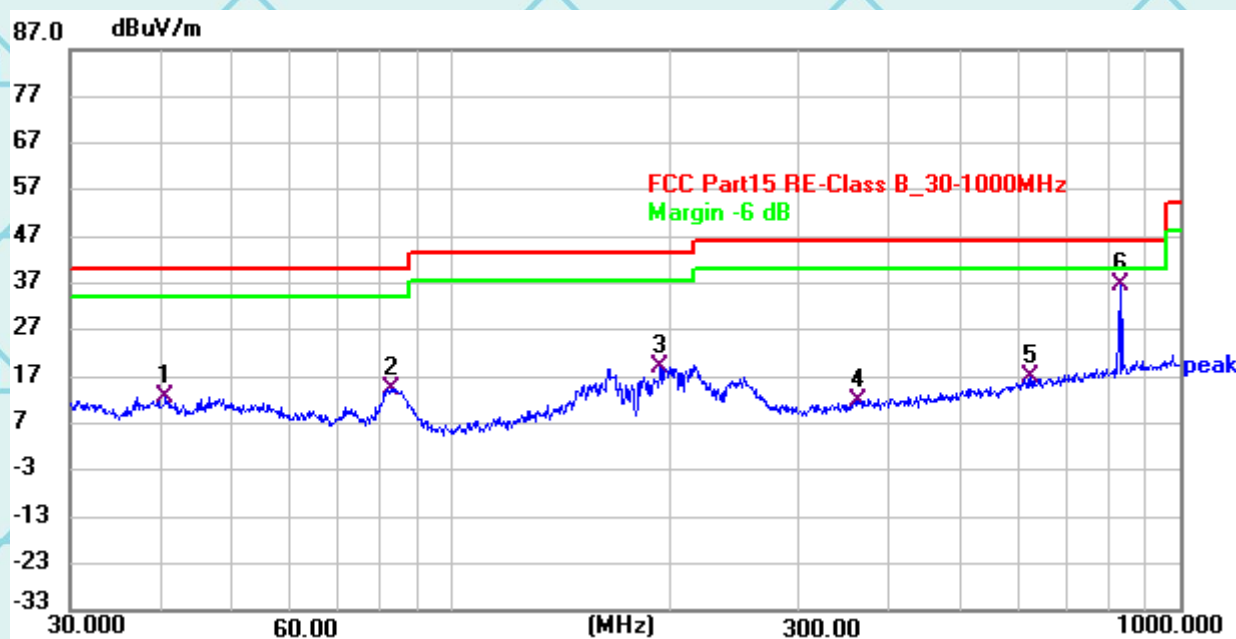

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.6660	31.59	-18.95	12.64	40.00	-27.36	QP
2	82.7932	38.38	-24.00	14.38	40.00	-25.62	QP
3	194.3682	42.09	-23.23	18.86	43.50	-24.64	QP
4	362.0311	30.79	-18.95	11.84	46.00	-34.16	QP
5	624.2566	30.29	-13.17	17.12	46.00	-28.88	QP
6 *	829.3089	47.27	-10.57	36.70	46.00	-9.30	QP

Report No.: WSCT-ANAB-R&E241200069A-BT

Vertical:

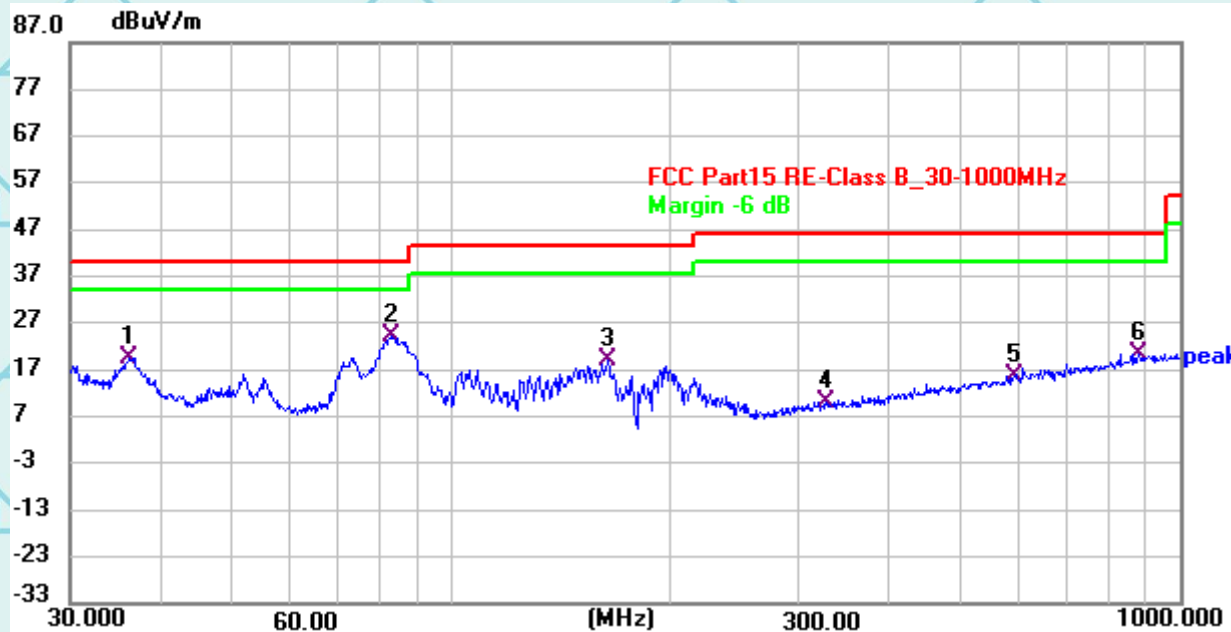

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.3177	39.05	-19.44	19.61	40.00	-20.39	QP
2 *	82.7569	48.08	-24.00	24.08	40.00	-15.92	QP
3	164.6186	38.99	-20.03	18.96	43.50	-24.54	QP
4	328.6067	29.27	-19.31	9.96	46.00	-36.04	QP
5	594.0904	29.45	-13.91	15.54	46.00	-30.46	QP
6	879.4772	30.14	-9.80	20.34	46.00	-25.66	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Report No.: WSCT-ANAB-R&E241200069A-BT

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz

Horizontal:

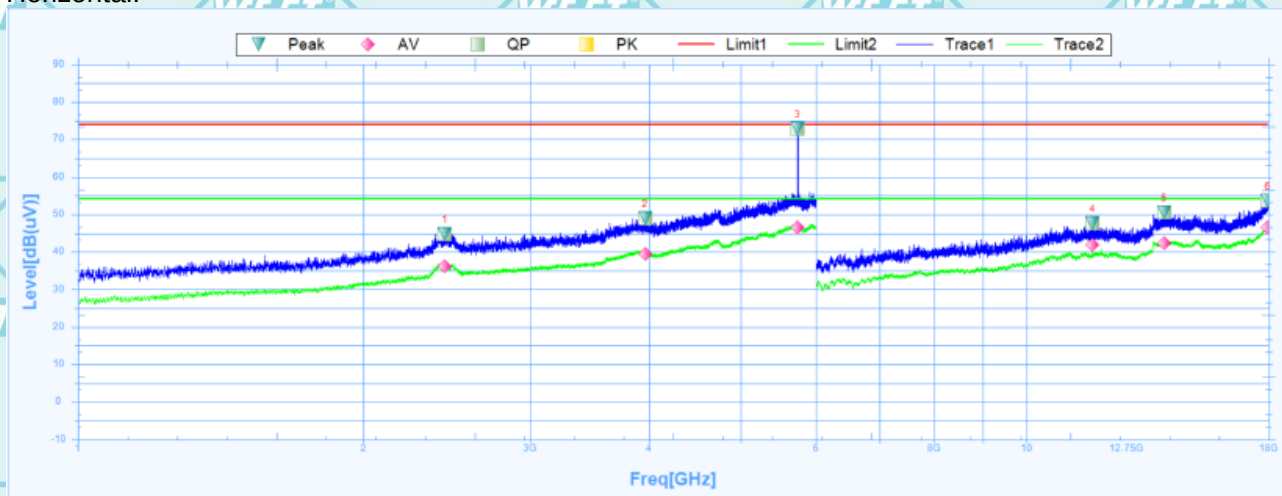


Susputed Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2436.8750	44.84	27.39	17.45	74	-29.16	351.1	Horizontal	PK	Pass
1	2436.8750	36.28	27.39	8.89	54	-17.72	351.1	Horizontal	AV	Pass
2	3963.1250	49.01	29.61	19.4	74	-24.99	204.9	Horizontal	PK	Pass
2	3963.1250	39.56	29.61	9.95	54	-14.44	204.9	Horizontal	AV	Pass
3	5739.3750	72.92	32.38	40.54	74	-1.08	43.5	Horizontal	PK	Pass
3	5739.3750	46.66	32.38	14.28	54	-7.34	43.5	Horizontal	AV	Pass
4	11743.5000	47.59	16.11	31.48	74	-26.41	171.9	Horizontal	PK	Pass
4	11743.5000	41.85	16.11	25.74	54	-12.15	171.9	Horizontal	AV	Pass
5	13972.5000	50.63	19.04	31.59	74	-23.37	262.7	Horizontal	PK	Pass
5	13972.5000	42.46	19.04	23.42	54	-11.54	262.7	Horizontal	AV	Pass
6	17958.0000	53.6	23.63	29.97	74	-20.4	118.1	Horizontal	PK	Pass
6	17958.0000	46.47	23.63	22.84	54	-7.53	118.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E241200069A-BT

Vertical:

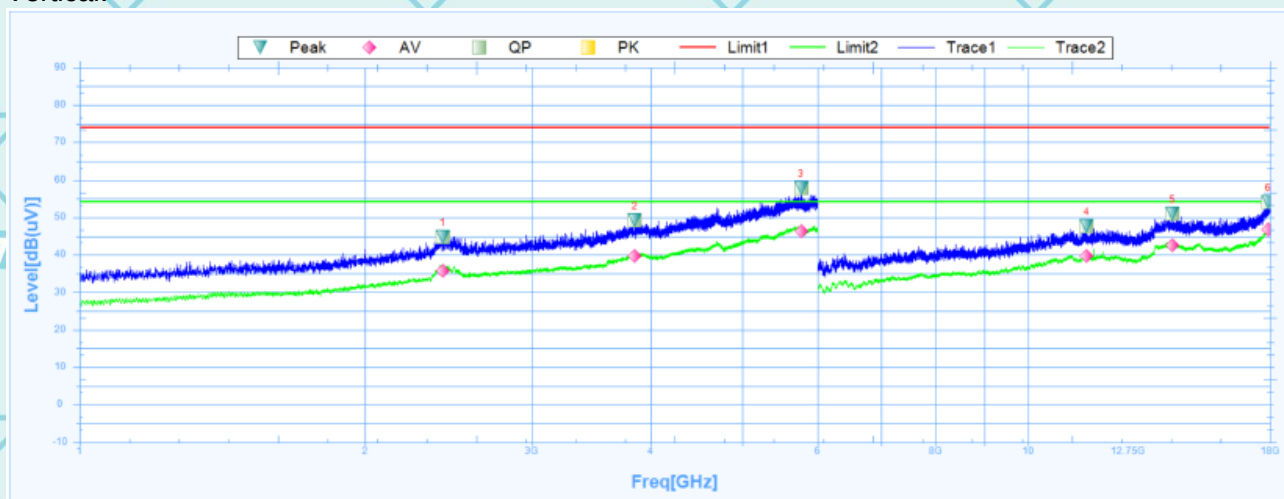

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2414.3750	44.85	27.31	17.54	74	-29.15	116.4	Vertical	PK	Pass
1	2414.3750	35.8	27.31	8.49	54	-18.2	116.4	Vertical	AV	Pass
2	3851.2500	49.24	29.34	19.9	74	-24.76	23.3	Vertical	PK	Pass
2	3851.2500	39.62	29.34	10.28	54	-14.38	23.3	Vertical	AV	Pass
3	5764.3750	57.85	32.42	25.43	74	-16.15	289.8	Vertical	PK	Pass
3	5764.3750	46.33	32.42	13.91	54	-7.67	289.8	Vertical	AV	Pass
4	11535.0000	47.74	16.22	31.52	74	-26.26	337.8	Vertical	PK	Pass
4	11535.0000	39.7	16.22	23.48	54	-14.3	337.8	Vertical	AV	Pass
5	14202.0000	50.89	18.92	31.97	74	-23.11	262.7	Vertical	PK	Pass
5	14202.0000	42.67	18.92	23.75	54	-11.33	262.7	Vertical	AV	Pass
6	17914.5000	54.06	23.35	30.71	74	-19.94	246	Vertical	PK	Pass
6	17914.5000	46.73	23.35	23.38	54	-7.27	246	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E241200069A-BT

Middle channel: 2441MHz

Horizontal:




Susputed Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2400.6250	45.84	27.26	18.58	74	-28.16	359.5	Horizontal	PK	Pass
1	2400.6250	37.25	27.26	9.99	54	-16.75	359.5	Horizontal	AV	Pass
2	3840.0000	49.98	29.32	20.66	74	-24.02	187.6	Horizontal	PK	Pass
2	3840.0000	40.53	29.32	11.21	54	-13.47	187.6	Horizontal	AV	Pass
3	5746.2500	71.12	32.39	38.73	74	-2.88	335.8	Horizontal	PK	Pass
3	5746.2500	47.06	32.39	14.67	54	-6.94	335.8	Horizontal	AV	Pass
4	11743.5000	46.79	16.11	30.68	74	-27.21	49.8	Horizontal	PK	Pass
4	11743.5000	42.62	16.11	26.51	54	-11.38	49.8	Horizontal	AV	Pass
5	14271.0000	50.07	18.85	31.22	74	-23.93	6.2	Horizontal	PK	Pass
5	14271.0000	42.66	18.85	23.81	54	-11.34	6.2	Horizontal	AV	Pass
6	17907.0000	53.42	23.31	30.11	74	-20.58	165.8	Horizontal	PK	Pass
6	17907.0000	46.07	23.31	22.76	54	-7.93	165.8	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E241200069A-BT

Vertical:

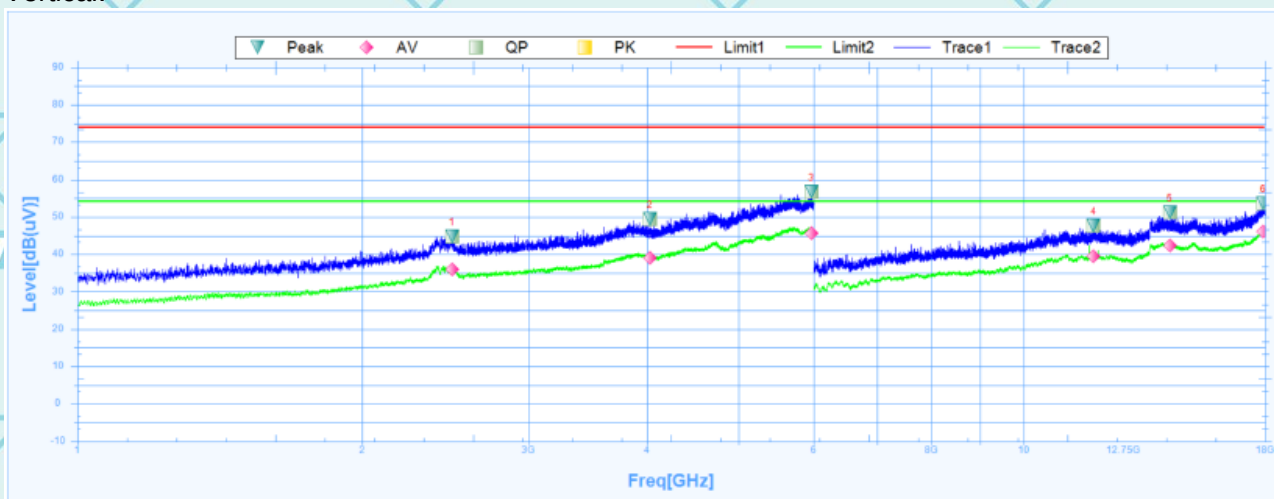


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2487.5000	44.8	27.56	17.24	74	-29.2	61.4	Vertical	PK	Pass
1	2487.5000	36.02	27.56	8.46	54	-17.98	61.4	Vertical	AV	Pass
2	4028.7500	49.38	29.75	19.63	74	-24.62	137.9	Vertical	PK	Pass
2	4028.7500	39.01	29.75	9.26	54	-14.99	137.9	Vertical	AV	Pass
3	5970.0000	56.73	32.75	23.98	74	-17.27	151.1	Vertical	PK	Pass
3	5970.0000	45.66	32.75	12.91	54	-8.34	151.1	Vertical	AV	Pass
4	11865.0000	47.66	16.41	31.25	74	-26.34	359.5	Vertical	PK	Pass
4	11865.0000	39.45	16.41	23.04	54	-14.55	359.5	Vertical	AV	Pass
5	14277.0000	51.23	18.84	32.39	74	-22.77	234.1	Vertical	PK	Pass
5	14277.0000	42.39	18.84	23.55	54	-11.61	234.1	Vertical	AV	Pass
6	17917.5000	53.61	23.37	30.24	74	-20.39	186.2	Vertical	PK	Pass
6	17917.5000	46.16	23.37	22.79	54	-7.84	186.2	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E241200069A-BT

High channel: 2480MHz

Horizontal:

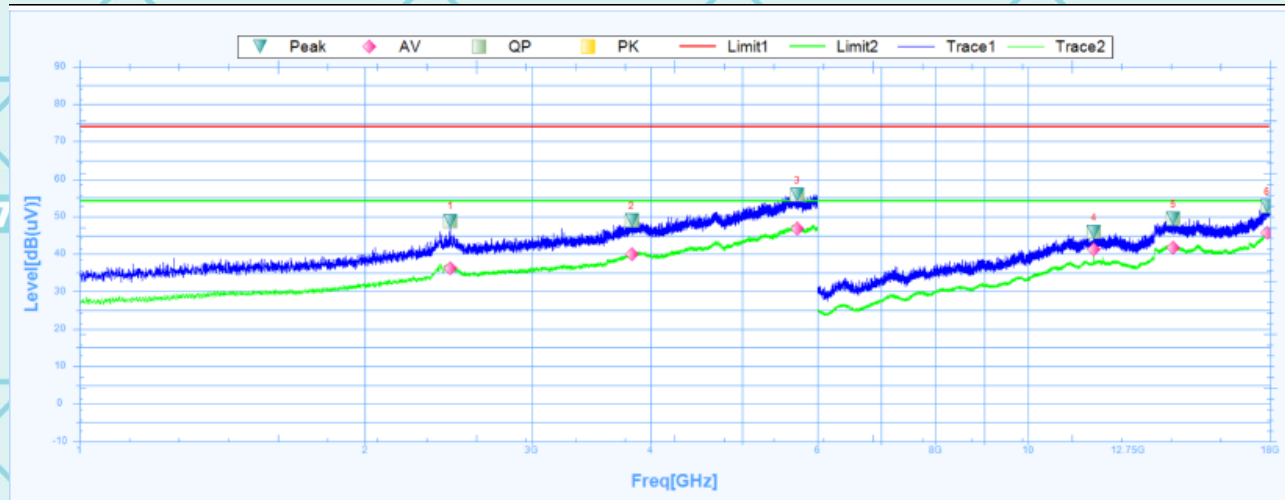


Susputed Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2460.6250	48.88	27.47	21.41	74	-25.12	360.1	Horizontal	PK	Pass
1	2460.6250	36.27	27.47	8.8	54	-17.73	360.1	Horizontal	AV	Pass
2	3821.2500	49.06	29.27	19.79	74	-24.94	0.5	Horizontal	PK	Pass
2	3821.2500	40	29.27	10.73	54	-14	0.5	Horizontal	AV	Pass
3	5712.5000	55.88	32.34	23.54	74	-18.12	261.1	Horizontal	PK	Pass
3	5712.5000	46.74	32.34	14.4	54	-7.26	261.1	Horizontal	AV	Pass
4	11745.0000	45.82	16.11	29.71	74	-28.18	31.9	Horizontal	PK	Pass
4	11745.0000	41.22	16.11	25.11	54	-12.78	31.9	Horizontal	AV	Pass
5	14238.0000	49.37	18.88	30.49	74	-24.63	230.4	Horizontal	PK	Pass
5	14238.0000	41.64	18.88	22.76	54	-12.36	230.4	Horizontal	AV	Pass
6	17881.5000	52.65	23.15	29.5	74	-21.35	254.3	Horizontal	PK	Pass
6	17881.5000	45.77	23.15	22.62	54	-8.23	254.3	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E241200069A-BT

Vertical:

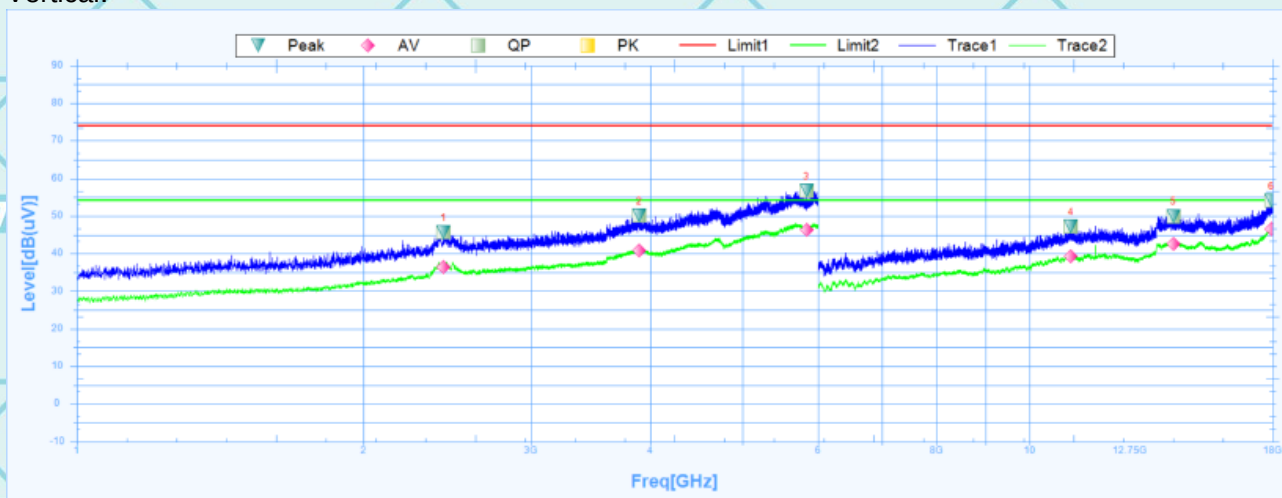

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2426.2500	45.76	27.35	18.41	74	-28.24	241.3	Vertical	PK	Pass
1	2426.2500	36.31	27.35	8.96	54	-17.69	241.3	Vertical	AV	Pass
2	3896.2500	50	29.45	20.55	74	-24	36.8	Vertical	PK	Pass
2	3896.2500	40.74	29.45	11.29	54	-13.26	36.8	Vertical	AV	Pass
3	5835.6250	56.62	32.54	24.08	74	-17.38	335.6	Vertical	PK	Pass
3	5835.6250	46.27	32.54	13.73	54	-7.73	335.6	Vertical	AV	Pass
4	11059.5000	47.3	15.81	31.49	74	-26.7	247.9	Vertical	PK	Pass
4	11059.5000	39.18	15.81	23.37	54	-14.82	247.9	Vertical	AV	Pass
5	14166.0000	49.98	18.95	31.03	74	-24.02	196.5	Vertical	PK	Pass
5	14166.0000	42.57	18.95	23.62	54	-11.43	196.5	Vertical	AV	Pass
6	17940.0000	54.16	23.52	30.64	74	-19.84	300.5	Vertical	PK	Pass
6	17940.0000	46.52	23.52	23	54	-7.48	300.5	Vertical	AV	Pass

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown "—" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
5. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	62.87	-8.76	54.11	74	19.89	H	PK
2387	55.43	-8.76	46.67	54	7.33	H	AV
2387	60.31	-8.73	51.58	74	22.42	V	PK
2387	57.66	-8.73	48.93	54	5.07	V	AV
2390	61.48	-8.76	52.72	74	21.28	H	PK
2390	55.57	-8.76	46.81	54	7.19	H	AV
2390	60.13	-8.73	51.40	74	22.60	V	PK
2390	55.43	-8.73	46.70	54	7.30	V	AV
High Channel							
2483.5	60.06	-8.17	51.89	74	22.11	H	PK
2483.5	54.75	-8.17	46.58	54	7.42	H	AV
2483.5	60.65	-8.17	52.48	74	21.52	V	PK
2483.5	54.61	-8.17	46.44	54	7.56	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E241200069A-BT

7. Test Setup Photographs

Please refer to the attachment "Set Up Photos-15C" for relevant test setup photos

*******END OF REPORT*******