

TEST REPORT

FCC ID: 2AXYP-OSW-823

Product: Smart Watch

Model No.: OSW-823

Trade Mark: oraimo

Report No.: WSCT-ANAB-R&E250500035A-BT

Issued Date: 26 May 2025

Issued for:

ORAIMO TECHNOLOGY LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyao
Street, Bao'an District, Shenzhen City, Guangdong Province, China.

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description	5
4. General Information	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS	8
5.3. MEASUREMENT UNCERTAINTY	9
5.4. MEASUREMENT INSTRUMENTS	10
6. Test Results and Measurement Data	11
6.1. ANTENNA REQUIREMENT	11
6.2. CONDUCTED EMISSION	12
6.3. CONDUCTED OUTPUT POWER	16
6.4. 20dB OCCUPY BANDWIDTH	23
6.5. CARRIER FREQUENCIES SEPARATION	30
6.6. HOPPING CHANNEL NUMBER	37
6.7. DWELL TIME	40
6.8. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	51
6.9. CONDUCTED BAND EDGE MEASUREMENT	52
6.10. CONDUCTED SPURIOUS EMISSION MEASUREMENT	55
6.11. RADIATED SPURIOUS EMISSION MEASUREMENT	65
7. Test Setup Photographs	77

Report No.: WSCT-ANAB-R&E250500035A-BT

1. Test Certification

Product:	Smart Watch
Model No.:	OSW-823
Additional Model:	oraimo
Applicant:	ORAIMO TECHNOLOGY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	ORAIMO TECHNOLOGY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of receipt:	28 April 2025
Date of Test:	28 April 2025 ~ 23 May 2025
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Qin Shiquan

(Qin Shiquan)

Approved By:

Li Huaibi

(Li Huaibi)

Date:

26 May 2025

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum conducted output power	§15.247 (b)(1) §2.1046	PASS
20dB Occupied Bandwidth	§15.247 (a)(1) §2.1049	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209 §2.1053, §2.1057	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Smart watch
Model :	OSW-823
Trade Mark:	oraimo
Software Version	OSW-823
Hardware version	MA1008.01
Frequency Range:	2402-2480MHz(TX/RX)
Channel Separation:	1MHz
Number of Channel:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type	Wire antenna
Antenna Gain:	-1.13dBi
Operating Voltage	Li-ion Polymer Battery: 552123 Nominal Voltage: 3.8V Rated Capacity: 300mAh/1.14Wh
Remark:	N/A.

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

Report No.: WSCT-ANAB-R&E250500035A-BT

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
...	...	...	...	...	...	...	...
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
...	...	...	...	...	...	...	...
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz	-	-

Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.

Report No.: WSCT-ANAB-R&E250500035A-BT

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Report No.: WSCT-ANAB-R&E250500035A-BT

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

Building A-B, Baoli'an Industrial Park, No. 58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA

ANAB - Certificate Number: AT-3951

China

CNAS (Registration Number: L3732)

Canada

ISED (CAB identifier: CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$

Report No.: WSCT-ANAB-R&E250500035A-BT

5.4. MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	-	EZ-EMC	CON-03A	-	-
Test software	-	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2024	11/04/2025
LISN	AFJ	LS16	16010222119	11/05/2024	11/04/2025
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2024	11/04/2025
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2024	11/04/2025
Coaxial cable	Megalon	LMR400	N/A	11/05/2024	11/04/2025
GPIO cable	Megalon	GPIO	N/A	11/05/2024	11/04/2025
Spectrum Analyzer	R&S	FSU	100114	11/05/2024	11/04/2025
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2024	11/04/2025
Pre-Amplifier	CDSI	PAP-1G18-38	-	11/05/2024	11/04/2025
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	07/29/2024	07/28/2025
9*6*6 Anechoic	-	-	-	11/05/2024	11/04/2025
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	-	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2024	11/04/2025
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2024	11/04/2025
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2024	11/04/2025
Loop Antenna	EMCO	6502	00042960	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2024	11/04/2025
Power meter	Anritsu	ML2487A	6K00003613	11/05/2024	11/04/2025
Power sensor	Anritsu	MX248XD	-	11/05/2024	11/04/2025
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2024	11/04/2025

Report No.: WSCT-ANAB-R&E250500035A-BT

6. Test Results and Measurement Data


6.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The Bluetooth antenna is a Wire Antenna. it meets the standards, and the best case gain of the antenna is -1.13dBi.	

Report No.: WSCT-ANAB-R&E250500035A-BT

6.2. Conducted Emission

6.2.1. Test Specification

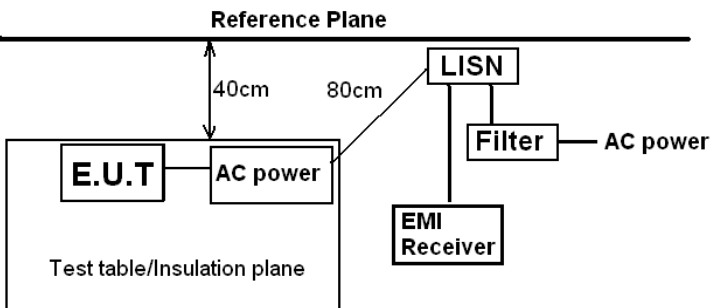Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2014		
Frequency Range:	150 kHz to 30 MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limits:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
Test Setup:	 <i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Mode:	Refer to item 4.1		
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2014 on conducted measurement.		
Test Result:	PASS		

6.2.2. EUT OPERATING CONDITIONS


The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Report No.: WSCT-ANAB-R&E250500035A-BT

Test data


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

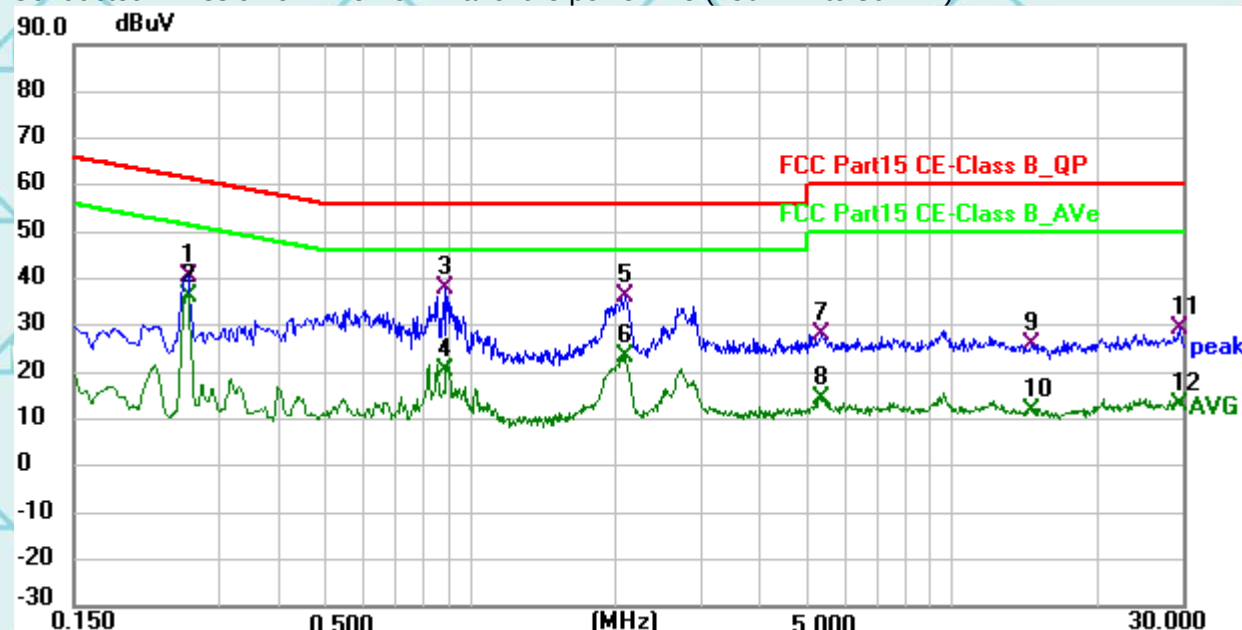

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	19.85	20.66	40.51	61.50	-20.99	QP
2 *	0.2580	15.75	20.66	36.41	51.50	-15.09	AVG
3	0.8880	17.44	20.62	38.06	56.00	-17.94	QP
4	0.8880	-0.41	20.62	20.21	46.00	-25.79	AVG
5	2.0985	15.40	20.61	36.01	56.00	-19.99	QP
6	2.0985	2.54	20.61	23.15	46.00	-22.85	AVG
7	5.3565	7.55	20.56	28.11	60.00	-31.89	QP
8	5.3565	-6.08	20.56	14.48	50.00	-35.52	AVG
9	14.5320	5.73	20.20	25.93	60.00	-34.07	QP
10	14.5320	-8.26	20.20	11.94	50.00	-38.06	AVG
11	29.5350	8.23	21.12	29.35	60.00	-30.65	QP
12	29.5350	-7.87	21.12	13.25	50.00	-36.75	AVG

Report No.: WSCT-ANAB-R&E250500035A-BT


Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

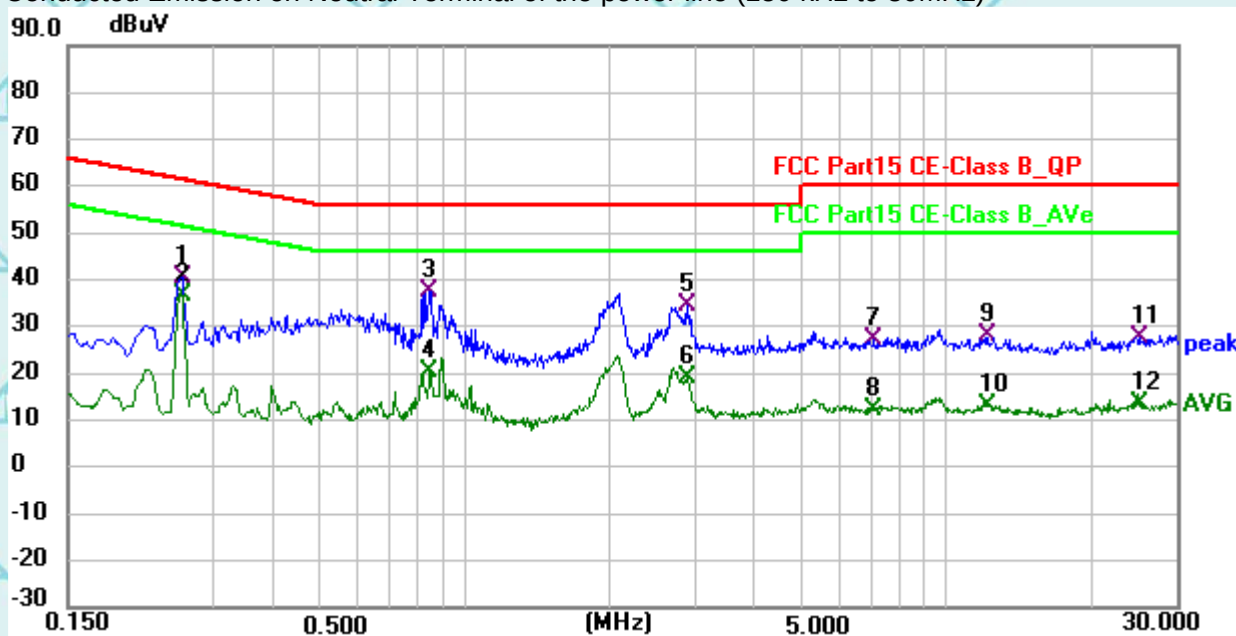

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	19.95	20.66	40.61	61.50	-20.89	QP
2 *	0.2580	15.81	20.66	36.47	51.50	-15.03	AVG
3	0.8475	17.06	20.60	37.66	56.00	-18.34	QP
4	0.8475	-0.14	20.60	20.46	46.00	-25.54	AVG
5	2.9130	14.10	20.60	34.70	56.00	-21.30	QP
6	2.9130	-1.60	20.60	19.00	46.00	-27.00	AVG
7	7.0935	6.67	20.51	27.18	60.00	-32.82	QP
8	7.0935	-8.36	20.51	12.15	50.00	-37.85	AVG
9	12.1830	7.92	20.33	28.25	60.00	-31.75	QP
10	12.1830	-7.35	20.33	12.98	50.00	-37.02	AVG
11	25.1565	7.10	20.62	27.72	60.00	-32.28	QP
12	25.1565	-7.00	20.62	13.62	50.00	-36.38	AVG

6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2014
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250500035A-BT

6.3.2. Test Data

GFSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	6.64	21	PASS
Middle	7.22	21	PASS
Highest	7.19	21	PASS

Pi/4DQPSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	6.97	21	PASS
Middle	7.52	21	PASS
Highest	7.51	21	PASS

8DPSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	7.13	21	PASS
Middle	7.71	21	PASS
Highest	7.69	21	PASS

Report No.: WSCT-ANAB-R&E250500035A-BT

Test Graphs

Power NVNT 1-DH5 2402MHz Ant1



Power NVNT 1-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

Power NVNT 1-DH5 2480MHz Ant1



Power NVNT 2-DH5 2402MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

Power NVNT 2-DH5 2441MHz Ant1



Power NVNT 2-DH5 2480MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

Power NVNT 3-DH5 2402MHz Ant1



Power NVNT 3-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

Power NVNT 3-DH5 2480MHz Ant1



6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	N/A
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250500035A-BT

6.4.2. Test data

Test channel	20dB Occupy Bandwidth (MHz)			
	GFSK	$\pi/4$ -DQPSK	8DPSK	Conclusion
Lowest	0.947	1.315	1.308	PASS
Middle	0.947	1.316	1.308	PASS
Highest	0.952	1.333	1.313	PASS

Test plots as follows:

Report No.: WSCT-ANAB-R&E250500035A-BT

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT


-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1




Report No.: WSCT-ANAB-R&E250500035A-BT

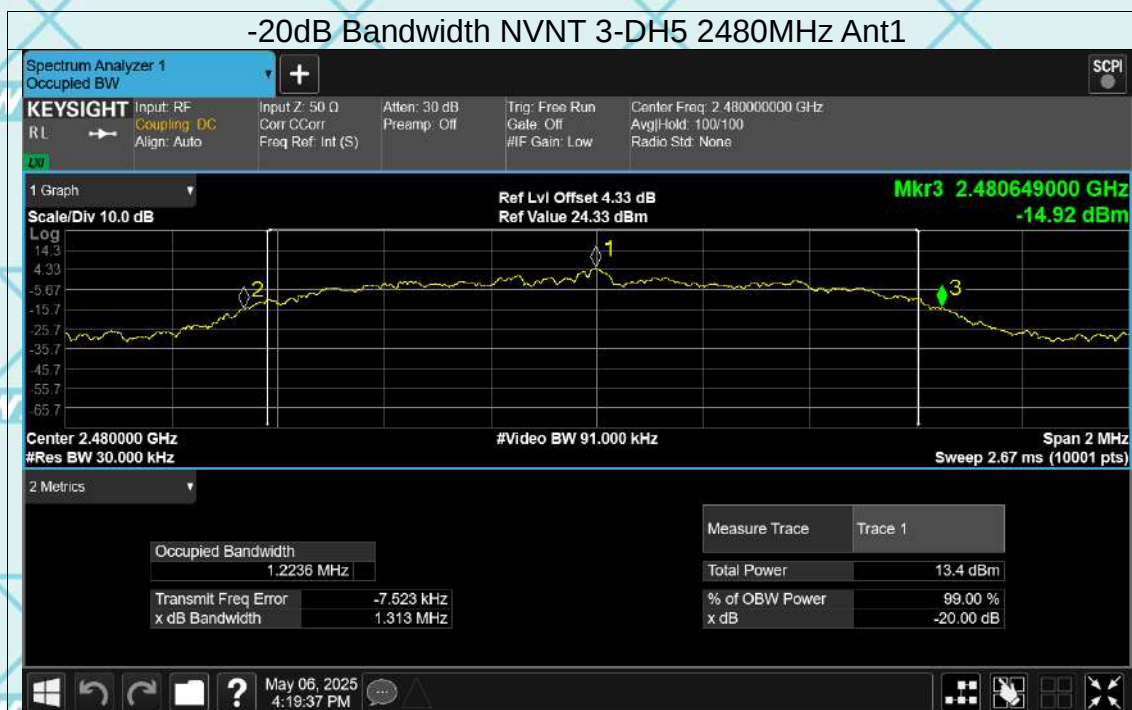

6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

6.5.2. Test data

GFSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit ((2/3*20dB BW MHz))	Result
Lowest	0.994	0.631	PASS
Middle	1.002	0.631	PASS
Highest	1.006	0.635	PASS

Pi/4 DQPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit ((2/3*20dB BW MHz))	Result
Lowest	1.004	0.877	PASS
Middle	1.008	0.877	PASS
Highest	0.994	0.889	PASS

8DPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit ((2/3*20dB BW MHz))	Result
Lowest	1.006	0.872	PASS
Middle	1.006	0.872	PASS
Highest	0.994	0.875	PASS

Test plots as follows:

Report No.: WSCT-ANAB-R&E250500035A-BT

Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1



CFS NVNT 1-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

CFS NVNT 1-DH5 2480MHz Ant1



CFS NVNT 2-DH5 2402MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

CFS NVNT 2-DH5 2441MHz Ant1



CFS NVNT 2-DH5 2480MHz Ant1



Report No.: WSCT-ANAB-R&E250500035A-BT

CFS NVNT 3-DH5 2402MHz Ant1



CFS NVNT 3-DH5 2441MHz Ant1




Report No.: WSCT-ANAB-R&E250500035A-BT

CFS NVNT 3-DH5 2480MHz Ant1



6.6. Hopping Channel Number

6.6.1. Test Specification

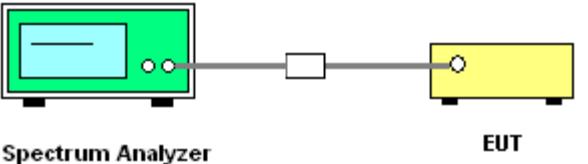
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. The number of hopping frequency used is defined as the number of total channel. 7. Record the measurement data in report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250500035A-BT

Test data


Mode	Hopping channel numbers	Limit	Result
GFSK, P/4-DQPSK, 8DPSK	79	15	PASS

Test plots as follows:

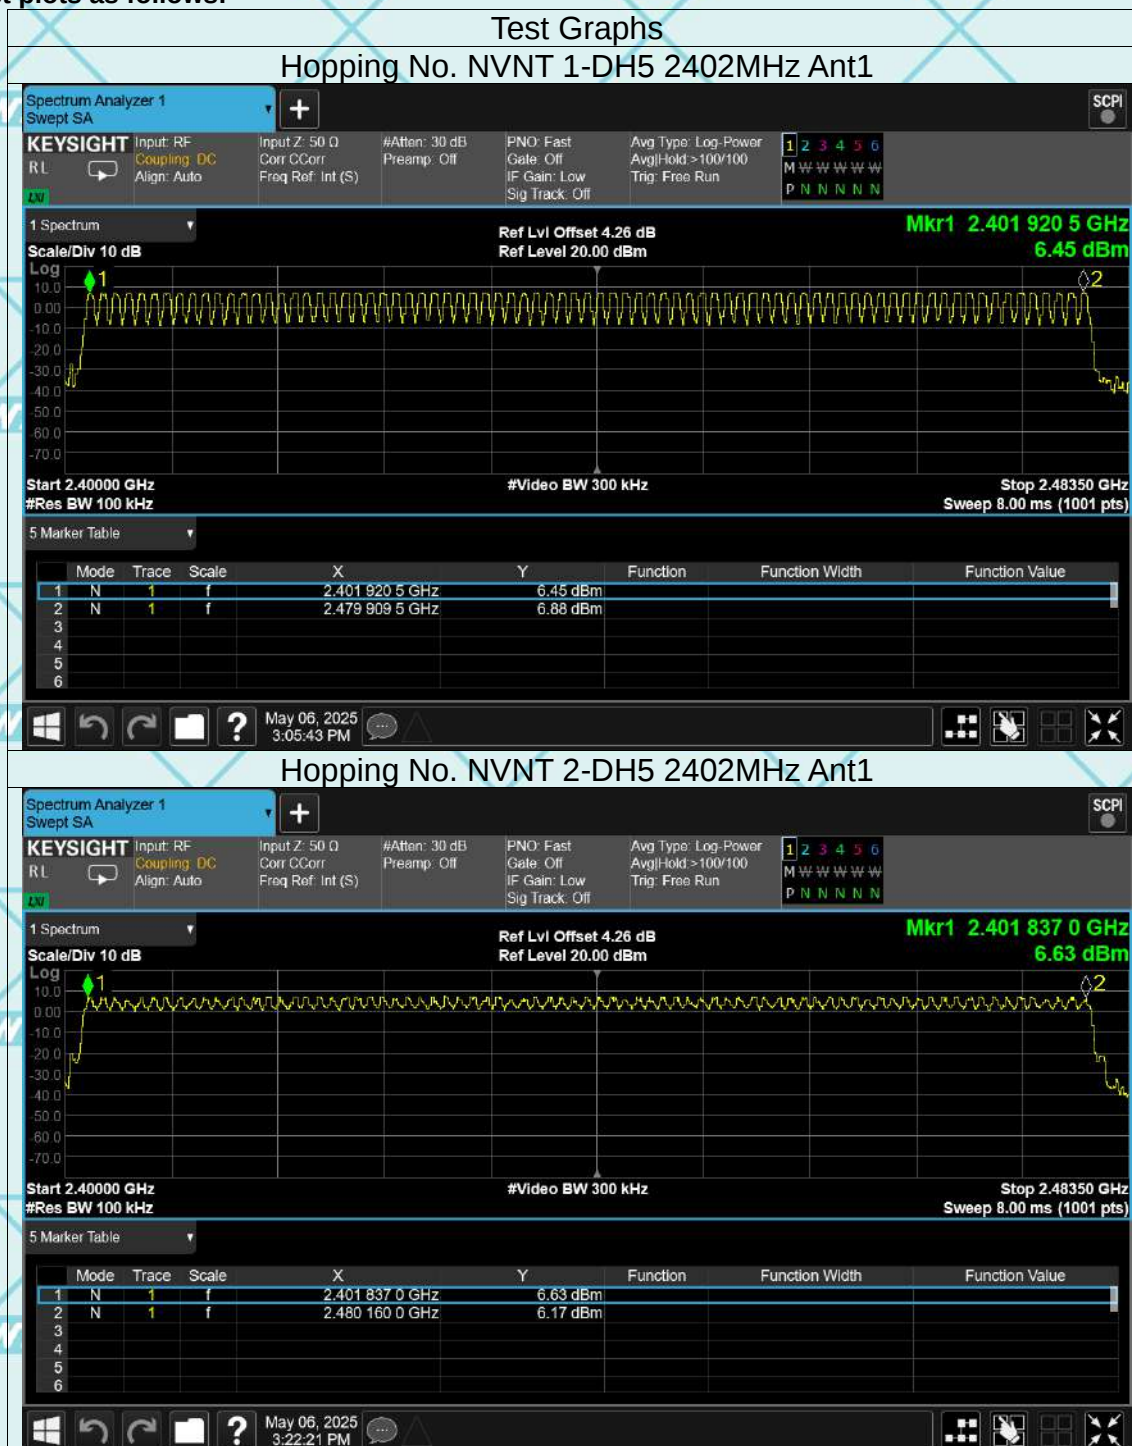


Report No.: WSCT-ANAB-R&E250500035A-BT

Hopping No. NVNT 3-DH5 2402MHz Ant1

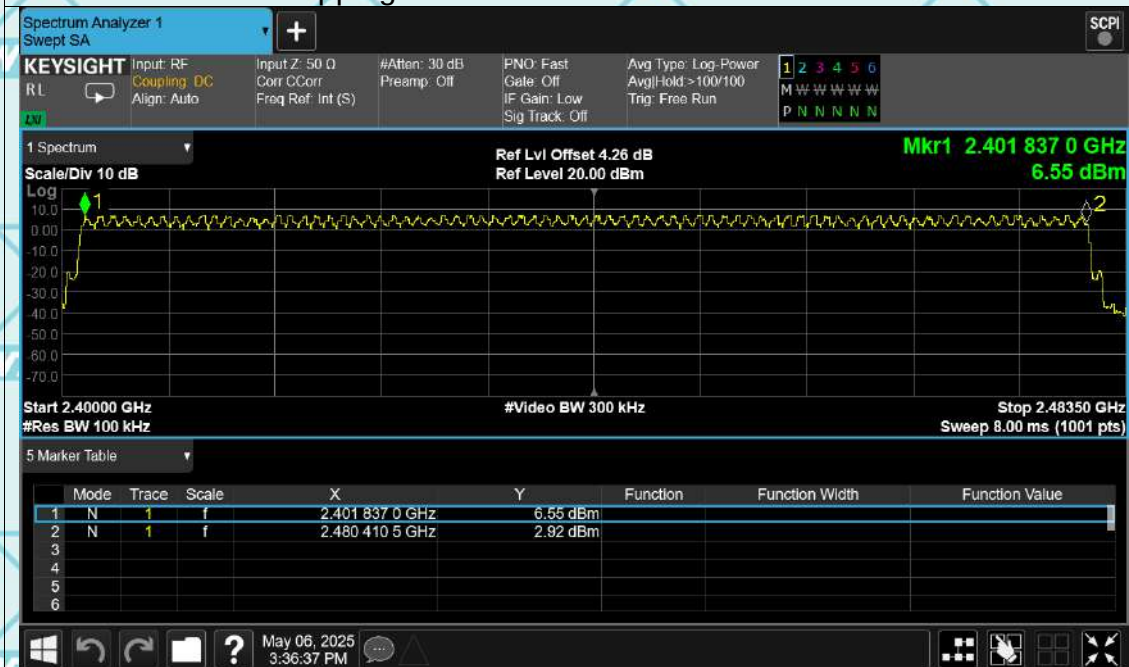

6.7. Dwell Time

6.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 6. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250500035A-BT

6.7.2. Test Data

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2402	0.382	121.094	317	31600	400	Pass
1-DH1	2441	0.382	121.476	318	31600	400	Pass
1-DH1	2480	0.382	121.094	317	31600	400	Pass
1-DH3	2402	1.639	267.157	163	31600	400	Pass
1-DH3	2441	1.638	248.976	152	31600	400	Pass
1-DH3	2480	1.638	276.822	169	31600	400	Pass
1-DH5	2402	2.887	317.57	110	31600	400	Pass
1-DH5	2441	2.885	328.89	114	31600	400	Pass
1-DH5	2480	2.886	277.056	96	31600	400	Pass

Note: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.

For DH1, With channel hopping rate $(1600 / 2 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 2 / 79) \times (0.4 \times 79) = 320$ hops

For DH3, With channel hopping rate $(1600 / 4 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 4 / 79) \times (0.4 \times 79) = 160$ hops

For DH5, With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops

2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:

Test Graphs

Dwell NVNT 1-DH1 2402MHz Ant1 One Burst



Dwell NVNT 1-DH1 2402MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst



Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated




Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH1 2480MHz Ant1 One Burst



Dwell NVNT 1-DH1 2480MHz Ant1 Accumulated

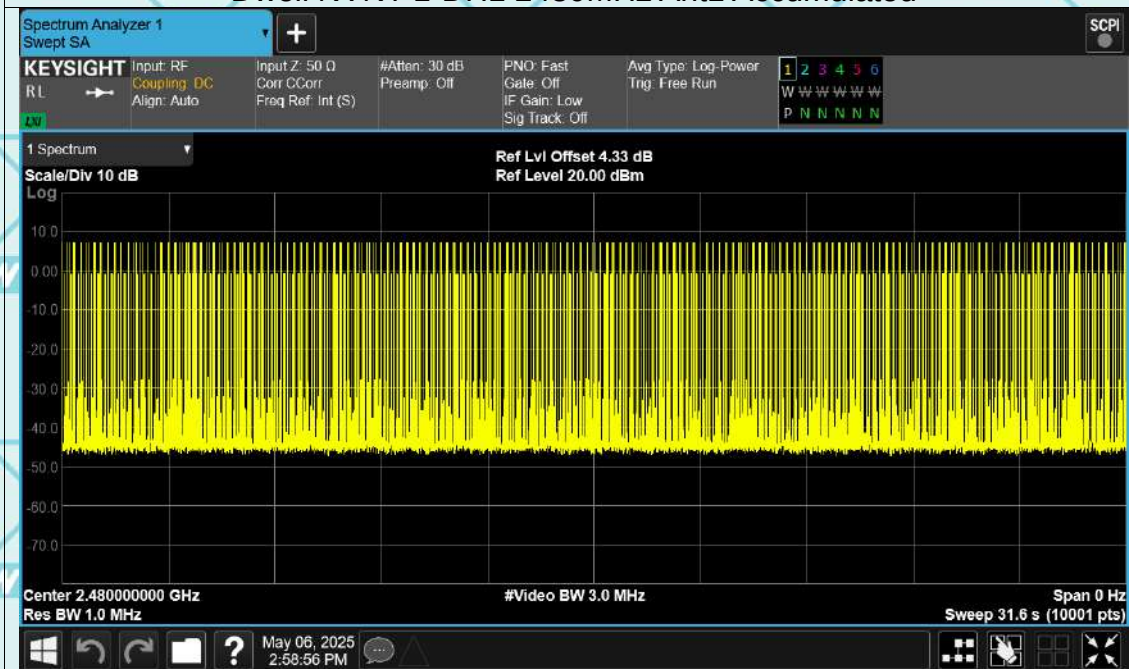

Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH3 2402MHz Ant1 One Burst



Dwell NVNT 1-DH3 2402MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst



Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH3 2480MHz Ant1 One Burst



Dwell NVNT 1-DH3 2480MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst



Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated




Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst



Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

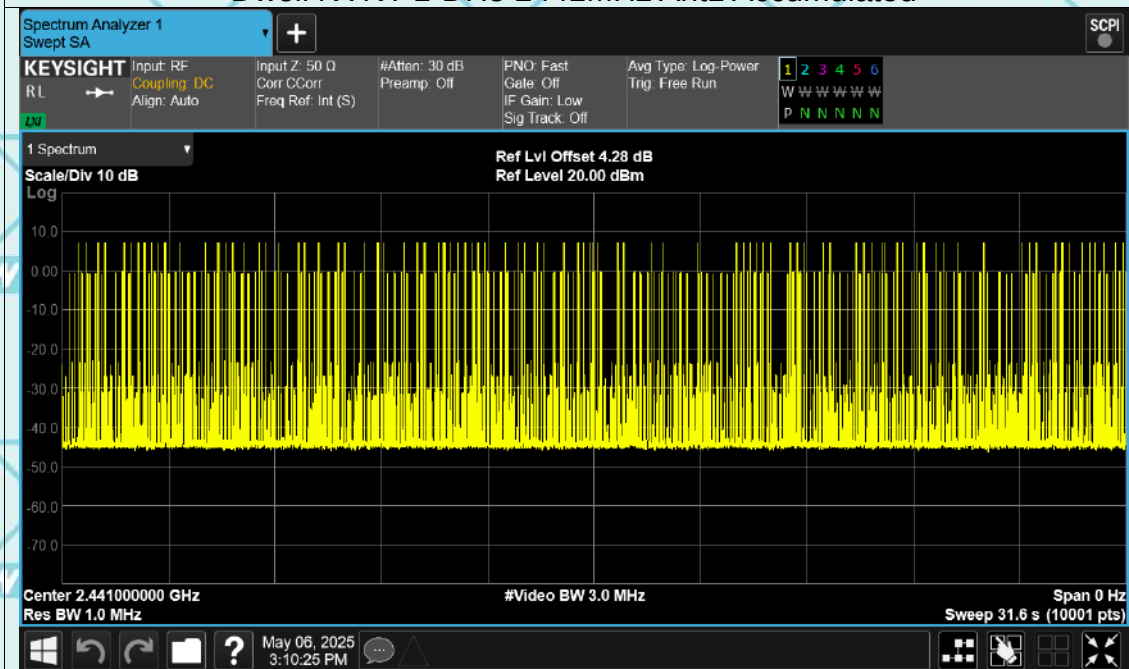

Report No.: WSCT-ANAB-R&E250500035A-BT

Dwell NVNT 1-DH5 2480MHz Ant1 One Burst



Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated



6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

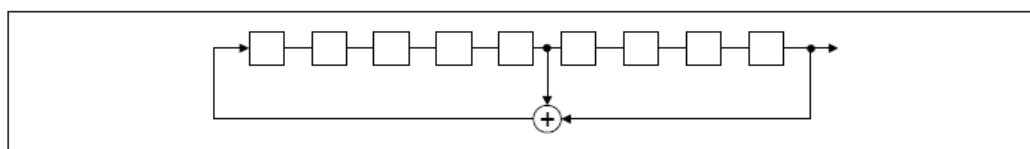

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

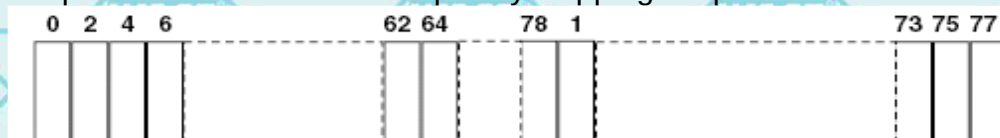

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 The diagram shows a Spectrum Analyzer (green box) connected via a cable to an EUT (yellow box). The Spectrum Analyzer is labeled 'Spectrum Analyzer' and the EUT is labeled 'EUT'.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250500035A-BT

Test Data


GFSK Modulation (the worst case)

Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref



Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

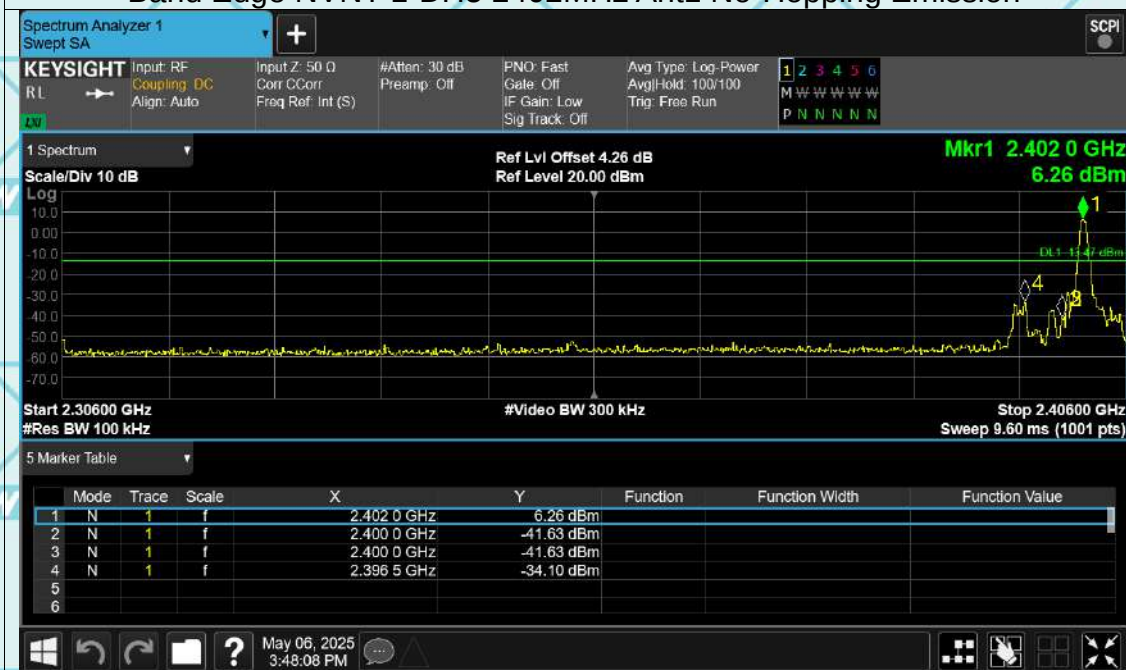

Report No.: WSCT-ANAB-R&E250500035A-BT

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission



6.10. Conducted Spurious Emission Measurement


6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250500035A-BT

Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

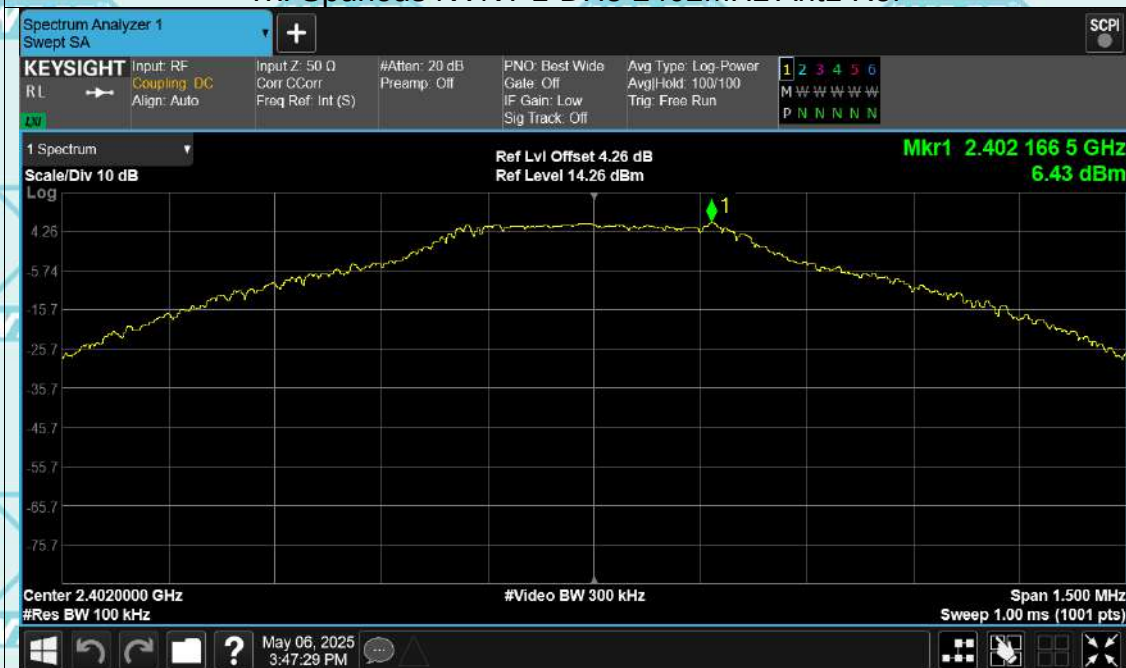

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

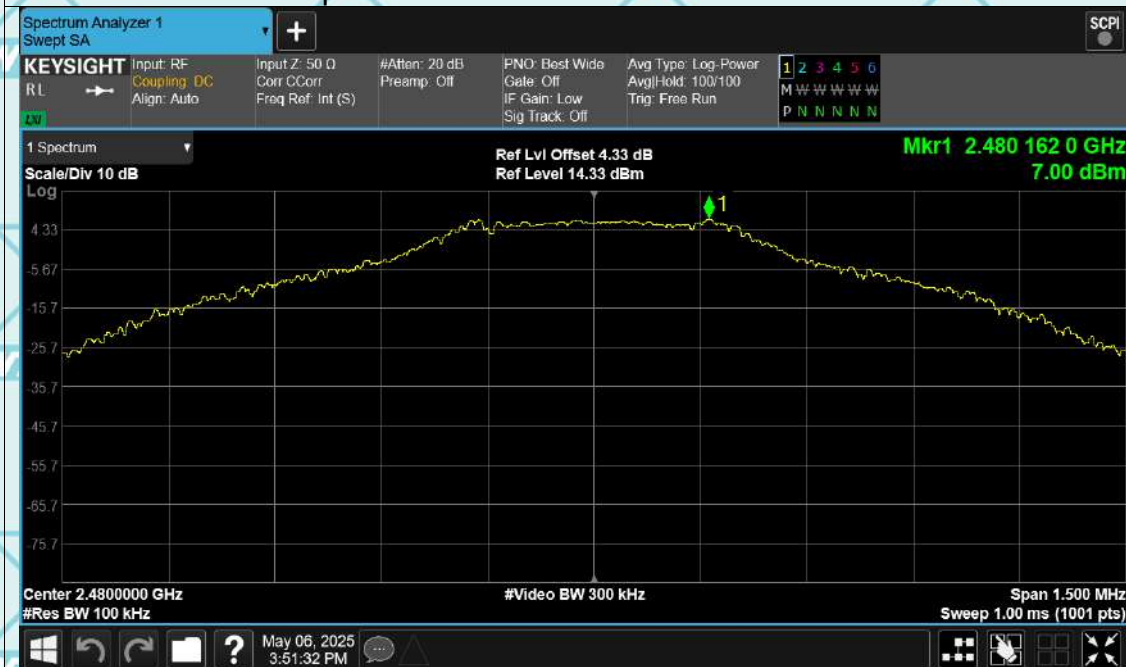

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref



Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref



Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission




Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

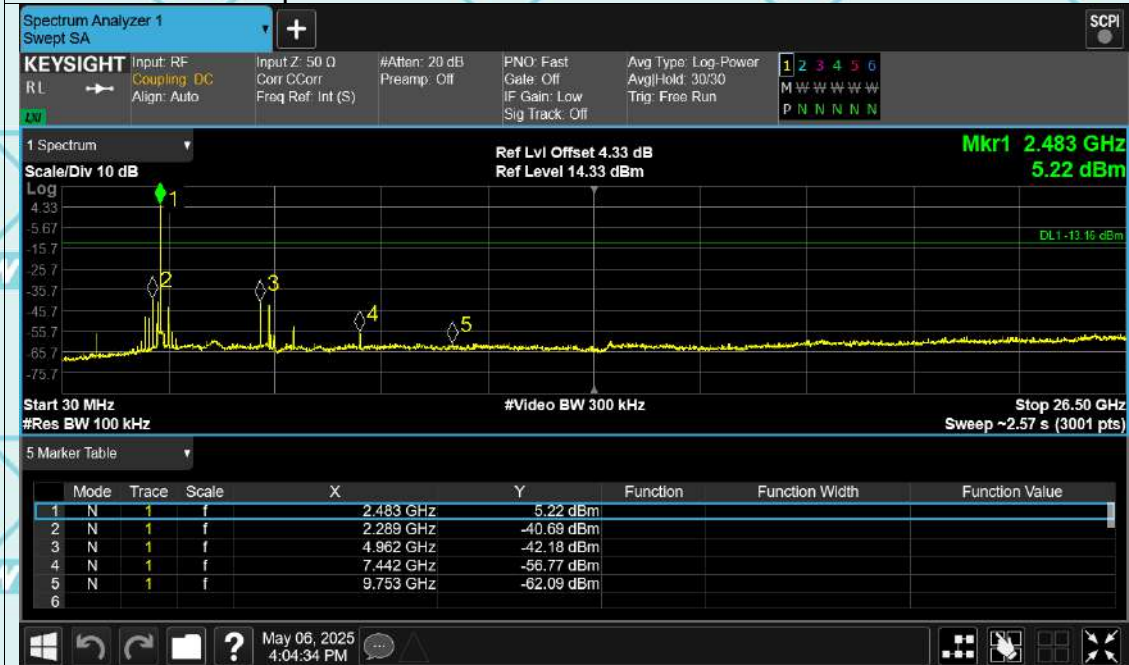

Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

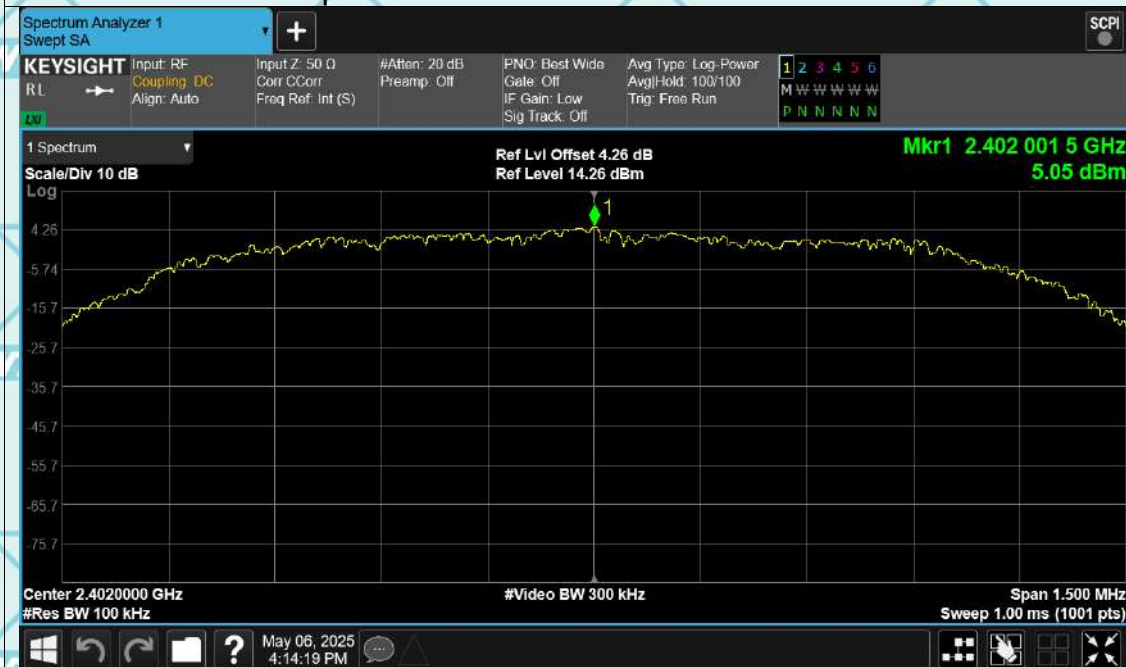


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

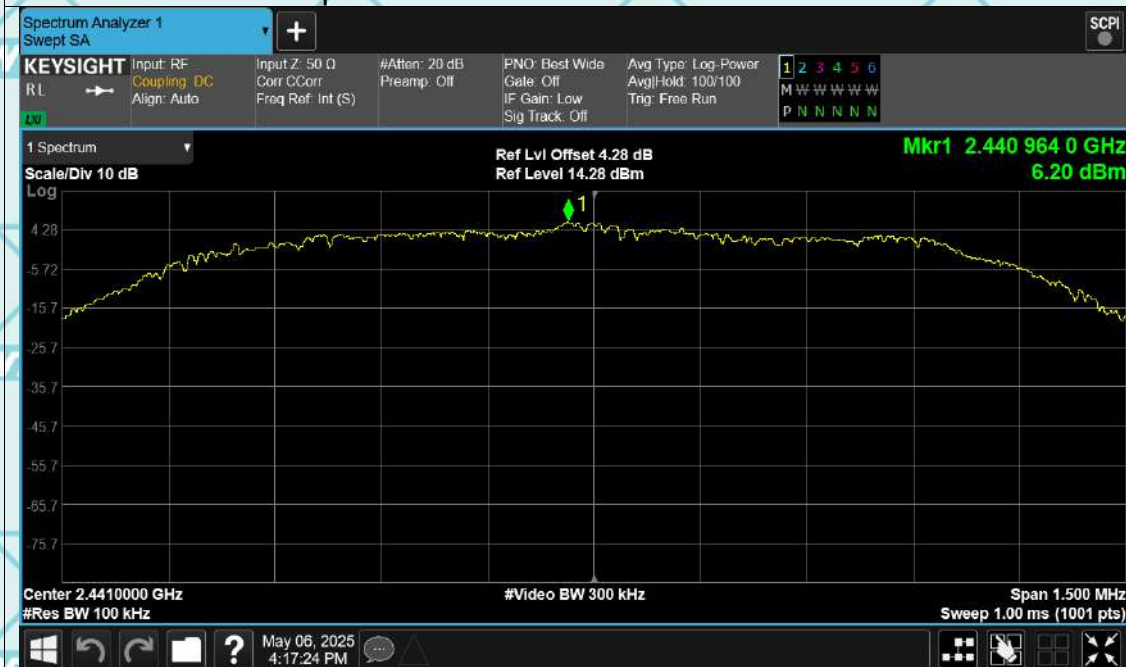

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E250500035A-BT

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission





Report No.: WSCT-ANAB-R&E250500035A-BT

6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

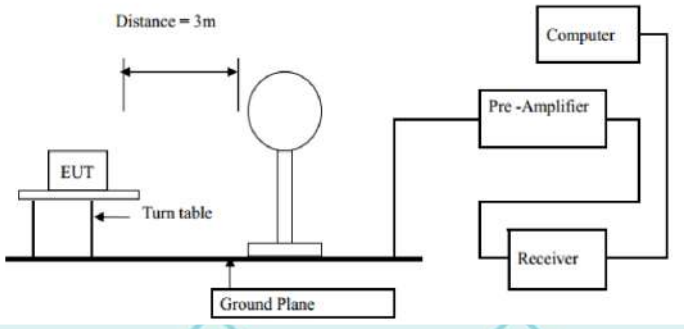Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10:2014			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:	Remark			
	Quasi-peak Value			
	Quasi-peak Value			
	Quasi-peak Value			
	Peak Value			
	Average Value			
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)	300	
Test setup:	0.490-1.705	24000/F(KHz)	30	
	1.705-30	30	30	
	30-88	100	3	
	88-216	150	3	
	216-960	200	3	
	Above 960	500	3	
Test setup:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
For radiated emissions below 30MHz				
				
30MHz to 1GHz				

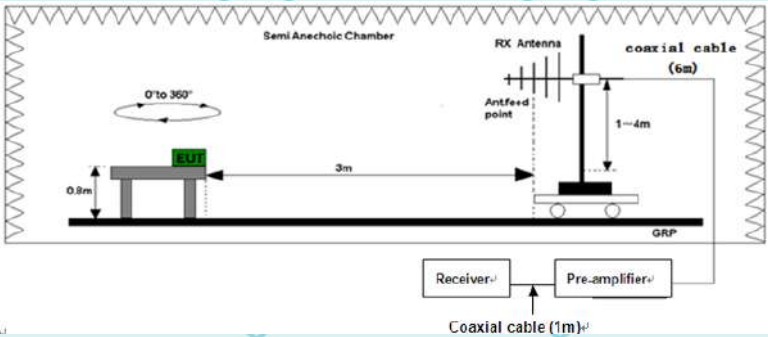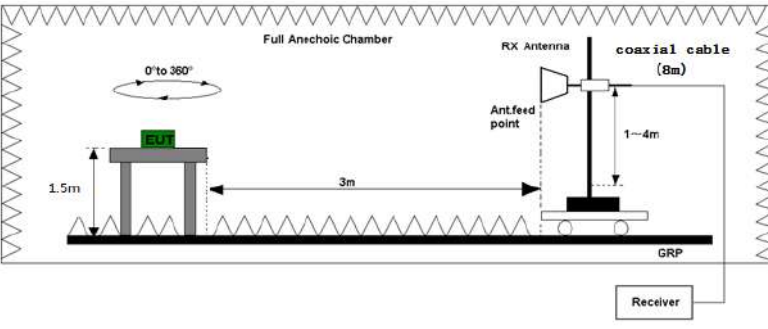	 Above 1GHz 
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which

Report No.: WSCT-ANAB-R&E250500035A-BT

	maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS


Report No.: WSCT-ANAB-R&E250500035A-BT

6.11.2. Test Data

Please refer to following diagram for individual

Below 1GHz


Horizontal:

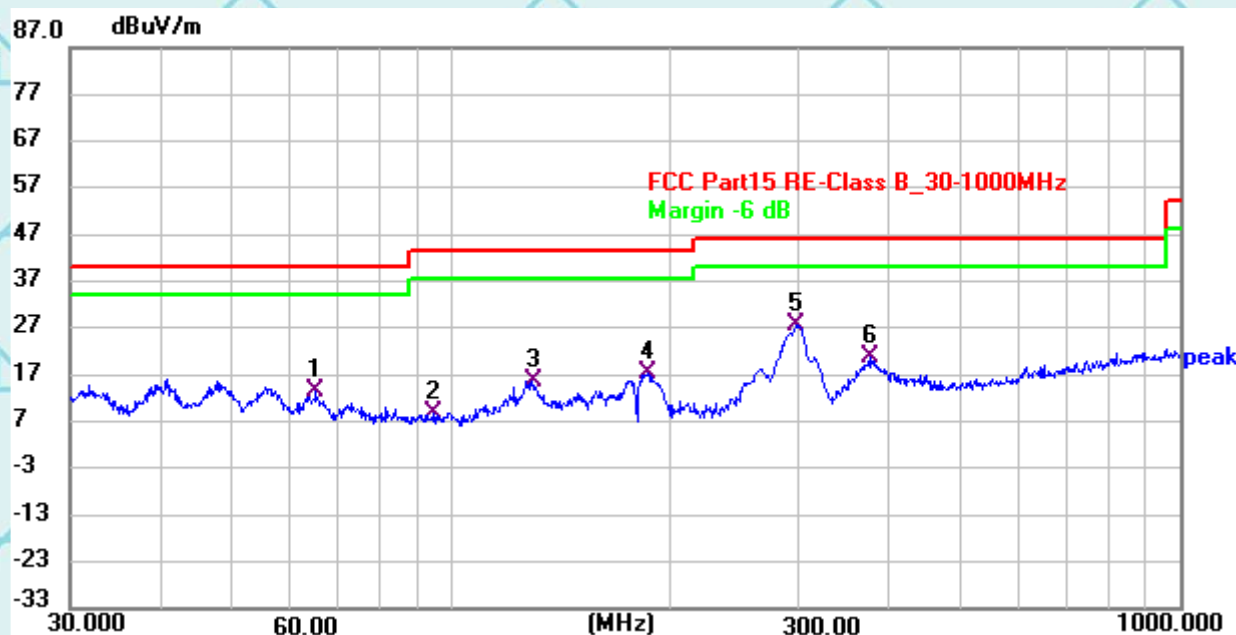

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	65.5440	34.71	-21.41	13.30	40.00	-26.70	QP
2	94.8016	33.05	-24.12	8.93	43.50	-34.57	QP
3	129.1276	36.45	-20.60	15.85	43.50	-27.65	QP
4	186.4409	40.25	-22.69	17.56	43.50	-25.94	QP
5 *	299.1847	47.68	-20.22	27.46	46.00	-18.54	QP
6	376.4332	39.07	-18.33	20.74	46.00	-25.26	QP

Report No.: WSCT-ANAB-R&E250500035A-BT

Vertical:

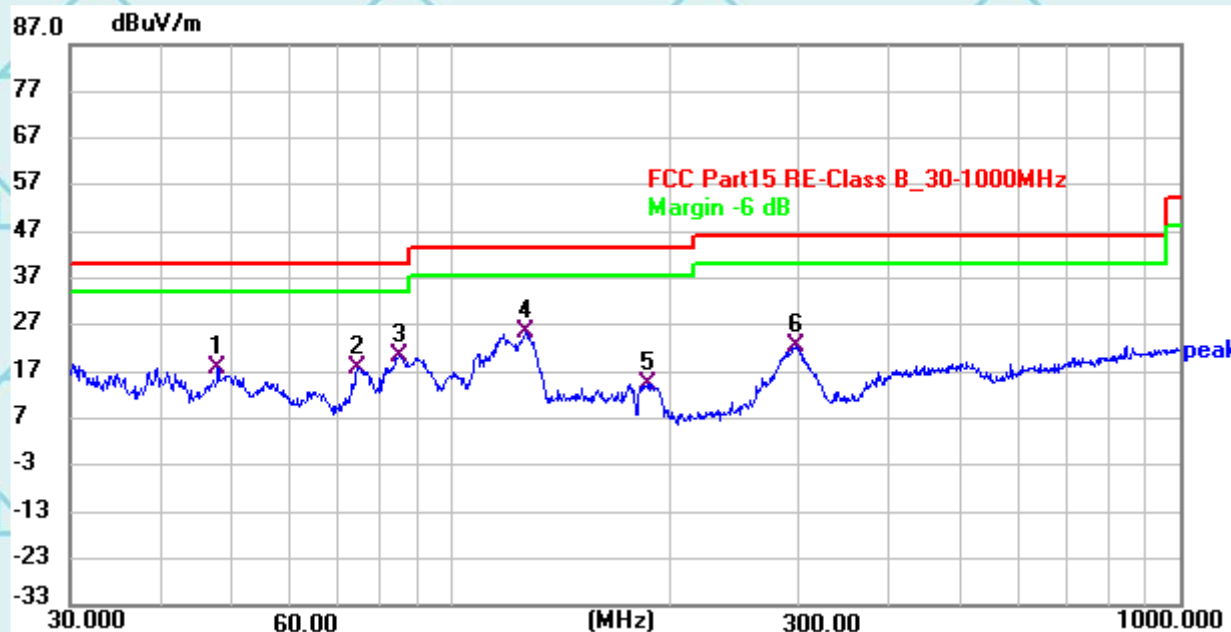

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.9730	36.68	-19.02	17.66	40.00	-22.34	QP
2	74.5588	41.16	-23.37	17.79	40.00	-22.21	QP
3	85.2233	44.47	-23.91	20.56	40.00	-19.44	QP
4 *	126.8835	46.40	-20.80	25.60	43.50	-17.90	QP
5	186.5226	37.09	-22.69	14.40	43.50	-29.10	QP
6	298.7915	42.73	-20.24	22.49	46.00	-23.51	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E250500035A-BT

Above 1GHz

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz

Horizontal:



Susputed Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1404.3750	39.64	-0.52	40.16	74	-34.36	8.9	Horizontal	PK	Pass
1	1404.3750	31.22	-0.52	31.74	54	-22.78	8.9	Horizontal	AV	Pass
2	2407.5000	47.18	7.6	39.58	74	-26.82	33.2	Horizontal	PK	Pass
2	2407.5000	38.61	7.6	31.01	54	-15.39	33.2	Horizontal	AV	Pass
3	5743.7500	68.2	21.16	47.04	74	-5.8	356.2	Horizontal	PK	Pass
3	5743.7500	48.4	21.16	27.24	54	-5.6	356.2	Horizontal	AV	Pass
4	7614.0000	42.02	36.42	5.6	74	-31.98	60.2	Horizontal	PK	Pass
4	7614.0000	34.12	36.42	-2.3	54	-19.88	60.2	Horizontal	AV	Pass
5	11026.5000	45.9	39.48	6.42	74	-28.1	241.9	Horizontal	PK	Pass
5	11026.5000	39.05	39.48	-0.43	54	-14.95	241.9	Horizontal	AV	Pass
6	17995.5000	54.3	46.47	7.83	74	-19.7	257.4	Horizontal	PK	Pass
6	17995.5000	47.06	46.47	0.59	54	-6.94	257.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250500035A-BT

Vertical:



Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1385.6250	39.32	-0.59	39.91	74	-34.68	359	Vertical	PK	Pass
1	1385.6250	30.98	-0.59	31.57	54	-23.02	359	Vertical	AV	Pass
2	2463.1250	51.27	7.78	43.49	74	-22.73	144.3	Vertical	PK	Pass
2	2463.1250	37.34	7.78	29.56	54	-16.66	144.3	Vertical	AV	Pass
3	5963.7500	63.41	21.89	41.52	74	-10.59	22.5	Vertical	PK	Pass
3	5963.7500	48.94	21.89	27.05	54	-5.06	22.5	Vertical	AV	Pass
4	6814.5000	40.6	35	5.6	74	-33.4	317.3	Vertical	PK	Pass
4	6814.5000	32.42	35	-2.58	54	-21.58	317.3	Vertical	AV	Pass
5	10759.5000	45.85	39.16	6.69	74	-28.15	355.8	Vertical	PK	Pass
5	10759.5000	38.32	39.16	-0.84	54	-15.68	355.8	Vertical	AV	Pass
6	17878.5000	54.59	45.69	8.9	74	-19.41	1.4	Vertical	PK	Pass
6	17878.5000	46.15	45.69	0.46	54	-7.85	1.4	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250500035A-BT

Middle channel: 2441MHz

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1107.5000	38.38	-2.35	40.73	74	-35.62	165.8	Horizontal	PK	Pass
1	1107.5000	28.99	-2.35	31.34	54	-25.01	165.8	Horizontal	AV	Pass
2	2438.7500	47.69	7.7	39.99	74	-26.31	134.7	Horizontal	PK	Pass
2	2438.7500	38.55	7.7	30.85	54	-15.45	134.7	Horizontal	AV	Pass
3	5807.5000	62.43	20.78	41.65	74	-11.57	-0.1	Horizontal	PK	Pass
3	5807.5000	47.98	20.78	27.2	54	-6.02	-0.1	Horizontal	AV	Pass
4	7132.5000	40.31	35.7	4.61	74	-33.69	265.9	Horizontal	PK	Pass
4	7132.5000	33.55	35.7	-2.15	54	-20.45	265.9	Horizontal	AV	Pass
5	11395.5000	46.2	39.14	7.06	74	-27.8	360.1	Horizontal	PK	Pass
5	11395.5000	38.62	39.14	-0.52	54	-15.38	360.1	Horizontal	AV	Pass
6	17923.5000	53.29	45.99	7.3	74	-20.71	220.5	Horizontal	PK	Pass
6	17923.5000	46.26	45.99	0.27	54	-7.74	220.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250500035A-BT

Vertical:




Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1238.7500	38.86	-1.65	40.51	74	-35.14	0	Vertical	PK	Pass
1	1238.7500	29.68	-1.65	31.33	54	-24.32	0	Vertical	AV	Pass
2	2408.1250	46.86	7.6	39.26	74	-27.14	356.9	Vertical	PK	Pass
2	2408.1250	38.68	7.6	31.08	54	-15.32	356.9	Vertical	AV	Pass
3	5936.8750	58.86	22.03	36.83	74	-15.14	248.4	Vertical	PK	Pass
3	5936.8750	48.91	22.03	26.88	54	-5.09	248.4	Vertical	AV	Pass
4	8002.5000	41.47	37	4.47	74	-32.53	337.6	Vertical	PK	Pass
4	8002.5000	33.89	37	-3.11	54	-20.11	337.6	Vertical	AV	Pass
5	10608.0000	45.65	38.95	6.7	74	-28.35	59	Vertical	PK	Pass
5	10608.0000	38.54	38.95	-0.41	54	-15.46	59	Vertical	AV	Pass
6	17791.5000	54.03	45.1	8.93	74	-19.97	231.2	Vertical	PK	Pass
6	17791.5000	45.64	45.1	0.54	54	-8.36	231.2	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250500035A-BT

High channel: 2480MHz

Horizontal:

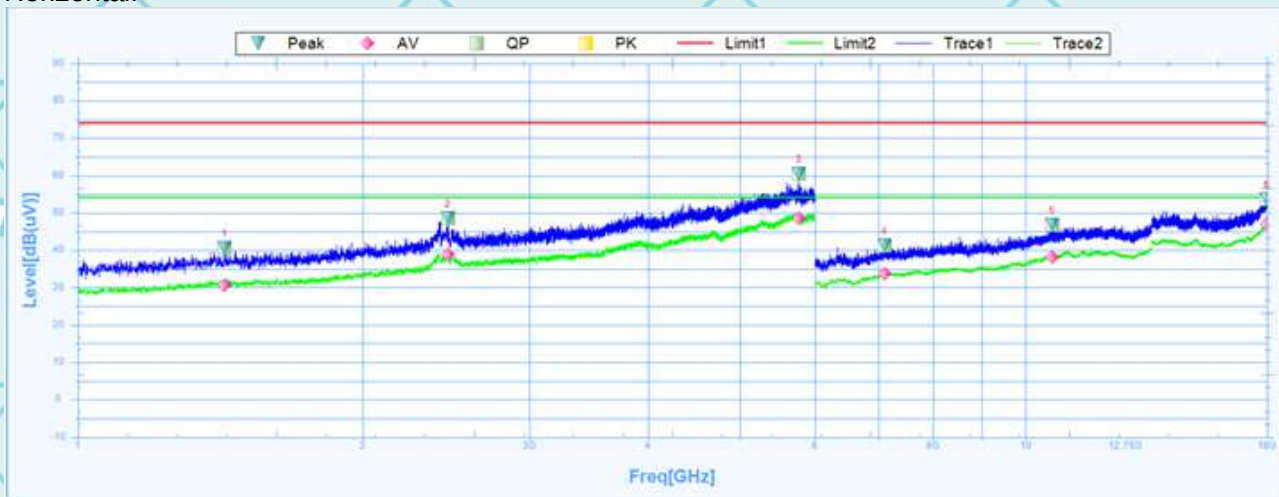

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1428.7500	40.63	-0.46	41.09	74	-33.37	313.7	Horizontal	PK	Pass
1	1428.7500	30.61	-0.46	31.07	54	-23.39	313.7	Horizontal	AV	Pass
2	2458.7500	48.47	7.77	40.7	74	-25.53	360.1	Horizontal	PK	Pass
2	2458.7500	38.79	7.77	31.02	54	-15.21	360.1	Horizontal	AV	Pass
3	5772.5000	60.43	20.99	39.44	74	-13.57	360.1	Horizontal	PK	Pass
3	5772.5000	48.54	20.99	27.55	54	-5.46	360.1	Horizontal	AV	Pass
4	7105.5000	41.25	35.66	5.59	74	-32.75	16.6	Horizontal	PK	Pass
4	7105.5000	33.65	35.66	-2.01	54	-20.35	16.6	Horizontal	AV	Pass
5	10672.5000	46.87	39.04	7.83	74	-27.13	250.3	Horizontal	PK	Pass
5	10672.5000	38.24	39.04	-0.8	54	-15.76	250.3	Horizontal	AV	Pass
6	17988.0000	53.57	46.42	7.15	74	-20.43	243.1	Horizontal	PK	Pass
6	17988.0000	47.1	46.42	0.68	54	-6.9	243.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250500035A-BT

Vertical:



Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1484.3750	40.88	-0.23	41.11	74	-33.12	89.4	Vertical	PK	Pass
1	1484.3750	30.75	-0.23	30.98	54	-23.25	89.4	Vertical	AV	Pass
2	2413.7500	49.35	7.62	41.73	74	-24.65	240	Vertical	PK	Pass
2	2413.7500	37.36	7.62	29.74	54	-16.64	240	Vertical	AV	Pass
3	5929.3750	58.52	21.94	36.58	74	-15.48	-0.1	Vertical	PK	Pass
3	5929.3750	49.2	21.94	27.26	54	-4.8	-0.1	Vertical	AV	Pass
4	7192.5000	41.68	35.79	5.89	74	-32.32	185.8	Vertical	PK	Pass
4	7192.5000	33.34	35.79	-2.45	54	-20.66	185.8	Vertical	AV	Pass
5	10288.5000	44.95	38.5	6.45	74	-29.05	226.5	Vertical	PK	Pass
5	10288.5000	37.32	38.5	-1.18	54	-16.68	226.5	Vertical	AV	Pass
6	17947.5000	53.61	46.15	7.46	74	-20.39	71	Vertical	PK	Pass
6	17947.5000	46.74	46.15	0.59	54	-7.26	71	Vertical	AV	Pass

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown “-“ in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
5. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	62.82	-8.76	54.06	74	19.94	H	PK
2387	54.53	-8.76	45.77	54	8.23	H	AV
2387	62.87	-8.73	54.14	74	19.86	V	PK
2387	54.93	-8.73	46.20	54	7.80	V	AV
2390	65.04	-8.76	56.28	74	17.72	H	PK
2390	54.77	-8.76	46.01	54	7.99	H	AV
2390	63.78	-8.73	55.05	74	18.95	V	PK
2390	54.64	-8.73	45.91	54	8.09	V	AV
High Channel							
2483.5	63.84	-8.17	55.67	74	18.33	H	PK
2483.5	55.07	-8.17	46.90	54	7.10	H	AV
2483.5	64.36	-8.17	56.19	74	17.81	V	PK
2483.5	55.20	-8.17	47.03	54	6.97	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E250500035A-BT

7. Test Setup Photographs

Please refer to the attachment "Set Up Photos-15C" for relevant test setup photos

*******END OF REPORT*******