

RF Test Report

Applicant : PepperlFuchs SE

Product Name : Phone

Trade Name :  **PEPPERL+FUCHS**

Model Number : Smart-Ex 03

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Apr. 20, 2023

Test Period : May 16 ~ Nov. 23, 2023

Issued Date : Nov. 28, 2023

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm Registration Number: 226252 (Bade test site)
Test Firm Registration Number: 191812 (Wugu test site)

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Nov. 28, 2023	Initial Issue	Nicole Chu

Verification of Compliance

Applicant : PepperlFuchs SE

Product Name : Phone

Trade Name :  **PEPPERL+FUCHS**

Model Number : Smart-Ex 03

FCC ID : 2AXZAS03GR01

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology	15
3.1.	Mode of Operation	15
3.2.	EUT Test Step	17
3.3.	Test Site Environment	6
3.4.	Configuration of Test System Details	18
3.5.	Test Instruments.....	19
4	Measurement Procedure	22
4.1.	AC Power Conducted Emission Measurement	22
4.2.	Transmitter Radiated Emissions Measurement.....	24
4.3.	Maximum Conducted Output Power Measurement	29
4.4.	26 dB RF Bandwidth Measurement	30
4.5.	6 dB RF Bandwidth Measurement	31
4.6.	Maximum Power Spectral Density Measurement.....	32
4.7.	Automatically discontinue transmission.....	34
4.8.	Antenna Requirement	34
5	Test Results	36
5.1.	Conducted Emission	36
5.2.	Radiated Emission Measurement	38
5.3.	Conducted Test Results	521

Appendix A. Test Data

Appendix B. Test Plots

Appendix C. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(b)(9) 15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power	PASS	---
15.407(a)	26 dB RF Bandwidth	Reference	---
15.407(e)	6 dB RF Bandwidth	PASS	---
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(c)	Automatically discontinue transmission	PASS	---
15.407(a) 15.203	Antenna Requirement	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☒ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: ☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Frequency	Uncertainty			
		BD		WG	
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB		2.6 dB	
Conducted Output Power		1.1 dB		1.1 dB	
RF Bandwidth		4.5 %		4.5 %	
Power Spectral Density		1.1 dB		1.1 dB	
Duty Cycle		1.1 %		1.0 %	
Time Occupancy		1.5 %		1.2 %	
Test Item	Frequency	Uncertainty			
		96601-BD	96603-BD	96602-WG	96603-WG
Radiated Emission	9 kHz ~ 30 MHz	1.9 dB	1.9 dB	1.6 dB	1.6 dB
	30 MHz ~ 1000 MHz	4.9 dB	4.9 dB	4.8 dB	4.8 dB
	1000 MHz ~ 18000 MHz	4.9 dB	5.0 dB	5.0 dB	5.2 dB
	18000 MHz ~ 26500 MHz	4.3 dB	4.4 dB	4.4 dB	4.5 dB
	26500 MHz ~ 40000 MHz	4.5 dB	4.5 dB	4.6 dB	4.5 dB

1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity(except Max. RF Output Power, EIRP).

Applicant	PepperlFuchs SE Lilienthalstrasse 200, Mannheim Germany		
Product Name	Phone		
Trade Name	 PEPPERL+FUCHS		
Model Number	Smart-Ex 03		
Variants Description	Smart-Ex 03 is provided to the end user in two variants, one with camera features and the other as a non-camera variant. The camera modules are also populated in the non-camera variant; only SW deactivation and assembling physical camera opening covers, which are not metal, are required. Therefore, the testing was completed on the DUT with the camera features only.		
FCC ID	2AXZAS03GR01		
Operate Frequency	Frequency Band		Frequency Range (MHz)
	802.11a	U-NII Band 1	5180 – 5240
		U-NII Band 2-A	5260 – 5320
		U-NII Band 2-C	5500 – 5700
		Straddle band	5720
		U-NII Band 3	5745 – 5825
		U-NII Band 4 (5850 - 5895 MHz)	5845 – 5885
	802.11n HT20 / 802.11ac VHT20 / 802.11ax HE20	U-NII Band 1	5180 – 5240
		U-NII Band 2-A	5260 – 5320
		U-NII Band 2-C	5500 – 5700
		Straddle band	5720
		U-NII Band 3	5745 – 5825
		U-NII Band 4 (5850 - 5895 MHz)	5845 – 5885
	802.11n HT40 / 802.11ac VHT40 / 802.11ax HE40	U-NII Band 1	5190 – 5230
		U-NII Band 2-A	5270 – 5310
		U-NII Band 2-C	5510 – 5670
		Straddle band	5710
		U-NII Band 3	5755 – 5795
		U-NII Band 4 (5850 - 5895 MHz)	5835 – 5875

Operate Frequency	Frequency Band		Frequency Range (MHz)	
	802.11ac VHT80 / 802.11ax HE80	U-NII Band 1	5210	
		U-NII Band 2-A	5290	
		U-NII Band 2-C	5530 – 5610	
		Straddle band	5690	
		U-NII Band 3	5775	
		U-NII Band 4 (5850 - 5895 MHz)	5855	
	802.11ac VHT160 / 802.11ax HE160	U-NII Band 1	5250	
		U-NII Band 2-A	5250	
		U-NII Band 2-C	5570	
U-NII Band 3+4		5815		
Modulation Type	OFDM/OFDMA			
Antenna information	Antenna	Type	Max. Gain (dBi)	
	ANT-0	PIFA Type	U-NII Band 1	1.60
			U-NII Band 2-A	1.60
			U-NII Band 2-C	1.60
			U-NII Band 3	1.60
			U-NII Band 4	1.60
	ANT-1	PIFA Type	U-NII Band 1	1.60
			U-NII Band 2-A	1.60
			U-NII Band 2-C	1.60
			U-NII Band 3	1.60
U-NII Band 4			1.60	
Antenna Delivery	Reference section 3.1			
Operate Temp. Range	-20 ~ +60 °C			
EUT Power Rating	3.70 Vdc, 4400 mAh			

Frequency Band		Max. RF Output Power (W)
802.11a	U-NII Band 1	0.116
	U-NII Band 2-A	0.119
	U-NII Band 2-C	0.117
	U-NII Band 3	0.118
	U-NII Band 4 (5850 - 5895 MHz)	0.117
802.11n HT20	U-NII Band 1	0.117
	U-NII Band 2-A	0.120
	U-NII Band 2-C	0.116
	U-NII Band 3	0.117
	U-NII Band 4 (5850 - 5895 MHz)	0.116
802.11n HT40	U-NII Band 1	0.116
	U-NII Band 2-A	0.119
	U-NII Band 2-C	0.117
	U-NII Band 3	0.116
	U-NII Band 4 (5850 - 5895 MHz)	0.117
802.11ac VHT20	U-NII Band 1	0.117
	U-NII Band 2-A	0.120
	U-NII Band 2-C	0.117
	U-NII Band 3	0.117
	U-NII Band 4 (5850 - 5895 MHz)	0.117
802.11ac VHT40	U-NII Band 1	0.114
	U-NII Band 2-A	0.121
	U-NII Band 2-C	0.116
	U-NII Band 3	0.117
	U-NII Band 4 (5850 - 5895 MHz)	0.117
802.11ac VHT80	U-NII Band 1	0.048
	U-NII Band 2-A	0.045
	U-NII Band 2-C	0.119
	U-NII Band 3	0.122
	U-NII Band 4 (5850 - 5895 MHz)	0.111
802.11ac VHT160	U-NII Band 1	0.025
	U-NII Band 2-A	0.019
	U-NII Band 2-C	0.050
	U-NII Band 3+4	0.123

Frequency Band		Max. RF Output Power (W)
802.11ax HE20	U-NII Band 1	0.118
	U-NII Band 2-A	0.121
	U-NII Band 2-C	0.117
	U-NII Band 3	0.117
	U-NII Band 4 (5850 - 5895 MHz)	0.118
802.11ax HE40	U-NII Band 1	0.117
	U-NII Band 2-A	0.117
	U-NII Band 2-C	0.115
	U-NII Band 3	0.117
	U-NII Band 4 (5850 - 5895 MHz)	0.115
802.11ax HE80	U-NII Band 1	0.049
	U-NII Band 2-A	0.045
	U-NII Band 2-C	0.115
	U-NII Band 3	0.116
	U-NII Band 4 (5850 - 5895 MHz)	0.116
802.11ax HE160	U-NII Band 1	0.025
	U-NII Band 2-A	0.019
	U-NII Band 2-C	0.051
	U-NII Band 3+4	0.116

Frequency Band (5.850-5.895 GHz band or spans across 5.725-5.895 GHz)		EIRP (W)
802.11a	U-NII Band 4 (5850 - 5895 MHz)	0.170
802.11n HT20	U-NII Band 4 (5850 - 5895 MHz)	0.335
802.11n HT40	U-NII Band 4 (5850 - 5895 MHz)	0.338
802.11ac VHT20	U-NII Band 4 (5850 - 5895 MHz)	0.339
802.11ac VHT40	U-NII Band 4 (5850 - 5895 MHz)	0.337
802.11ac VHT80	U-NII Band 4 (5850 - 5895 MHz)	0.320
802.11ac VHT160	U-NII Band 4 (5850 - 5895 MHz)	0.356
802.11ax HE20	U-NII Band 4 (5850 - 5895 MHz)	0.340
802.11ax HE40	U-NII Band 4 (5850 - 5895 MHz)	0.332
802.11ax HE80	U-NII Band 4 (5850 - 5895 MHz)	0.334
802.11ax HE160	U-NII Band 4 (5850 - 5895 MHz)	0.334

Beamforming on

Frequency Band		Max. RF Output Power (W)
802.11n HT20	U-NII Band 1	0.054
	U-NII Band 2-A	0.051
	U-NII Band 2-C	0.062
	U-NII Band 3	0.067
	U-NII Band 4 (5850 - 5895 MHz)	0.043
802.11n HT40	U-NII Band 1	0.046
	U-NII Band 2-A	0.044
	U-NII Band 2-C	0.068
	U-NII Band 3	0.059
	U-NII Band 4 (5850 - 5895 MHz)	0.047
802.11ac VHT20	U-NII Band 1	0.055
	U-NII Band 2-A	0.052
	U-NII Band 2-C	0.062
	U-NII Band 3	0.069
	U-NII Band 4 (5850 - 5895 MHz)	0.044
802.11ac VHT40	U-NII Band 1	0.047
	U-NII Band 2-A	0.044
	U-NII Band 2-C	0.072
	U-NII Band 3	0.060
	U-NII Band 4 (5850 - 5895 MHz)	0.047
802.11ac VHT80	U-NII Band 1	0.024
	U-NII Band 2-A	0.021
	U-NII Band 2-C	0.070
	U-NII Band 3	0.049
	U-NII Band 4 (5850 - 5895 MHz)	0.052
802.11ac VHT160	U-NII Band 1	0.011
	U-NII Band 2-A	0.008
	U-NII Band 2-C	0.024
	U-NII Band 3+4	0.040

Frequency Band		Max. RF Output Power (W)
802.11ax HE20	U-NII Band 1	0.056
	U-NII Band 2-A	0.053
	U-NII Band 2-C	0.064
	U-NII Band 3	0.070
	U-NII Band 4 (5850 - 5895 MHz)	0.061
802.11ax HE40	U-NII Band 1	0.053
	U-NII Band 2-A	0.051
	U-NII Band 2-C	0.077
	U-NII Band 3	0.069
	U-NII Band 4 (5850 - 5895 MHz)	0.053
802.11ax HE80	U-NII Band 1	0.024
	U-NII Band 2-A	0.022
	U-NII Band 2-C	0.075
	U-NII Band 3	0.055
	U-NII Band 4 (5850 - 5895 MHz)	0.059
802.11ax HE160	U-NII Band 1	0.012
	U-NII Band 2-A	0.009
	U-NII Band 2-C	0.024
	U-NII Band 3+4	0.040

Frequency Band (5.850-5.895 GHz band or spans across 5.725-5.895 GHz)		EIRP (W)
802.11n HT20	U-NII Band 4 (5850 - 5895 MHz)	0.125
802.11n HT40	U-NII Band 4 (5850 - 5895 MHz)	0.135
802.11ac VHT20	U-NII Band 4 (5850 - 5895 MHz)	0.126
802.11ac VHT40	U-NII Band 4 (5850 - 5895 MHz)	0.136
802.11ac VHT80	U-NII Band 4 (5850 - 5895 MHz)	0.150
802.11ac VHT160	U-NII Band 4 (5850 - 5895 MHz)	0.116
802.11ax HE20	U-NII Band 4 (5850 - 5895 MHz)	0.177
802.11ax HE40	U-NII Band 4 (5850 - 5895 MHz)	0.154
802.11ax HE80	U-NII Band 4 (5850 - 5895 MHz)	0.171
802.11ax HE160	U-NII Band 4 (5850 - 5895 MHz)	0.117

Equipment Type		
Outdoor access point	point-to-point	---
	point-to-multipoint	---
Indoor access point		V
Fixed point-to-point access points		---
Client devices		---

WIFI 5G

5150 MHz ~5250 MHz(UNII-1):

BW 20M	CH	36	40	44	48
	Freq. (MHz)	5180	5200	5220	5240
BW 40M	CH	38		46	
	Freq. (MHz)	5190		5230	
BW 80M	CH	42			
	Freq. (MHz)	5210			

5250 MHz ~5350 MHz(UNII-2A):

BW 20M	CH	52	56	60	64
	Freq. (MHz)	5260	5280	5300	5320
BW 40M	CH	54		62	
	Freq. (MHz)	5270		5310	
BW 80M	CH	58			
	Freq. (MHz)	5290			
BW 160M	CH	50			
	Freq. (MHz)	5250			

5470 MHz ~5725 MHz(UNII-2C):

BW 20M	CH	100	104	108	112	116	120	124	128	132	136	140	144
	Freq. (MHz)	5500	5520	5540	5560	5580	5600	5620	5640	5660	5680	5700	5720
BW 40M	CH	102		110		118		126		134		142	
	Freq. (MHz)	5510		5550		5590		5630		5670		5710	
BW 80M	CH	106				122				138			
	Freq. (MHz)	5530				5610				5690			
BW 160M	CH	114								NA			
	Freq. (MHz)	5570											

5725 MHz ~5850 MHz(UNII-3):

BW 20M	CH	149	153	157	161	165
	Freq. (MHz)	5745	5765	5785	5805	5825
BW 40M	CH	151		159		NA
	Freq. (MHz)	5755		5795		
BW 80M	CH	155				
	Freq. (MHz)	5775				

5850 MHz ~5895 MHz(UNII-4):

BW 20M	CH	NA	169	173	177
	Freq. (MHz)		5845	5865	5885
BW 40M	CH	167		175	
	Freq. (MHz)	5835		5875	
BW 80M	CH	171			
	Freq. (MHz)	5855			
BW 160M	CH	163			
	Freq. (MHz)	5815			

Note: 5850~5895 MHz is not available for operation in Canada.

3 Test Methodology

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11a	V
802.11n HT20	
802.11n HT40	
802.11ac VHT20	
802.11ac VHT40	
802.11ac VHT80	
802.11ac VHT160	
802.11ax HE20	V
802.11ax HE40	V
802.11ax HE80	V
802.11ax HE160	V

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Z axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: This product supports normal mode and Beamforming on mode. According to power table, the normal mode is worst power. So, normal mode has to test and record results for Conducted.

Note 2: Investigation has been done on all the possible configurations for searching the worst cases (HE covers HT /VHT). The table is a list of the test modes show in this test report.

Note 3: 802.11ax only support Full RU.

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11a	V	V	V
802.11n HT20	V	V	V
802.11n HT40	V	V	V
802.11ac VHT20	V	V	V
802.11ac VHT40	V	V	V
802.11ac VHT80	V	V	V
802.11ac VHT160	V	V	V
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11ax HE80	V	V	V
802.11ax HE160	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11a	2TX (CDD/Beamforming on)	6	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
			U-NII Band 4 (5850 - 5895 MHz)	169, 173, 177
802.11n HT20	2TX (MIMO/Beamforming on)	13	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
			U-NII Band 4 (5850 - 5895 MHz)	169, 173, 177
802.11n HT40	2TX (MIMO/Beamforming on)	27	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134, 142
			U-NII Band 3	142, 151, 159
			U-NII Band 4 (5850 - 5895 MHz)	167, 175
802.11ac VHT20	2TX (MIMO/Beamforming on)	13	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
			U-NII Band 4 (5850 - 5895 MHz)	169, 173, 177
802.11ac VHT40	2TX (MIMO/Beamforming on)	27	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134, 142
			U-NII Band 3	142, 151, 159
			U-NII Band 4 (5850 - 5895 MHz)	167, 175
802.11ac VHT80	2TX (MIMO/Beamforming on)	58.6	U-NII Band 1	42
			U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
			U-NII Band 4 (5850 - 5895 MHz)	171
802.11ac VHT160	2TX (MIMO/Beamforming on)	117	U-NII Band 1	50
			U-NII Band 2-A	50
			U-NII Band 2-C	114
			U-NII Band 3+4	163

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11ax HE20	2TX (MIMO/Beamforming on)	MCS 0	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
			U-NII Band 4 (5850 - 5895 MHz)	169, 173, 177
802.11ax HE40	2TX (MIMO/Beamforming on)	MCS 0	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134, 142
			U-NII Band 3	142, 151, 159
802.11ax HE80	2TX (MIMO/Beamforming on)	MCS 0	U-NII Band 4 (5850 - 5895 MHz)	167, 175
			U-NII Band 1	42
			U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
802.11ax HE160	2TX (MIMO/Beamforming on)	MCS 0	U-NII Band 4 (5850 - 5895 MHz)	171
			U-NII Band 1	50
			U-NII Band 2-A	50
			U-NII Band 2-C	114
			U-NII Band 3+4	163

3.2. EUT Test Step


The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.


1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

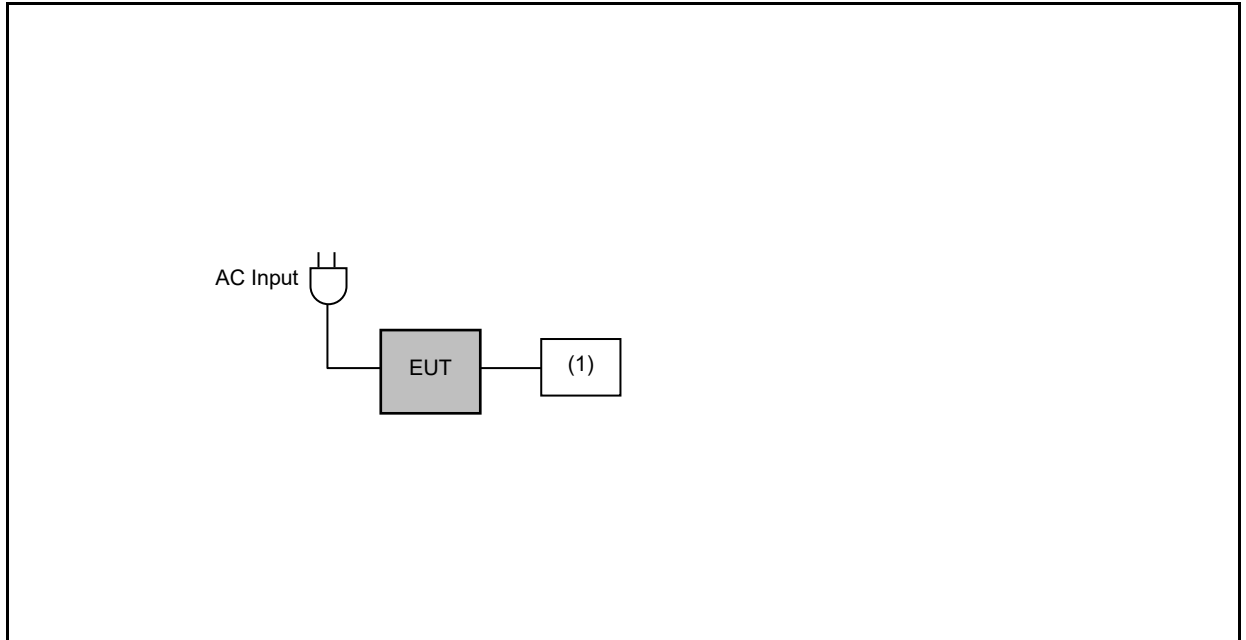

Radiated Emissions

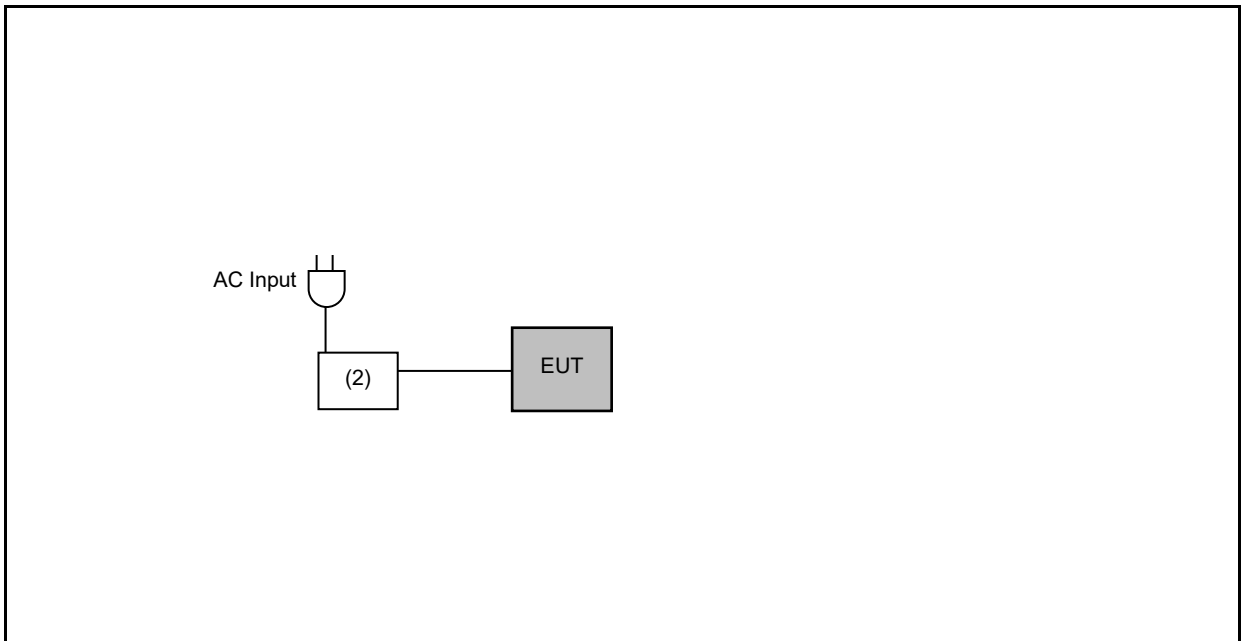

	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Headset microphone	YUJI	S350	---	---
(2)	Notebook	HP	HSN-I14C-4	---	---

3.4. Test Instruments

For Conducted Emission
Test Period: Sep. 23, 2023
Testing Engineer: Jayson Hsieh

Test Site		Conduction01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESCI	100367	May 22, 2023	1 year
☒	LISN	R&S	ENV216	101040	Mar. 21, 2023	1 year
☒	LISN	R&S	ENV216	101140	Jan. 12, 2023	1 year
☒	RF Cable	Woken	00100D1380194M	TE-02-03	Jun. 01, 2023	1 year
☒	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

For Conducted
Test Period: May. 16 ~ Nov. 20, 2023
Testing Engineer: Peter Shui, Luke Yang

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Power Sensor	Agilent	N1921A	MY45241957	Nov. 30, 2022	1 year
☒	Power Meter	Agilent	N1911A	MY45101619	Nov. 30, 2022	1 year
☒	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 01, 2022 Sep. 04, 2023	1 year
☒	Power Supply	KEITHLEY	2303	4045290	Jan. 06, 2023	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Sep. 22 ~ Nov. 23, 2023

Testing Engineer: Hung Chou, Kerry Xu, Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 07, 2023	1 year
☒	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9020B	MY60112363	Jan. 13, 2023	1 year
☒	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 07, 2023	1 year
☐	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330 A1F	001	Jul. 24, 2023	1 year
☐	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 19, 2022	1 year
☒	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 24, 2023	1 year
☒	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Sep. 01, 2023	1 year
☐	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Mar. 23, 2023	1 year
☐	Active Loop Antenna (9 kHz~30 MHz)	Schwarzbeck Mess-Elektronik	FMZB 1513-60	1513-60-031	Feb. 21, 2023	1 year
☒	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jun. 26, 2023	1 year
☐	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Jun.13,2023	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 07, 2023	1 year
☐	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 25, 2022	1 year
☒	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Jul. 21, 2023	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions
 Test Period: Sep. 22 ~ Nov. 23, 2023
 Testing Engineer: Hung Chou, Kerry Xu, Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 05, 2022	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 10, 2023	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 10, 2023	1 year
☒	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 10, 2023	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 20, 2023	2 years
☐	Power Supply	KEITHLEY	2303	4045290	Jan. 06, 2023	1 year
☒	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.


4 Measurement Procedure

4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

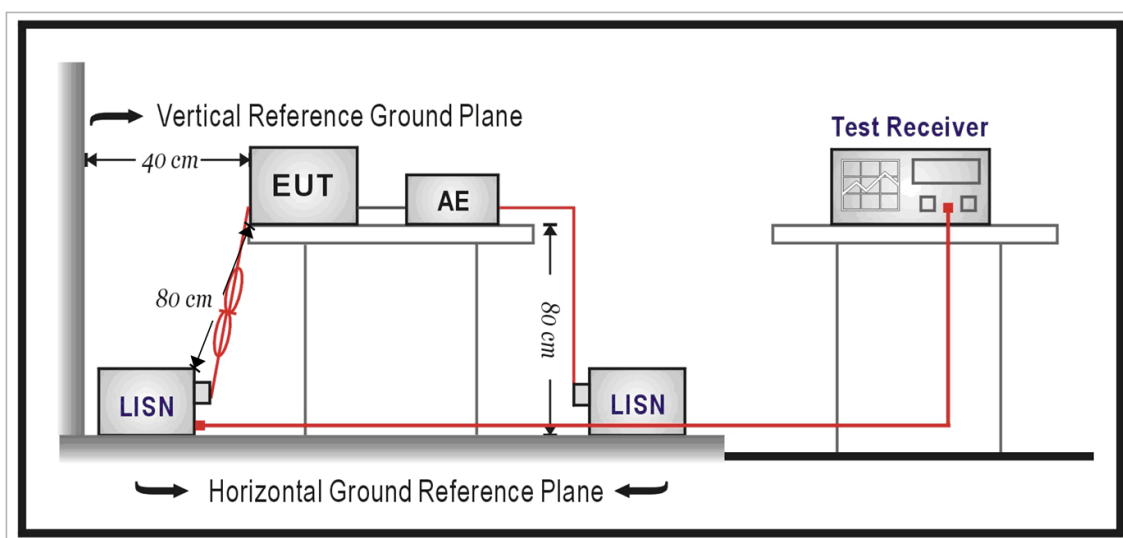

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

4.2. Transmitter Radiated Emissions Measurement

■ Limit

- (1) Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - (d) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (e) For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz:

Device Type		Limit
☒	indoor access point	(i) all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.
☐	subordinate	(ii) all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.
☐	client	(i) all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz. (ii) all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

IRP (dBm)	Field Strength at 3 m (dBuV/m)
-27	68.3

(2) Limits of Radiated Emission Measurement


Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


- Note: 1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

■ Setup


9 kHz ~ 30 MHz

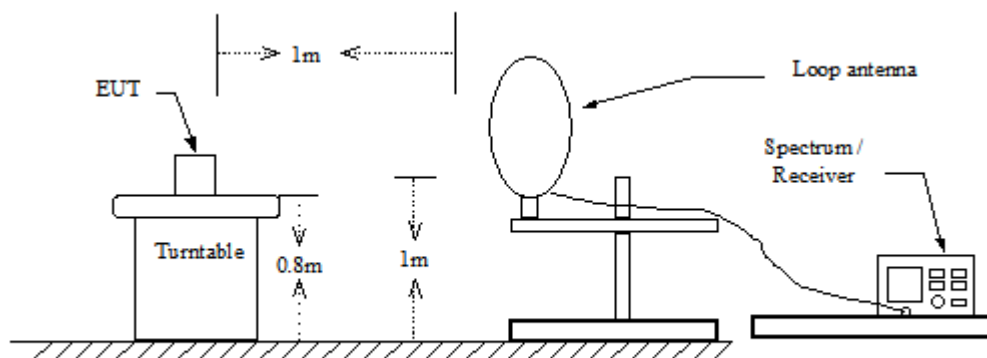

30 MHz ~ 1 GHz

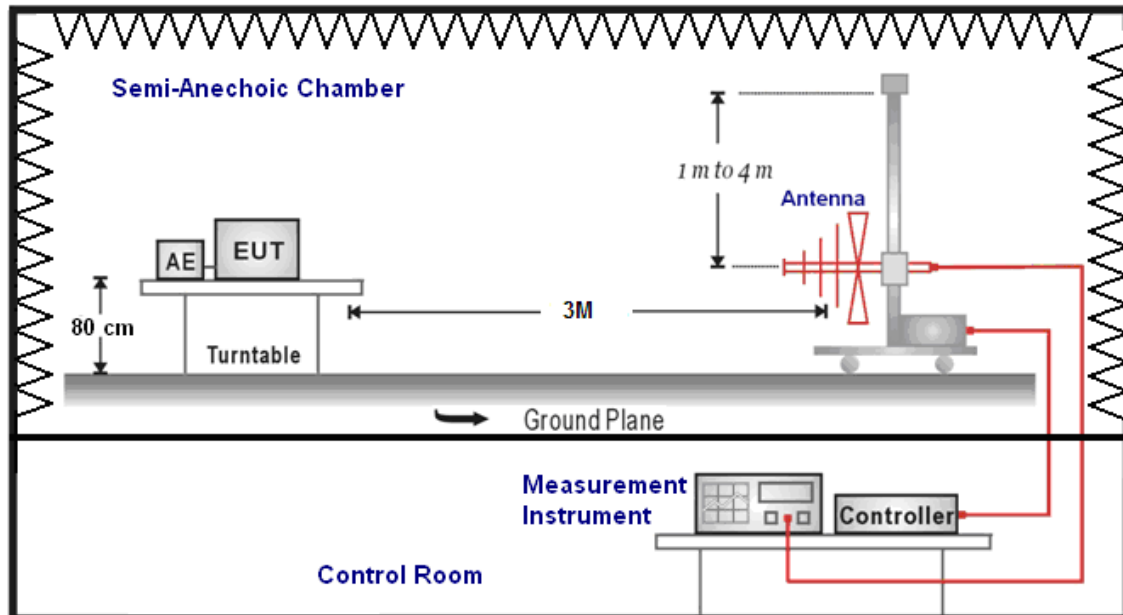

Above 1 GHz

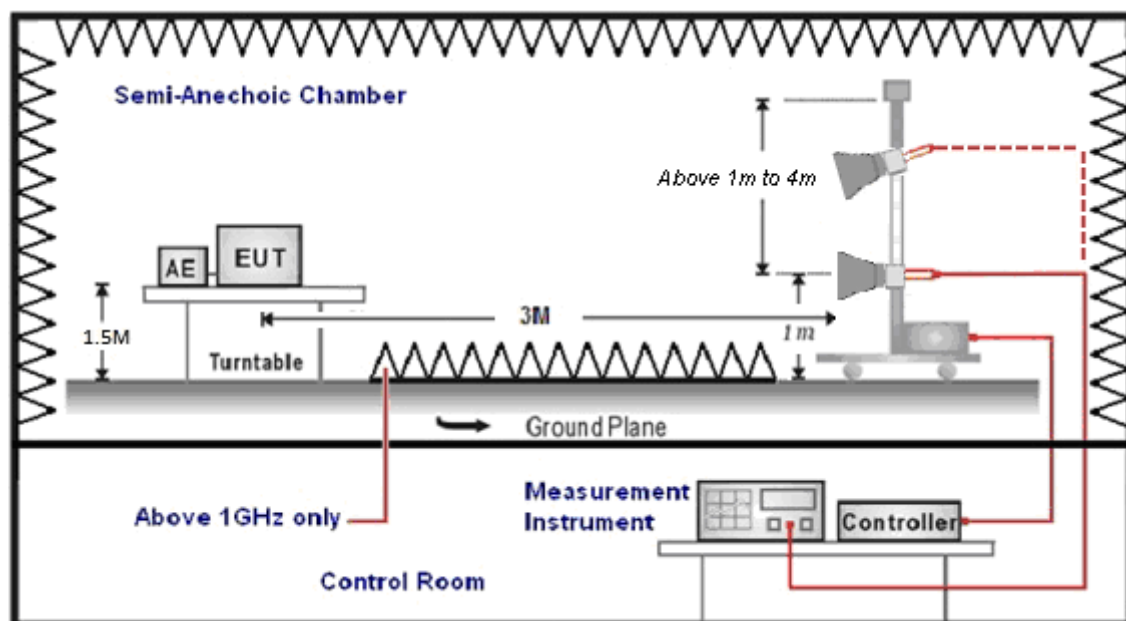

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak

4.3. Maximum Conducted Output Power Measurement


■ Limit

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit
	Master
5.150 ~ 5.250 GHz	The lesser of 1 W (30 dBm)
5.250 ~ 5.350 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.470 ~ 5.725 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.725 ~ 5.850 GHz	The lesser of 1 W (30 dBm)

Frequency Range (MHz)		5.850 ~ 5.895 GHz or spans across 5.725-5.895 GHz
Device Type		EIRP Limit
☒	indoor access point	The maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. Indoor access points operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 36 dBm.
☐	subordinate	The maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm.
☐	client	The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

■ Test Setup

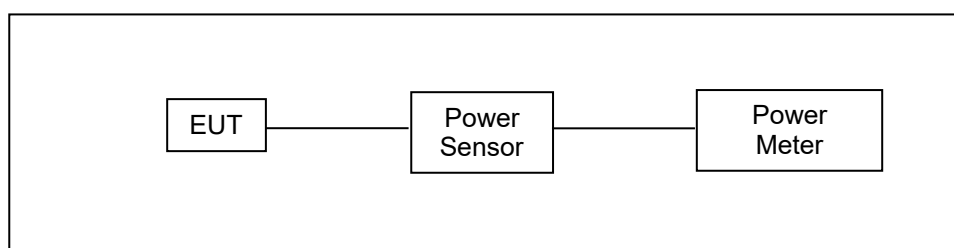

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)


b) Method PM-G (Measurement using a gated RF average power meter)

4.4. 26 dB RF Bandwidth Measurement

■ **Limit**

N/A

■ **Test Setup**

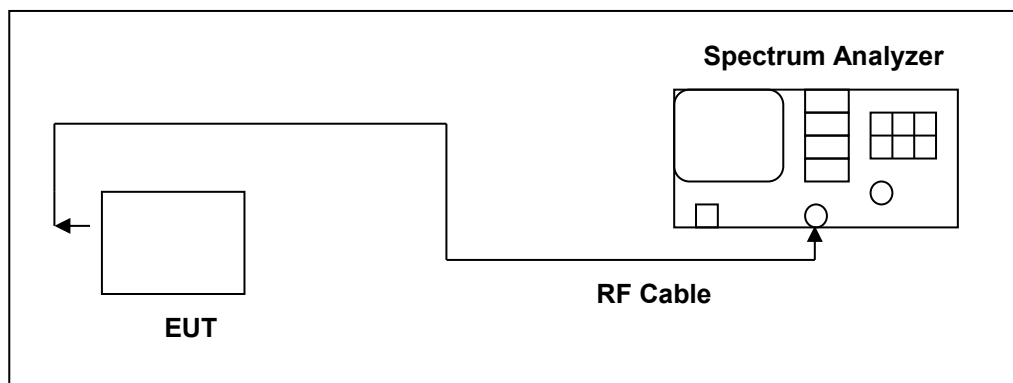

■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.4.1, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


4.5. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth

Systems using digital modulation techniques may operate in the 5725~5850 MHz and 5850~5895 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup

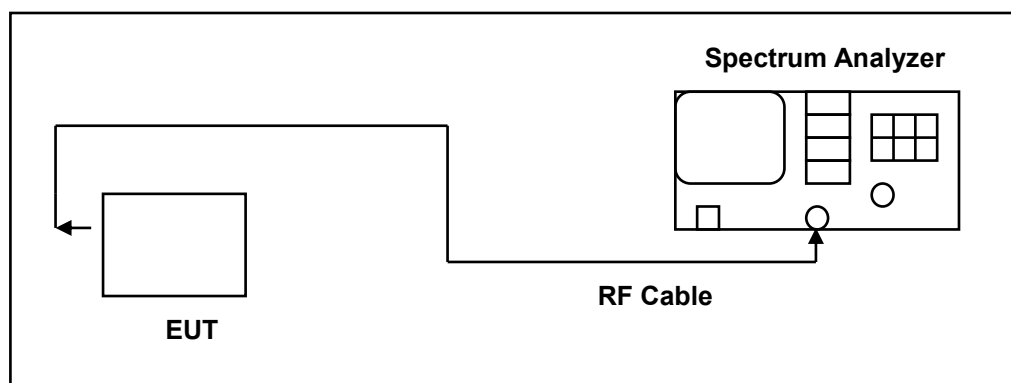

■ Test Procedure

6 dB RF Bandwidth

The EUT tested to UNII test procedure of ANSI C63.10:2013 section 6.9.2 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.

4.6. Maximum Power Spectral Density Measurement

■ Limit

Frequency Range (MHz)	FCC Limit
	Master
5.150 ~ 5.250 GHz	17 dBm/MHz
5.250 ~ 5.350 GHz	11 dBm/MHz
5.470 ~ 5.725 GHz	11 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500 kHz


EIRP spectral density

Frequency Range (MHz)		5.850 ~ 5.895 GHz
Device Type		EIRP spectral density Limit
☒	indoor access point	20 dBm/MHz
☐	subordinate	
☐	client	14 dBm/MHz

Note: EIRP spectral density = conducted power spectral density + Directional Gain

According FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

■ Test Setup

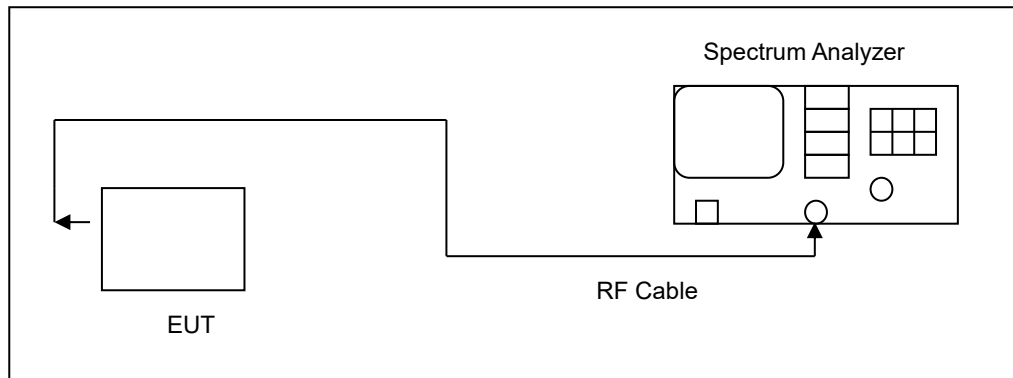

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5895 MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5895 MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz or 1 MHz, add $10 \log(500 \text{ kHz}/100 \text{ kHz})$ or $10 \log(1 \text{ MHz}/100 \text{ kHz})$ to the measured result.	

4.7. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

■ Declare

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

4.8. Antenna Requirement

■ Requirement

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction

See section 2 – antenna information.


■ Directional Gain Calculated

Test mode	Band	Transmission Type	Antenna				Directional Gain	Directional Gain	Power	PSD
							for	for	Limit	Limit
			Ant-0	Ant-1	Ant-2	Ant-3	Power	PSD	Reduction	Reduction
			(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
802.11a	Band 1	CDD	1.60	1.60	---	---	1.60	4.61	0.00	0.00
	Band 2-A		1.60	1.60	---	---	1.60	4.61	0.00	0.00
	Band 2-C		1.60	1.60	---	---	1.60	4.61	0.00	0.00
	Band 3		1.60	1.60	---	---	1.60	4.61	0.00	0.00
	Band 4		1.60	1.60	---	---	1.60	4.61	0.00	0.00
802.11n HT20 802.11n HT40 802.11ac VHT20 802.11ac VHT40 802.11ac VHT80 802.11ac VHT160 802.11ax HE20 802.11ax HE40 802.11ax HE80 802.11ax HE160	Band 1 Band 2-A Band 2-C Band 3 Band 4	MIMO	1.60	1.60	---	---	4.61	4.61	0.00	0.00
1.60	1.60		---	---	4.61	4.61	0.00	0.00		
1.60	1.60		---	---	4.61	4.61	0.00	0.00		
1.60	1.60		---	---	4.61	4.61	0.00	0.00		
1.60	1.60		---	---	4.61	4.61	0.00	0.00		
If transmit signals are correlated, then Directional gain = 10 log[(10 ^{G1/20} + 10 ^{G2/20} + ... + 10 ^{GN/20}) ² /NANT]										
If all transmit signals are completely uncorrelated, then Directional gain = 10 log[(10 ^{G1/10} + 10 ^{G2/10} + ... + 10 ^{GN/10})/NANT]										

5 Test Results

5.1. Conducted Emission

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:			

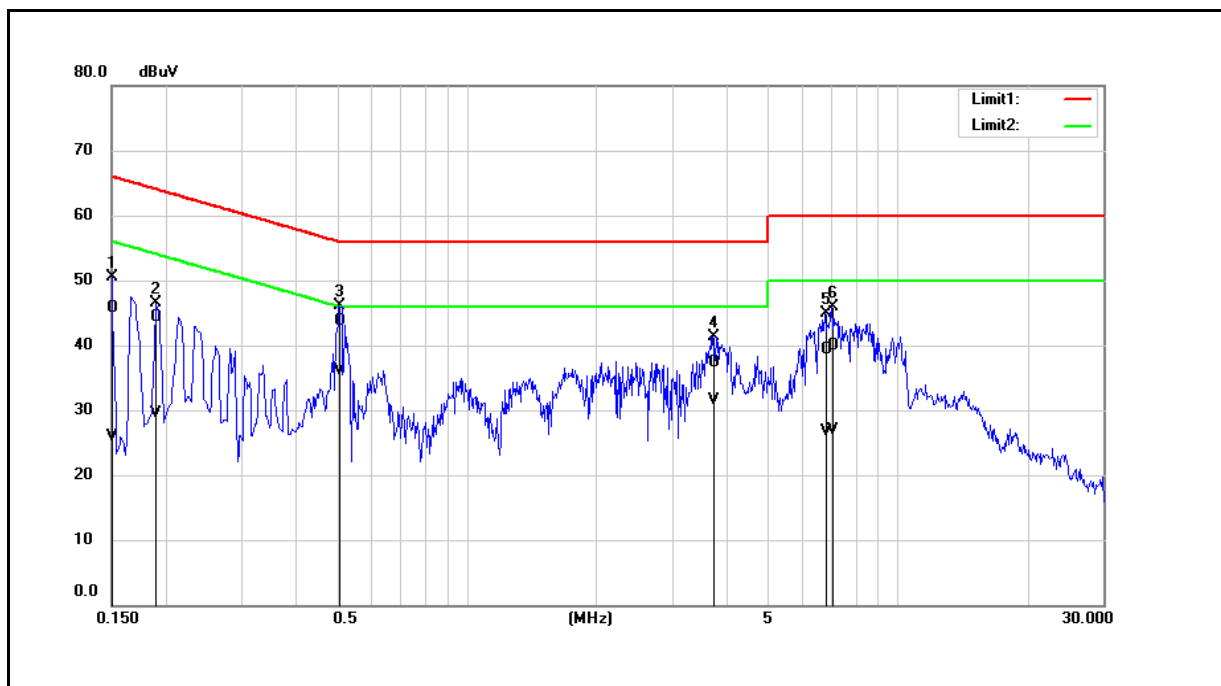


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	36.05	16.24	9.61	45.66	25.85	66.00	56.00	-20.34	-30.15	Pass
2	0.1900	34.67	19.93	9.61	44.28	29.54	64.04	54.04	-19.76	-24.50	Pass
3	0.5060	34.15	26.53	9.63	43.78	36.16	56.00	46.00	-12.22	-9.84	Pass
4	3.7300	27.61	21.70	9.74	37.35	31.44	56.00	46.00	-18.65	-14.56	Pass
5	6.7740	29.49	16.94	9.81	39.30	26.75	60.00	50.00	-20.70	-23.25	Pass
6	7.0340	30.15	17.03	9.82	39.97	26.85	60.00	50.00	-20.03	-23.15	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:			

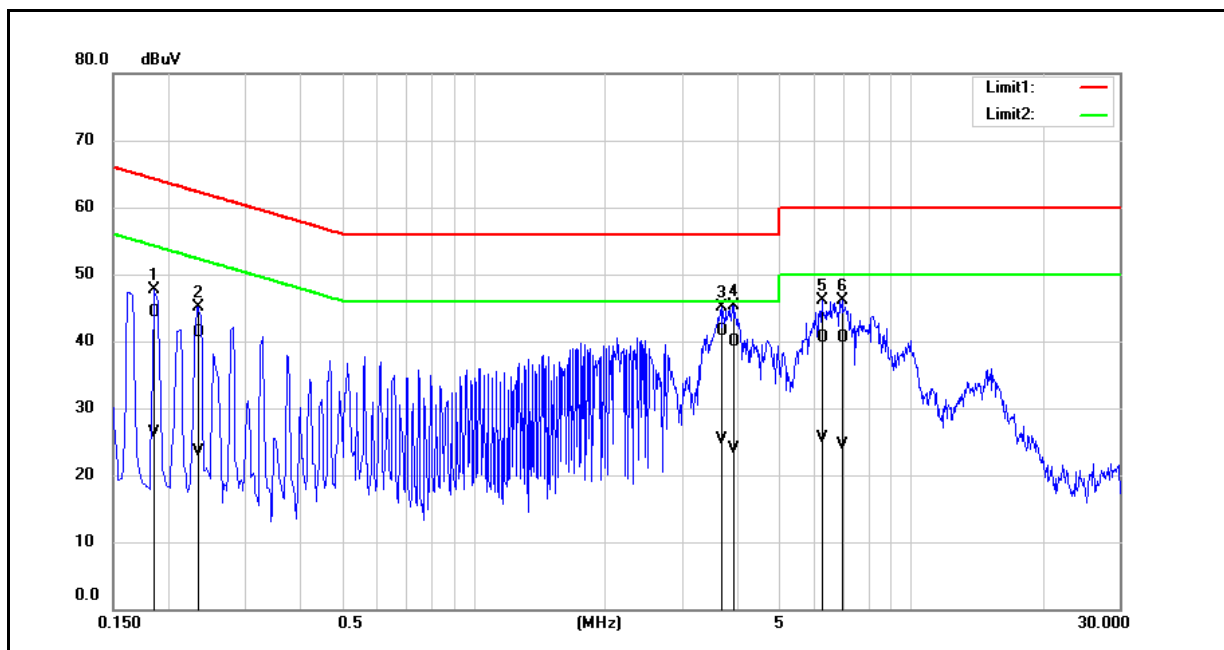

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1860	34.64	16.63	9.61	44.25	26.24	64.21	54.21	-19.96	-27.97	Pass
2	0.2340	31.66	13.96	9.61	41.27	23.57	62.31	52.31	-21.04	-28.74	Pass
3	3.6860	31.73	15.63	9.74	41.47	25.37	56.00	46.00	-14.53	-20.63	Pass
4	3.9380	30.22	14.11	9.75	39.97	23.86	56.00	46.00	-16.03	-22.14	Pass
5	6.2540	30.67	15.68	9.81	40.48	25.49	60.00	50.00	-19.52	-24.51	Pass
6	6.9700	30.61	14.69	9.83	40.44	24.52	60.00	50.00	-19.56	-25.48	Pass


Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5.2. Radiated Emission Measurement


Below 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Transmit Mode		
Remark:			

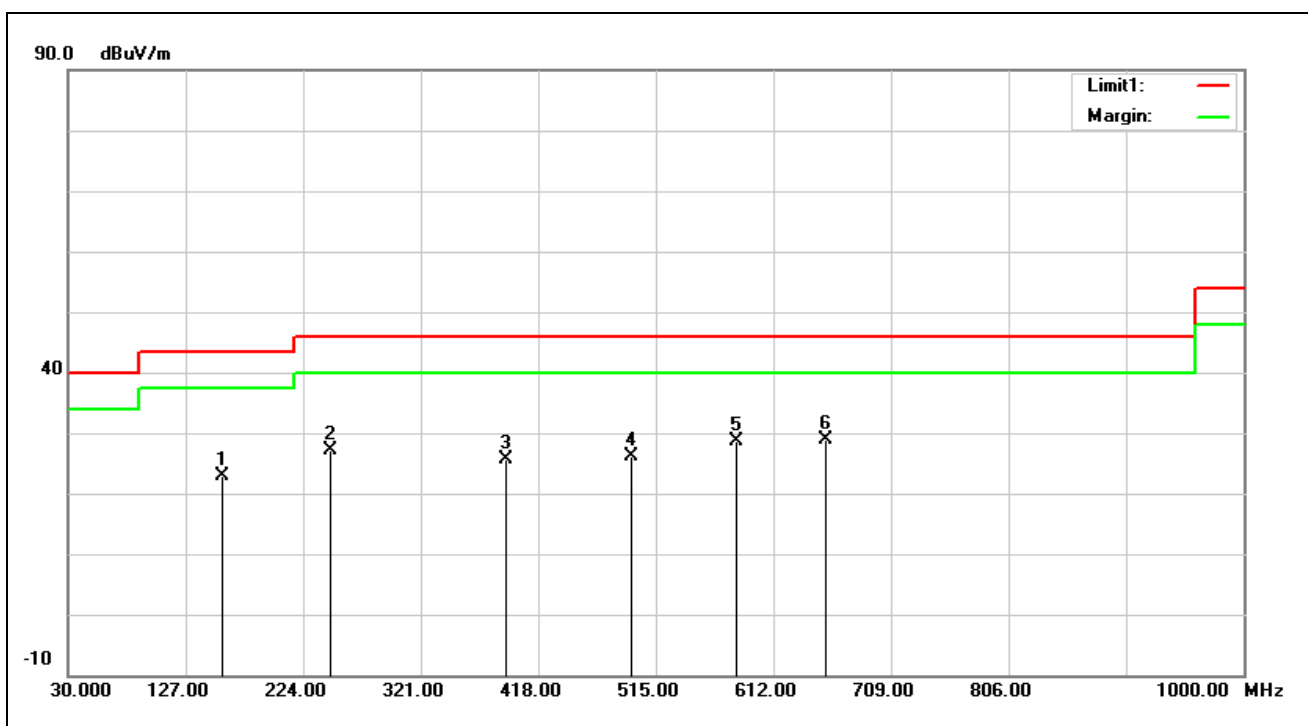

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	157.0700	29.53	-6.56	22.97	43.50	-20.53	QP
2	246.3100	34.22	-7.20	27.02	46.00	-18.98	QP
3	390.8400	29.01	-3.46	25.55	46.00	-20.45	QP
4	494.6300	28.11	-1.92	26.19	46.00	-19.81	QP
5	580.9600	28.51	0.07	28.58	46.00	-17.42	QP
6*	655.6500	27.39	1.48	28.87	46.00	-17.13	QP

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Transmit Mode		
Remark:			

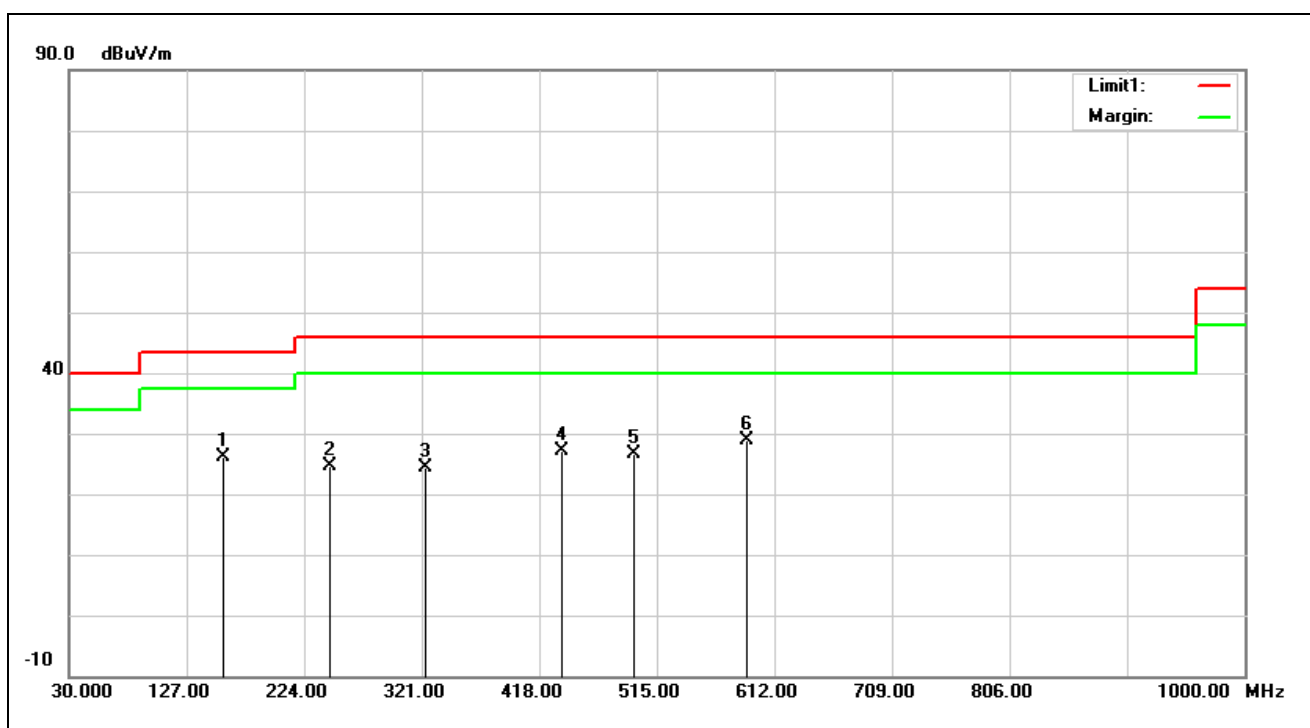


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	157.0700	32.79	-6.56	26.23	43.50	-17.27	QP
2	245.3400	31.81	-7.23	24.58	46.00	-21.42	QP
3	323.9100	29.46	-5.17	24.29	46.00	-21.71	QP
4	436.4300	29.56	-2.33	27.23	46.00	-18.77	QP
5	495.6000	28.65	-1.93	26.72	46.00	-19.28	QP
6*	589.6900	28.51	0.31	28.82	46.00	-17.18	QP

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

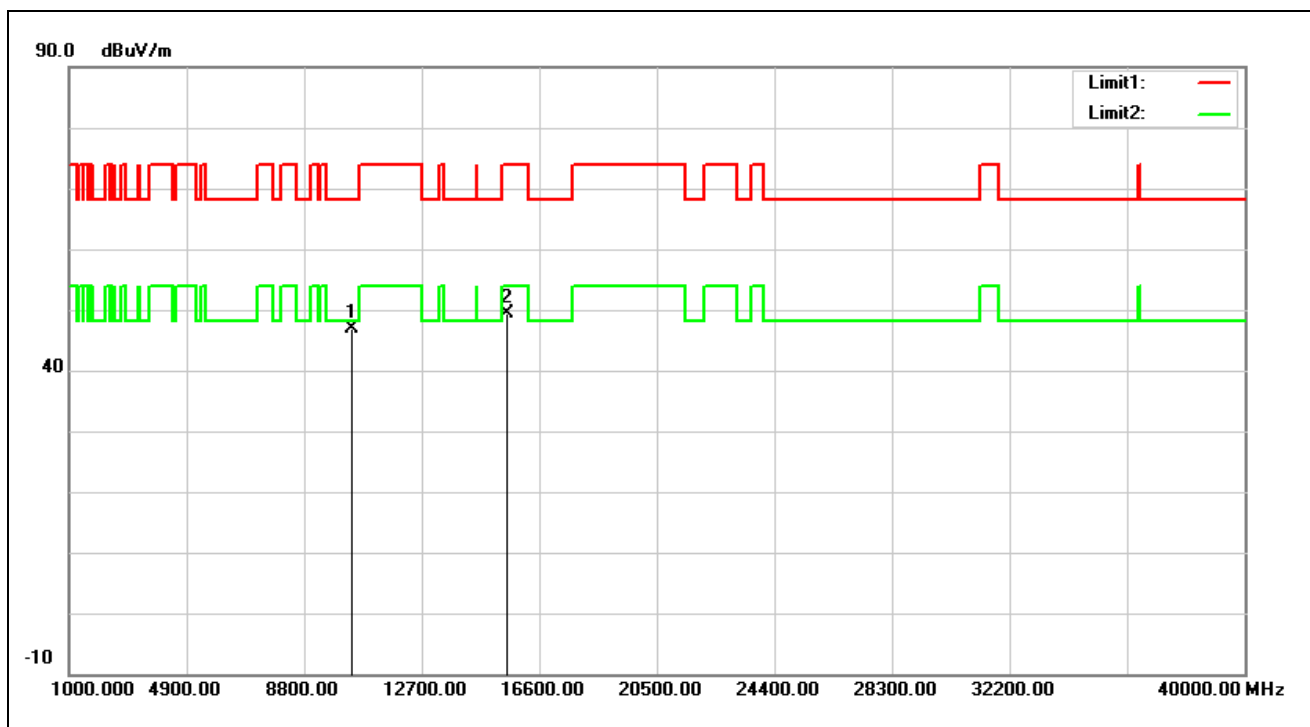


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	32.97	13.82	46.79	68.20	-21.41	peak
2	15540.000	32.67	16.74	49.41	74.00	-24.59	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

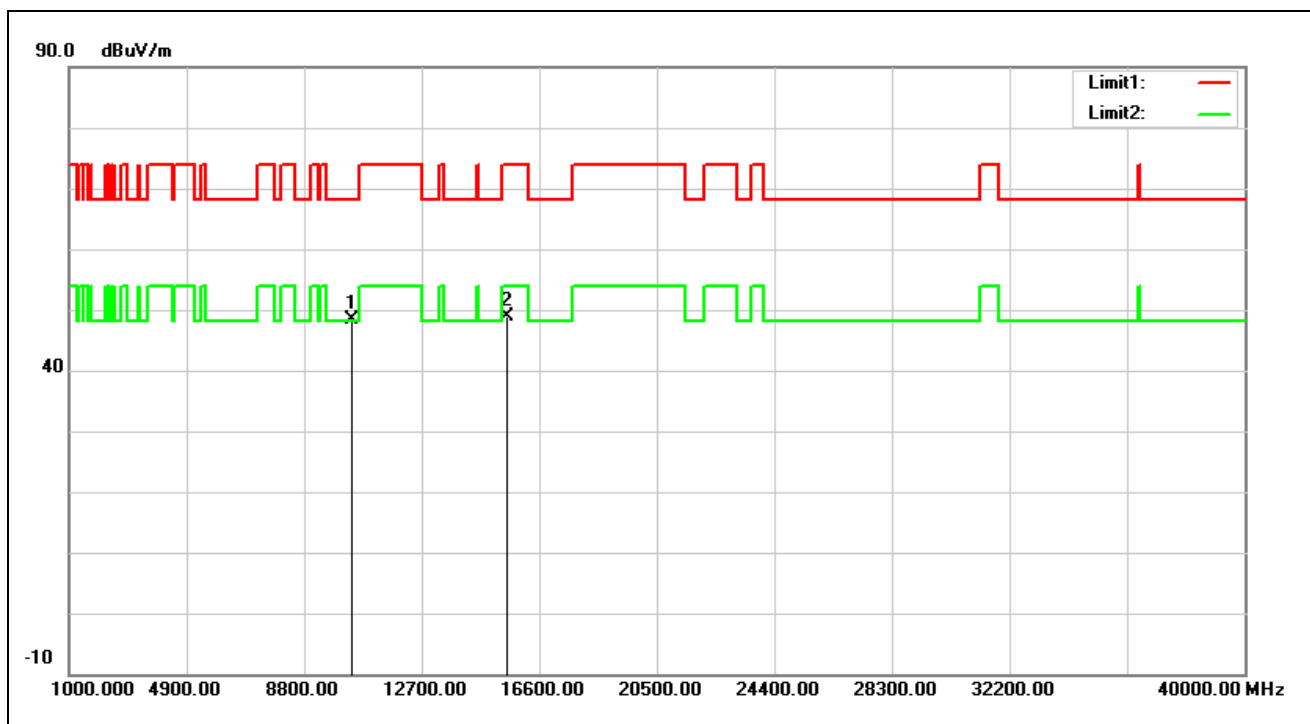


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.57	13.82	48.39	68.20	-19.81	peak
2	15540.000	32.17	16.74	48.91	74.00	-25.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5200 MHz		
Remark:			

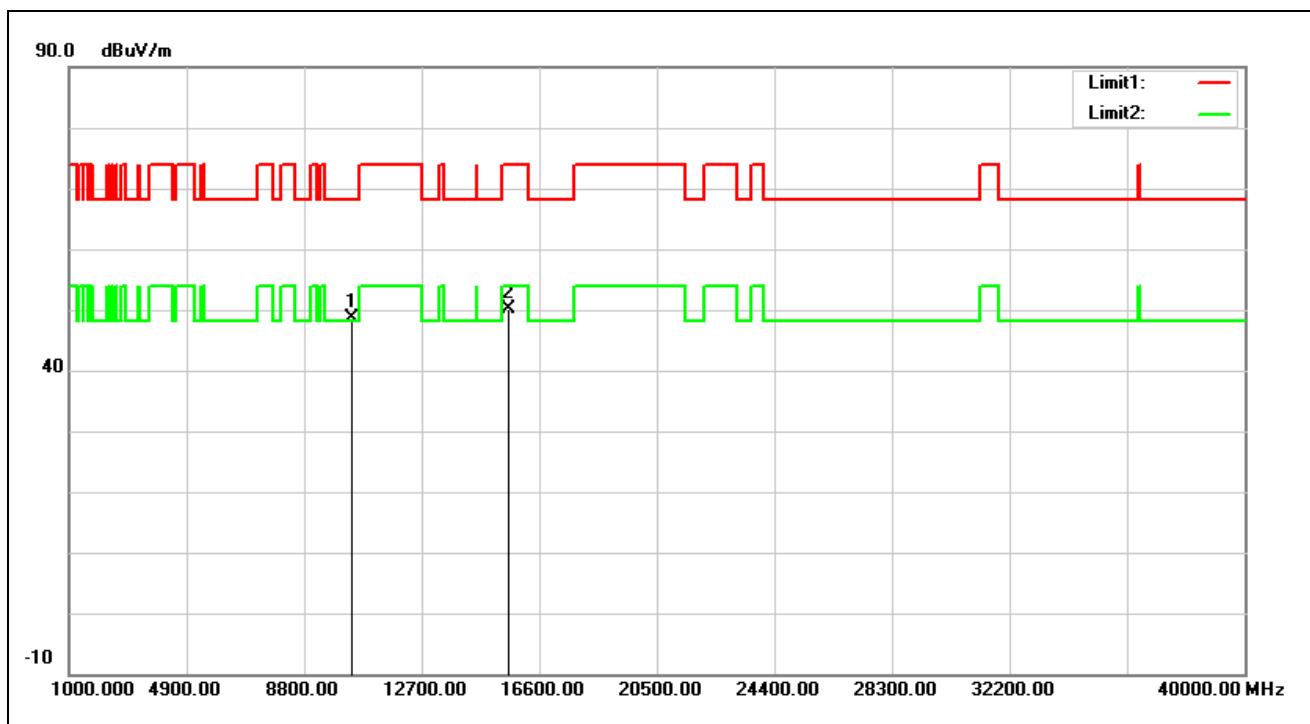


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.62	14.05	48.67	68.20	-19.53	peak
2	15600.000	33.60	16.51	50.11	74.00	-23.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

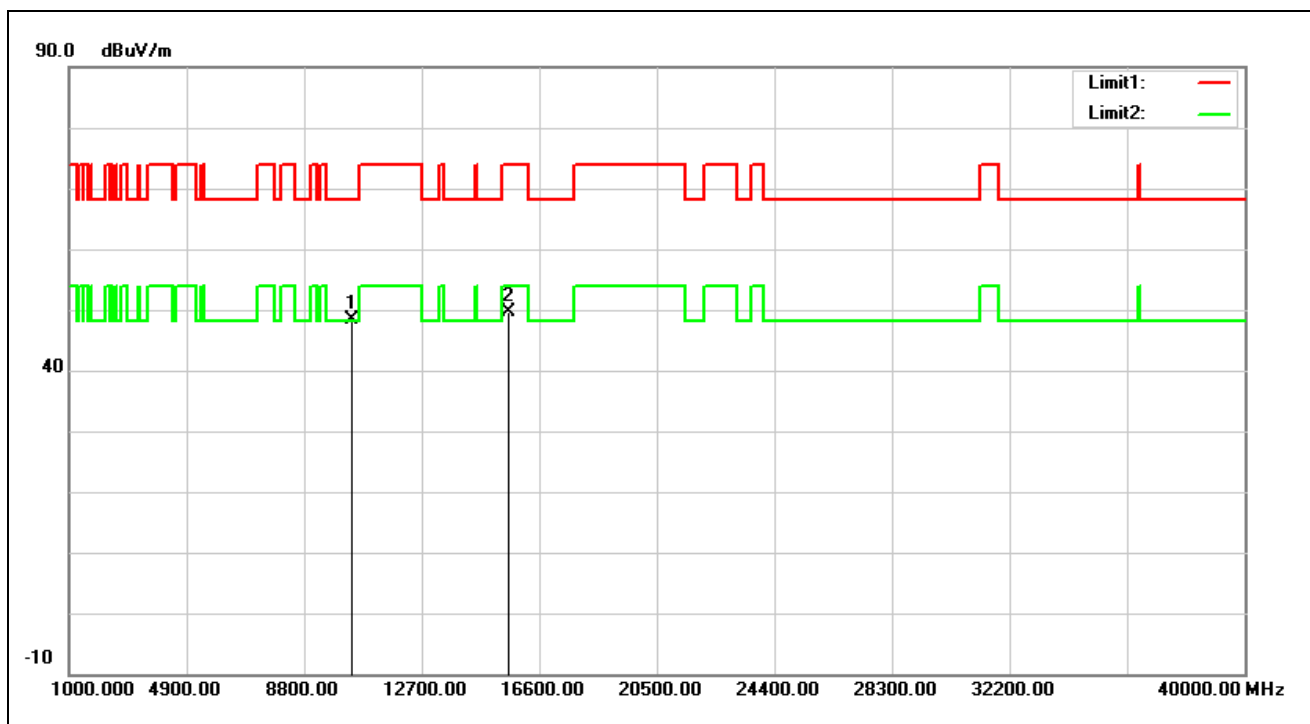


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.28	14.05	48.33	68.20	-19.87	peak
2	15600.000	33.12	16.51	49.63	74.00	-24.37	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

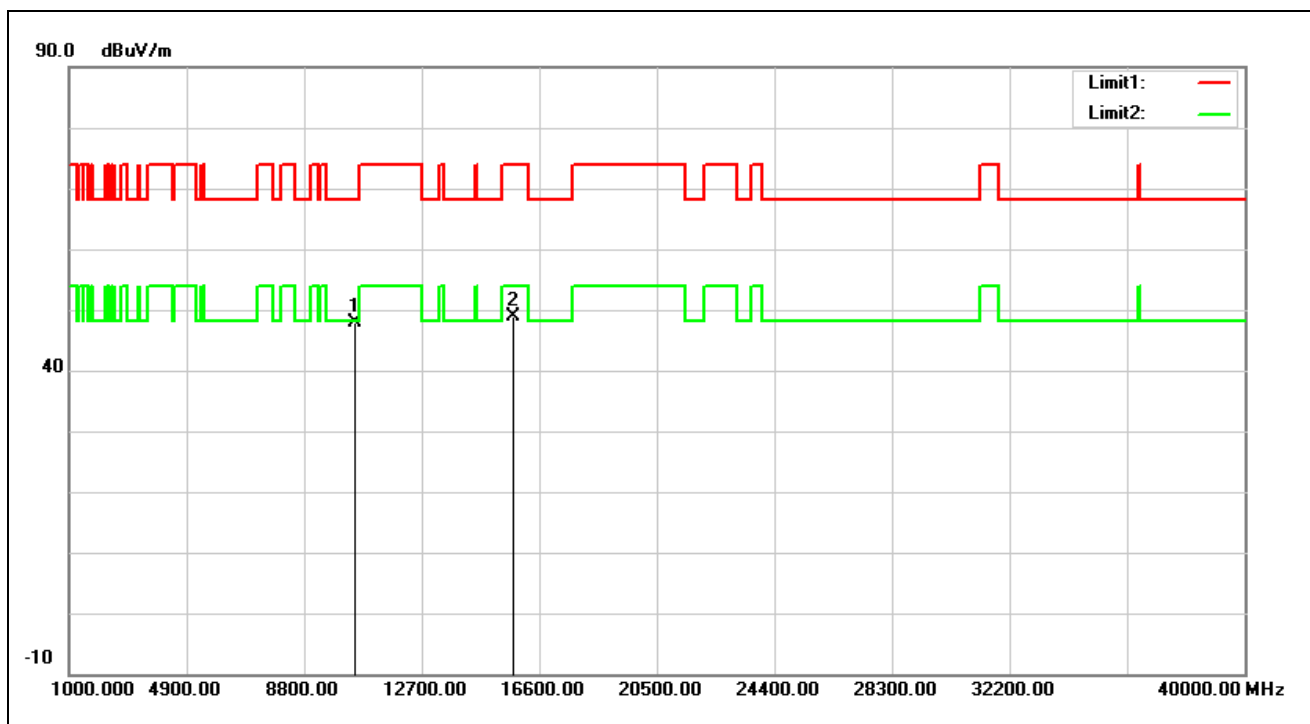


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	33.52	14.26	47.78	68.20	-20.42	peak
2	15720.000	32.38	16.48	48.86	74.00	-25.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5240 MHz		
Remark:			

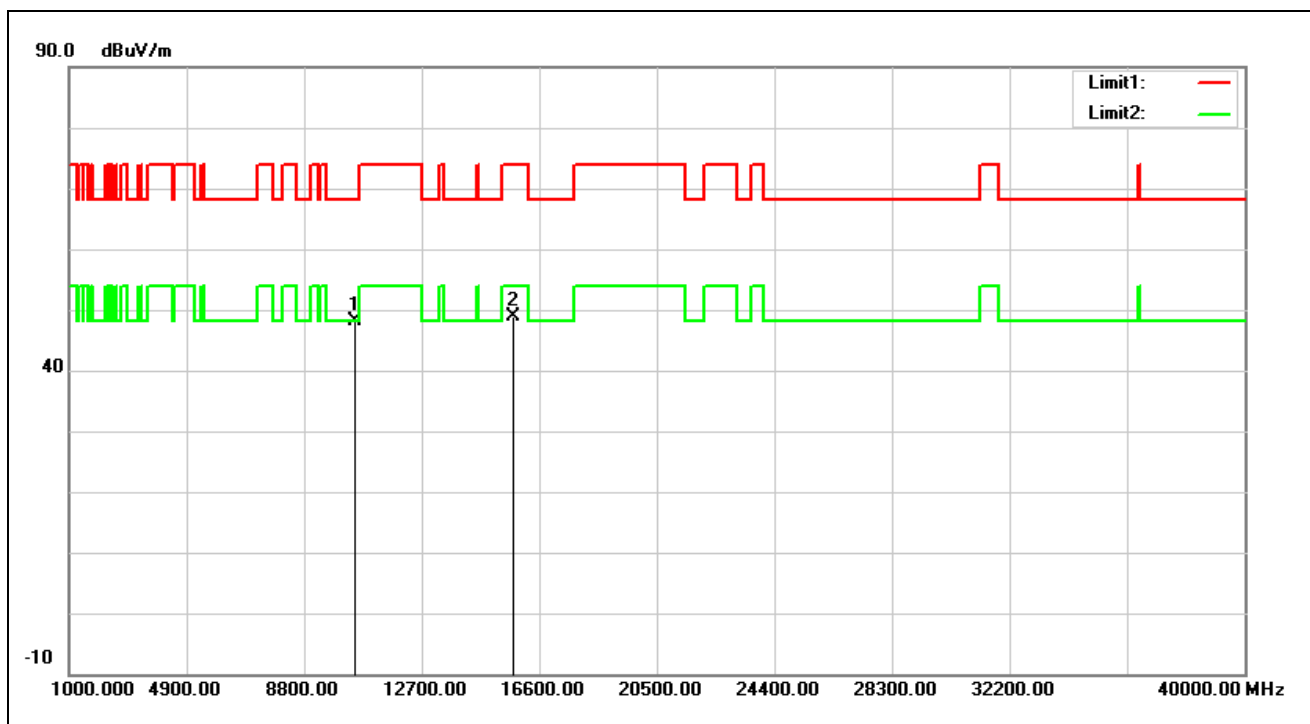


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	33.80	14.26	48.06	68.20	-20.14	peak
2	15720.000	32.51	16.48	48.99	74.00	-25.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

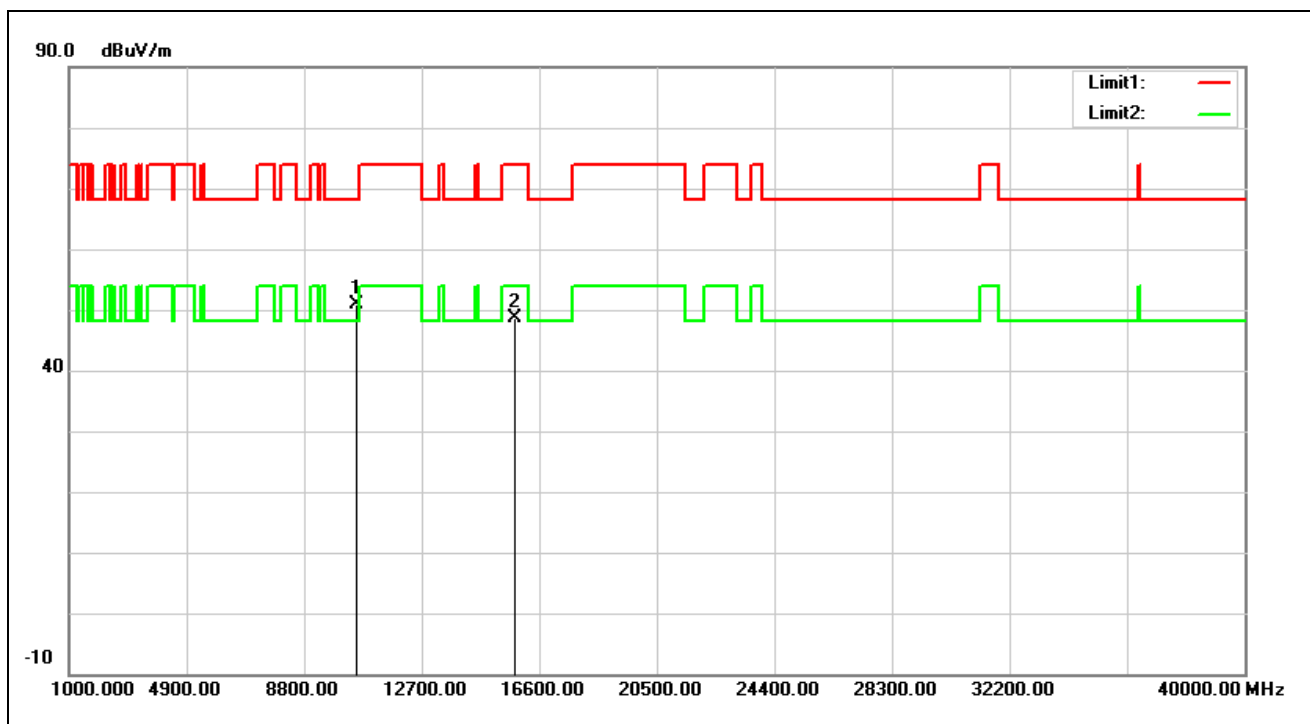


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	36.51	14.31	50.82	68.20	-17.38	peak
2	15780.000	32.18	16.38	48.56	74.00	-25.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5260 MHz		
Remark:			

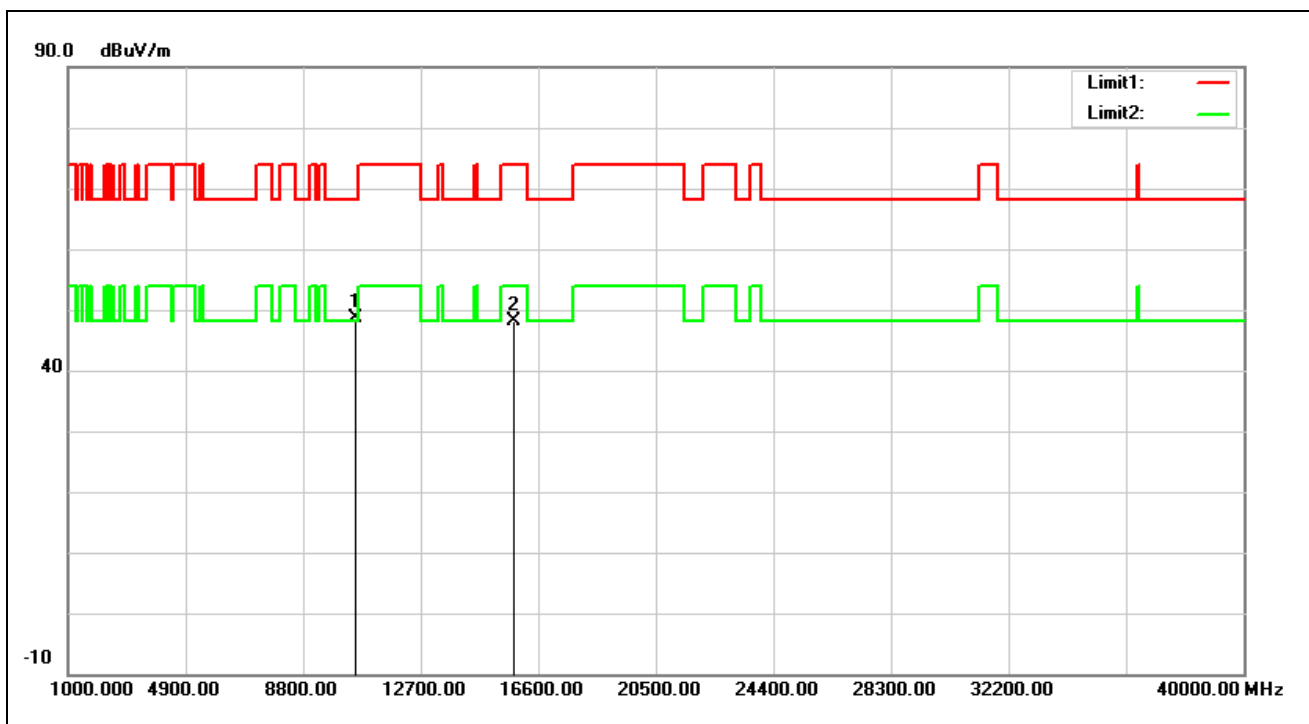


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.44	14.31	48.75	68.20	-19.45	peak
2	15780.000	31.65	16.38	48.03	74.00	-25.97	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

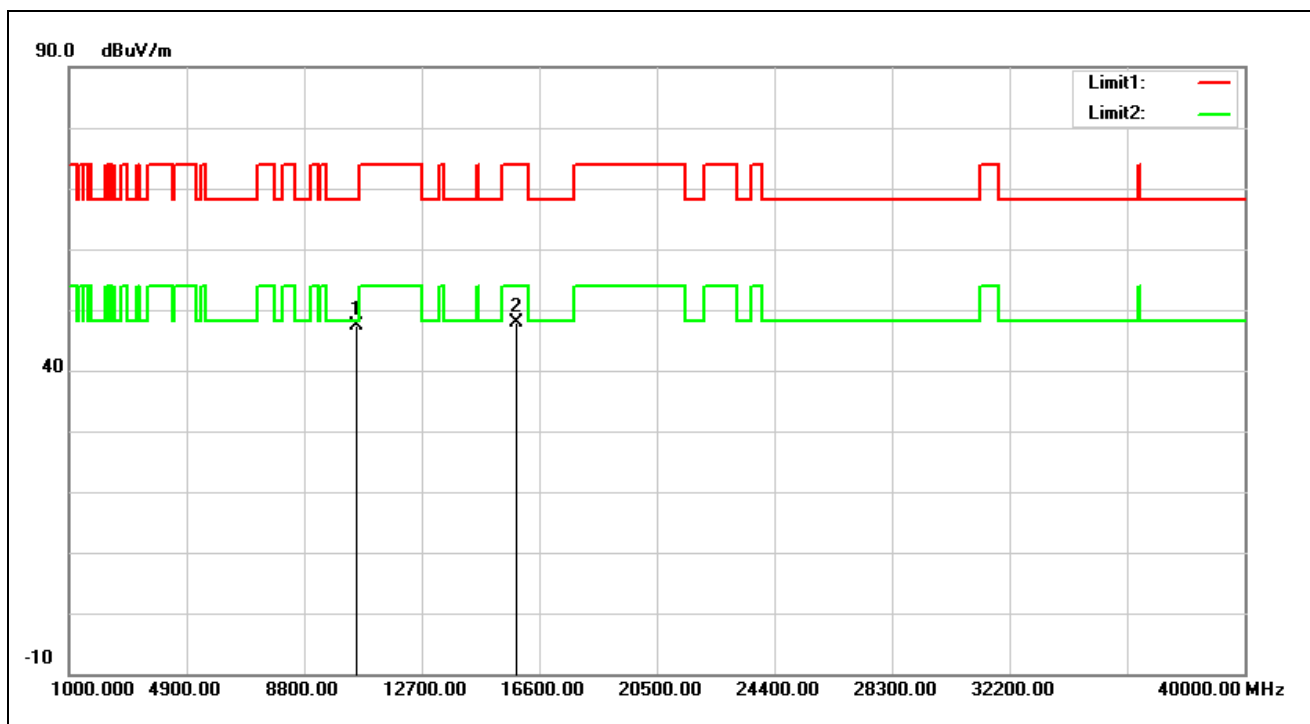


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	33.06	14.31	47.37	68.20	-20.83	peak
2	15840.000	31.72	16.18	47.90	74.00	-26.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5280 MHz		
Remark:			

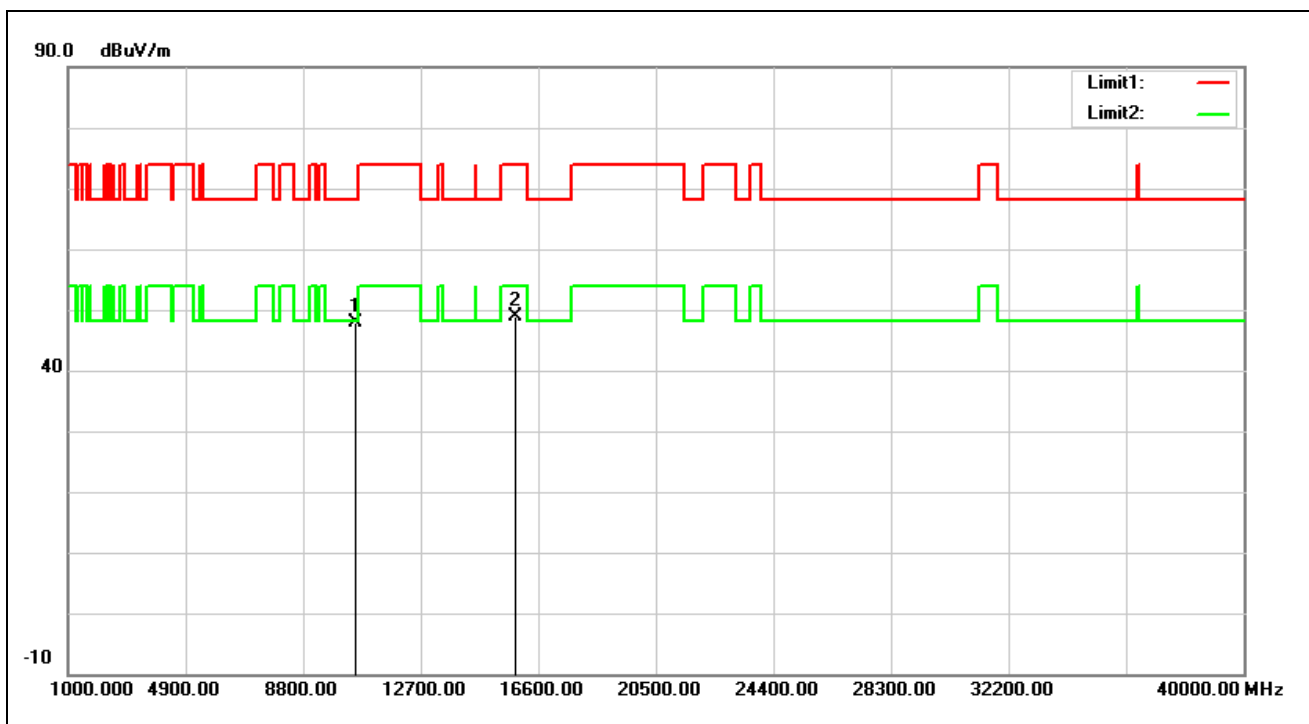


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	33.46	14.31	47.77	68.20	-20.43	peak
2	15840.000	32.76	16.18	48.94	74.00	-25.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

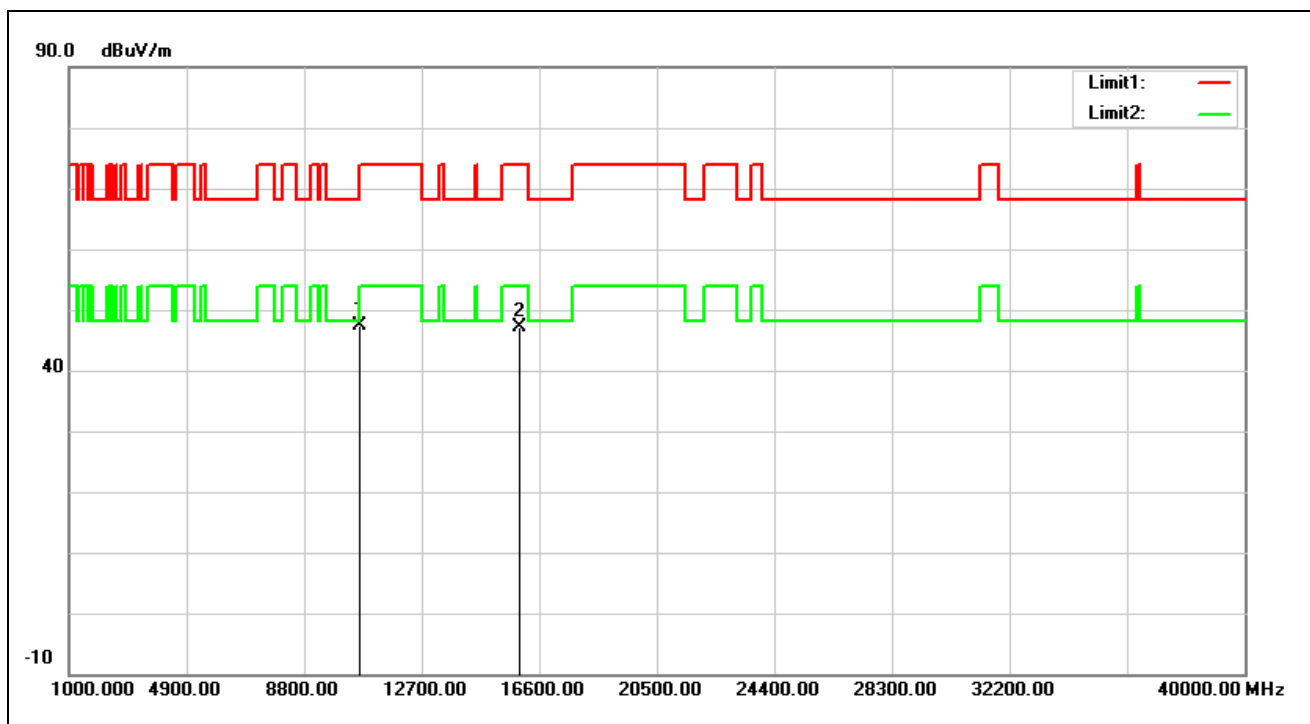


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10640.000	33.14	14.19	47.33	74.00	-26.67	peak
2	15960.000	31.36	15.77	47.13	74.00	-26.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

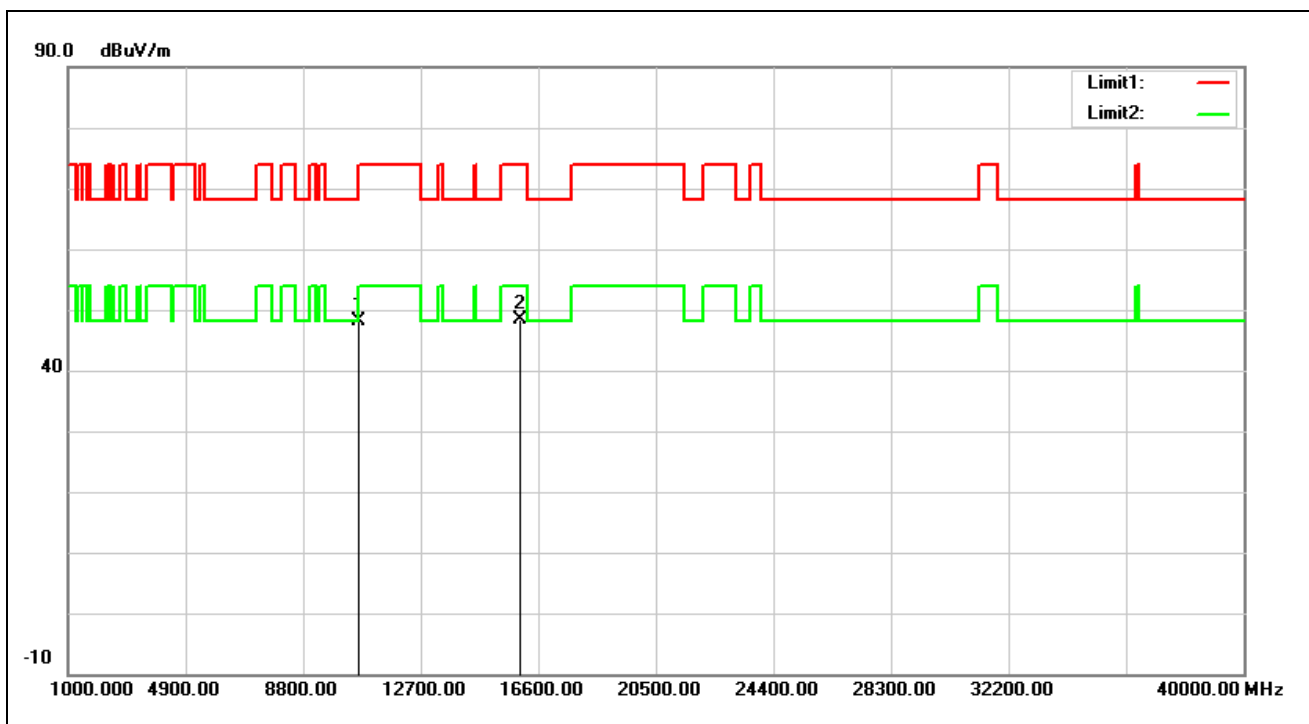


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.93	14.19	48.12	74.00	-25.88	peak
2*	15960.000	32.54	15.77	48.31	74.00	-25.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

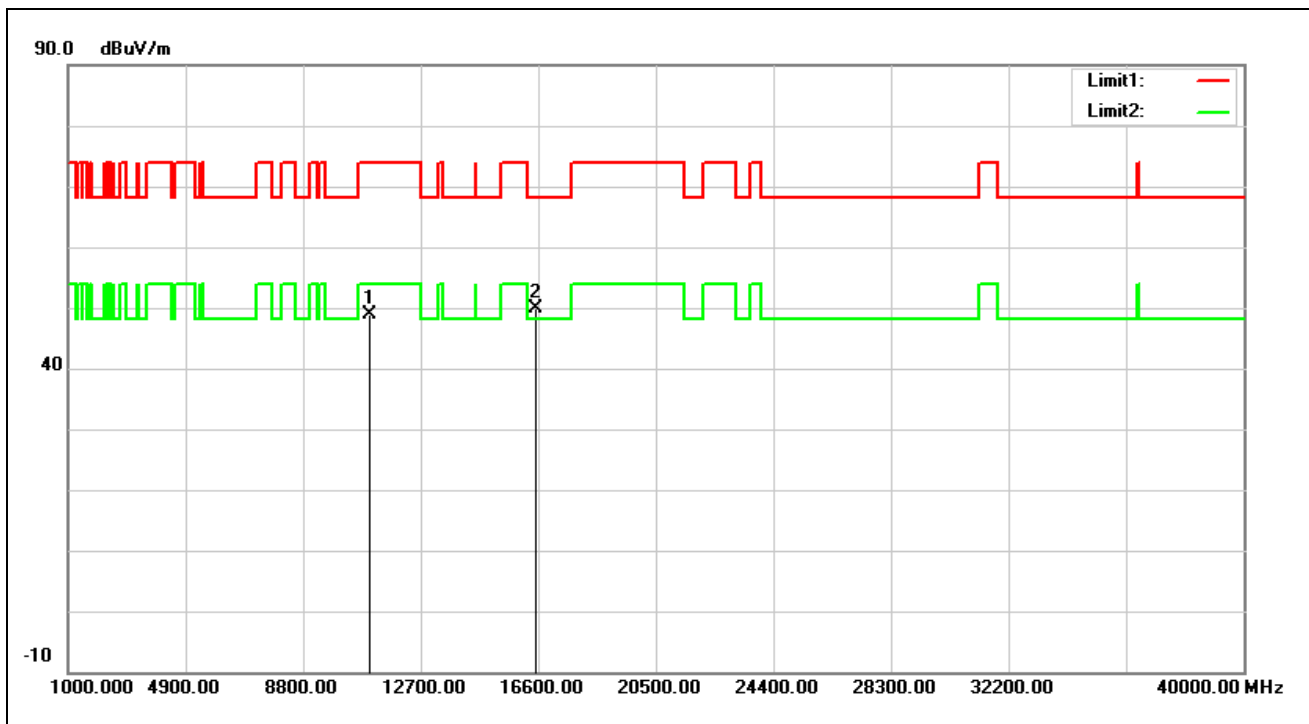


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.66	14.22	48.88	74.00	-25.12	peak
2*	16500.000	33.07	16.87	49.94	68.20	-18.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

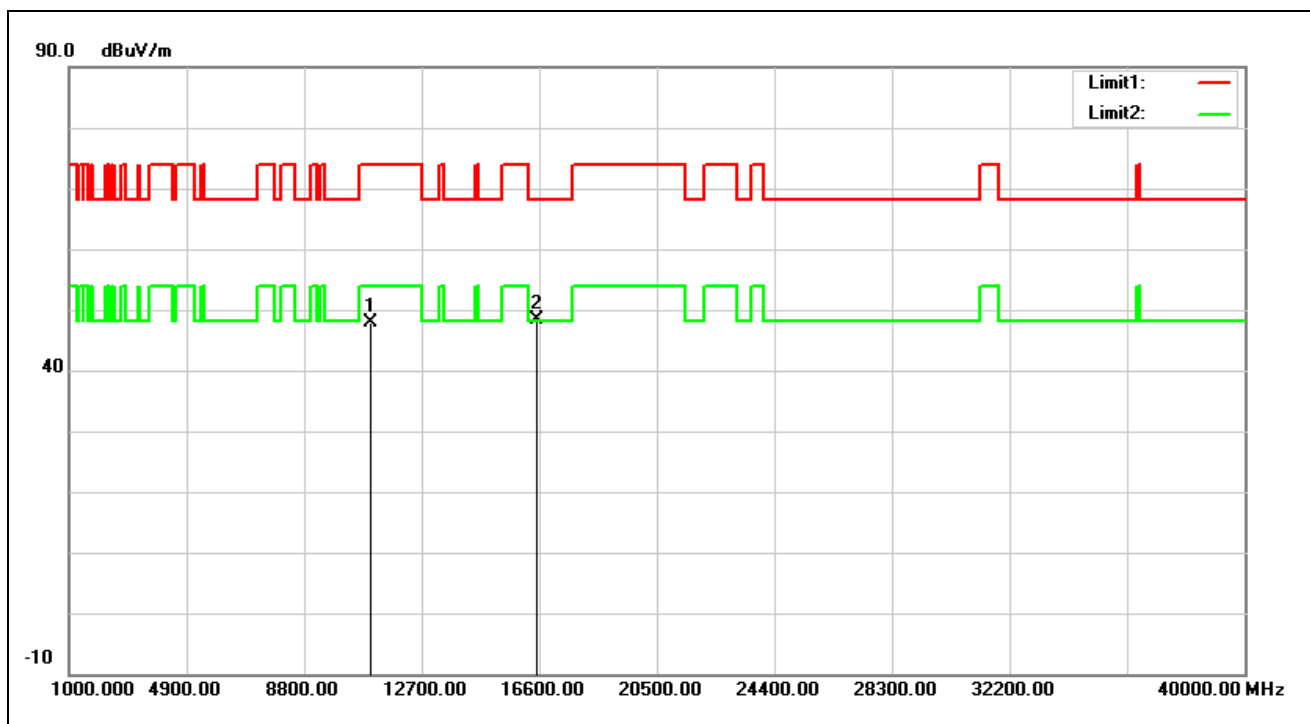


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.56	14.22	47.78	74.00	-26.22	peak
2*	16500.000	31.44	16.87	48.31	68.20	-19.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5560 MHz		
Remark:			

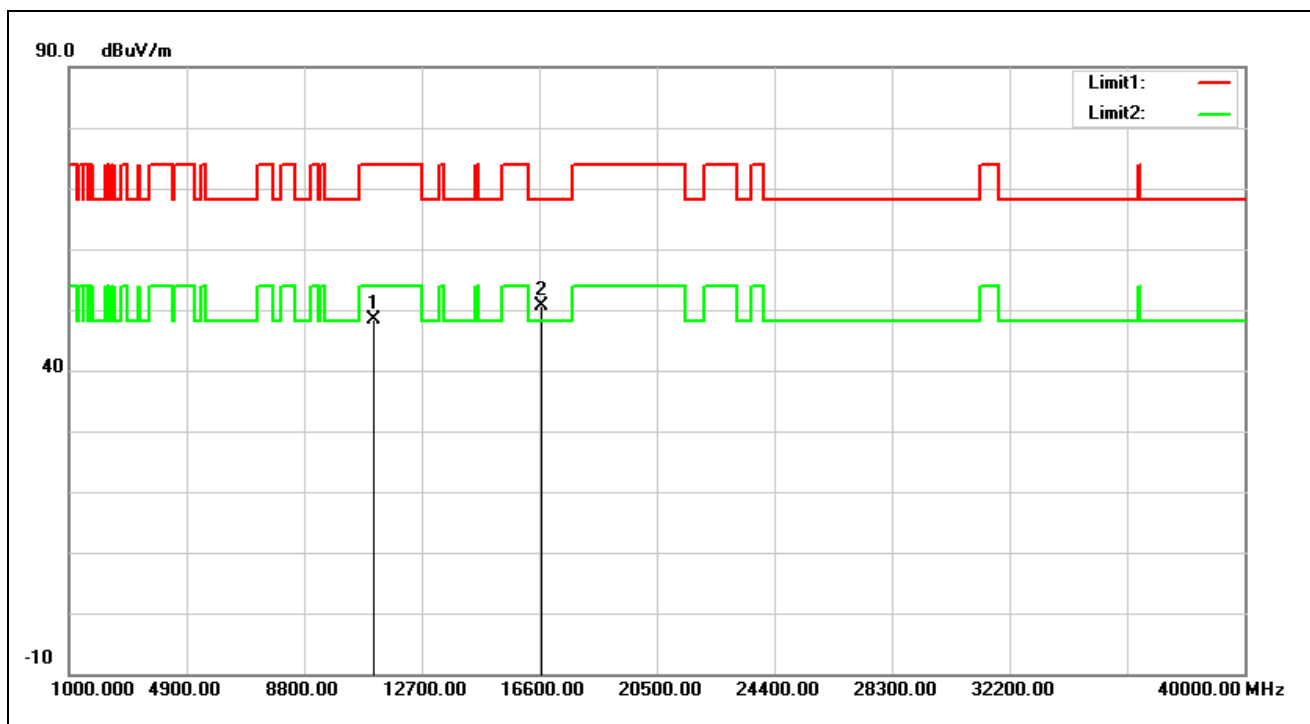


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.78	14.49	48.27	74.00	-25.73	peak
2*	16680.000	32.65	17.98	50.63	68.20	-17.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5560 MHz		
Remark:			

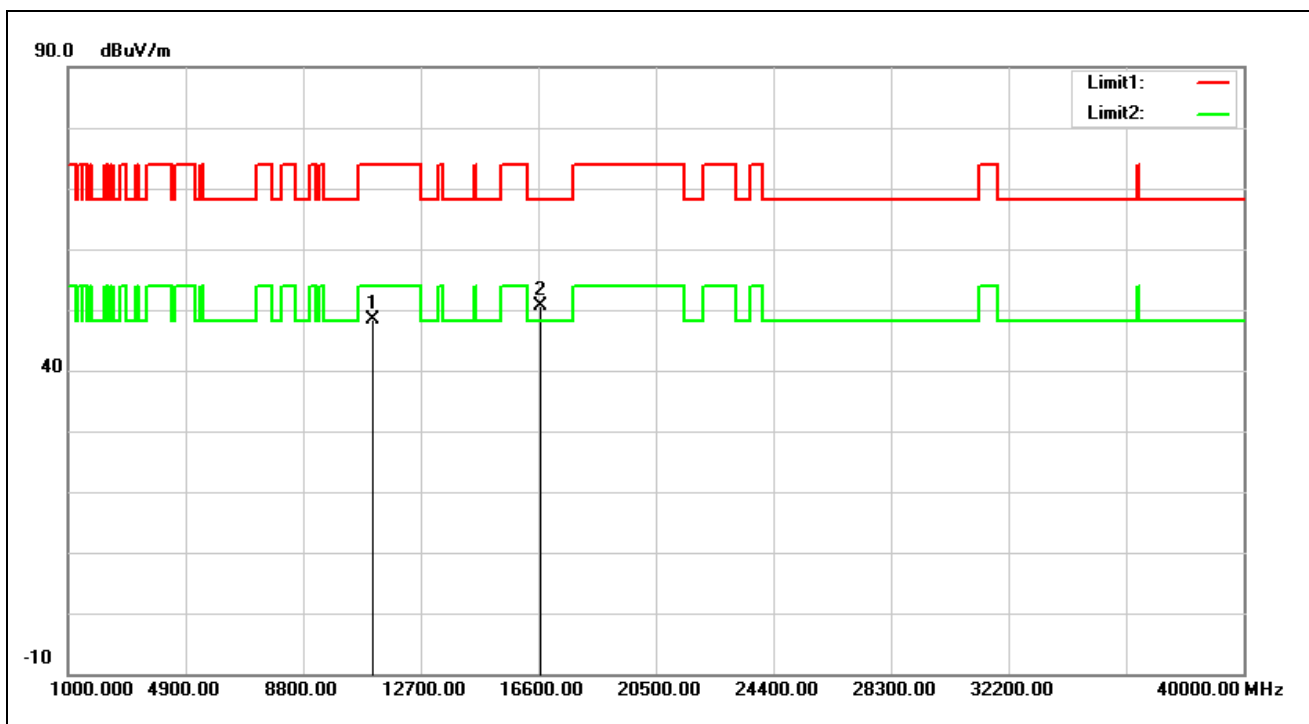


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.89	14.49	48.38	74.00	-25.62	peak
2*	16680.000	32.73	17.98	50.71	68.20	-17.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

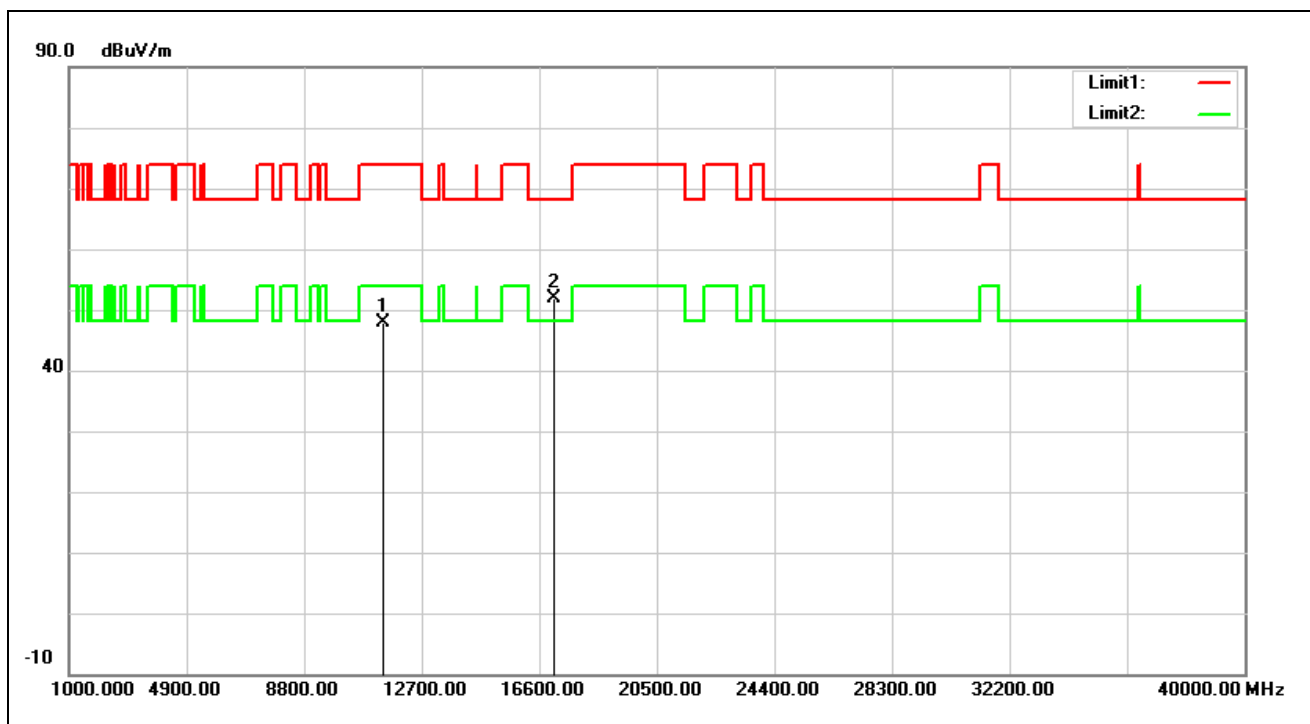


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.53	14.26	47.79	74.00	-26.21	peak
2*	17100.000	31.13	20.69	51.82	68.20	-16.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

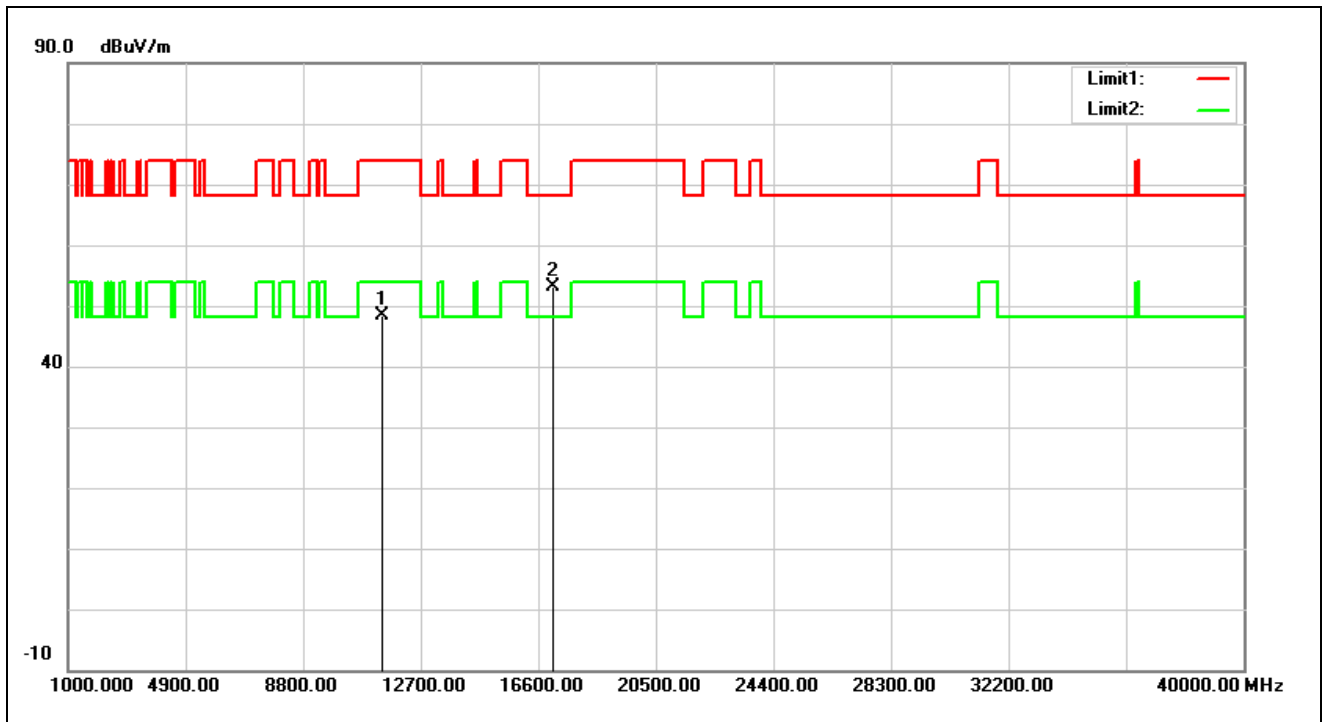


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.22	14.26	48.48	74.00	-25.52	peak
2*	17100.000	32.34	20.69	53.03	68.20	-15.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			

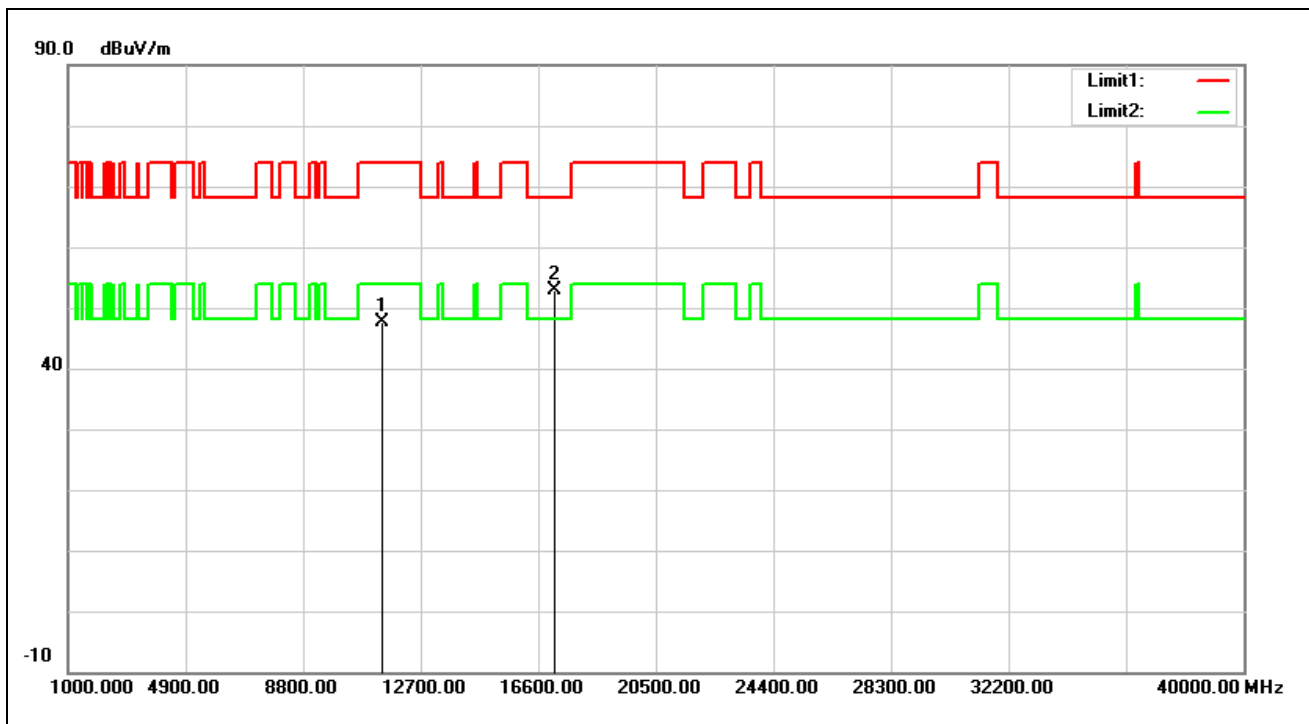


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	33.09	14.56	47.65	74.00	-26.35	peak
2*	17160.000	31.81	21.09	52.90	68.20	-15.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5720 MHz		
Remark:			

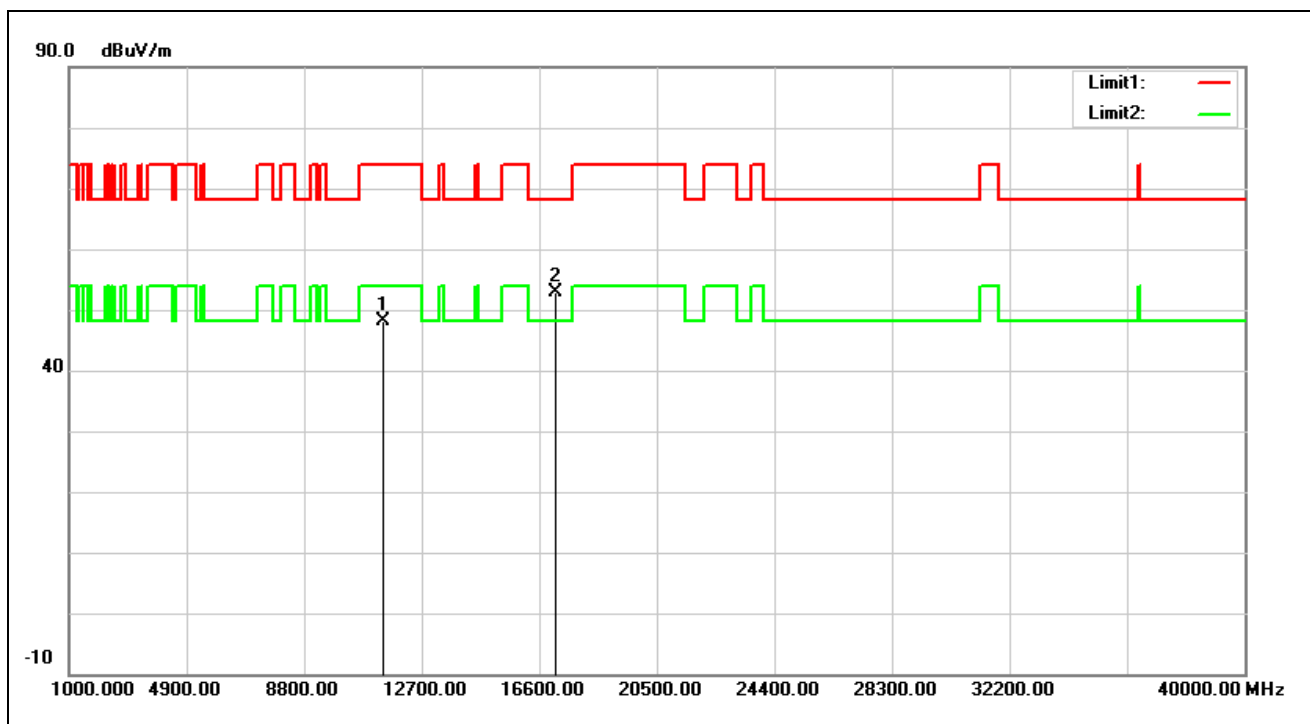


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	33.47	14.56	48.03	74.00	-25.97	peak
2*	17160.000	31.72	21.09	52.81	68.20	-15.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

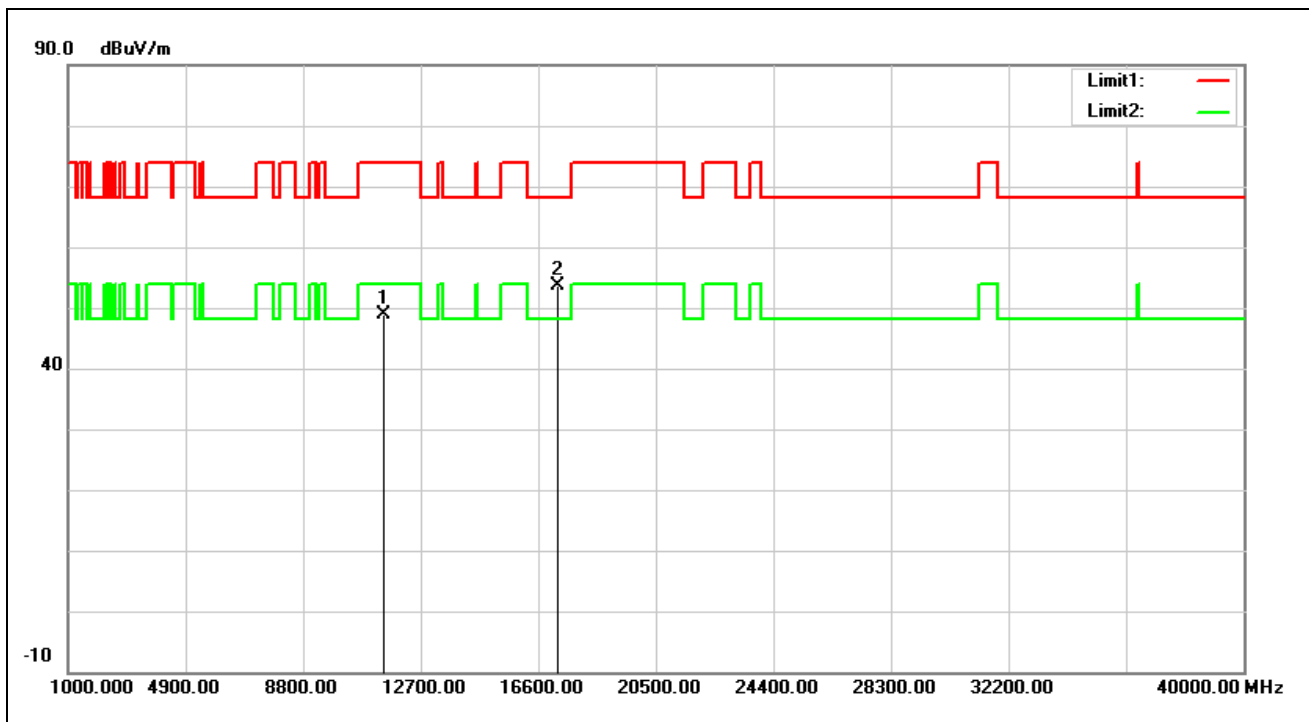


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.03	14.93	48.96	74.00	-25.04	peak
2*	17235.000	31.81	21.70	53.51	68.20	-14.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

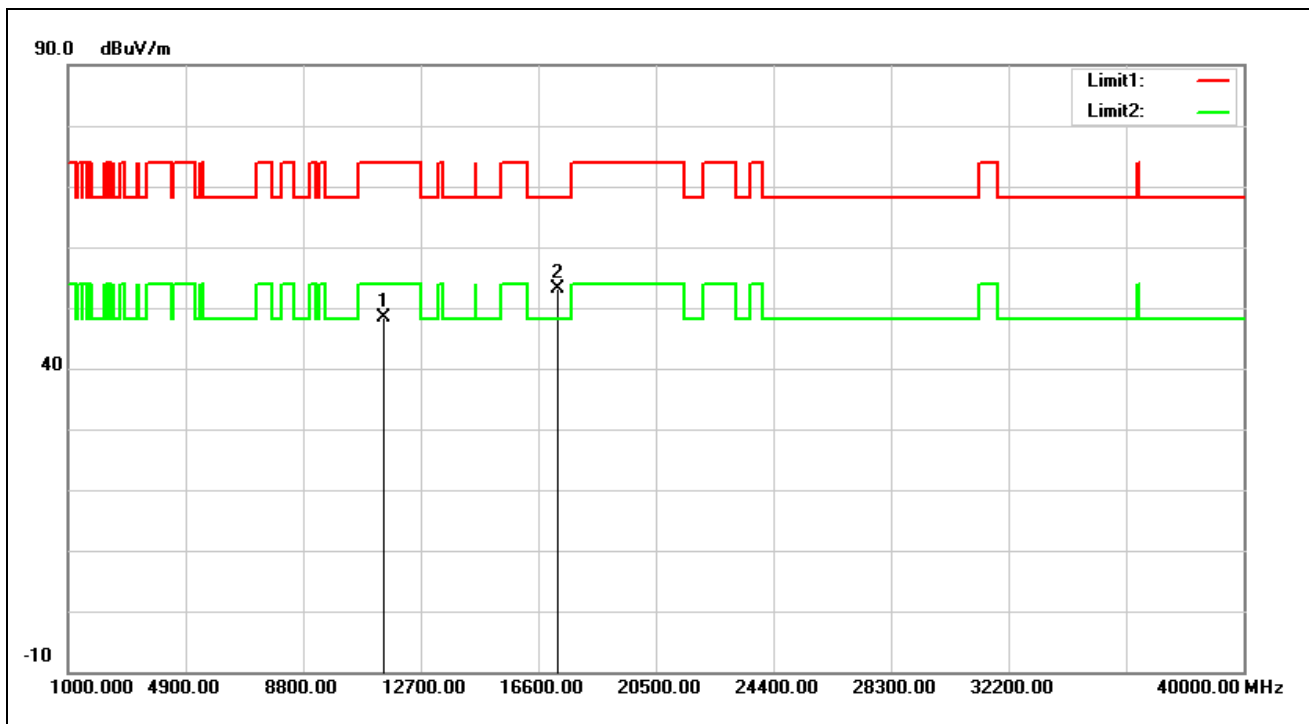


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.43	14.93	48.36	74.00	-25.64	peak
2*	17235.000	31.46	21.70	53.16	68.20	-15.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5785 MHz		
Remark:			

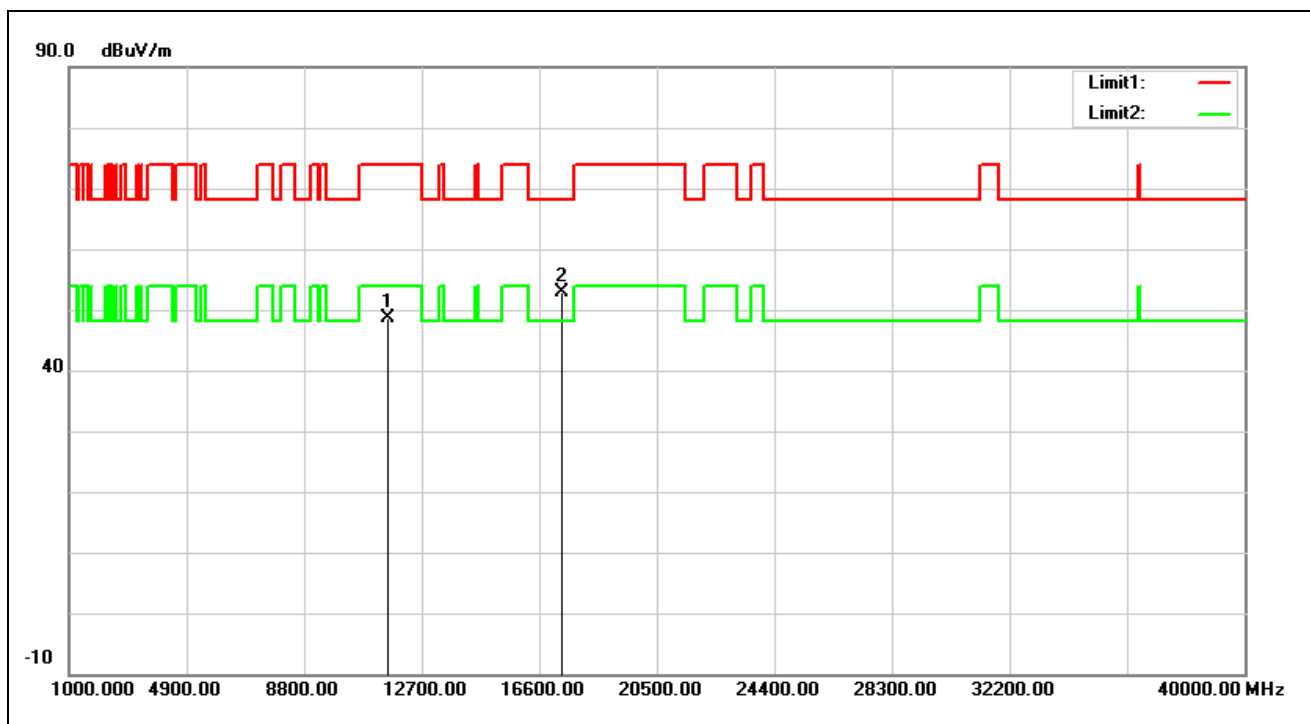


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.10	14.60	48.70	74.00	-25.30	peak
2*	17355.000	30.34	22.64	52.98	68.20	-15.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			

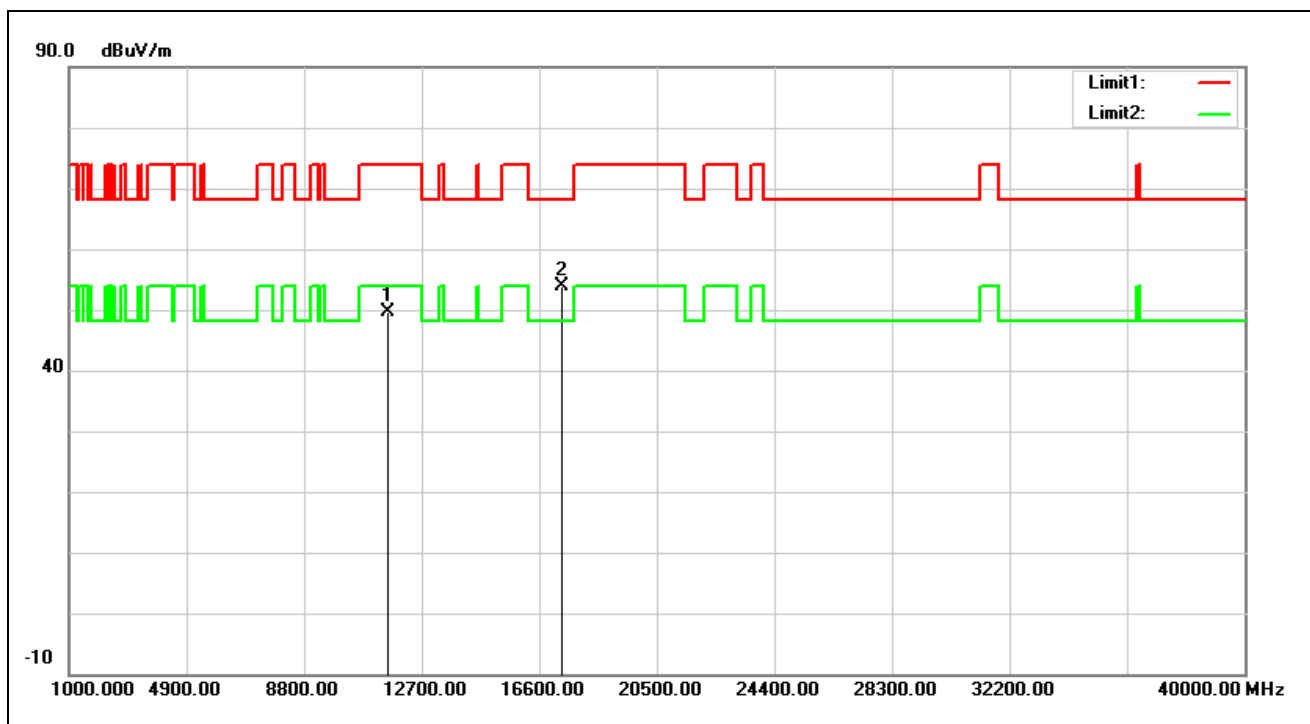


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.96	14.60	49.56	74.00	-24.44	peak
2*	17355.000	31.28	22.64	53.92	68.20	-14.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

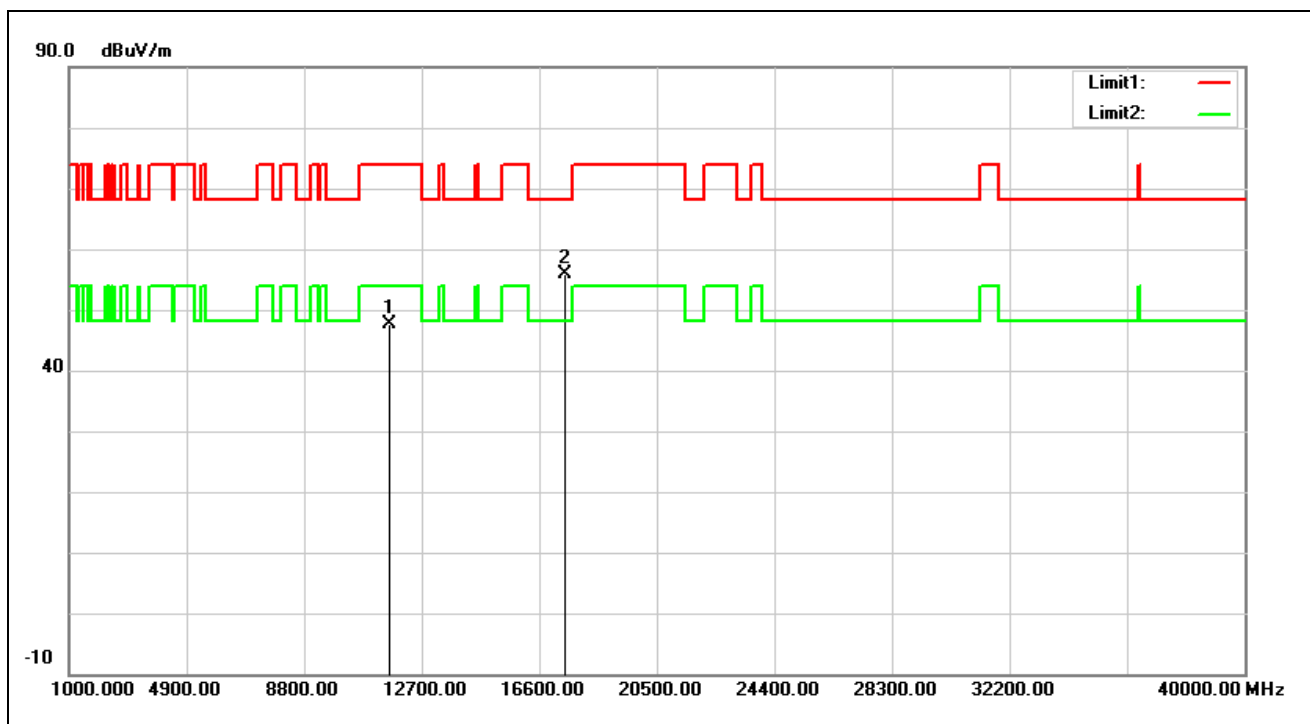


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.18	14.39	47.57	74.00	-26.43	peak
2*	17475.000	31.86	23.92	55.78	68.20	-12.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

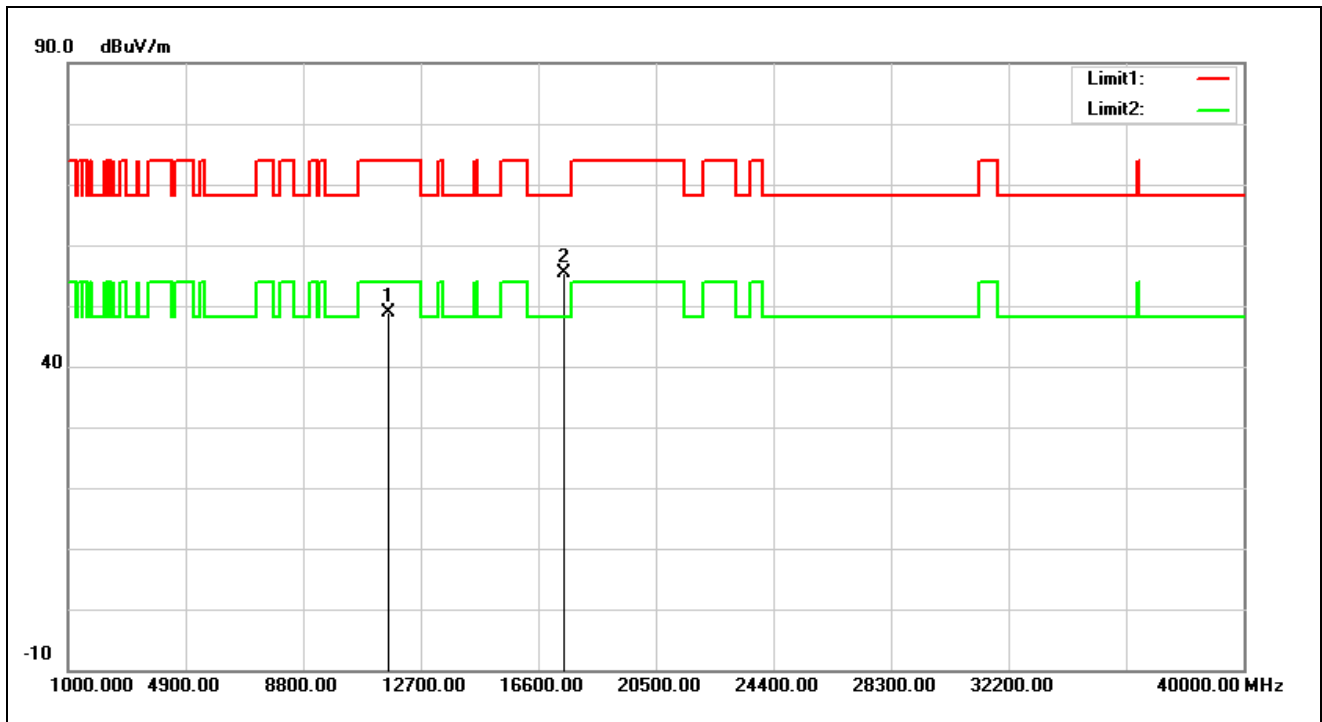


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.43	14.39	48.82	74.00	-25.18	peak
2*	17475.000	31.43	23.92	55.35	68.20	-12.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

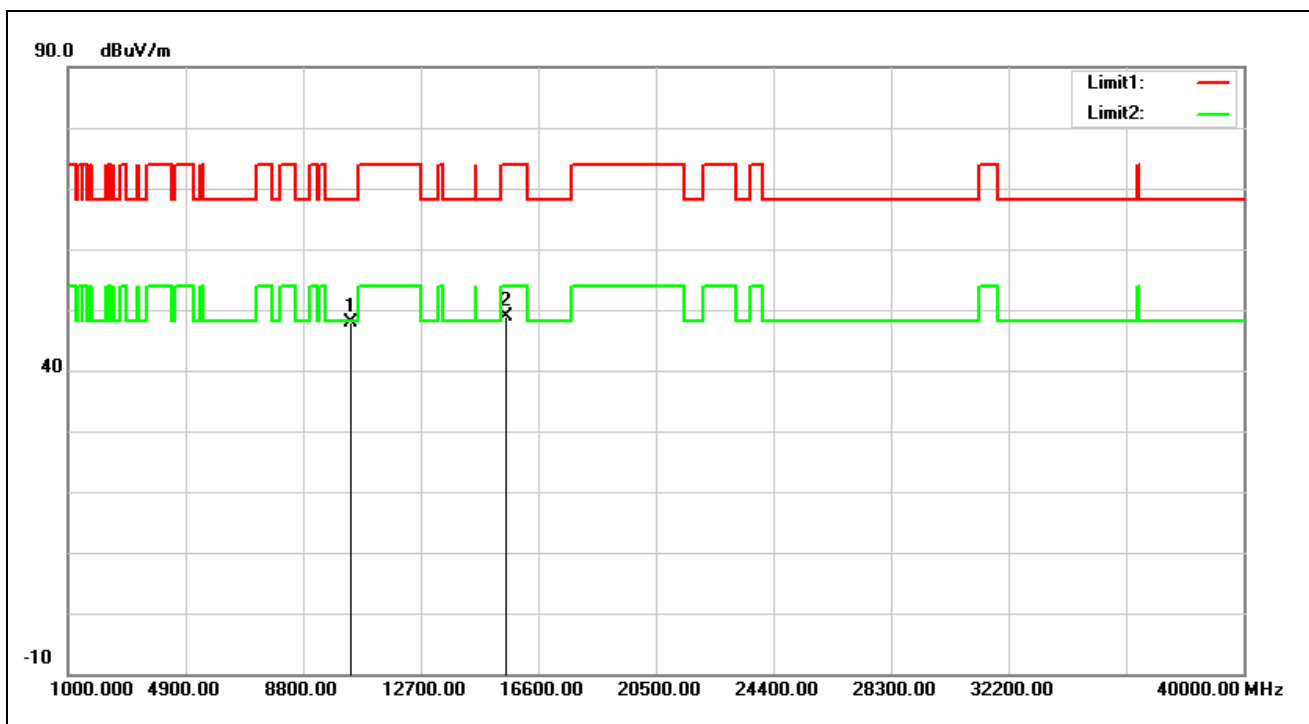


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.16	13.82	47.98	68.20	-20.22	peak
2	15540.000	32.19	16.74	48.93	74.00	-25.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

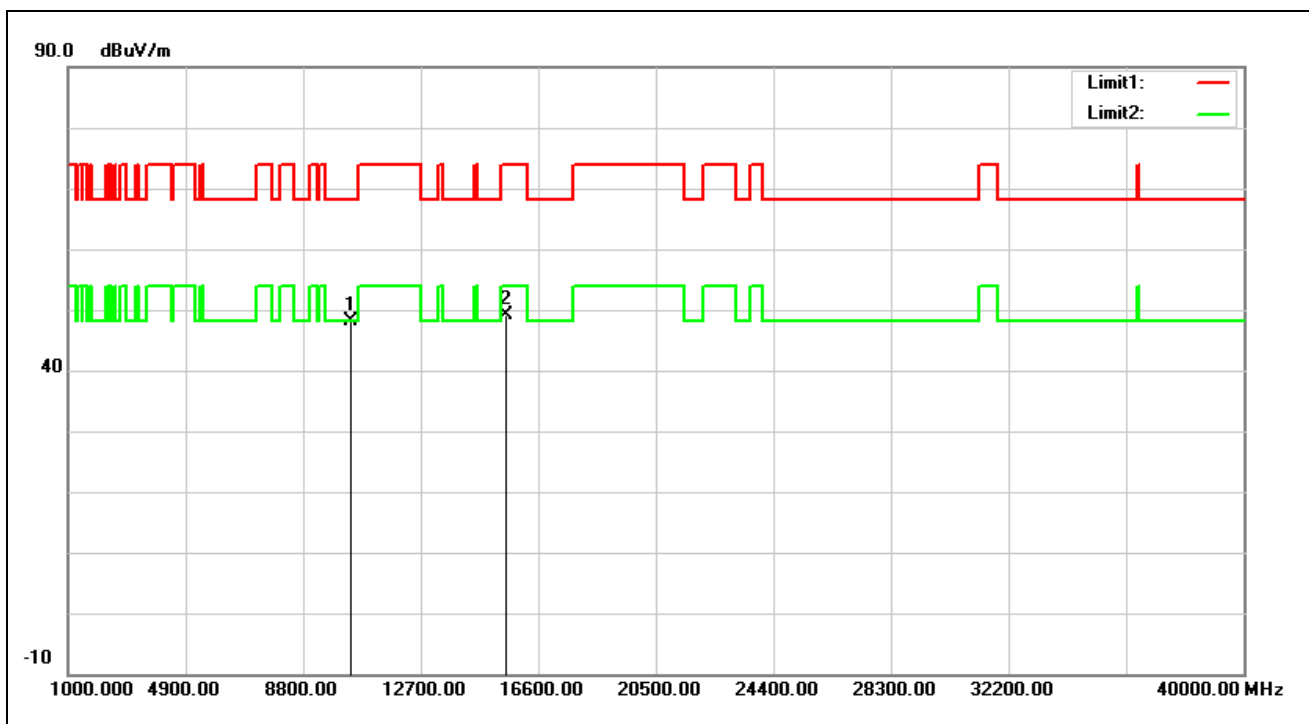


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.38	13.82	48.20	68.20	-20.00	peak
2	15540.000	32.37	16.74	49.11	74.00	-24.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

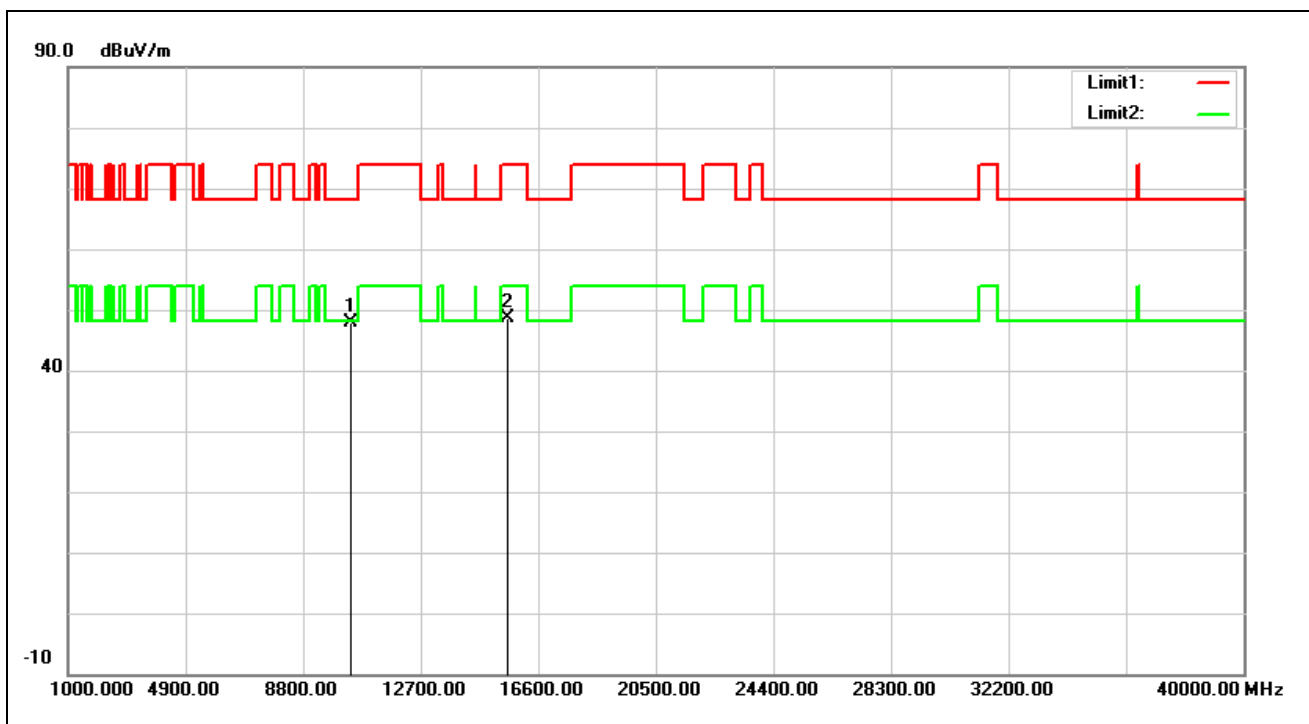


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	33.88	14.05	47.93	68.20	-20.27	peak
2	15600.000	32.15	16.51	48.66	74.00	-25.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

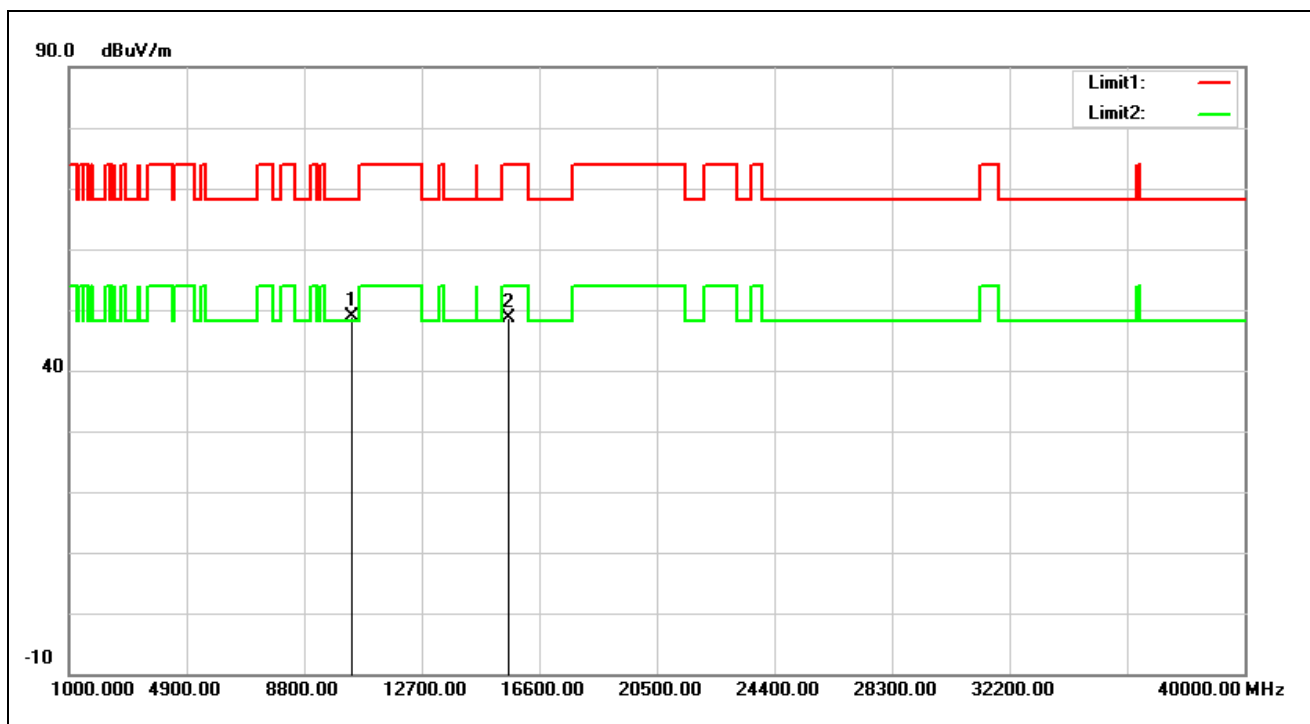


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.89	14.05	48.94	68.20	-19.26	peak
2	15600.000	32.06	16.51	48.57	74.00	-25.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

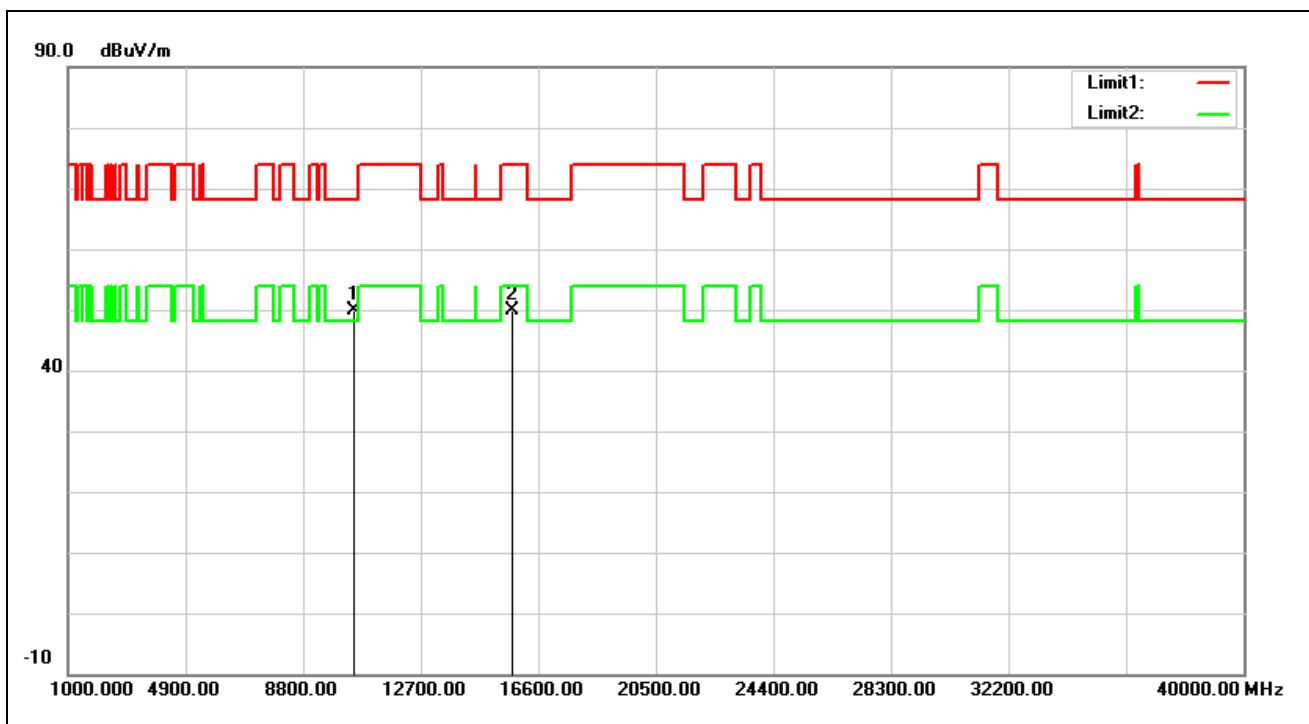


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.60	14.26	49.86	68.20	-18.34	peak
2	15720.000	33.37	16.48	49.85	74.00	-24.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

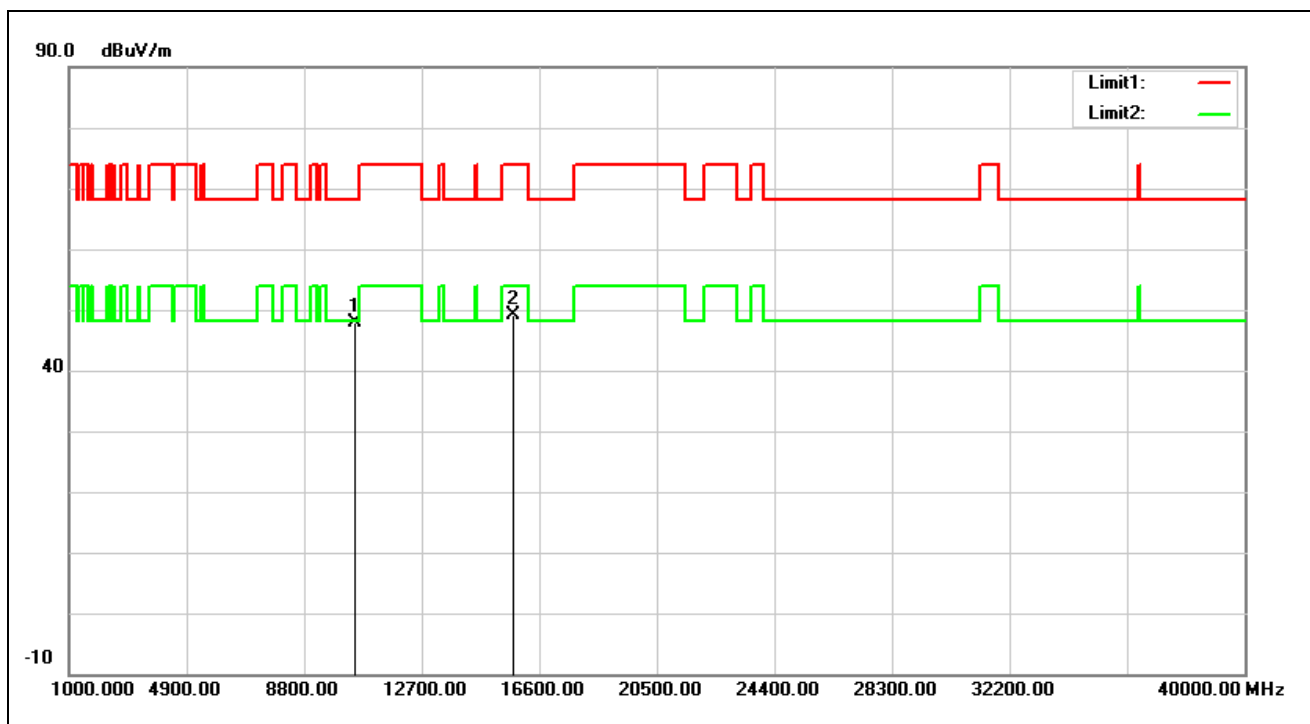


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	33.69	14.26	47.95	68.20	-20.25	peak
2	15720.000	32.68	16.48	49.16	74.00	-24.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

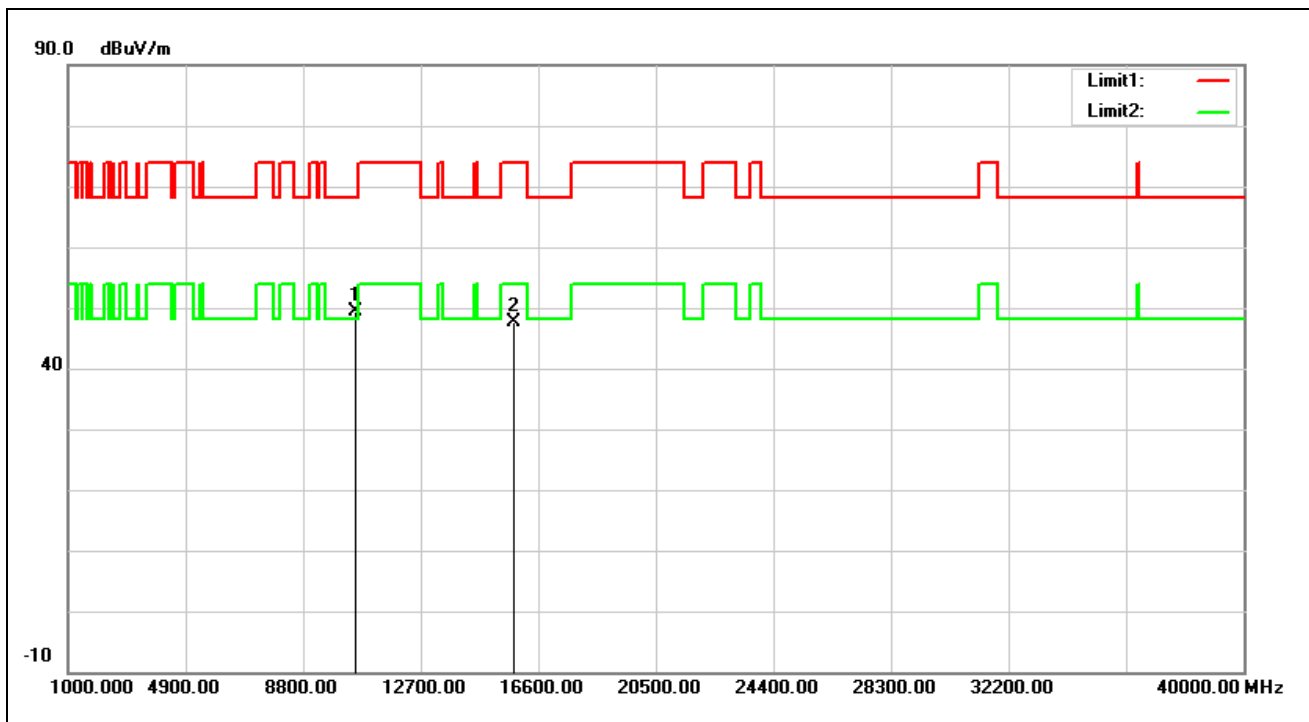


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.99	14.31	49.30	68.20	-18.90	peak
2	15780.000	31.36	16.38	47.74	74.00	-26.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

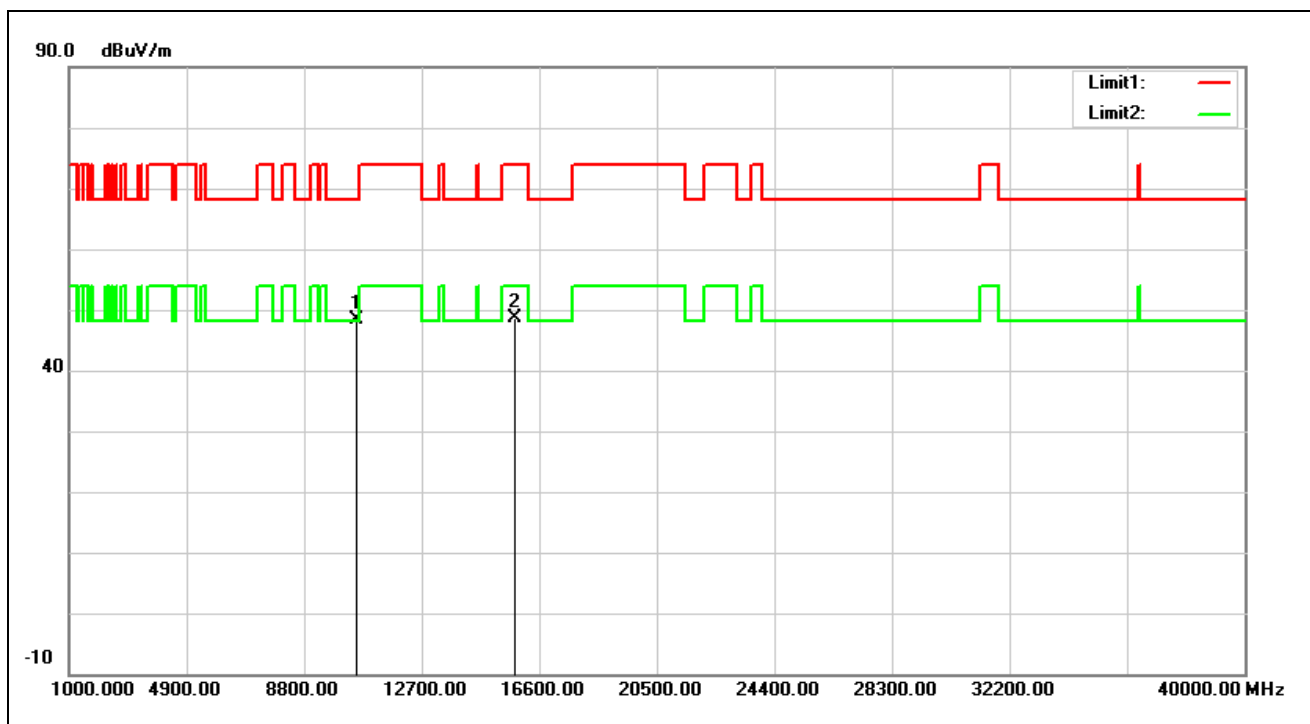


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.06	14.31	48.37	68.20	-19.83	peak
2	15780.000	32.30	16.38	48.68	74.00	-25.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

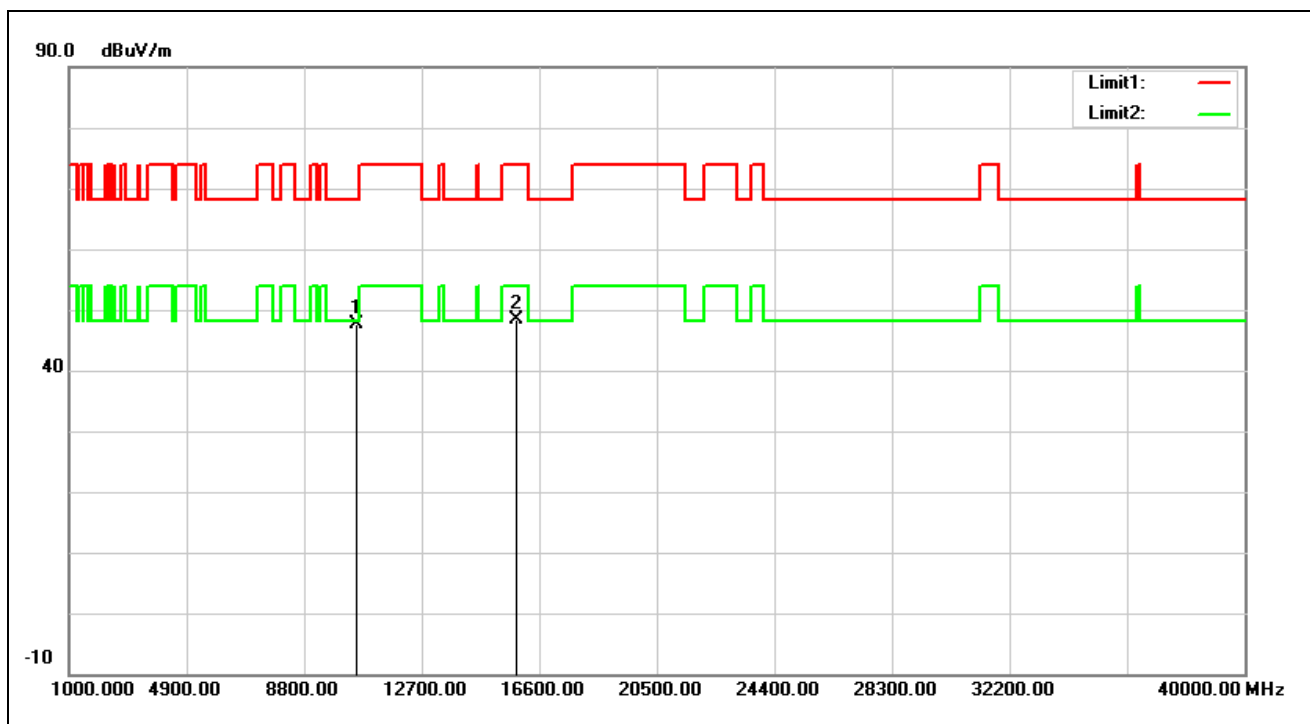


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	33.27	14.31	47.58	68.20	-20.62	peak
2	15840.000	32.13	16.18	48.31	74.00	-25.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

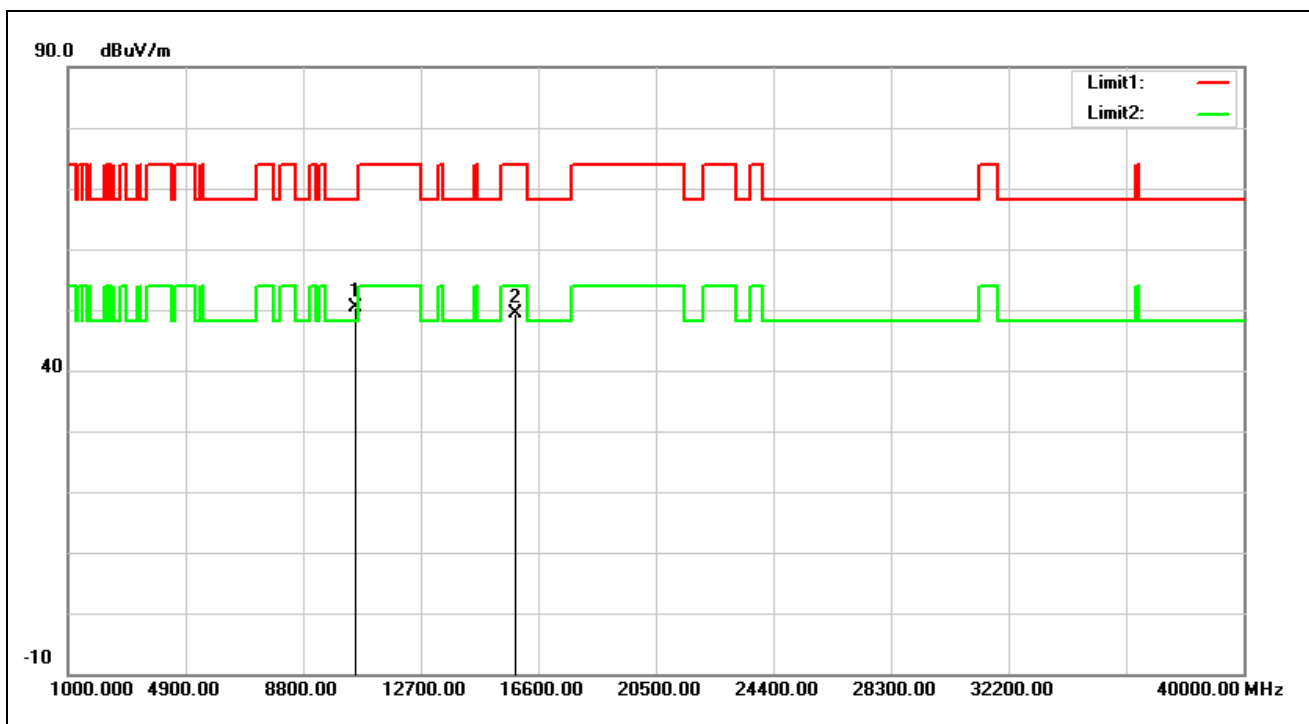


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	36.17	14.31	50.48	68.20	-17.72	peak
2	15840.000	33.23	16.18	49.41	74.00	-24.59	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

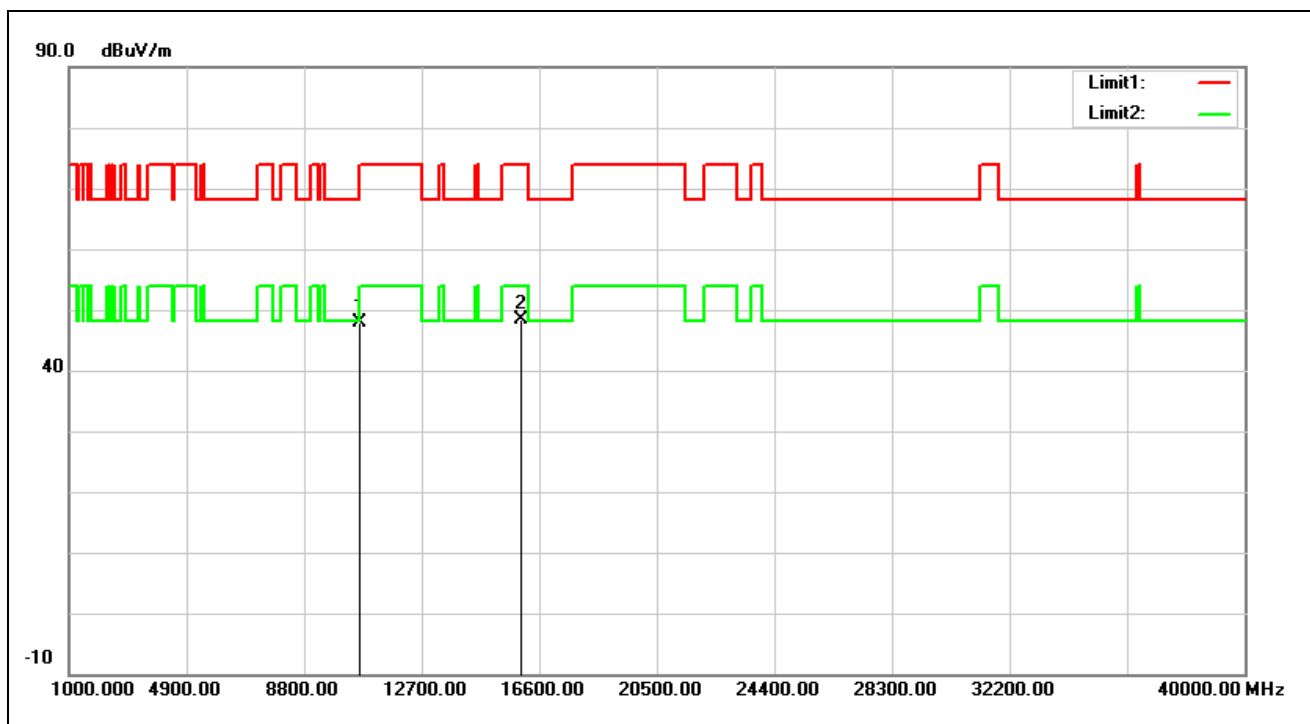


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.72	14.19	47.91	74.00	-26.09	peak
2*	15960.000	32.70	15.77	48.47	74.00	-25.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

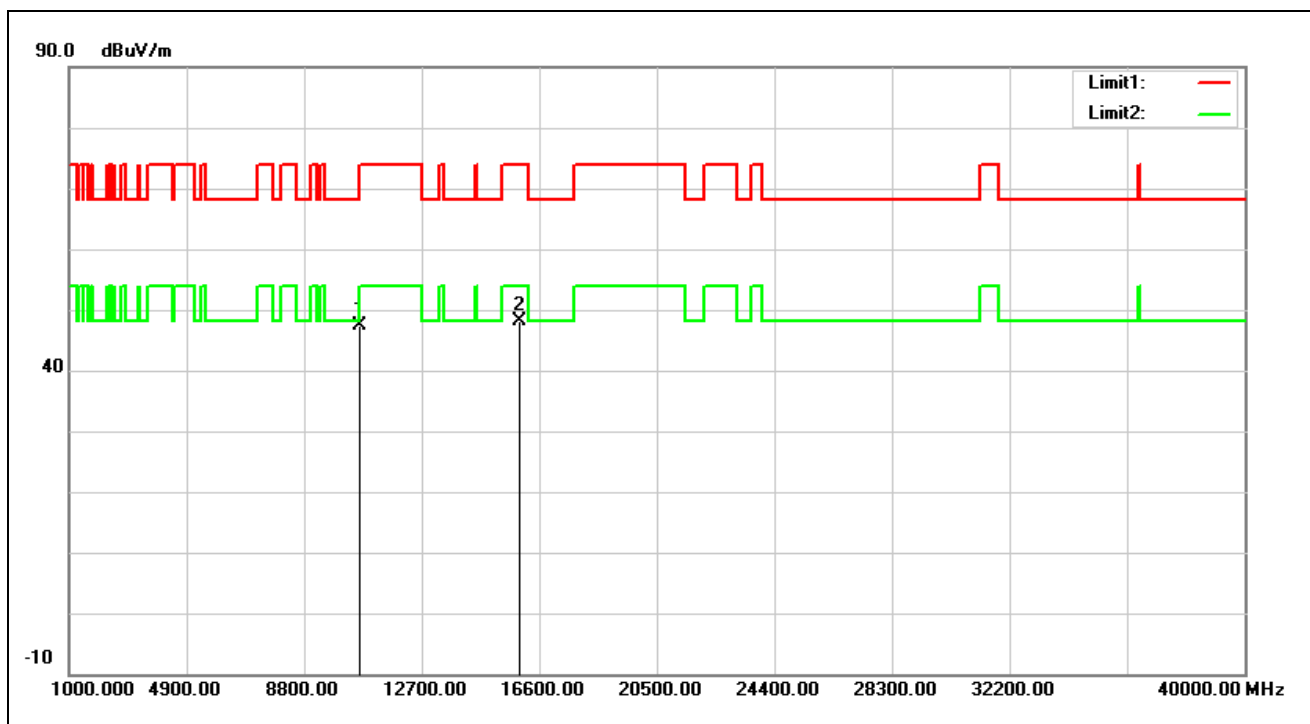


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.12	14.19	47.31	74.00	-26.69	peak
2*	15960.000	32.39	15.77	48.16	74.00	-25.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

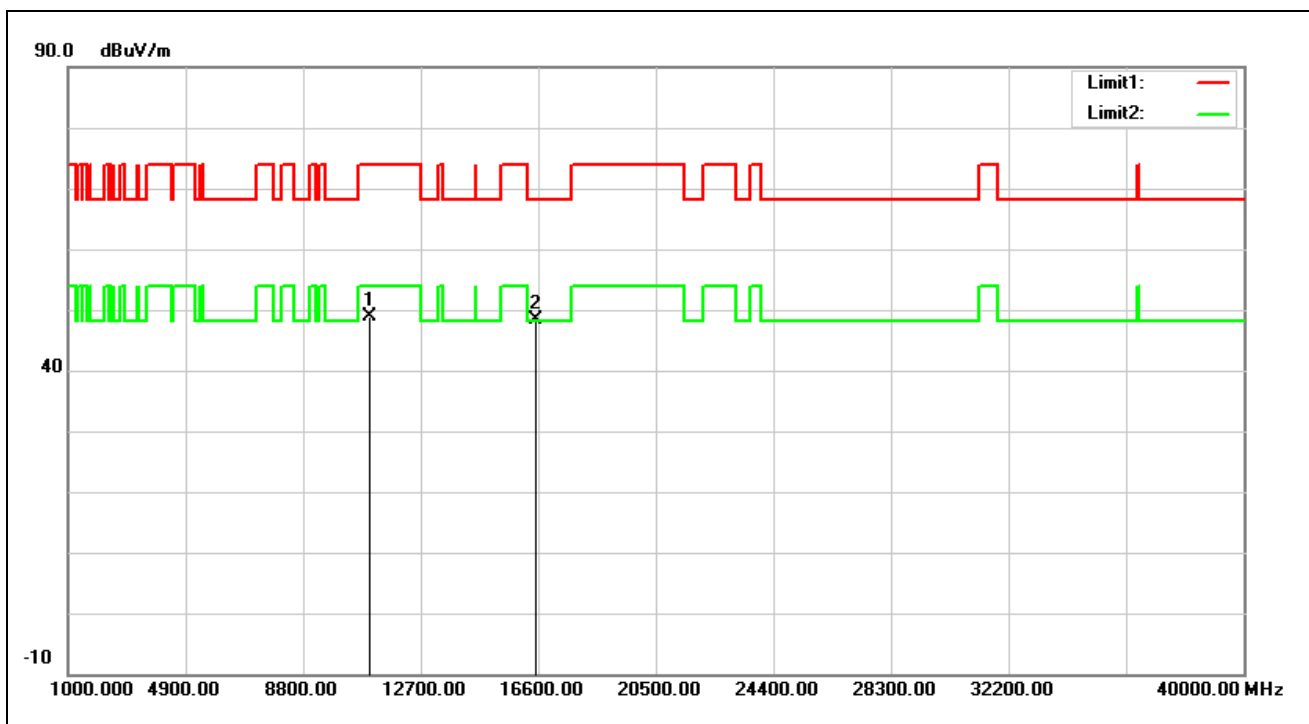


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.64	14.22	48.86	74.00	-25.14	peak
2*	16500.000	31.50	16.87	48.37	68.20	-19.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

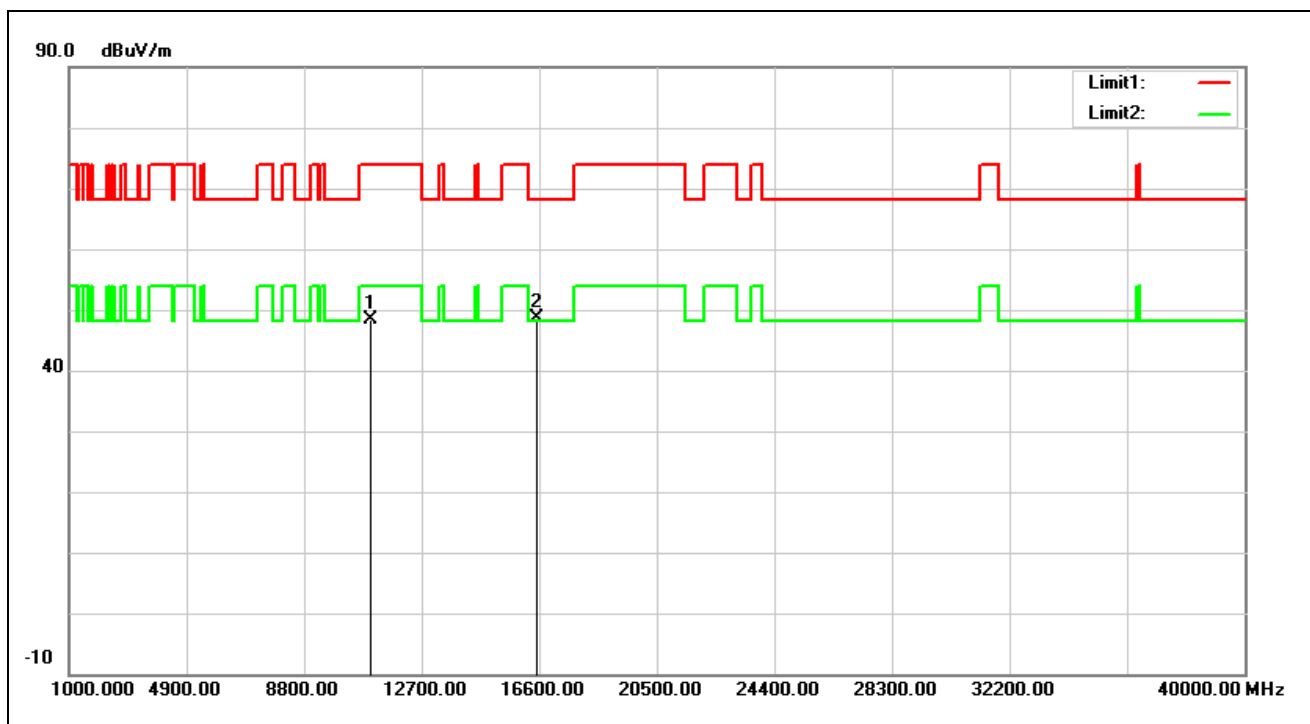


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.26	14.22	48.48	74.00	-25.52	peak
2*	16500.000	31.70	16.87	48.57	68.20	-19.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5560 MHz		
Remark:			

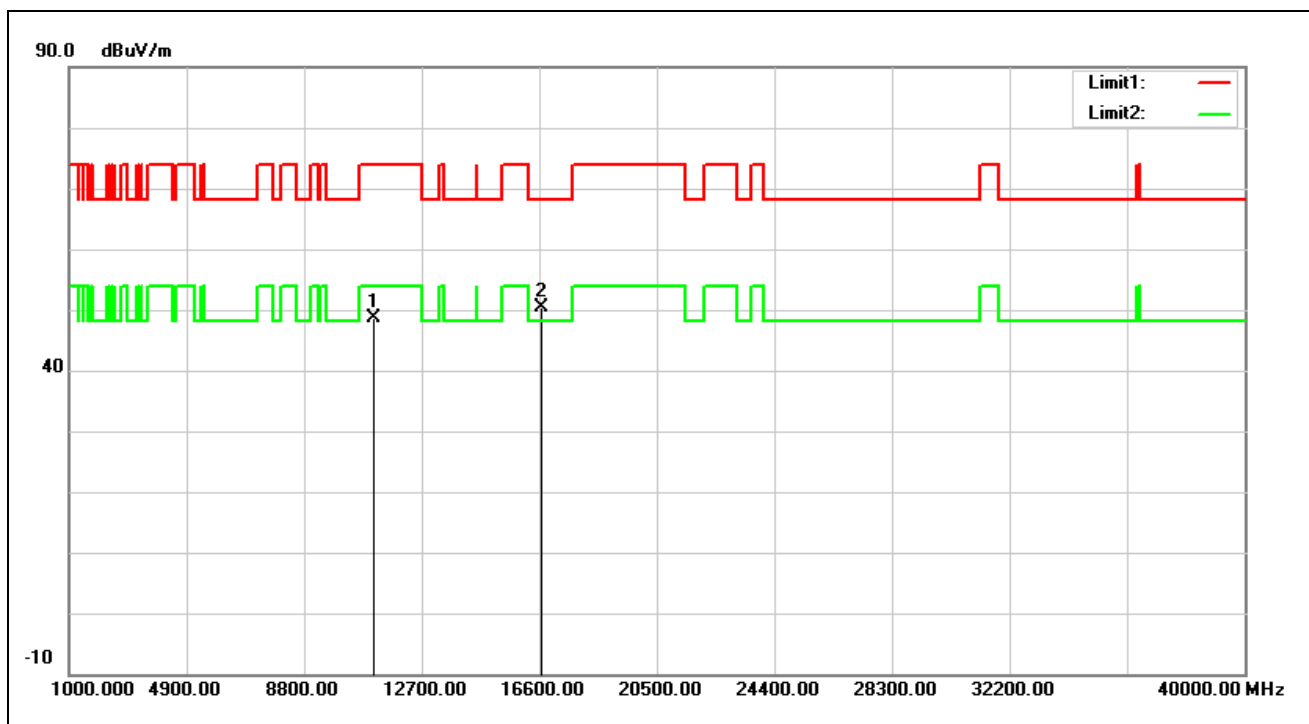


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.22	14.49	48.71	74.00	-25.29	peak
2*	16680.000	32.41	17.98	50.39	68.20	-17.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5560 MHz		
Remark:			

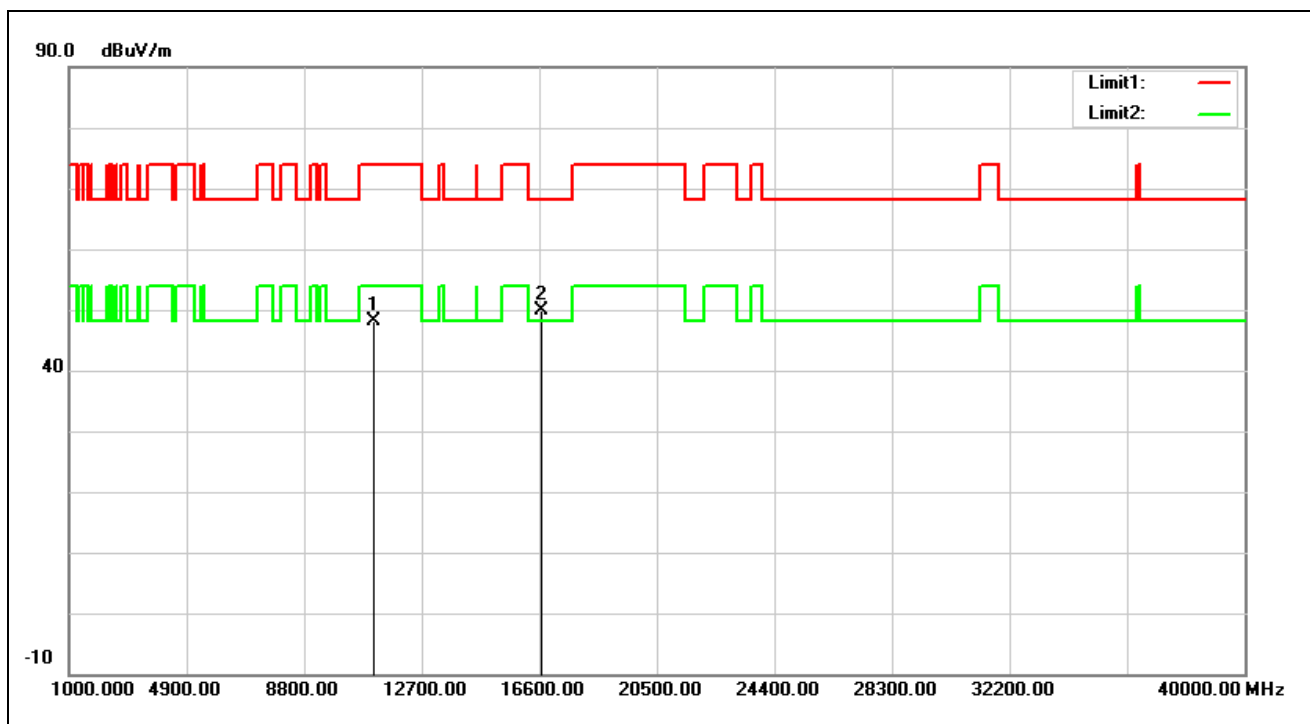


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.73	14.49	48.22	74.00	-25.78	peak
2*	16680.000	31.96	17.98	49.94	68.20	-18.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

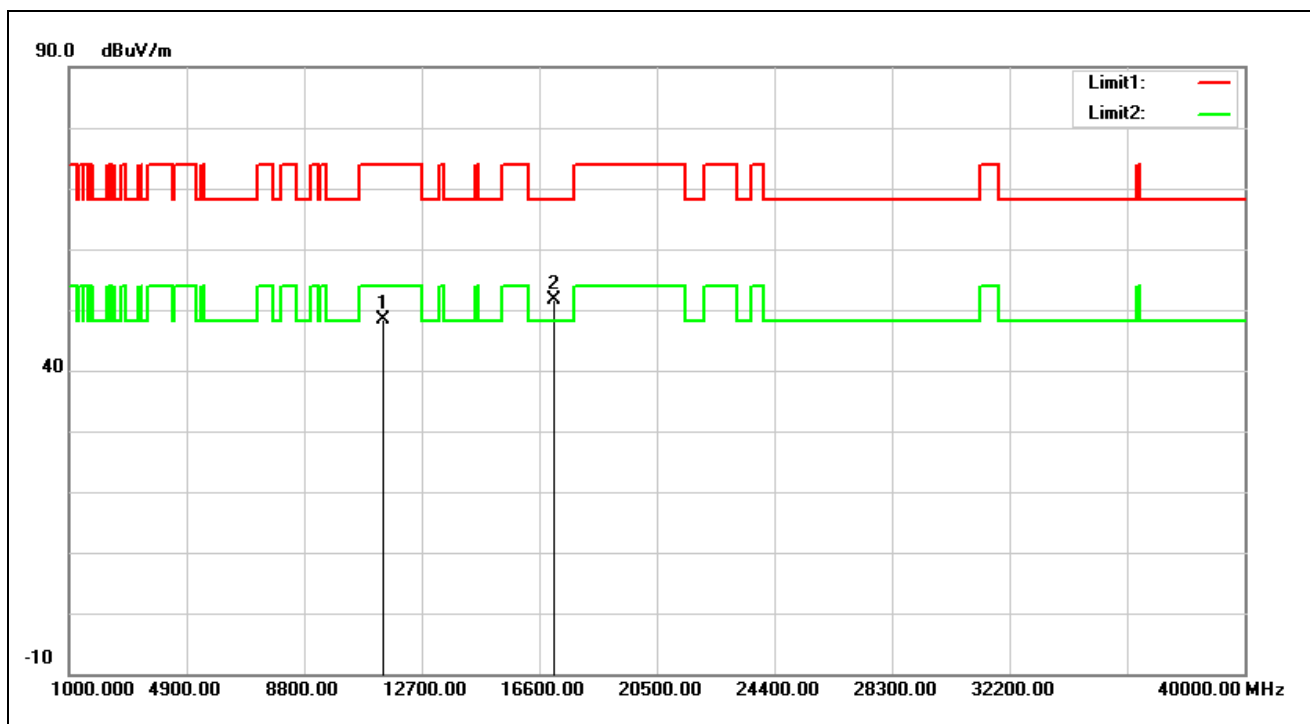


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.12	14.26	48.38	74.00	-25.62	peak
2*	17100.000	31.06	20.69	51.75	68.20	-16.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

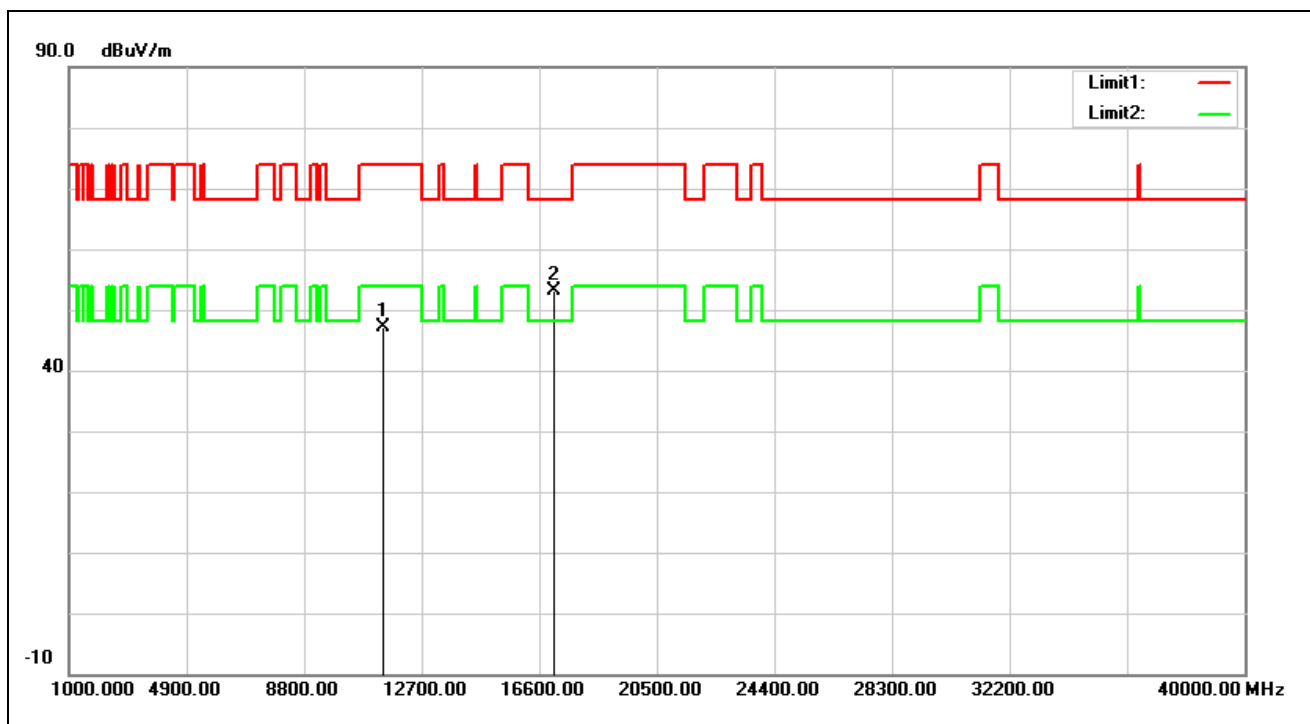


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.97	14.26	47.23	74.00	-26.77	peak
2*	17100.000	32.48	20.69	53.17	68.20	-15.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

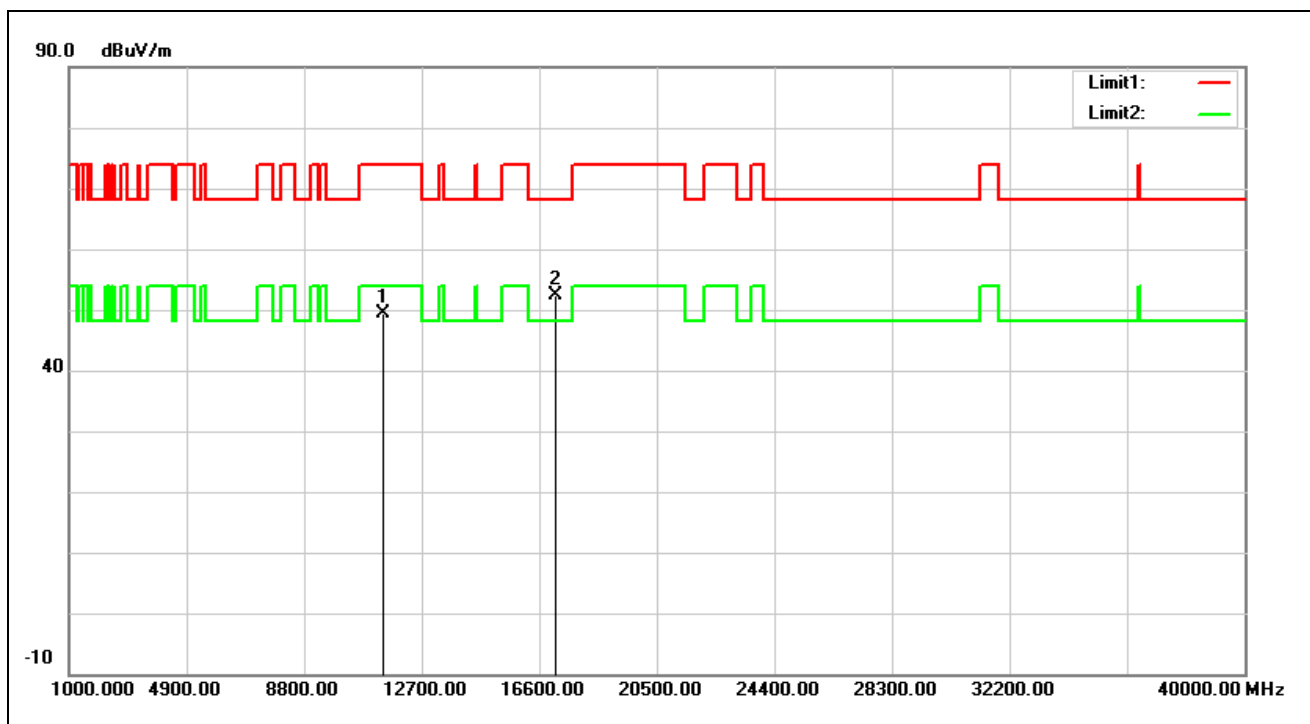


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.90	14.56	49.46	74.00	-24.54	peak
2*	17160.000	31.30	21.09	52.39	68.20	-15.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

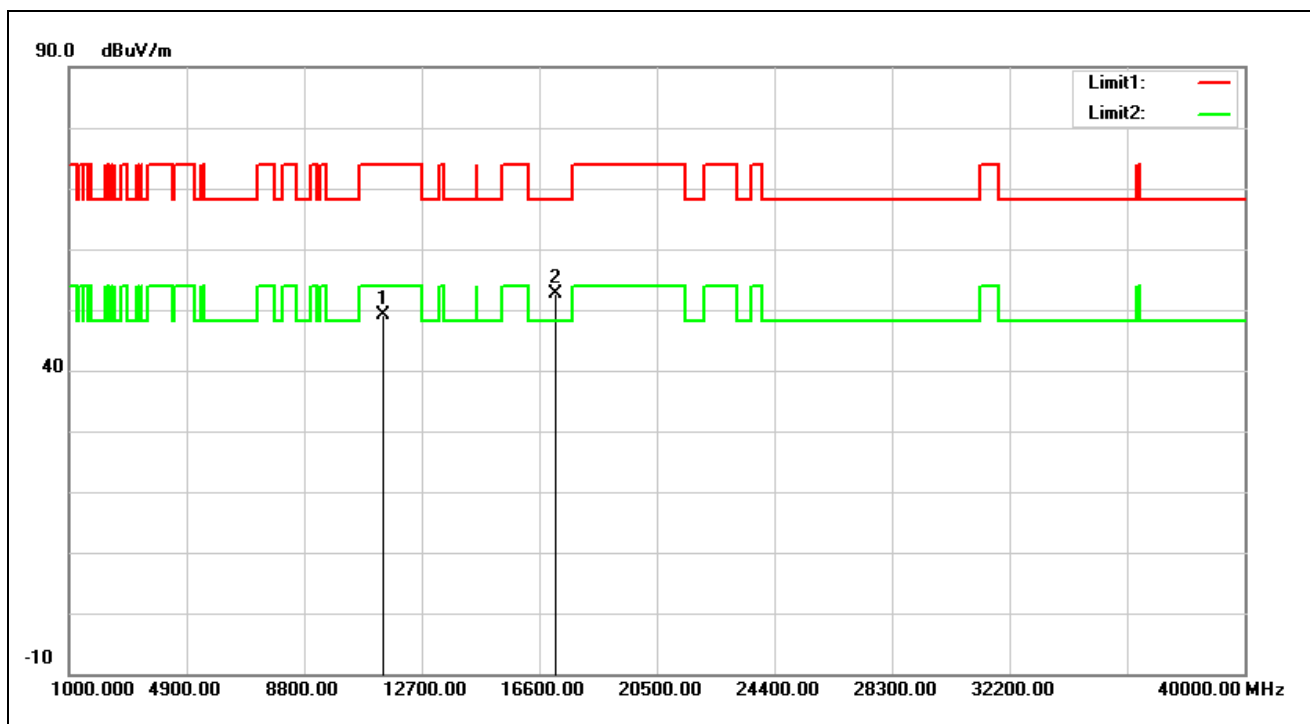


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.52	14.56	49.08	74.00	-24.92	peak
2*	17160.000	31.66	21.09	52.75	68.20	-15.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

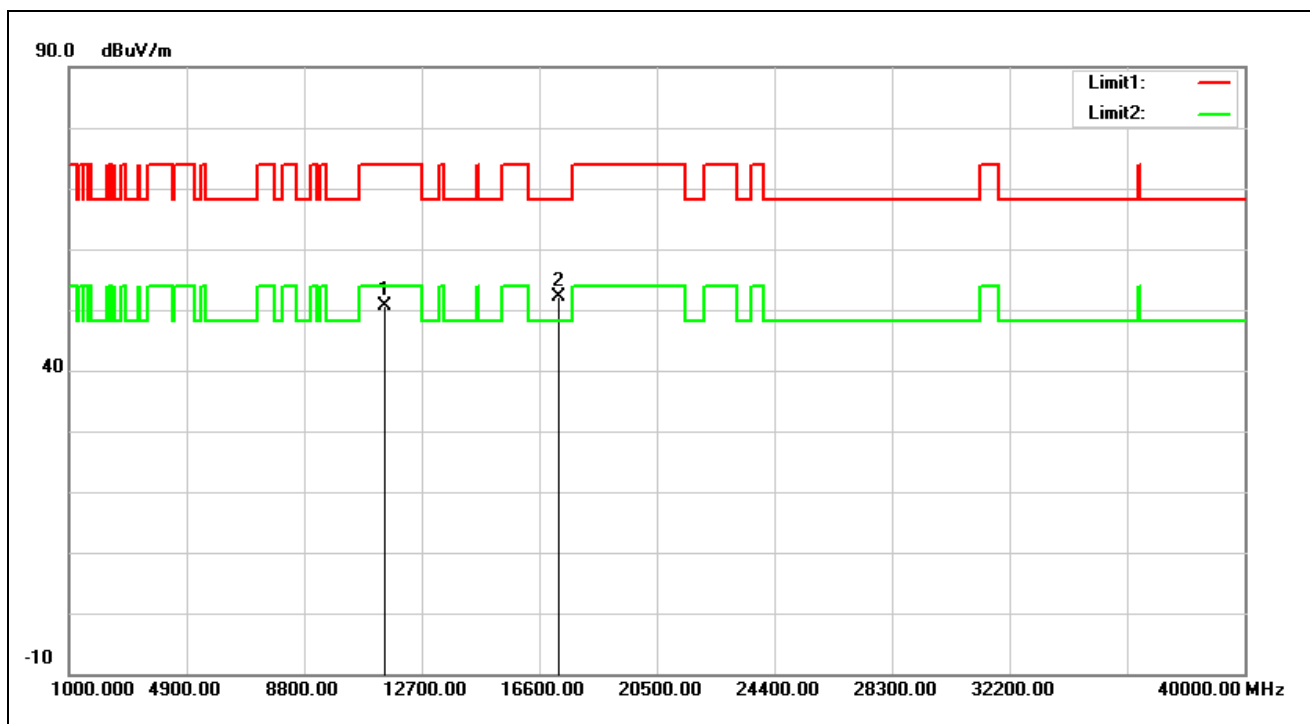


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.60	14.93	50.53	74.00	-23.47	peak
2*	17235.000	30.42	21.70	52.12	68.20	-16.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

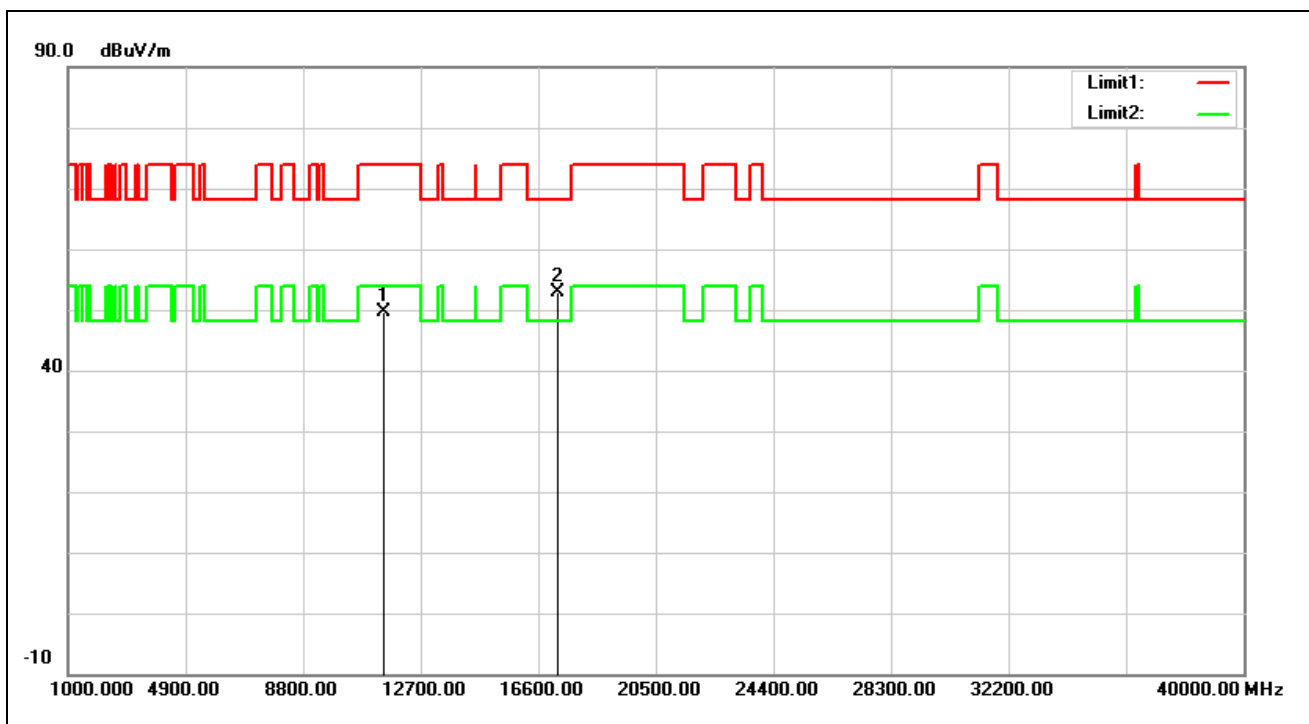


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.58	14.93	49.51	74.00	-24.49	peak
2*	17235.000	31.18	21.70	52.88	68.20	-15.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

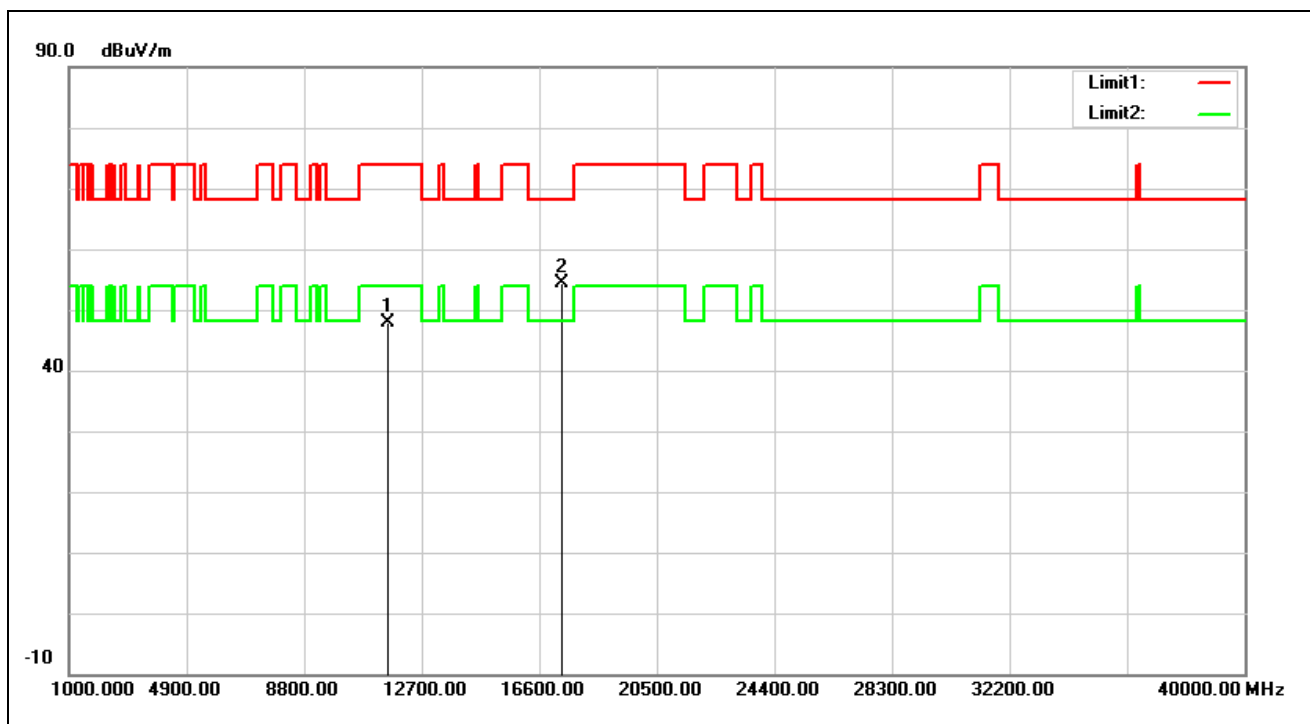


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.20	14.60	47.80	74.00	-26.20	peak
2*	17355.000	31.71	22.64	54.35	68.20	-13.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

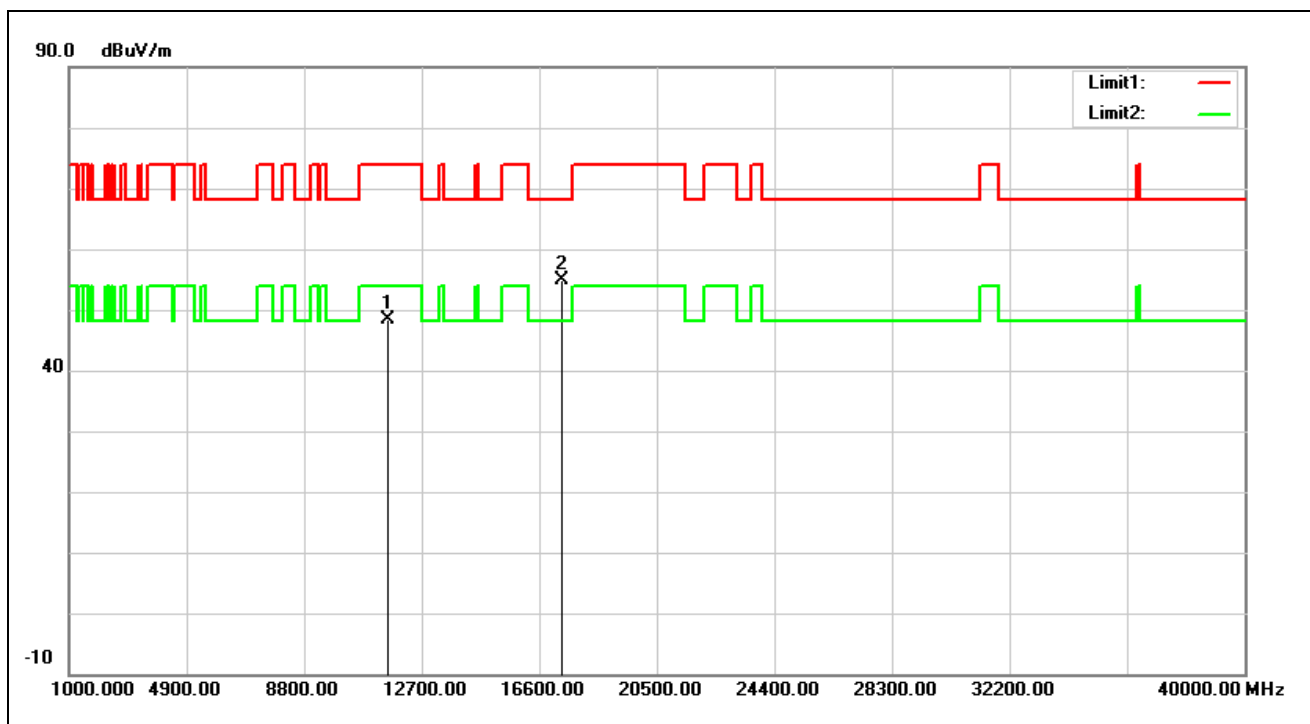


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.68	14.60	48.28	74.00	-25.72	peak
2*	17355.000	32.22	22.64	54.86	68.20	-13.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

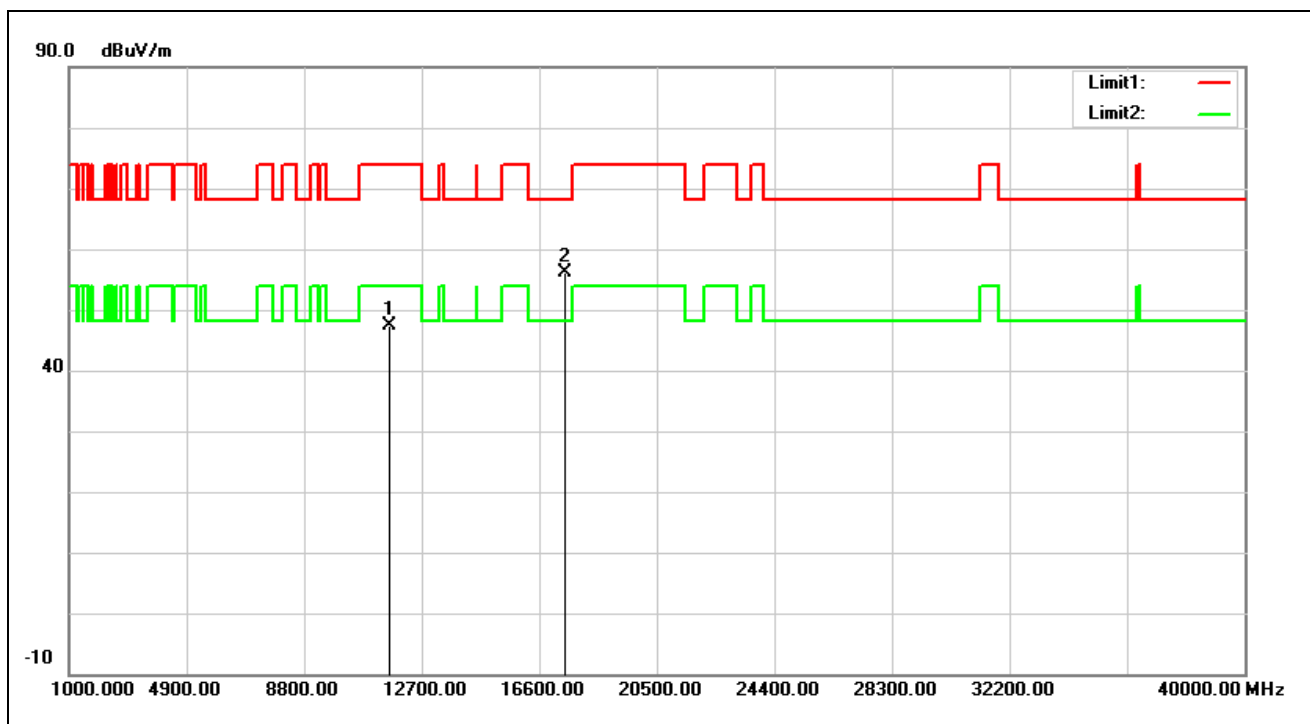


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.09	14.39	47.48	74.00	-26.52	peak
2*	17475.000	32.30	23.92	56.22	68.20	-11.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

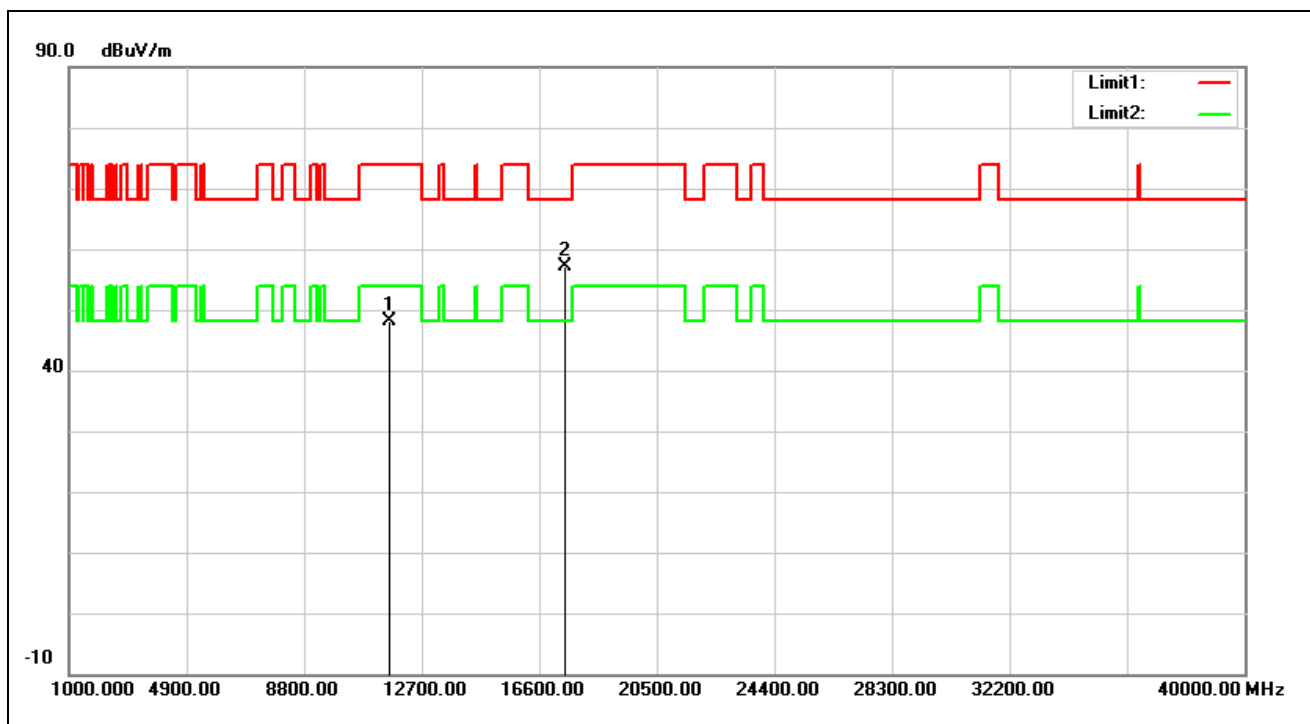


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.70	14.39	48.09	74.00	-25.91	peak
2*	17475.000	33.28	23.92	57.20	68.20	-11.00	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

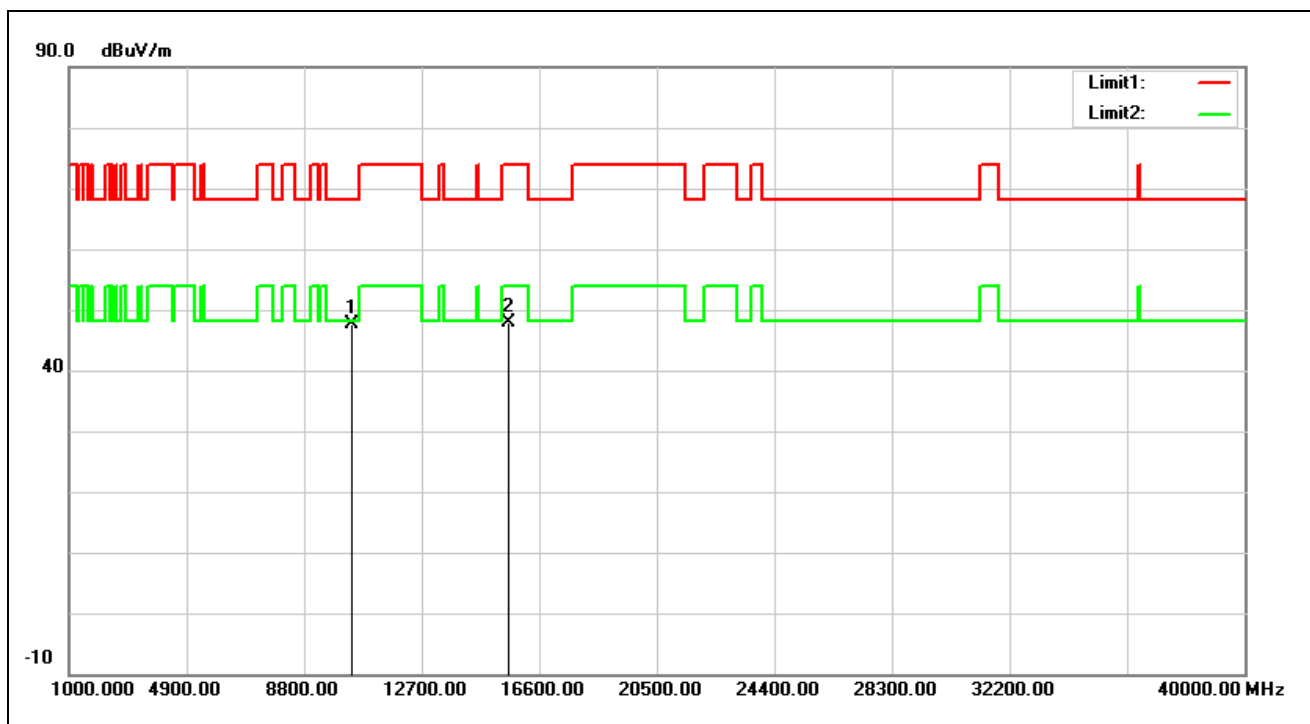


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	33.77	13.93	47.70	68.20	-20.50	peak
2	15570.000	31.15	16.62	47.77	74.00	-26.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

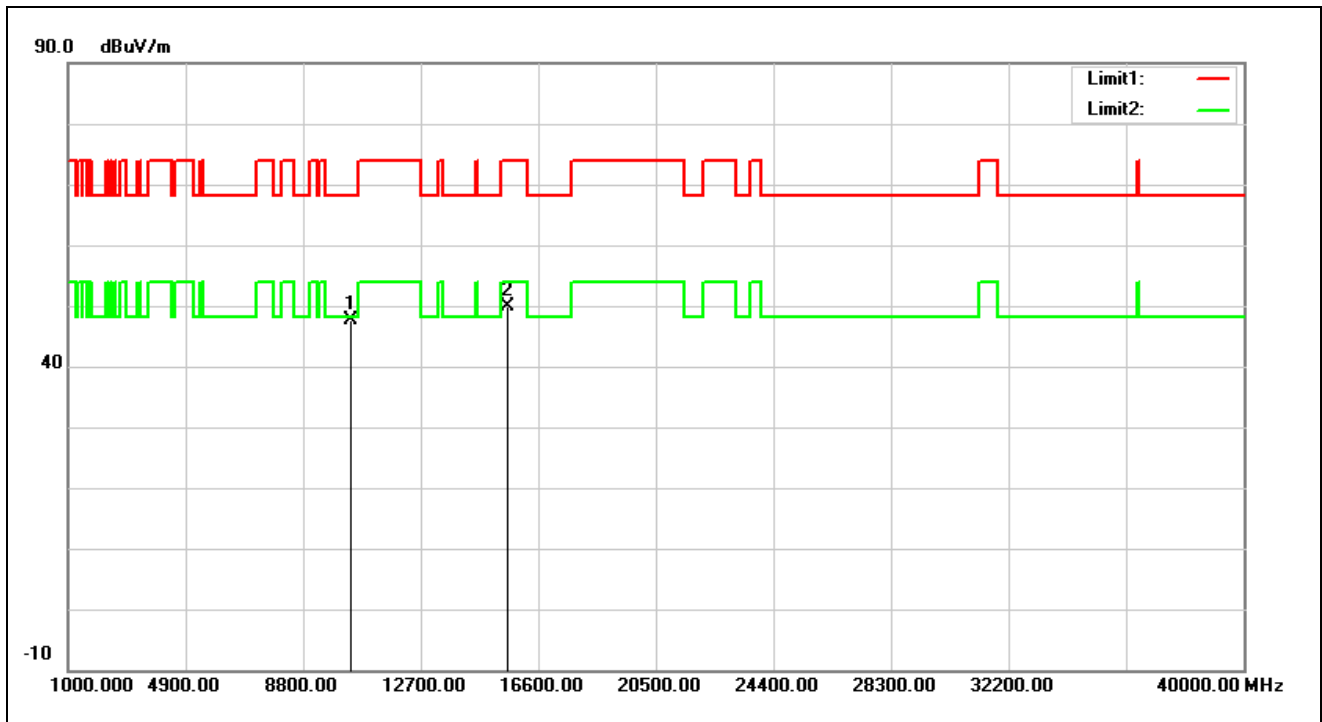


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	33.63	13.93	47.56	68.20	-20.64	peak
2	15570.000	33.26	16.62	49.88	74.00	-24.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

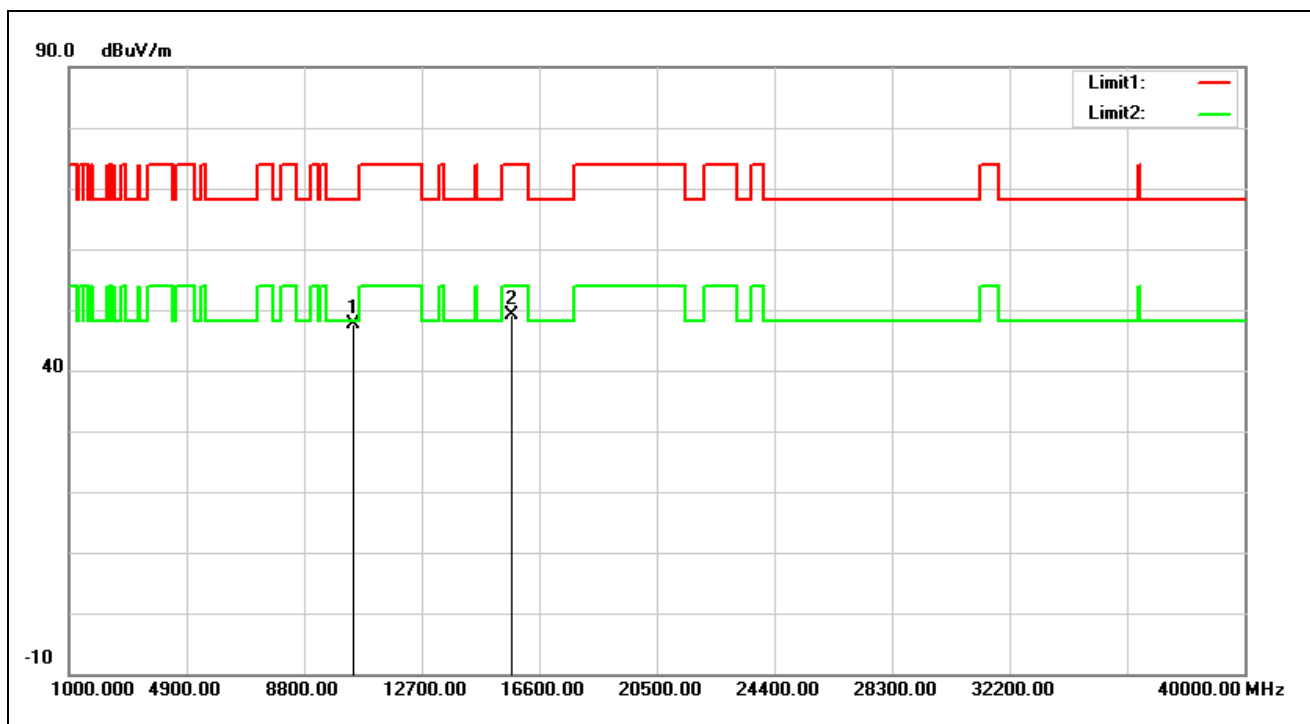


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	33.33	14.20	47.53	68.20	-20.67	peak
2	15690.000	32.67	16.52	49.19	74.00	-24.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

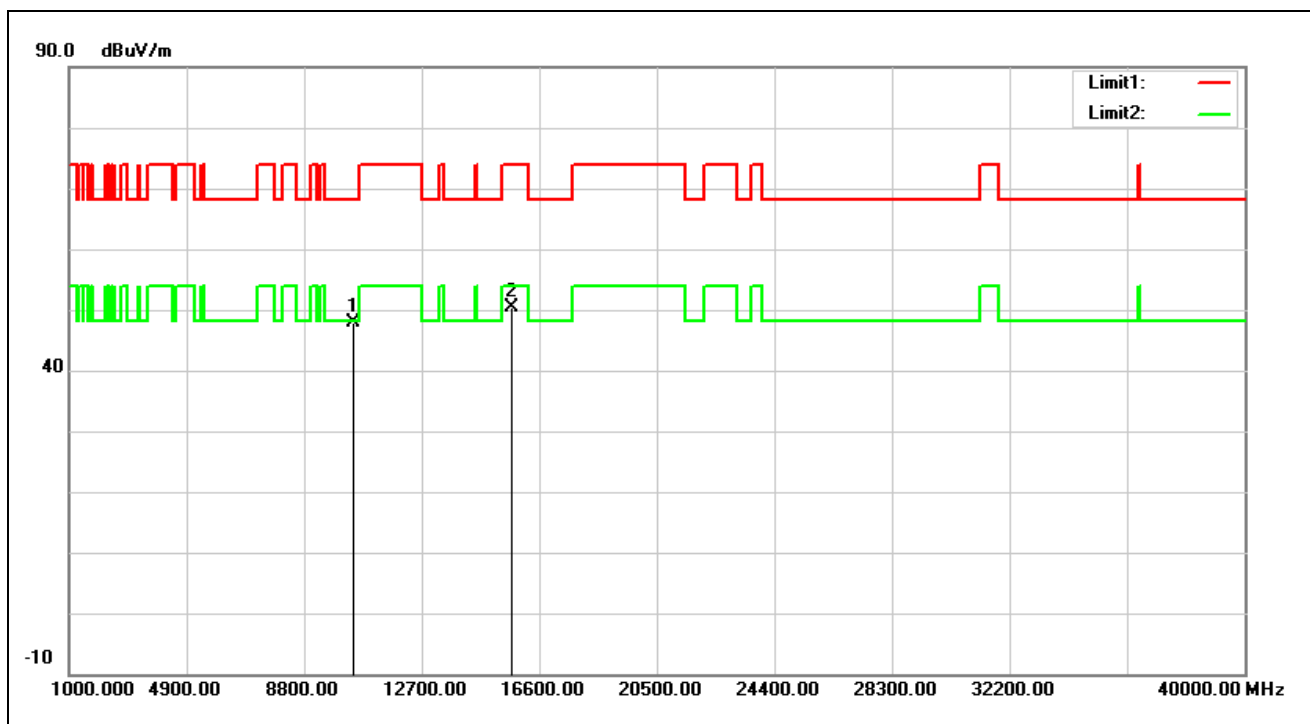


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	33.60	14.20	47.80	68.20	-20.40	peak
2	15690.000	33.98	16.52	50.50	74.00	-23.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

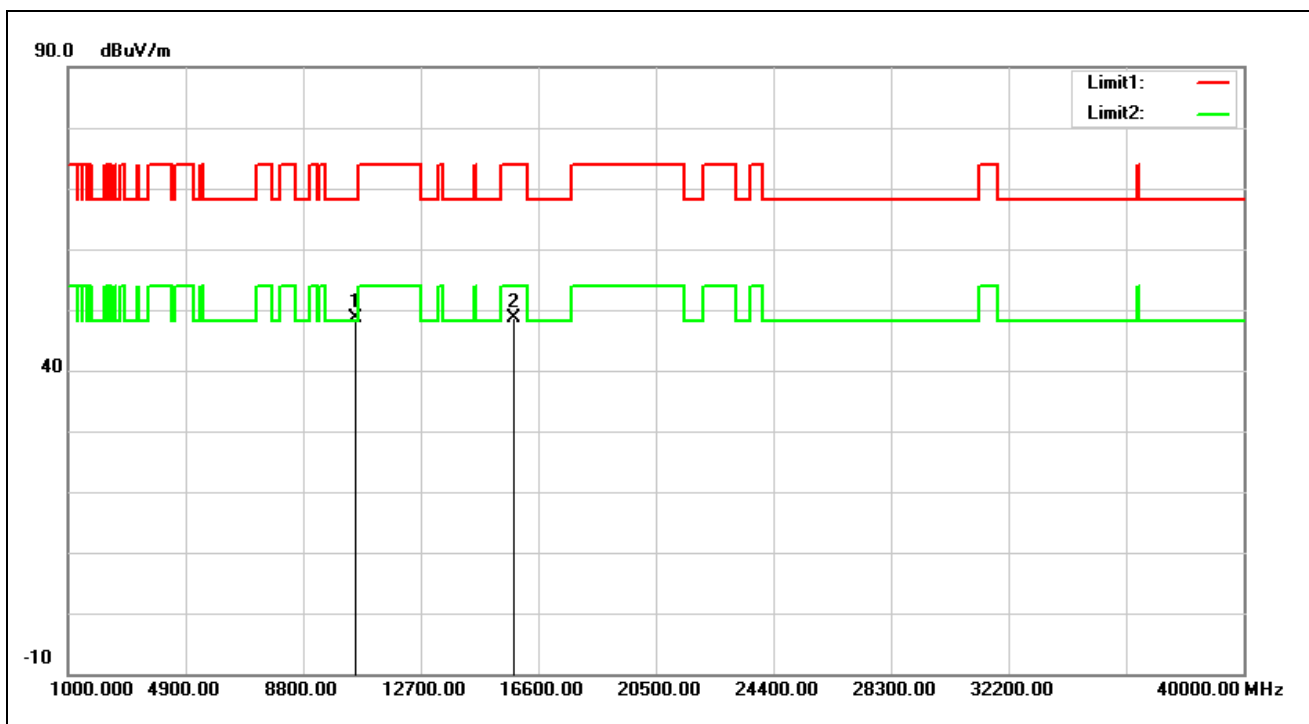


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	34.33	14.32	48.65	68.20	-19.55	peak
2	15810.000	32.42	16.29	48.71	74.00	-25.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

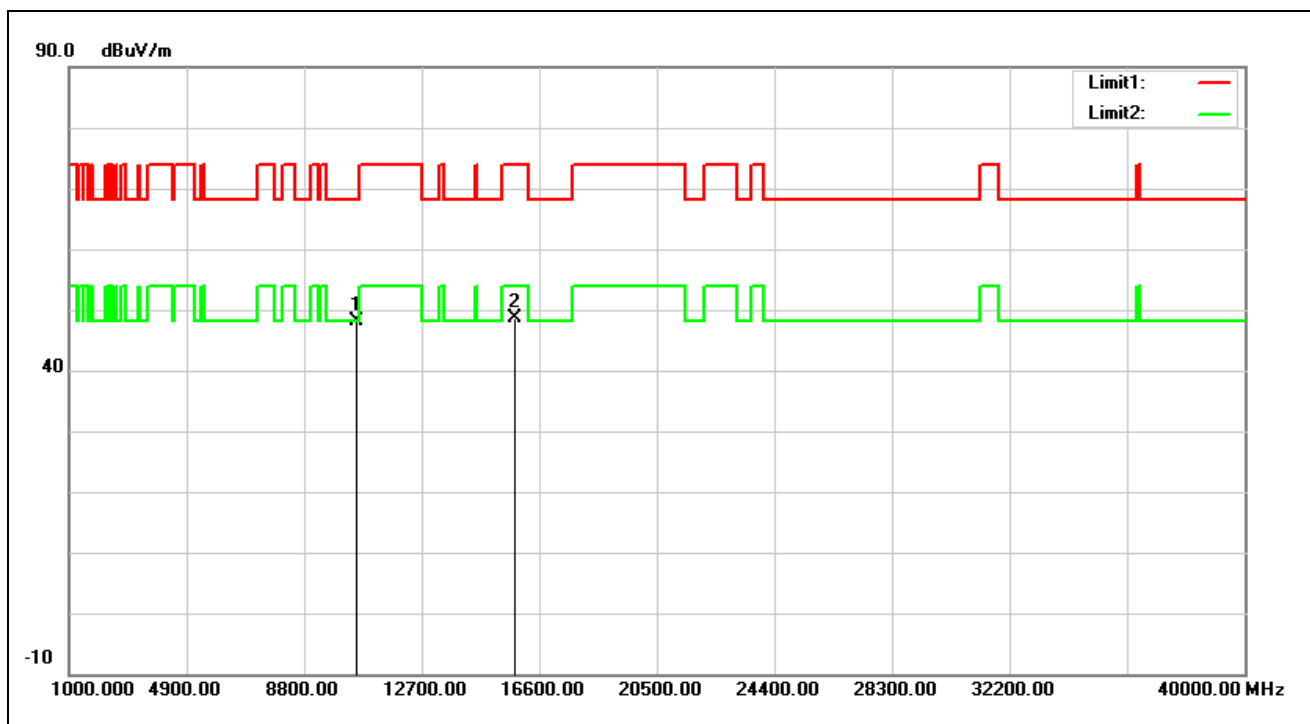


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.89	14.32	48.21	68.20	-19.99	peak
2	15810.000	32.27	16.29	48.56	74.00	-25.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

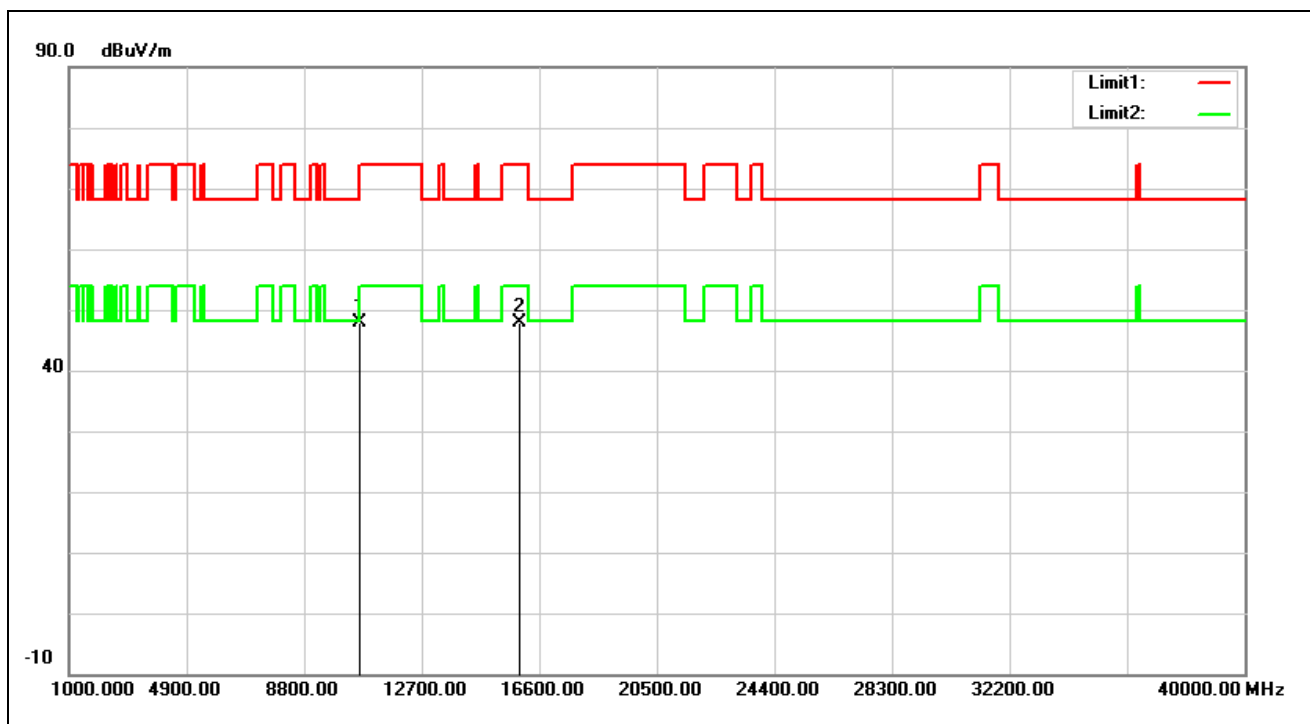


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.54	14.26	47.80	74.00	-26.20	peak
2*	15930.000	32.09	15.86	47.95	74.00	-26.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

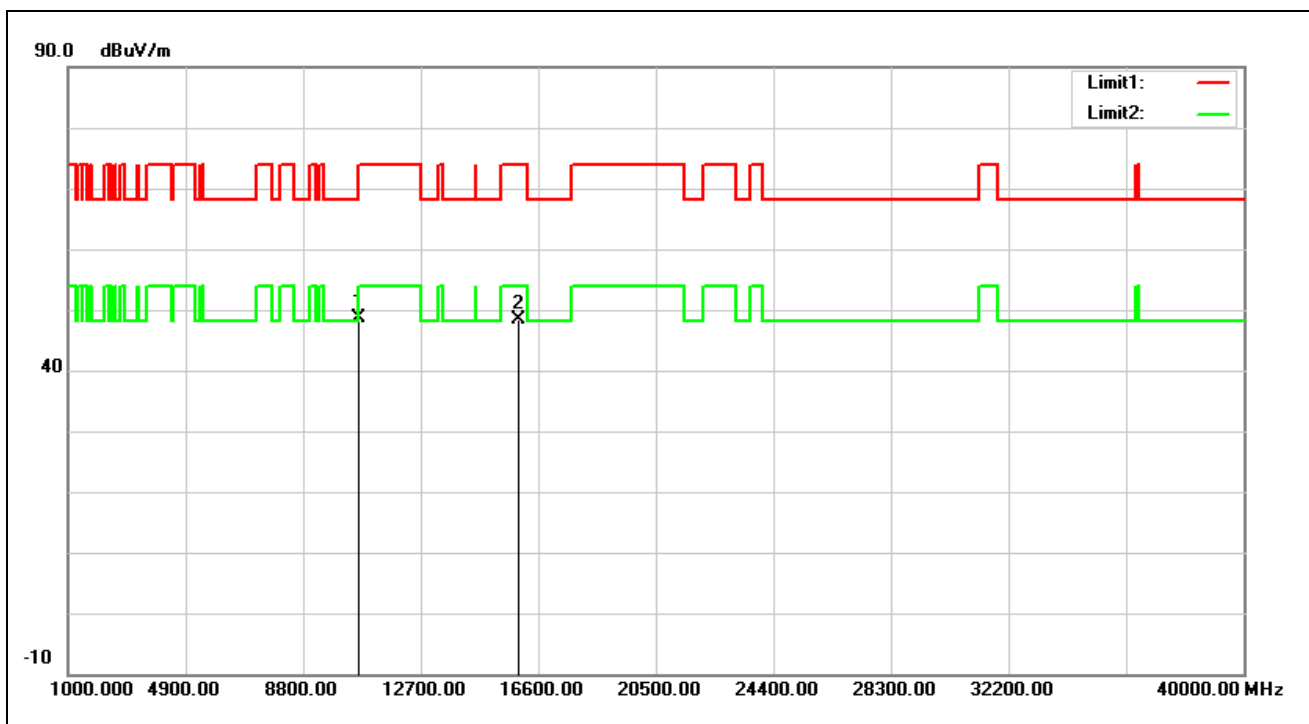


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10620.000	34.38	14.26	48.64	74.00	-25.36	peak
2	15930.000	32.47	15.86	48.33	74.00	-25.67	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

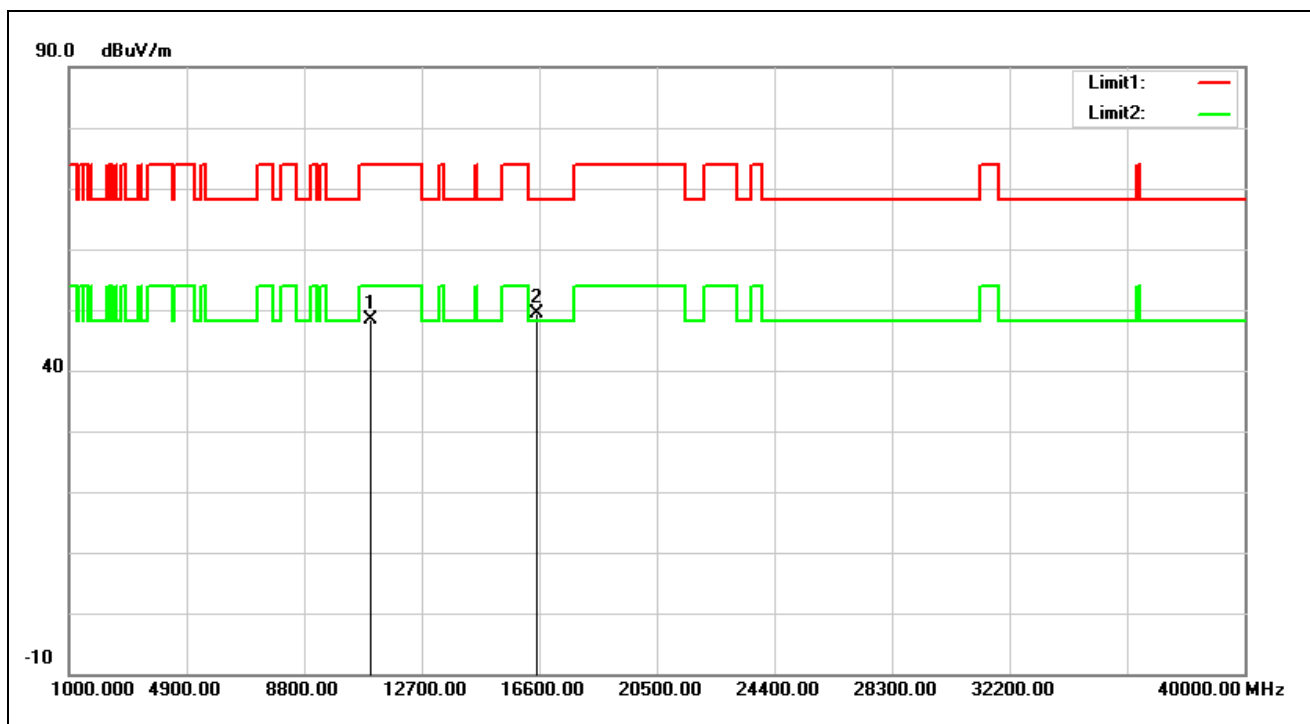


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.13	14.29	48.42	74.00	-25.58	peak
2*	16530.000	32.39	17.05	49.44	68.20	-18.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

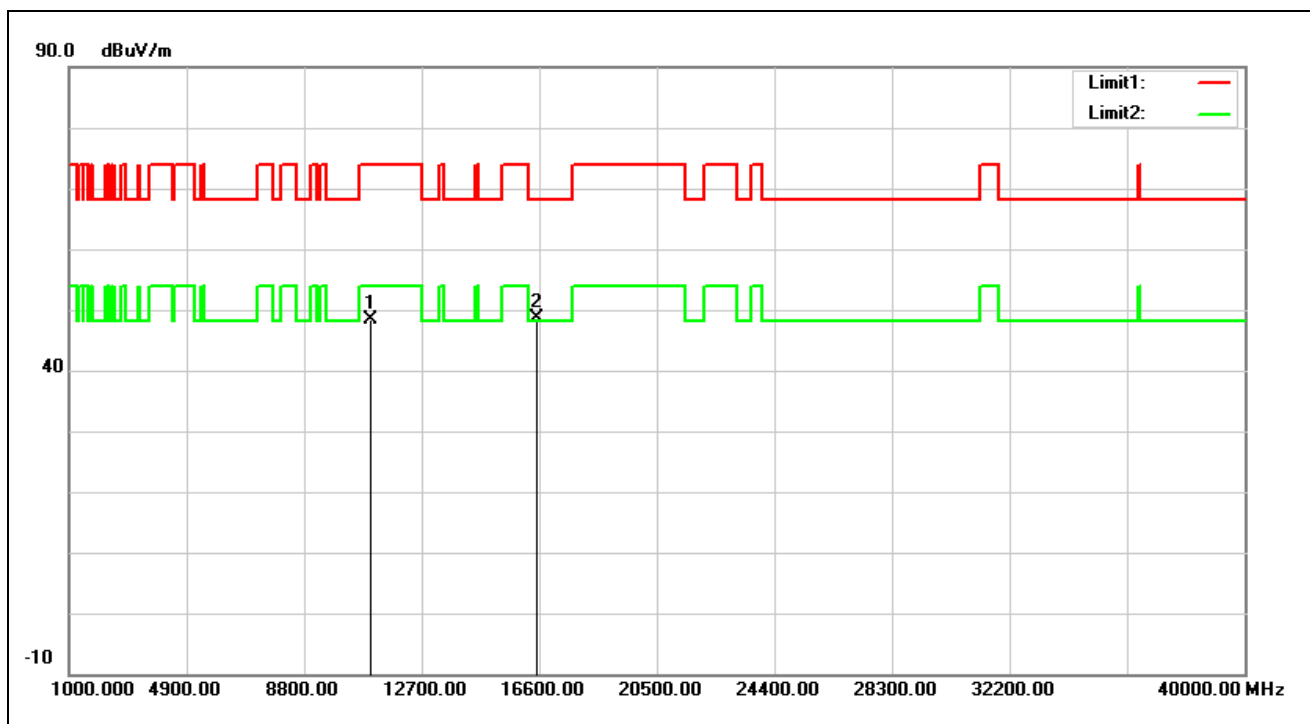


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.08	14.29	48.37	74.00	-25.63	peak
2*	16530.000	31.69	17.05	48.74	68.20	-19.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5550 MHz		
Remark:			

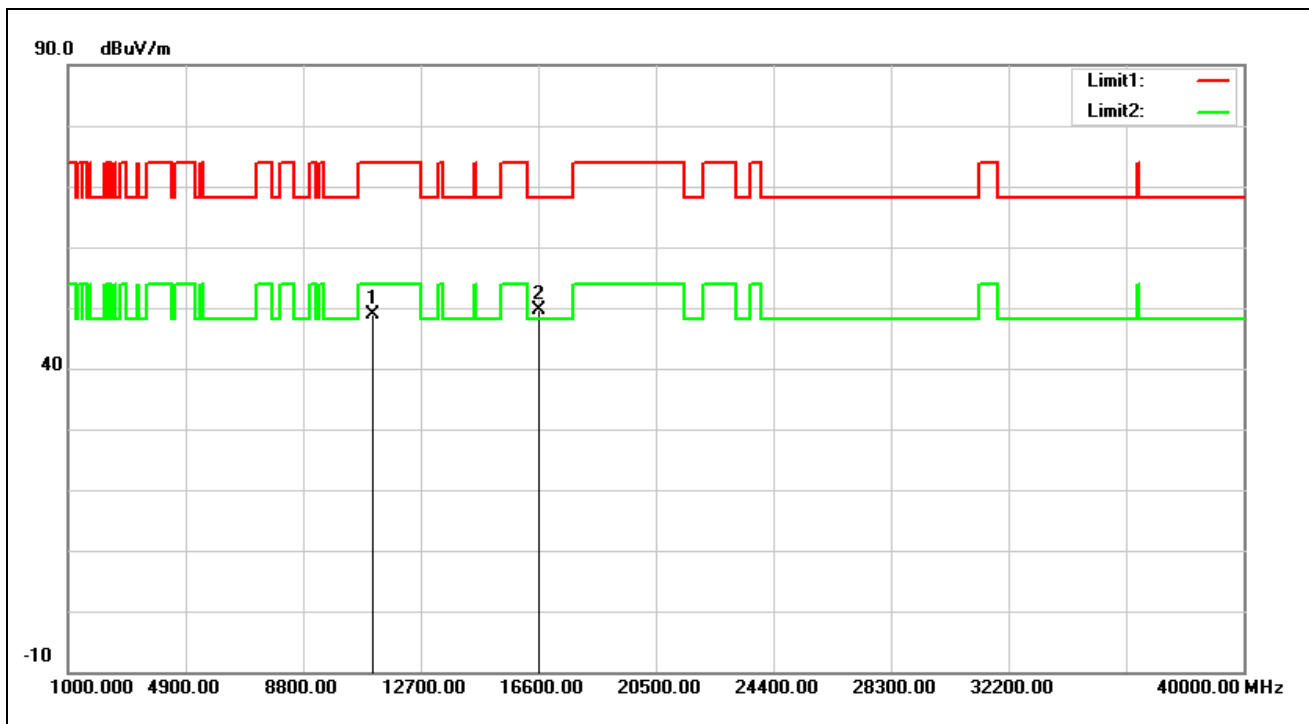


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.44	14.56	49.00	74.00	-25.00	peak
2*	16650.000	31.87	17.78	49.65	68.20	-18.55	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5550 MHz		
Remark:			

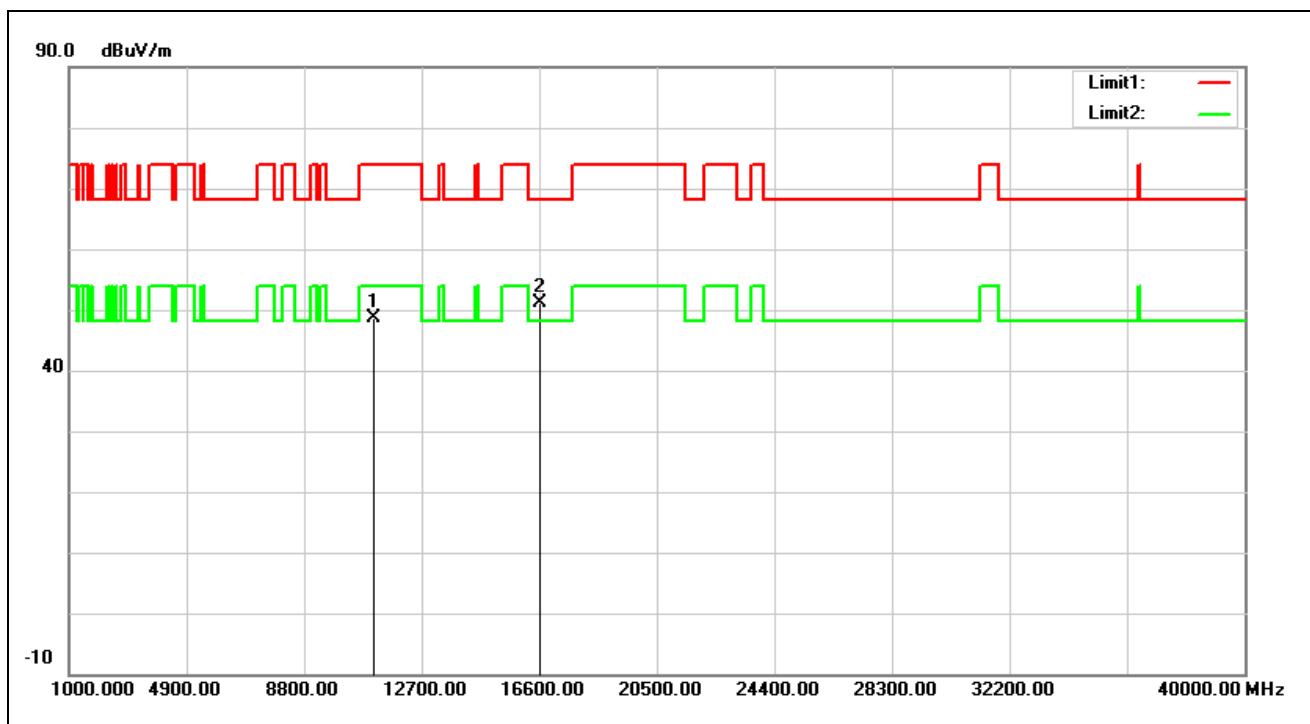


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.12	14.56	48.68	74.00	-25.32	peak
2*	16650.000	33.44	17.78	51.22	68.20	-16.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

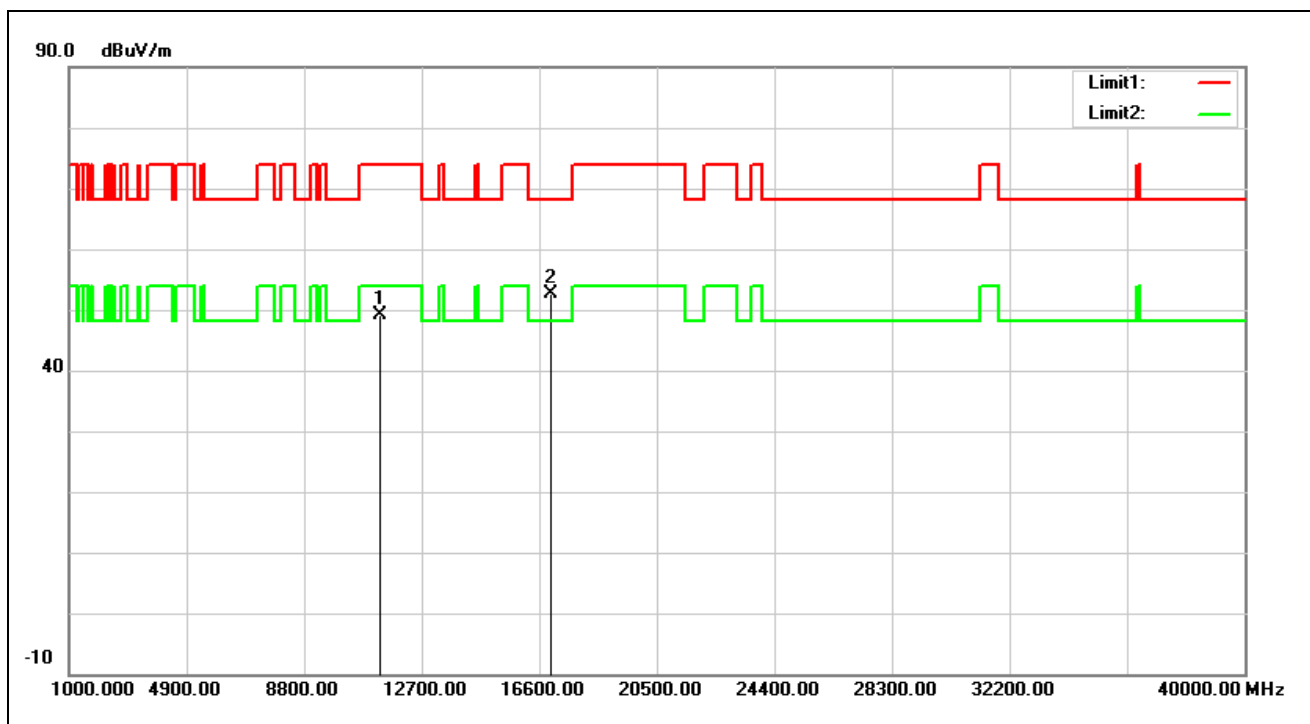


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.86	14.36	49.22	74.00	-24.78	peak
2*	17010.000	32.59	19.92	52.51	68.20	-15.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

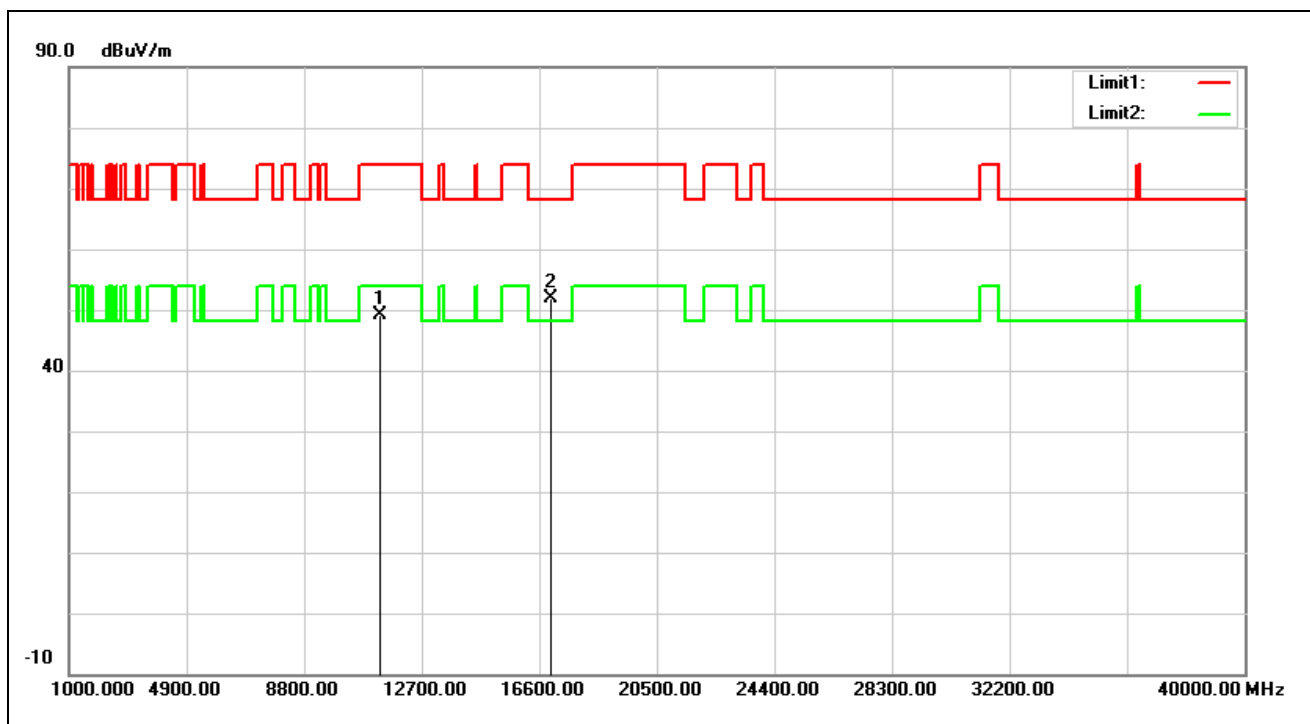


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.80	14.36	49.16	74.00	-24.84	peak
2*	17010.000	32.07	19.92	51.99	68.20	-16.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

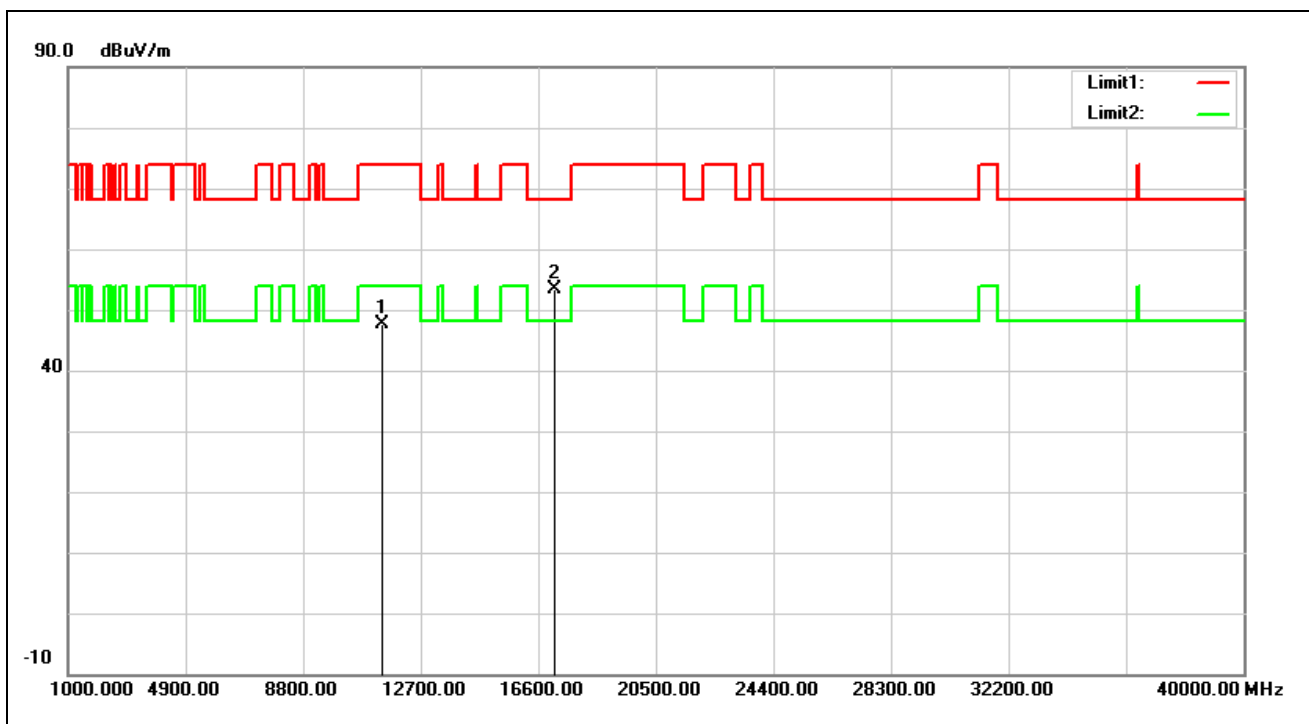


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.17	14.41	47.58	74.00	-26.42	peak
2*	17130.000	32.55	20.89	53.44	68.20	-14.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

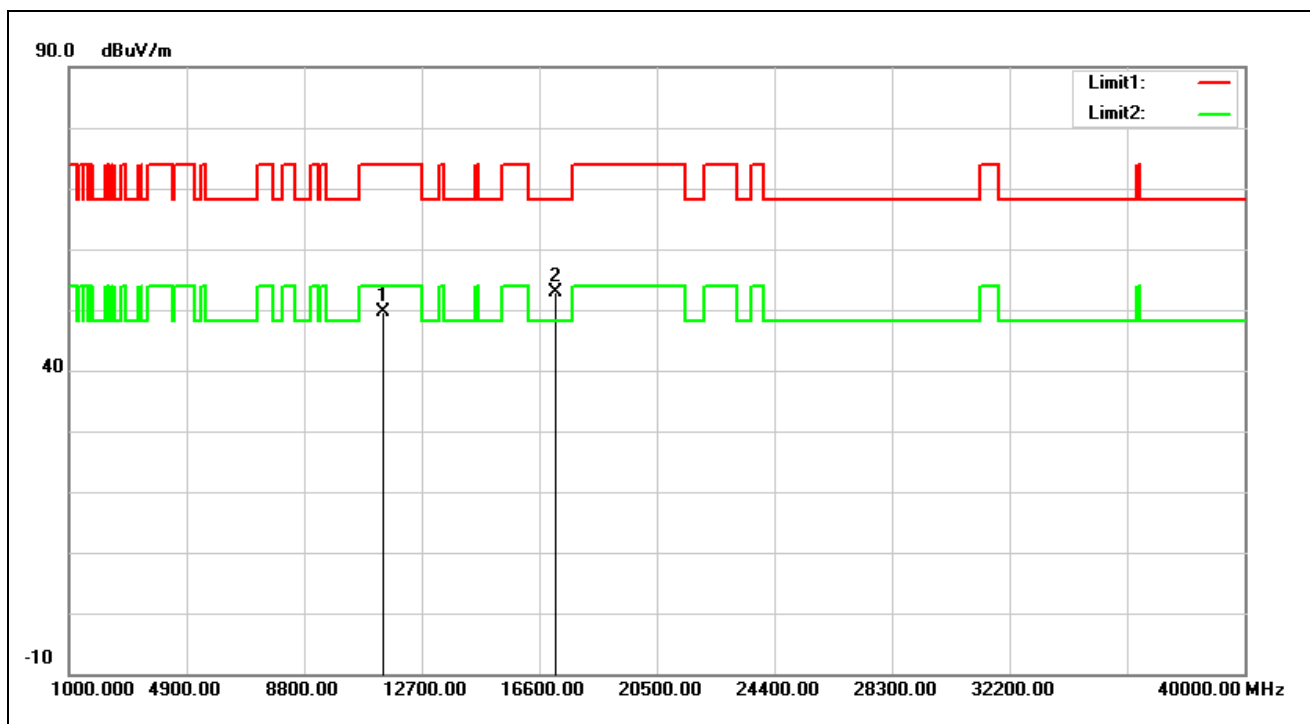


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	35.31	14.41	49.72	74.00	-24.28	peak
2*	17130.000	32.01	20.89	52.90	68.20	-15.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

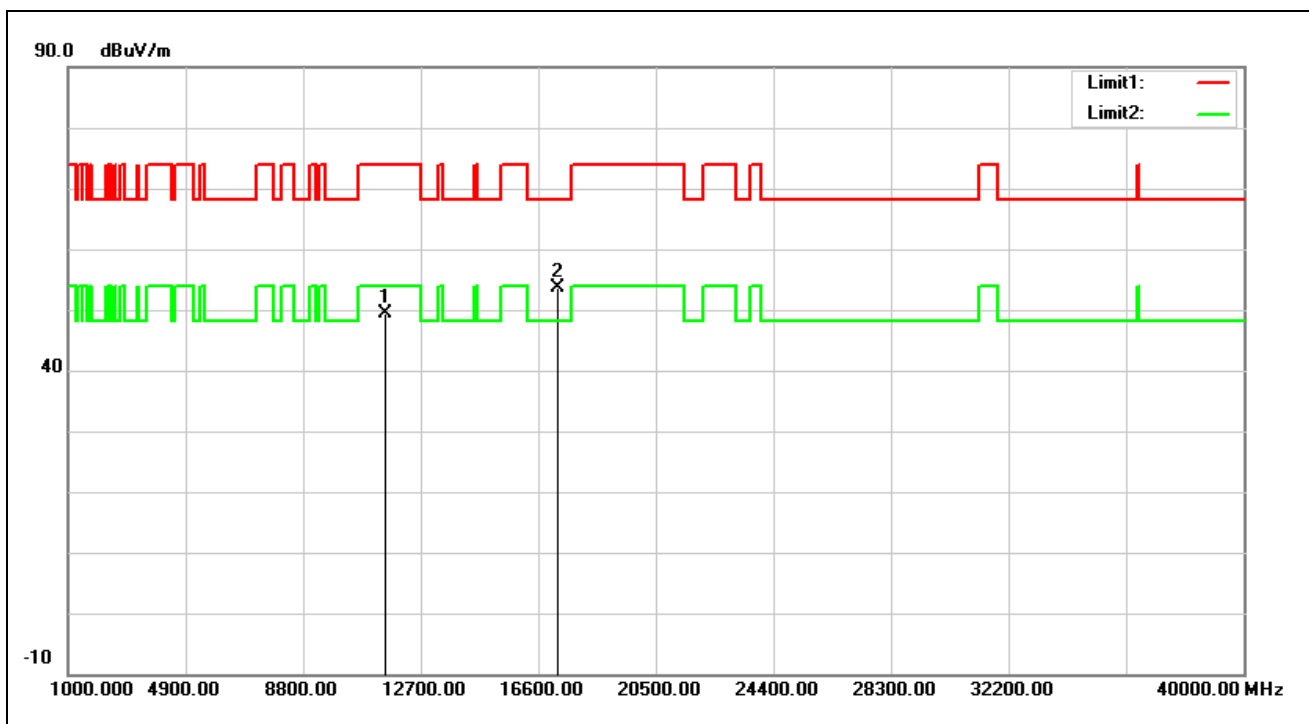


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.41	14.94	49.35	74.00	-24.65	peak
2*	17265.000	31.76	21.98	53.74	68.20	-14.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

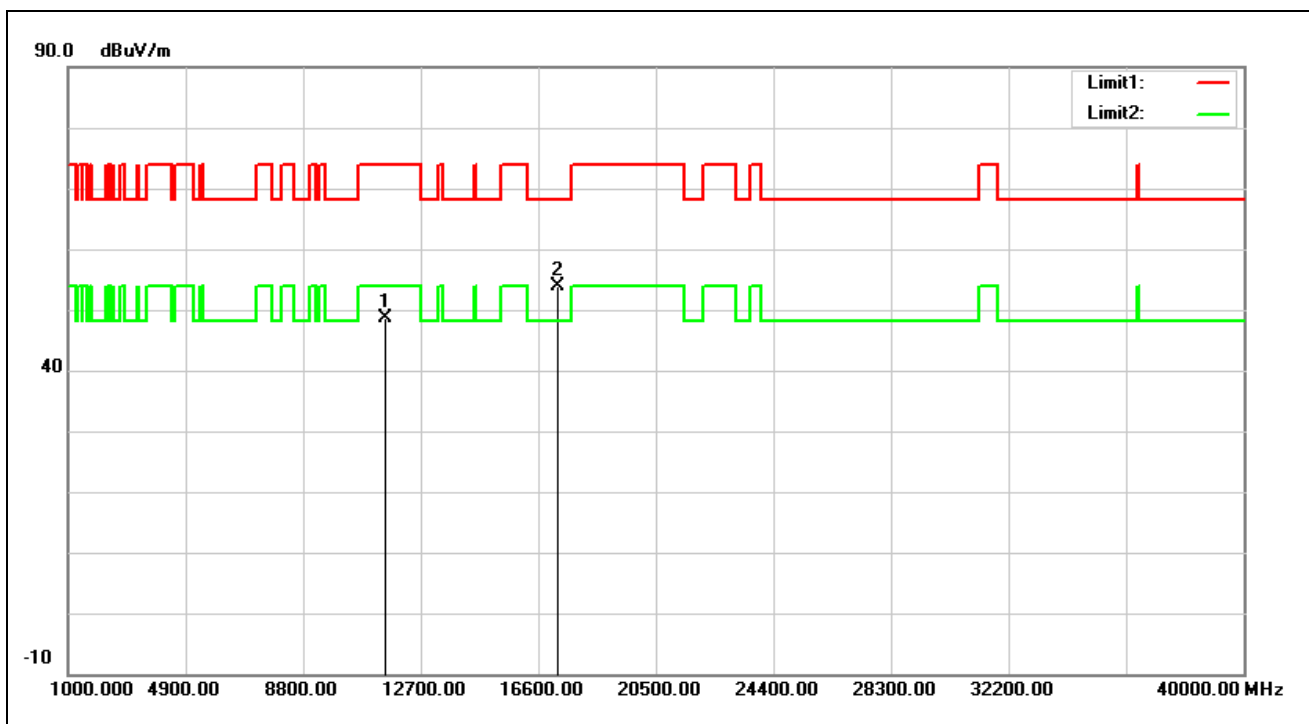


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.70	14.94	48.64	74.00	-25.36	peak
2*	17265.000	31.79	21.98	53.77	68.20	-14.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

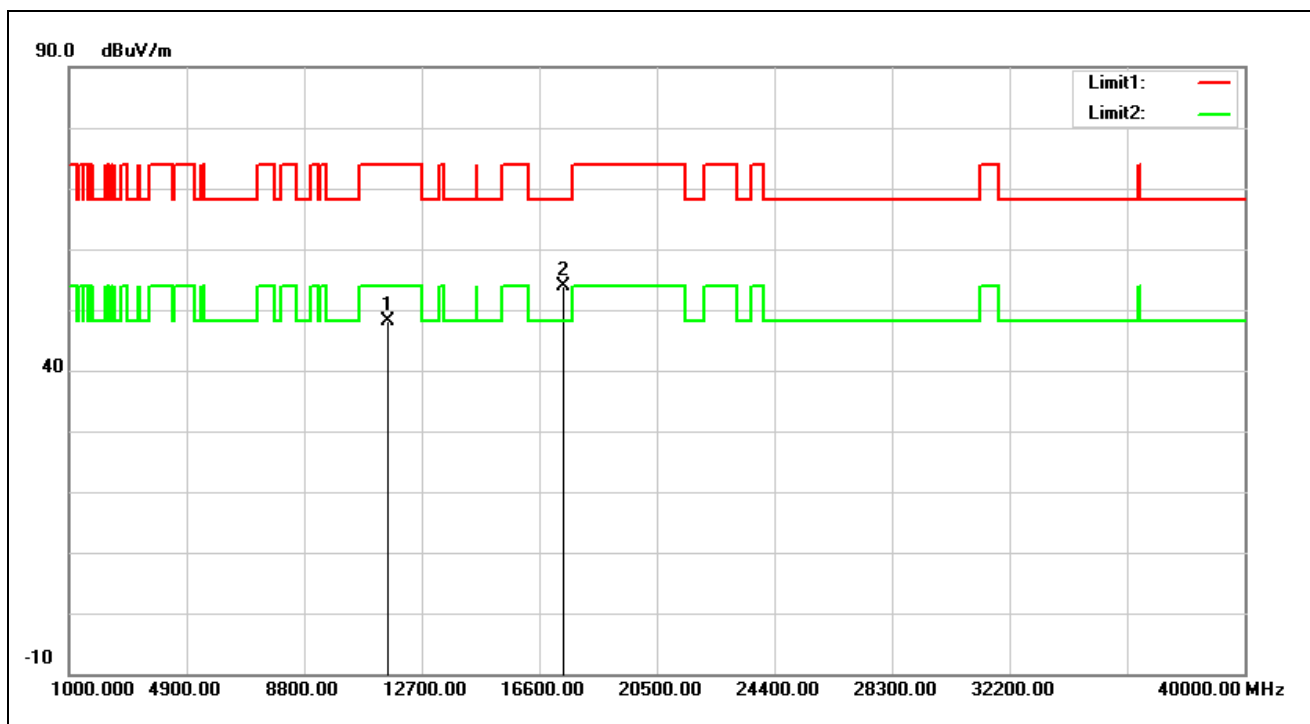


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.71	14.49	48.20	74.00	-25.80	peak
2*	17385.000	31.02	22.80	53.82	68.20	-14.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

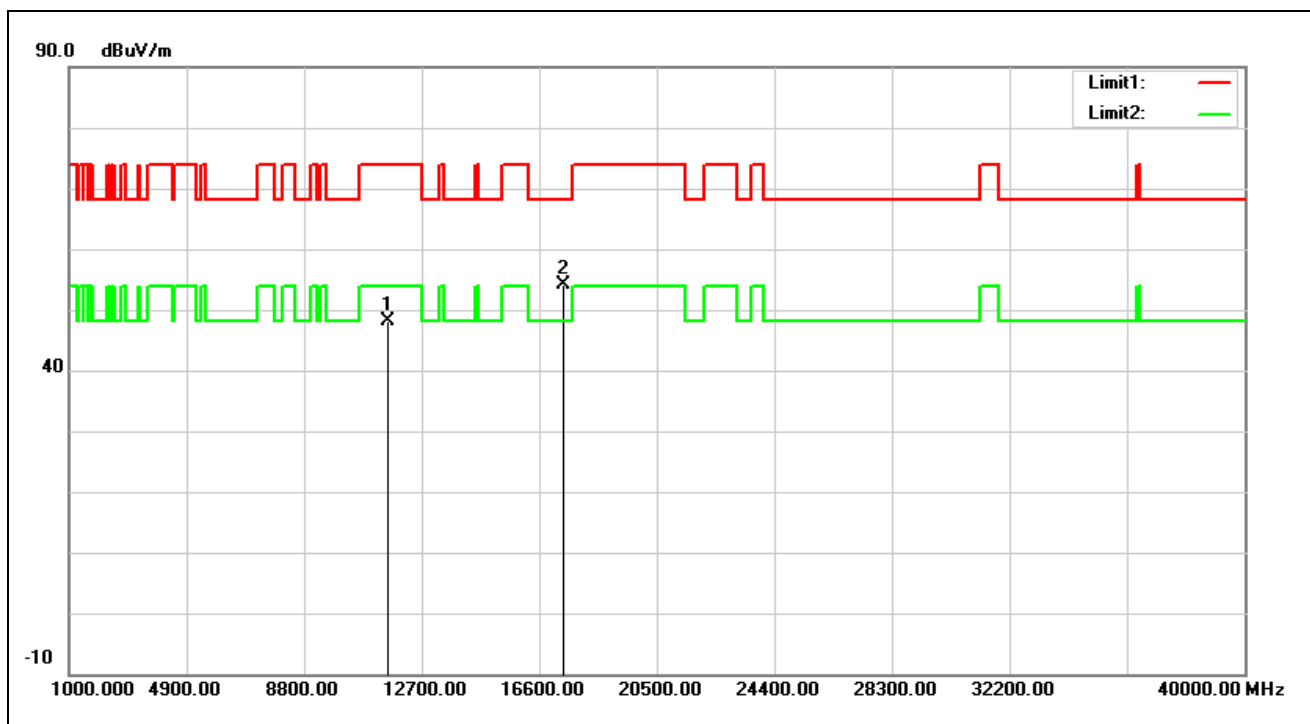


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.60	14.49	48.09	74.00	-25.91	peak
2*	17385.000	31.41	22.80	54.21	68.20	-13.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

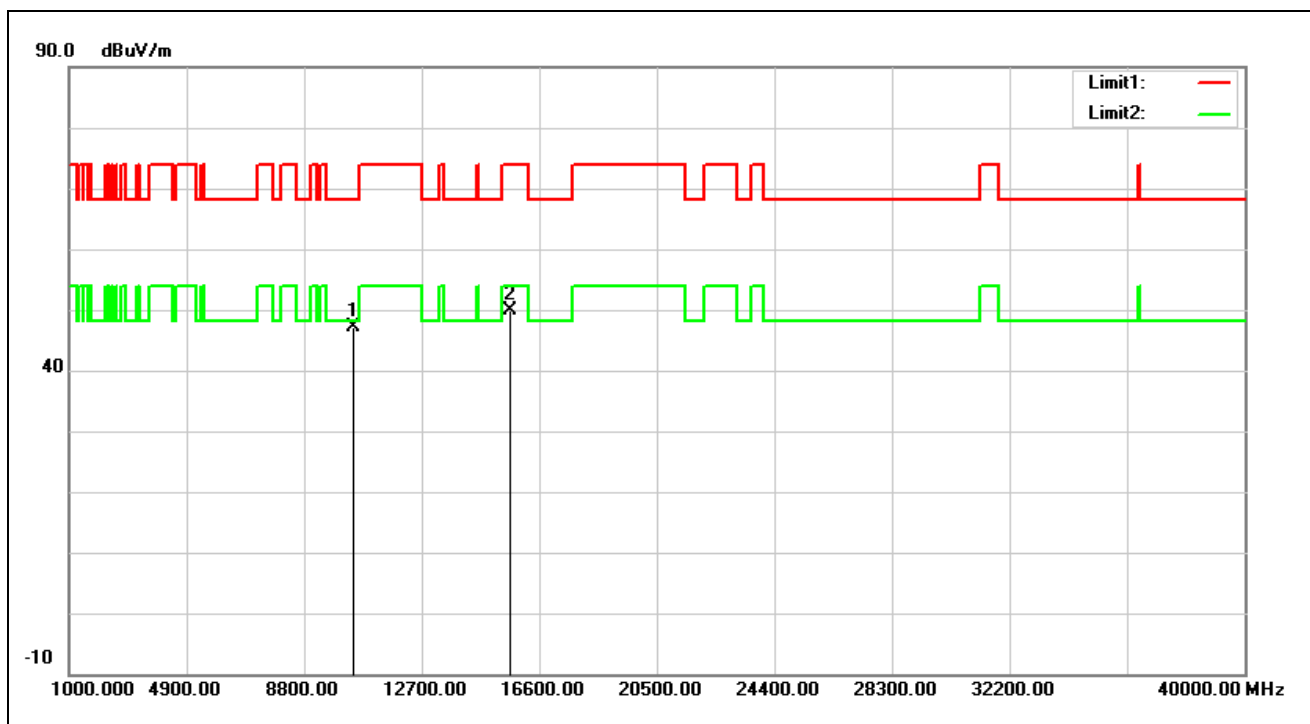


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	32.93	14.10	47.03	68.20	-21.17	peak
2	15630.000	33.40	16.52	49.92	74.00	-24.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

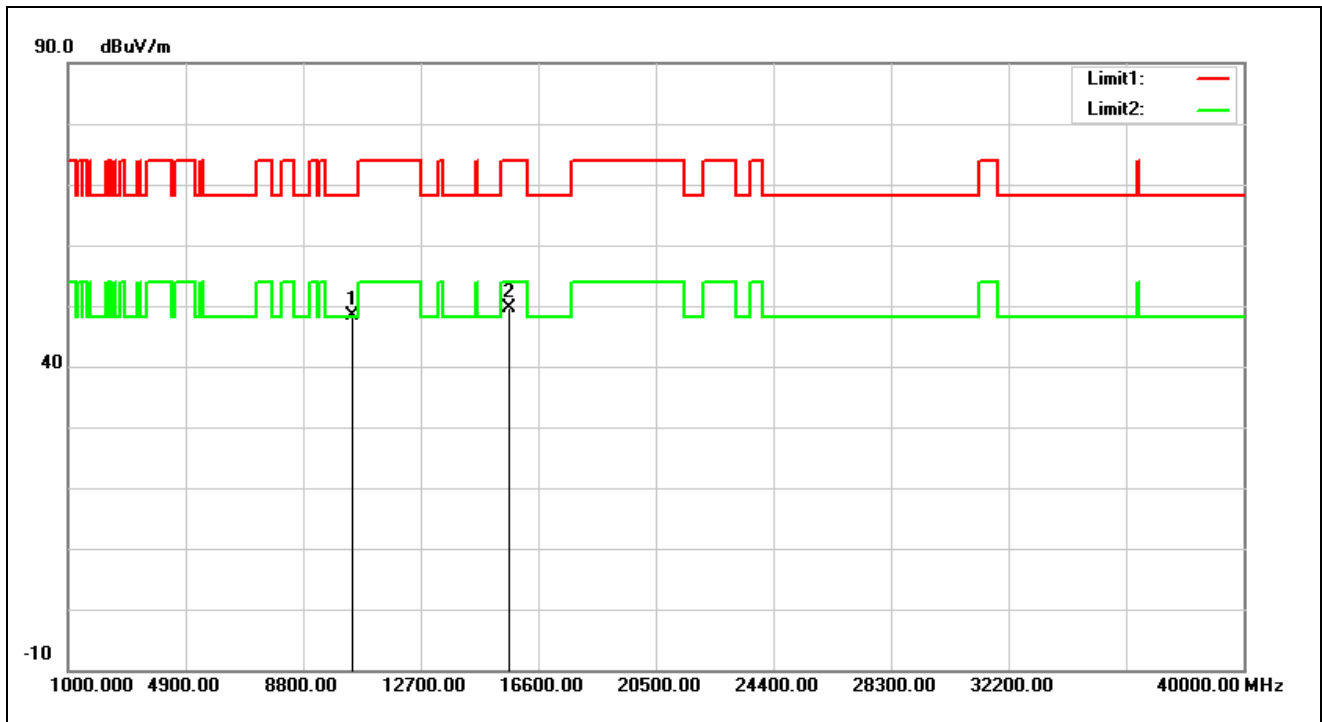


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	34.18	14.10	48.28	68.20	-19.92	peak
2	15630.000	33.11	16.52	49.63	74.00	-24.37	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

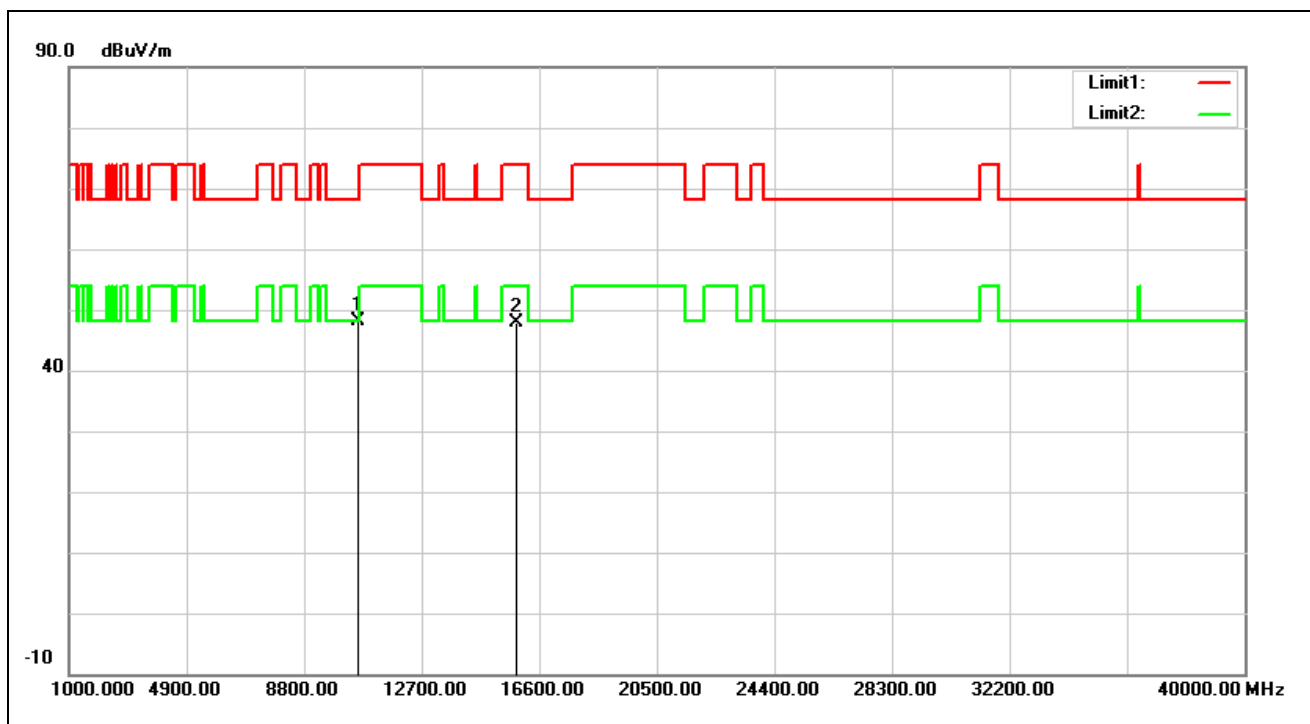


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	33.84	14.32	48.16	68.20	-20.04	peak
2	15870.000	31.86	16.06	47.92	74.00	-26.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

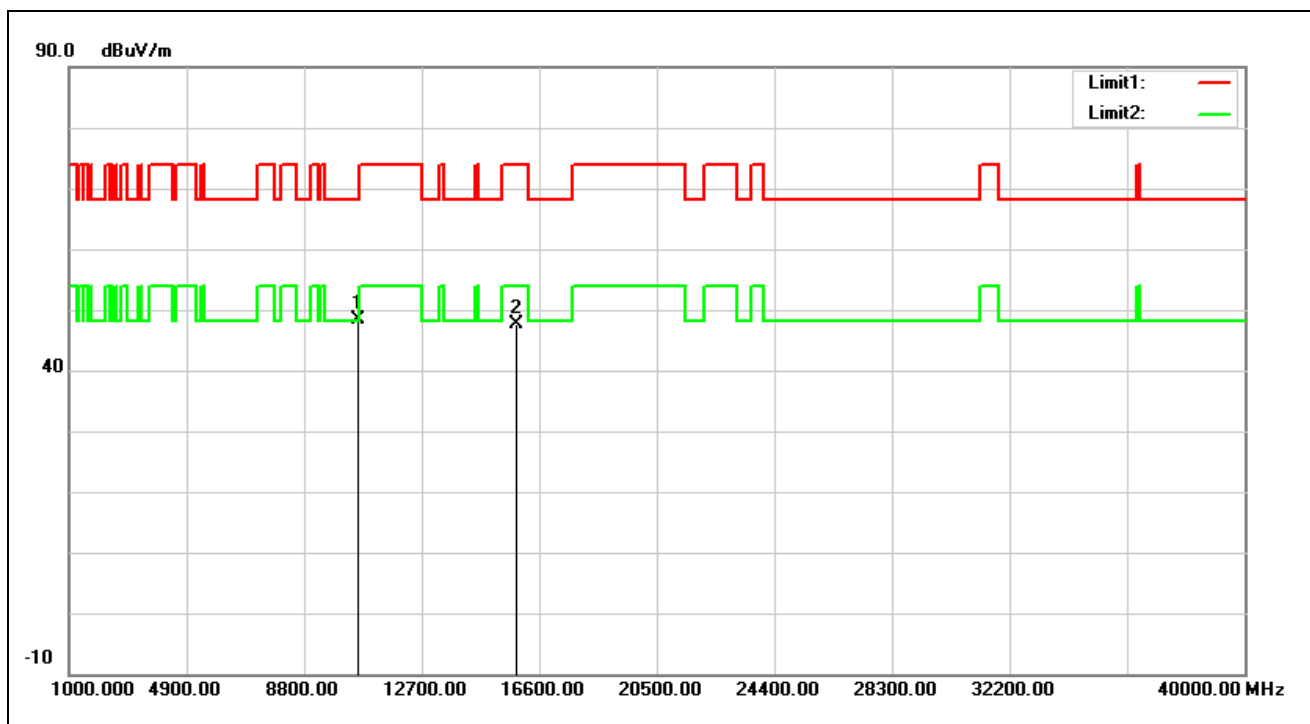


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	34.17	14.32	48.49	68.20	-19.71	peak
2	15870.000	31.66	16.06	47.72	74.00	-26.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

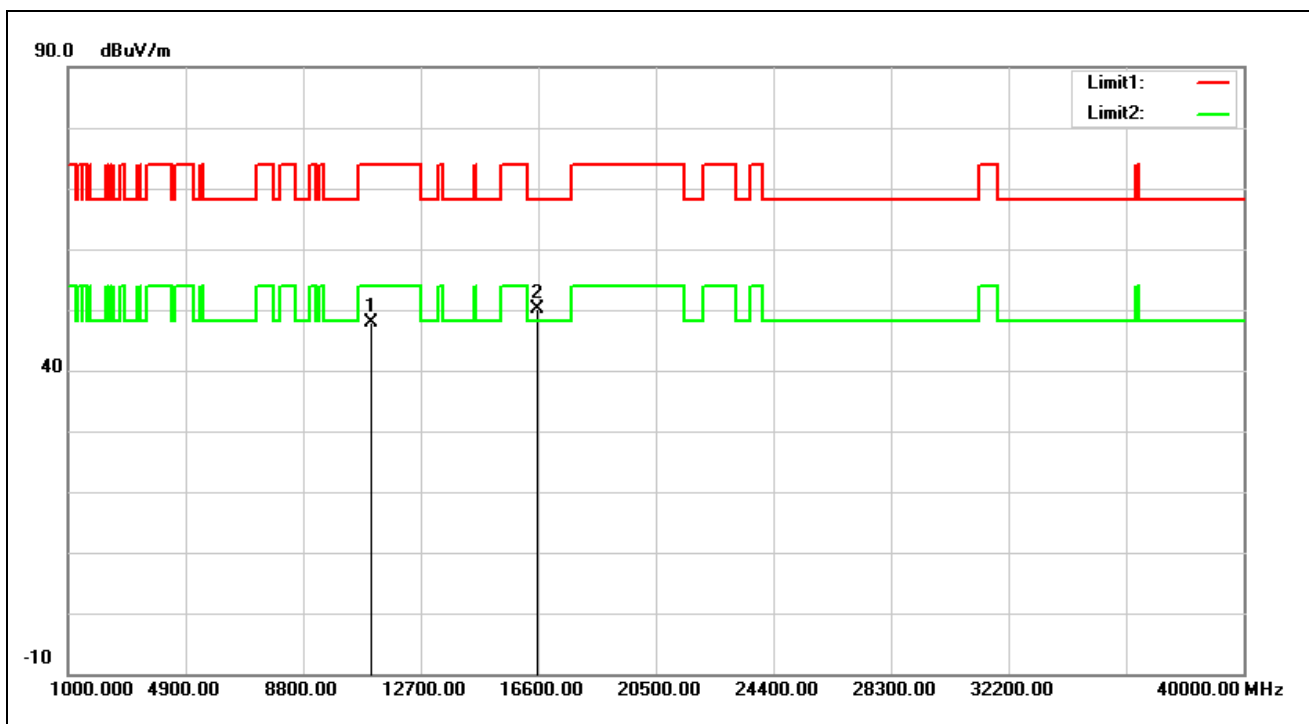


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.54	14.42	47.96	74.00	-26.04	peak
2*	16590.000	32.74	17.39	50.13	68.20	-18.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

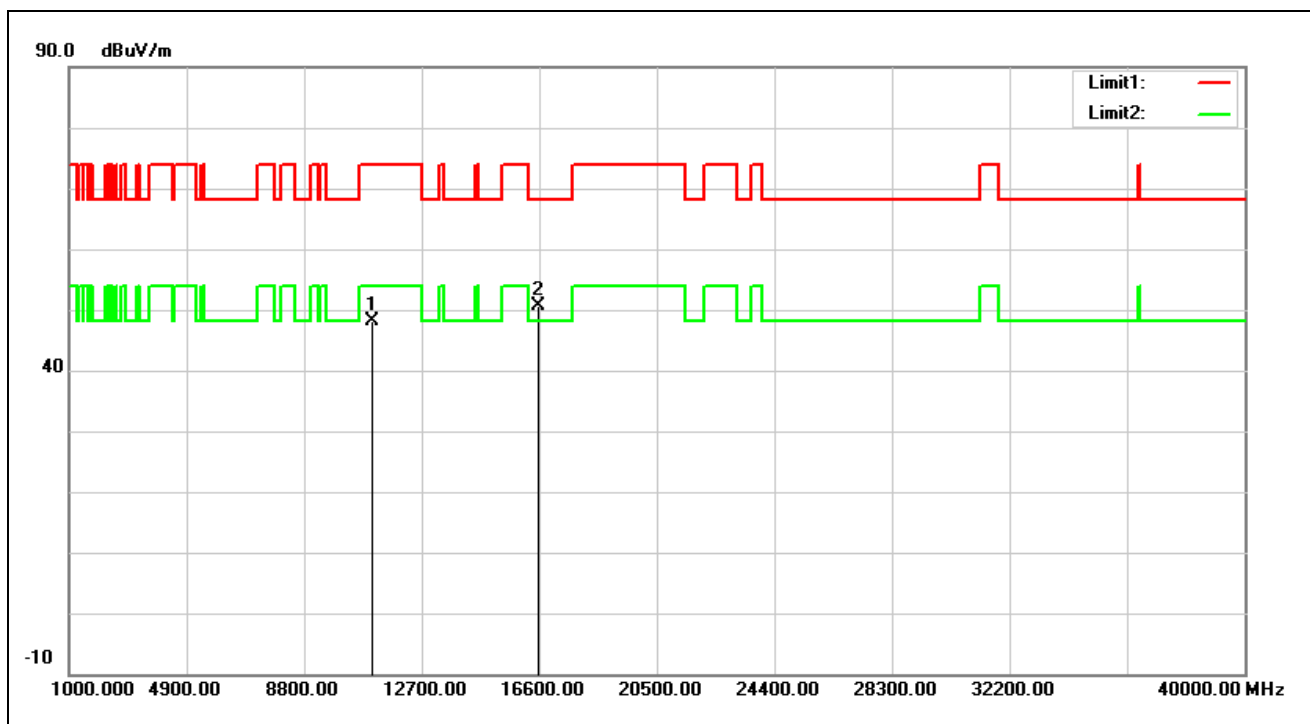


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.69	14.42	48.11	74.00	-25.89	peak
2*	16590.000	33.34	17.39	50.73	68.20	-17.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

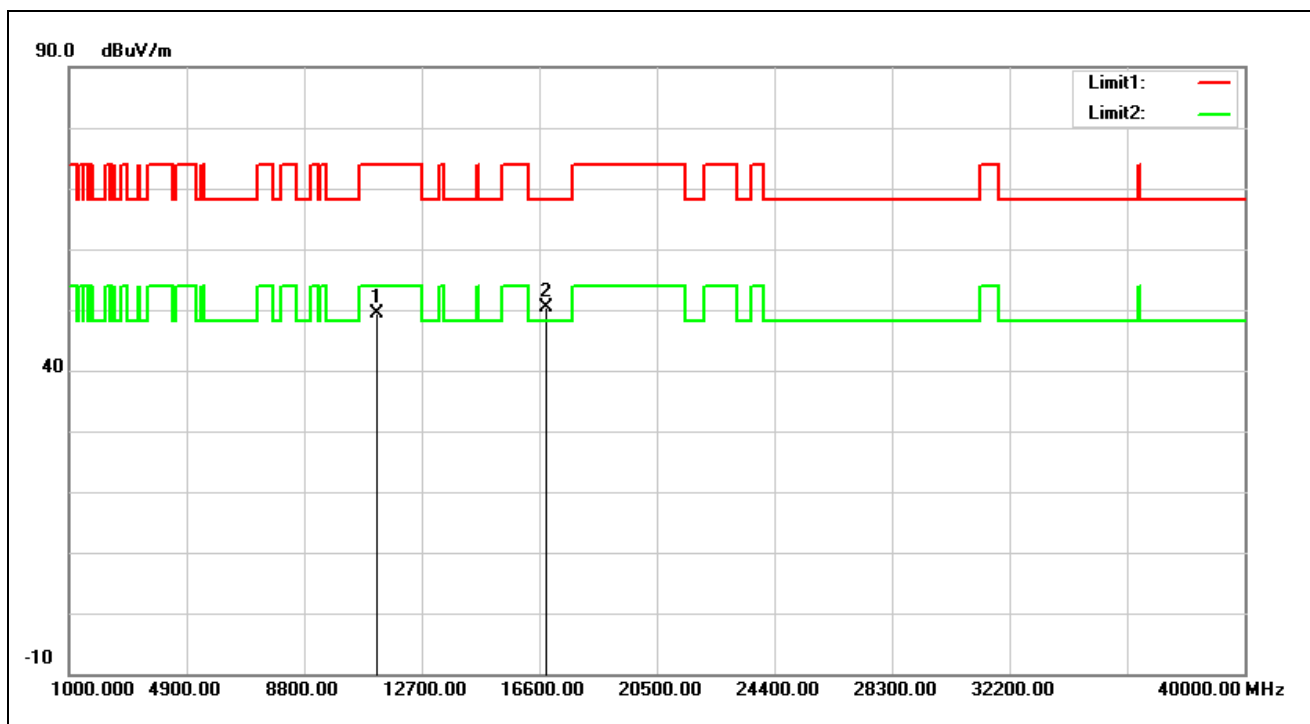


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	35.02	14.24	49.26	74.00	-24.74	peak
2*	16830.000	31.22	19.09	50.31	68.20	-17.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

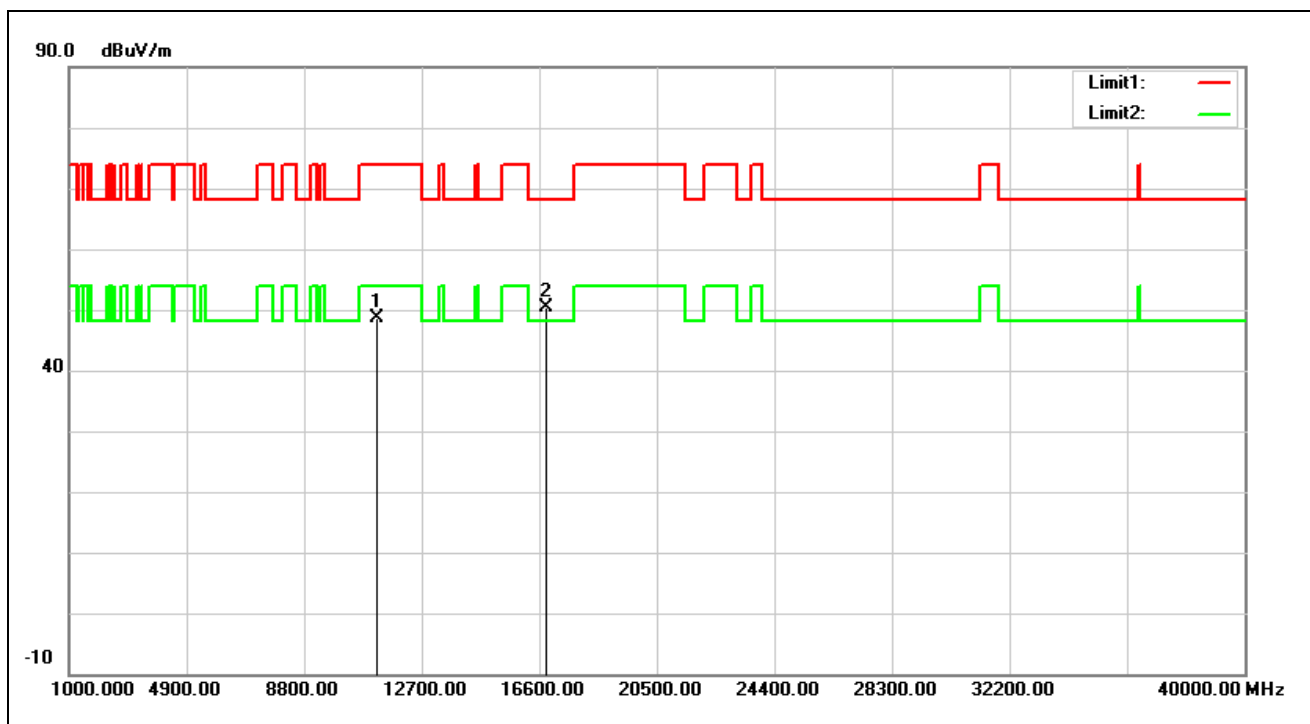


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.30	14.24	48.54	74.00	-25.46	peak
2*	16830.000	31.24	19.09	50.33	68.20	-17.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

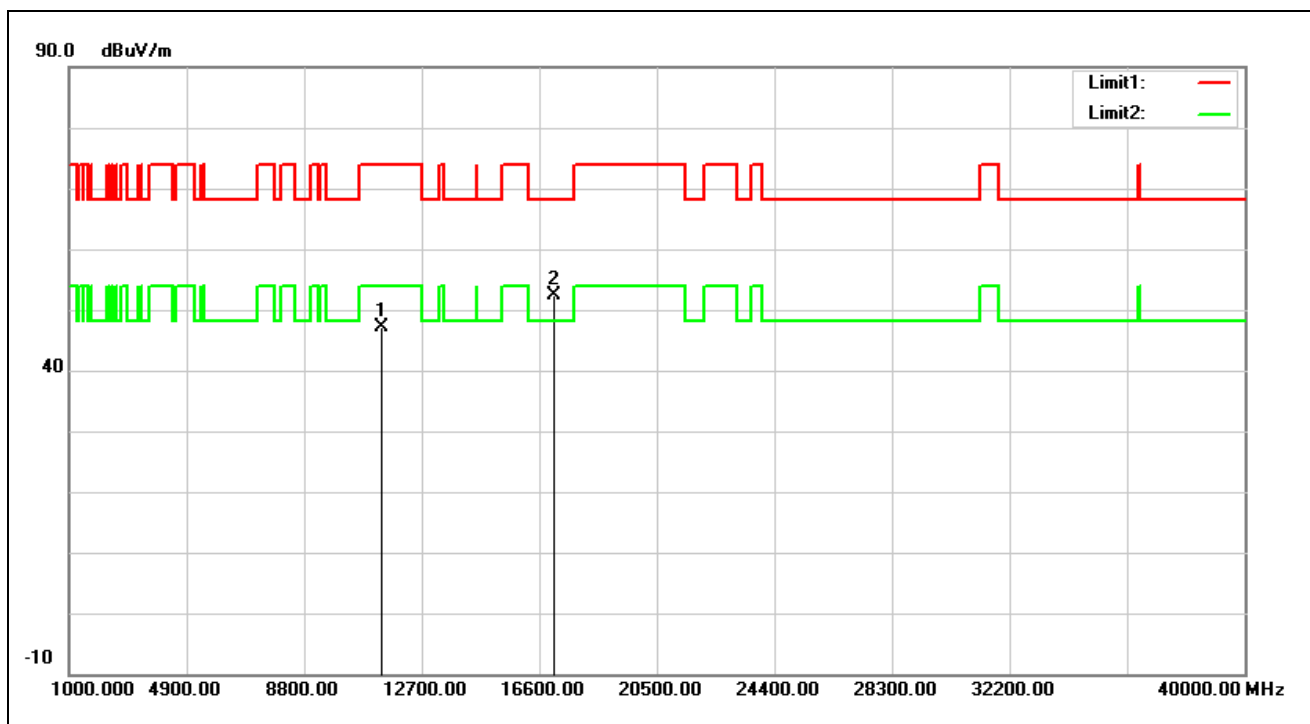


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	32.79	14.29	47.08	74.00	-26.92	peak
2*	17070.000	31.92	20.43	52.35	68.20	-15.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

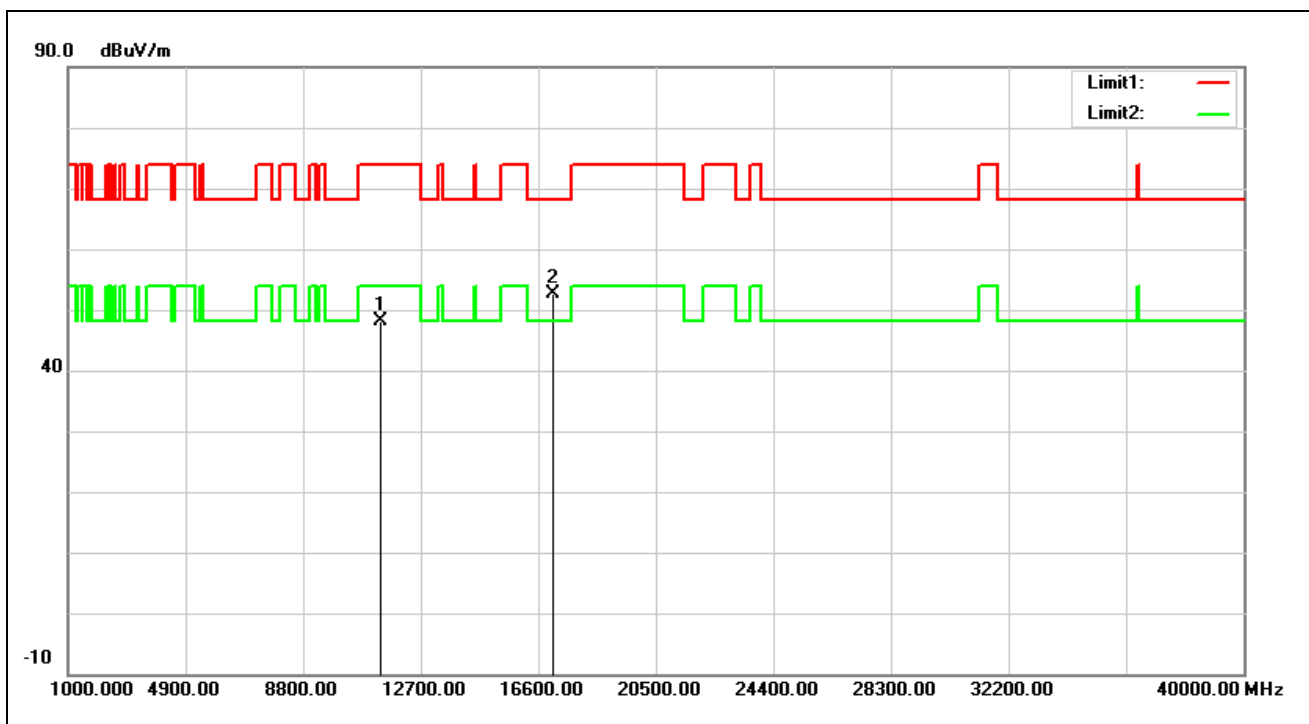


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.79	14.29	48.08	74.00	-25.92	peak
2*	17070.000	32.19	20.43	52.62	68.20	-15.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

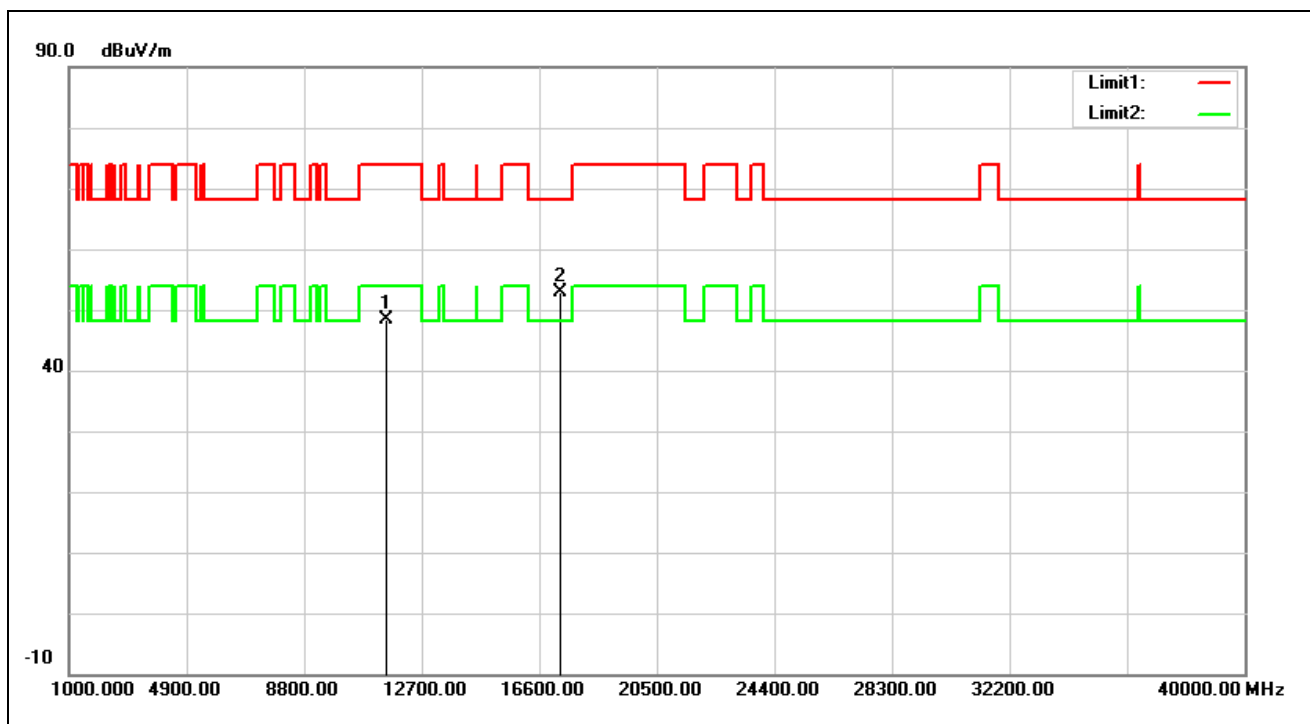


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.68	14.71	48.39	74.00	-25.61	peak
2*	17325.000	30.39	22.46	52.85	68.20	-15.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

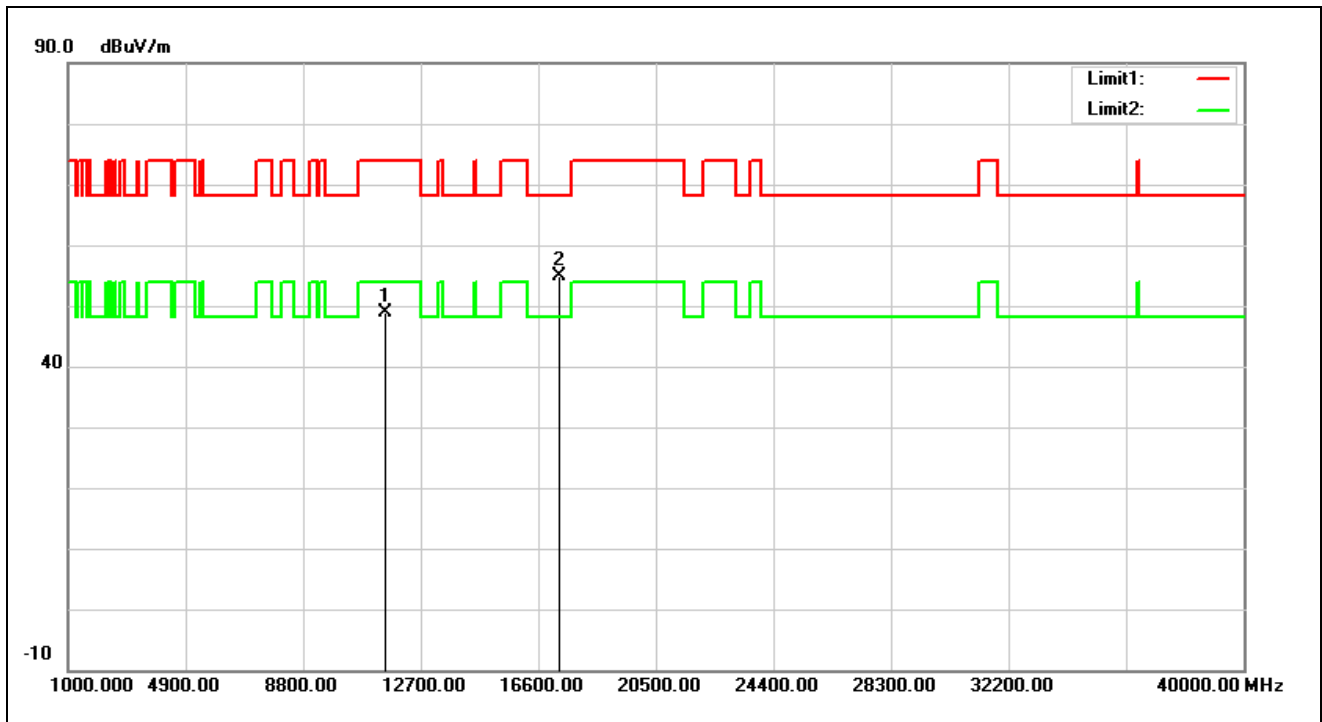


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	34.17	14.71	48.88	74.00	-25.12	peak
2*	17325.000	32.33	22.46	54.79	68.20	-13.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

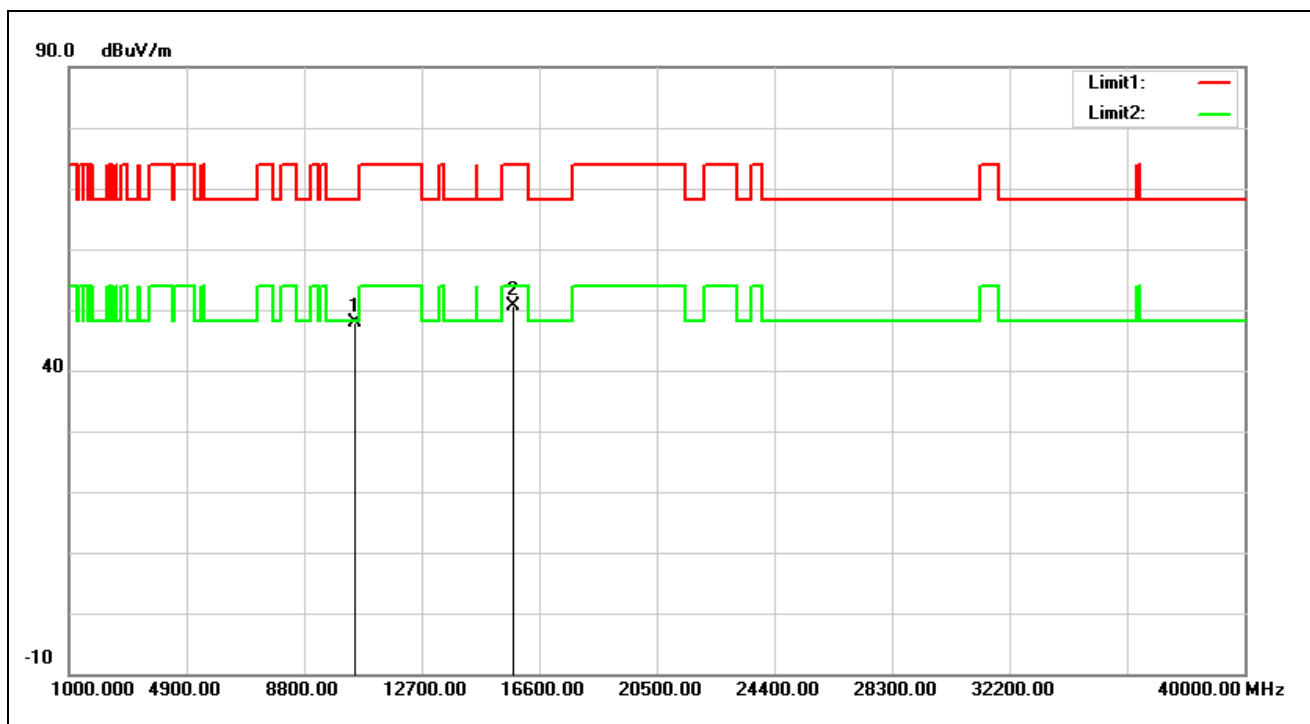


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.67	14.31	47.98	68.20	-20.22	peak
2	15750.000	34.17	16.43	50.60	74.00	-23.40	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

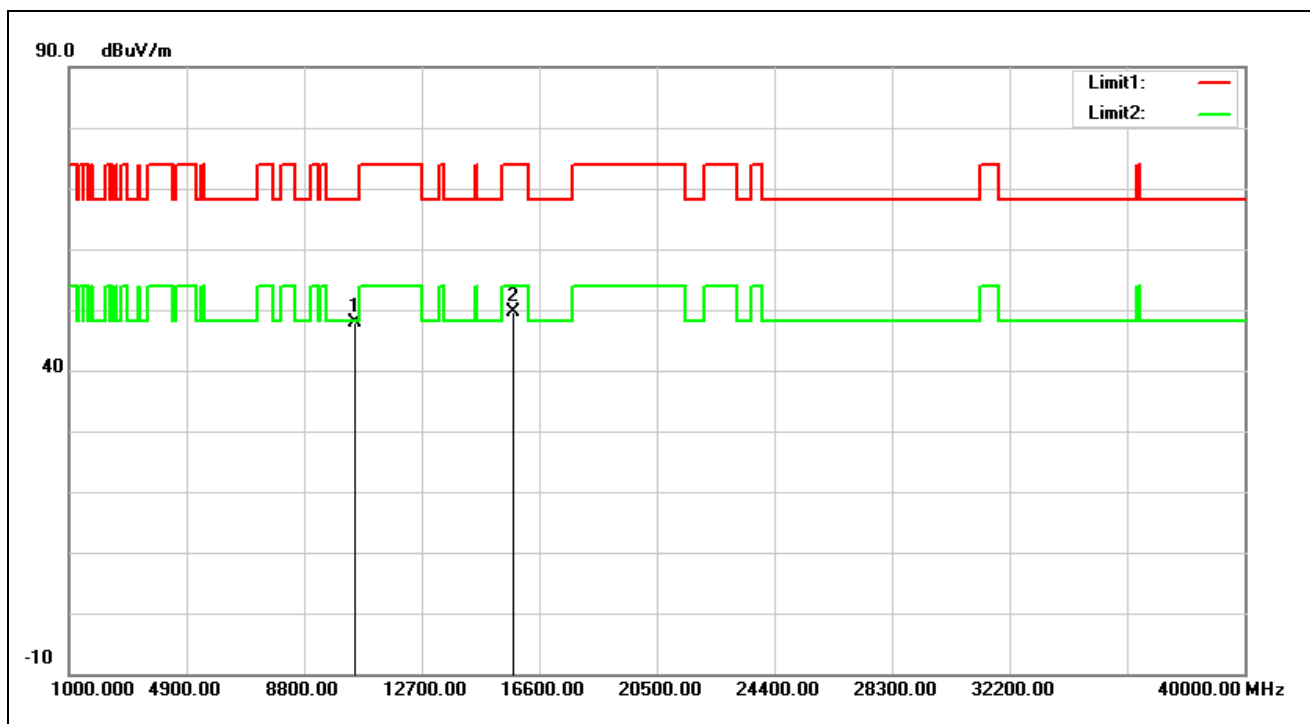


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.60	14.31	47.91	68.20	-20.29	peak
2	15750.000	33.11	16.43	49.54	74.00	-24.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

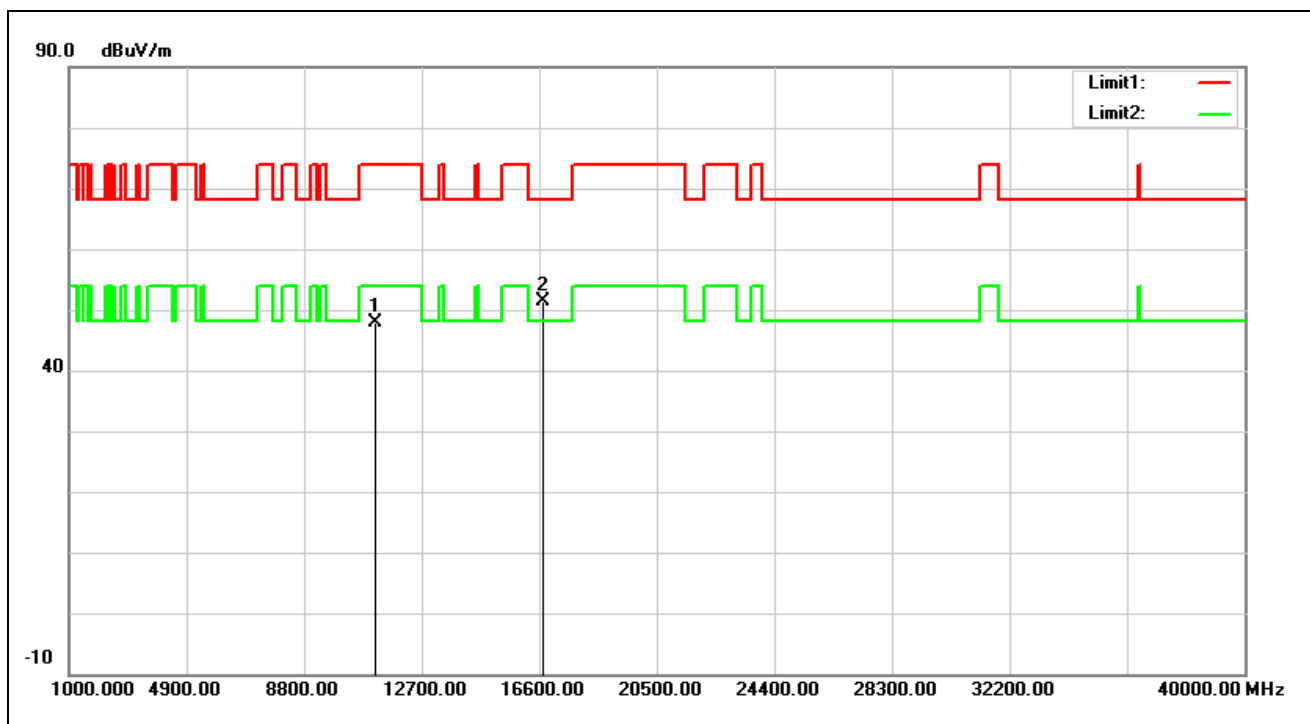


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.37	14.41	47.78	74.00	-26.22	peak
2*	16710.000	33.13	18.19	51.32	68.20	-16.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

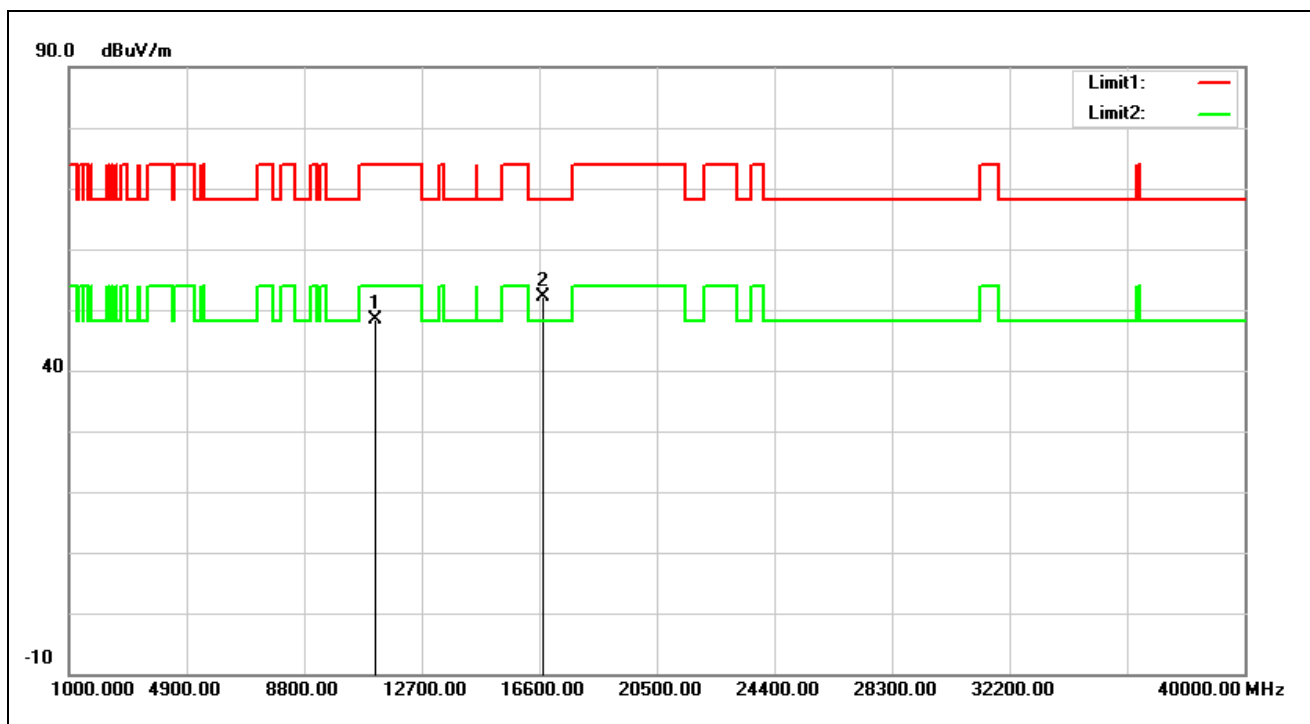


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	34.05	14.41	48.46	74.00	-25.54	peak
2*	16710.000	34.01	18.19	52.20	68.20	-16.00	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5845 MHz		
Remark:			

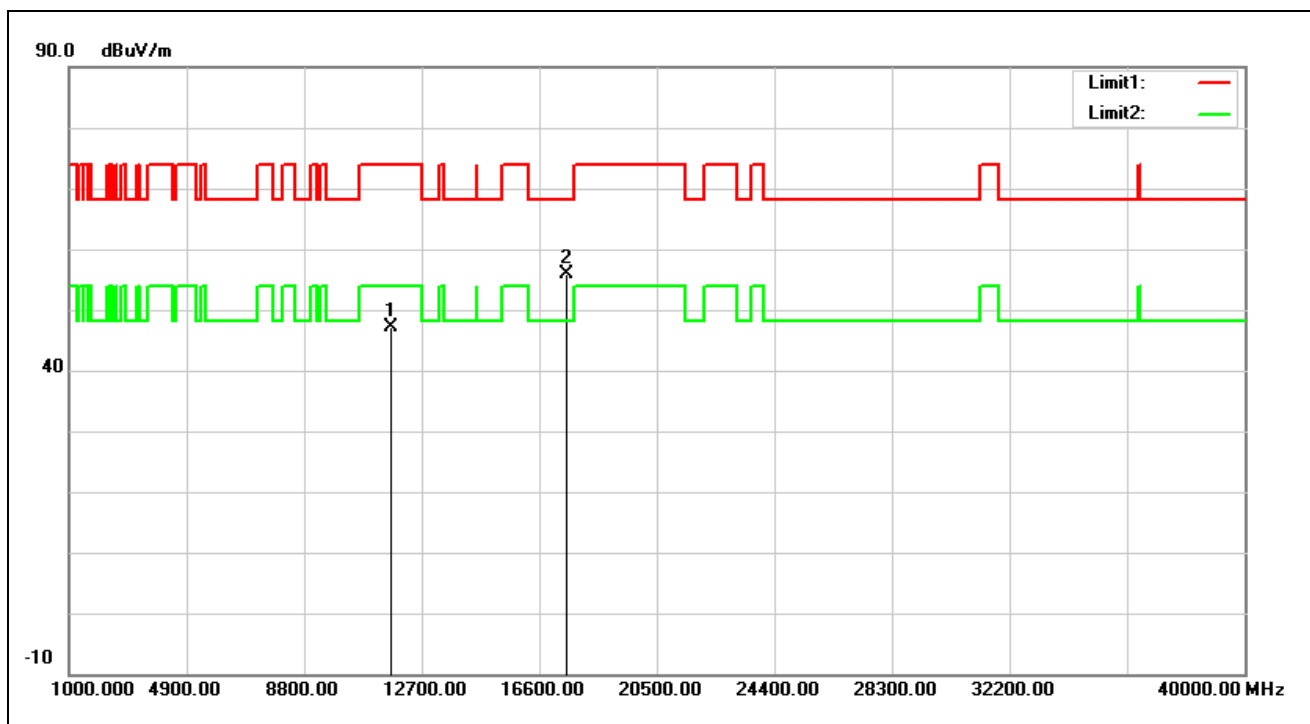


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11690.000	32.70	14.36	47.06	74.00	-26.94	peak
2*	17535.000	31.38	24.45	55.83	68.20	-12.37	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5845 MHz		
Remark:			

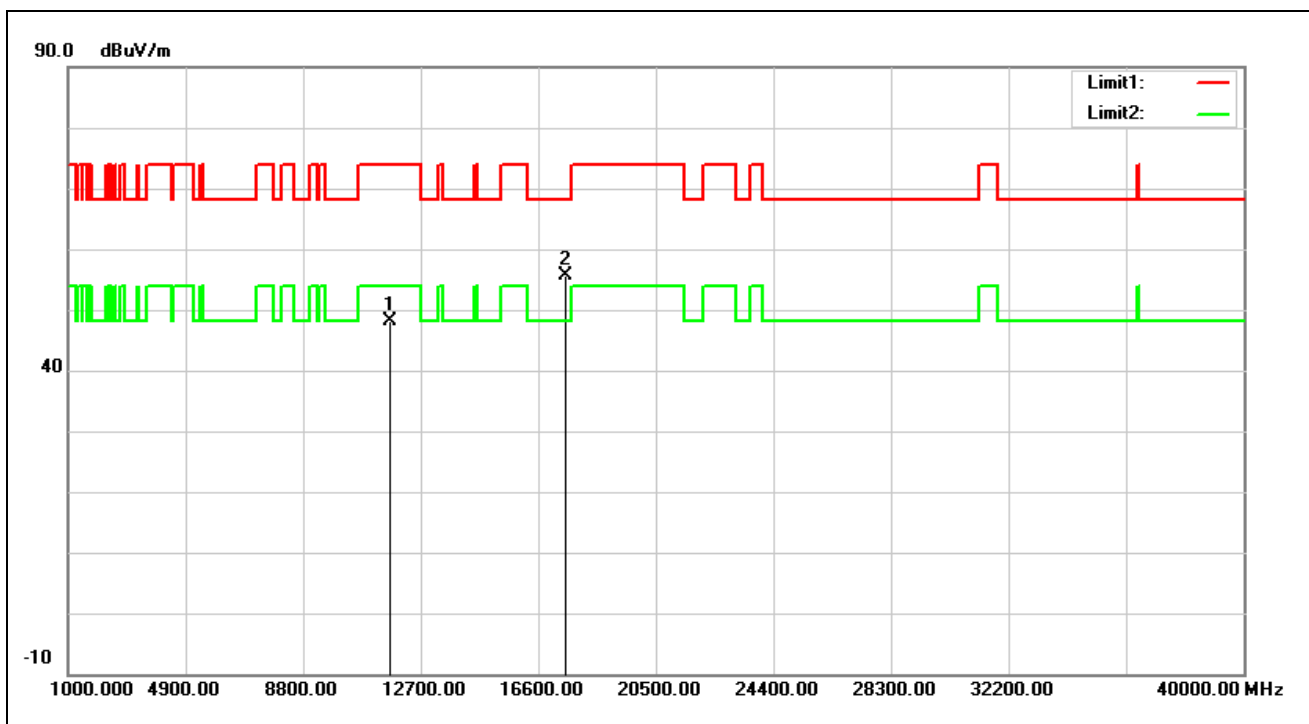


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11690.000	33.74	14.36	48.10	74.00	-25.90	peak
2*	17535.000	31.29	24.45	55.74	68.20	-12.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5865 MHz		
Remark:			

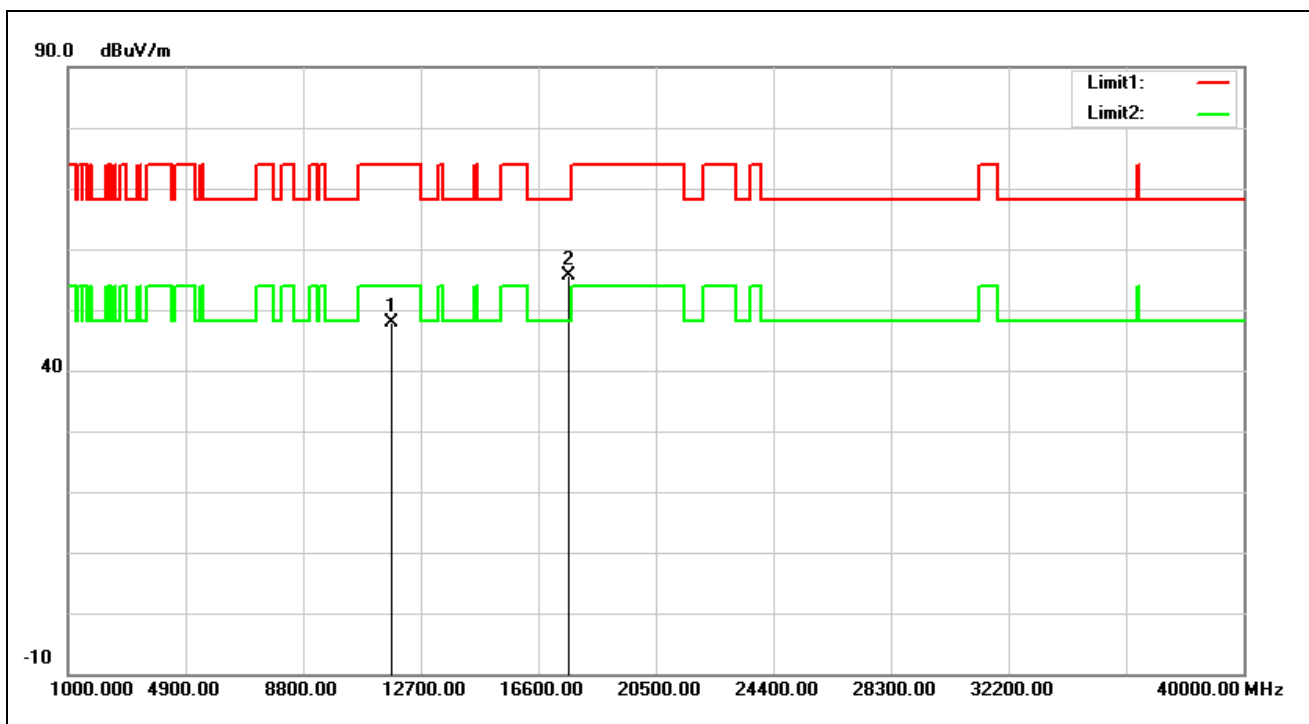


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11730.000	33.67	14.21	47.88	74.00	-26.12	peak
2*	17595.000	30.76	24.76	55.52	68.20	-12.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5865 MHz		
Remark:			

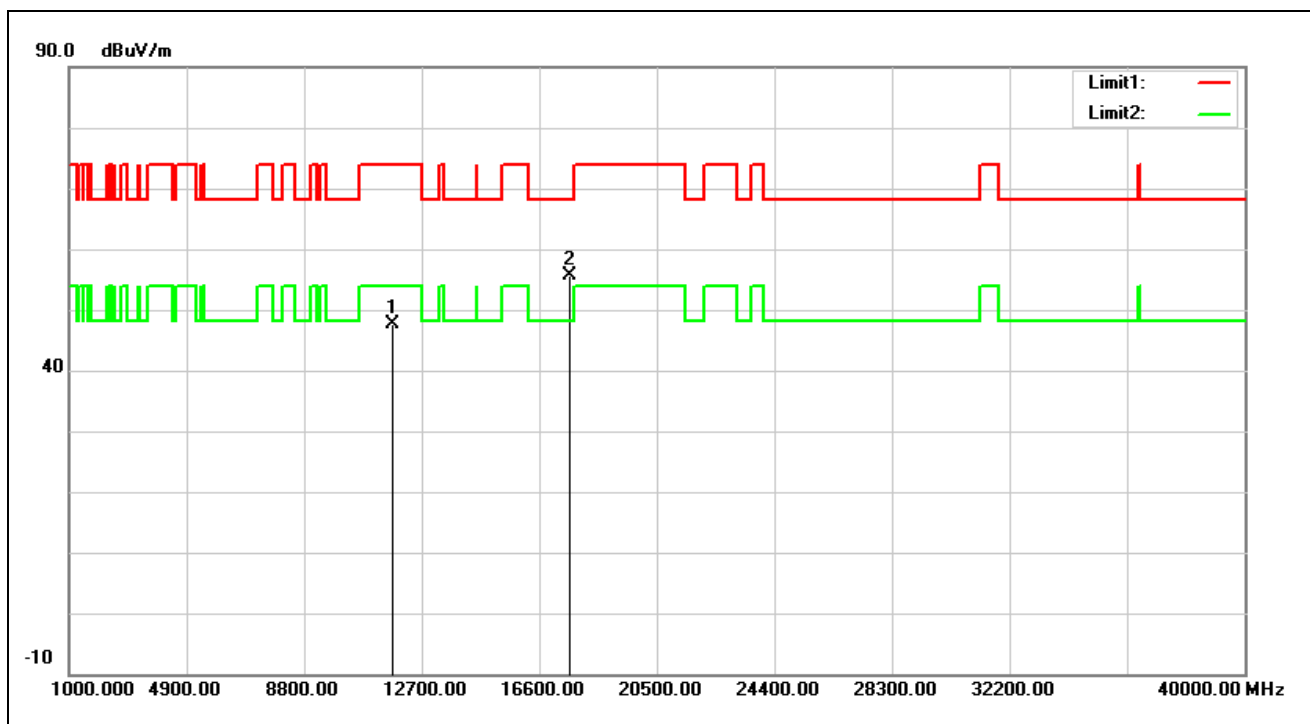


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11730.000	33.30	14.21	47.51	74.00	-26.49	peak
2*	17595.000	30.82	24.76	55.58	68.20	-12.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5885 MHz		
Remark:			

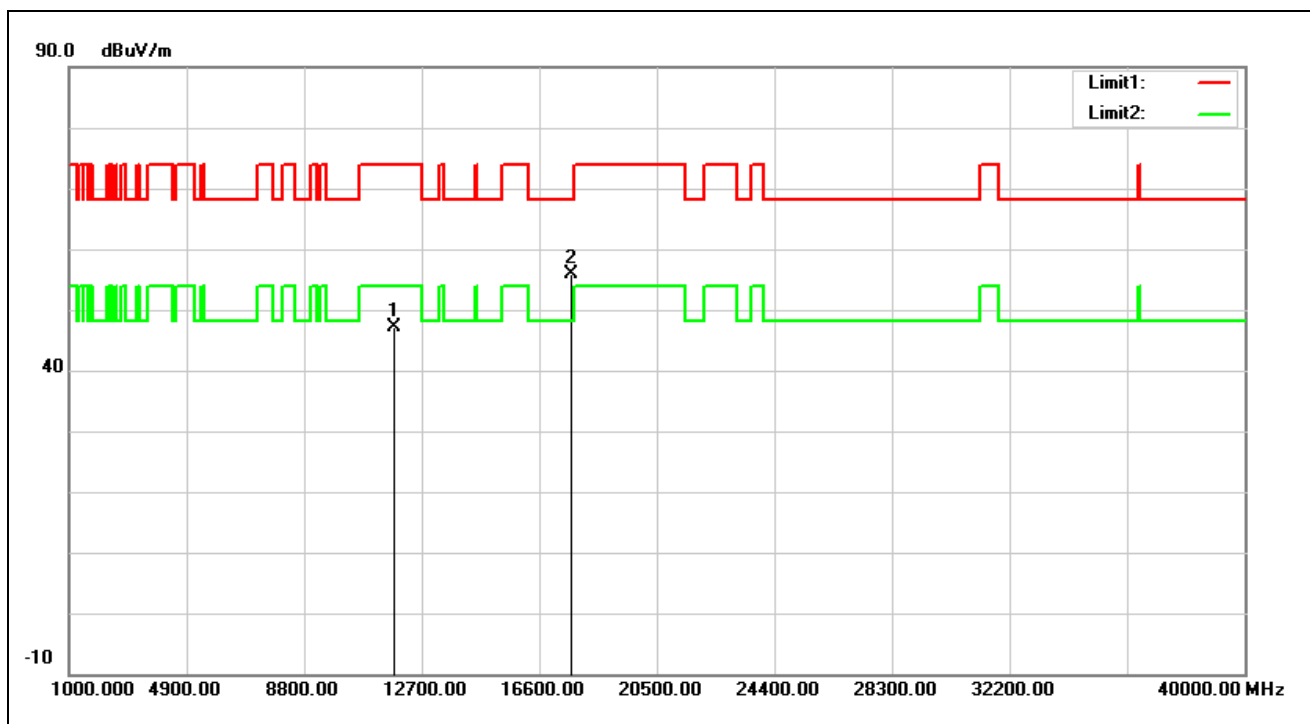


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11770.000	33.21	14.02	47.23	74.00	-26.77	peak
2*	17655.000	30.62	25.14	55.76	68.20	-12.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5885 MHz		
Remark:			

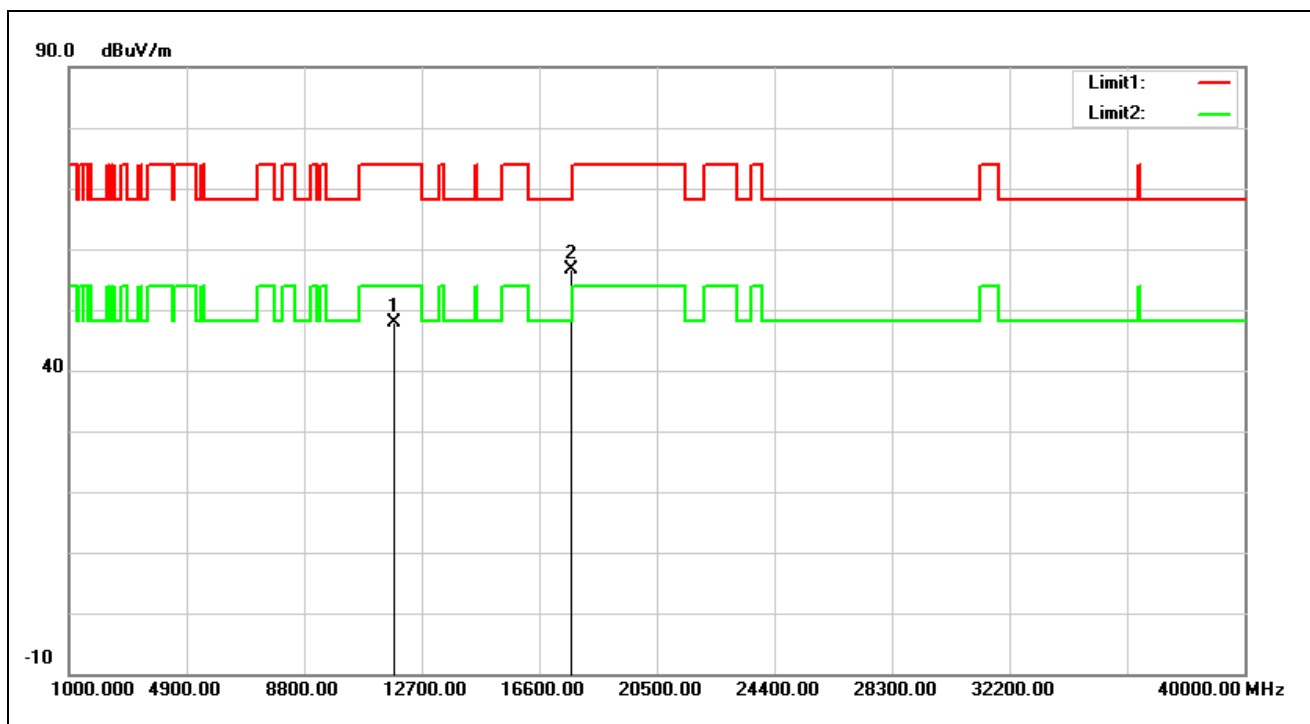


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11770.000	33.93	14.02	47.95	74.00	-26.05	peak
2*	17655.000	31.56	25.14	56.70	68.20	-11.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5845 MHz		
Remark:			

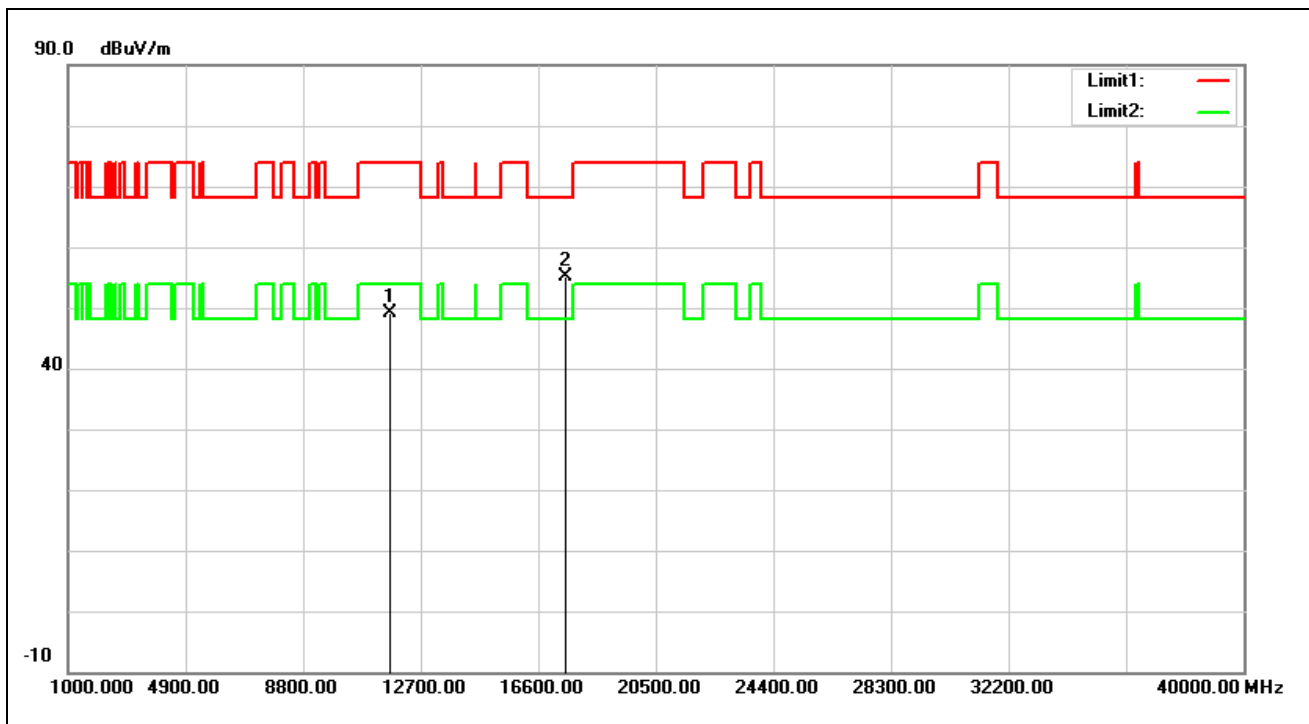


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11690.000	34.86	14.36	49.22	74.00	-24.78	peak
2*	17535.000	30.57	24.45	55.02	68.20	-13.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5845 MHz		
Remark:			

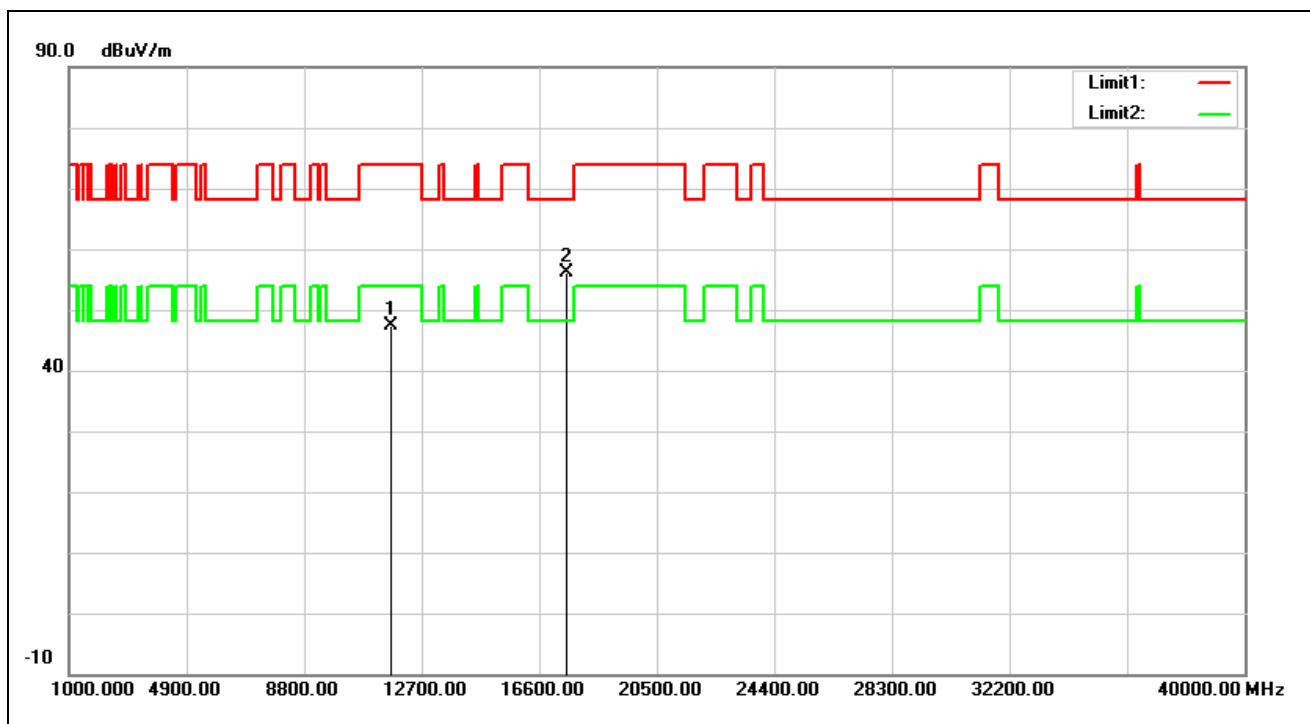


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11690.000	32.93	14.36	47.29	74.00	-26.71	peak
2*	17535.000	31.80	24.45	56.25	68.20	-11.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5865 MHz		
Remark:			

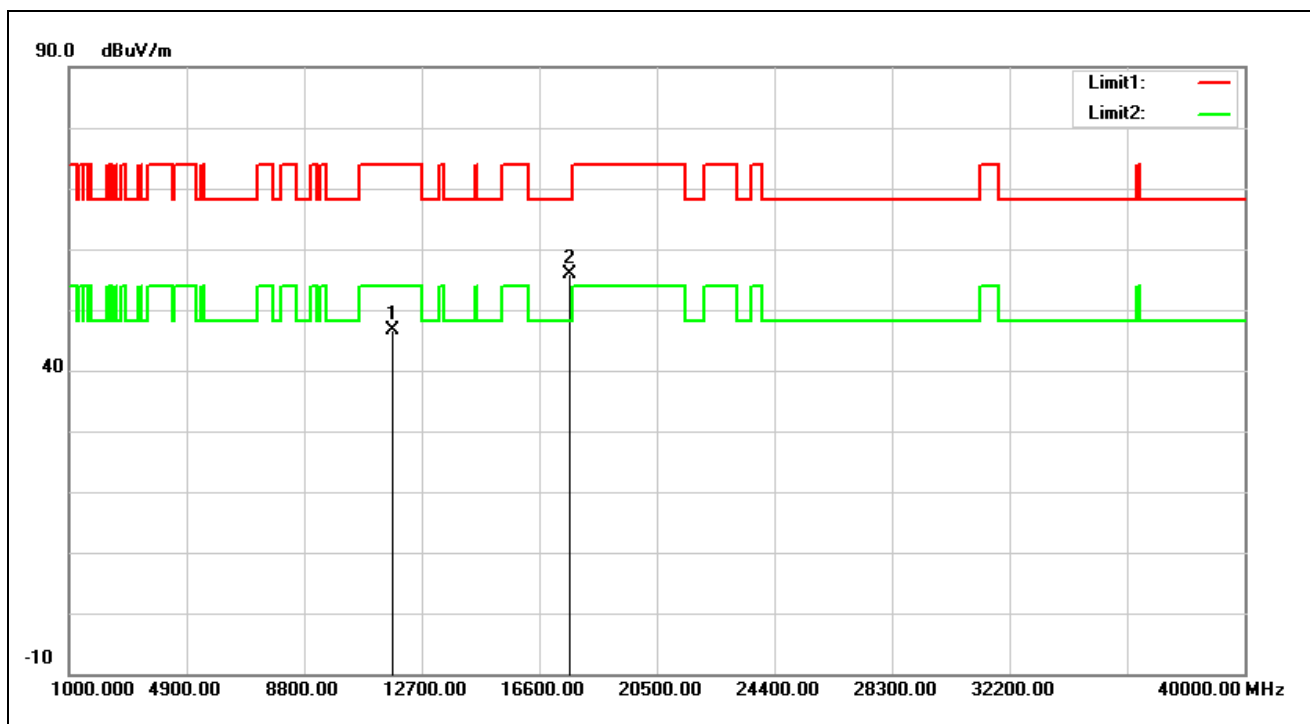


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11730.000	32.51	14.21	46.72	74.00	-27.28	peak
2*	17595.000	31.18	24.76	55.94	68.20	-12.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5865 MHz		
Remark:			

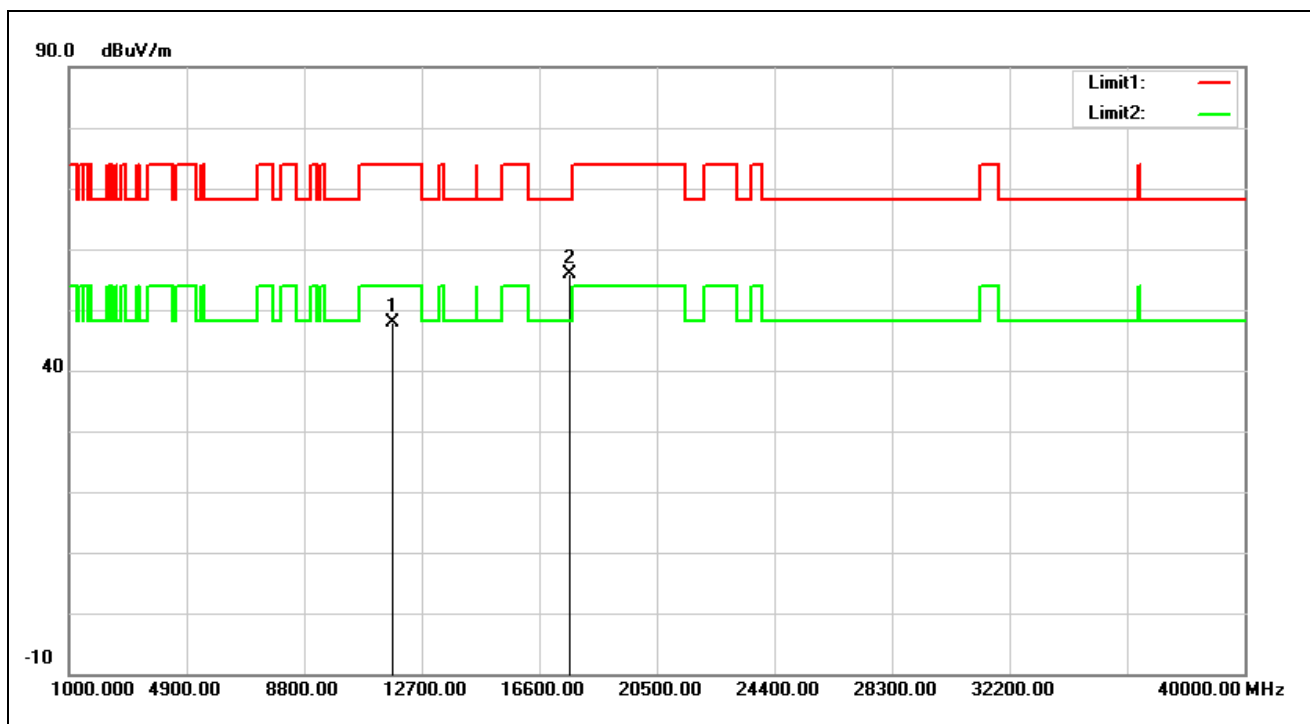


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11730.000	33.59	14.21	47.80	74.00	-26.20	peak
2*	17595.000	31.13	24.76	55.89	68.20	-12.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5885 MHz		
Remark:			

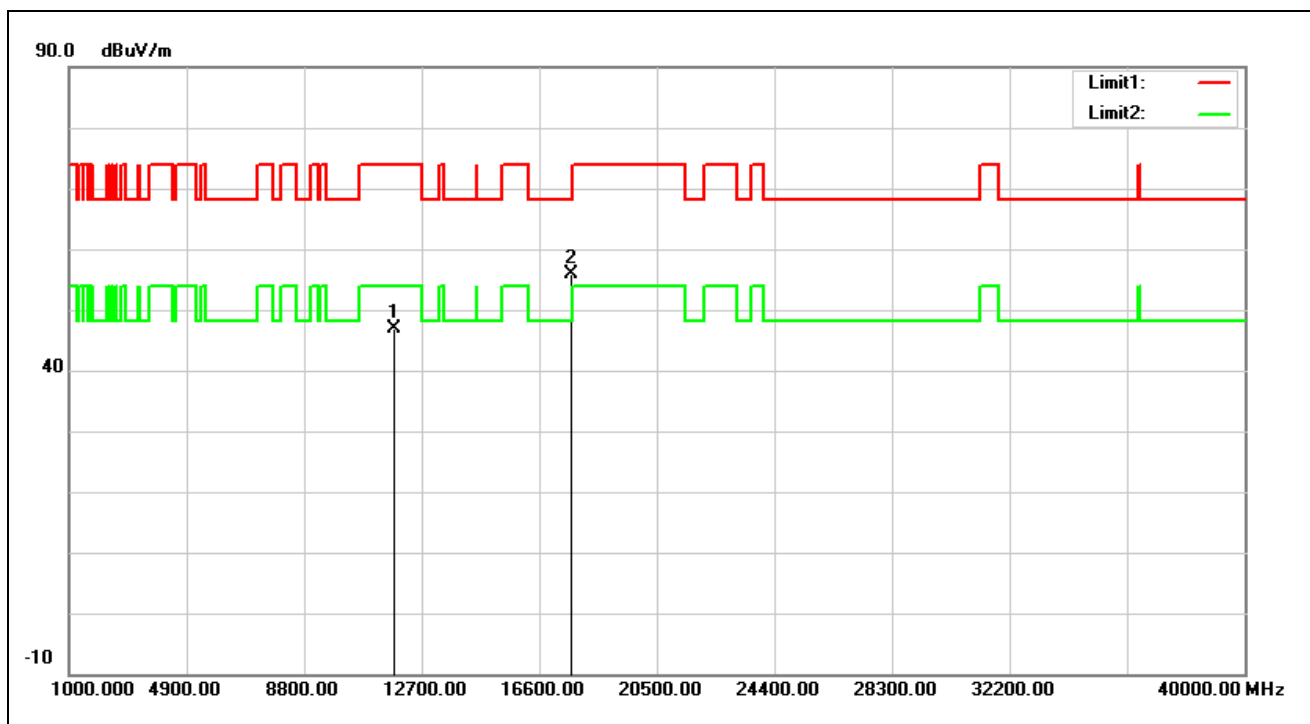


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11770.000	32.86	14.02	46.88	74.00	-27.12	peak
2*	17655.000	30.69	25.14	55.83	68.20	-12.37	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5885 MHz		
Remark:			

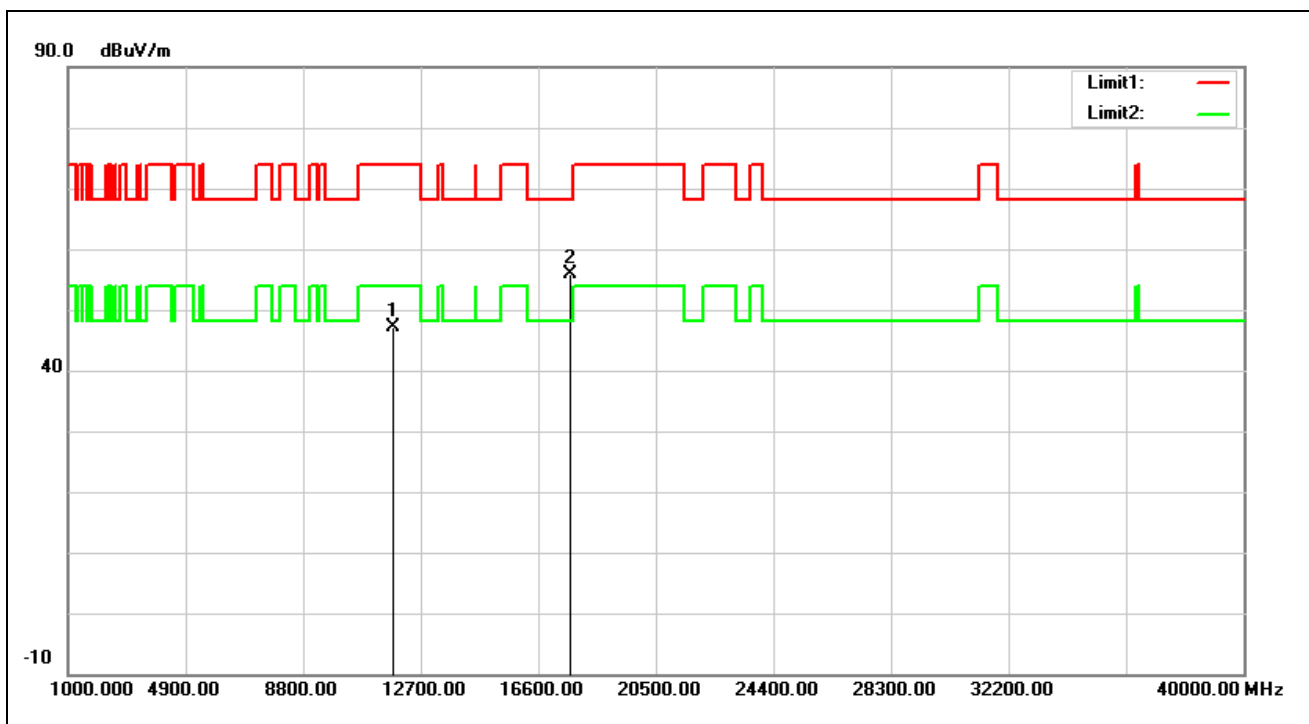


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11770.000	33.17	14.02	47.19	74.00	-26.81	peak
2*	17655.000	30.75	25.14	55.89	68.20	-12.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5835 MHz		
Remark:			

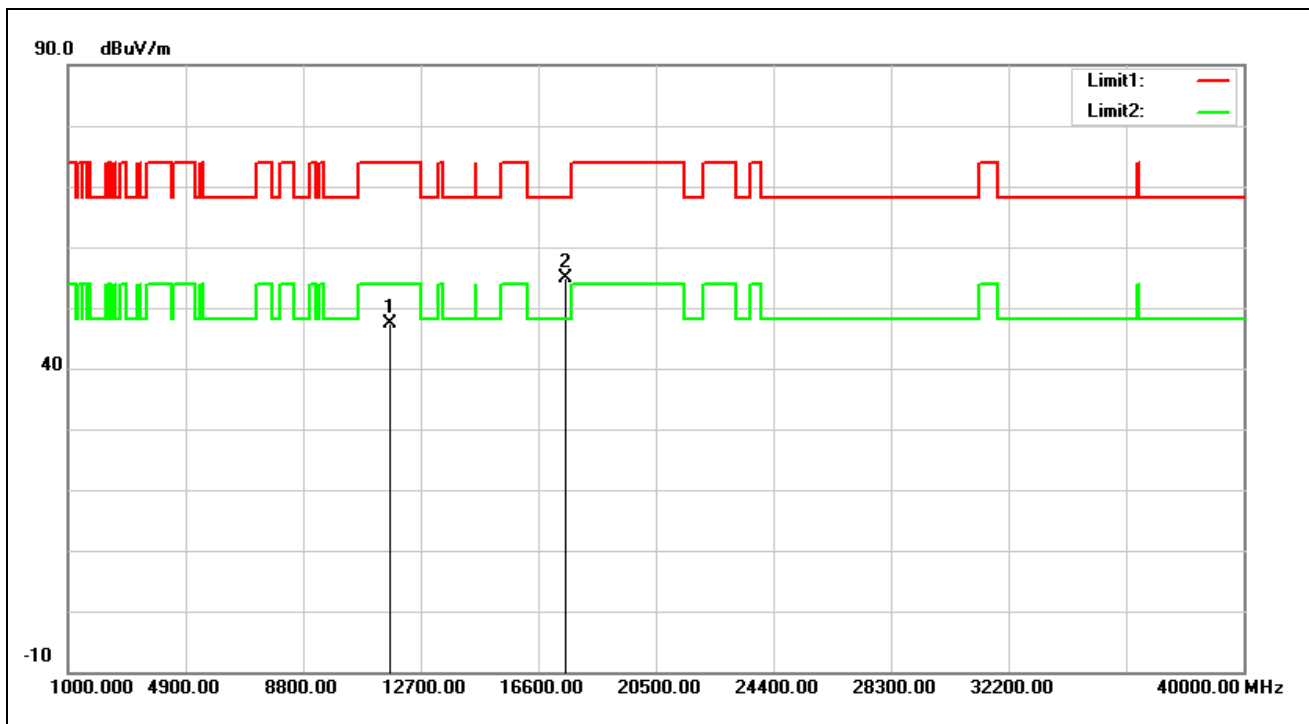


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11670.000	33.03	14.38	47.41	74.00	-26.59	peak
2*	17505.000	30.57	24.28	54.85	68.20	-13.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5835 MHz		
Remark:			

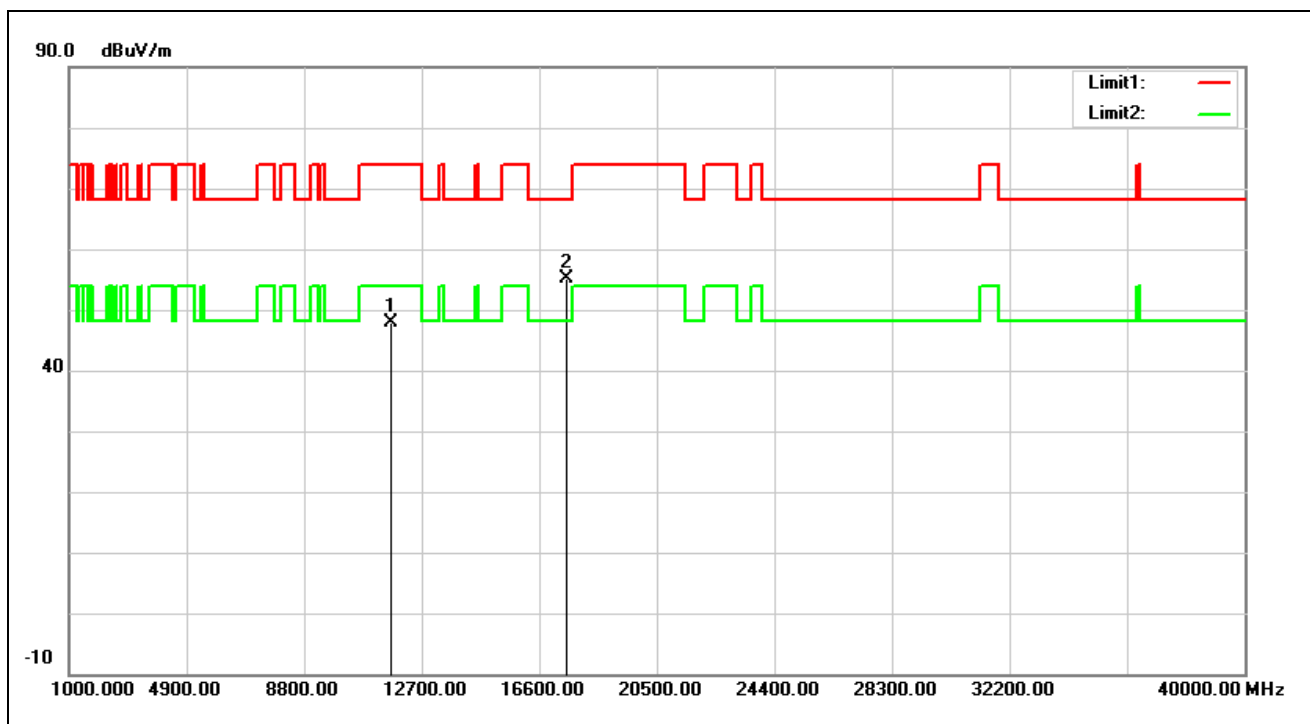


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11670.000	33.40	14.38	47.78	74.00	-26.22	peak
2*	17505.000	30.86	24.28	55.14	68.20	-13.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5875 MHz		
Remark:			

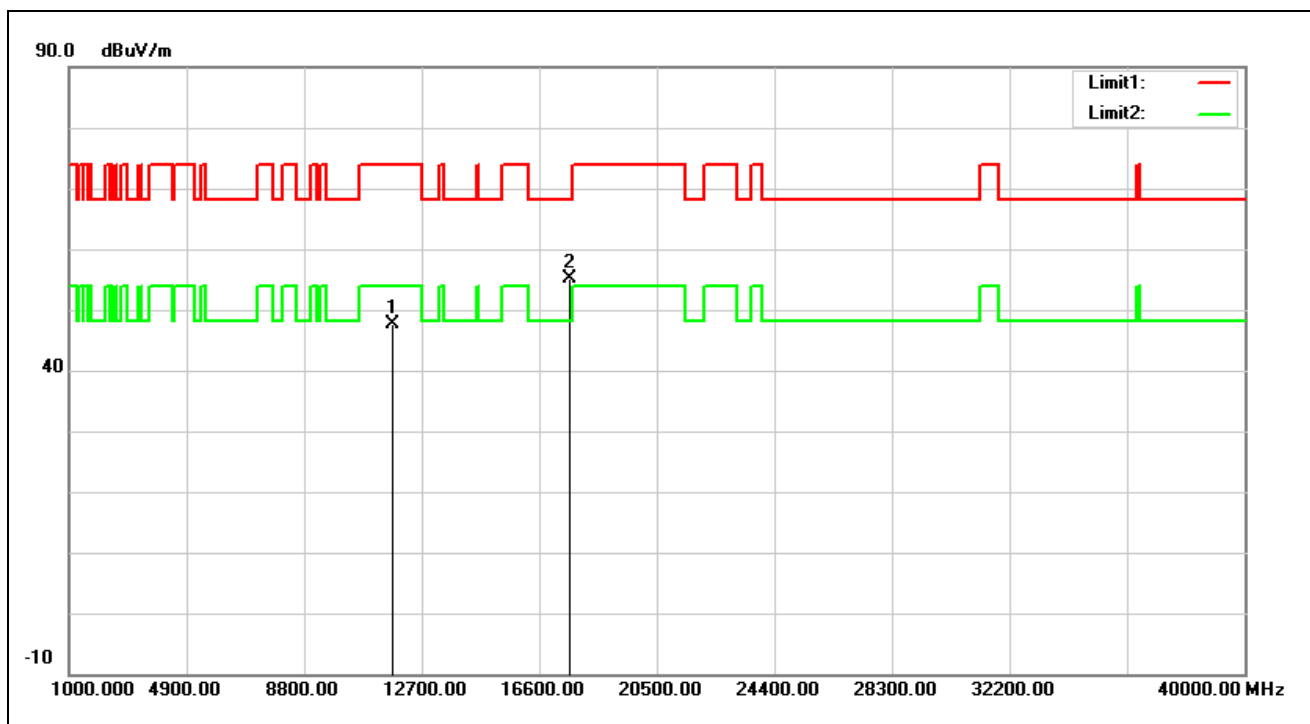


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11750.000	33.56	14.12	47.68	74.00	-26.32	peak
2*	17625.000	30.16	24.95	55.11	68.20	-13.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5875 MHz		
Remark:			

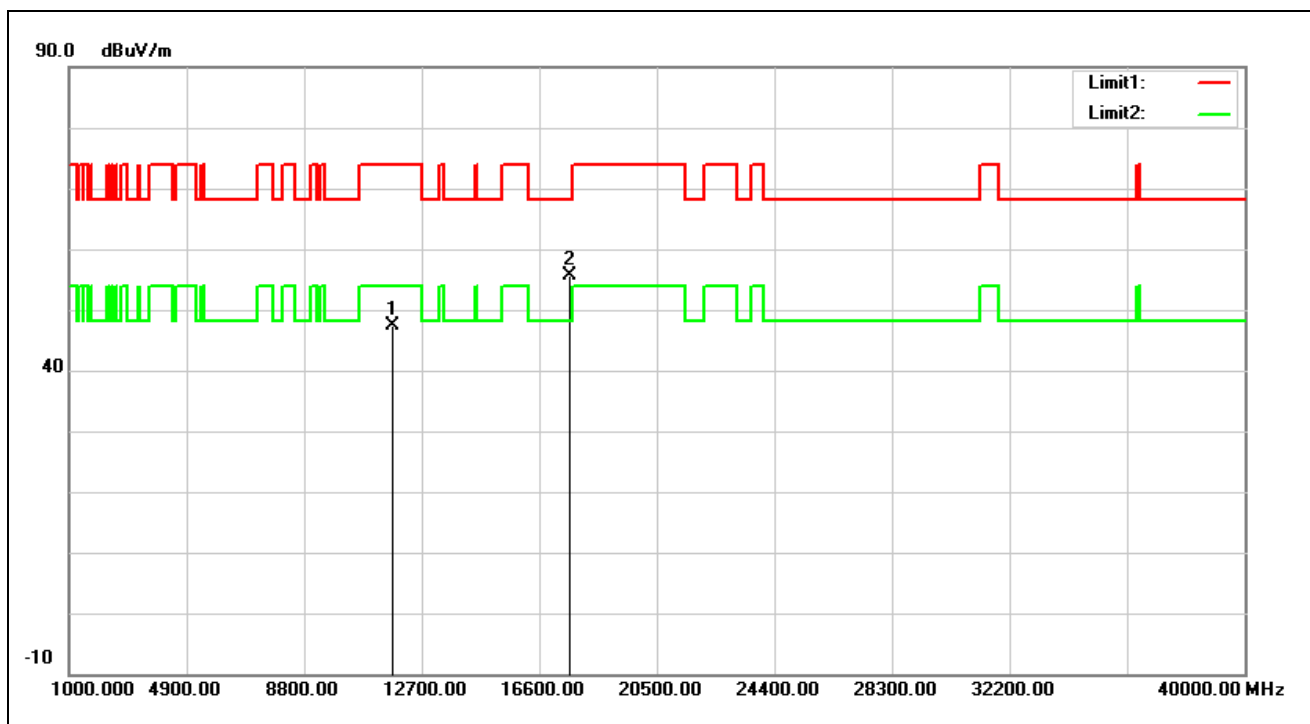


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11750.000	33.35	14.12	47.47	74.00	-26.53	peak
2*	17625.000	30.66	24.95	55.61	68.20	-12.59	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5855 MHz		
Remark:			

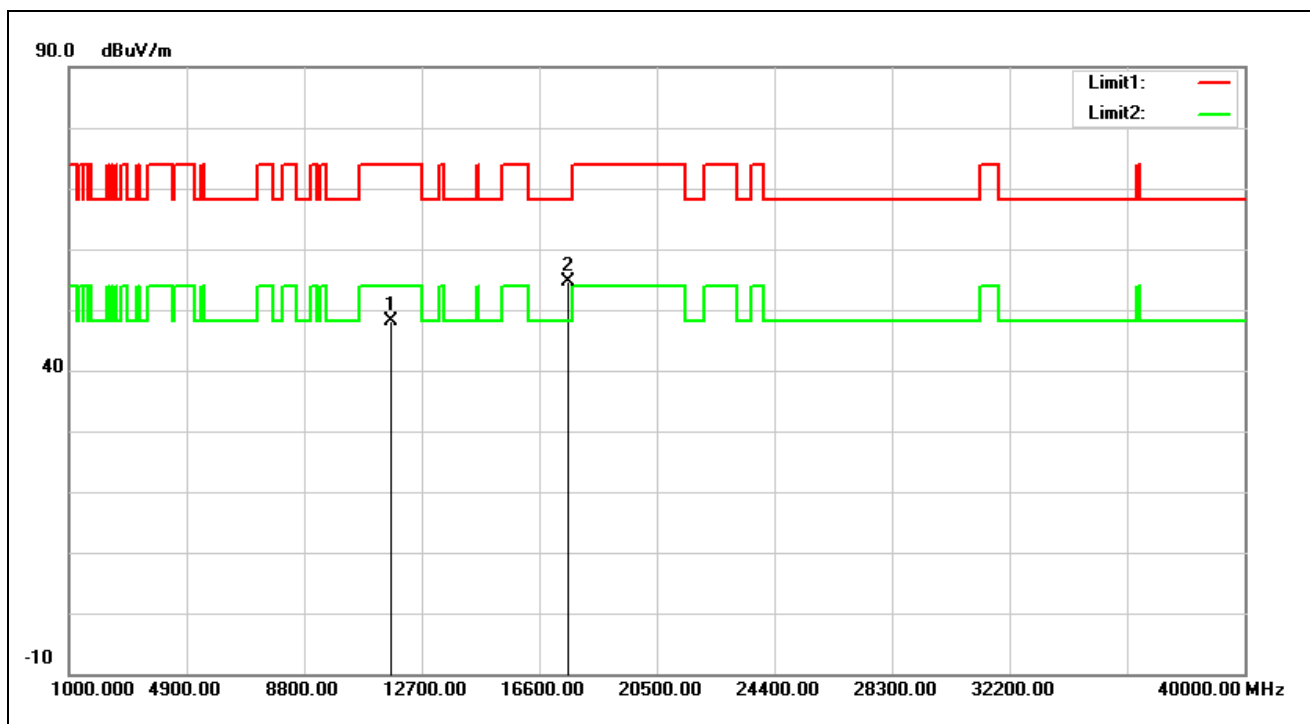


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11710.000	33.79	14.31	48.10	74.00	-25.90	peak
2*	17565.000	30.11	24.61	54.72	68.20	-13.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5855 MHz		
Remark:			

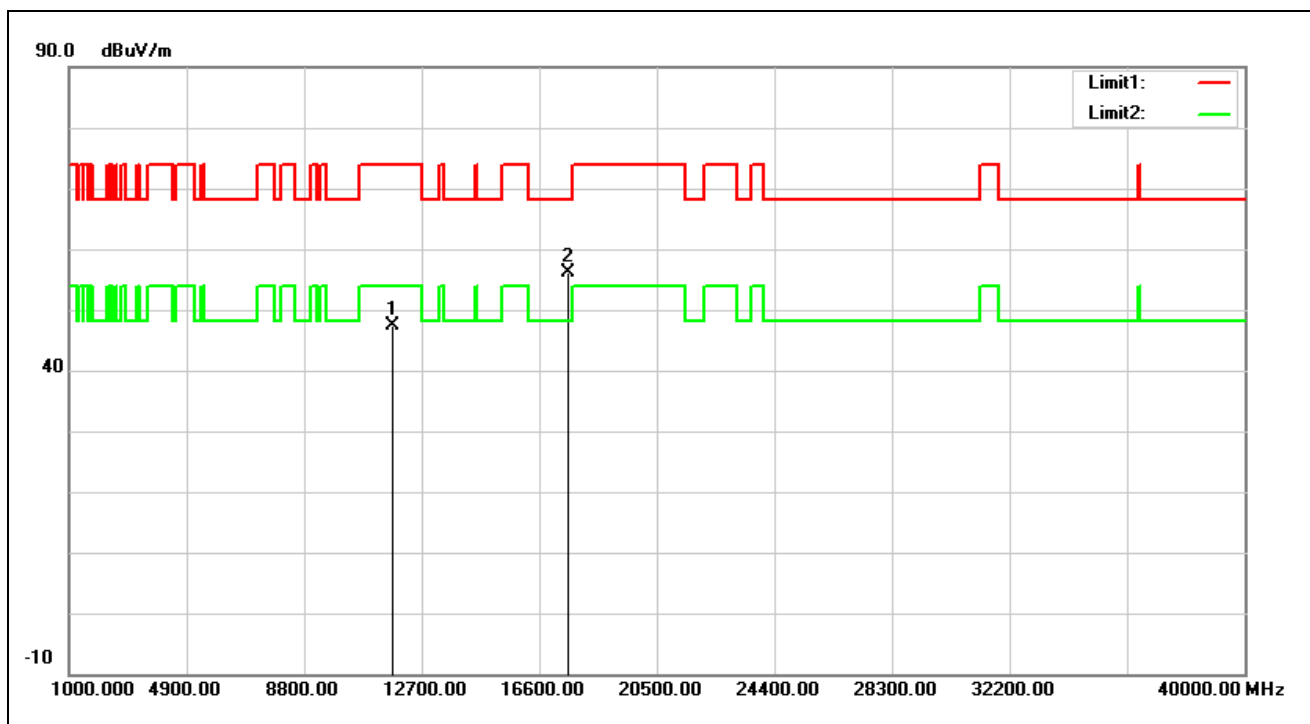


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11710.000	32.98	14.31	47.29	74.00	-26.71	peak
2*	17565.000	31.52	24.61	56.13	68.20	-12.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

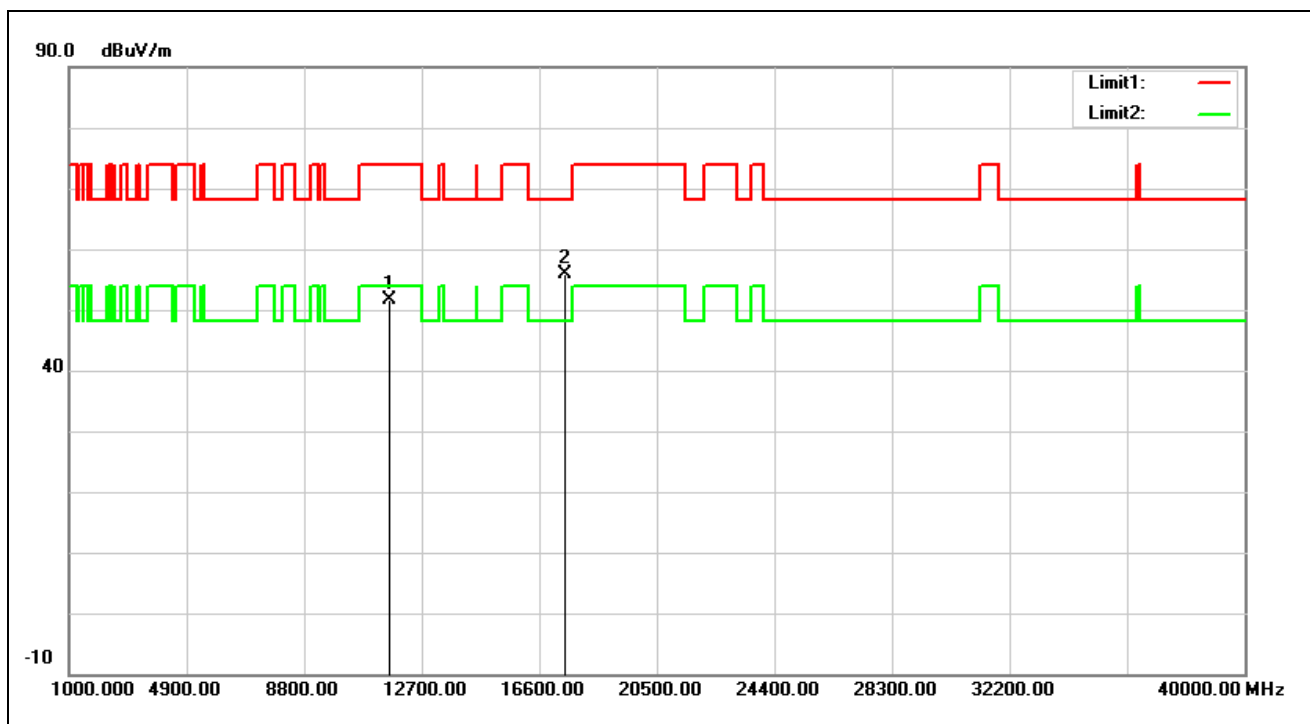


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11630.000	37.21	14.41	51.62	74.00	-22.38	peak
2*	17445.000	32.41	23.50	55.91	68.20	-12.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

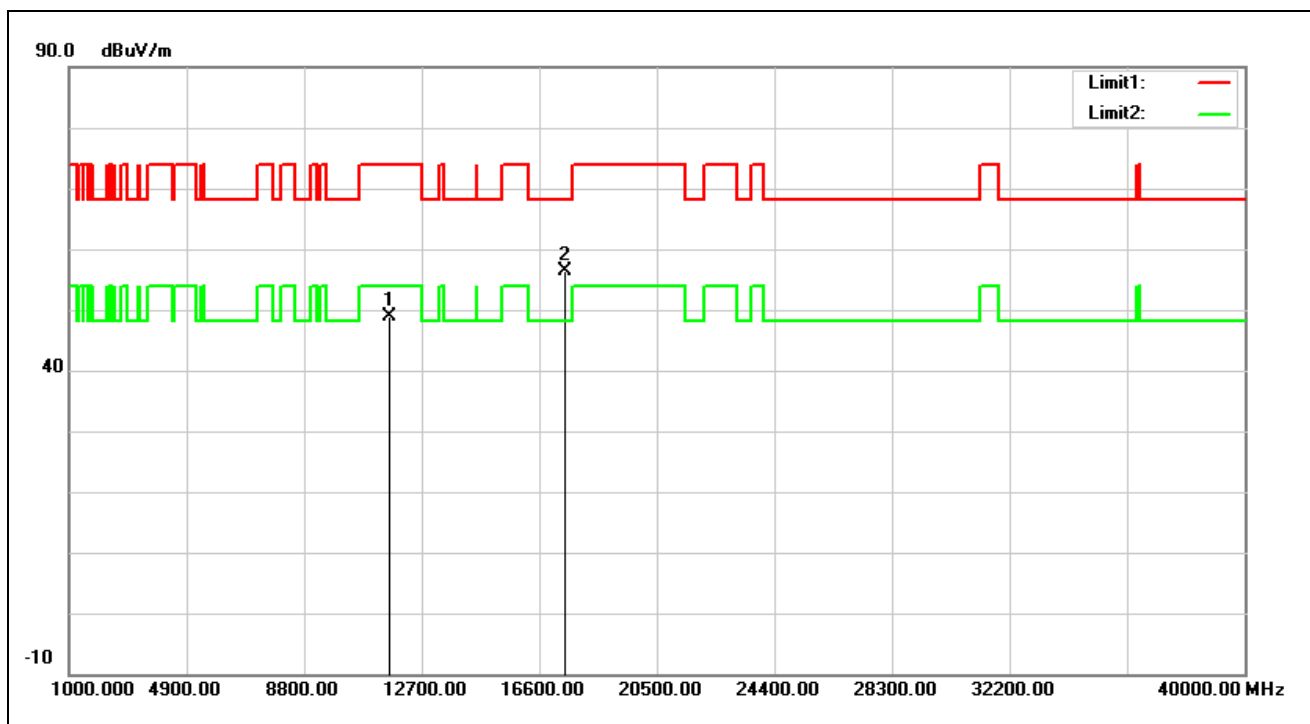


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11630.000	34.49	14.41	48.90	74.00	-25.10	peak
2*	17445.000	32.76	23.50	56.26	68.20	-11.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting		
Remark:	(Bluetooth + WLAN 5 GHz)		

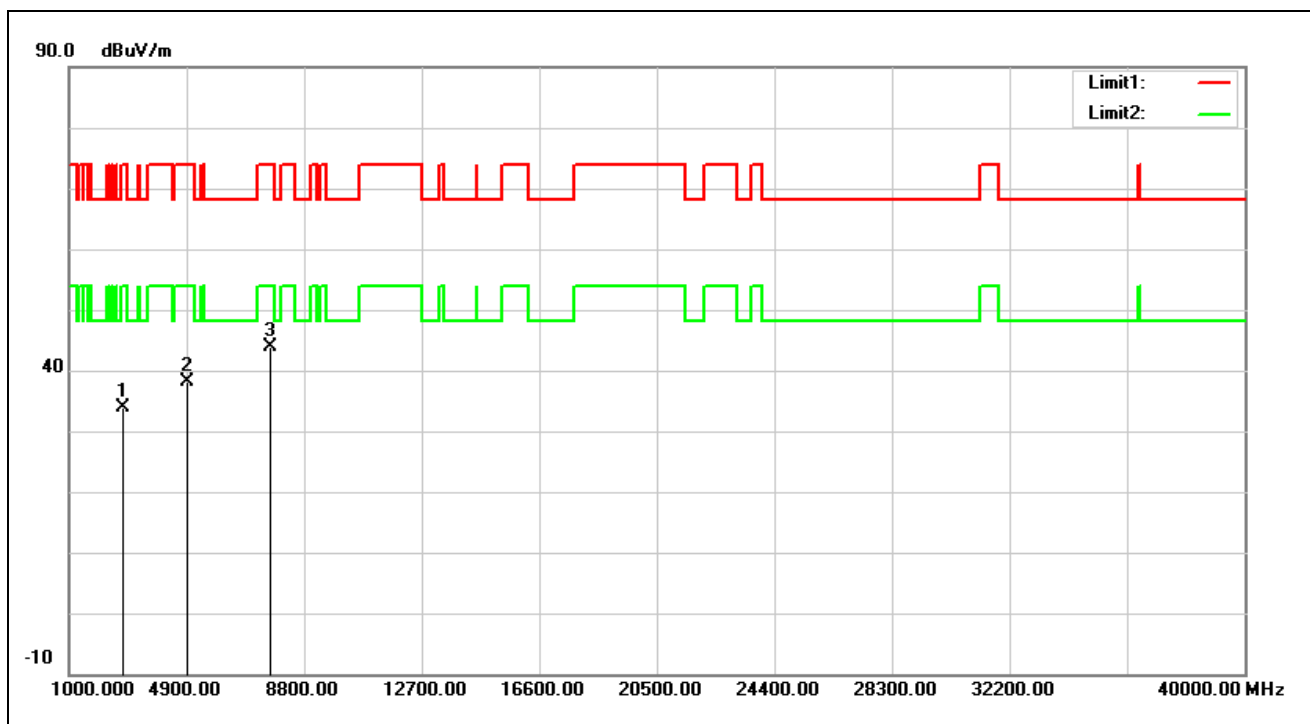


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	39.64	-5.64	34.00	74.00	-40.00	peak
2	4910.000	38.20	-0.08	38.12	74.00	-35.88	peak
3*	7647.000	37.42	6.40	43.82	74.00	-30.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting		
Remark:	(Bluetooth + WLAN 5 GHz)		

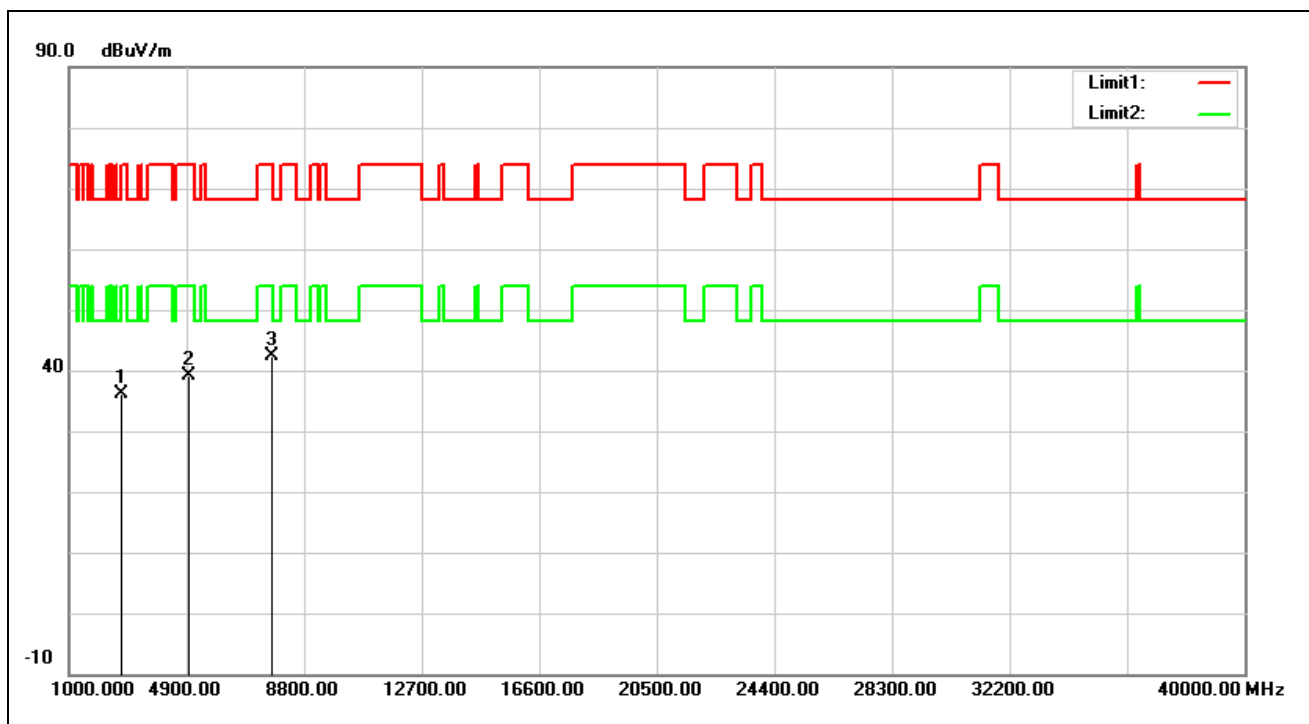


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	41.79	-5.69	36.10	74.00	-37.90	peak
2	4961.000	38.95	0.22	39.17	74.00	-34.83	peak
3*	7681.000	35.91	6.43	42.34	74.00	-31.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting		
Remark:	(WLAN 2.4 GHz + 5 GHz)		

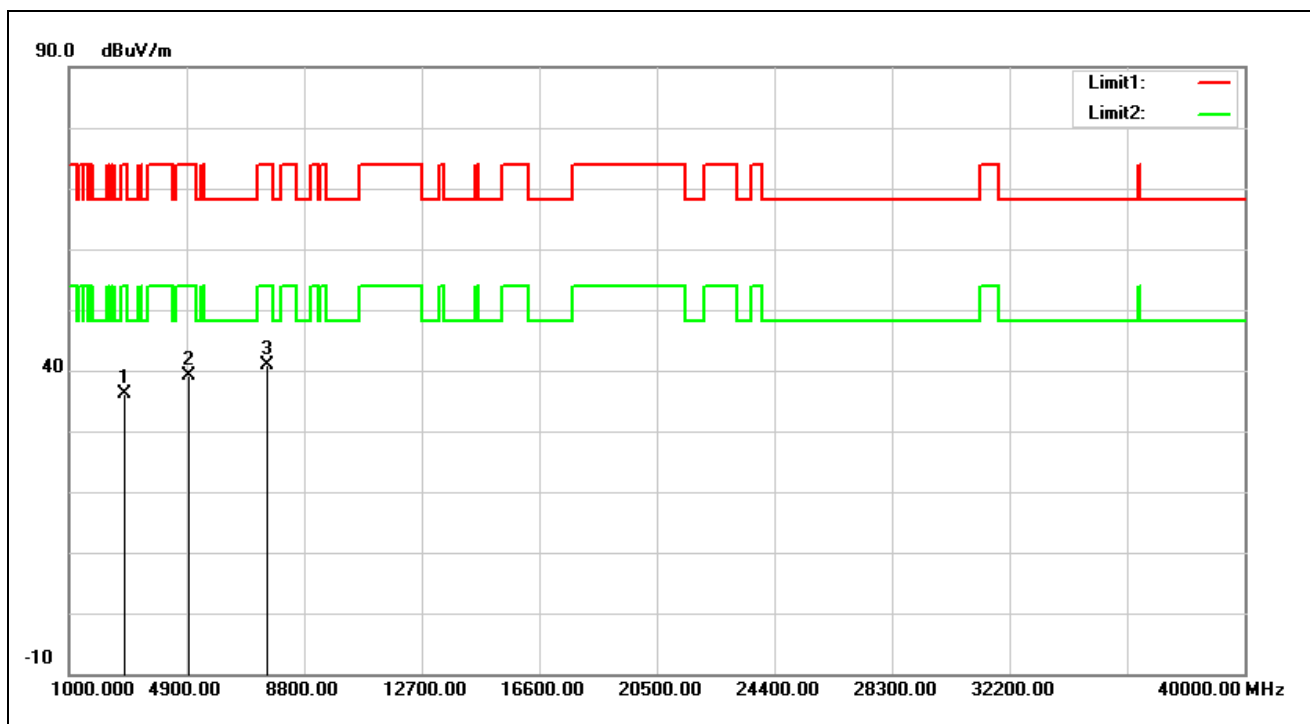

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	41.71	-5.58	36.13	74.00	-37.87	peak
2	4978.000	38.85	0.33	39.18	74.00	-34.82	peak
3*	7562.000	34.51	6.39	40.90	74.00	-33.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting		
Remark:	(WLAN 2.4 GHz + 5 GHz)		

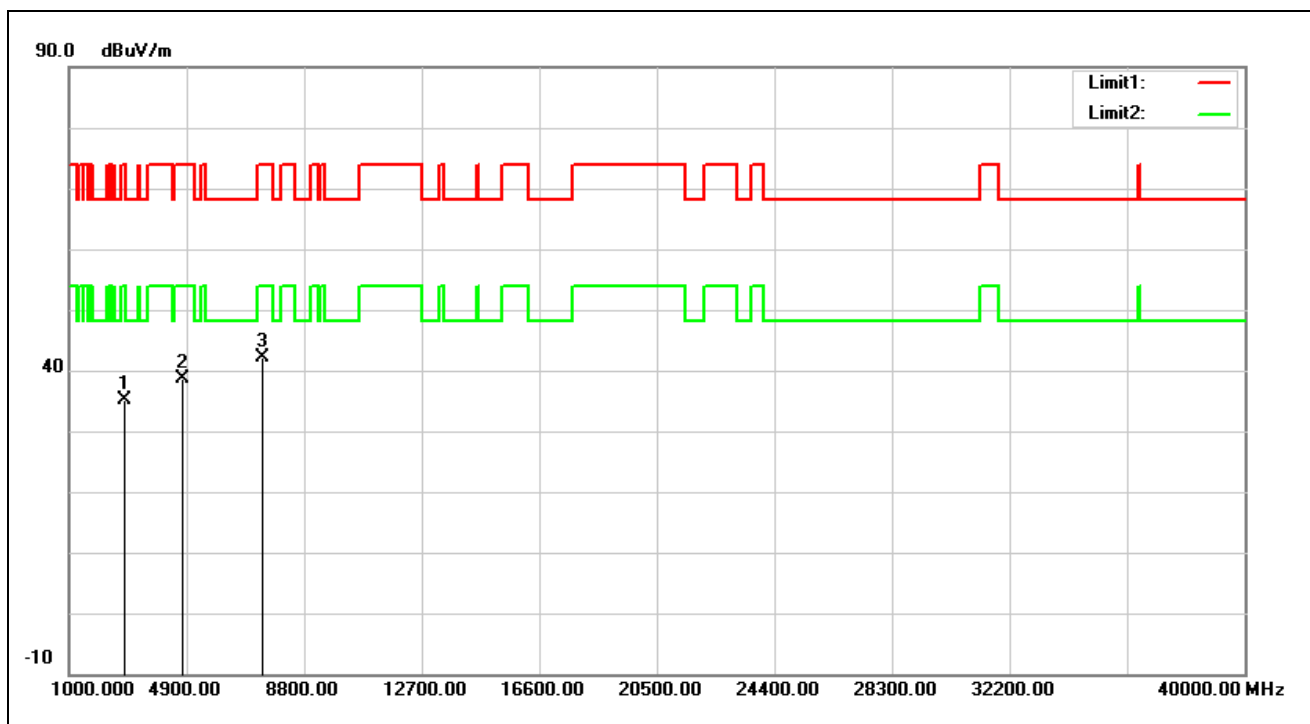


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	40.66	-5.64	35.02	74.00	-38.98	peak
2	4706.000	39.26	-0.56	38.70	74.00	-35.30	peak
3*	7426.000	35.66	6.39	42.05	74.00	-31.95	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

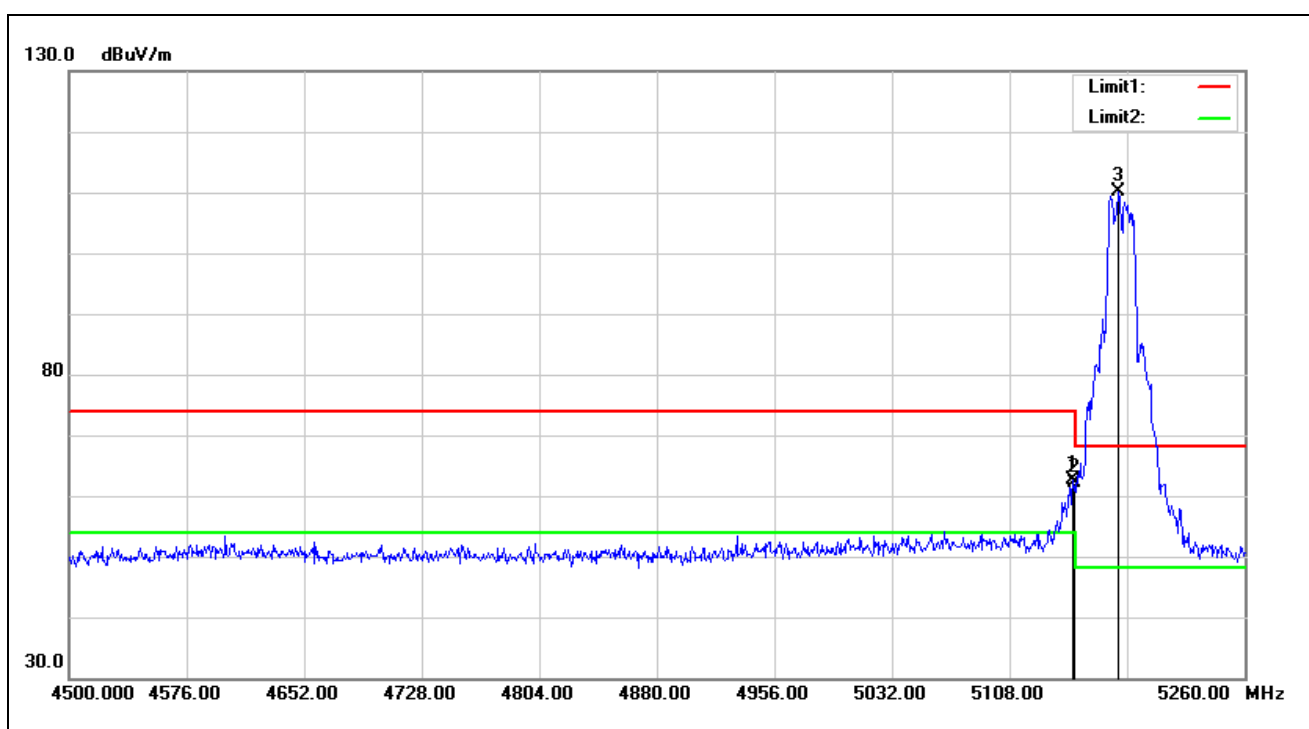


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	61.50	1.13	62.63	74.00	-11.37	peak
2	5150.000	60.93	1.13	62.06	74.00	-11.94	peak
3*	5178.680	109.30	0.95	110.25	68.20	42.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

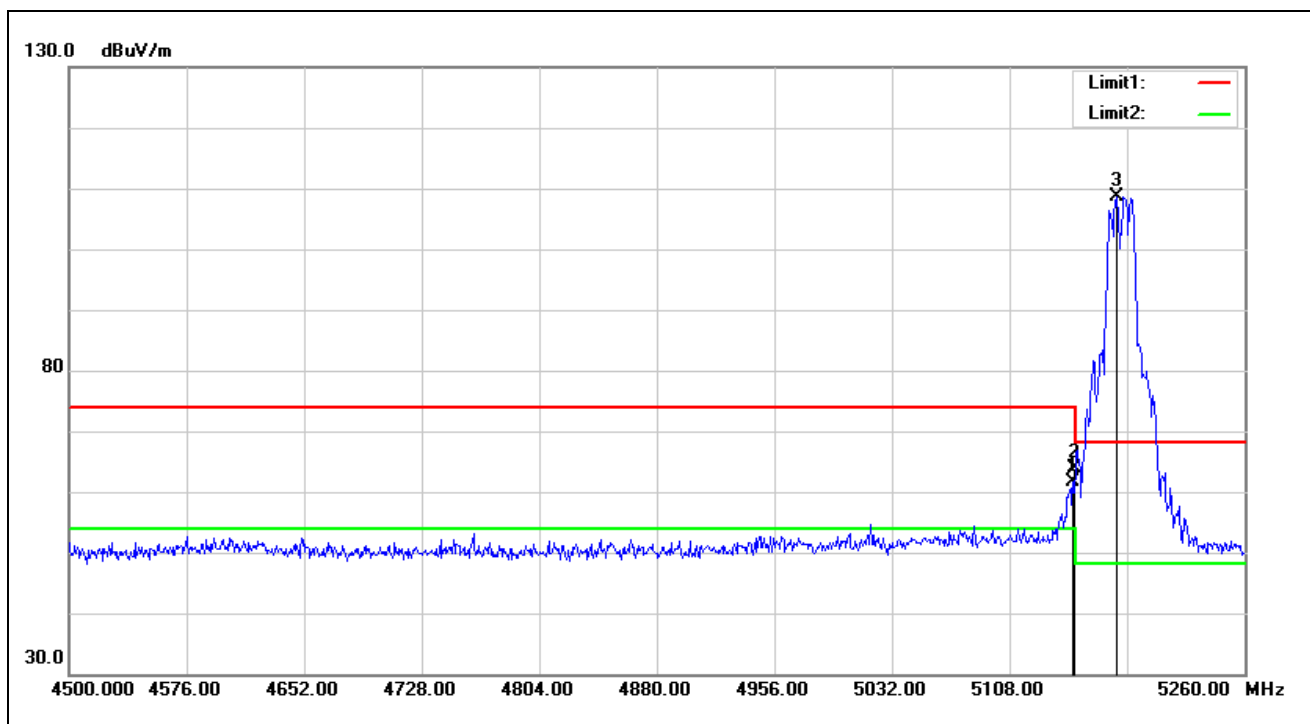


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	60.42	1.13	61.55	74.00	-12.45	peak
2	5150.000	62.68	1.13	63.81	74.00	-10.19	peak
3*	5177.160	107.73	0.96	108.69	68.20	40.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

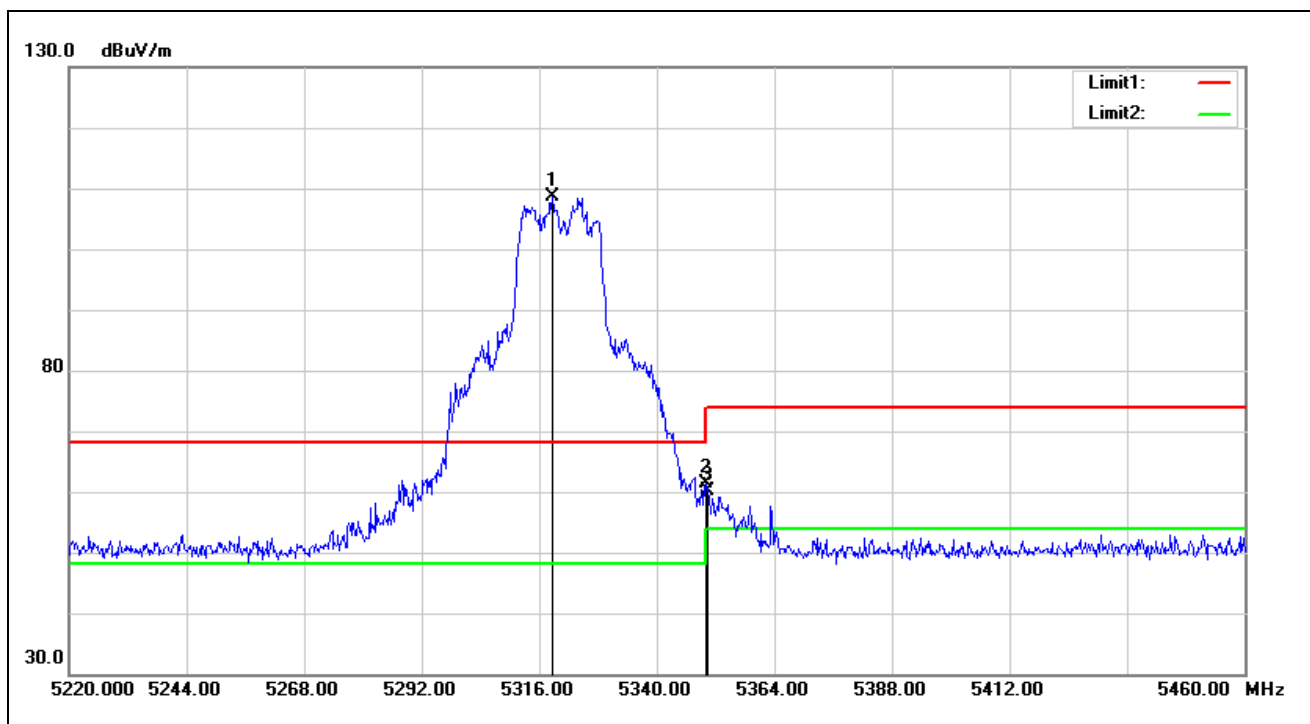


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5318.640	107.94	0.77	108.71	68.20	40.51	peak
2	5350.000	60.45	0.89	61.34	74.00	-12.66	peak
3	5350.320	59.30	0.89	60.19	74.00	-13.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

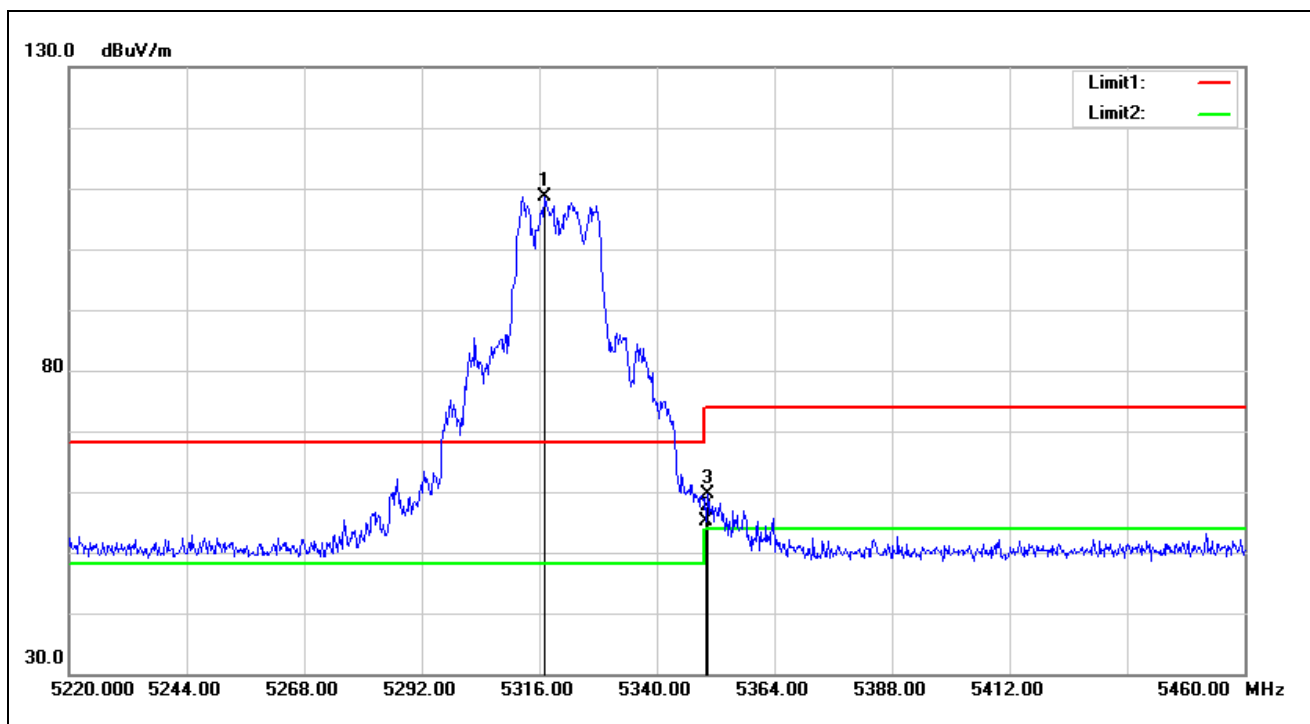


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5316.960	107.90	0.76	108.66	68.20	40.46	peak
2	5350.000	54.33	0.89	55.22	74.00	-18.78	peak
3	5350.320	58.72	0.89	59.61	74.00	-14.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

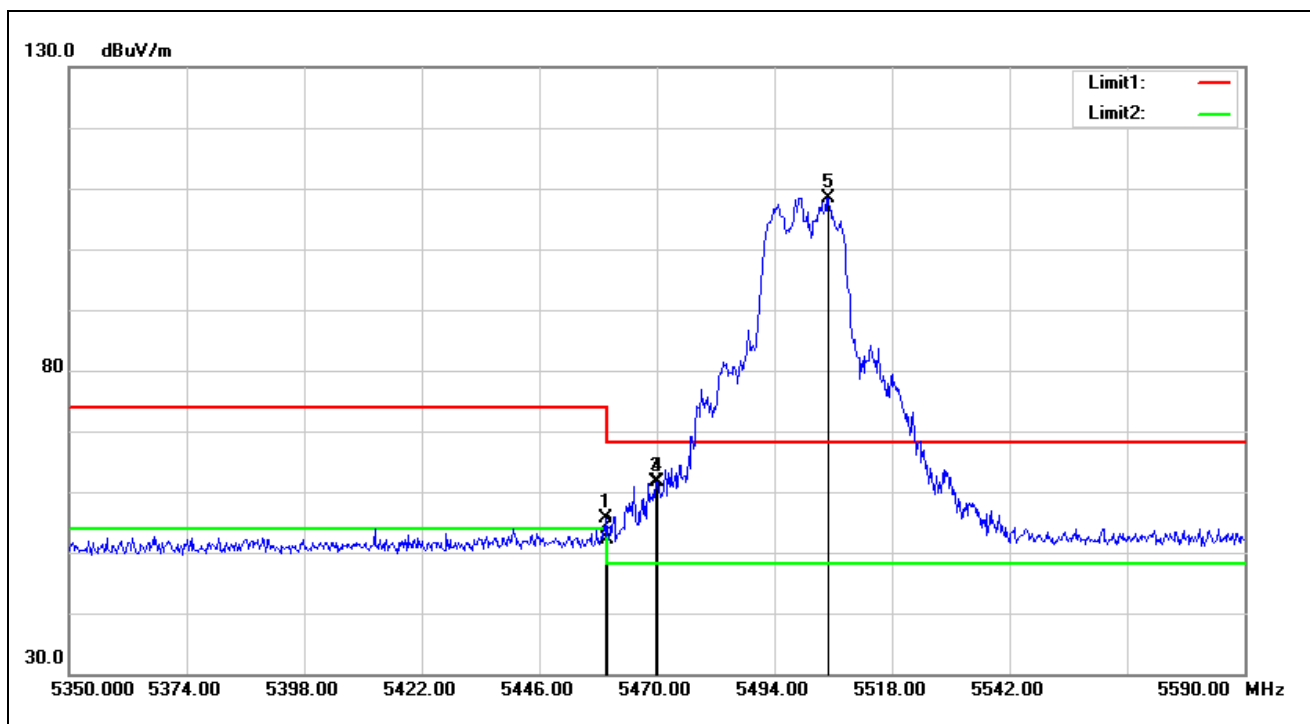


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	53.91	1.79	55.70	74.00	-18.30	peak
2	5460.000	50.33	1.79	52.12	74.00	-21.88	peak
3	5469.760	59.75	1.80	61.55	68.20	-6.65	peak
4	5470.000	59.85	1.80	61.65	68.20	-6.55	peak
5*	5505.040	106.66	1.84	108.50	68.20	40.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

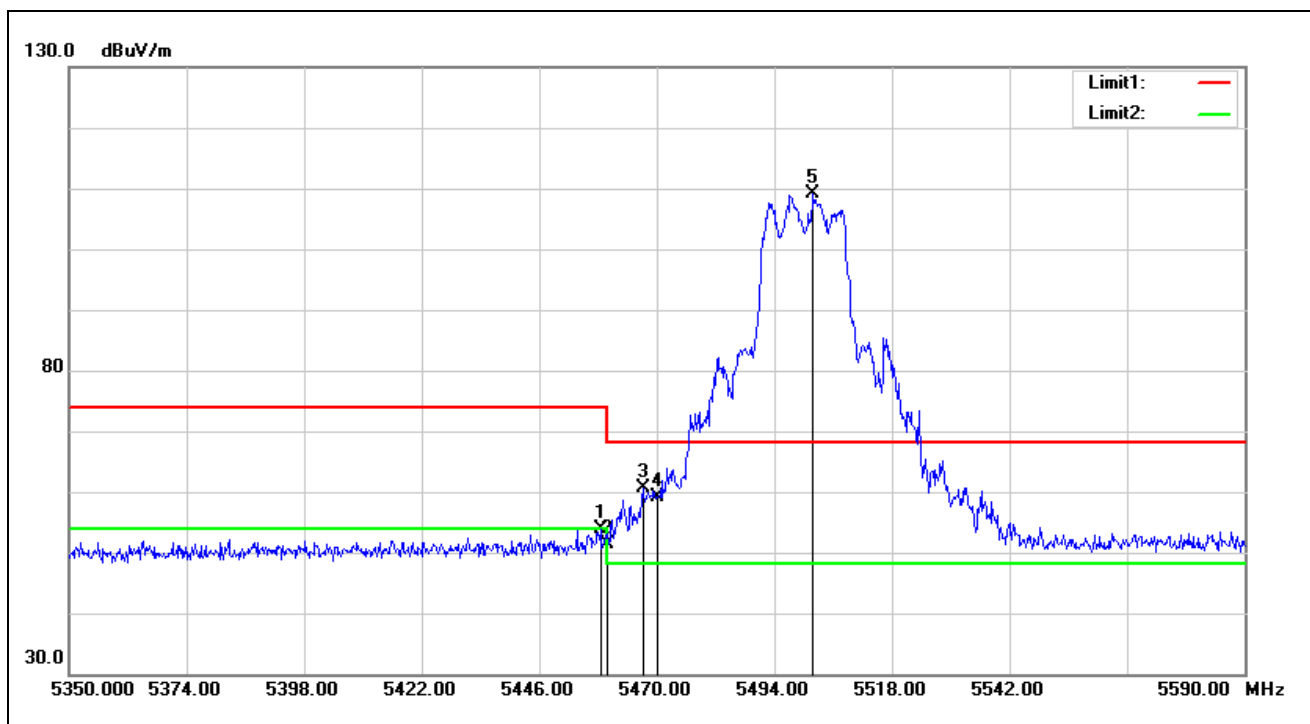


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.480	52.20	1.79	53.99	74.00	-20.01	peak
2	5460.000	49.69	1.79	51.48	74.00	-22.52	peak
3	5467.120	58.80	1.79	60.59	68.20	-7.61	peak
4	5470.000	57.26	1.80	59.06	68.20	-9.14	peak
5*	5501.920	107.23	1.85	109.08	68.20	40.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

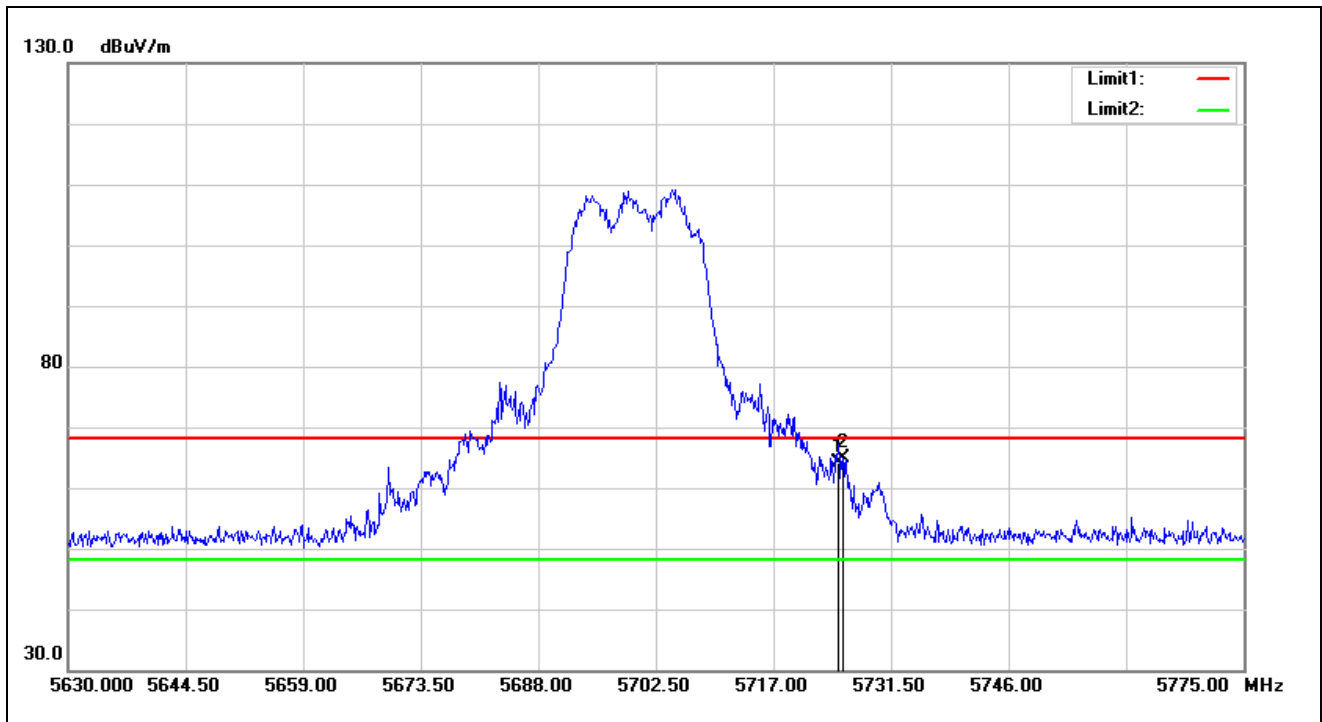


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	62.25	1.89	64.14	68.20	-4.06	peak
2*	5725.555	62.94	1.91	64.85	68.20	-3.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

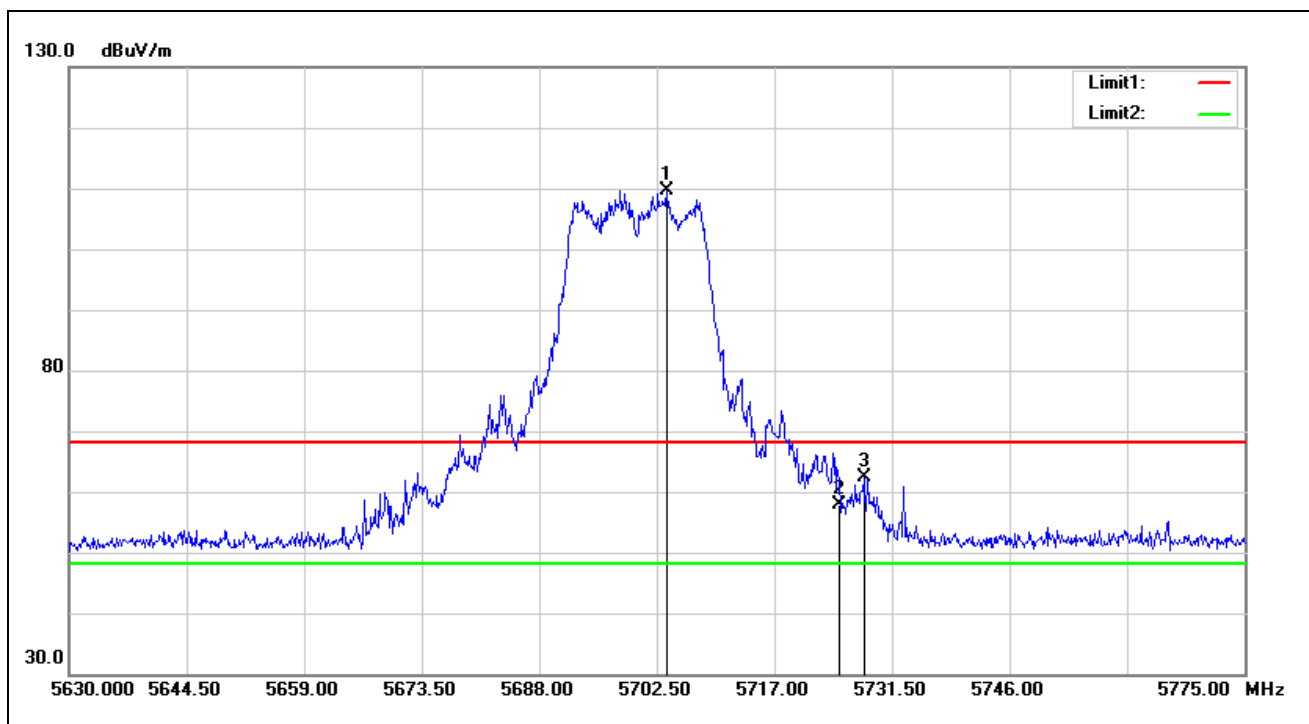

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5703.660	108.07	1.62	109.69	68.20	41.49	peak
2	5725.000	56.03	1.89	57.92	68.20	-10.28	peak
3	5728.020	60.44	1.94	62.38	68.20	-5.82	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			

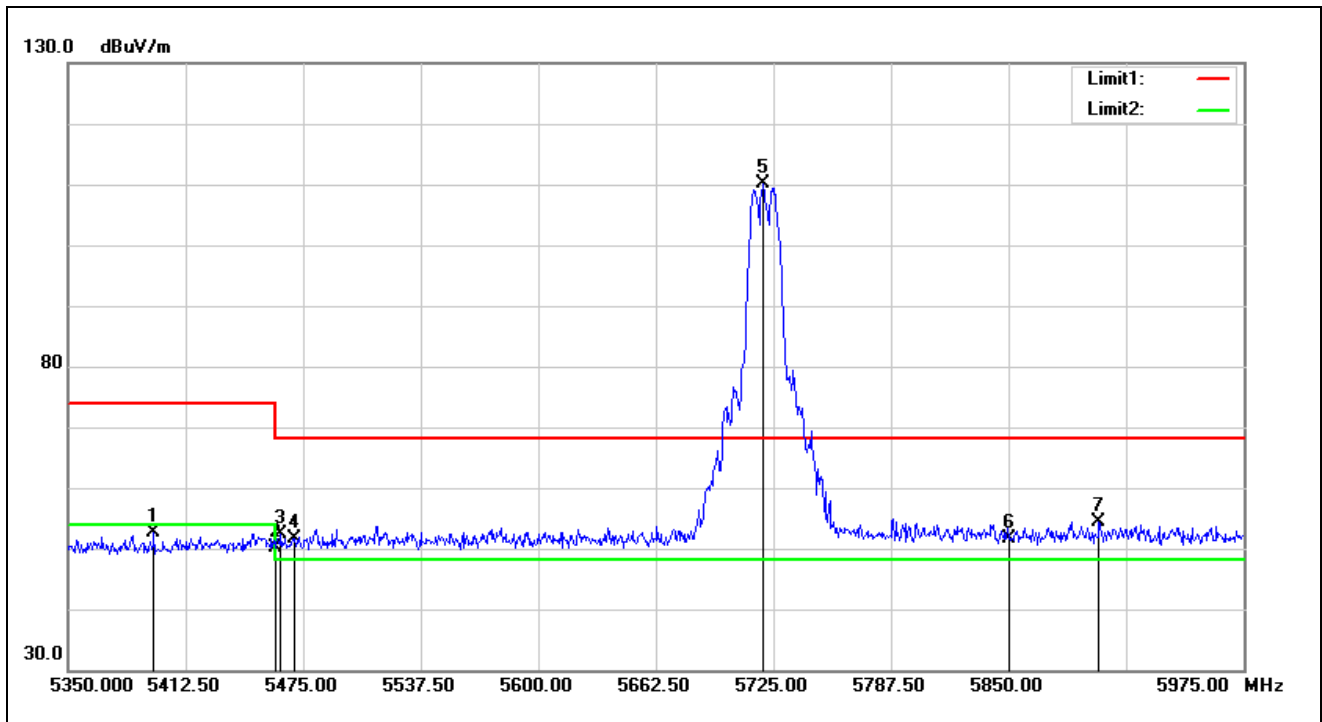

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5395.625	51.27	1.24	52.51	74.00	-21.49	peak
1	5460.000	48.43	1.79	50.22	74.00	-23.78	peak
2	5463.125	50.62	1.79	52.41	68.20	-15.79	peak
3	5470.000	49.77	1.80	51.57	68.20	-16.63	peak
4*	5719.375	108.22	1.82	110.04	68.20	41.84	peak
5	5850.000	49.16	2.57	51.73	68.20	-16.47	peak
6	5898.125	51.58	2.71	54.29	68.20	-13.91	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5720 MHz		
Remark:			

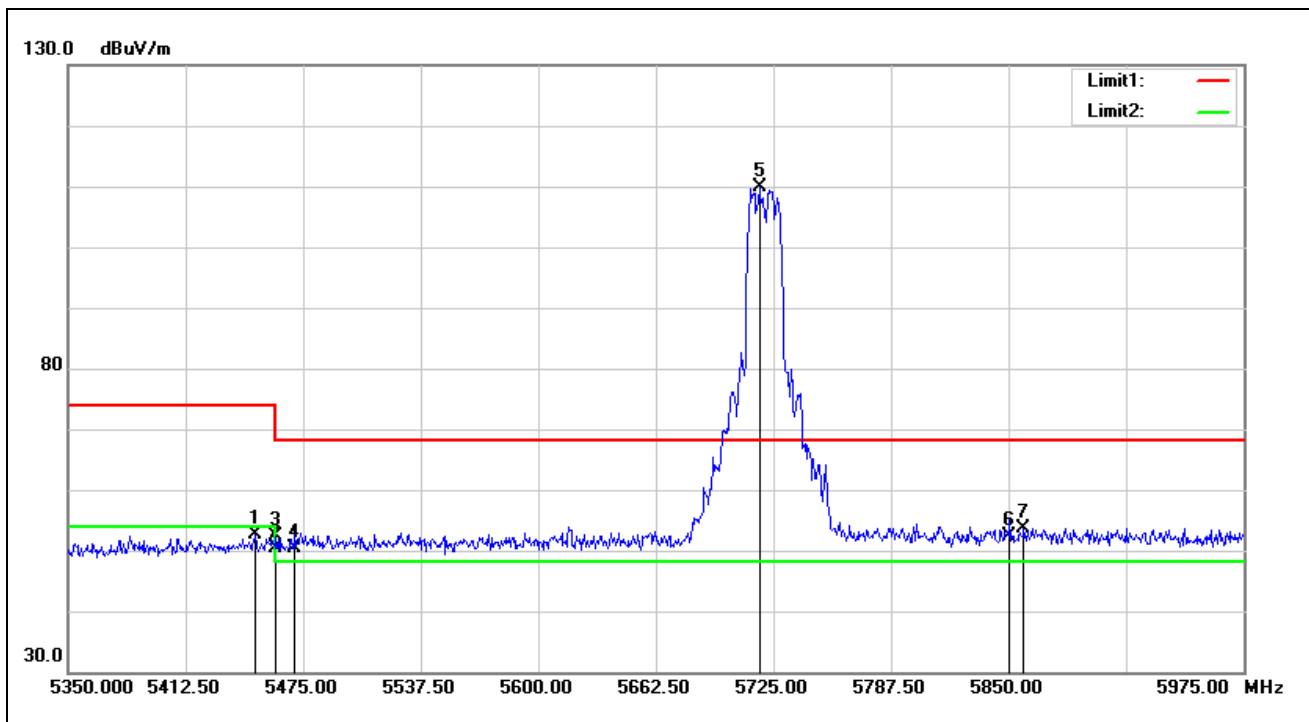

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5449.375	50.76	1.77	52.53	74.00	-21.47	peak
1	5460.000	48.70	1.79	50.49	74.00	-23.51	peak
2	5460.625	50.52	1.79	52.31	68.20	-15.89	peak
3	5470.000	48.54	1.80	50.34	68.20	-17.86	peak
4*	5717.500	108.00	1.80	109.80	68.20	41.60	peak
5	5850.000	49.90	2.57	52.47	68.20	-15.73	peak
6	5858.125	51.07	2.60	53.67	68.20	-14.53	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

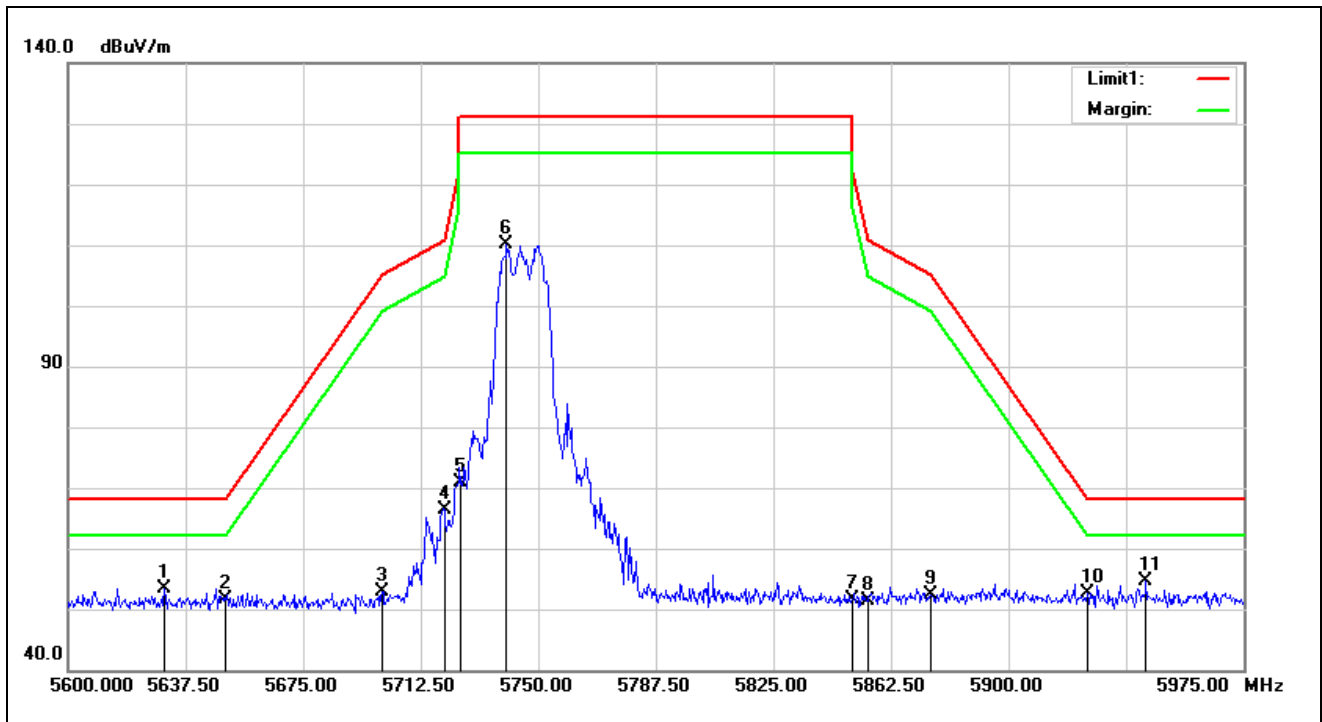

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5630.750	51.85	1.64	53.49	68.20	-14.71	peak
1	5650.000	50.01	1.65	51.66	68.20	-16.54	peak
2	5700.000	51.18	1.58	52.76	105.20	-52.44	peak
3	5720.000	64.50	1.83	66.33	110.80	-44.47	peak
4	5725.000	69.03	1.89	70.92	122.20	-51.28	peak
5	5739.875	108.16	2.09	110.25	131.20	-20.95	peak
6	5850.000	49.04	2.57	51.61	122.20	-70.59	peak
7	5855.000	48.71	2.59	51.30	110.80	-59.50	peak
8	5875.000	49.83	2.64	52.47	105.20	-52.73	peak
9	5925.000	50.10	2.58	52.68	68.20	-15.52	peak
10*	5943.875	52.15	2.47	54.62	68.20	-13.58	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

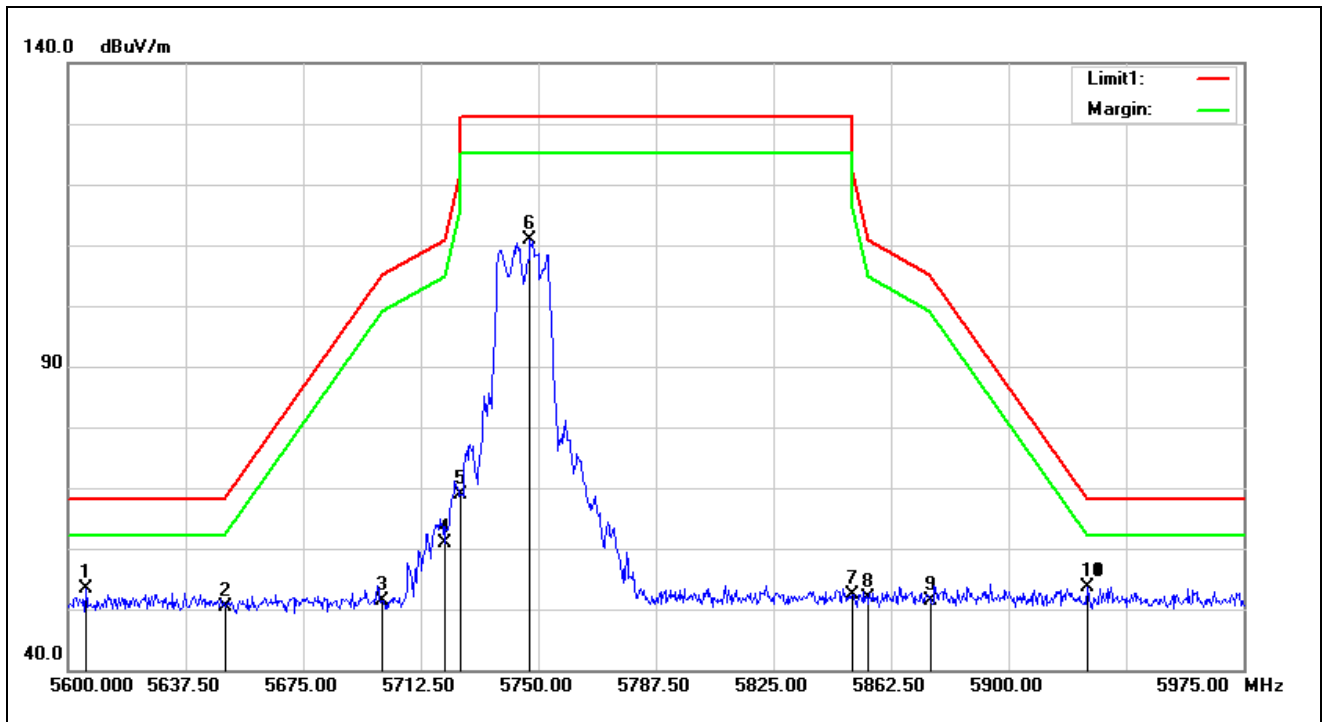

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5605.625	51.86	1.62	53.48	68.20	-14.72	peak
1	5650.000	48.80	1.65	50.45	68.20	-17.75	peak
2	5700.000	49.76	1.58	51.34	105.20	-53.86	peak
3	5720.000	59.06	1.83	60.89	110.80	-49.91	peak
4	5725.000	67.01	1.89	68.90	122.20	-53.30	peak
5	5747.375	108.58	2.18	110.76	131.20	-20.44	peak
6	5850.000	49.80	2.57	52.37	122.20	-69.83	peak
7	5855.000	49.27	2.59	51.86	110.80	-58.94	peak
8	5875.000	48.63	2.64	51.27	105.20	-53.93	peak
9*	5925.000	51.13	2.58	53.71	68.20	-14.49	peak
10	5925.125	51.13	2.58	53.71	68.20	-14.49	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

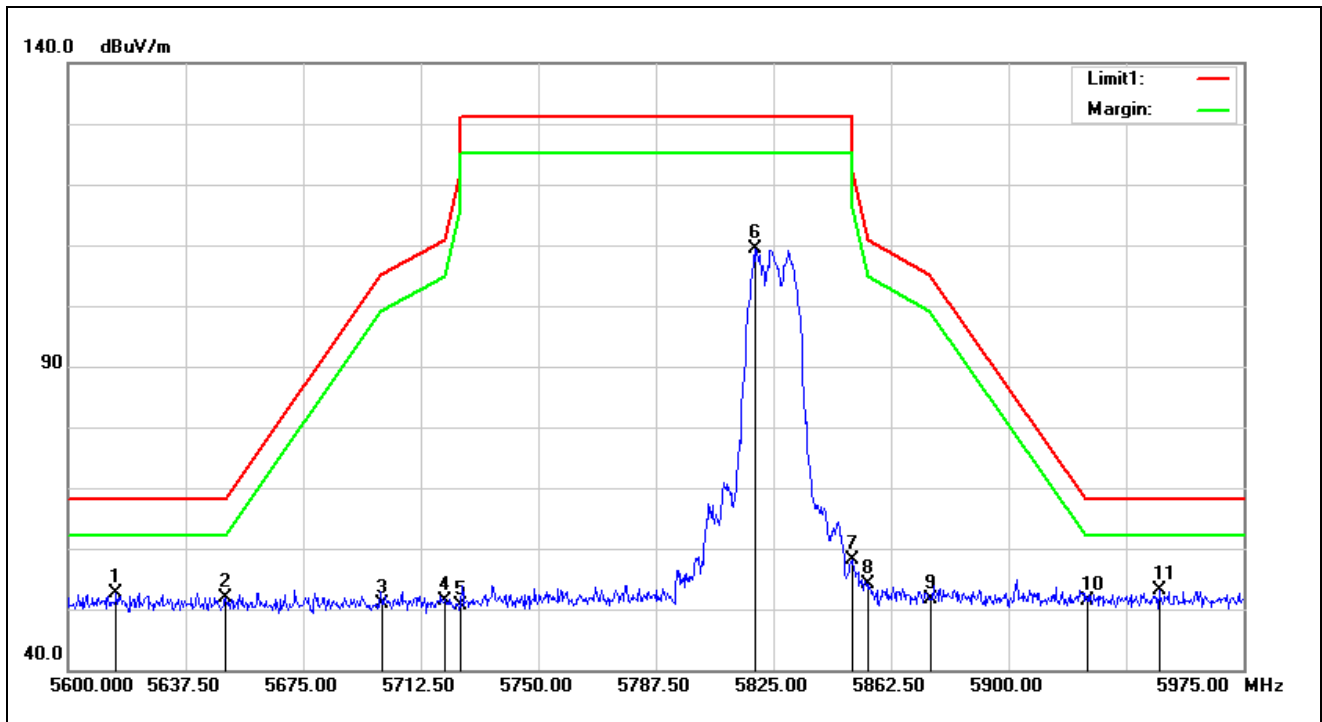

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5615.375	51.05	1.63	52.68	68.20	-15.52	peak
1	5650.000	50.30	1.65	51.95	68.20	-16.25	peak
2	5700.000	49.18	1.58	50.76	105.20	-54.44	peak
3	5720.000	49.56	1.83	51.39	110.80	-59.41	peak
4	5725.000	48.73	1.89	50.62	122.20	-71.58	peak
5	5819.000	106.71	2.55	109.26	131.20	-21.94	peak
6	5850.000	55.66	2.57	58.23	122.20	-63.97	peak
7	5855.000	51.50	2.59	54.09	110.80	-56.71	peak
8	5875.000	48.98	2.64	51.62	105.20	-53.58	peak
9	5925.000	48.88	2.58	51.46	68.20	-16.74	peak
10*	5948.000	50.62	2.44	53.06	68.20	-15.14	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

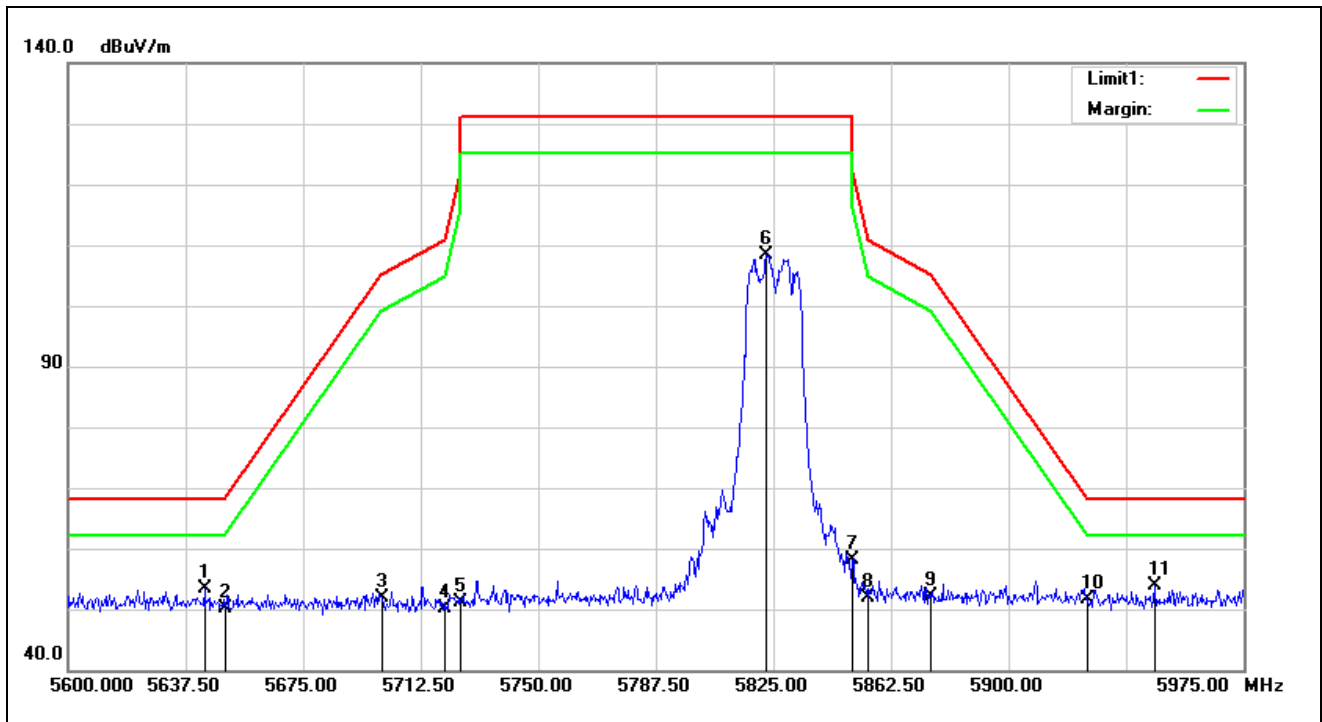

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5643.500	51.72	1.65	53.37	68.20	-14.83	peak
1	5650.000	48.53	1.65	50.18	68.20	-18.02	peak
2	5700.000	50.40	1.58	51.98	105.20	-53.22	peak
3	5720.000	48.34	1.83	50.17	110.80	-60.63	peak
4	5725.000	49.28	1.89	51.17	122.20	-71.03	peak
5	5822.750	105.93	2.55	108.48	131.20	-22.72	peak
6	5850.000	55.50	2.57	58.07	122.20	-64.13	peak
7	5855.000	49.32	2.59	51.91	110.80	-58.89	peak
8	5875.000	49.51	2.64	52.15	105.20	-53.05	peak
9	5925.000	49.09	2.58	51.67	68.20	-16.53	peak
10*	5946.500	51.43	2.45	53.88	68.20	-14.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

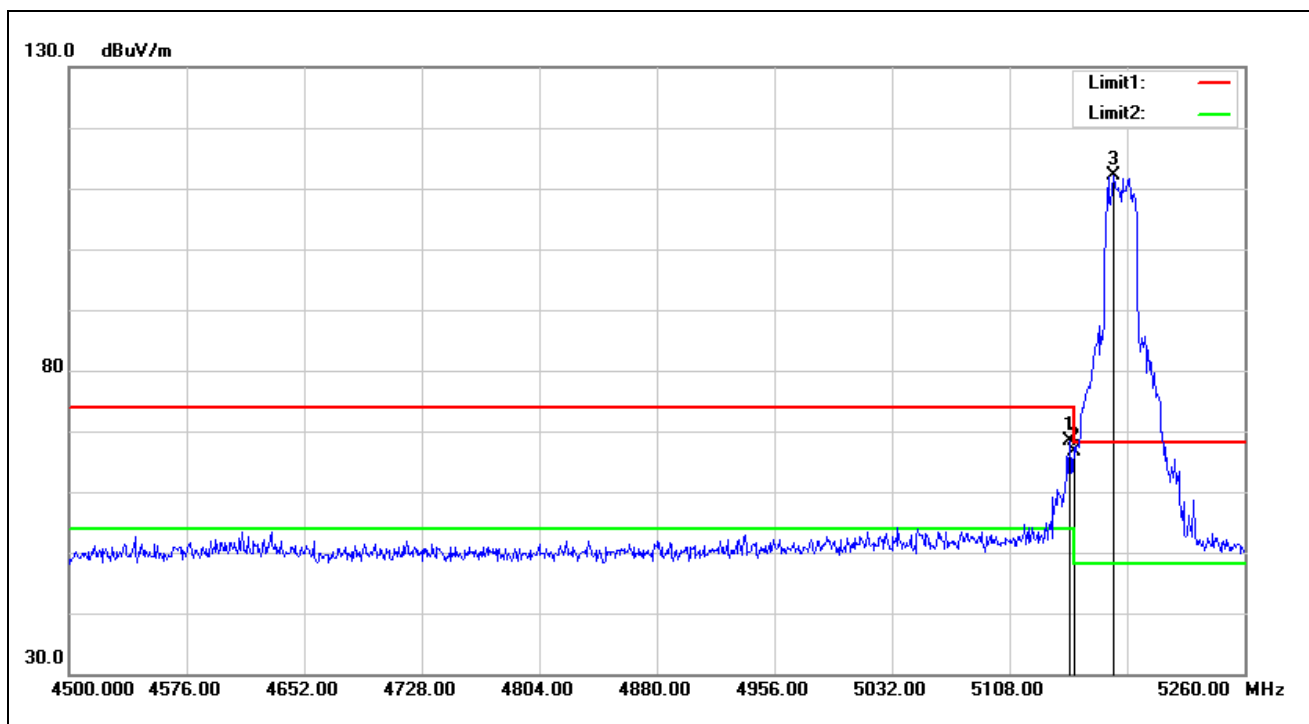


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	67.25	1.13	68.38	74.00	-5.62	peak
2	5150.000	65.54	1.13	66.67	74.00	-7.33	peak
3*	5175.640	111.12	0.96	112.08	68.20	43.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

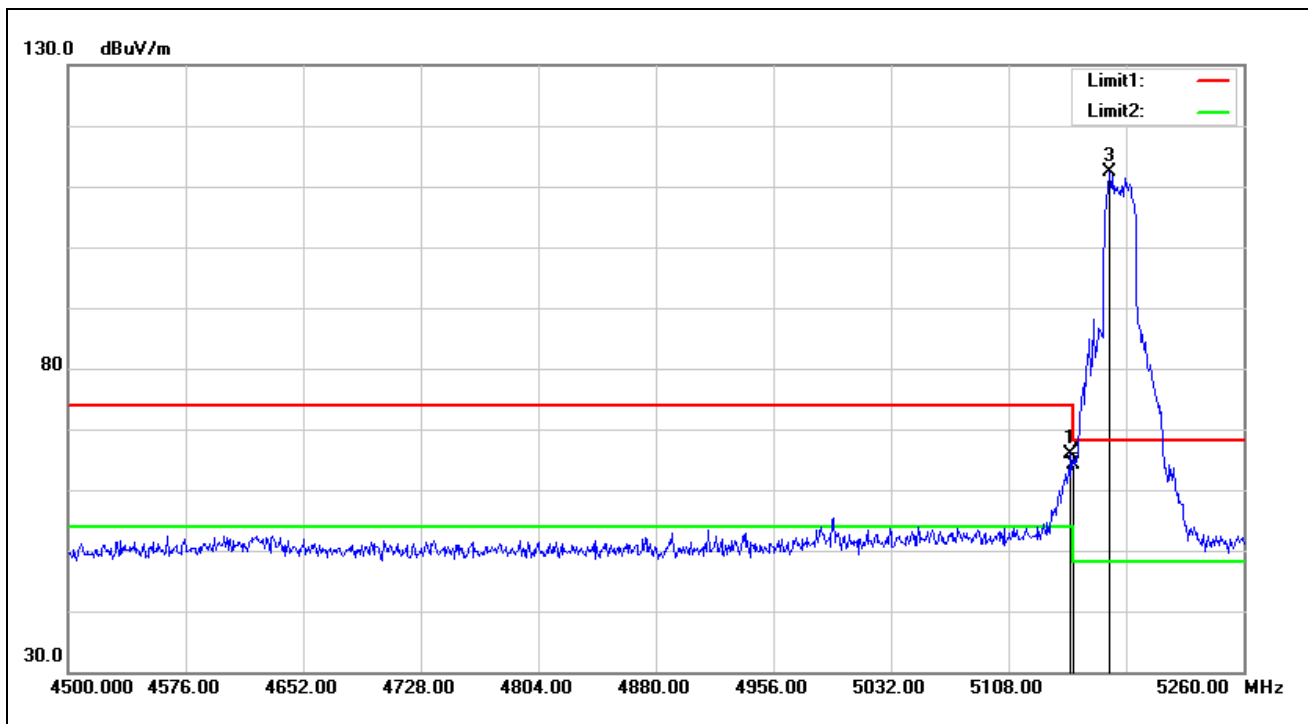


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	64.87	1.13	66.00	74.00	-8.00	peak
2	5150.000	62.89	1.13	64.02	74.00	-9.98	peak
3*	5173.360	111.32	0.98	112.30	68.20	44.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

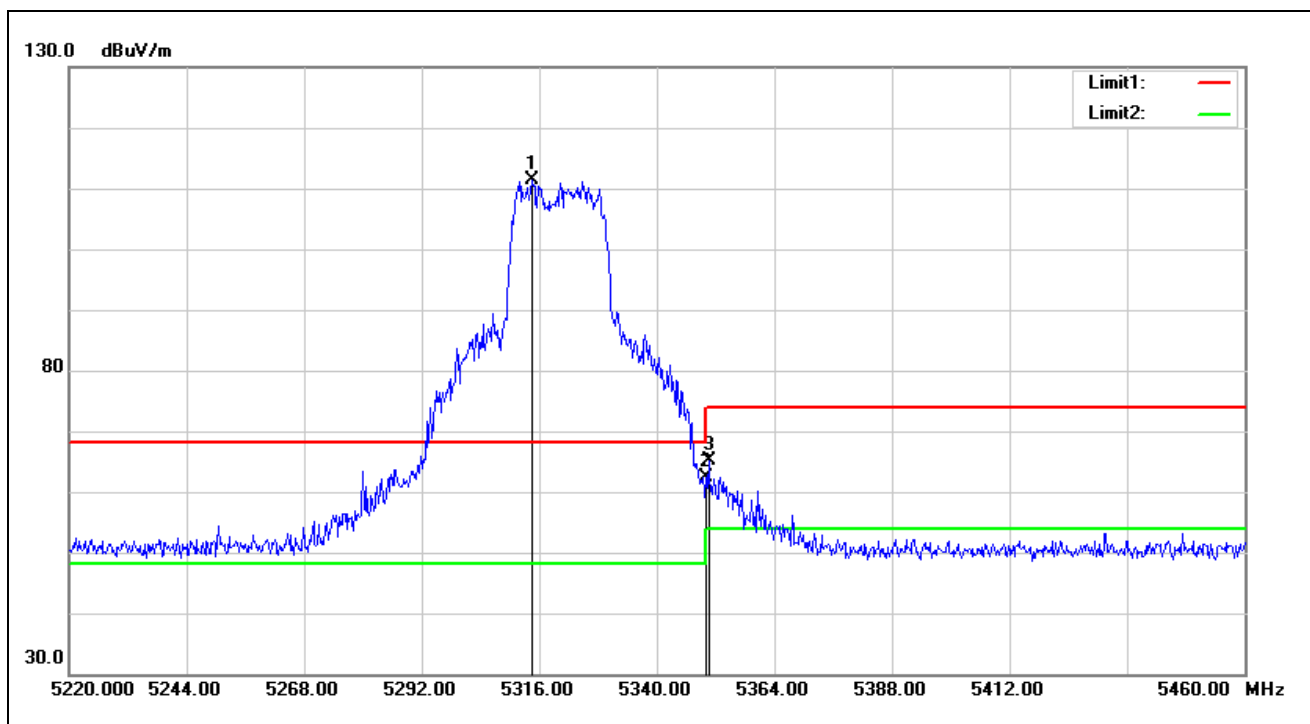


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5314.560	110.66	0.75	111.41	68.20	43.21	peak
2	5350.000	61.59	0.89	62.48	74.00	-11.52	peak
3	5350.560	64.26	0.89	65.15	74.00	-8.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

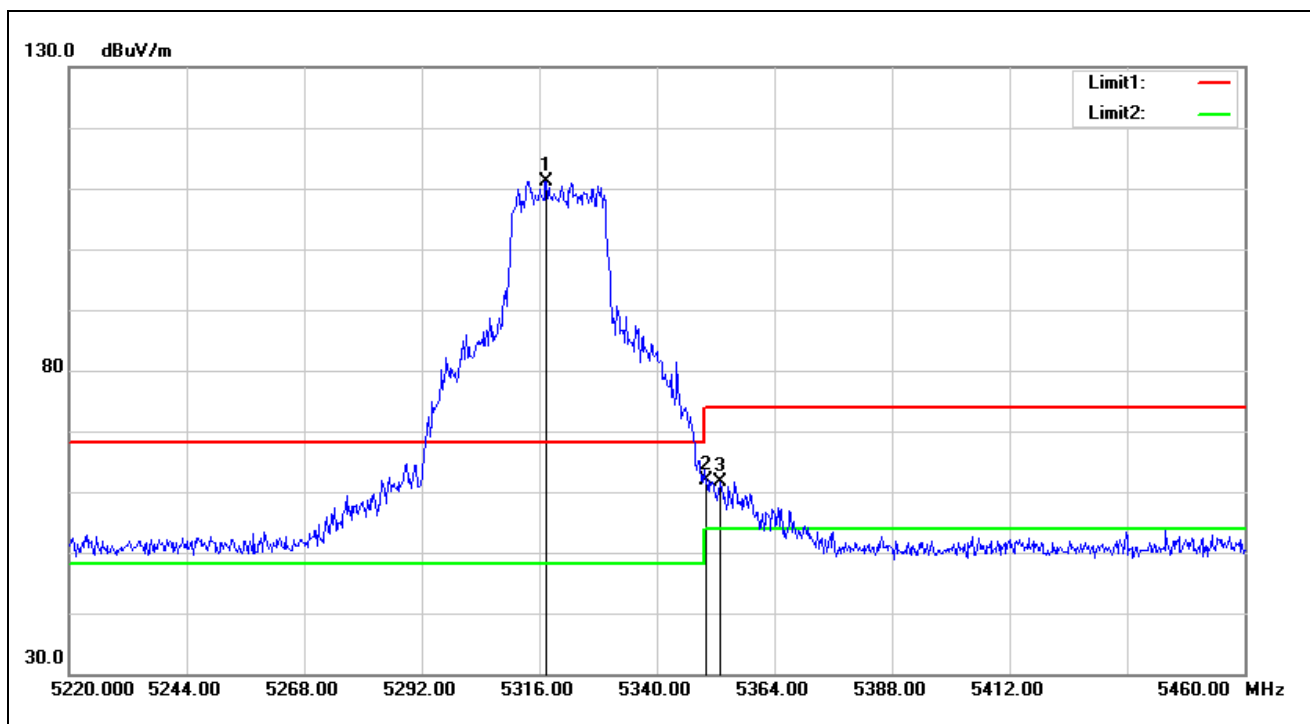


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5317.440	110.33	0.76	111.09	68.20	42.89	peak
2	5350.000	61.08	0.89	61.97	74.00	-12.03	peak
3	5352.960	60.84	0.91	61.75	74.00	-12.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

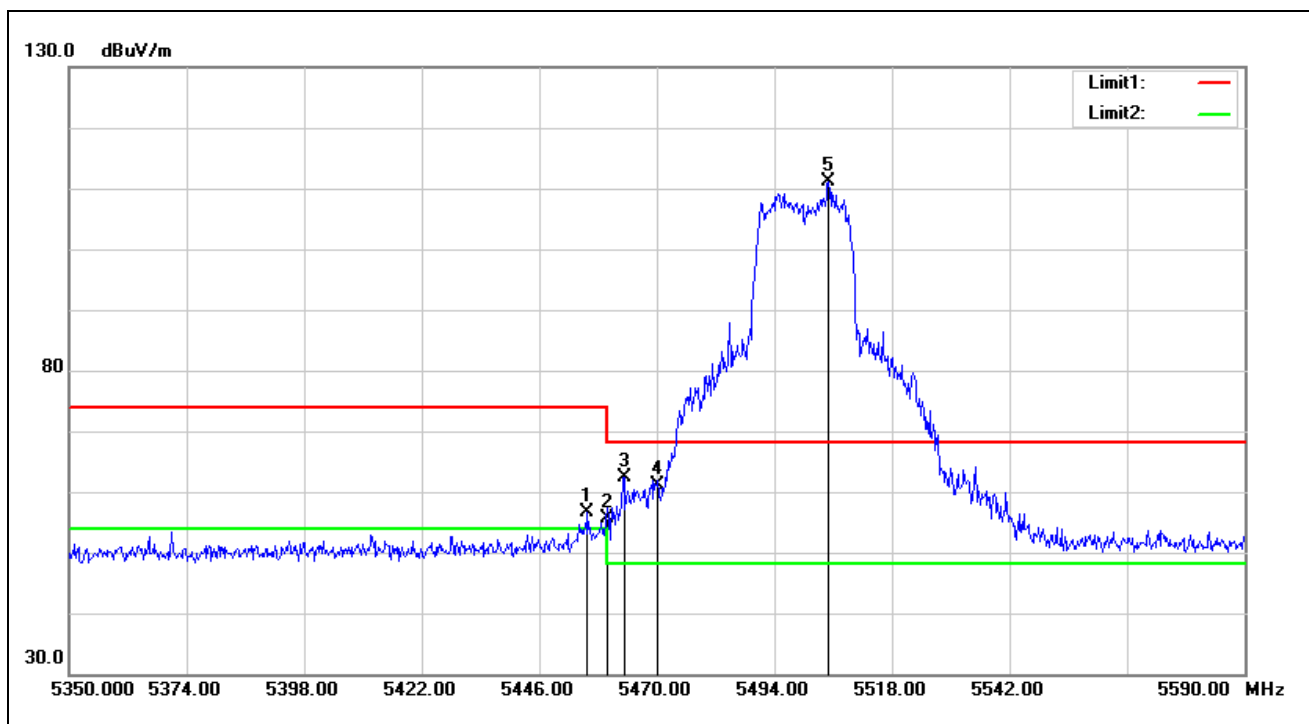


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.840	54.97	1.77	56.74	74.00	-17.26	peak
2	5460.000	53.92	1.79	55.71	74.00	-18.29	peak
3	5463.280	60.66	1.79	62.45	68.20	-5.75	peak
4	5470.000	59.28	1.80	61.08	68.20	-7.12	peak
5*	5505.040	109.23	1.84	111.07	68.20	42.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

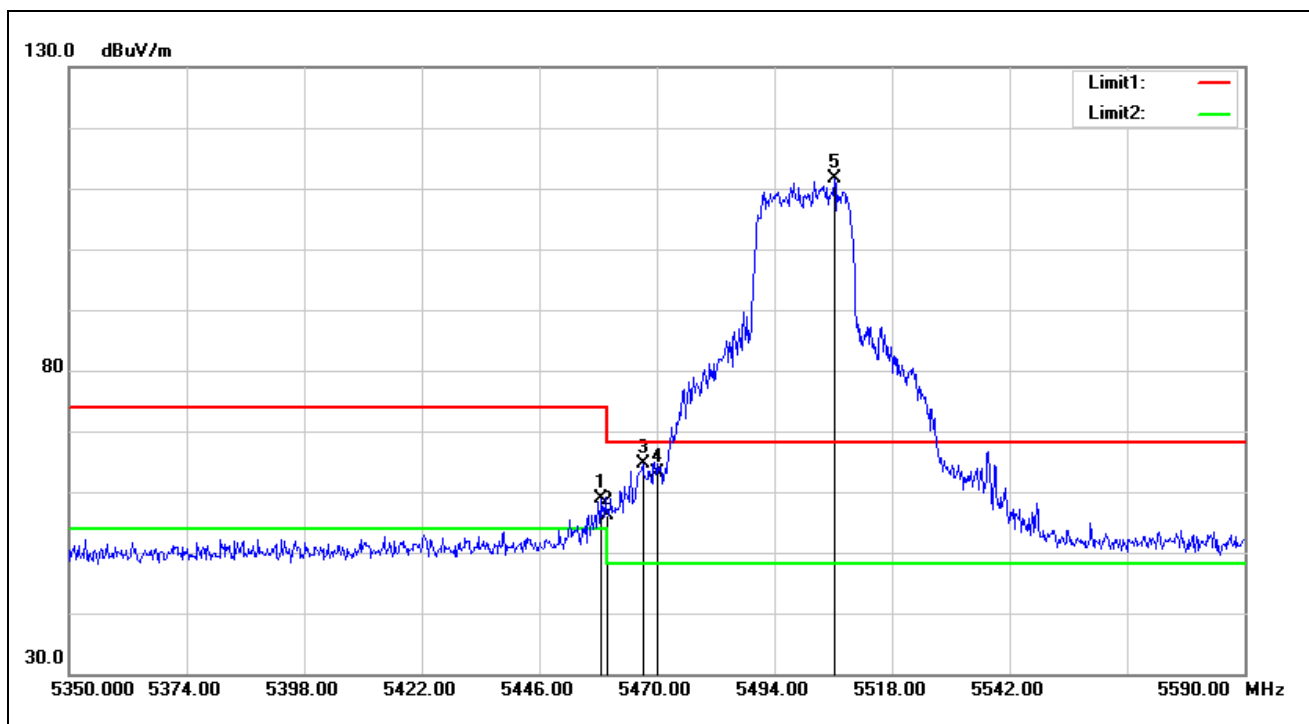


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.480	57.05	1.79	58.84	74.00	-15.16	peak
2	5460.000	54.45	1.79	56.24	74.00	-17.76	peak
3	5467.120	62.84	1.79	64.63	68.20	-3.57	peak
4	5470.000	61.35	1.80	63.15	68.20	-5.05	peak
5*	5506.240	109.69	1.84	111.53	68.20	43.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

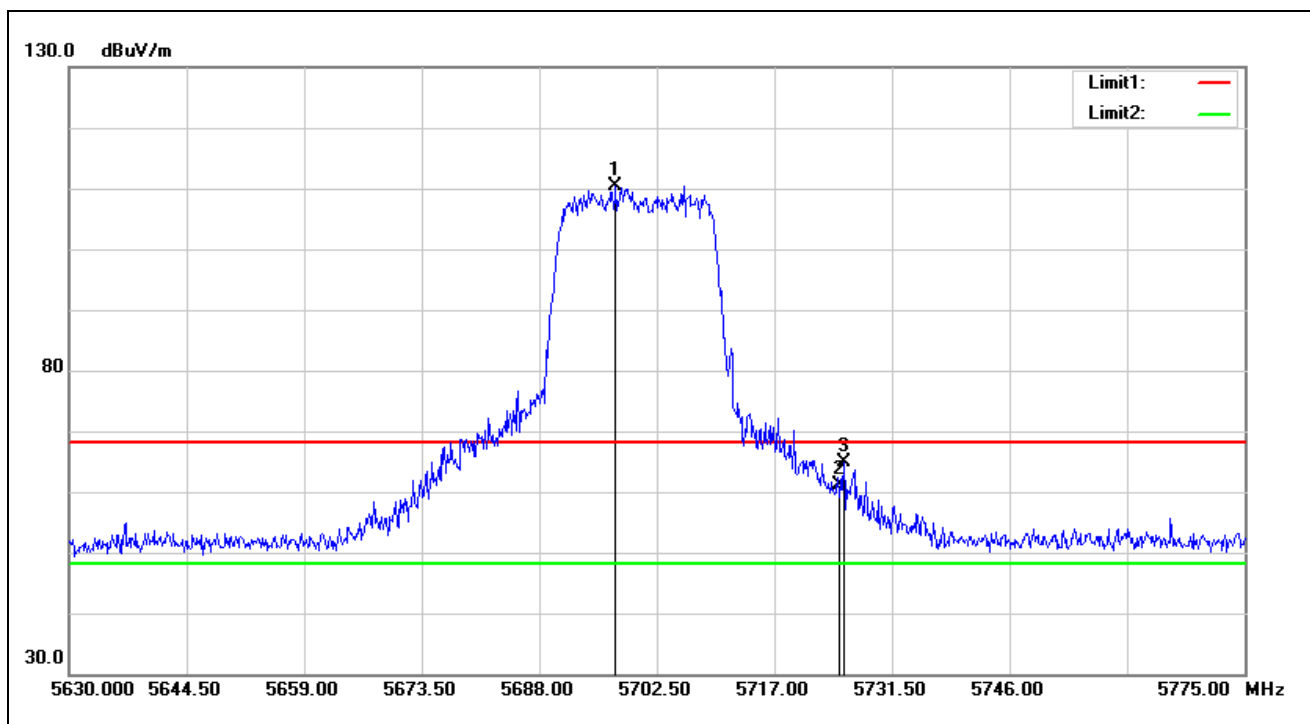


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5697.425	108.73	1.59	110.32	68.20	42.12	peak
2	5725.000	59.34	1.89	61.23	68.20	-6.97	peak
3	5725.555	63.06	1.91	64.97	68.20	-3.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

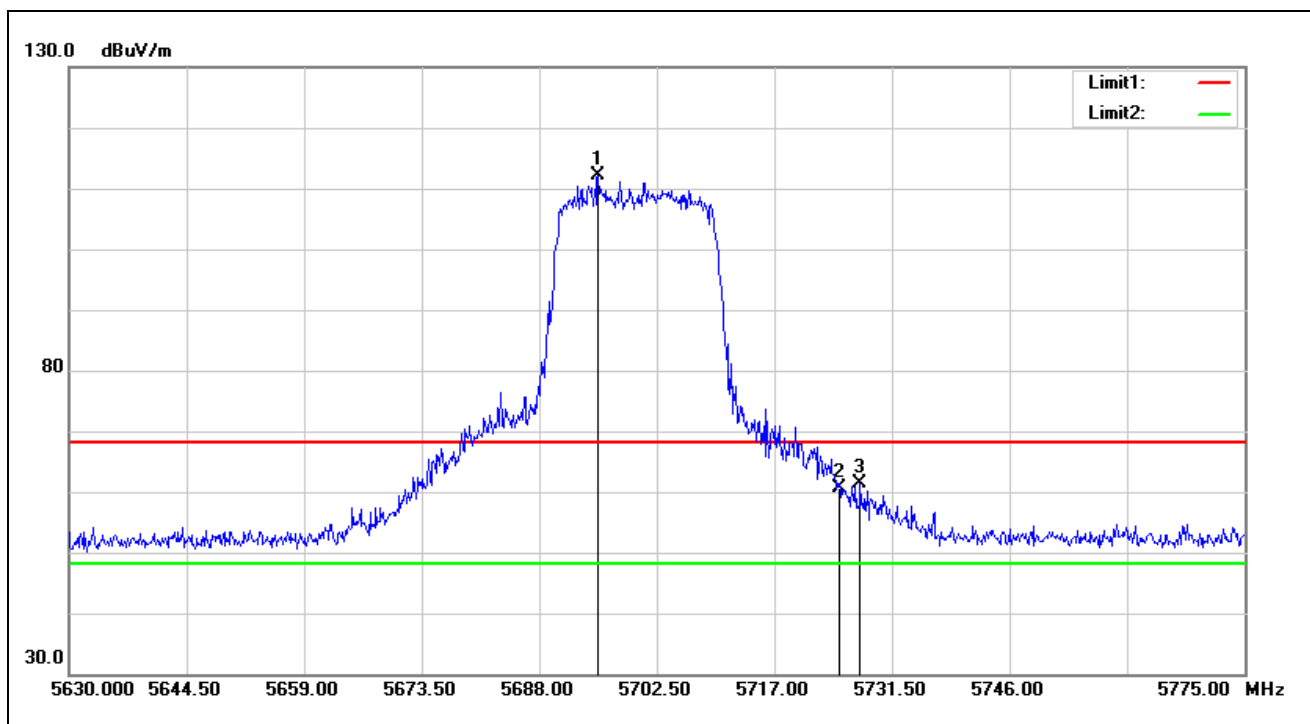


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5695.250	110.55	1.58	112.13	68.20	43.93	peak
2	5725.000	58.64	1.89	60.53	68.20	-7.67	peak
3	5727.585	59.55	1.93	61.48	68.20	-6.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

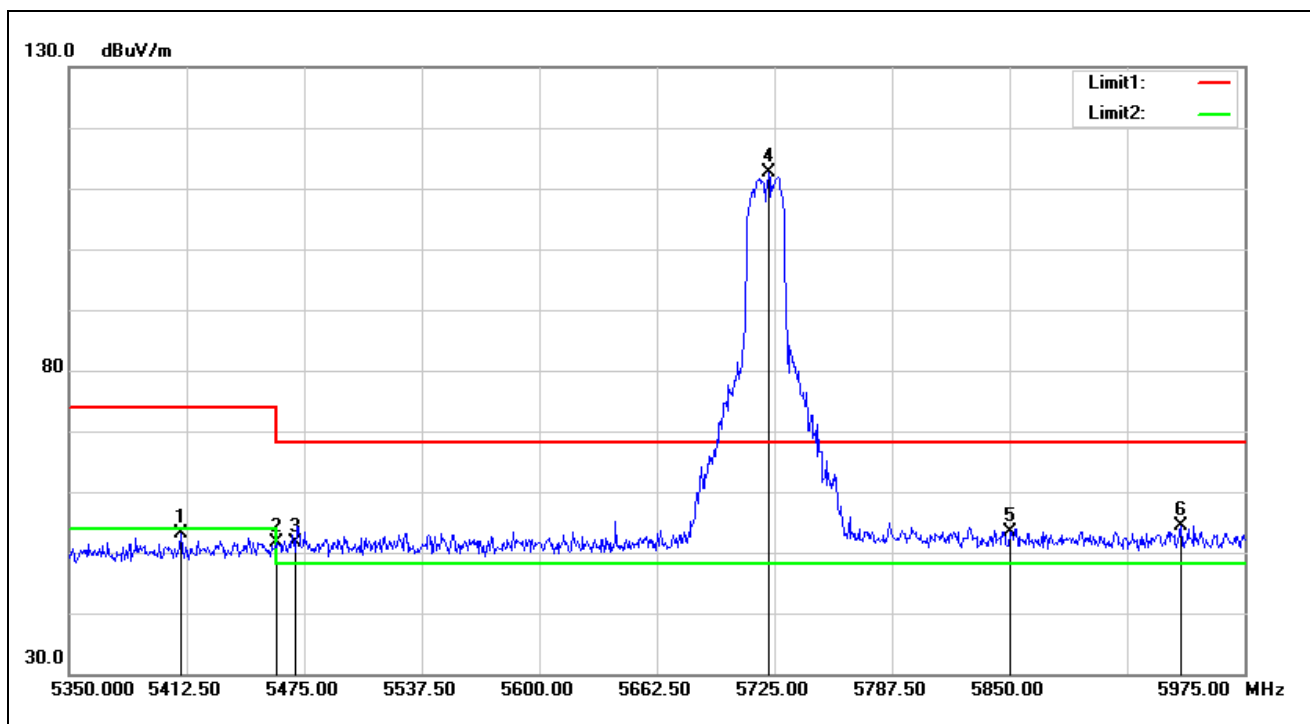

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5409.375	51.76	1.37	53.13	74.00	-20.87	peak
2	5460.000	49.76	1.79	51.55	74.00	-22.45	peak
3	5470.000	49.90	1.80	51.70	68.20	-16.50	peak
4*	5721.875	110.87	1.85	112.72	68.20	44.52	peak
5	5850.000	50.78	2.57	53.35	68.20	-14.85	peak
6	5941.250	51.86	2.48	54.34	68.20	-13.86	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

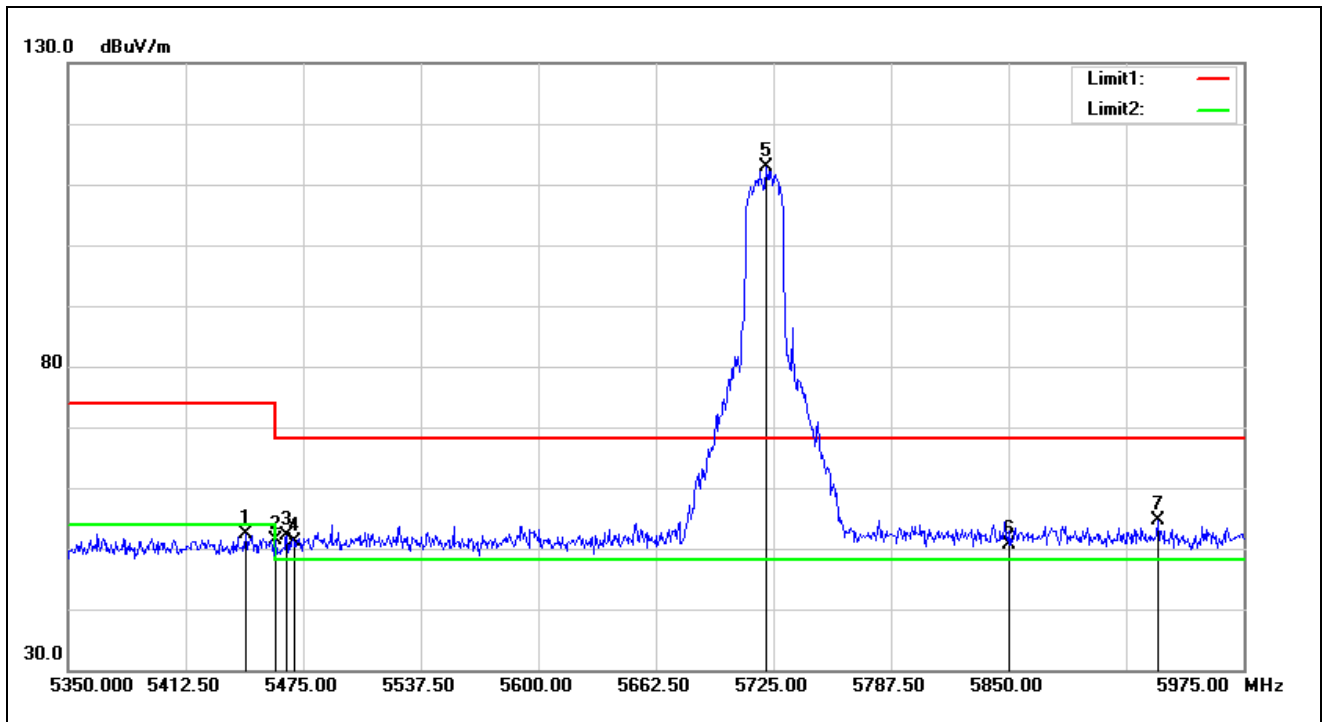

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5444.375	50.70	1.72	52.42	74.00	-21.58	peak
1	5460.000	49.54	1.79	51.33	74.00	-22.67	peak
2	5466.250	50.30	1.79	52.09	68.20	-16.11	peak
3	5470.000	49.33	1.80	51.13	68.20	-17.07	peak
4*	5721.250	110.99	1.84	112.83	68.20	44.63	peak
5	5850.000	48.00	2.57	50.57	68.20	-17.63	peak
6	5929.375	52.01	2.55	54.56	68.20	-13.64	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

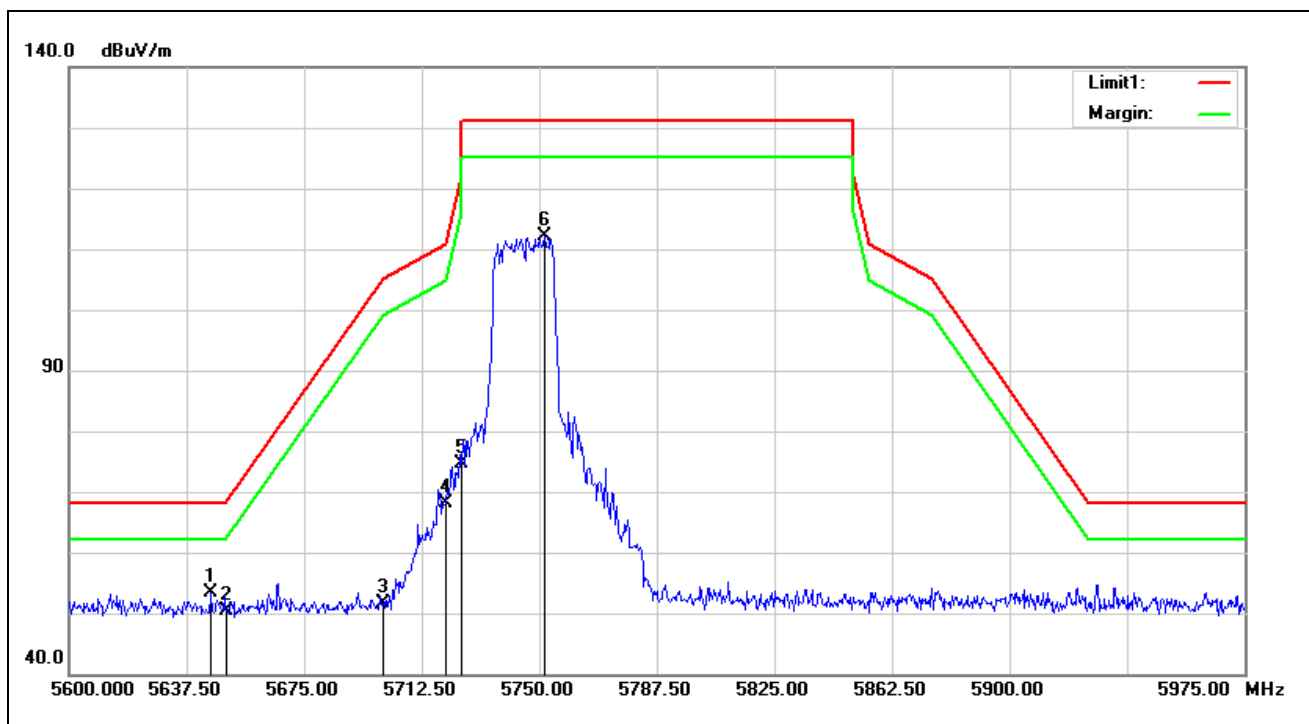


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5645.375	51.82	1.65	53.47	68.20	-14.73	peak
2	5650.000	48.70	1.65	50.35	68.20	-17.85	peak
3	5700.000	50.15	1.58	51.73	105.20	-53.47	peak
4	5720.000	66.36	1.83	68.19	110.80	-42.61	peak
5	5725.000	72.79	1.89	74.68	122.20	-47.52	peak
6	5751.875	109.95	2.22	112.17	131.20	-19.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

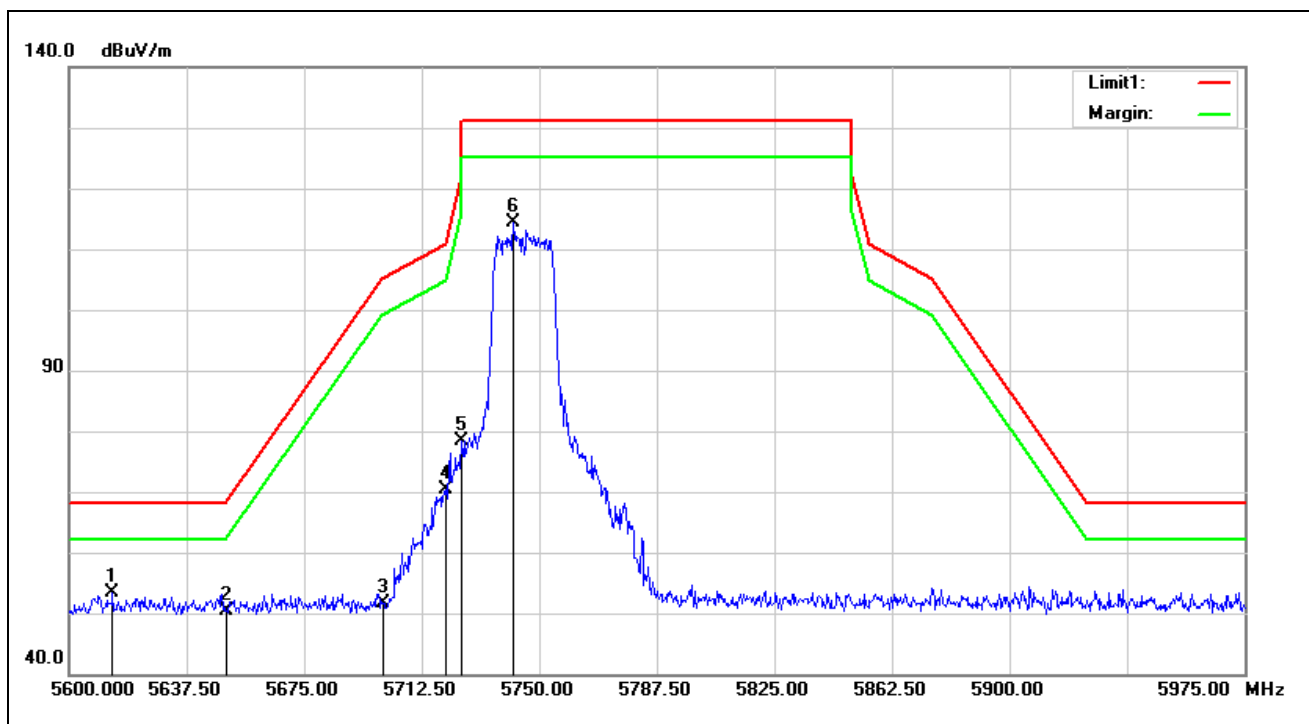


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5613.875	51.87	1.63	53.50	68.20	-14.70	peak
2	5650.000	48.66	1.65	50.31	68.20	-17.89	peak
3	5700.000	50.05	1.58	51.63	105.20	-53.57	peak
4	5720.000	68.52	1.83	70.35	110.80	-40.45	peak
5	5725.000	76.39	1.89	78.28	122.20	-43.92	peak
6	5741.750	112.24	2.11	114.35	131.20	-16.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

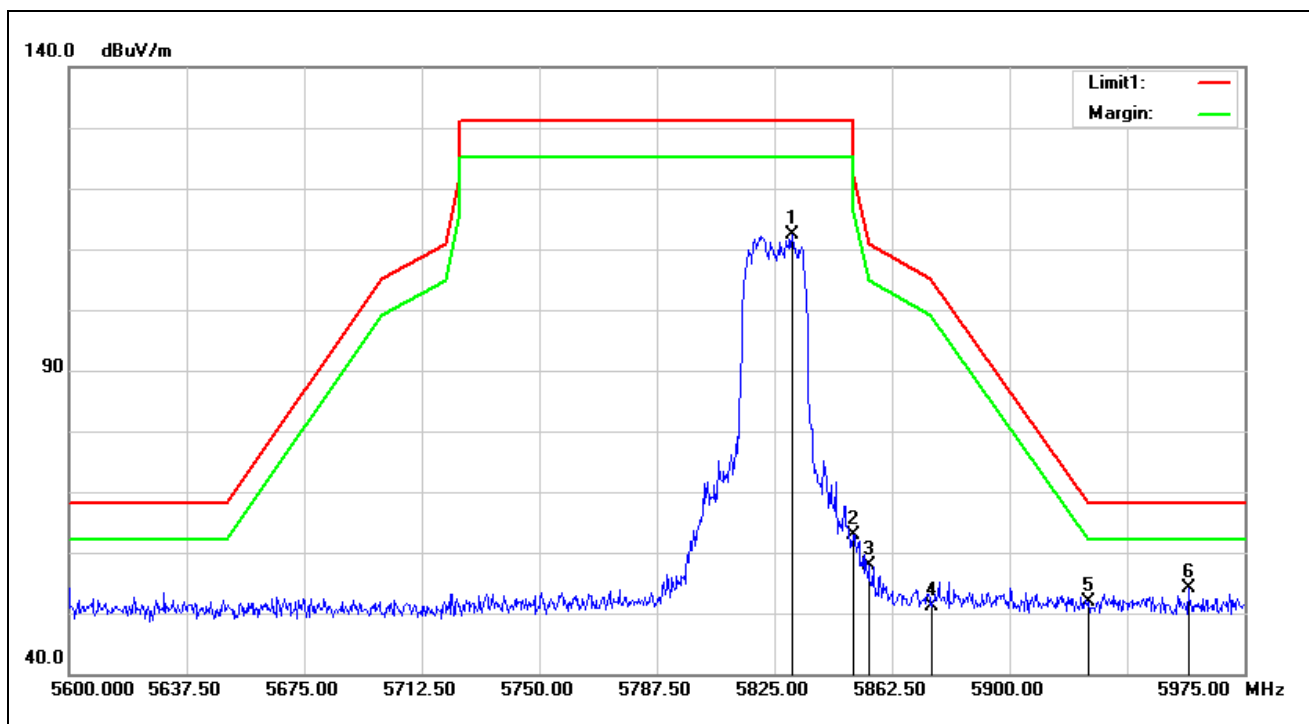


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5830.625	109.82	2.56	112.38	131.20	-18.82	peak
2	5850.000	60.22	2.57	62.79	122.20	-59.41	peak
3	5855.000	55.29	2.59	57.88	110.80	-52.92	peak
4	5875.000	48.51	2.64	51.15	105.20	-54.05	peak
5	5925.000	49.36	2.58	51.94	68.20	-16.26	peak
6*	5957.000	51.75	2.45	54.20	68.20	-14.00	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

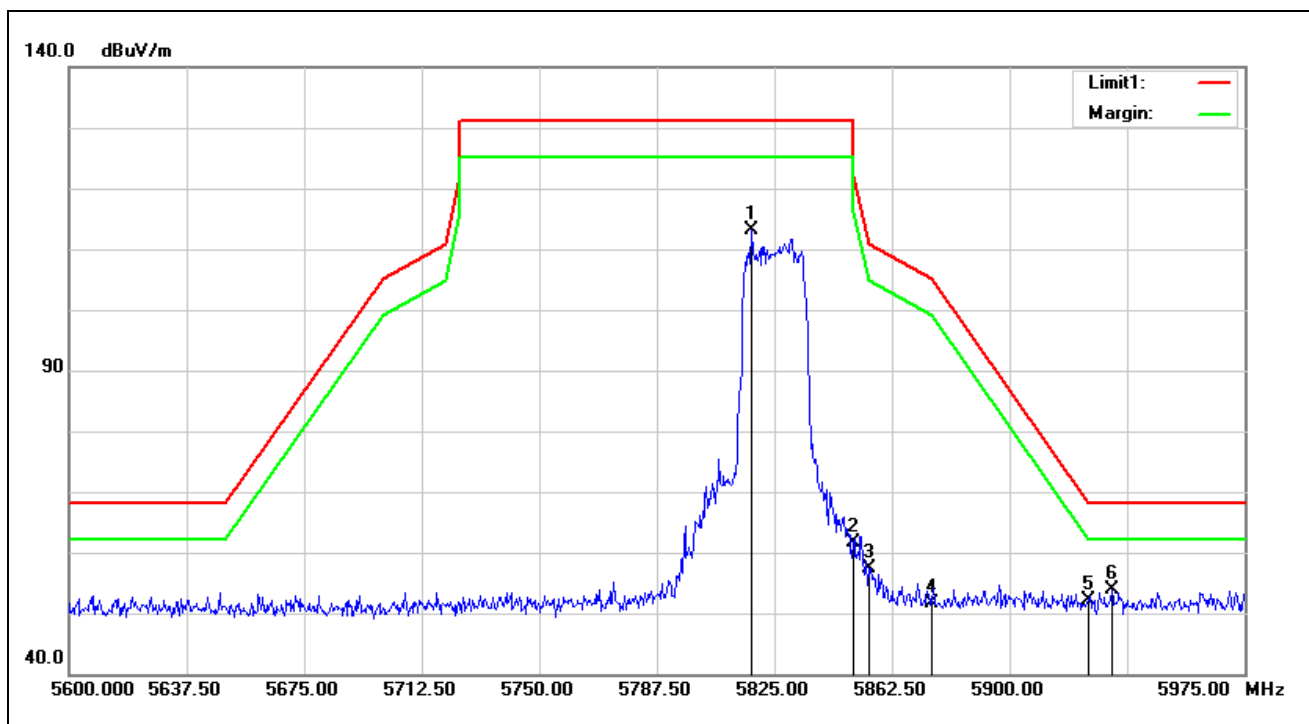


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5817.500	110.50	2.55	113.05	131.20	-18.15	peak
2	5850.000	58.95	2.57	61.52	122.20	-60.68	peak
3	5855.000	54.69	2.59	57.28	110.80	-53.52	peak
4	5875.000	48.96	2.64	51.60	105.20	-53.60	peak
5	5925.000	49.57	2.58	52.15	68.20	-16.05	peak
6*	5932.625	51.42	2.53	53.95	68.20	-14.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

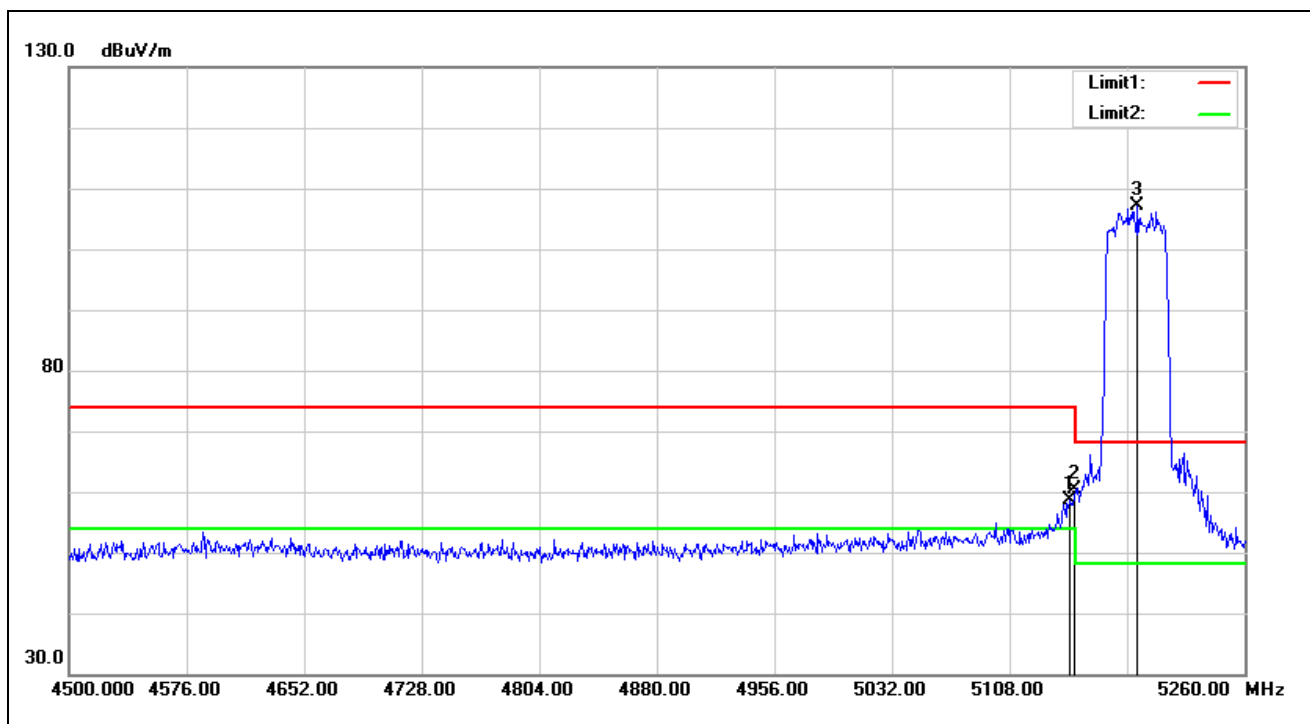


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	57.52	1.13	58.65	74.00	-15.35	peak
2	5150.000	59.24	1.13	60.37	74.00	-13.63	peak
3*	5190.840	106.26	0.88	107.14	68.20	38.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

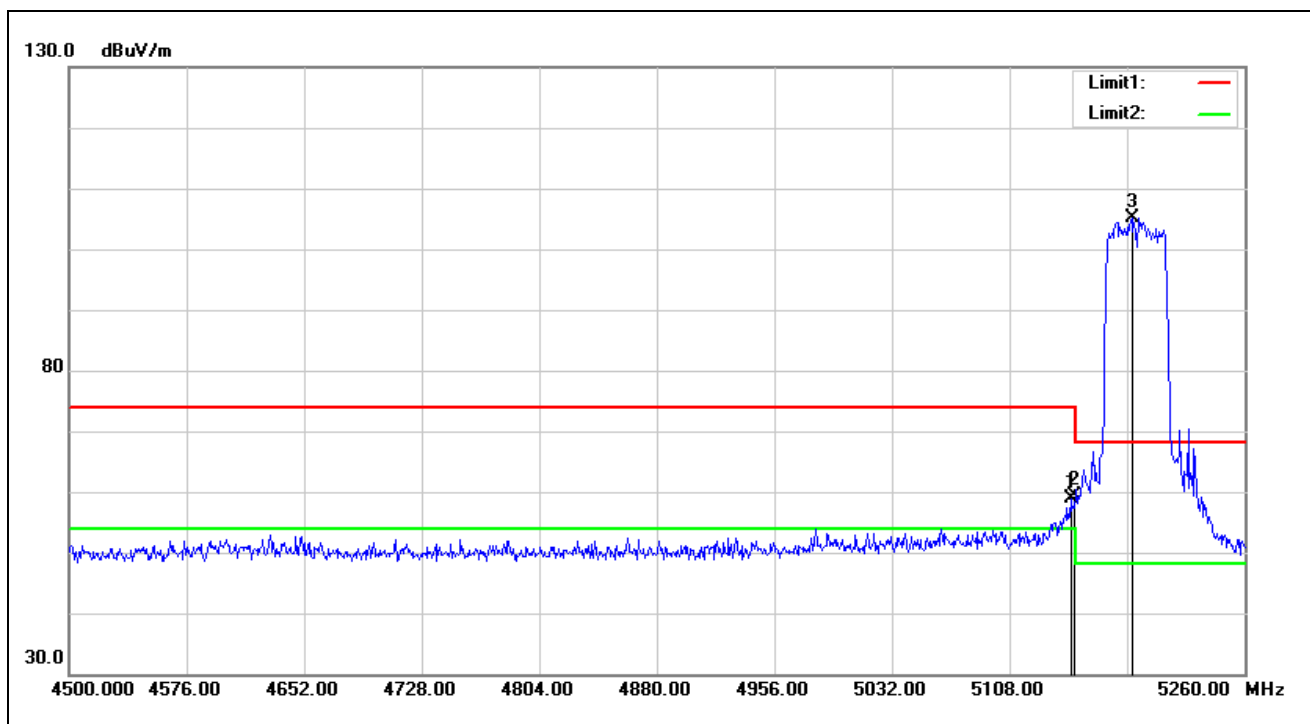


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.520	57.83	1.12	58.95	74.00	-15.05	peak
2	5150.000	58.20	1.13	59.33	74.00	-14.67	peak
3*	5187.040	104.26	0.89	105.15	68.20	36.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

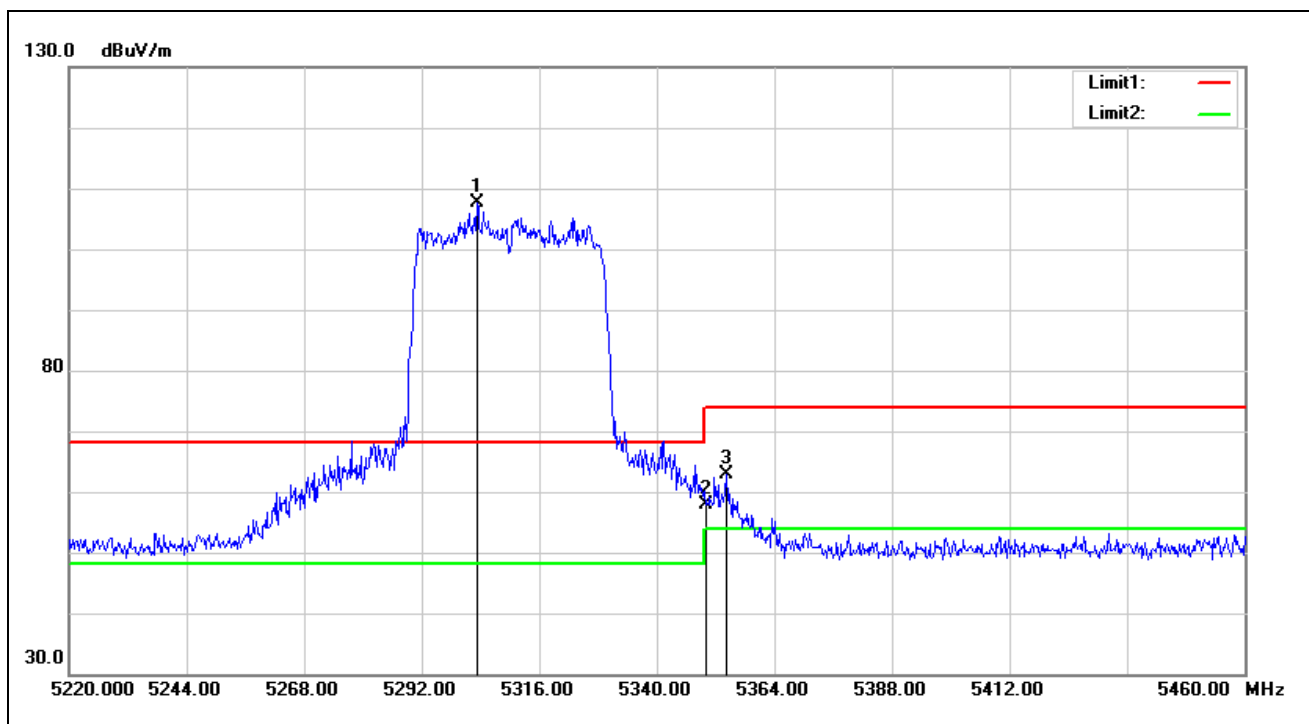


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5303.280	107.02	0.72	107.74	68.20	39.54	peak
2	5350.000	57.07	0.89	57.96	74.00	-16.04	peak
3	5354.160	61.97	0.91	62.88	74.00	-11.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

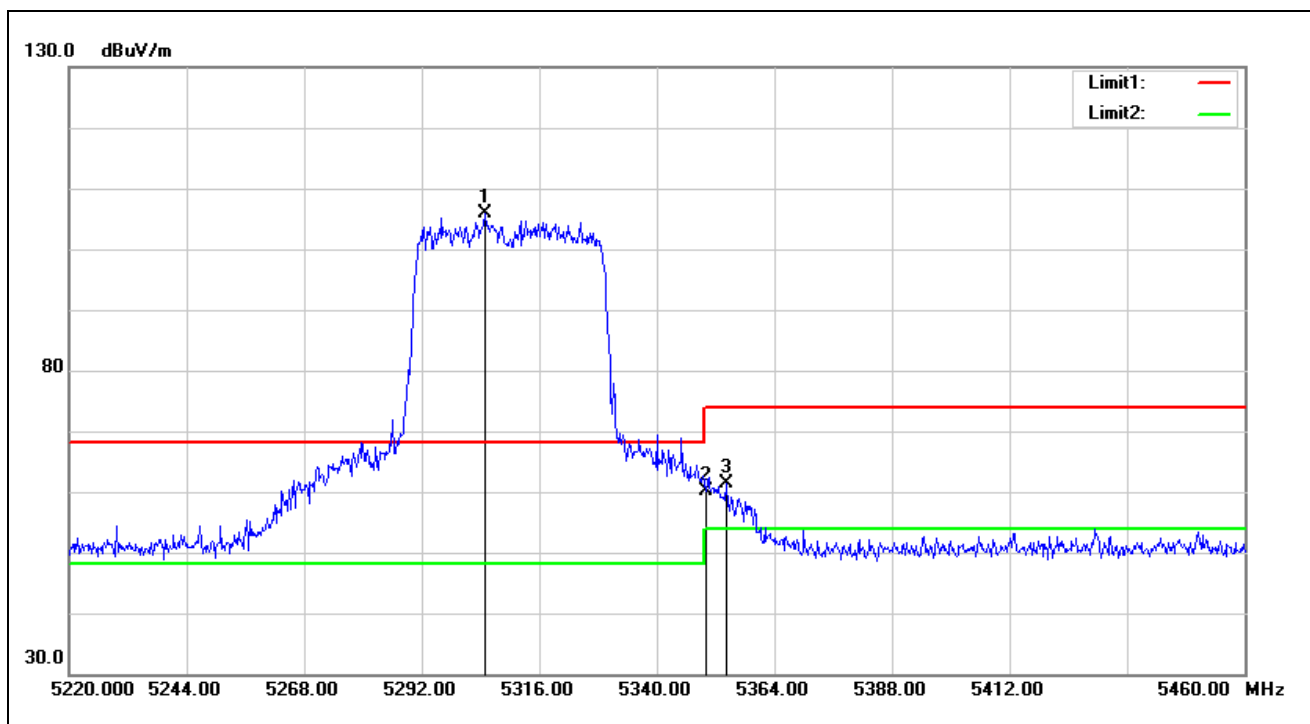


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5304.960	105.25	0.72	105.97	68.20	37.77	peak
2	5350.000	59.15	0.89	60.04	74.00	-13.96	peak
3	5354.160	60.50	0.91	61.41	74.00	-12.59	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

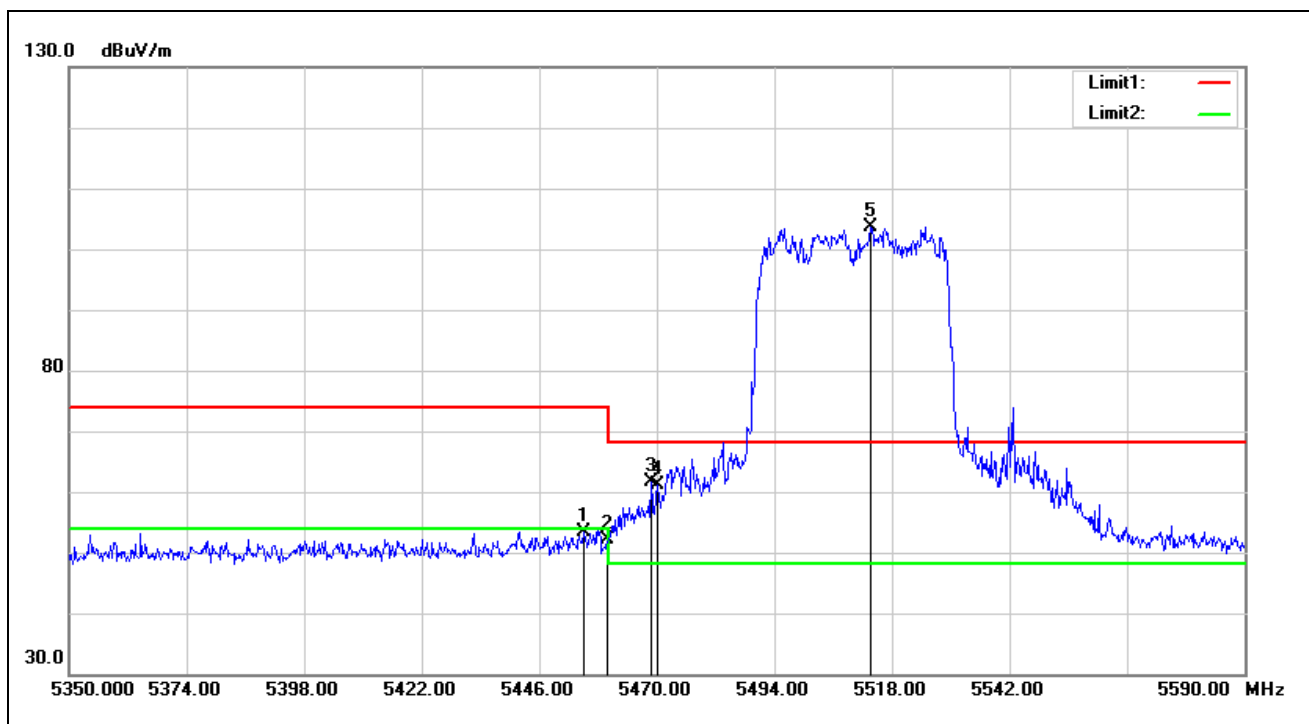


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.120	51.58	1.77	53.35	74.00	-20.65	peak
2	5460.000	50.38	1.79	52.17	74.00	-21.83	peak
3	5468.800	59.78	1.80	61.58	68.20	-6.62	peak
4	5470.000	59.25	1.80	61.05	68.20	-7.15	peak
5*	5513.680	101.75	1.81	103.56	68.20	35.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

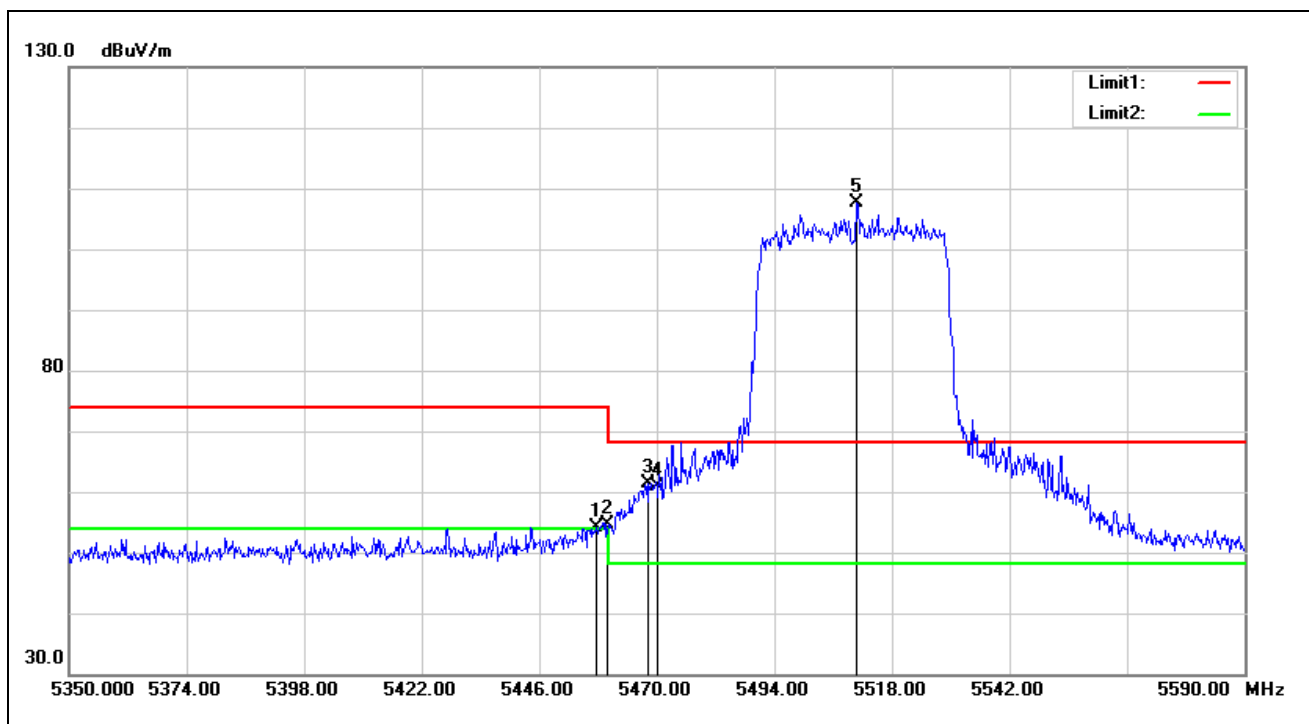


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.520	52.44	1.77	54.21	74.00	-19.79	peak
2	5460.000	52.91	1.79	54.70	74.00	-19.30	peak
3	5468.320	59.59	1.80	61.39	68.20	-6.81	peak
4	5470.000	58.96	1.80	60.76	68.20	-7.44	peak
5*	5510.800	105.71	1.82	107.53	68.20	39.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

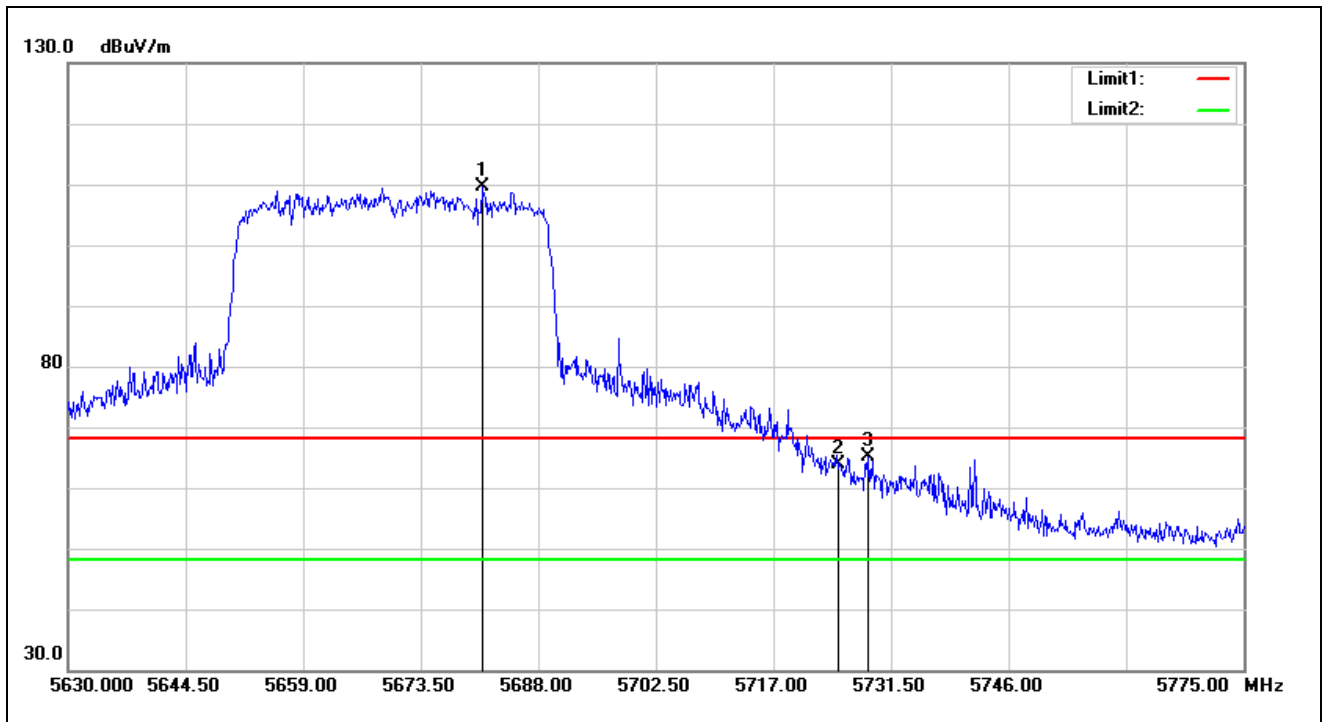


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5681.040	107.90	1.61	109.51	68.20	41.31	peak
2	5725.000	62.07	1.89	63.96	68.20	-4.24	peak
3	5728.745	63.23	1.94	65.17	68.20	-3.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

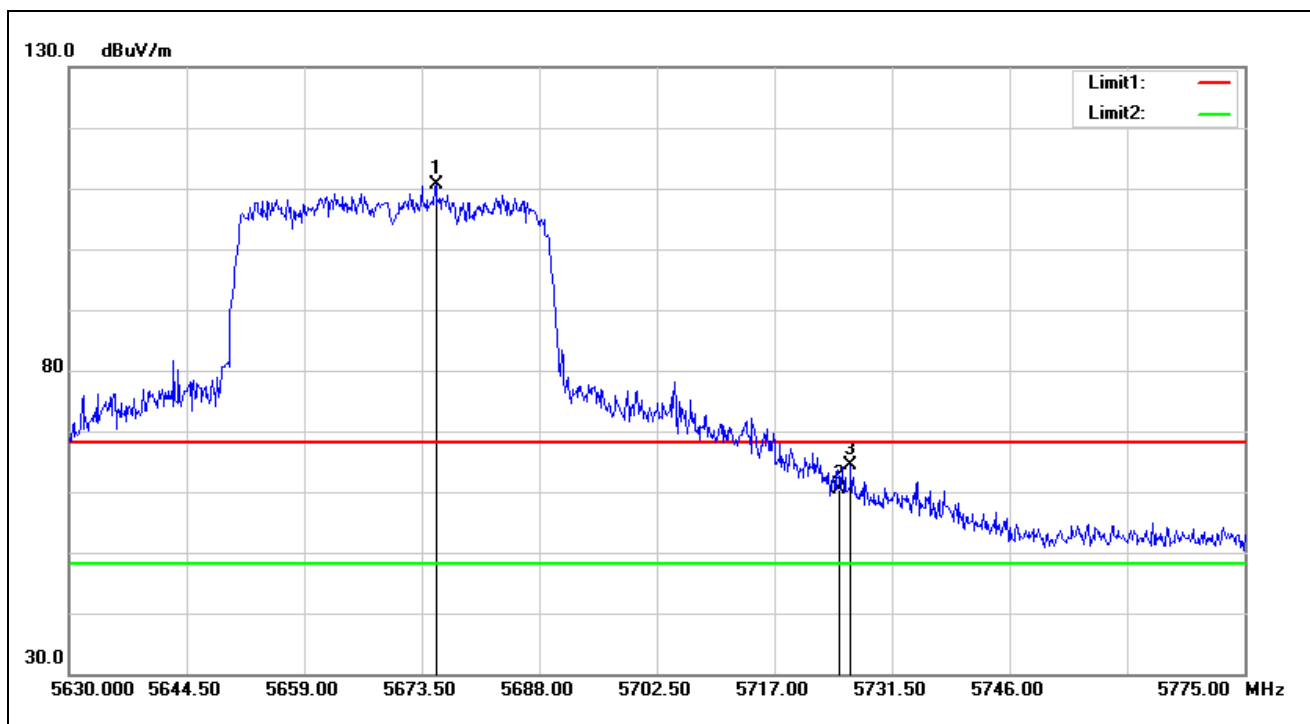

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5675.240	108.91	1.62	110.53	68.20	42.33	peak
2	5725.000	58.51	1.89	60.40	68.20	-7.80	peak
3	5726.425	62.51	1.92	64.43	68.20	-3.77	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

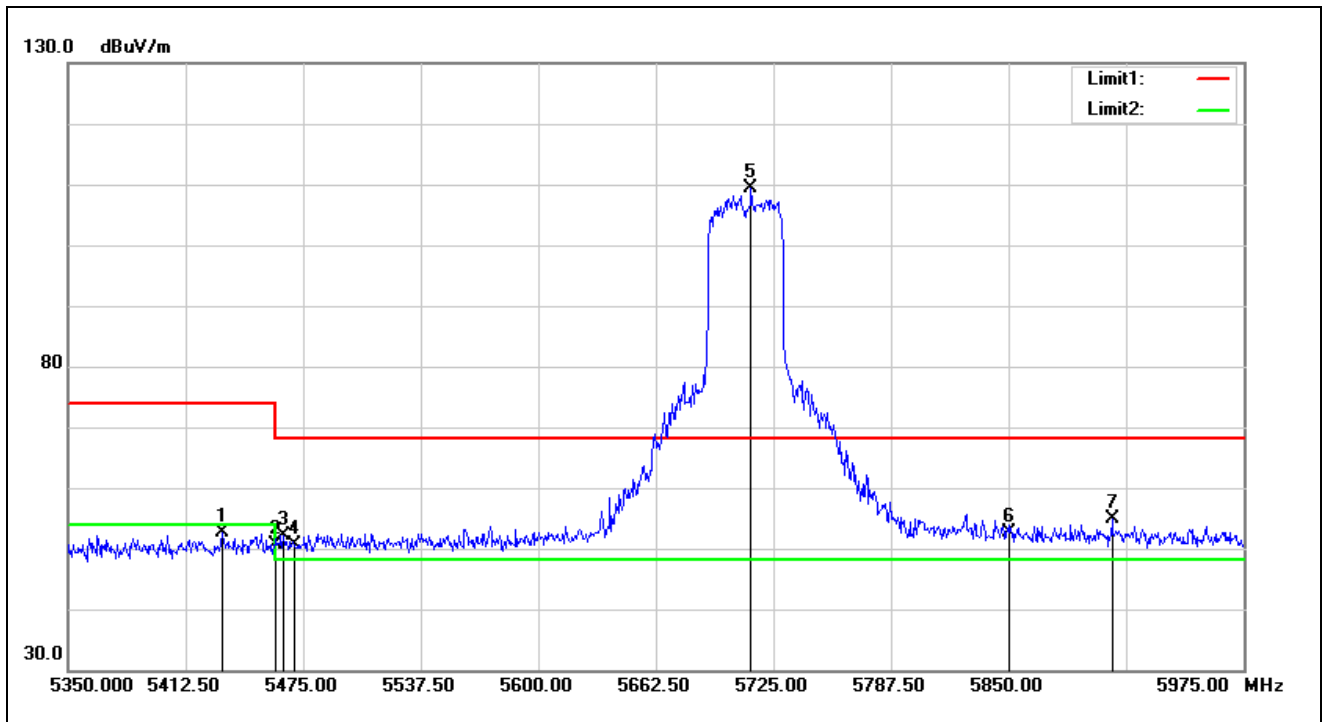

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5431.875	50.99	1.59	52.58	74.00	-21.42	peak
1	5460.000	48.82	1.79	50.61	74.00	-23.39	peak
2	5464.375	50.43	1.79	52.22	68.20	-15.98	peak
3	5470.000	48.77	1.80	50.57	68.20	-17.63	peak
4*	5713.125	107.54	1.75	109.29	68.20	41.09	peak
5	5850.000	49.94	2.57	52.51	68.20	-15.69	peak
6	5905.000	52.32	2.68	55.00	68.20	-13.20	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

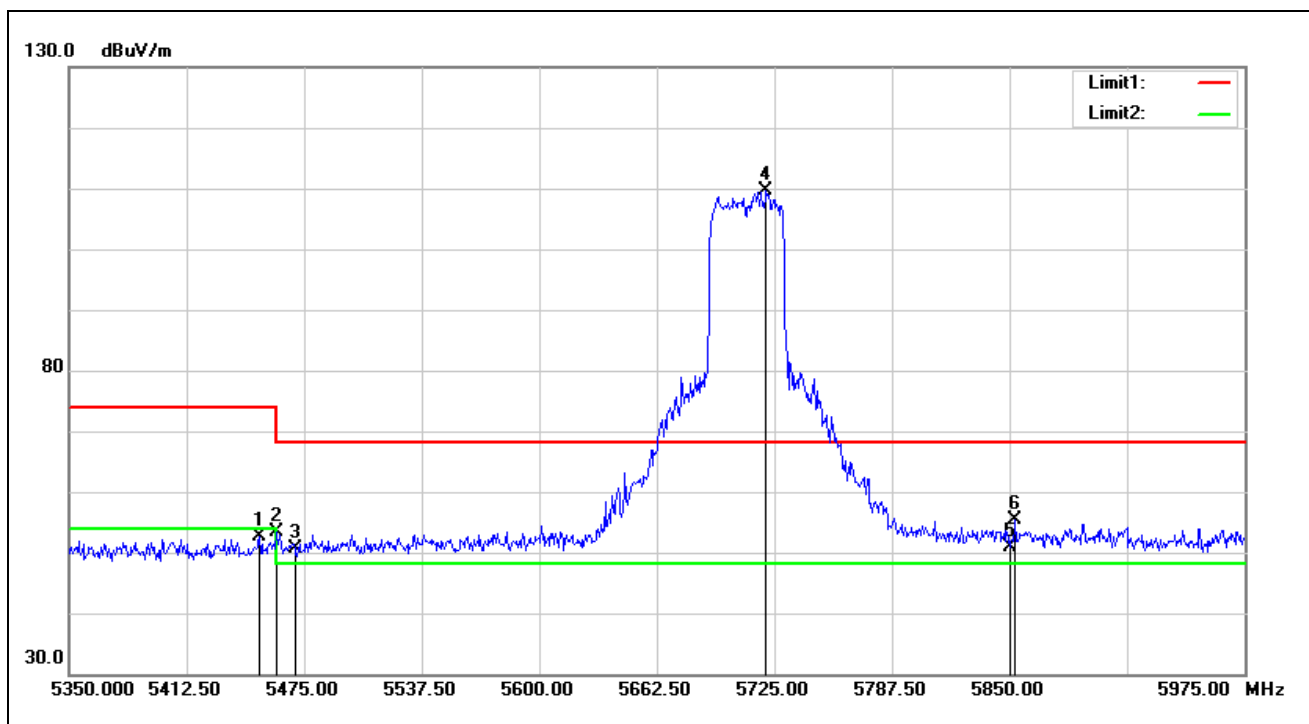


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.250	50.79	1.77	52.56	74.00	-21.44	peak
2	5460.000	51.65	1.79	53.44	74.00	-20.56	peak
3	5470.000	48.72	1.80	50.52	68.20	-17.68	peak
4*	5720.625	107.85	1.84	109.69	68.20	41.49	peak
5	5850.000	48.38	2.57	50.95	68.20	-17.25	peak
6	5853.125	52.80	2.59	55.39	68.20	-12.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

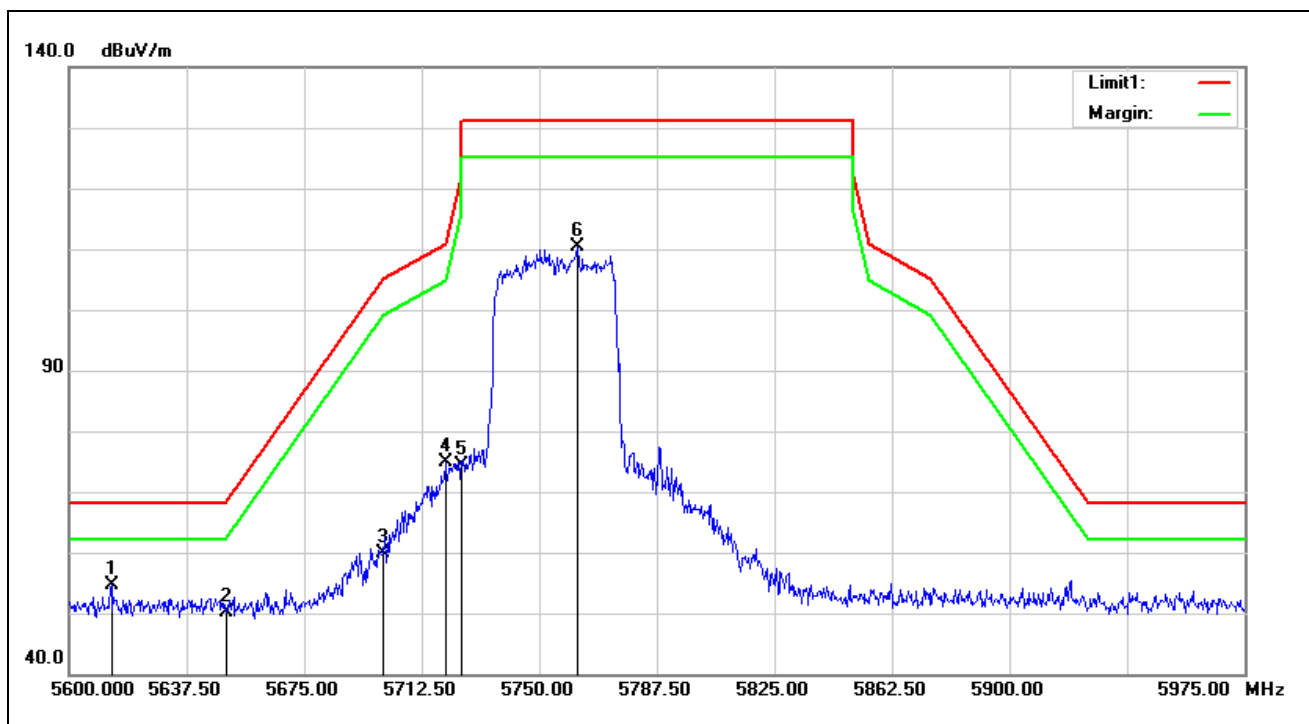


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5613.500	53.07	1.63	54.70	68.20	-13.50	peak
2	5650.000	48.60	1.65	50.25	68.20	-17.95	peak
3	5700.000	58.30	1.58	59.88	105.20	-45.32	peak
4	5720.000	72.98	1.83	74.81	110.80	-35.99	peak
5	5725.000	72.57	1.89	74.46	122.20	-47.74	peak
6	5762.000	108.12	2.29	110.41	131.20	-20.79	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

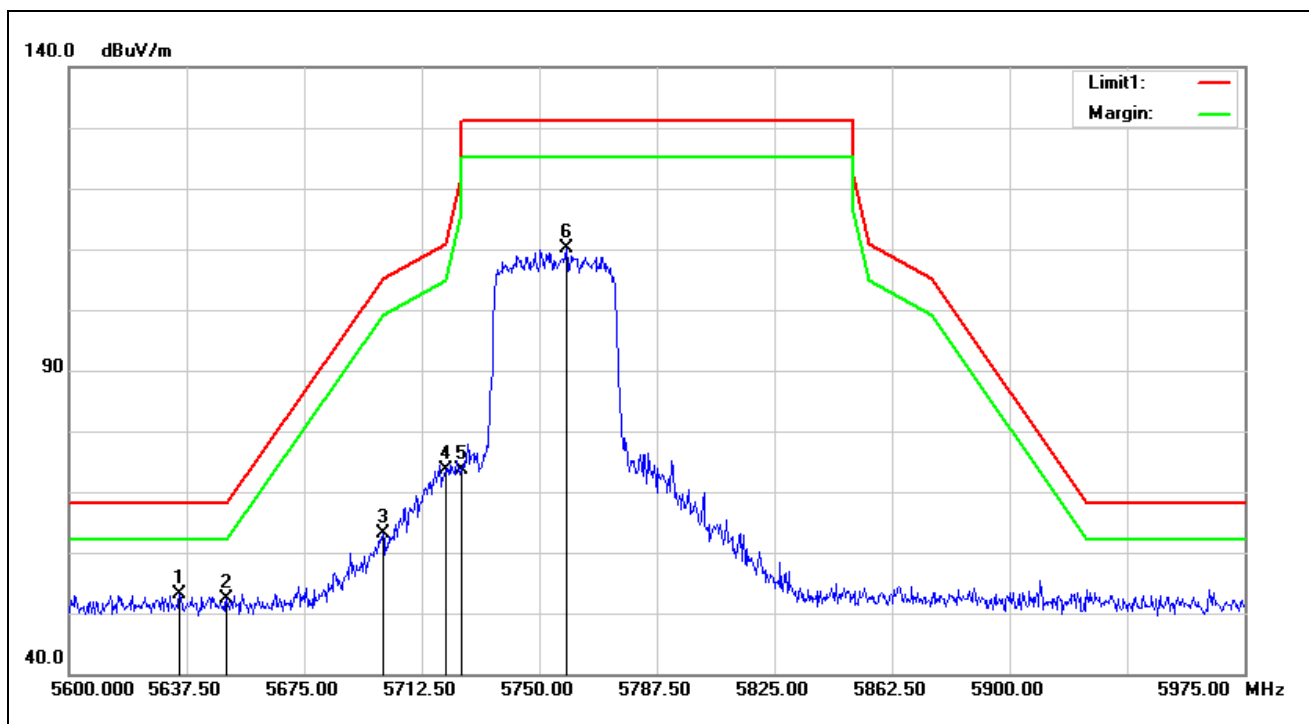


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5635.250	51.44	1.64	53.08	68.20	-15.12	peak
2	5650.000	50.83	1.65	52.48	68.20	-15.72	peak
3	5700.000	61.45	1.58	63.03	105.20	-42.17	peak
4	5720.000	71.76	1.83	73.59	110.80	-37.21	peak
5	5725.000	71.78	1.89	73.67	122.20	-48.53	peak
6	5758.625	107.82	2.27	110.09	131.20	-21.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

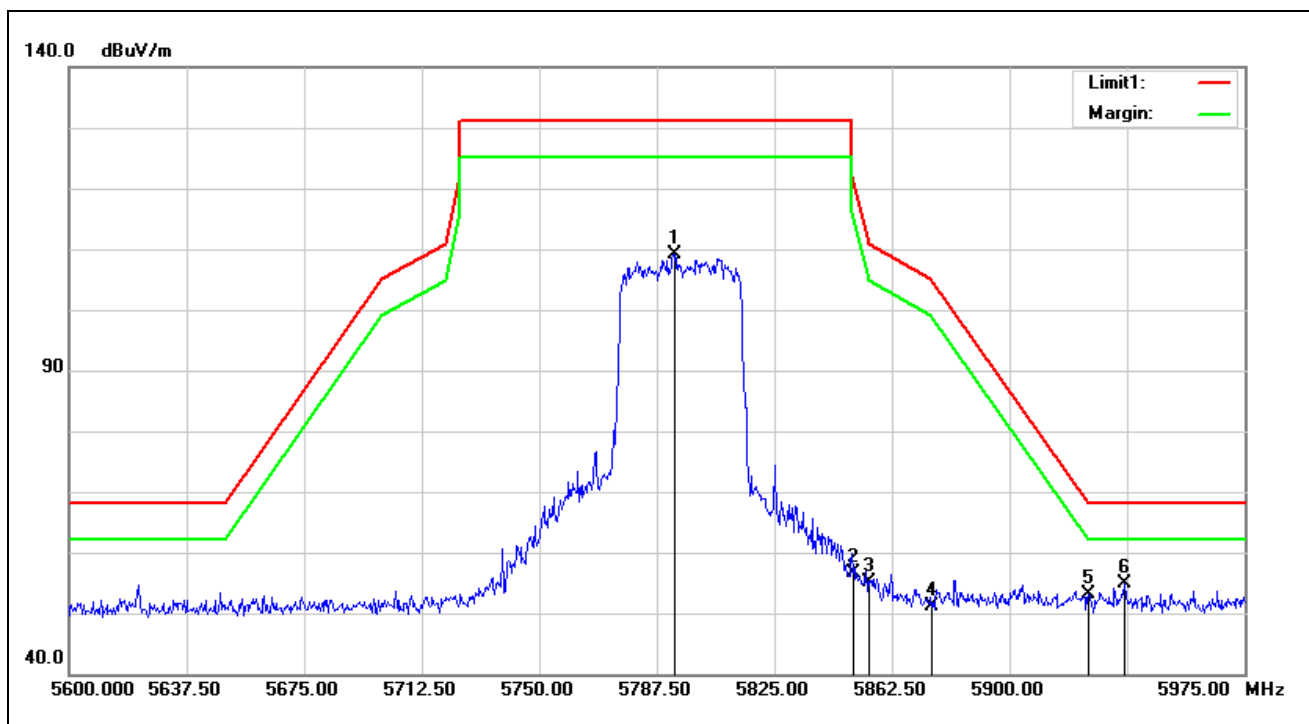


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5793.125	106.66	2.50	109.16	131.20	-22.04	peak
2	5850.000	54.14	2.57	56.71	122.20	-65.49	peak
3	5855.000	52.64	2.59	55.23	110.80	-55.57	peak
4	5875.000	48.56	2.64	51.20	105.20	-54.00	peak
5	5925.000	50.58	2.58	53.16	68.20	-15.04	peak
6*	5936.750	52.34	2.52	54.86	68.20	-13.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

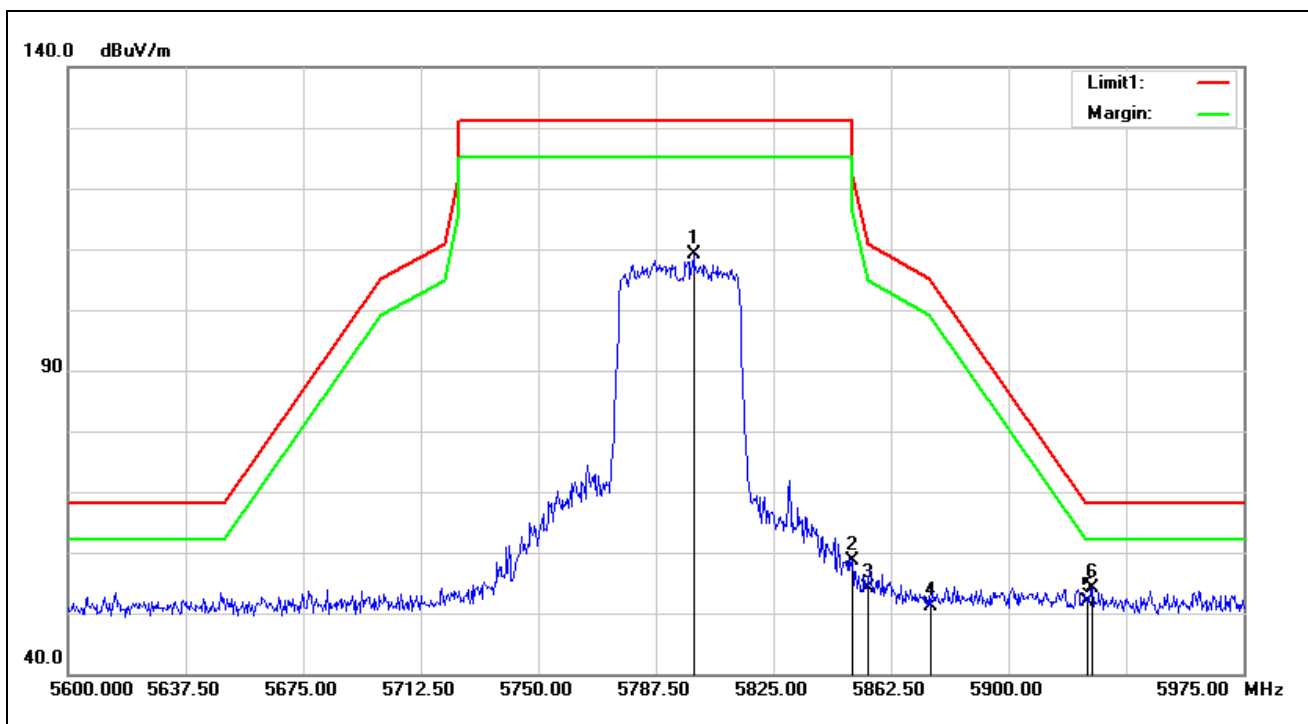


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5799.500	106.50	2.55	109.05	131.20	-22.15	peak
2	5850.000	55.94	2.57	58.51	122.20	-63.69	peak
3	5855.000	51.61	2.59	54.20	110.80	-56.60	peak
4	5875.000	48.42	2.64	51.06	105.20	-54.14	peak
5	5925.000	49.36	2.58	51.94	68.20	-16.26	peak
6*	5926.625	51.63	2.57	54.20	68.20	-14.00	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

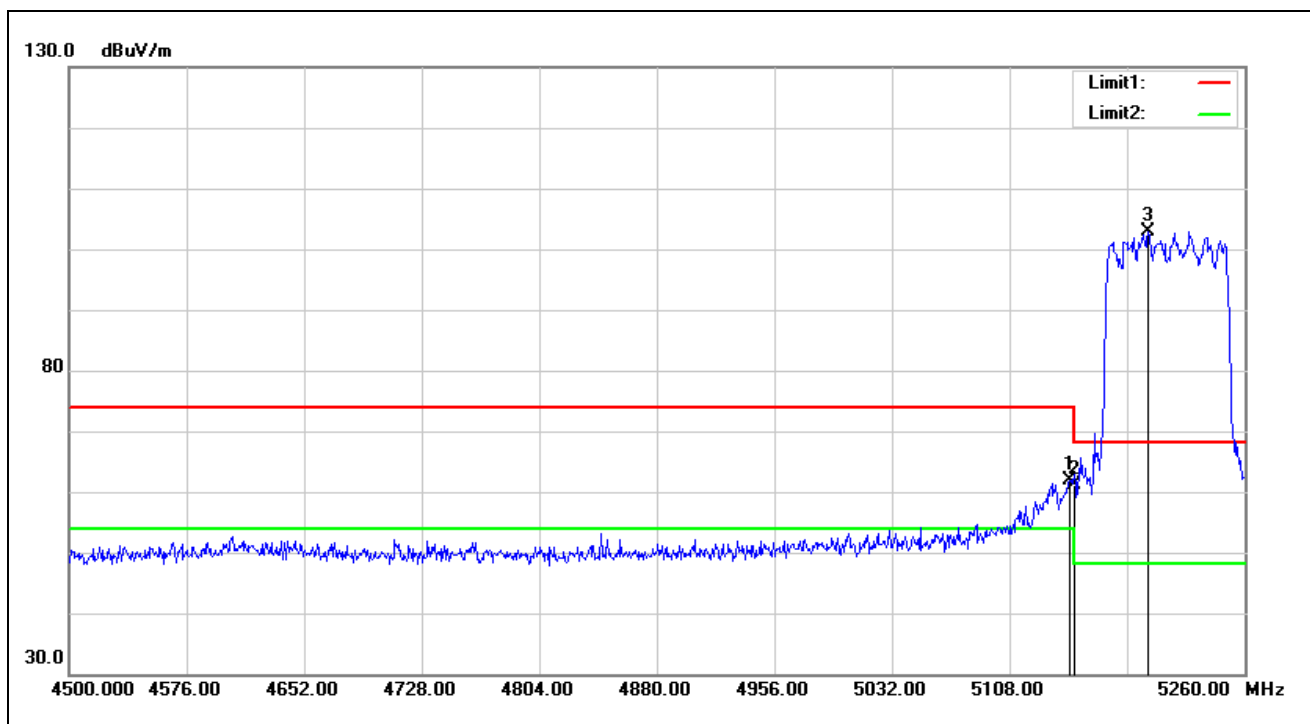


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	60.67	1.13	61.80	74.00	-12.20	peak
2	5150.000	59.96	1.13	61.09	74.00	-12.91	peak
3*	5197.680	101.99	0.83	102.82	68.20	34.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

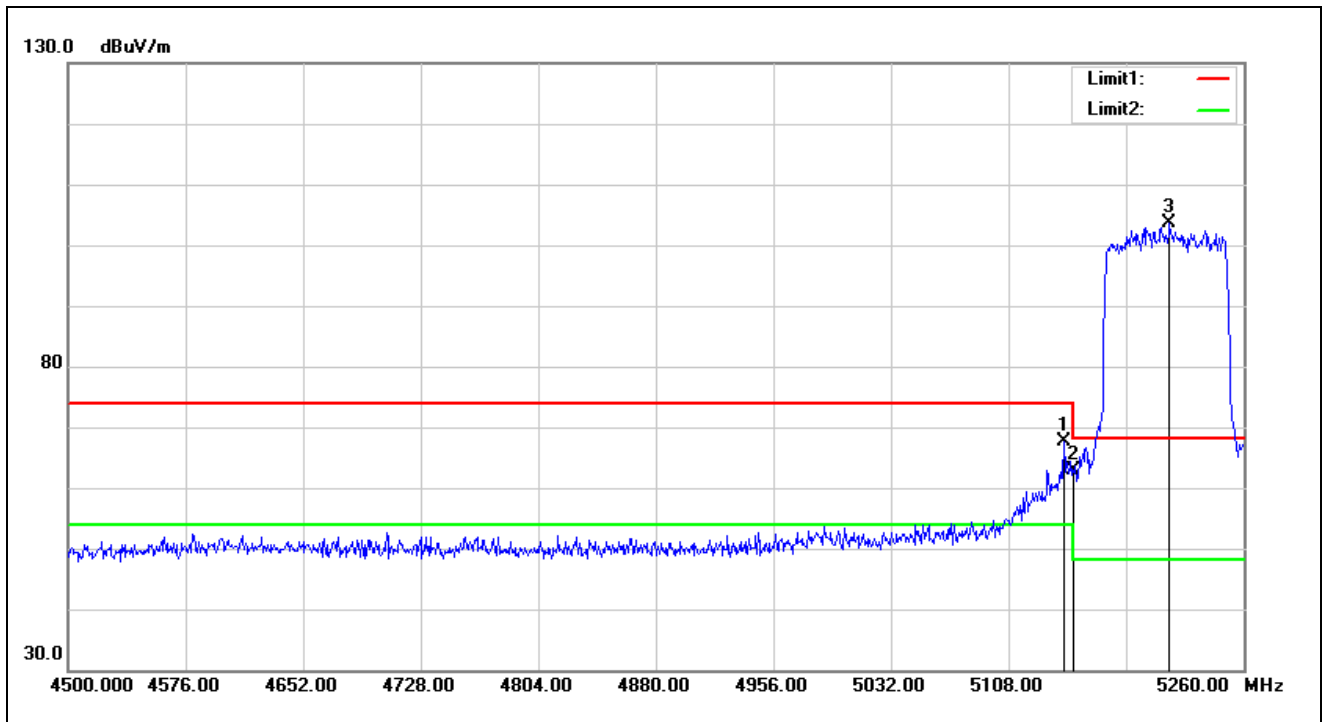


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.720	66.60	1.13	67.73	74.00	-6.27	peak
2	5150.000	61.63	1.13	62.76	74.00	-11.24	peak
3*	5212.120	102.88	0.82	103.70	68.20	35.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

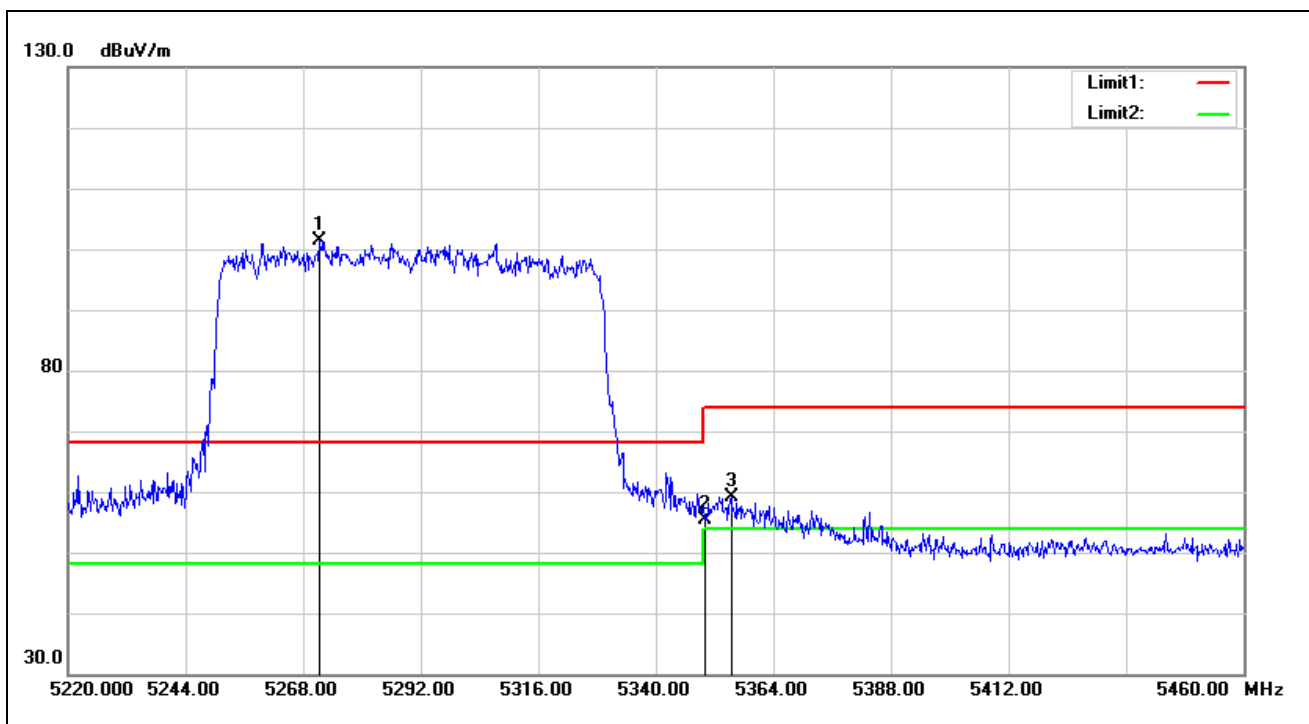


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5271.360	100.62	0.75	101.37	68.20	33.17	peak
2	5350.000	54.38	0.89	55.27	74.00	-18.73	peak
3	5355.360	58.24	0.92	59.16	74.00	-14.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

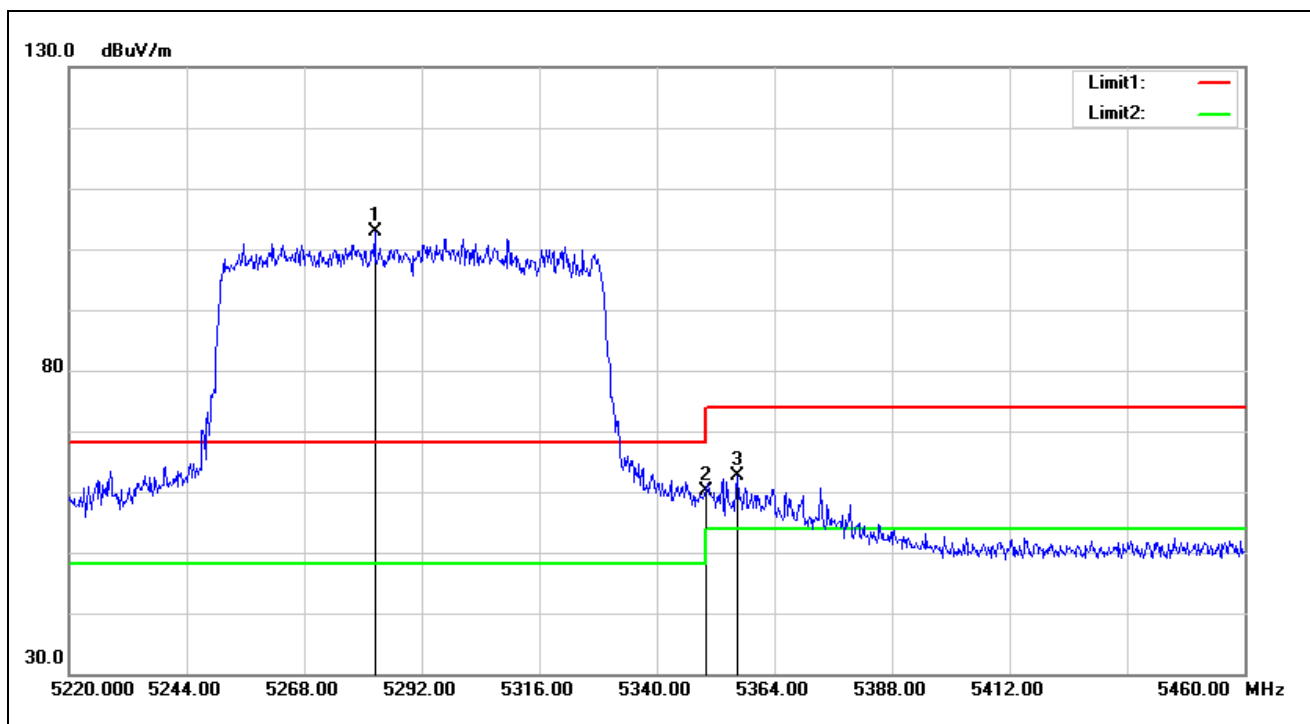


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5282.400	102.03	0.73	102.76	68.20	34.56	peak
2	5350.000	59.19	0.89	60.08	74.00	-13.92	peak
3	5356.560	61.75	0.94	62.69	74.00	-11.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

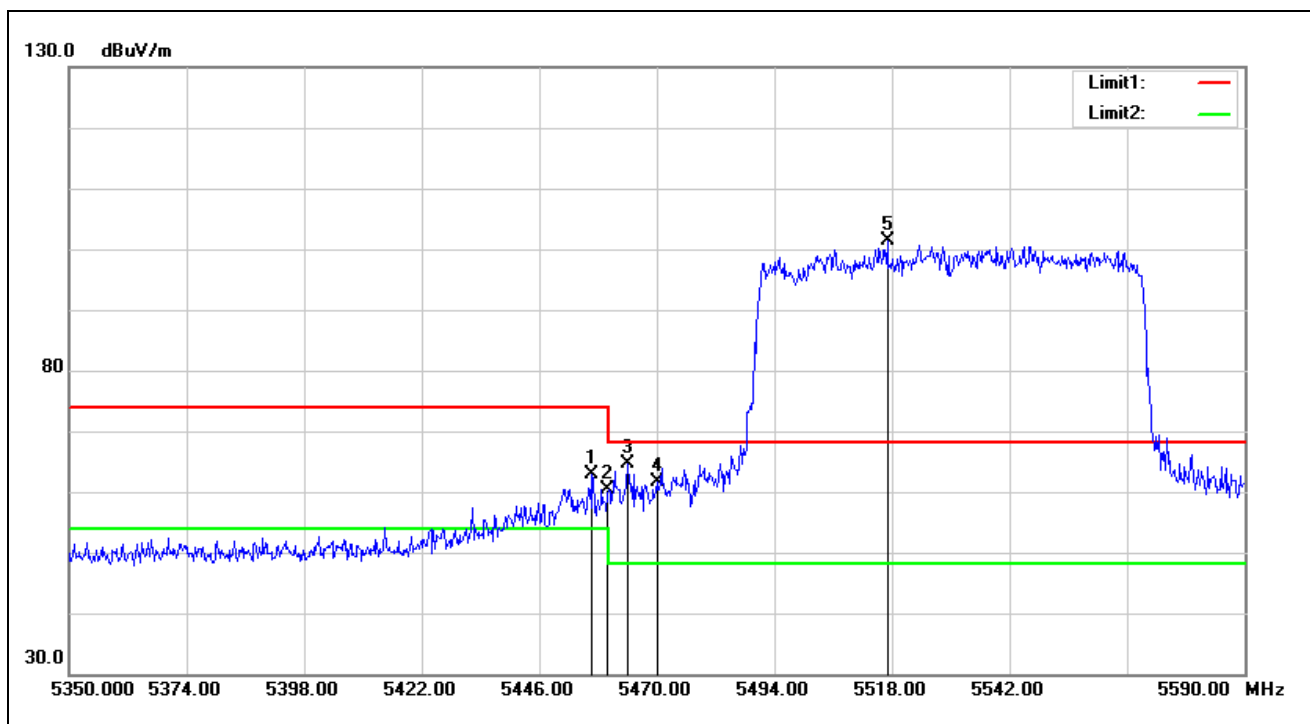


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.800	61.04	1.77	62.81	74.00	-11.19	peak
2	5460.000	58.58	1.79	60.37	74.00	-13.63	peak
3	5464.000	62.78	1.79	64.57	68.20	-3.63	peak
4	5470.000	59.92	1.80	61.72	68.20	-6.48	peak
5*	5517.040	99.48	1.80	101.28	68.20	33.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

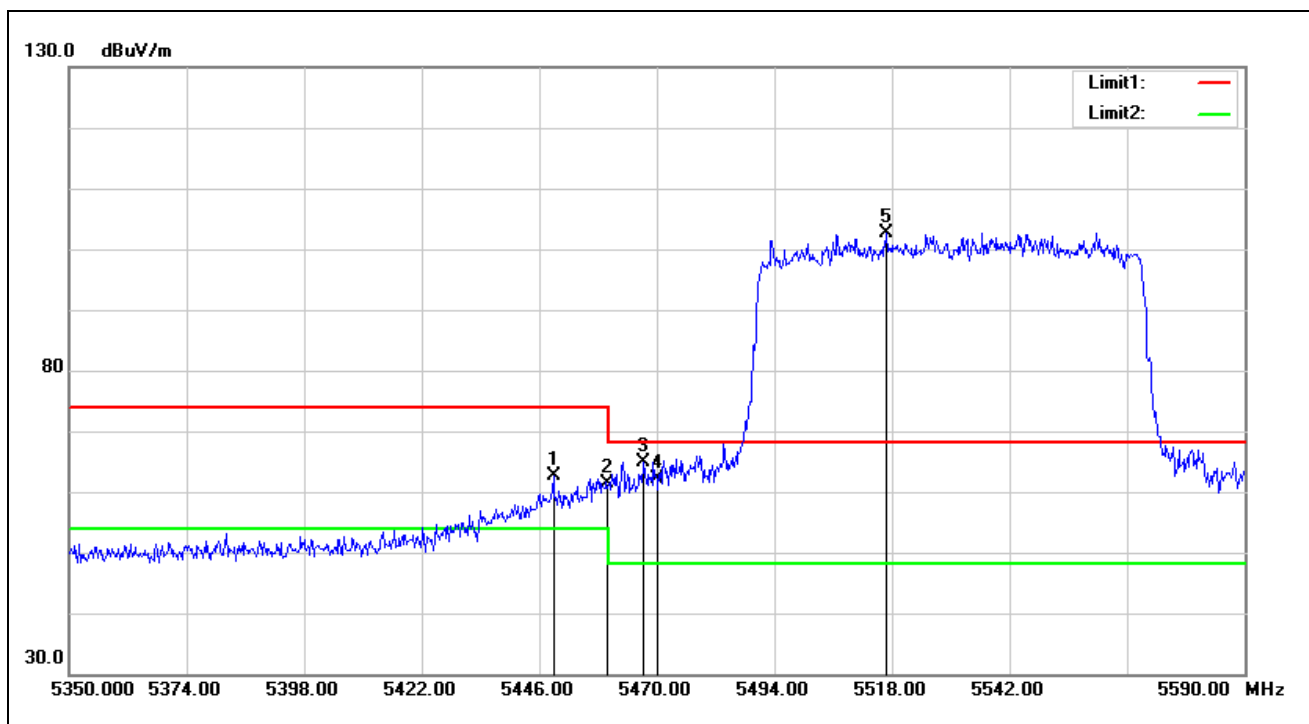

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.880	60.79	1.75	62.54	74.00	-11.46	peak
2	5460.000	59.52	1.79	61.31	74.00	-12.69	peak
3	5467.360	63.09	1.79	64.88	68.20	-3.32	peak
4	5470.000	60.32	1.80	62.12	68.20	-6.08	peak
5*	5516.800	100.85	1.80	102.65	68.20	34.45	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

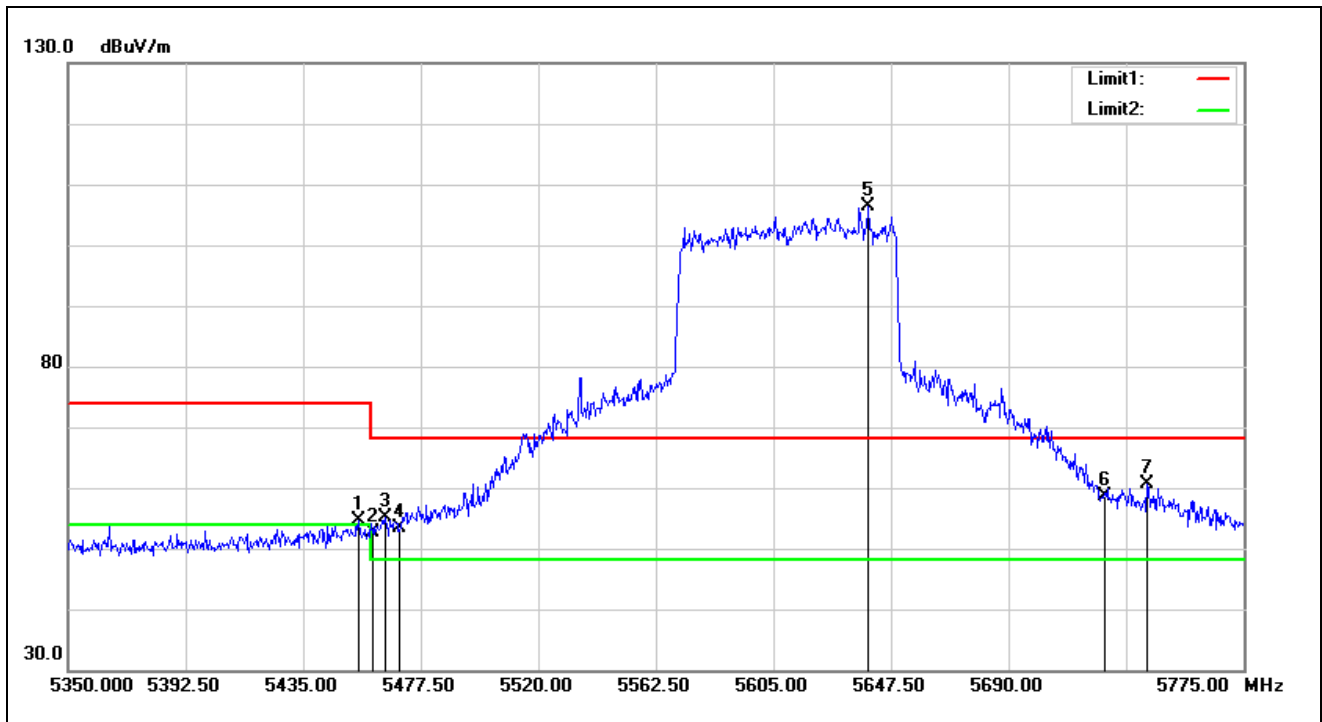

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5454.975	52.76	1.77	54.53	74.00	-19.47	peak
1	5460.000	50.84	1.79	52.63	74.00	-21.37	peak
2	5464.750	53.28	1.79	55.07	68.20	-13.13	peak
3	5470.000	51.50	1.80	53.30	68.20	-14.90	peak
4*	5639.425	104.62	1.64	106.26	68.20	38.06	peak
5	5725.000	56.75	1.89	58.64	68.20	-9.56	peak
6	5740.150	58.47	2.09	60.56	68.20	-7.64	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

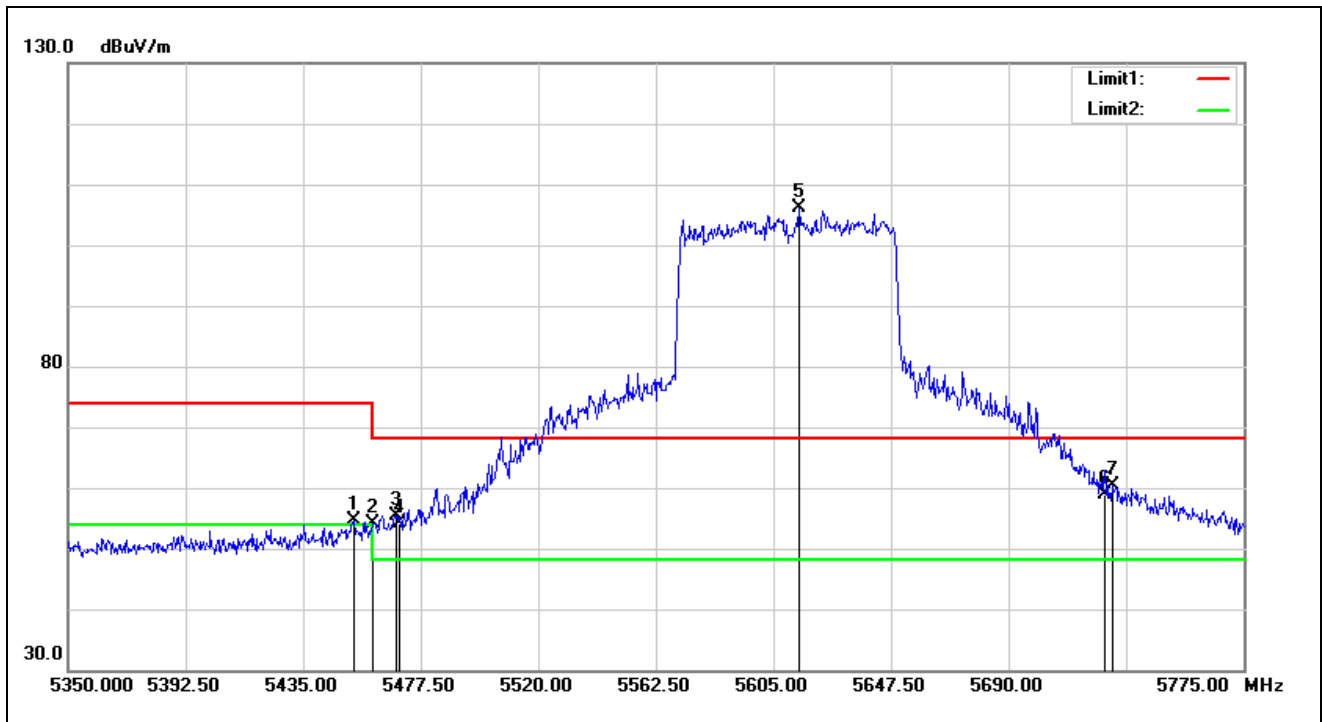

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5453.275	52.83	1.77	54.60	74.00	-19.40	peak
1	5460.000	52.33	1.79	54.12	74.00	-19.88	peak
2	5468.575	53.67	1.80	55.47	68.20	-12.73	peak
3	5470.000	52.44	1.80	54.24	68.20	-13.96	peak
4*	5614.350	104.62	1.63	106.25	68.20	38.05	peak
5	5725.000	57.03	1.89	58.92	68.20	-9.28	peak
6	5727.400	58.46	1.93	60.39	68.20	-7.81	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

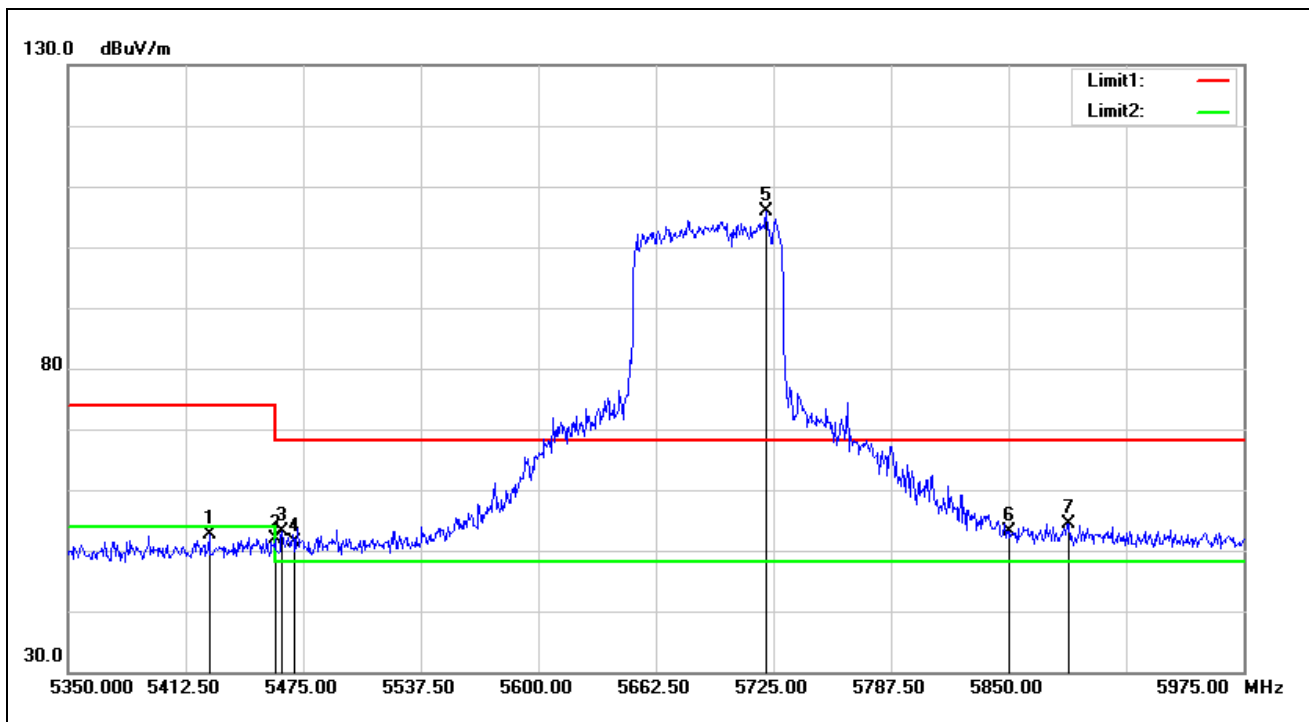

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5425.000	51.12	1.52	52.64	74.00	-21.36	peak
1	5460.000	50.14	1.79	51.93	74.00	-22.07	peak
2	5463.750	51.31	1.79	53.10	68.20	-15.10	peak
3	5470.000	49.63	1.80	51.43	68.20	-16.77	peak
4*	5721.250	103.97	1.84	105.81	68.20	37.61	peak
5	5850.000	50.46	2.57	53.03	68.20	-15.17	peak
6	5881.875	51.81	2.66	54.47	68.20	-13.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

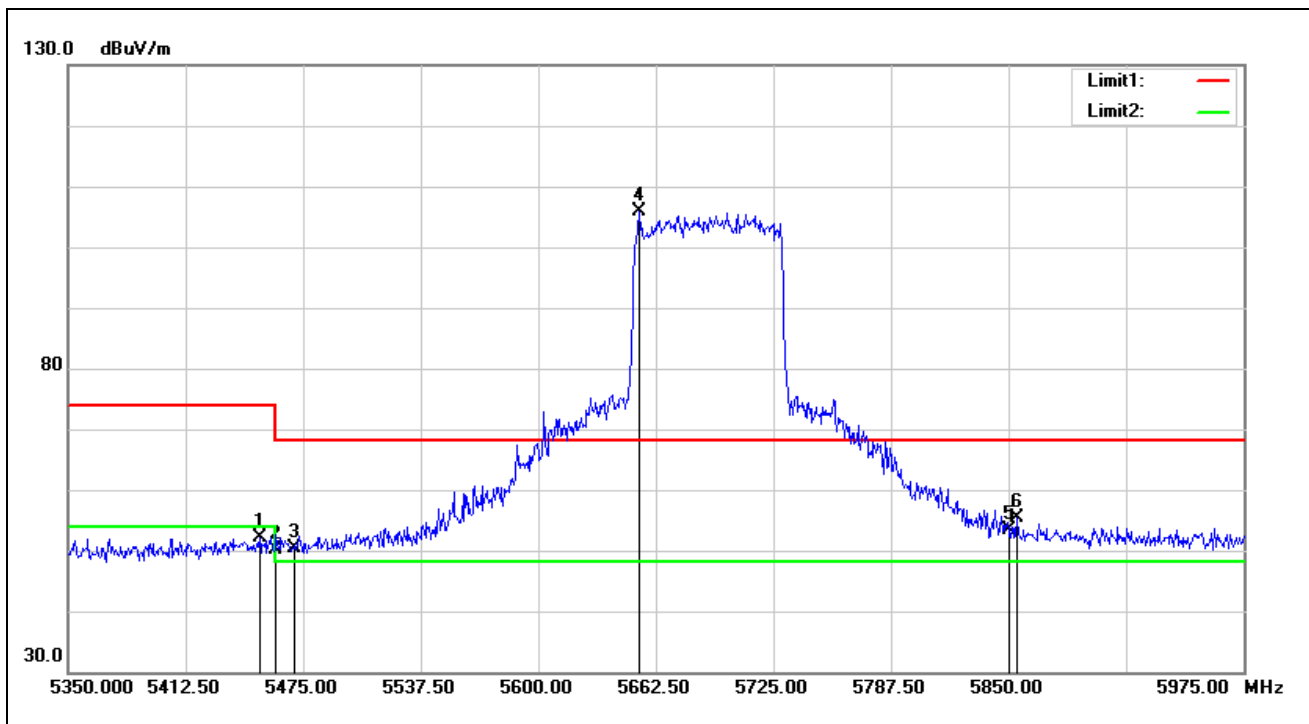

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.875	50.25	1.77	52.02	74.00	-21.98	peak
2	5460.000	48.41	1.79	50.20	74.00	-23.80	peak
3	5470.000	48.70	1.80	50.50	68.20	-17.70	peak
4*	5663.750	104.24	1.64	105.88	68.20	37.68	peak
5	5850.000	50.89	2.57	53.46	68.20	-14.74	peak
6	5854.375	52.70	2.59	55.29	68.20	-12.91	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

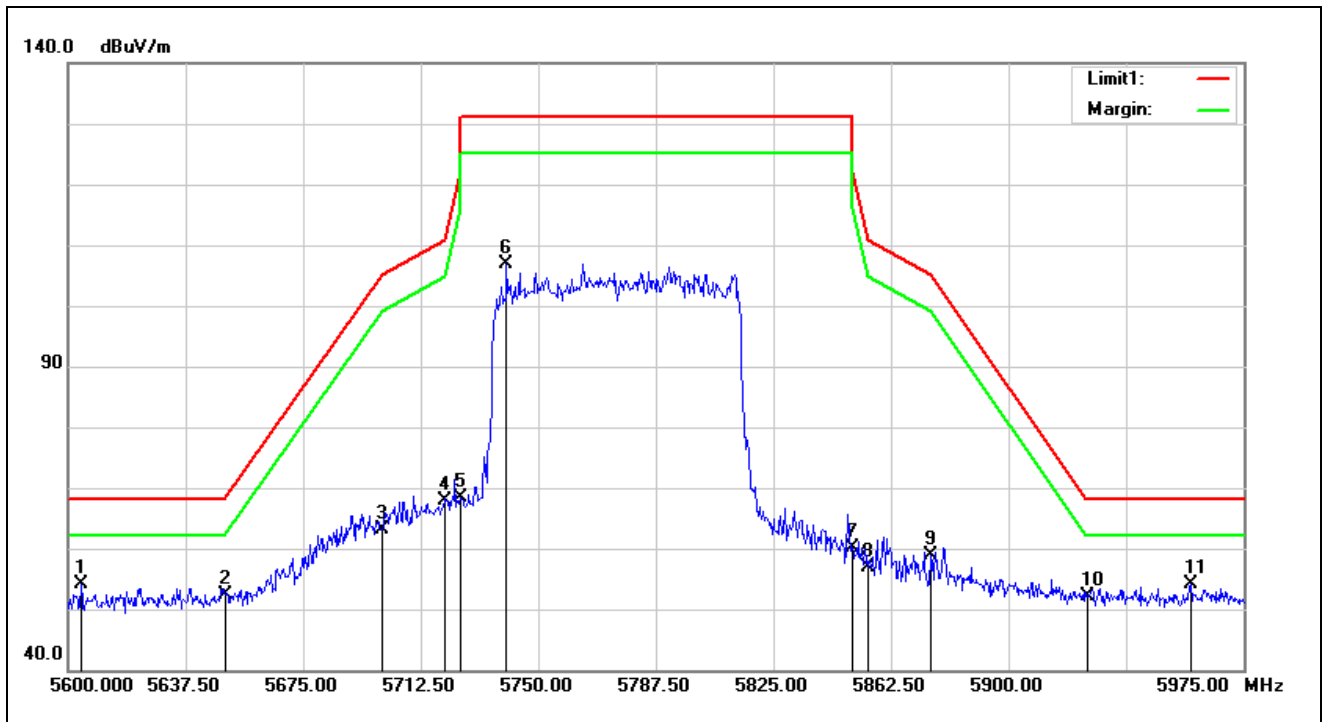

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5604.125	52.51	1.62	54.13	68.20	-14.07	peak
1	5650.000	50.84	1.65	52.49	68.20	-15.71	peak
2	5700.000	61.65	1.58	63.23	105.20	-41.97	peak
3	5720.000	65.94	1.83	67.77	110.80	-43.03	peak
4	5725.000	66.52	1.89	68.41	122.20	-53.79	peak
5	5739.875	104.86	2.09	106.95	131.20	-24.25	peak
6	5850.000	57.50	2.57	60.07	122.20	-62.13	peak
7	5855.000	54.20	2.59	56.79	110.80	-54.01	peak
8	5875.000	56.33	2.64	58.97	105.20	-46.23	peak
9	5925.000	49.66	2.58	52.24	68.20	-15.96	peak
10	5958.125	51.55	2.46	54.01	68.20	-14.19	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

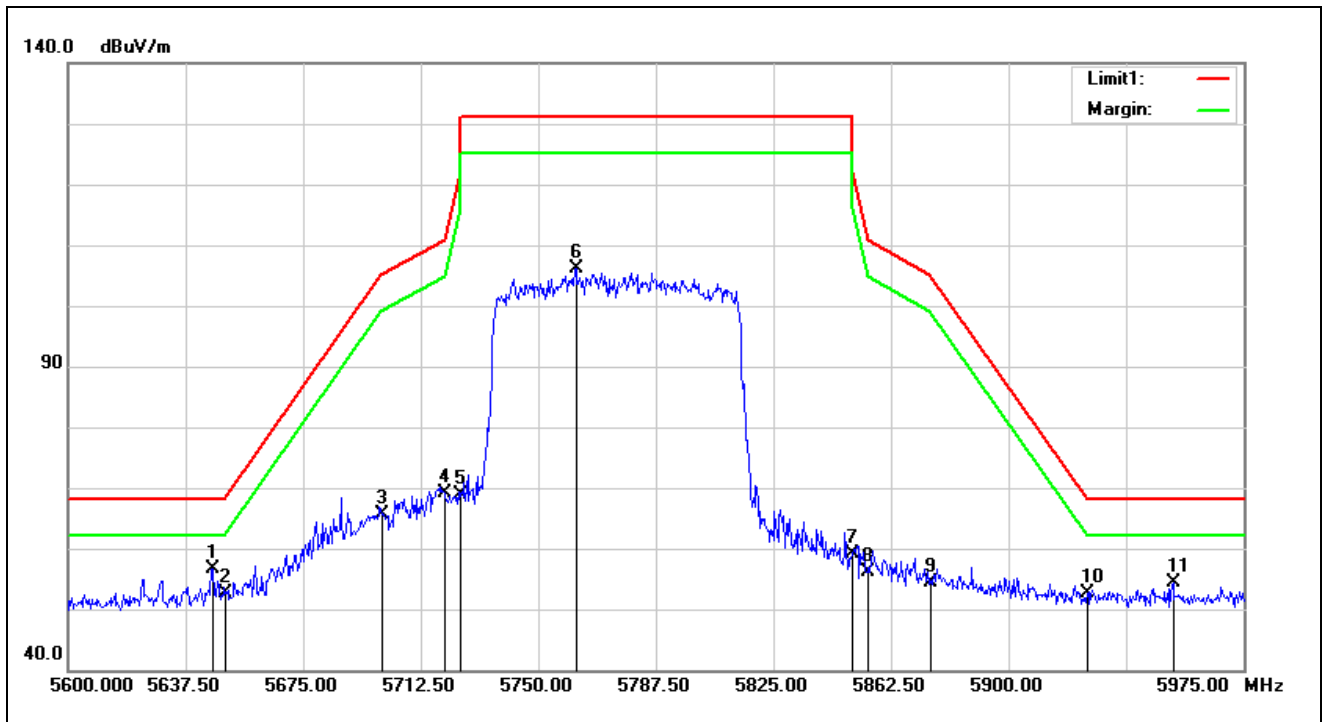

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5646.125	55.00	1.65	56.65	68.20	-11.55	peak
1	5650.000	50.95	1.65	52.60	68.20	-15.60	peak
2	5700.000	64.08	1.58	65.66	105.20	-39.54	peak
3	5720.000	67.24	1.83	69.07	110.80	-41.73	peak
4	5725.000	66.88	1.89	68.77	122.20	-53.43	peak
5	5762.000	103.79	2.29	106.08	131.20	-25.12	peak
6	5850.000	56.65	2.57	59.22	122.20	-62.98	peak
7	5855.000	53.46	2.59	56.05	110.80	-54.75	peak
8	5875.000	51.72	2.64	54.36	105.20	-50.84	peak
9	5925.000	49.94	2.58	52.52	68.20	-15.68	peak
10	5952.500	51.93	2.45	54.38	68.20	-13.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

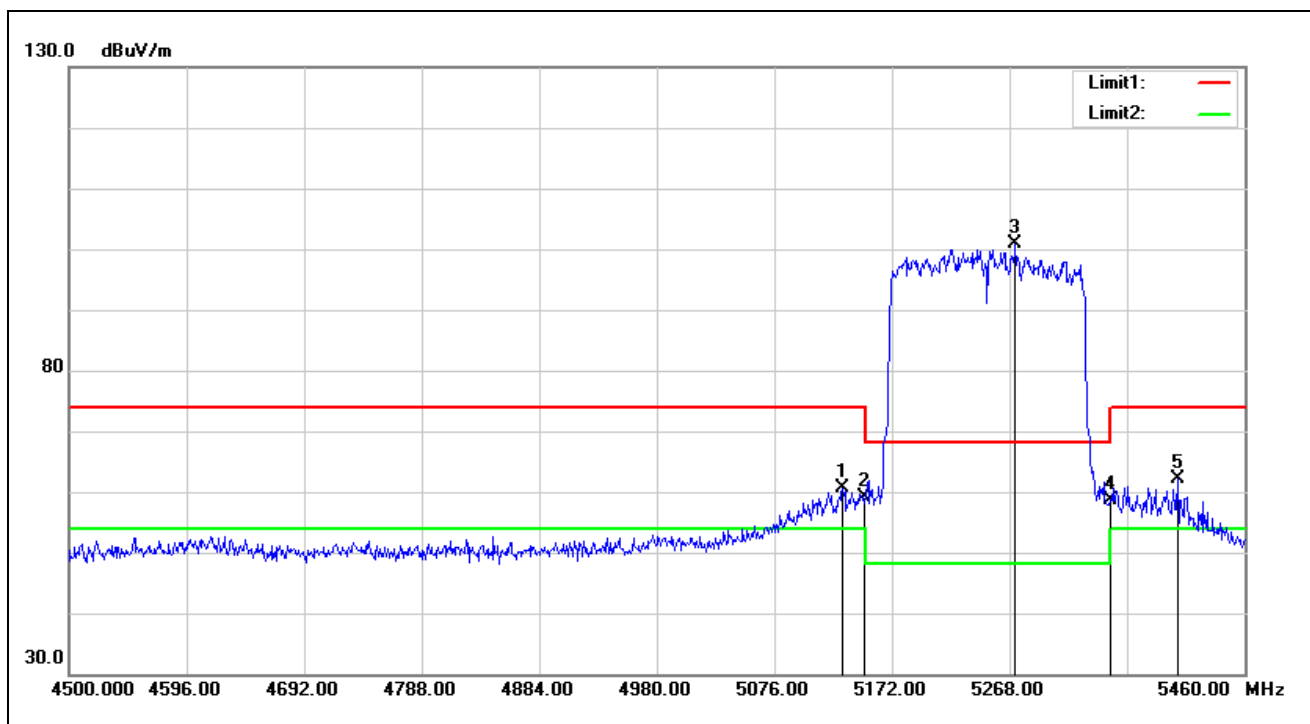


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5131.680	59.56	1.13	60.69	74.00	-13.31	peak
2	5150.000	57.95	1.13	59.08	74.00	-14.92	peak
3*	5272.800	100.17	0.75	100.92	68.20	32.72	peak
4	5350.000	57.68	0.89	58.57	74.00	-15.43	peak
5	5405.280	60.84	1.33	62.17	74.00	-11.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

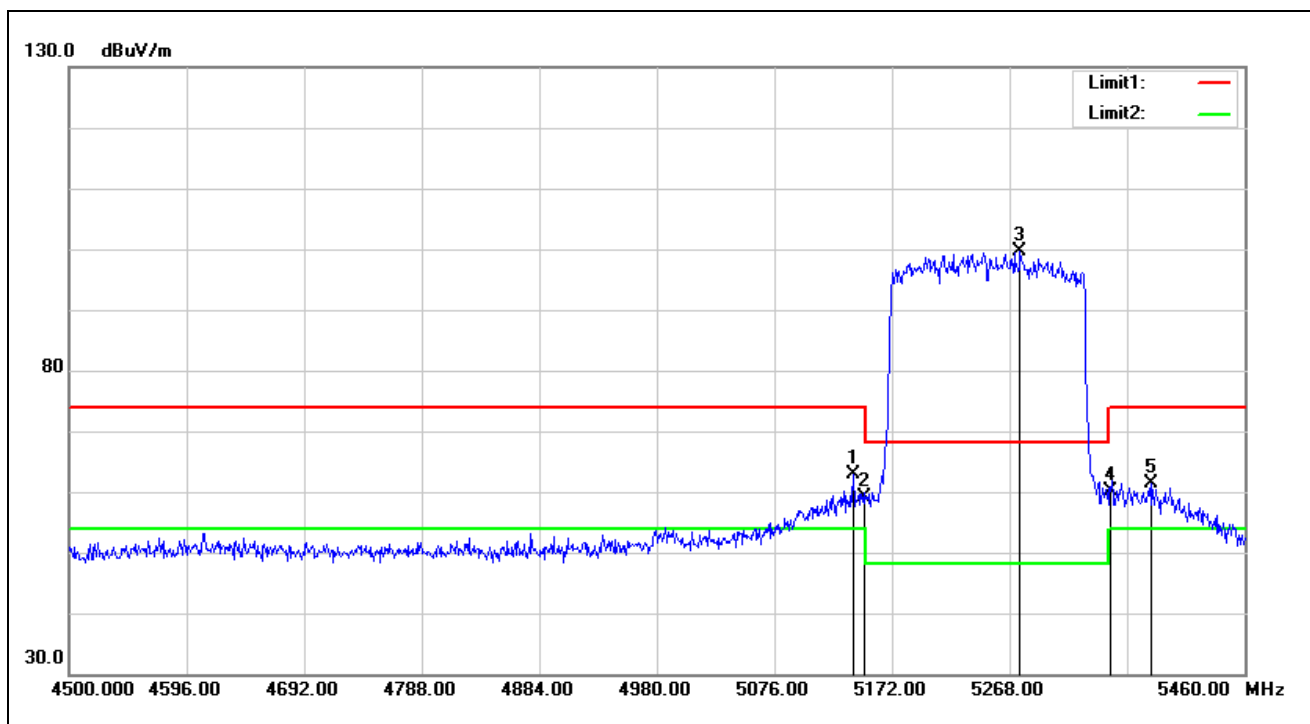

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.320	61.69	1.13	62.82	74.00	-11.18	peak
2	5150.000	58.00	1.13	59.13	74.00	-14.87	peak
3*	5276.640	98.98	0.75	99.73	68.20	31.53	peak
4	5350.000	59.14	0.89	60.03	74.00	-13.97	peak
5	5384.160	60.31	1.14	61.45	74.00	-12.55	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

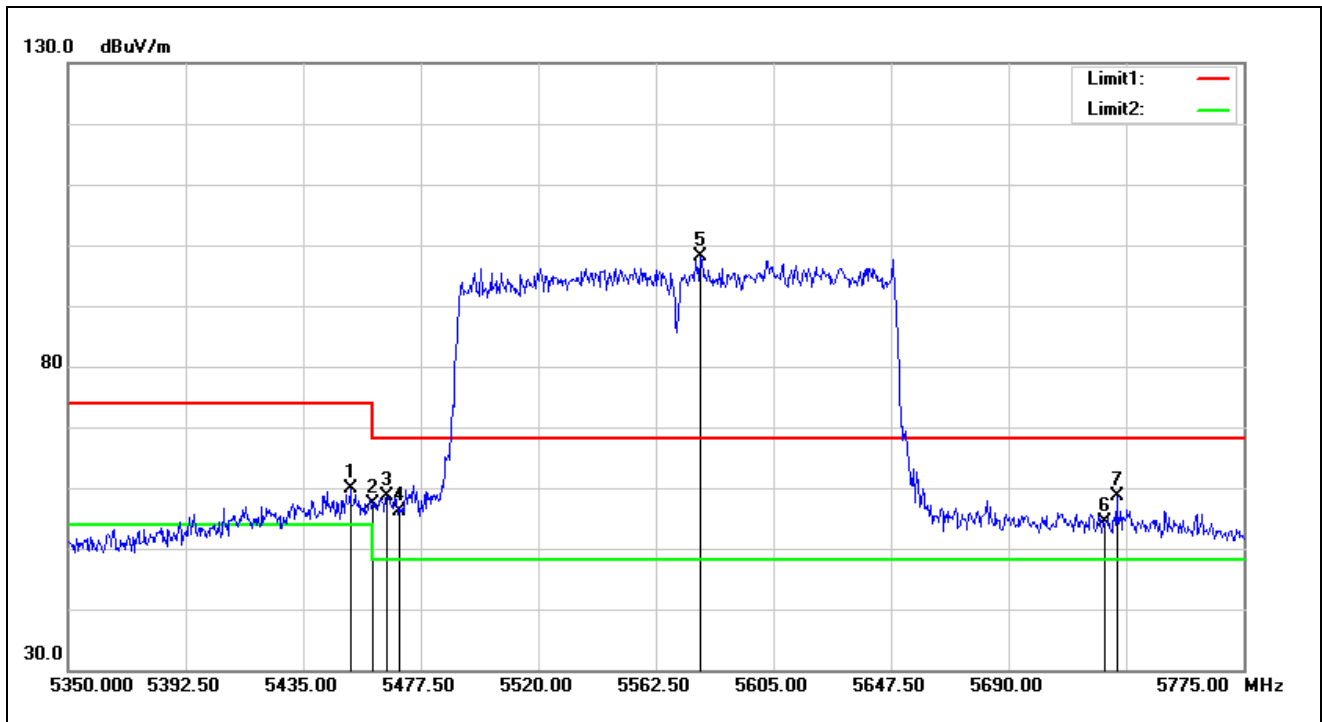

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5452.000	58.09	1.77	59.86	74.00	-14.14	peak
1	5460.000	55.49	1.79	57.28	74.00	-16.72	peak
2	5465.175	56.73	1.79	58.52	68.20	-9.68	peak
3	5470.000	54.29	1.80	56.09	68.20	-12.11	peak
4*	5578.650	96.57	1.64	98.21	68.20	30.01	peak
5	5725.000	52.58	1.89	54.47	68.20	-13.73	peak
6	5729.100	56.73	1.95	58.68	68.20	-9.52	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

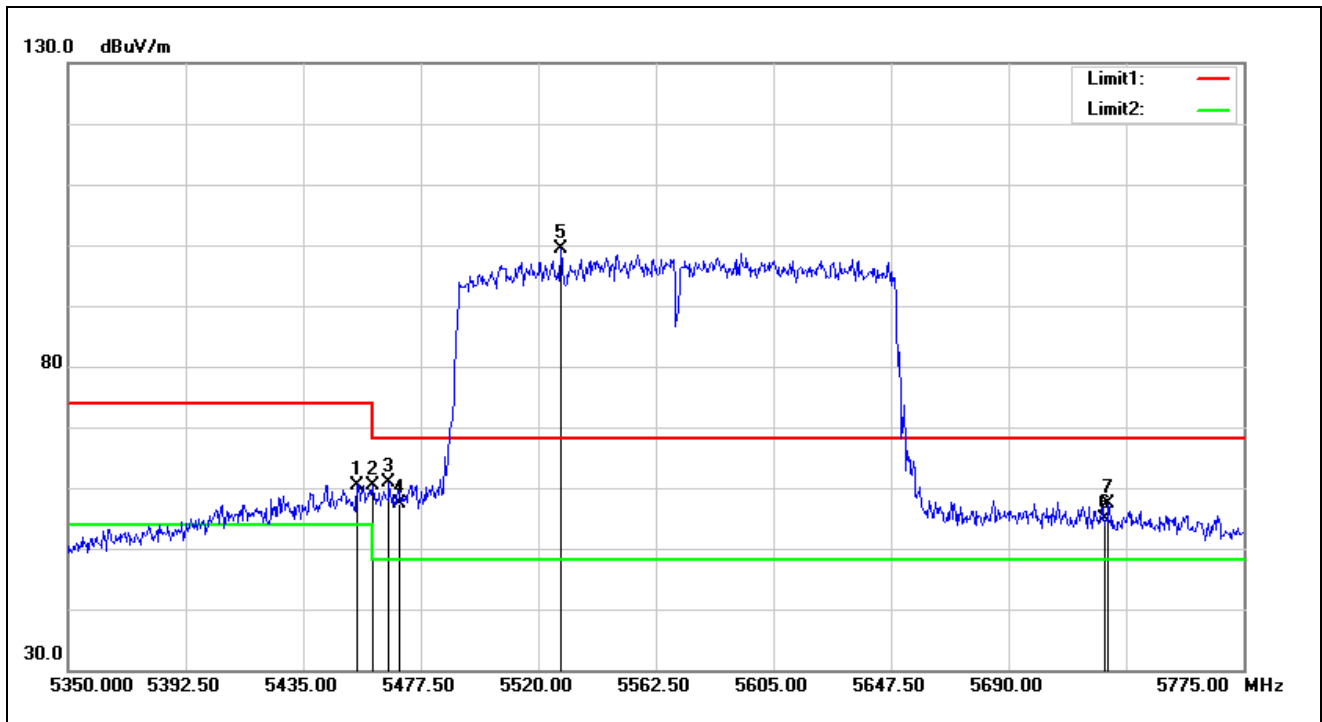

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5454.550	58.62	1.77	60.39	74.00	-13.61	peak
1	5460.000	58.55	1.79	60.34	74.00	-13.66	peak
2	5466.025	59.05	1.79	60.84	68.20	-7.36	peak
3	5470.000	55.62	1.80	57.42	68.20	-10.78	peak
4*	5528.075	97.73	1.76	99.49	68.20	31.29	peak
5	5725.000	53.01	1.89	54.90	68.20	-13.30	peak
6	5726.125	55.38	1.91	57.29	68.20	-10.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5845 MHz		
Remark:			

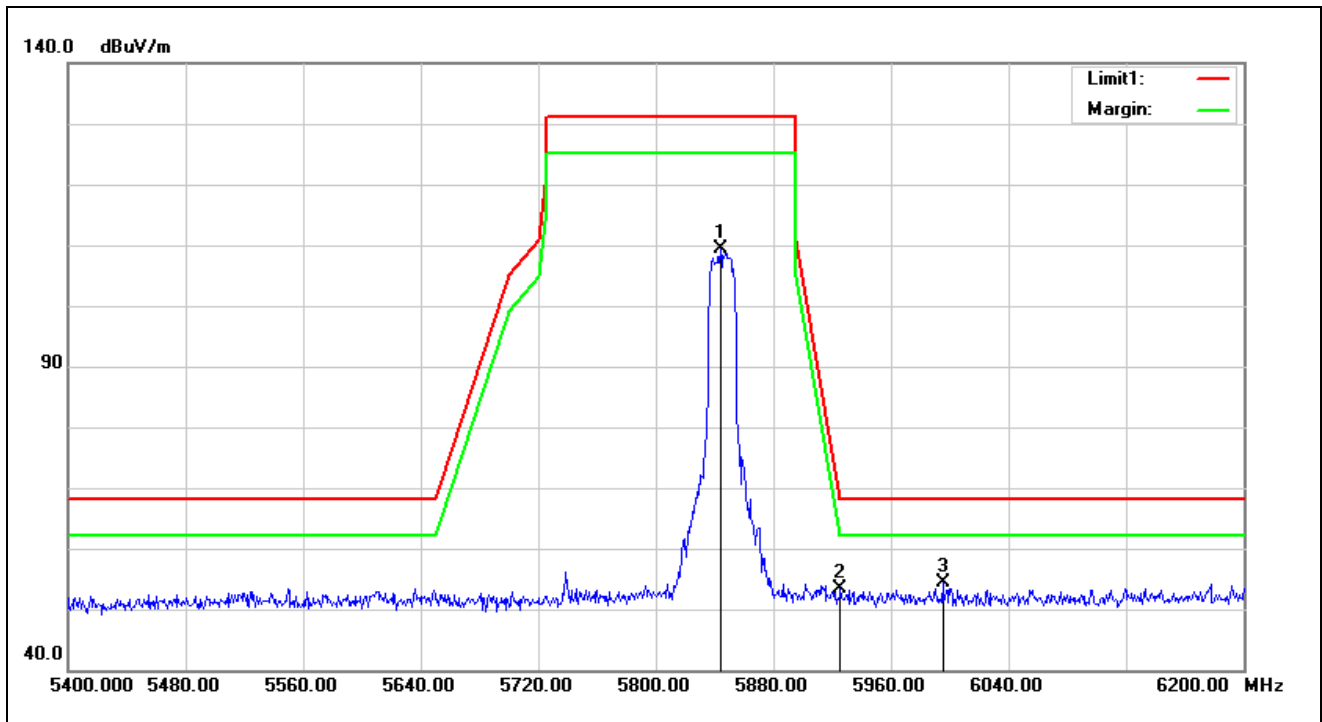


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5844.000	106.72	2.57	109.29	131.20	-21.91	peak
2	5925.000	50.81	2.58	53.39	68.20	-14.81	peak
3*	5995.200	51.80	2.56	54.36	68.20	-13.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5845 MHz		
Remark:			

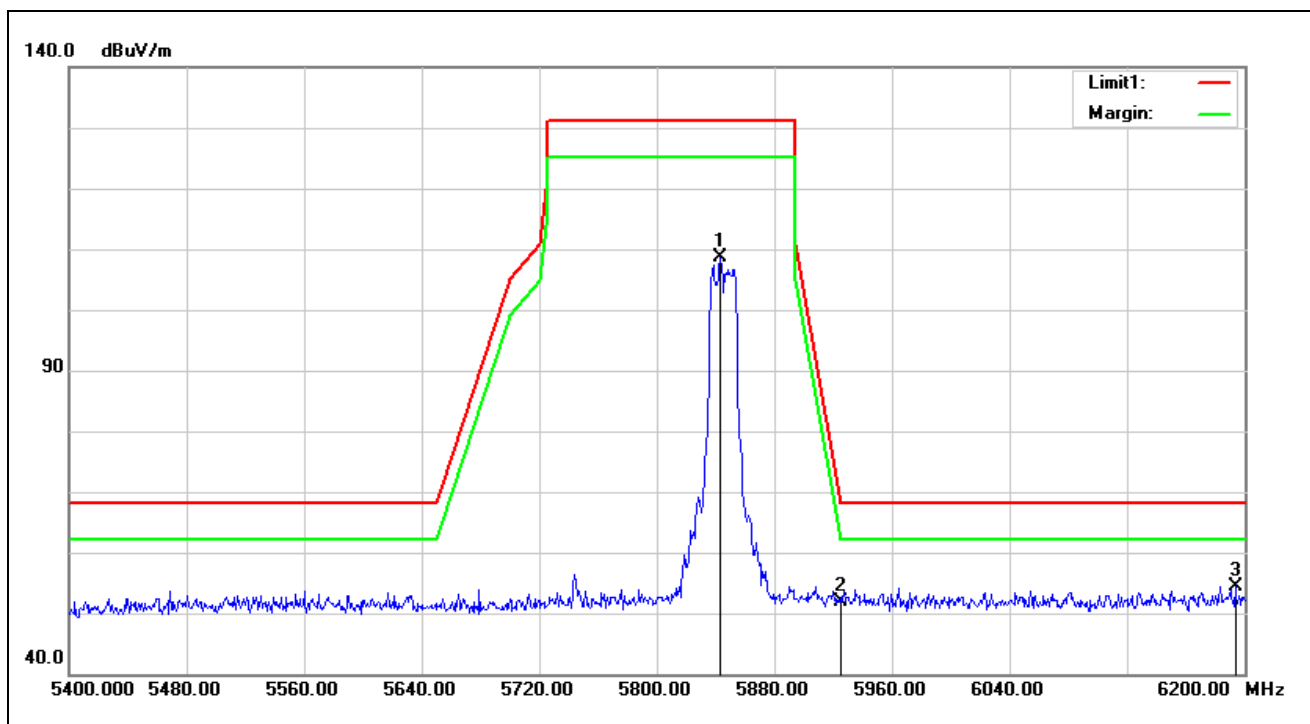


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5843.200	106.18	2.57	108.75	131.20	-22.45	peak
2	5925.000	49.19	2.58	51.77	68.20	-16.43	peak
3*	6193.600	51.08	3.29	54.37	68.20	-13.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5885 MHz		
Remark:			

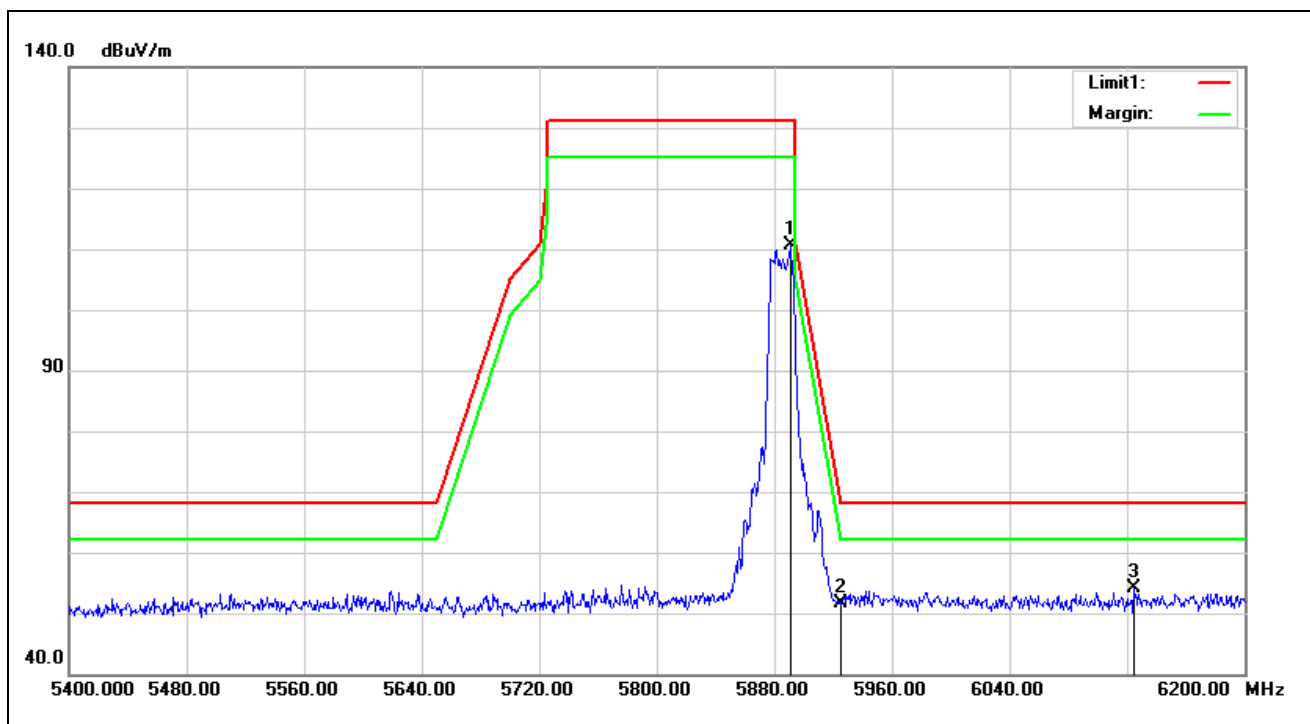


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5891.200	107.88	2.68	110.56	131.20	-20.64	peak
2	5925.000	49.13	2.58	51.71	68.20	-16.49	peak
3*	6124.800	50.91	3.14	54.05	68.20	-14.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5885 MHz		
Remark:			

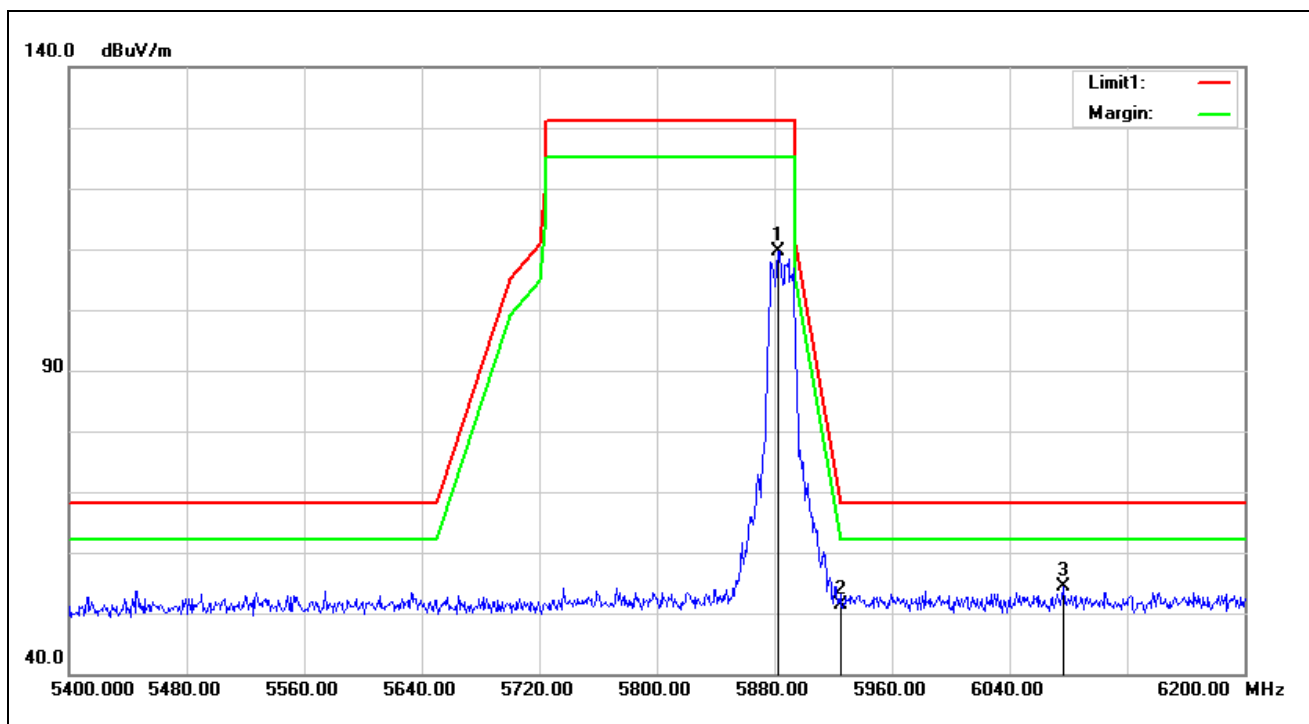


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5882.400	107.08	2.66	109.74	131.20	-21.46	peak
2	5925.000	48.90	2.58	51.48	68.20	-16.72	peak
3*	6076.800	51.38	2.92	54.30	68.20	-13.90	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5845 MHz		
Remark:			

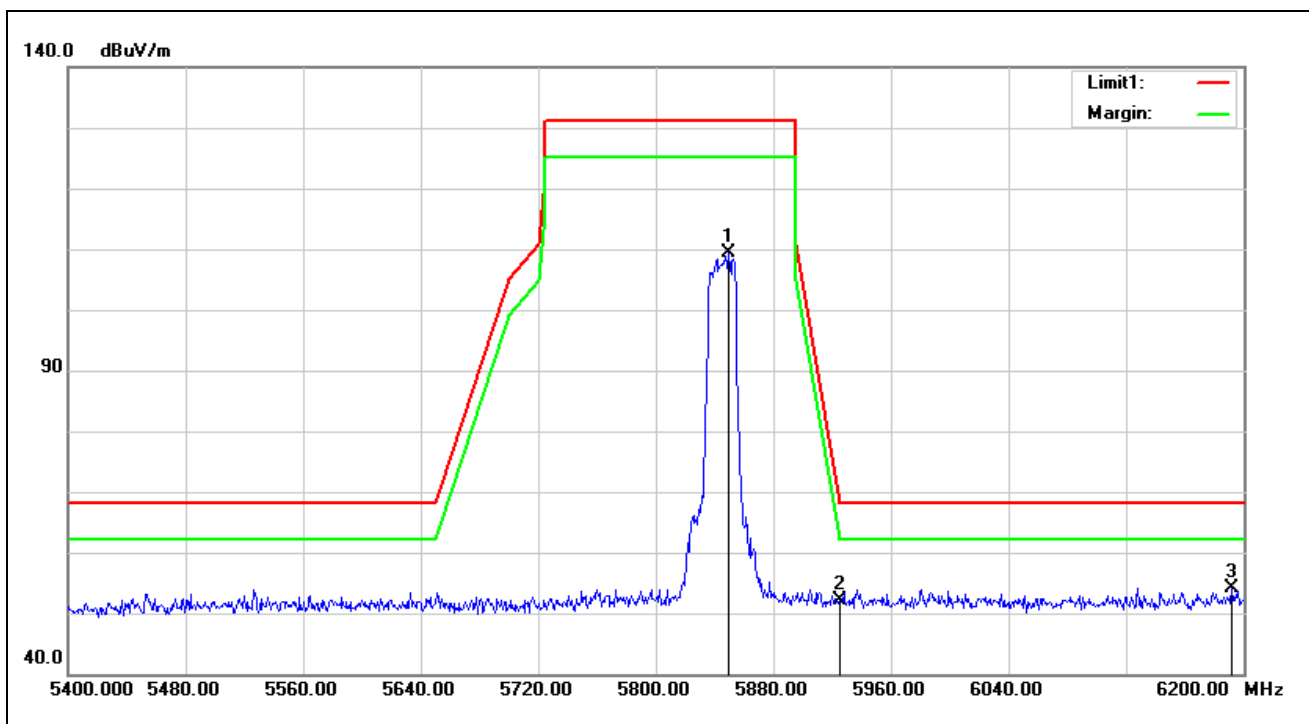


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5849.600	106.86	2.57	109.43	131.20	-21.77	peak
2	5925.000	49.49	2.58	52.07	68.20	-16.13	peak
3*	6192.000	50.88	3.28	54.16	68.20	-14.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5845 MHz		
Remark:			

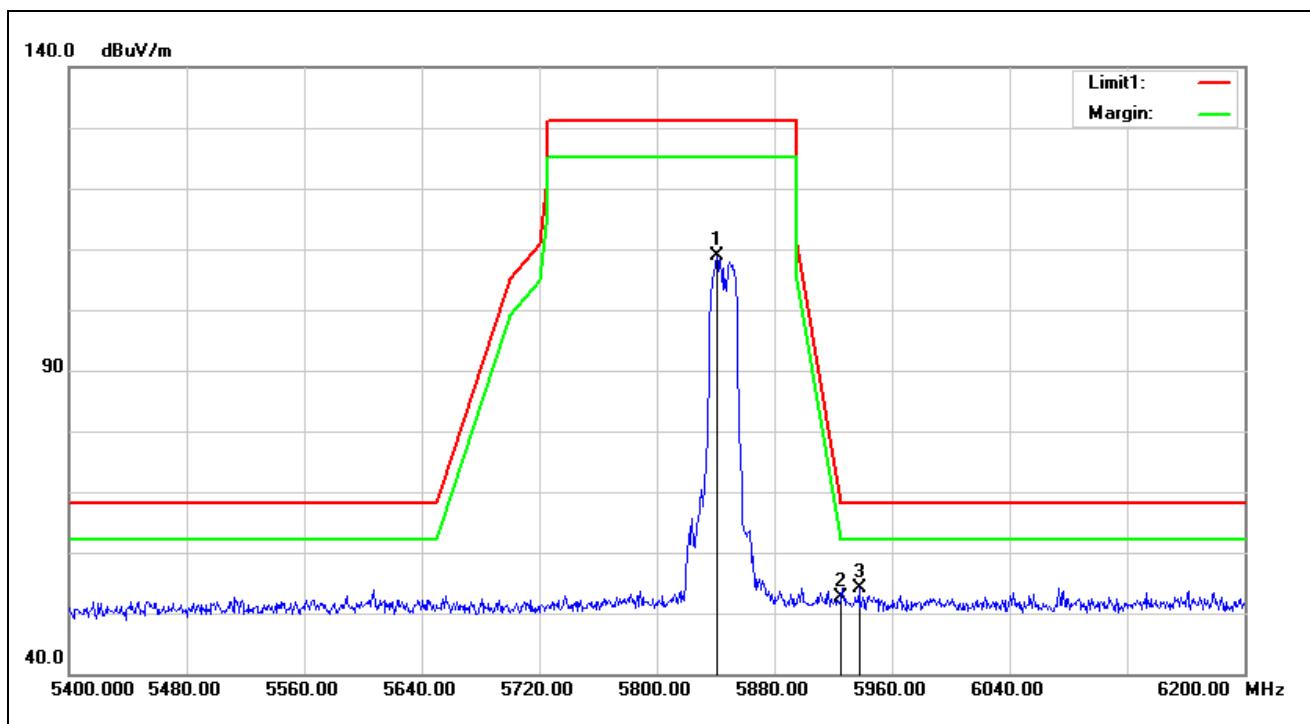


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5840.800	106.26	2.57	108.83	131.20	-22.37	peak
2	5925.000	50.02	2.58	52.60	68.20	-15.60	peak
3*	5937.600	51.55	2.50	54.05	68.20	-14.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5885 MHz		
Remark:			

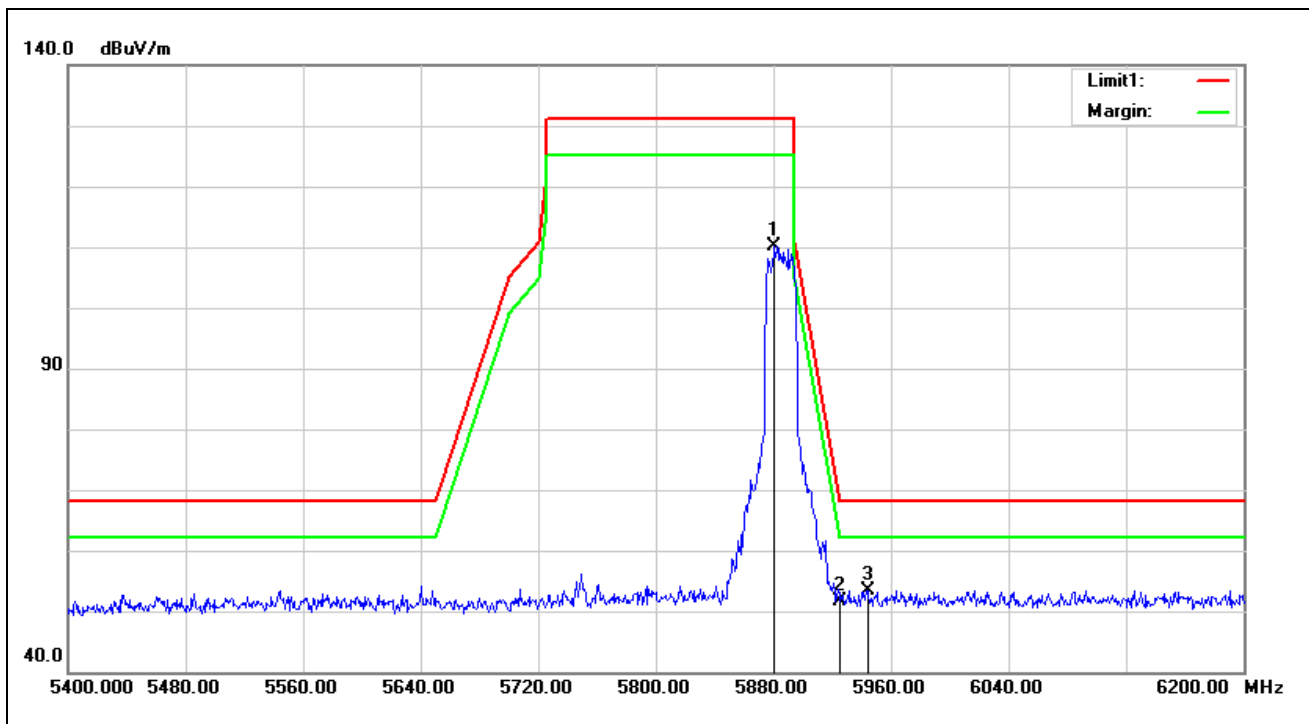


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.800	107.57	2.66	110.23	131.20	-20.97	peak
2	5925.000	48.96	2.58	51.54	68.20	-16.66	peak
3*	5944.000	50.98	2.47	53.45	68.20	-14.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5885 MHz		
Remark:			

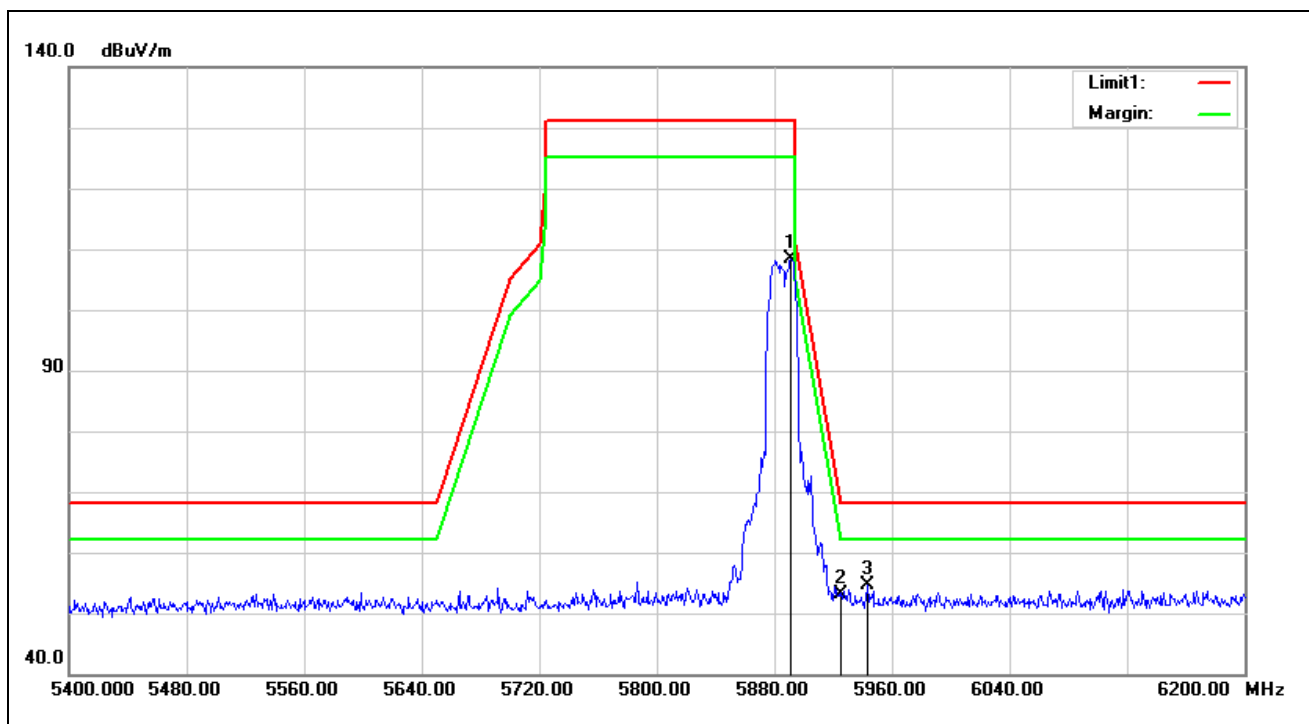


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5891.200	105.66	2.68	108.34	131.20	-22.86	peak
2	5925.000	50.64	2.58	53.22	68.20	-14.98	peak
3*	5943.200	52.23	2.47	54.70	68.20	-13.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5835 MHz		
Remark:			

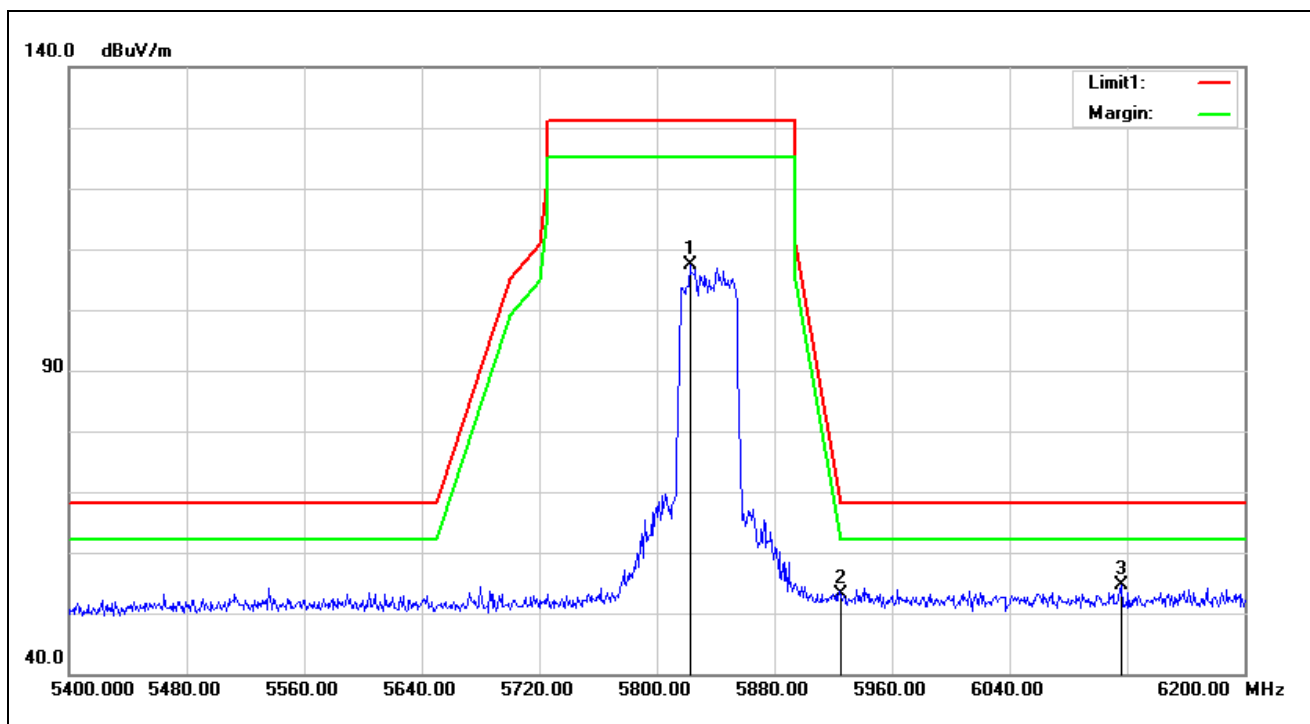


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5822.400	104.84	2.55	107.39	131.20	-23.81	peak
2	5925.000	50.51	2.58	53.09	68.20	-15.11	peak
3*	6116.000	51.59	3.10	54.69	68.20	-13.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5835 MHz		
Remark:			

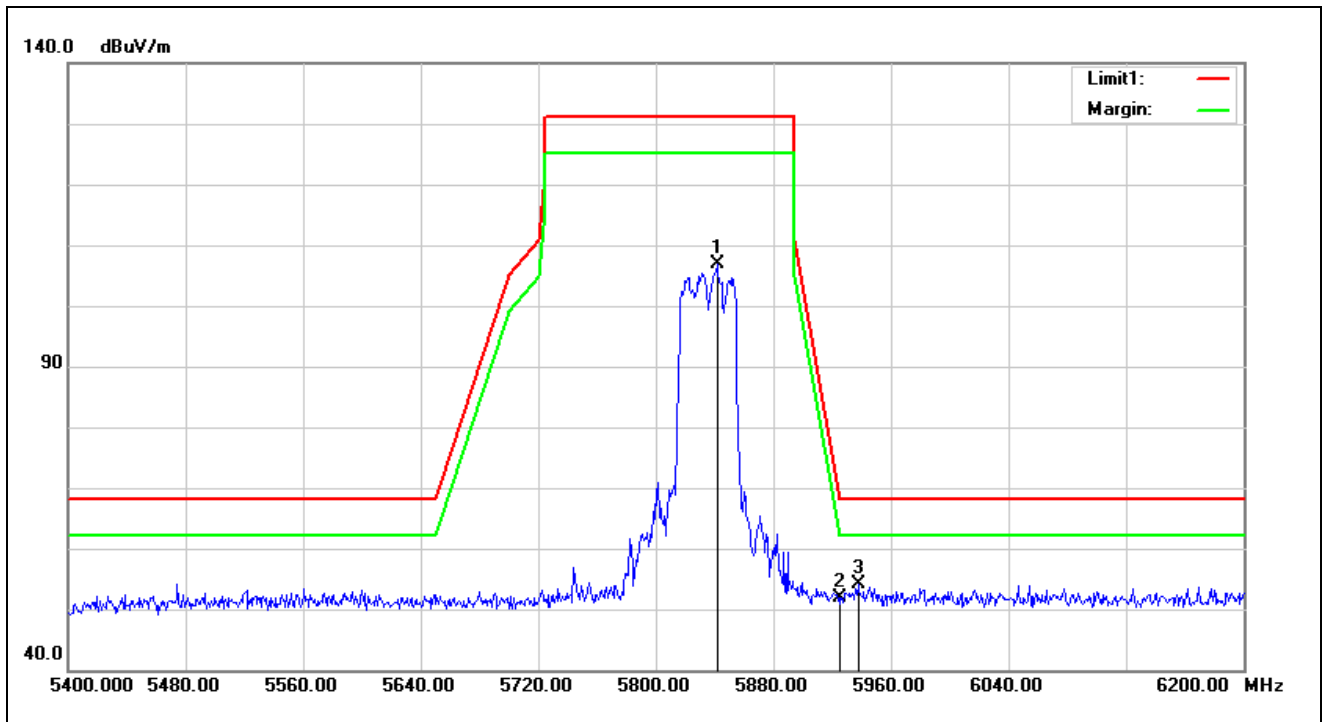


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5841.600	104.43	2.57	107.00	131.20	-24.20	peak
2	5925.000	49.39	2.58	51.97	68.20	-16.23	peak
3*	5937.600	51.64	2.50	54.14	68.20	-14.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5875 MHz		
Remark:			

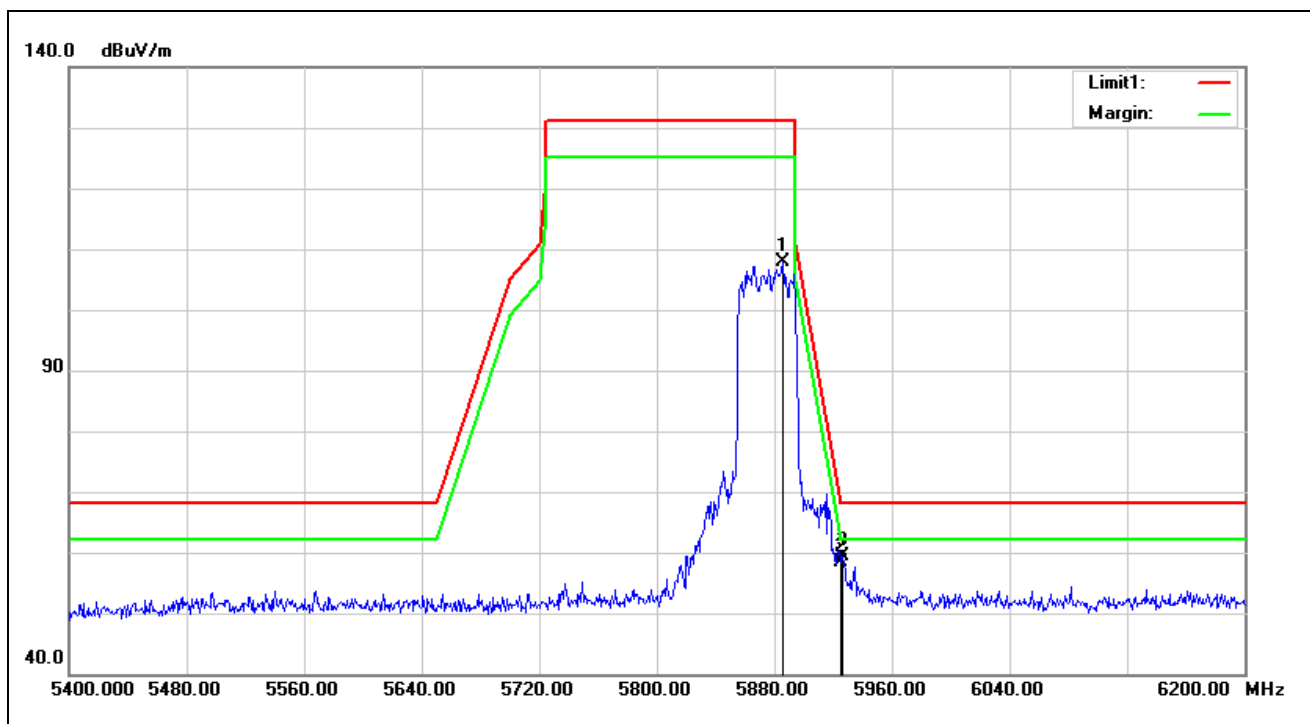


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5885.600	105.10	2.67	107.77	131.20	-23.43	peak
2	5925.000	55.83	2.58	58.41	68.20	-9.79	peak
3*	5926.400	56.81	2.57	59.38	68.20	-8.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5875 MHz		
Remark:			

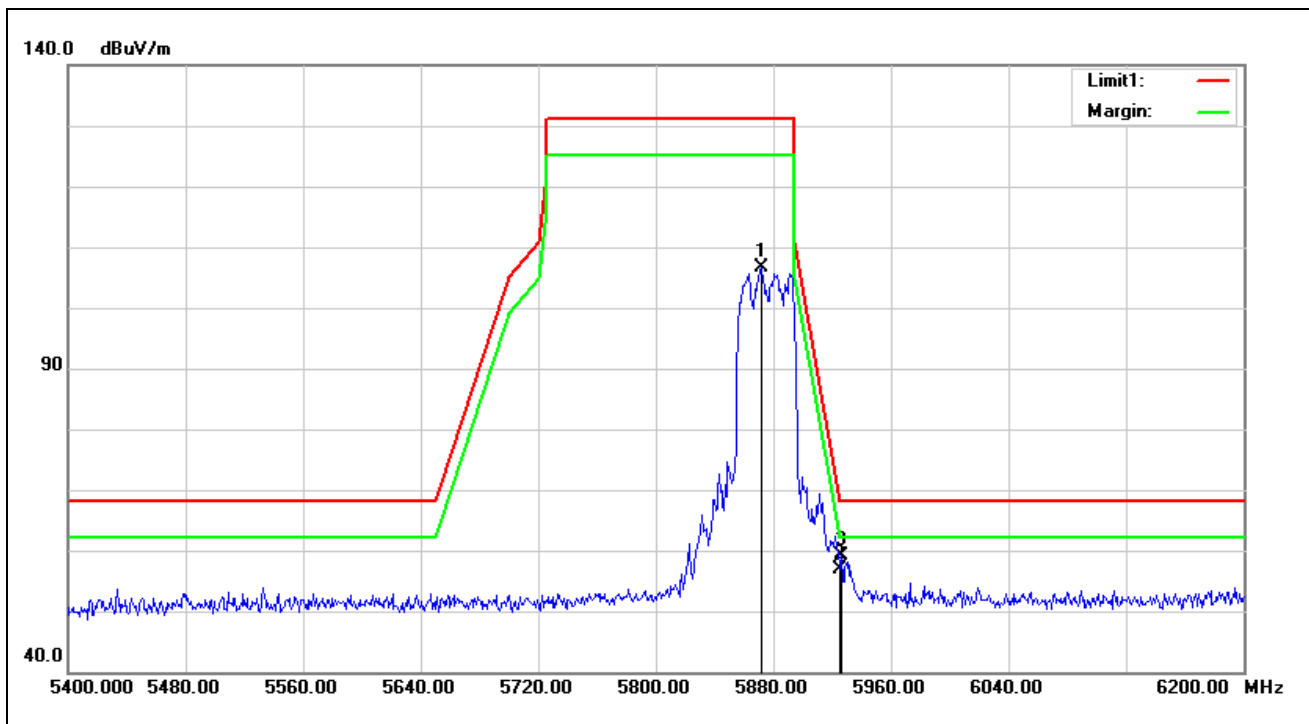


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5872.000	103.88	2.63	106.51	131.20	-24.69	peak
2	5925.000	54.39	2.58	56.97	68.20	-11.23	peak
3*	5926.400	56.48	2.57	59.05	68.20	-9.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5855 MHz		
Remark:			

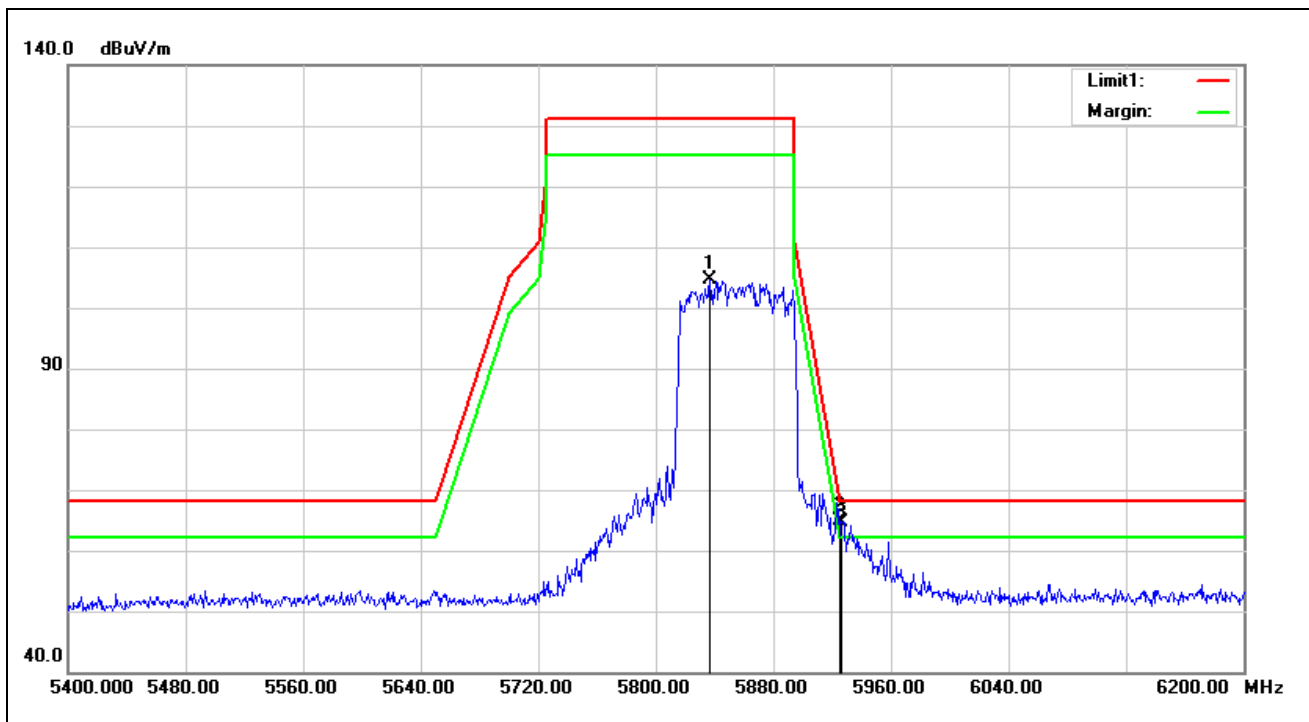


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5836.800	102.17	2.56	104.73	131.20	-26.47	peak
2*	5925.000	62.36	2.58	64.94	68.20	-3.26	peak
3!	5926.400	62.10	2.57	64.67	68.20	-3.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5855 MHz		
Remark:			

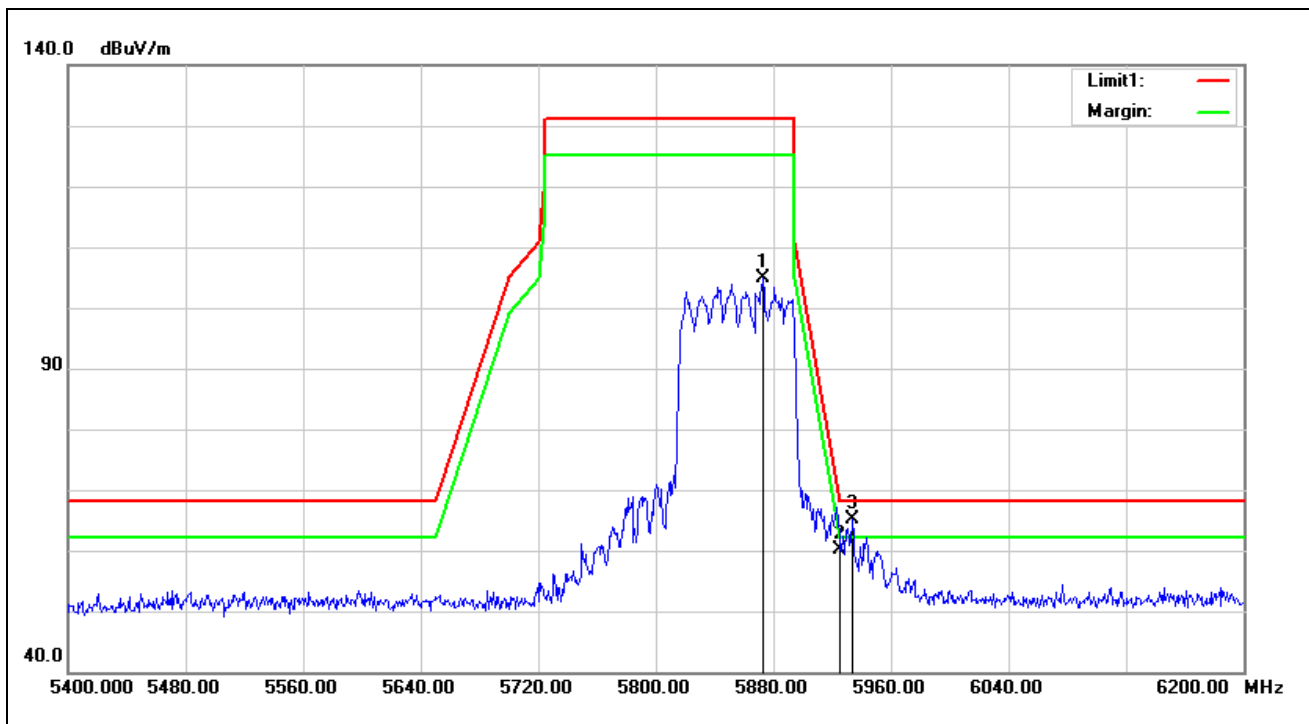

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5872.800	102.30	2.64	104.94	131.20	-26.26	peak
2	5925.000	57.51	2.58	60.09	68.20	-8.11	peak
3*	5933.600	62.66	2.53	65.19	68.20	-3.01	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

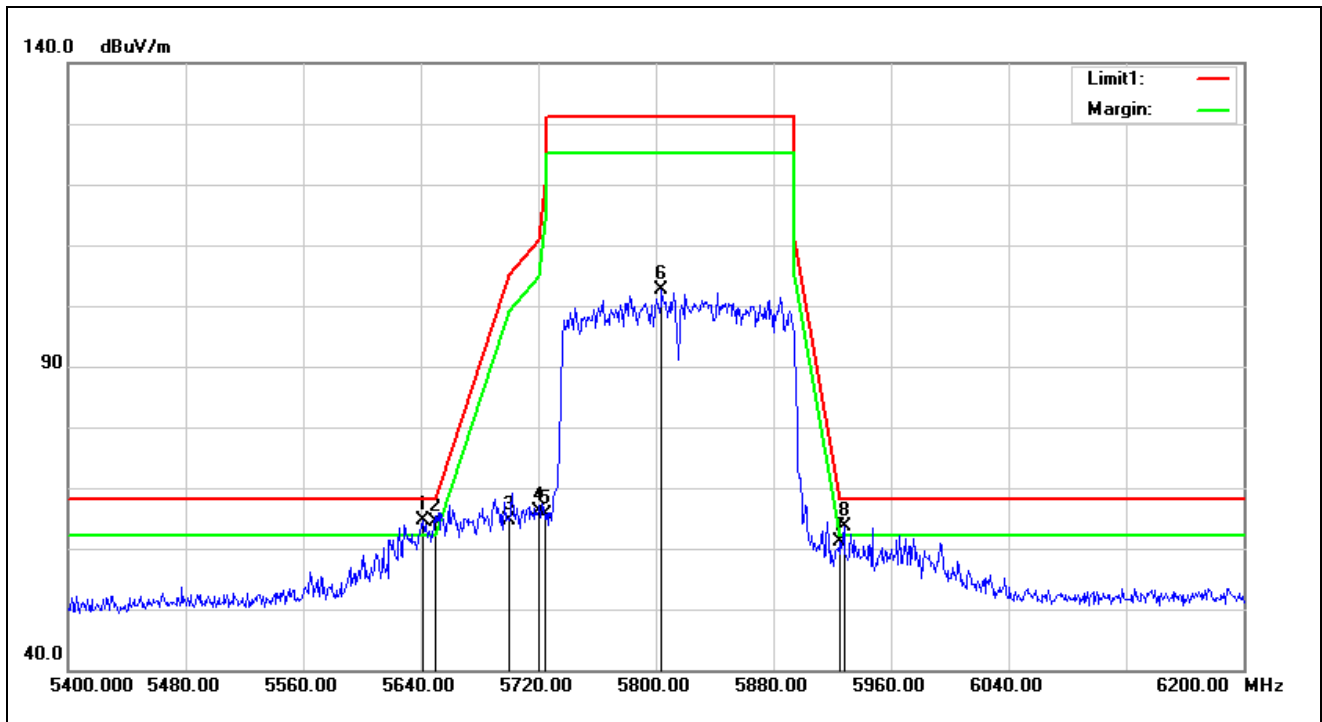

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5641.600	62.93	1.65	64.58	68.20	-3.62	peak
1!	5650.000	62.72	1.65	64.37	68.20	-3.83	peak
2	5700.000	63.02	1.58	64.60	105.20	-40.60	peak
3	5720.000	64.24	1.83	66.07	110.80	-44.73	peak
4	5725.000	63.85	1.89	65.74	122.20	-56.46	peak
5	5804.000	100.18	2.55	102.73	131.20	-28.47	peak
6	5925.000	58.47	2.58	61.05	68.20	-7.15	peak
7!	5928.000	61.13	2.56	63.69	68.20	-4.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

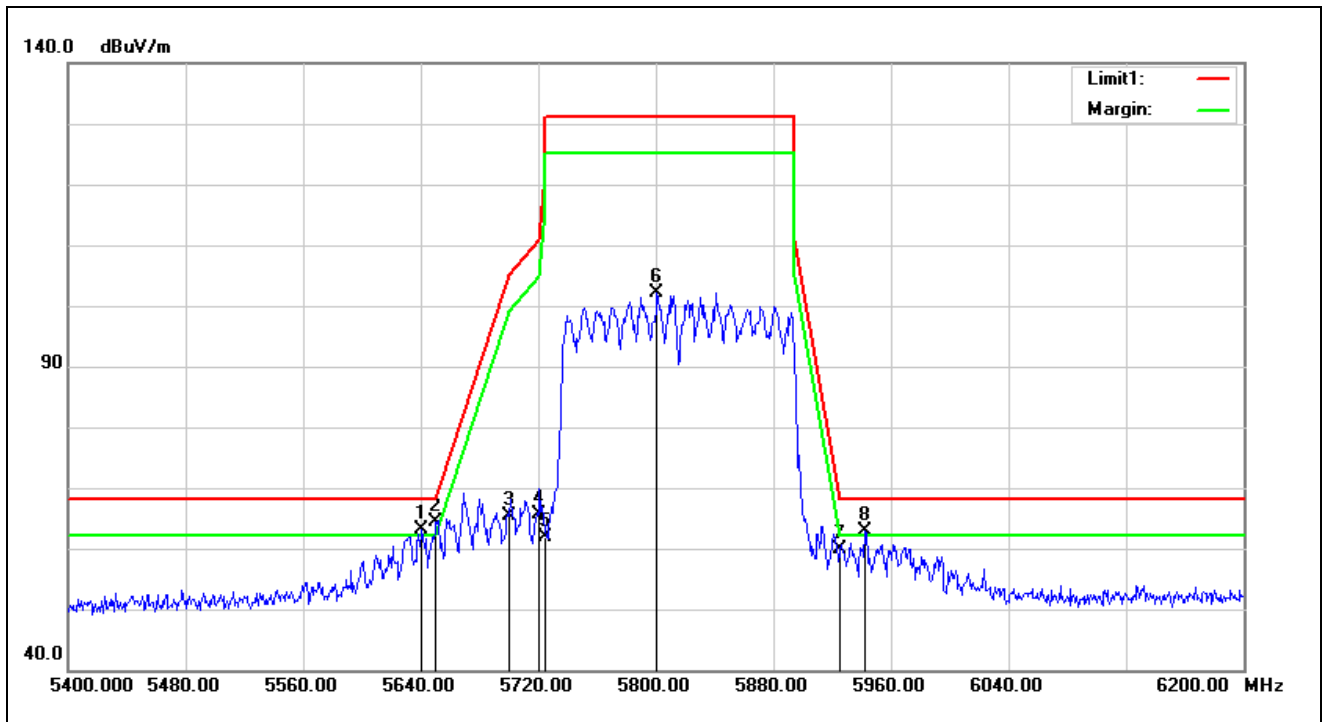


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0!	5640.800	61.42	1.64	63.06	68.20	-5.14	peak
1*	5650.000	62.77	1.65	64.42	68.20	-3.78	peak
2	5700.000	63.88	1.58	65.46	105.20	-39.74	peak
3	5720.000	63.86	1.83	65.69	110.80	-45.11	peak
4	5725.000	60.11	1.89	62.00	122.20	-60.20	peak
5	5800.800	99.67	2.55	102.22	131.20	-28.98	peak
6	5925.000	57.33	2.58	59.91	68.20	-8.29	peak
7!	5942.400	60.44	2.48	62.92	68.20	-5.28	peak


Average

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

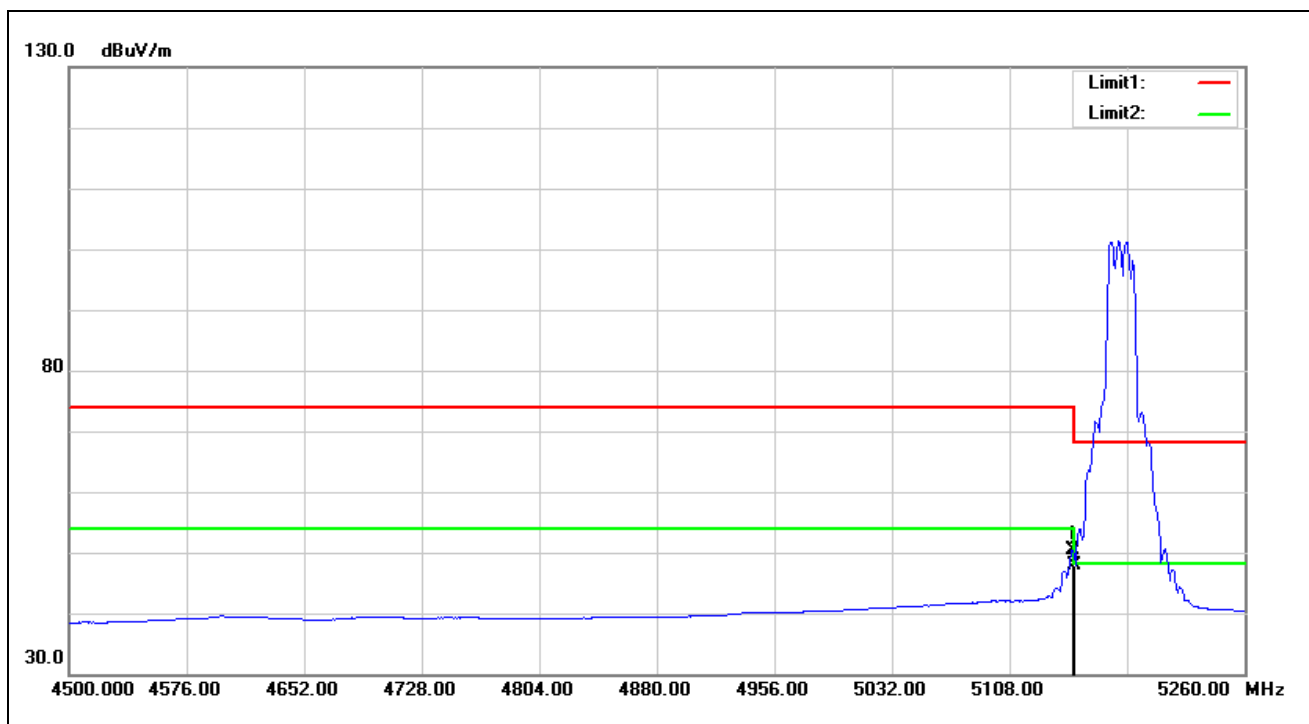


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5149.040	49.18	1.13	50.31	54.00	-3.69	AVG
2	5150.000	46.66	1.13	47.79	54.00	-6.21	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

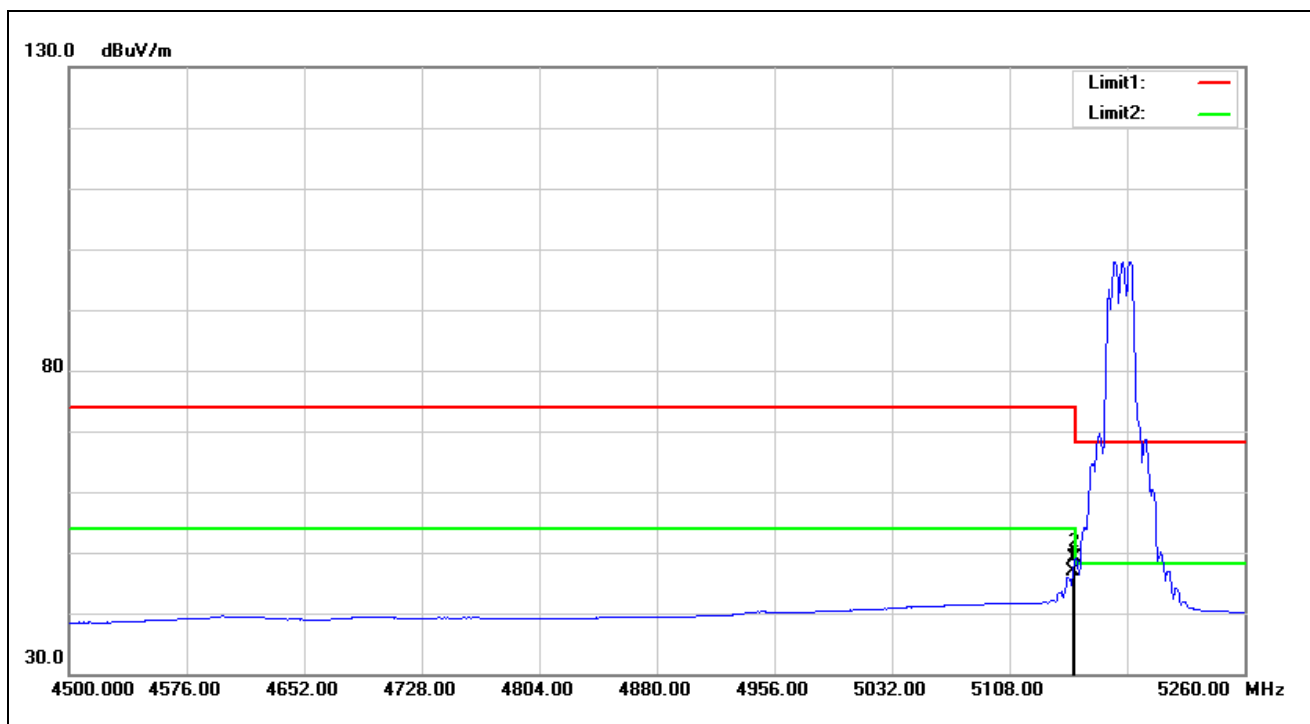


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	45.71	1.13	46.84	54.00	-7.16	AVG
2*	5150.000	48.06	1.13	49.19	54.00	-4.81	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

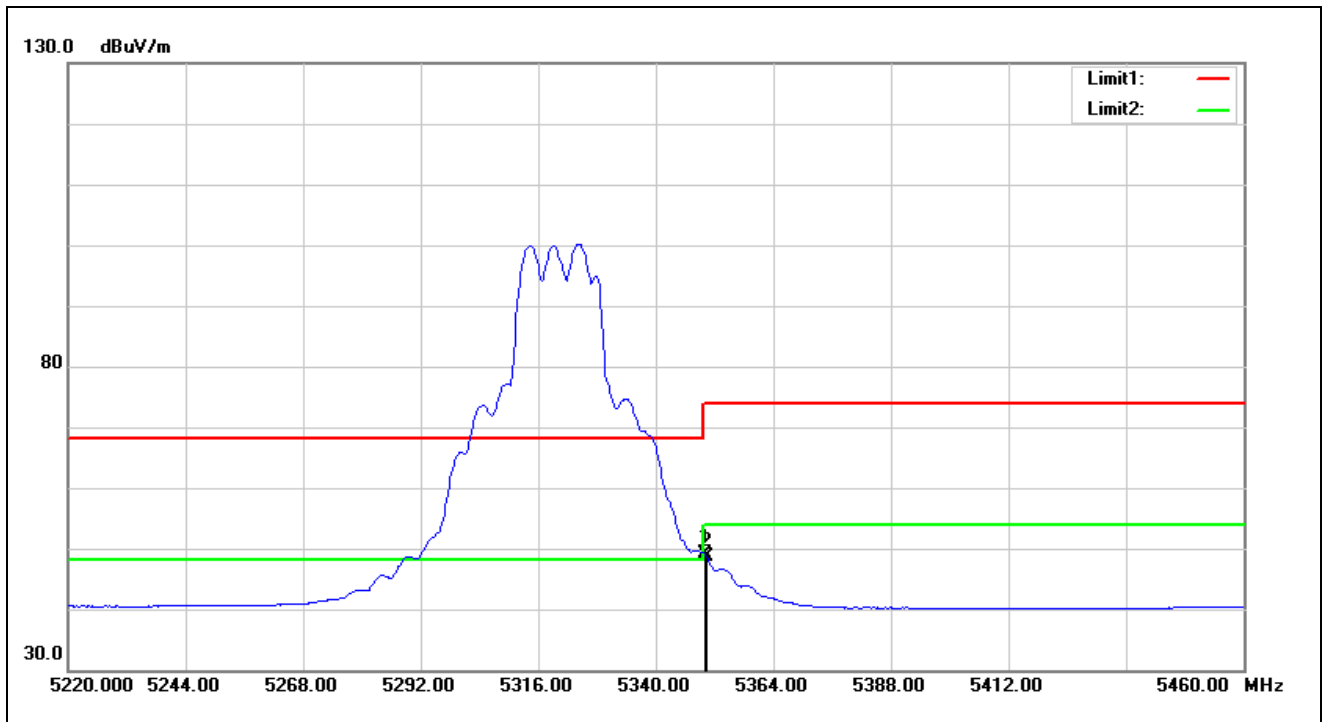


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	48.23	0.89	49.12	54.00	-4.88	AVG
2	5350.320	47.83	0.89	48.72	54.00	-5.28	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

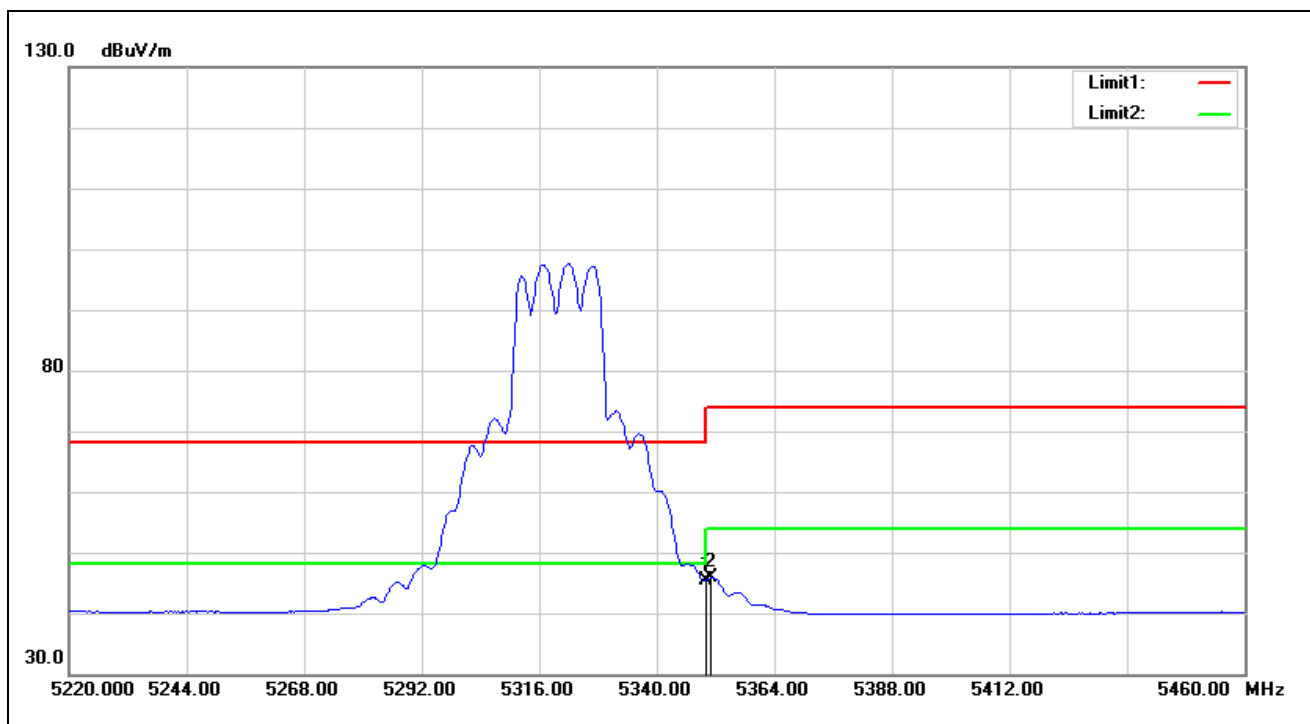


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	44.57	0.89	45.46	54.00	-8.54	AVG
2*	5351.040	44.96	0.90	45.86	54.00	-8.14	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

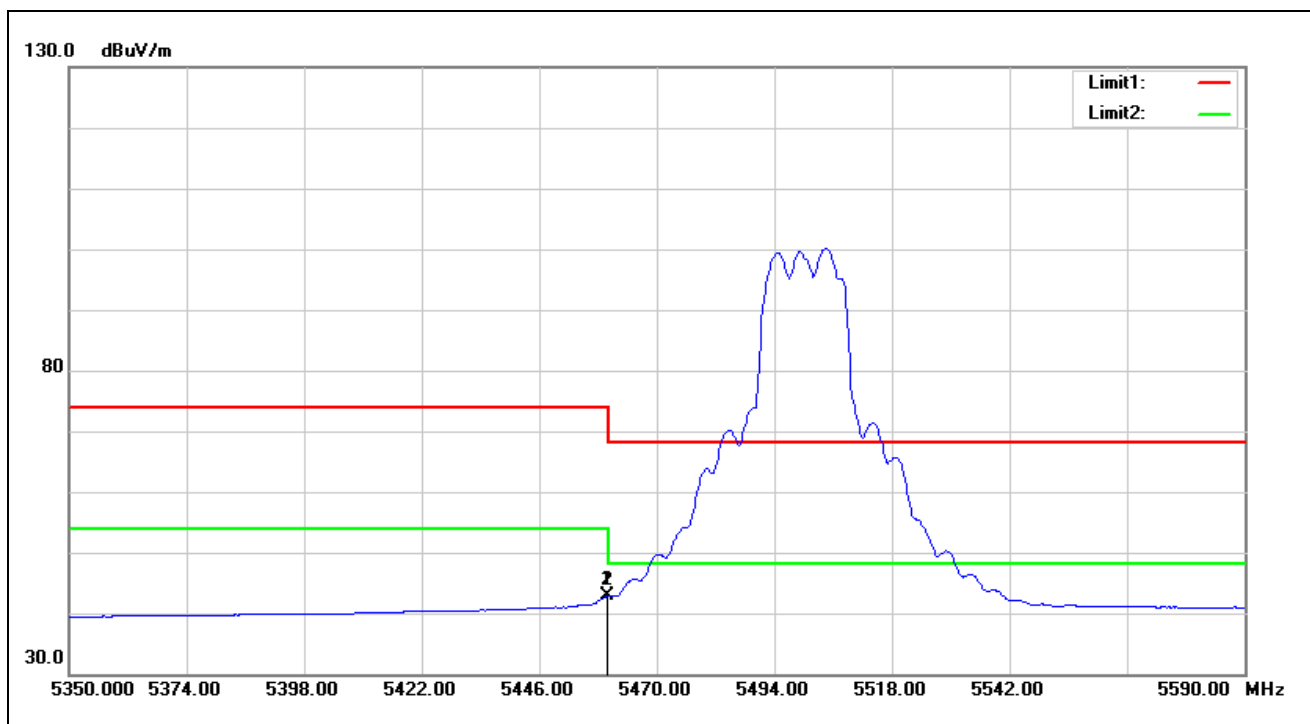


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.920	41.14	1.79	42.93	54.00	-11.07	AVG
2*	5460.000	41.15	1.79	42.94	54.00	-11.06	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

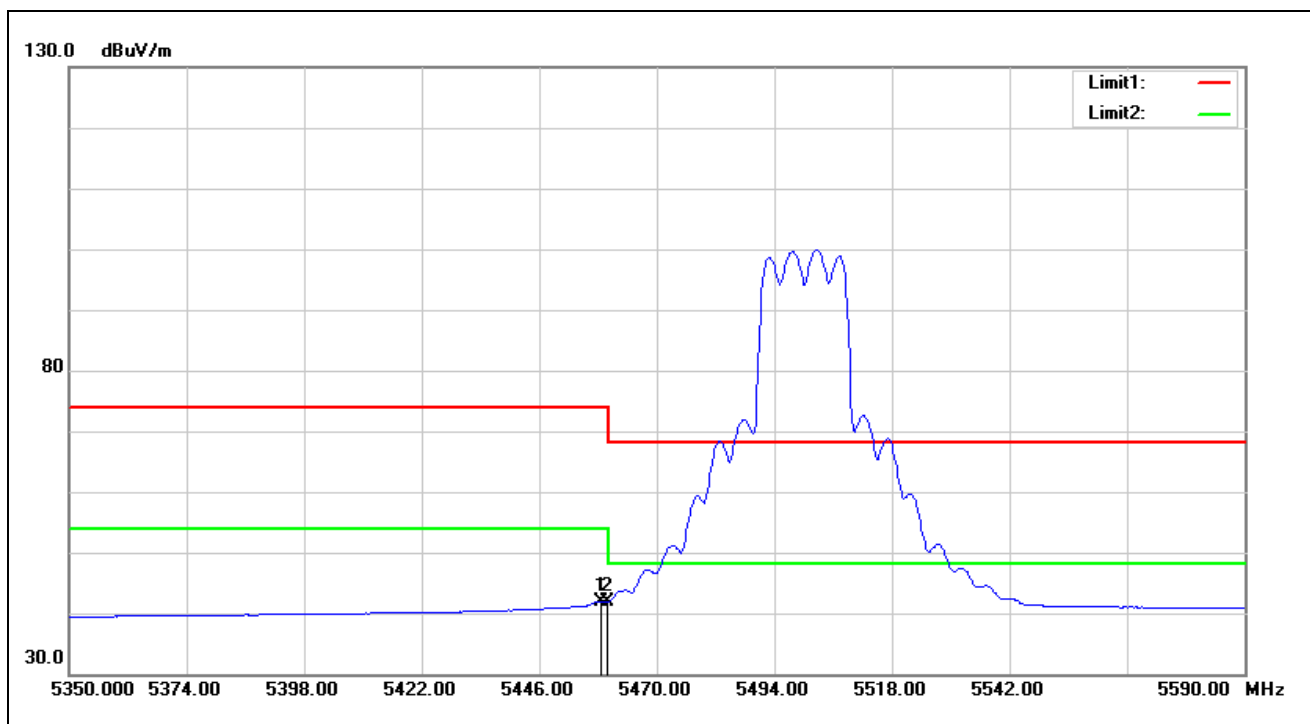


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.480	40.20	1.79	41.99	54.00	-12.01	AVG
2	5460.000	40.13	1.79	41.92	54.00	-12.08	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			

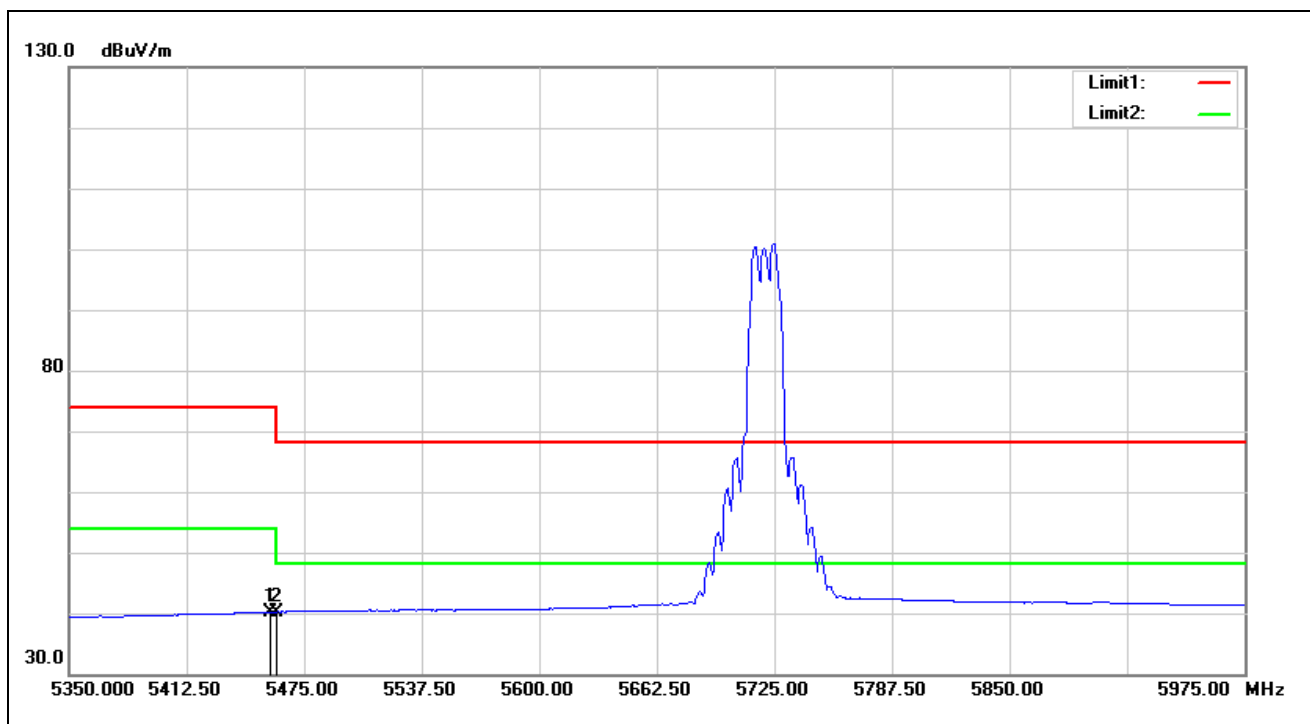


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.875	38.47	1.77	40.24	54.00	-13.76	AVG
2	5460.000	38.43	1.79	40.22	54.00	-13.78	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5720 MHz		
Remark:			

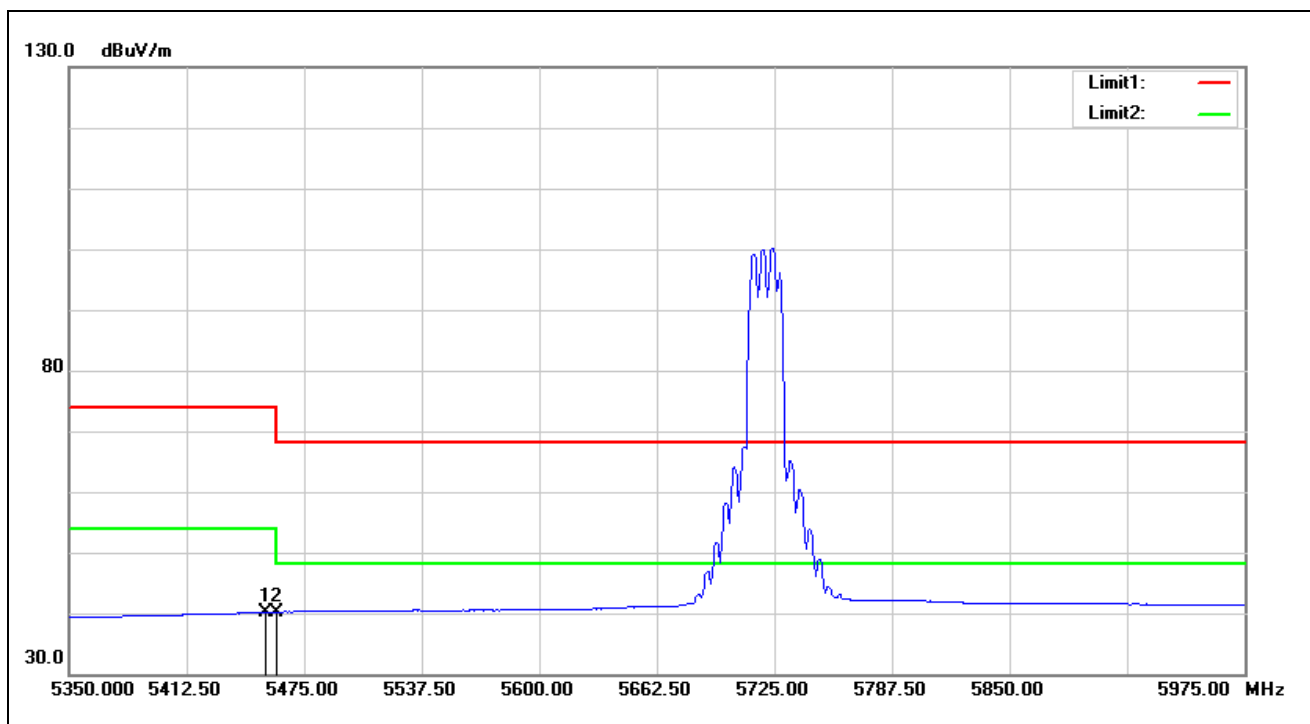


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.375	38.45	1.77	40.22	54.00	-13.78	AVG
2*	5460.000	38.44	1.79	40.23	54.00	-13.77	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

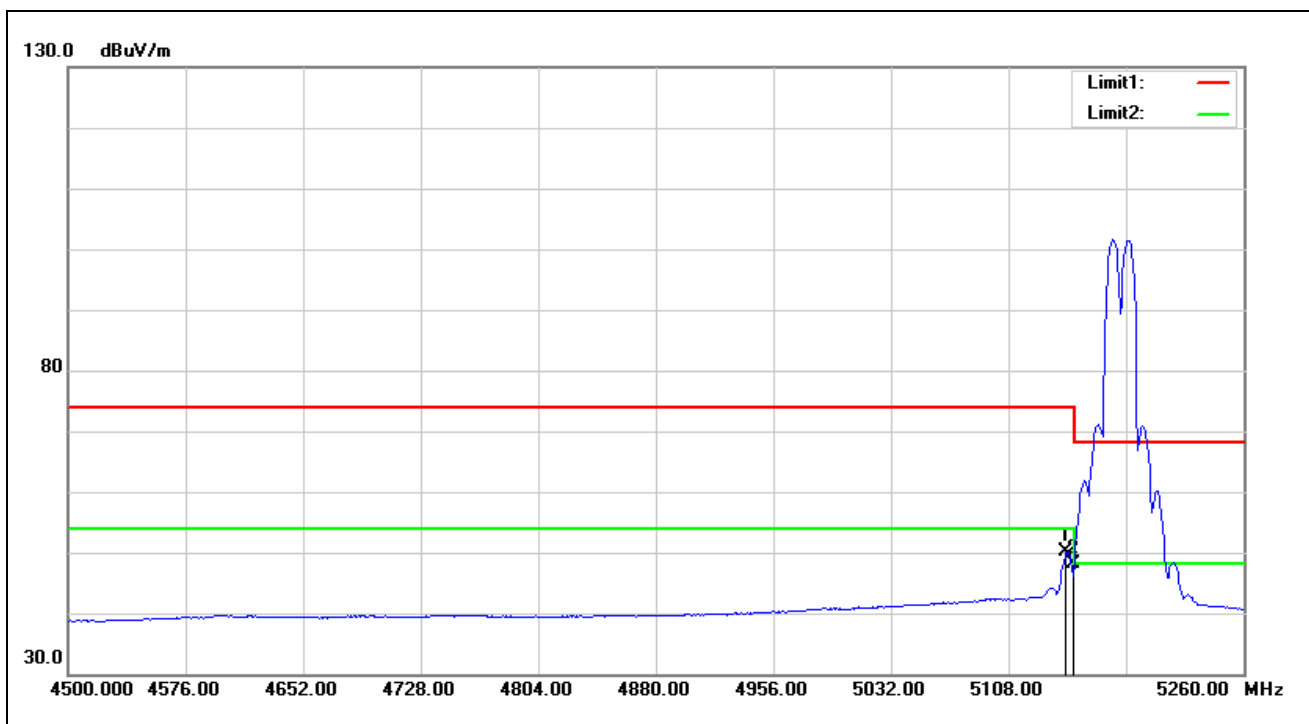


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5145.240	49.04	1.13	50.17	54.00	-3.83	AVG
2	5150.000	46.91	1.13	48.04	54.00	-5.96	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

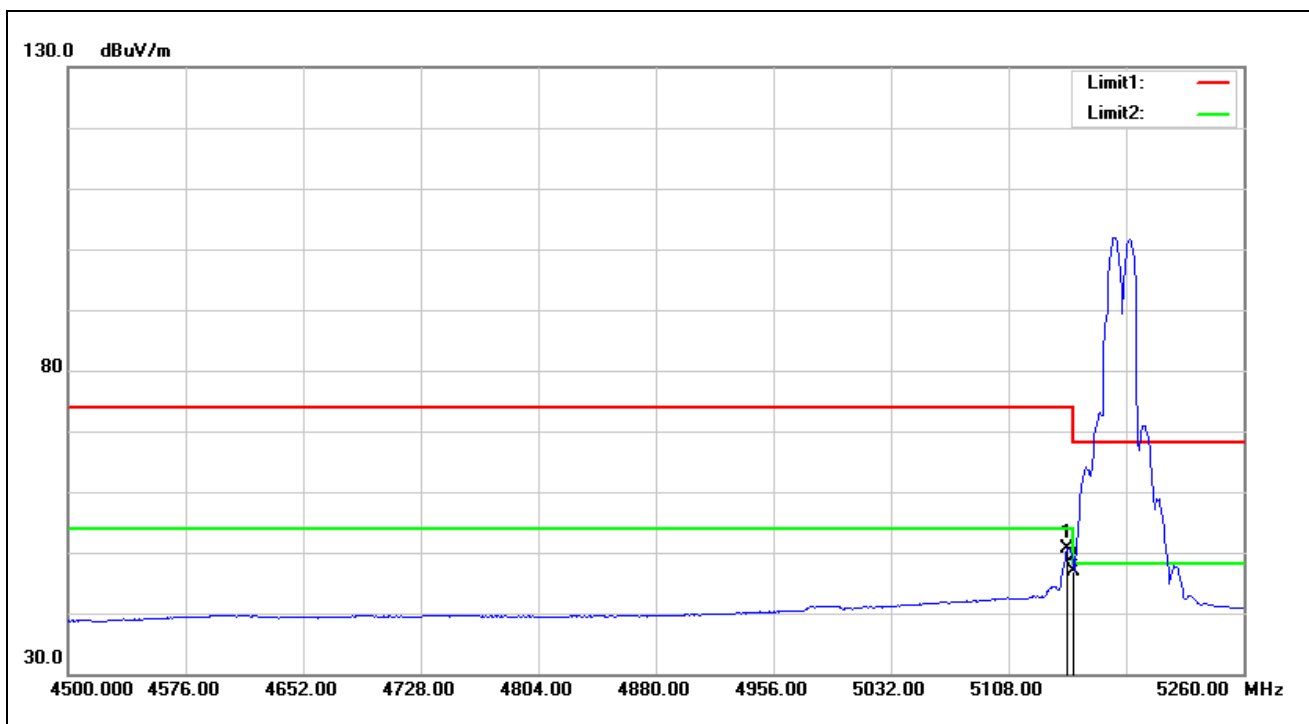


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5146.000	49.48	1.13	50.61	54.00	-3.39	AVG
2	5150.000	45.66	1.13	46.79	54.00	-7.21	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

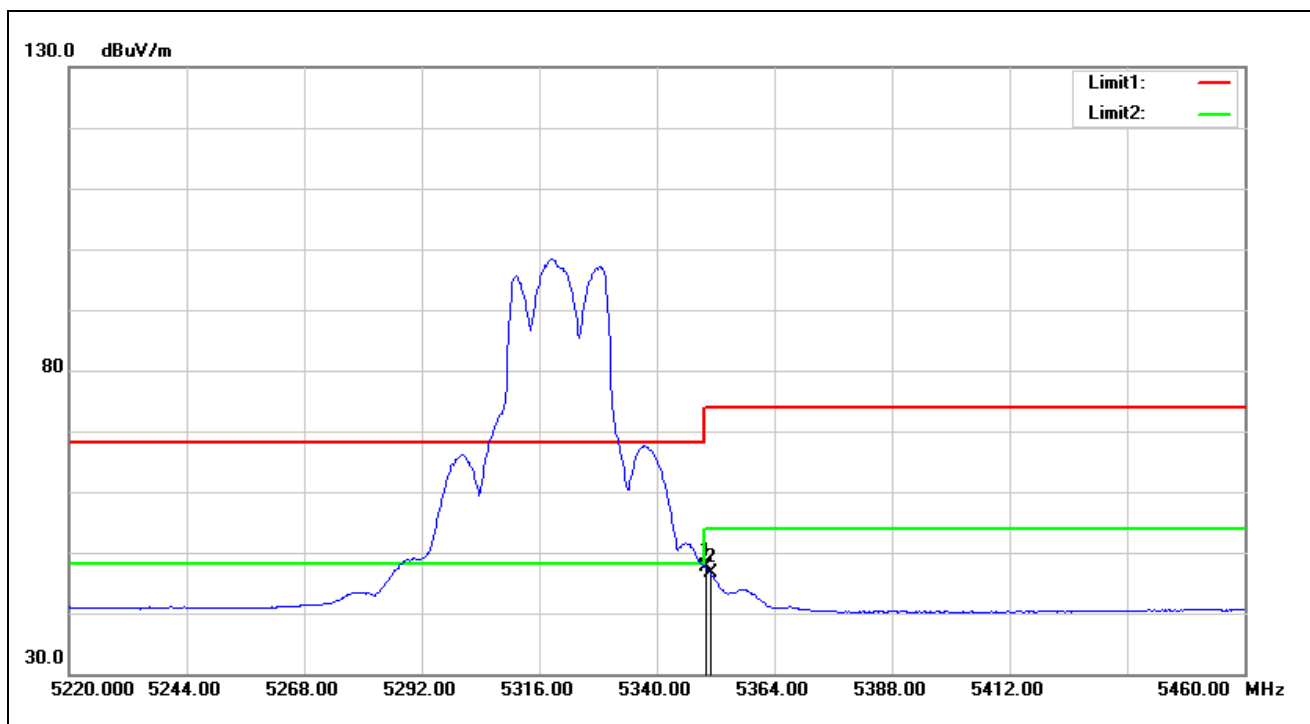


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	46.63	0.89	47.52	54.00	-6.48	AVG
2	5351.040	45.64	0.90	46.54	54.00	-7.46	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

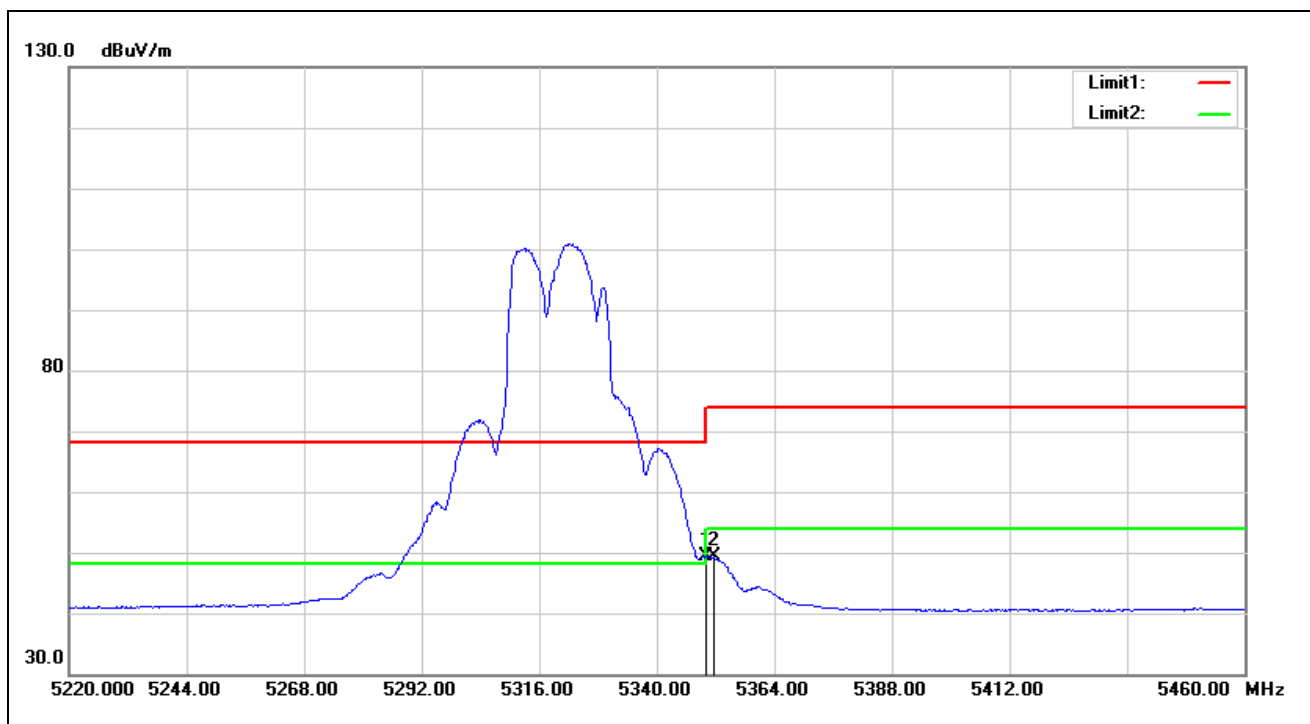


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	48.60	0.89	49.49	54.00	-4.51	AVG
2	5351.760	48.38	0.90	49.28	54.00	-4.72	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

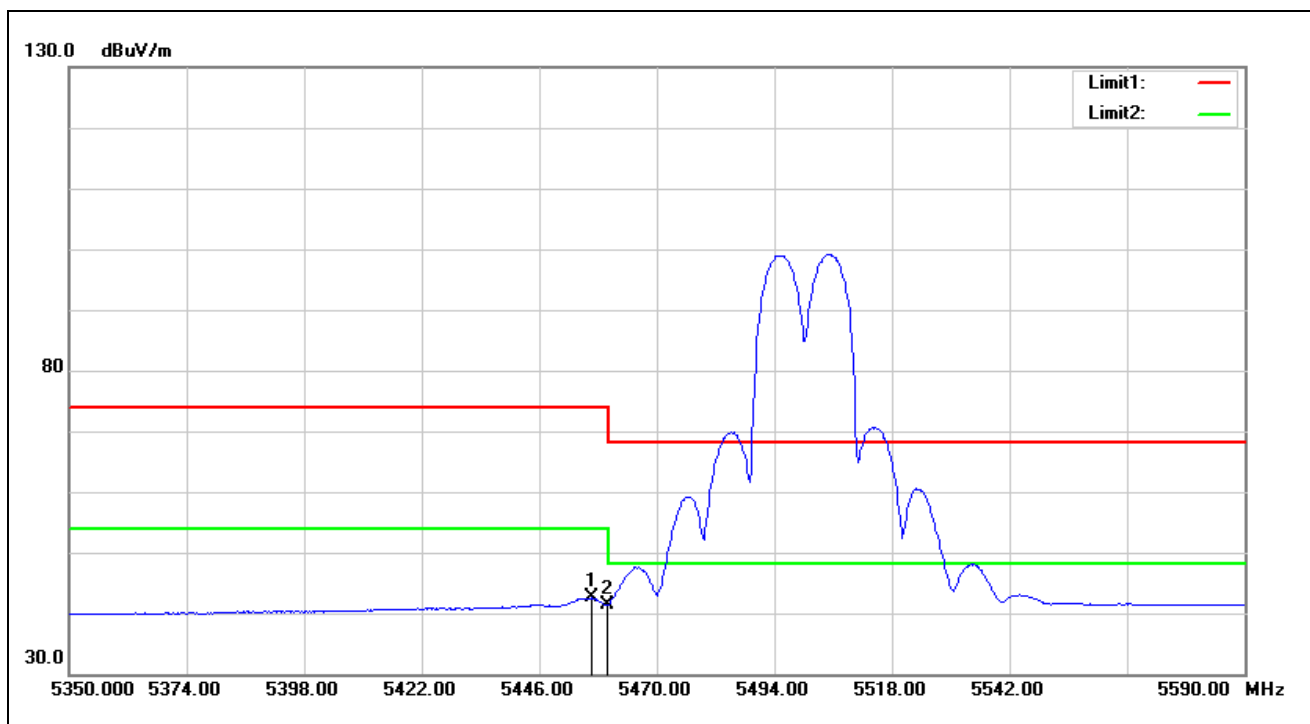


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.800	40.80	1.77	42.57	54.00	-11.43	AVG
2	5460.000	39.71	1.79	41.50	54.00	-12.50	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

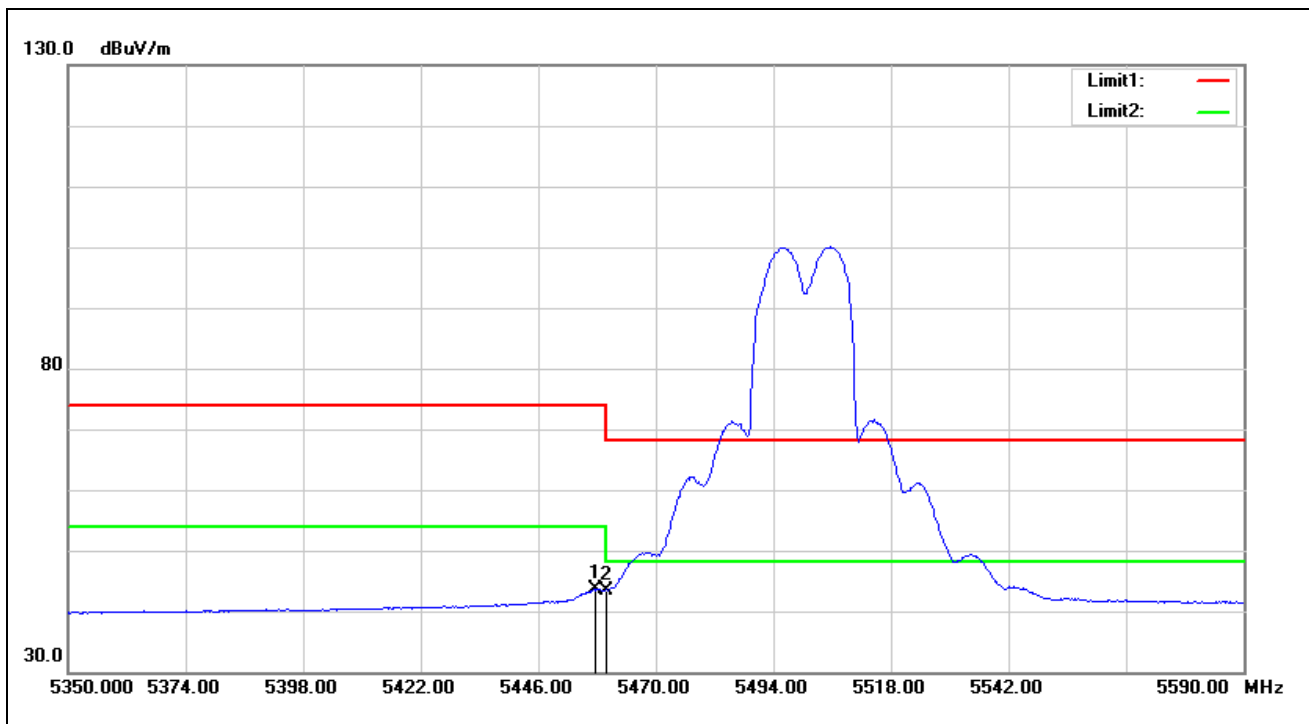


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5457.520	41.80	1.77	43.57	54.00	-10.43	AVG
2	5460.000	41.66	1.79	43.45	54.00	-10.55	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

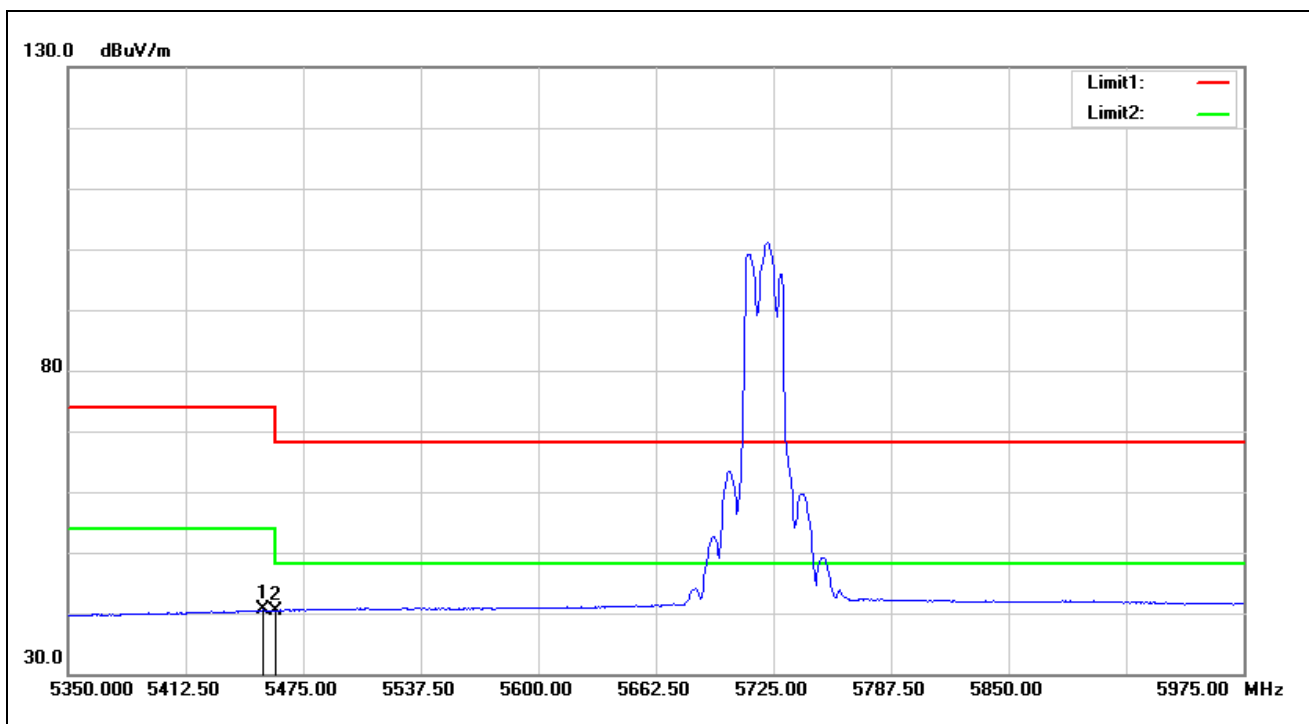


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5453.750	38.76	1.77	40.53	54.00	-13.47	AVG
2	5460.000	38.70	1.79	40.49	54.00	-13.51	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

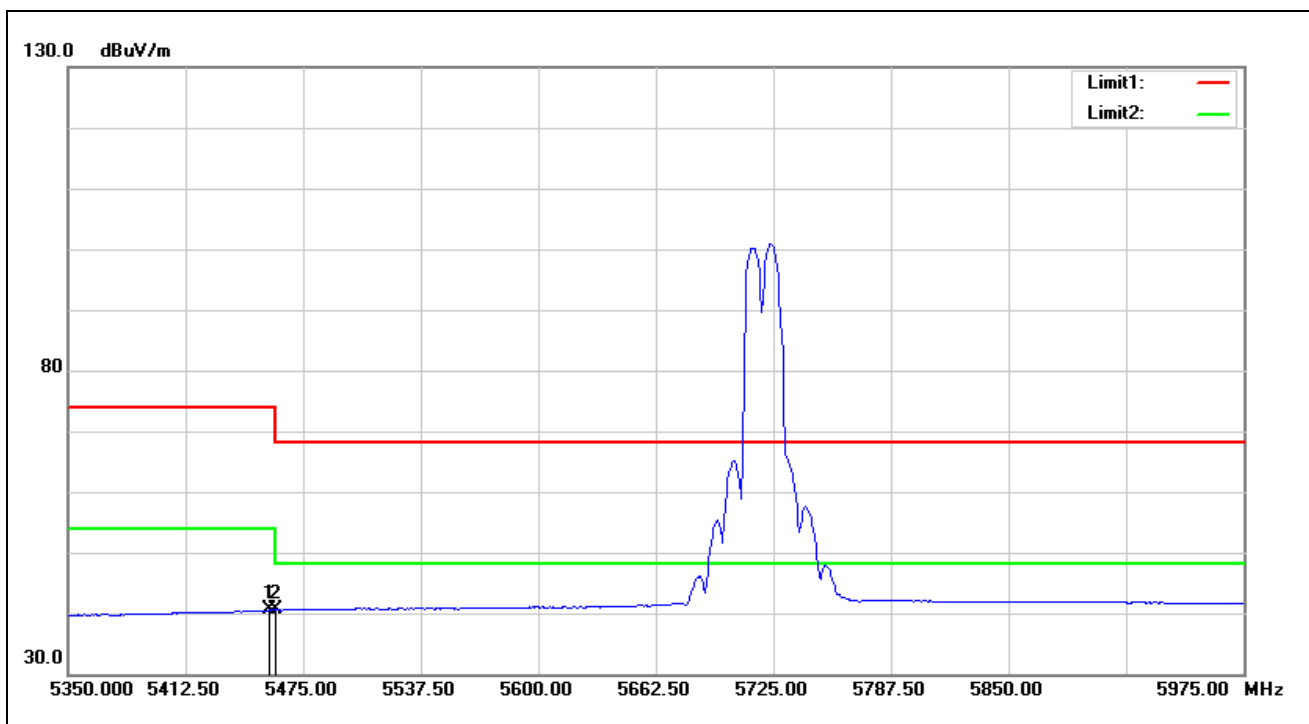


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.875	38.76	1.77	40.53	54.00	-13.47	AVG
2	5460.000	38.72	1.79	40.51	54.00	-13.49	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

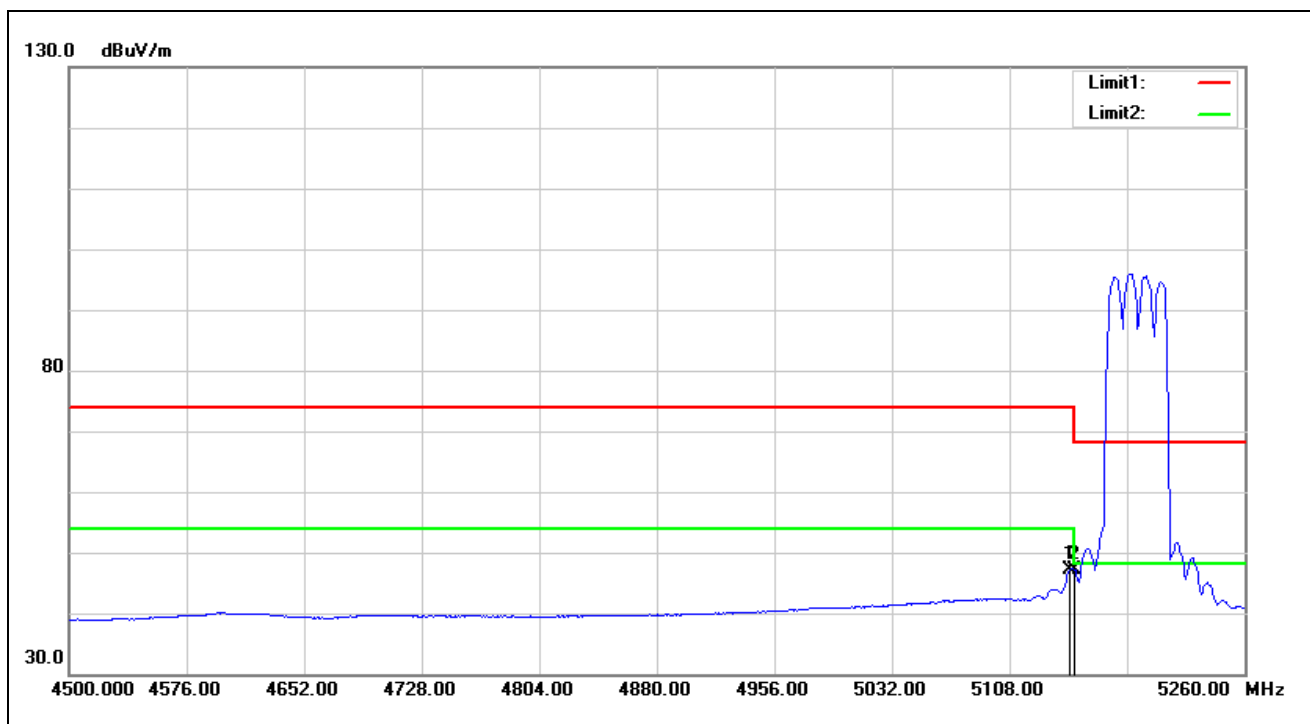


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5146.760	46.07	1.13	47.20	54.00	-6.80	AVG
2	5150.000	45.92	1.13	47.05	54.00	-6.95	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

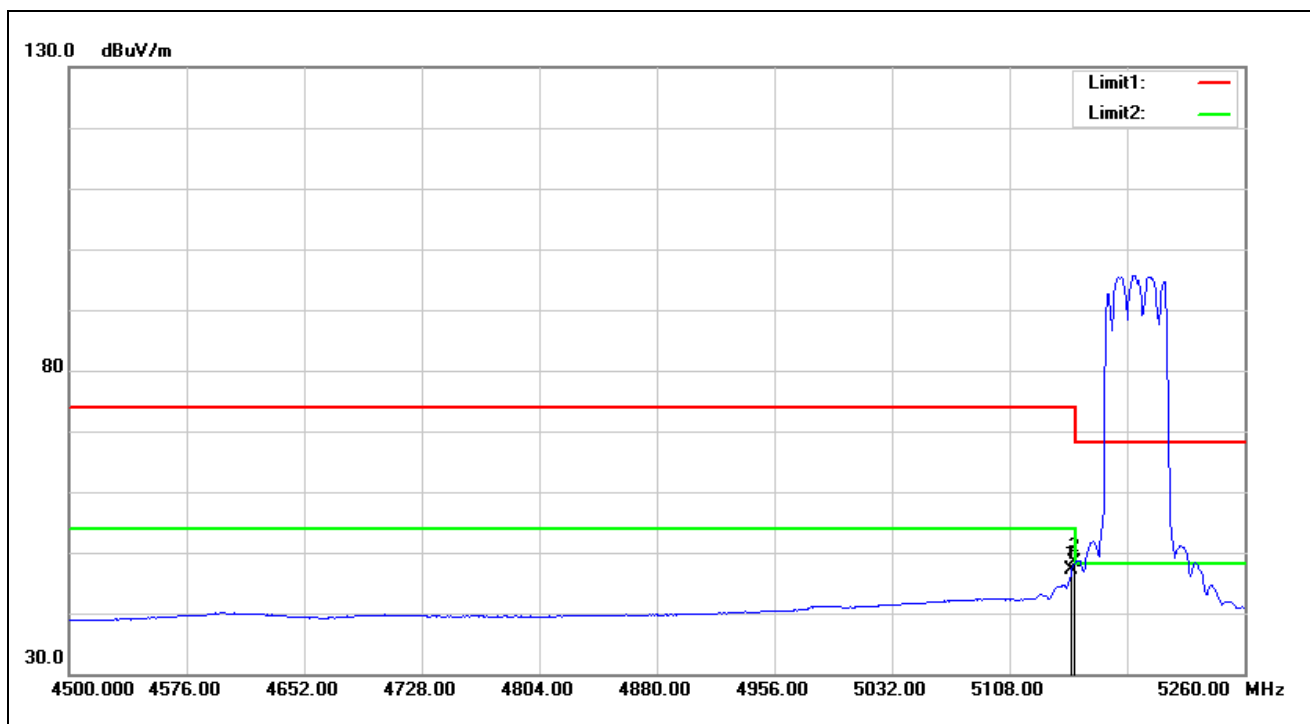


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	46.11	1.13	47.24	54.00	-6.76	AVG
2*	5150.000	47.21	1.13	48.34	54.00	-5.66	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

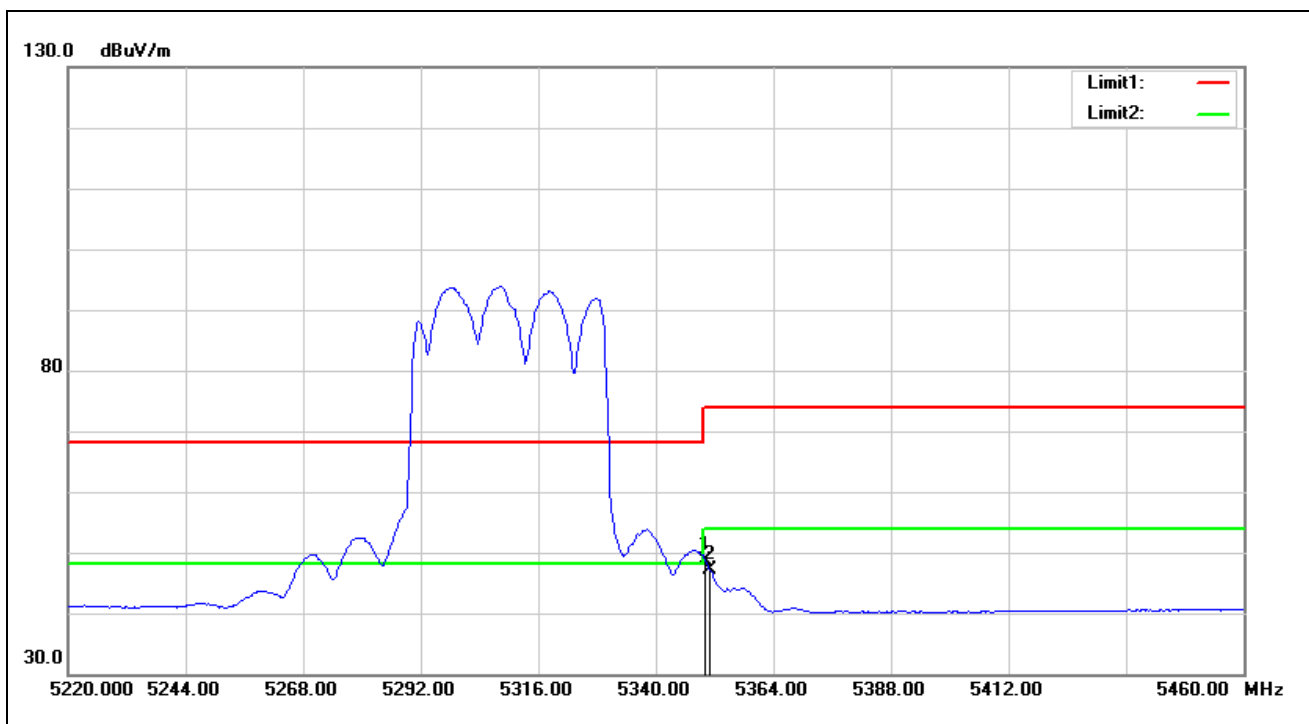


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	47.78	0.89	48.67	54.00	-5.33	AVG
2	5351.040	46.23	0.90	47.13	54.00	-6.87	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

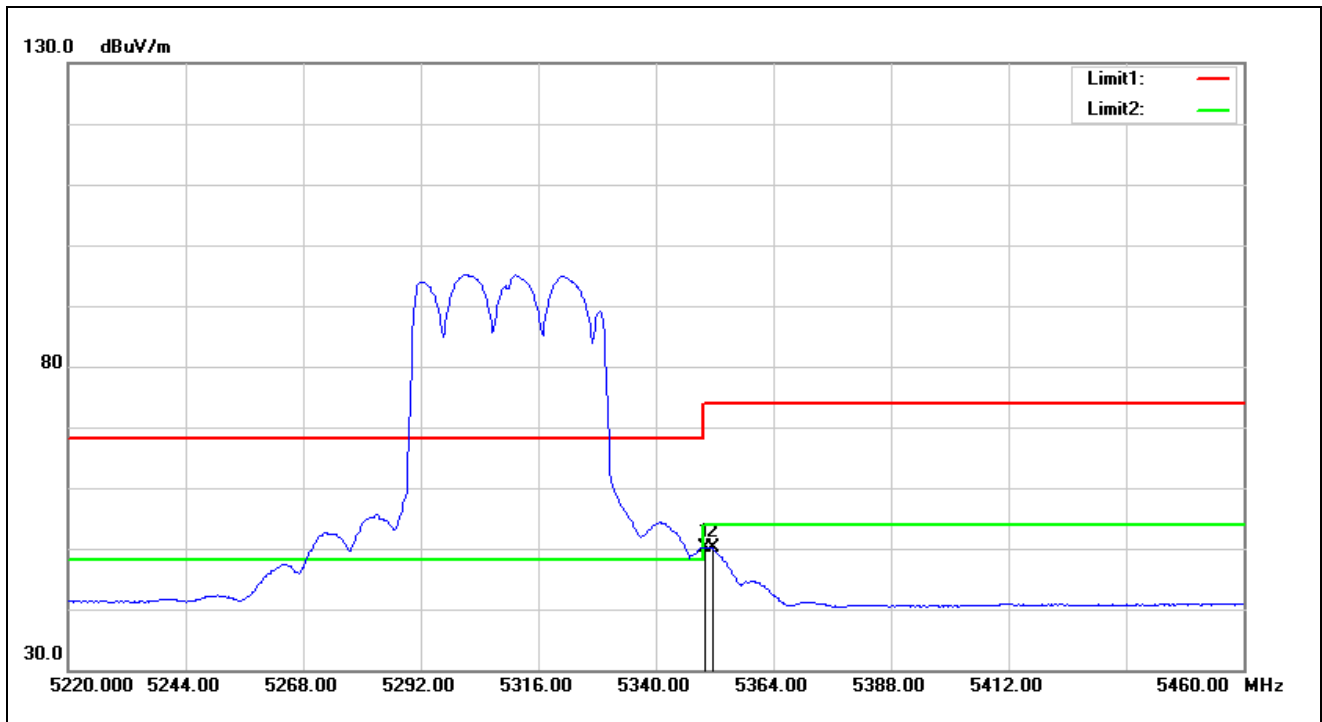


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	49.31	0.89	50.20	54.00	-3.80	AVG
2	5351.520	49.24	0.90	50.14	54.00	-3.86	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

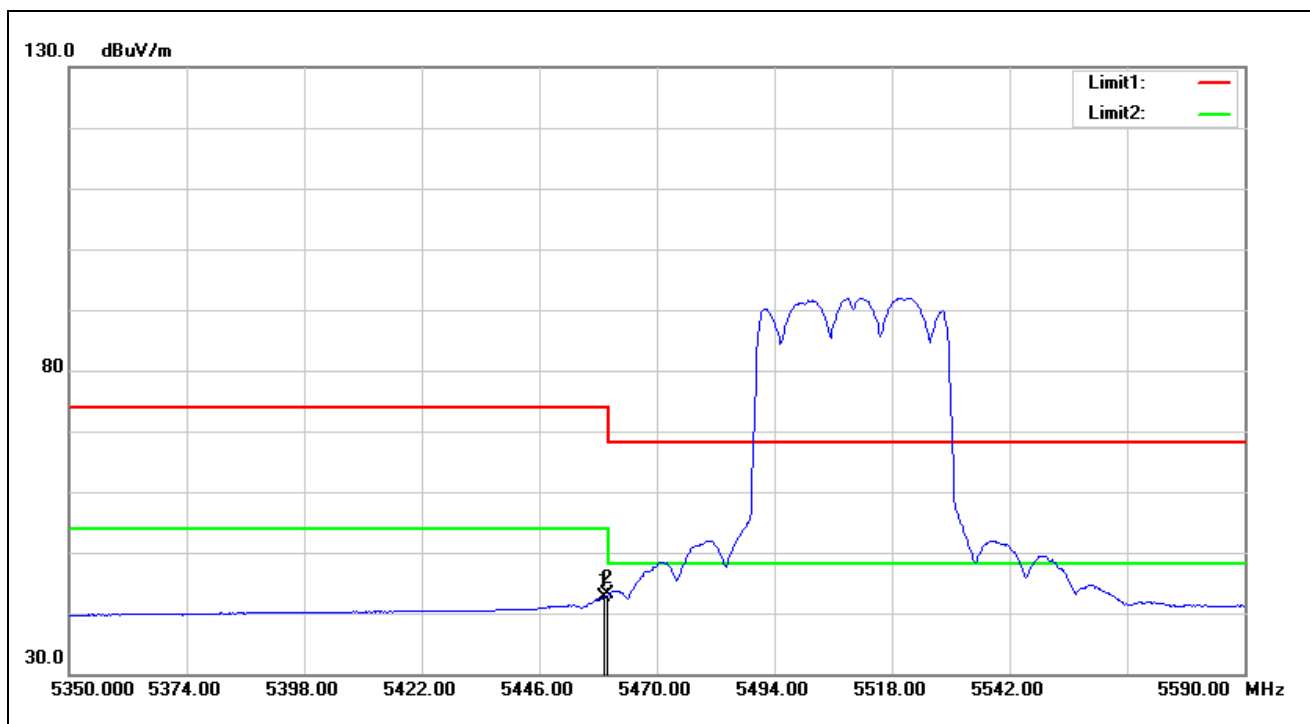


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.200	40.74	1.79	42.53	54.00	-11.47	AVG
2*	5460.000	41.39	1.79	43.18	54.00	-10.82	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

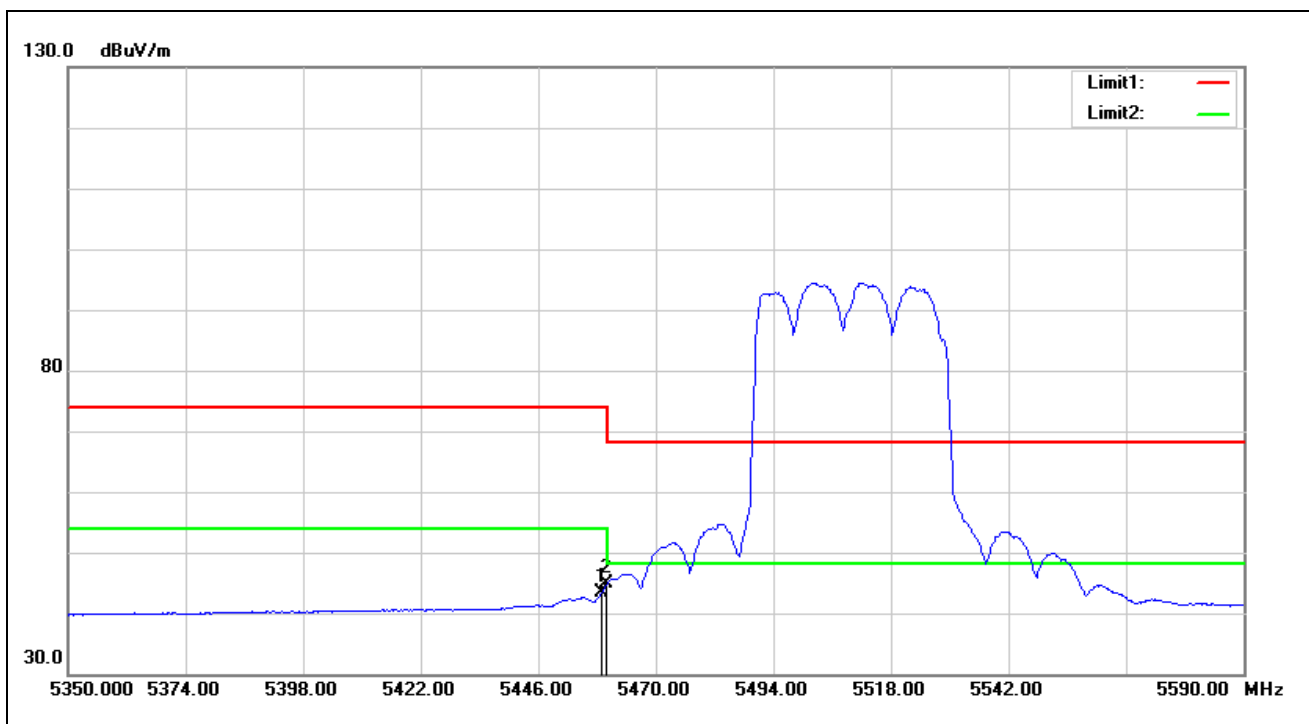


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.960	41.64	1.79	43.43	54.00	-10.57	AVG
2*	5460.000	43.11	1.79	44.90	54.00	-9.10	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

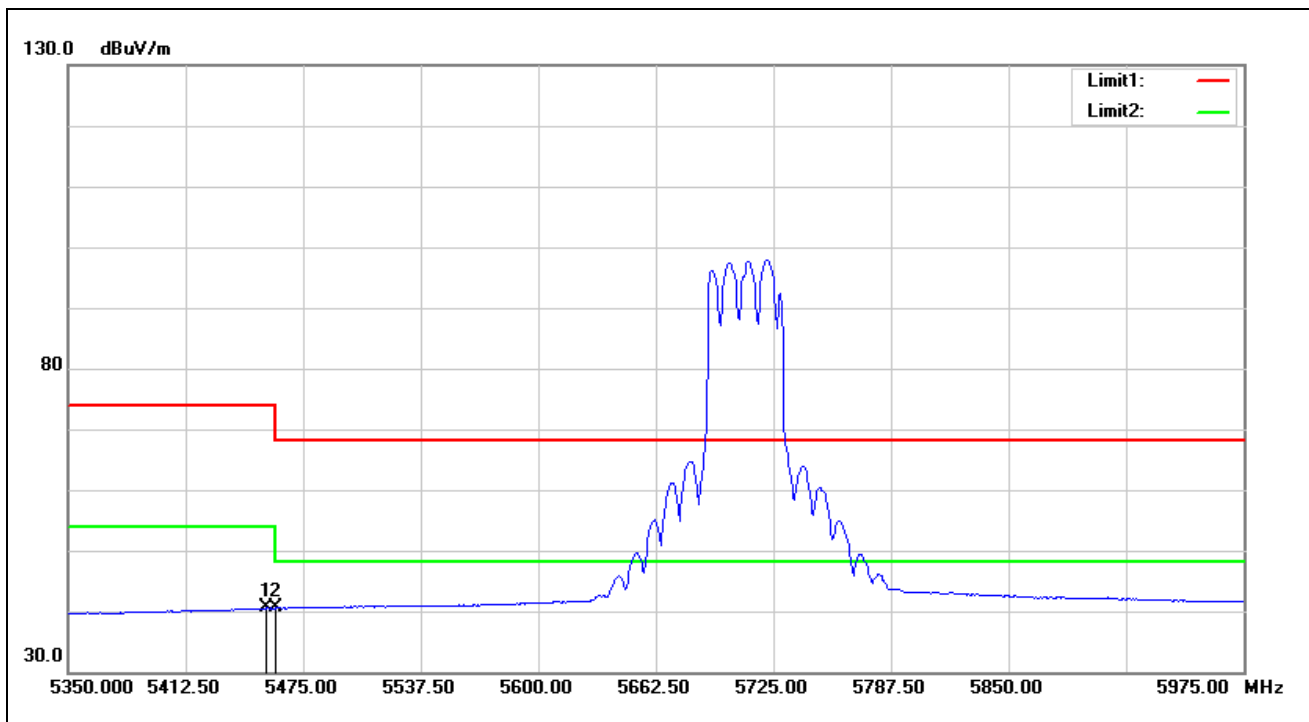


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5455.000	38.77	1.77	40.54	54.00	-13.46	AVG
2	5460.000	38.74	1.79	40.53	54.00	-13.47	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

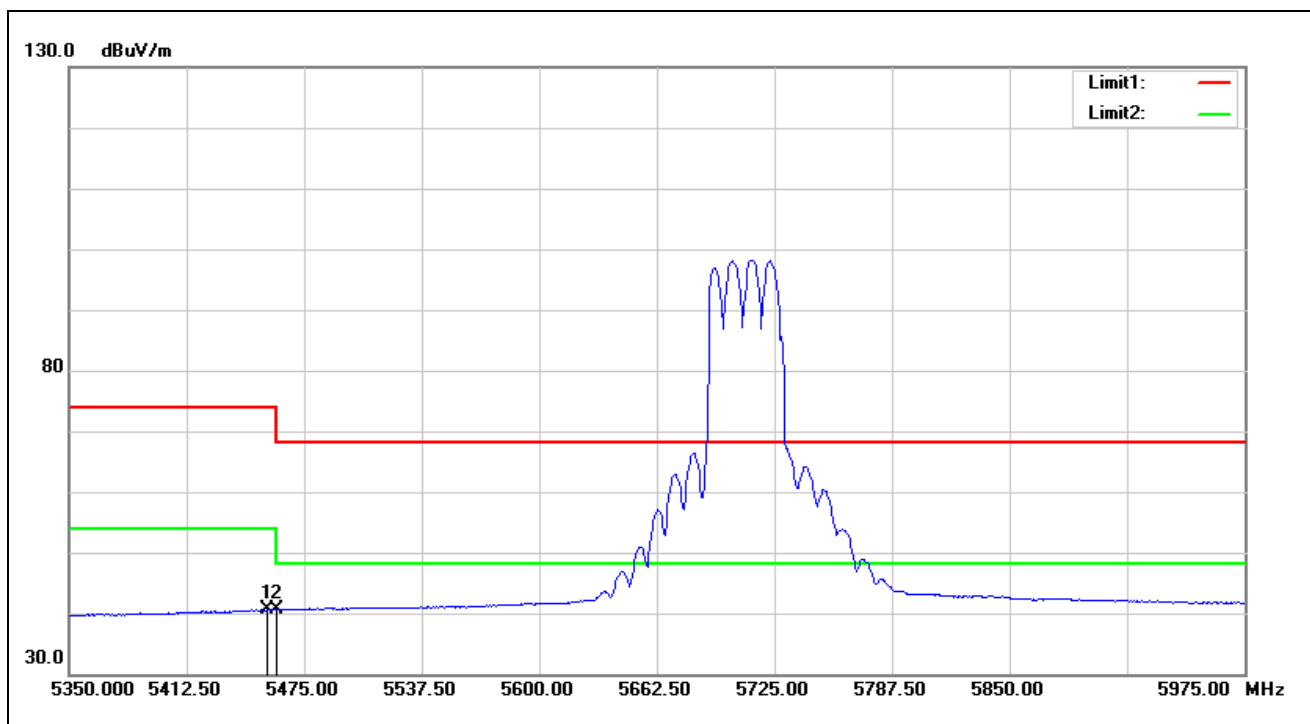


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5455.625	38.80	1.77	40.57	54.00	-13.43	AVG
2	5460.000	38.72	1.79	40.51	54.00	-13.49	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

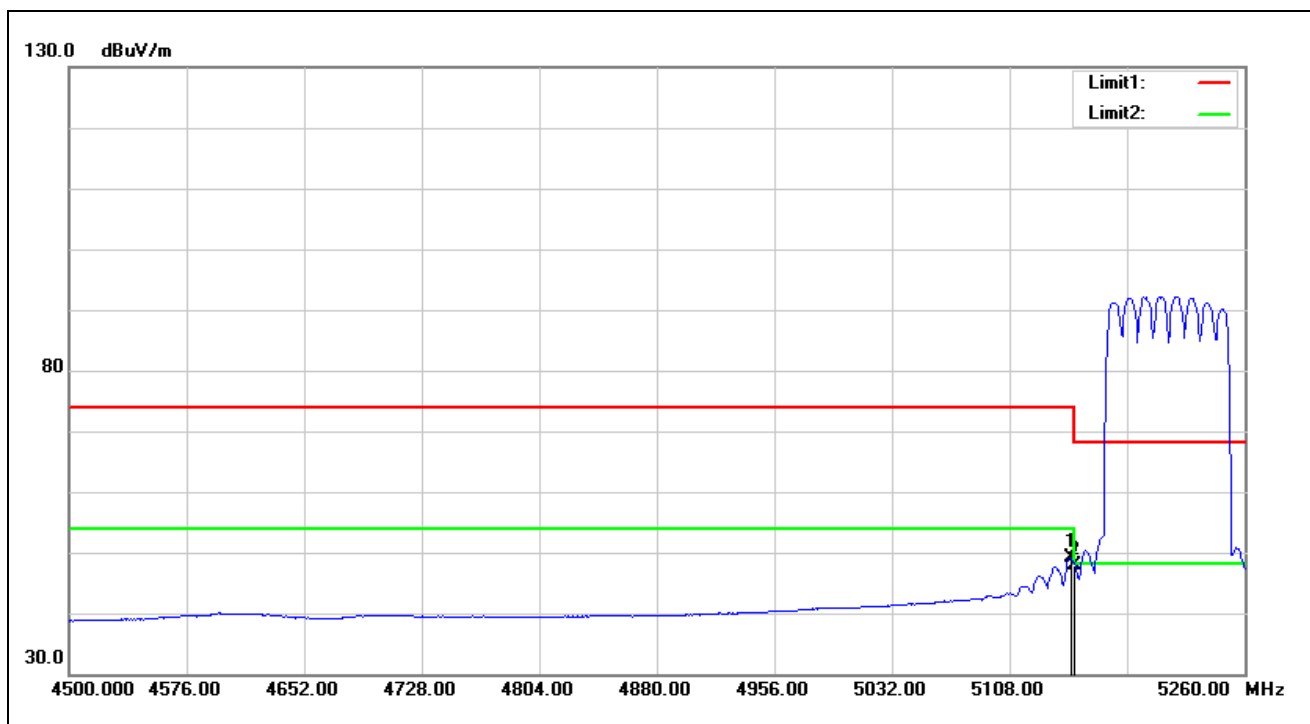


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5147.520	48.05	1.12	49.17	54.00	-4.83	AVG
2	5150.000	46.81	1.13	47.94	54.00	-6.06	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

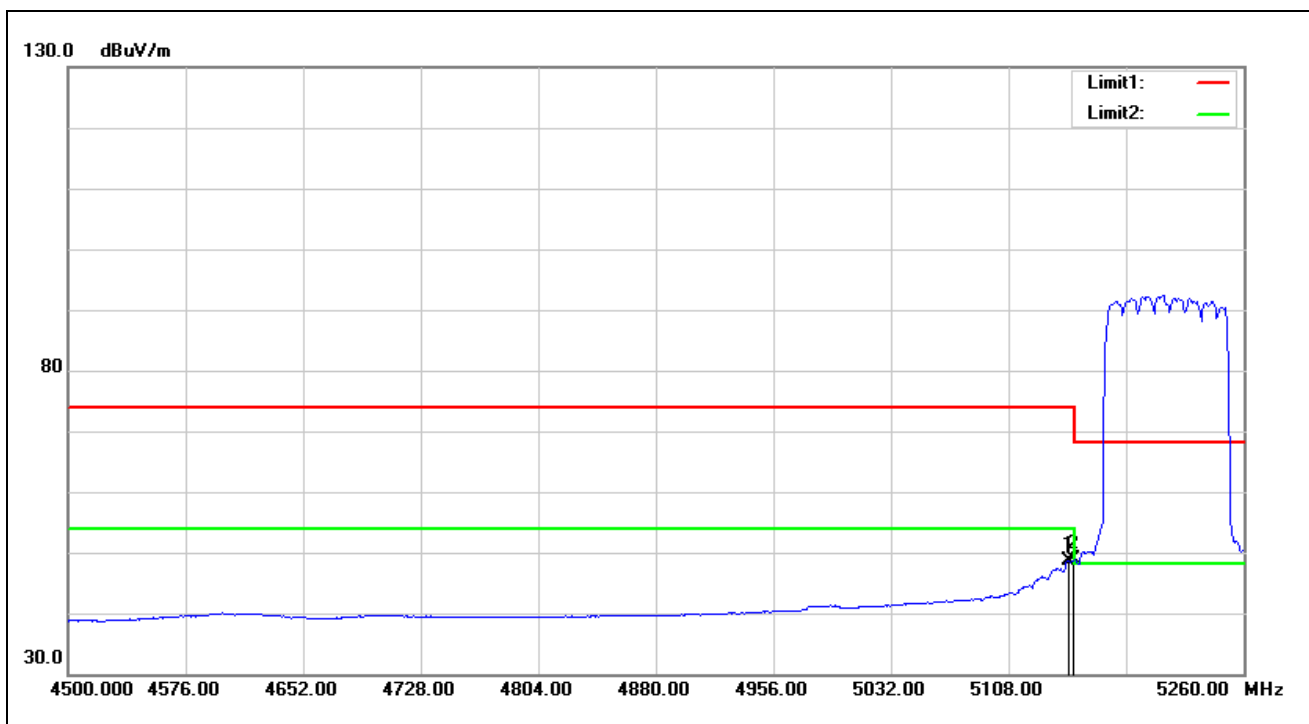


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	47.58	1.13	48.71	54.00	-5.29	AVG
2*	5150.000	47.65	1.13	48.78	54.00	-5.22	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

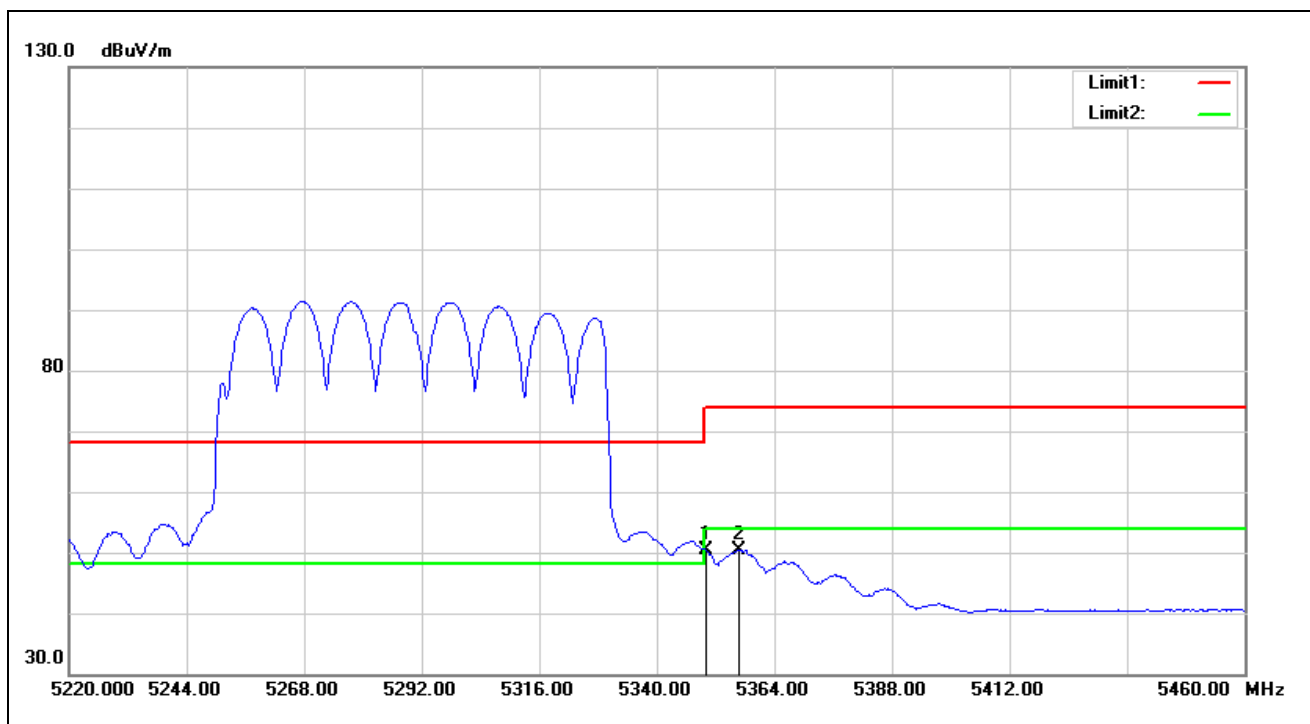


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.38	0.89	50.27	54.00	-3.73	AVG
2*	5356.800	49.55	0.94	50.49	54.00	-3.51	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

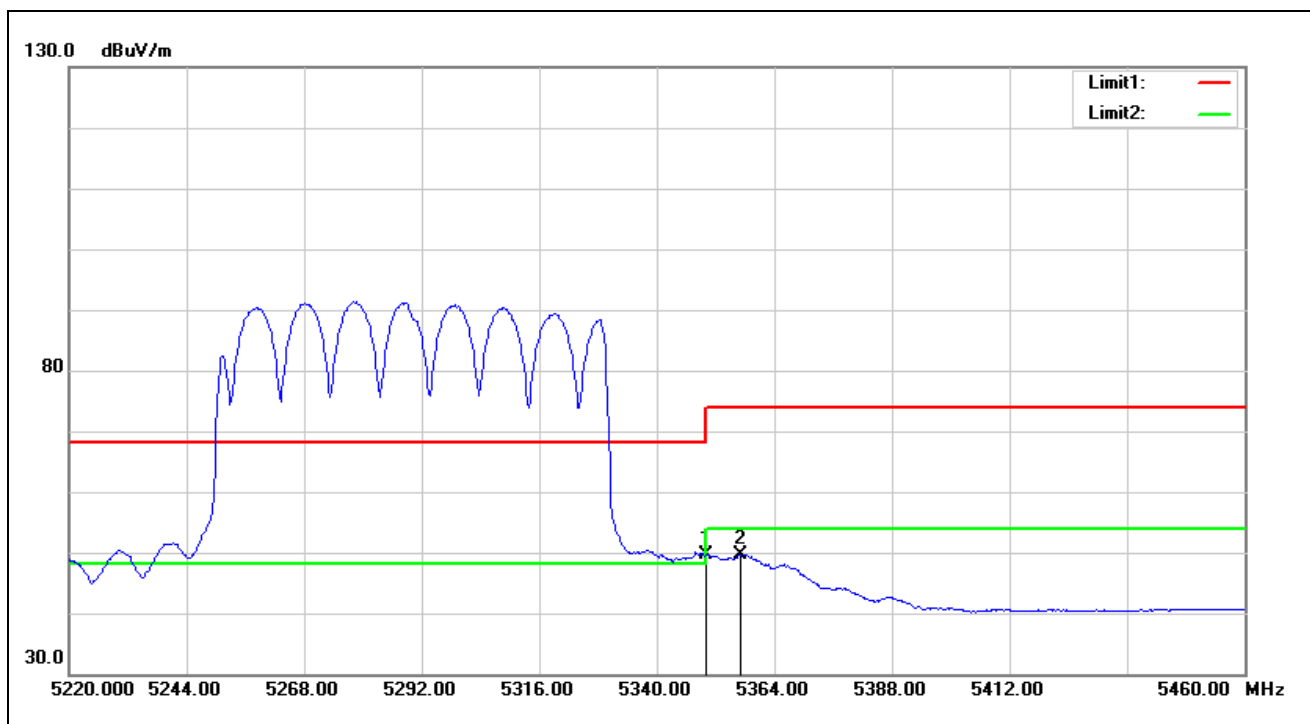


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	48.82	0.89	49.71	54.00	-4.29	AVG
2	5357.040	48.70	0.94	49.64	54.00	-4.36	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

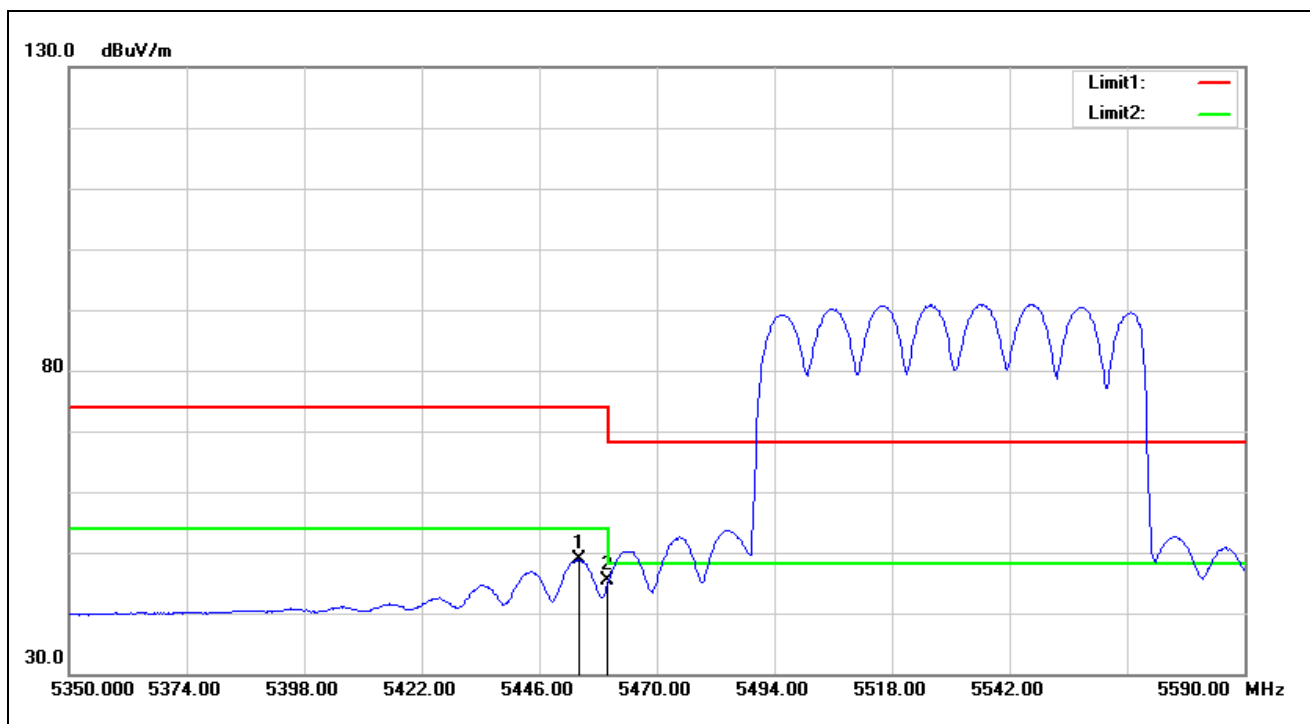


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5454.160	47.04	1.77	48.81	54.00	-5.19	AVG
2	5460.000	43.51	1.79	45.30	54.00	-8.70	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

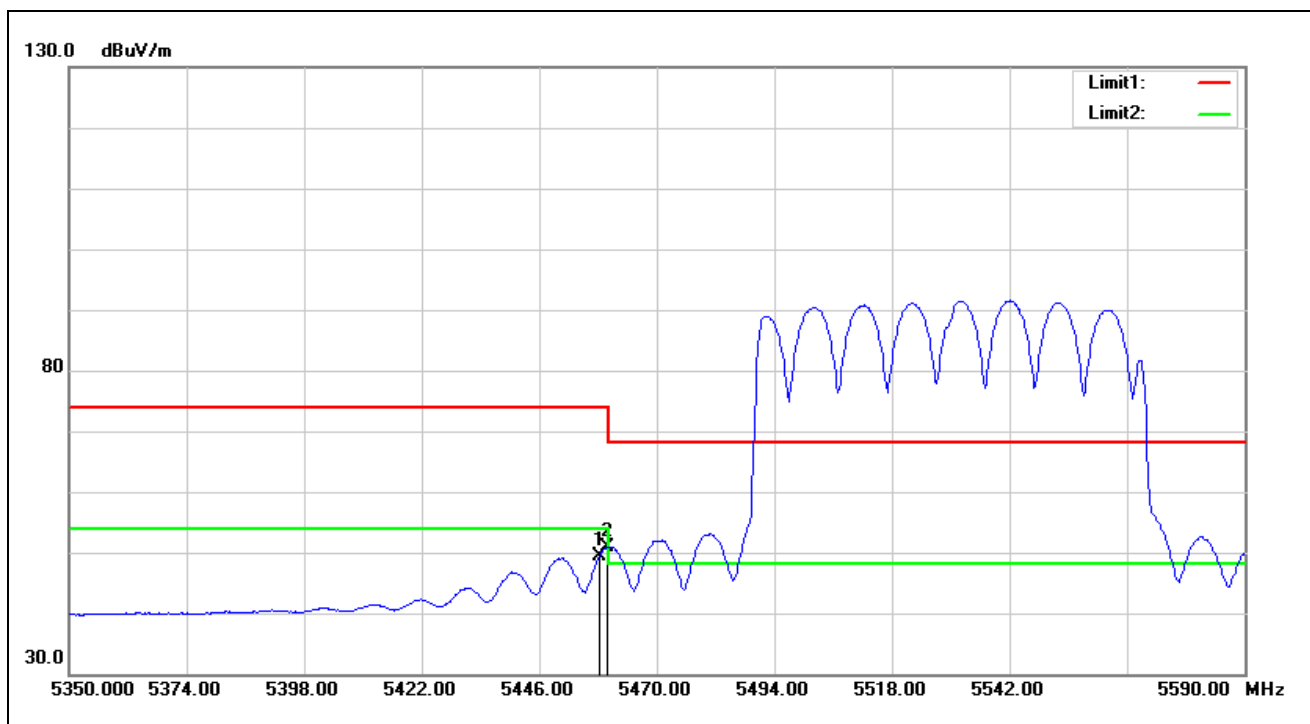


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.240	47.66	1.78	49.44	54.00	-4.56	AVG
2*	5460.000	49.16	1.79	50.95	54.00	-3.05	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

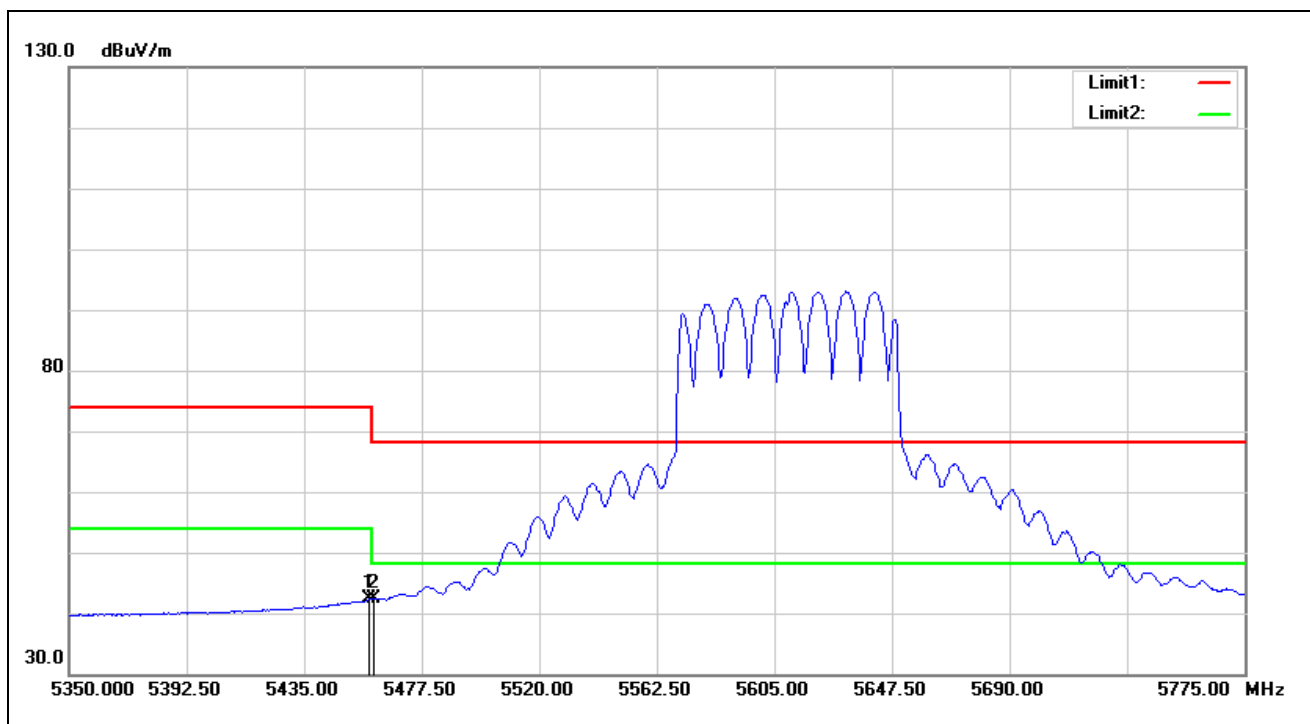


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.375	40.56	1.79	42.35	54.00	-11.65	AVG
2	5460.000	40.50	1.79	42.29	54.00	-11.71	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

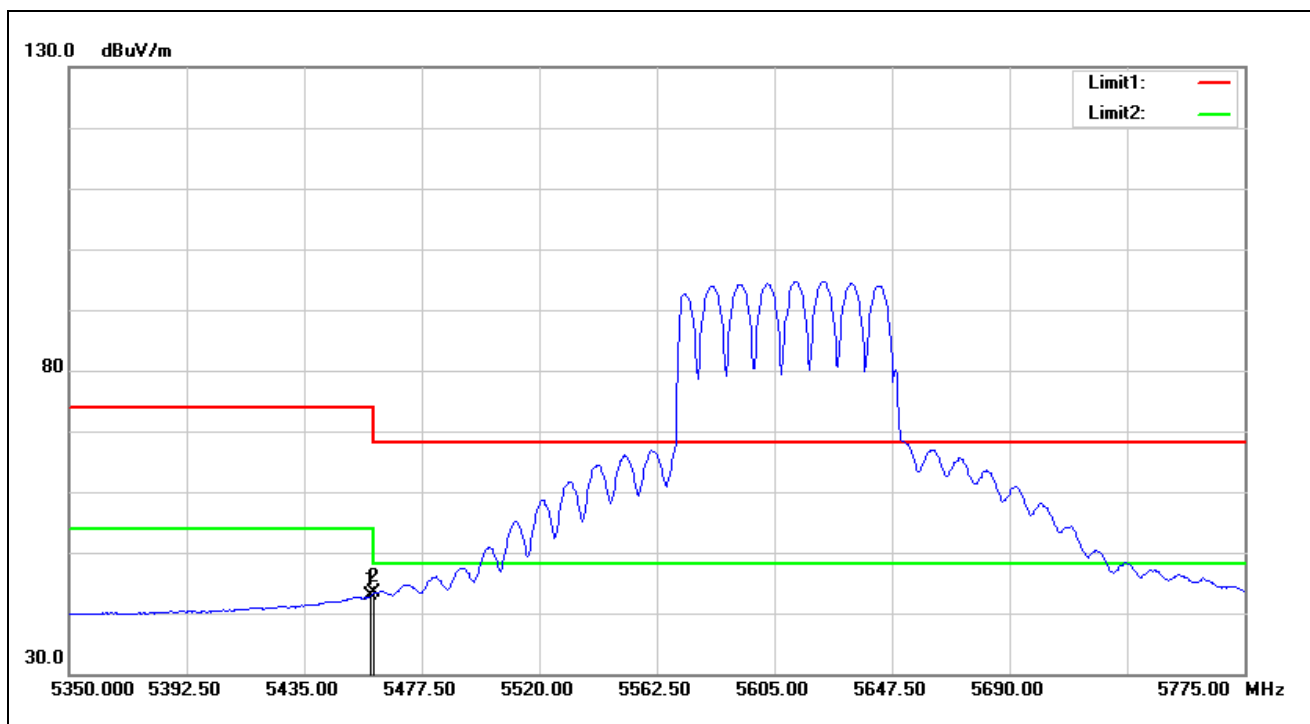


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.225	41.12	1.79	42.91	54.00	-11.09	AVG
2*	5460.000	41.50	1.79	43.29	54.00	-10.71	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

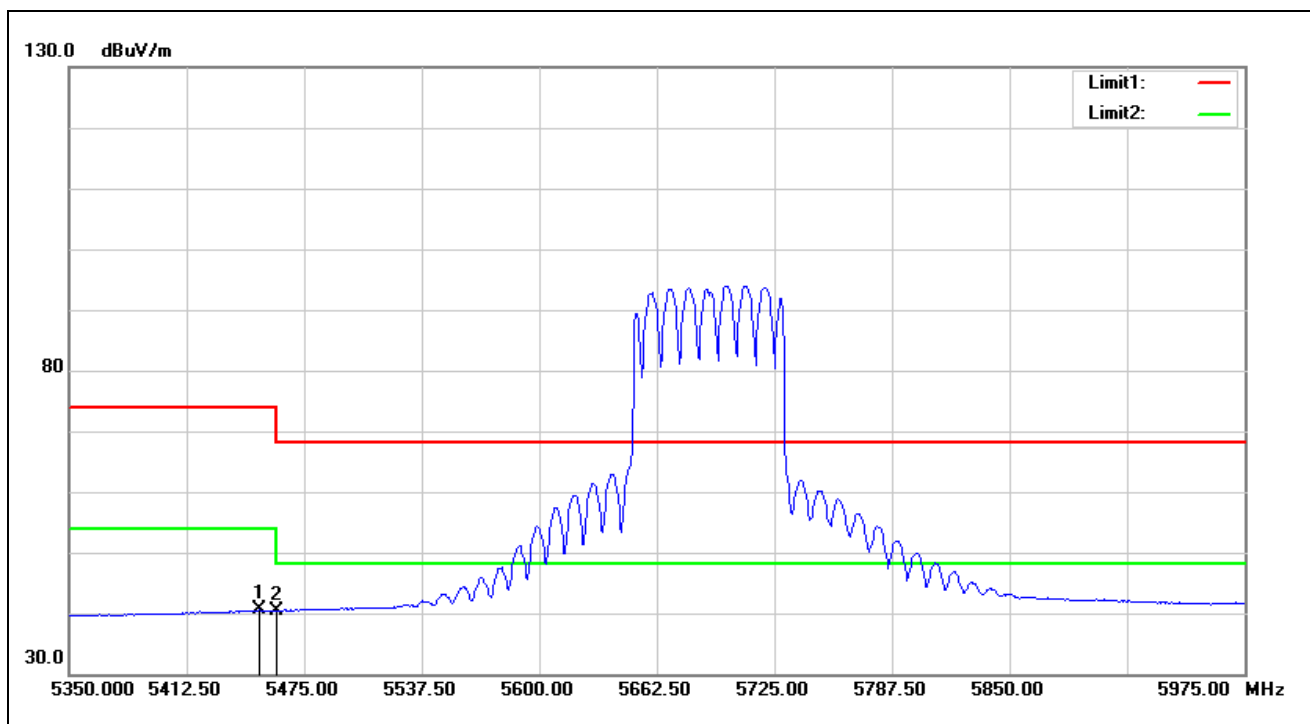


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5451.250	38.74	1.77	40.51	54.00	-13.49	AVG
2	5460.000	38.65	1.79	40.44	54.00	-13.56	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

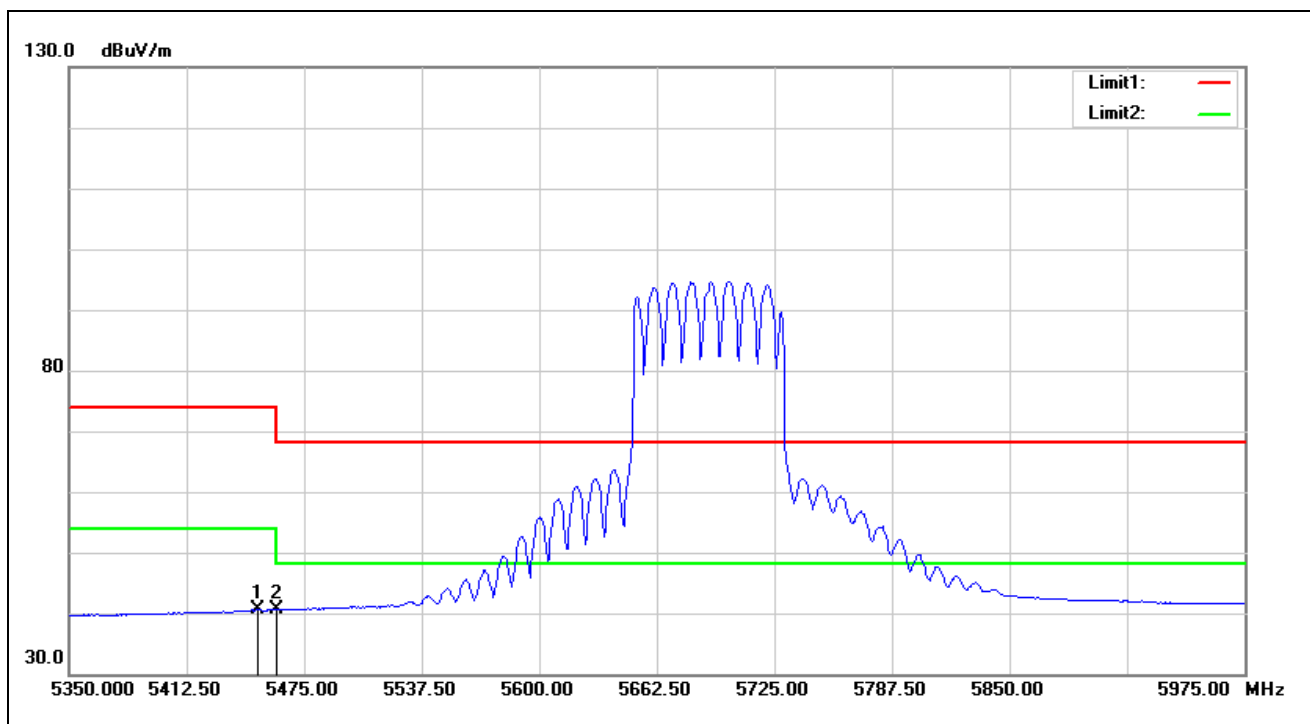


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.000	38.79	1.77	40.56	54.00	-13.44	AVG
2*	5460.000	38.81	1.79	40.60	54.00	-13.40	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

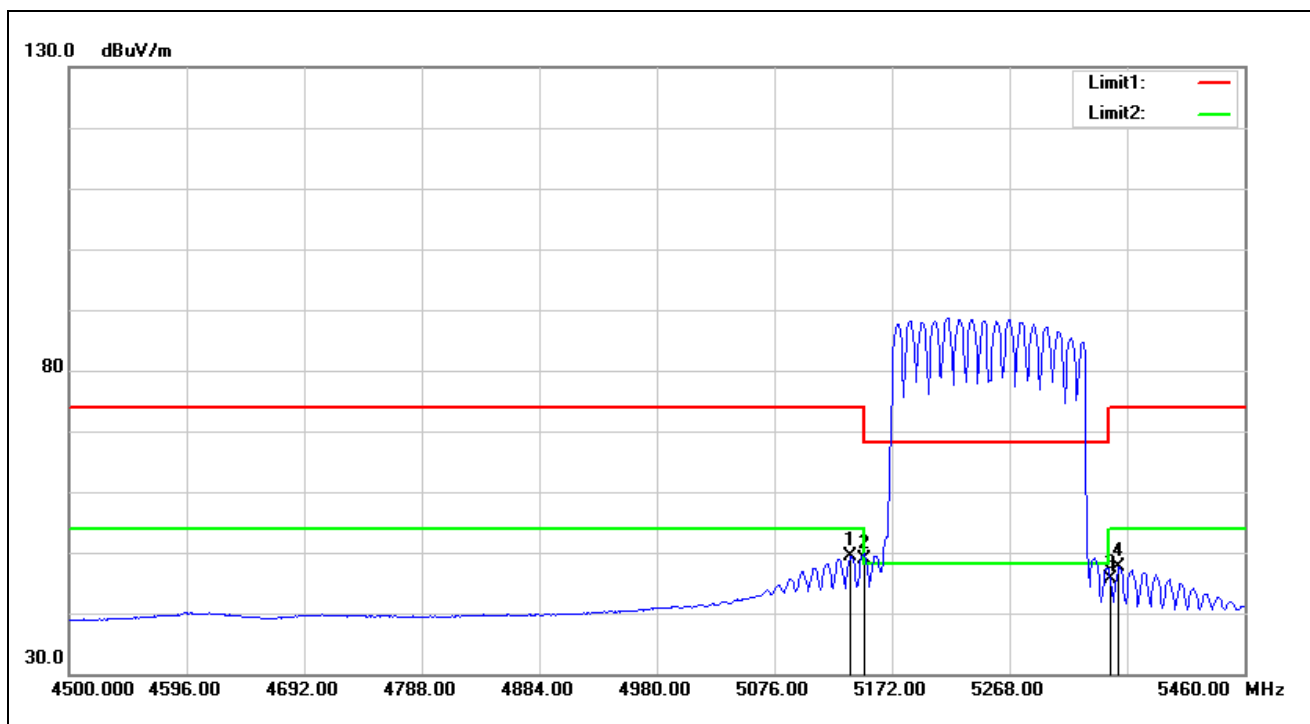


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5138.400	48.25	1.13	49.38	54.00	-4.62	AVG
2	5150.000	47.64	1.13	48.77	54.00	-5.23	AVG
3	5350.000	44.67	0.89	45.56	54.00	-8.44	AVG
4	5357.280	46.64	0.94	47.58	54.00	-6.42	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

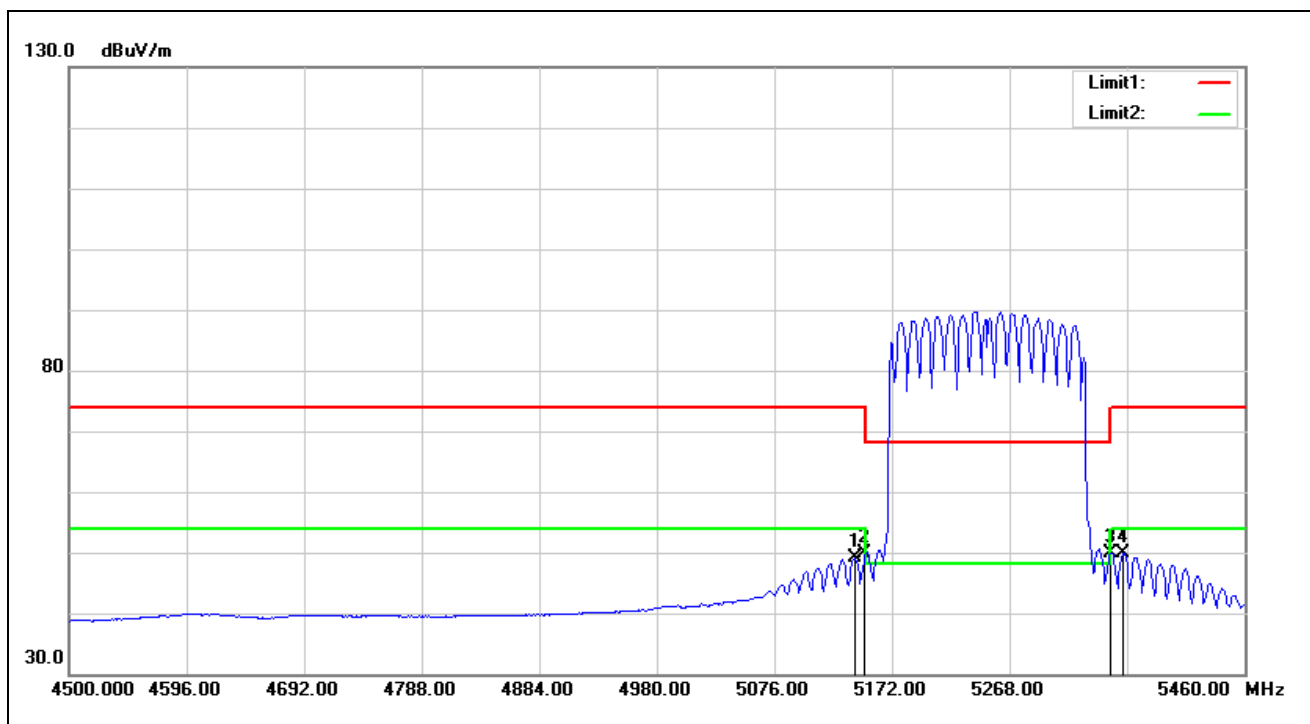


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.240	48.03	1.13	49.16	54.00	-4.84	AVG
2*	5150.000	48.77	1.13	49.90	54.00	-4.10	AVG
3	5350.000	48.89	0.89	49.78	54.00	-4.22	AVG
4	5360.160	48.90	0.97	49.87	54.00	-4.13	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

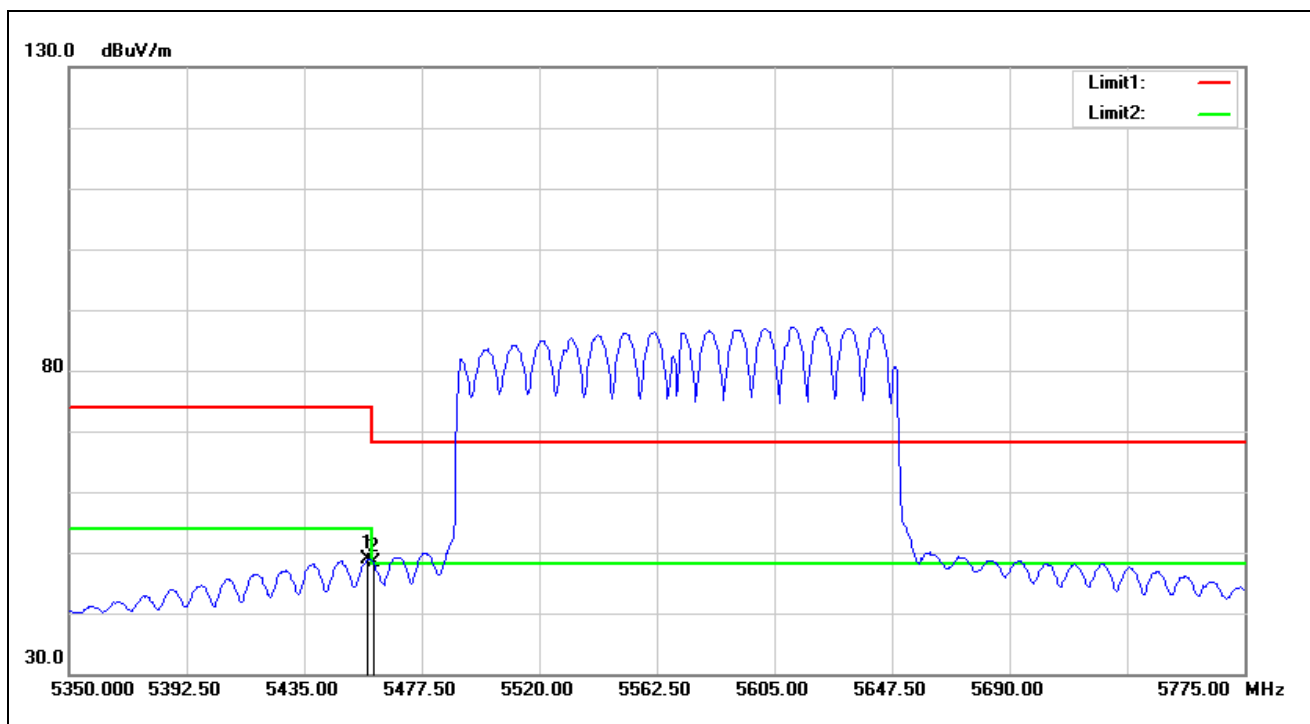

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5457.950	47.13	1.78	48.91	54.00	-5.09	AVG
2	5460.000	46.55	1.79	48.34	54.00	-5.66	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

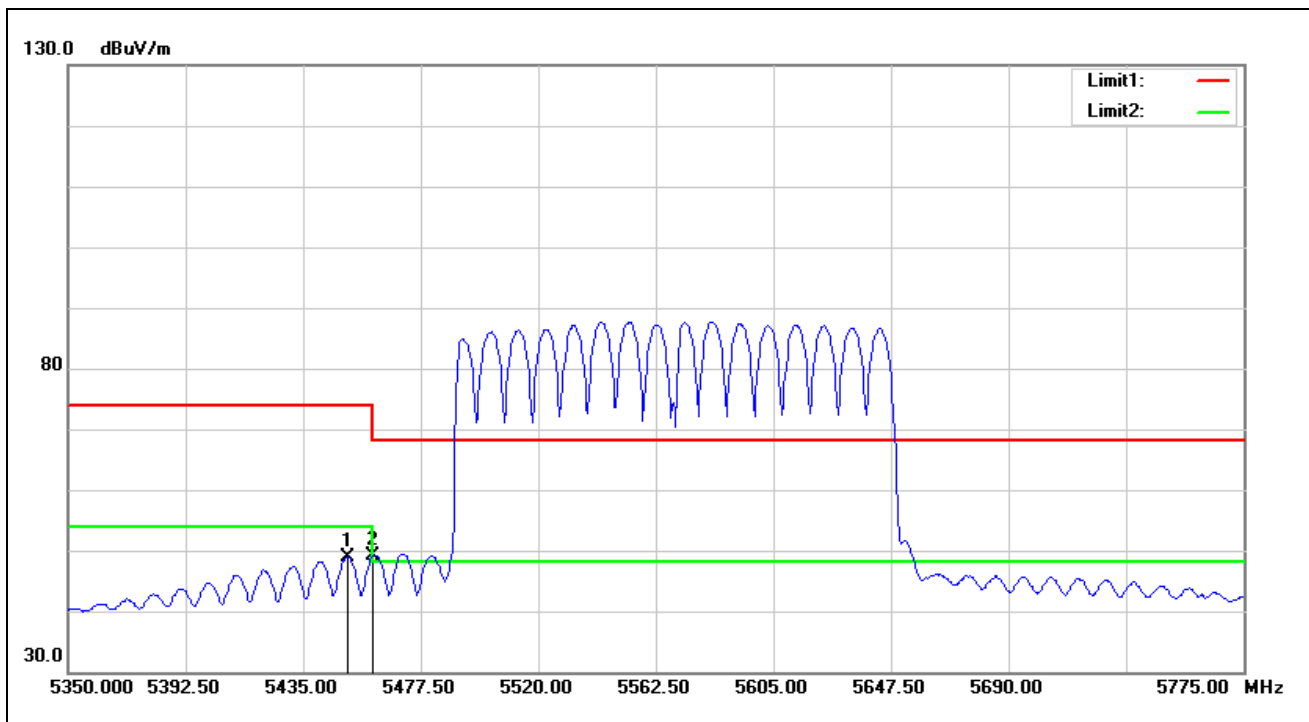


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.150	47.15	1.77	48.92	54.00	-5.08	AVG
2*	5460.000	47.31	1.79	49.10	54.00	-4.90	AVG

Beamforming on

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

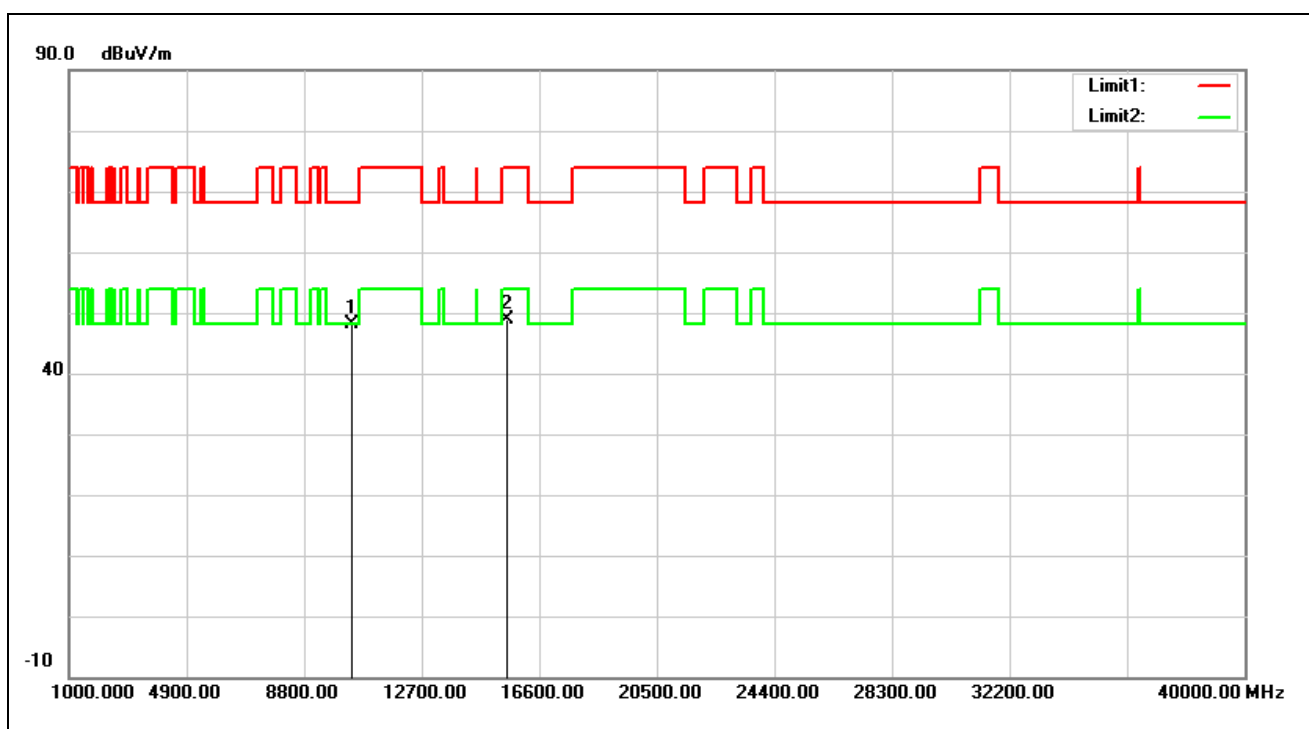


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.29	13.82	48.11	68.20	-20.09	peak
2	15540.000	32.02	16.74	48.76	74.00	-25.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

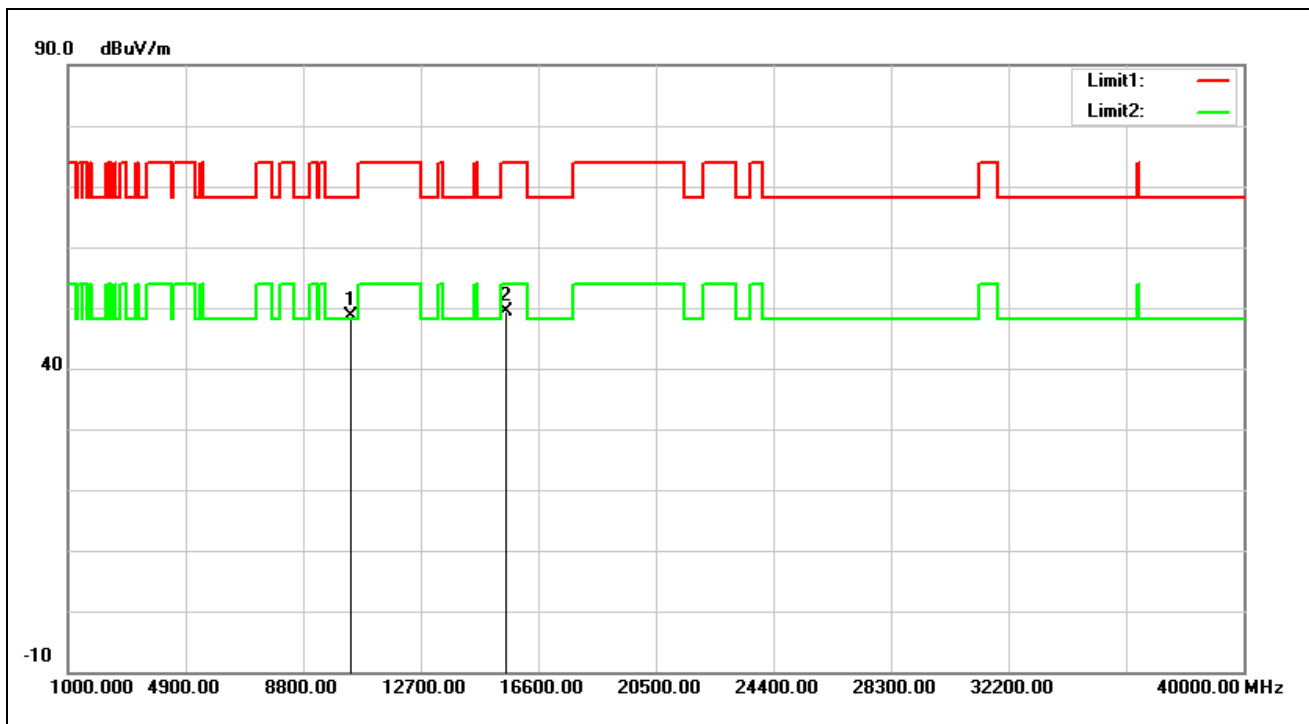


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.72	13.82	48.54	68.20	-19.66	peak
2	15540.000	32.58	16.74	49.32	74.00	-24.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

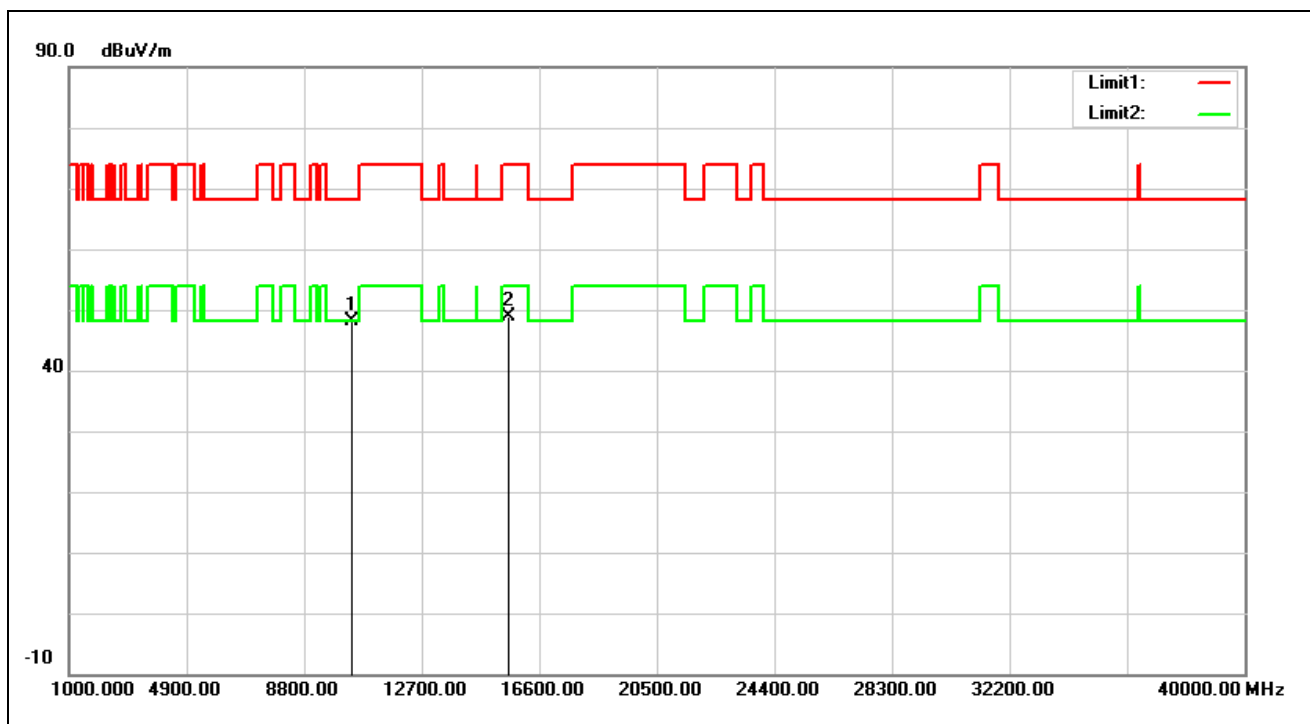


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.07	14.05	48.12	68.20	-20.08	peak
2	15600.000	32.49	16.51	49.00	74.00	-25.00	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

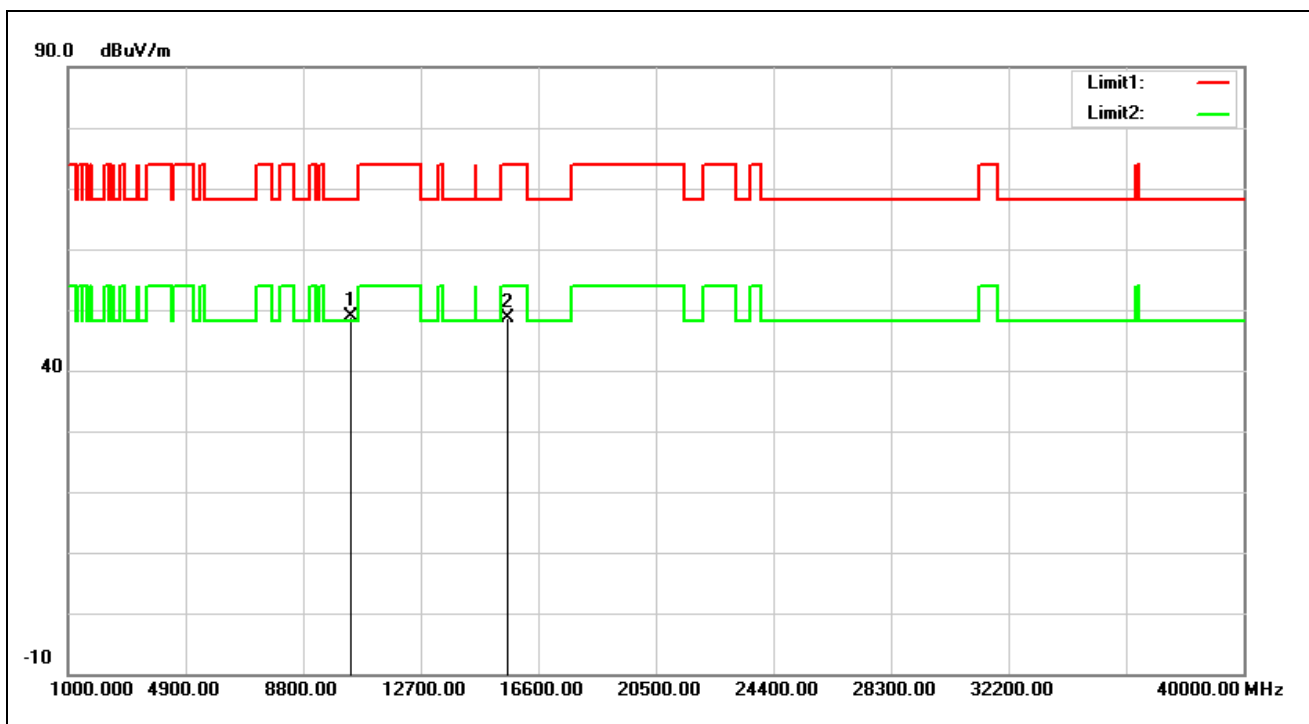


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.76	14.05	48.81	68.20	-19.39	peak
2	15600.000	32.18	16.51	48.69	74.00	-25.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

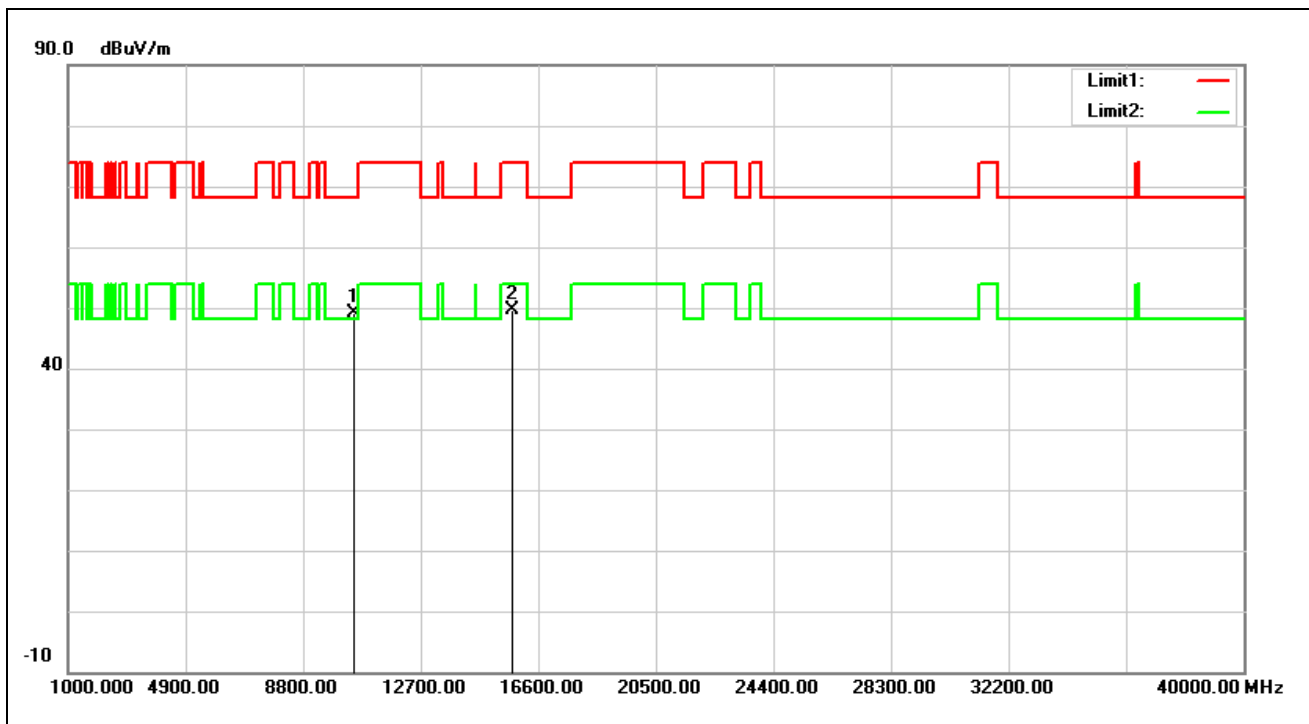


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	34.94	14.26	49.20	68.20	-19.00	peak
2	15720.000	33.07	16.48	49.55	74.00	-24.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

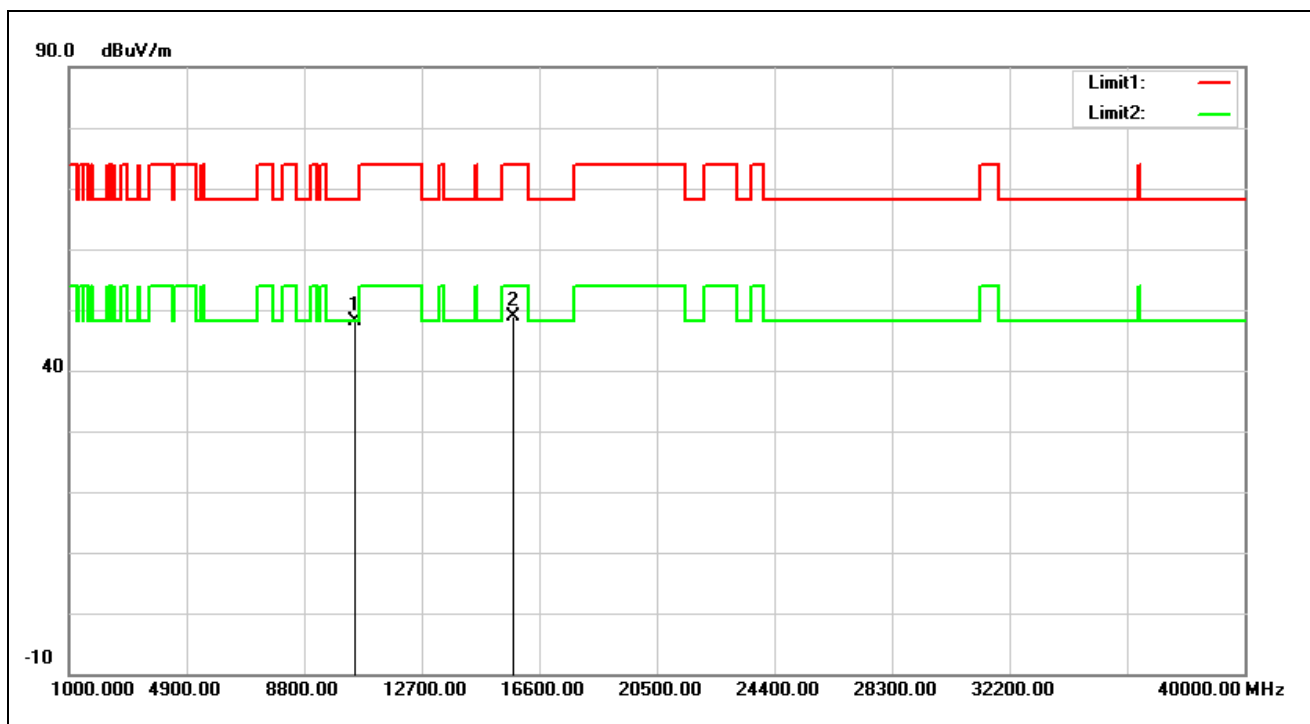


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	33.88	14.26	48.14	68.20	-20.06	peak
2	15720.000	32.45	16.48	48.93	74.00	-25.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

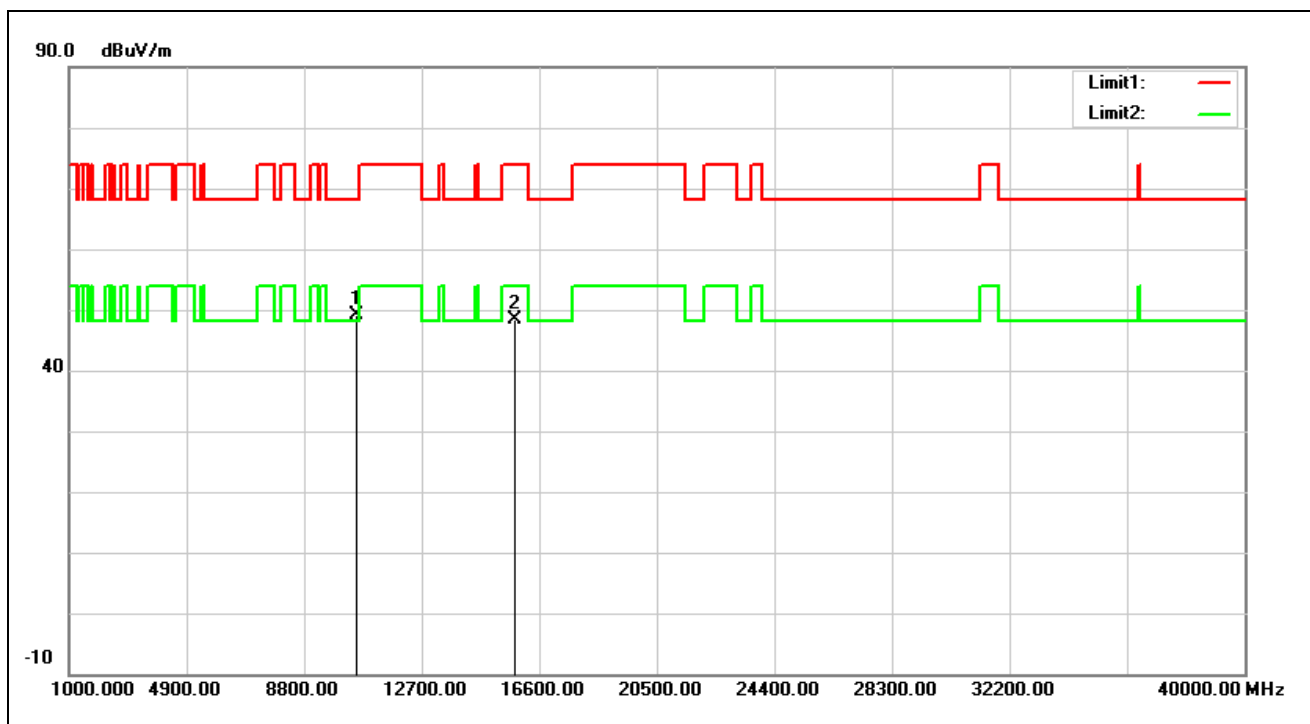


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.74	14.31	49.05	68.20	-19.15	peak
2	15780.000	31.96	16.38	48.34	74.00	-25.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

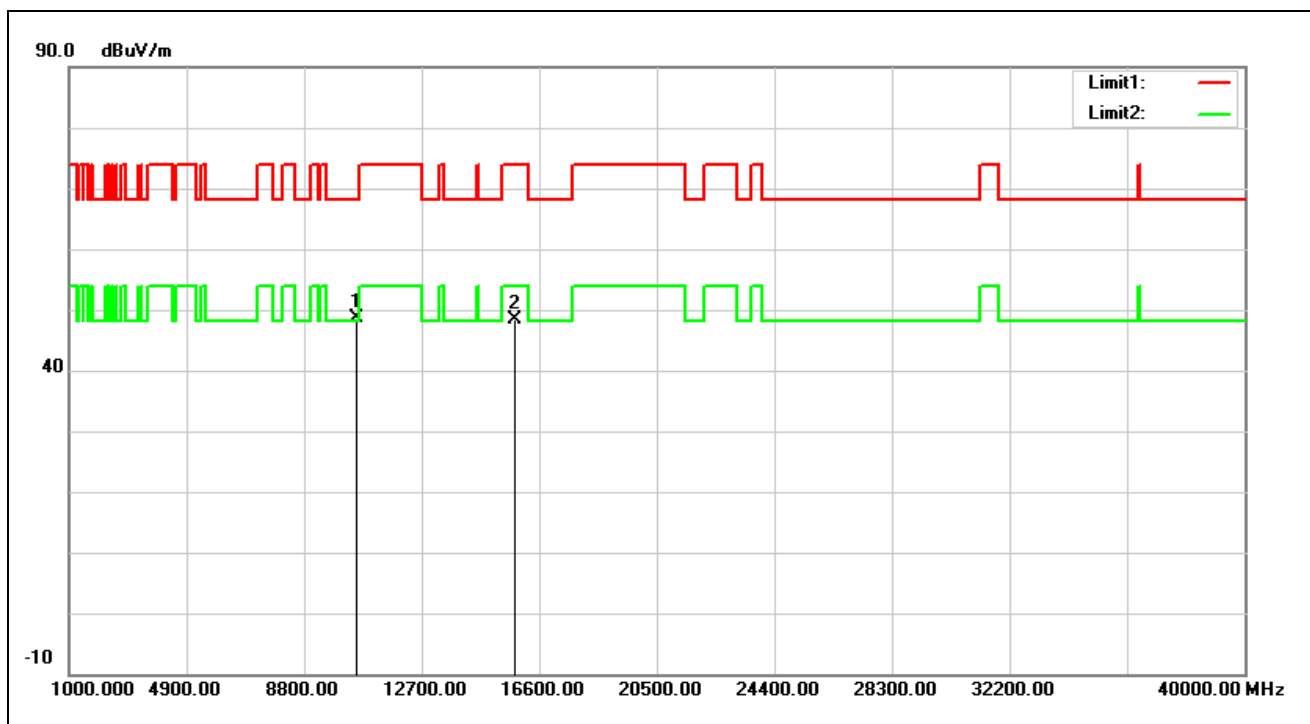


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.29	14.31	48.60	68.20	-19.60	peak
2	15780.000	31.99	16.38	48.37	74.00	-25.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

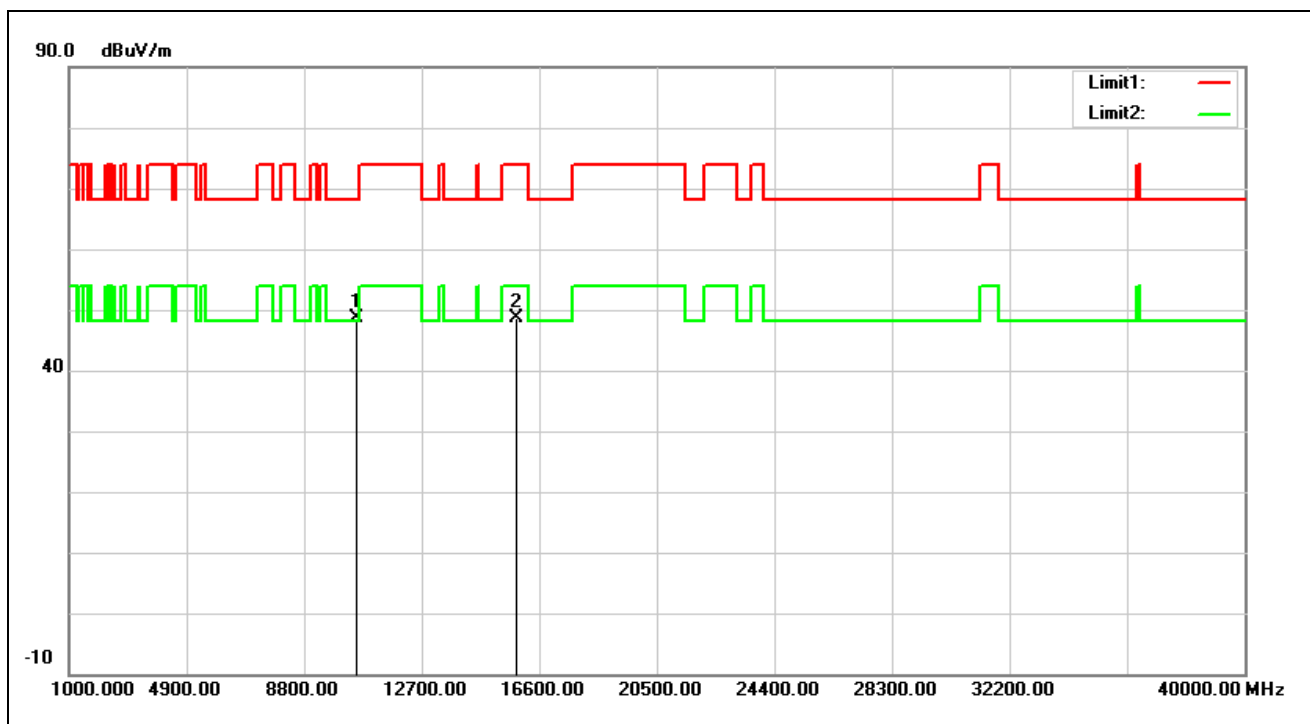


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.30	14.31	48.61	68.20	-19.59	peak
2	15840.000	32.52	16.18	48.70	74.00	-25.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

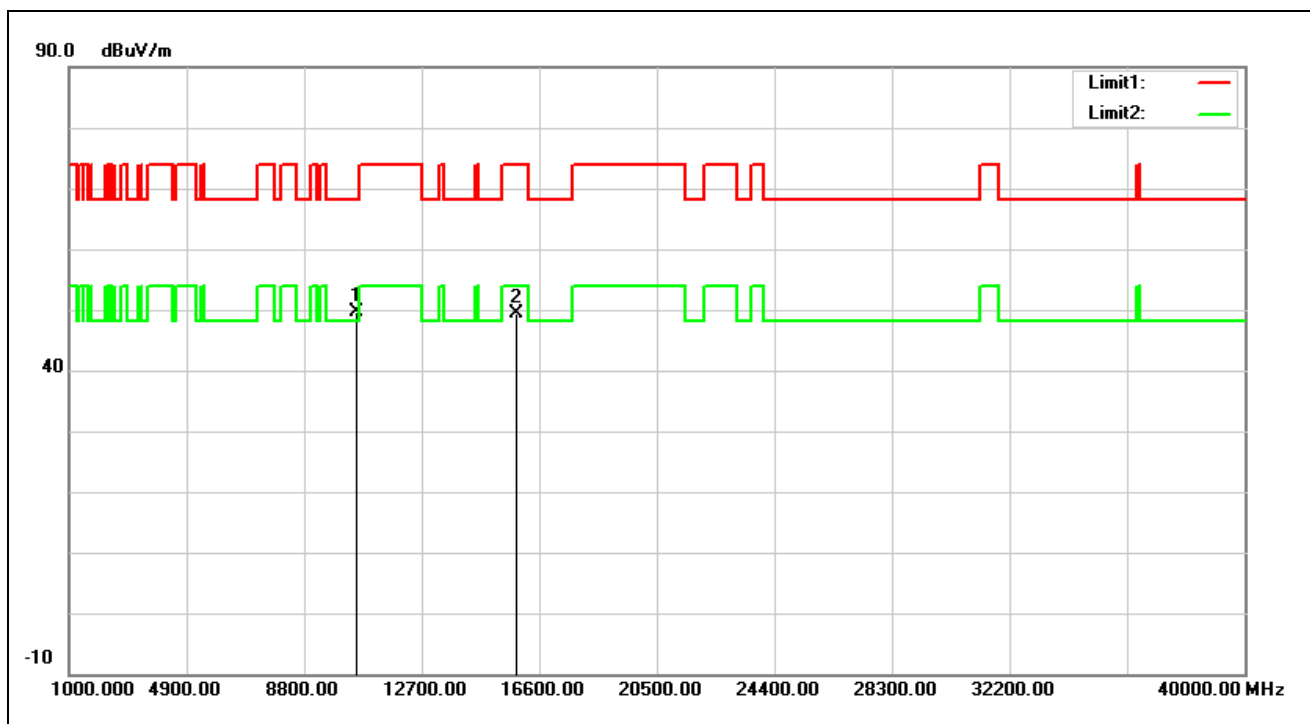


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.23	14.31	49.54	68.20	-18.66	peak
2	15840.000	33.14	16.18	49.32	74.00	-24.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

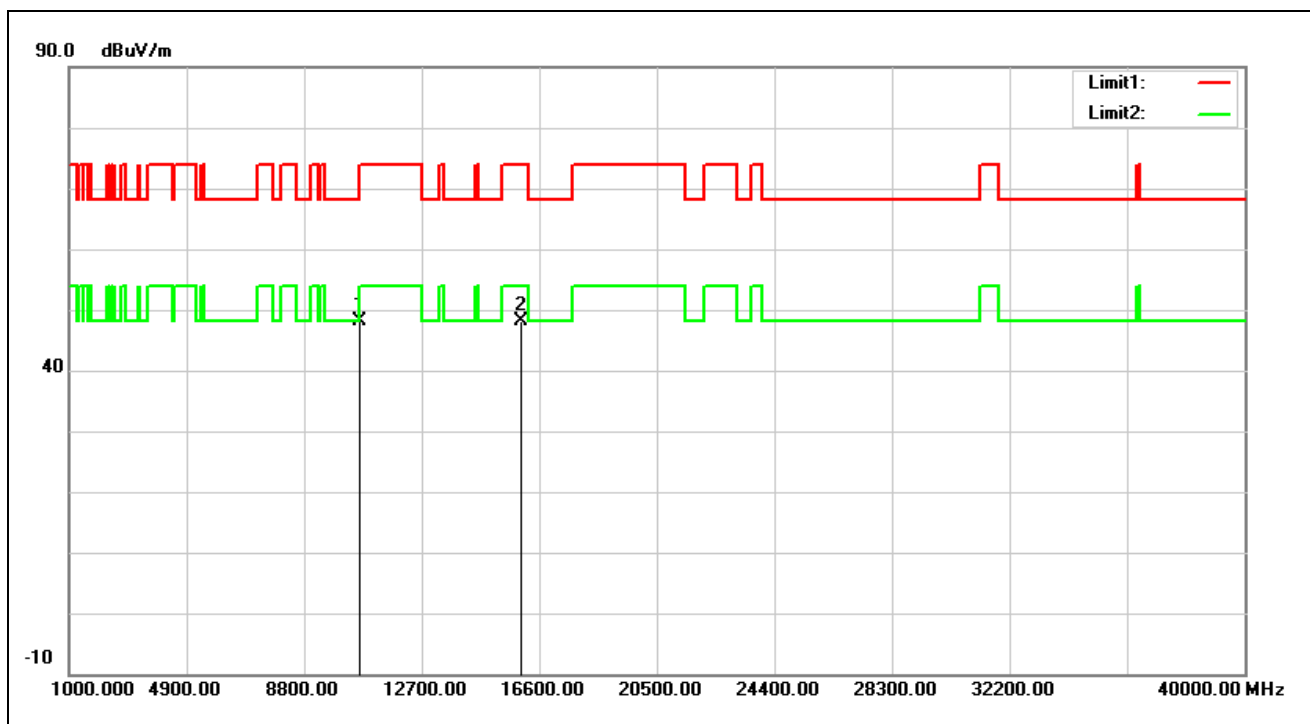


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.90	14.19	48.09	74.00	-25.91	peak
2*	15960.000	32.46	15.77	48.23	74.00	-25.77	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

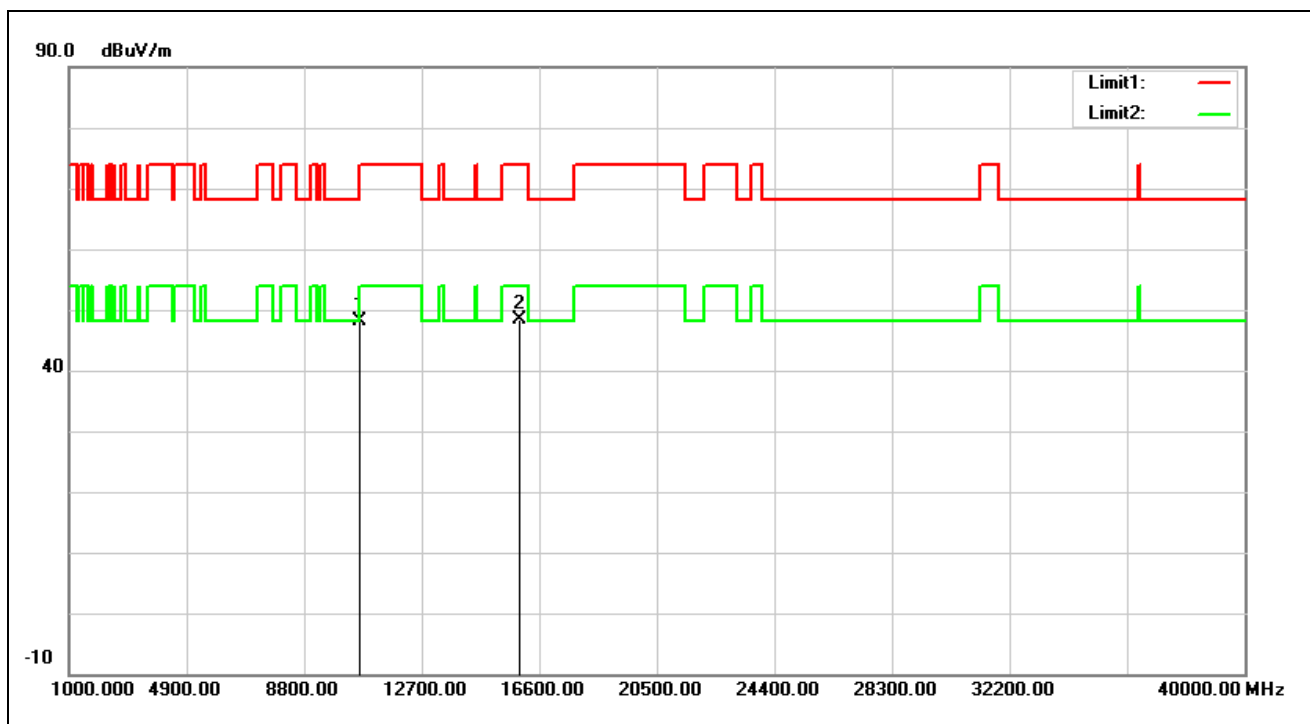


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.06	14.19	48.25	74.00	-25.75	peak
2*	15960.000	32.59	15.77	48.36	74.00	-25.64	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

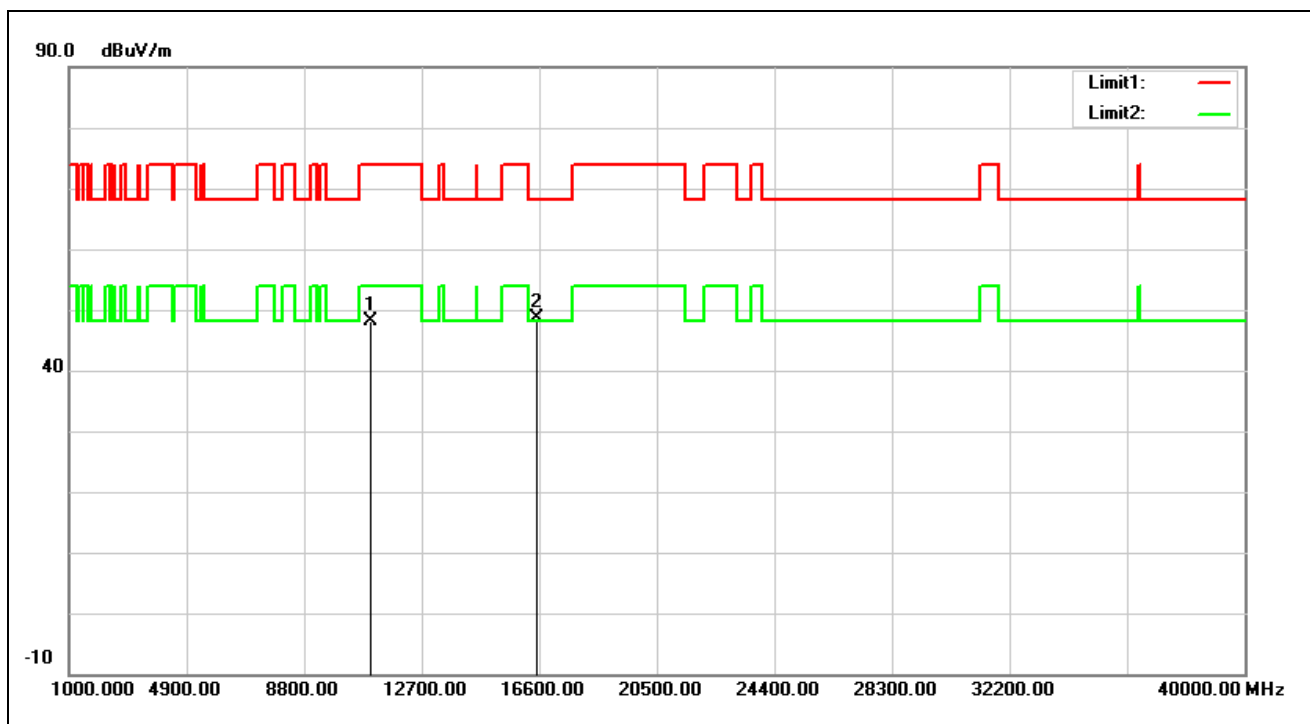


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.02	14.22	48.24	74.00	-25.76	peak
2*	16500.000	31.76	16.87	48.63	68.20	-19.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

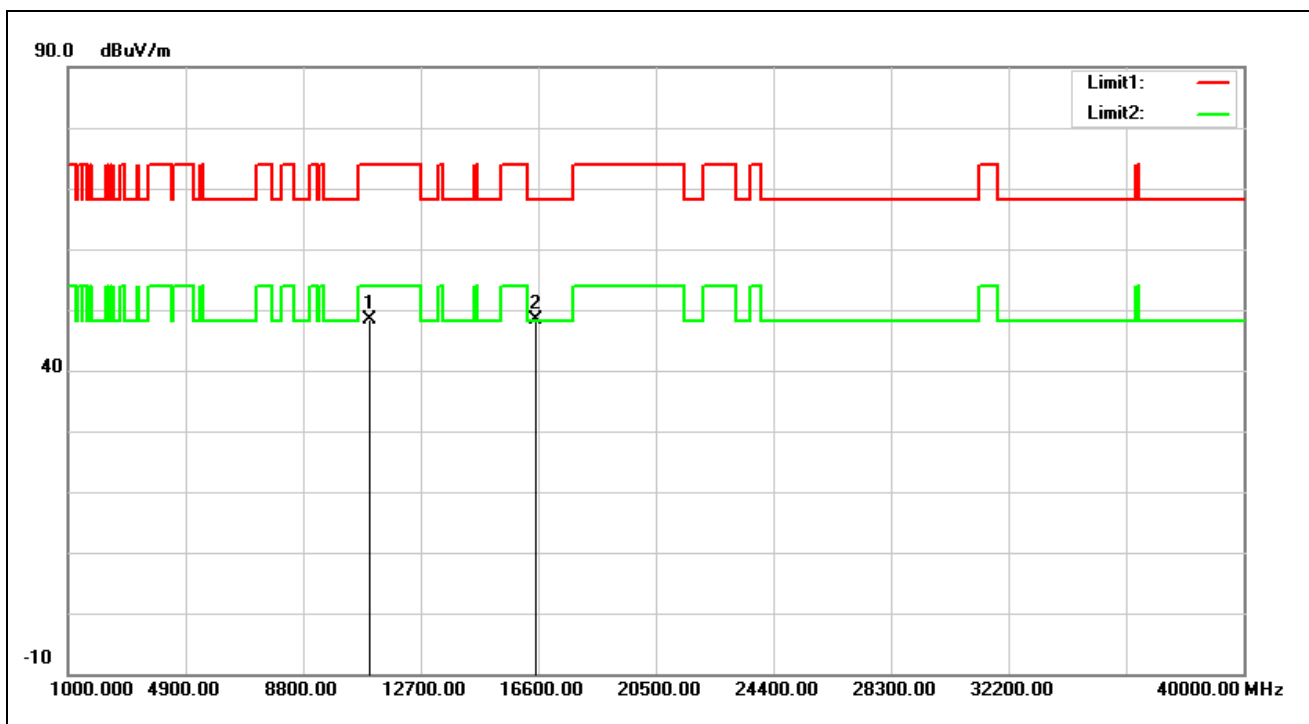


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.09	14.22	48.31	74.00	-25.69	peak
2*	16500.000	31.39	16.87	48.26	68.20	-19.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5560 MHz		
Remark:			

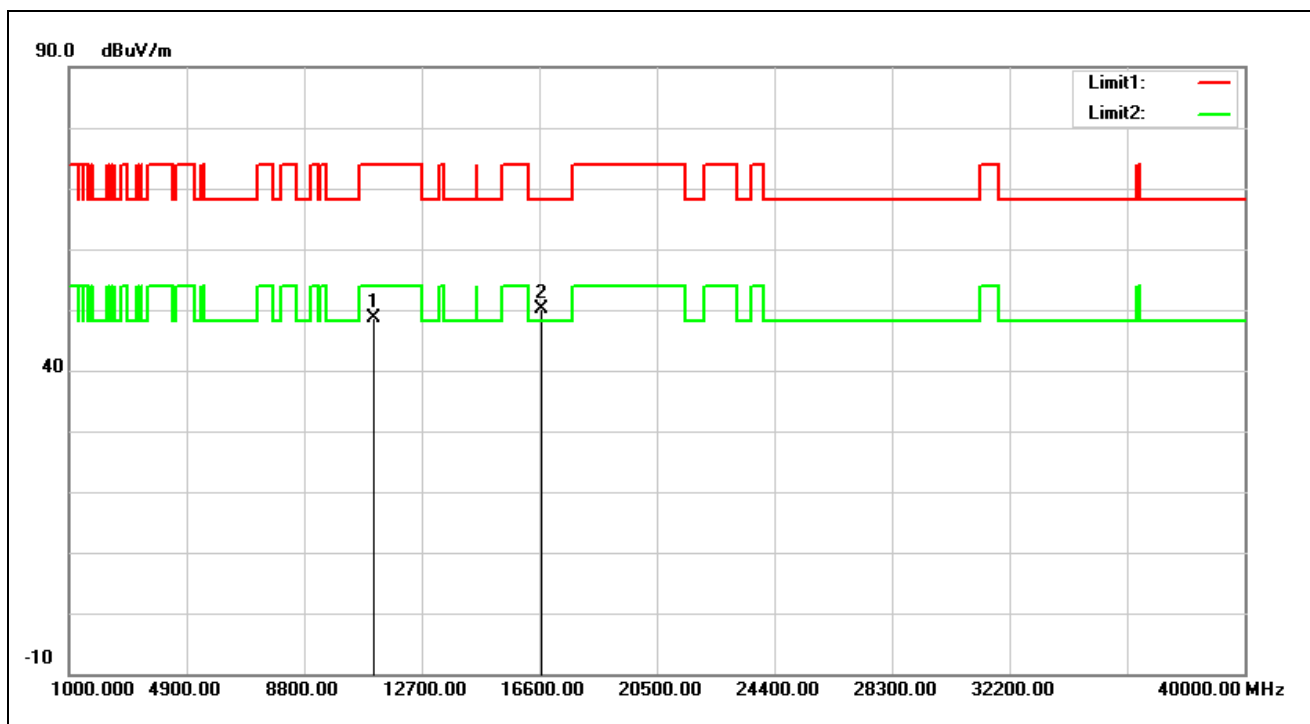


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.08	14.49	48.57	74.00	-25.43	peak
2*	16680.000	32.04	17.98	50.02	68.20	-18.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5560 MHz		
Remark:			

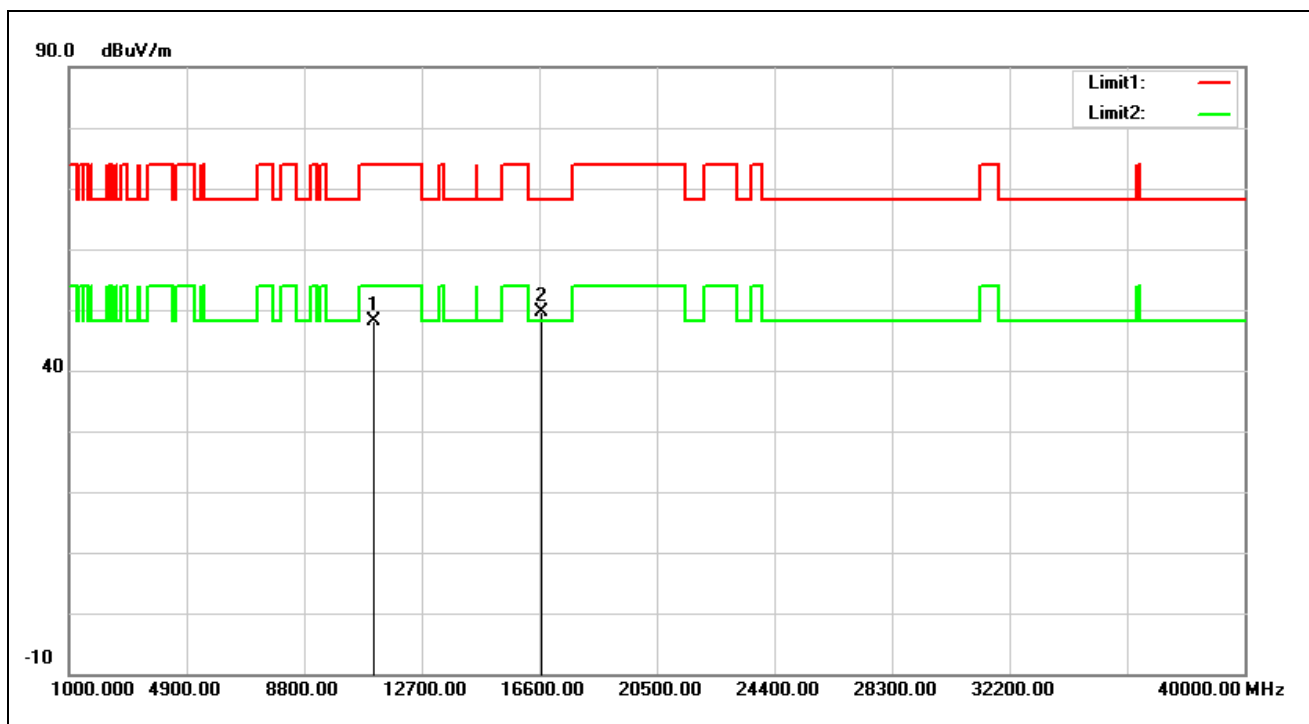


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.60	14.49	48.09	74.00	-25.91	peak
2*	16680.000	31.73	17.98	49.71	68.20	-18.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

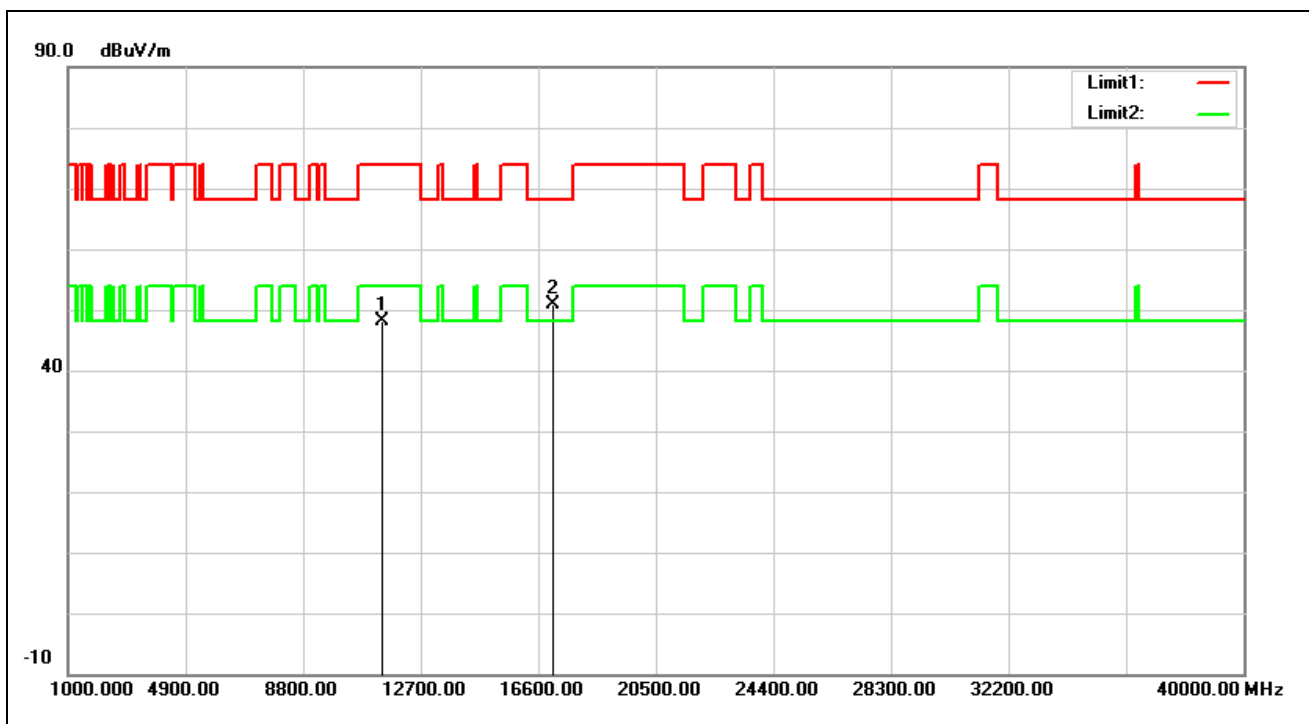


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.91	14.26	48.17	74.00	-25.83	peak
2*	17100.000	30.26	20.69	50.95	68.20	-17.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

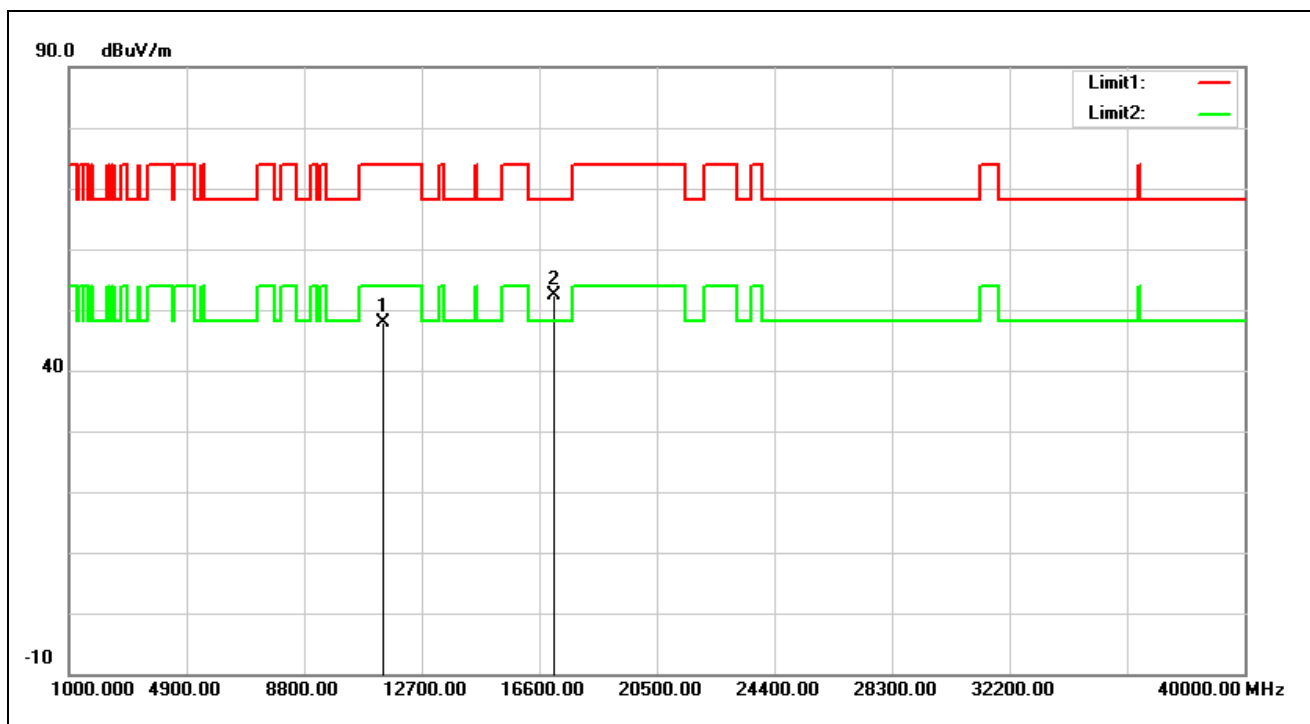


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.69	14.26	47.95	74.00	-26.05	peak
2*	17100.000	31.65	20.69	52.34	68.20	-15.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

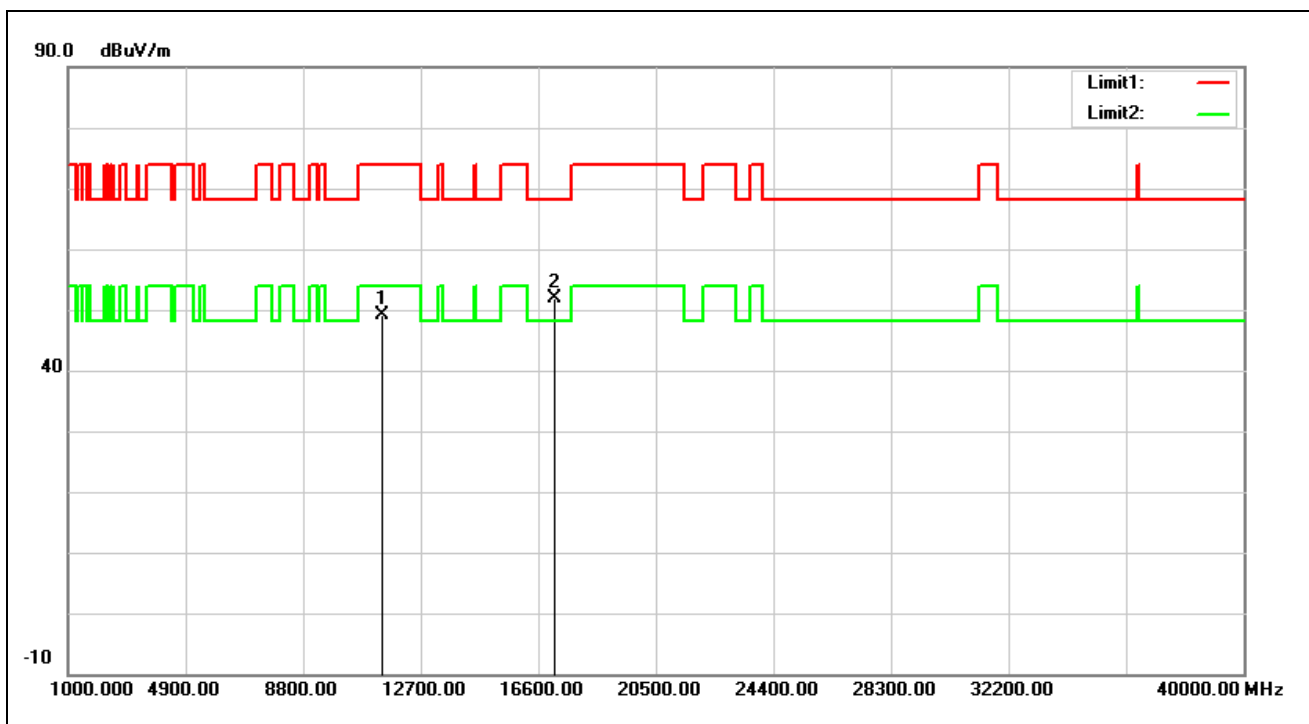


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.65	14.56	49.21	74.00	-24.79	peak
2*	17160.000	30.76	21.09	51.85	68.20	-16.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

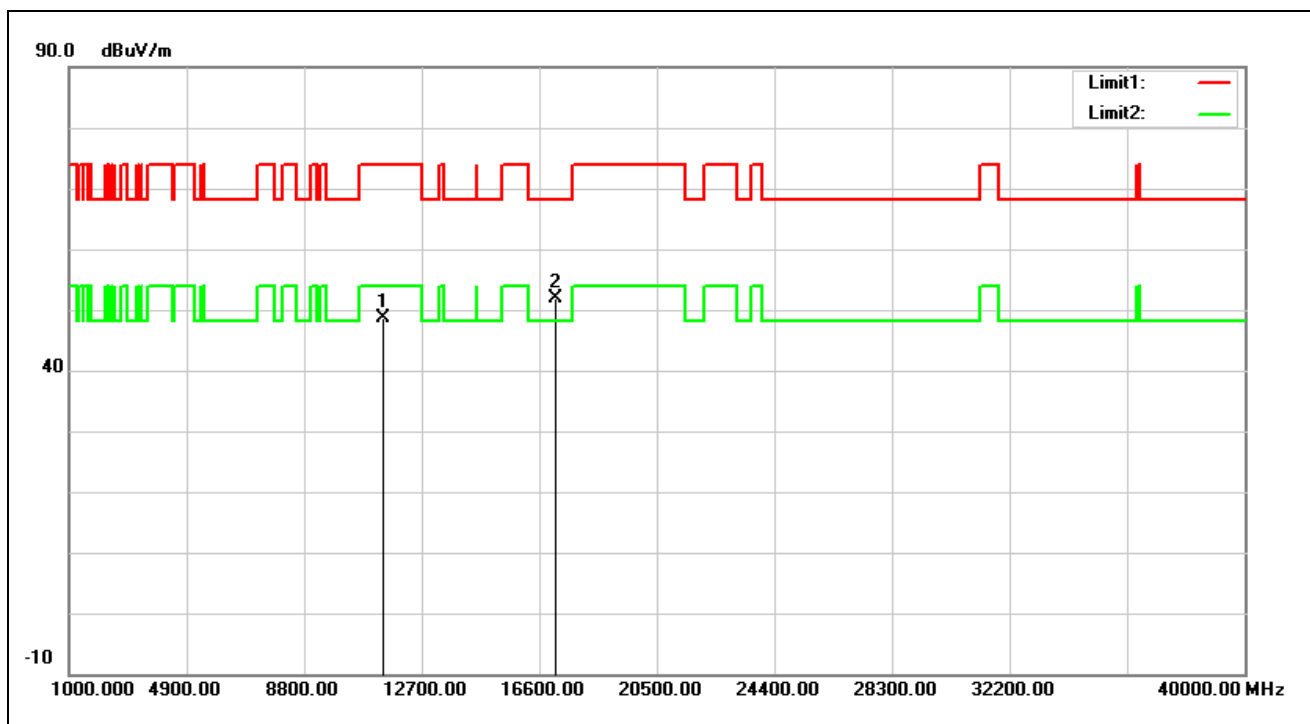


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.07	14.56	48.63	74.00	-25.37	peak
2*	17160.000	30.75	21.09	51.84	68.20	-16.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

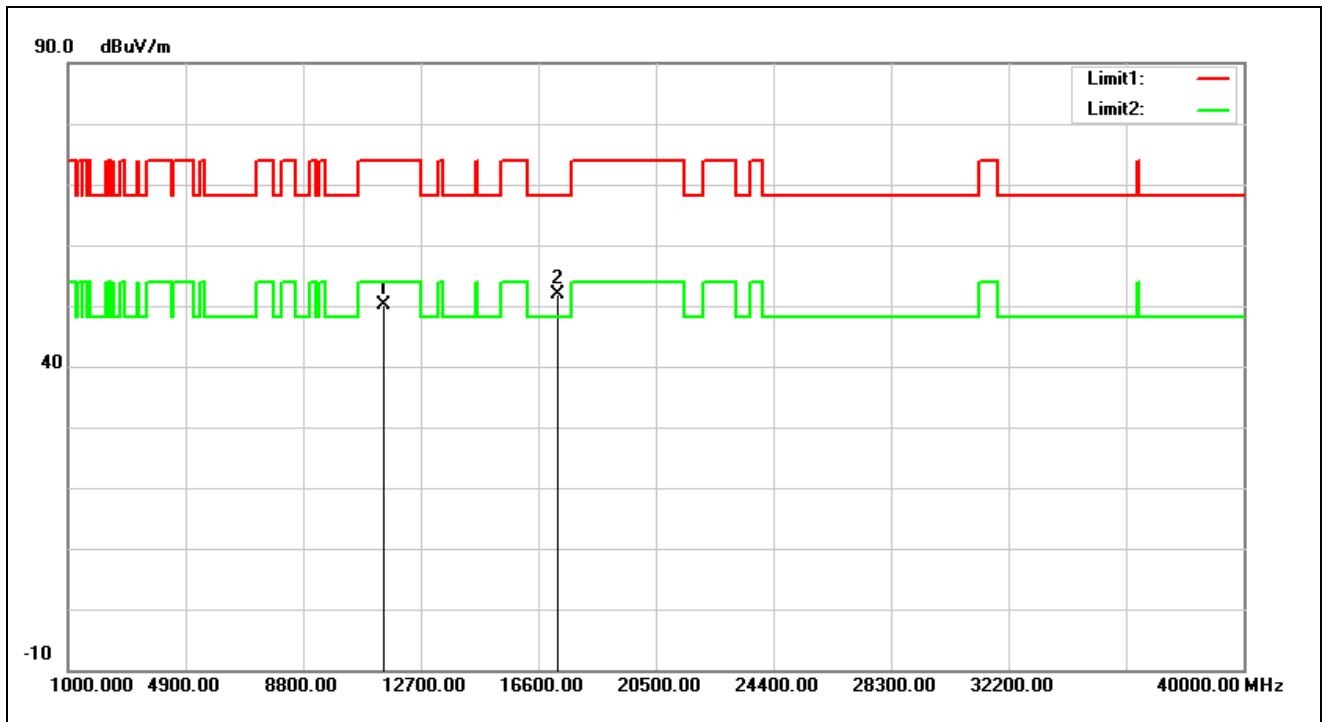


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.09	14.93	50.02	74.00	-23.98	peak
2*	17235.000	30.16	21.70	51.86	68.20	-16.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

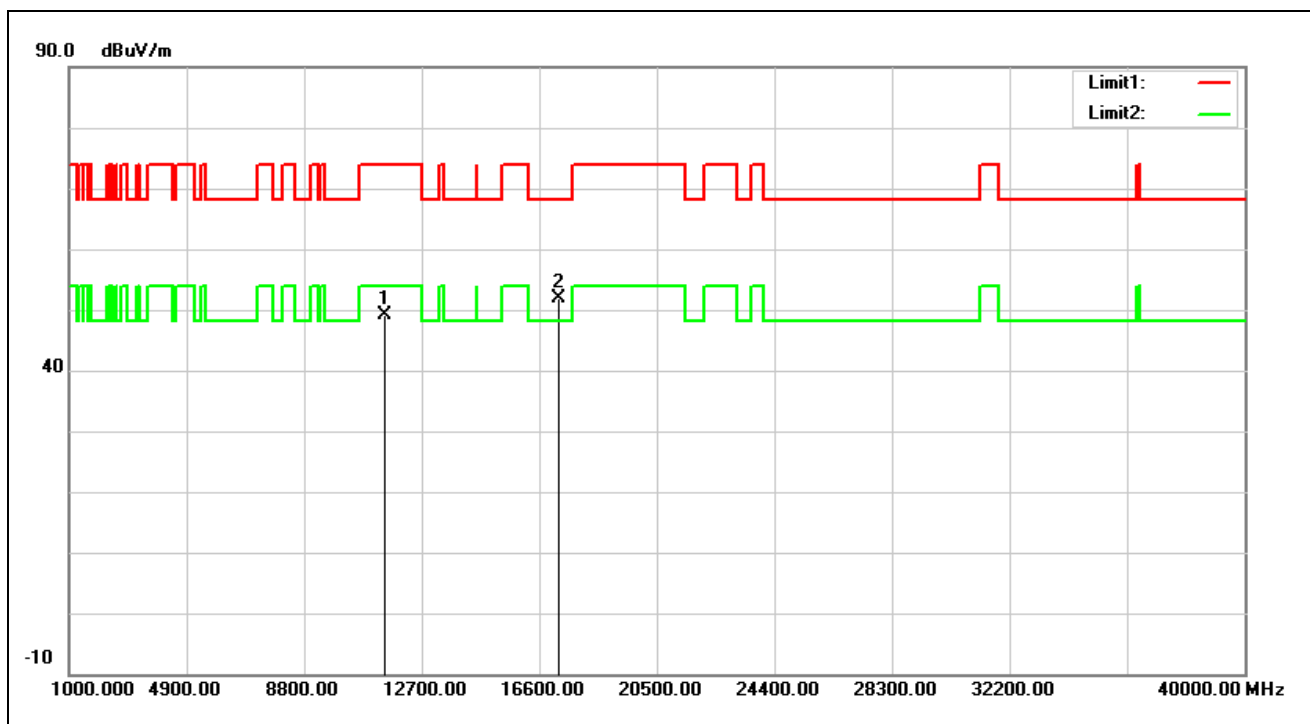


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.09	14.93	49.02	74.00	-24.98	peak
2*	17235.000	30.27	21.70	51.97	68.20	-16.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

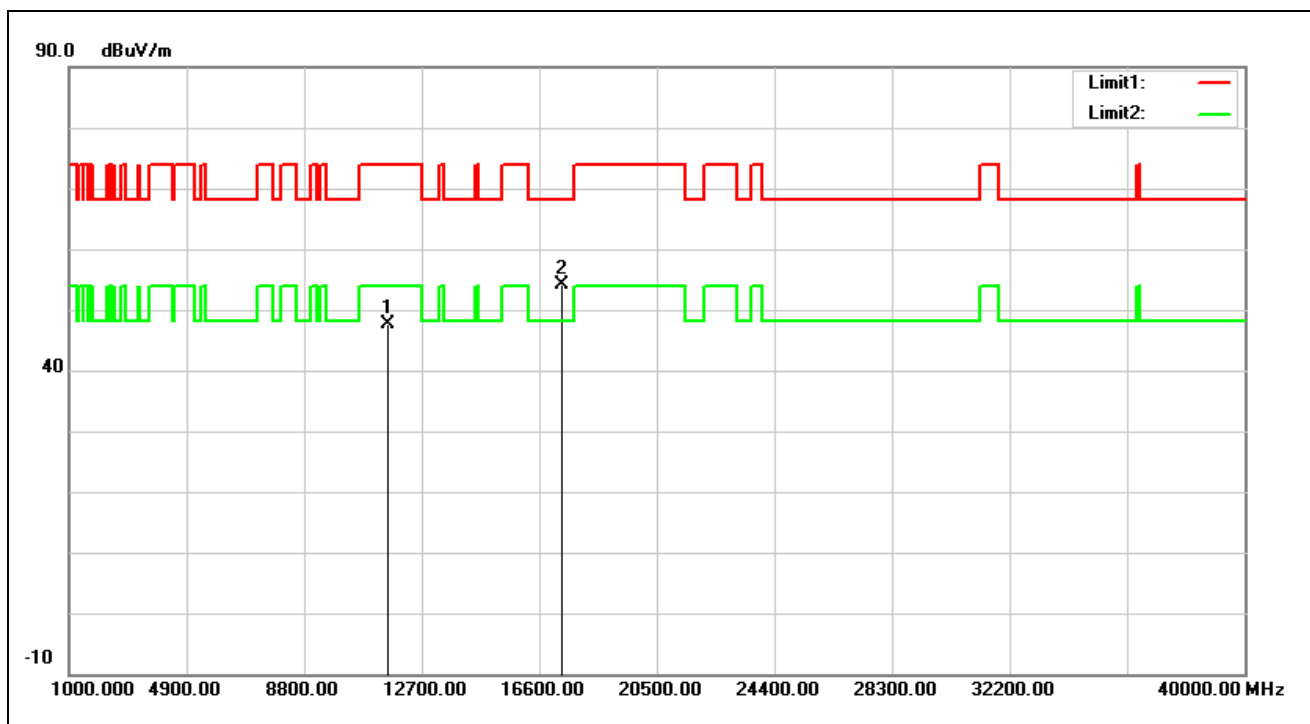


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.03	14.60	47.63	74.00	-26.37	peak
2*	17355.000	31.38	22.64	54.02	68.20	-14.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

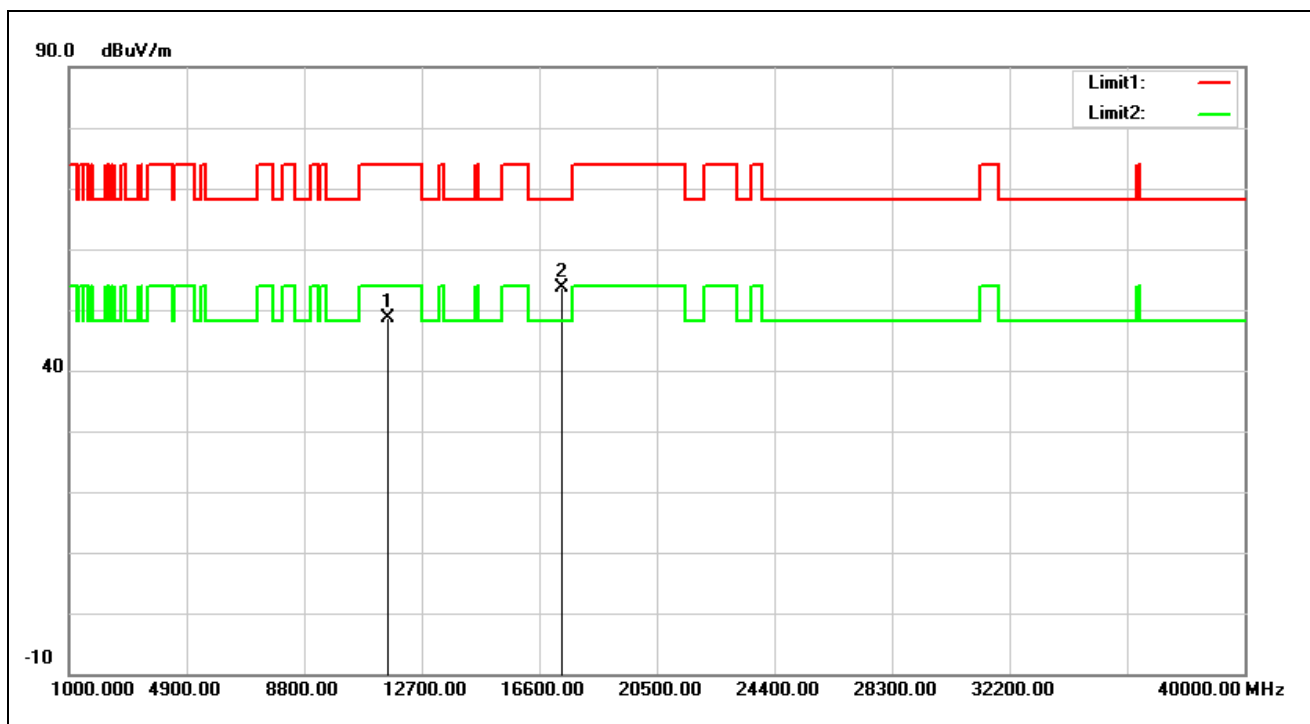


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.03	14.60	48.63	74.00	-25.37	peak
2*	17355.000	31.02	22.64	53.66	68.20	-14.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

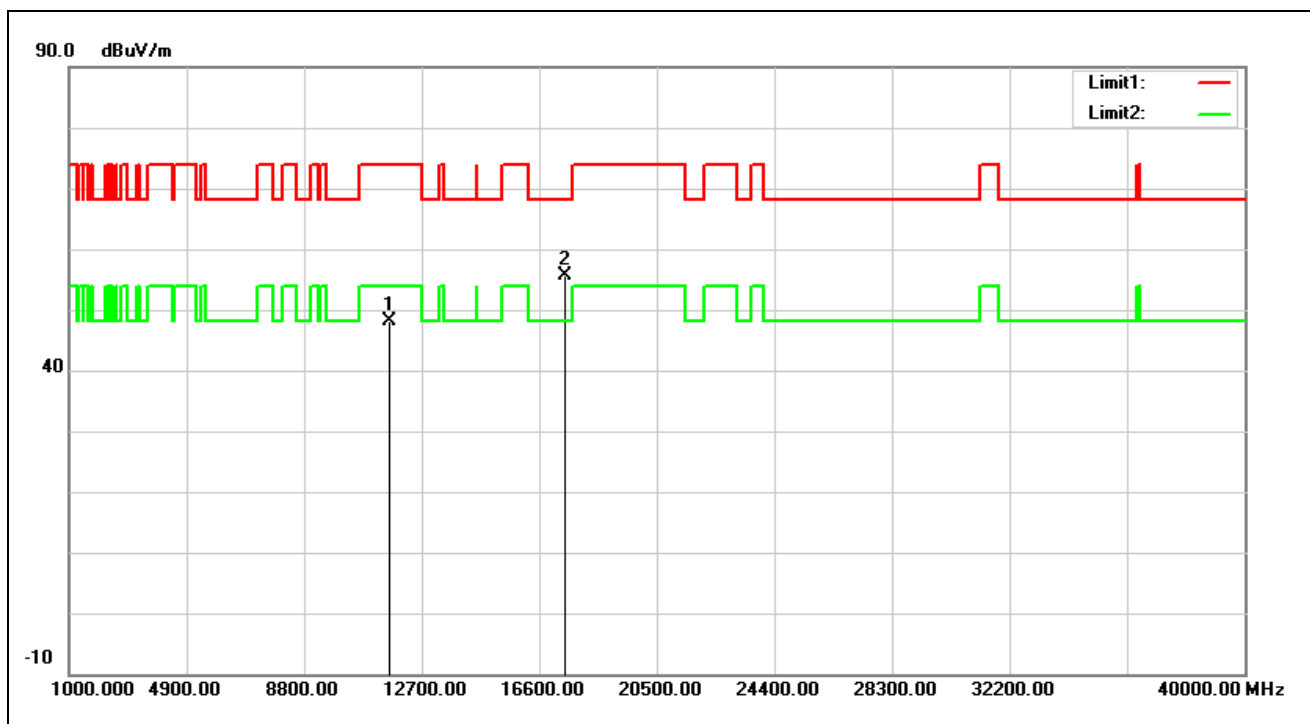


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.83	14.39	48.22	74.00	-25.78	peak
2*	17475.000	31.82	23.92	55.74	68.20	-12.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

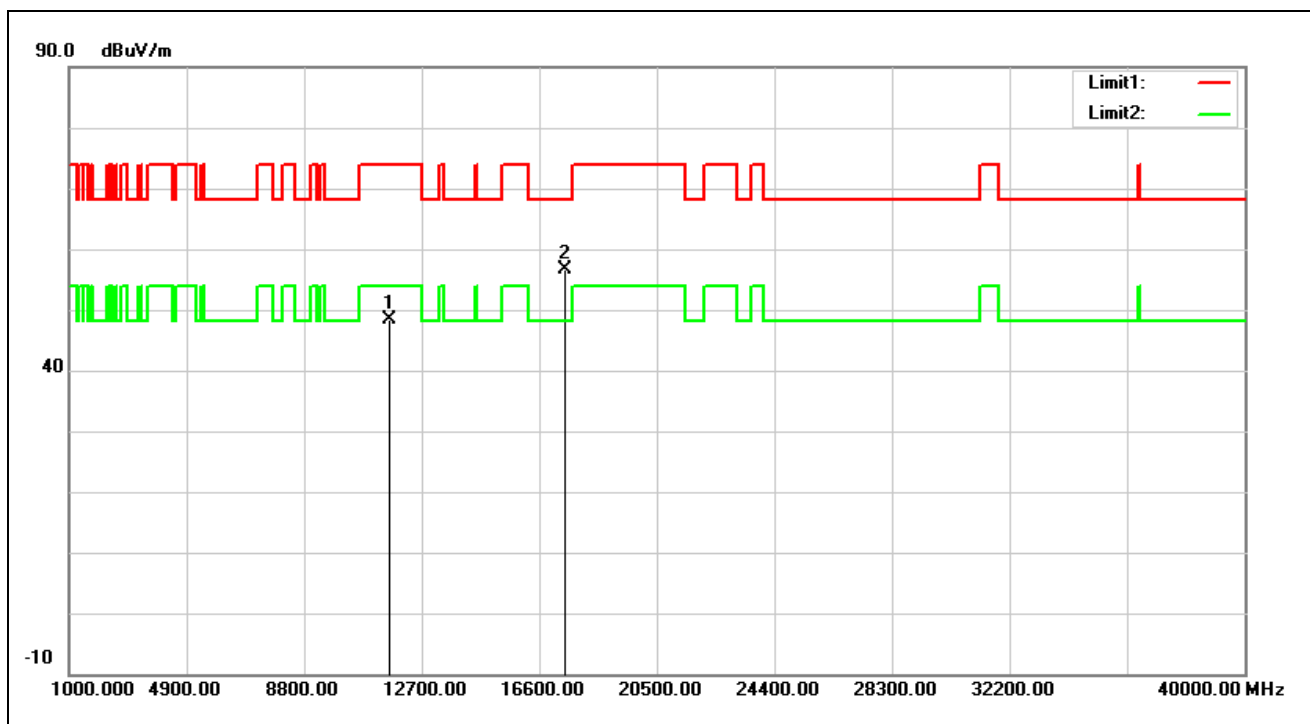


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.93	14.39	48.32	74.00	-25.68	peak
2*	17475.000	32.79	23.92	56.71	68.20	-11.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

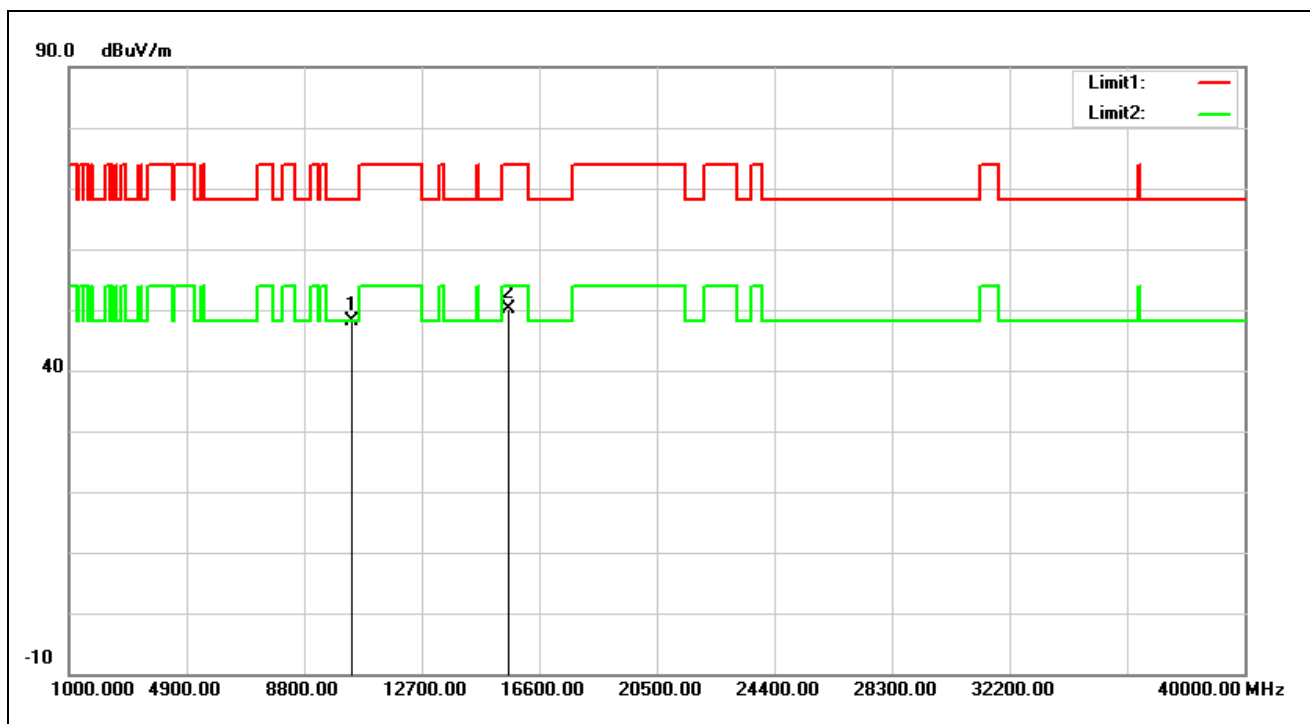


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	34.09	13.93	48.02	68.20	-20.18	peak
2	15570.000	33.53	16.62	50.15	74.00	-23.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

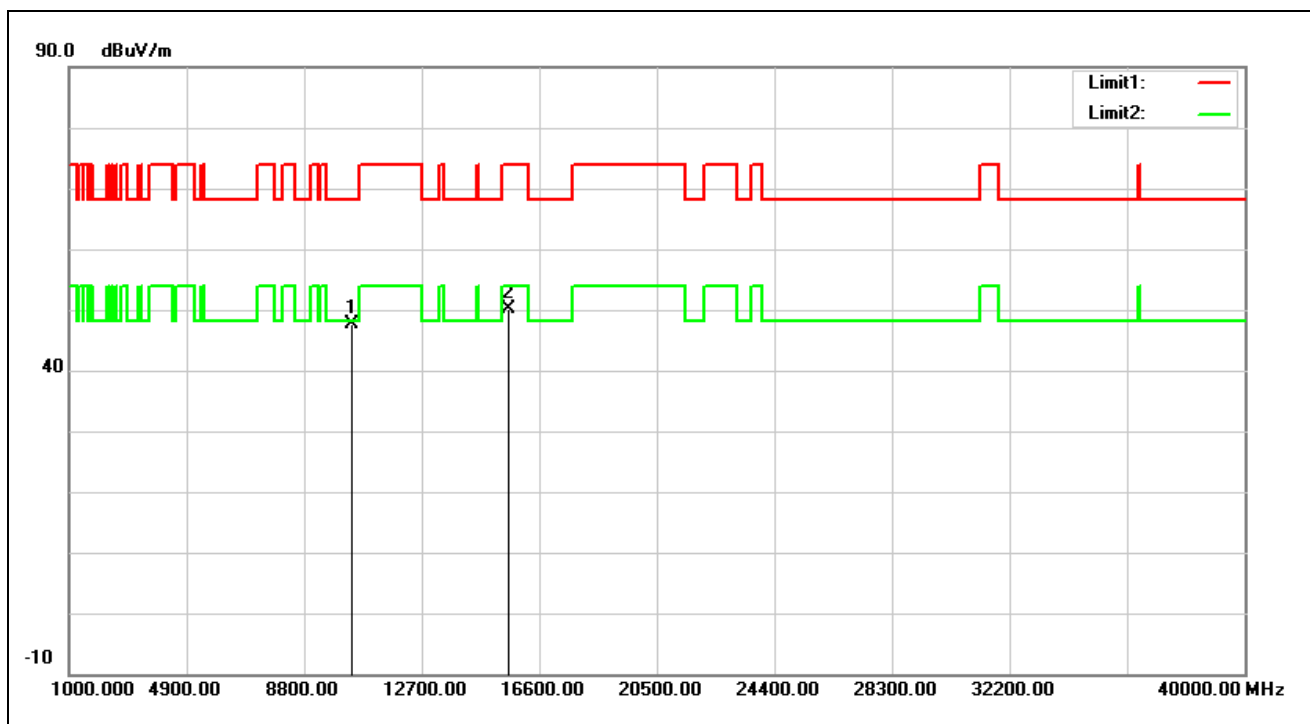


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	33.76	13.93	47.69	68.20	-20.51	peak
2	15570.000	33.45	16.62	50.07	74.00	-23.93	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

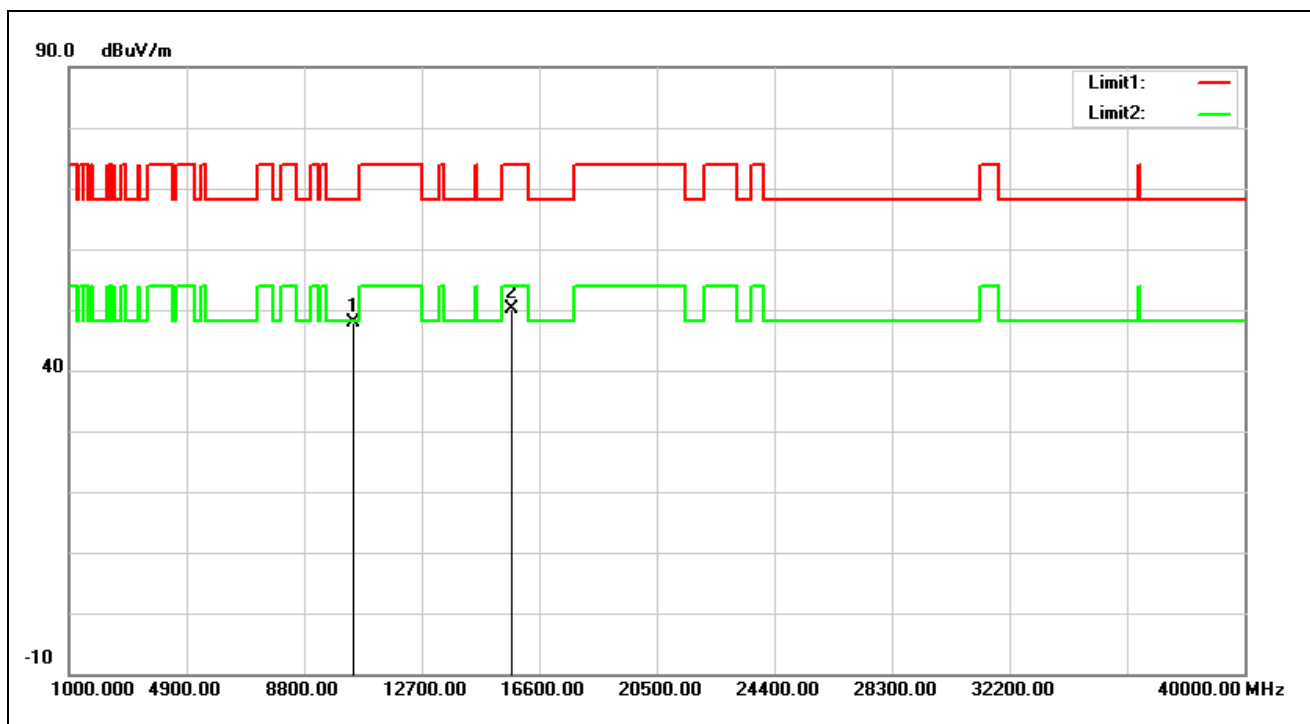


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	33.76	14.20	47.96	68.20	-20.24	peak
2	15690.000	33.53	16.52	50.05	74.00	-23.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

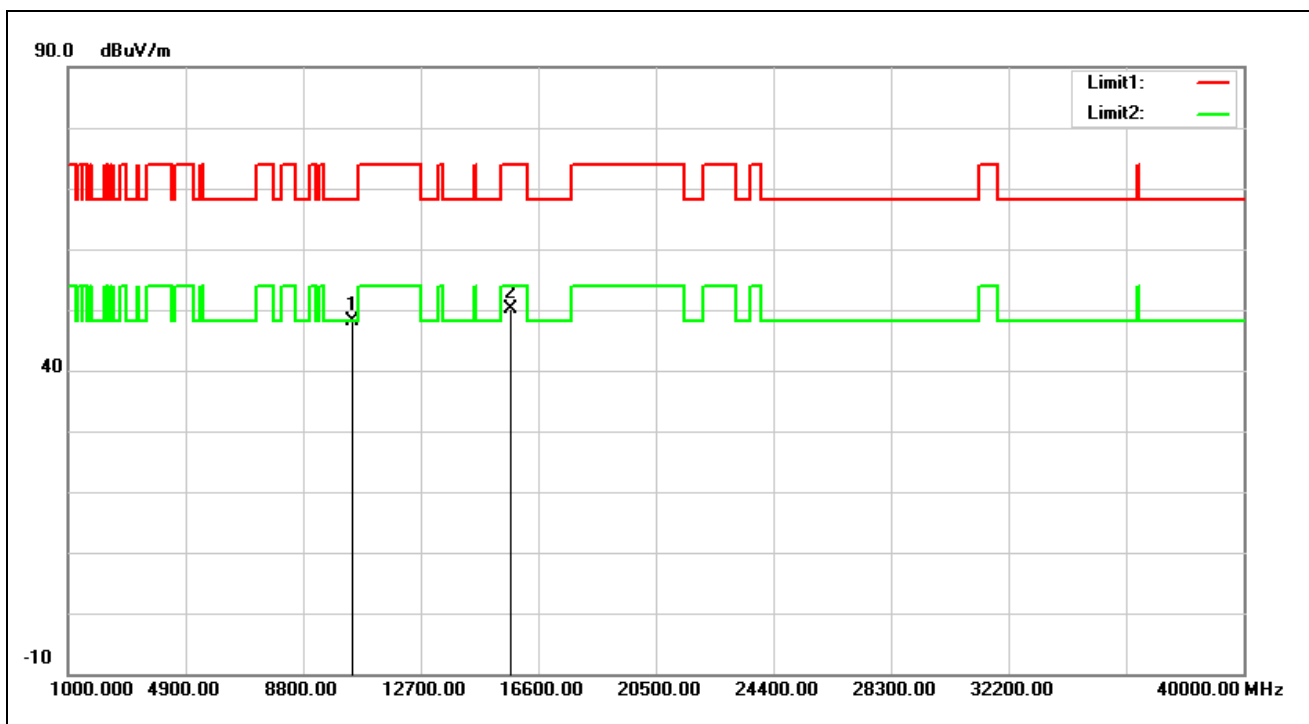


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	34.00	14.20	48.20	68.20	-20.00	peak
2	15690.000	33.59	16.52	50.11	74.00	-23.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

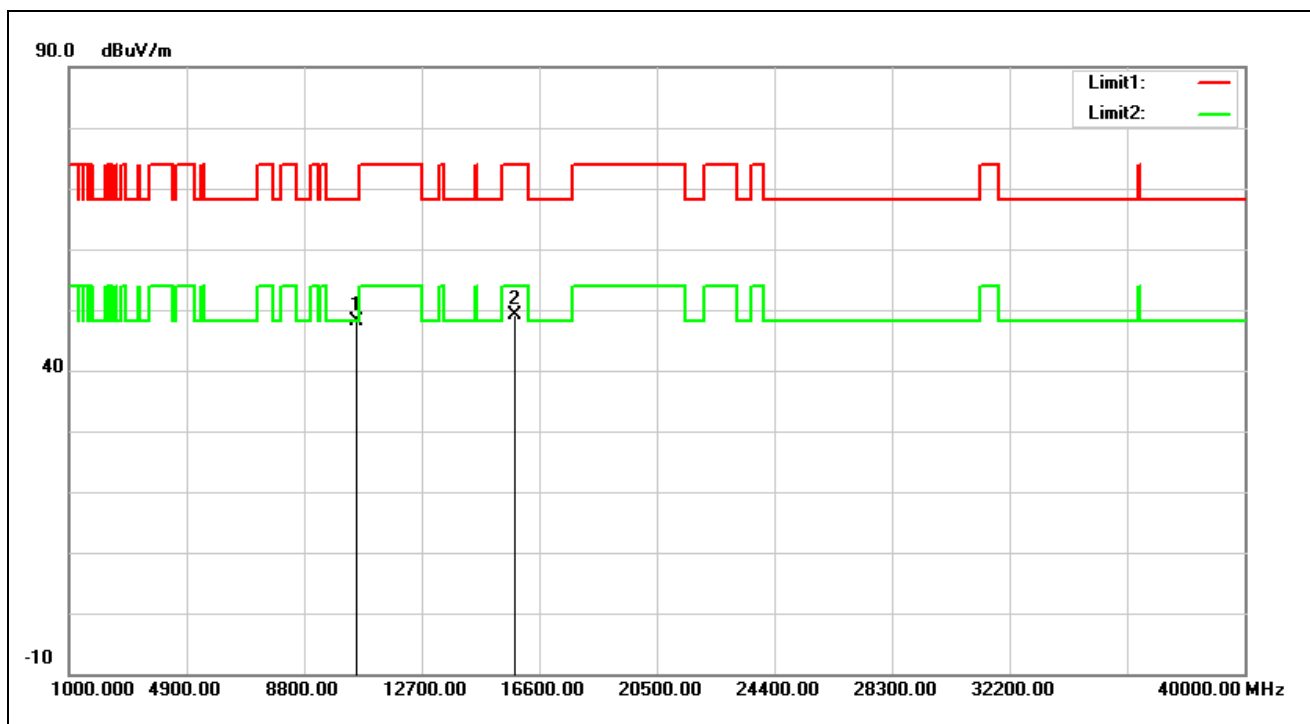


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.92	14.32	48.24	68.20	-19.96	peak
2	15810.000	32.80	16.29	49.09	74.00	-24.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

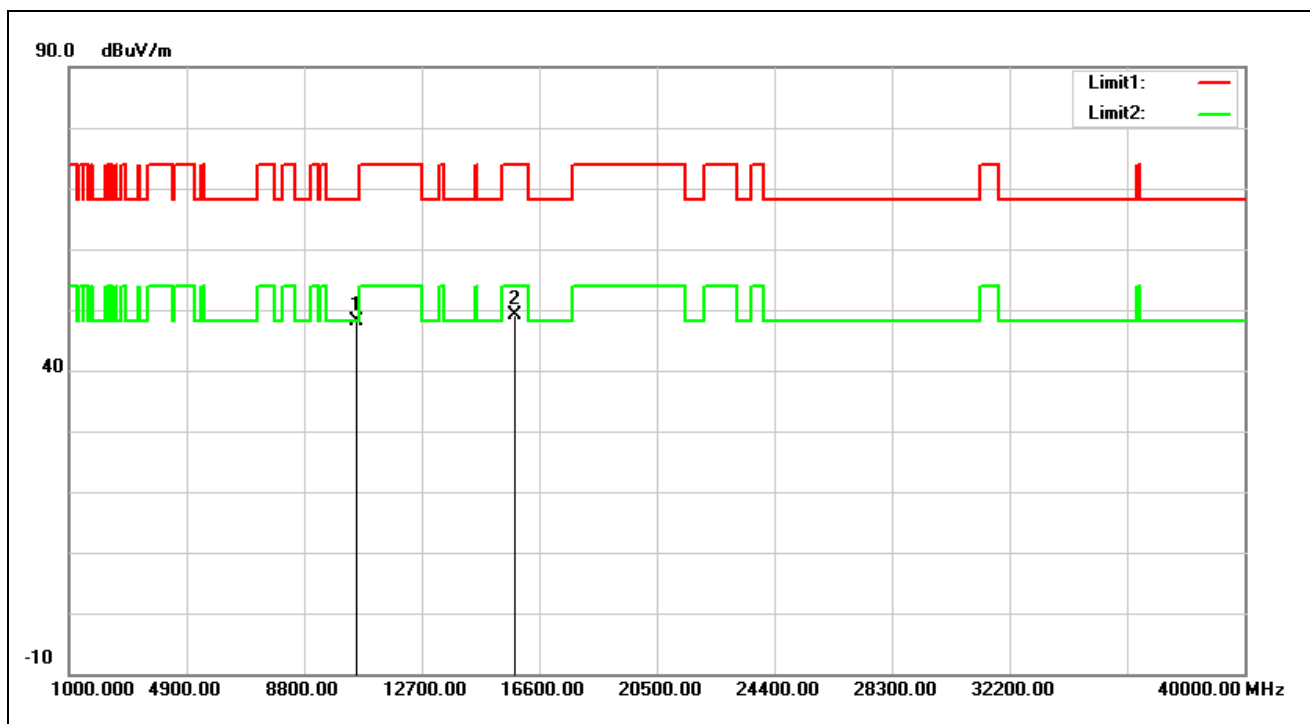


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.72	14.32	48.04	68.20	-20.16	peak
2	15810.000	32.84	16.29	49.13	74.00	-24.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

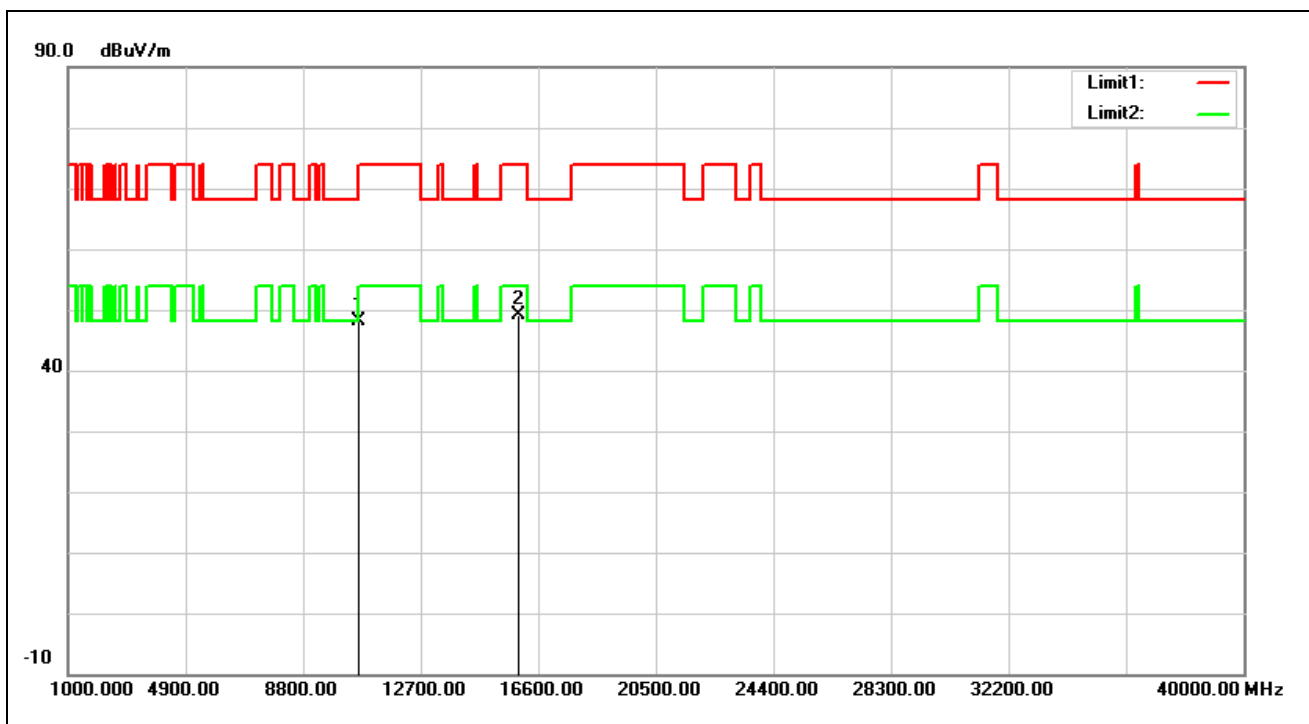


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.92	14.26	48.18	74.00	-25.82	peak
2*	15930.000	33.39	15.86	49.25	74.00	-24.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

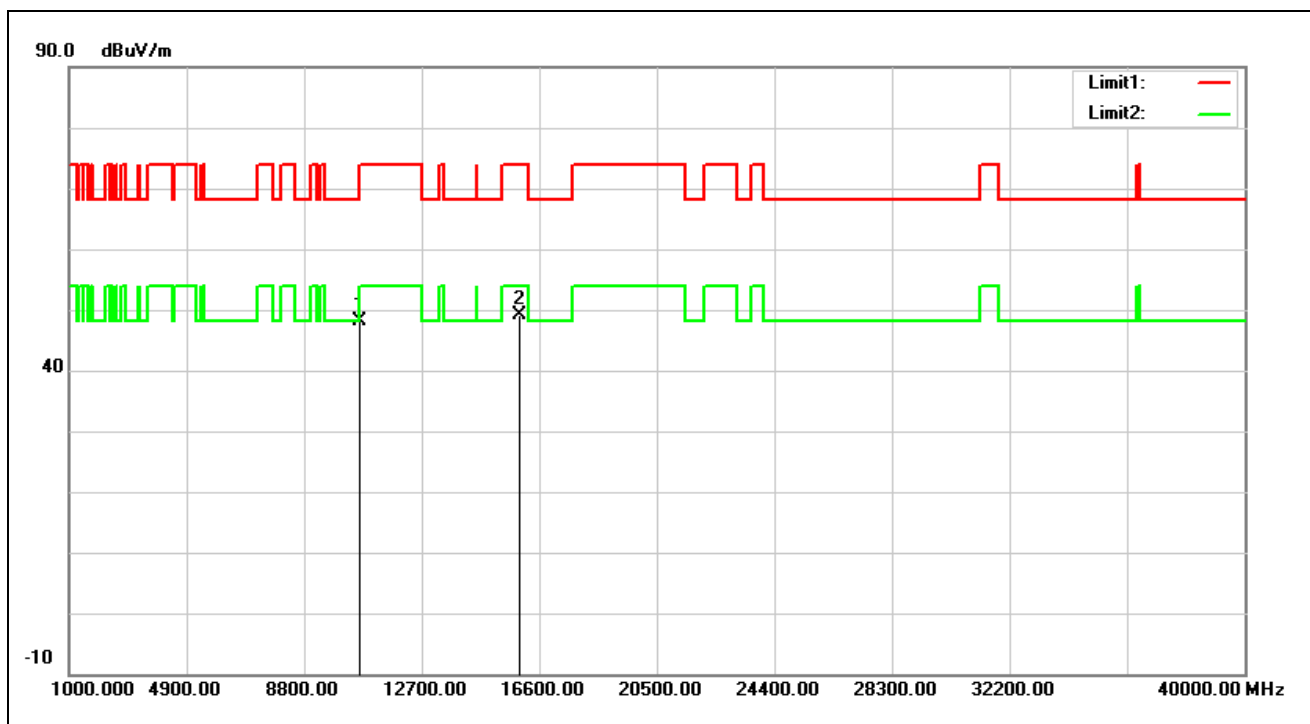


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.84	14.26	48.10	74.00	-25.90	peak
2*	15930.000	33.35	15.86	49.21	74.00	-24.79	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

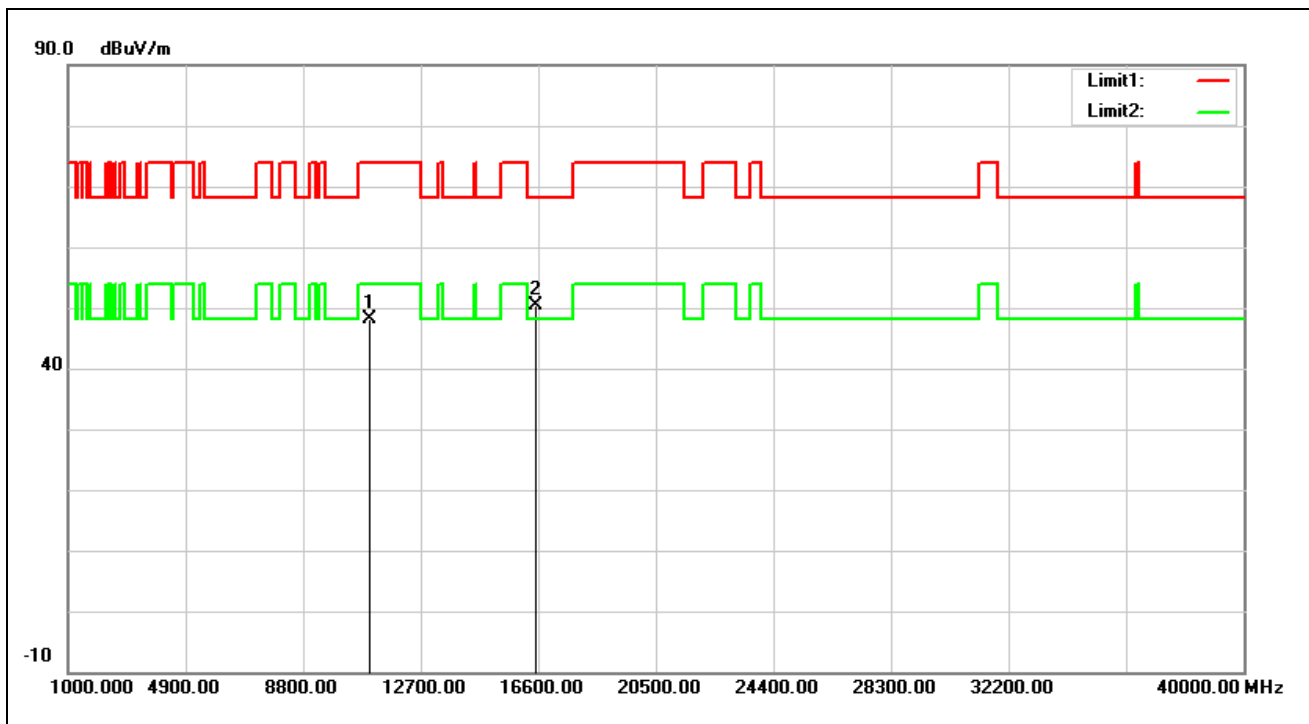


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.85	14.29	48.14	74.00	-25.86	peak
2*	16530.000	33.27	17.05	50.32	68.20	-17.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

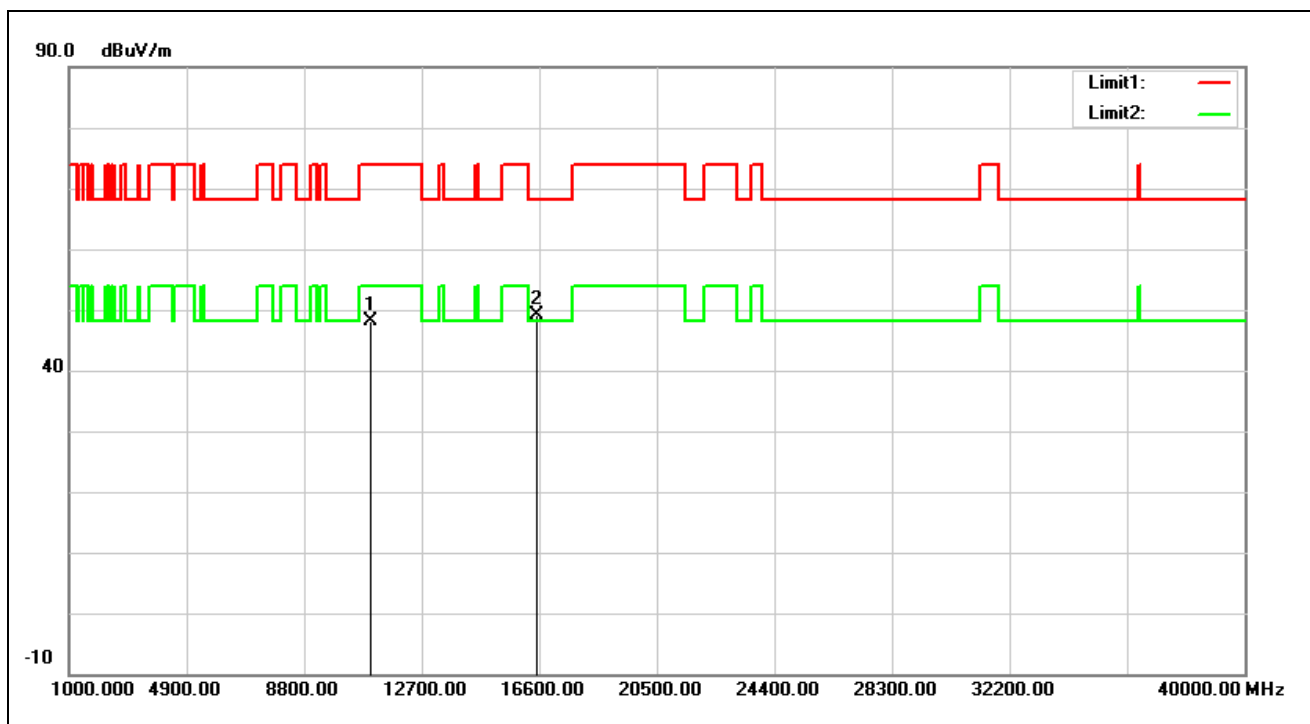


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.90	14.29	48.19	74.00	-25.81	peak
2*	16530.000	31.98	17.05	49.03	68.20	-19.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5550 MHz		
Remark:			

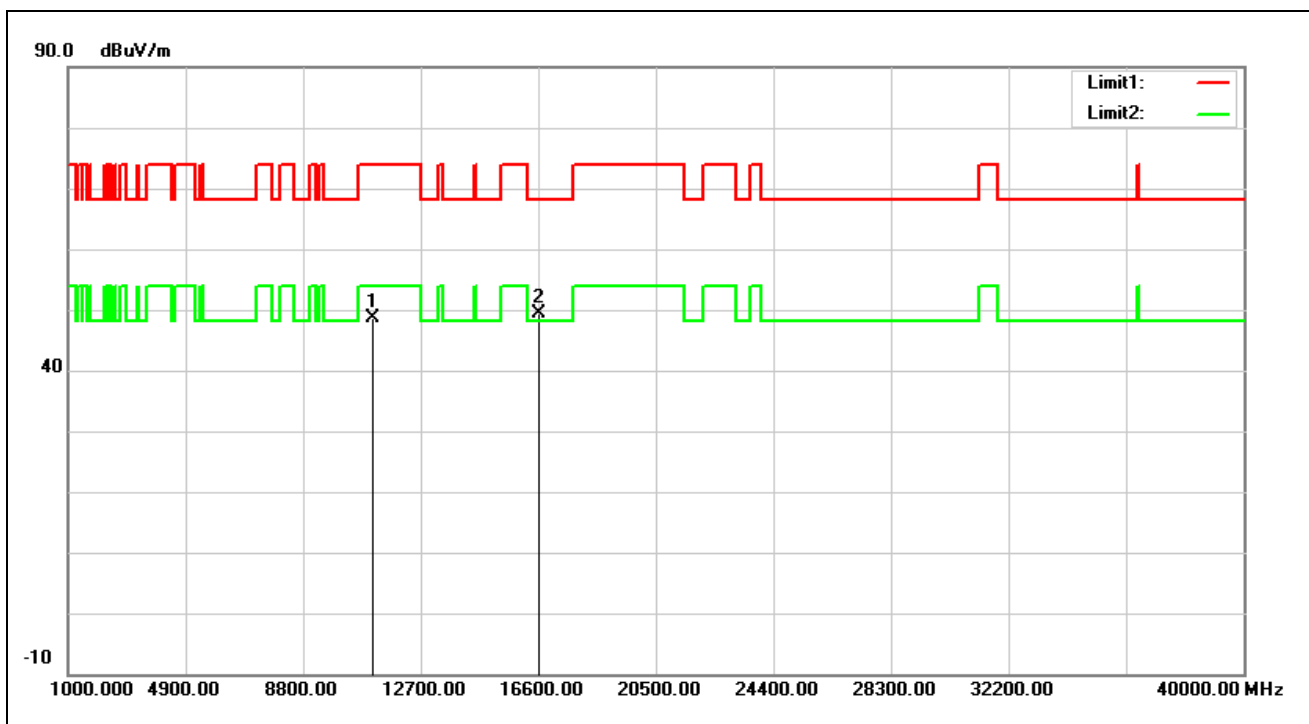


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.13	14.56	48.69	74.00	-25.31	peak
2*	16650.000	31.60	17.78	49.38	68.20	-18.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5550 MHz		
Remark:			

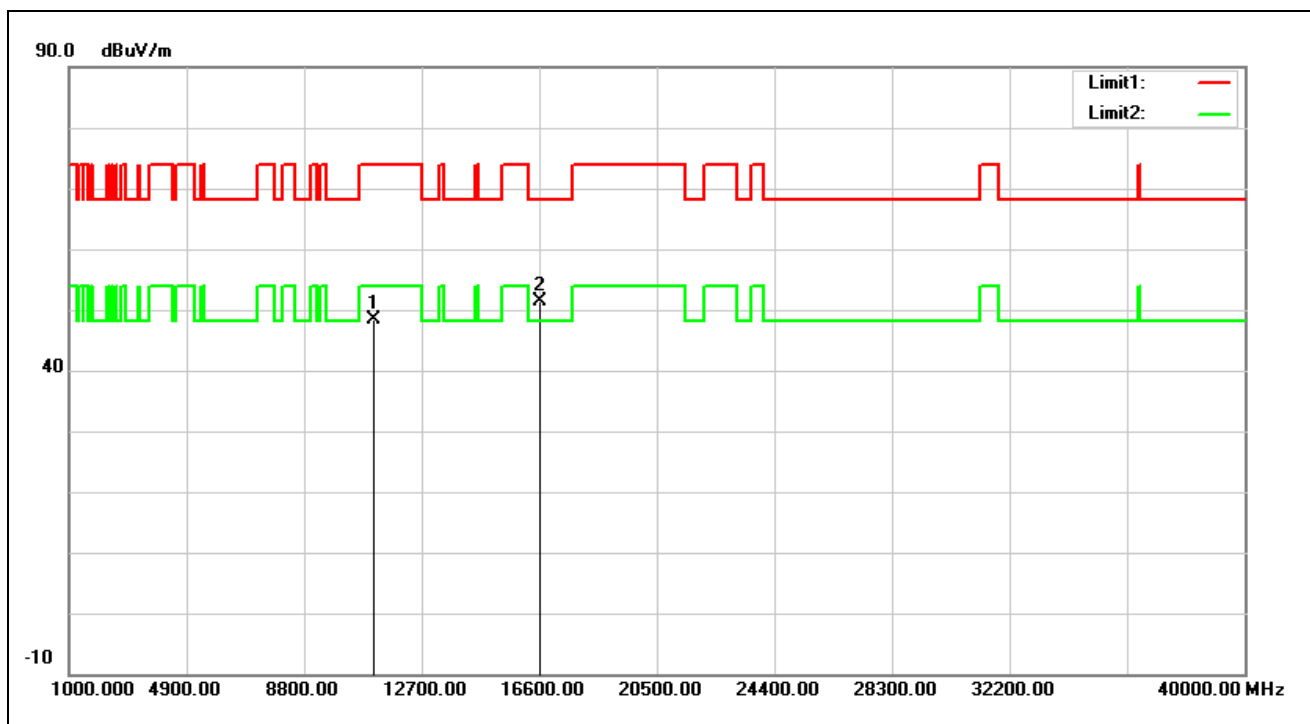


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.70	14.56	48.26	74.00	-25.74	peak
2*	16650.000	33.56	17.78	51.34	68.20	-16.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

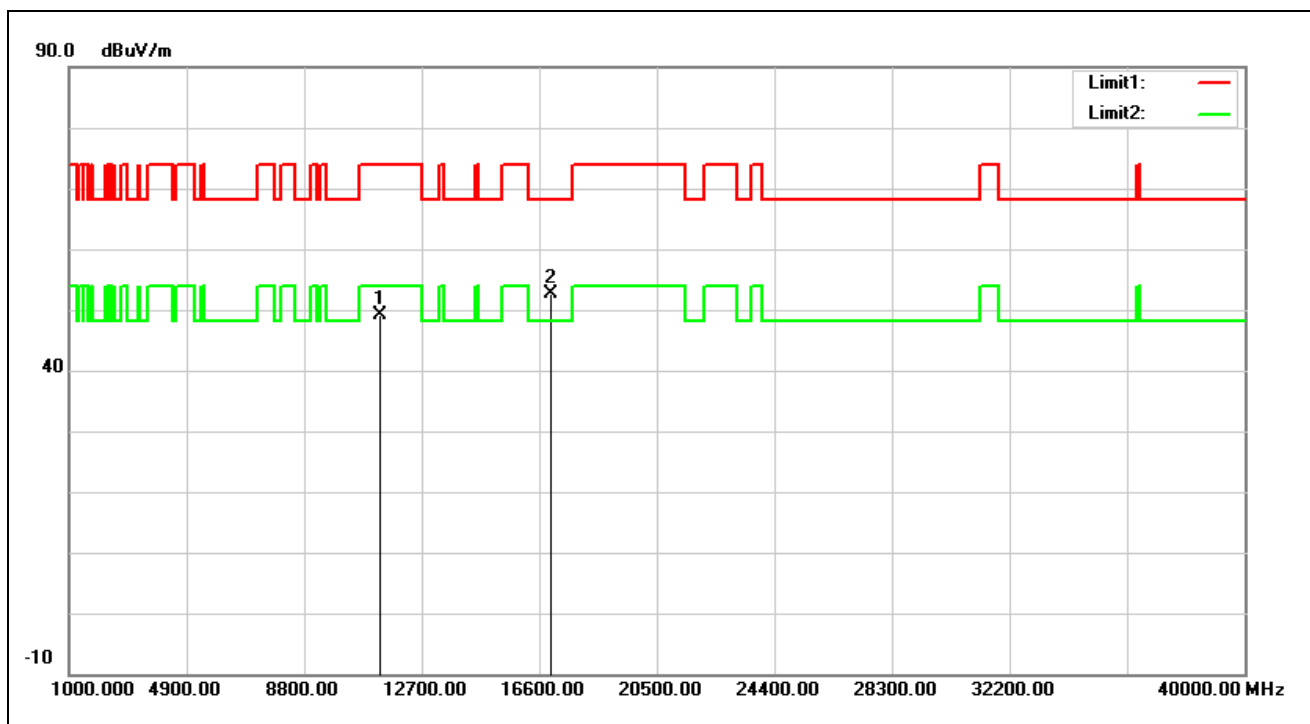


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.69	14.36	49.05	74.00	-24.95	peak
2*	17010.000	32.78	19.92	52.70	68.20	-15.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

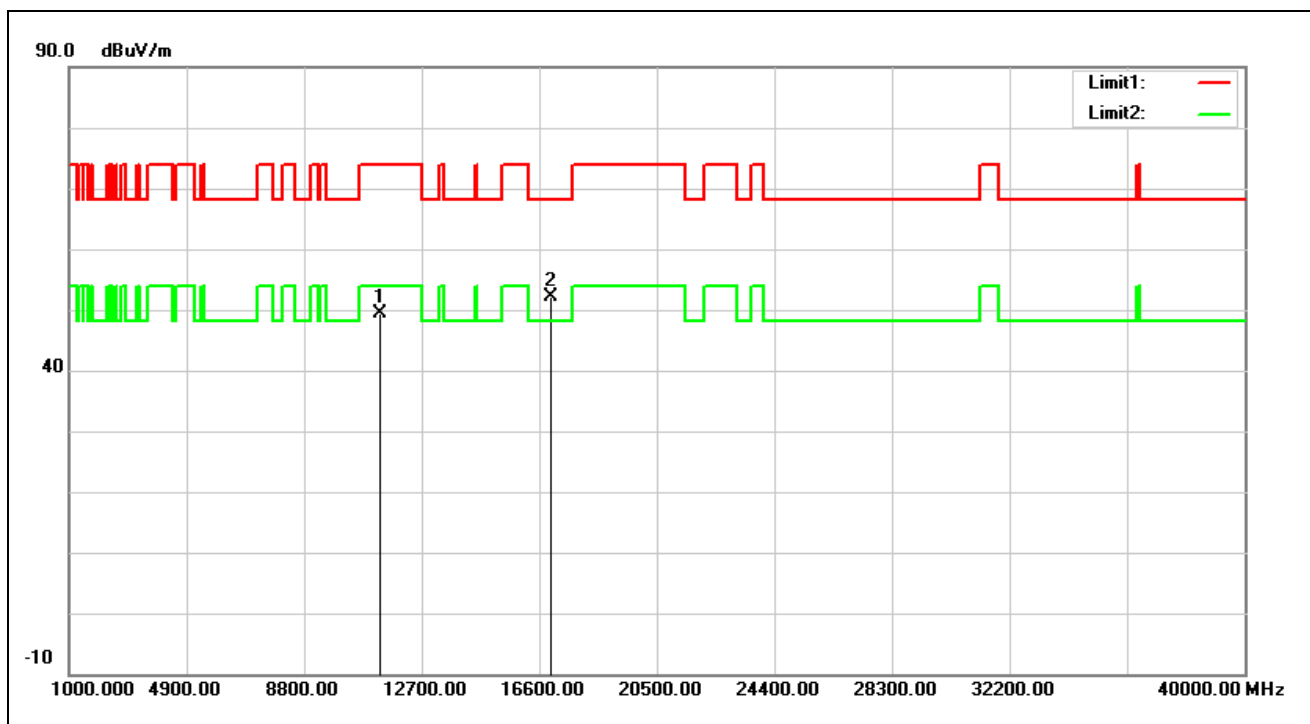


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.94	14.36	49.30	74.00	-24.70	peak
2*	17010.000	32.33	19.92	52.25	68.20	-15.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

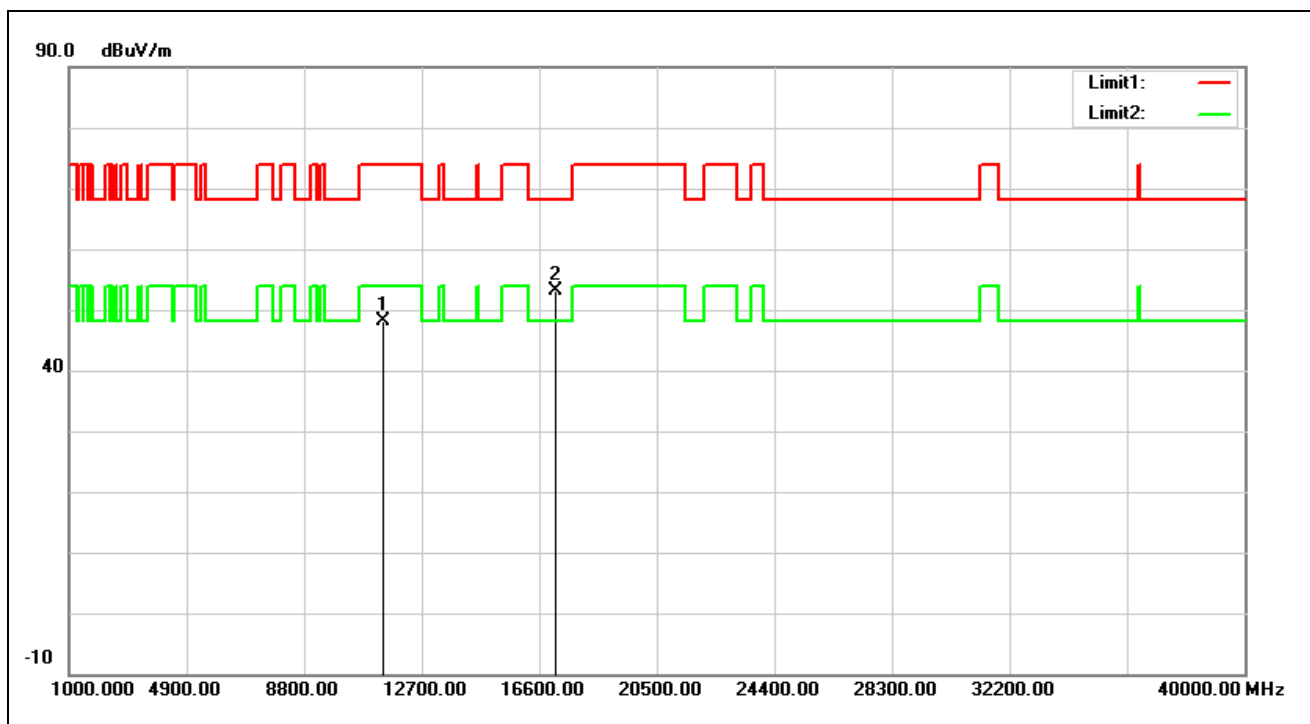


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.83	14.41	48.24	74.00	-25.76	peak
2*	17130.000	32.14	20.89	53.03	68.20	-15.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

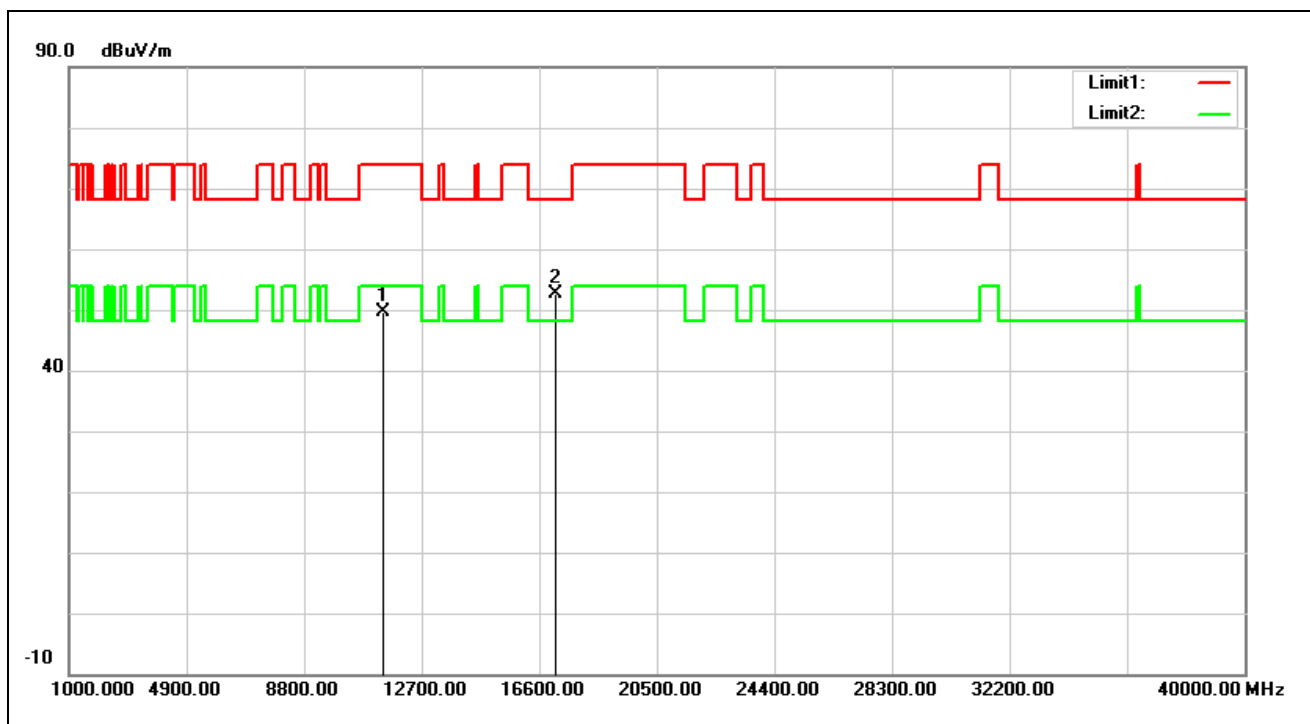


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	35.13	14.41	49.54	74.00	-24.46	peak
2*	17130.000	31.75	20.89	52.64	68.20	-15.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

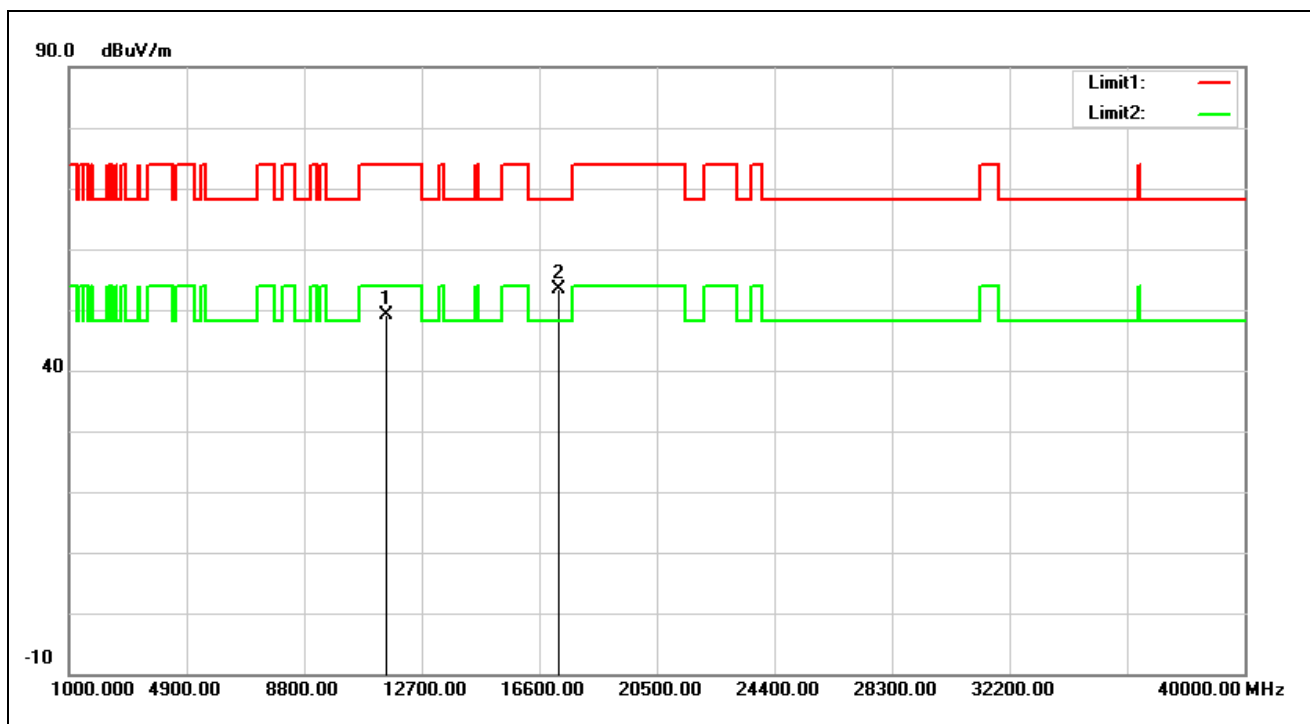


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.09	14.94	49.03	74.00	-24.97	peak
2*	17265.000	31.46	21.98	53.44	68.20	-14.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

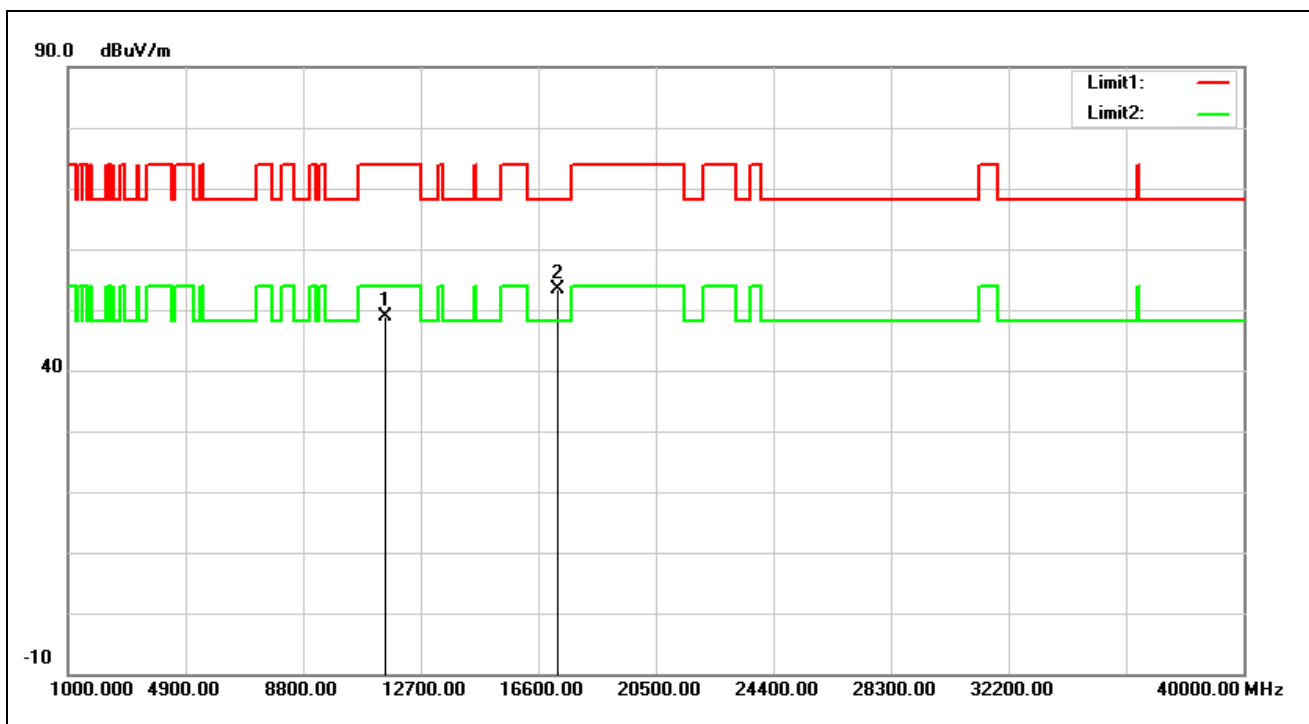


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.95	14.94	48.89	74.00	-25.11	peak
2*	17265.000	31.39	21.98	53.37	68.20	-14.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

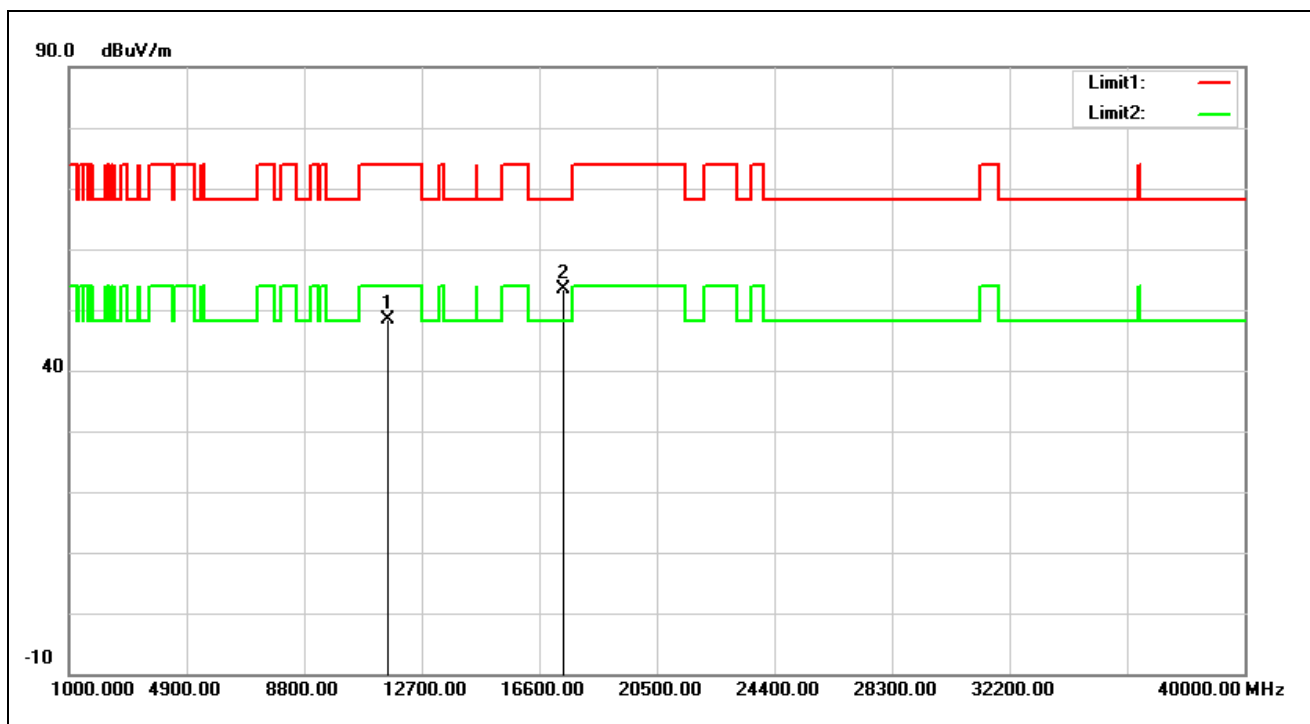


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.81	14.49	48.30	74.00	-25.70	peak
2*	17385.000	30.55	22.80	53.35	68.20	-14.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

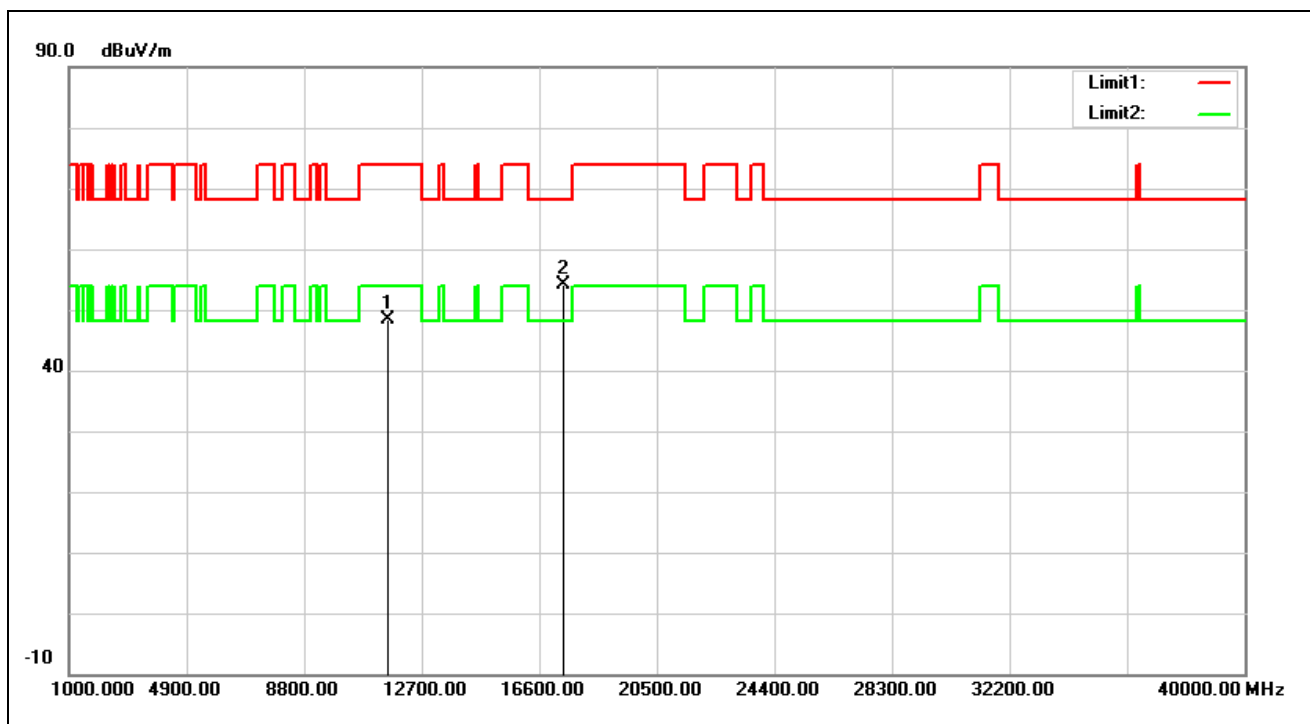


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.87	14.49	48.36	74.00	-25.64	peak
2*	17385.000	31.37	22.80	54.17	68.20	-14.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

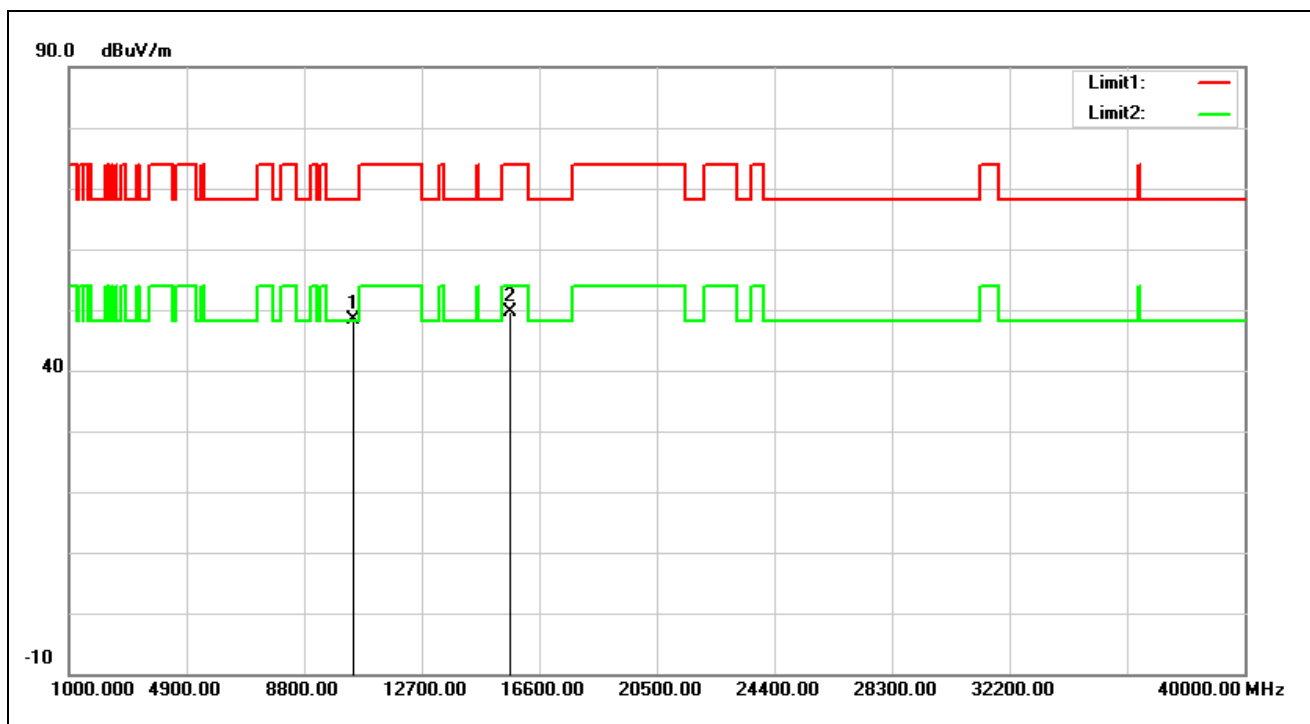


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	34.20	14.10	48.30	68.20	-19.90	peak
2	15630.000	33.04	16.52	49.56	74.00	-24.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

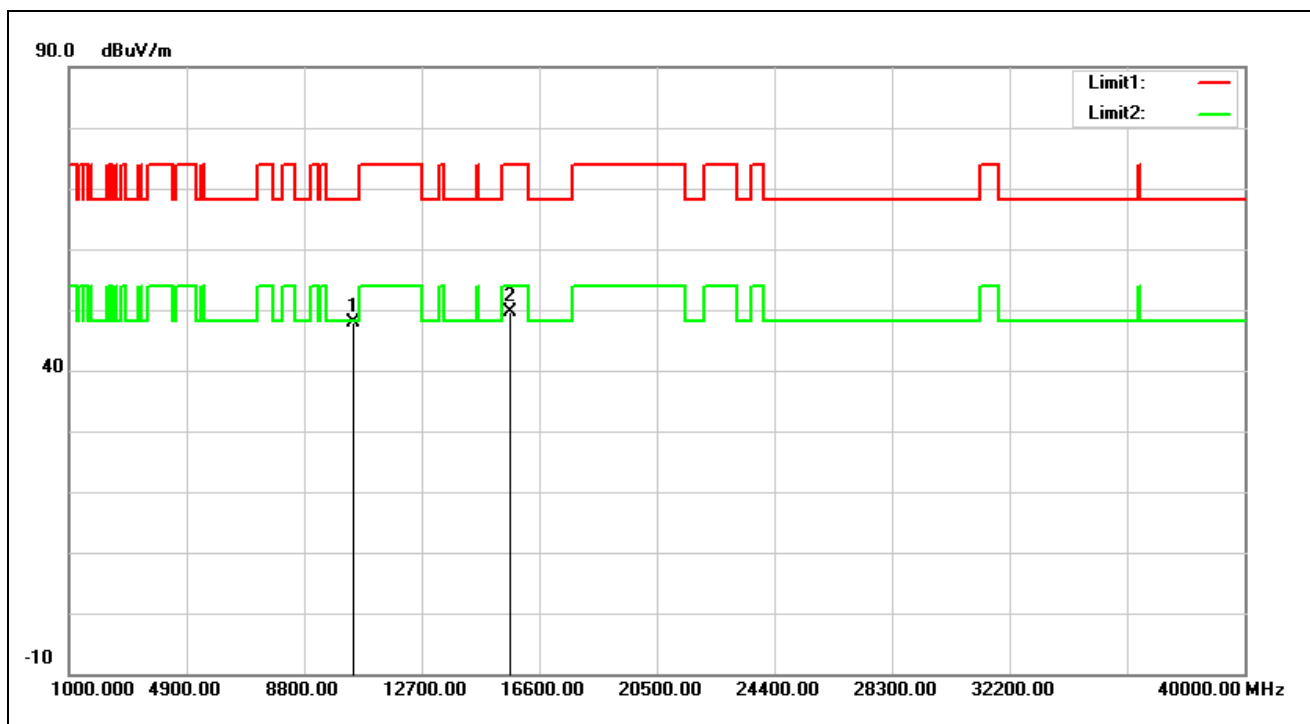


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	33.86	14.10	47.96	68.20	-20.24	peak
2	15630.000	33.09	16.52	49.61	74.00	-24.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

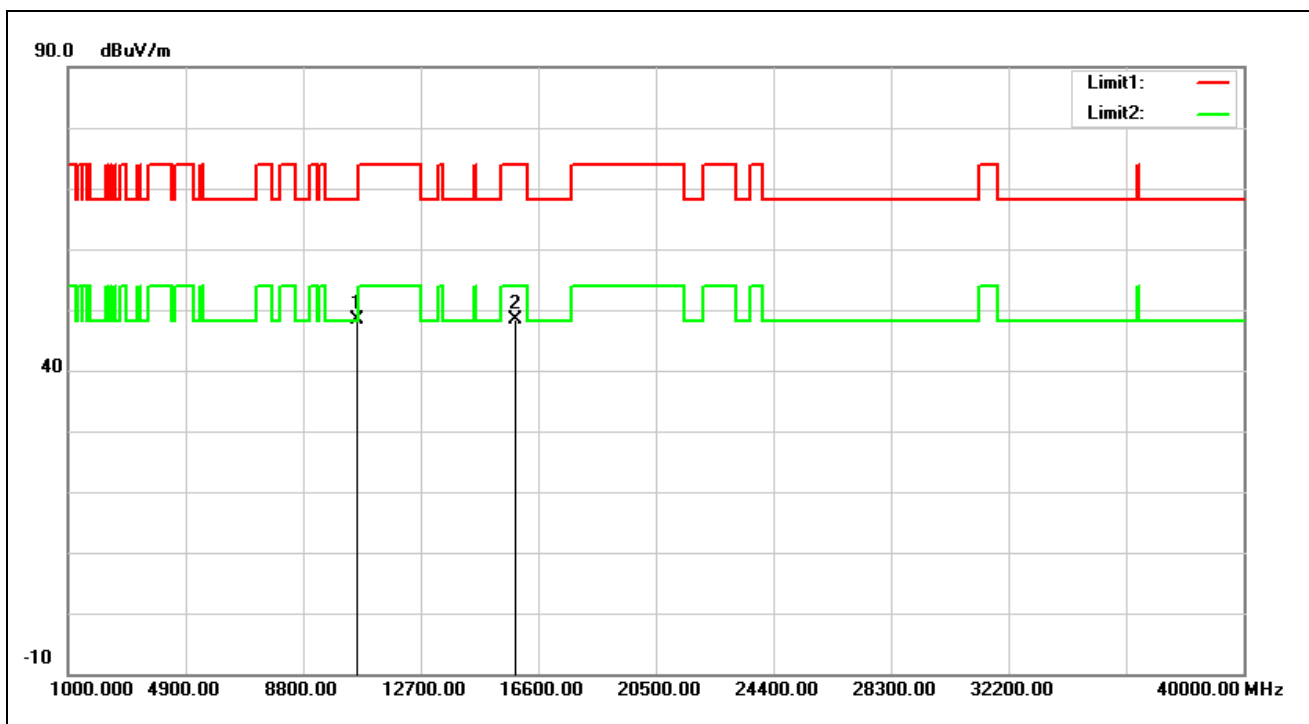


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	34.05	14.32	48.37	68.20	-19.83	peak
2	15870.000	32.20	16.06	48.26	74.00	-25.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

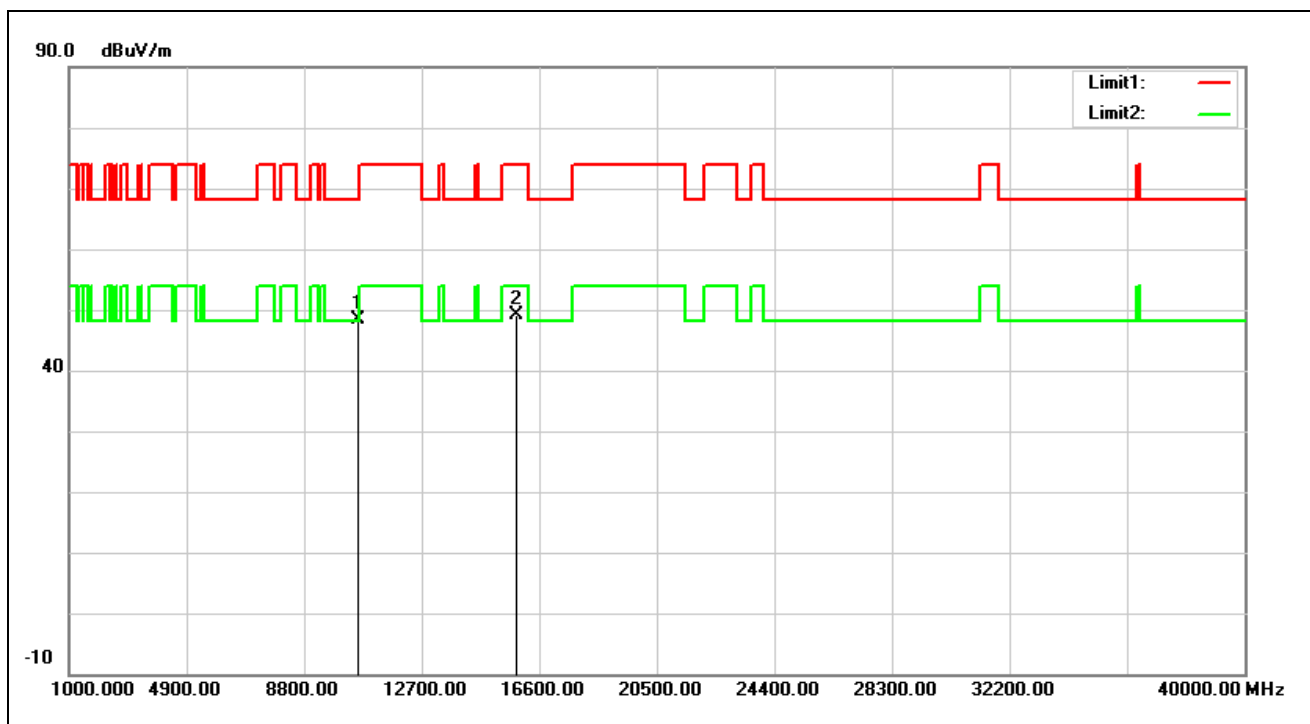


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	33.94	14.32	48.26	68.20	-19.94	peak
2	15870.000	32.96	16.06	49.02	74.00	-24.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

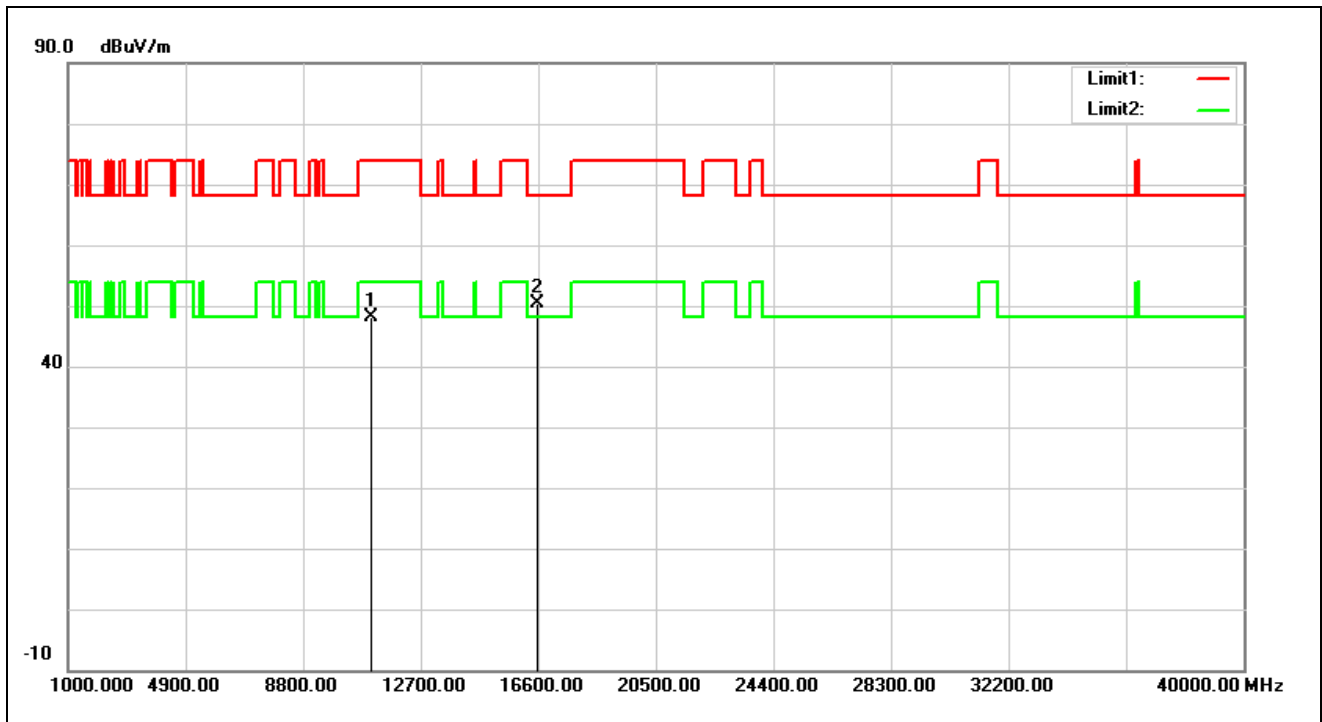


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.68	14.42	48.10	74.00	-25.90	peak
2*	16590.000	32.95	17.39	50.34	68.20	-17.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

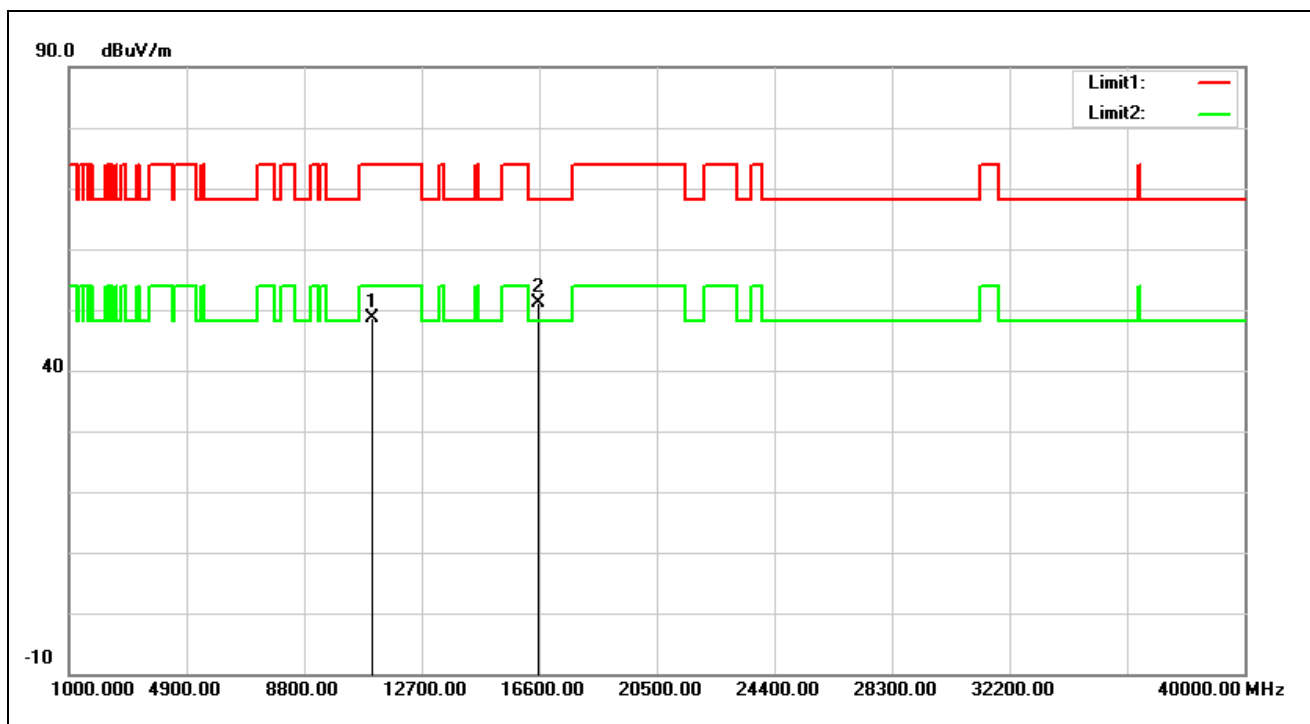


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	34.21	14.42	48.63	74.00	-25.37	peak
2*	16590.000	33.66	17.39	51.05	68.20	-17.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

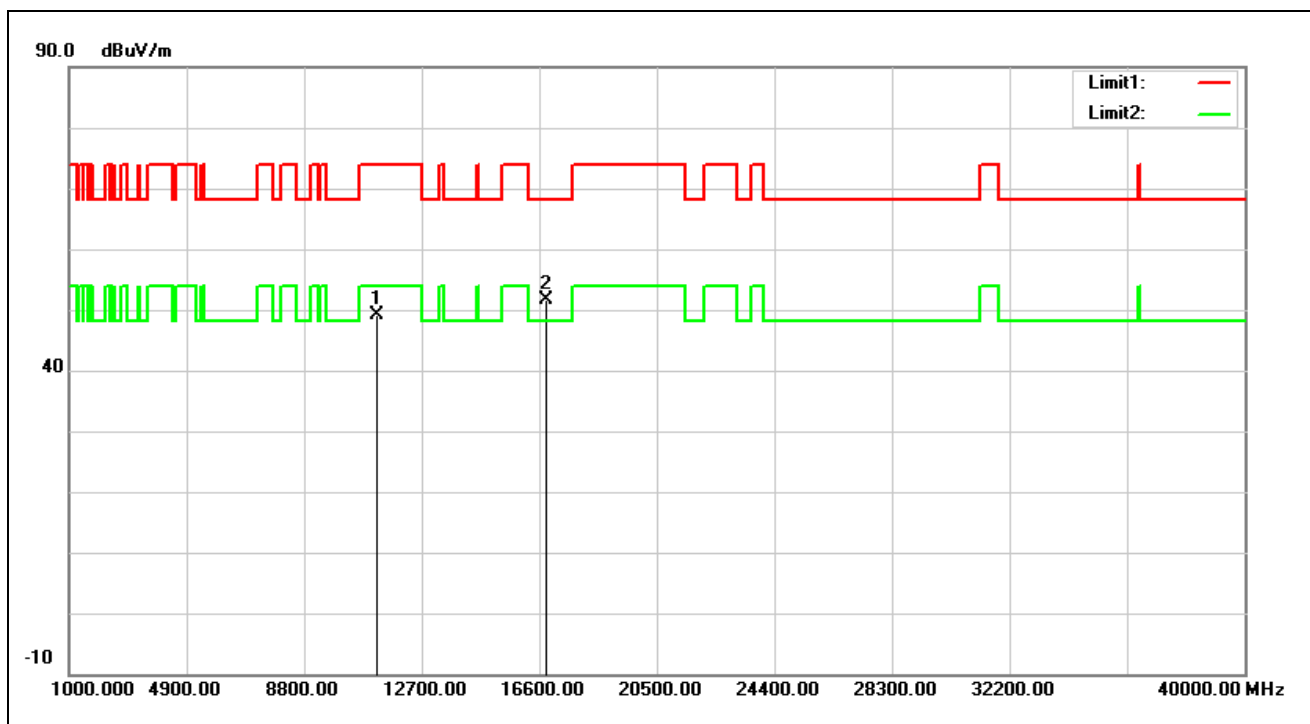


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.78	14.24	49.02	74.00	-24.98	peak
2*	16830.000	32.46	19.09	51.55	68.20	-16.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

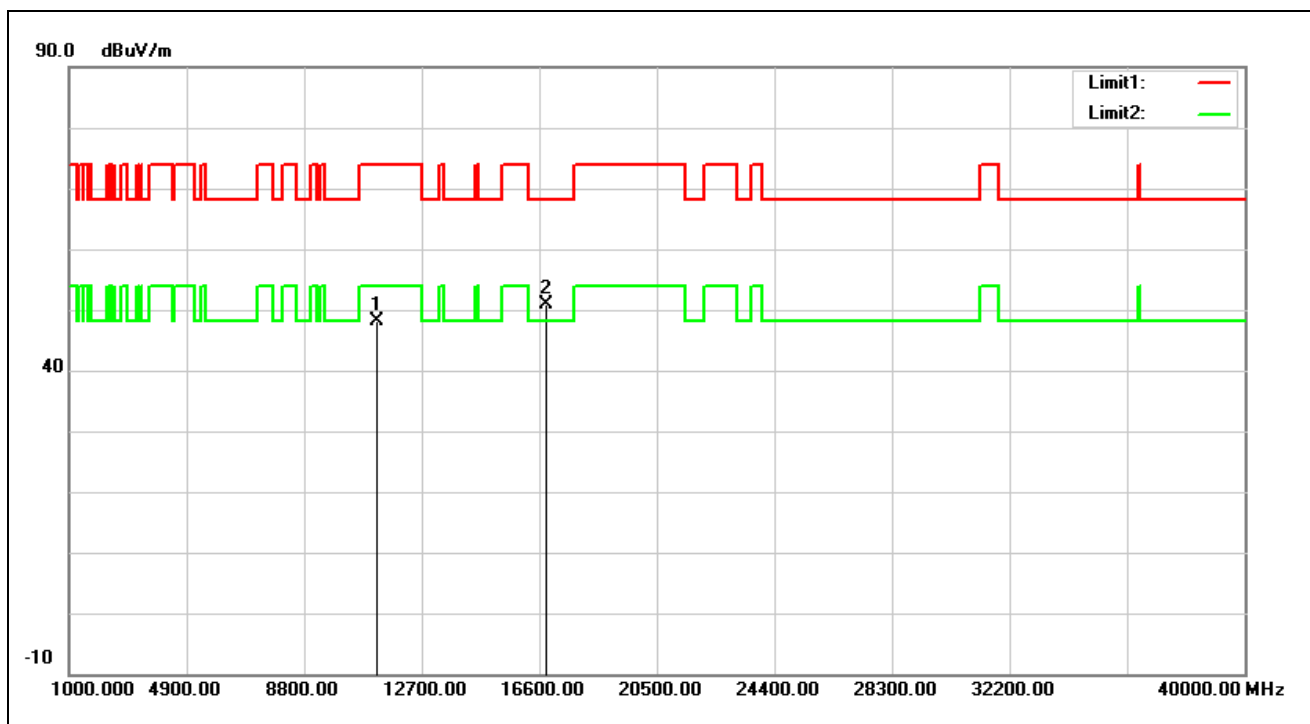


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.01	14.24	48.25	74.00	-25.75	peak
2*	16830.000	31.87	19.09	50.96	68.20	-17.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

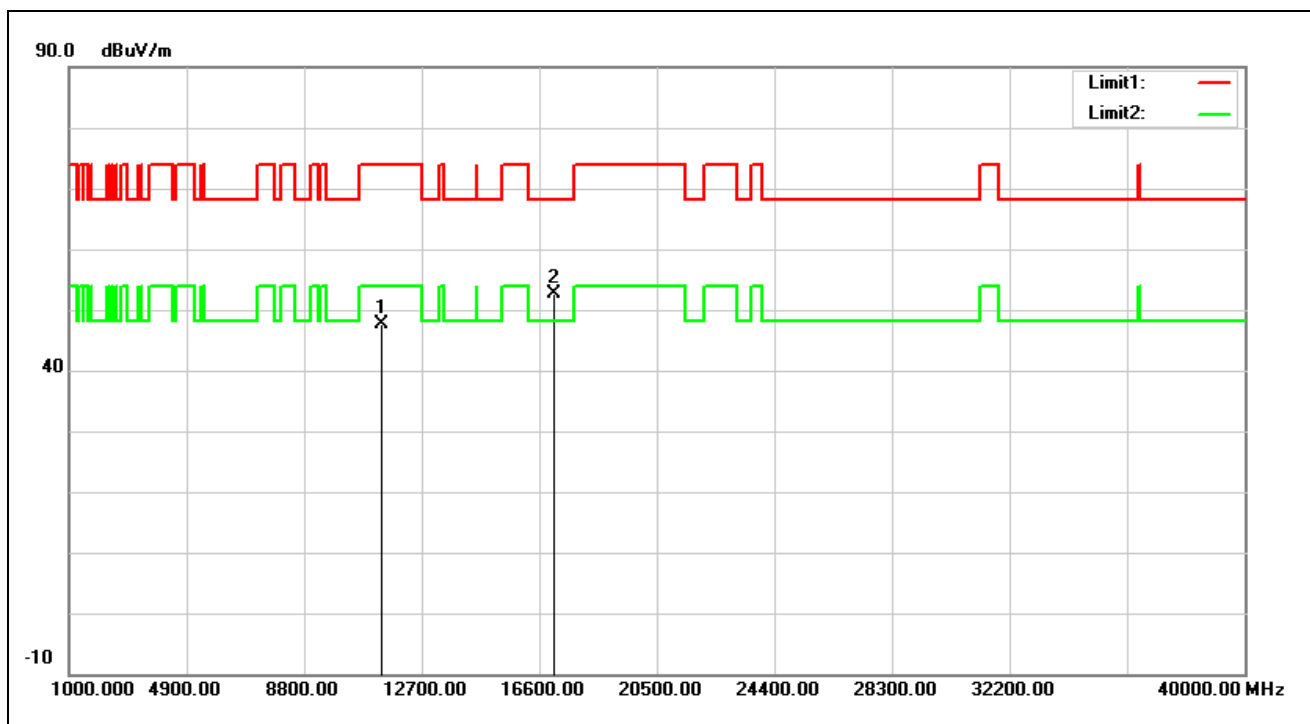


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.36	14.29	47.65	74.00	-26.35	peak
2*	17070.000	32.20	20.43	52.63	68.20	-15.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

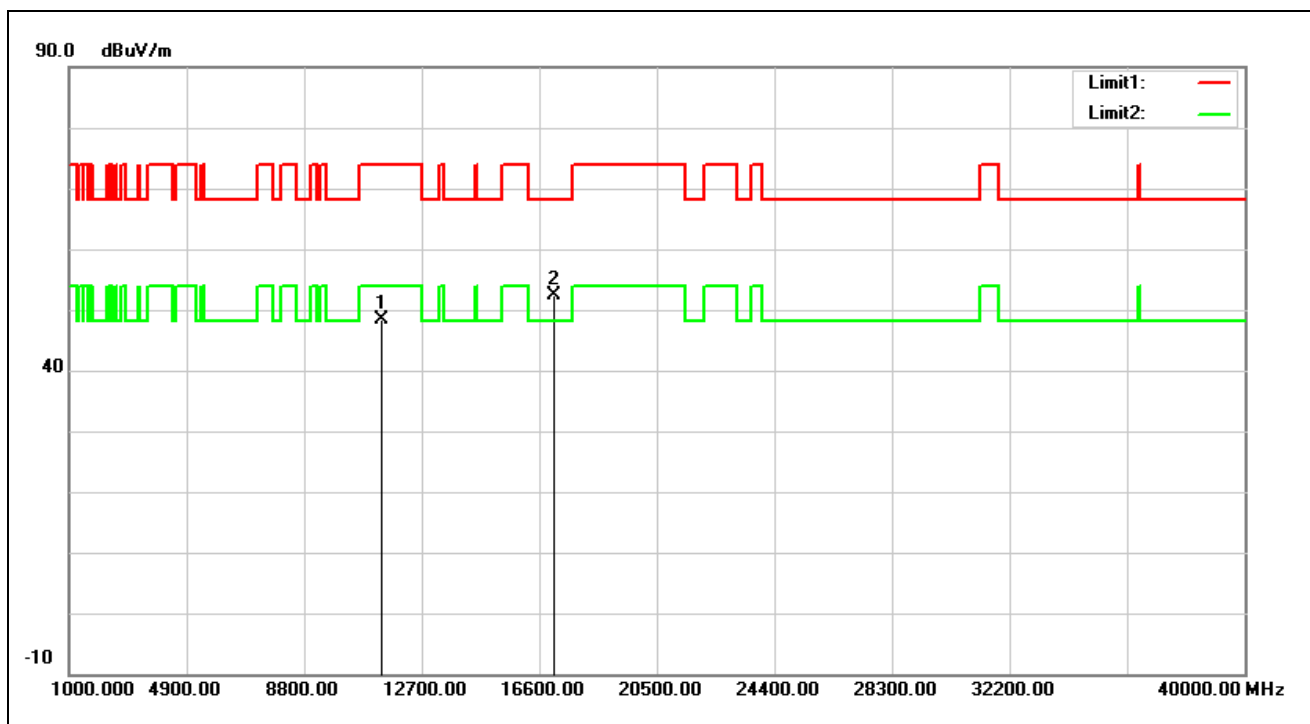


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	34.01	14.29	48.30	74.00	-25.70	peak
2*	17070.000	31.91	20.43	52.34	68.20	-15.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

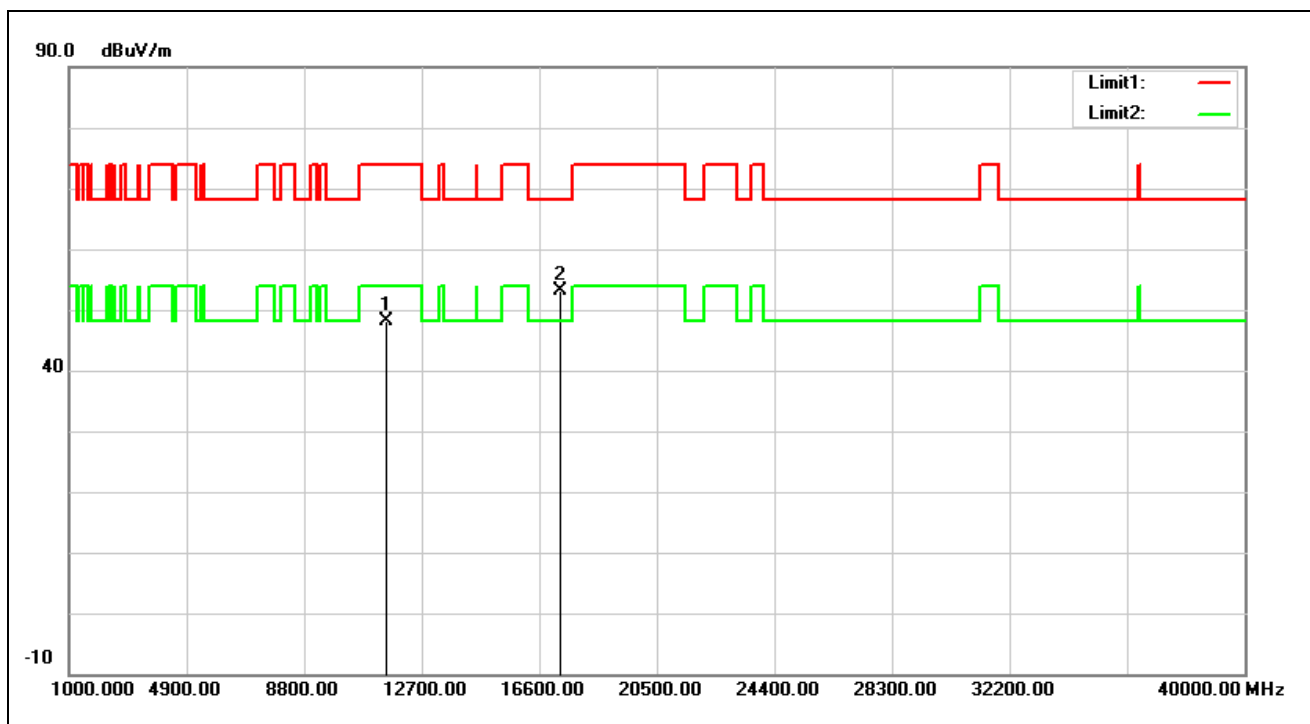


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.48	14.71	48.19	74.00	-25.81	peak
2*	17325.000	30.63	22.46	53.09	68.20	-15.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

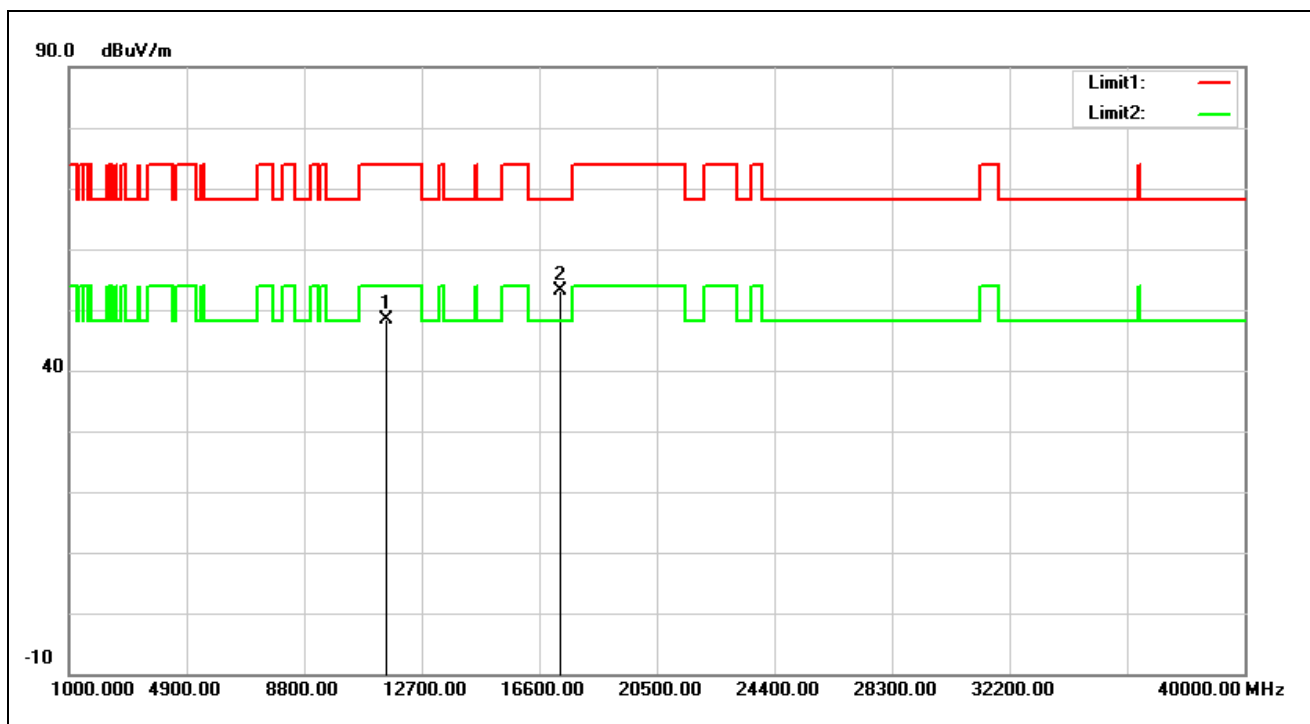


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.76	14.71	48.47	74.00	-25.53	peak
2*	17325.000	30.79	22.46	53.25	68.20	-14.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

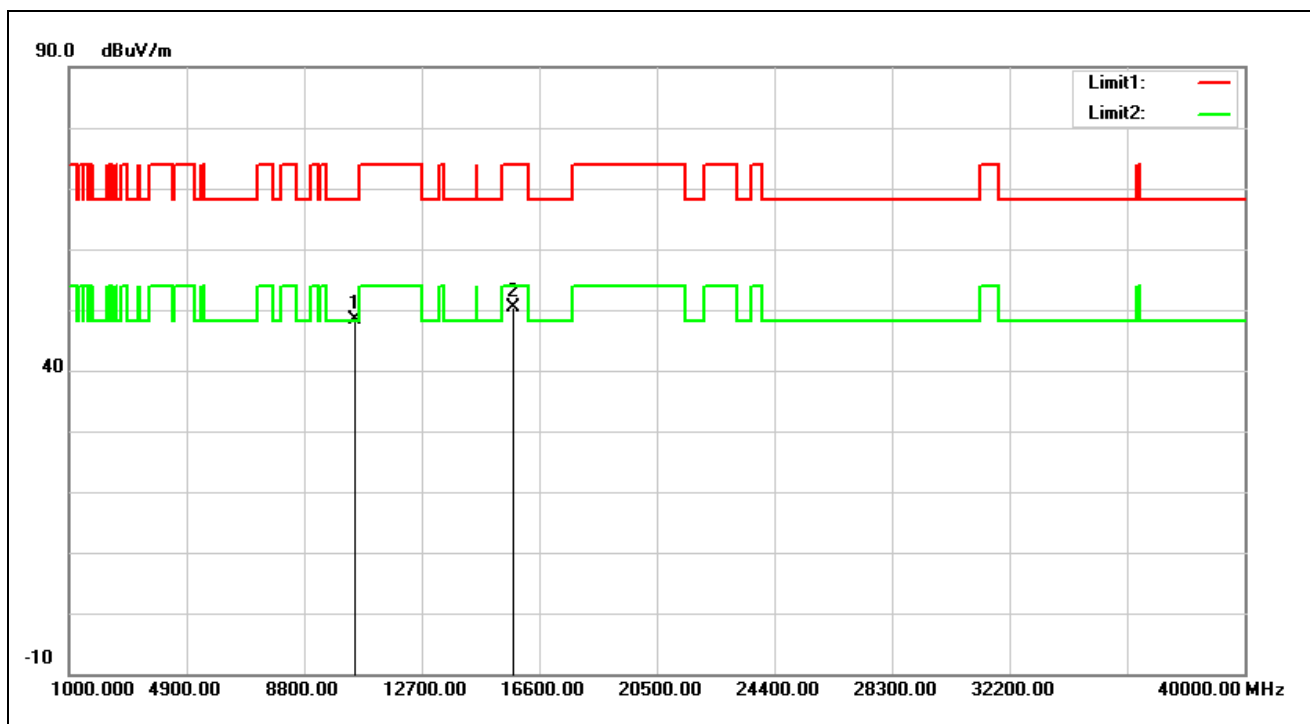


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.99	14.31	48.30	68.20	-19.90	peak
2	15750.000	33.84	16.43	50.27	74.00	-23.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

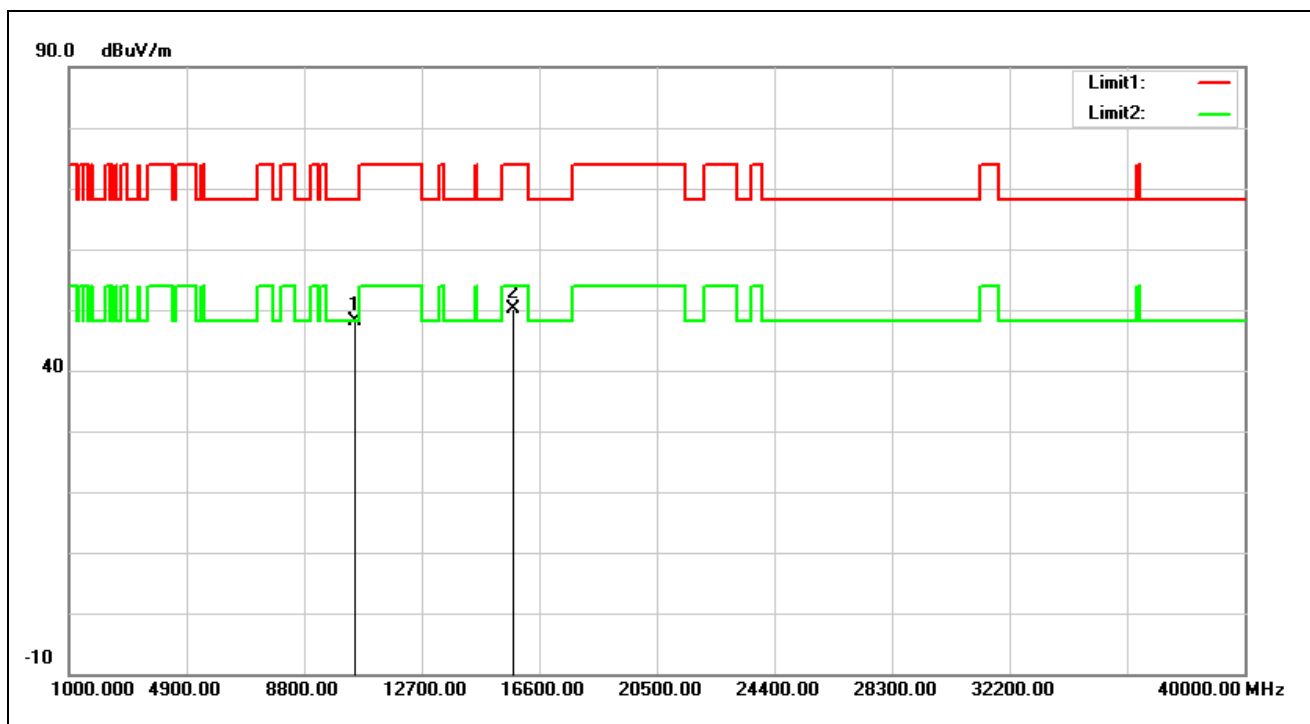


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.86	14.31	48.17	68.20	-20.03	peak
2	15750.000	33.59	16.43	50.02	74.00	-23.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

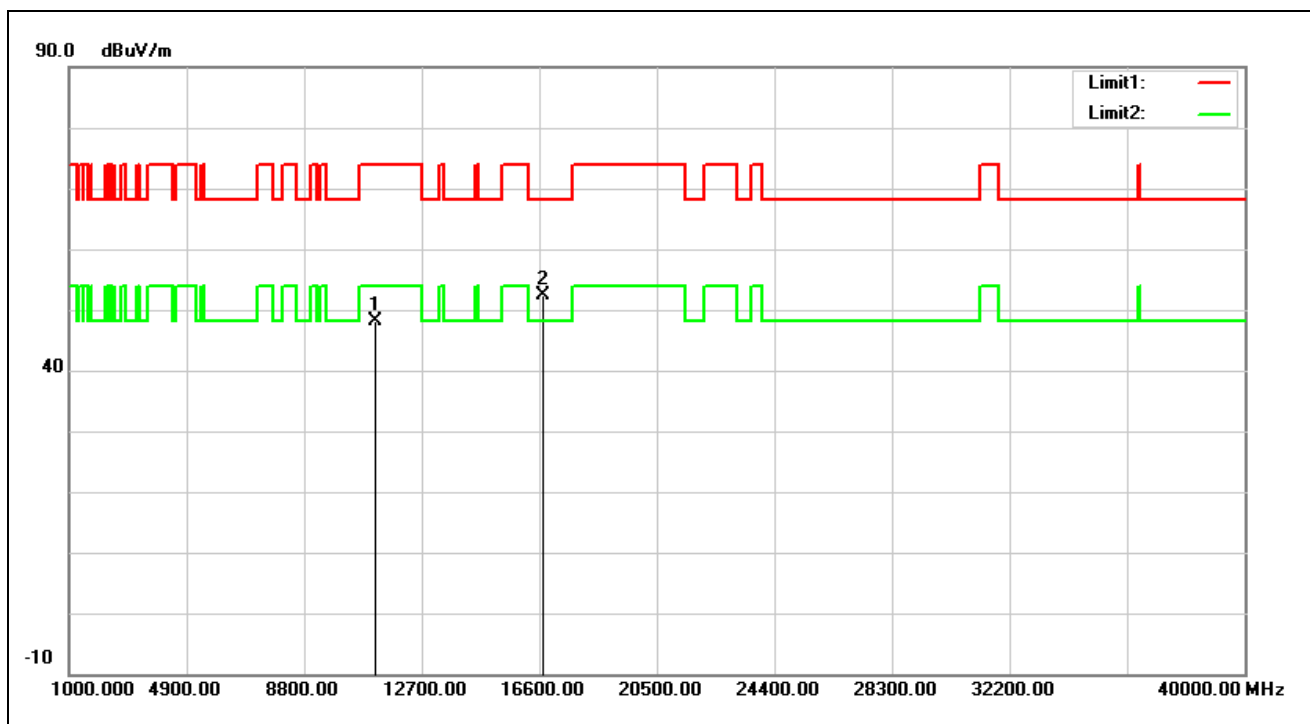


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.73	14.41	48.14	74.00	-25.86	peak
2*	16710.000	34.14	18.19	52.33	68.20	-15.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

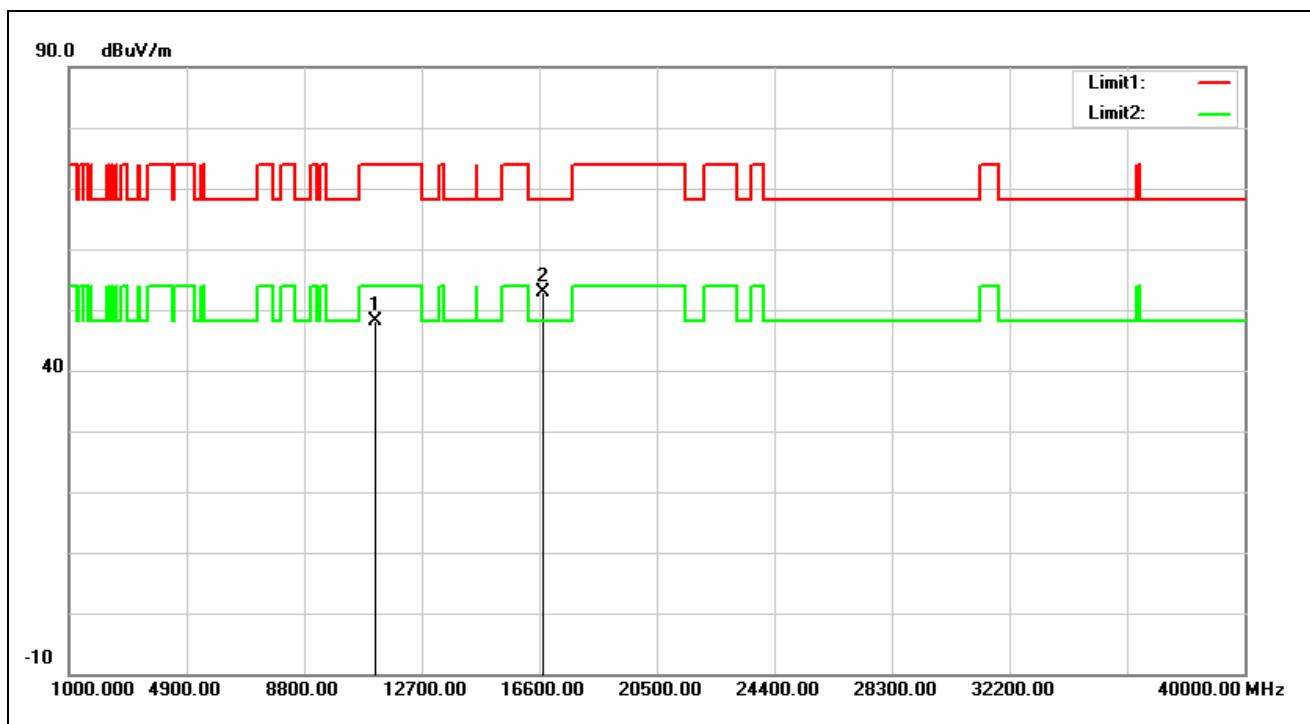


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.73	14.41	48.14	74.00	-25.86	peak
2*	16710.000	34.74	18.19	52.93	68.20	-15.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

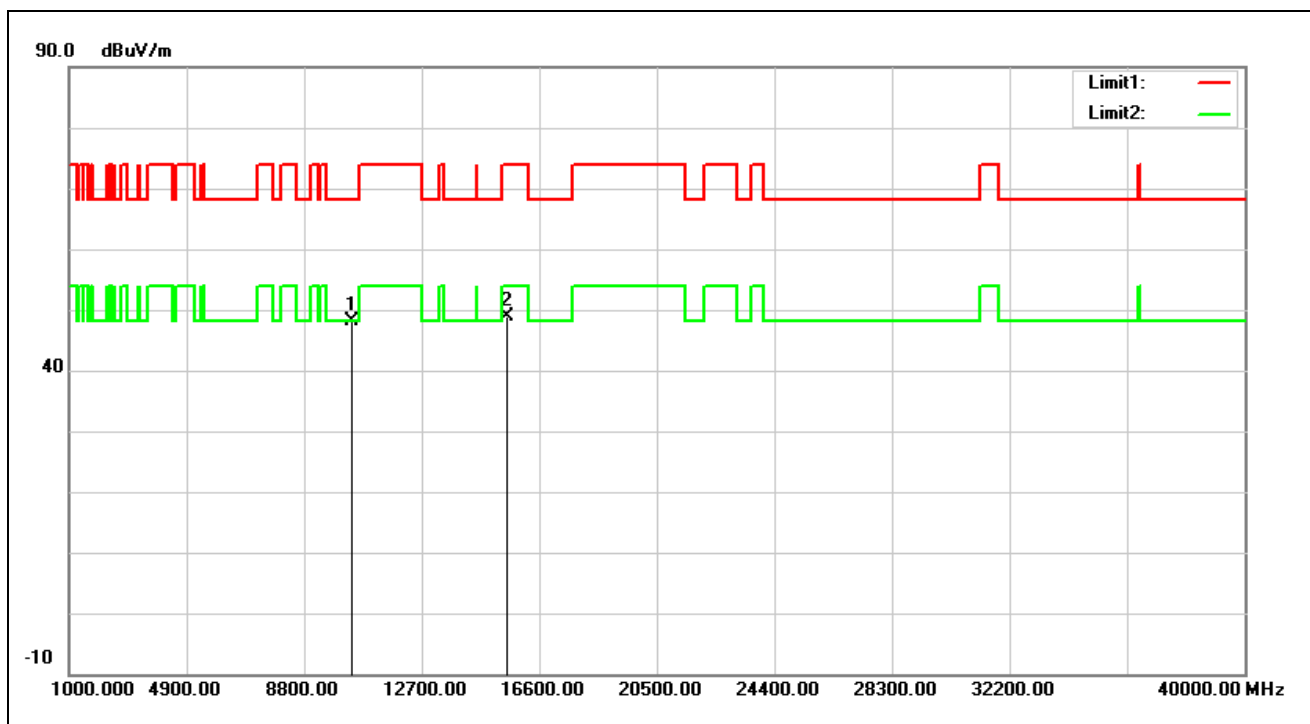


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.29	13.82	48.11	68.20	-20.09	peak
2	15540.000	32.02	16.74	48.76	74.00	-25.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

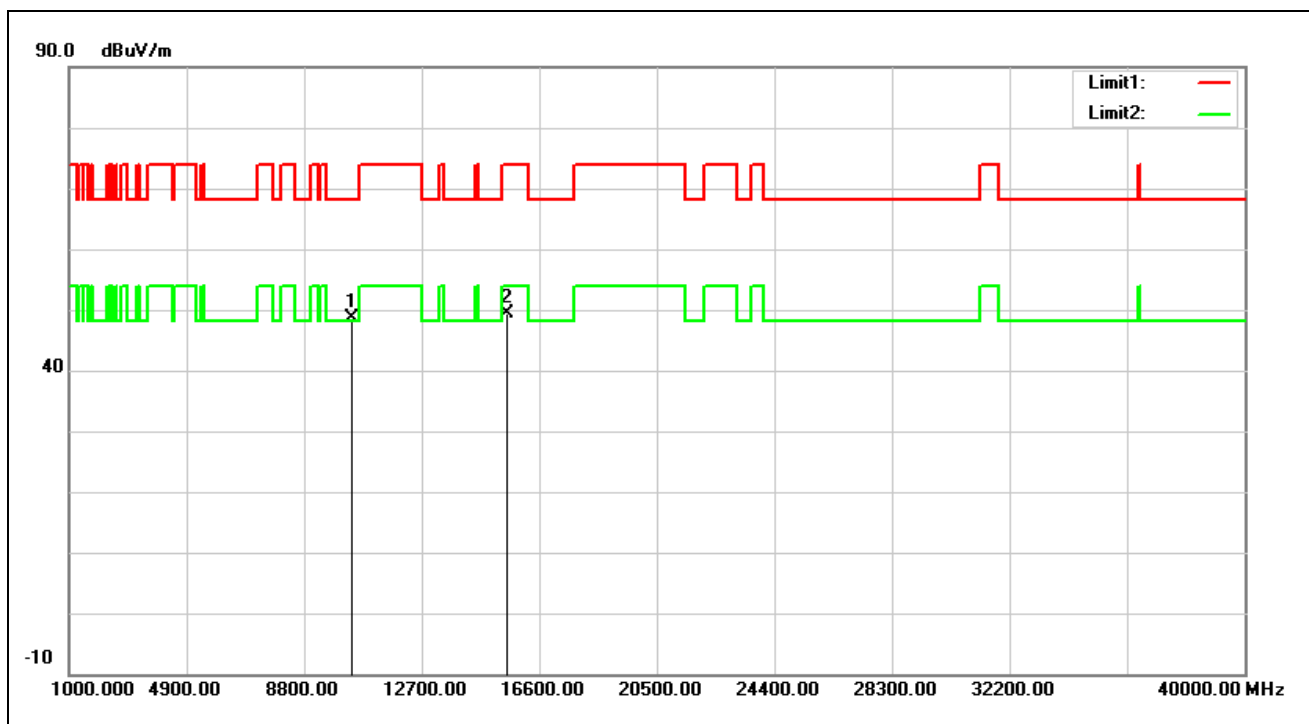


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.72	13.82	48.54	68.20	-19.66	peak
2	15540.000	32.58	16.74	49.32	74.00	-24.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

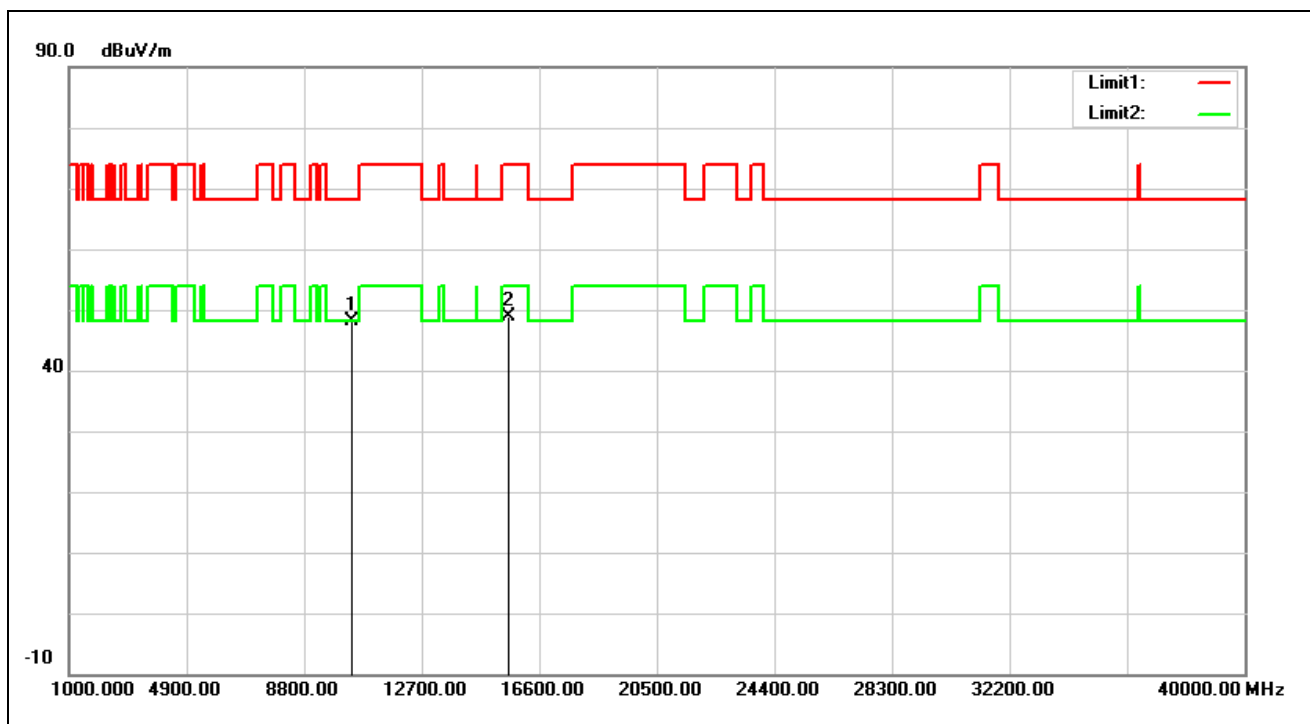


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.07	14.05	48.12	68.20	-20.08	peak
2	15600.000	32.49	16.51	49.00	74.00	-25.00	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

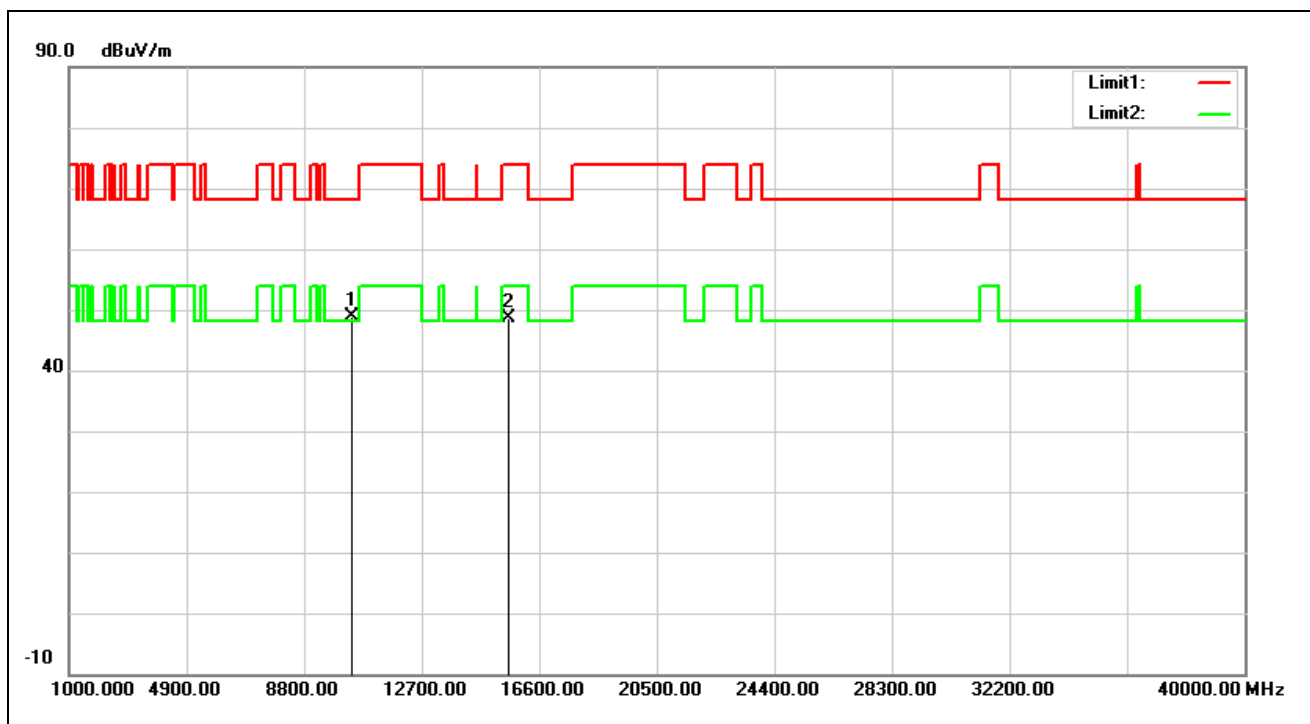


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.76	14.05	48.81	68.20	-19.39	peak
2	15600.000	32.18	16.51	48.69	74.00	-25.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

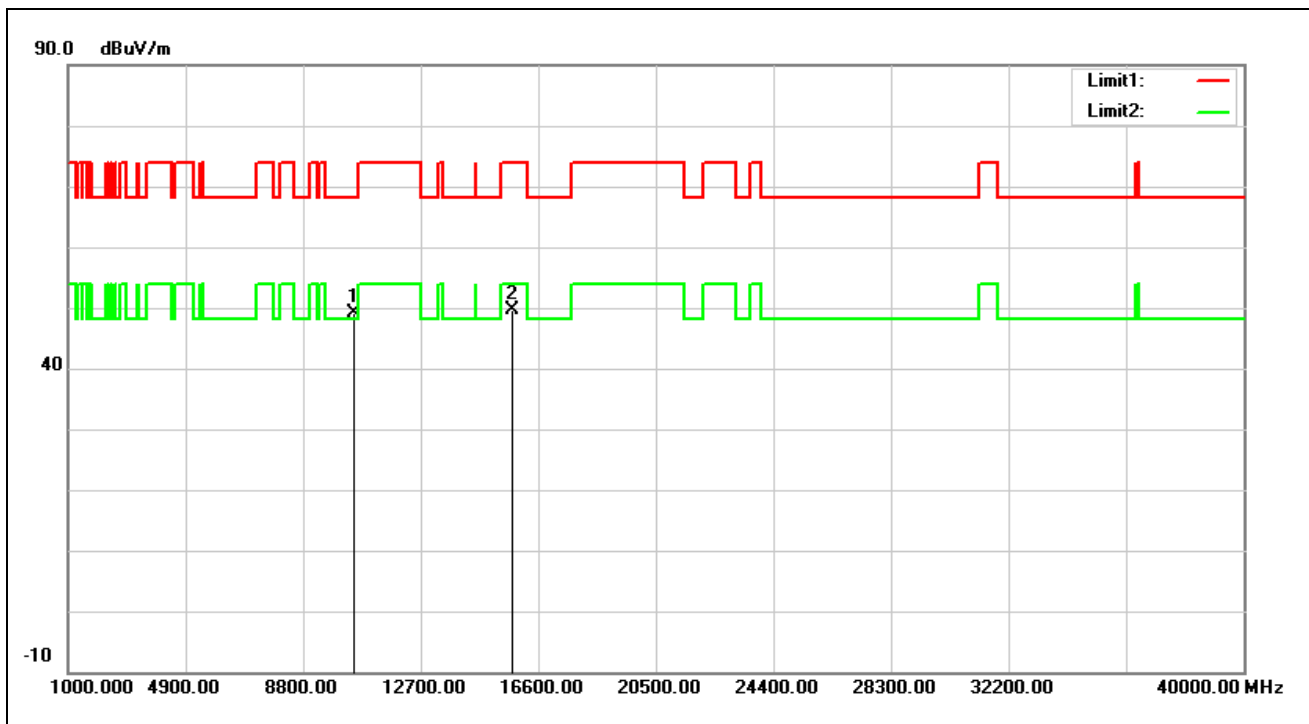


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	34.94	14.26	49.20	68.20	-19.00	peak
2	15720.000	33.07	16.48	49.55	74.00	-24.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

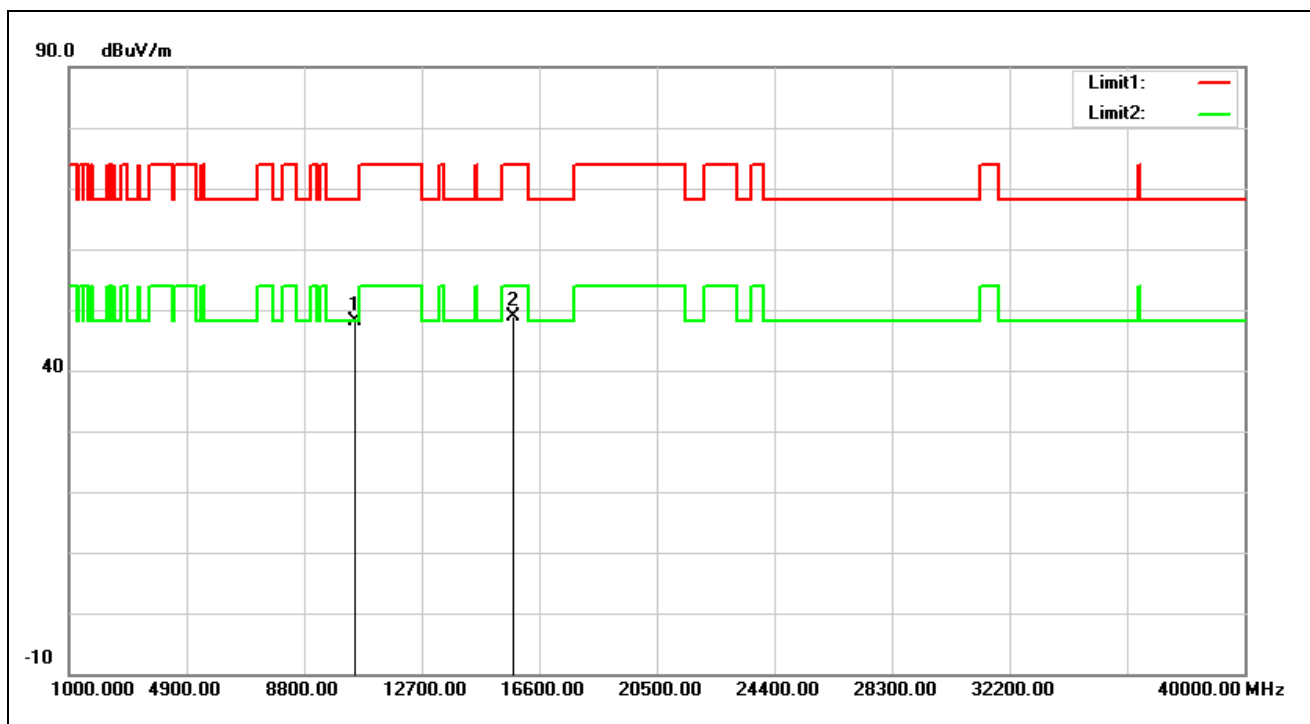

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	33.88	14.26	48.14	68.20	-20.06	peak
2	15720.000	32.45	16.48	48.93	74.00	-25.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

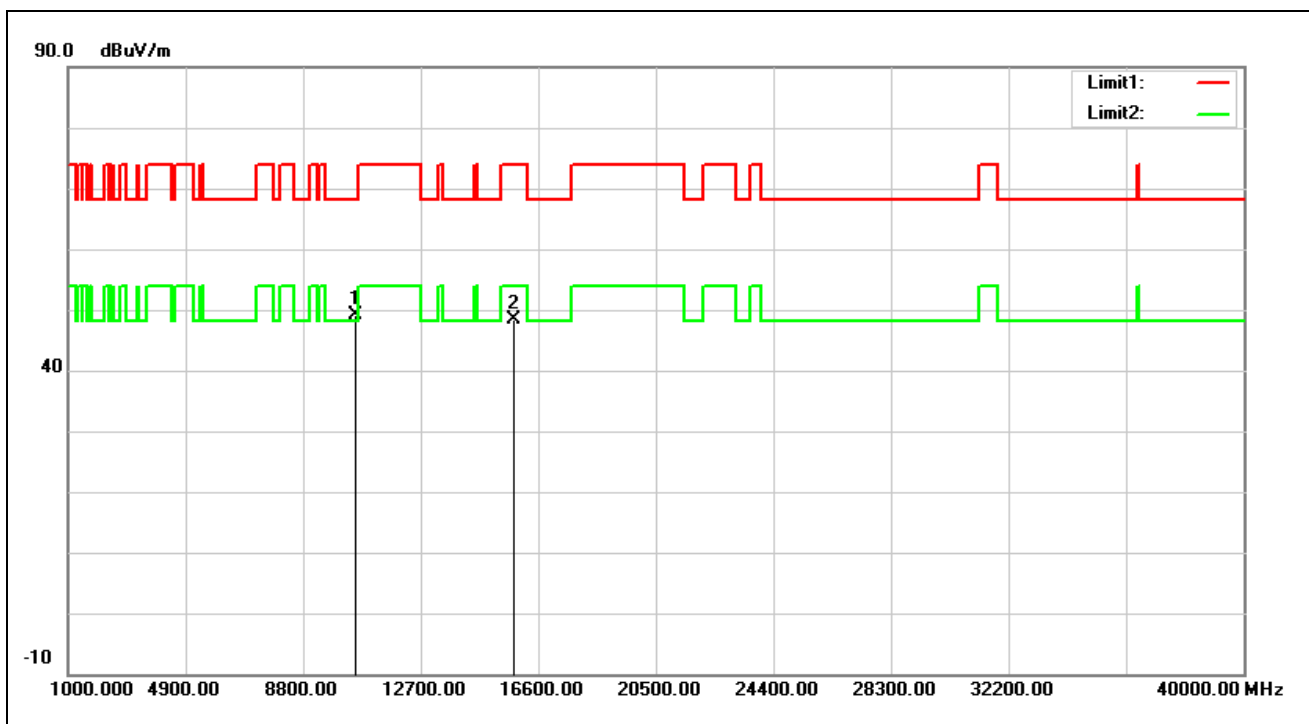

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.74	14.31	49.05	68.20	-19.15	peak
2	15780.000	31.96	16.38	48.34	74.00	-25.66	peak