



Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

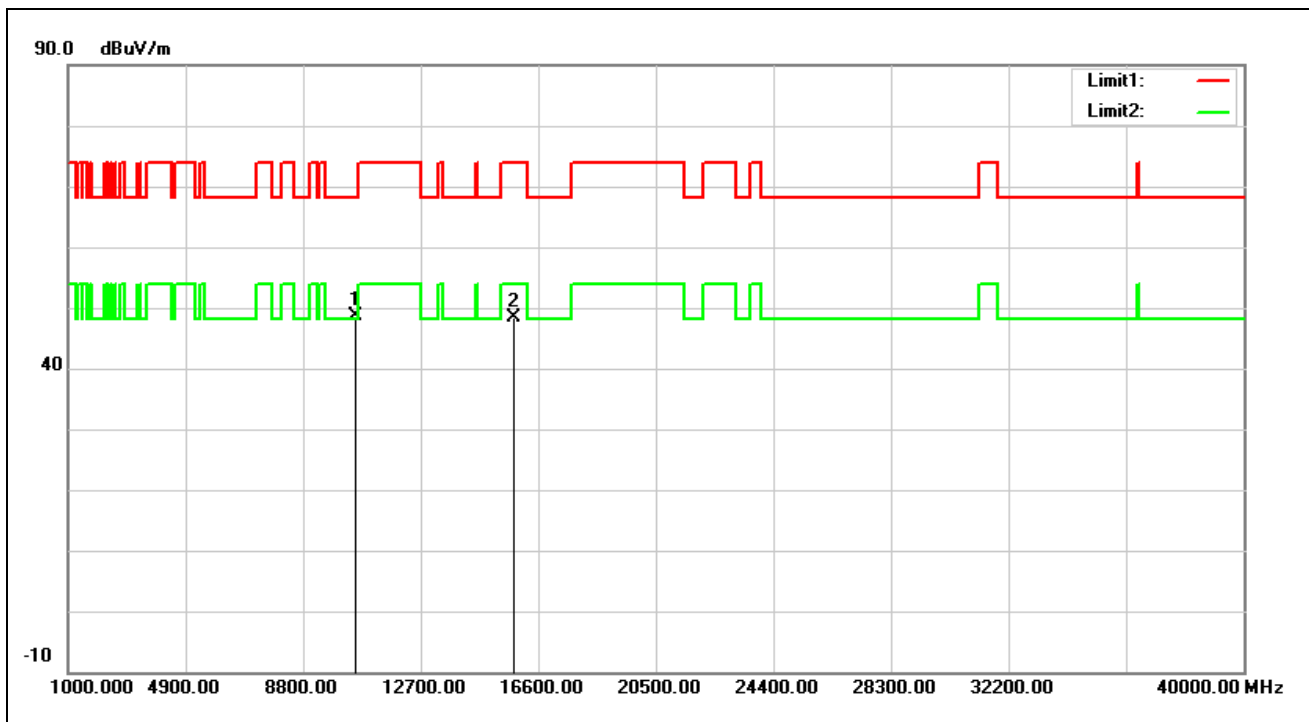


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.29	14.31	48.60	68.20	-19.60	peak
2	15780.000	31.99	16.38	48.37	74.00	-25.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

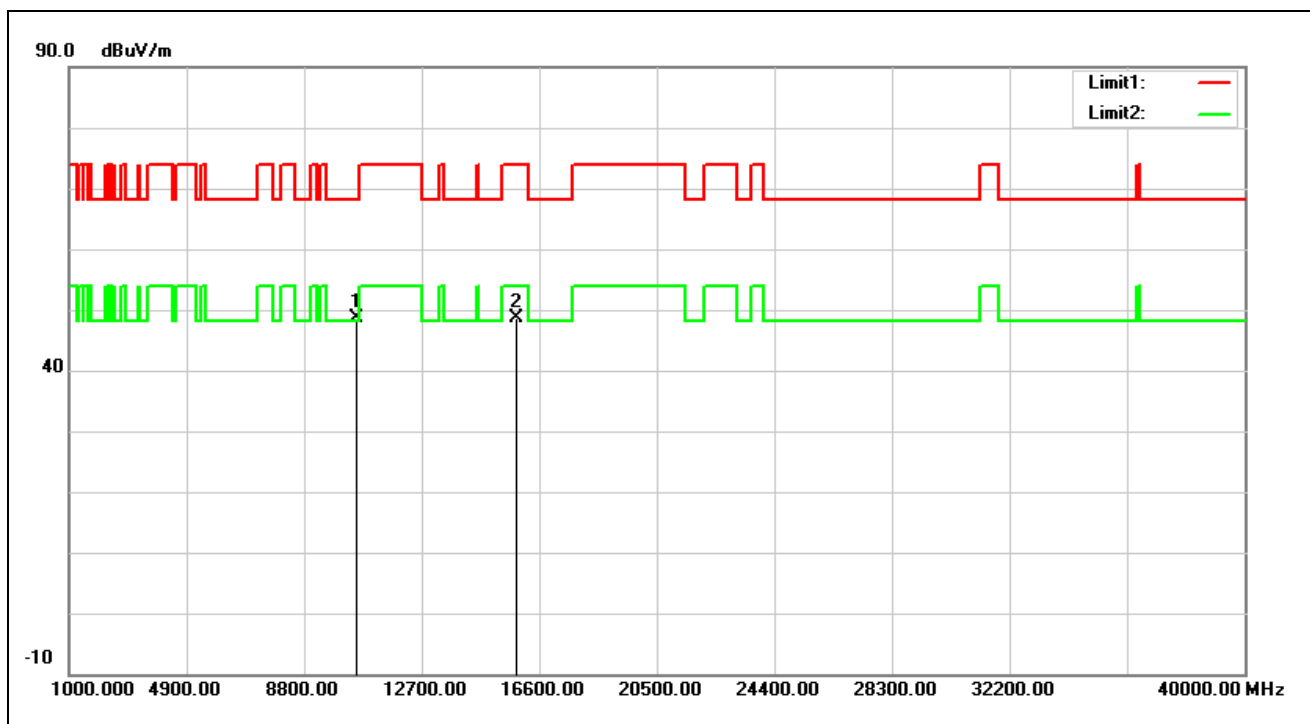


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.30	14.31	48.61	68.20	-19.59	peak
2	15840.000	32.52	16.18	48.70	74.00	-25.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

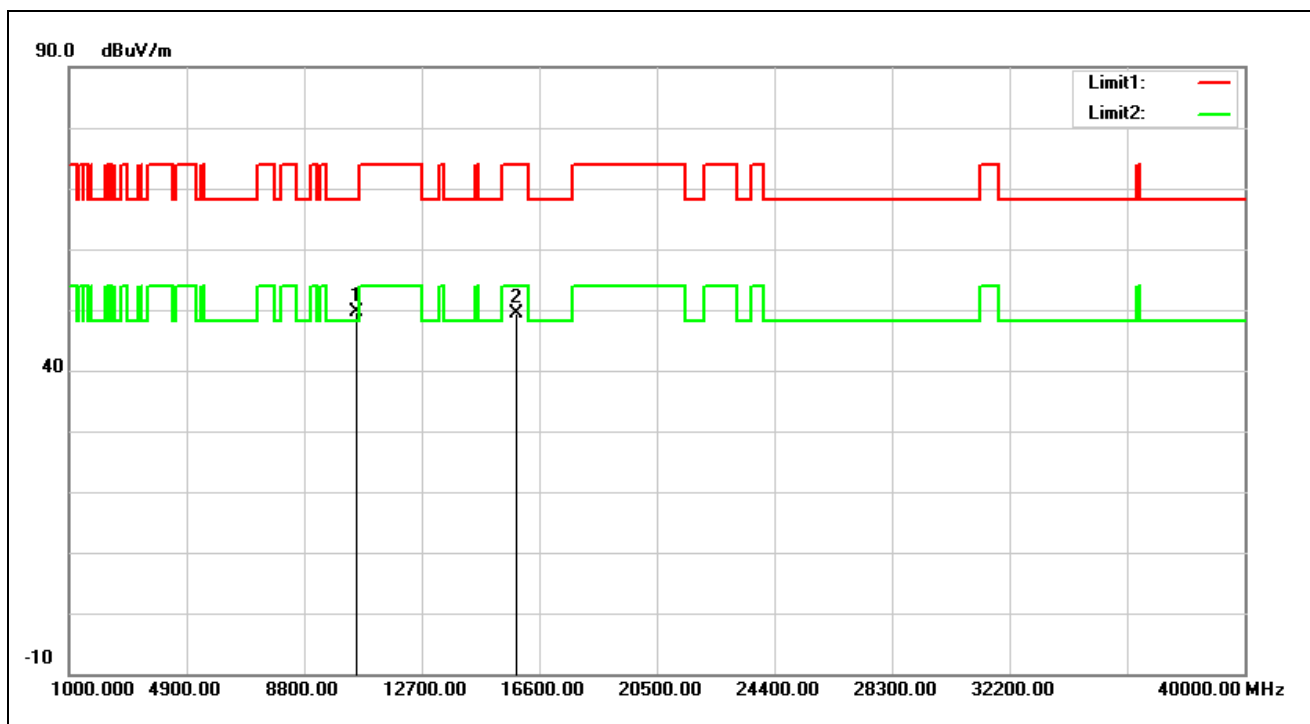


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.23	14.31	49.54	68.20	-18.66	peak
2	15840.000	33.14	16.18	49.32	74.00	-24.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

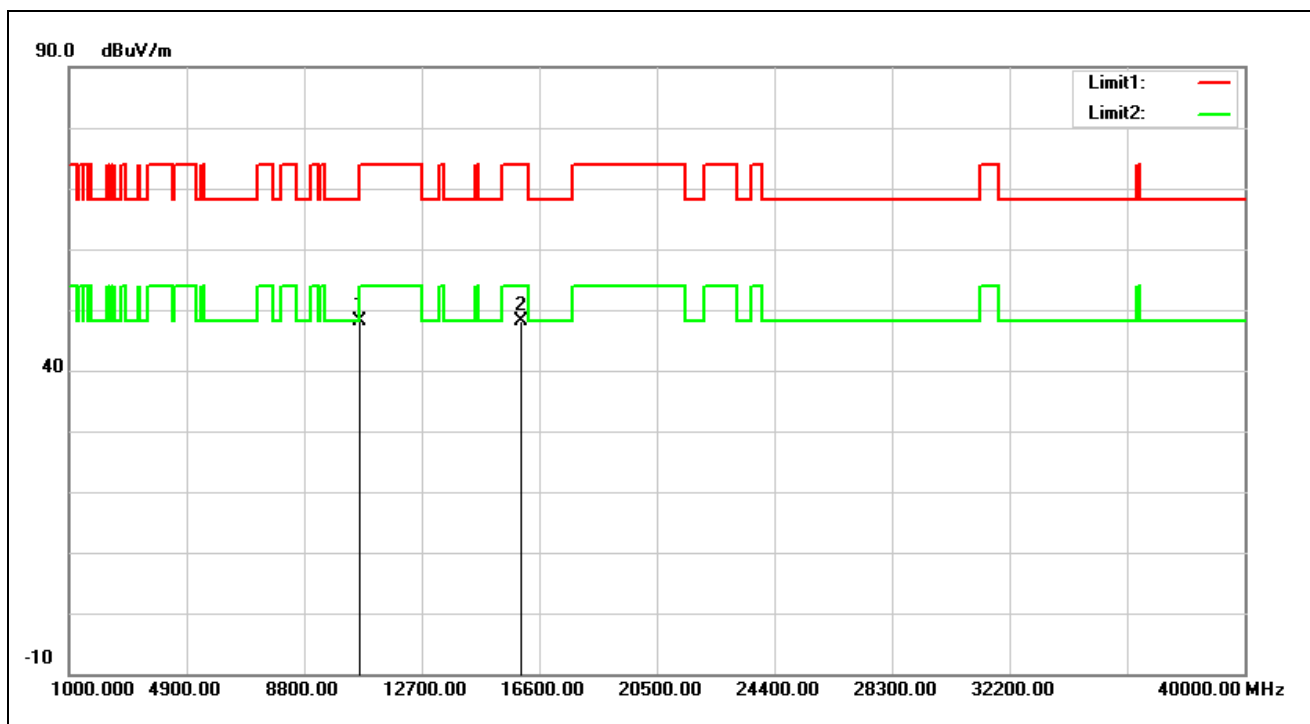


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.90	14.19	48.09	74.00	-25.91	peak
2*	15960.000	32.46	15.77	48.23	74.00	-25.77	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

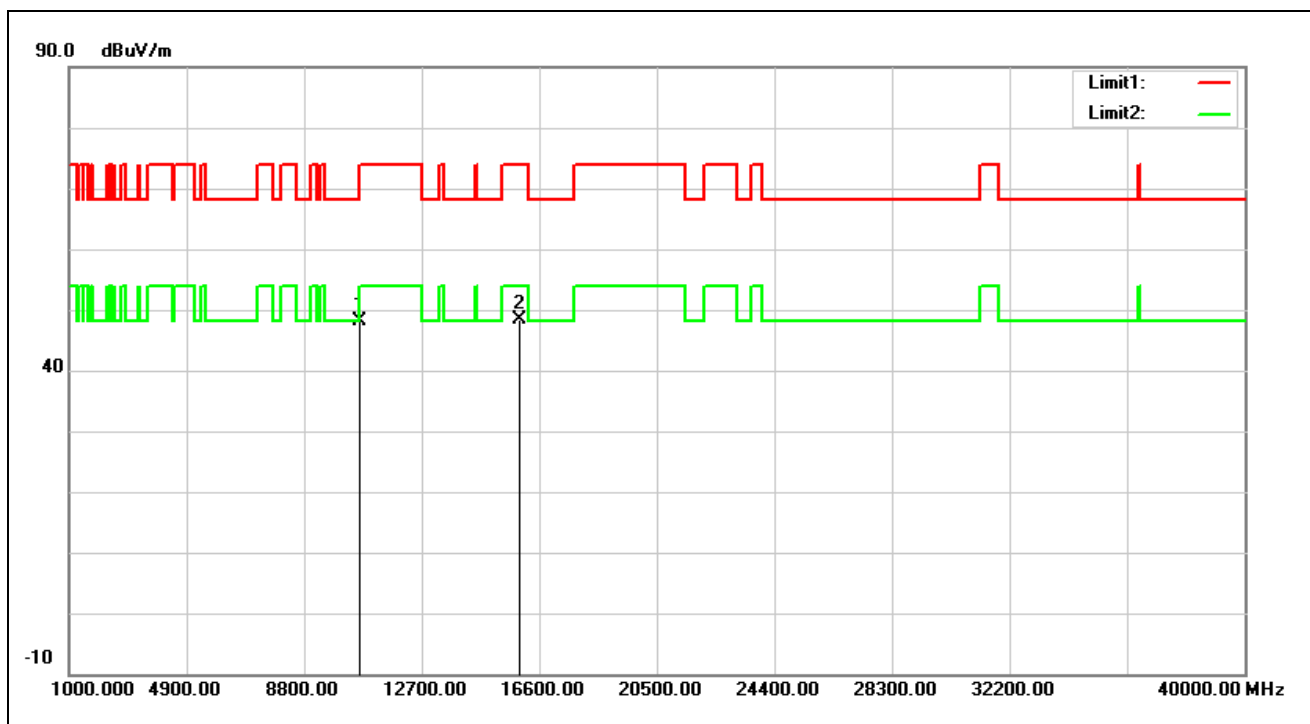


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.06	14.19	48.25	74.00	-25.75	peak
2*	15960.000	32.59	15.77	48.36	74.00	-25.64	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

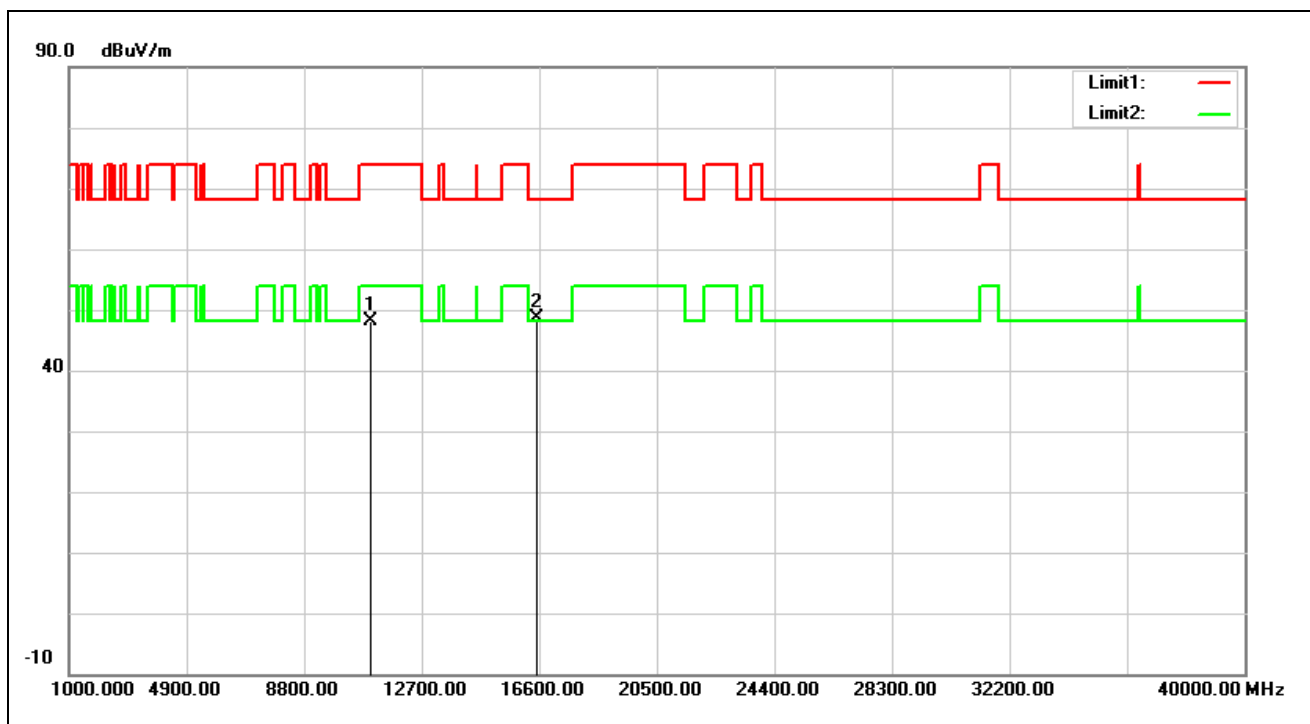


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.02	14.22	48.24	74.00	-25.76	peak
2*	16500.000	31.76	16.87	48.63	68.20	-19.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

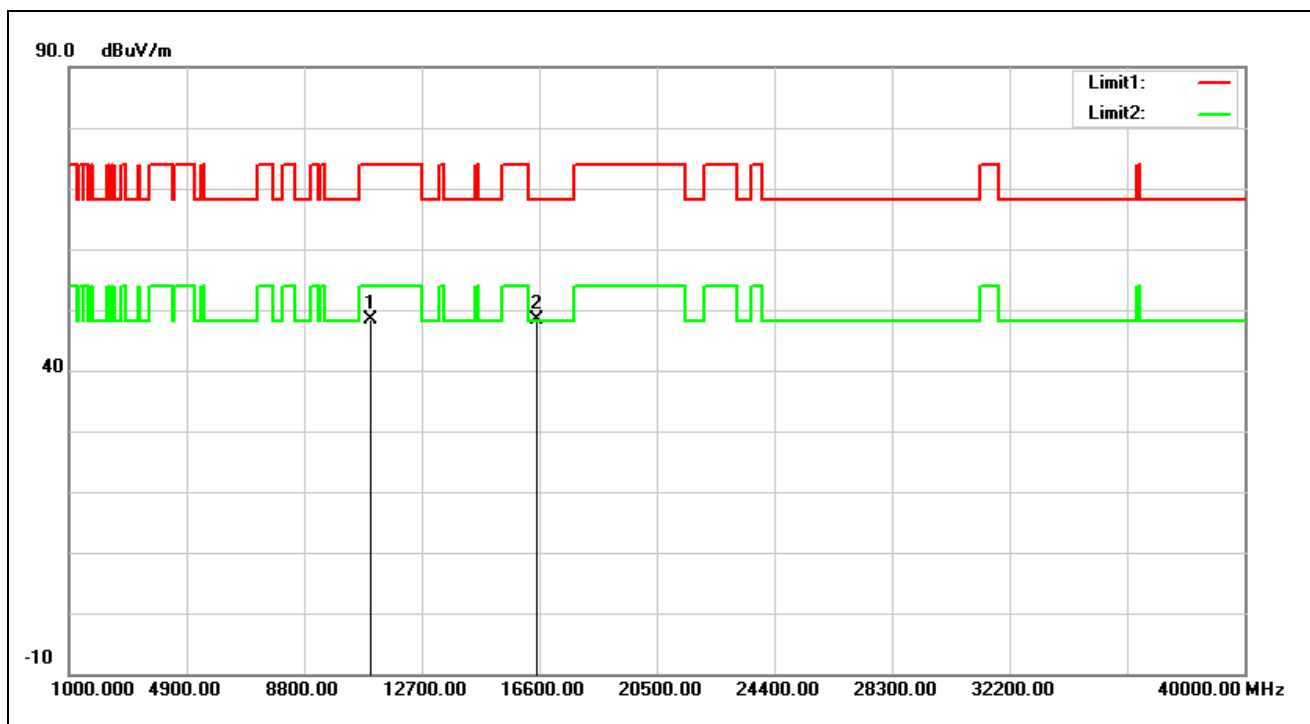


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.09	14.22	48.31	74.00	-25.69	peak
2*	16500.000	31.39	16.87	48.26	68.20	-19.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5560 MHz		
Remark:			

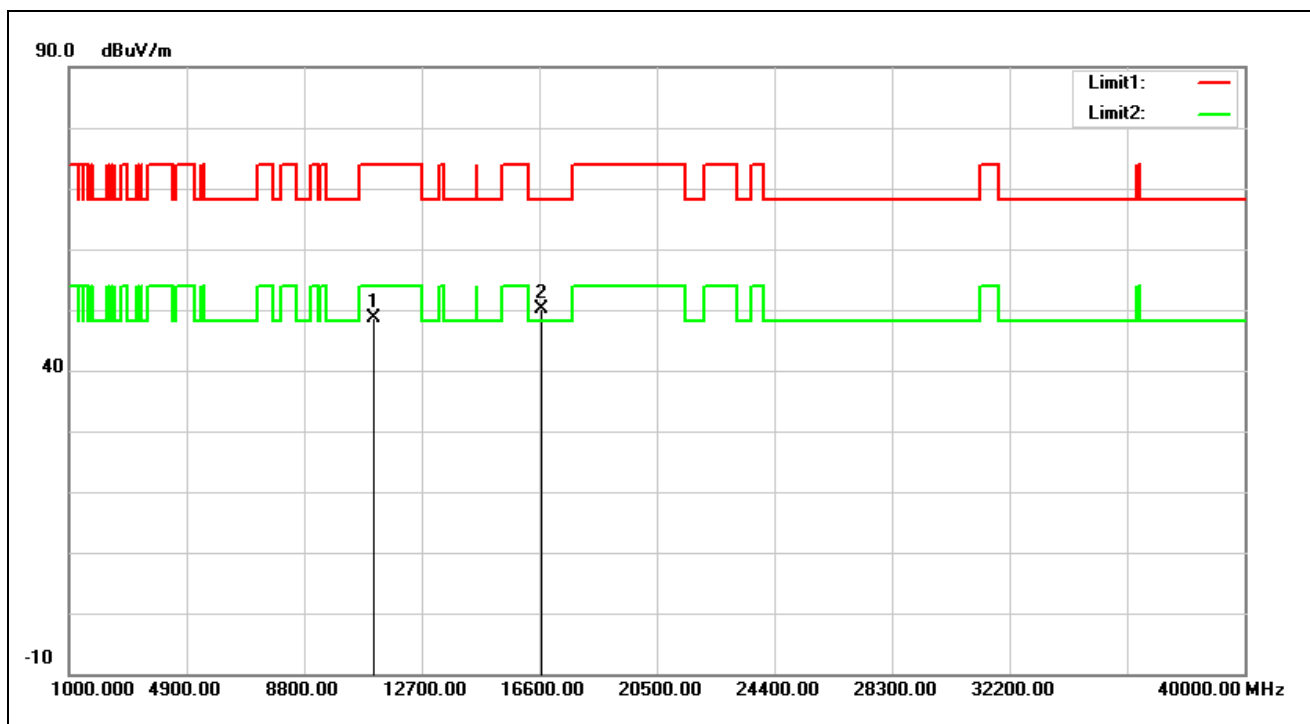


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.08	14.49	48.57	74.00	-25.43	peak
2*	16680.000	32.04	17.98	50.02	68.20	-18.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5560 MHz		
Remark:			

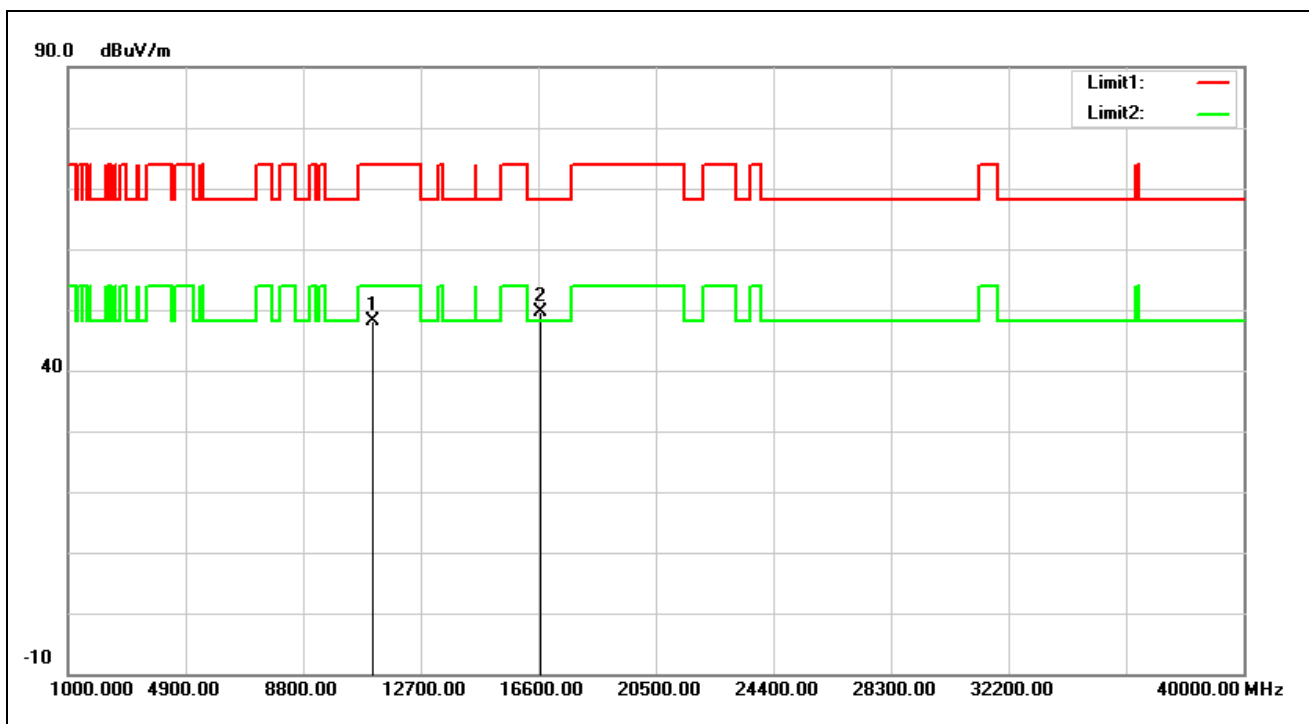


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.60	14.49	48.09	74.00	-25.91	peak
2*	16680.000	31.73	17.98	49.71	68.20	-18.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

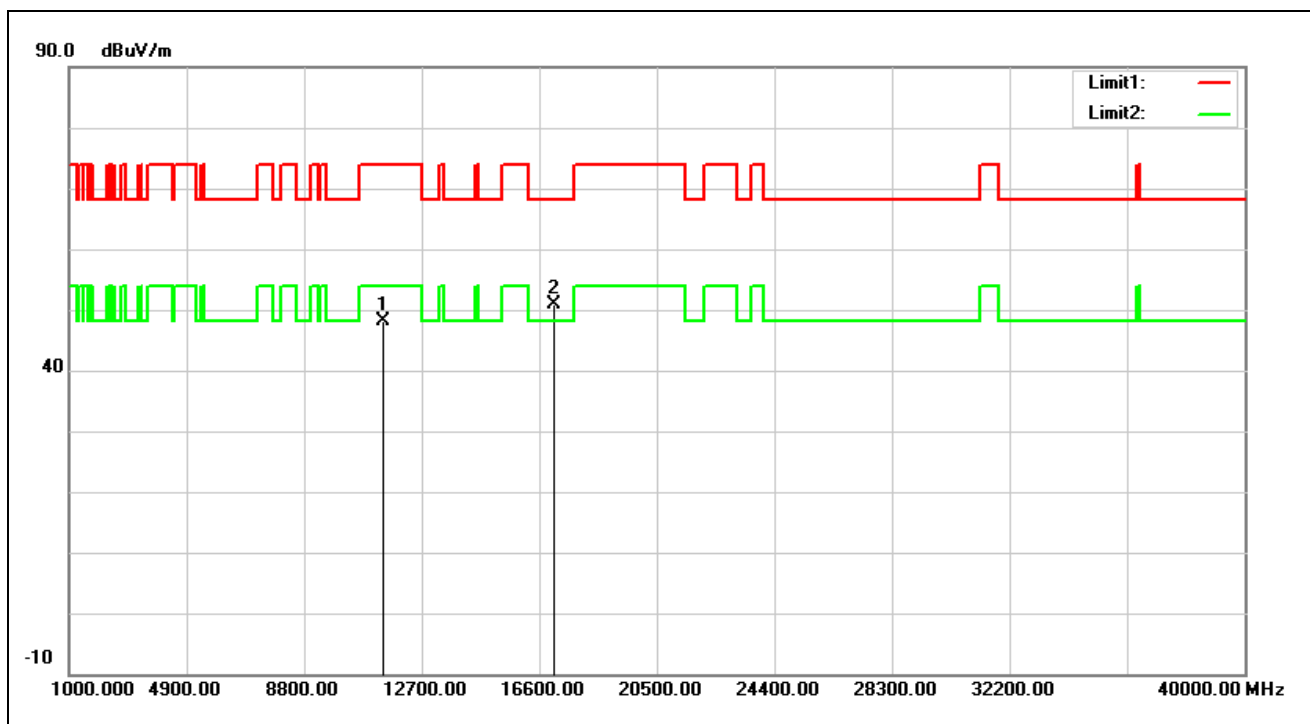


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.91	14.26	48.17	74.00	-25.83	peak
2*	17100.000	30.26	20.69	50.95	68.20	-17.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

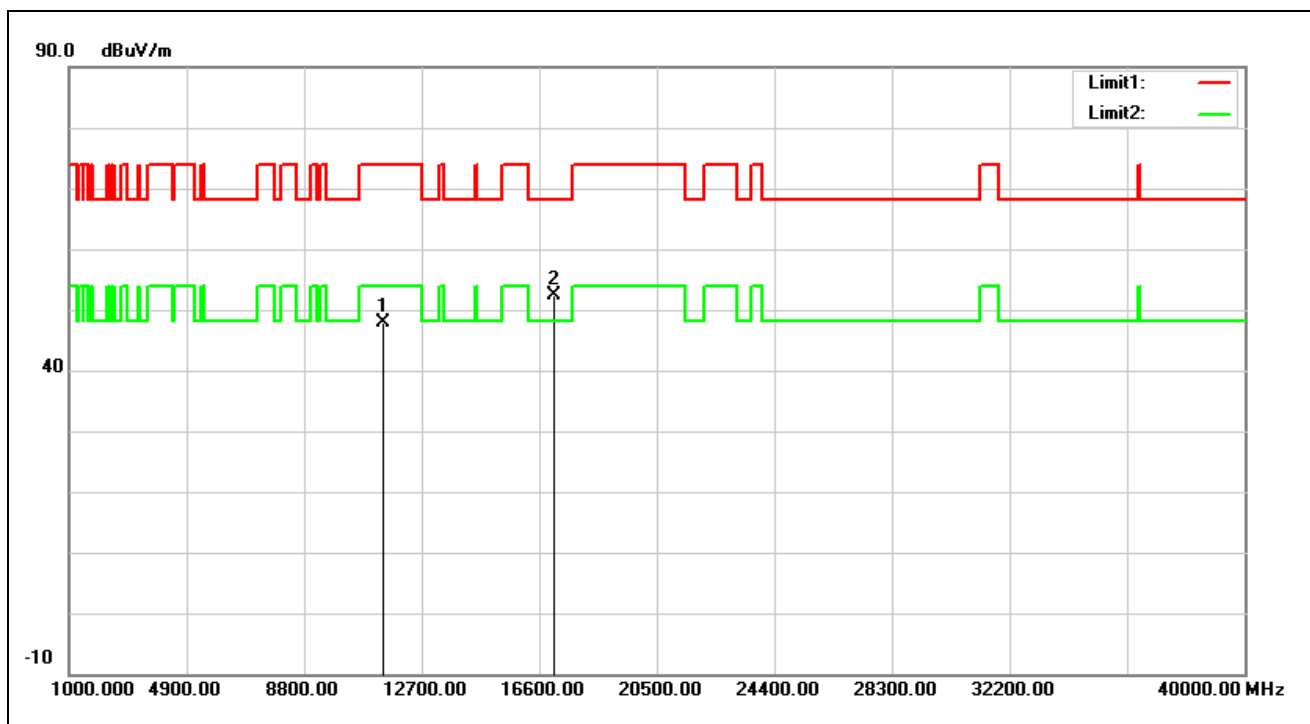


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.69	14.26	47.95	74.00	-26.05	peak
2*	17100.000	31.65	20.69	52.34	68.20	-15.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

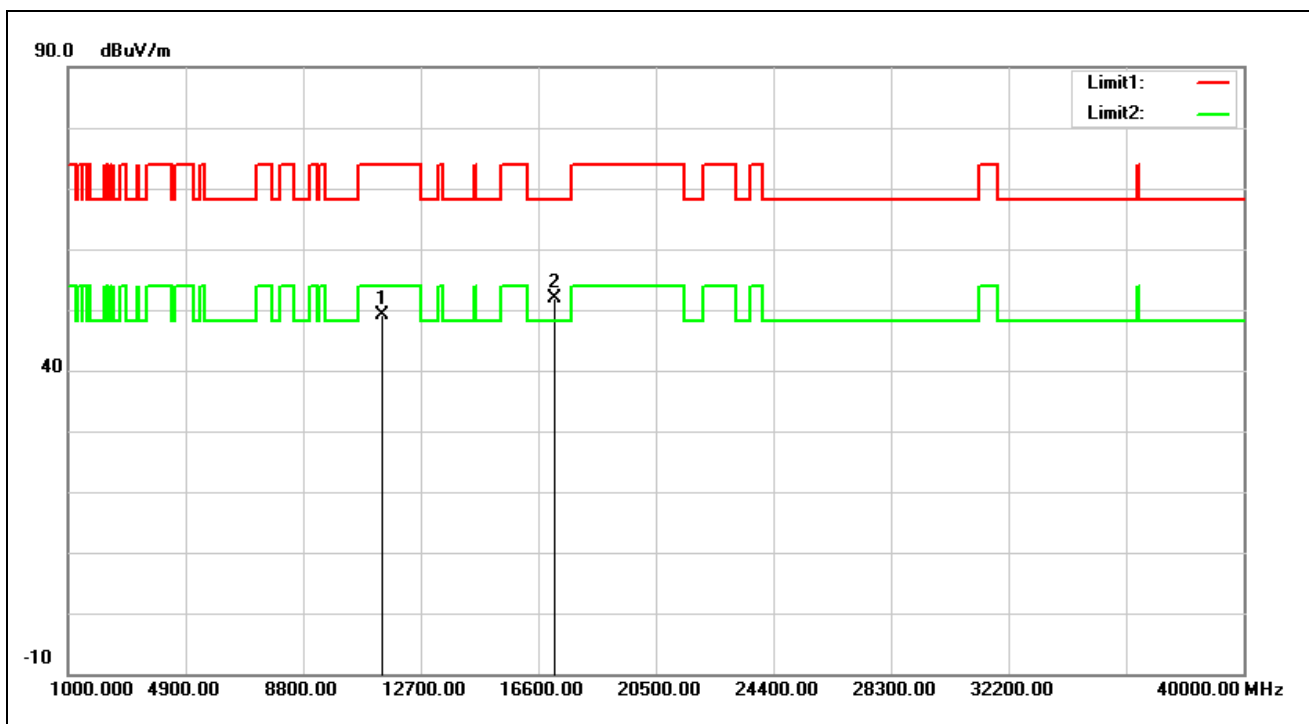


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.65	14.56	49.21	74.00	-24.79	peak
2*	17160.000	30.76	21.09	51.85	68.20	-16.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

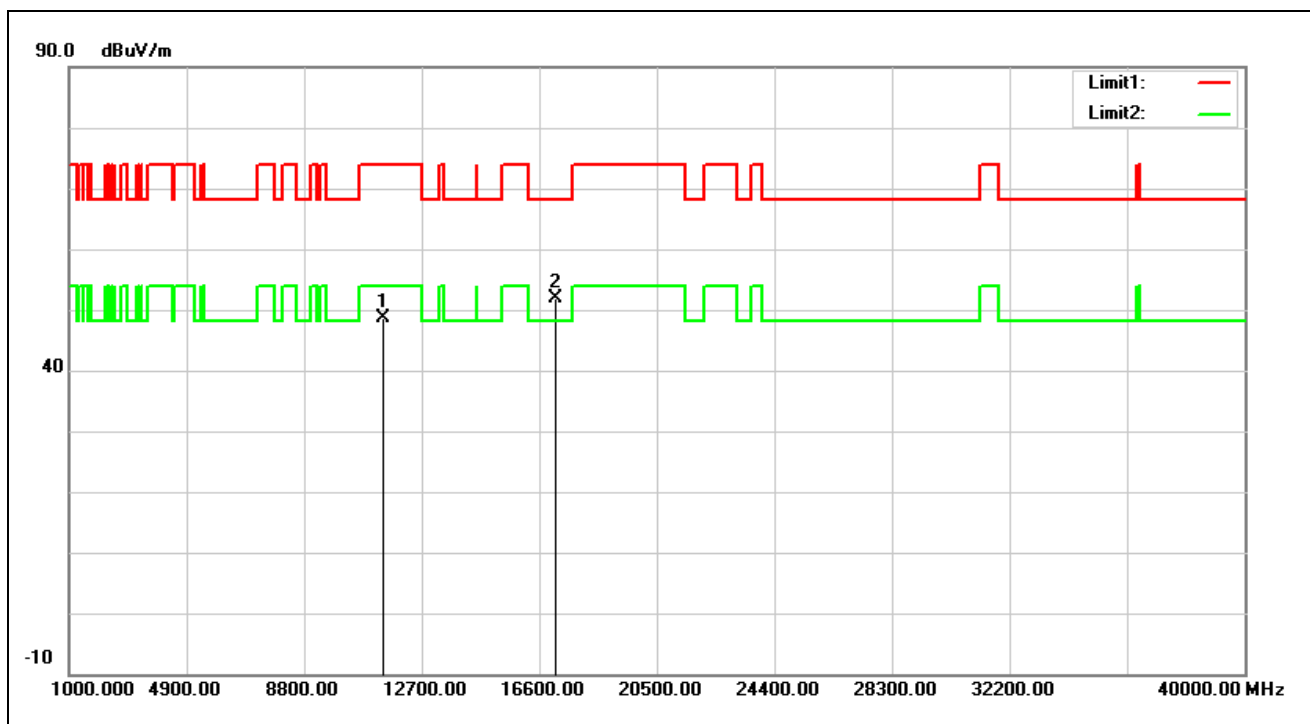


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.07	14.56	48.63	74.00	-25.37	peak
2*	17160.000	30.75	21.09	51.84	68.20	-16.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

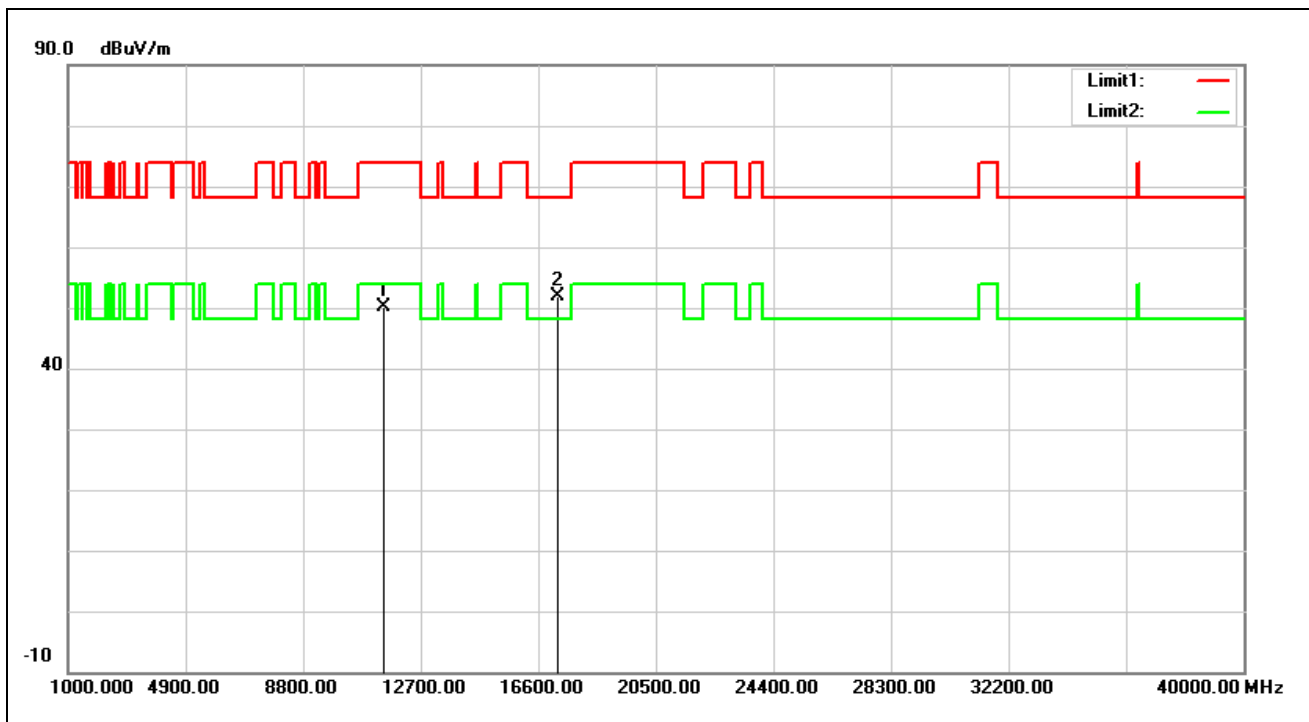


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.09	14.93	50.02	74.00	-23.98	peak
2*	17235.000	30.16	21.70	51.86	68.20	-16.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

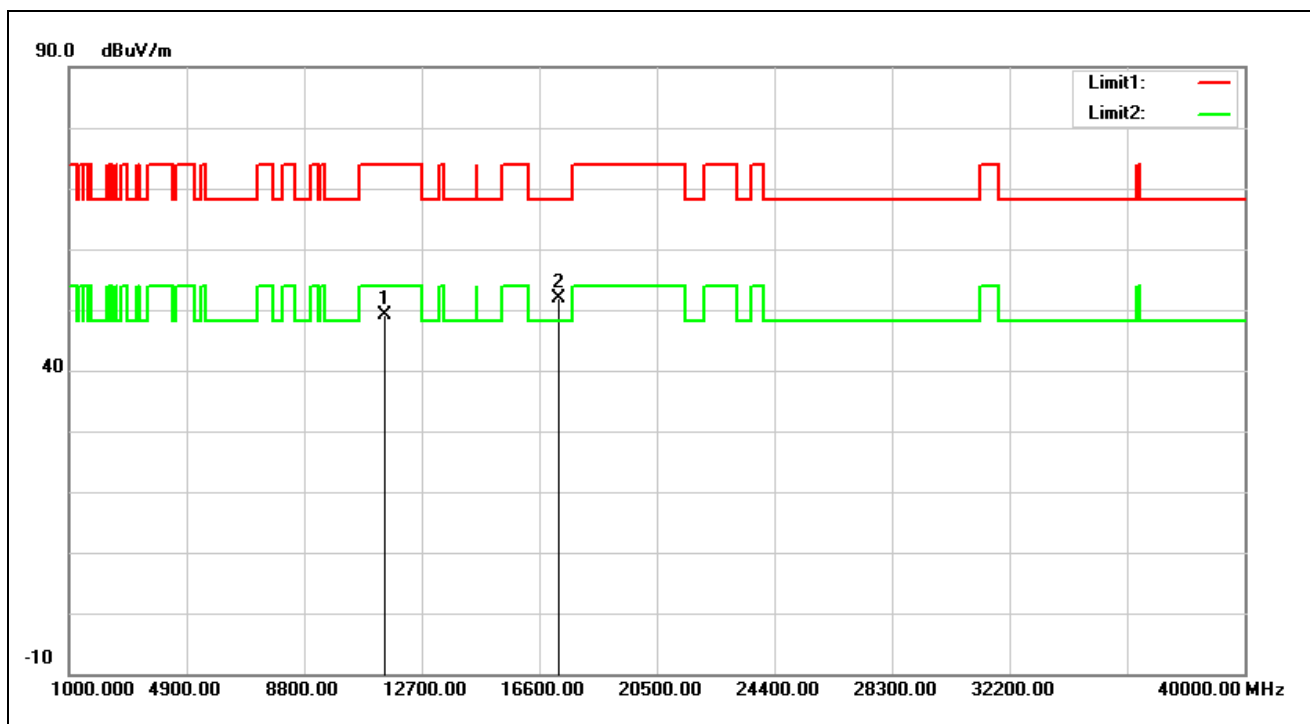


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.09	14.93	49.02	74.00	-24.98	peak
2*	17235.000	30.27	21.70	51.97	68.20	-16.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

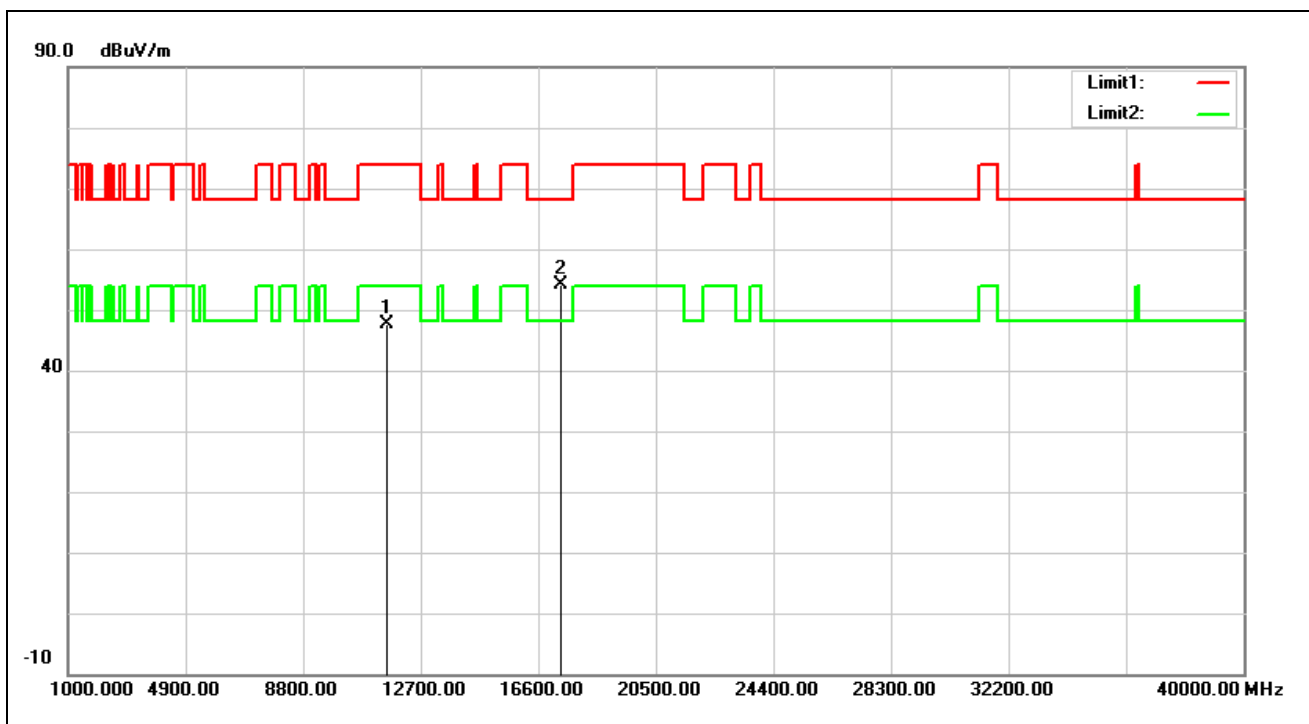


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.03	14.60	47.63	74.00	-26.37	peak
2*	17355.000	31.38	22.64	54.02	68.20	-14.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

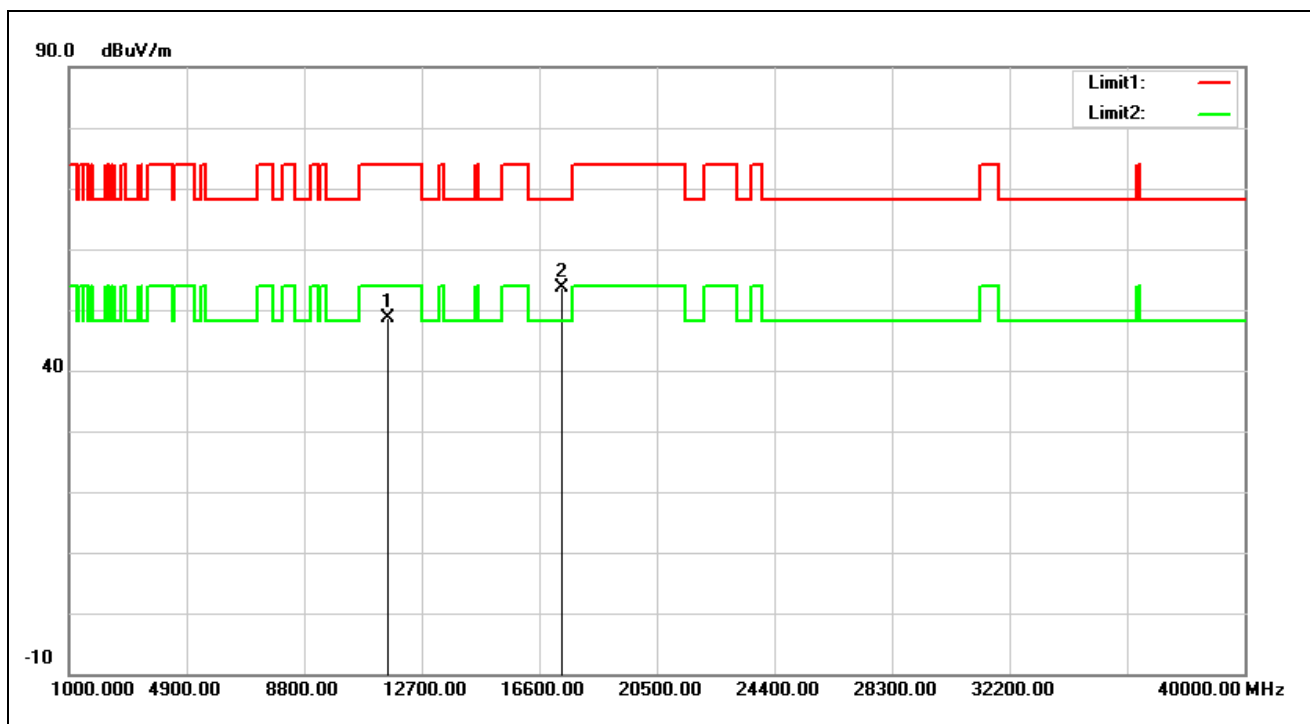


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.03	14.60	48.63	74.00	-25.37	peak
2*	17355.000	31.02	22.64	53.66	68.20	-14.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

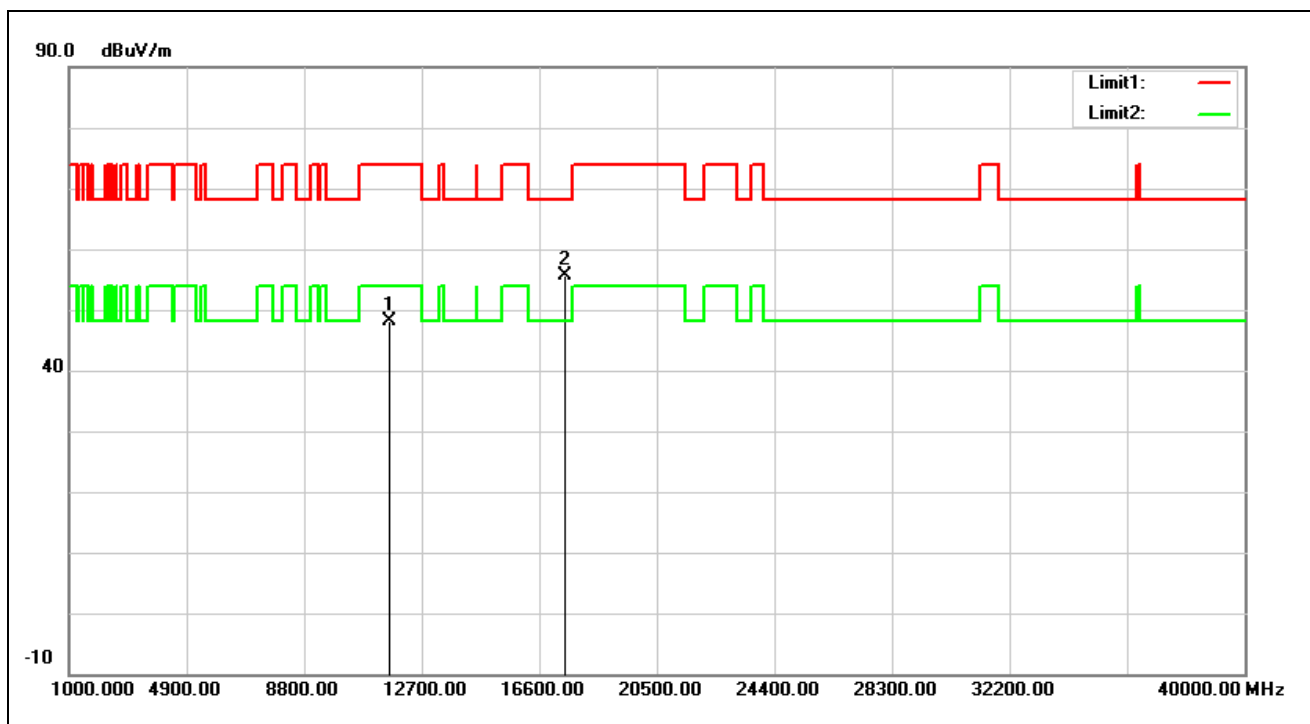


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.83	14.39	48.22	74.00	-25.78	peak
2*	17475.000	31.82	23.92	55.74	68.20	-12.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

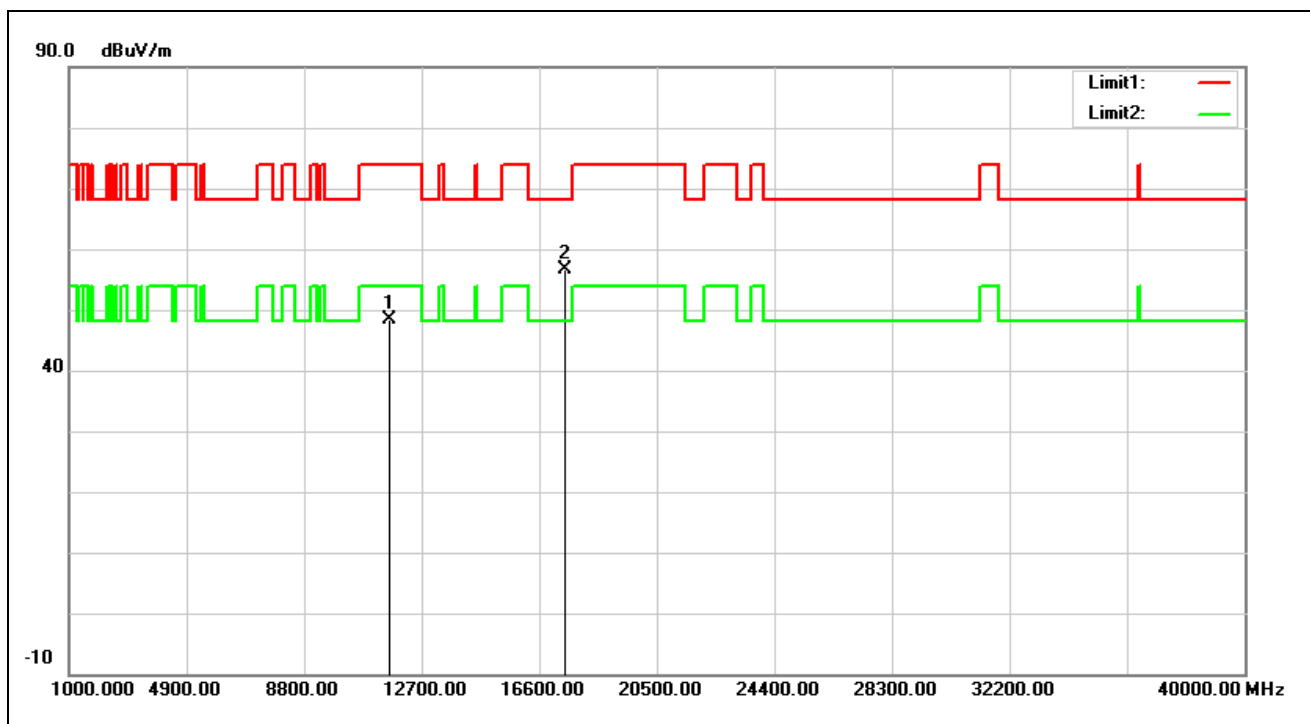


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.93	14.39	48.32	74.00	-25.68	peak
2*	17475.000	32.79	23.92	56.71	68.20	-11.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

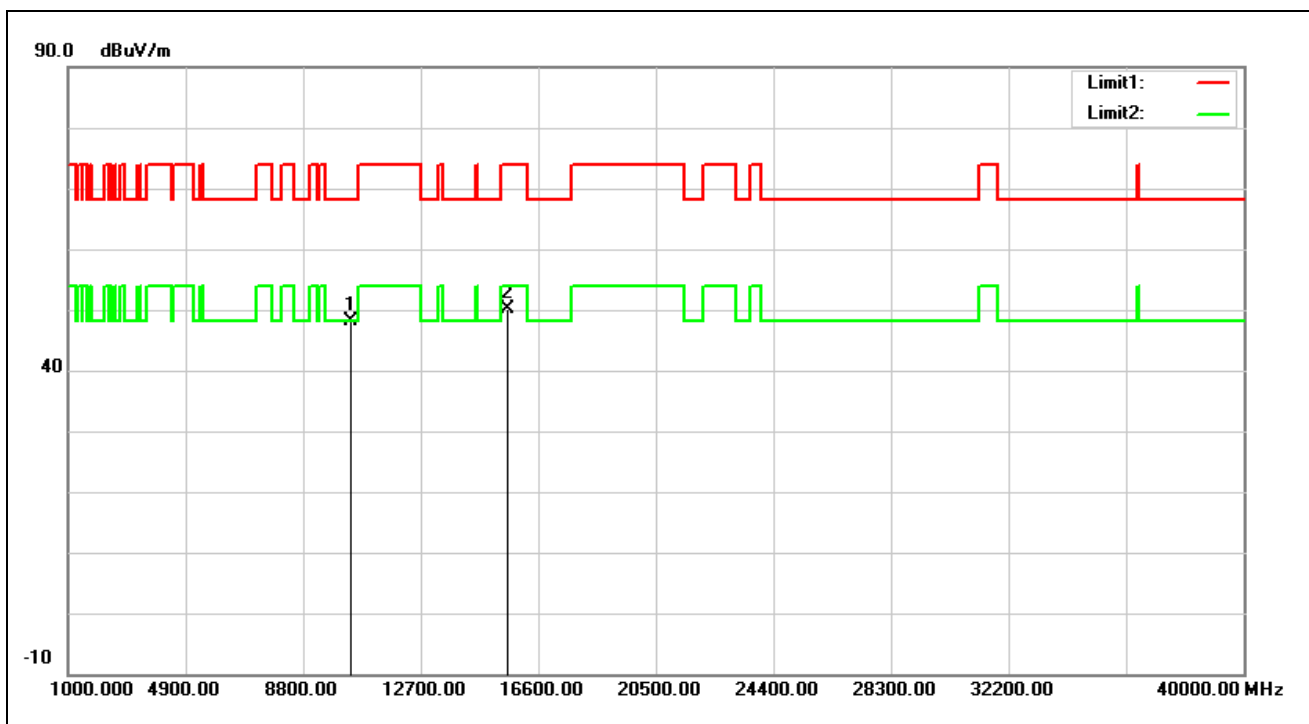


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	34.09	13.93	48.02	68.20	-20.18	peak
2	15570.000	33.53	16.62	50.15	74.00	-23.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

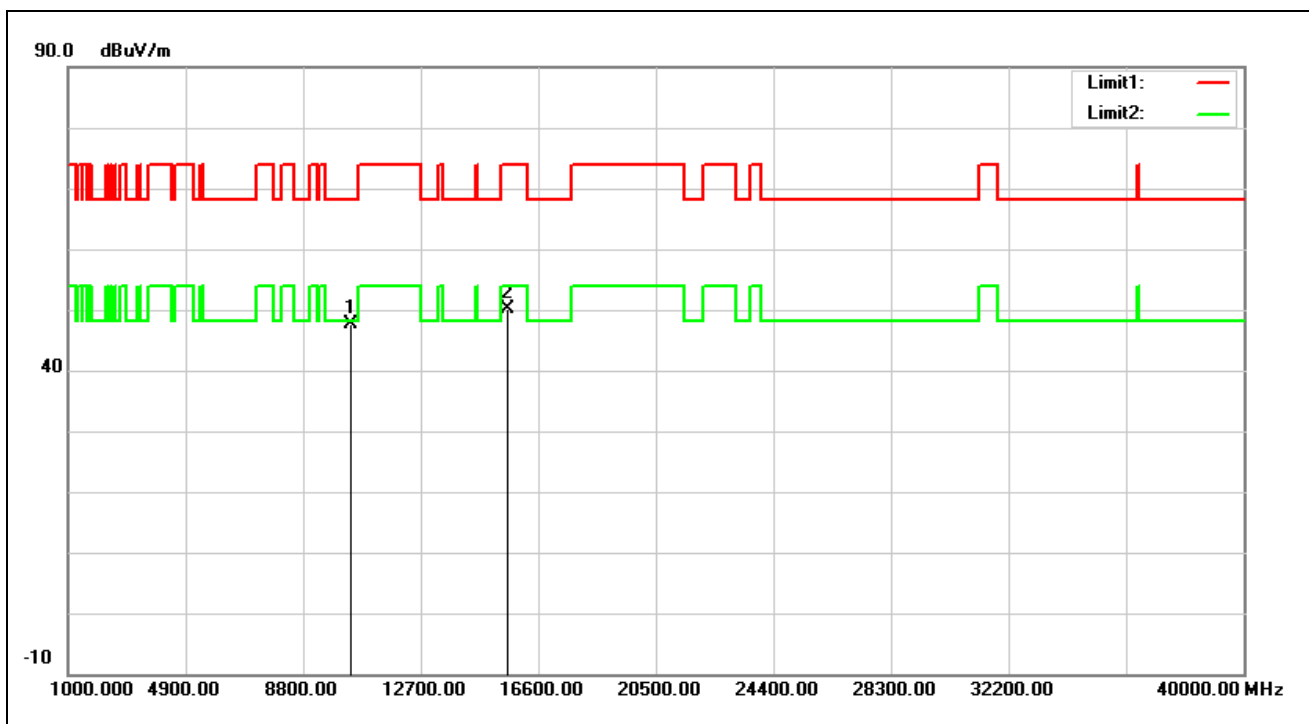


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	33.76	13.93	47.69	68.20	-20.51	peak
2	15570.000	33.45	16.62	50.07	74.00	-23.93	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

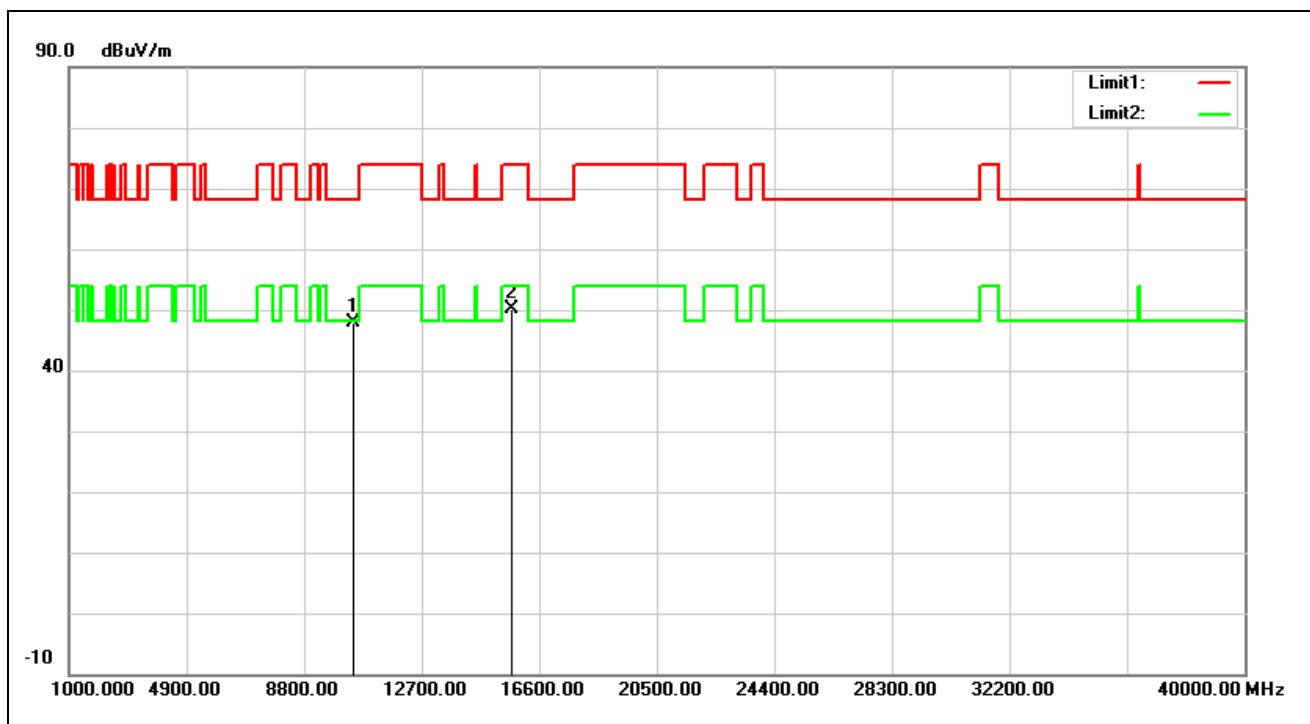


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	33.76	14.20	47.96	68.20	-20.24	peak
2	15690.000	33.53	16.52	50.05	74.00	-23.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

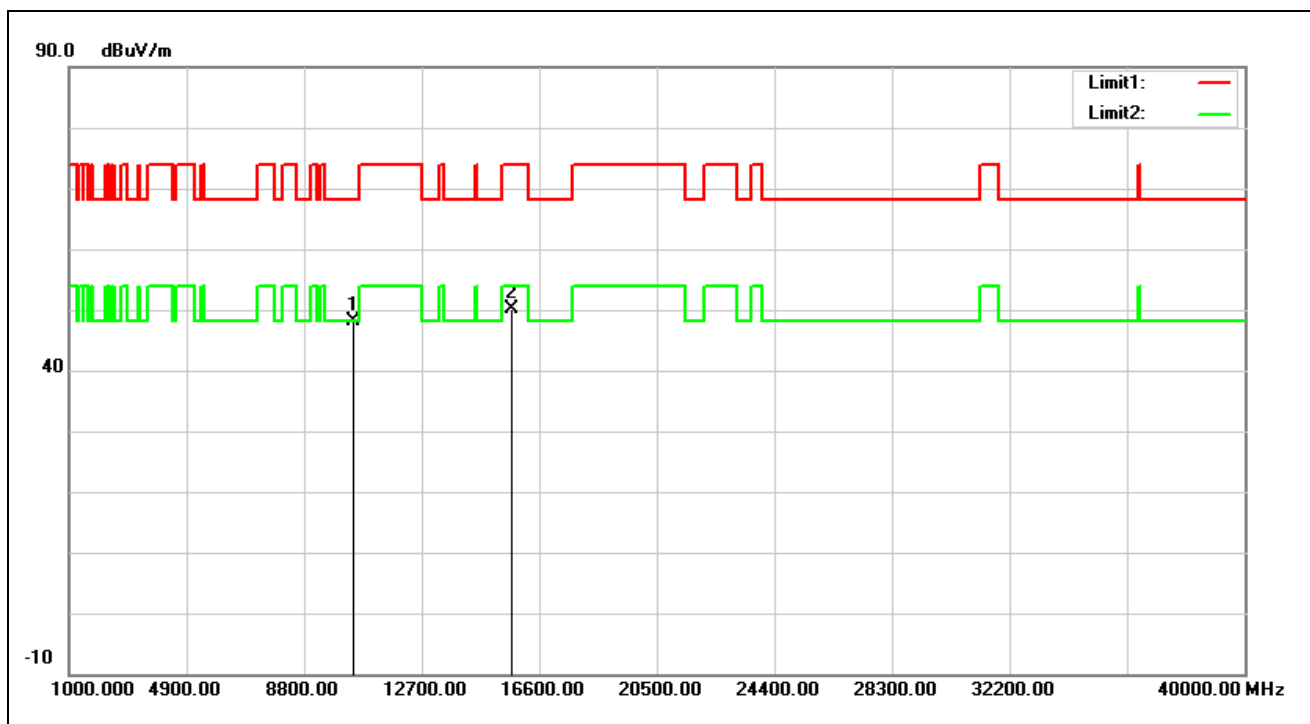


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	34.00	14.20	48.20	68.20	-20.00	peak
2	15690.000	33.59	16.52	50.11	74.00	-23.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

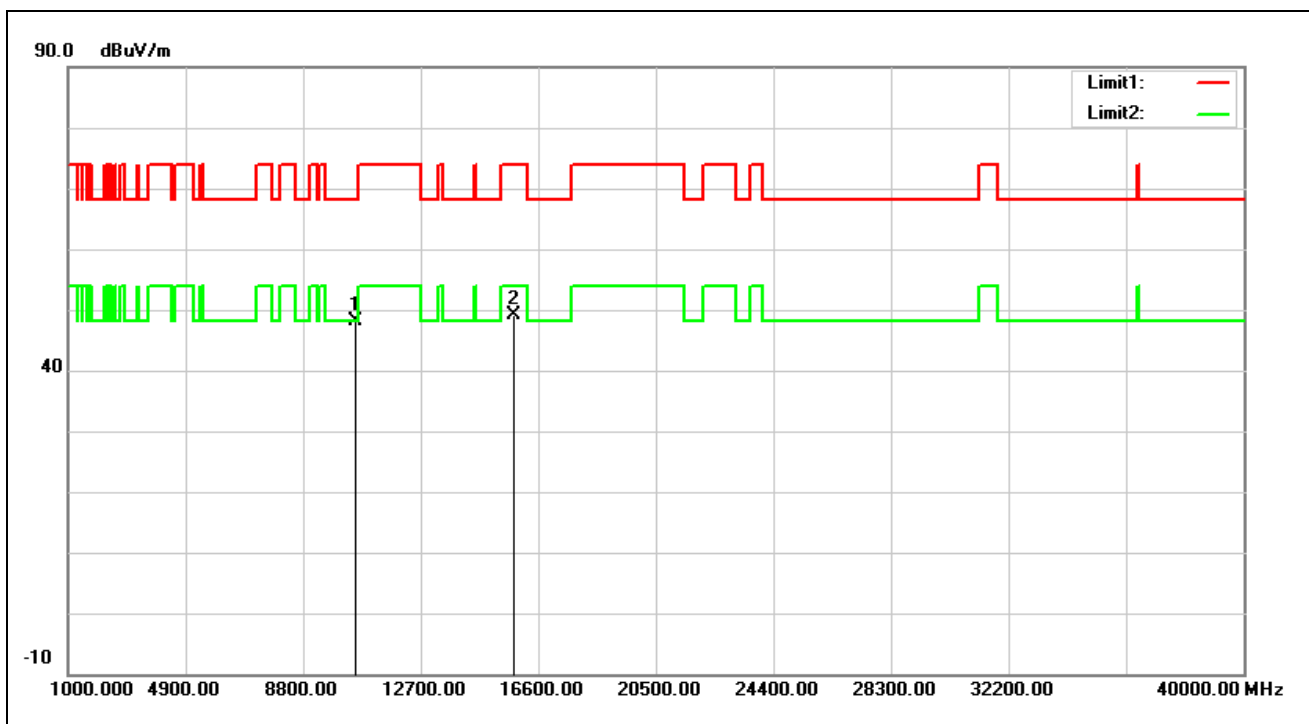


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.92	14.32	48.24	68.20	-19.96	peak
2	15810.000	32.80	16.29	49.09	74.00	-24.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

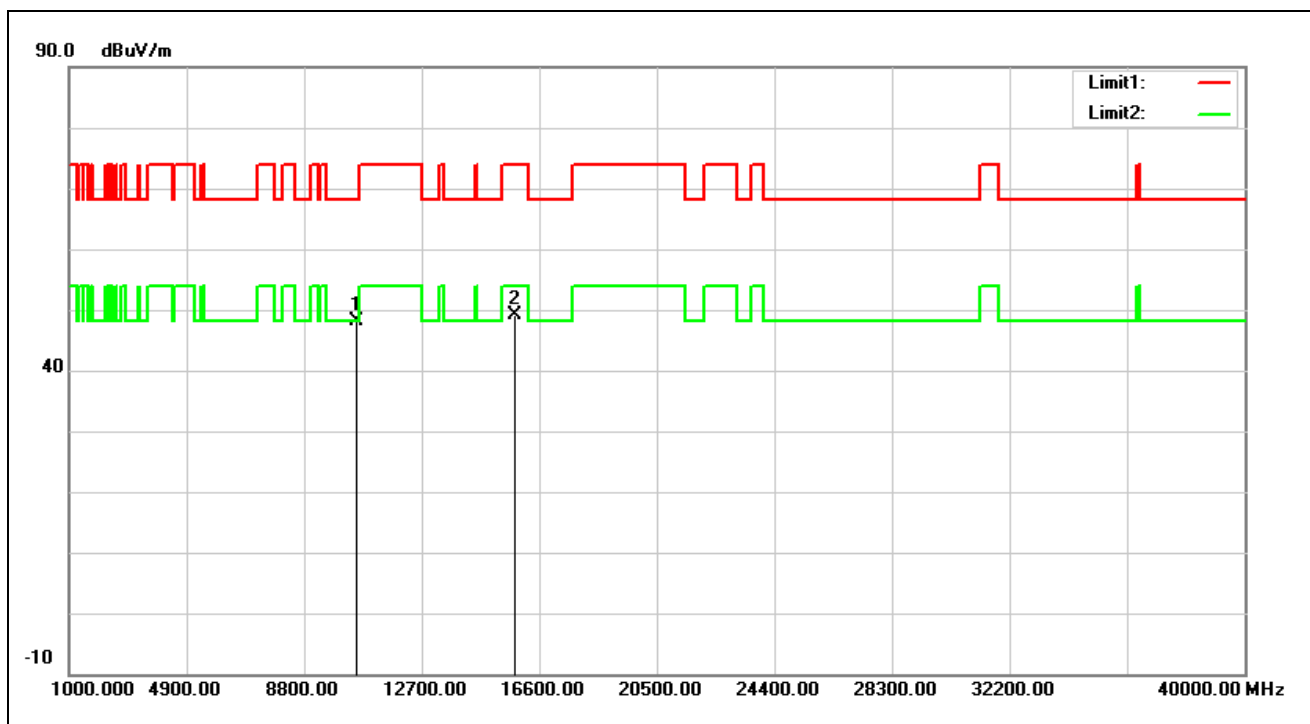


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.72	14.32	48.04	68.20	-20.16	peak
2	15810.000	32.84	16.29	49.13	74.00	-24.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

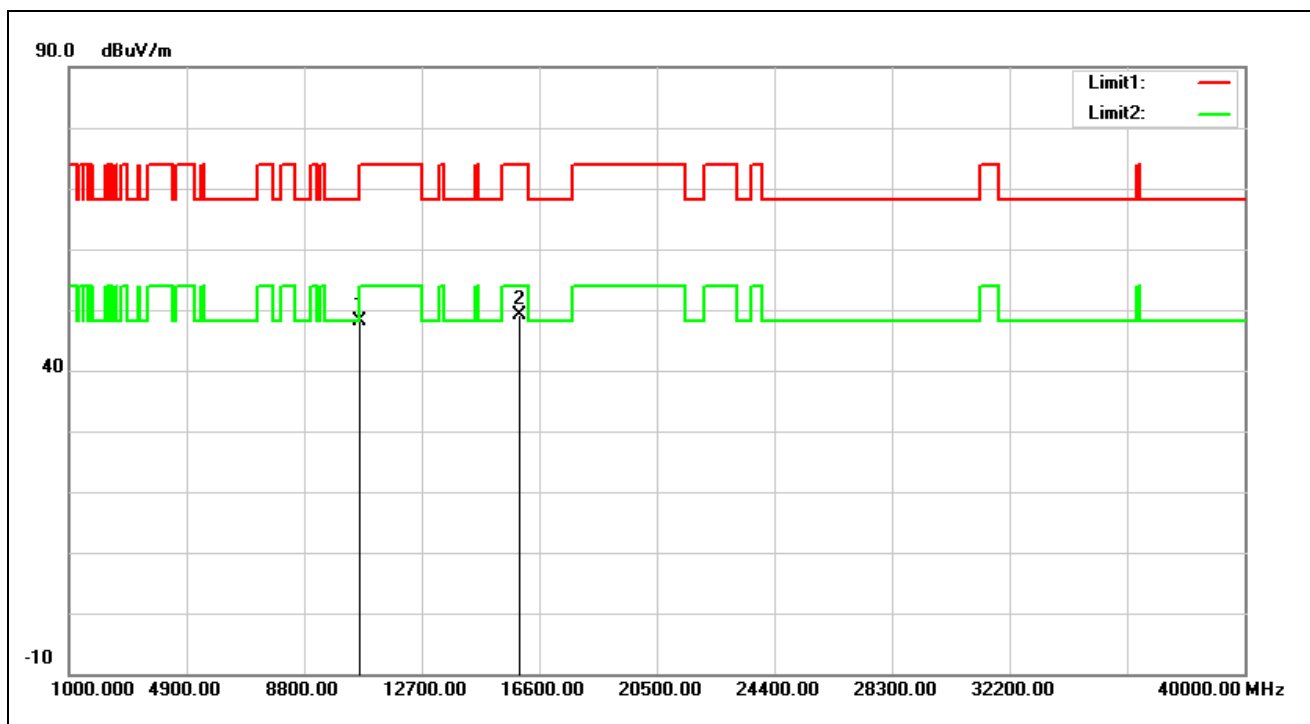


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.92	14.26	48.18	74.00	-25.82	peak
2*	15930.000	33.39	15.86	49.25	74.00	-24.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

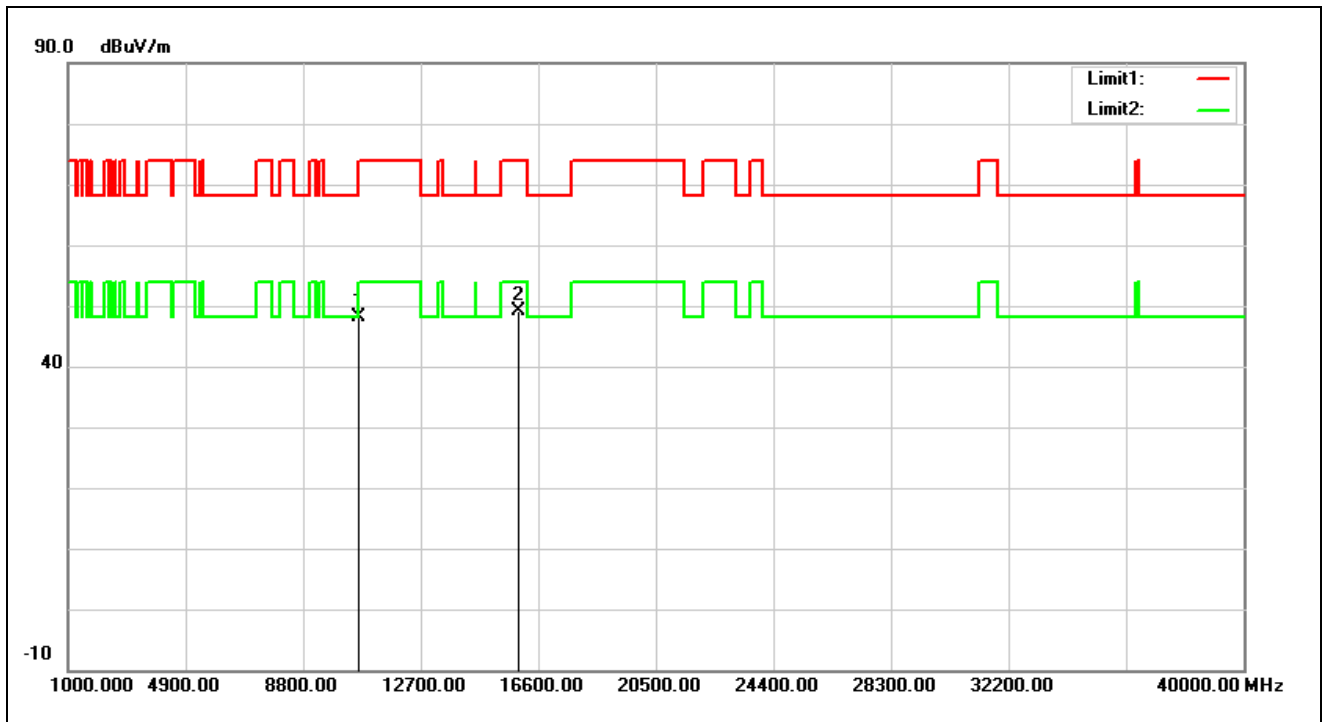


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.84	14.26	48.10	74.00	-25.90	peak
2*	15930.000	33.35	15.86	49.21	74.00	-24.79	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

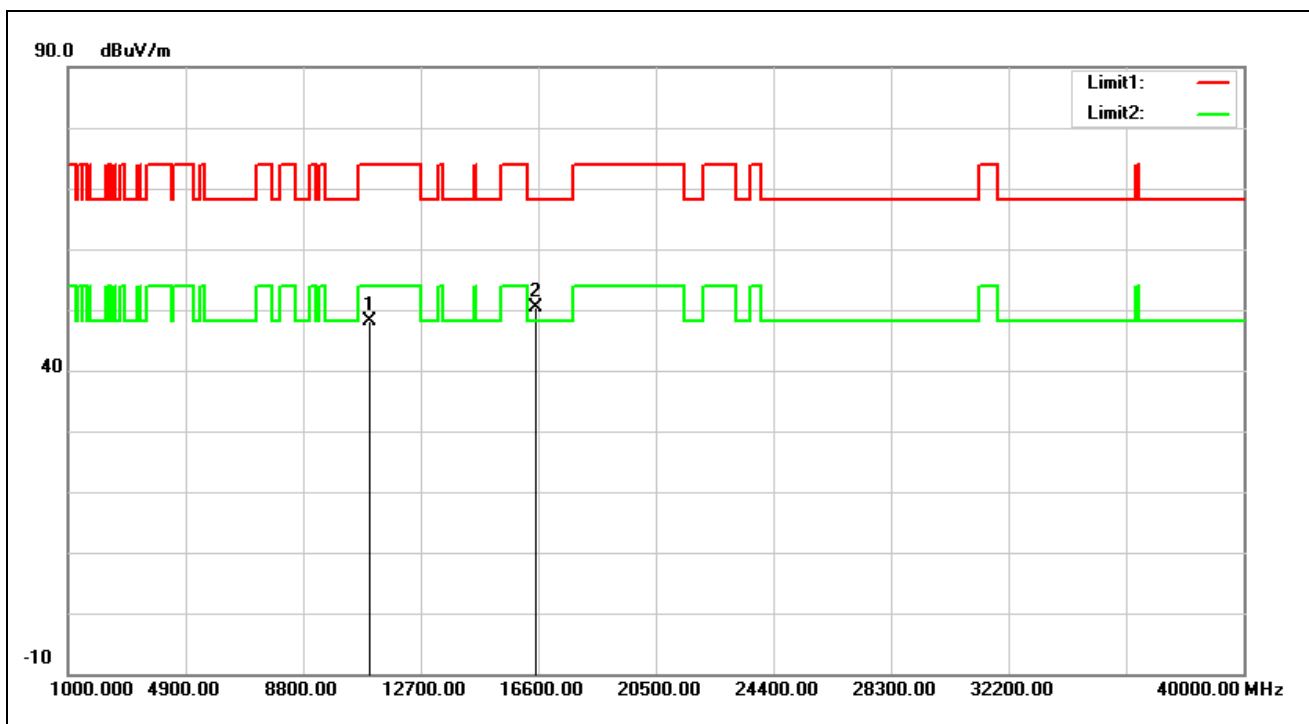


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.85	14.29	48.14	74.00	-25.86	peak
2*	16530.000	33.27	17.05	50.32	68.20	-17.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

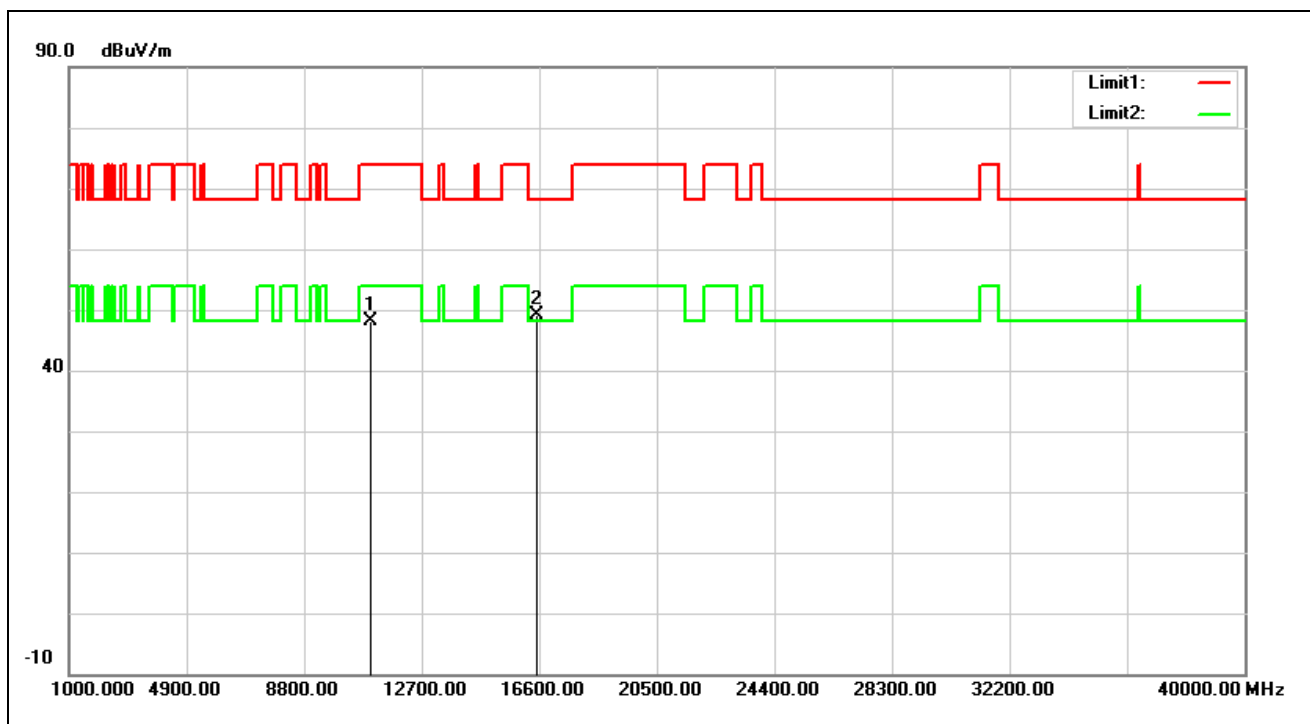


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.90	14.29	48.19	74.00	-25.81	peak
2*	16530.000	31.98	17.05	49.03	68.20	-19.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5550 MHz		
Remark:			

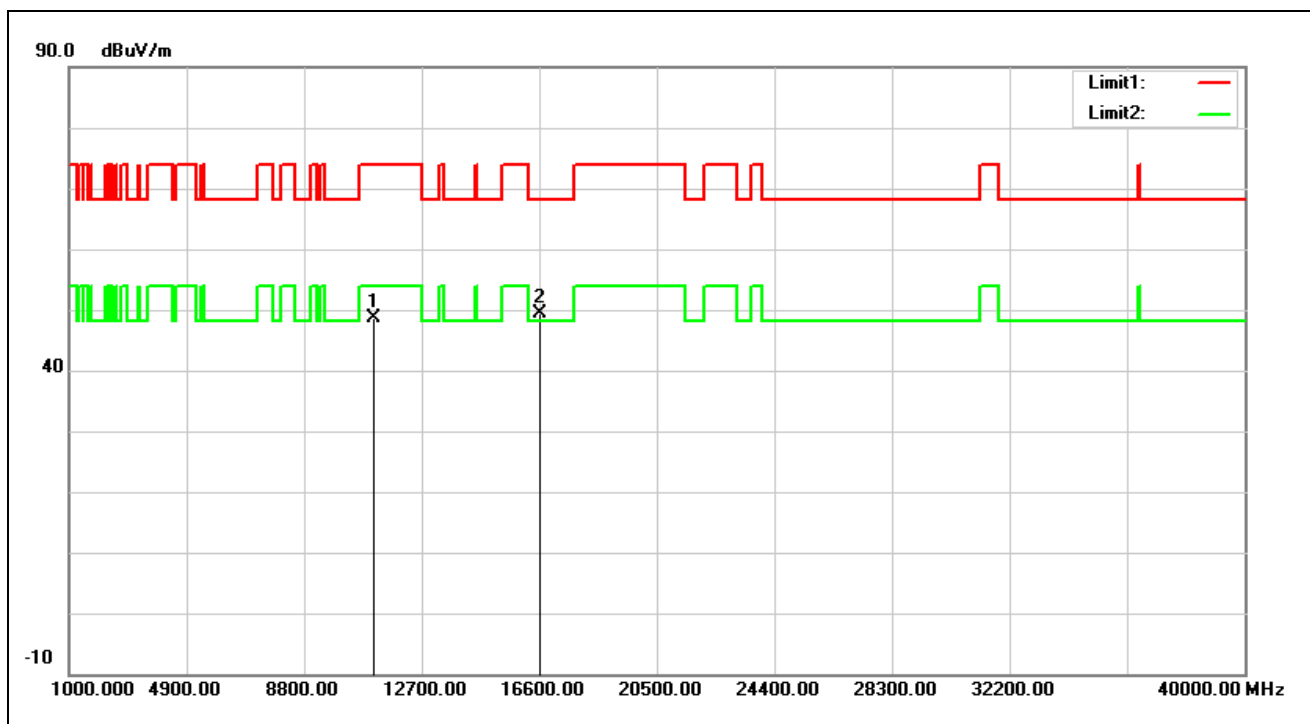


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.13	14.56	48.69	74.00	-25.31	peak
2*	16650.000	31.60	17.78	49.38	68.20	-18.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5550 MHz		
Remark:			

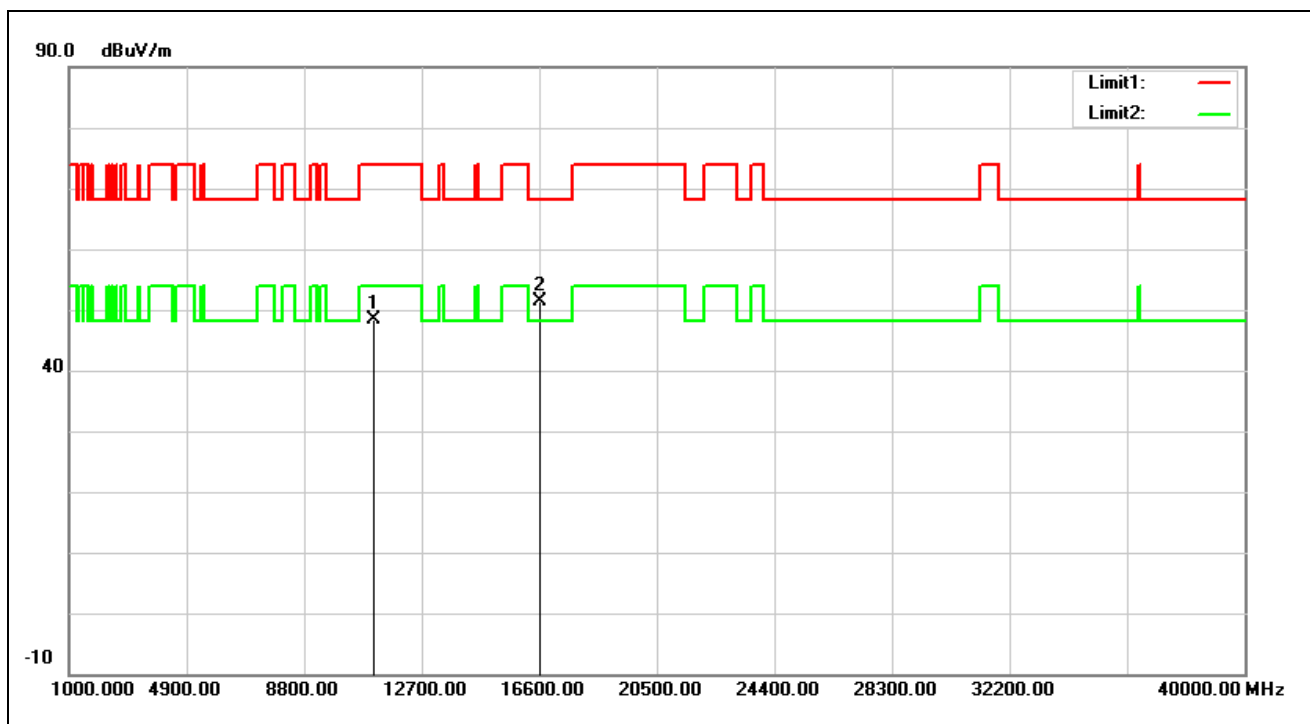


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.70	14.56	48.26	74.00	-25.74	peak
2*	16650.000	33.56	17.78	51.34	68.20	-16.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

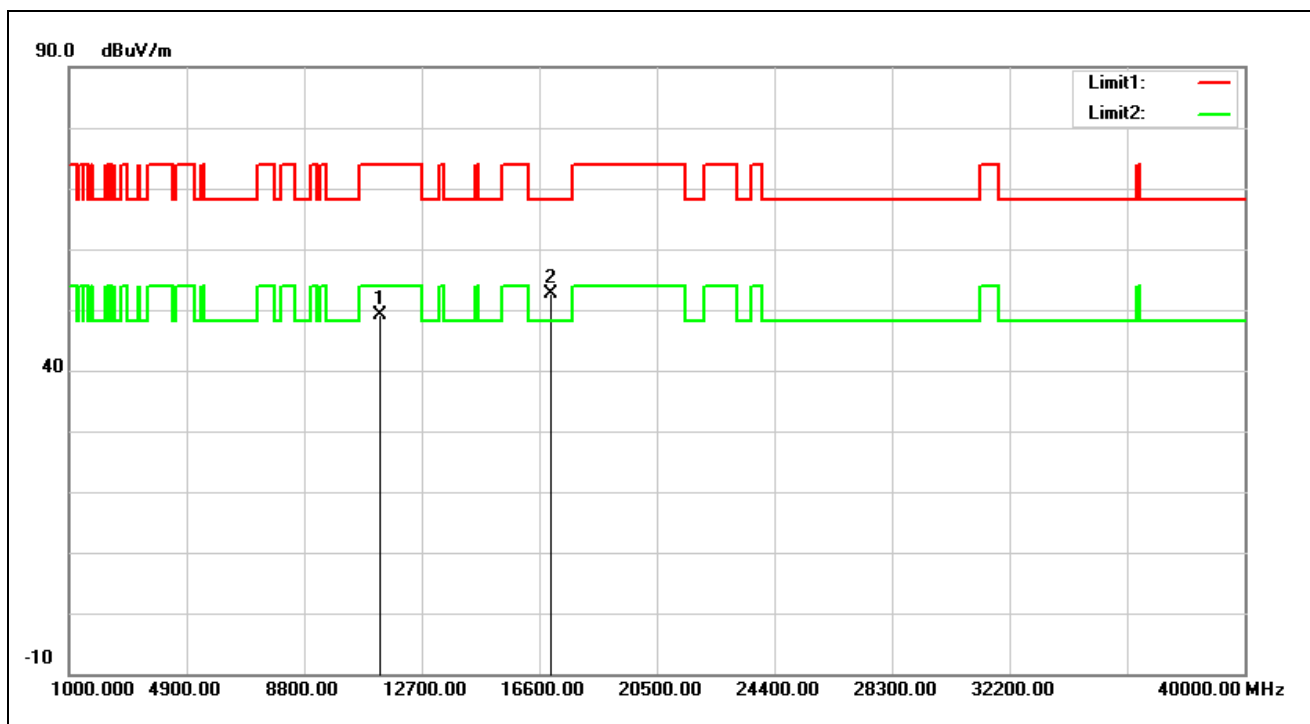


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.69	14.36	49.05	74.00	-24.95	peak
2*	17010.000	32.78	19.92	52.70	68.20	-15.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

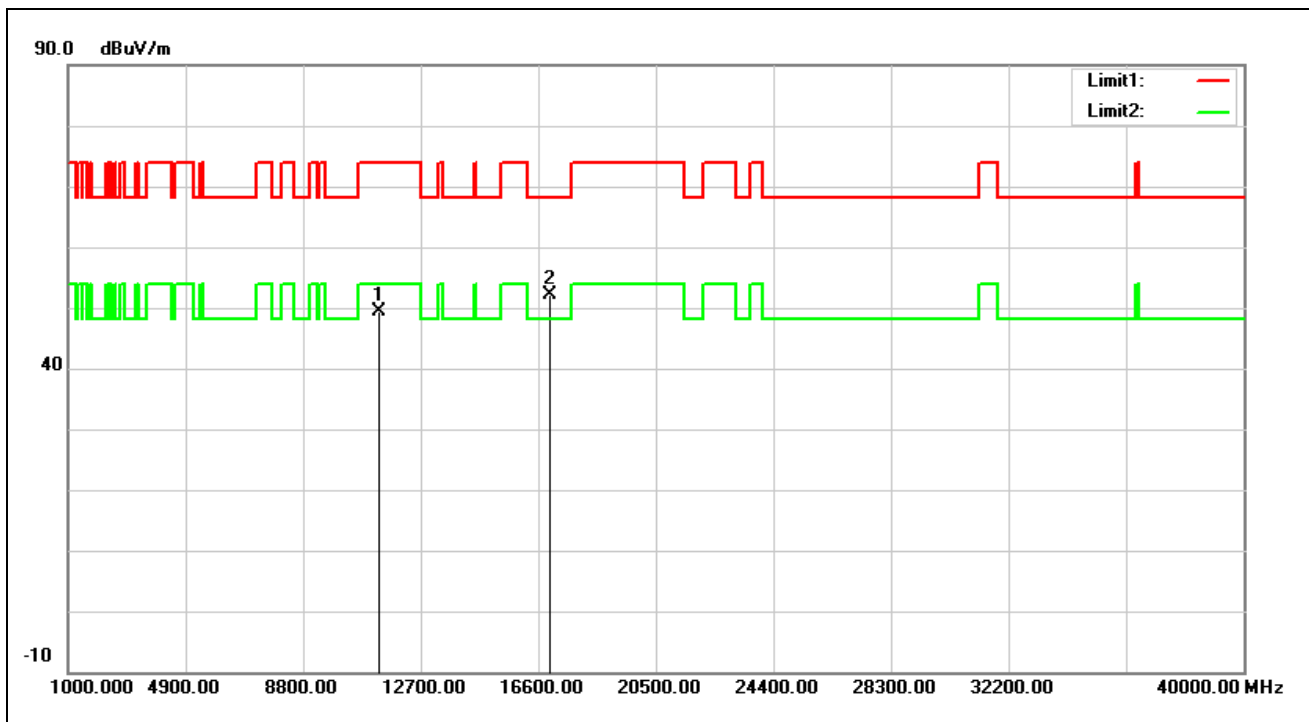


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.94	14.36	49.30	74.00	-24.70	peak
2*	17010.000	32.33	19.92	52.25	68.20	-15.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

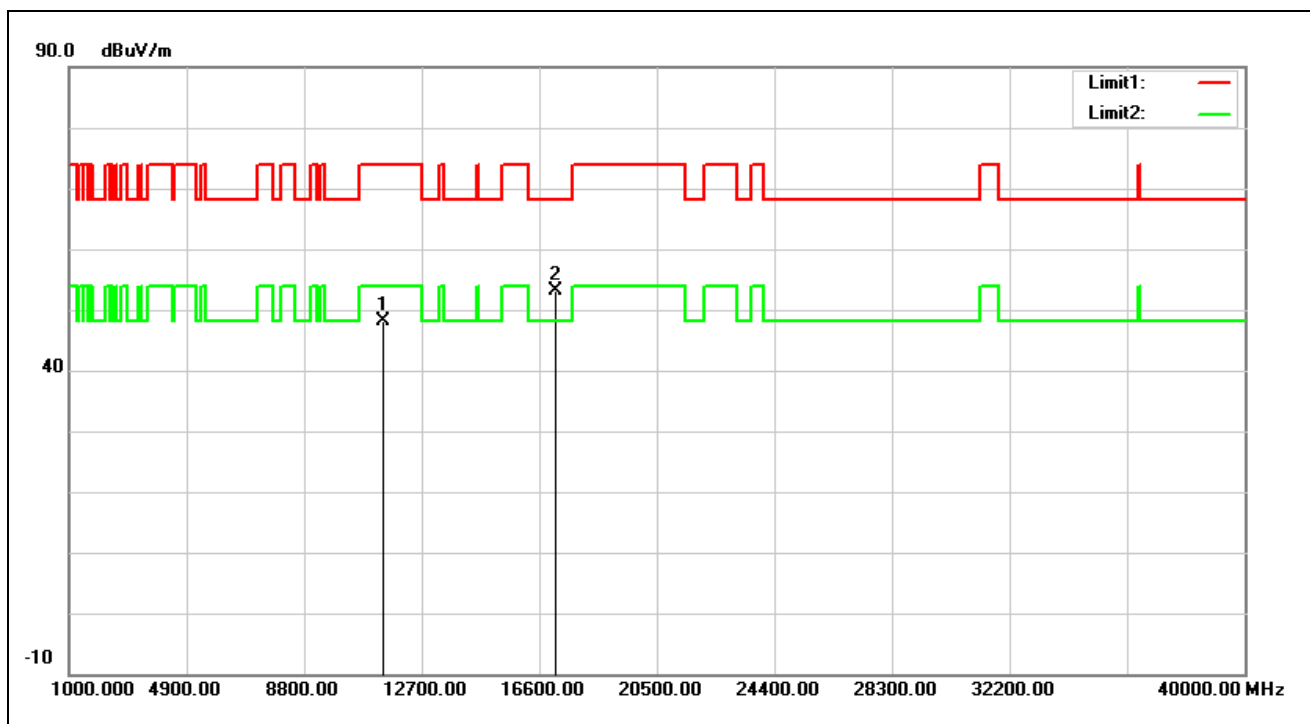


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.83	14.41	48.24	74.00	-25.76	peak
2*	17130.000	32.14	20.89	53.03	68.20	-15.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

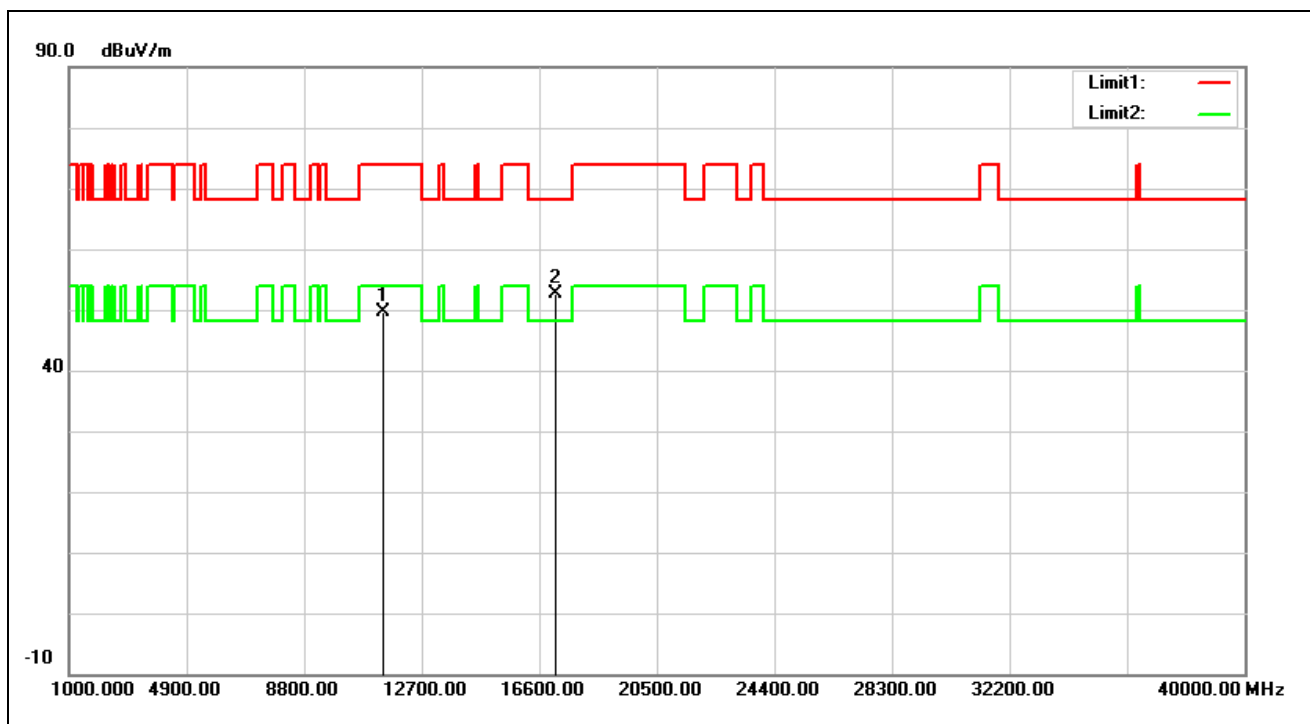


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	35.13	14.41	49.54	74.00	-24.46	peak
2*	17130.000	31.75	20.89	52.64	68.20	-15.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

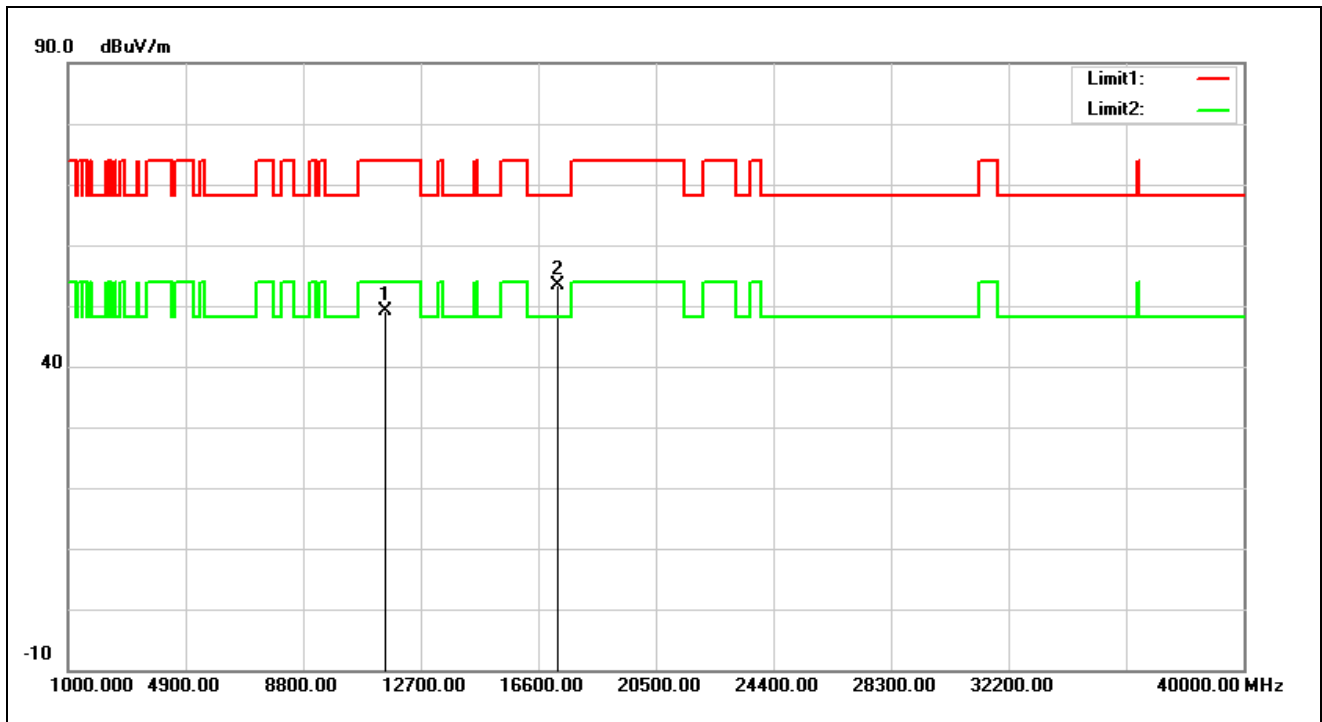


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.09	14.94	49.03	74.00	-24.97	peak
2*	17265.000	31.46	21.98	53.44	68.20	-14.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

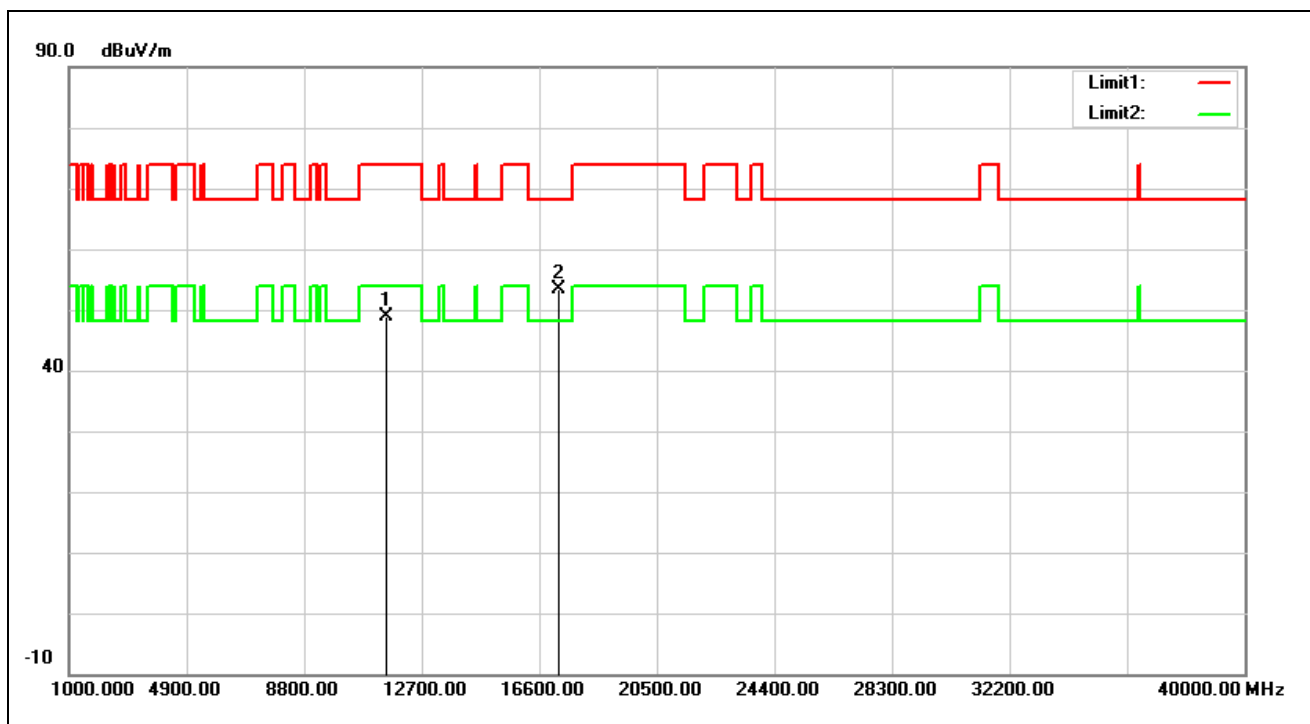


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.95	14.94	48.89	74.00	-25.11	peak
2*	17265.000	31.39	21.98	53.37	68.20	-14.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

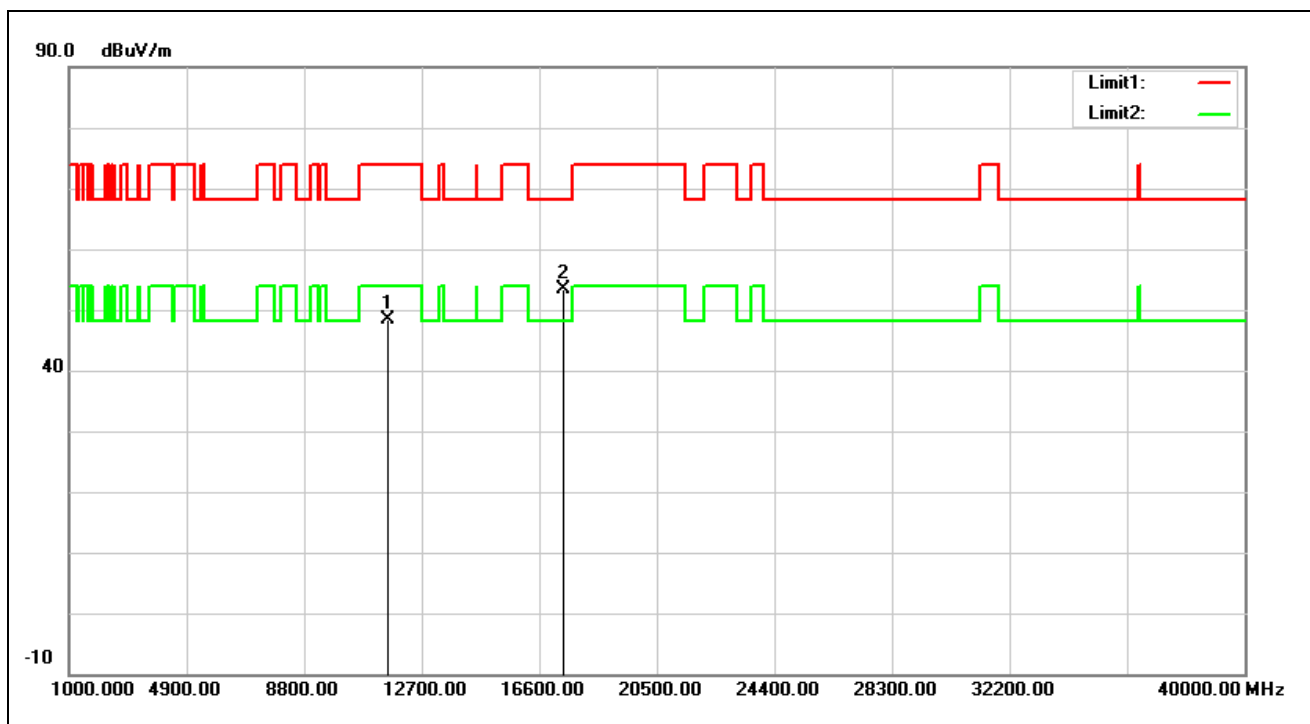


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.81	14.49	48.30	74.00	-25.70	peak
2*	17385.000	30.55	22.80	53.35	68.20	-14.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

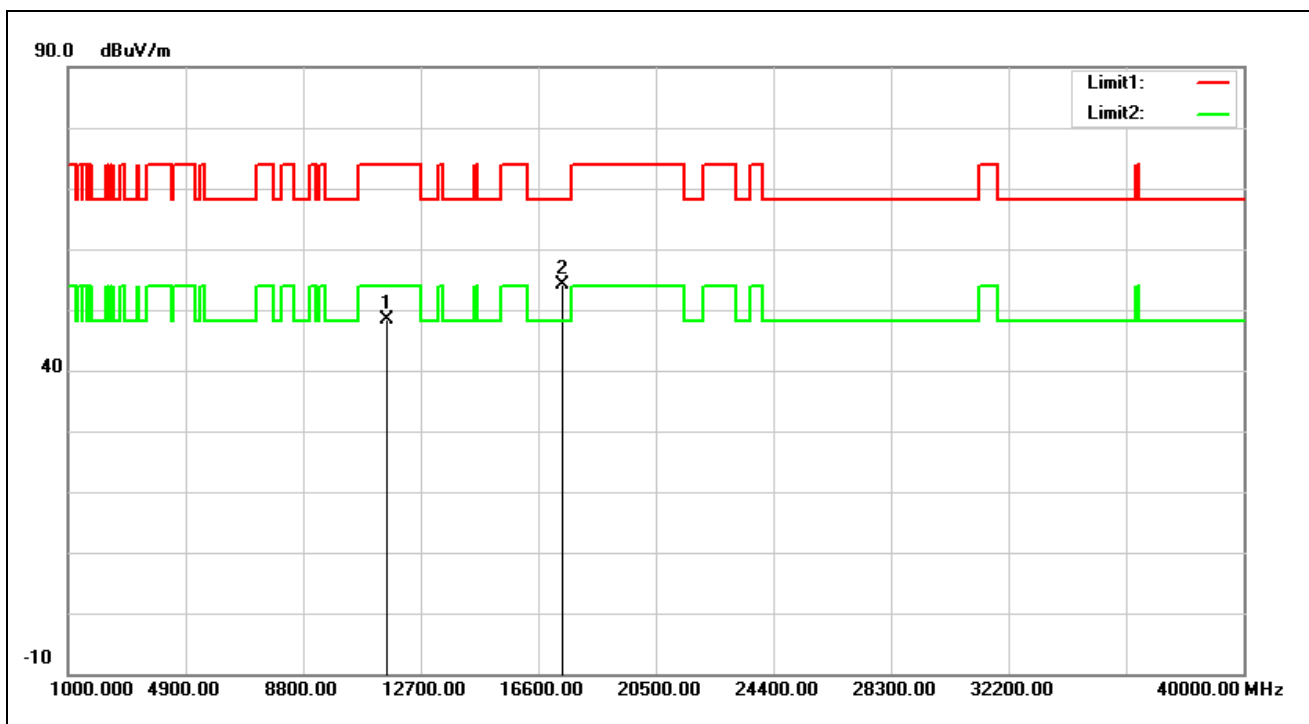


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.87	14.49	48.36	74.00	-25.64	peak
2*	17385.000	31.37	22.80	54.17	68.20	-14.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

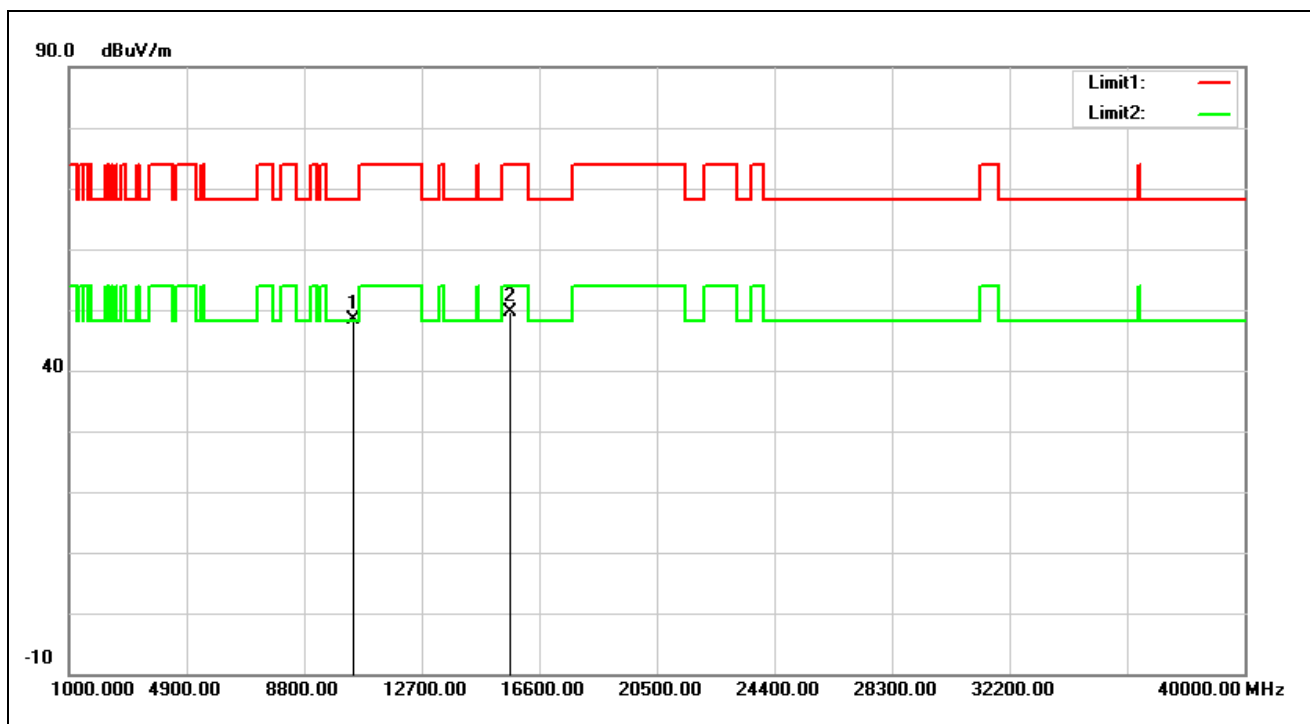


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	34.20	14.10	48.30	68.20	-19.90	peak
2	15630.000	33.04	16.52	49.56	74.00	-24.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

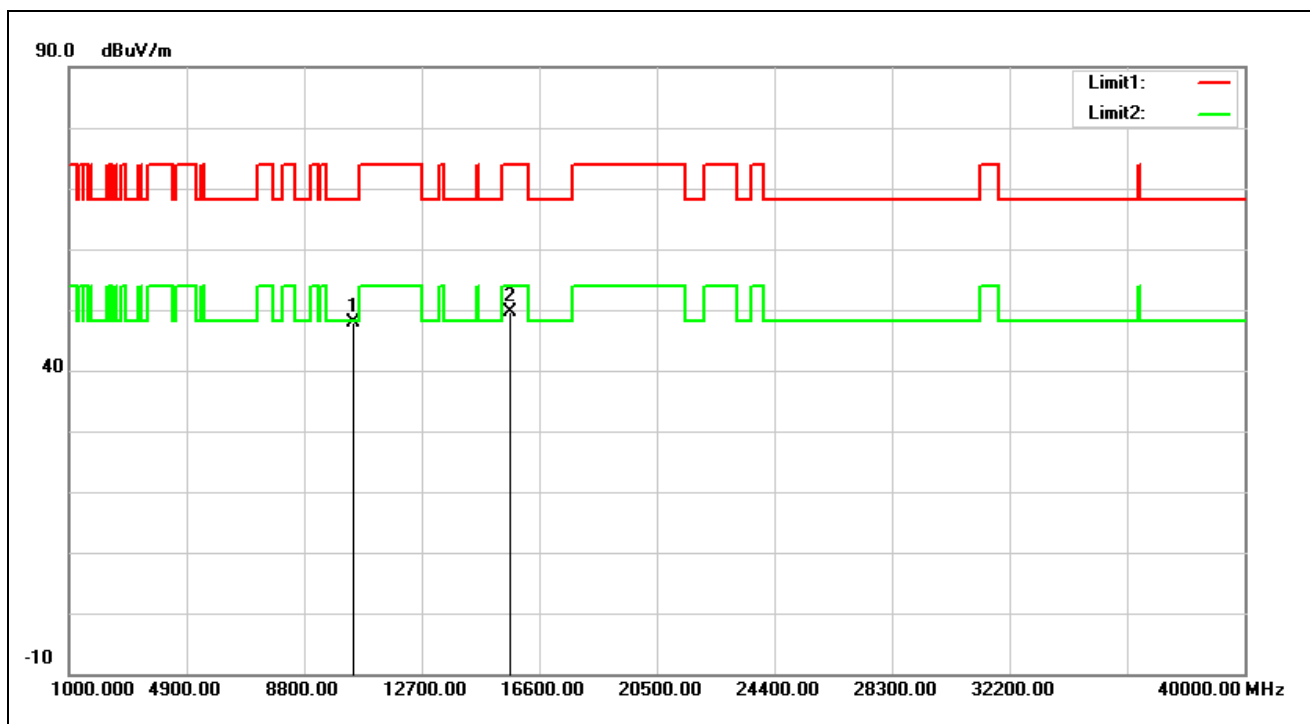


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	33.86	14.10	47.96	68.20	-20.24	peak
2	15630.000	33.09	16.52	49.61	74.00	-24.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

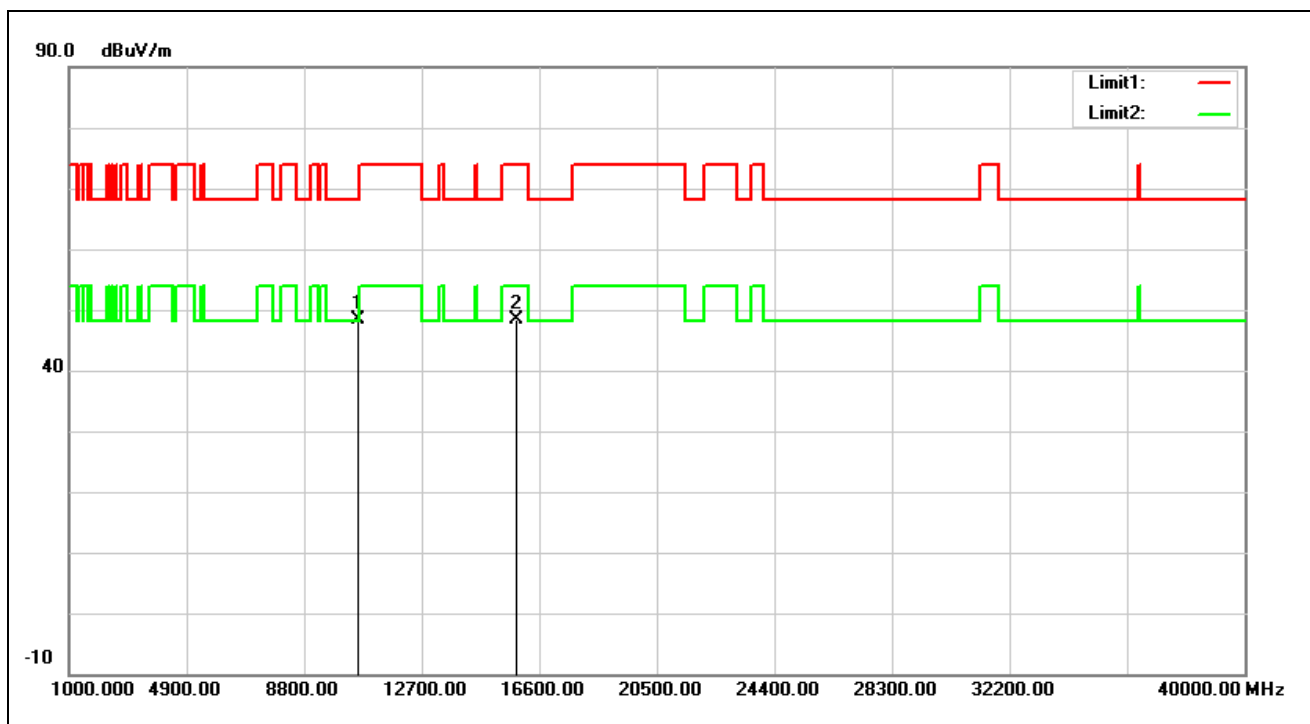


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	34.05	14.32	48.37	68.20	-19.83	peak
2	15870.000	32.20	16.06	48.26	74.00	-25.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

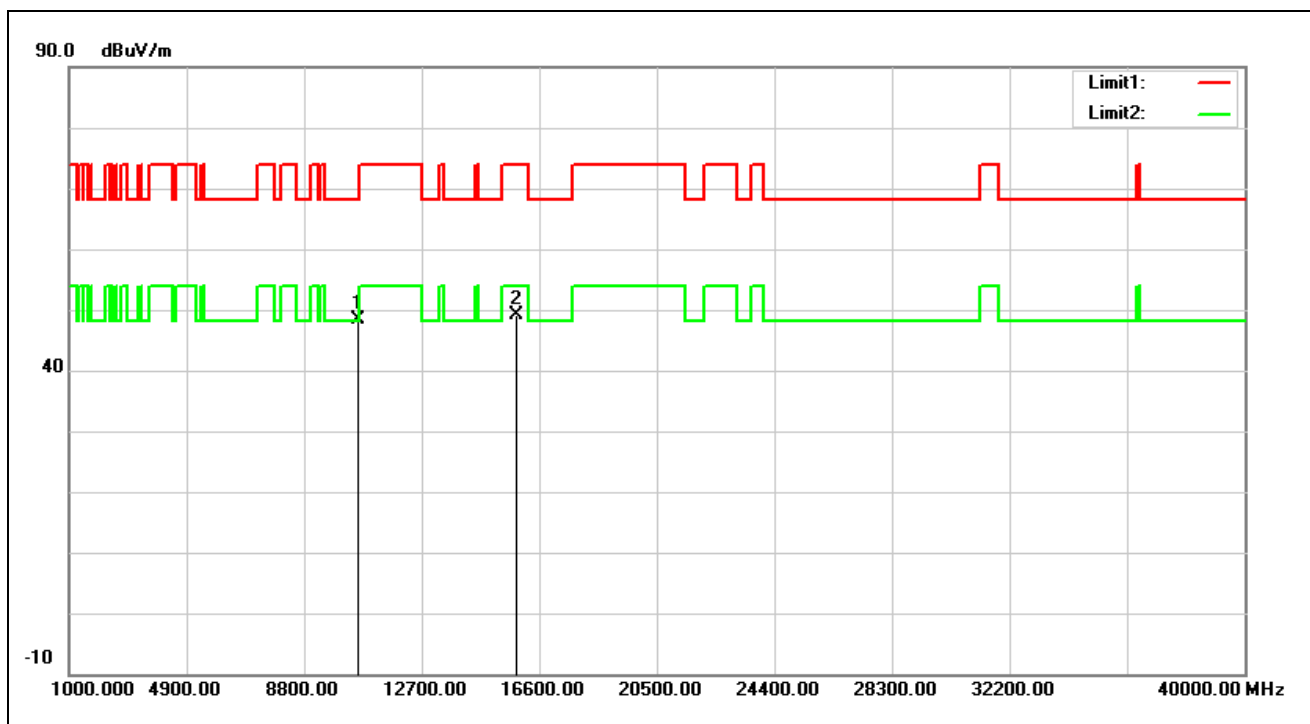


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	33.94	14.32	48.26	68.20	-19.94	peak
2	15870.000	32.96	16.06	49.02	74.00	-24.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

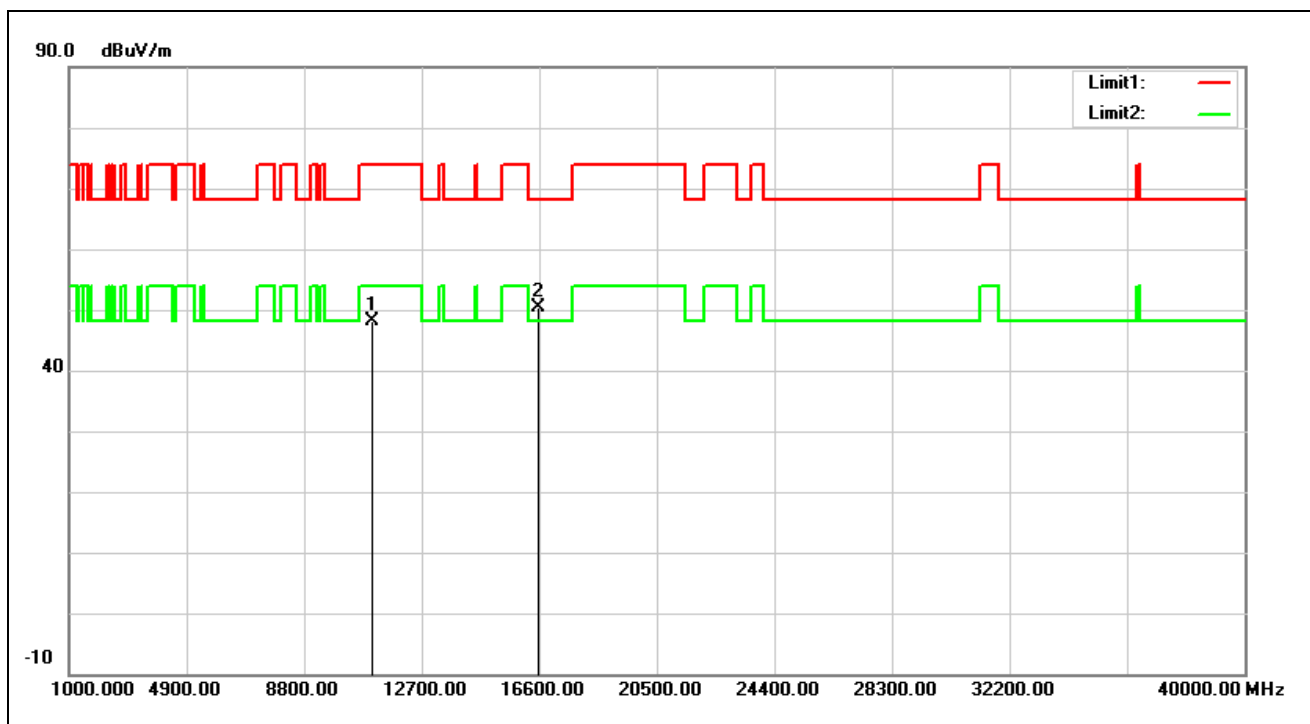


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.68	14.42	48.10	74.00	-25.90	peak
2*	16590.000	32.95	17.39	50.34	68.20	-17.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

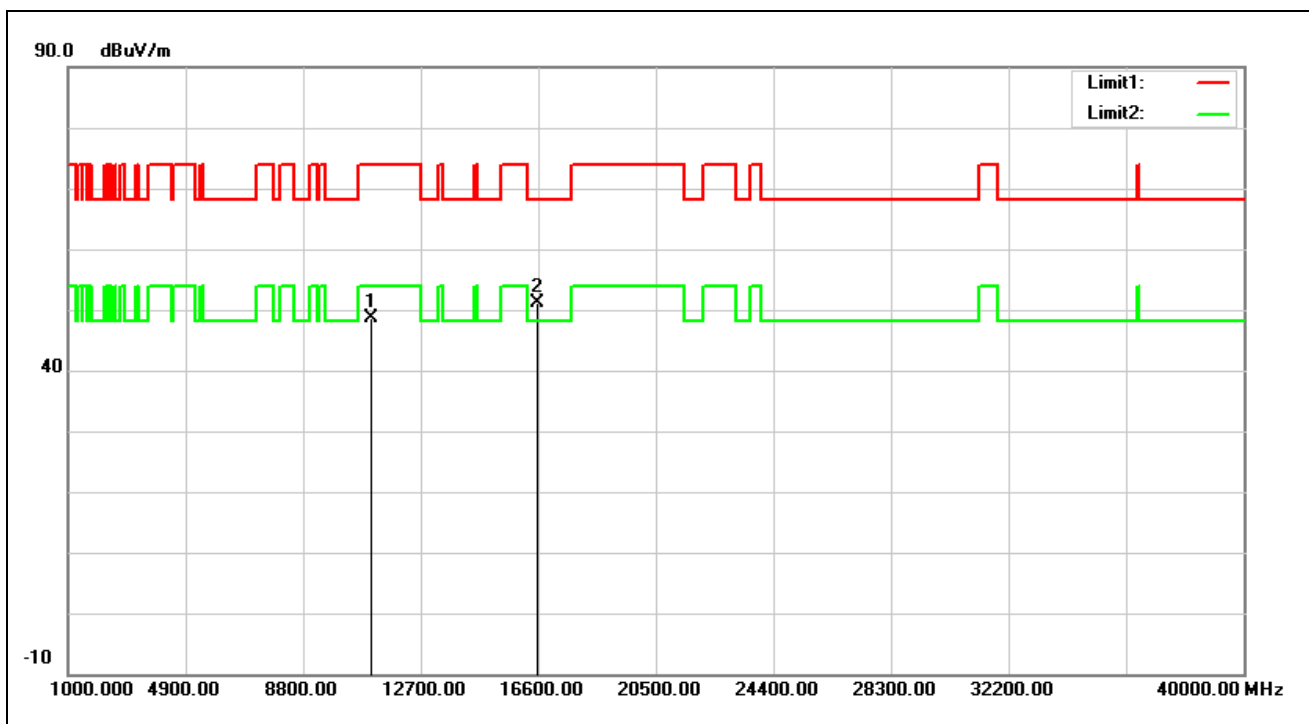


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	34.21	14.42	48.63	74.00	-25.37	peak
2*	16590.000	33.66	17.39	51.05	68.20	-17.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

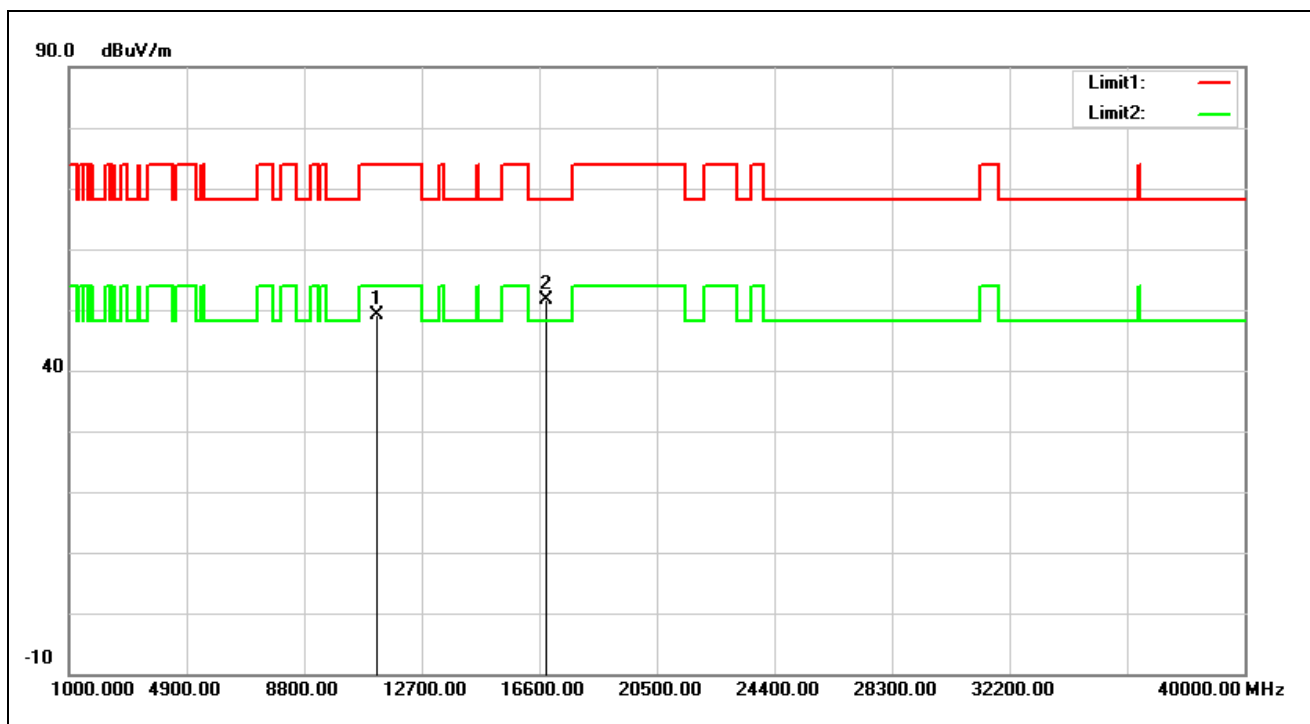


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.78	14.24	49.02	74.00	-24.98	peak
2*	16830.000	32.46	19.09	51.55	68.20	-16.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

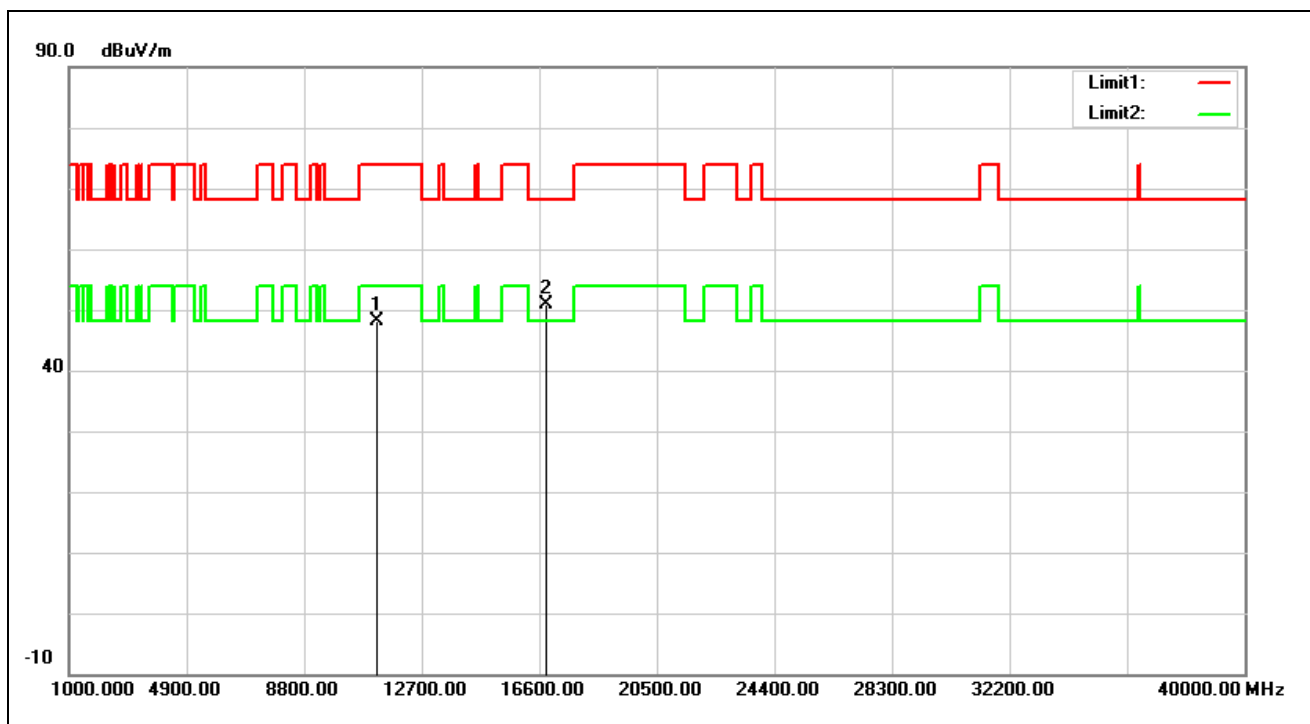


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.01	14.24	48.25	74.00	-25.75	peak
2*	16830.000	31.87	19.09	50.96	68.20	-17.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

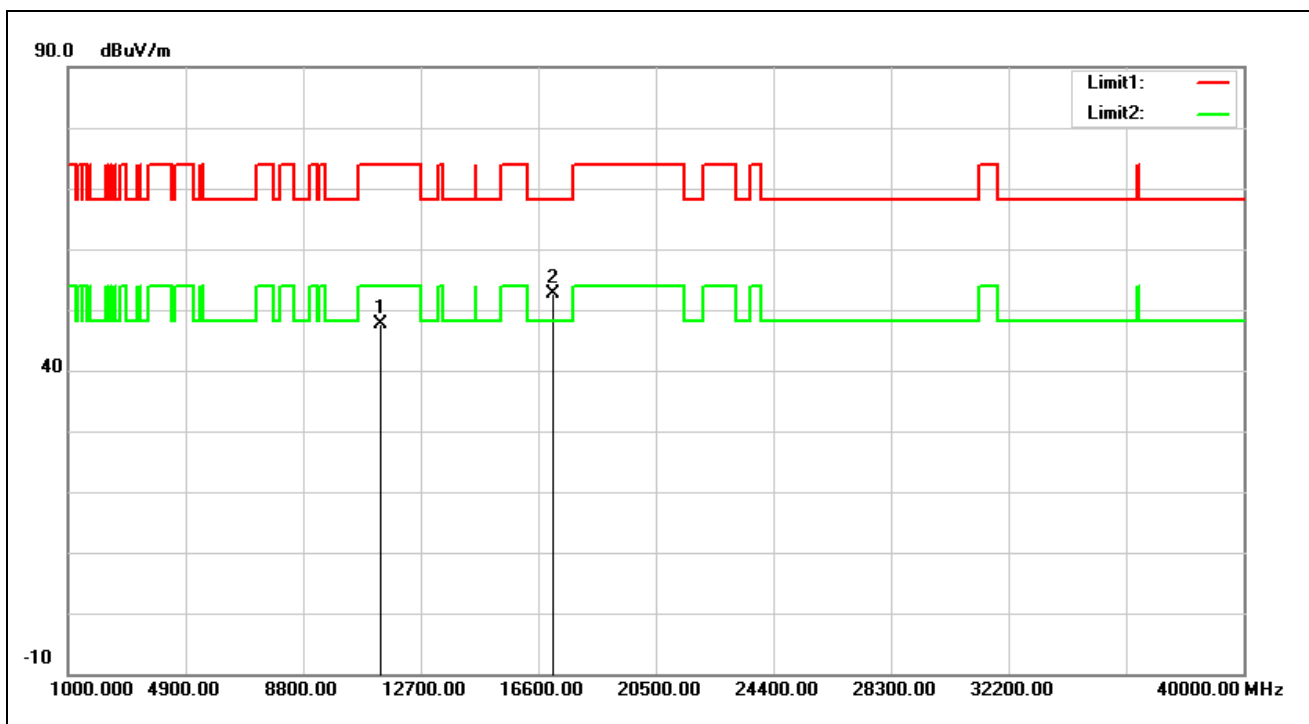


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.36	14.29	47.65	74.00	-26.35	peak
2*	17070.000	32.20	20.43	52.63	68.20	-15.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

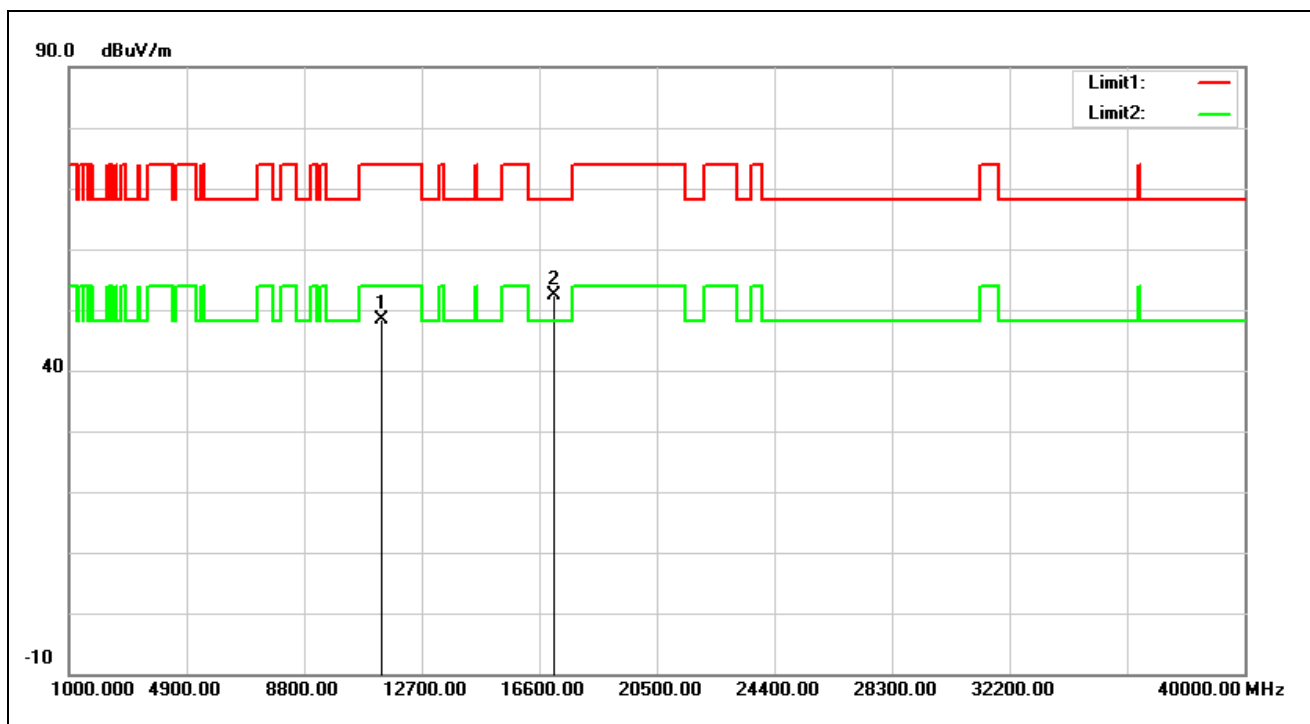


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	34.01	14.29	48.30	74.00	-25.70	peak
2*	17070.000	31.91	20.43	52.34	68.20	-15.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

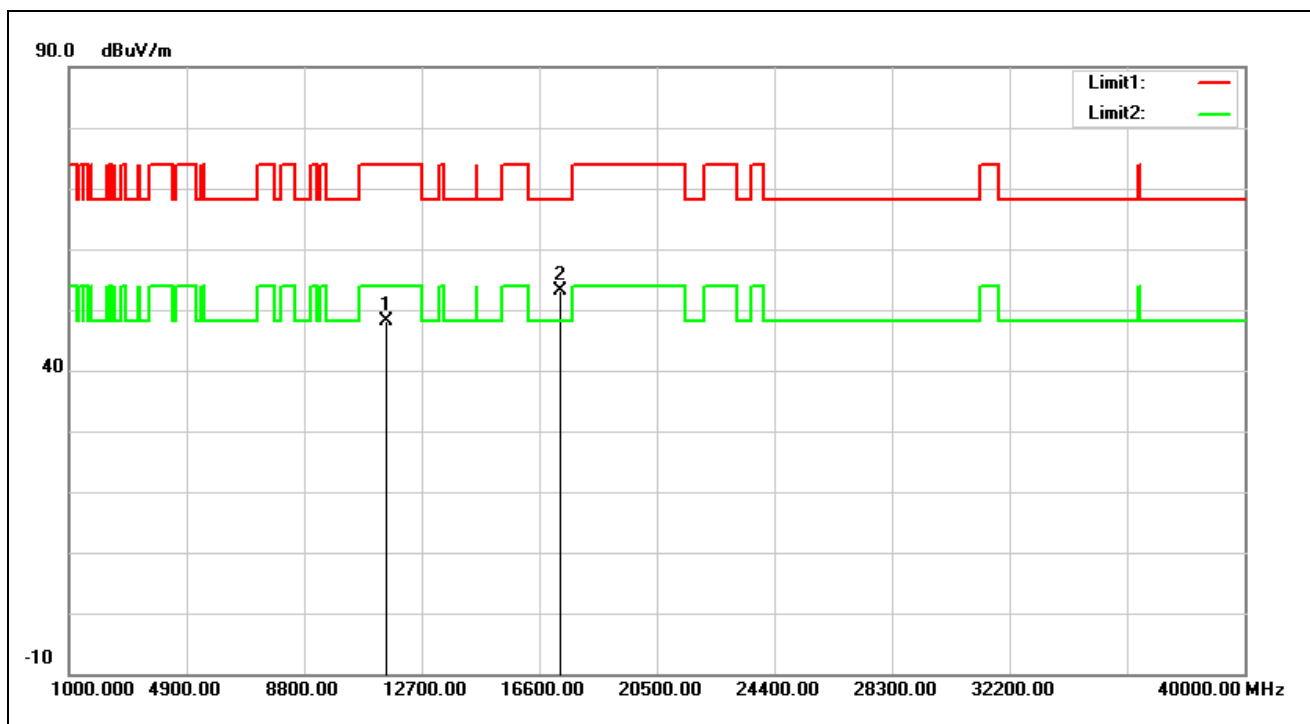


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.48	14.71	48.19	74.00	-25.81	peak
2*	17325.000	30.63	22.46	53.09	68.20	-15.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

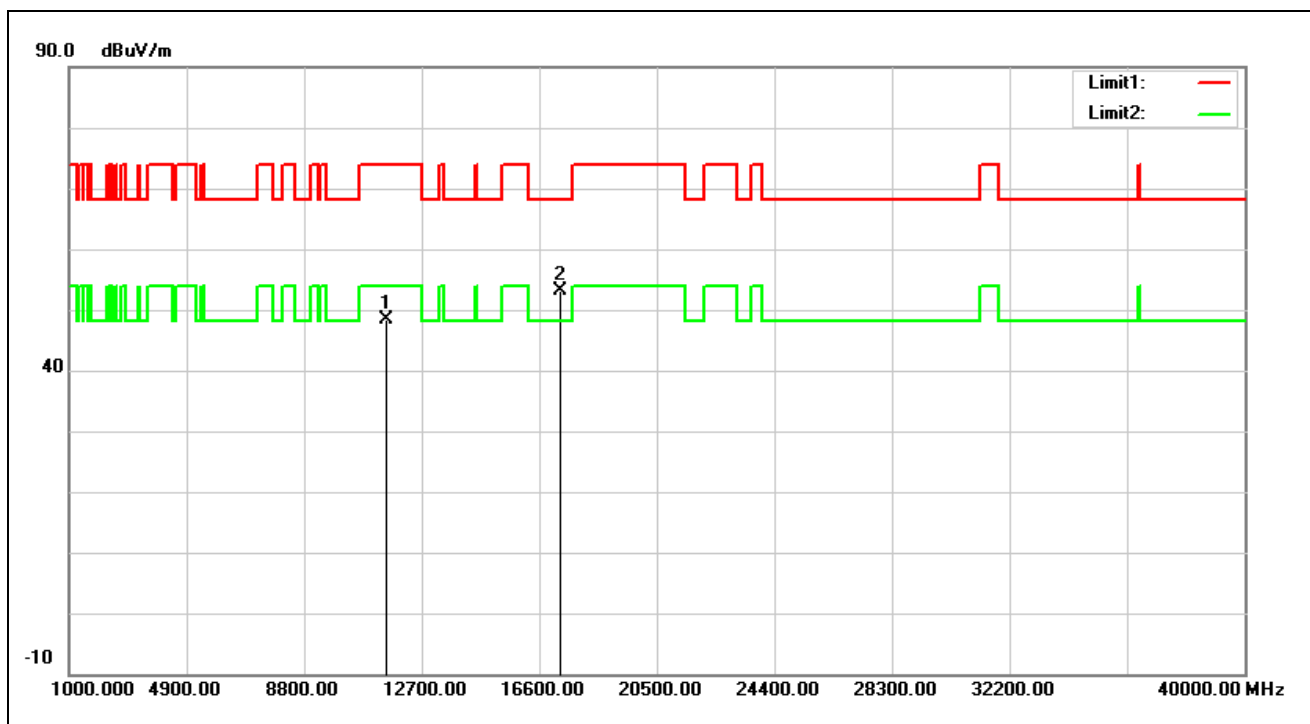


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.76	14.71	48.47	74.00	-25.53	peak
2*	17325.000	30.79	22.46	53.25	68.20	-14.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

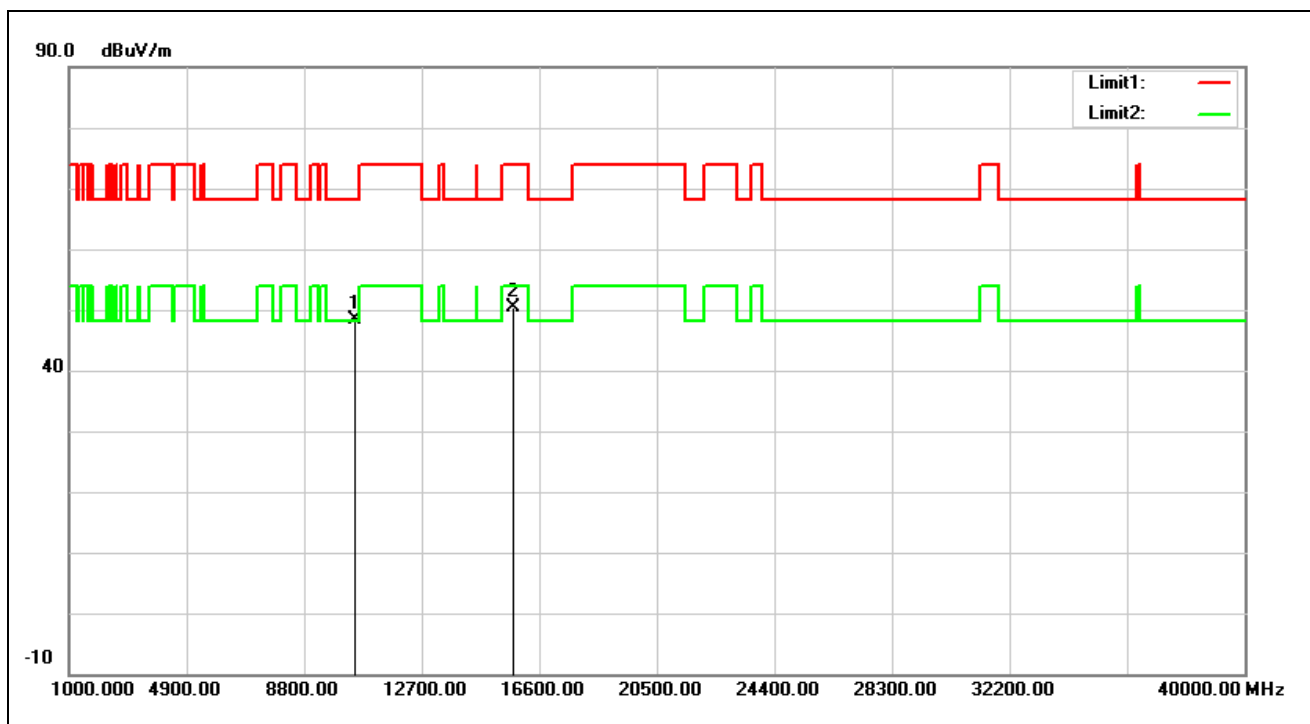


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.99	14.31	48.30	68.20	-19.90	peak
2	15750.000	33.84	16.43	50.27	74.00	-23.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

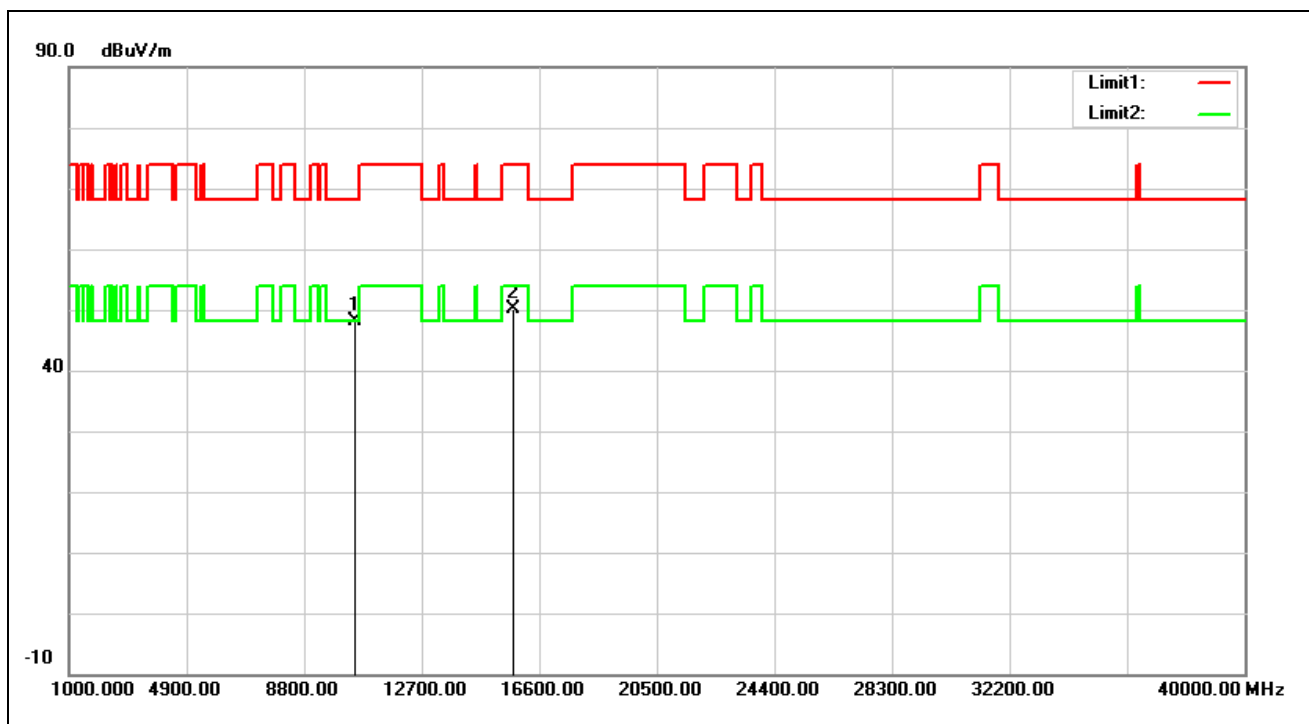


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.86	14.31	48.17	68.20	-20.03	peak
2	15750.000	33.59	16.43	50.02	74.00	-23.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

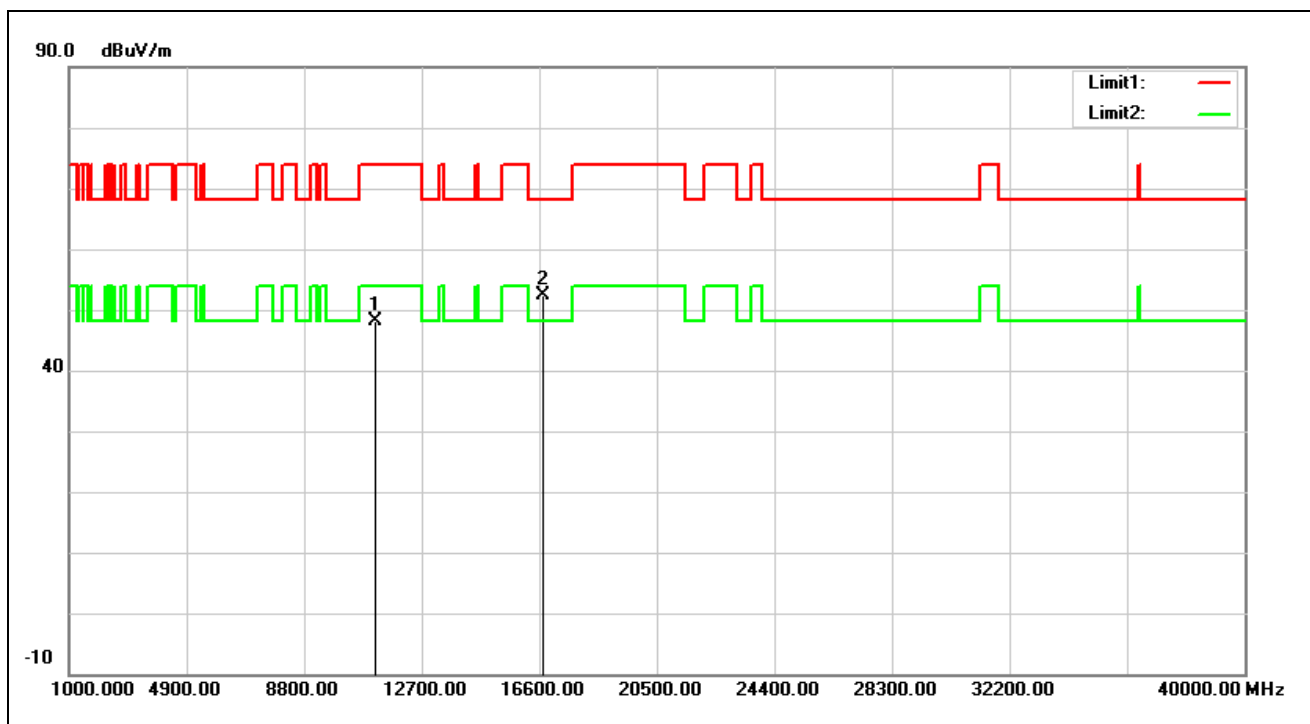


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.73	14.41	48.14	74.00	-25.86	peak
2*	16710.000	34.14	18.19	52.33	68.20	-15.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

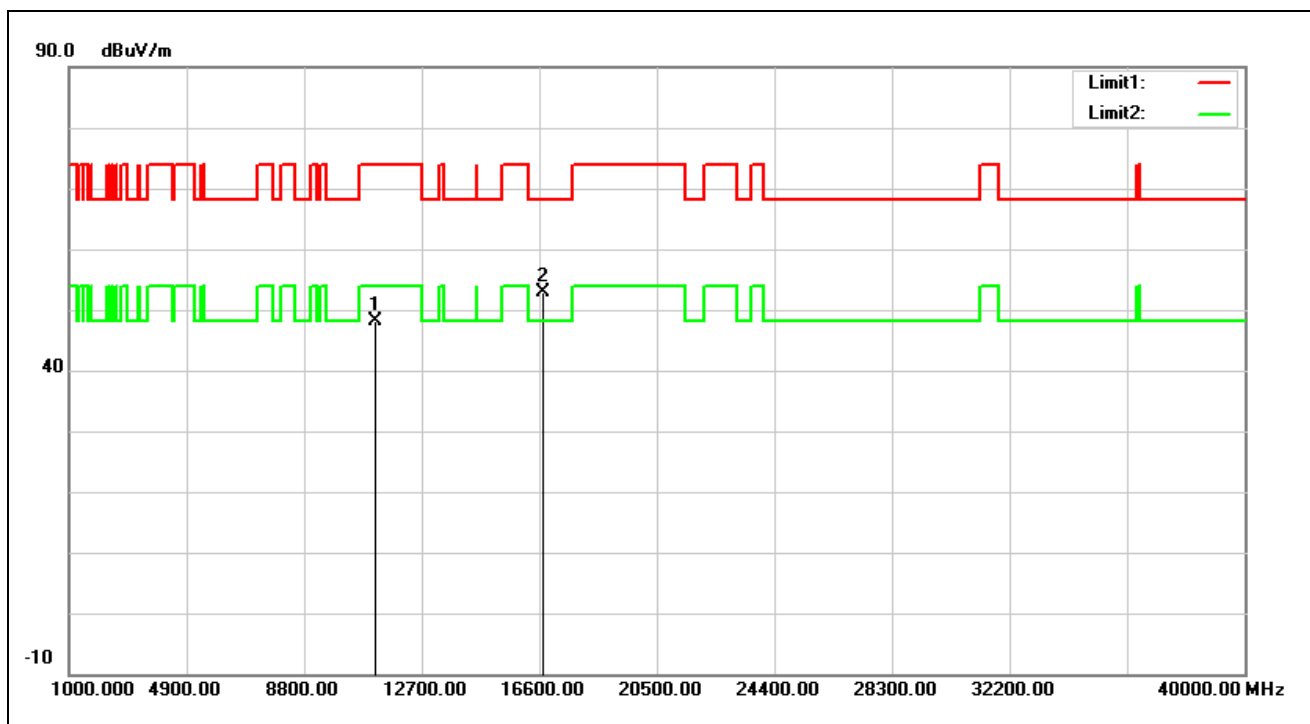


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.73	14.41	48.14	74.00	-25.86	peak
2*	16710.000	34.74	18.19	52.93	68.20	-15.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting		
Remark:	(Bluetooth + WLAN 5 GHz)		

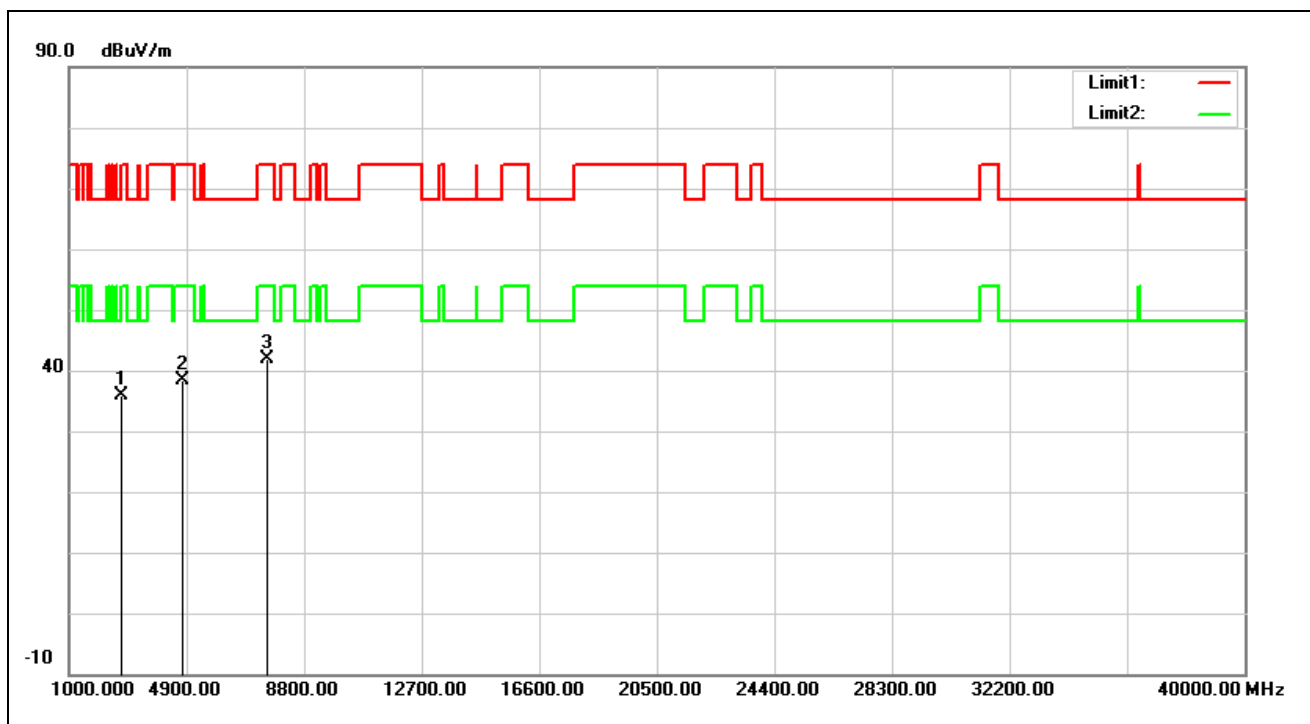


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	41.45	-5.69	35.76	74.00	-38.24	peak
2	4757.000	38.41	-0.15	38.26	74.00	-35.74	peak
3*	7562.000	35.39	6.39	41.78	74.00	-32.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting		
Remark:	(Bluetooth + WLAN 5 GHz)		

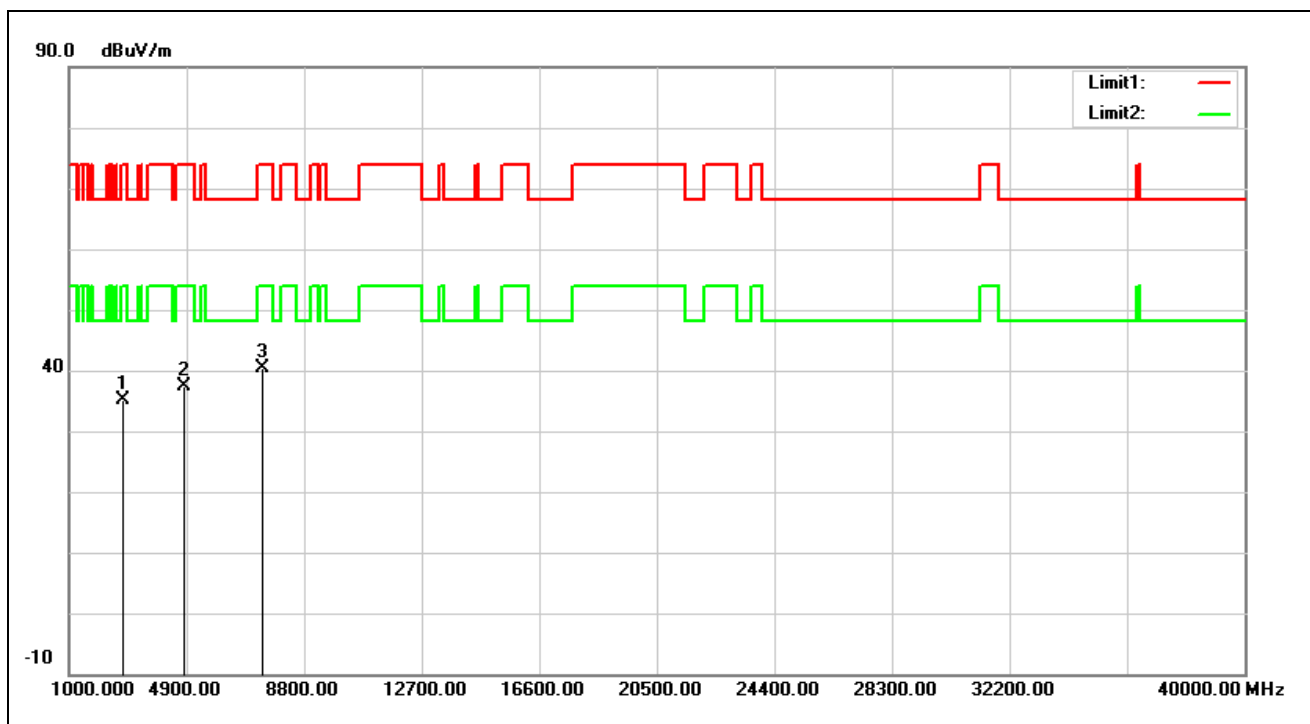


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	40.68	-5.66	35.02	74.00	-38.98	peak
2	4825.000	37.54	-0.23	37.31	74.00	-36.69	peak
3*	7426.000	33.87	6.39	40.26	74.00	-33.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting		
Remark:	(WLAN 2.4 GHz + 5 GHz)		

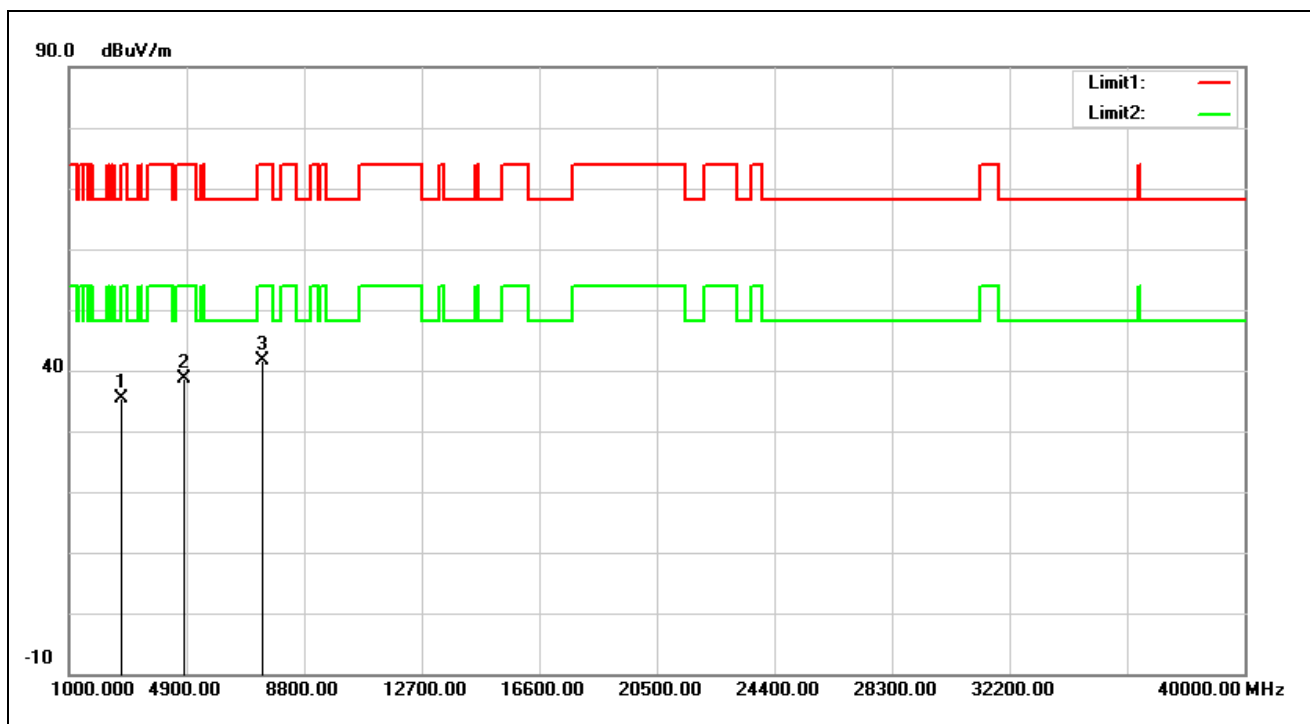


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	41.18	-5.69	35.49	74.00	-38.51	peak
2	4791.000	38.81	-0.30	38.51	74.00	-35.49	peak
3*	7426.000	35.22	6.39	41.61	74.00	-32.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting		
Remark:	(WLAN 2.4 GHz + 5 GHz)		

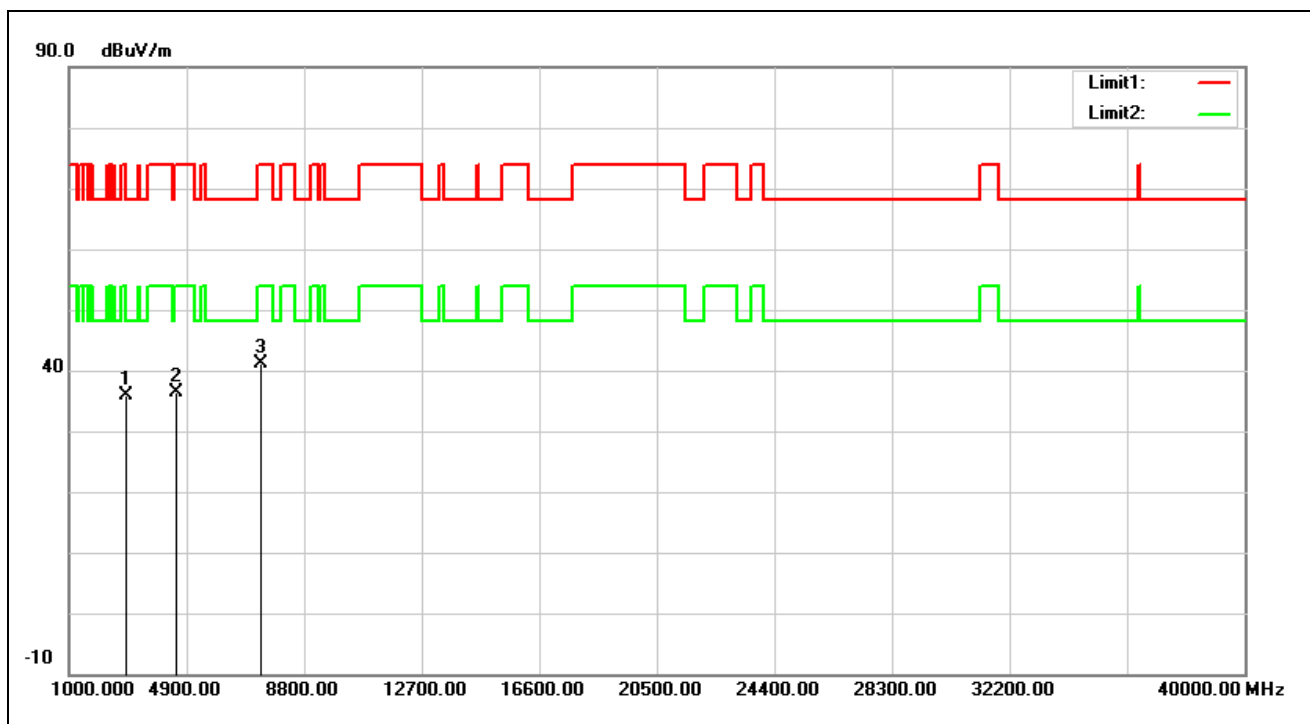


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	41.48	-5.48	36.00	74.00	-38.00	peak
2	4570.000	37.44	-1.09	36.35	74.00	-37.65	peak
3*	7358.000	34.92	6.20	41.12	74.00	-32.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting		
Remark:	(Bluetooth + WLAN 5 GHz)		

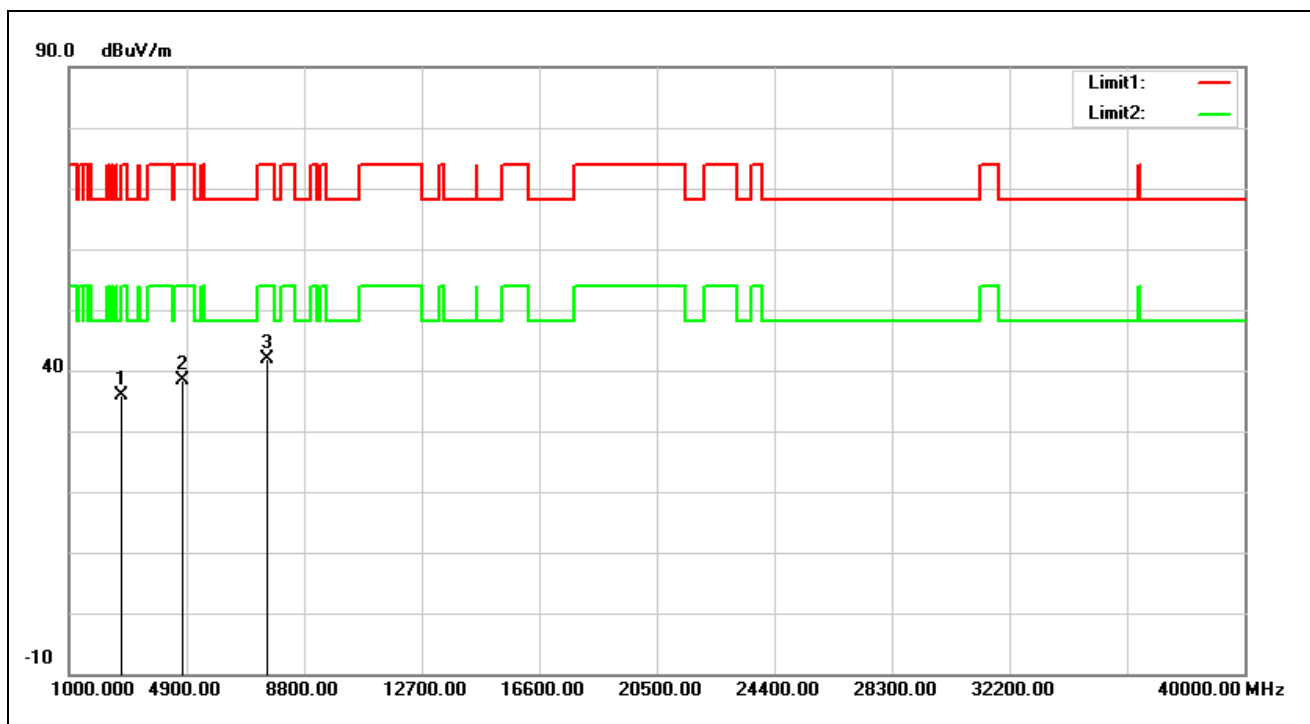


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	41.45	-5.69	35.76	74.00	-38.24	peak
2	4757.000	38.41	-0.15	38.26	74.00	-35.74	peak
3*	7562.000	35.39	6.39	41.78	74.00	-32.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting		
Remark:	(Bluetooth + WLAN 5 GHz)		

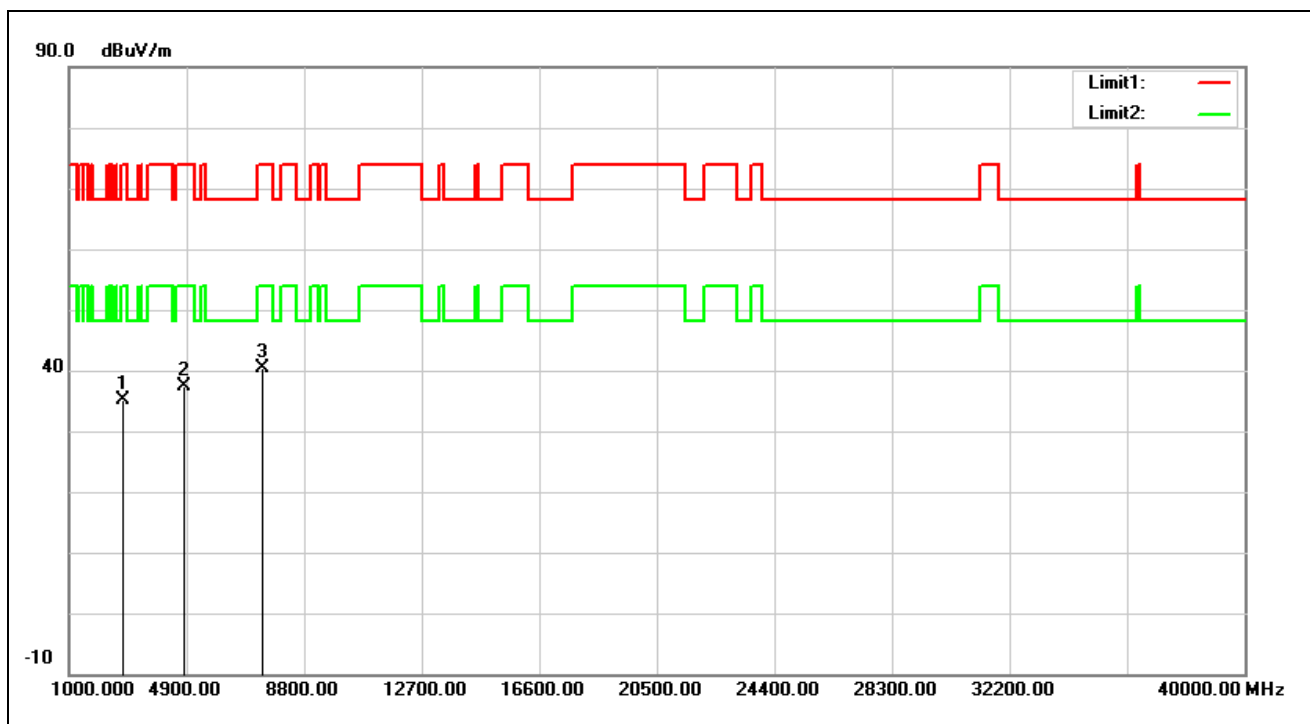


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	40.68	-5.66	35.02	74.00	-38.98	peak
2	4825.000	37.54	-0.23	37.31	74.00	-36.69	peak
3*	7426.000	33.87	6.39	40.26	74.00	-33.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting		
Remark:	(WLAN 2.4 GHz + 5 GHz)		

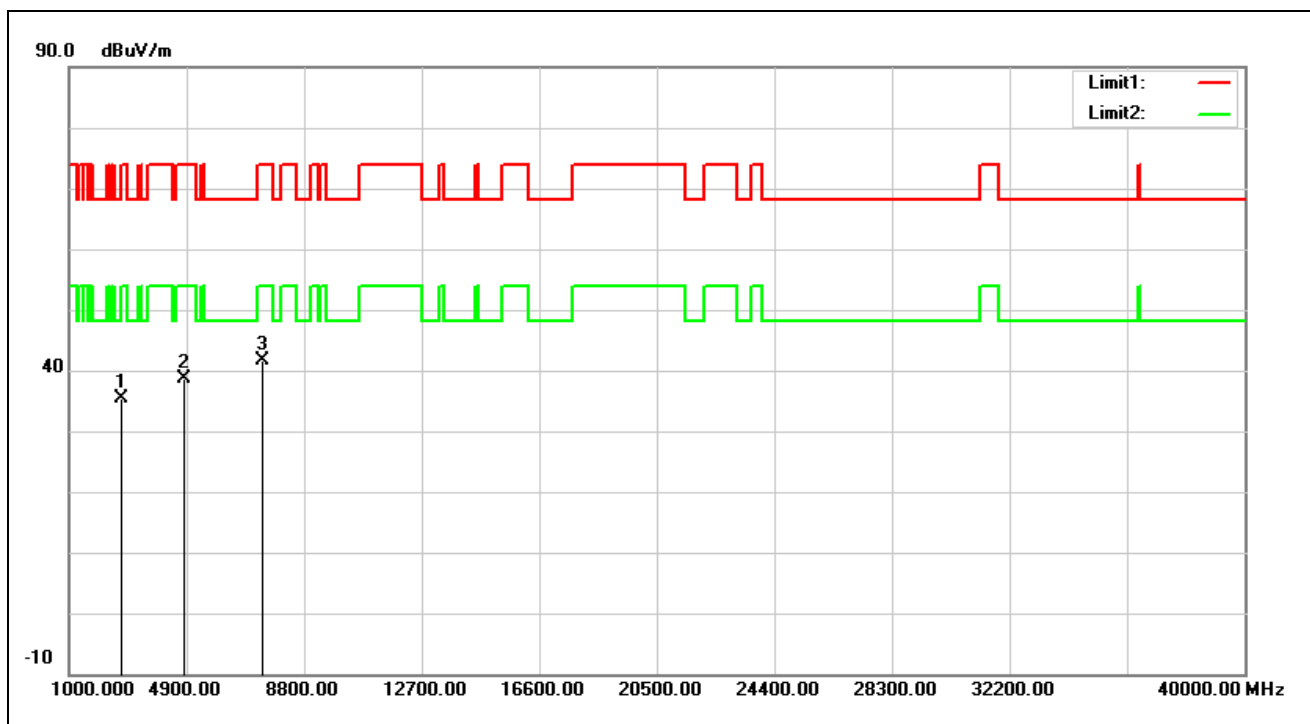

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	41.18	-5.69	35.49	74.00	-38.51	peak
2	4791.000	38.81	-0.30	38.51	74.00	-35.49	peak
3*	7426.000	35.22	6.39	41.61	74.00	-32.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting		
Remark:	(WLAN 2.4 GHz + 5 GHz)		

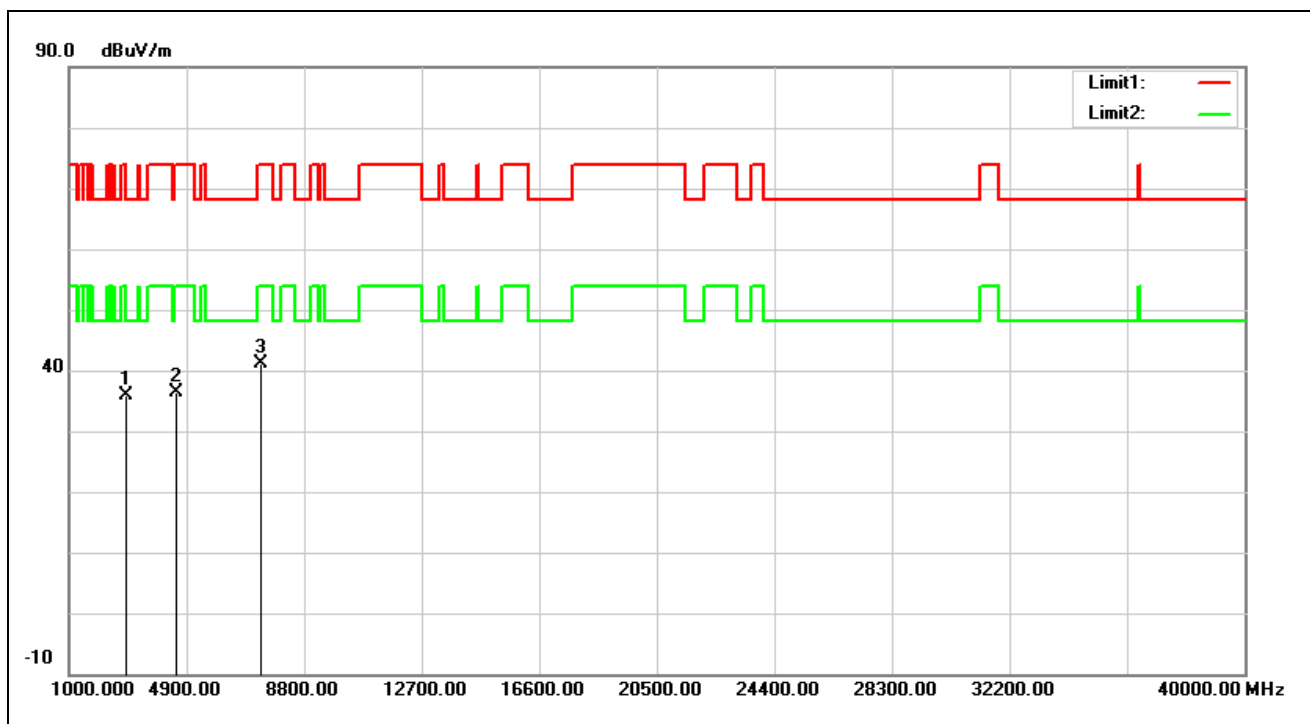


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	41.48	-5.48	36.00	74.00	-38.00	peak
2	4570.000	37.44	-1.09	36.35	74.00	-37.65	peak
3*	7358.000	34.92	6.20	41.12	74.00	-32.88	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

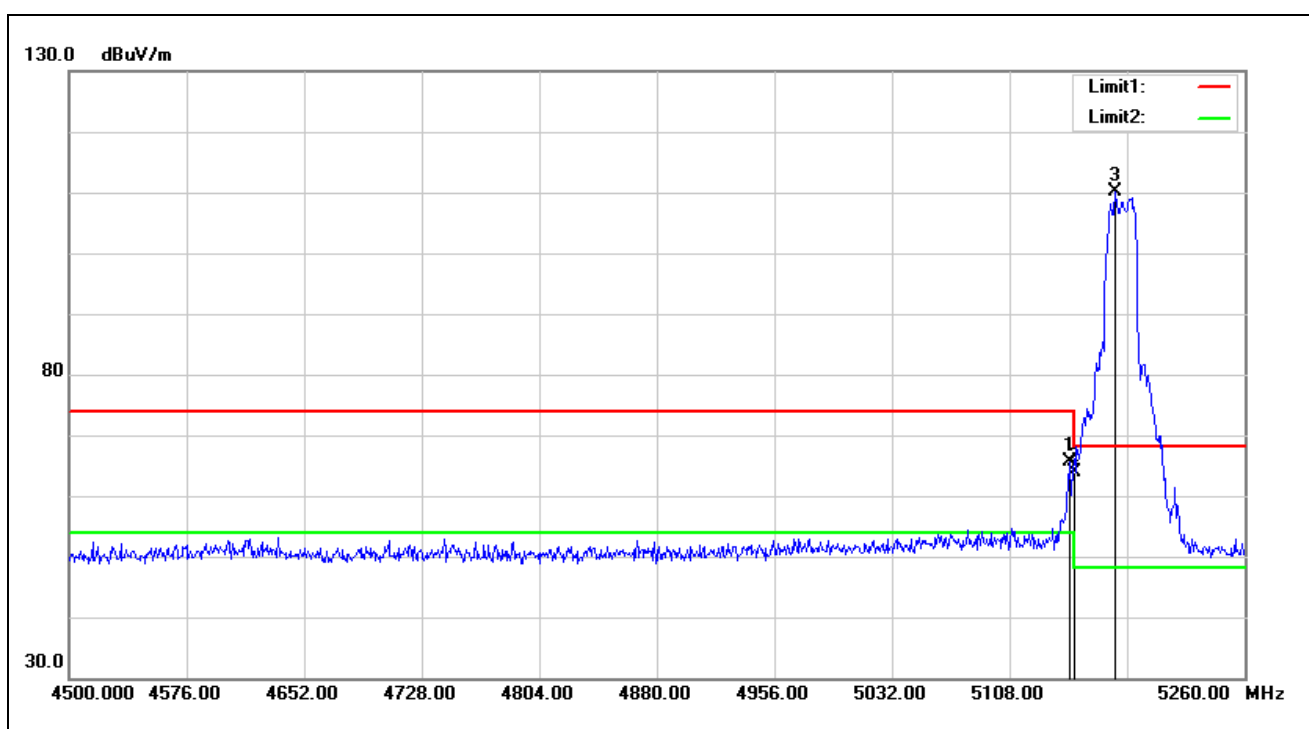


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	64.41	1.13	65.54	74.00	-8.46	peak
2	5150.000	62.68	1.13	63.81	74.00	-10.19	peak
3*	5176.400	109.22	0.97	110.19	68.20	41.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

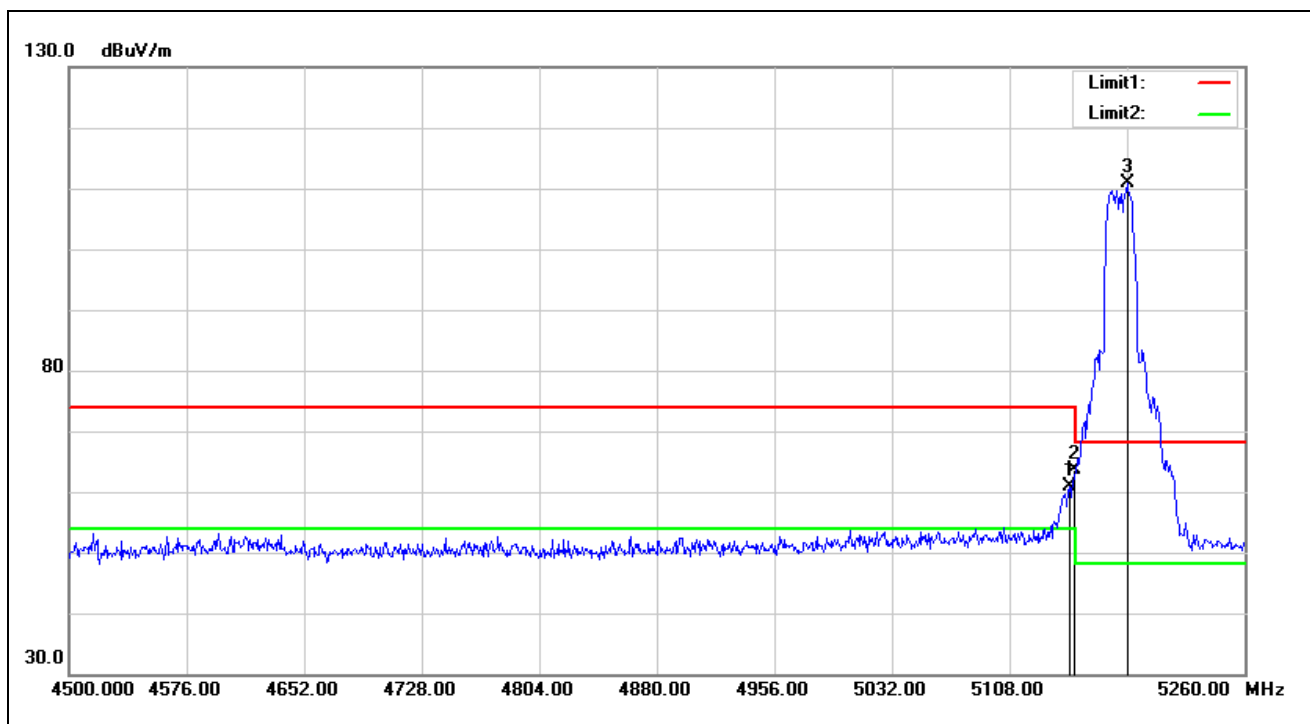


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	59.81	1.13	60.94	74.00	-13.06	peak
2	5150.000	62.51	1.13	63.64	74.00	-10.36	peak
3*	5184.000	109.90	0.92	110.82	68.20	42.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

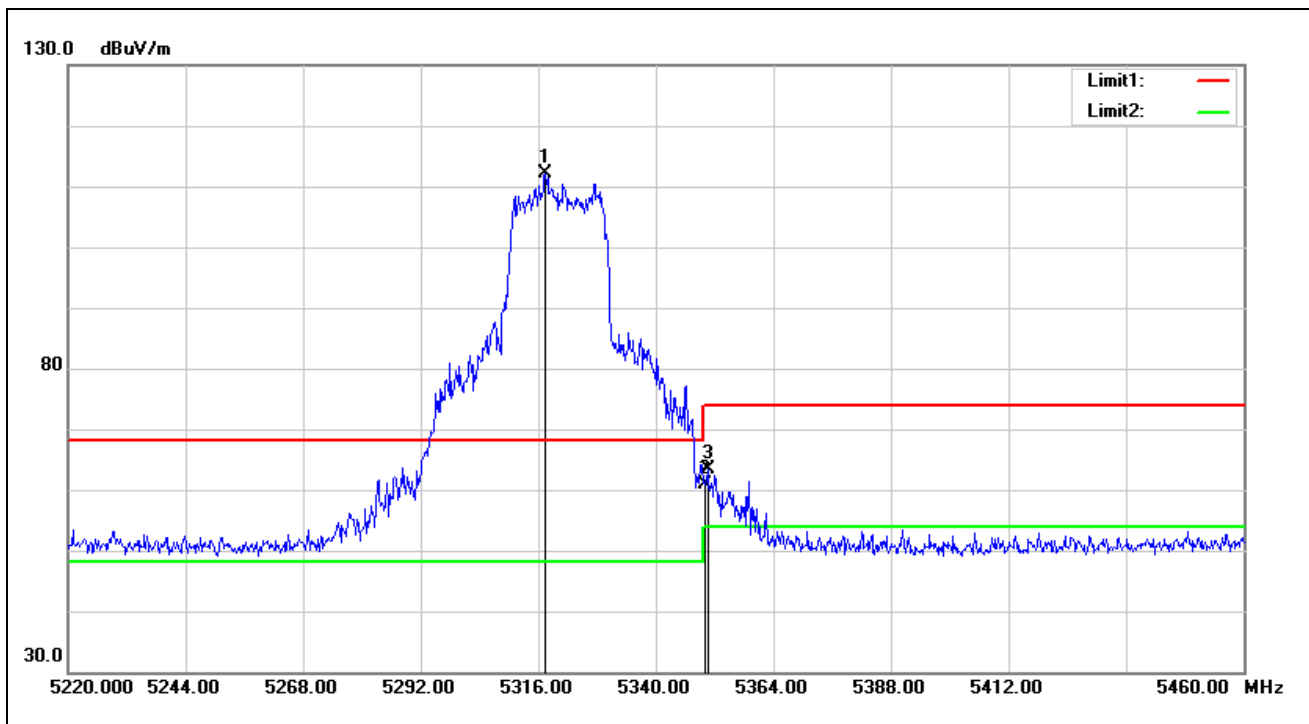


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5317.440	111.44	0.76	112.20	68.20	44.00	peak
2	5350.000	59.90	0.89	60.79	74.00	-13.21	peak
3	5350.560	62.48	0.89	63.37	74.00	-10.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

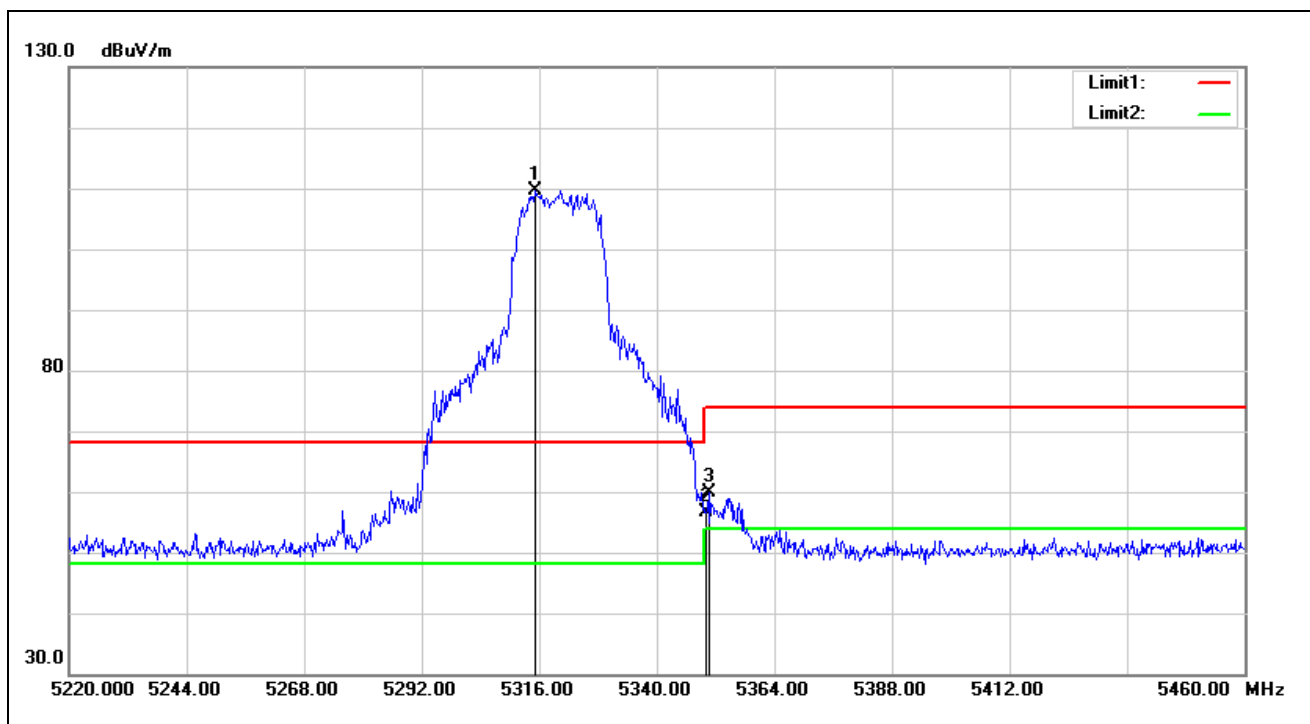


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5315.280	109.00	0.75	109.75	68.20	41.55	peak
2	5350.000	55.71	0.89	56.60	74.00	-17.40	peak
3	5350.560	59.06	0.89	59.95	74.00	-14.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

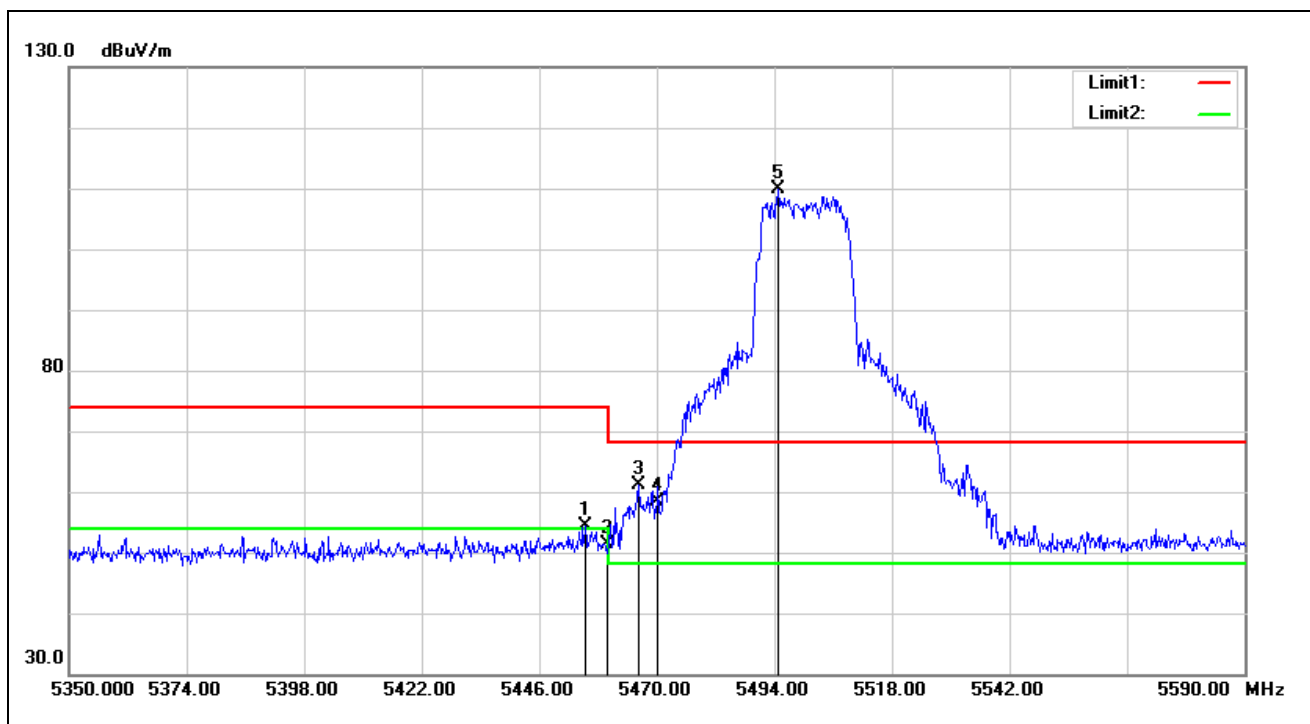


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.360	52.60	1.77	54.37	74.00	-19.63	peak
2	5460.000	49.58	1.79	51.37	74.00	-22.63	peak
3	5466.160	59.44	1.79	61.23	68.20	-6.97	peak
4	5470.000	56.49	1.80	58.29	68.20	-9.91	peak
5*	5494.720	108.09	1.84	109.93	68.20	41.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

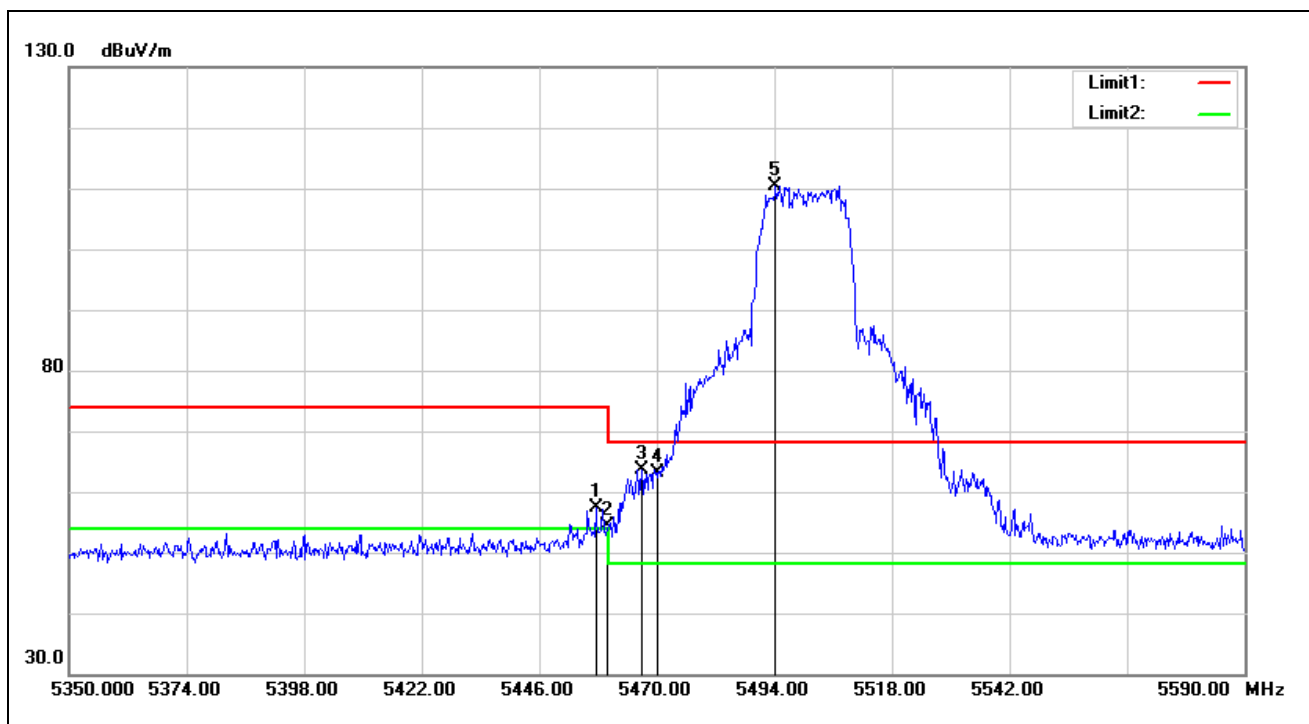


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.520	55.62	1.77	57.39	74.00	-16.61	peak
2	5460.000	52.71	1.79	54.50	74.00	-19.50	peak
3	5466.880	61.96	1.79	63.75	68.20	-4.45	peak
4	5470.000	61.37	1.80	63.17	68.20	-5.03	peak
5*	5494.240	108.64	1.84	110.48	68.20	42.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

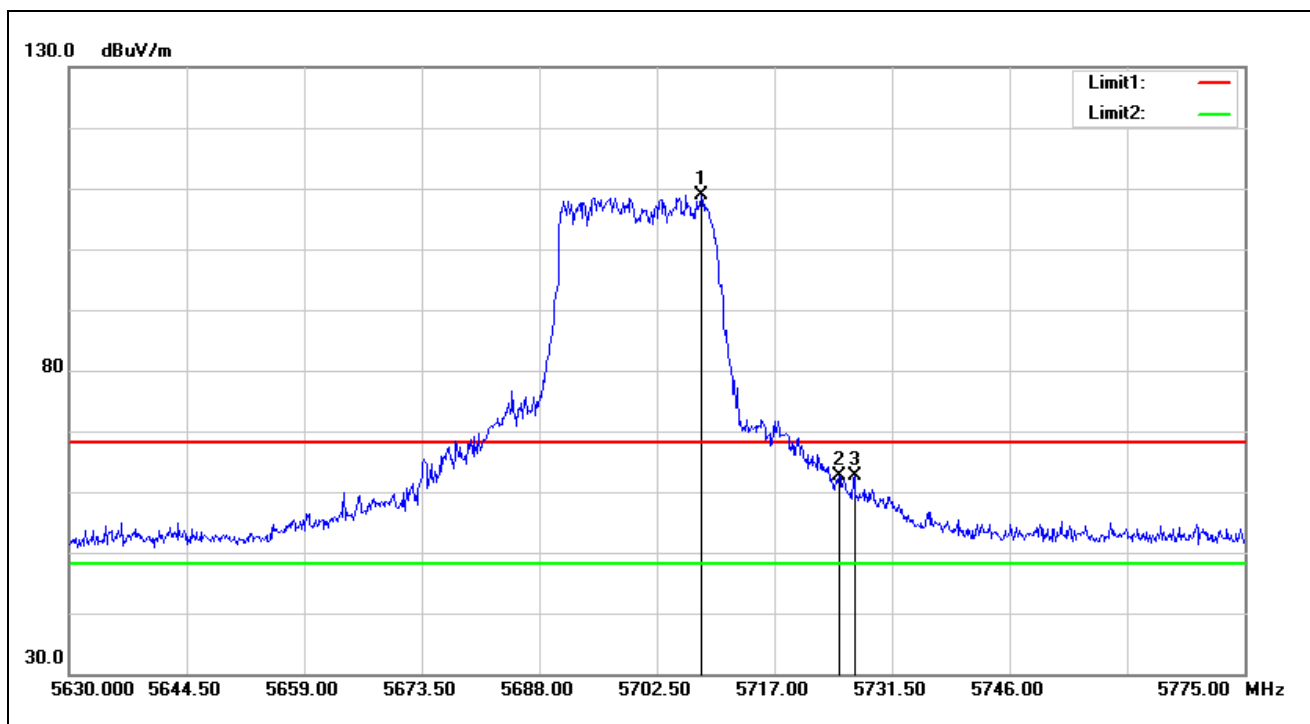


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5708.010	107.31	1.68	108.99	68.20	40.79	peak
2	5725.000	60.72	1.89	62.61	68.20	-5.59	peak
3	5726.860	60.74	1.92	62.66	68.20	-5.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

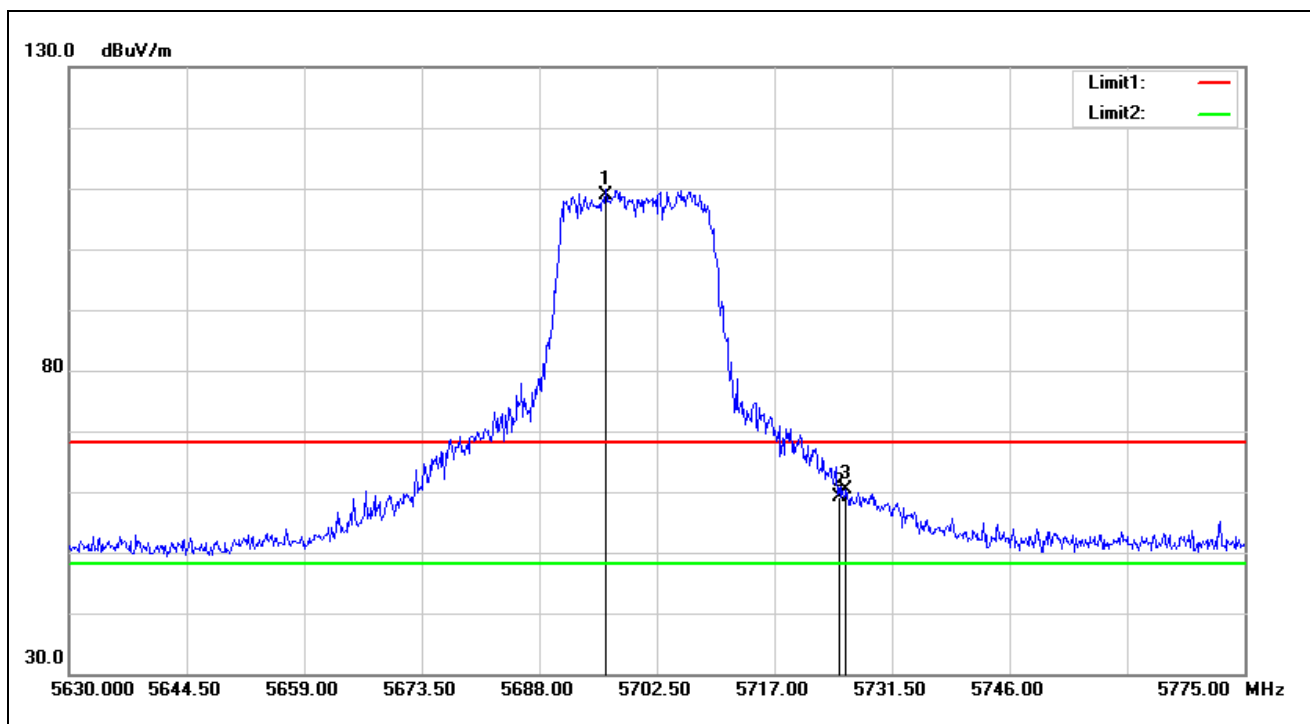

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5696.265	107.34	1.58	108.92	68.20	40.72	peak
2	5725.000	57.35	1.89	59.24	68.20	-8.96	peak
3	5725.845	58.53	1.91	60.44	68.20	-7.76	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

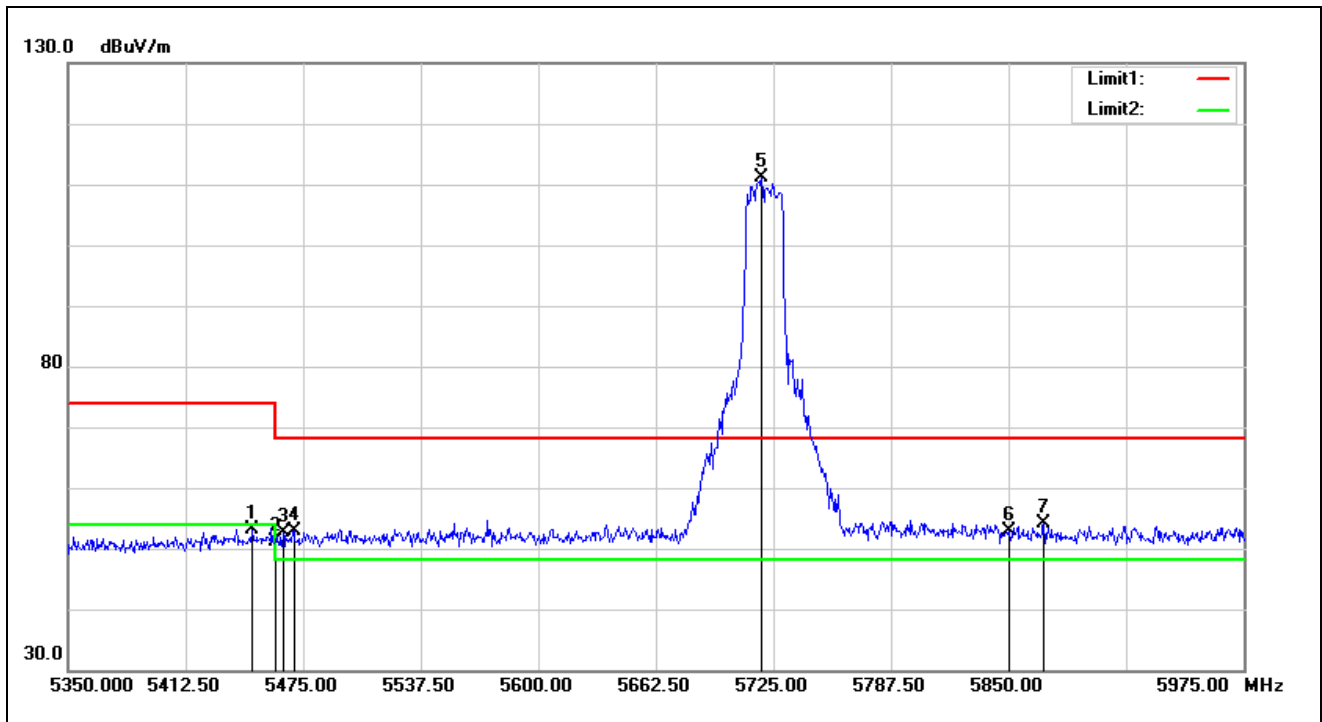

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5448.125	51.34	1.75	53.09	74.00	-20.91	peak
1	5460.000	49.41	1.79	51.20	74.00	-22.80	peak
2	5464.375	50.87	1.79	52.66	68.20	-15.54	peak
3	5470.000	51.12	1.80	52.92	68.20	-15.28	peak
4*	5718.750	109.24	1.81	111.05	68.20	42.85	peak
5	5850.000	50.30	2.57	52.87	68.20	-15.33	peak
6	5868.750	51.41	2.63	54.04	68.20	-14.16	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

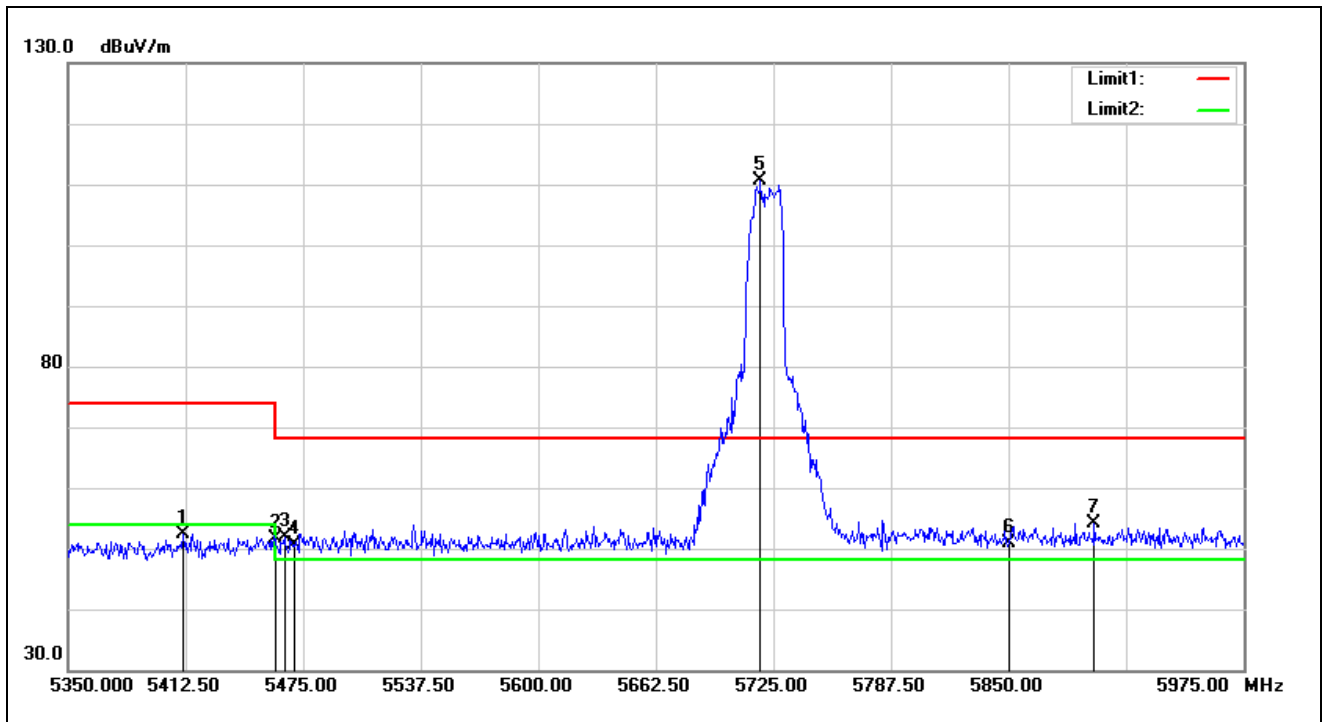

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5411.250	51.11	1.38	52.49	74.00	-21.51	peak
1	5460.000	49.86	1.79	51.65	74.00	-22.35	peak
2	5465.000	50.09	1.79	51.88	68.20	-16.32	peak
3	5470.000	48.90	1.80	50.70	68.20	-17.50	peak
4*	5718.125	108.83	1.81	110.64	68.20	42.44	peak
5	5850.000	48.27	2.57	50.84	68.20	-17.36	peak
6	5895.625	51.47	2.70	54.17	68.20	-14.03	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

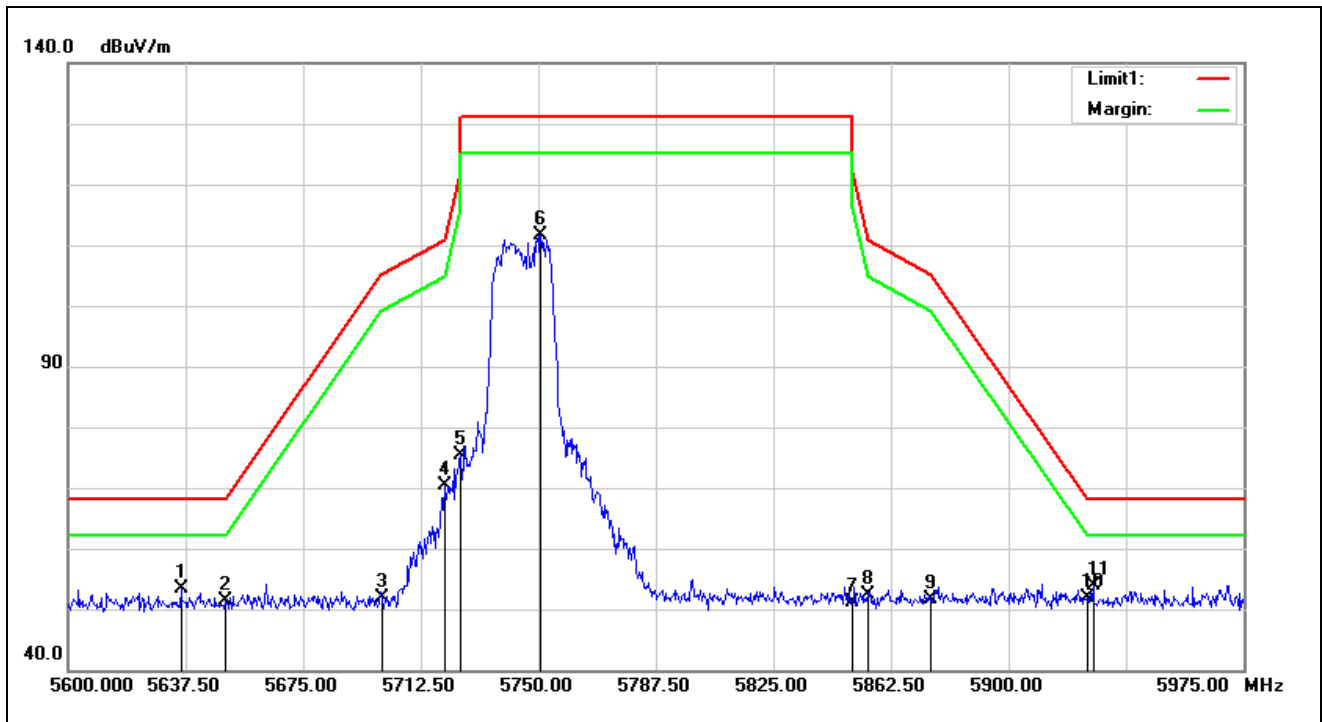

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5636.000	51.74	1.64	53.38	68.20	-14.82	peak
1	5650.000	49.67	1.65	51.32	68.20	-16.88	peak
2	5700.000	50.18	1.58	51.76	105.20	-53.44	peak
3	5720.000	68.54	1.83	70.37	110.80	-40.43	peak
4	5725.000	73.38	1.89	75.27	122.20	-46.93	peak
5	5750.750	109.49	2.21	111.70	131.20	-19.50	peak
6	5850.000	48.55	2.57	51.12	122.20	-71.08	peak
7	5855.000	49.67	2.59	52.26	110.80	-58.54	peak
8	5875.000	49.07	2.64	51.71	105.20	-53.49	peak
9	5925.000	49.20	2.58	51.78	68.20	-16.42	peak
10*	5927.000	51.38	2.57	53.95	68.20	-14.25	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

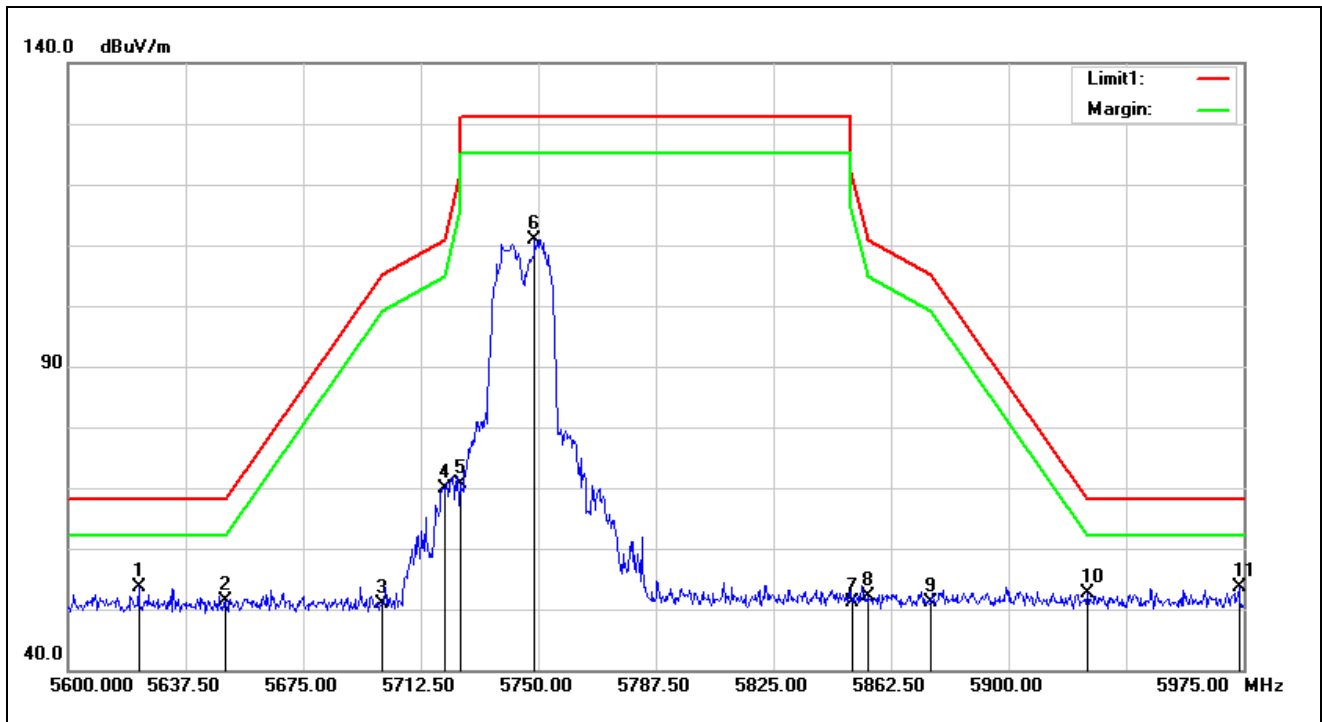

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5622.500	52.08	1.63	53.71	68.20	-14.49	peak
1	5650.000	49.76	1.65	51.41	68.20	-16.79	peak
2	5700.000	49.37	1.58	50.95	105.20	-54.25	peak
3	5720.000	68.01	1.83	69.84	110.80	-40.96	peak
4	5725.000	68.67	1.89	70.56	122.20	-51.64	peak
5	5748.875	108.79	2.20	110.99	131.20	-20.21	peak
6	5850.000	48.50	2.57	51.07	122.20	-71.13	peak
7	5855.000	49.61	2.59	52.20	110.80	-58.60	peak
8	5875.000	48.38	2.64	51.02	105.20	-54.18	peak
9	5925.000	49.94	2.58	52.52	68.20	-15.68	peak
10*	5973.500	51.22	2.50	53.72	68.20	-14.48	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

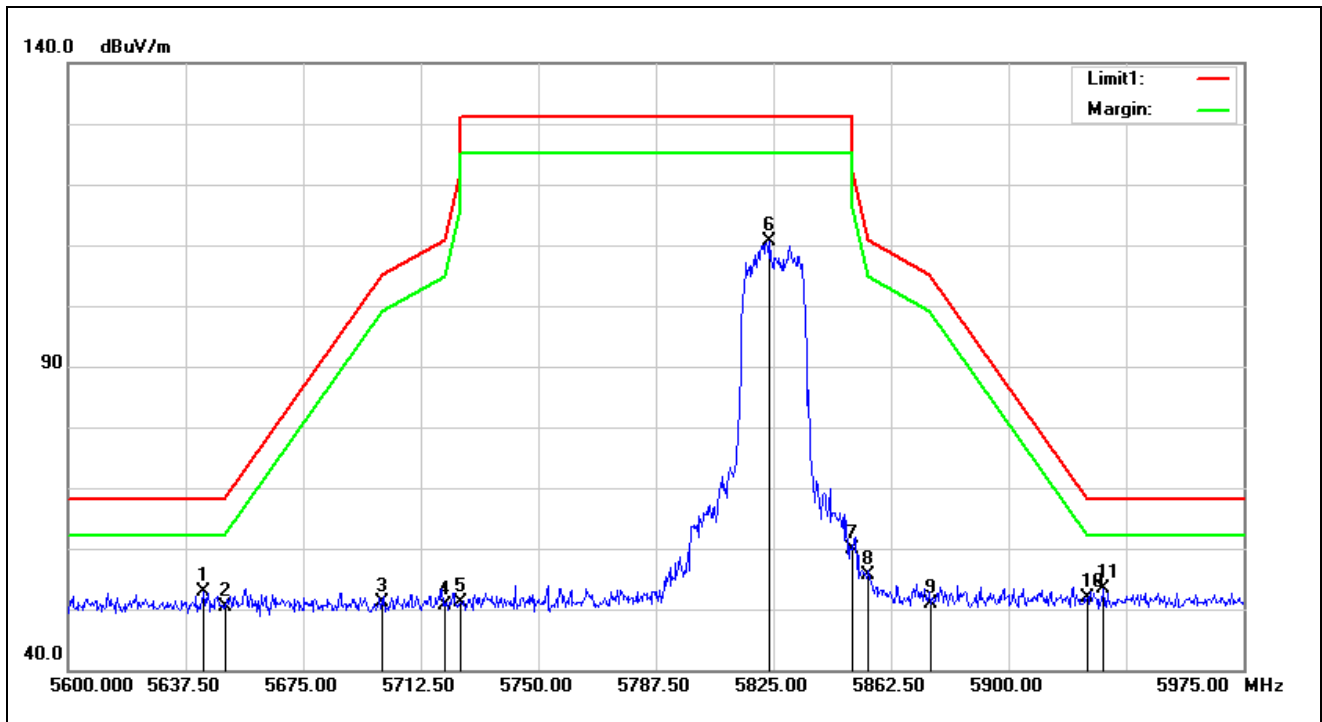

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5643.125	51.28	1.65	52.93	68.20	-15.27	peak
1	5650.000	48.65	1.65	50.30	68.20	-17.90	peak
2	5700.000	49.64	1.58	51.22	105.20	-53.98	peak
3	5720.000	48.80	1.83	50.63	110.80	-60.17	peak
4	5725.000	49.23	1.89	51.12	122.20	-71.08	peak
5	5823.875	108.14	2.55	110.69	131.20	-20.51	peak
6	5850.000	57.39	2.57	59.96	122.20	-62.24	peak
7	5855.000	53.11	2.59	55.70	110.80	-55.10	peak
8	5875.000	48.31	2.64	50.95	105.20	-54.25	peak
9	5925.000	49.36	2.58	51.94	68.20	-16.26	peak
10*	5930.375	50.85	2.55	53.40	68.20	-14.80	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

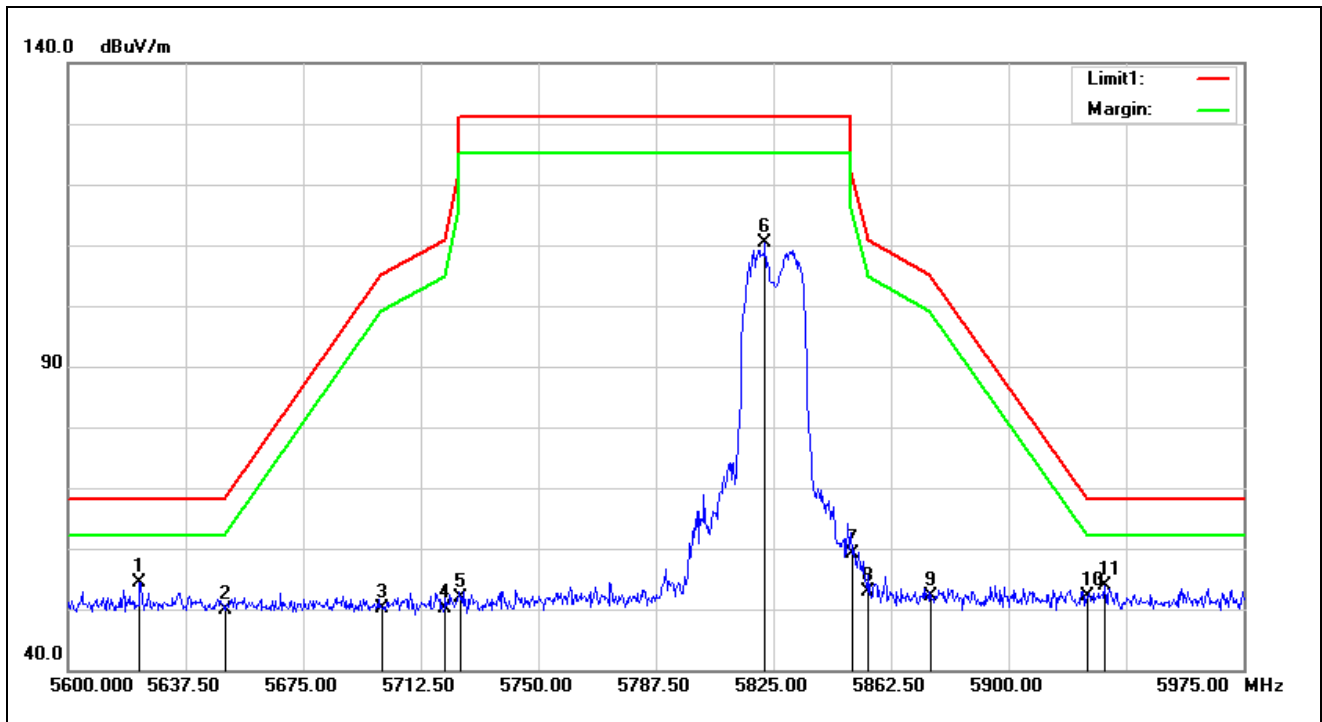

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5622.875	52.82	1.63	54.45	68.20	-13.75	peak
1	5650.000	48.35	1.65	50.00	68.20	-18.20	peak
2	5700.000	48.55	1.58	50.13	105.20	-55.07	peak
3	5720.000	48.41	1.83	50.24	110.80	-60.56	peak
4	5725.000	50.08	1.89	51.97	122.20	-70.23	peak
5	5822.375	107.73	2.55	110.28	131.20	-20.92	peak
6	5850.000	56.46	2.57	59.03	122.20	-63.17	peak
7	5855.000	50.21	2.59	52.80	110.80	-58.00	peak
8	5875.000	49.41	2.64	52.05	105.20	-53.15	peak
9	5925.000	49.55	2.58	52.13	68.20	-16.07	peak
10	5930.750	51.44	2.55	53.99	68.20	-14.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

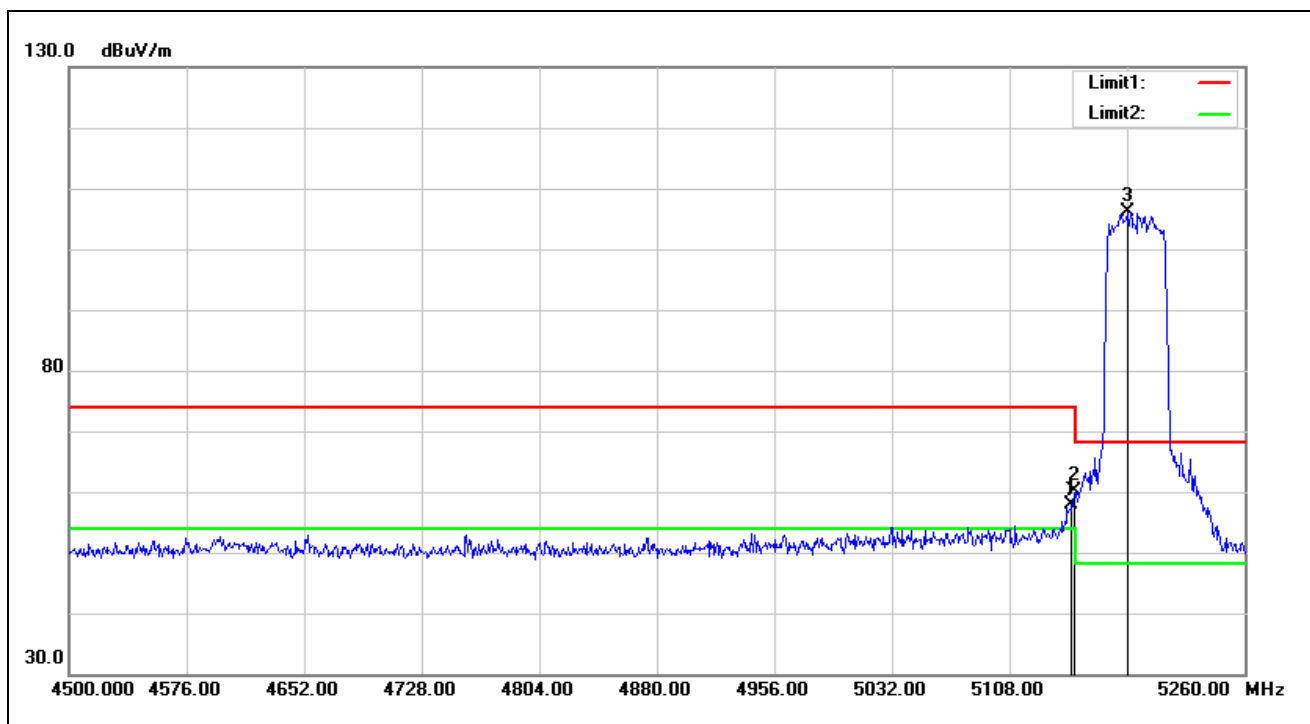


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	56.77	1.13	57.90	74.00	-16.10	peak
2	5150.000	58.90	1.13	60.03	74.00	-13.97	peak
3*	5184.000	105.14	0.92	106.06	68.20	37.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

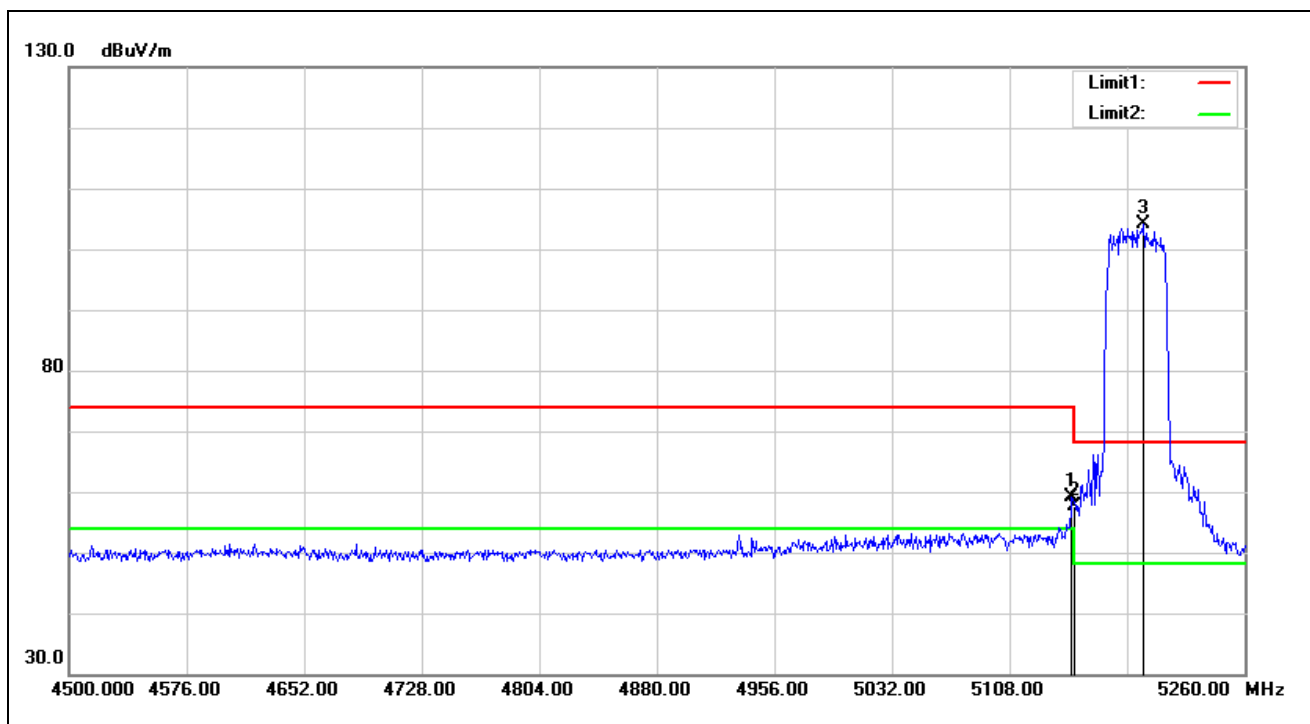


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	58.12	1.13	59.25	74.00	-14.75	peak
2	5150.000	56.41	1.13	57.54	74.00	-16.46	peak
3*	5194.640	103.31	0.85	104.16	68.20	35.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

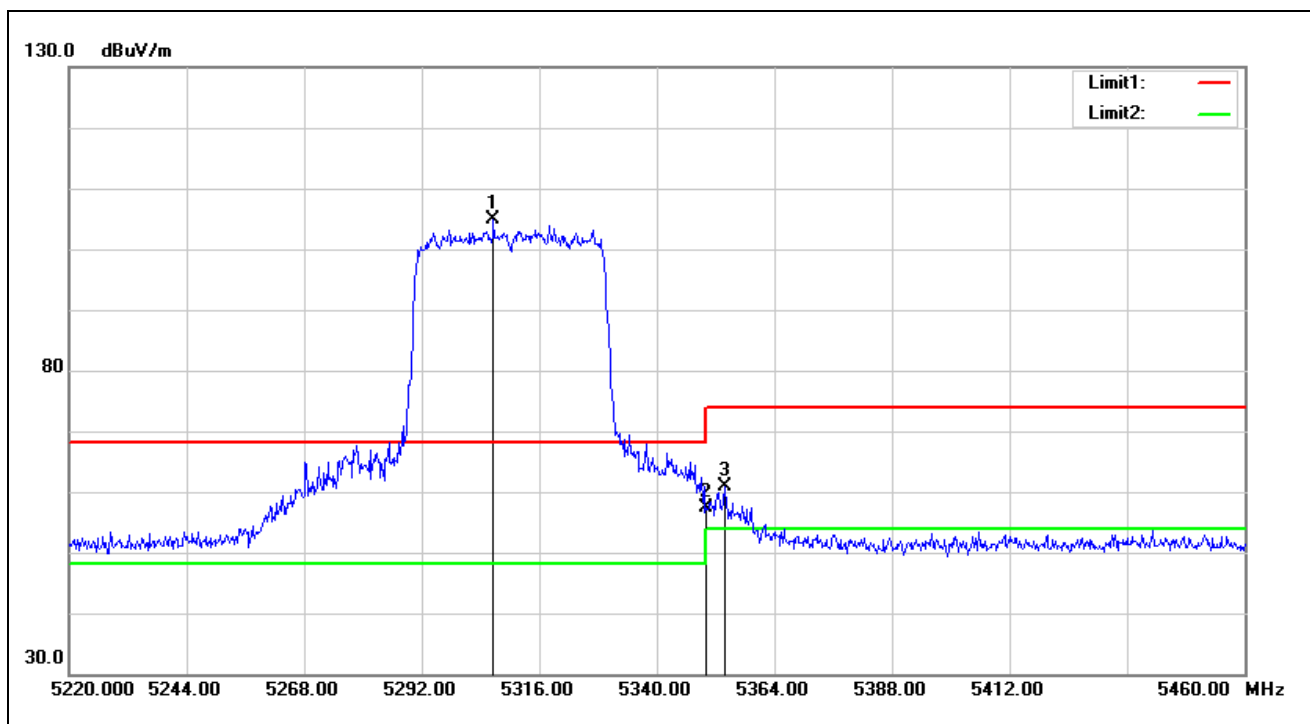


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5306.640	104.28	0.72	105.00	68.20	36.80	peak
2	5350.000	56.44	0.89	57.33	74.00	-16.67	peak
3	5353.920	59.94	0.91	60.85	74.00	-13.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

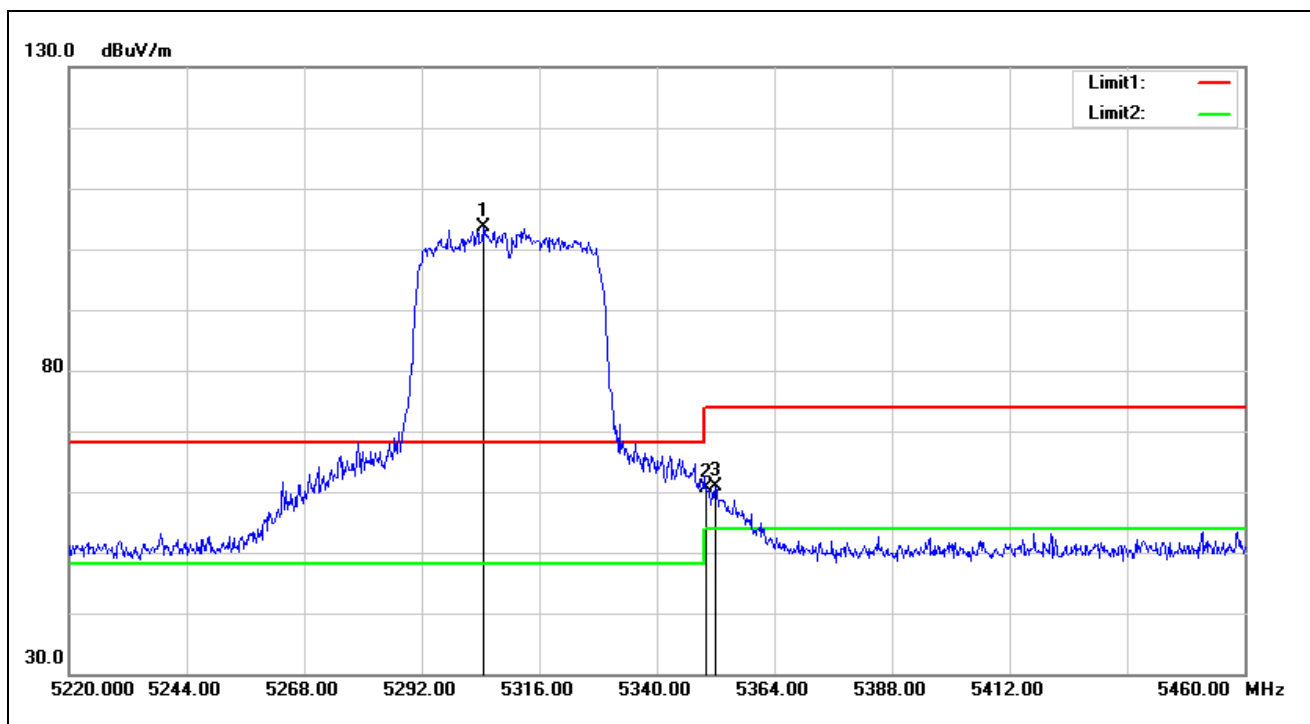


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5304.480	102.92	0.72	103.64	68.20	35.44	peak
2	5350.000	59.71	0.89	60.60	74.00	-13.40	peak
3	5352.000	60.07	0.90	60.97	74.00	-13.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

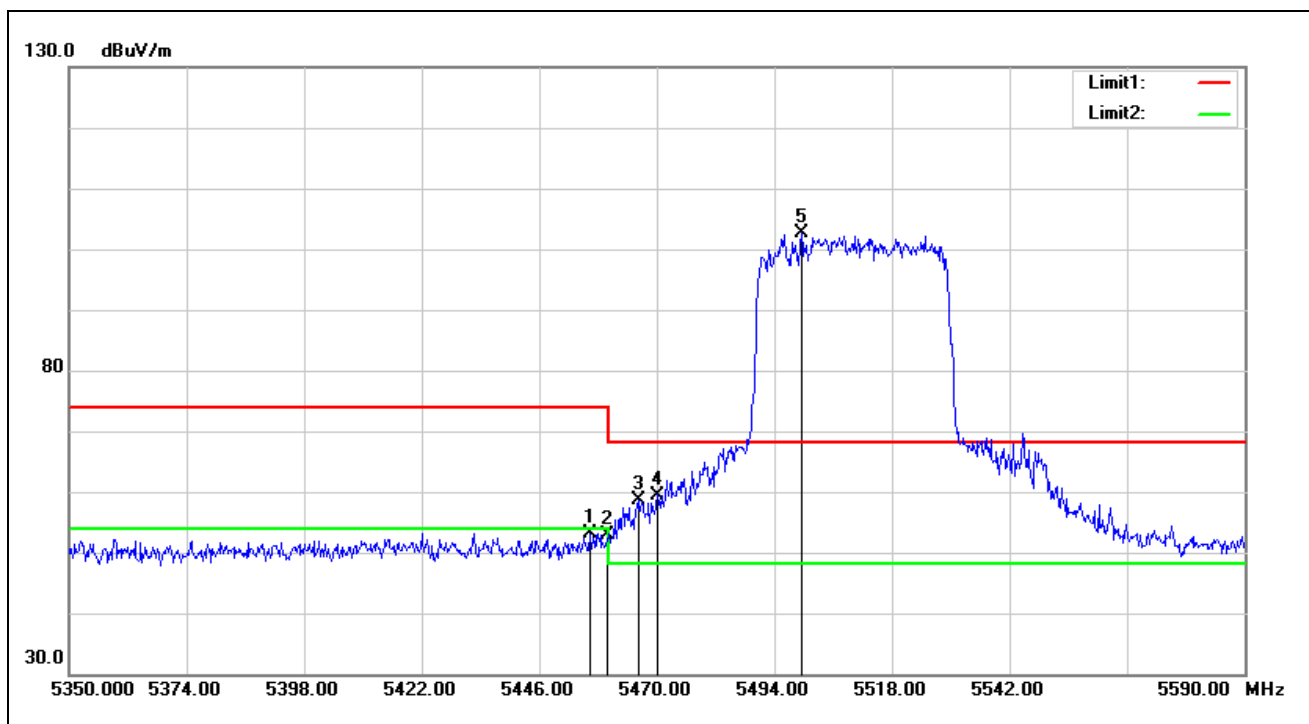


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.320	51.41	1.77	53.18	74.00	-20.82	peak
2	5460.000	51.18	1.79	52.97	74.00	-21.03	peak
3	5466.160	56.82	1.79	58.61	68.20	-9.59	peak
4	5470.000	57.63	1.80	59.43	68.20	-8.77	peak
5*	5499.520	100.85	1.85	102.70	68.20	34.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

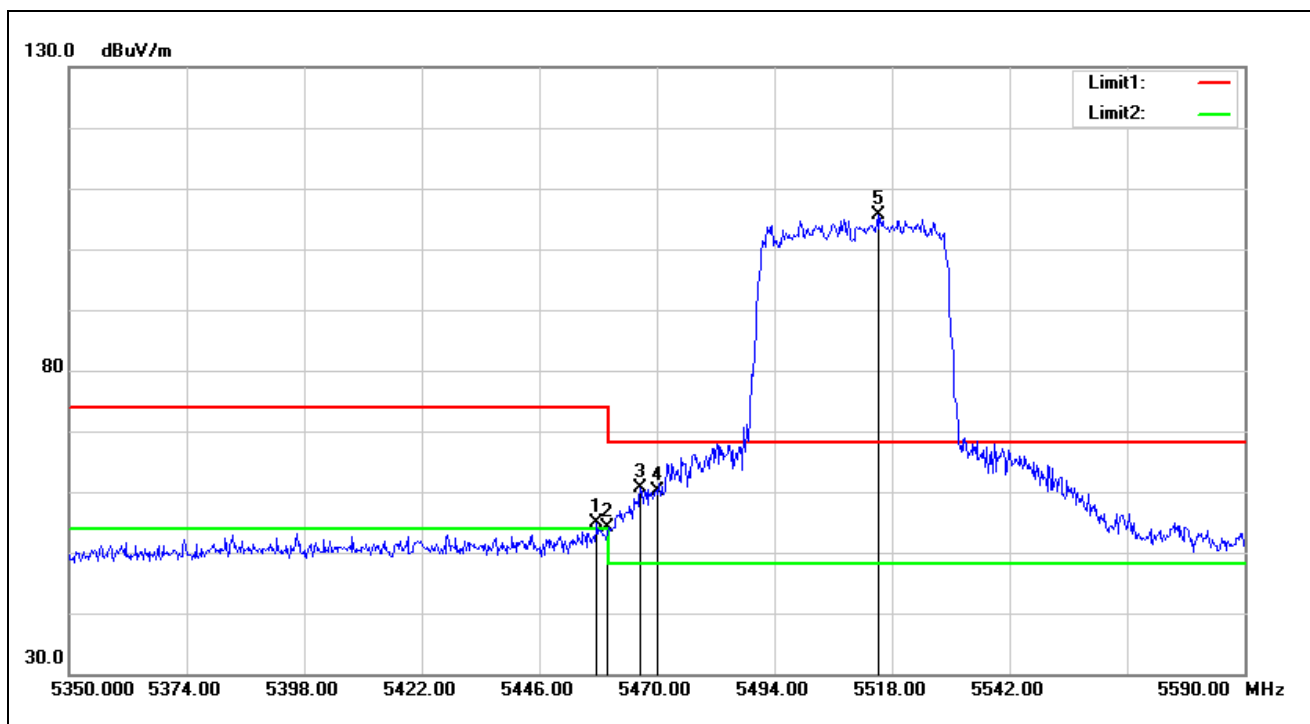


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.760	53.15	1.78	54.93	74.00	-19.07	peak
2	5460.000	52.44	1.79	54.23	74.00	-19.77	peak
3	5466.640	58.91	1.79	60.70	68.20	-7.50	peak
4	5470.000	58.42	1.80	60.22	68.20	-7.98	peak
5*	5515.120	103.92	1.81	105.73	68.20	37.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

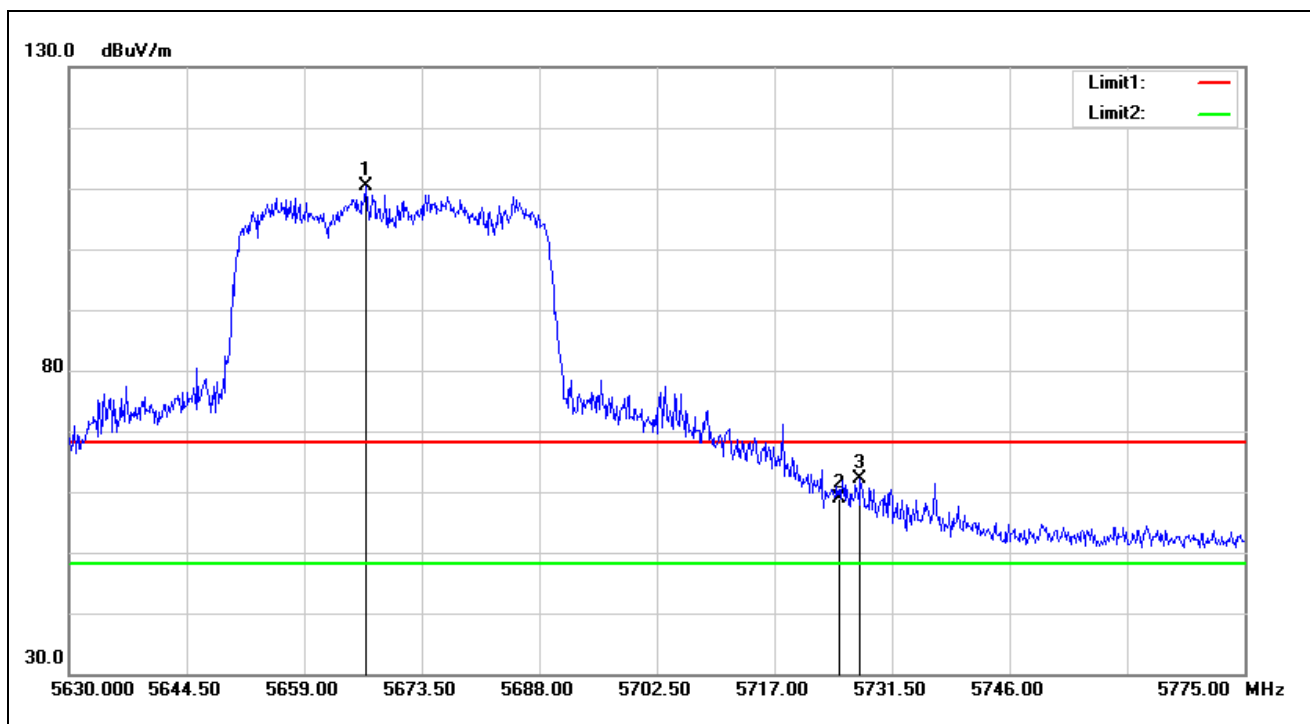


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5666.540	108.87	1.63	110.50	68.20	42.30	peak
2	5725.000	57.05	1.89	58.94	68.20	-9.26	peak
3	5727.585	60.11	1.93	62.04	68.20	-6.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

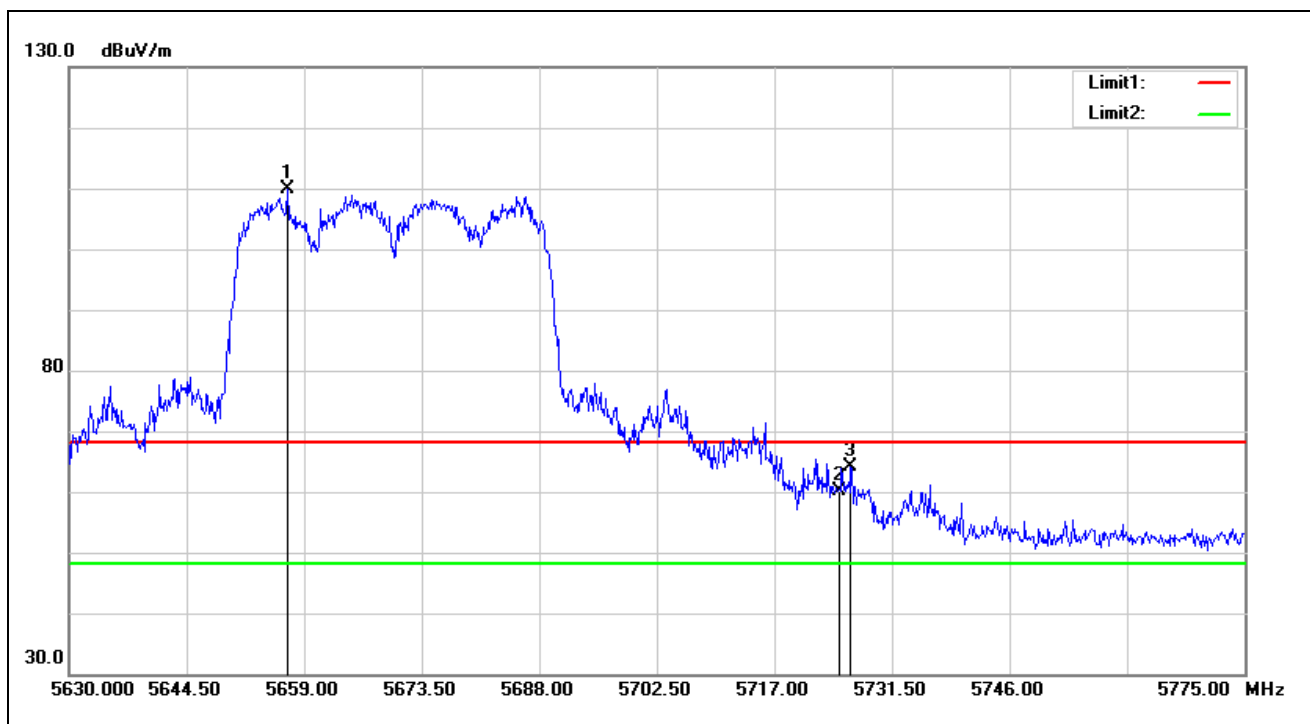

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5656.970	108.16	1.65	109.81	68.20	41.61	peak
2	5725.000	58.35	1.89	60.24	68.20	-7.96	peak
3	5726.425	62.32	1.92	64.24	68.20	-3.96	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

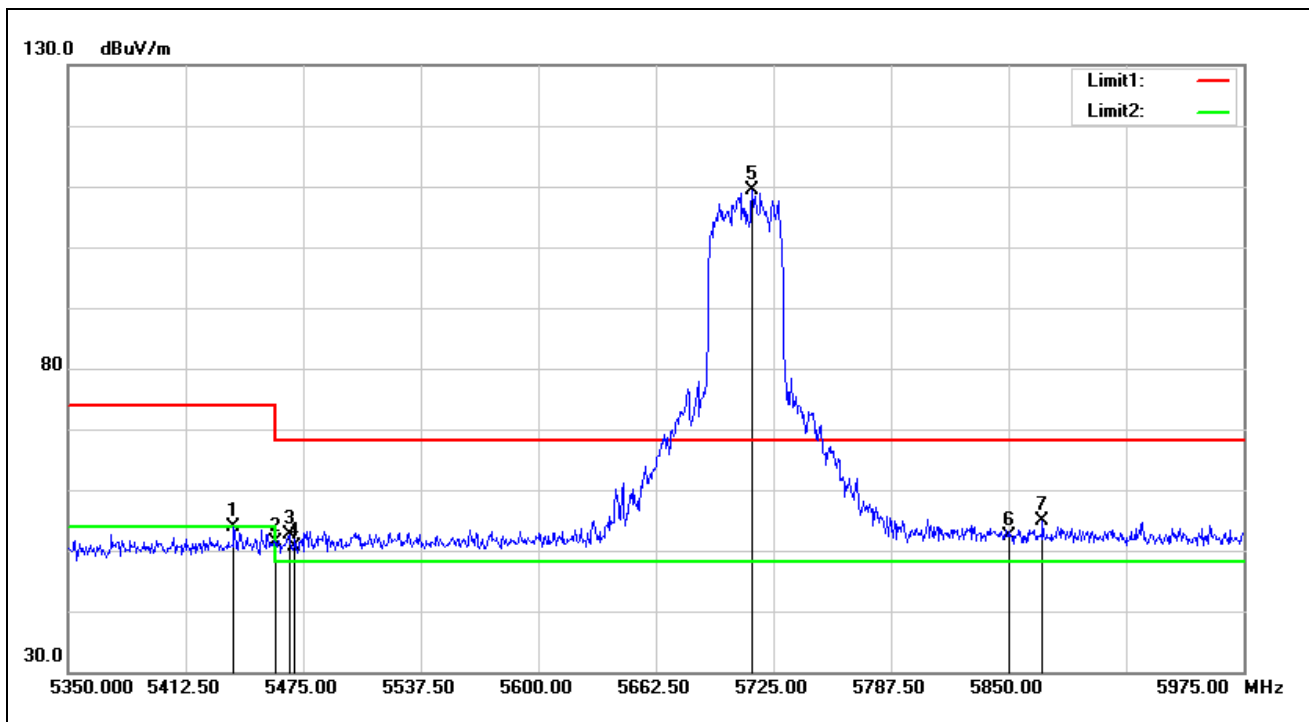

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5438.125	52.22	1.65	53.87	74.00	-20.13	peak
1	5460.000	49.70	1.79	51.49	74.00	-22.51	peak
2	5467.500	50.76	1.79	52.55	68.20	-15.65	peak
3	5470.000	48.80	1.80	50.60	68.20	-17.60	peak
4*	5713.750	107.55	1.75	109.30	68.20	41.10	peak
5	5850.000	49.80	2.57	52.37	68.20	-15.83	peak
6	5868.125	52.34	2.63	54.97	68.20	-13.23	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

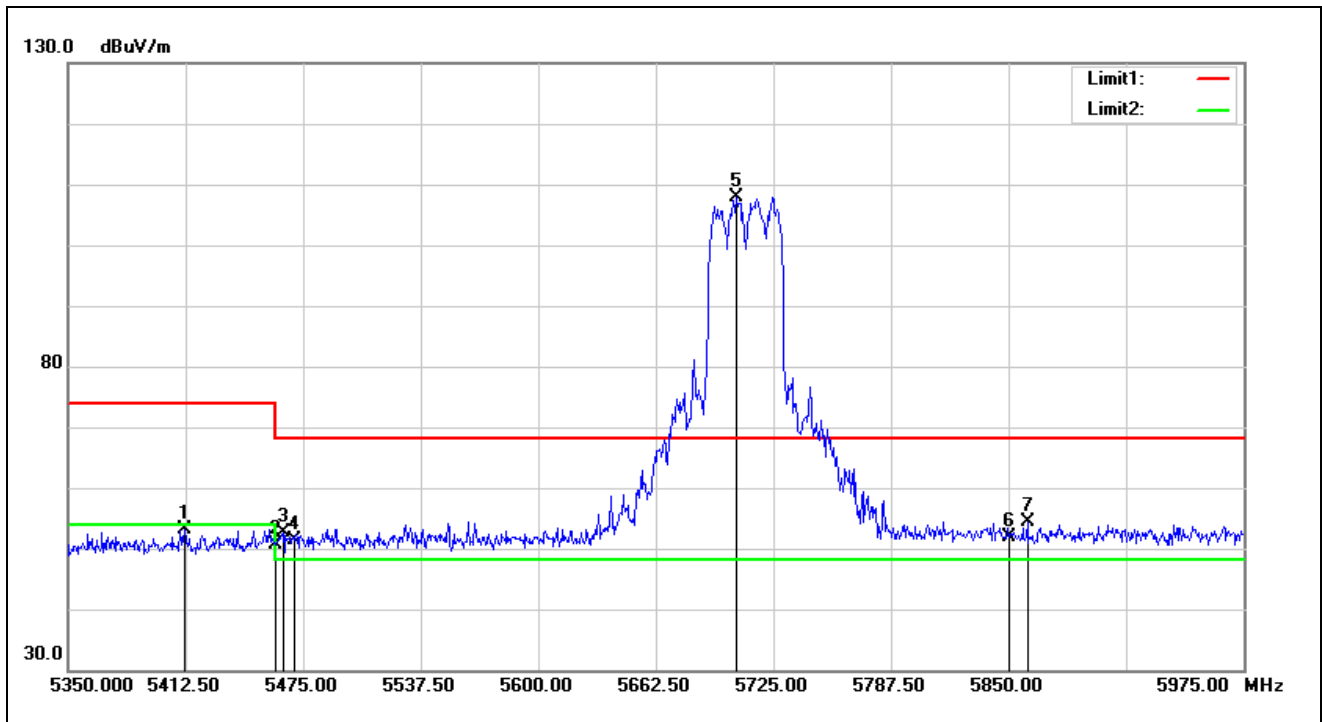

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5411.875	51.69	1.38	53.07	74.00	-20.93	peak
1	5460.000	48.83	1.79	50.62	74.00	-23.38	peak
2	5464.375	50.89	1.79	52.68	68.20	-15.52	peak
3	5470.000	49.65	1.80	51.45	68.20	-16.75	peak
4*	5705.000	106.31	1.64	107.95	68.20	39.75	peak
5	5850.000	49.35	2.57	51.92	68.20	-16.28	peak
6	5860.000	51.90	2.60	54.50	68.20	-13.70	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

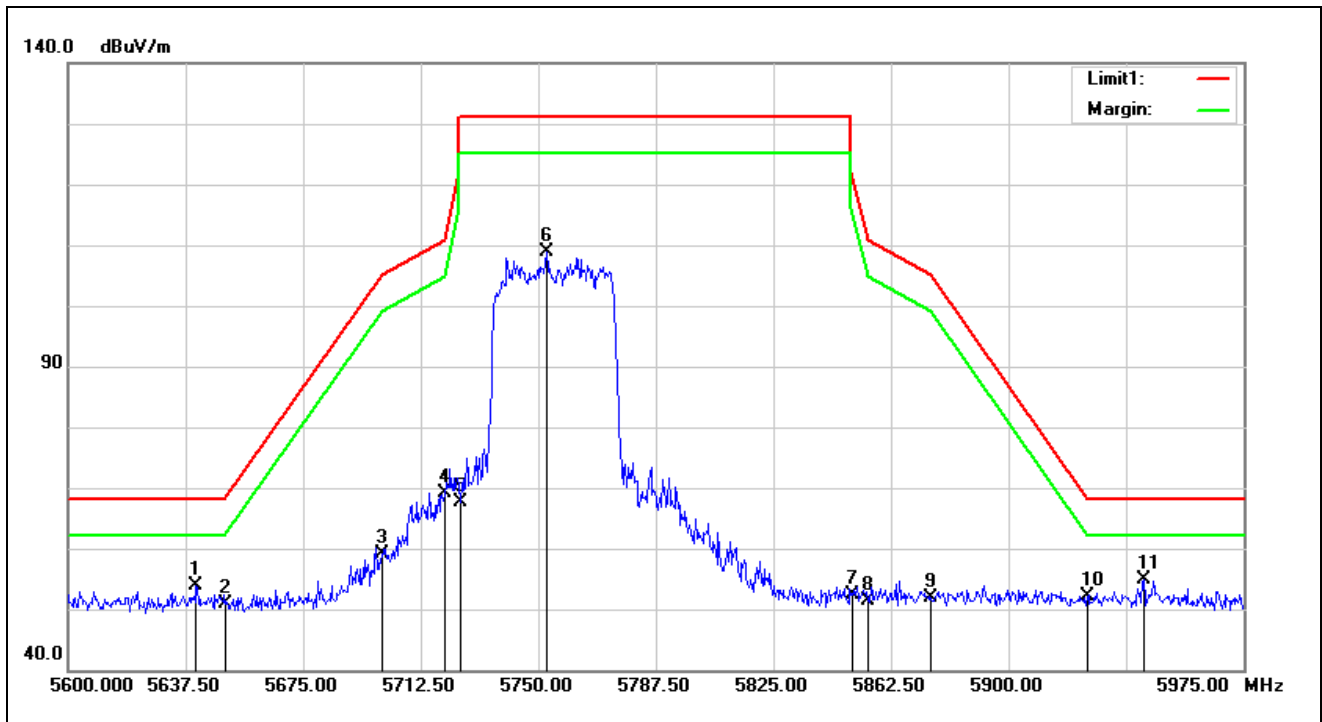

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5640.875	52.26	1.65	53.91	68.20	-14.29	peak
1	5650.000	49.28	1.65	50.93	68.20	-17.27	peak
2	5700.000	57.48	1.58	59.06	105.20	-46.14	peak
3	5720.000	67.26	1.83	69.09	110.80	-41.71	peak
4	5725.000	65.85	1.89	67.74	122.20	-54.46	peak
5	5752.625	106.75	2.23	108.98	131.20	-22.22	peak
6	5850.000	49.83	2.57	52.40	122.20	-69.80	peak
7	5855.000	48.75	2.59	51.34	110.80	-59.46	peak
8	5875.000	49.12	2.64	51.76	105.20	-53.44	peak
9	5925.000	49.56	2.58	52.14	68.20	-16.06	peak
10*	5943.125	52.34	2.47	54.81	68.20	-13.39	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

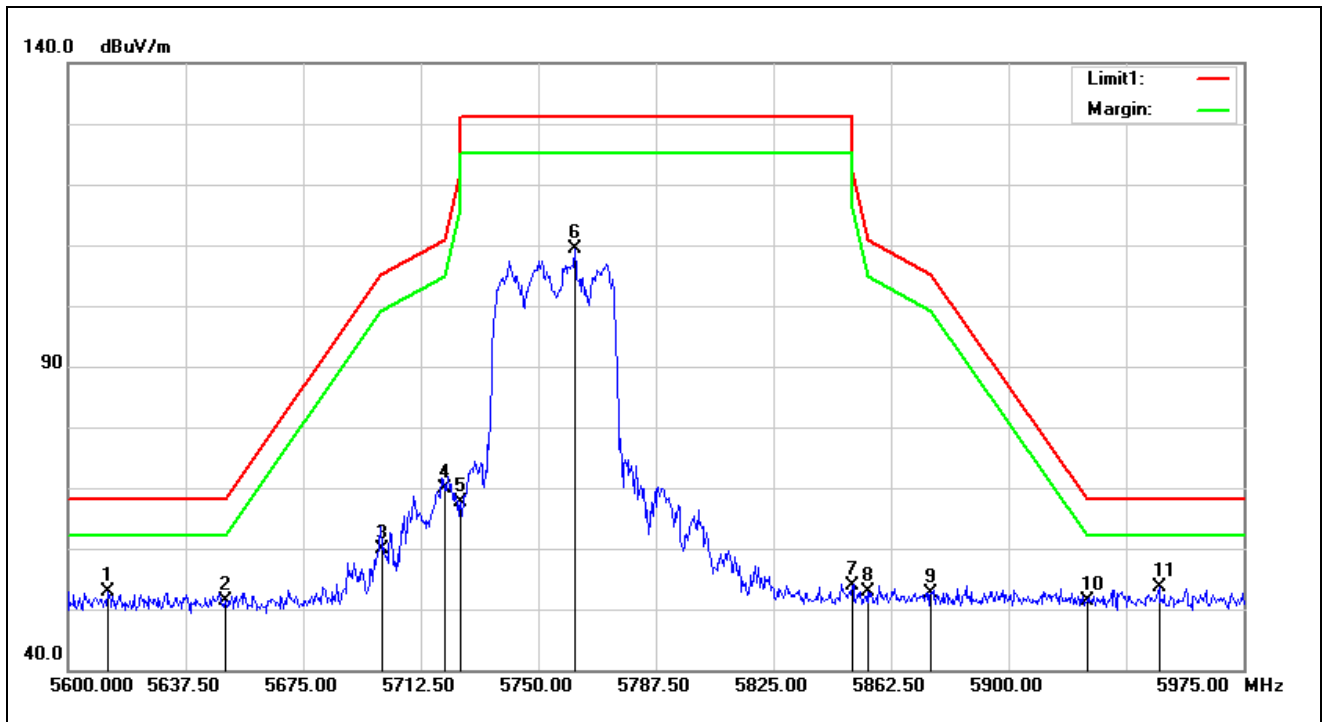

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5612.750	51.35	1.63	52.98	68.20	-15.22	peak
1	5650.000	49.74	1.65	51.39	68.20	-16.81	peak
2	5700.000	58.33	1.58	59.91	105.20	-45.29	peak
3	5720.000	68.10	1.83	69.93	110.80	-40.87	peak
4	5725.000	65.67	1.89	67.56	122.20	-54.64	peak
5	5761.625	107.15	2.29	109.44	131.20	-21.76	peak
6	5850.000	51.24	2.57	53.81	122.20	-68.39	peak
7	5855.000	50.32	2.59	52.91	110.80	-57.89	peak
8	5875.000	49.91	2.64	52.55	105.20	-52.65	peak
9	5925.000	48.80	2.58	51.38	68.20	-16.82	peak
10*	5948.000	51.18	2.44	53.62	68.20	-14.58	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

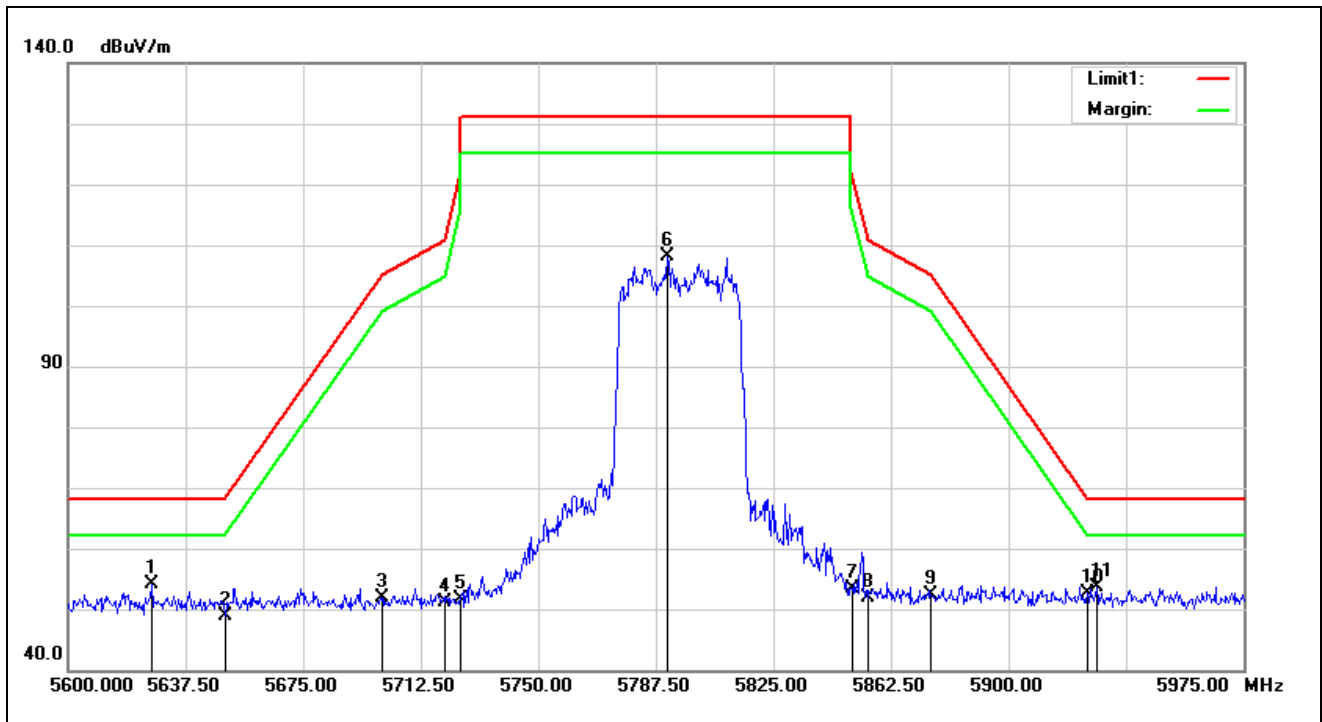

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5626.625	52.38	1.63	54.01	68.20	-14.19	peak
1	5650.000	47.16	1.65	48.81	68.20	-19.39	peak
2	5700.000	50.34	1.58	51.92	105.20	-53.28	peak
3	5720.000	49.37	1.83	51.20	110.80	-59.60	peak
4	5725.000	49.63	1.89	51.52	122.20	-70.68	peak
5	5791.250	105.73	2.49	108.22	131.20	-22.98	peak
6	5850.000	50.69	2.57	53.26	122.20	-68.94	peak
7	5855.000	49.37	2.59	51.96	110.80	-58.84	peak
8	5875.000	49.64	2.64	52.28	105.20	-52.92	peak
9	5925.000	49.95	2.58	52.53	68.20	-15.67	peak
10	5928.125	51.07	2.56	53.63	68.20	-14.57	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

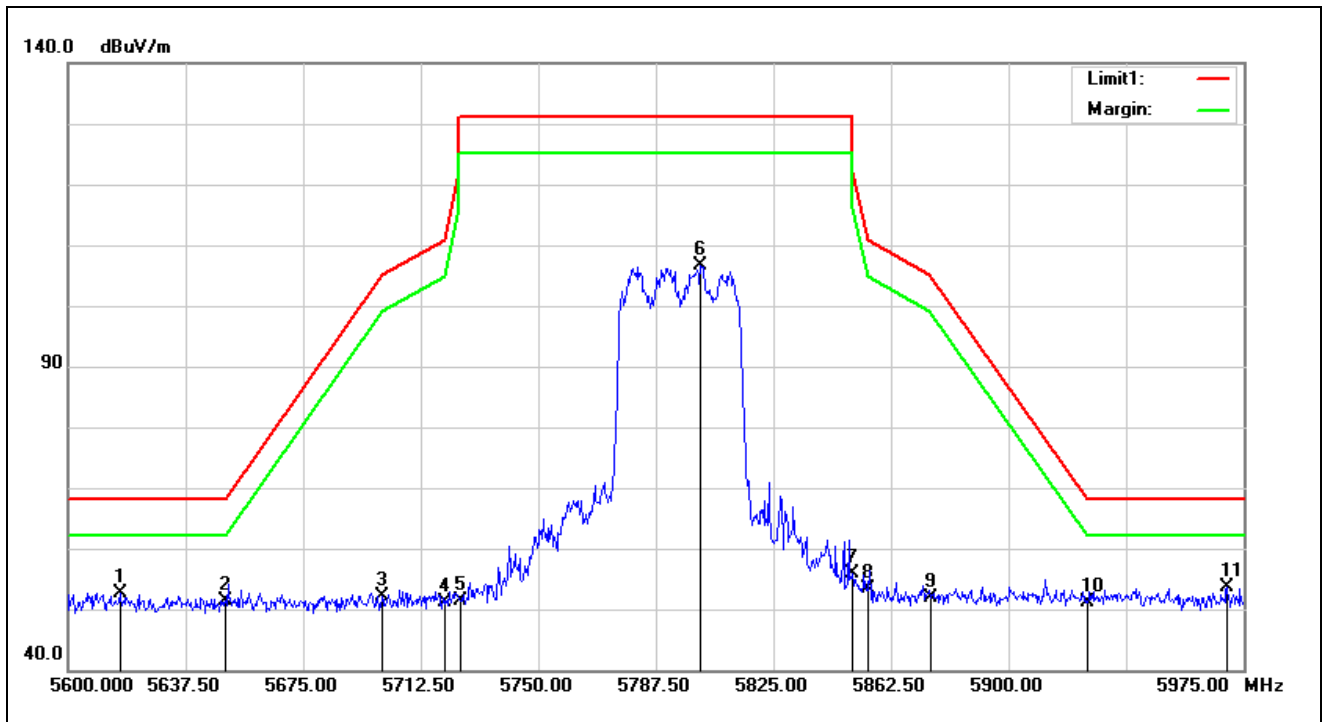

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5616.500	50.94	1.63	52.57	68.20	-15.63	peak
1	5650.000	49.62	1.65	51.27	68.20	-16.93	peak
2	5700.000	50.61	1.58	52.19	105.20	-53.01	peak
3	5720.000	49.22	1.83	51.05	110.80	-59.75	peak
4	5725.000	49.55	1.89	51.44	122.20	-70.76	peak
5	5801.750	104.11	2.55	106.66	131.20	-24.54	peak
6	5850.000	53.35	2.57	55.92	122.20	-66.28	peak
7	5855.000	50.70	2.59	53.29	110.80	-57.51	peak
8	5875.000	49.32	2.64	51.96	105.20	-53.24	peak
9	5925.000	48.67	2.58	51.25	68.20	-16.95	peak
10*	5969.750	51.06	2.49	53.55	68.20	-14.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

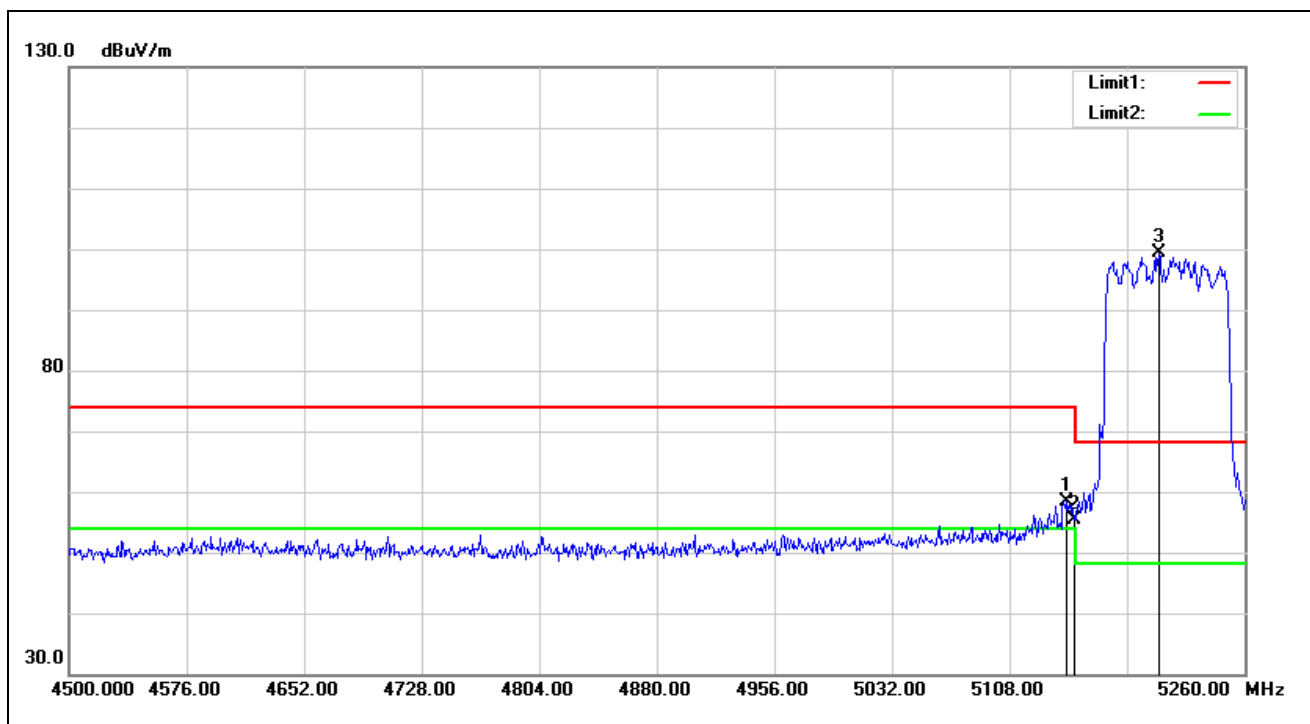


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	57.26	1.13	58.39	74.00	-15.61	peak
2	5150.000	54.32	1.13	55.45	74.00	-18.55	peak
3*	5204.520	98.64	0.82	99.46	68.20	31.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

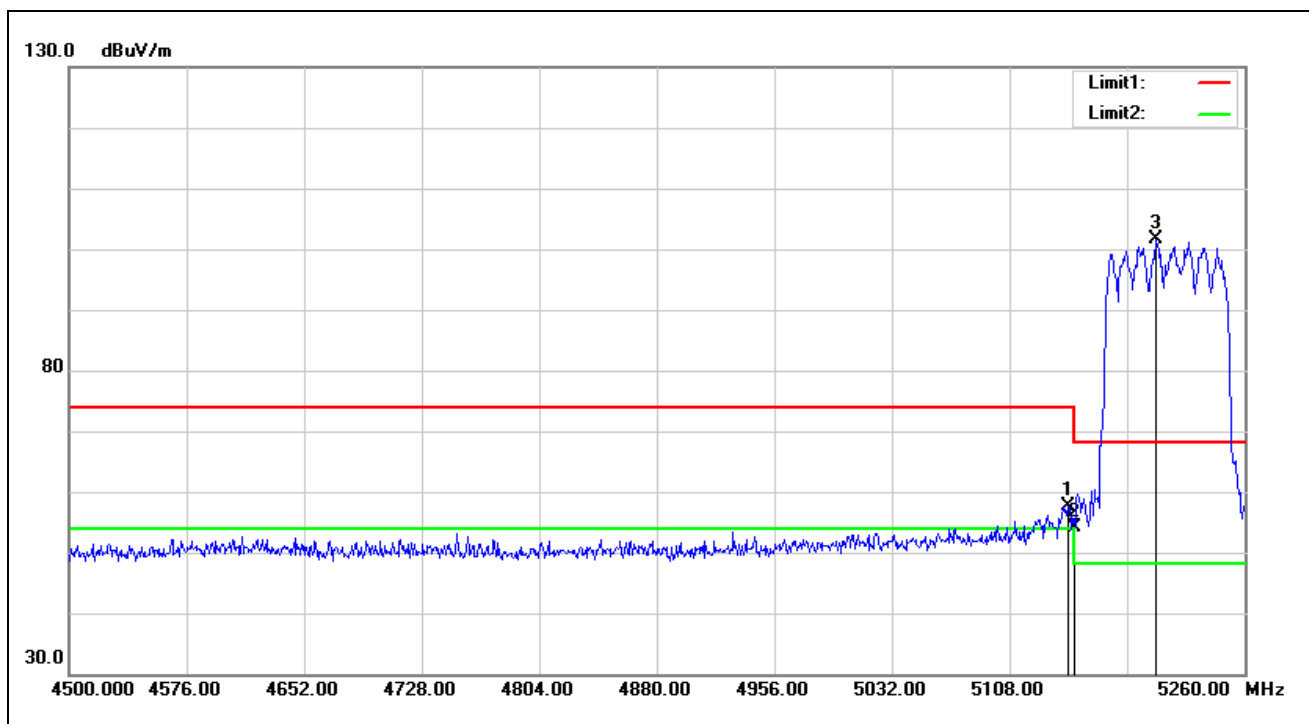


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.000	56.46	1.13	57.59	74.00	-16.41	peak
2	5150.000	52.99	1.13	54.12	74.00	-19.88	peak
3*	5202.240	100.87	0.82	101.69	68.20	33.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

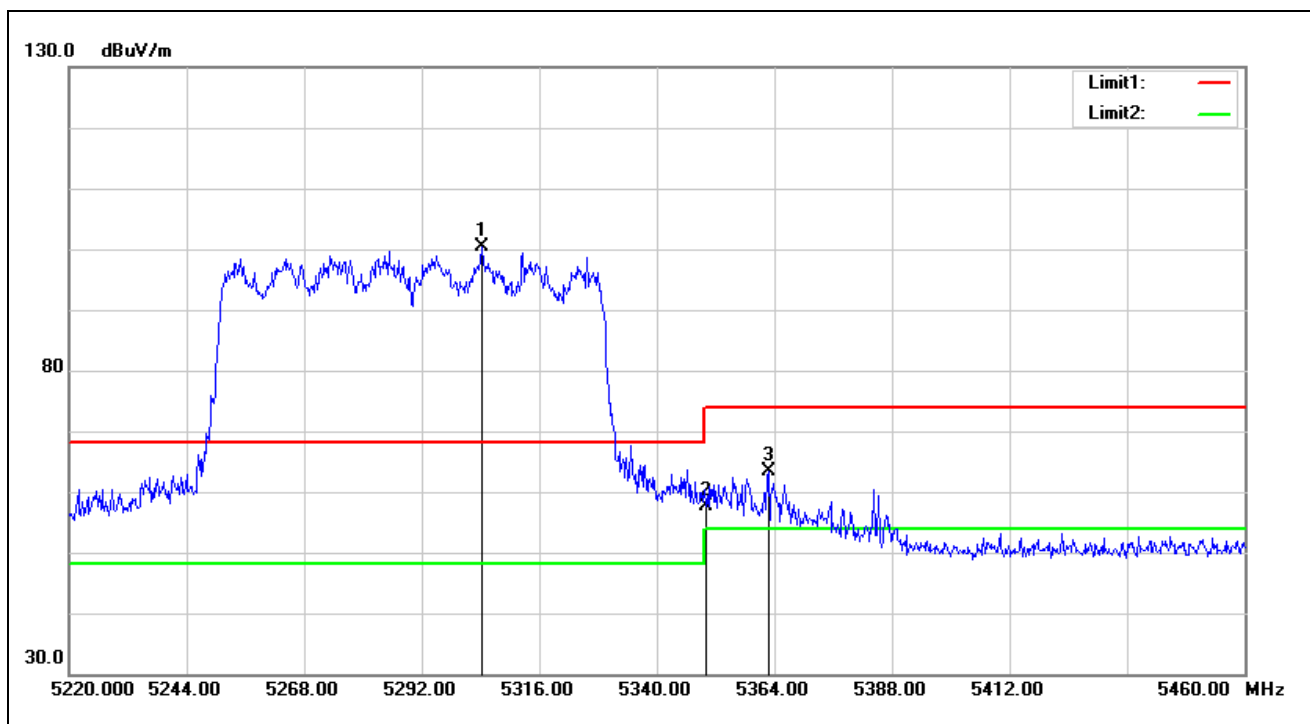


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5304.240	99.72	0.72	100.44	68.20	32.24	peak
2	5350.000	56.82	0.89	57.71	74.00	-16.29	peak
3	5362.800	62.36	0.99	63.35	74.00	-10.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

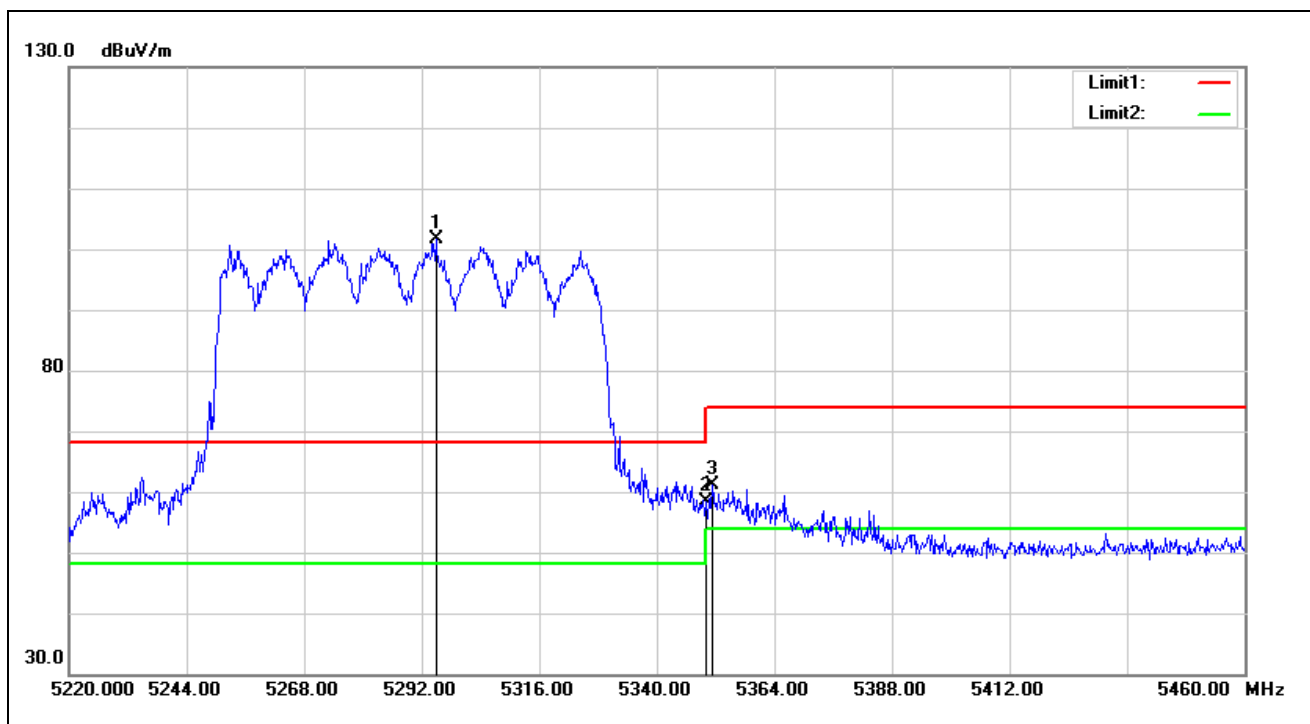


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5294.880	100.81	0.71	101.52	68.20	33.32	peak
2	5350.000	57.45	0.89	58.34	74.00	-15.66	peak
3	5351.280	60.20	0.90	61.10	74.00	-12.90	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

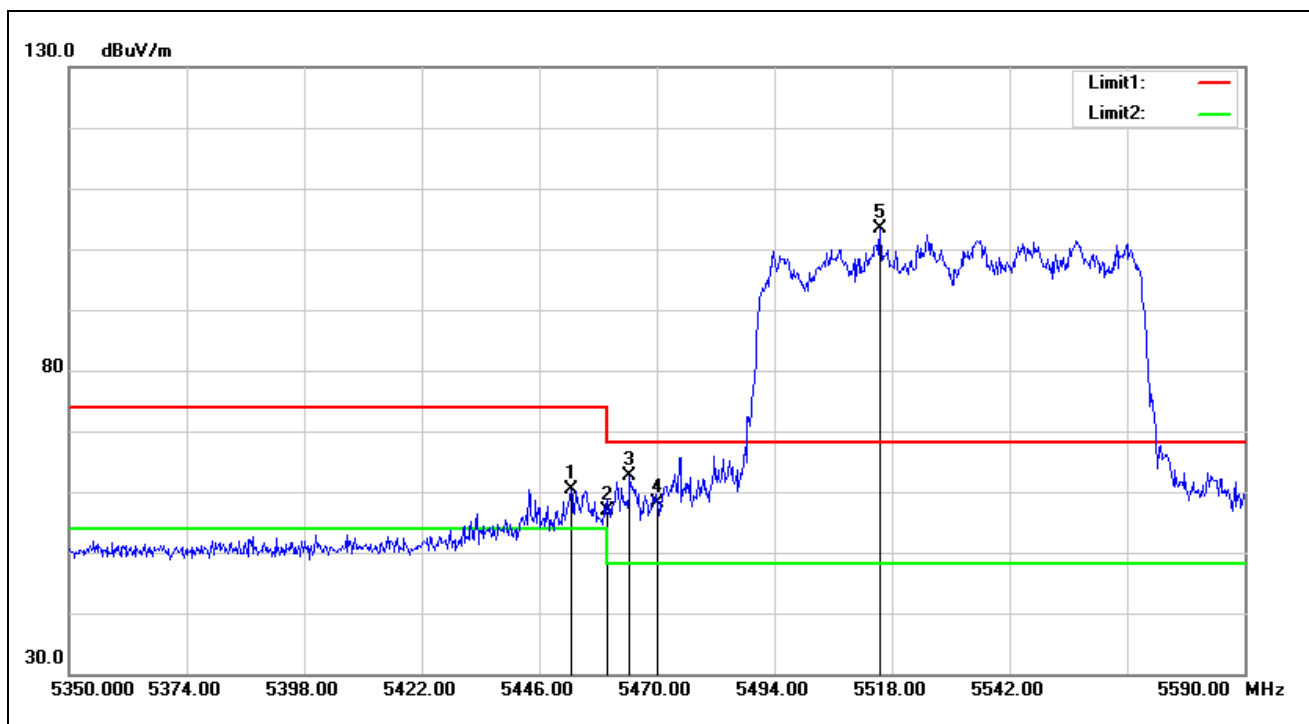


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.480	58.68	1.77	60.45	74.00	-13.55	peak
2	5460.000	55.10	1.79	56.89	74.00	-17.11	peak
3	5464.480	60.76	1.79	62.55	68.20	-5.65	peak
4	5470.000	56.45	1.80	58.25	68.20	-9.95	peak
5*	5515.600	101.47	1.81	103.28	68.20	35.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

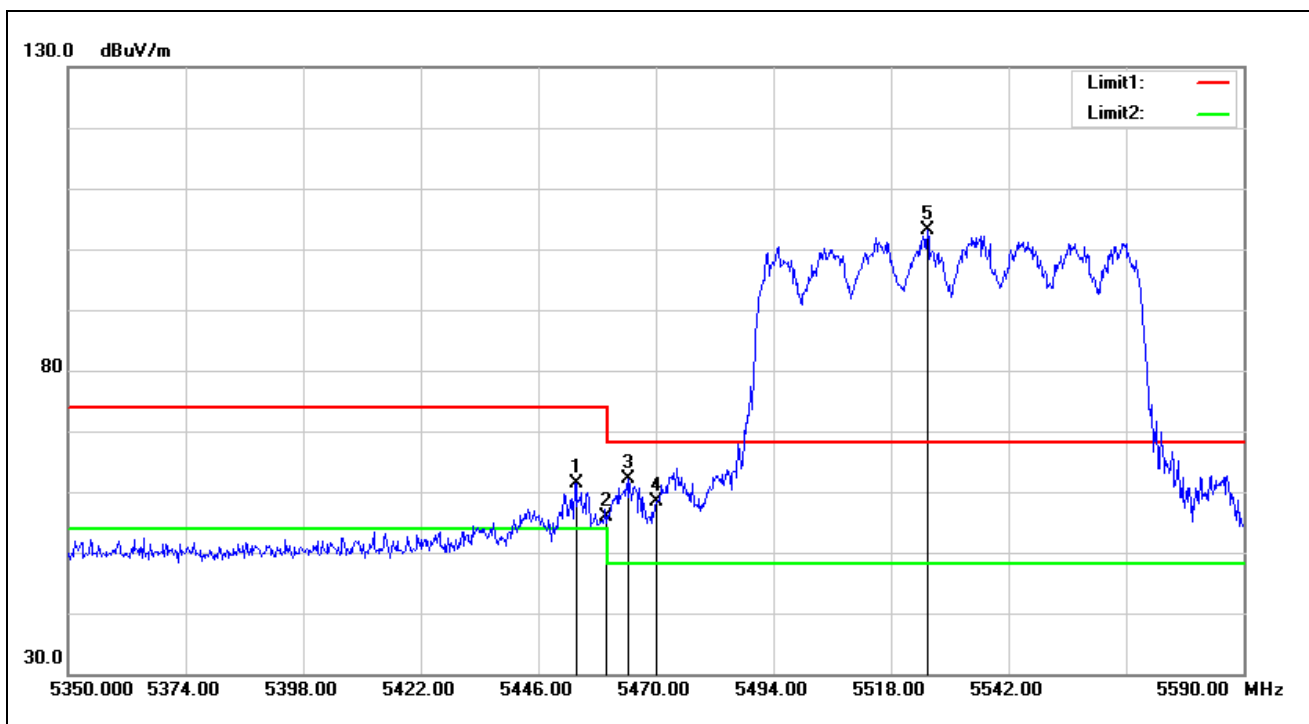

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.680	59.58	1.77	61.35	74.00	-12.65	peak
2	5460.000	54.11	1.79	55.90	74.00	-18.10	peak
3	5464.480	60.23	1.79	62.02	68.20	-6.18	peak
4	5470.000	56.63	1.80	58.43	68.20	-9.77	peak
5*	5525.440	101.37	1.77	103.14	68.20	34.94	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

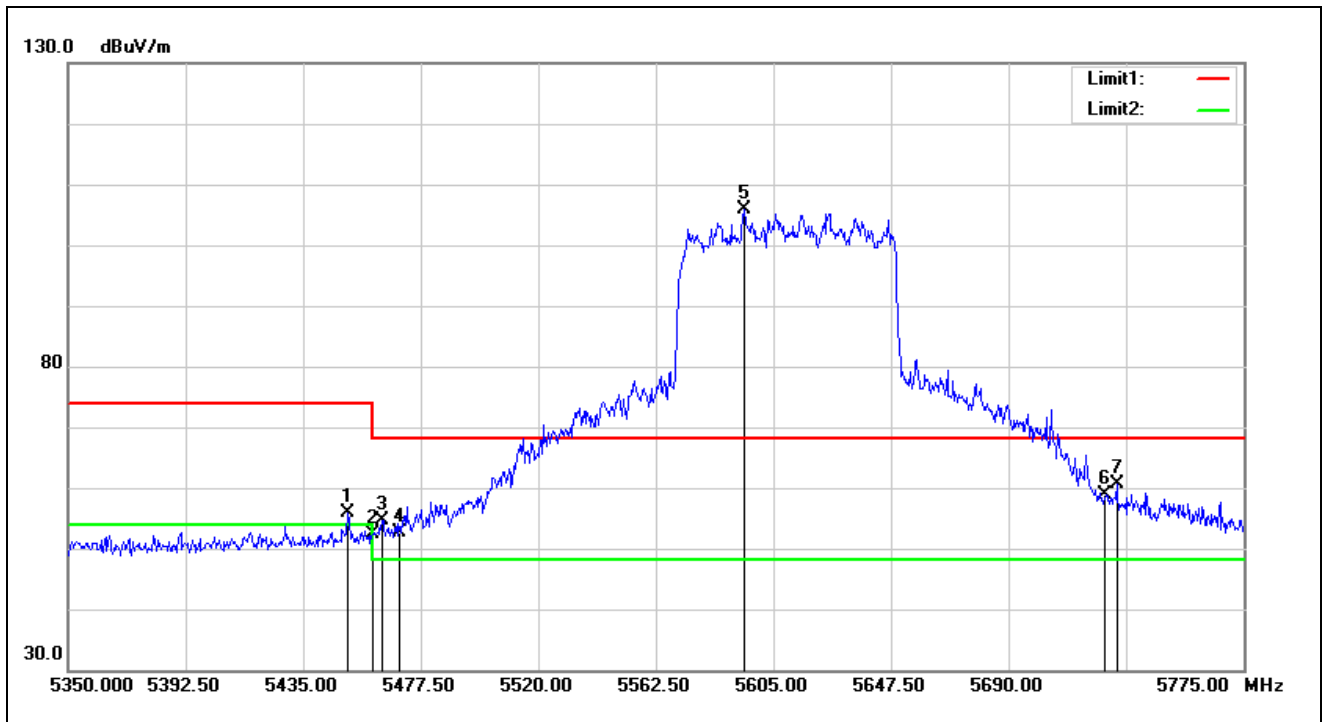

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5451.150	54.07	1.77	55.84	74.00	-18.16	peak
1	5460.000	50.49	1.79	52.28	74.00	-21.72	peak
2	5463.475	52.92	1.79	54.71	68.20	-13.49	peak
3	5470.000	50.83	1.80	52.63	68.20	-15.57	peak
4*	5594.375	104.20	1.62	105.82	68.20	37.62	peak
5	5725.000	56.88	1.89	58.77	68.20	-9.43	peak
6	5729.100	58.60	1.95	60.55	68.20	-7.65	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

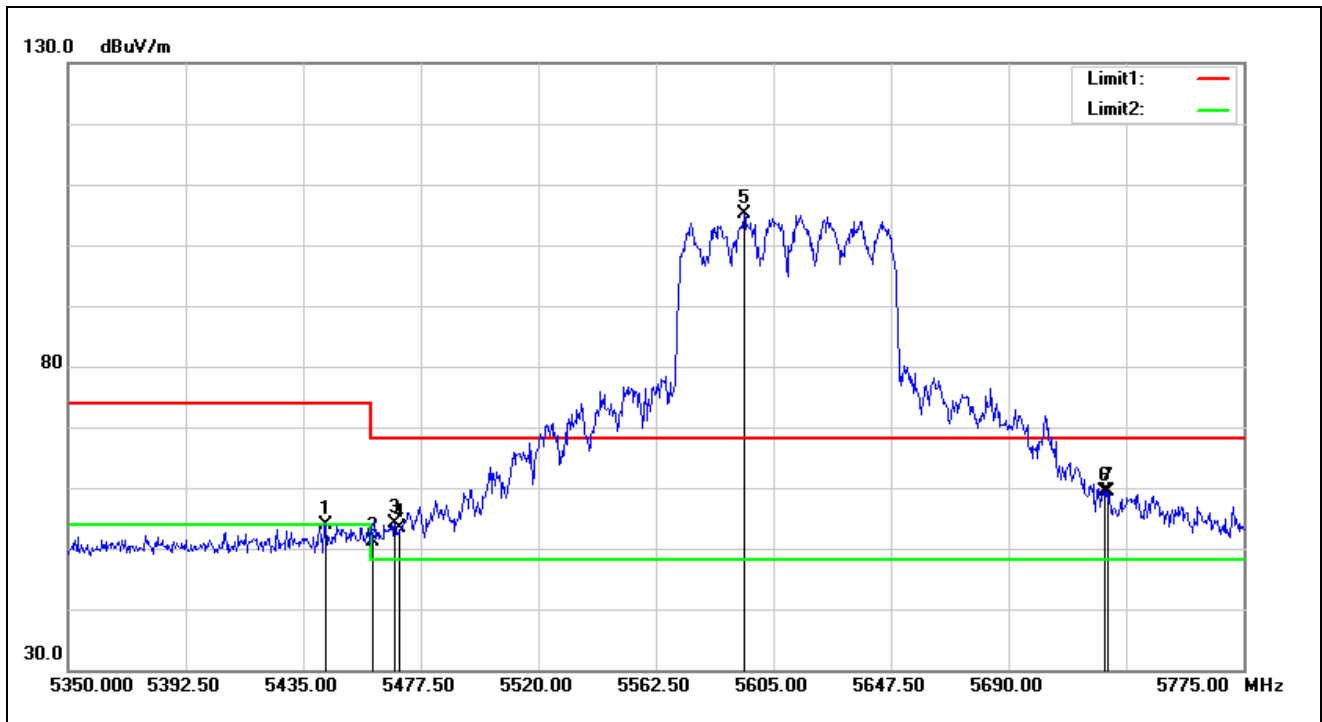

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5443.075	52.22	1.69	53.91	74.00	-20.09	peak
1	5460.000	49.30	1.79	51.09	74.00	-22.91	peak
2	5468.150	52.34	1.80	54.14	68.20	-14.06	peak
3	5470.000	51.57	1.80	53.37	68.20	-14.83	peak
4*	5594.375	103.43	1.62	105.05	68.20	36.85	peak
5	5725.000	57.41	1.89	59.30	68.20	-8.90	peak
6	5726.125	57.42	1.91	59.33	68.20	-8.87	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

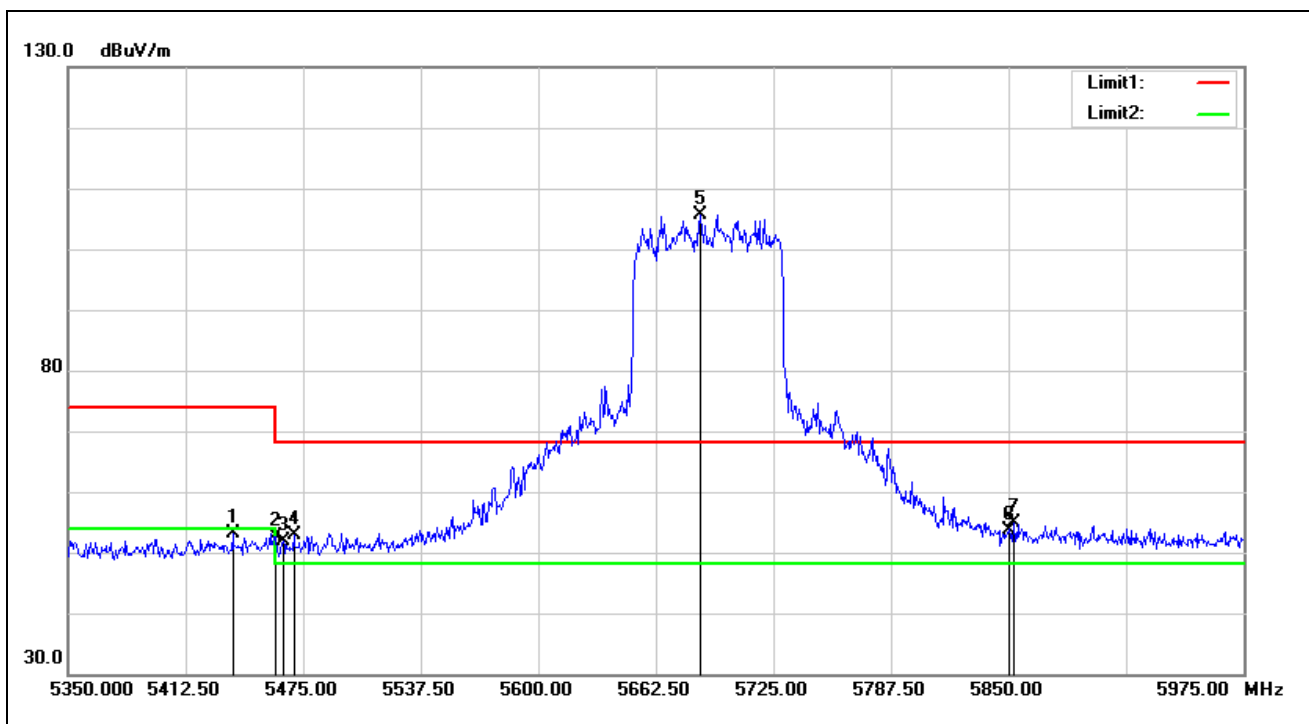

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5437.500	51.56	1.64	53.20	74.00	-20.80	peak
1	5460.000	50.96	1.79	52.75	74.00	-21.25	peak
2	5464.375	50.05	1.79	51.84	68.20	-16.36	peak
3	5470.000	51.14	1.80	52.94	68.20	-15.26	peak
4*	5686.250	104.11	1.61	105.72	68.20	37.52	peak
5	5850.000	50.95	2.57	53.52	68.20	-14.68	peak
6	5853.125	52.39	2.59	54.98	68.20	-13.22	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

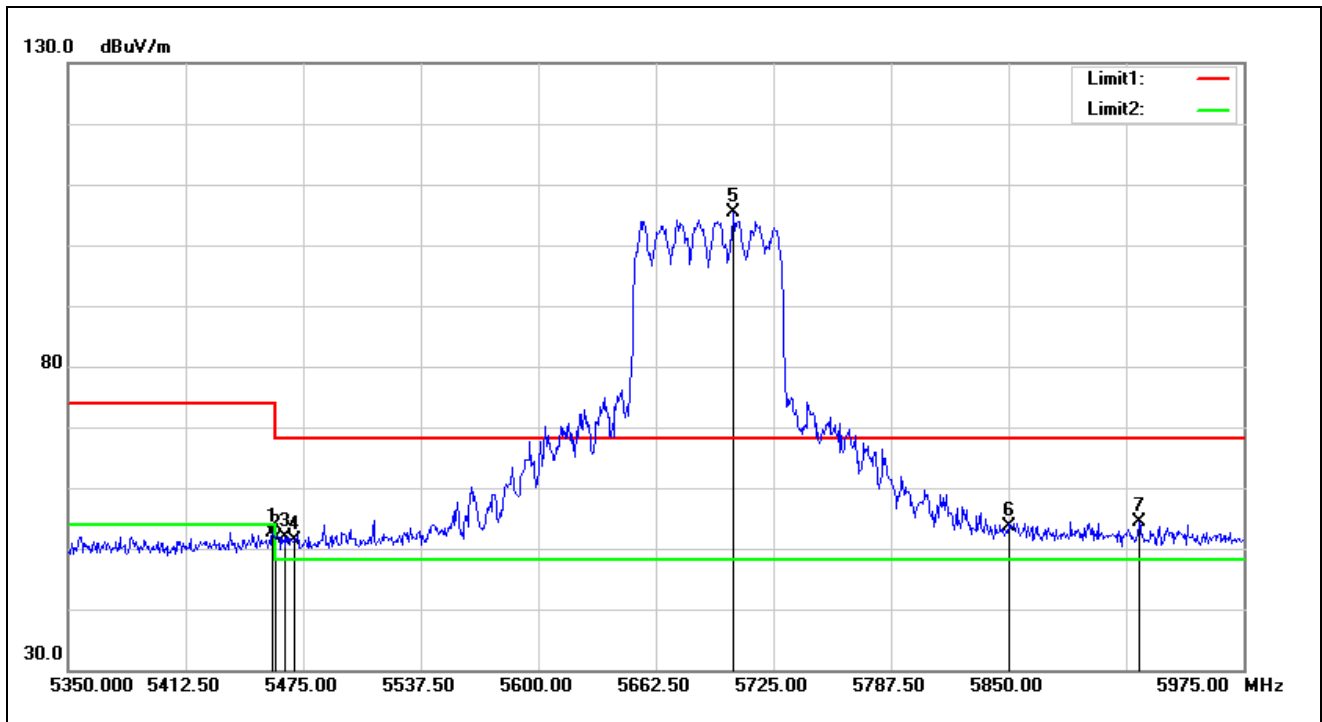

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5458.750	50.92	1.79	52.71	74.00	-21.29	peak
1	5460.000	49.84	1.79	51.63	74.00	-22.37	peak
2	5465.000	50.09	1.79	51.88	68.20	-16.32	peak
3	5470.000	49.50	1.80	51.30	68.20	-16.90	peak
4*	5703.750	103.84	1.62	105.46	68.20	37.26	peak
5	5850.000	51.12	2.57	53.69	68.20	-14.51	peak
6	5919.375	51.77	2.60	54.37	68.20	-13.83	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

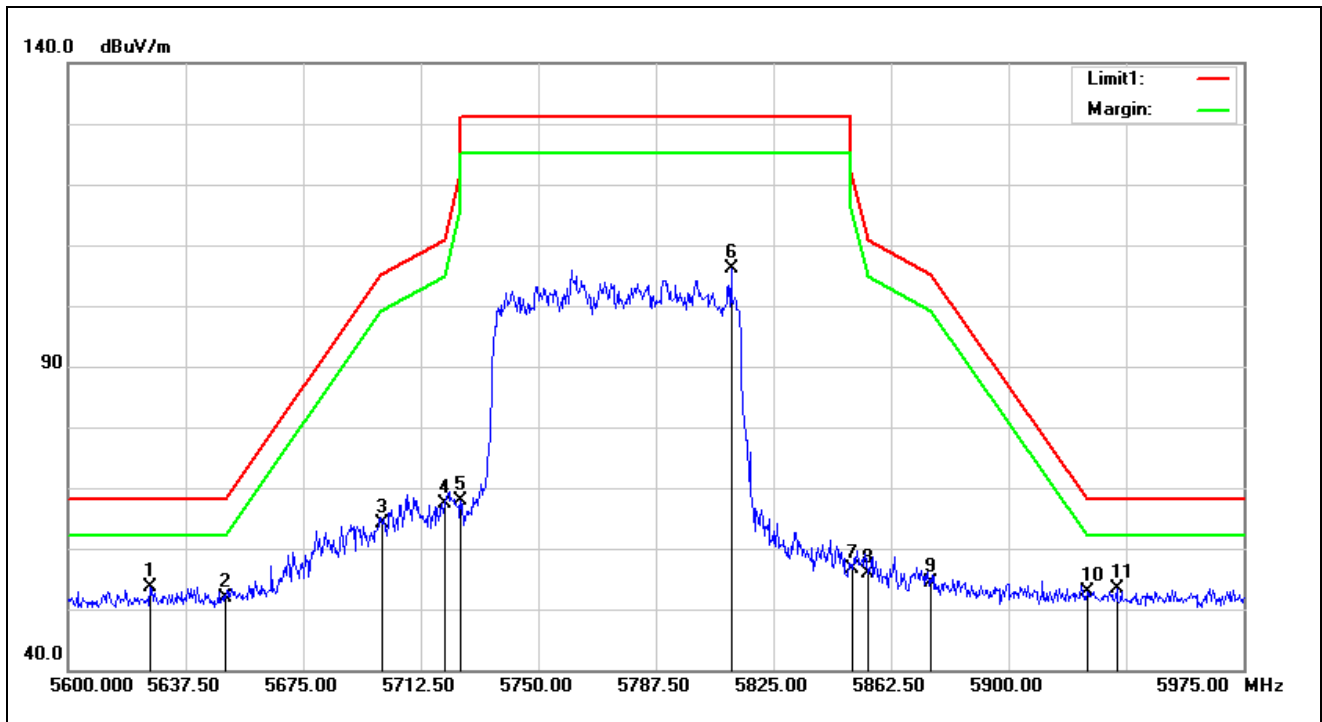

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5626.250	51.95	1.63	53.58	68.20	-14.62	peak
1	5650.000	50.31	1.65	51.96	68.20	-16.24	peak
2	5700.000	62.49	1.58	64.07	105.20	-41.13	peak
3	5720.000	65.53	1.83	67.36	110.80	-43.44	peak
4	5725.000	65.87	1.89	67.76	122.20	-54.44	peak
5	5811.500	103.58	2.56	106.14	131.20	-25.06	peak
6	5850.000	53.95	2.57	56.52	122.20	-65.68	peak
7	5855.000	53.22	2.59	55.81	110.80	-54.99	peak
8	5875.000	51.77	2.64	54.41	105.20	-50.79	peak
9	5925.000	50.21	2.58	52.79	68.20	-15.41	peak
10	5934.500	50.88	2.52	53.40	68.20	-14.80	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

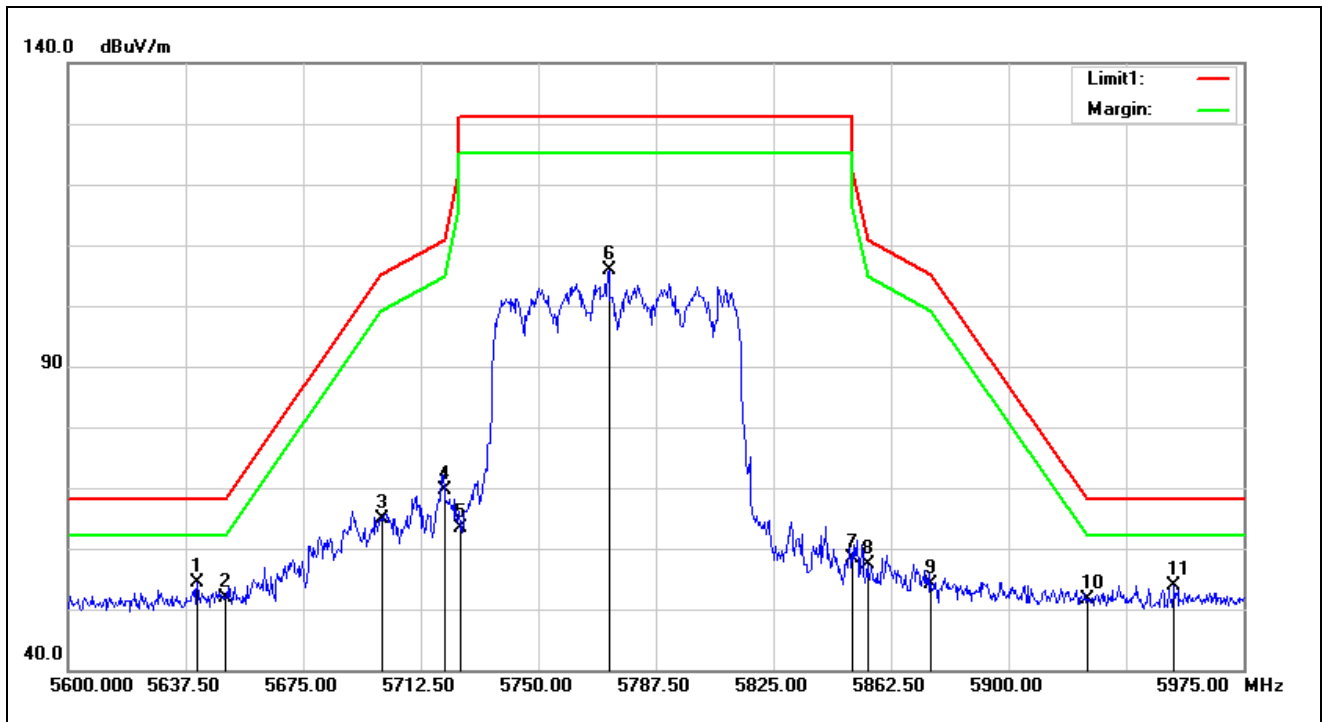

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5641.250	52.67	1.65	54.32	68.20	-13.88	peak
1	5650.000	50.18	1.65	51.83	68.20	-16.37	peak
2	5700.000	63.23	1.58	64.81	105.20	-40.39	peak
3	5720.000	67.90	1.83	69.73	110.80	-41.07	peak
4	5725.000	61.61	1.89	63.50	122.20	-58.70	peak
5	5772.500	103.55	2.37	105.92	131.20	-25.28	peak
6	5850.000	55.87	2.57	58.44	122.20	-63.76	peak
7	5855.000	54.84	2.59	57.43	110.80	-53.37	peak
8	5875.000	51.61	2.64	54.25	105.20	-50.95	peak
9	5925.000	49.10	2.58	51.68	68.20	-16.52	peak
10	5952.875	51.46	2.45	53.91	68.20	-14.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

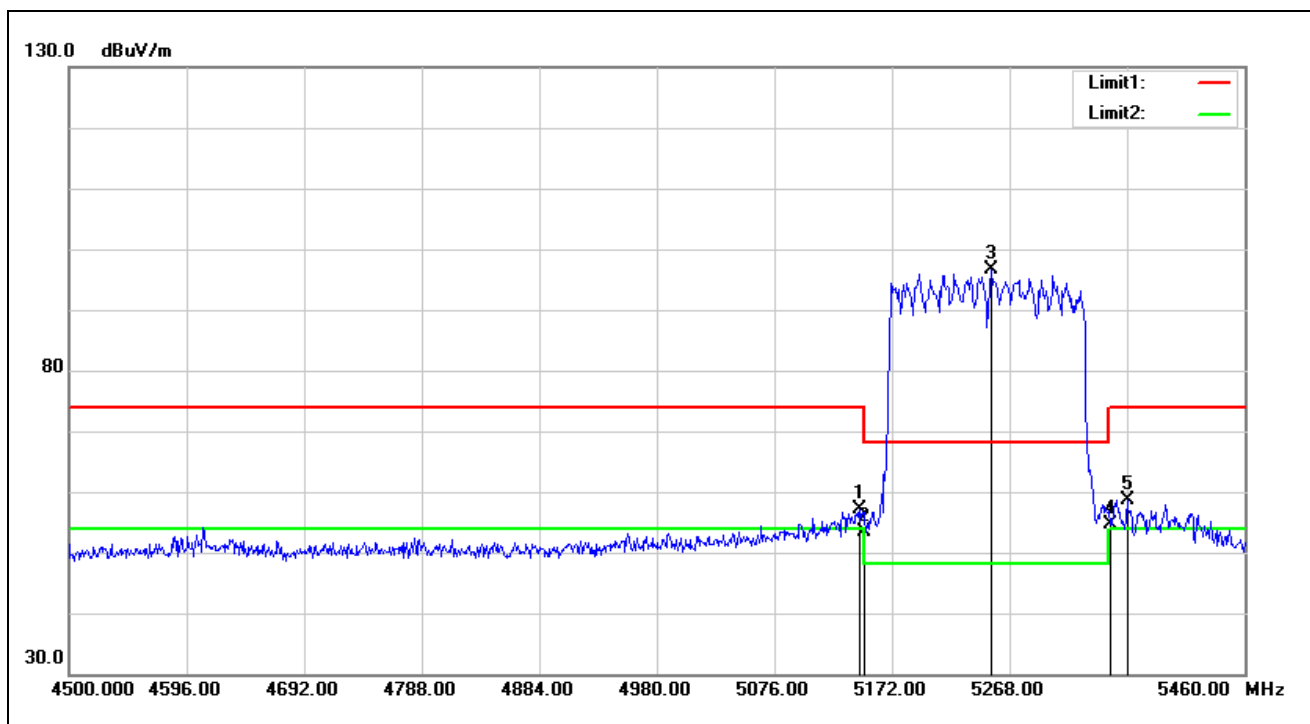


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.080	56.01	1.13	57.14	74.00	-16.86	peak
2	5150.000	52.21	1.13	53.34	74.00	-20.66	peak
3*	5253.600	95.89	0.80	96.69	68.20	28.49	peak
4	5350.000	53.71	0.89	54.60	74.00	-19.40	peak
5	5364.000	57.66	0.99	58.65	74.00	-15.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

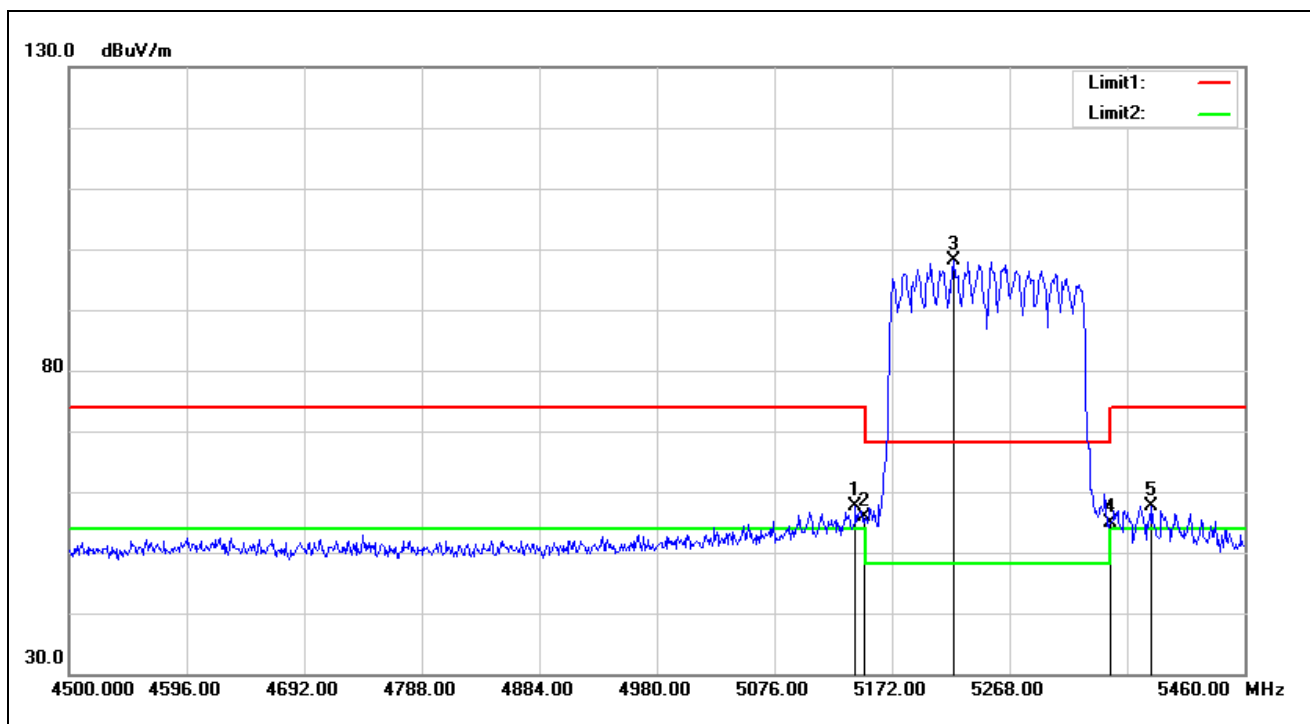

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.240	56.51	1.13	57.64	74.00	-16.36	peak
2	5150.000	54.74	1.13	55.87	74.00	-18.13	peak
3*	5222.880	97.39	0.81	98.20	68.20	30.00	peak
4	5350.000	54.05	0.89	54.94	74.00	-19.06	peak
5	5384.160	56.53	1.14	57.67	74.00	-16.33	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

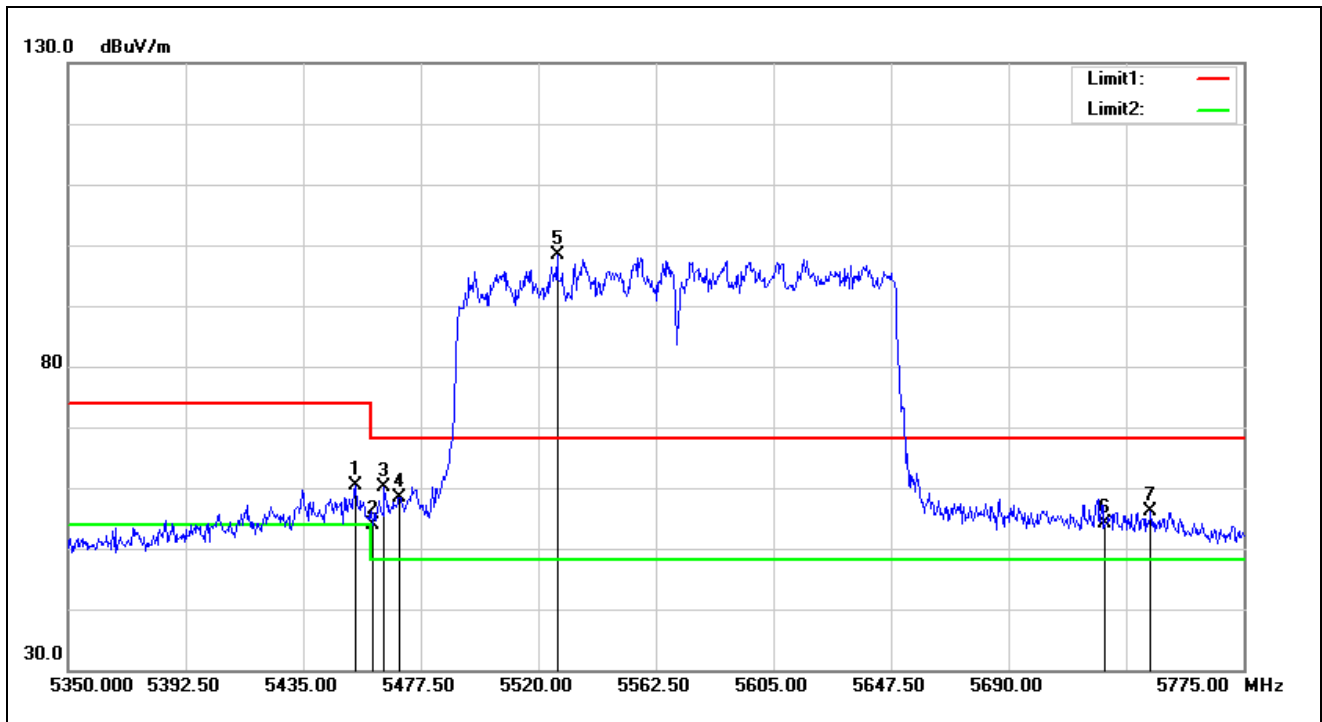

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5454.125	58.61	1.77	60.38	74.00	-13.62	peak
1	5460.000	52.08	1.79	53.87	74.00	-20.13	peak
2	5464.325	58.26	1.79	60.05	68.20	-8.15	peak
3	5470.000	56.61	1.80	58.41	68.20	-9.79	peak
4*	5526.800	96.70	1.76	98.46	68.20	30.26	peak
5	5725.000	52.19	1.89	54.08	68.20	-14.12	peak
6	5741.425	53.96	2.11	56.07	68.20	-12.13	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

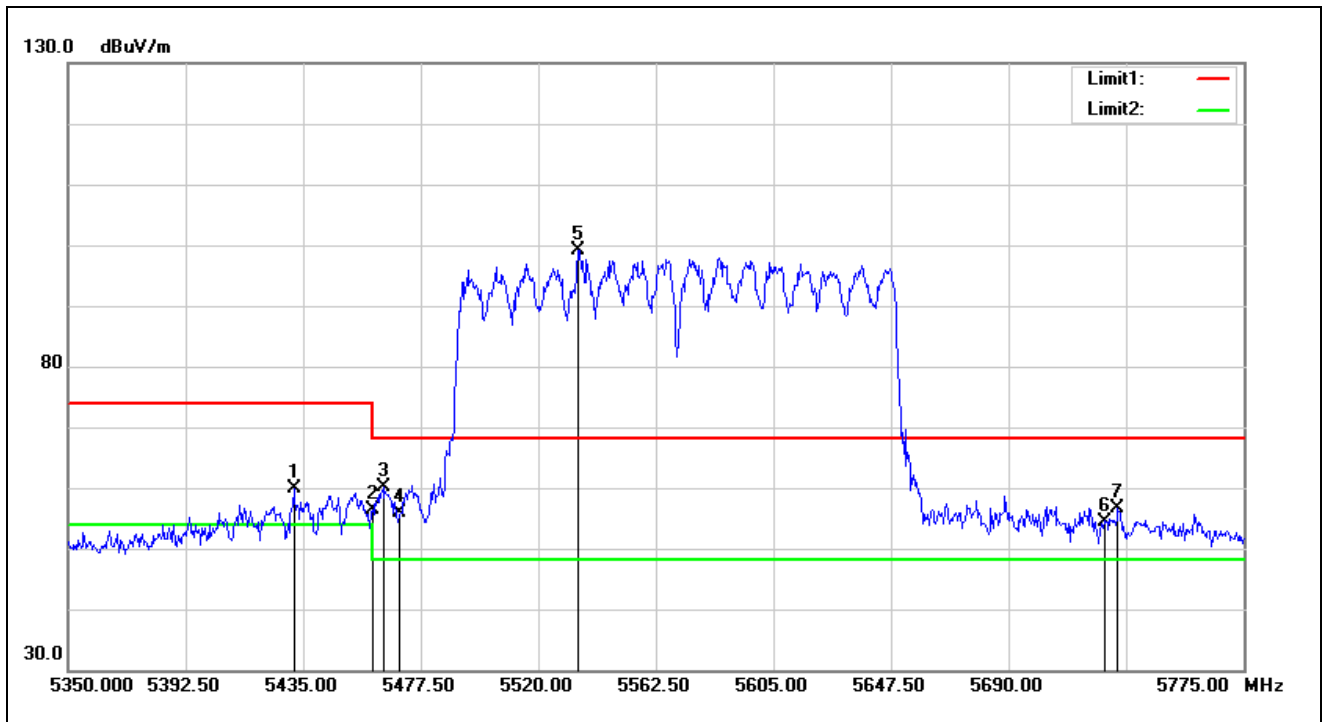

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0	5431.600	58.19	1.59	59.78	74.00	-14.22	peak
1	5460.000	54.67	1.79	56.46	74.00	-17.54	peak
2	5463.900	58.43	1.79	60.22	68.20	-7.98	peak
3	5470.000	54.15	1.80	55.95	68.20	-12.25	peak
4*	5534.450	97.48	1.74	99.22	68.20	31.02	peak
5	5725.000	52.38	1.89	54.27	68.20	-13.93	peak
6	5729.525	54.62	1.95	56.57	68.20	-11.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5845 MHz		
Remark:			

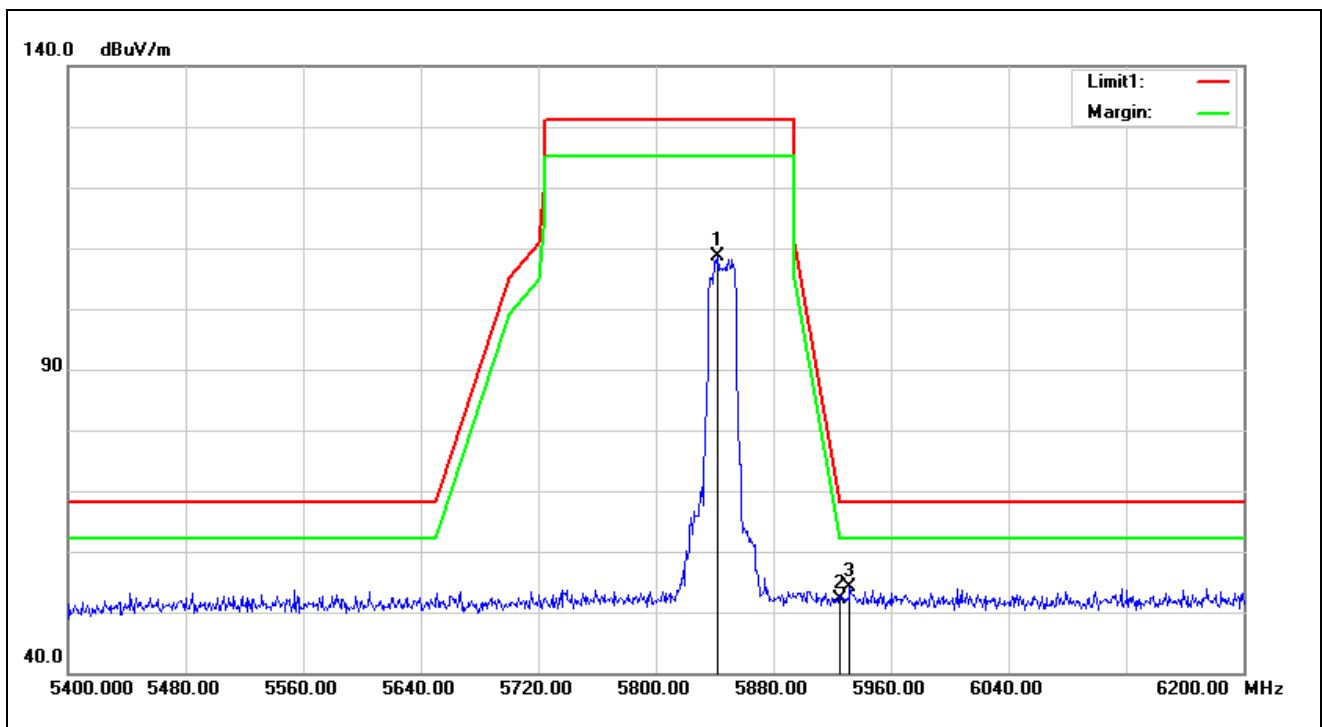


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5842.400	105.96	2.57	108.53	131.20	-22.67	peak
2	5925.000	49.49	2.58	52.07	68.20	-16.13	peak
3*	5932.000	51.57	2.54	54.11	68.20	-14.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5845 MHz		
Remark:			

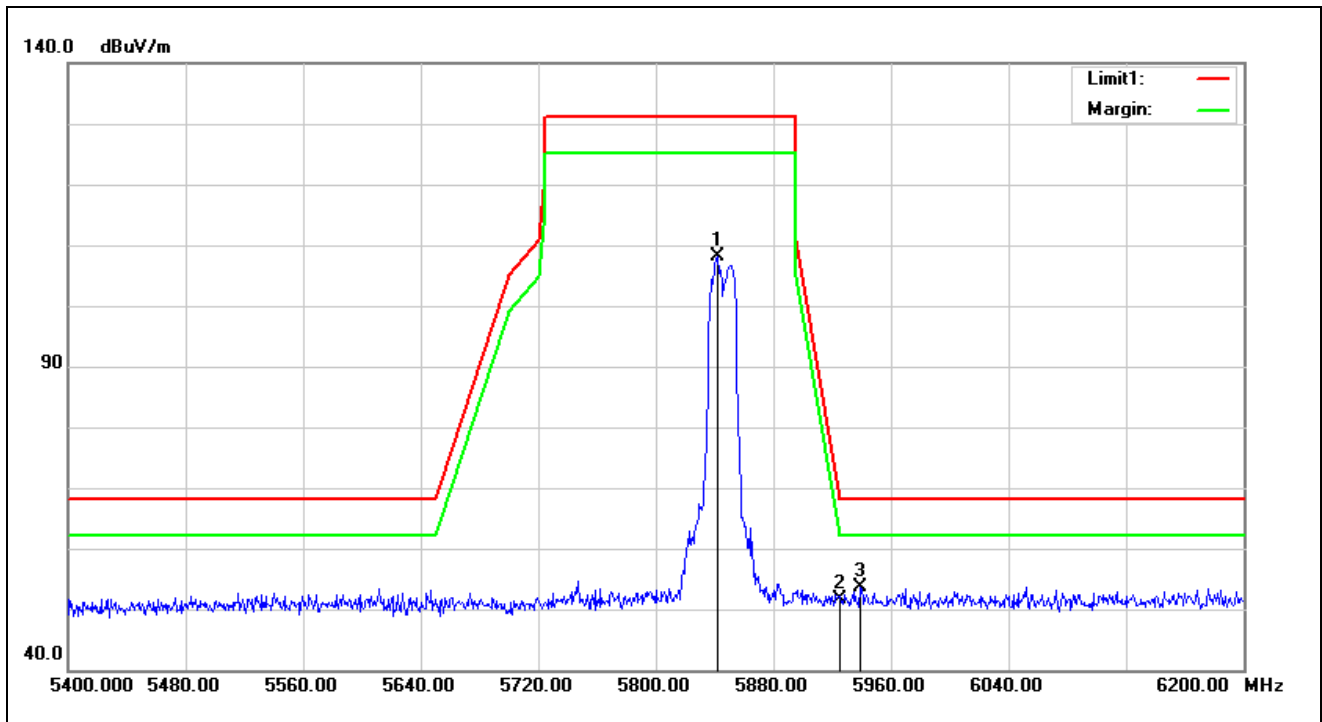


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5842.400	105.60	2.57	108.17	131.20	-23.03	peak
2	5925.000	48.93	2.58	51.51	68.20	-16.69	peak
3*	5939.200	51.04	2.49	53.53	68.20	-14.67	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5885 MHz		
Remark:			

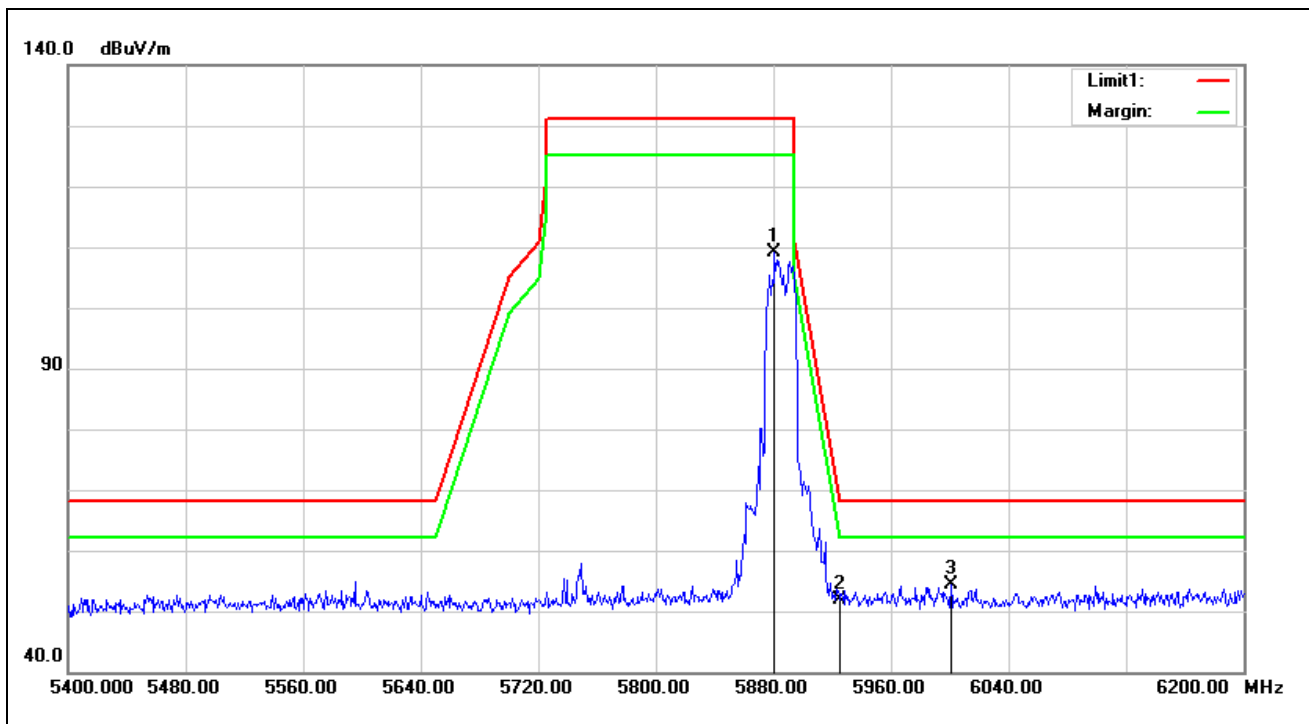


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.800	106.46	2.66	109.12	131.20	-22.08	peak
2	5925.000	49.22	2.58	51.80	68.20	-16.40	peak
3*	6000.800	51.71	2.57	54.28	68.20	-13.92	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5885 MHz		
Remark:			

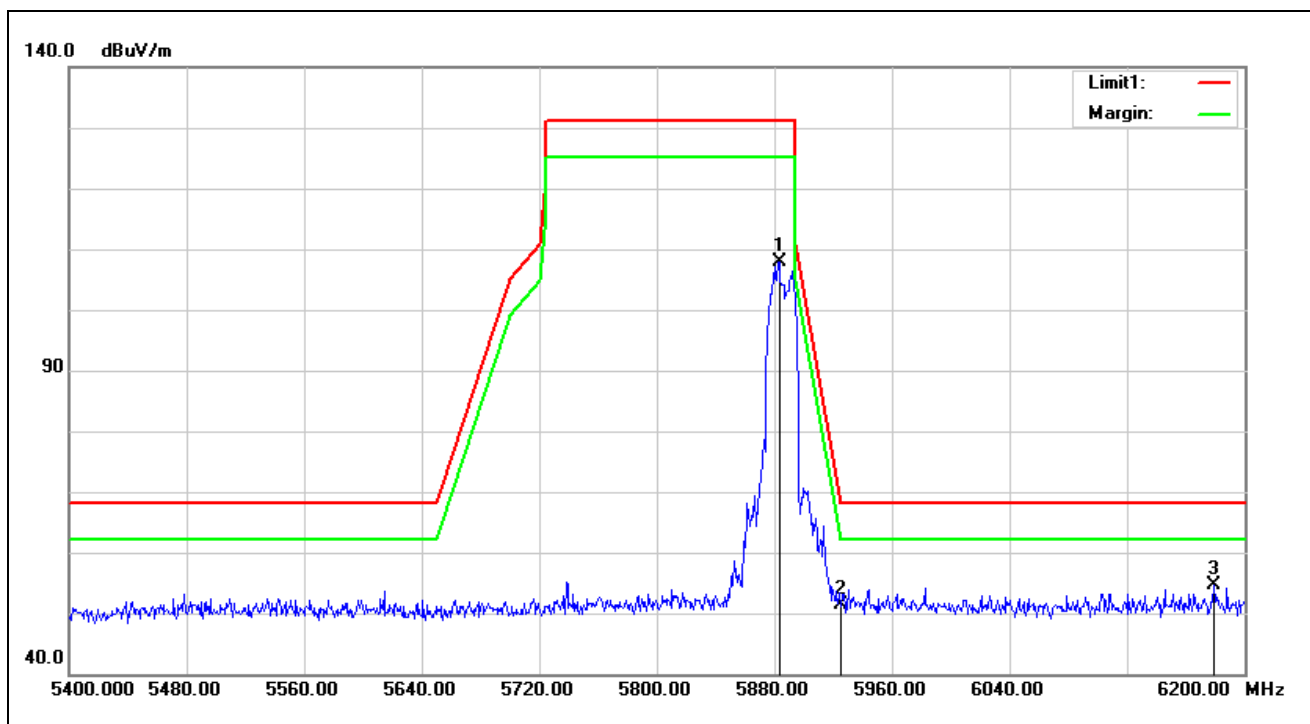


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5883.200	105.19	2.67	107.86	131.20	-23.34	peak
2	5925.000	48.90	2.58	51.48	68.20	-16.72	peak
3*	6179.200	51.23	3.28	54.51	68.20	-13.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5835 MHz		
Remark:			

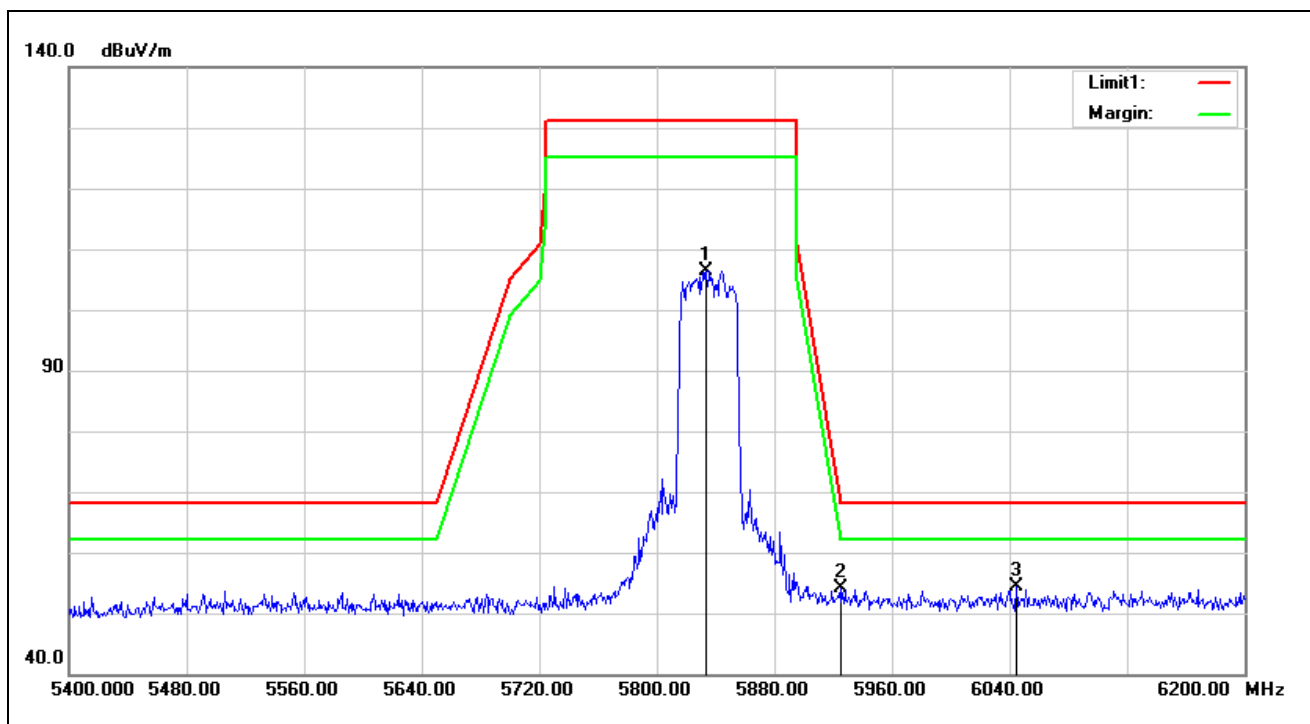


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5833.600	103.90	2.56	106.46	131.20	-24.74	peak
2	5925.000	51.55	2.58	54.13	68.20	-14.07	peak
3*	6044.800	51.48	2.78	54.26	68.20	-13.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5835 MHz		
Remark:			

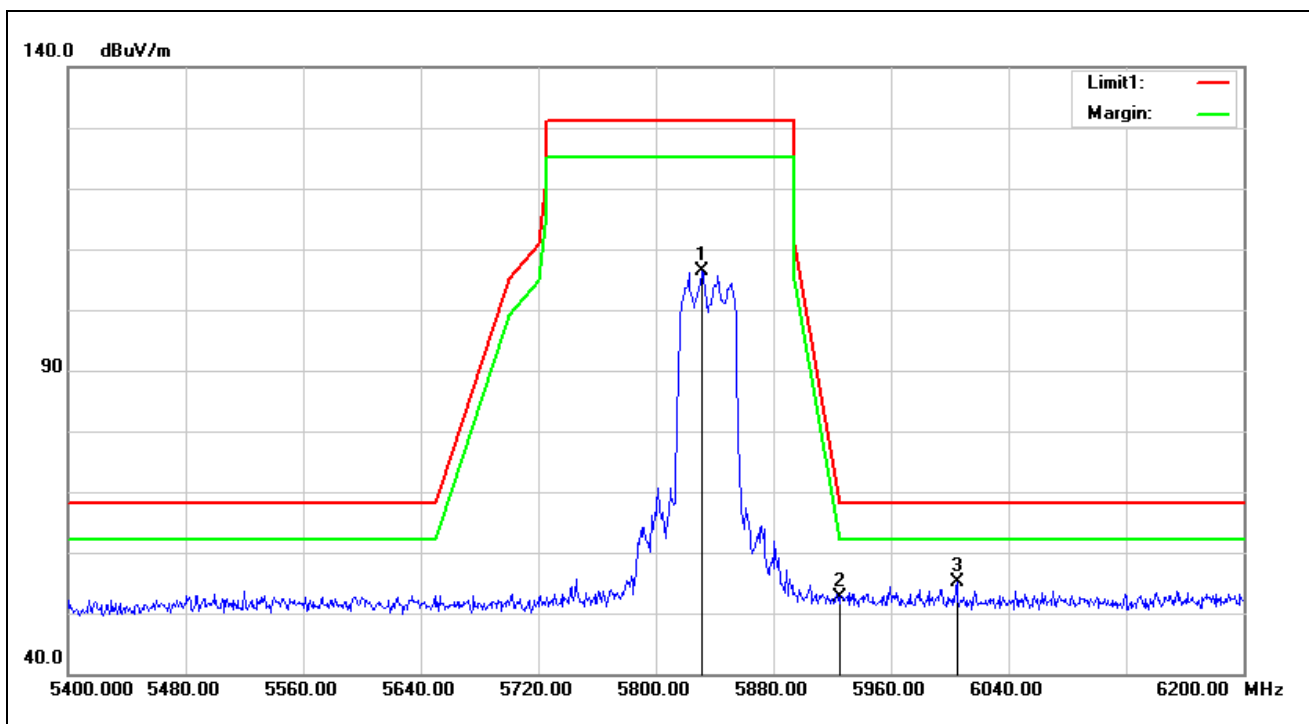


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5831.200	103.71	2.56	106.27	131.20	-24.93	peak
2	5925.000	50.03	2.58	52.61	68.20	-15.59	peak
3*	6004.800	52.56	2.59	55.15	68.20	-13.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5875 MHz		
Remark:			

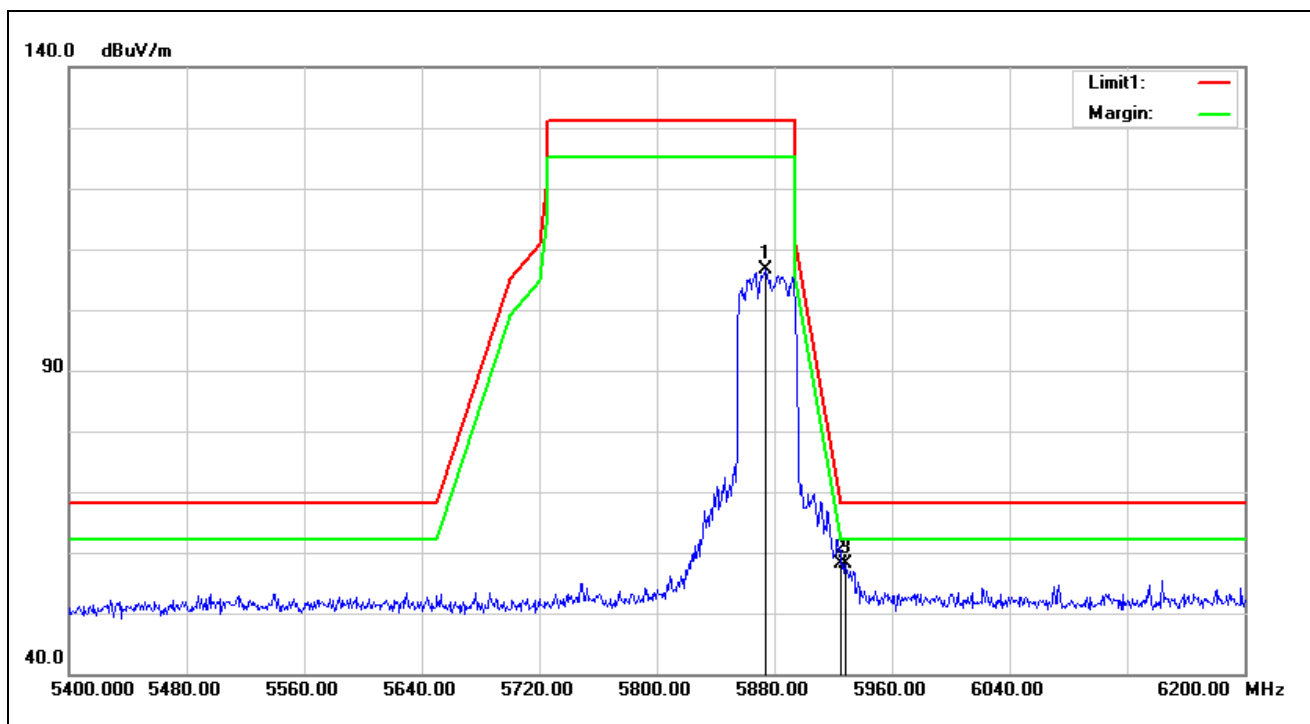


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5873.600	104.07	2.64	106.71	131.20	-24.49	peak
2*	5925.000	55.66	2.58	58.24	68.20	-9.96	peak
3	5928.000	55.51	2.56	58.07	68.20	-10.13	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5875 MHz		
Remark:			

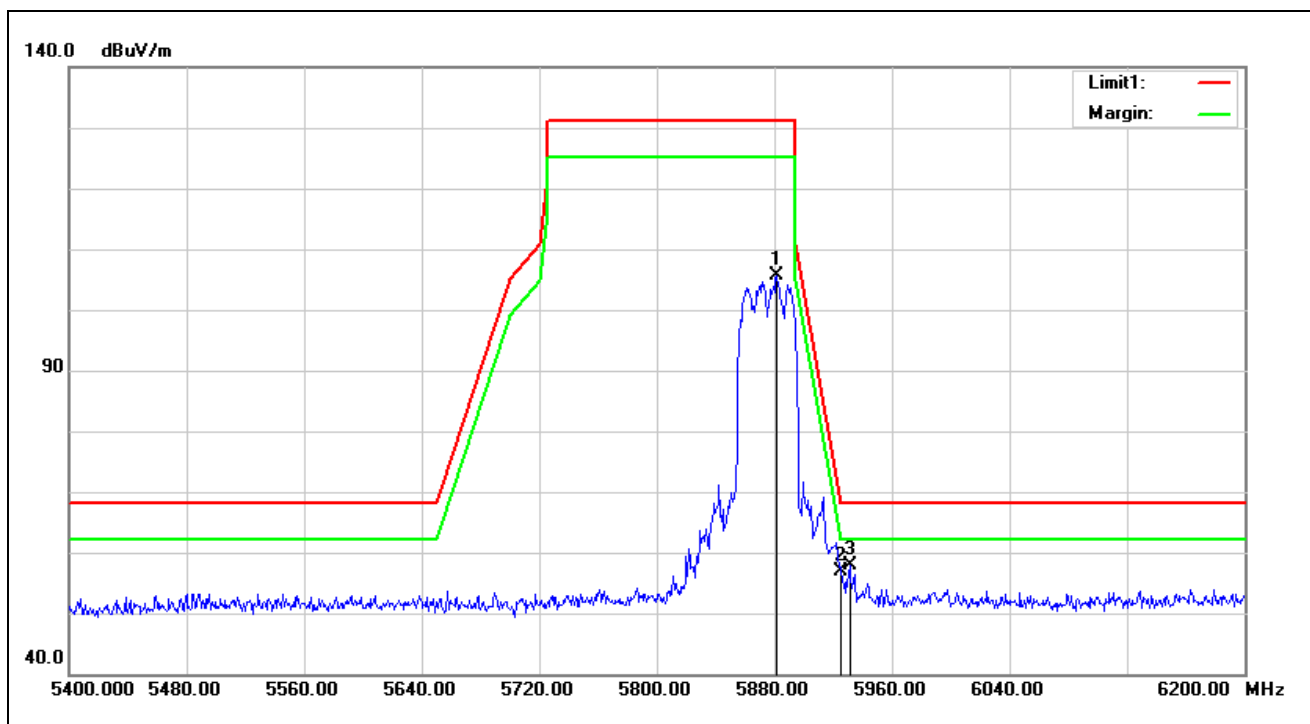


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5881.600	102.95	2.66	105.61	131.20	-25.59	peak
2	5925.000	54.33	2.58	56.91	68.20	-11.29	peak
3*	5931.200	55.25	2.54	57.79	68.20	-10.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5855 MHz		
Remark:			

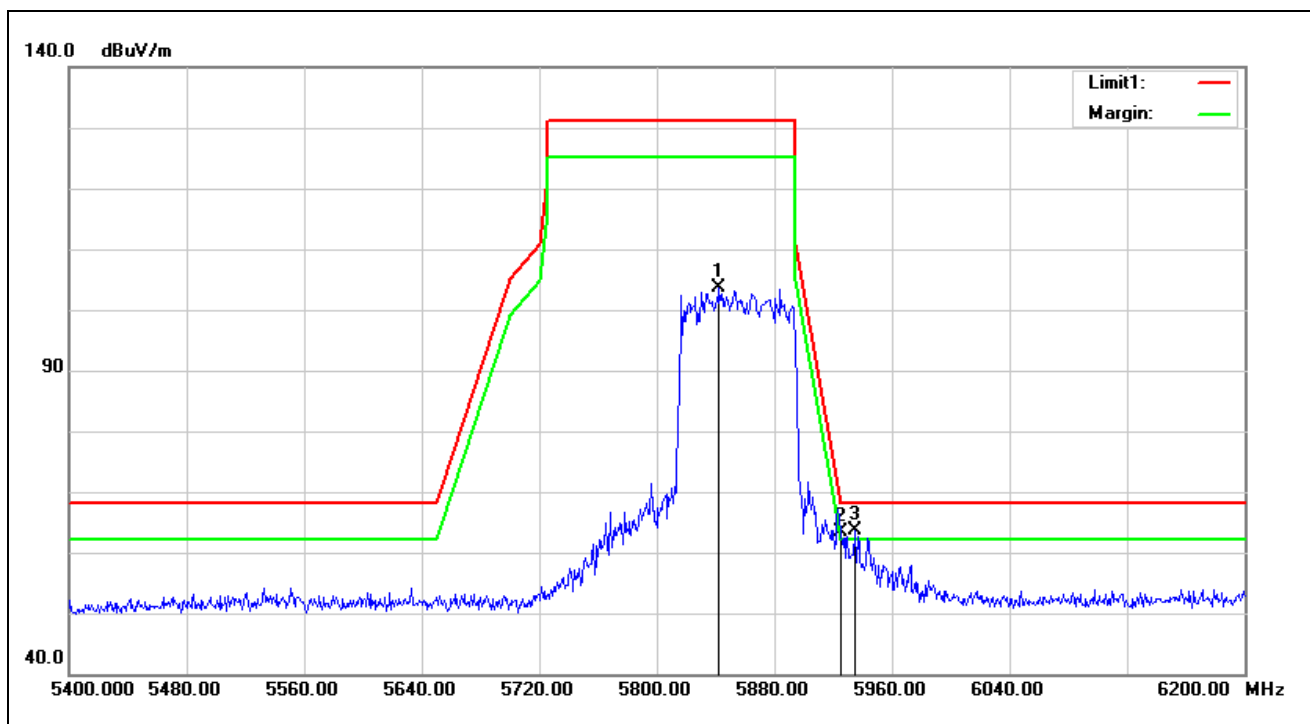


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5842.400	101.10	2.57	103.67	131.20	-27.53	peak
2!	5925.000	60.81	2.58	63.39	68.20	-4.81	peak
3*	5935.200	61.13	2.52	63.65	68.20	-4.55	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5855 MHz		
Remark:			

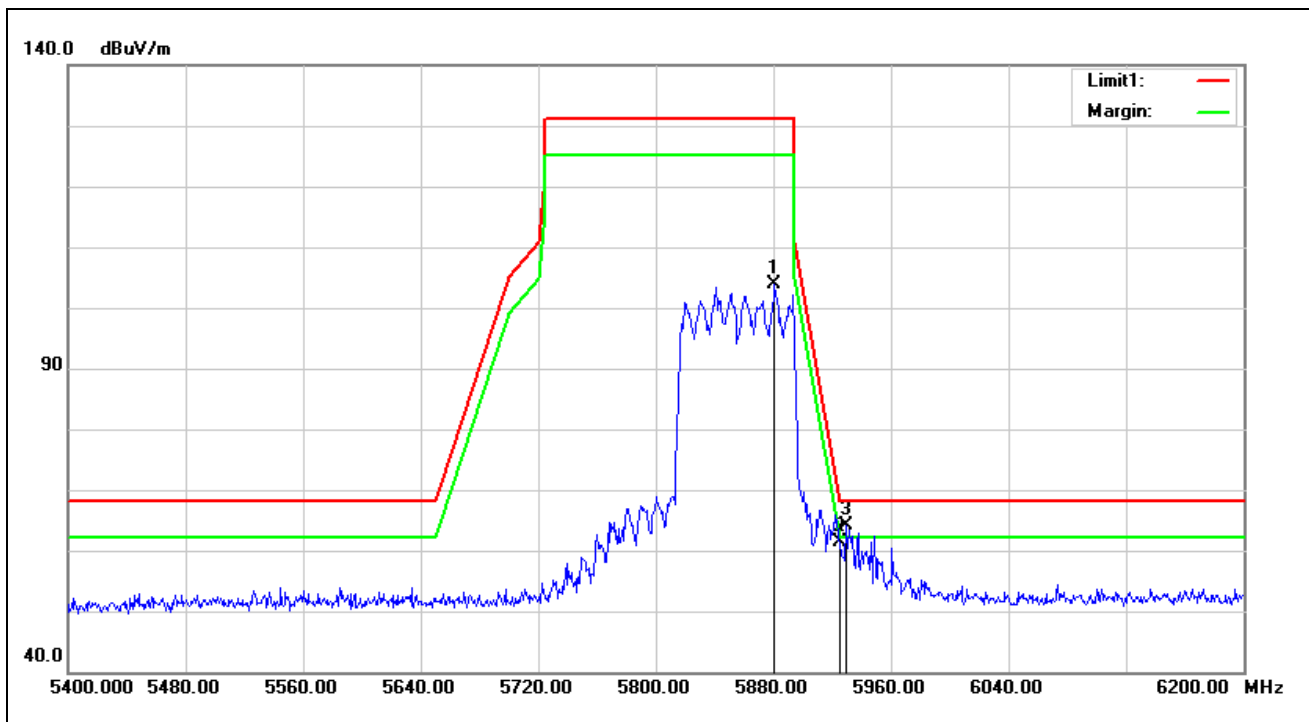

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.800	101.32	2.66	103.98	131.20	-27.22	peak
2	5925.000	58.91	2.58	61.49	68.20	-6.71	peak
3*	5929.600	61.65	2.55	64.20	68.20	-4.00	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

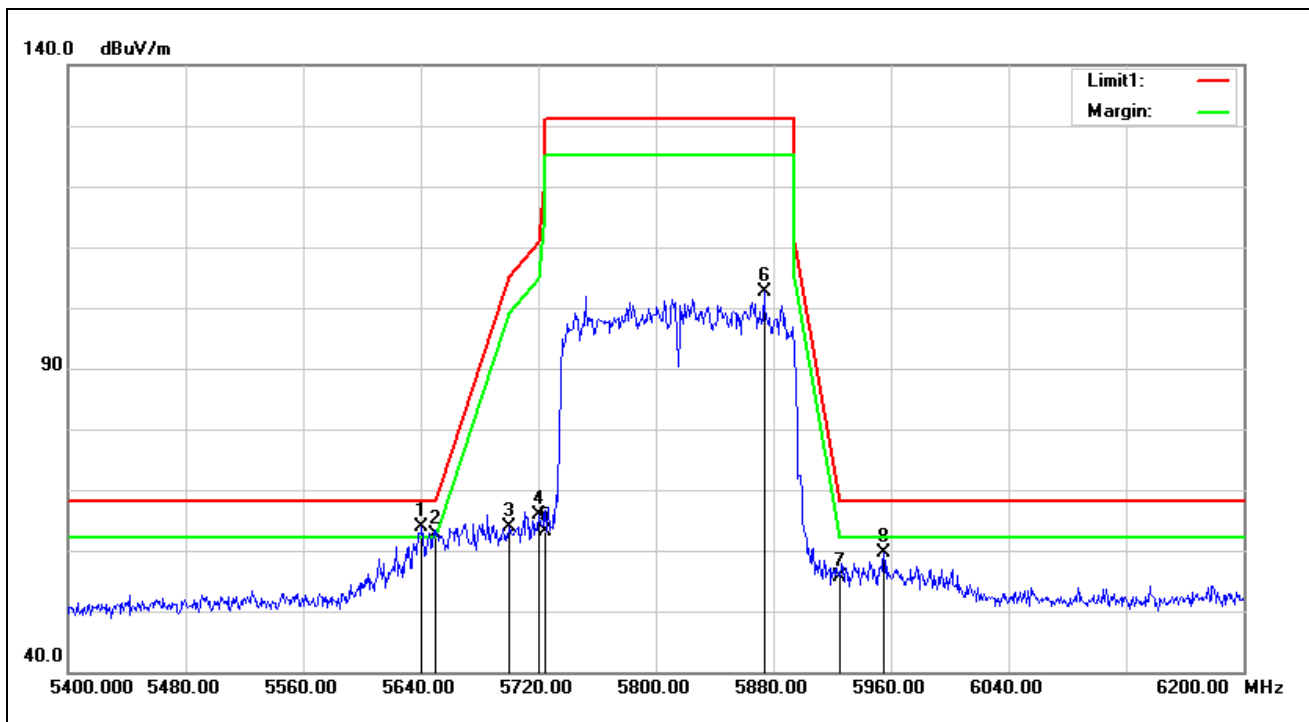

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5640.800	62.33	1.64	63.97	68.20	-4.23	peak
1!	5650.000	61.02	1.65	62.67	68.20	-5.53	peak
2	5700.000	62.40	1.58	63.98	105.20	-41.22	peak
3	5720.000	63.95	1.83	65.78	110.80	-45.02	peak
4	5725.000	61.15	1.89	63.04	122.20	-59.16	peak
5	5873.600	99.90	2.64	102.54	131.20	-28.66	peak
6	5925.000	53.09	2.58	55.67	68.20	-12.53	peak
7	5955.200	57.06	2.45	59.51	68.20	-8.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

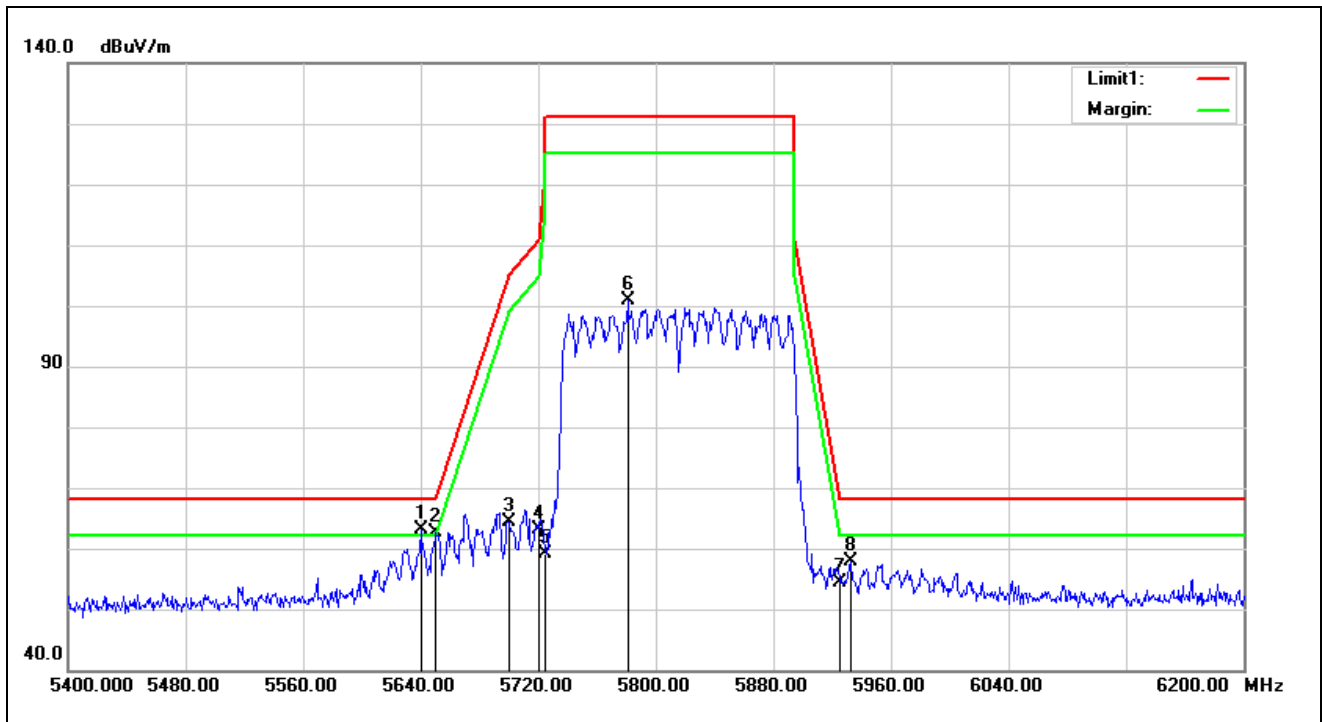


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5815 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
0*	5640.000	61.41	1.64	63.05	68.20	-5.15	peak
1!	5650.000	60.90	1.65	62.55	68.20	-5.65	peak
2	5700.000	62.72	1.58	64.30	105.20	-40.90	peak
3	5720.000	61.26	1.83	63.09	110.80	-47.71	peak
4	5725.000	57.31	1.89	59.20	122.20	-63.00	peak
5	5780.800	98.41	2.41	100.82	131.20	-30.38	peak
6	5925.000	51.72	2.58	54.30	68.20	-13.90	peak
7	5932.800	55.45	2.53	57.98	68.20	-10.22	peak


Average

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

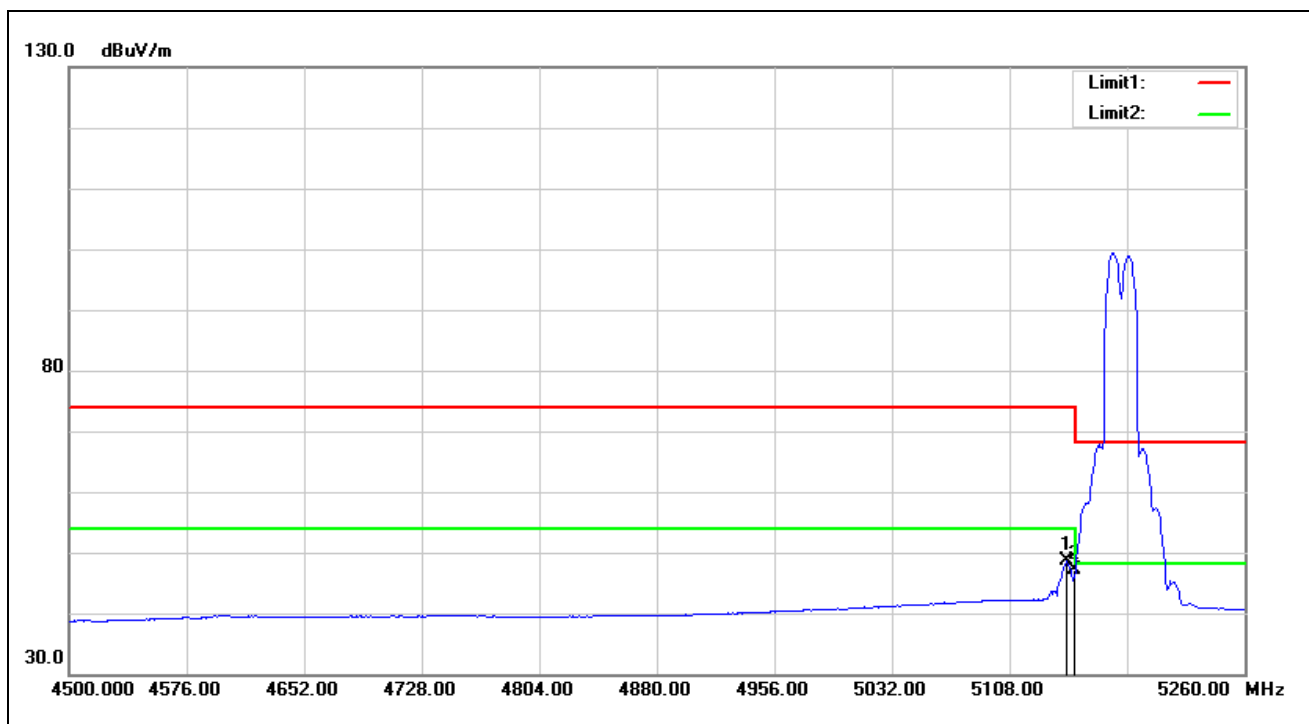


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5145.240	47.42	1.13	48.55	54.00	-5.45	AVG
2	5150.000	45.88	1.13	47.01	54.00	-6.99	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

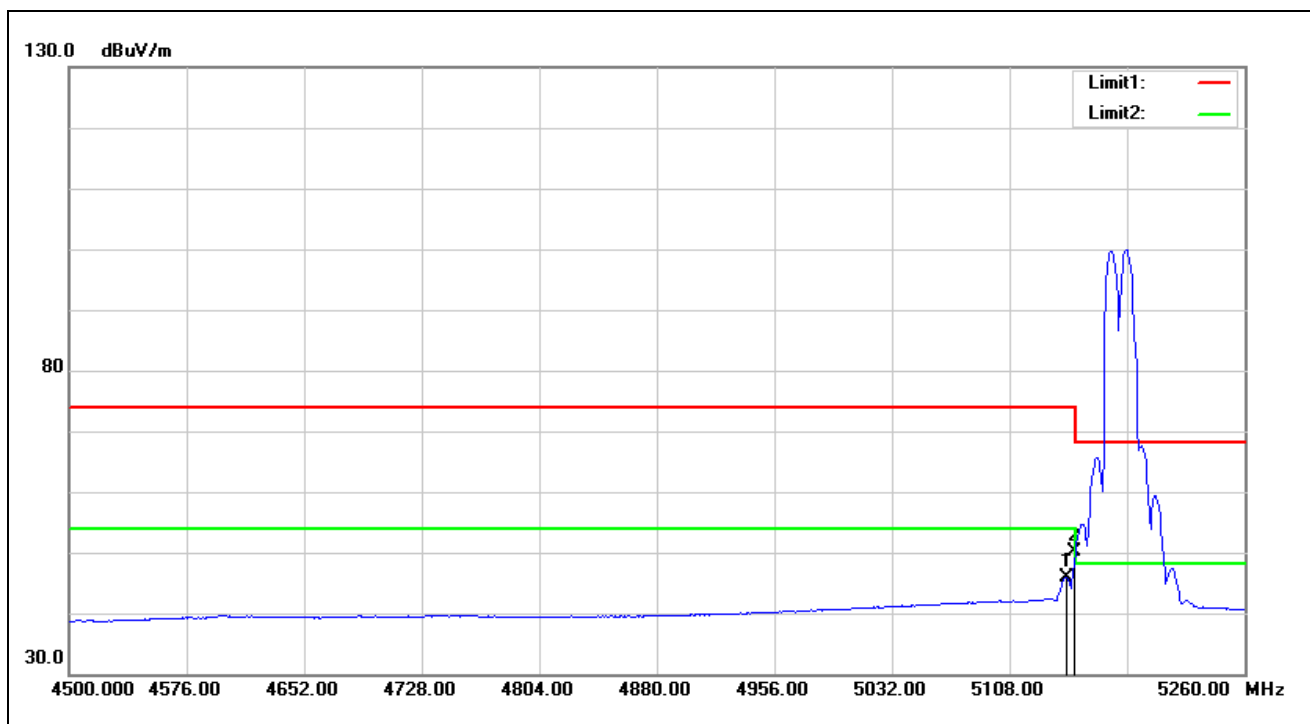


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.480	44.73	1.13	45.86	54.00	-8.14	AVG
2*	5150.000	48.89	1.13	50.02	54.00	-3.98	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

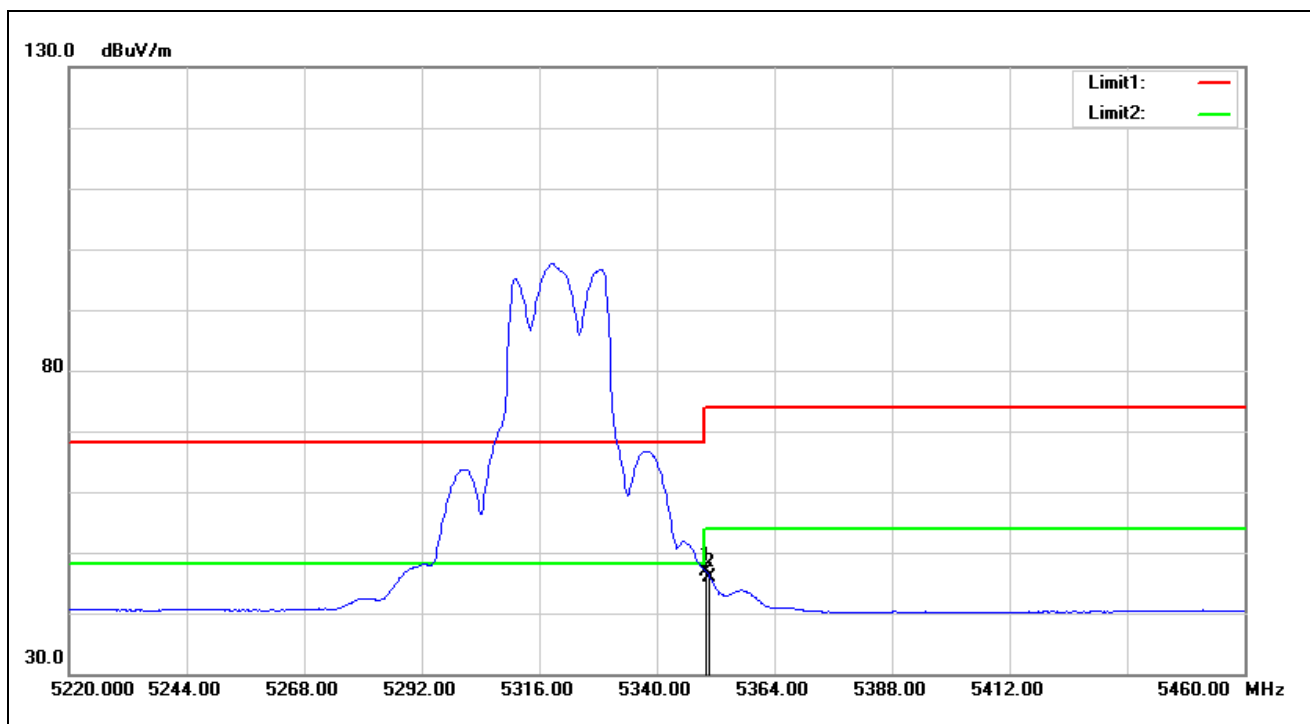


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	45.93	0.89	46.82	54.00	-7.18	AVG
2	5350.800	45.10	0.89	45.99	54.00	-8.01	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

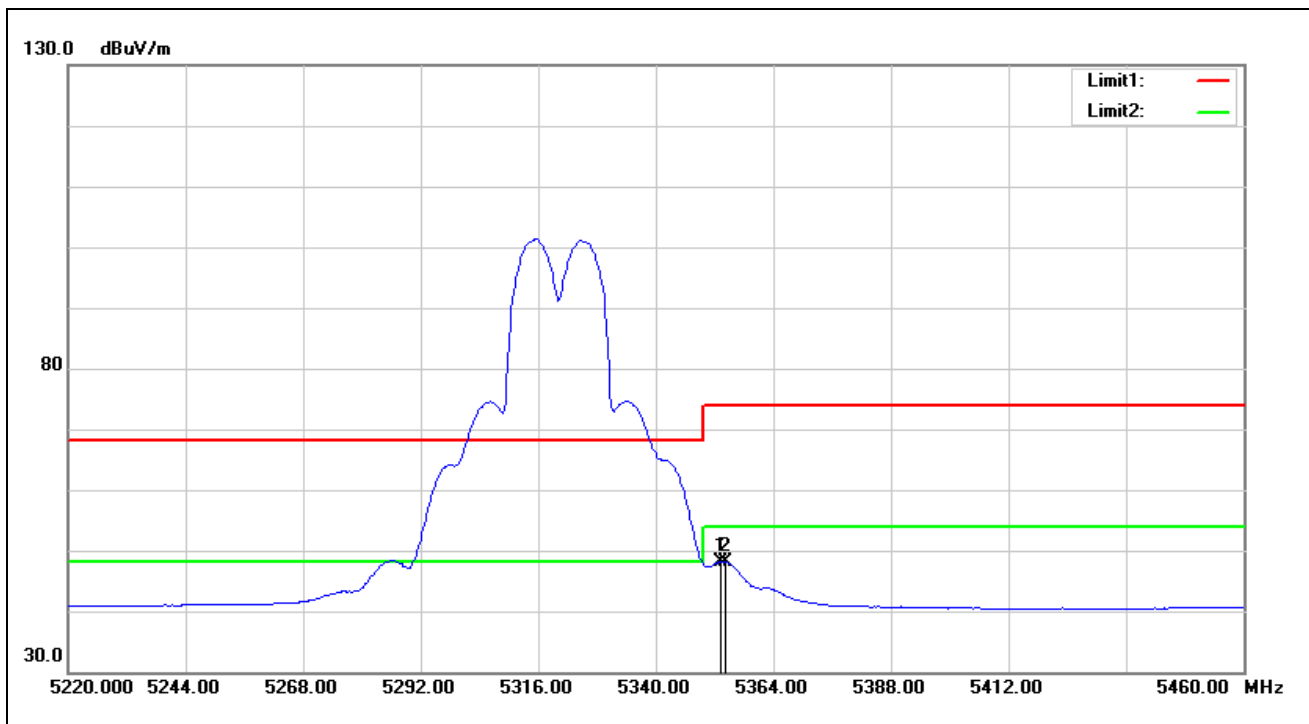


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5353.200	47.21	0.91	48.12	54.00	-5.88	AVG
2	5354.160	47.18	0.91	48.09	54.00	-5.91	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

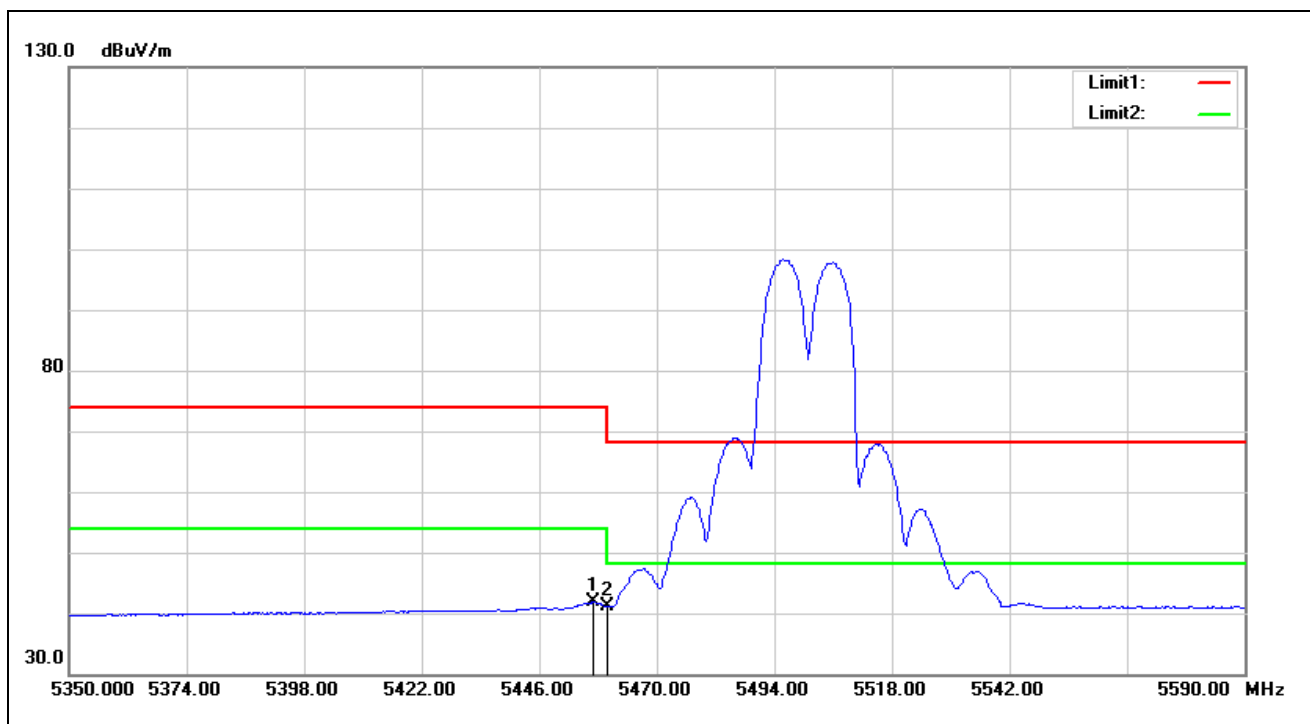


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5457.040	40.05	1.77	41.82	54.00	-12.18	AVG
2	5460.000	39.30	1.79	41.09	54.00	-12.91	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

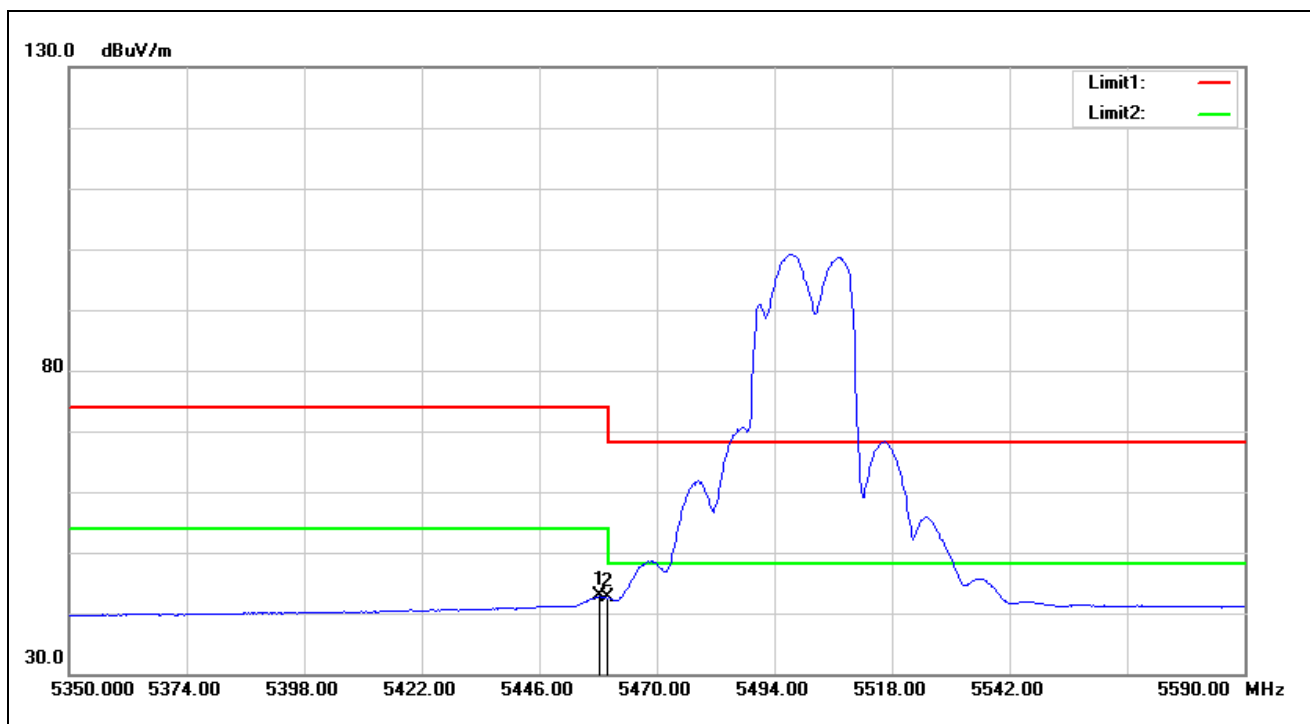


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.240	40.98	1.78	42.76	54.00	-11.24	AVG
2	5460.000	40.73	1.79	42.52	54.00	-11.48	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

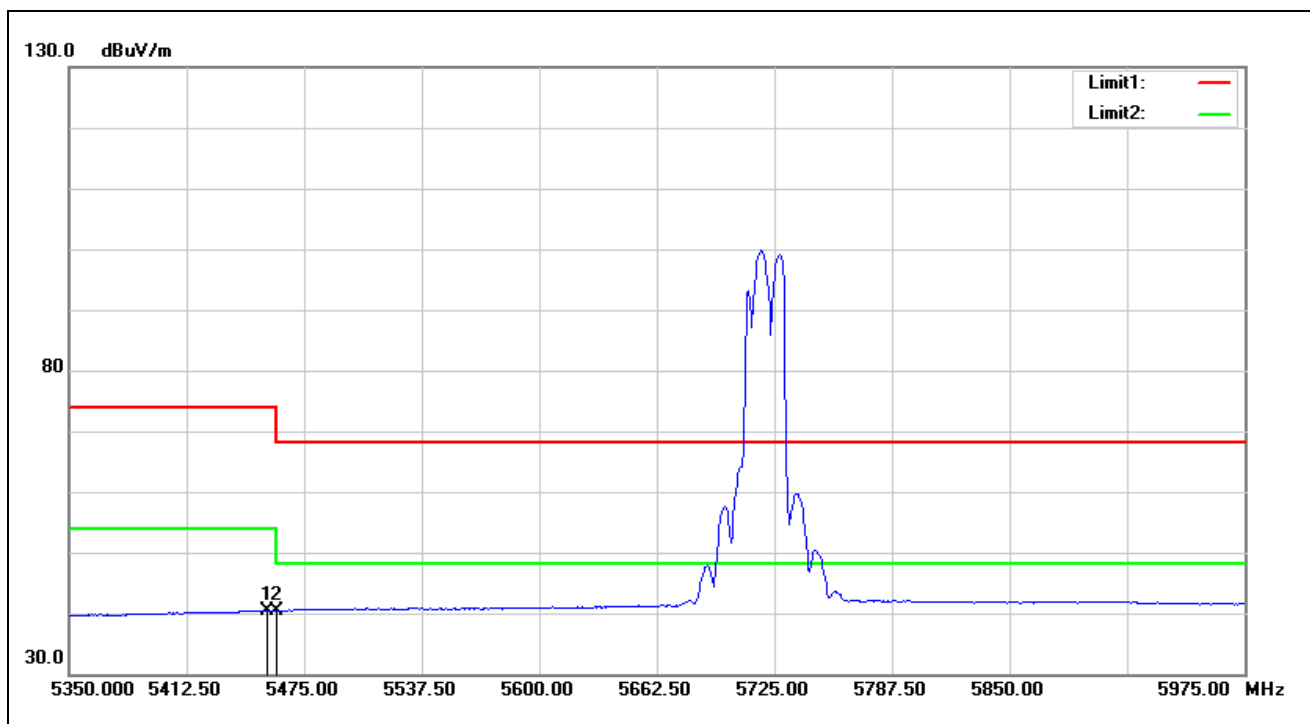


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5455.625	38.72	1.77	40.49	54.00	-13.51	AVG
2	5460.000	38.64	1.79	40.43	54.00	-13.57	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

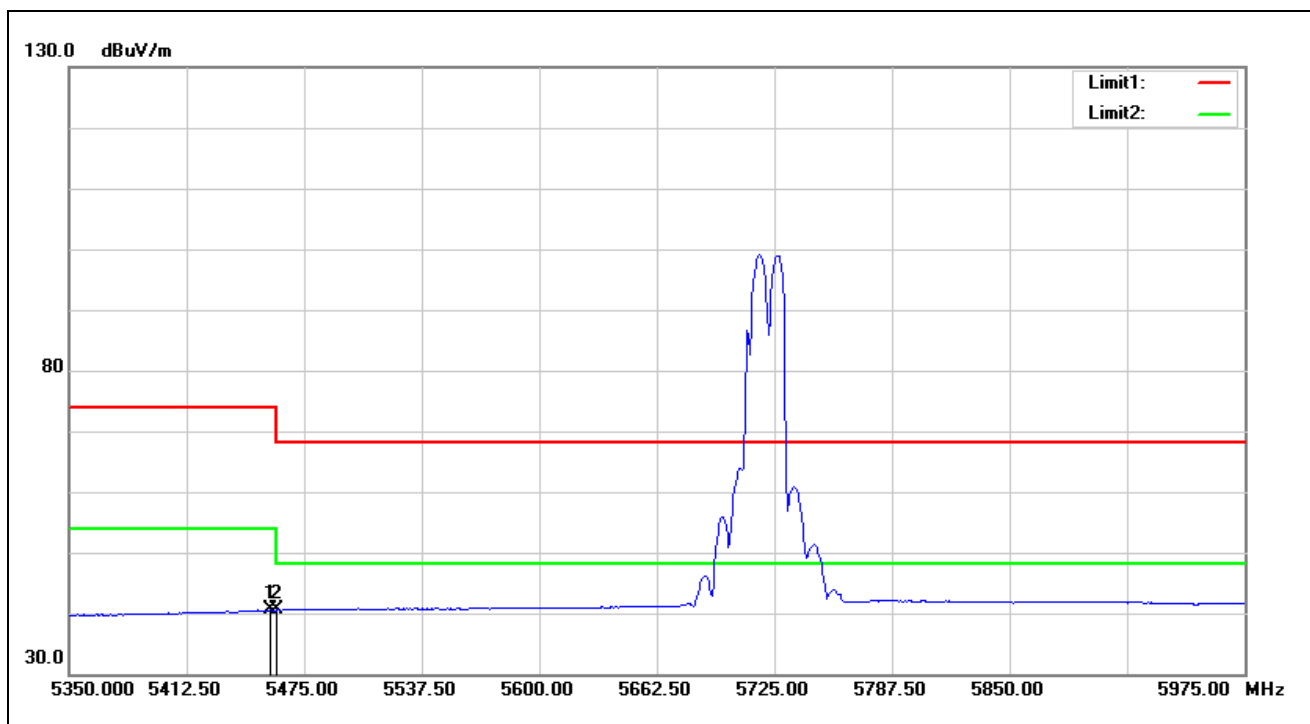


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.875	38.75	1.77	40.52	54.00	-13.48	AVG
2	5460.000	38.72	1.79	40.51	54.00	-13.49	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

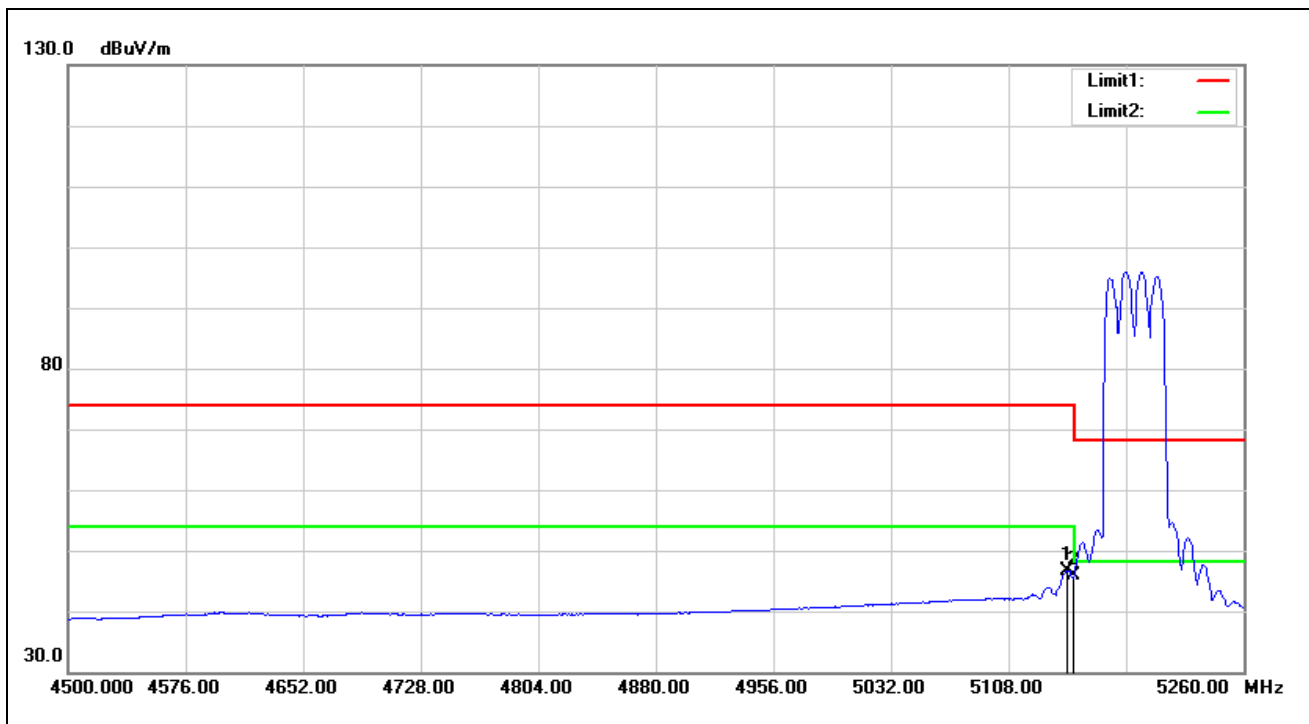


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5146.000	45.62	1.13	46.75	54.00	-7.25	AVG
2	5150.000	44.70	1.13	45.83	54.00	-8.17	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

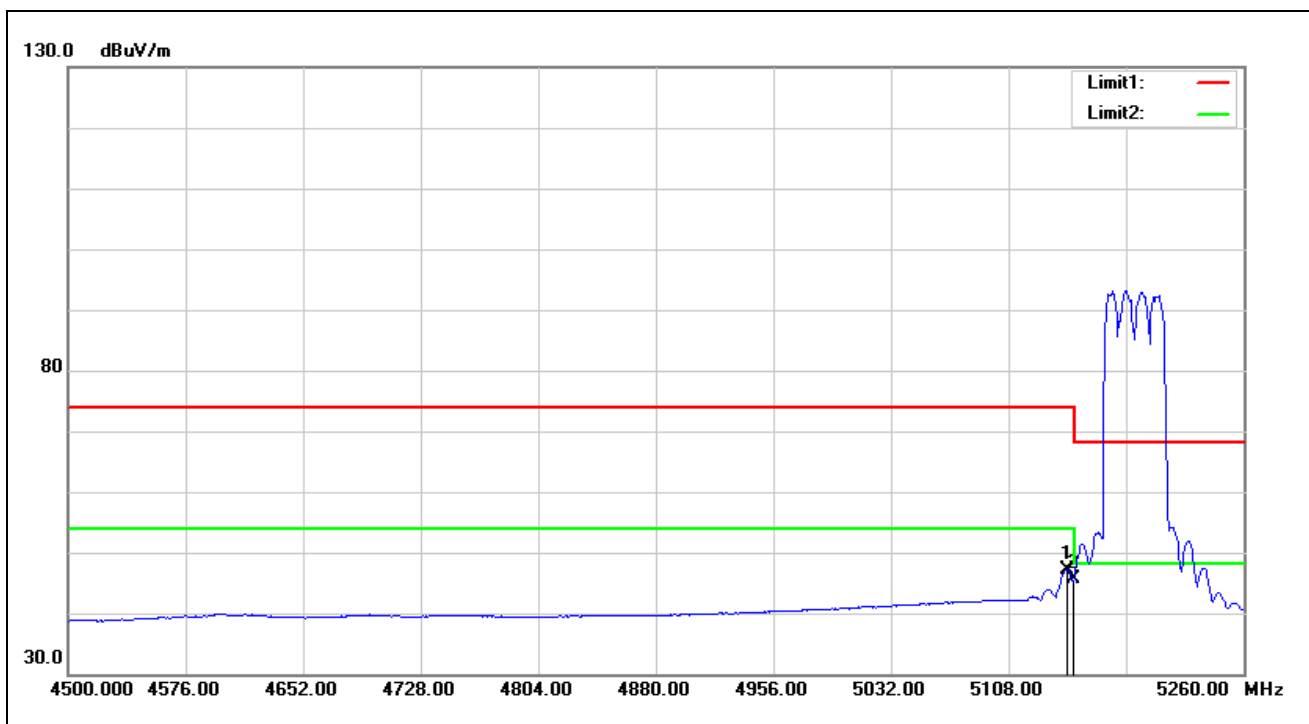


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5146.000	46.12	1.13	47.25	54.00	-6.75	AVG
2	5150.000	44.60	1.13	45.73	54.00	-8.27	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

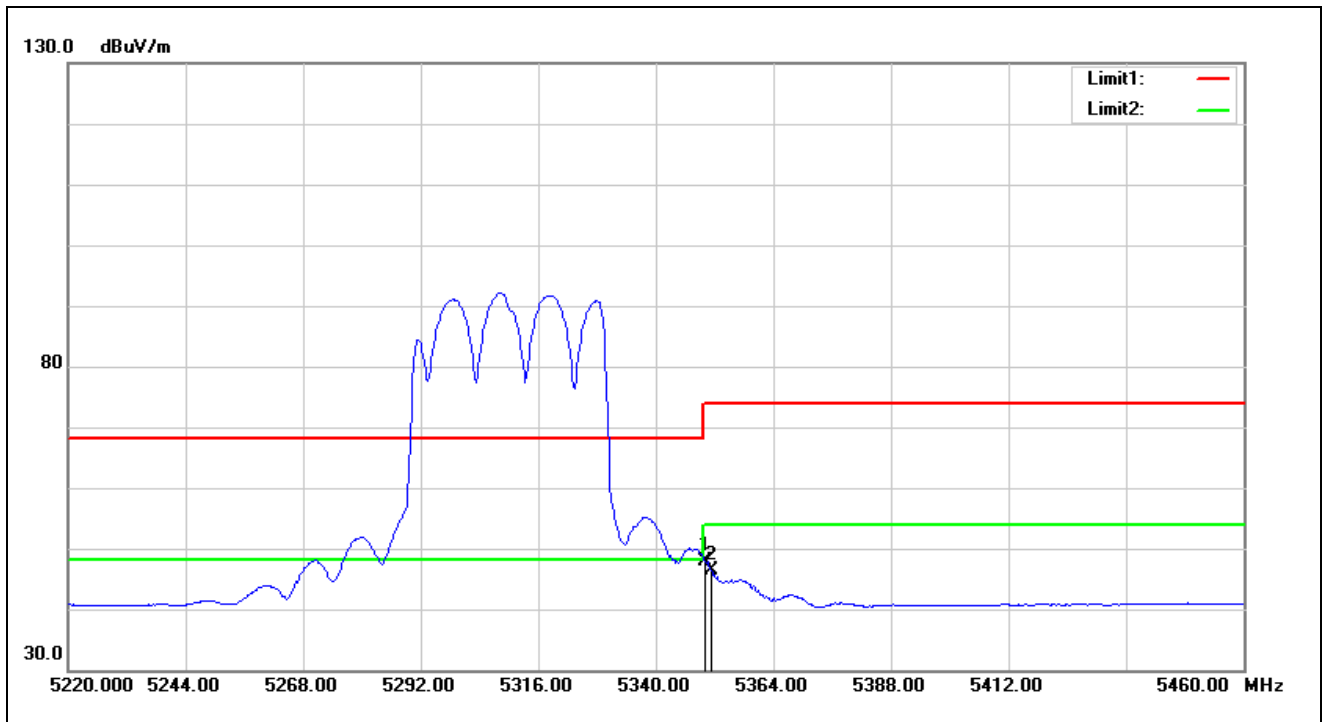


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	47.06	0.89	47.95	54.00	-6.05	AVG
2	5351.280	45.57	0.90	46.47	54.00	-7.53	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

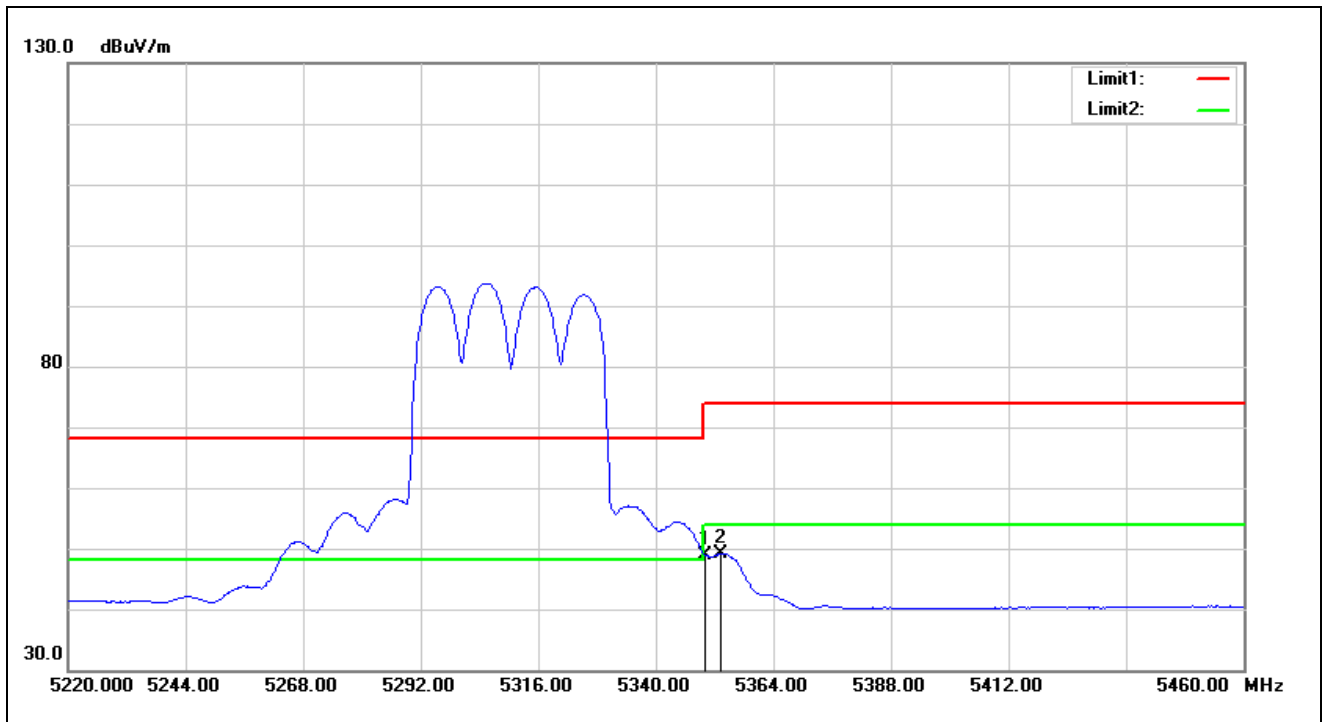


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.03	0.89	48.92	54.00	-5.08	AVG
2*	5353.200	48.31	0.91	49.22	54.00	-4.78	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

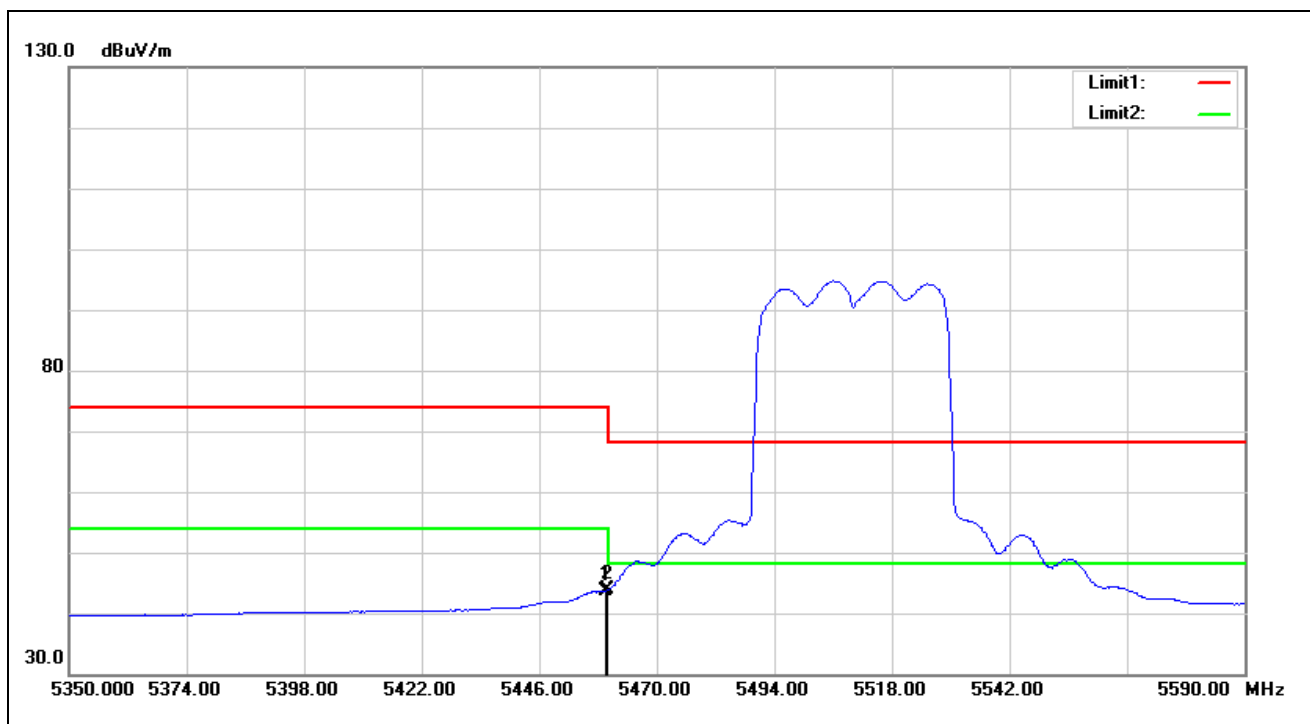


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	41.95	1.79	43.74	54.00	-10.26	AVG
2*	5460.000	42.05	1.79	43.84	54.00	-10.16	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

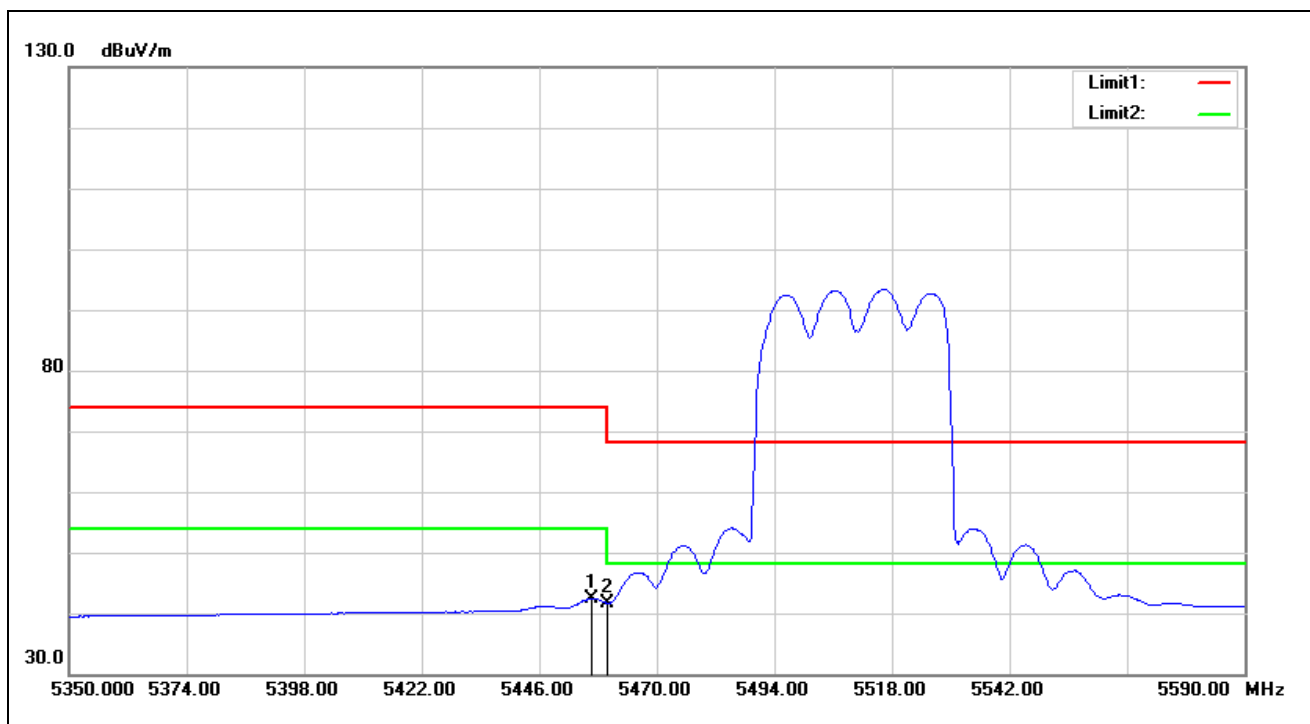


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.800	40.71	1.77	42.48	54.00	-11.52	AVG
2	5460.000	39.90	1.79	41.69	54.00	-12.31	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

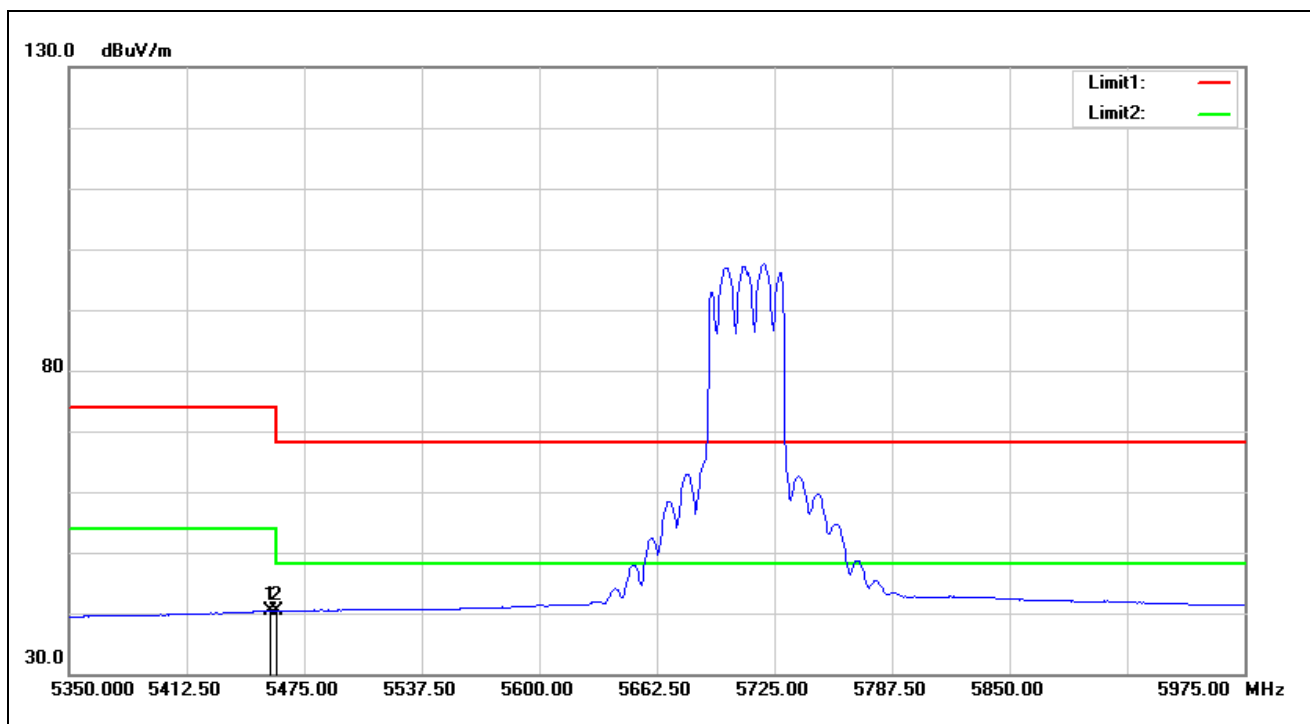


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.875	38.55	1.77	40.32	54.00	-13.68	AVG
2	5460.000	38.53	1.79	40.32	54.00	-13.68	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

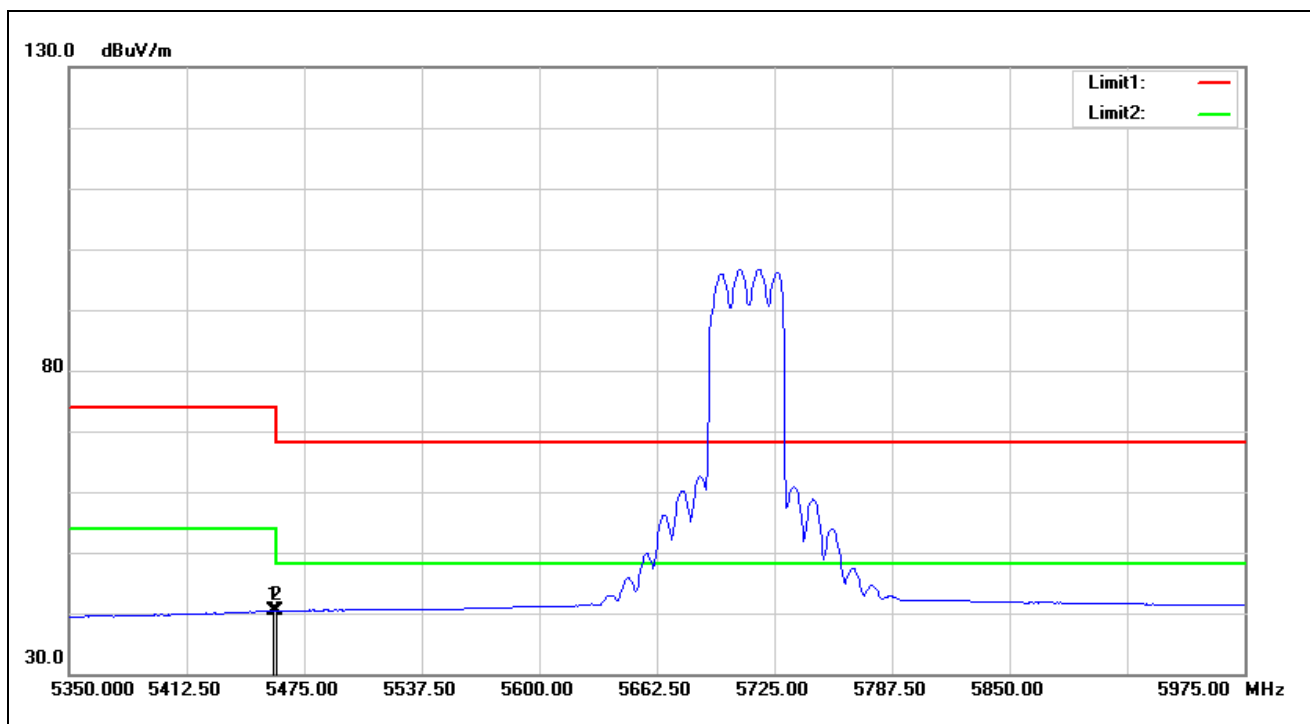


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.750	38.55	1.79	40.34	54.00	-13.66	AVG
2	5460.000	38.53	1.79	40.32	54.00	-13.68	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

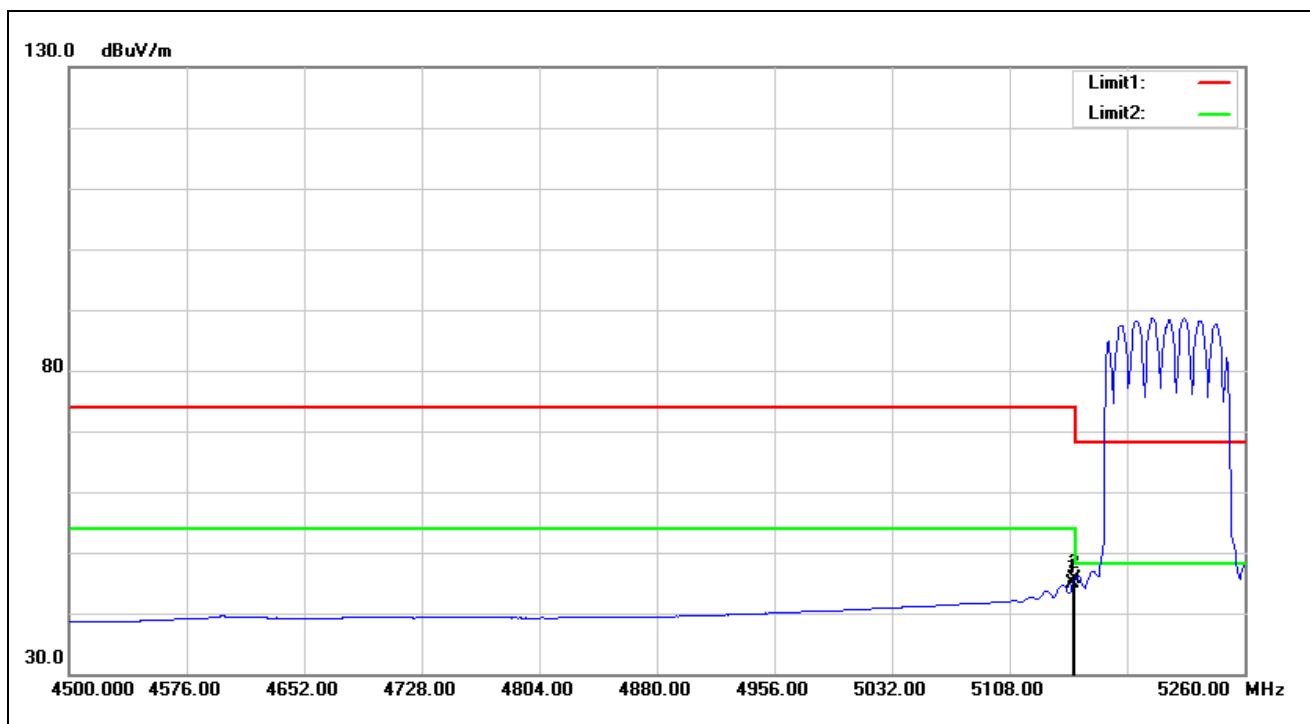


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	43.74	1.13	44.87	54.00	-9.13	AVG
2*	5150.000	44.58	1.13	45.71	54.00	-8.29	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

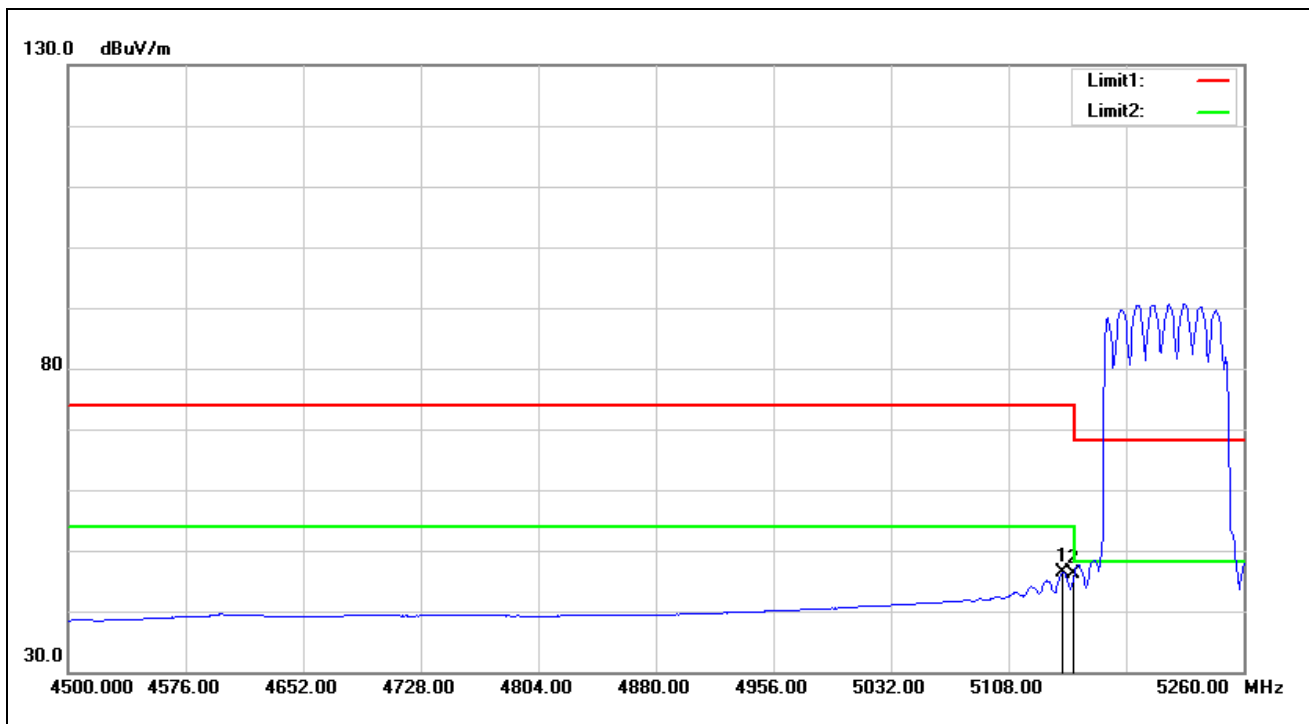


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5142.960	45.28	1.12	46.40	54.00	-7.60	AVG
2	5150.000	44.90	1.13	46.03	54.00	-7.97	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

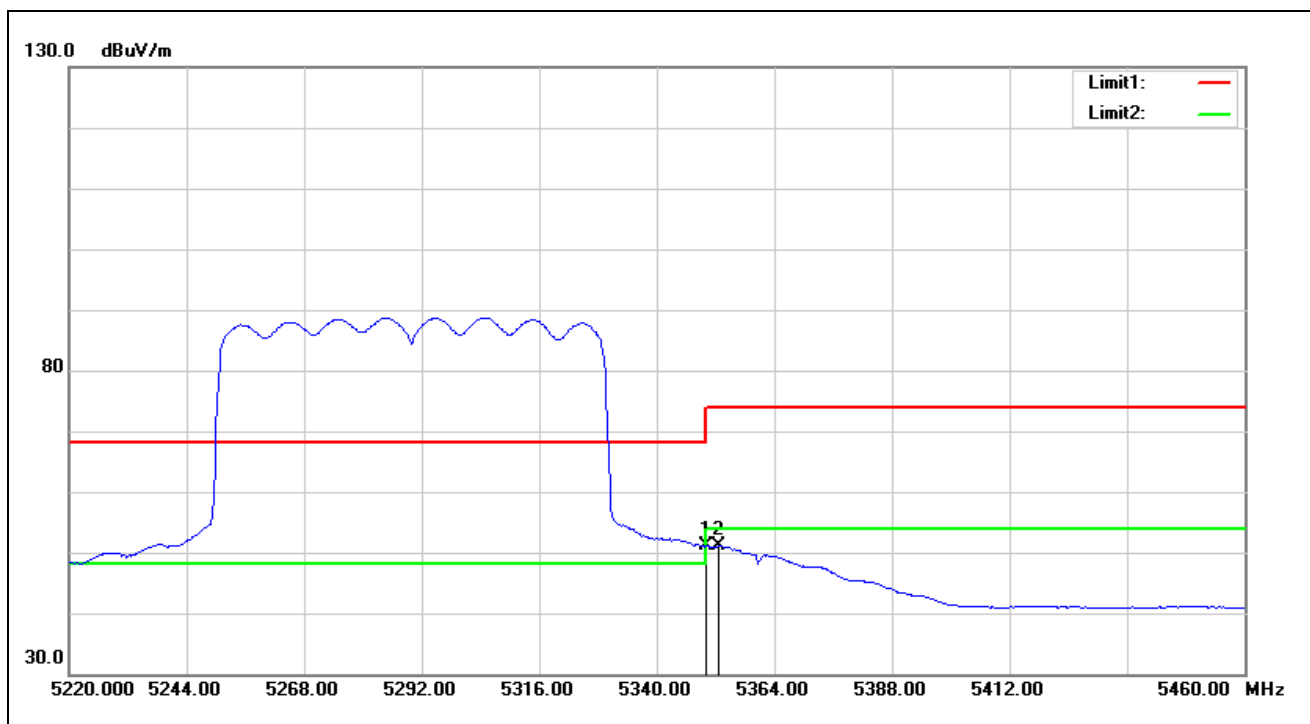


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.14	0.89	51.03	54.00	-2.97	AVG
2*	5352.720	50.17	0.91	51.08	54.00	-2.92	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

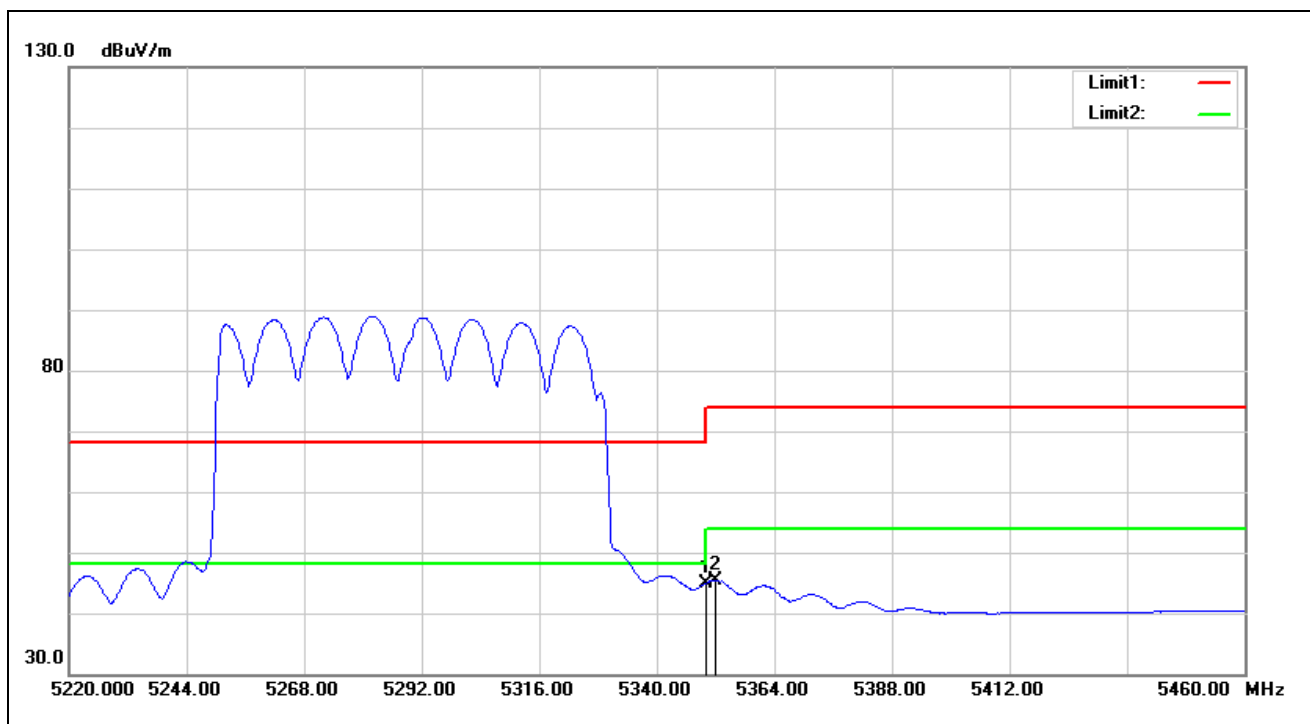


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	44.08	0.89	44.97	54.00	-9.03	AVG
2*	5352.000	44.51	0.90	45.41	54.00	-8.59	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

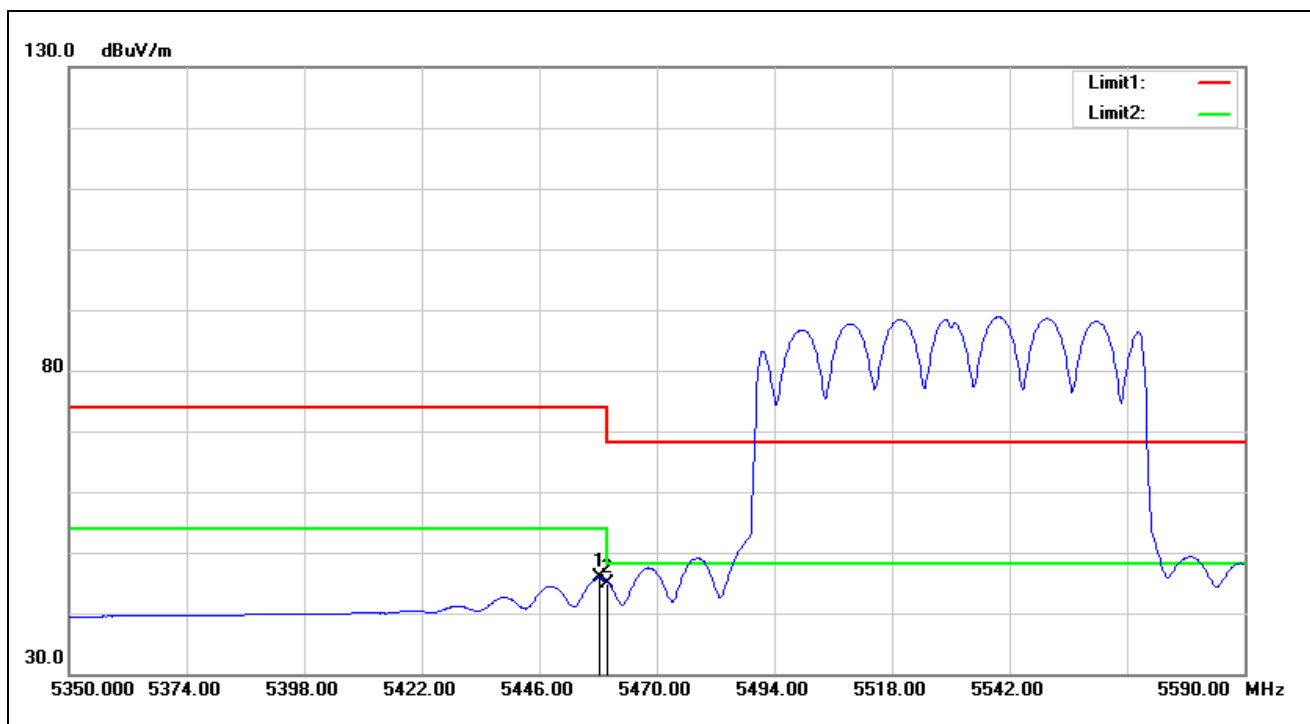


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.240	44.01	1.78	45.79	54.00	-8.21	AVG
2	5460.000	43.12	1.79	44.91	54.00	-9.09	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

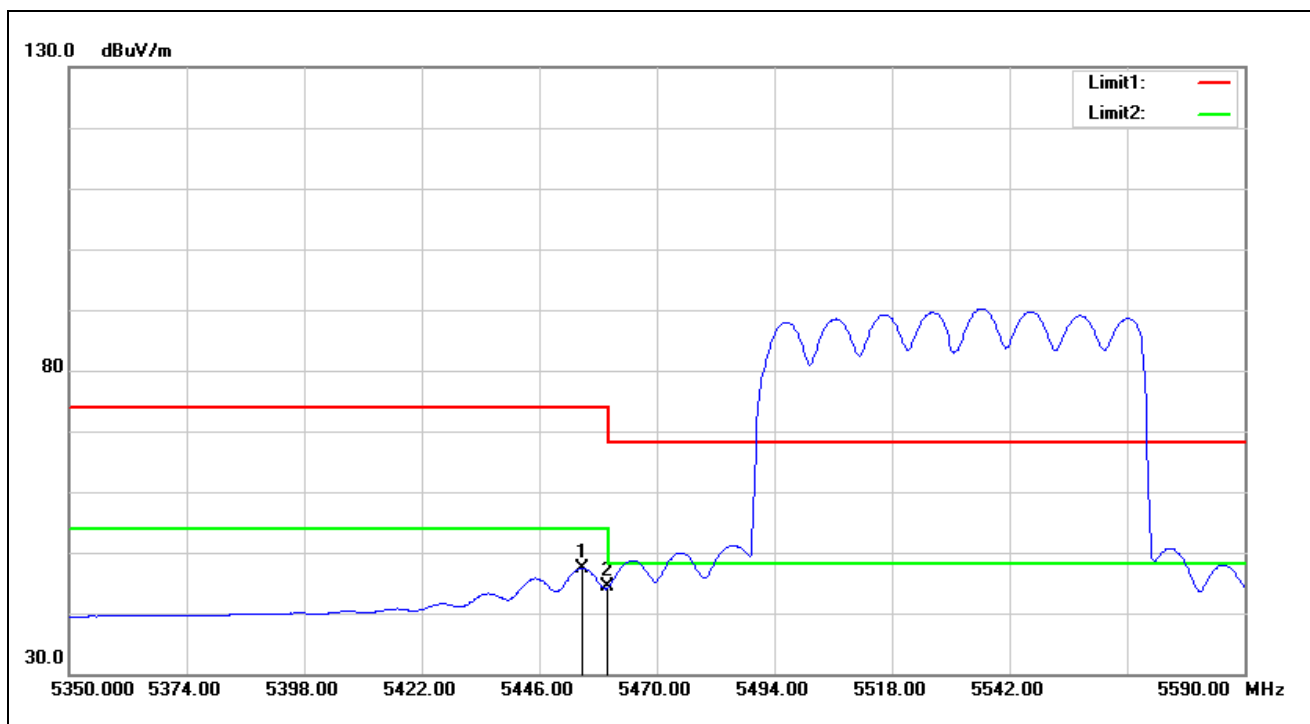


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5454.640	45.68	1.77	47.45	54.00	-6.55	AVG
2	5460.000	42.56	1.79	44.35	54.00	-9.65	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

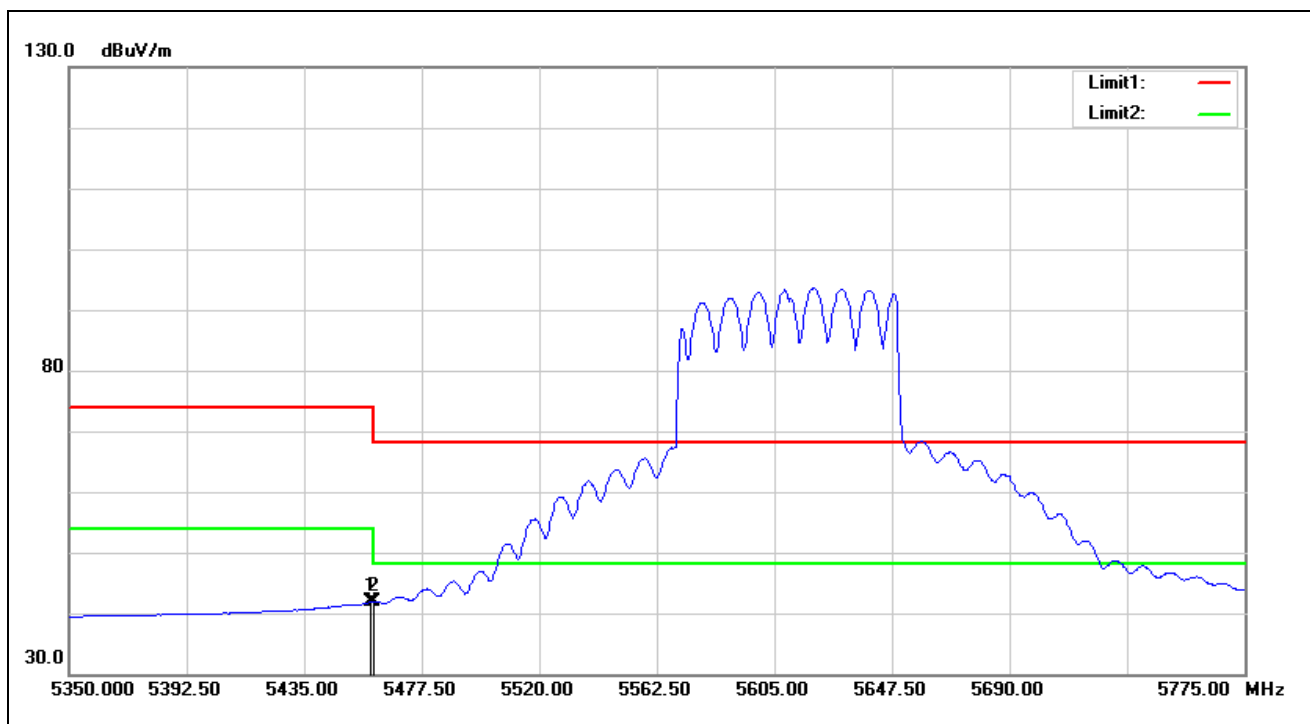


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.800	40.09	1.79	41.88	54.00	-12.12	AVG
2*	5460.000	40.14	1.79	41.93	54.00	-12.07	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

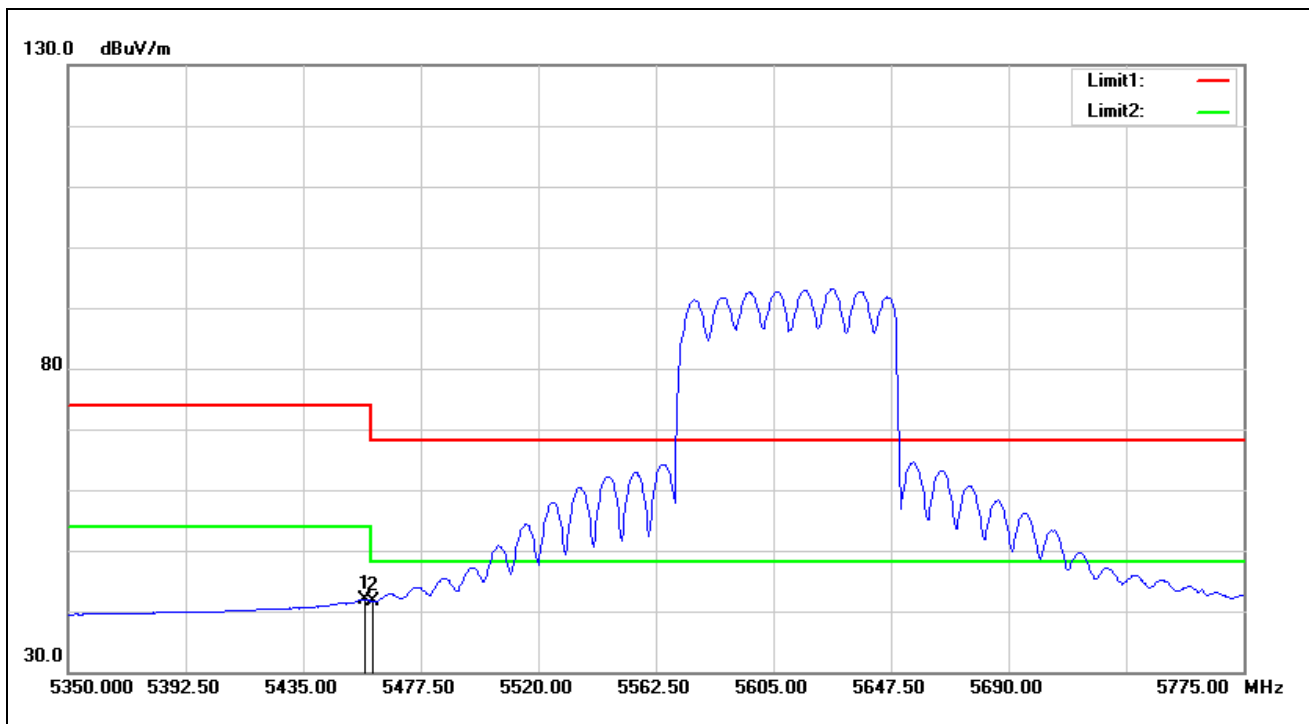


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5457.525	40.20	1.77	41.97	54.00	-12.03	AVG
2	5460.000	39.88	1.79	41.67	54.00	-12.33	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

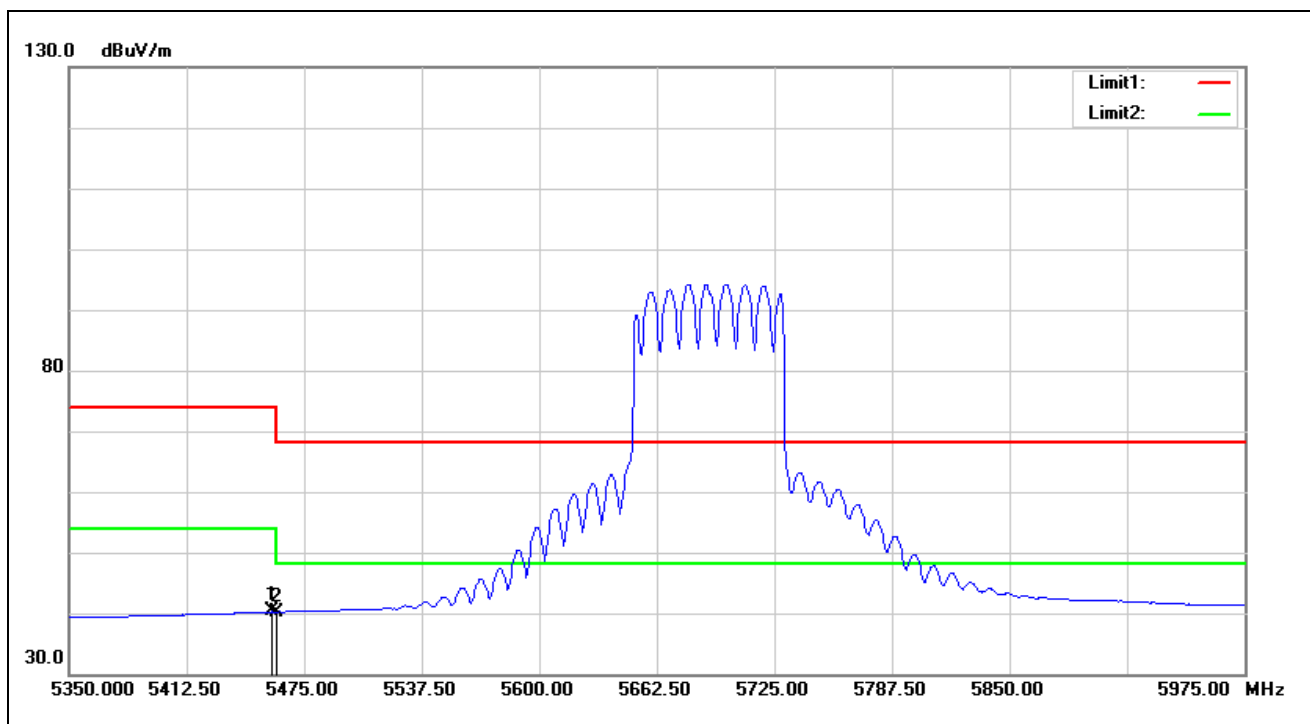


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.125	38.49	1.78	40.27	54.00	-13.73	AVG
2	5460.000	38.45	1.79	40.24	54.00	-13.76	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

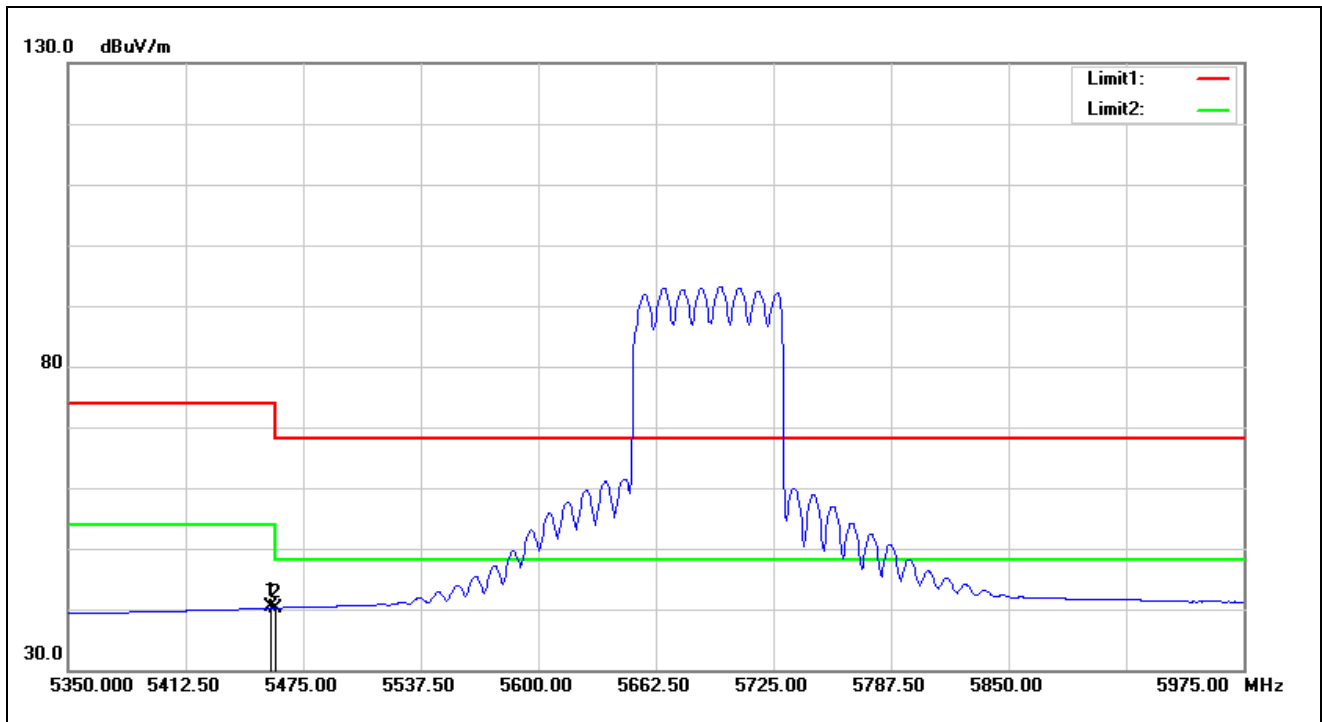


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5457.500	38.51	1.77	40.28	54.00	-13.72	AVG
2	5460.000	38.43	1.79	40.22	54.00	-13.78	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

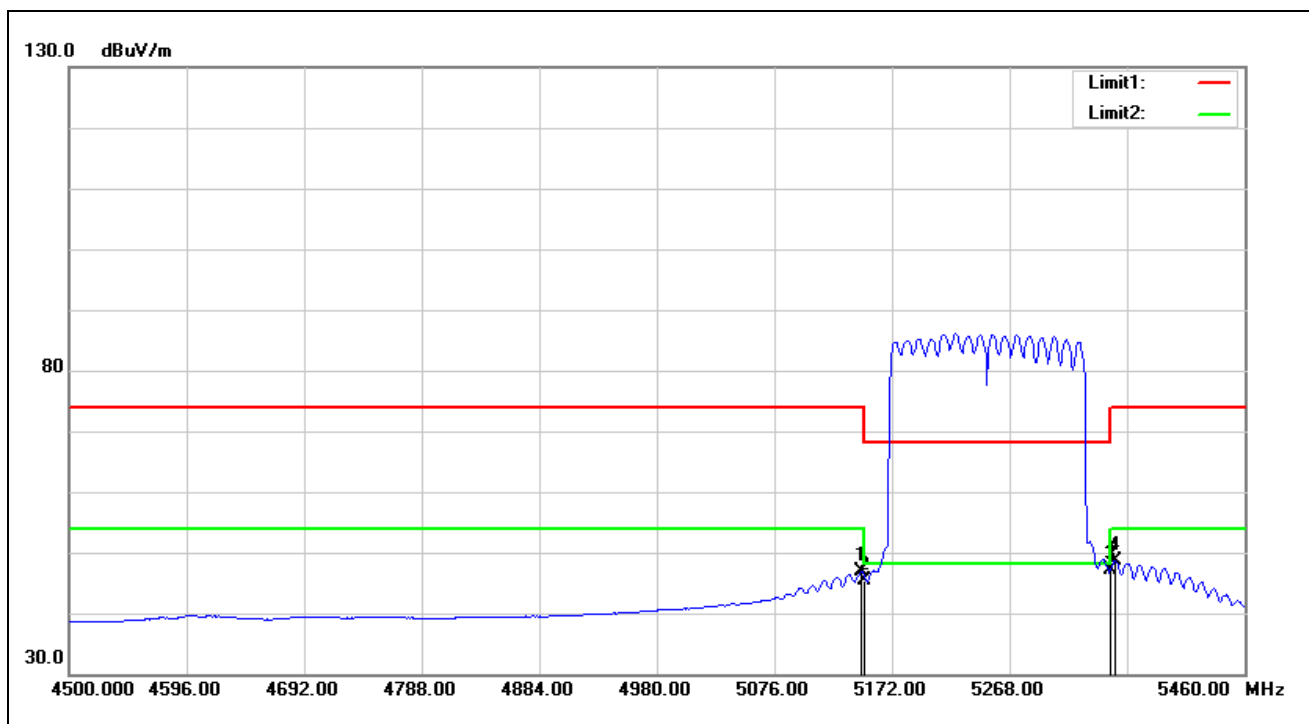


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.040	45.67	1.13	46.80	54.00	-7.20	AVG
2	5150.000	44.30	1.13	45.43	54.00	-8.57	AVG
3	5350.000	46.31	0.89	47.20	54.00	-6.80	AVG
4*	5354.400	47.73	0.92	48.65	54.00	-5.35	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

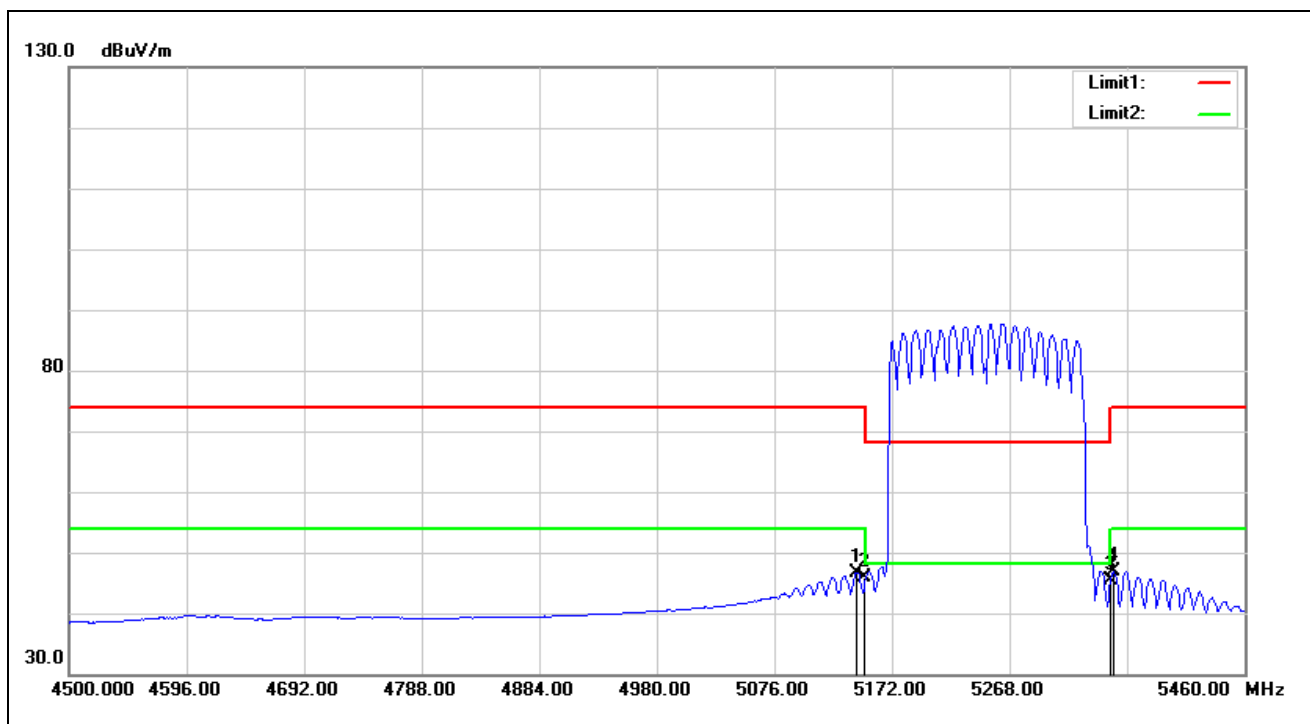


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.200	45.63	1.12	46.75	54.00	-7.25	AVG
2	5150.000	44.73	1.13	45.86	54.00	-8.14	AVG
3	5350.000	44.59	0.89	45.48	54.00	-8.52	AVG
4*	5352.480	45.87	0.90	46.77	54.00	-7.23	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

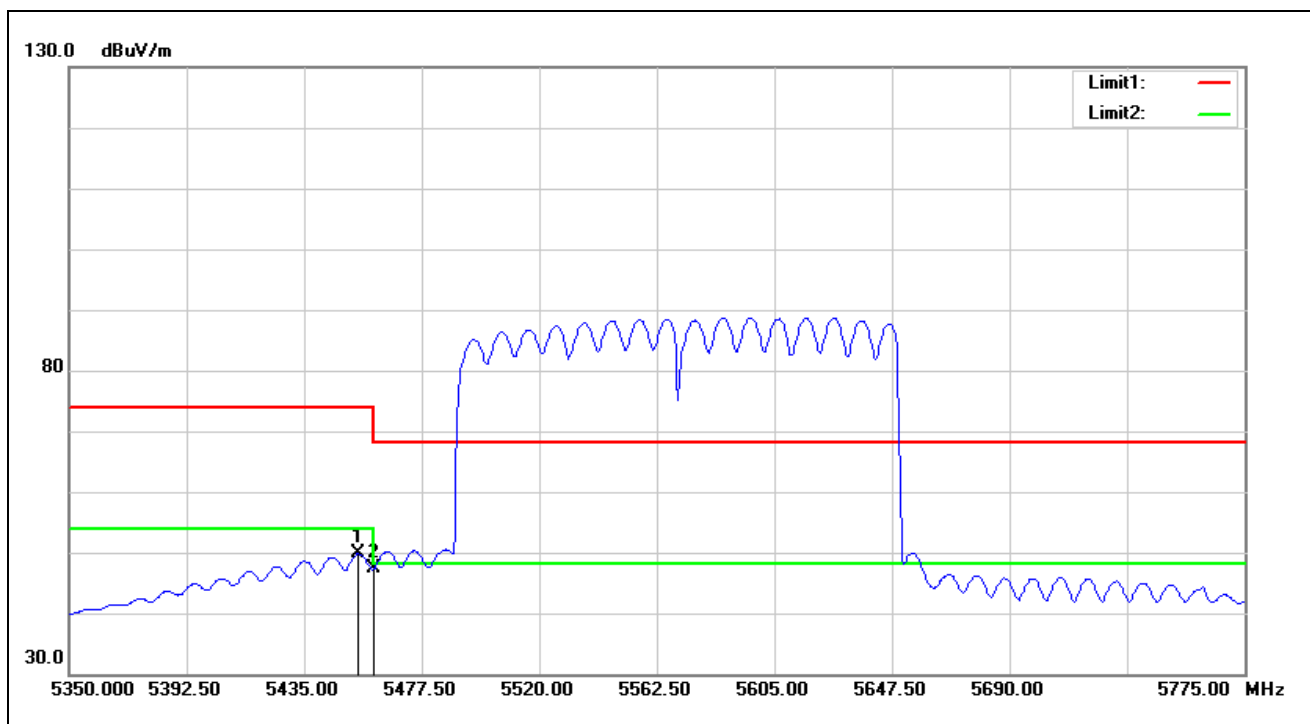

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5454.550	48.02	1.77	49.79	54.00	-4.21	AVG
2	5460.000	45.47	1.79	47.26	54.00	-6.74	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

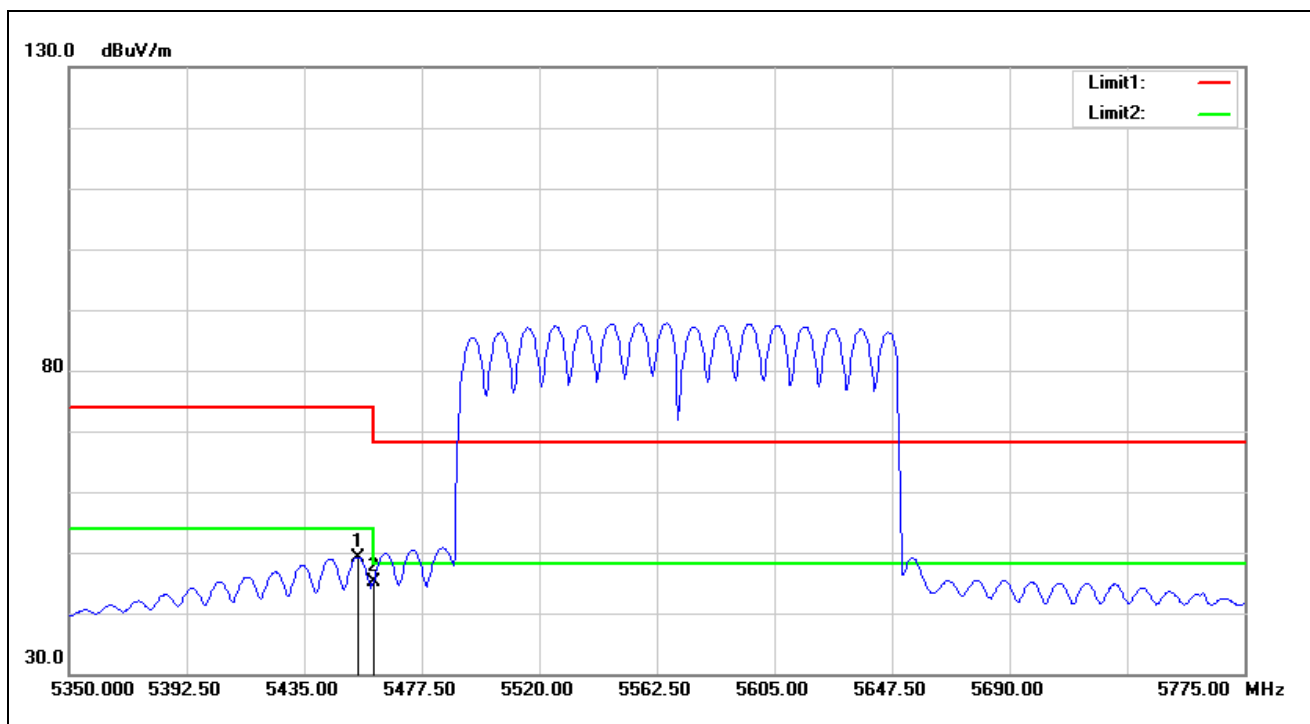

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5454.550	47.47	1.77	49.24	54.00	-4.76	AVG
2	5460.000	43.37	1.79	45.16	54.00	-8.84	AVG

5.3. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density and E.I.R.P. Spectral Density Measurement

Reference Appendix A / Appendix B

---END---