

K4W 2.4 GHz PCB antenna Specification

By KKM

1 KEYWORDS

- *K4W*
- *2.4 GHz*
- *Inverted F Antenna*

2 INTRODUCTION

The PCB antenna used on the K4W reference design is described in this application note.

This application note describes the antenna dimensions, the RF performance

and considerations for complying with regulatory limits when using this design.

The antenna design requires no more than 14.7 x 3.7 mm of space and ensures a VSWR ratio of less than 2 across the 2.4 GHz ISM band when connected to a 50 ohm source.

3 Testing Conditions

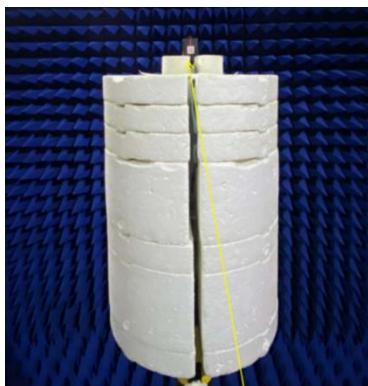


Figure 2:Testing environment





Figure 3:Testing 3D microwave darkroom(6m*6m*6m)

Product Testing Conditions

Parameters	Value
Working Temp	-30°C ~ +60°C

KKM


5 S Parameter_Return Loss&VSWR - Smith

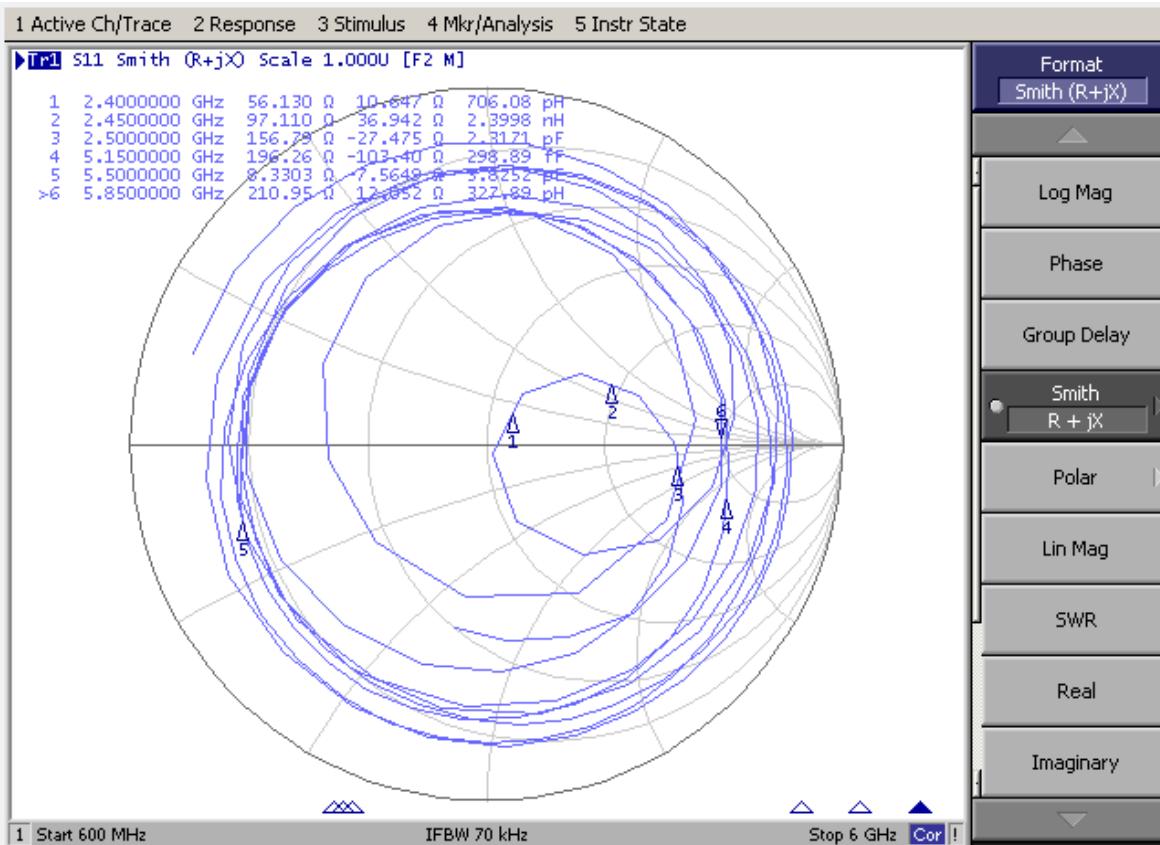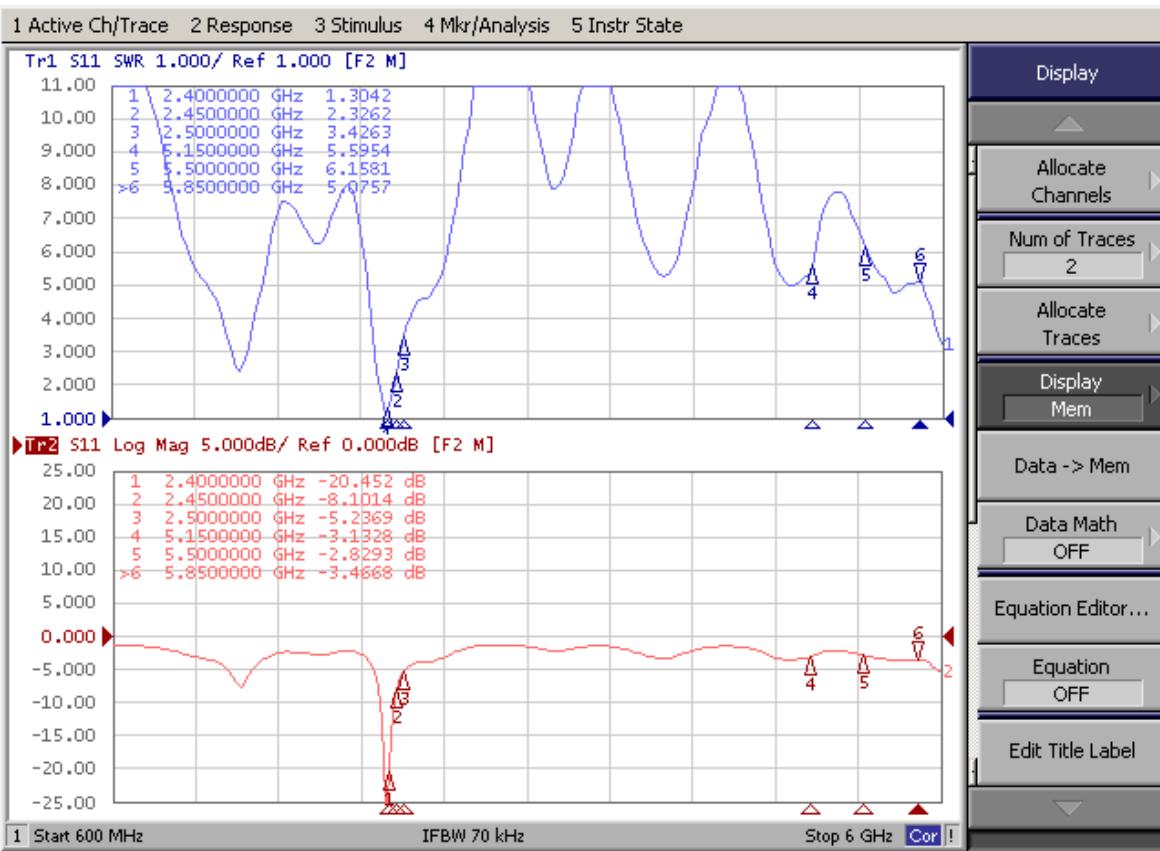


6 Efficiency and Gain

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Gain (dBi)	0.31	-0.16	-0.36	-0.13	-0.33	-0.81	-0.95	-1.08	-1.78	-1.91	-2.34
Efficiency (%)	19.69	20.19	20.08	20.29	19.64	18.37	18.20	17.52	16.08	15.75	14.29

7 Antenna Pattern

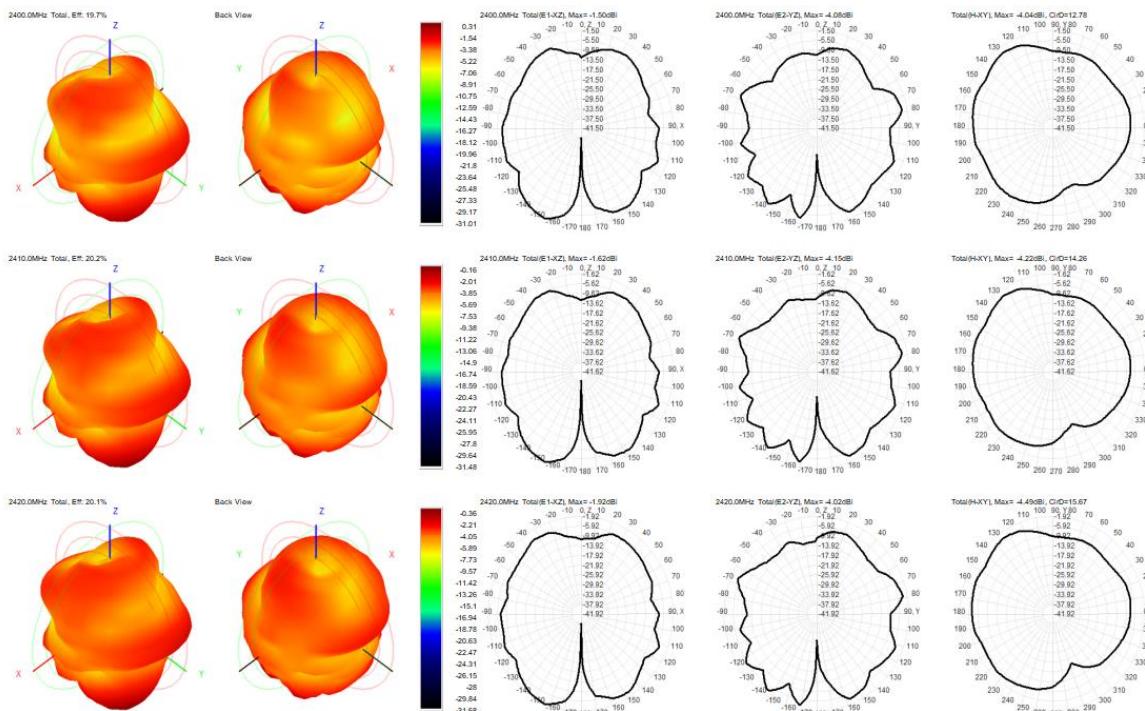

KKM

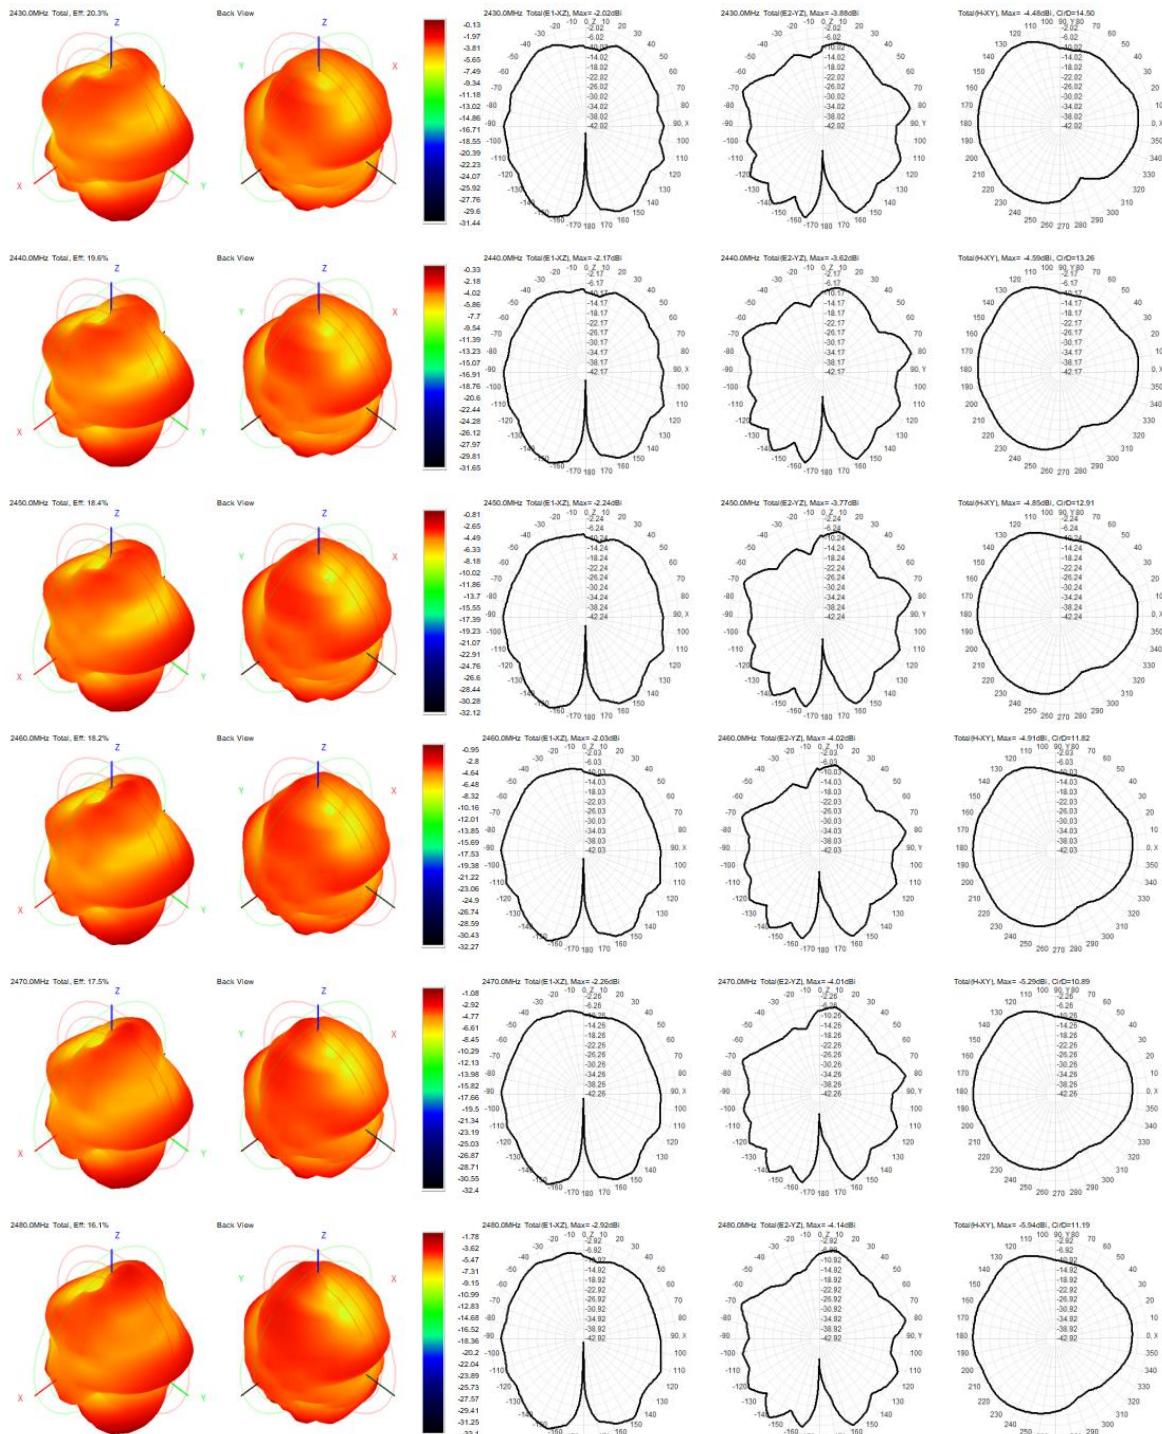

KKM

