



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.407

TEST REPORT

For

Shopify Inc.

151 O'Connor Street, Ground Floor, Ottawa, Ontario, Canada

FCC ID: 2AY2DS2004

Report Type: Original Report	Product Type: POS tablet
Project Engineer:	Stone Zhang <i>Stone Zhang</i>
Report Number:	RKSA210419002-00D
Report Date:	2021-05-29
Reviewed By:	Oscar Ye EMC Manager <i>Oscar Ye</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	13
SUPPORT EQUIPMENT LIST AND DETAILS	13
EXTERNAL I/O CABLE.....	13
BLOCK DIAGRAM OF TEST SETUP	14
SUMMARY OF TEST RESULTS	16
TEST EQUIPMENT LIST	17
FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION	18
TEST RESULT	18
FCC §15.203 – ANTENNA REQUIREMENT	19
APPLICABLE STANDARD	19
ANTENNA CONNECTOR CONSTRUCTION	19
FCC §15.407 (b) (8) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP.....	20
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	21
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	21
TEST RESULTS SUMMARY	21
TEST DATA	21
§15.205 & §15.209 & §15.407(B) (1), (4), (8),(9) – UNDESIRABLE EMISSION & RESTRICTED BANDS.....	26
APPLICABLE STANDARD	26
EUT SETUP.....	26
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	27
TEST PROCEDURE	27
CORRECTED AMPLITUDE & MARGIN CALCULATION	28
TEST DATA	28
FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH	66
APPLICABLE STANDARD	66
TEST PROCEDURE	66
TEST DATA	67
FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	90
APPLICABLE STANDARD	90
TEST PROCEDURE	90
TEST DATA	91
FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY	93
APPLICABLE STANDARD	93

TEST PROCEDURE	93
TEST DATA	93

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Shopify Inc.	
Tested Model	S2004	
Product Type	POS tablet	
Power Supply	DC 5V from adapter and DC 3.85V from battery	
Maximum Output Power	5G Wi-Fi B1:	5G Wi-Fi B4:
	802.11a:13.30 dBm	11.86 dBm
	802.11ac20:12.68 dBm	11.91 dBm
	802.11n-HT20:12.33 dBm	11.56 dBm
	802.11ac40:11.46 dBm	9.95 dBm
	802.11n-HT40:11.58 dBm	10.16 dBm
	802.11ac80:8.09 dBm	6.84 dBm
Operating Frequency	5G Wi-Fi B1: 5180-5240 MHz, B4: 5745-5825 MHz	
Channel Number	5G Wi-Fi B1: 7, B4: 8	
Channel Separation	5G Wi-Fi: a/ac20/n20: 20 MHz, ac40/n40: 40 MHz, ac80: 80 MHz	
Modulation Type	OFDM	
Antenna Type	FPC Antenna	
*Maximum Antenna Gain	1.71 dBi	

Note: The Maximum Antenna Gain was declared by the manufacturer.

**All measurement and test data in this report was gathered from production sample serial number: RKSA210419002-1 (Assigned by the BACL. The EUT supplied by the applicant was received on 2021-04-19)*

Objective

This type approval report is prepared on behalf of *Shopify Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS Submittal with FCC ID: 2AY2DS2004
 FCC Part 15.247 DTS Submittal with FCC ID: 2AY2DS2004
 FCC Part 15B JBP submissions with FCC ID: 2AY2DS2004

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan).

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/ac20/n20 mode Channel 36, 40, 48 were tested.
 802.11n40/ac40 mode Channel 38, 46 were tested.
 802.11ac80 mode Channel 42 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For **5725~5850 MHz** band,

802.11a/ac20/n20 mode Channel 149, 157, 165 were tested.
 802.11n40/ac40 mode Channel 151, 159 were tested.
 802.11ac80 mode Channel 155 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

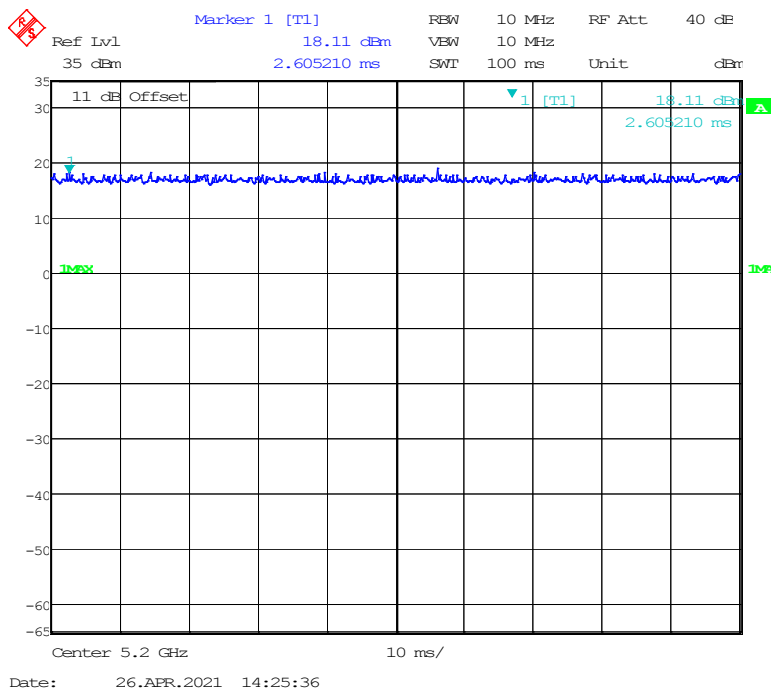
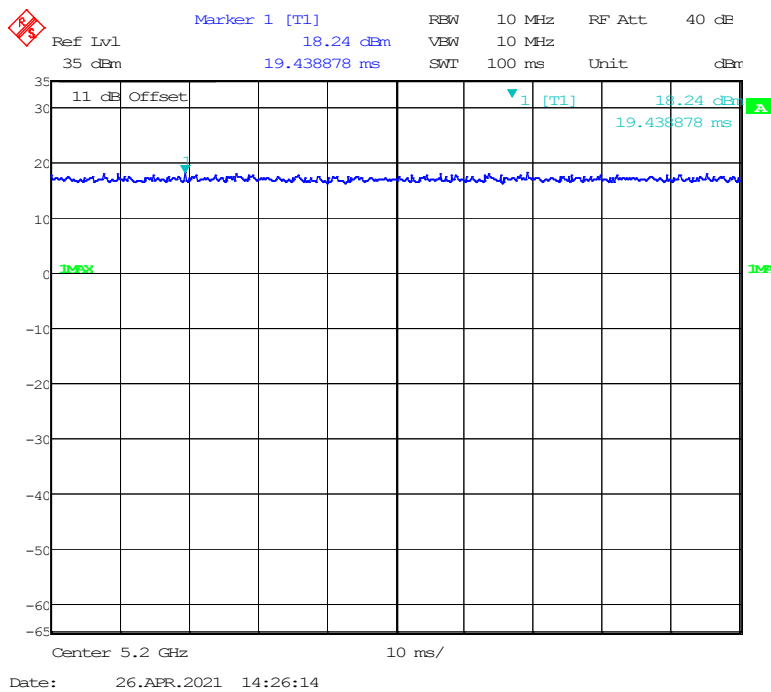
EUT Exercise Software



RF test tool: QRCT



The worst case was performed under:



Mode	Data rate	*Power level setting	
		5150-5250 Band	5725-5850 Band
802.11a	6 Mbps	18.5	18.5
802.11ac20	MCS0	18.5	18.5
802.11n-HT20	MCS0	18.5	18.5
802.11ac40	MCS0	18.5	18.5
802.11n-HT40	MCS0	18.5	18.5
802.11ac80	MCS0	18.5	18.5

Note: The power level setting was declared by the applicant.

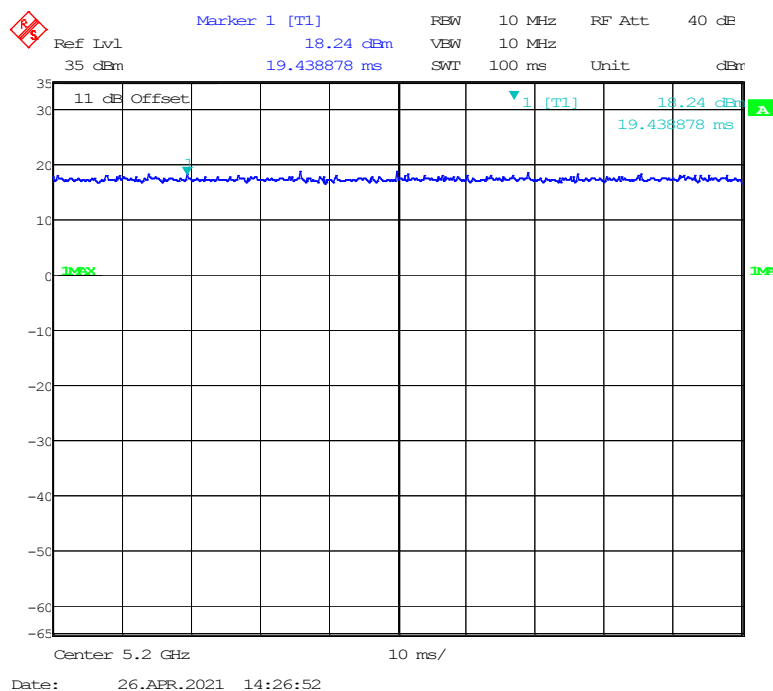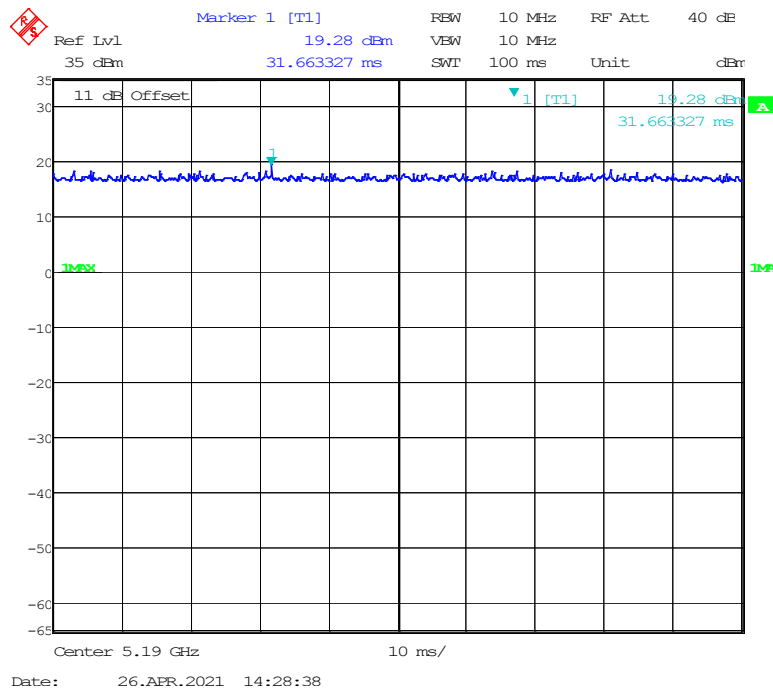
Duty Cycle**5150MHz-5250MHz Band:****802.11a mode****802.11ac20 mode**

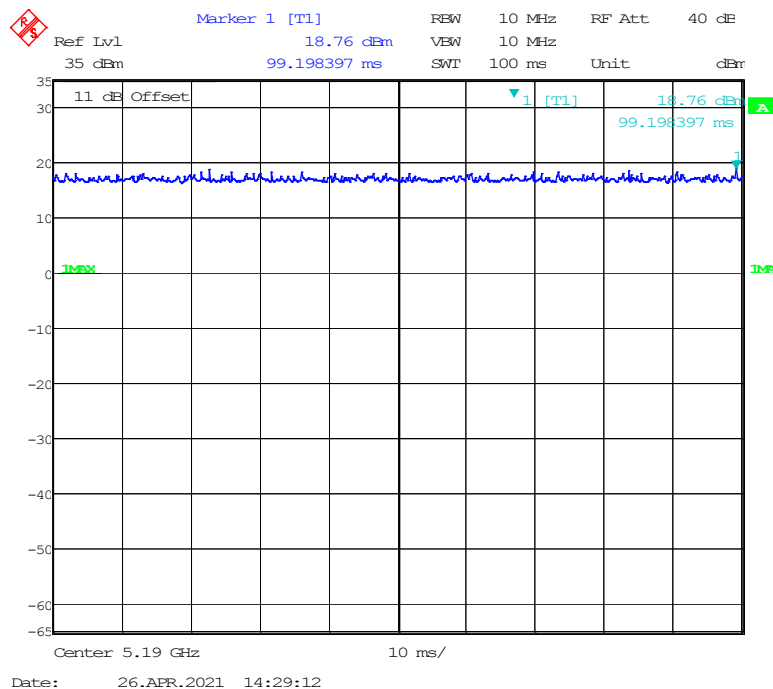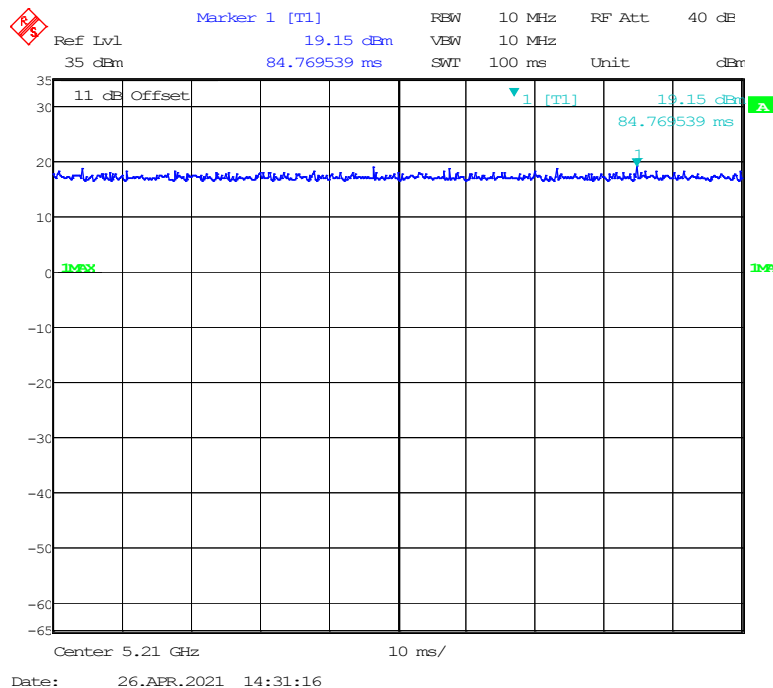802.11n-HT20 mode**802.11ac40 mode**

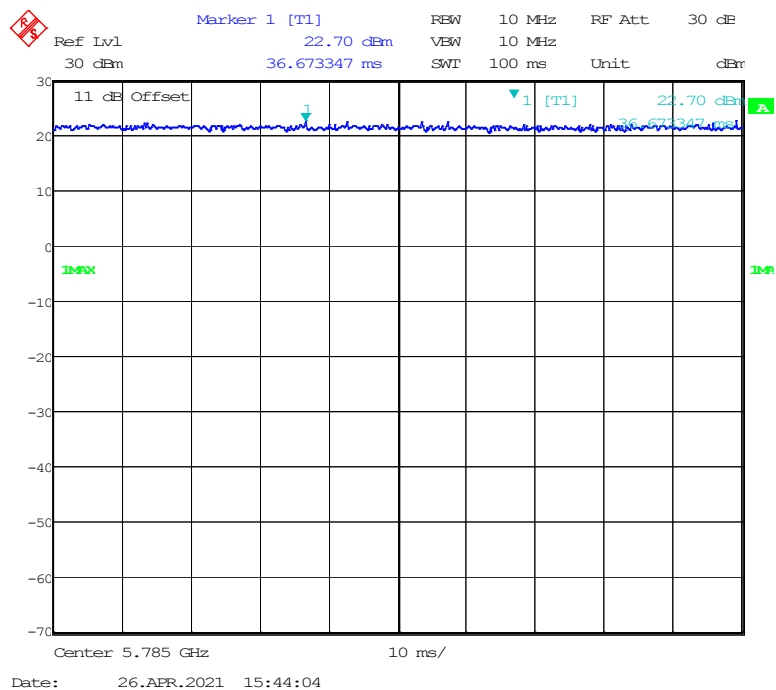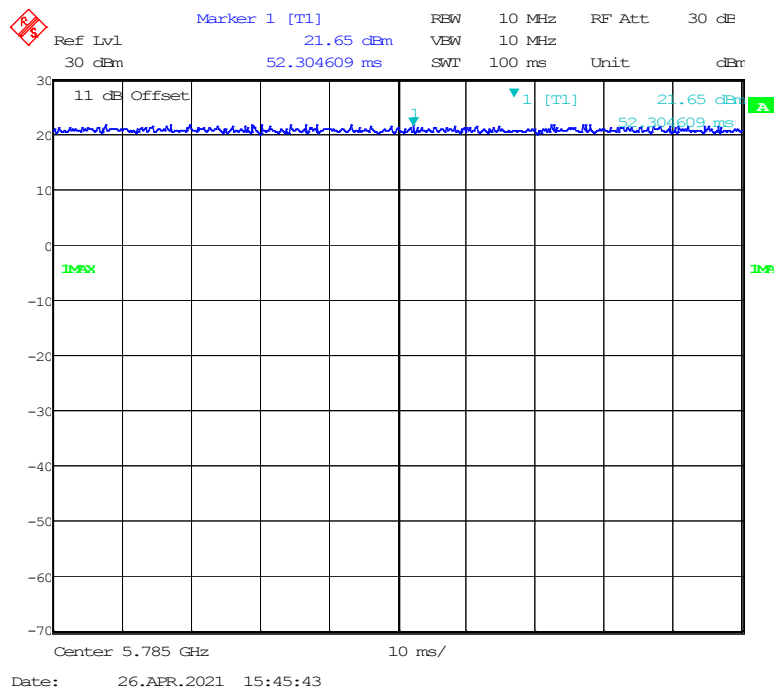
802.11n-HT40 mode**802.11ac80 mode**



5725MHz-5850MHz Band:**802.11a mode****802.11ac20 mode**

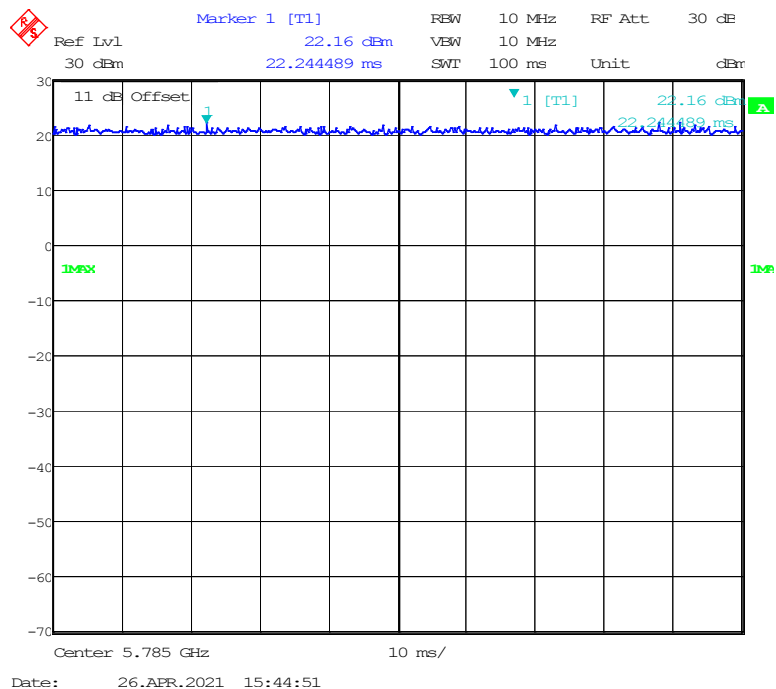802.11n-HT20 mode



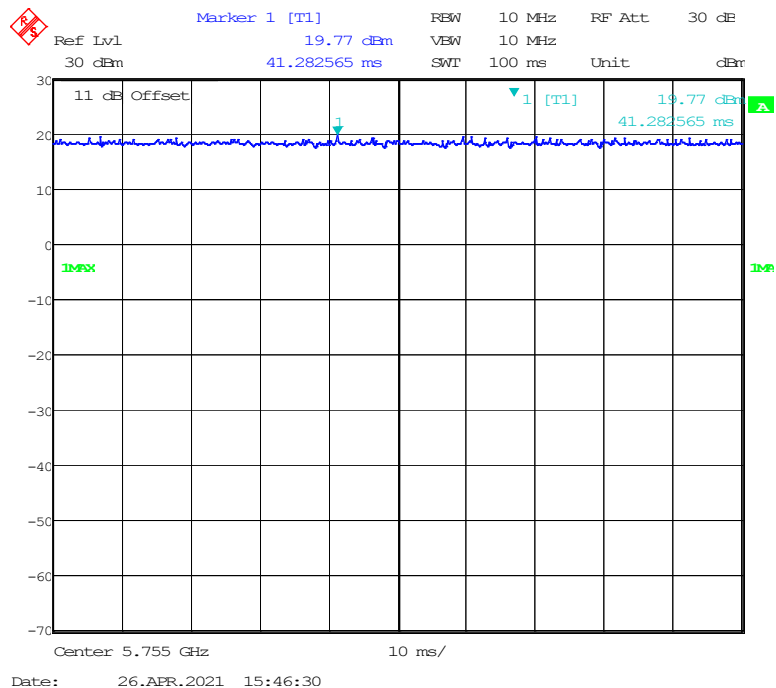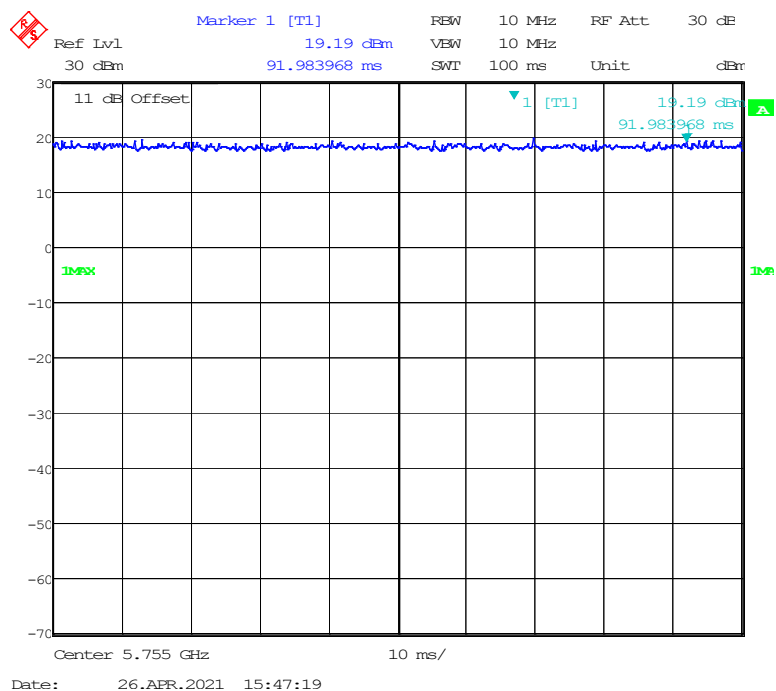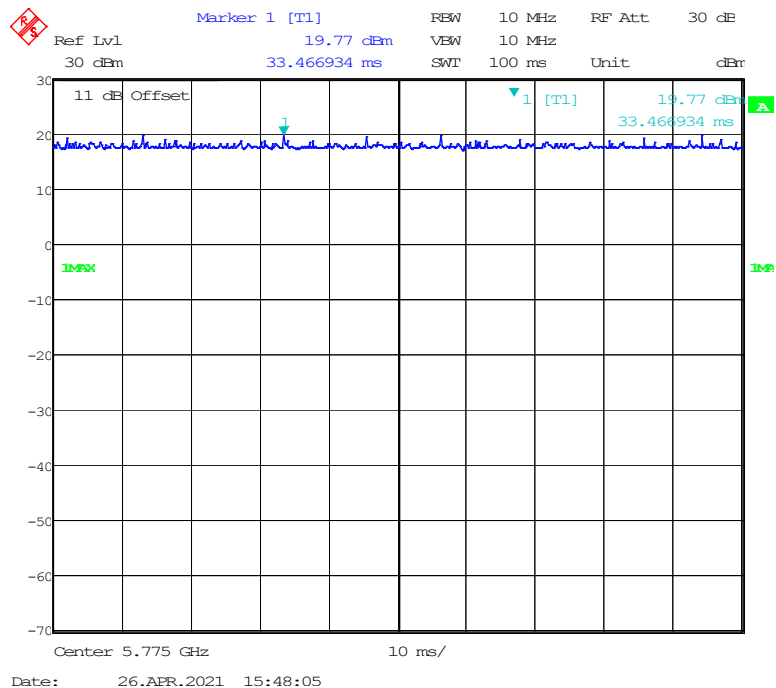802.11ac40 mode



802.11n-HT40 mode**802.11ac80 mode**

Mode	Frequency Range (MHz)	Duty Cycle (%)	T _{on} (ms)	T _{on+off} (ms)	10log(1/x)
802.11a	5150-5250	100	100	100	0
802.11ac20		100	100	100	0
802.11n-HT20		100	100	100	0
802.11ac40		100	100	100	0
802.11n-HT40		100	100	100	0
802.11ac80		100	100	100	0
802.11a	5725-5850	100	100	100	0
802.11ac20		100	100	100	0
802.11n-HT20		100	100	100	0
802.11ac40		100	100	100	0
802.11n-HT40		100	100	100	0
802.11ac80		100	100	100	0

Note: “x” means duty cycle.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SHENZHEN TIANYIN ELECTRONICS CO.,LTD	Adapter	TPA-23A050200UU01	/
BOLD	Earphone	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	EUT	Adapter
Power Cable	1.0	Adapter	LISN/AC Source

Block Diagram of Test Setup

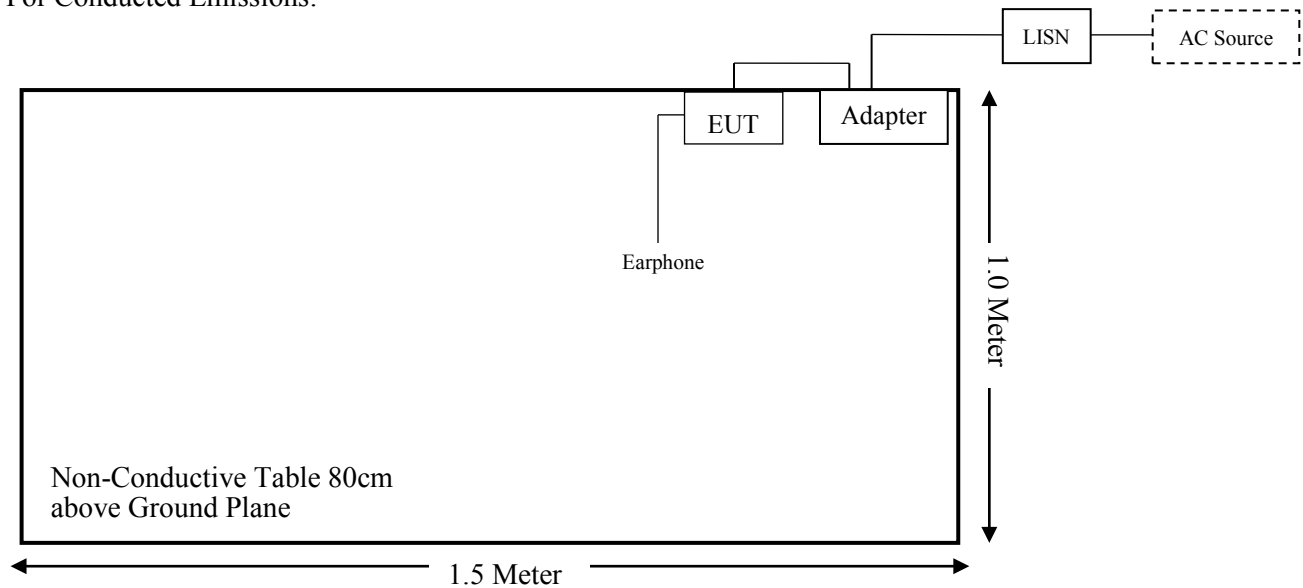
For Conducted Emissions:



For Radiated Emissions (Below 1GHz):

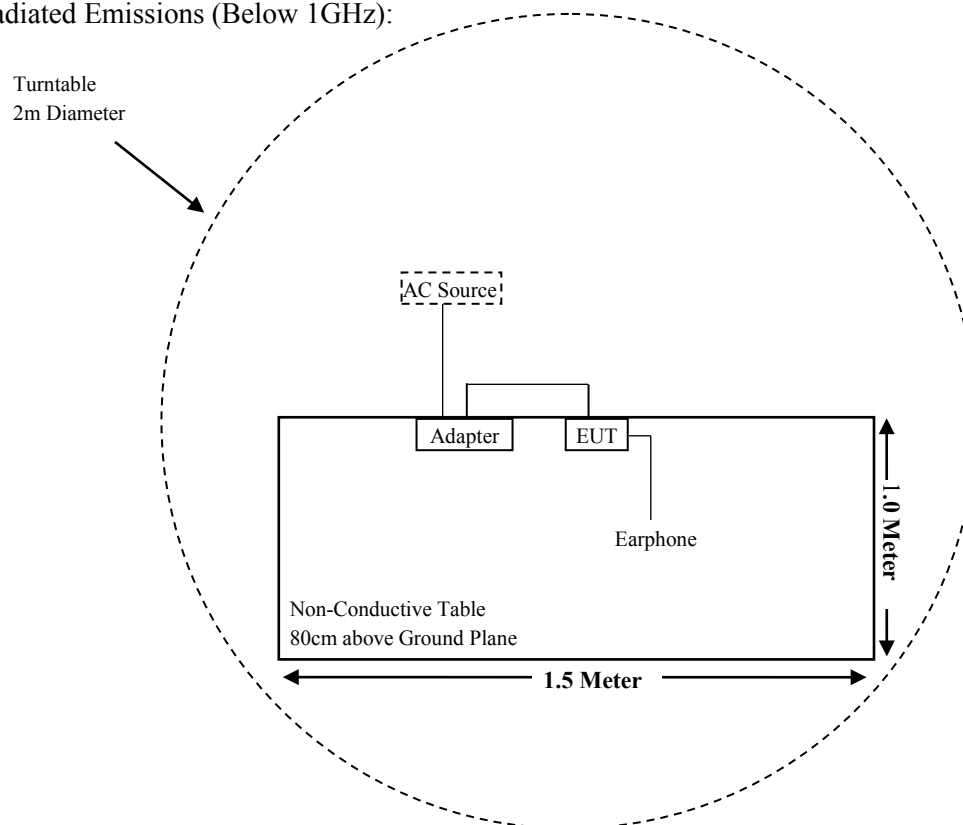

For Radiated Emissions (Above 1GHz):

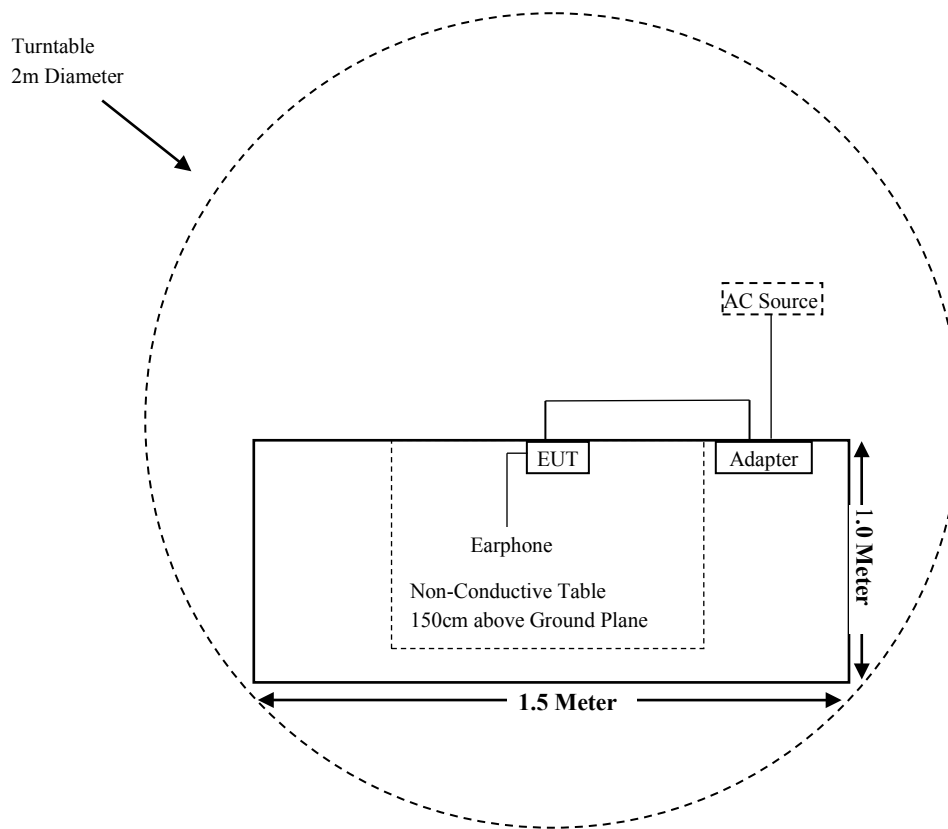

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307(b)(1)& §2.1093	RF Exposure Information	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 & §15.407(b) (8)	AC Power Line Conducted Emissions	Compliant
§ 15.205 & §15.209 & §15.407(b) (1), (4), (8),(9)	Undesirable Emission & Restricted Bands	Compliant
§§15.407(a) & §15.407(e)	Emission Bandwidth	Compliant
§15.407(a) (1) (3)	Conducted Transmitter Output Power	Compliant
§15.407(a) (1) (3)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2020-11-27	2021-11-26
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2020-08-05	2023-08-04
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2021-04-01	2022-03-31
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	84159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-08-14	2021-08-13
EM Electronics Corporation	Amplifier	EM18G40G	060726	2021-03-22	2022-03-21
MICRO-TRONICS	Band Reject Filter	BRC50703	G094	2020-08-05	2021-08-04
MICRO-TRONICS	Band Reject Filter	BRC50705	G085	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048/027	2020-11-27	2021-11-26
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-11-27	2021-11-26
Agilent	Power Meter	N1912A	MY5000492	2020-11-18	2021-11-17
Agilent	Power Sensor	N1921A	MY54210024	2020-11-18	2021-11-17
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Shopify Inc.	RF Cable	Shopify Inc. C01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-07-28	2021-07-27
Rohde & Schwarz	LISN	ENV216	101115	2020-11-27	2021-11-26
Audix	Test Software	e3	V9	--	--
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307,§2.1093.

Test Result

Compliant, please refer to the SAR report: RKSA210419002-20B

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an FPC antenna for 5G Wi-Fi which the antenna gain is 1.17 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

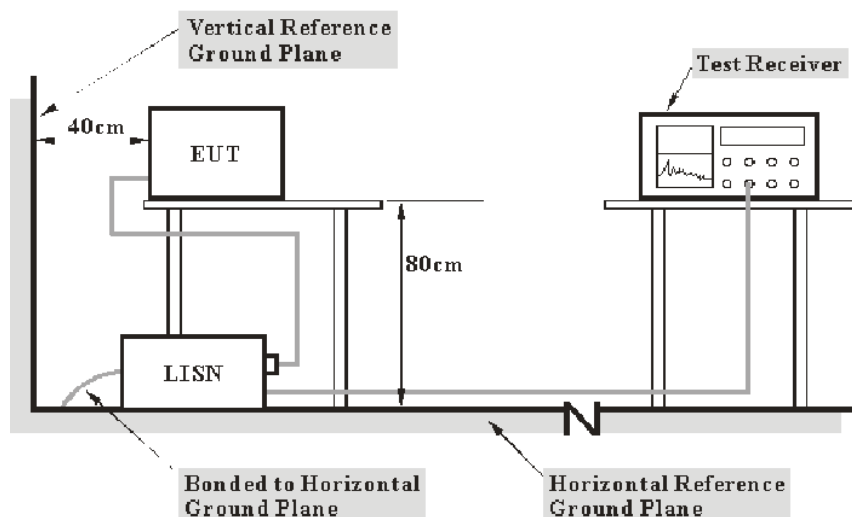
Result: Compliant.

FCC §15.407 (b) (8) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (8)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	24.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Stone Zhang on 2021-04-25.


EUT operation mode: Transmitting in 802.11a mode low channel of 5150~5250MHz (worst case).

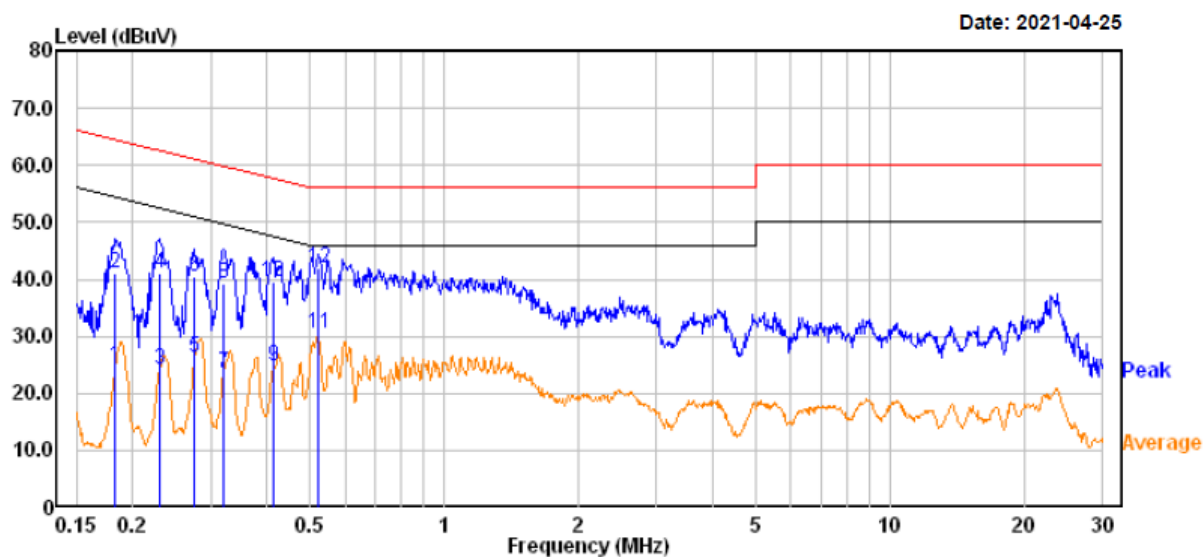AC 120V/60 Hz, Line



		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.183	4.90	19.83	24.73	54.34	-29.61	Average
2	0.183	21.20	19.83	41.03	64.34	-23.31	QP
3	0.230	4.40	19.82	24.22	52.44	-28.22	Average
4	0.230	21.30	19.82	41.12	62.44	-21.32	QP
5	0.276	6.50	19.82	26.32	50.95	-24.63	Average
6	0.276	20.60	19.82	40.42	60.95	-20.53	QP
7	0.320	3.70	19.82	23.52	49.71	-26.19	Average
8	0.320	19.30	19.82	39.12	59.71	-20.59	QP
9	0.413	5.10	19.74	24.84	47.60	-22.76	Average
10	0.413	19.90	19.74	39.64	57.60	-17.96	QP
11	0.524	10.71	19.75	30.46	46.00	-15.54	Average
12	0.524	22.11	19.75	41.86	56.00	-14.14	QP

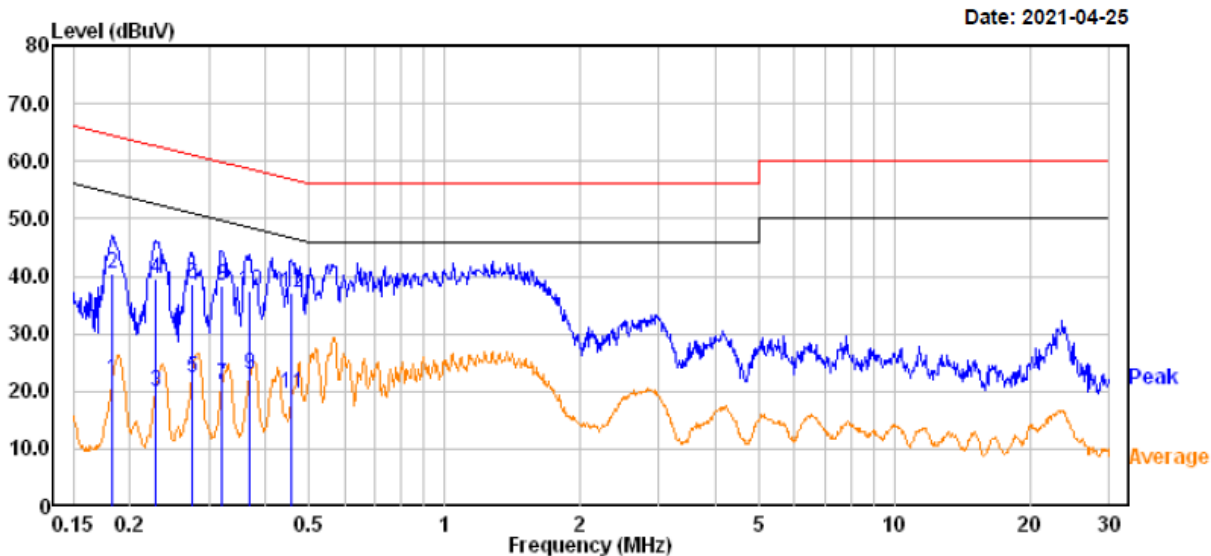AC 120V/60 Hz, Neutral



	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.183	2.30	19.83	22.13	54.34	-32.21	Average
2	0.183	20.50	19.83	40.33	64.34	-24.01	QP
3	0.228	0.20	19.82	20.02	52.52	-32.50	Average
4	0.228	19.70	19.82	39.52	62.52	-23.00	QP
5	0.274	2.60	19.82	22.42	50.99	-28.57	Average
6	0.274	18.80	19.82	38.62	60.99	-22.37	QP
7	0.320	1.20	19.82	21.02	49.71	-28.69	Average
8	0.320	18.40	19.82	38.22	59.71	-21.49	QP
9	0.370	3.10	19.78	22.88	48.51	-25.63	Average
10	0.370	17.80	19.78	37.58	58.51	-20.93	QP
11	0.458	-0.10	19.75	19.65	46.73	-27.08	Average
12	0.458	17.50	19.75	37.25	56.73	-19.48	QP

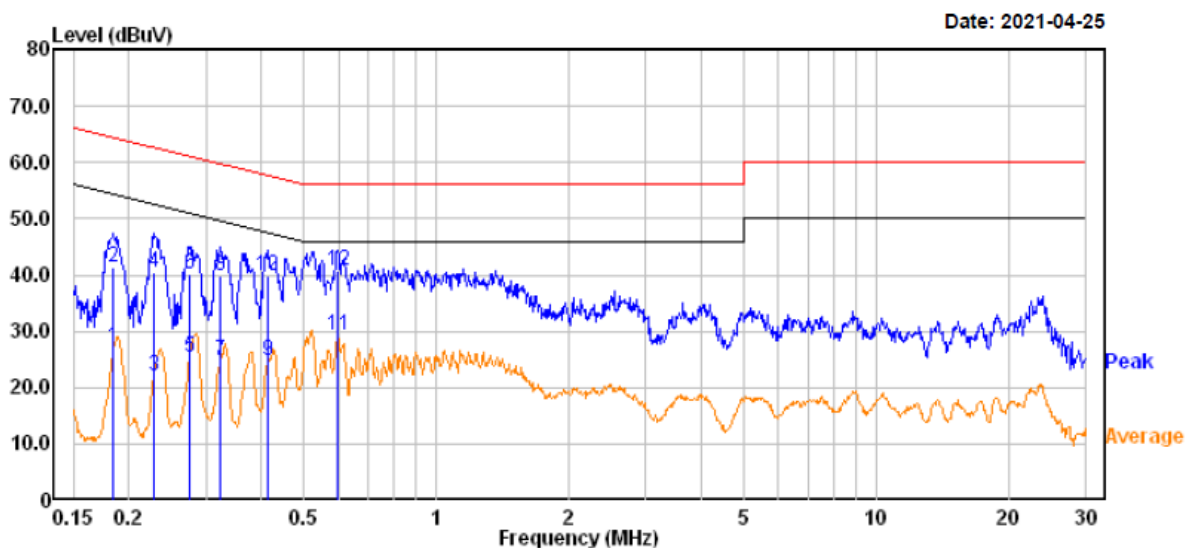
Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)


EUT operation mode: Transmitting in 802.11a mode high channel of 5725~5850MHz (worst case).

AC 120V/60 Hz, Line



	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.185	7.21	19.82	27.03	54.26	-27.23	Average
2	0.185	21.61	19.82	41.43	64.26	-22.83	QP
3	0.228	2.30	19.82	22.12	52.52	-30.40	Average
4	0.228	20.60	19.82	40.42	62.52	-22.10	QP
5	0.274	5.50	19.82	25.32	50.99	-25.67	Average
6	0.274	20.20	19.82	40.02	60.99	-20.97	QP
7	0.322	5.00	19.82	24.82	49.67	-24.85	Average
8	0.322	20.10	19.82	39.92	59.67	-19.75	QP
9	0.413	4.90	19.74	24.64	47.60	-22.96	Average
10	0.413	20.00	19.74	39.74	57.60	-17.86	QP
11	0.597	9.40	19.75	29.15	46.00	-16.85	Average
12	0.597	20.90	19.75	40.65	56.00	-15.35	QP

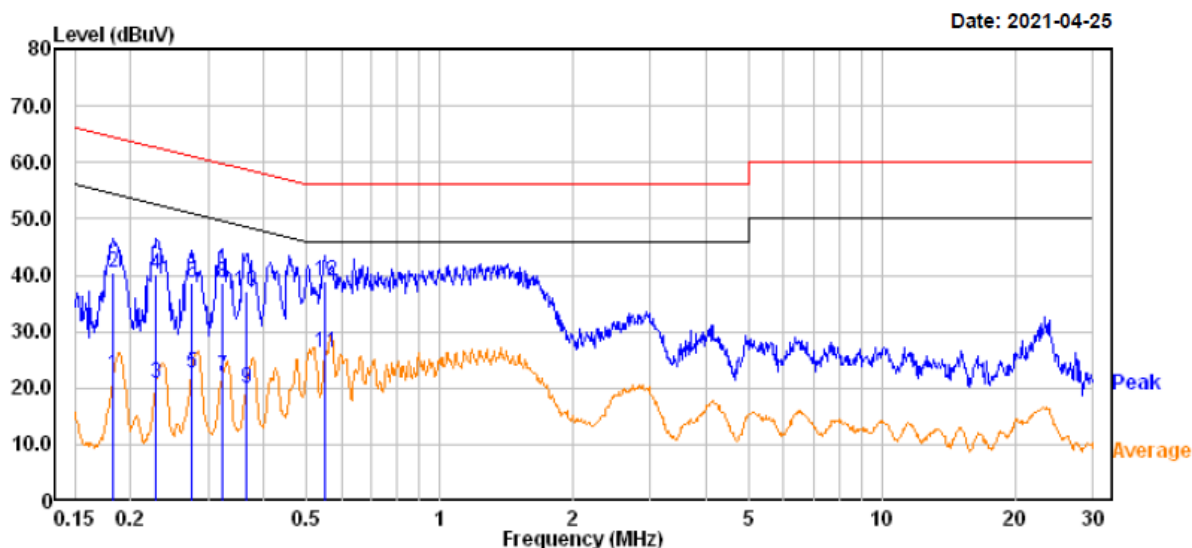AC 120V/60 Hz, Neutral



	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.183	2.40	19.83	22.23	54.34	-32.11	Average
2	0.183	20.50	19.83	40.33	64.34	-24.01	QP
3	0.229	1.10	19.82	20.92	52.48	-31.56	Average
4	0.229	20.30	19.82	40.12	62.48	-22.36	QP
5	0.274	2.70	19.82	22.52	50.99	-28.47	Average
6	0.274	18.80	19.82	38.62	60.99	-22.37	QP
7	0.322	2.30	19.82	22.12	49.67	-27.55	Average
8	0.322	18.90	19.82	38.72	59.67	-20.95	QP
9	0.364	0.10	19.79	19.89	48.63	-28.74	Average
10	0.364	17.20	19.79	36.99	58.63	-21.64	QP
11	0.551	6.40	19.75	26.15	46.00	-19.85	Average
12	0.551	19.20	19.75	38.95	56.00	-17.05	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

§15.205 & §15.209 & §15.407(B) (1), (4), (8),(9) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (4), (8), (9); §15.209; §15.205;

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

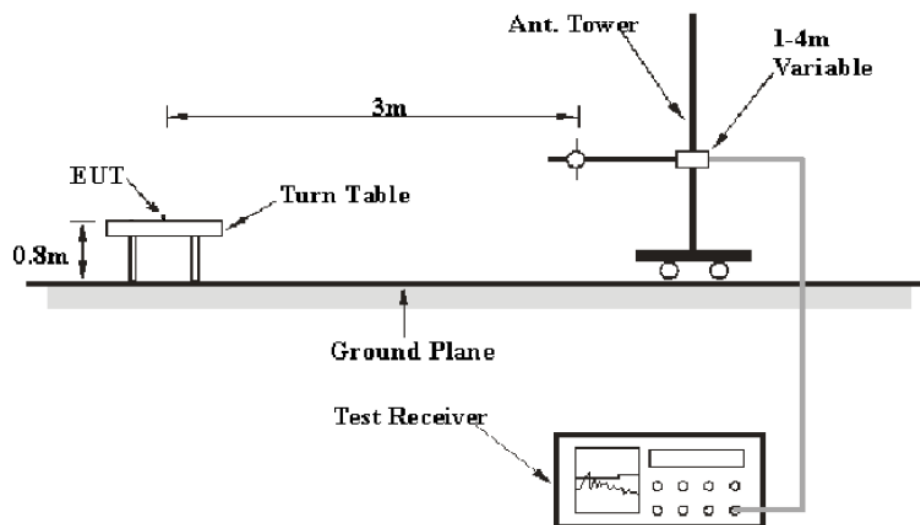
For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for $d = 3$ meters.

EUT Setup

Below 1 GHz:



1 GHz-40GHz:

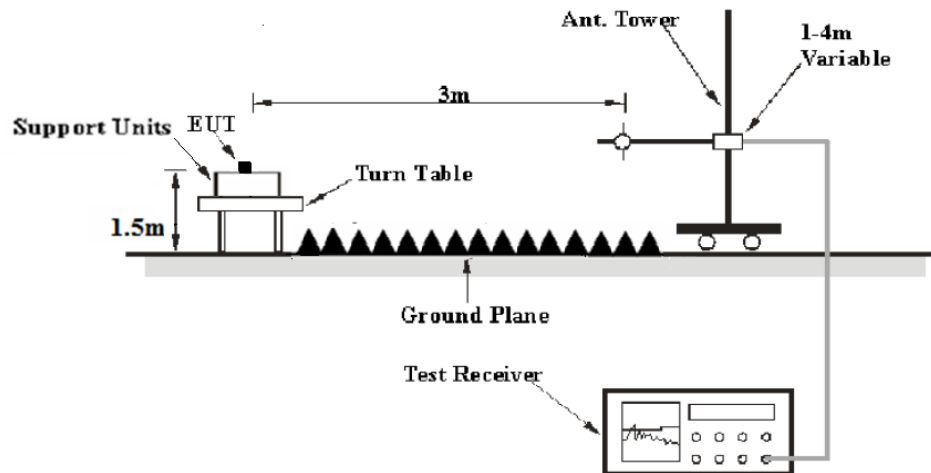

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	24.9 °C
Relative Humidity:	54 %
ATM Pressure:	101.7 kPa

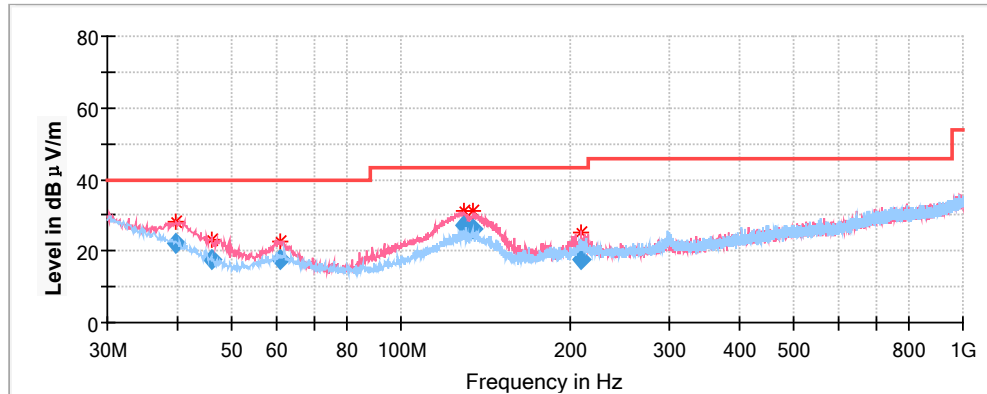
The testing was performed by Stone Zhang on 2021-04-23.

Test Mode: Transmitting

Spurious Emission Test

30MHz-1GHz(5150-5250MHz Band):


Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, **the worst case 802.11a mode low channel** in Z-axis of orientation was recorded



Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
39.678300	22.38	101.0	V	96.0	-10.2	40.00	17.62
46.197550	17.63	101.0	V	36.0	-14.7	40.00	22.37
60.938150	17.66	101.0	V	235.0	-14.7	40.00	22.34
129.007450	26.93	101.0	V	352.0	-11.2	43.50	16.57
134.415400	26.18	101.0	V	222.0	-11.4	43.50	17.32
209.460850	17.82	101.0	V	163.0	-12.0	43.50	25.68

30MHz-1GHz(5725-5850MHz Band):

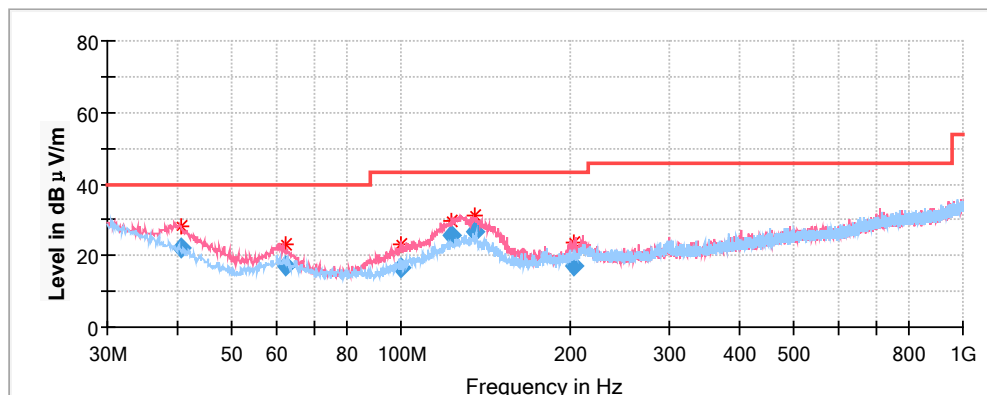Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, **the worst case 802.11a mode high channel** in Z-axis of orientation was recorded




Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
40.597200	22.18	100.0	V	95.0	-10.9	40.00	17.82
62.281500	17.27	100.0	V	216.0	-15.0	40.00	22.73
100.010600	16.65	100.0	V	345.0	-14.5	43.50	26.85
123.319250	25.50	100.0	V	53.0	-11.0	43.50	18.00
134.807000	26.52	100.0	V	308.0	-11.4	43.50	16.98
203.715150	16.88	100.0	V	1.0	-12.0	43.50	26.62

1GHz-18GHz(5150-5250MHz Band):**802.11a Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:

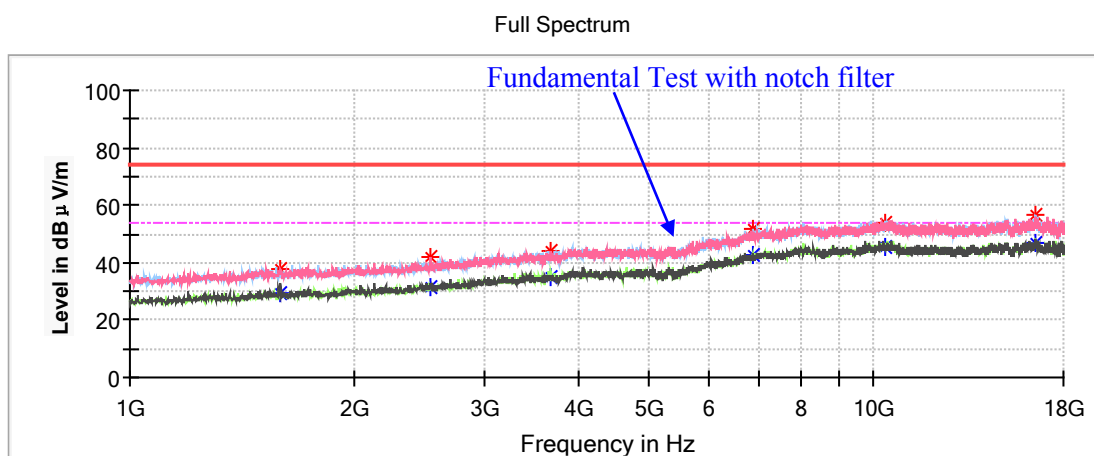
1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5180MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.000000	---	29.32	200.0	H	305.0	-9.1	54.00	24.68
1595.000000	37.97	---	200.0	H	305.0	-9.1	74.00	36.03
2531.700000	42.03	---	150.0	V	238.0	-5.6	68.20	26.17
3680.900000	---	34.71	200.0	V	103.0	-1.0	54.00	19.29
3680.900000	44.36	---	200.0	V	103.0	-1.0	74.00	29.64
6892.200000	52.08	---	200.0	H	199.0	8.4	68.20	16.12
10358.500000	53.67	---	200.0	V	155.0	12.7	68.20	14.53
16531.200000	56.95	---	150.0	H	117.0	11.9	68.20	11.25

Middle Channel: 5200MHz

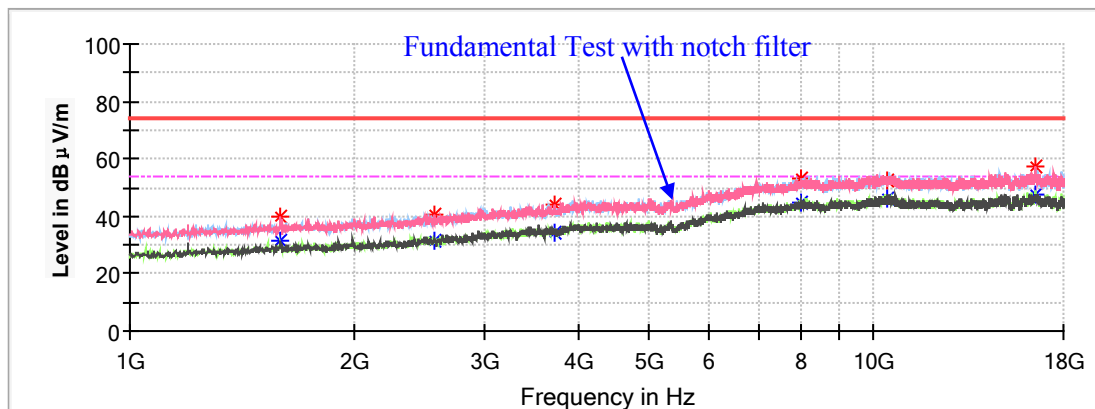
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1591.600000	---	31.70	200.0	V	225.0	-9.1	54.00	22.30
1591.600000	39.81	---	200.0	V	225.0	-9.1	74.00	34.19
2572.500000	40.64	---	150.0	V	191.0	-5.4	68.20	27.56
3718.300000	---	34.55	200.0	V	0.0	-0.8	54.00	19.45
3718.300000	43.73	---	200.0	V	0.0	-0.8	74.00	30.27
7997.200000	53.48	---	200.0	V	357.0	10.8	68.20	14.72
10399.300000	52.23	---	150.0	H	359.0	12.8	68.20	15.97
16519.300000	57.36	---	200.0	V	301.0	11.9	68.20	10.84

High Channel: 5240MHz

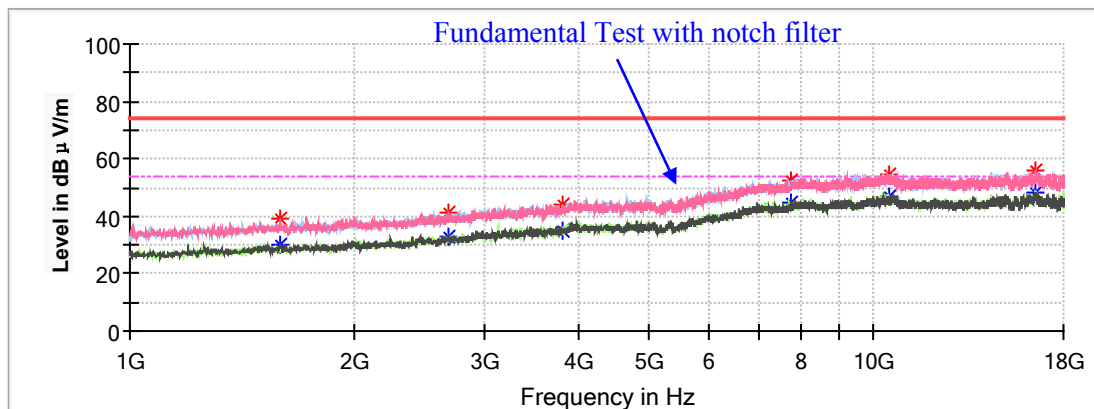Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1593.300000	---	30.38	200.0	V	207.0	-9.1	54.00	23.62
1593.300000	39.14	---	200.0	V	207.0	-9.1	74.00	34.86
2688.100000	41.20	---	200.0	V	296.0	-4.8	68.20	27.00
3816.900000	---	34.75	200.0	V	322.0	-0.4	54.00	19.25
3816.900000	43.80	---	200.0	V	322.0	-0.4	74.00	30.20
7760.900000	52.65	---	150.0	V	174.0	10.0	68.20	15.55
10486.000000	54.65	---	150.0	V	283.0	13.0	68.20	13.55
16492.100000	56.17	---	200.0	V	258.0	11.9	68.20	12.03

802.11ac20 Mode:

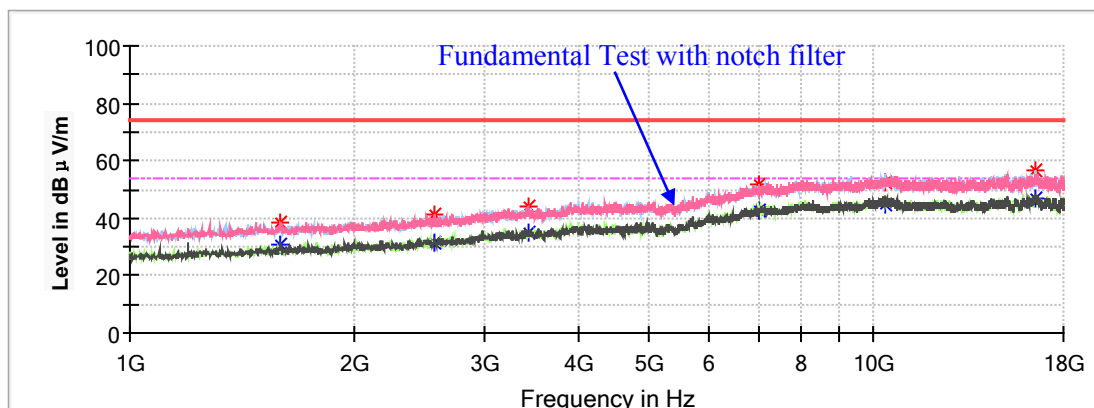
(Pre-scan in the X, Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5180MHz

Full Spectrum




Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1593.300000	38.47	---	150.0	V	231.0	-9.1	74.00	35.53
1593.300000	---	30.95	150.0	V	231.0	-9.1	54.00	23.05
2564.000000	40.96	---	200.0	V	92.0	-5.5	68.20	27.24
3425.900000	44.28	---	150.0	V	46.0	-2.0	68.20	23.92
7004.400000	51.80	---	150.0	V	0.0	8.9	68.20	16.40
10358.500000	52.71	---	150.0	V	10.0	12.7	68.20	15.49
16502.300000	56.67	---	150.0	H	24.0	11.9	68.20	11.53

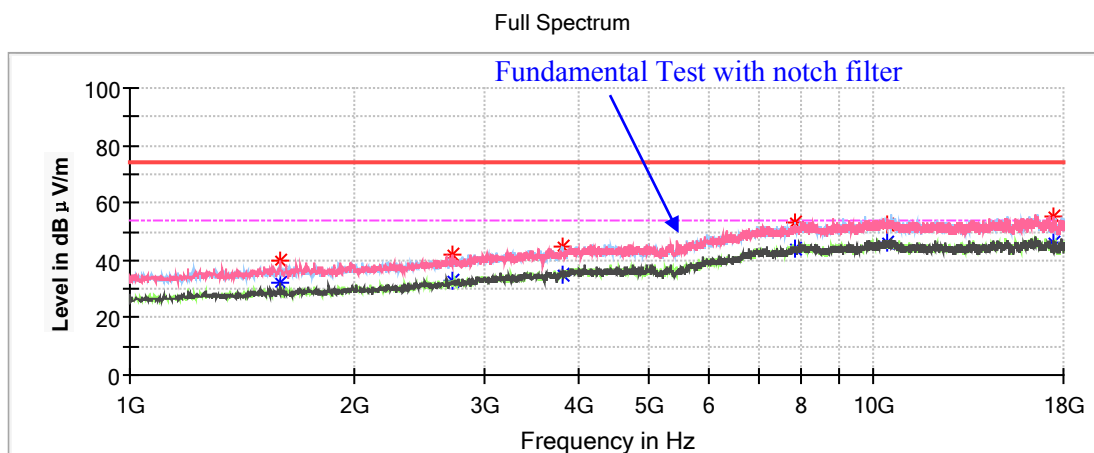Middle Channel: 5200MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1593.300000	---	32.08	150.0	V	231.0	-9.1	54.00	21.92
1593.300000	39.89	---	150.0	V	231.0	-9.1	74.00	34.11
2708.500000	---	32.52	150.0	H	341.0	-4.7	54.00	21.48
2708.500000	41.82	---	150.0	H	341.0	-4.7	74.00	32.18
3818.600000	---	35.23	200.0	V	130.0	-0.4	54.00	18.77
3818.600000	44.65	---	200.0	V	130.0	-0.4	74.00	29.35
7828.900000	53.28	---	150.0	H	351.0	10.3	68.20	14.92
10399.300000	52.55	---	150.0	V	33.0	12.8	68.20	15.65
17493.400000	55.13	---	200.0	V	284.0	10.9	68.20	13.07

High Channel: 5240MHz

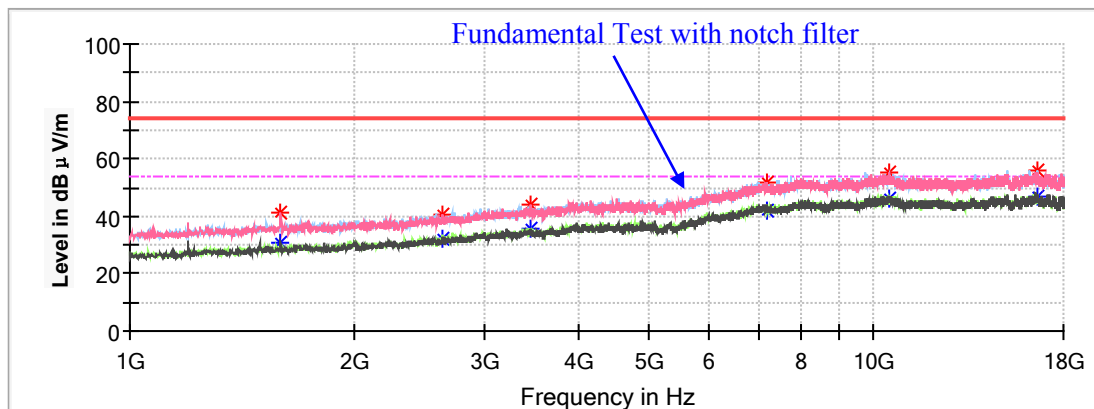Full Spectrum




Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1596.700000	---	30.95	200.0	V	226.0	-9.1	54.00	23.05
1596.700000	41.07	---	200.0	V	226.0	-9.1	74.00	32.93
2633.700000	40.76	---	200.0	V	0.0	-5.1	68.20	27.44
3454.800000	43.80	---	150.0	V	256.0	-1.9	68.20	24.40
7179.500000	51.84	---	150.0	H	264.0	9.0	68.20	16.36
10486.000000	55.00	---	150.0	V	216.0	13.0	68.20	13.20
16563.500000	55.65	---	150.0	H	289.0	11.9	68.20	12.55

802.11n-HT20 Mode:

Pre-scan with X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded

Note:

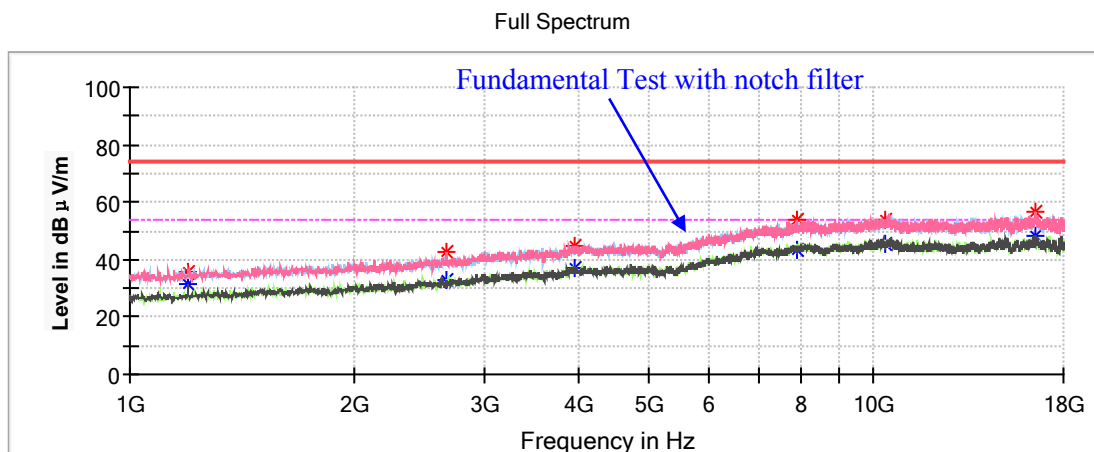
1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5180MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	35.94	---	200.0	H	141.0	-11.3	74.00	38.06
1198.900000	---	31.18	200.0	H	141.0	-11.3	54.00	22.82
2662.600000	42.76	---	200.0	V	262.0	-5.0	68.20	25.44
3968.200000	44.82	---	200.0	V	288.0	0.3	74.00	29.18
3968.200000	---	36.92	200.0	V	288.0	0.3	54.00	17.08
7900.300000	53.56	---	200.0	V	121.0	10.5	68.20	14.64
10358.500000	53.90	---	150.0	V	76.0	12.7	68.20	14.30
16512.500000	56.53	---	200.0	V	249.0	11.9	68.20	11.67

Middle Channel: 5200MHz

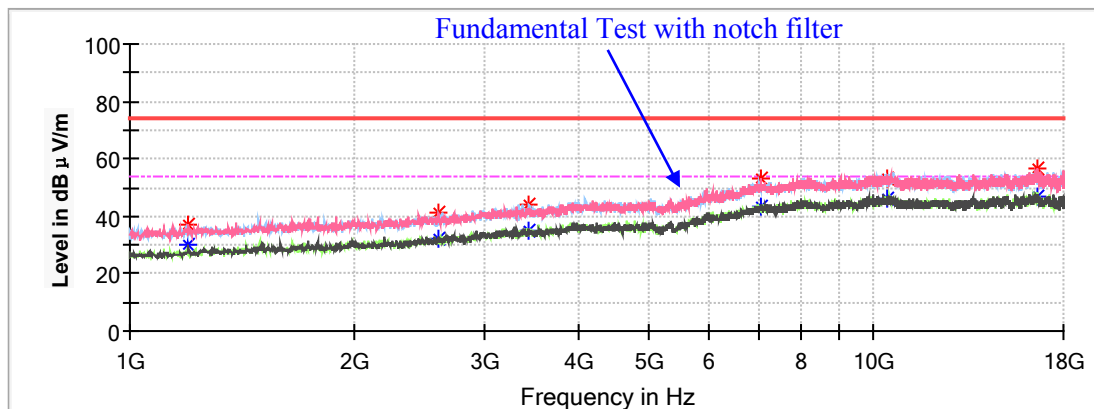
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1198.900000	---	29.88	200.0	V	212.0	-11.3	54.00	24.12
1198.900000	37.17	---	200.0	V	212.0	-11.3	74.00	36.83
2604.800000	41.33	---	200.0	V	129.0	-5.3	68.20	26.87
3446.300000	43.85	---	200.0	H	1.0	-1.9	68.20	24.35
7060.500000	52.92	---	200.0	V	275.0	8.9	68.20	15.28
10399.300000	53.16	---	150.0	H	15.0	12.8	68.20	15.04
16577.100000	56.42	---	150.0	V	335.0	11.9	68.20	11.78

High Channel: 5240MHz

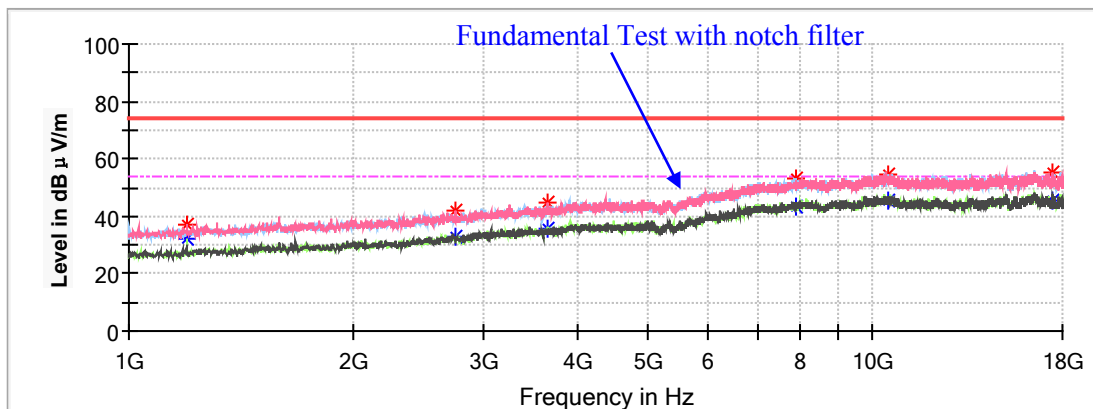Full Spectrum




Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1198.900000	---	32.11	200.0	H	269.0	-11.3	54.00	21.89
1198.900000	37.31	---	200.0	H	269.0	-11.3	74.00	36.69
2747.600000	---	32.53	150.0	V	110.0	-4.5	54.00	21.47
2747.600000	41.62	---	150.0	V	110.0	-4.5	74.00	32.38
3646.900000	---	35.80	150.0	H	263.0	-1.1	54.00	18.20
3646.900000	44.67	---	150.0	H	263.0	-1.1	74.00	29.33
7890.100000	53.04	---	150.0	H	200.0	10.5	68.20	15.16
10484.300000	54.63	---	150.0	H	104.0	13.0	68.20	13.57
17476.400000	54.92	---	200.0	V	220.0	10.9	68.20	13.28

802.11ac40 Mode:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:

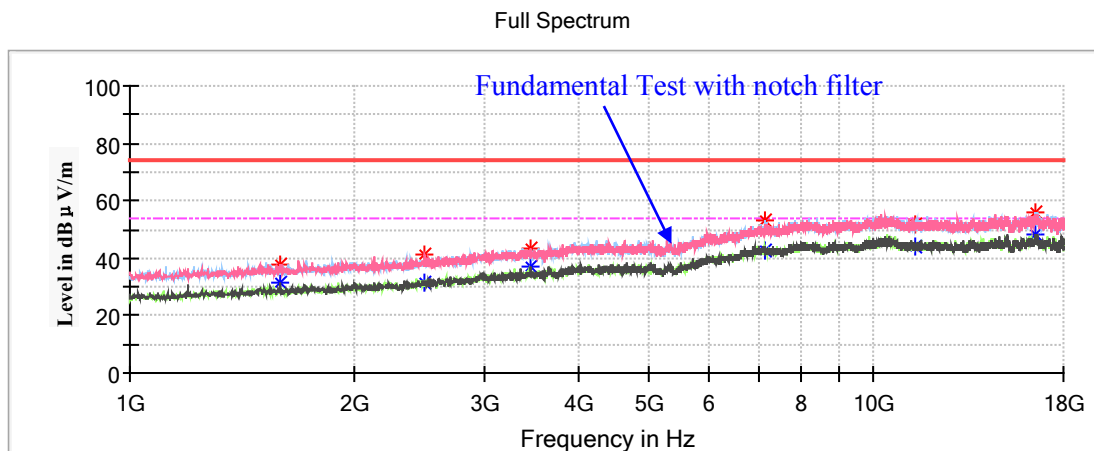
1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5190MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.600000	---	31.36	150.0	V	238.0	-9.1	54.00	22.64
1591.600000	38.07	---	150.0	V	238.0	-9.1	74.00	35.93
2496.000000	---	31.66	200.0	H	165.0	-5.8	54.00	22.34
2496.000000	40.97	---	200.0	H	165.0	-5.8	74.00	33.03
3454.800000	43.03	---	200.0	V	221.0	-1.9	68.20	25.17
7133.600000	53.28	---	200.0	H	1.0	9.0	68.20	14.92
11378.500000	---	44.33	150.0	V	96.0	11.7	54.00	9.67
11378.500000	51.47	---	150.0	V	96.0	11.7	74.00	22.53
16544.800000	55.86	---	150.0	H	0.0	11.9	68.20	12.34

High Channel: 5230MHz

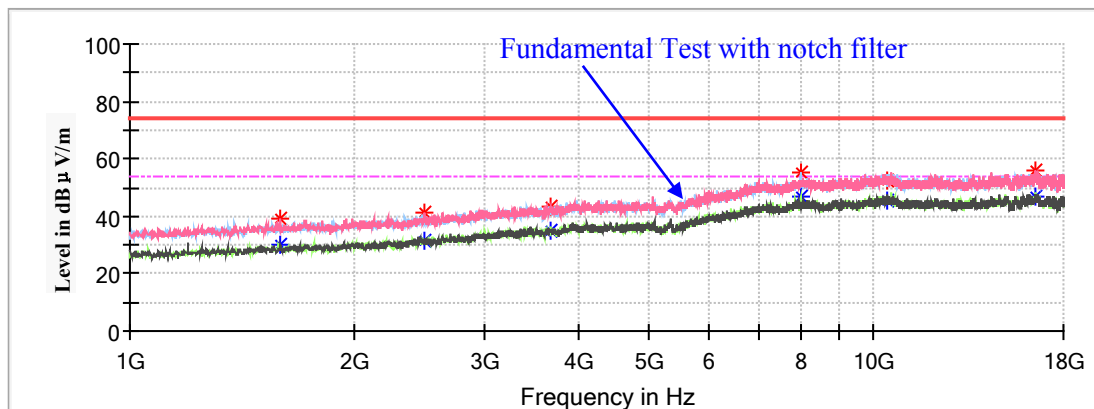Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.600000	---	30.20	200.0	V	238.0	-9.1	54.00	23.80
1591.600000	38.83	---	200.0	V	238.0	-9.1	74.00	35.17
2494.300000	---	31.22	200.0	V	302.0	-5.8	54.00	22.78
2494.300000	40.93	---	200.0	V	302.0	-5.8	74.00	33.07
3680.900000	---	35.08	200.0	H	89.0	-1.0	54.00	18.92
3680.900000	43.60	---	200.0	H	89.0	-1.0	74.00	30.40
7963.200000	54.95	---	150.0	H	175.0	10.7	68.20	13.25
10460.500000	52.13	---	150.0	H	213.0	12.9	68.20	16.07
16529.500000	55.83	---	200.0	V	315.0	11.9	68.20	12.37

802.11n-HT40 Mode:

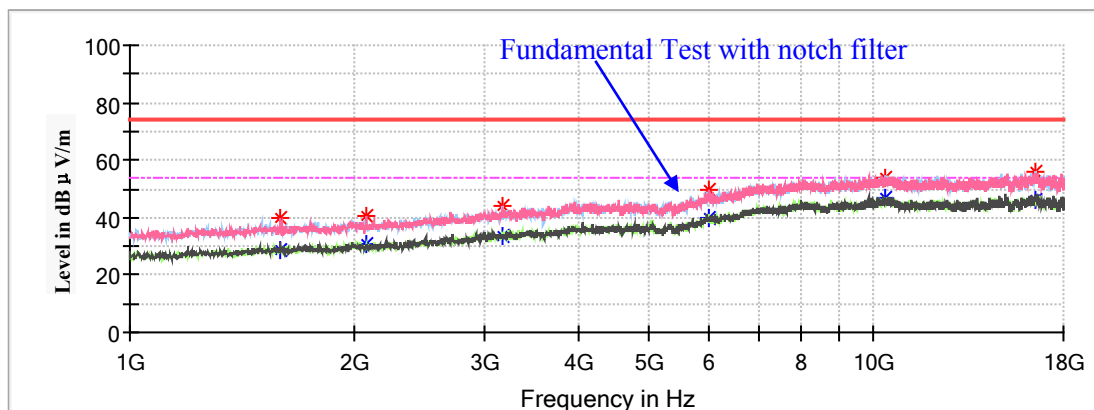
Pre-scan with X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5190MHz


Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.000000	---	28.65	150.0	V	179.0	-9.1	54.00	25.35
1595.000000	39.66	---	150.0	V	179.0	-9.1	74.00	34.34
2076.100000	40.70	---	200.0	V	0.0	-7.4	68.20	27.50
3176.000000	44.37	---	150.0	H	359.0	-2.7	68.20	23.83
5992.900000	49.36	---	200.0	V	143.0	5.1	68.20	18.84
10382.300000	54.02	---	150.0	V	1.0	12.7	68.20	14.18
16526.100000	56.15	---	150.0	H	161.0	11.9	68.20	12.05

Middle Channel: 5230MHz

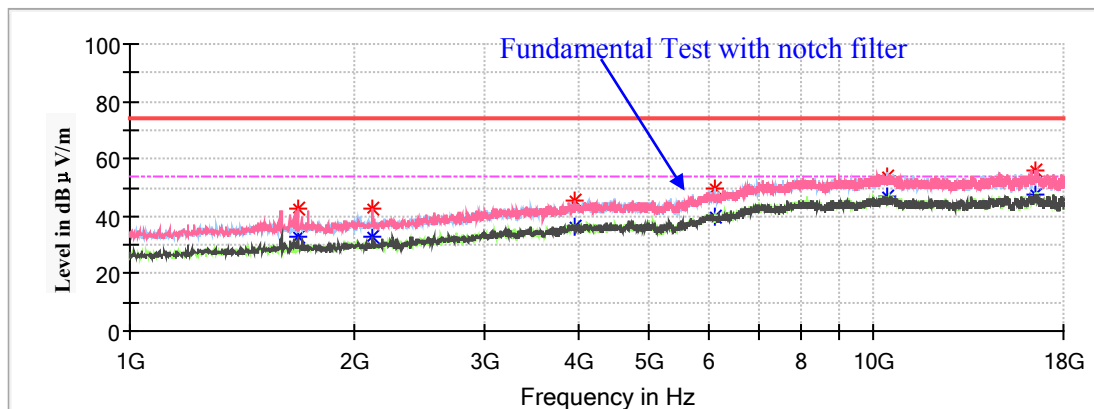Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1685.100000	---	32.84	150.0	V	203.0	-8.8	54.00	21.16
1685.100000	42.89	---	150.0	V	203.0	-8.8	74.00	31.11
2122.000000	42.69	---	150.0	V	296.0	-7.2	68.20	25.51
3963.100000	---	36.40	150.0	V	323.0	0.2	54.00	17.60
3963.100000	45.19	---	150.0	V	323.0	0.2	74.00	28.81
6105.100000	49.48	---	150.0	H	90.0	5.5	68.20	18.72
10458.800000	53.91	---	200.0	V	359.0	12.9	68.20	14.29
16512.500000	55.98	---	150.0	V	101.0	11.9	68.20	12.22

802.11ac80 Mode:

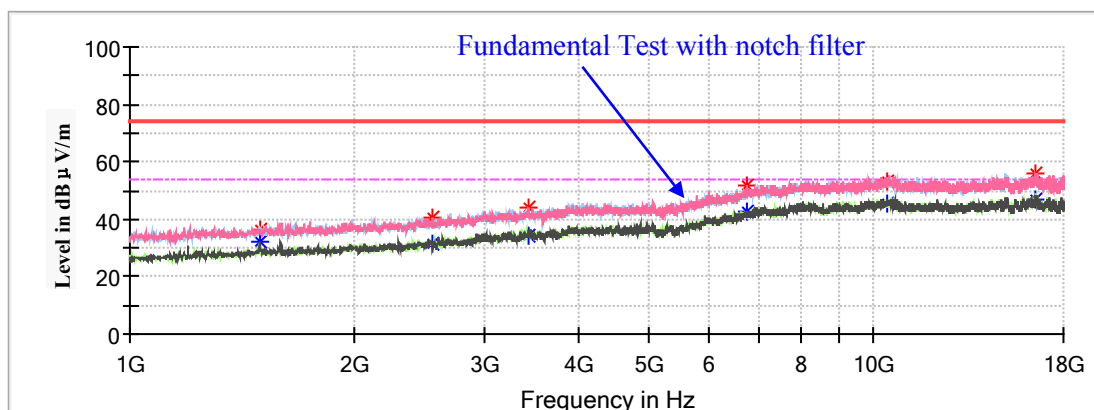
Pre-scan with X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5210MHz

Full Spectrum




Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1493.000000	---	31.94	150.0	V	270.0	-9.4	54.00	22.06
1493.000000	36.23	---	150.0	V	270.0	-9.4	74.00	37.77
2552.100000	40.83	---	150.0	V	59.0	-5.5	68.20	27.37
3427.600000	43.73	---	200.0	V	359.0	-2.0	68.20	24.47
6769.800000	51.51	---	200.0	V	220.0	7.9	68.20	16.69
10419.700000	53.17	---	150.0	V	33.0	12.8	68.20	15.03
16522.700000	56.15	---	150.0	H	169.0	11.9	68.20	12.05

1GHz-18GHz(5725-5850MHz Band):**802.11a Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:

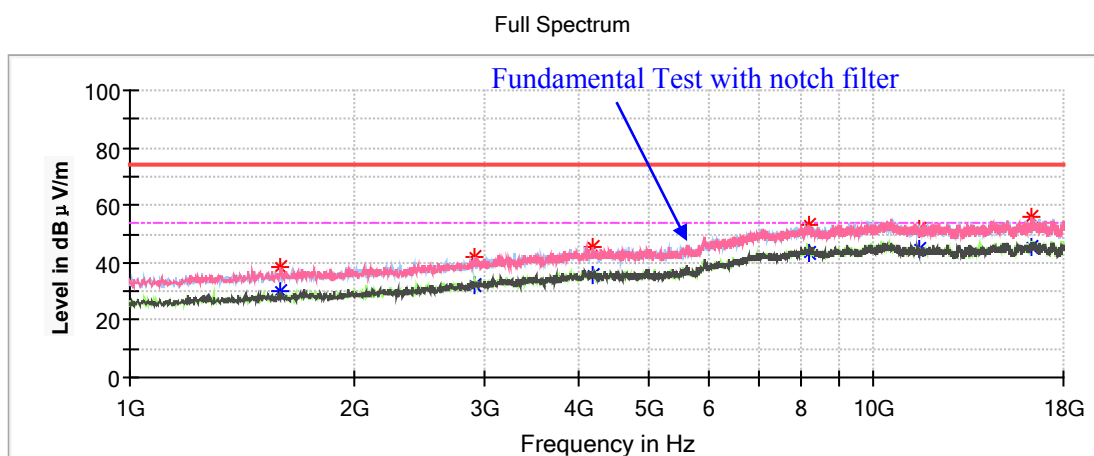
1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5745MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1593.300000	---	30.29	150.0	V	205.0	-9.1	54.00	23.71
1593.300000	38.33	---	150.0	V	205.0	-9.1	74.00	35.67
2910.800000	41.78	---	150.0	H	143.0	-3.7	68.20	26.42
4182.400000	---	36.00	150.0	H	50.0	0.6	54.00	18.00
4182.400000	45.72	---	150.0	H	50.0	0.6	74.00	28.28
8196.100000	---	43.46	150.0	H	359.0	10.8	54.00	10.54
8196.100000	53.33	---	150.0	H	359.0	10.8	74.00	20.67
11500.900000	---	44.72	200.0	H	3.0	11.8	54.00	9.28
11500.900000	51.88	---	200.0	H	3.0	11.8	74.00	22.12
16339.100000	56.17	---	200.0	V	18.0	12.1	68.20	12.03

Middle Channel: 5785MHz

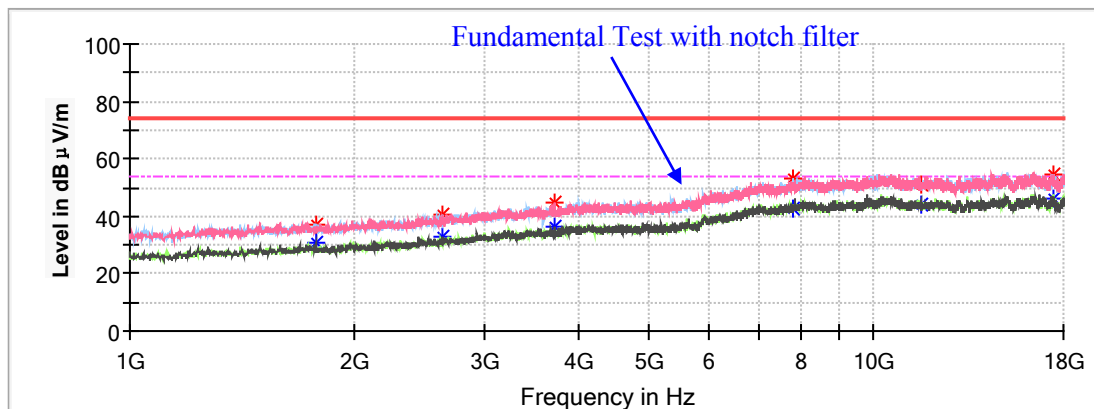
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1775.200000	37.07	---	200.0	H	309.0	-8.4	68.20	31.13
2626.900000	40.33	---	200.0	H	323.0	-5.1	68.20	27.87
3730.200000	---	36.26	200.0	V	359.0	-0.8	54.00	17.74
3730.200000	44.63	---	200.0	V	359.0	-0.8	74.00	29.37
7815.300000	53.12	---	200.0	H	242.0	10.2	68.20	15.08
11570.600000	---	44.39	200.0	V	311.0	11.8	54.00	9.61
11570.600000	50.83	---	200.0	V	311.0	11.8	74.00	23.17
17416.900000	54.75	---	150.0	H	297.0	11.1	68.20	13.45

High Channel: 5825MHz

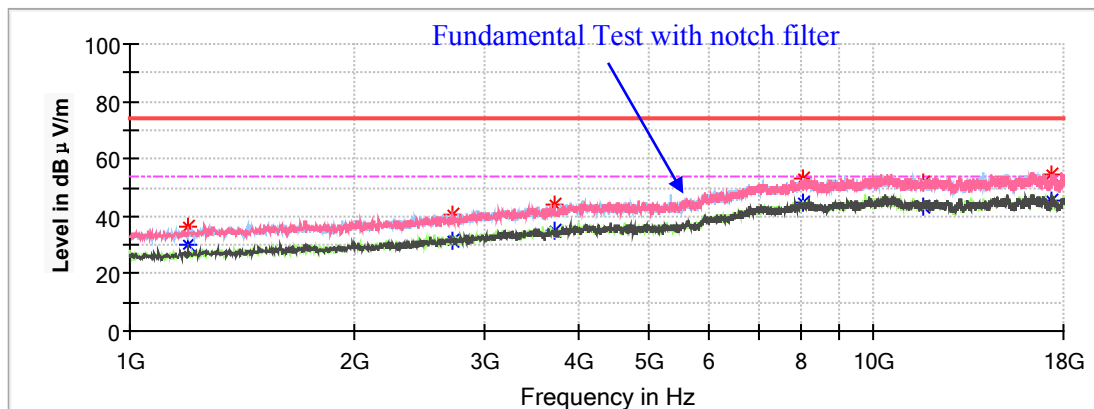Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	29.98	200.0	V	251.0	-11.3	54.00	24.02
1198.900000	36.43	---	200.0	V	251.0	-11.3	74.00	37.57
2722.100000	---	31.39	200.0	V	55.0	-4.6	54.00	22.61
2722.100000	40.54	---	200.0	V	55.0	-4.6	74.00	33.46
3723.400000	---	34.98	150.0	V	102.0	-0.8	54.00	19.02
3723.400000	43.95	---	150.0	V	102.0	-0.8	74.00	30.05
8032.900000	---	44.94	150.0	H	170.0	10.8	54.00	9.06
8032.900000	52.80	---	150.0	H	170.0	10.8	74.00	21.20
11650.500000	---	43.65	150.0	H	359.0	11.7	54.00	10.35
11650.500000	51.45	---	150.0	H	359.0	11.7	74.00	22.55
17389.700000	54.86	---	200.0	V	213.0	11.1	68.20	13.34

802.11ac20 Mode:

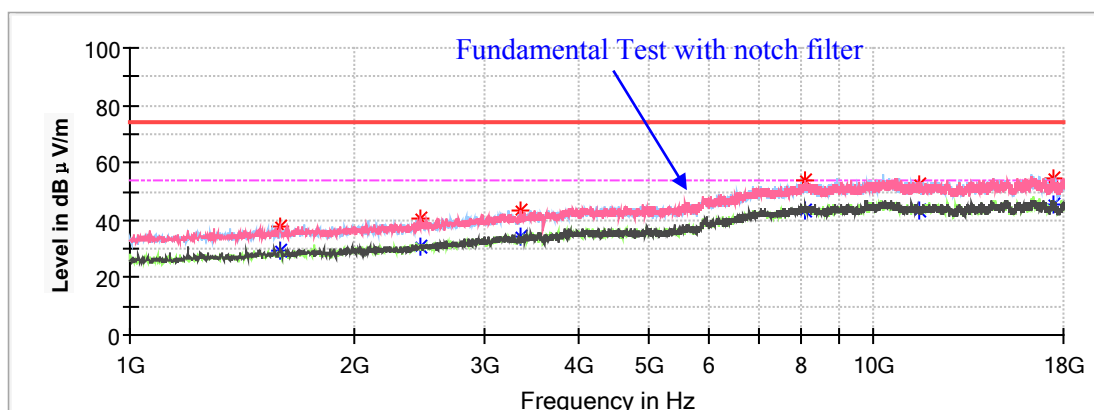
(Pre-scan in the X, Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5745MHz


Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1588.200000	---	29.21	150.0	V	282.0	-9.1	54.00	24.79
1588.200000	37.98	---	150.0	V	282.0	-9.1	74.00	36.02
2465.400000	40.54	---	200.0	V	249.0	-5.9	68.20	27.66
3357.900000	---	34.61	200.0	V	237.0	-2.2	54.00	19.39
3357.900000	43.68	---	200.0	V	237.0	-2.2	74.00	30.32
8092.400000	---	43.21	200.0	V	0.0	10.8	54.00	10.79
8092.400000	53.64	---	200.0	V	0.0	10.8	74.00	20.36
11489.000000	---	43.08	150.0	H	194.0	11.8	54.00	10.92
11489.000000	52.51	---	150.0	H	194.0	11.8	74.00	21.49
17401.600000	54.65	---	200.0	V	0.0	11.1	68.20	13.55

Middle Channel: 5785MHz

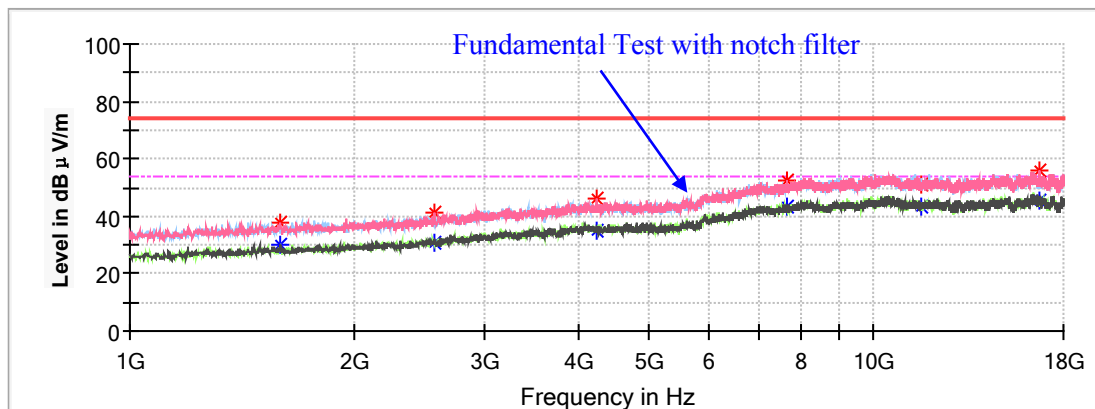
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1595.000000	38.01	---	150.0	V	187.0	-9.1	74.00	35.99
1595.000000	---	30.21	150.0	V	187.0	-9.1	54.00	23.79
2569.100000	41.24	---	200.0	V	220.0	-5.4	68.20	26.96
4248.700000	46.01	---	150.0	V	22.0	0.7	74.00	27.99
4248.700000	---	35.18	150.0	V	22.0	0.7	54.00	18.82
7658.900000	52.51	---	200.0	V	0.0	9.7	74.00	21.49
7658.900000	---	43.18	200.0	V	0.0	9.7	54.00	10.82
11568.900000	51.07	---	200.0	V	301.0	11.8	74.00	22.93
11568.900000	---	43.44	200.0	V	301.0	11.8	54.00	10.56
16675.700000	56.01	---	200.0	V	50.0	11.9	68.20	12.19

High Channel: 5825MHz

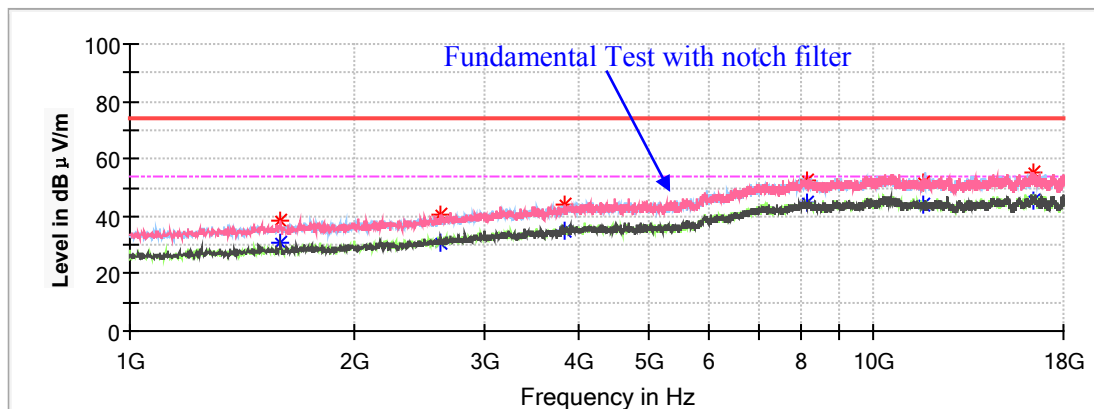Full Spectrum




Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.700000	---	30.80	150.0	V	203.0	-9.1	54.00	23.20
1596.700000	38.45	---	150.0	V	203.0	-9.1	74.00	35.55
2616.700000	40.76	---	150.0	V	147.0	-5.2	68.20	27.44
3845.800000	---	34.70	150.0	V	335.0	-0.3	54.00	19.30
3845.800000	44.35	---	150.0	V	335.0	-0.3	74.00	29.65
8121.300000	---	44.66	200.0	V	359.0	10.8	54.00	9.34
8121.300000	52.75	---	200.0	V	359.0	10.8	74.00	21.25
11648.800000	---	43.87	200.0	V	195.0	11.7	54.00	10.13
11648.800000	51.68	---	200.0	V	195.0	11.7	74.00	22.32
16419.000000	55.58	---	150.0	V	203.0	12.0	68.20	12.62

802.11n-HT20 Mode:

Pre-scan with X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded

Note:

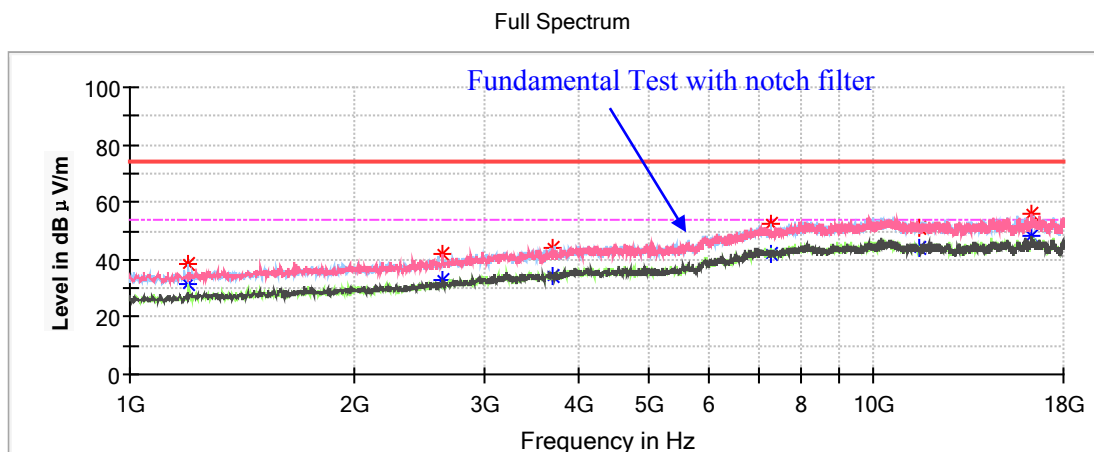
1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5745MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	31.14	200.0	H	270.0	-11.3	54.00	22.86
1198.900000	38.47	---	200.0	H	270.0	-11.3	74.00	35.53
2628.600000	41.75	---	150.0	V	224.0	-5.1	68.20	26.45
3708.100000	---	34.31	200.0	V	156.0	-0.9	54.00	19.69
3708.100000	44.32	---	200.0	V	156.0	-0.9	74.00	29.68
7269.600000	---	42.23	200.0	H	256.0	9.1	54.00	11.77
7269.600000	52.62	---	200.0	H	256.0	9.1	74.00	21.38
11490.700000	---	44.06	150.0	H	314.0	11.8	54.00	9.94
11490.700000	51.33	---	150.0	H	314.0	11.8	74.00	22.67
16347.600000	55.86	---	200.0	V	220.0	12.1	68.20	12.34

Middle Channel: 5785MHz

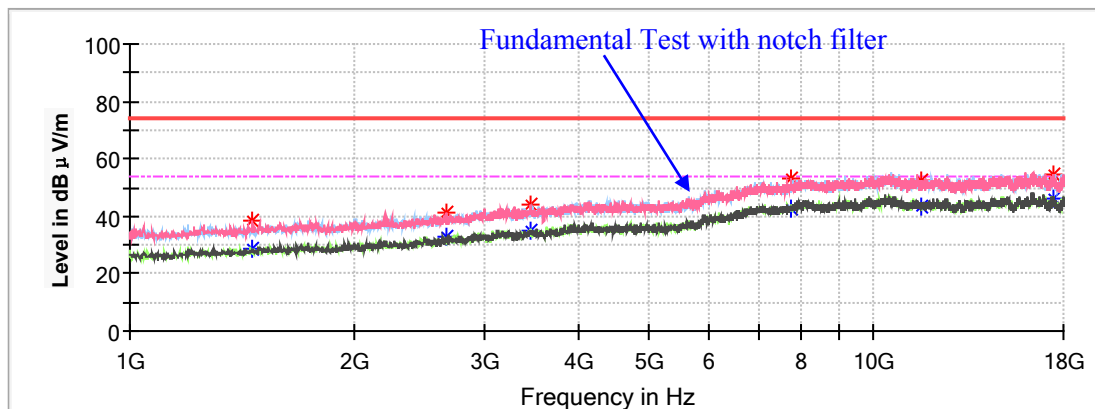
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1460.700000	---	28.94	200.0	V	68.0	-9.6	54.00	25.06
1460.700000	38.59	---	200.0	V	68.0	-9.6	74.00	35.41
2660.900000	41.23	---	200.0	V	357.0	-5.0	68.20	26.97
3454.800000	44.29	---	200.0	V	339.0	-1.9	68.20	23.91
7760.900000	52.81	---	150.0	V	353.0	10.0	68.20	15.39
11568.900000	---	43.11	150.0	H	284.0	11.8	54.00	10.89
11568.900000	52.32	---	150.0	H	284.0	11.8	74.00	21.68
17411.800000	54.66	---	200.0	V	314.0	11.1	68.20	13.54

High Channel: 5825MHz

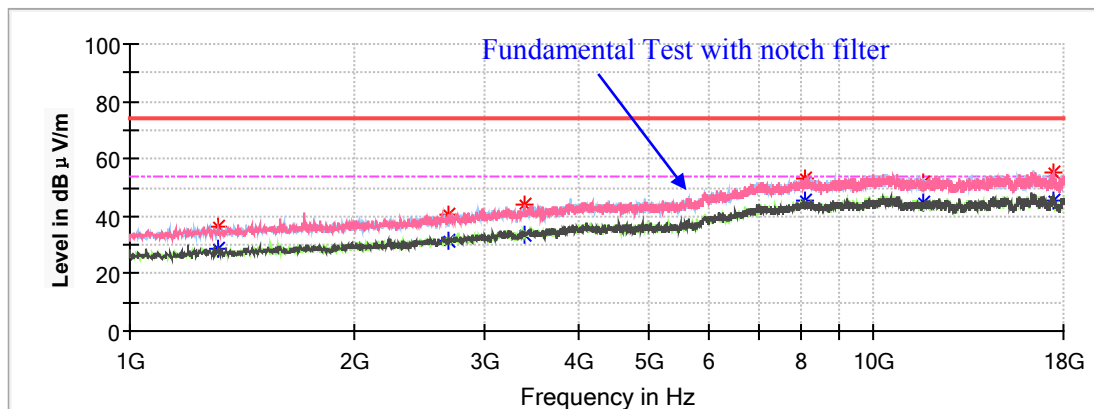Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1316.200000	---	28.47	150.0	V	306.0	-10.5	54.00	25.53
1316.200000	36.66	---	150.0	V	306.0	-10.5	74.00	37.34
2684.700000	40.70	---	200.0	V	357.0	-4.8	68.20	27.50
3398.700000	43.80	---	200.0	V	0.0	-2.1	68.20	24.40
8104.300000	---	45.41	150.0	H	302.0	10.8	54.00	8.59
8104.300000	53.38	---	150.0	H	302.0	10.8	74.00	20.62
11652.200000	---	44.69	200.0	V	350.0	11.7	54.00	9.31
11652.200000	51.58	---	200.0	V	350.0	11.7	74.00	22.42
17425.400000	55.13	---	150.0	V	84.0	11.0	68.20	13.07

802.11ac40 Mode:

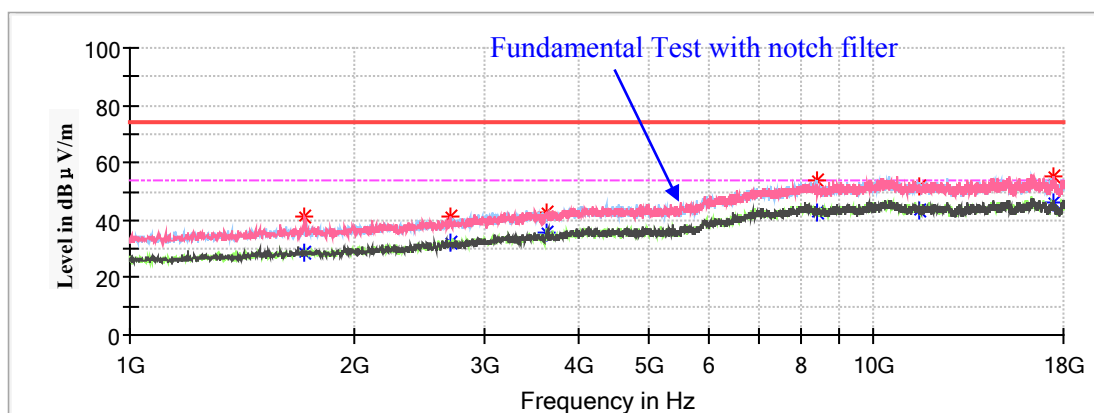
(Pre-scan in the X, Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5755MHz


Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1719.100000	---	28.51	200.0	V	239.0	-8.6	54.00	25.49
1719.100000	41.03	---	200.0	V	239.0	-8.6	74.00	32.97
2693.200000	---	32.16	150.0	V	269.0	-4.8	54.00	21.84
2693.200000	41.17	---	150.0	V	269.0	-4.8	74.00	32.83
3623.100000	---	35.44	150.0	V	203.0	-1.2	54.00	18.56
3623.100000	42.99	---	150.0	V	203.0	-1.2	74.00	31.01
8383.100000	---	42.57	150.0	H	289.0	10.7	54.00	11.43
8383.100000	54.12	---	150.0	H	289.0	10.7	74.00	19.88
11511.100000	---	43.62	150.0	H	121.0	11.8	54.00	10.38
11511.100000	51.67	---	150.0	H	121.0	11.8	74.00	22.33
17445.800000	55.15	---	150.0	V	0.0	11.0	68.20	13.05

High Channel: 5795MHz

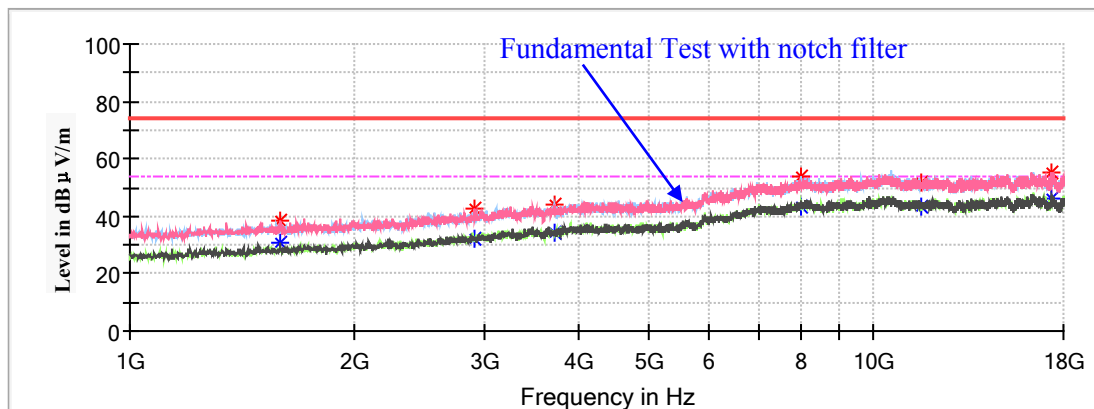Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1591.600000	---	30.71	150.0	V	204.0	-9.1	54.00	23.29
1591.600000	38.43	---	150.0	V	204.0	-9.1	74.00	35.57
2902.300000	42.34	---	200.0	V	238.0	-3.7	68.20	25.86
3733.600000	---	34.29	150.0	H	314.0	-0.8	54.00	19.71
3733.600000	44.23	---	150.0	H	314.0	-0.8	74.00	29.77
7966.600000	53.54	---	150.0	H	174.0	10.7	68.20	14.66
11591.000000	---	43.40	150.0	V	335.0	11.8	54.00	10.60
11591.000000	51.91	---	150.0	V	335.0	11.8	74.00	22.09
17391.400000	55.36	---	200.0	V	77.0	11.1	68.20	12.84

802.11n-HT40 Mode:

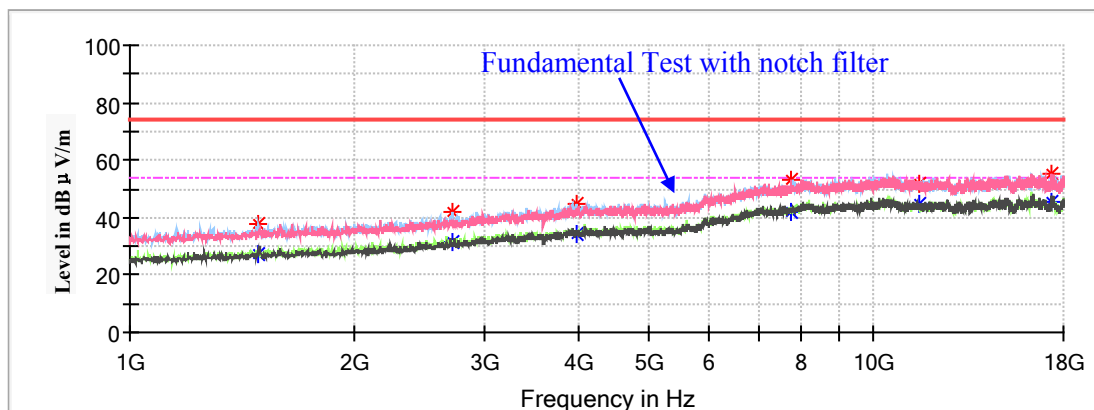
Pre-scan with X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5755MHz


Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1491.300000	---	27.13	150.0	H	167.0	-9.5	54.00	26.87
1491.300000	37.50	---	150.0	H	167.0	-9.5	74.00	36.50
2717.000000	---	31.71	150.0	H	205.0	-4.7	54.00	22.29
2717.000000	42.16	---	150.0	H	205.0	-4.7	74.00	31.84
3995.400000	---	34.53	150.0	H	154.0	0.4	54.00	19.47
3995.400000	44.73	---	150.0	H	154.0	0.4	74.00	29.27
7728.600000	---	42.02	200.0	V	355.0	9.9	54.00	11.98
7728.600000	53.13	---	200.0	V	355.0	9.9	74.00	20.87
11489.000000	---	44.78	200.0	H	60.0	11.8	54.00	9.22
11489.000000	51.75	---	200.0	H	60.0	11.8	74.00	22.25
17335.300000	55.44	---	200.0	V	246.0	11.2	68.20	12.76

Middle Channel: 5795MHz

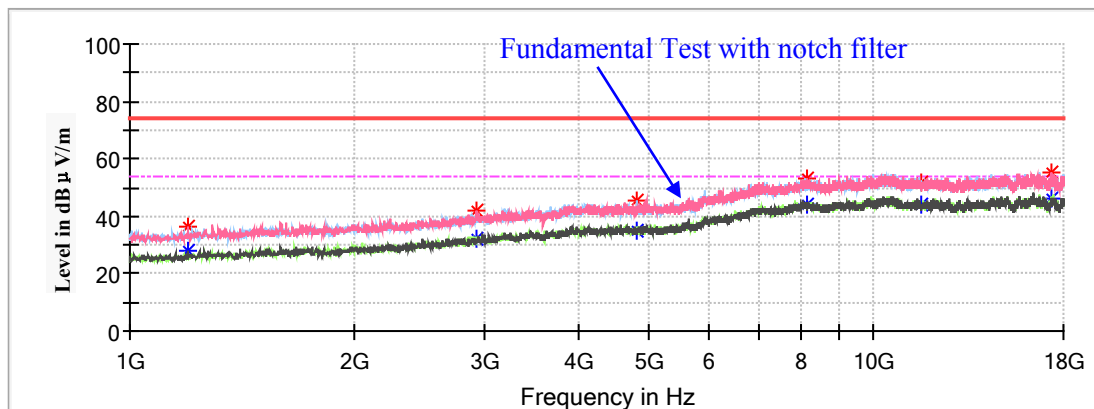Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	27.77	200.0	V	90.0	-11.3	54.00	26.23
1198.900000	36.47	---	200.0	V	90.0	-11.3	74.00	37.53
2917.600000	42.13	---	200.0	V	338.0	-3.6	68.20	26.07
4816.500000	---	34.87	150.0	H	94.0	1.0	54.00	19.13
4816.500000	45.50	---	150.0	H	94.0	1.0	74.00	28.50
8150.200000	---	44.18	200.0	V	103.0	10.8	54.00	9.82
8150.200000	52.82	---	200.0	V	103.0	10.8	74.00	21.18
11591.000000	---	43.87	150.0	V	6.0	11.8	54.00	10.13
11591.000000	51.41	---	150.0	V	6.0	11.8	74.00	22.59
17381.200000	54.97	---	150.0	V	154.0	11.1	68.20	13.23

802.11ac80 Mode:

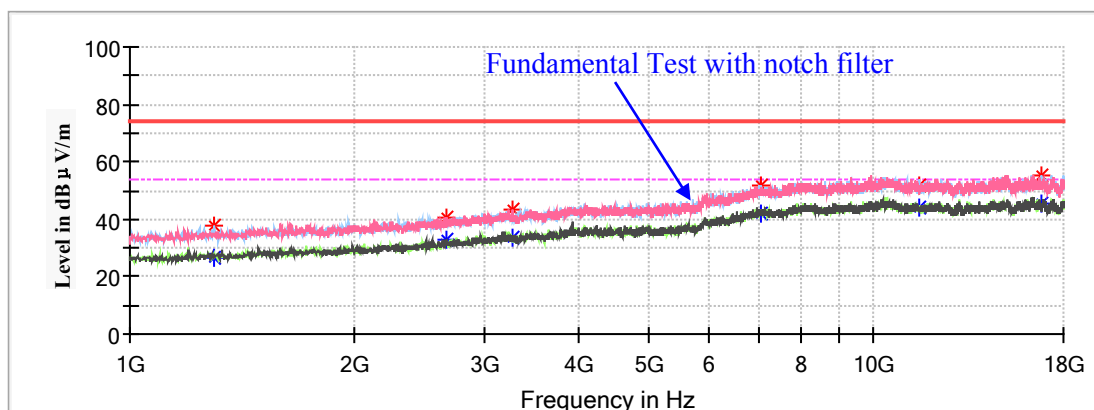
Pre-scan with X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5775MHz

Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1300.900000	---	26.87	150.0	H	0.0	-10.6	54.00	27.13
1300.900000	37.72	---	150.0	H	0.0	-10.6	74.00	36.28
2662.600000	40.75	---	150.0	V	135.0	-5.0	68.20	27.45
3262.700000	---	33.41	150.0	V	173.0	-2.4	54.00	20.59
3262.700000	43.69	---	150.0	V	173.0	-2.4	74.00	30.31
7062.200000	51.95	---	200.0	H	37.0	8.9	68.20	16.25
11550.200000	---	44.24	200.0	H	358.0	11.8	54.00	9.76
11550.200000	51.88	---	200.0	H	358.0	11.8	74.00	22.12
16862.700000	55.33	---	200.0	H	88.0	12.0	68.20	12.87

*Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11a mode low channel** in Z-axis of orientation was recorded*

Controlled by EMC32

Ref 107 dBμV *Att 10 dB *RBW 1 MHz Marker 1 [T1] 60.36 dBμV
 *VIEW 3 MHz 35.22000000 GHz
 *SWT 130 ms

Marker 2 [T2] 49.40 dBμV
 40.00000000 GHz

1 ER
 MASH

D2 74 dBμV

D1 54 dBμV

Start 18 GHz 2.2 GHz/ Stop 40 GHz

Date: 23.APR.2021 12:12:50

Controlled by EMC32

★ RBW 1 MHz
★ VEW 3 MHz
SWT 130 ms

Marker 2 [T2]
49.59 dBμV
40.00000000 GHz

Ref 107 dBμV
★ Att 10 dB

Marker 1 [T1]
60.65 dBμV
39.95600000 GHz

1 RBW
MHz

2 VEW
MHz

D2 74 dBμV

D1 54 dBμV

Start 18 GHz

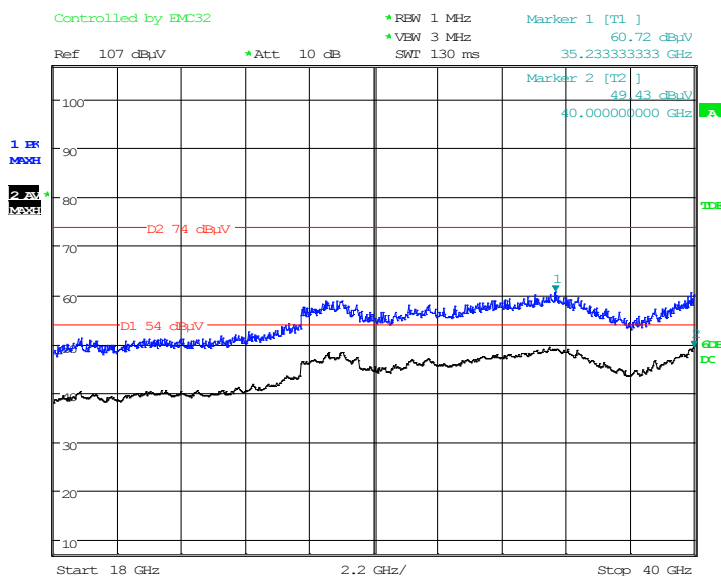
2.2 GHz/

Stop 40 GHz


Date: 23.APR.2021 12:25:45

18GHz-40GHz(5725-5850MHz Band):

Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11a mode high channel** in Z-axis of orientation was recorded

Horizontal

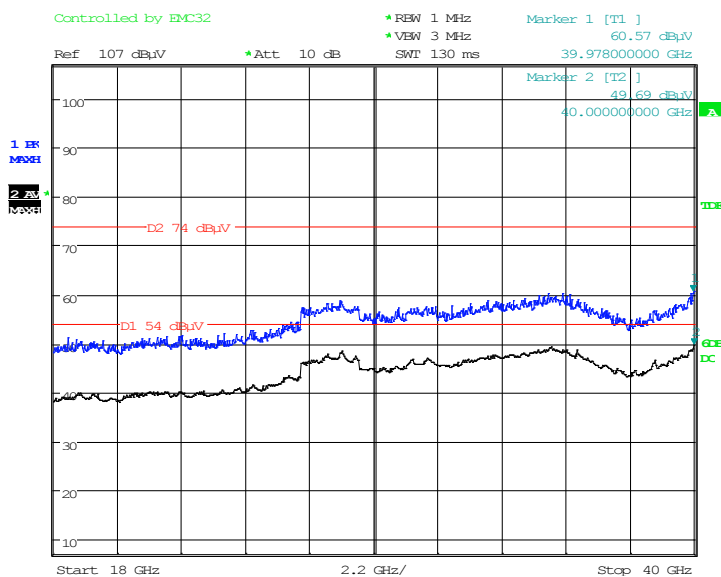Date: 23.APR.2021 12:35:43

Vertical

Date: 23.APR.2021 12:45:31

Restricted Bands Emissions Test (5150-5250MHz Band):

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	---	50.79	200	V	221	11.3	54.00	3.21
5150.00	59.77	---	200	V	221	11.3	74.00	14.23
High Channel: 5240MHz								
5350.00	59.12	---	150	V	145	11.8	74.00	14.88
5350.00	---	51.36	150	V	145	11.8	54.00	2.64

802.11ac20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	---	51.92	150	V	113	11.3	54.00	2.08
5150.00	59.13	---	150	V	113	11.3	74.00	14.87
High Channel: 5240MHz								
5350.00	58.63	---	200	V	320	11.8	74.00	15.37
5350.00	---	51.66	200	V	320	11.8	54.00	2.34

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	---	50.69	150	V	50	11.3	54.00	3.31
5150.00	59.06	---	150	V	50	11.3	74.00	14.94
High Channel: 5240MHz								
5350.00	58.88	---	200	V	76	11.8	74.00	15.12
5350.00	---	52.31	200	V	76	11.8	54.00	3.69

802.11ac40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5150.00	---	51.09	200	V	193	11.3	54.00	2.91
5150.00	59.07	---	200	V	193	11.3	74.00	14.93
High Channel: 5230MHz								
5350.00	59.18	---	150	V	182	11.8	74.00	14.82
5350.00	---	51.08	150	V	182	11.8	54.00	2.92

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation in horizontal polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5150.00	---	50.06	200	H	243	11.3	54.00	3.94
5150.00	58.38	---	200	H	243	11.3	74.00	15.62
High Channel: 5230MHz								
5350.00	59.89	---	200	H	189	11.8	74.00	14.11
5350.00	---	52.63	200	H	189	11.8	54.00	3.37

802.11ac80 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation in horizontal polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Channel: 5210MHz								
5150.00	59.85	---	150	H	32	11.3	74.00	14.15
5150.00	---	51.38	150	H	32	11.3	54.00	2.62
5350.00	59.12	---	200	H	42	11.8	74.00	14.88
5350.00	---	52.00	200	H	42	11.8	54.00	2.00

Restricted Bands Emissions Test (5725-5850MHz Band):

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	58.42	---	200	V	53	13.0	68.2	9.78
5700.00	58.85	---	200	H	65	13.3	105.2	46.35
5720.00	62.17	---	150	V	49	13.4	110.8	48.63
5725.00	68.72	---	150	V	4	13.4	122.2	53.48
High Channel: 5825MHz								
5850.00	61.39	---	200	H	146	14.2	122.2	60.81
5855.00	60.41	---	200	H	191	14.2	110.8	50.39
5875.00	60.31	---	200	V	355	14.3	105.2	44.89
5925.00	59.75	---	200	H	299	14.7	68.2	8.45

802.11ac20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	59.04	---	150	H	90	13.0	68.2	9.16
5700.00	61.94	---	200	H	222	13.3	105.2	43.26
5720.00	61.99	---	150	V	358	13.4	110.8	48.81
5725.00	71.16	---	150	V	0	13.4	122.2	51.04
High Channel: 5825MHz								
5850.00	60.92	---	150	V	295	14.2	122.2	61.28
5855.00	61.82	---	200	H	74	14.2	110.8	48.98
5875.00	59.62	---	200	H	137	14.3	105.2	45.58
5925.00	60.17	---	150	V	211	14.7	68.2	8.03

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	59.31	---	150	H	0	13.0	68.2	8.89
5700.00	60.31	---	200	H	185	13.3	105.2	44.89
5720.00	62.6	---	150	V	0	13.4	110.8	48.2
5725.00	69.67	---	150	V	2	13.4	122.2	52.53
High Channel: 5825MHz								
5850.00	59.8	---	150	V	39	14.2	122.2	62.4
5855.00	60.39	---	150	H	244	14.2	110.8	50.41
5875.00	60.09	---	150	H	51	14.3	105.2	45.11
5925.00	60.84	---	150	H	244	14.7	68.2	7.36

802.11ac40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5650.00	59.65	---	150	H	202	13.0	68.2	8.55
5700.00	60.62	---	150	V	51	13.3	105.2	44.58
5720.00	74.61	---	150	V	14	13.4	110.8	36.19
5725.00	77.21	---	150	V	1	13.4	122.2	44.99
High Channel: 5795MHz								
5850.00	60.51	---	150	H	274	14.2	122.2	61.69
5855.00	60.22	---	200	H	29	14.2	110.8	50.58
5875.00	60.45	---	150	H	353	14.3	105.2	44.75
5925.00	61.25	---	200	H	110	14.7	68.2	6.95

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5650.00	58.74	---	150	V	50	13.0	68.2	9.46
5700.00	61.04	---	150	V	5	13.3	105.2	44.16
5720.00	75.87	---	150	V	50	13.4	110.8	34.93
5725.00	77.52	---	150	V	12	13.4	122.2	44.68
High Channel: 5795MHz								
5850.00	60.83	---	150	V	64	14.2	122.2	61.37
5855.00	59.56	---	200	H	97	14.2	110.8	51.24
5875.00	61.35	---	200	H	195	14.3	105.2	43.85
5925.00	60.22	---	150	H	311	14.7	68.2	7.98

802.11ac80 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Channel: 5775MHz								
5650.00	60.11	---	150	V	274	13.0	68.2	8.09
5700.00	68.74	---	150	V	44	13.3	105.2	36.46
5720.00	73.7	---	150	V	34	13.4	110.8	37.1
5725.00	72.67	---	150	V	0	13.4	122.2	49.53
5850.00	64.16	---	150	V	24	14.2	122.2	58.04
5855.00	63.96	---	150	V	63	14.2	110.8	46.84
5875.00	61.74	---	200	V	23	14.3	105.2	43.46
5925.00	60.66	---	150	H	232	14.7	68.2	7.54

FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz band is made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	24.3~24.7 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.3~101.5 kPa

The testing was performed by Stone Zhang from 2021-04-26 to 2021-05-28.

Test Result: Compliant



5150-5250 MHz:

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	Low	5180	22.846	17.014
	Middle	5200	22.926	16.834
	High	5240	22.485	16.894
802.11ac20	Low	5180	23.687	18.036
	Middle	5200	23.868	18.036
	High	5240	24.289	18.036
802.11n-HT20	Low	5180	23.747	18.036
	Middle	5200	23.527	18.036
	High	5240	23.988	18.036
802.11ac40	Low	5190	42.204	36.433
	High	5230	42.004	36.313
802.11n-HT40	Low	5190	42.084	36.433
	High	5230	42.244	36.553
802.11ac80	/	5210	87.535	76.232


5725-5850MHz:

Test mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	Low	5745	15.691	17.255	≥ 0.5
	Middle	5785	15.631	16.894	≥ 0.5
	High	5825	15.691	16.834	≥ 0.5
802.11ac20	Low	5745	16.232	18.156	≥ 0.5
	Middle	5785	15.752	18.036	≥ 0.5
	High	5825	16.232	17.976	≥ 0.5
802.11n-HT20	Low	5745	16.413	18.277	≥ 0.5
	Middle	5785	16.473	18.036	≥ 0.5
	High	5825	16.353	18.096	≥ 0.5
802.11ac40	Low	5755	35.952	36.433	≥ 0.5
	High	5795	35.711	36.433	≥ 0.5
802.11n-HT40	Low	5755	35.952	36.553	≥ 0.5
	High	5795	35.832	36.433	≥ 0.5
802.11ac80	/	5775	75.030	75.992	≥ 0.5

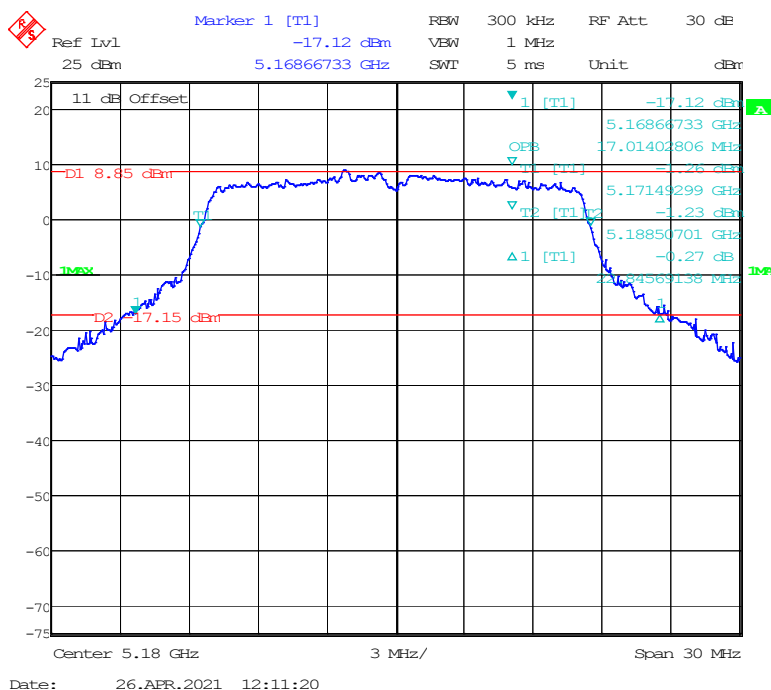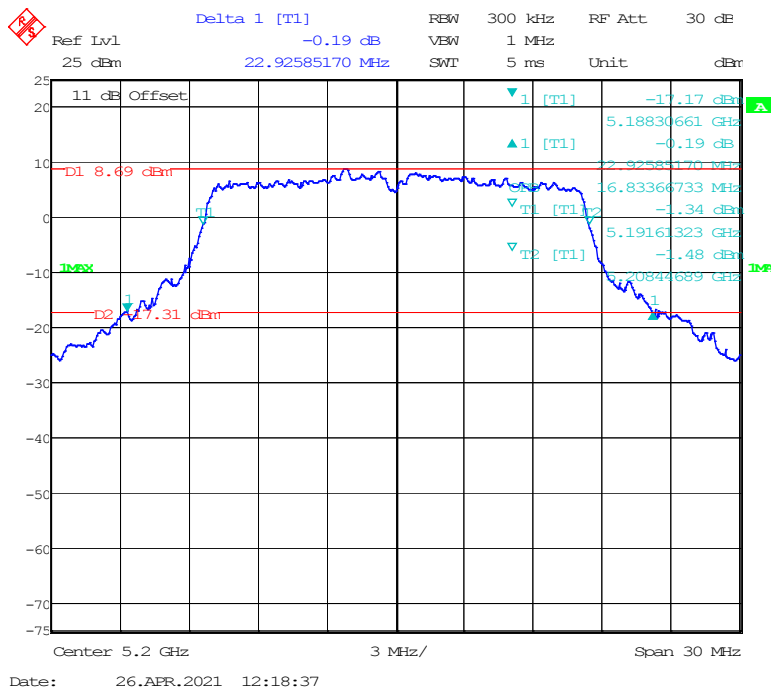
Note: No transmitted signal in the 99% bandwidth extends into the U-NII-2A and U-NII-2C band.



5150-5250 MHz Band:**26 Bandwidth&99% Occupied Bandwidth****802.11a mode, 5180MHz****802.11a mode, 5200MHz**

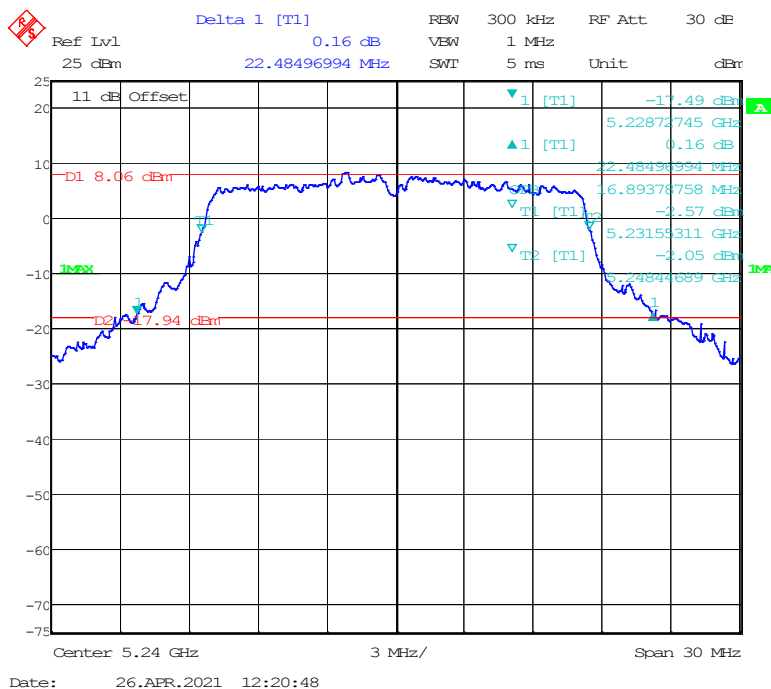802.11a mode, 5240MHz




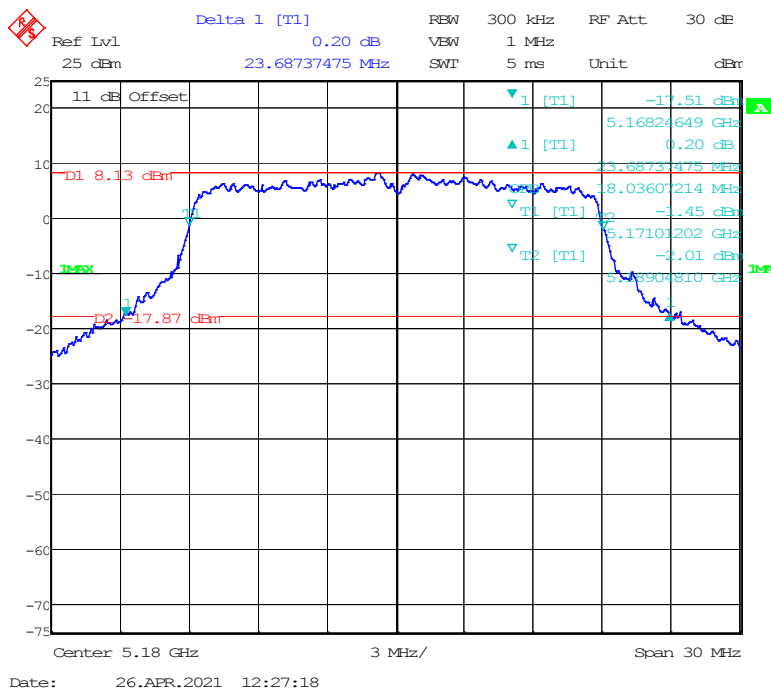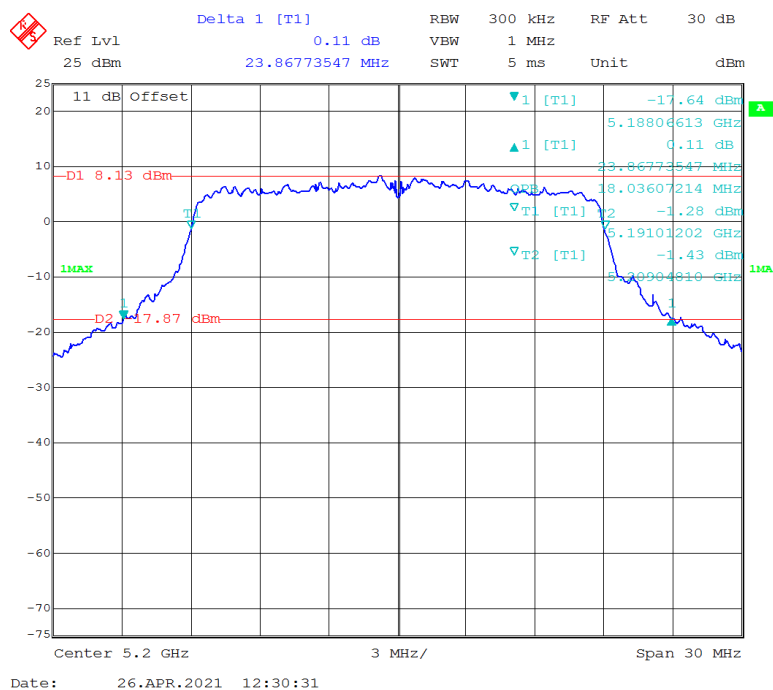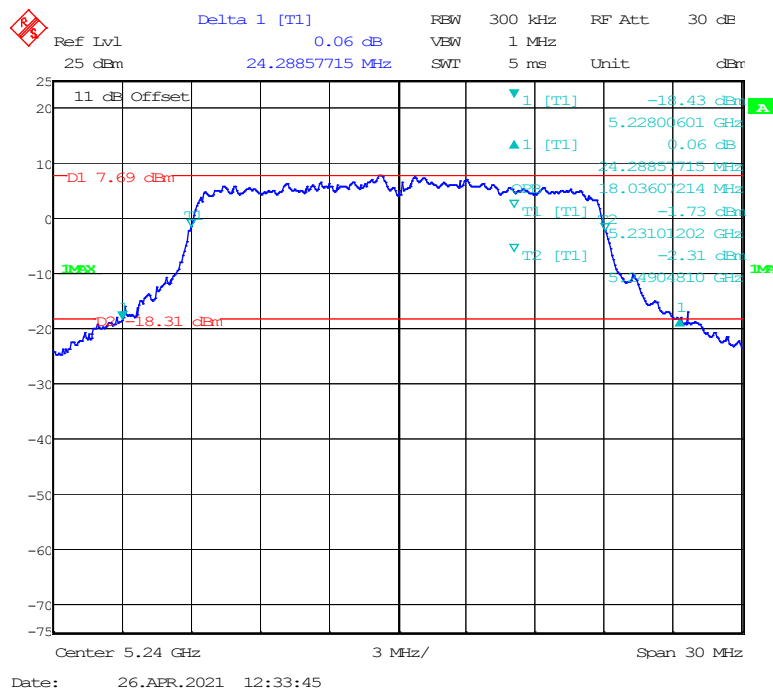802.11ac20 mode, 5180MHz




802.11ac20 mode, 5200MHz**802.11ac20 mode, 5240MHz**

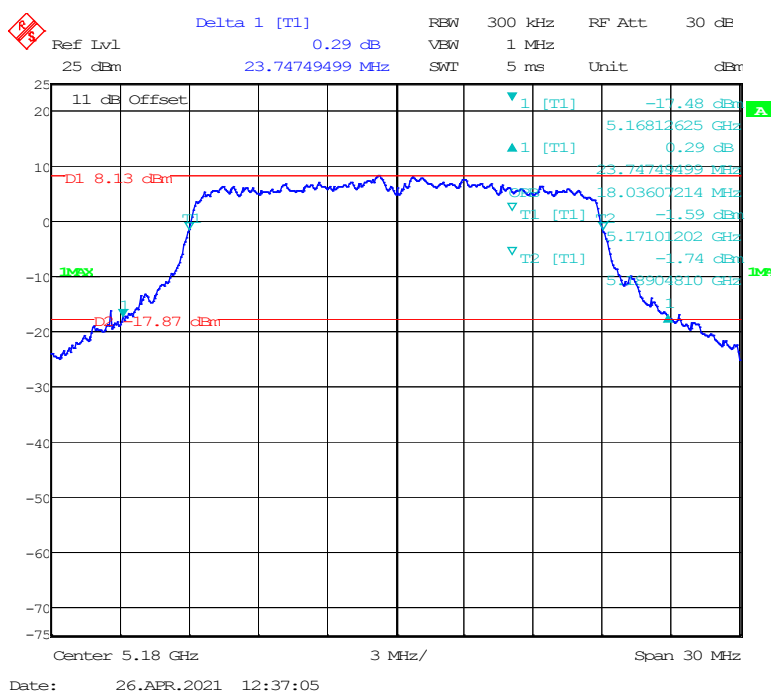
802.11n-HT20 mode, 5180MHz



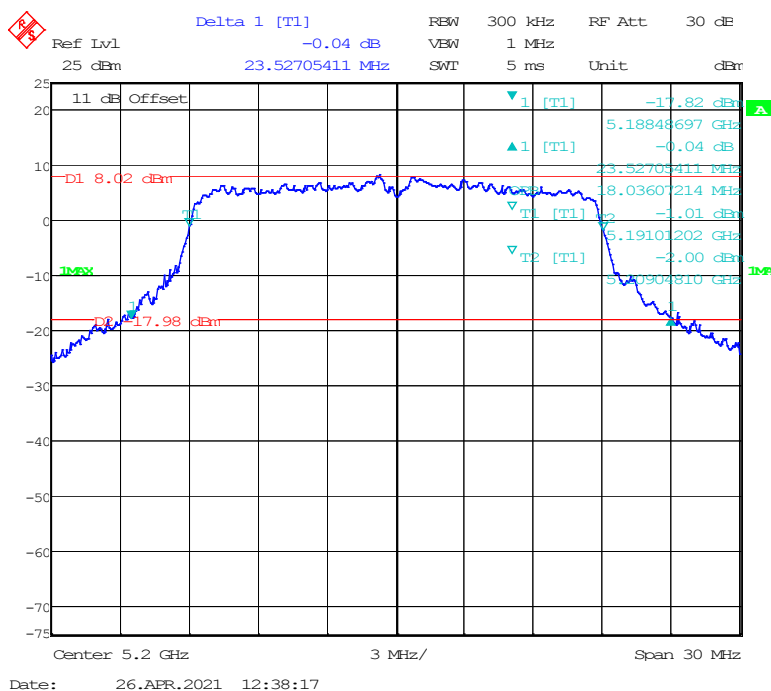
802.11n-HT20 mode, 5200MHz





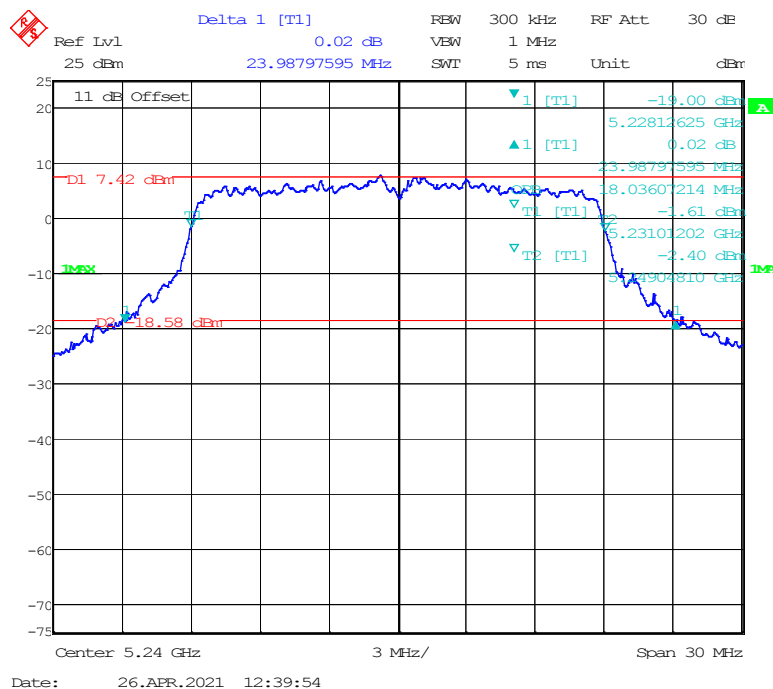802.11n-HT20 mode, 5240MHz




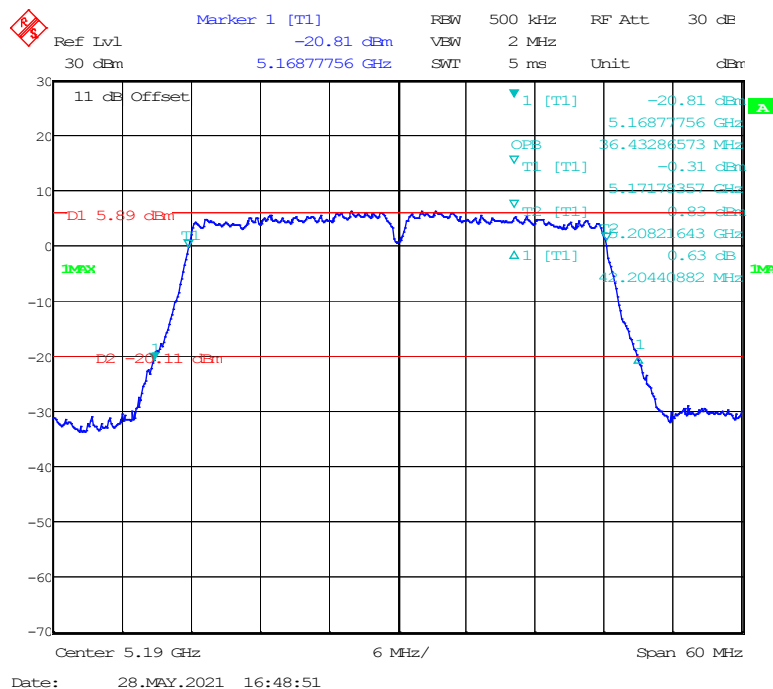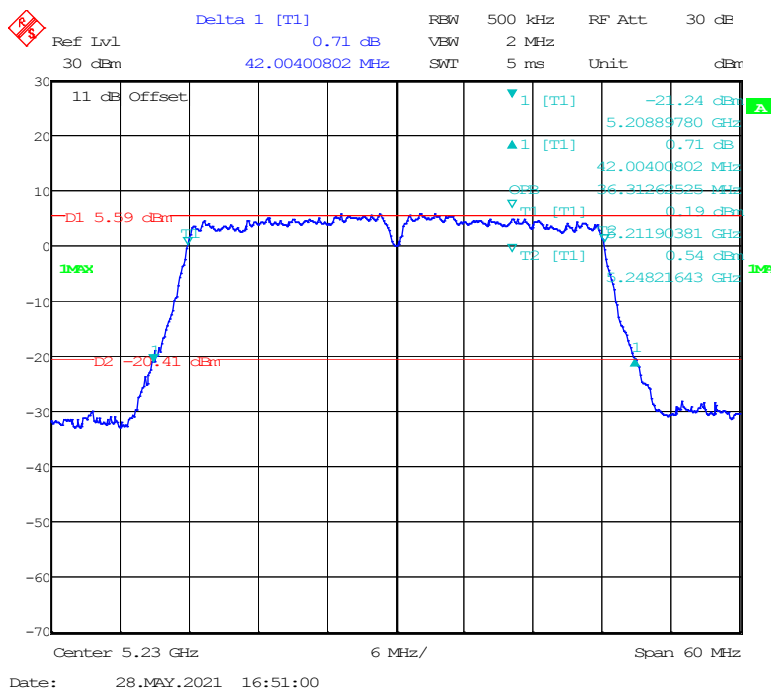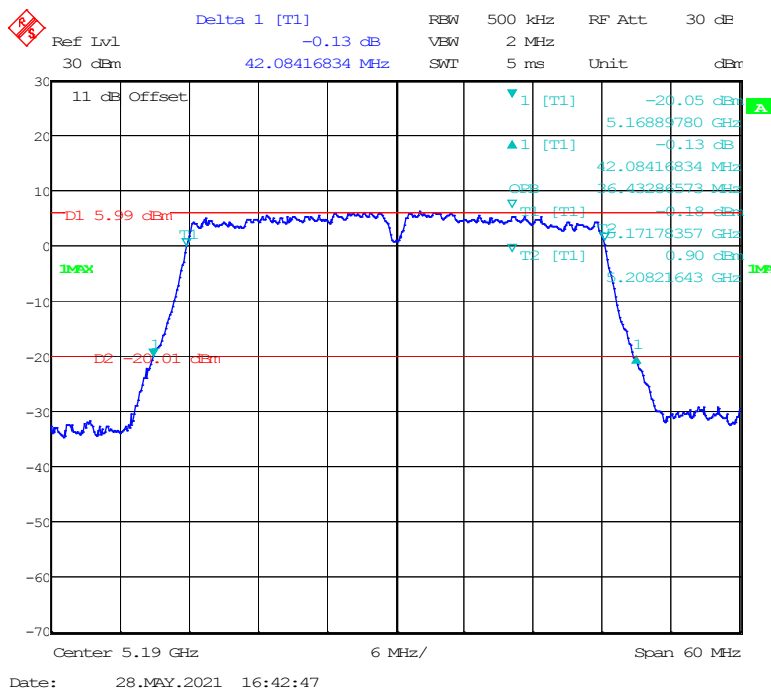802.11ac40 mode, 5190MHz




802.11ac40 mode, 5230MHz**802.11n-HT40 mode, 5190MHz**

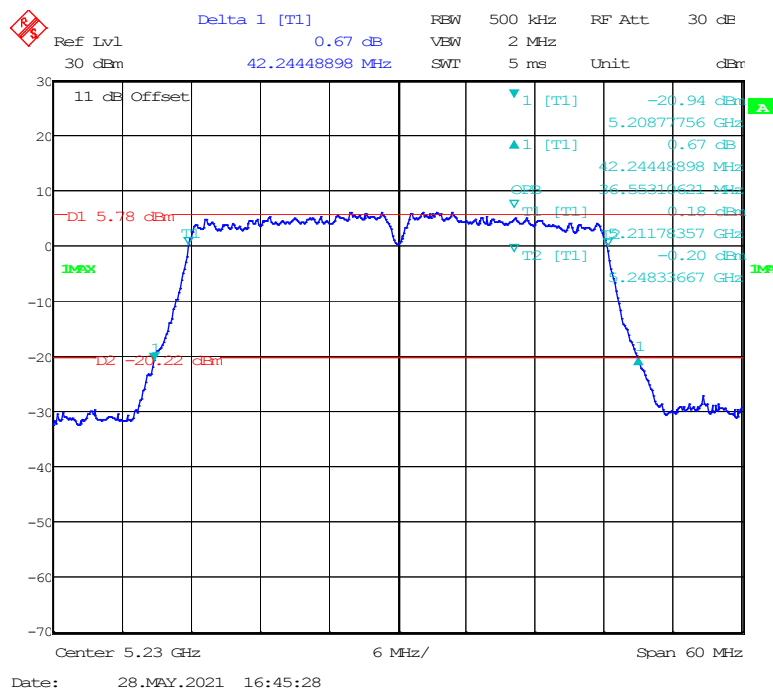802.11n-HT40 mode, 5230MHz



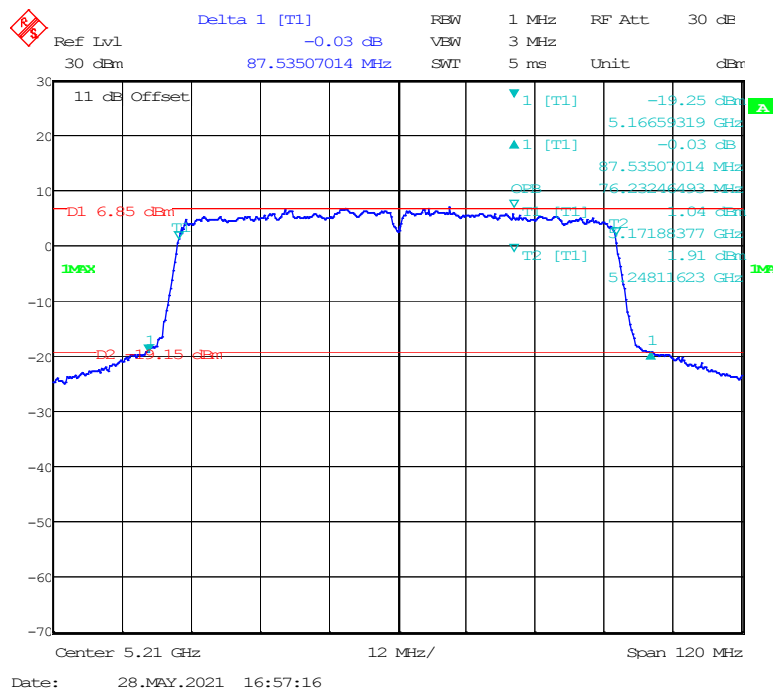
802.11ac80 mode, 5210MHz




5725-5850 MHz Band



6dB Bandwidth


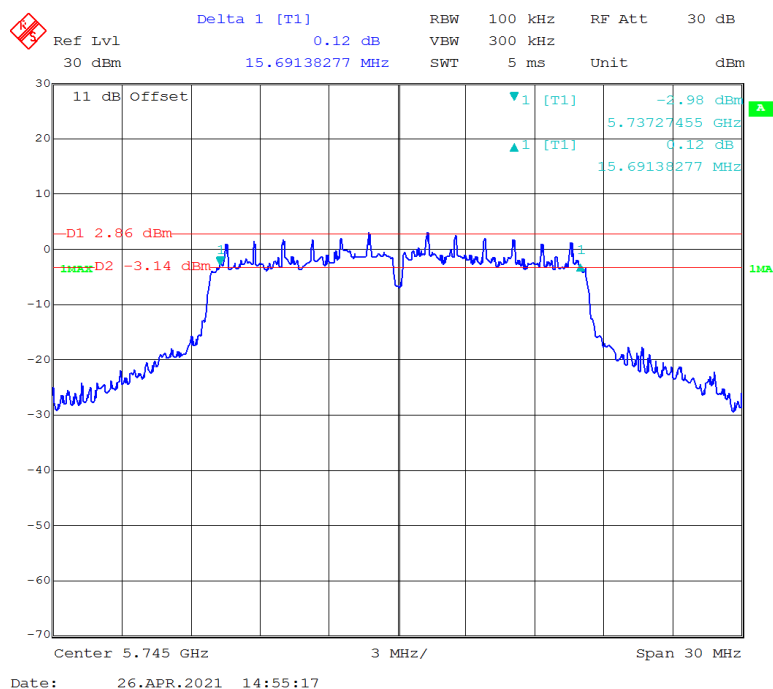
802.11a mode, 5745MHz





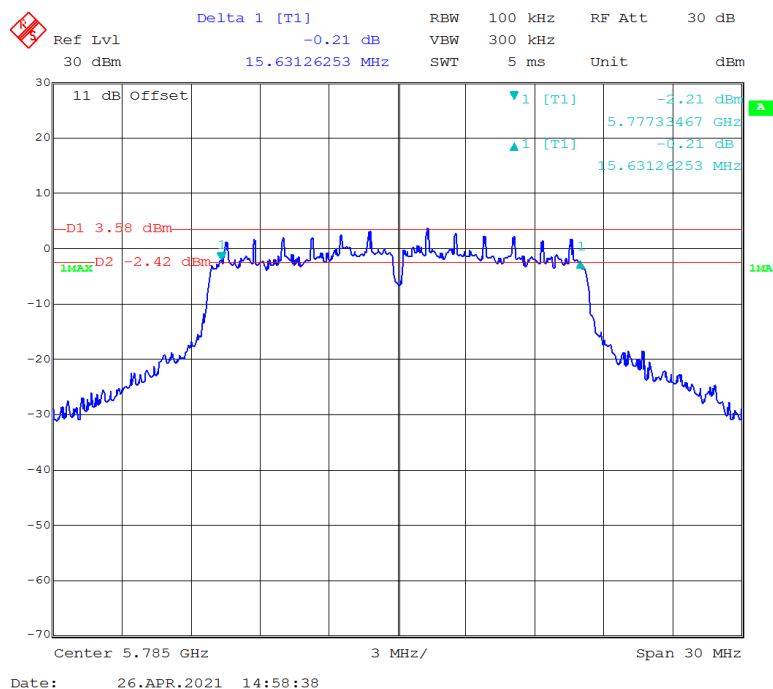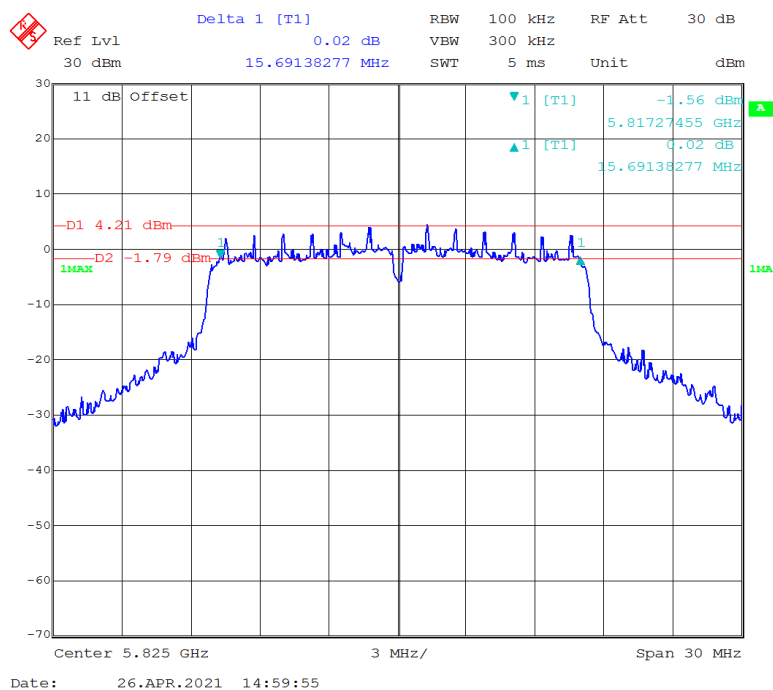
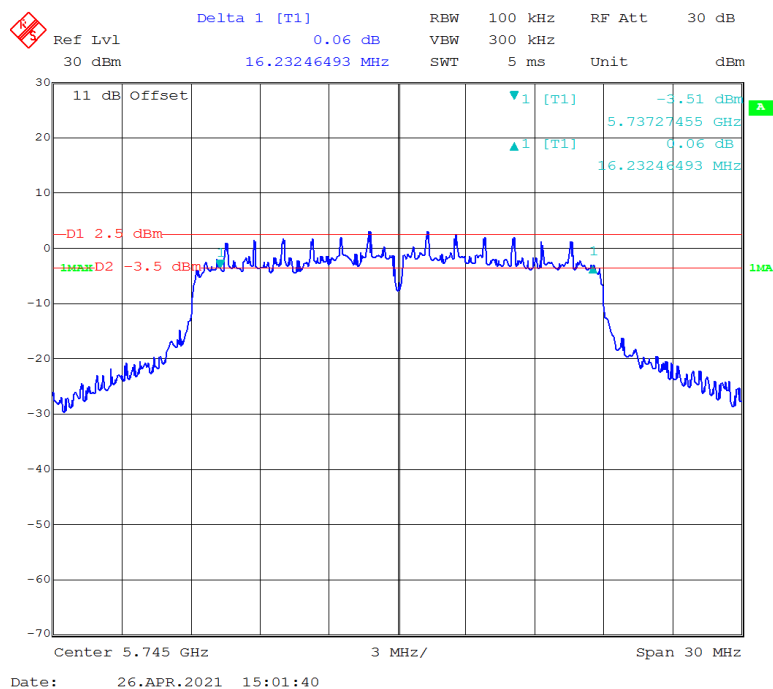
802.11a mode, 5785MHz





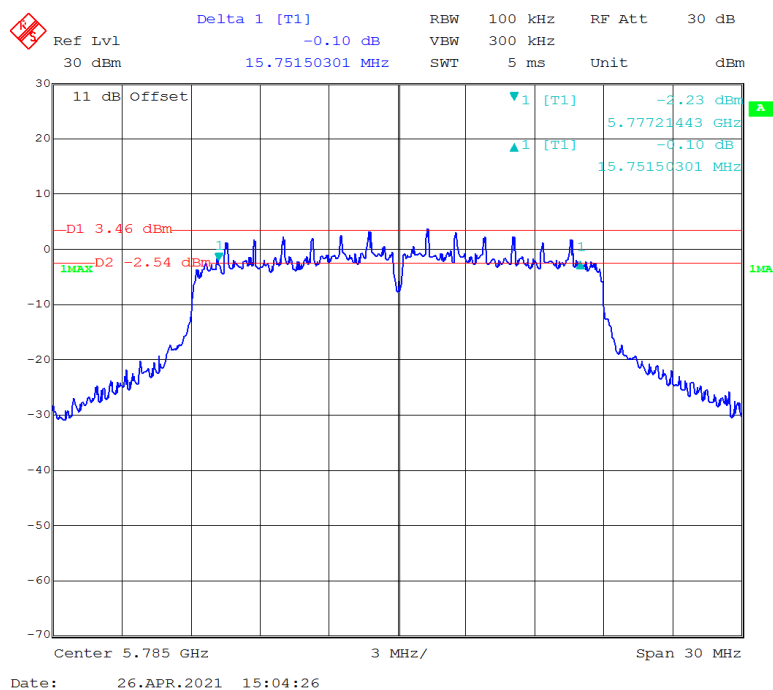
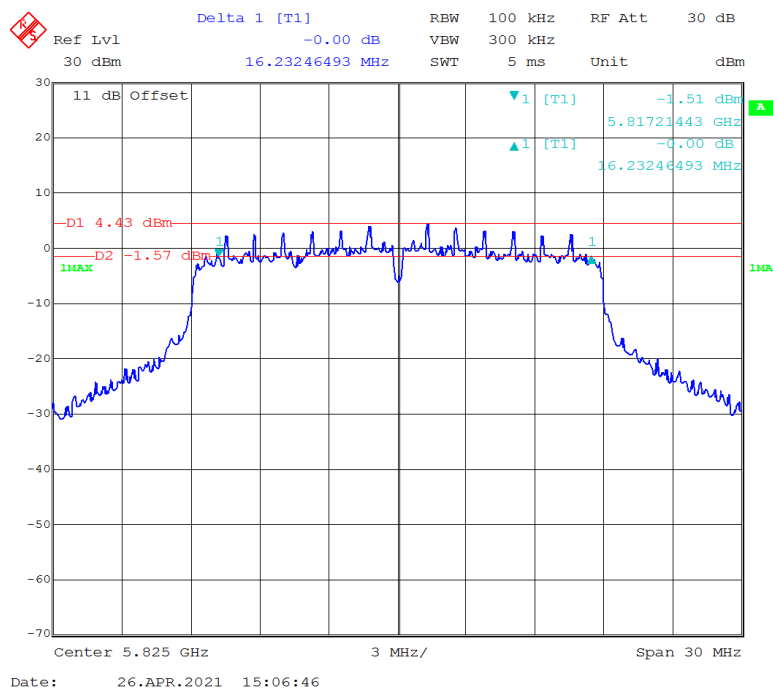
802.11a mode, 5825MHz**802.11ac20 mode, 5745MHz**

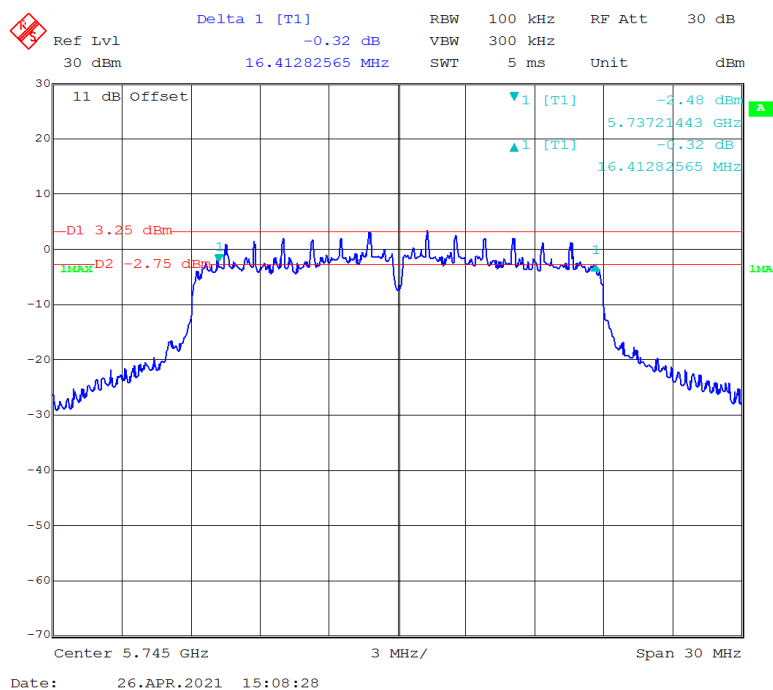
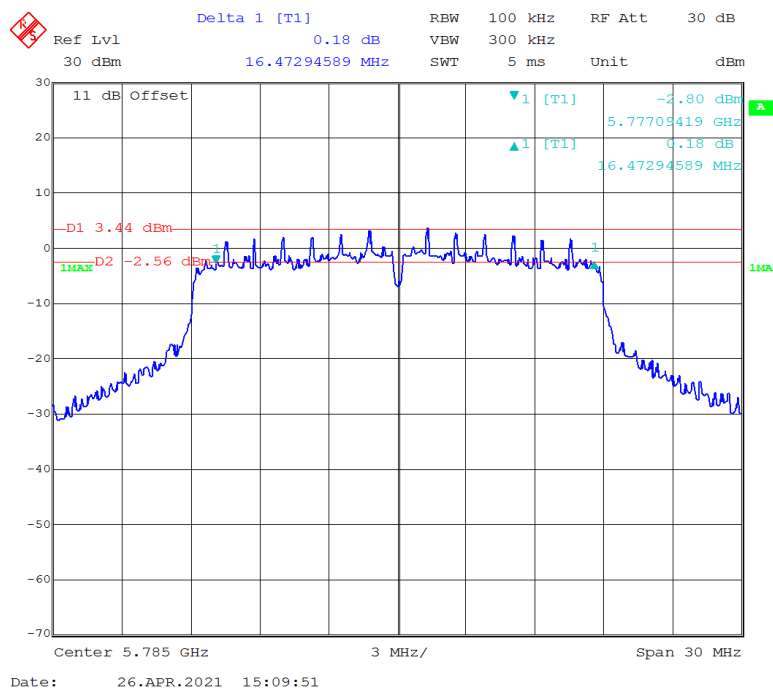
802.11ac20 mode, 5785MHz**802.11ac20 mode, 5825MHz**

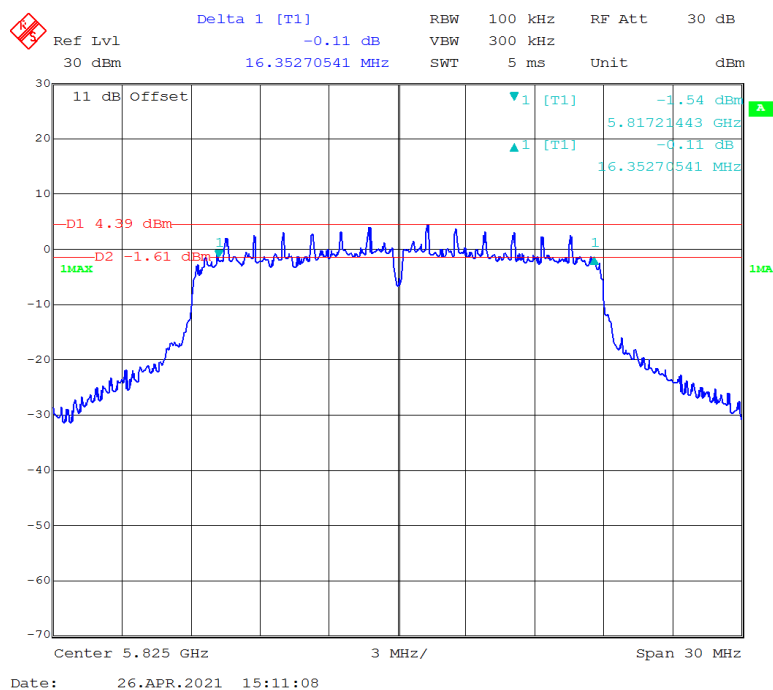
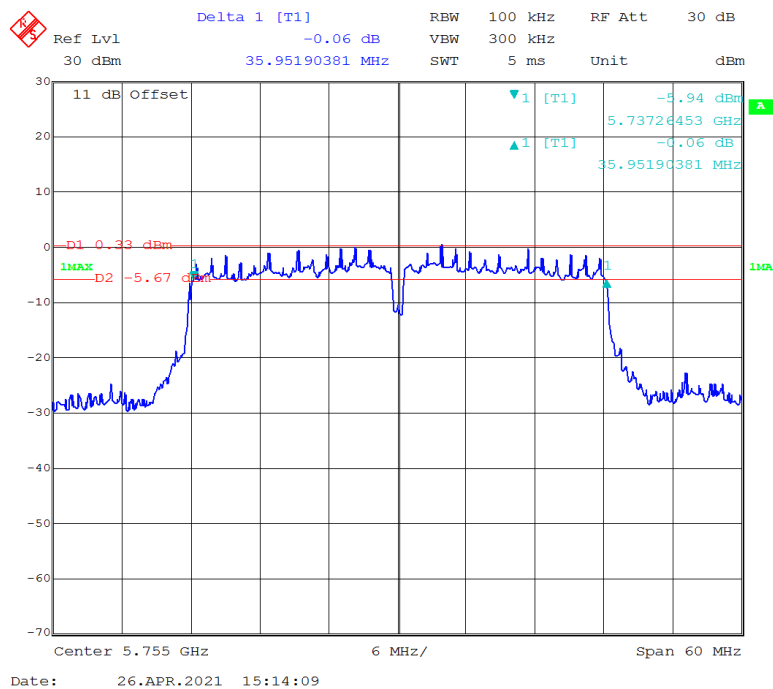
802.11n-HT20 mode, 5745MHz**802.11n-HT20 mode, 5785MHz**

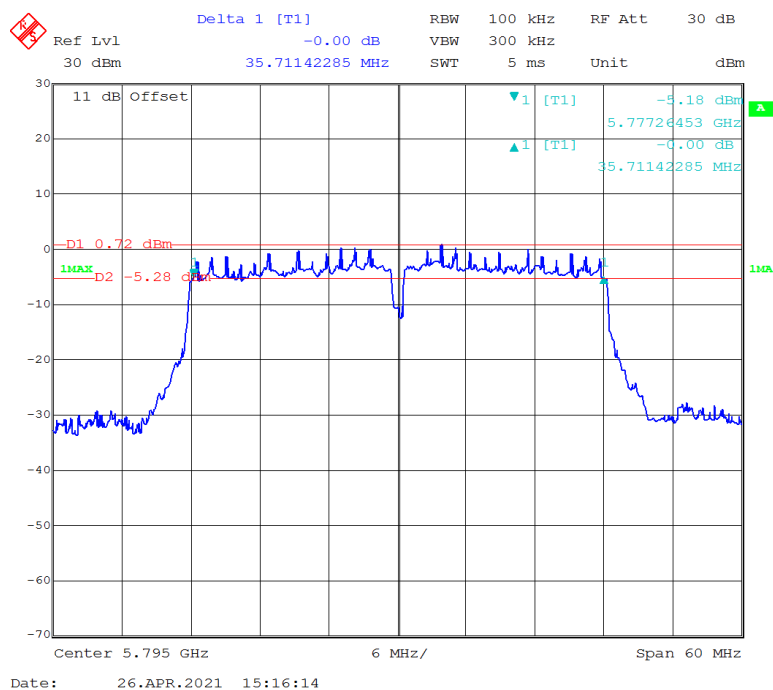
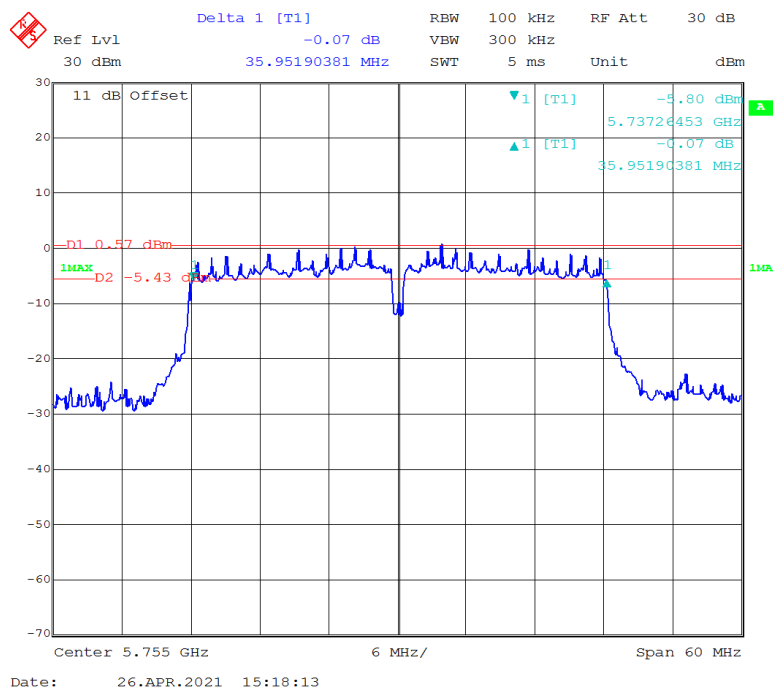
802.11n-HT20 mode, 5825MHz**802.11ac40 mode, 5755MHz**

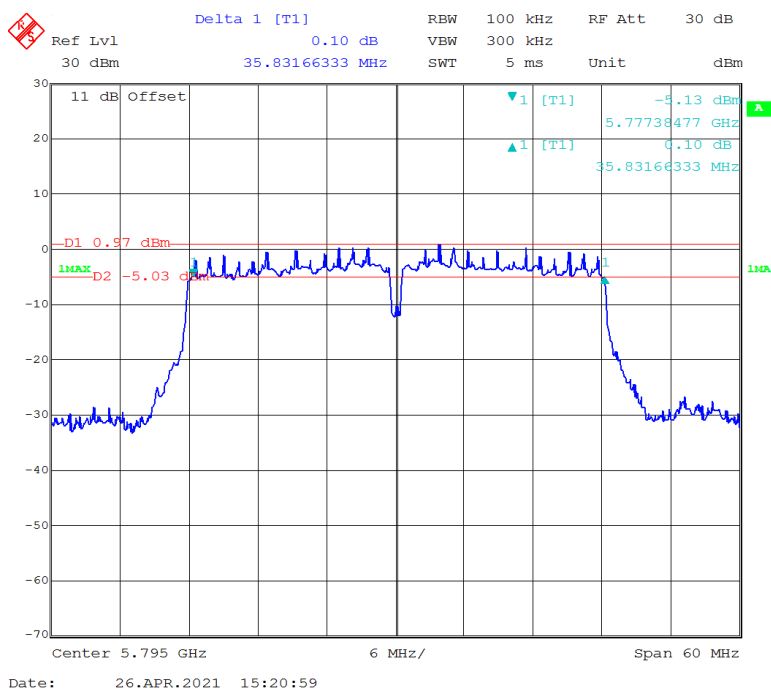
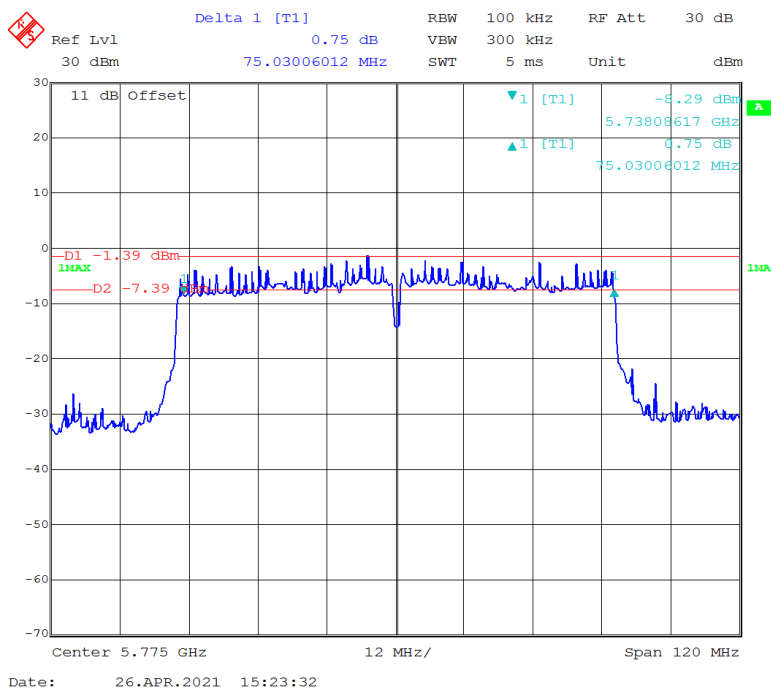
802.11ac40 mode, 5795MHz**802.11n-HT40 mode, 5755MHz**

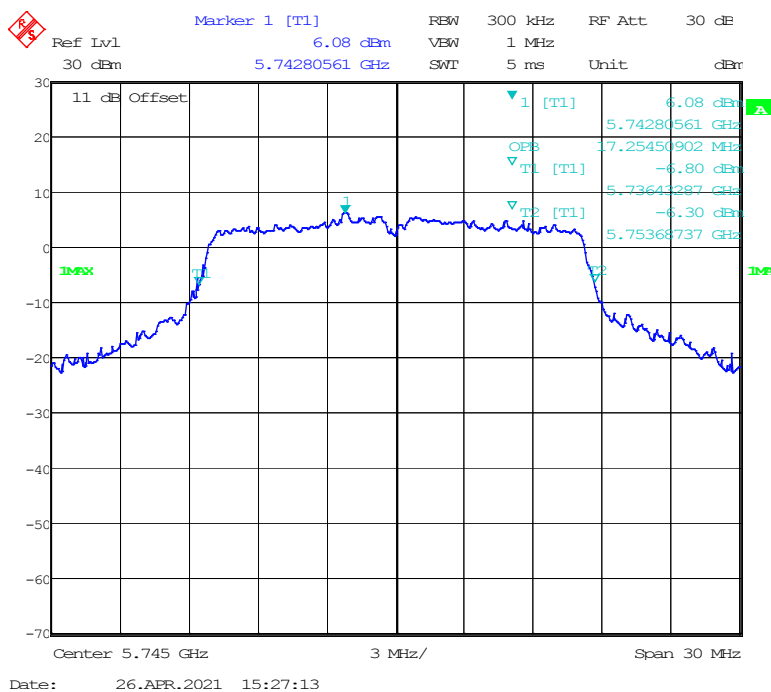
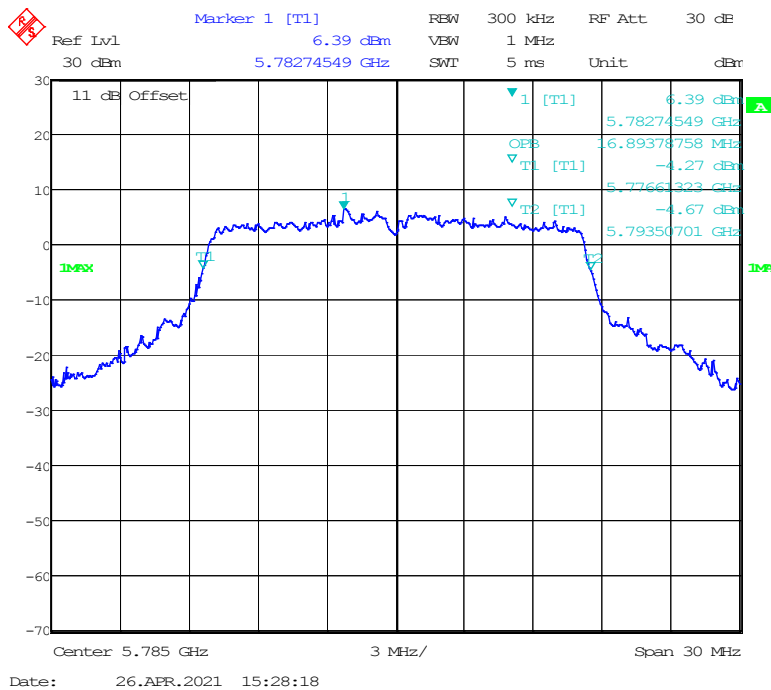
802.11n-HT40 mode, 5795MHz**802.11ac80 mode, 5775MHz**

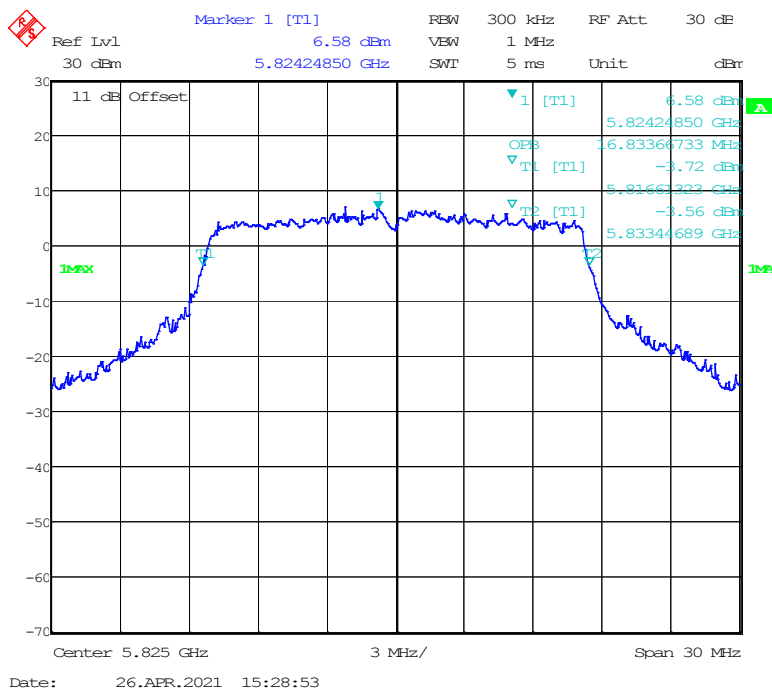
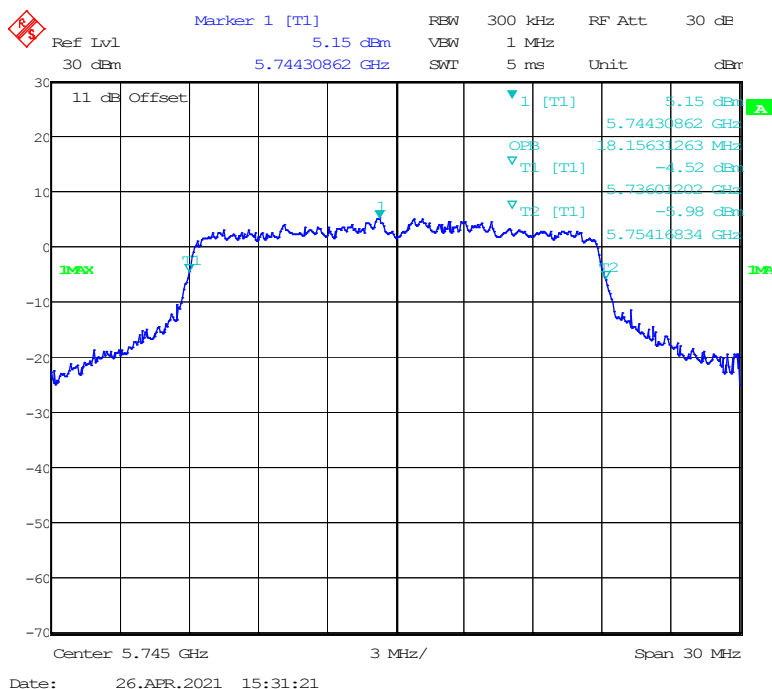
99% Occupied Bandwidth:**802.11a mode, 5745MHz****802.11a mode, 5785MHz**

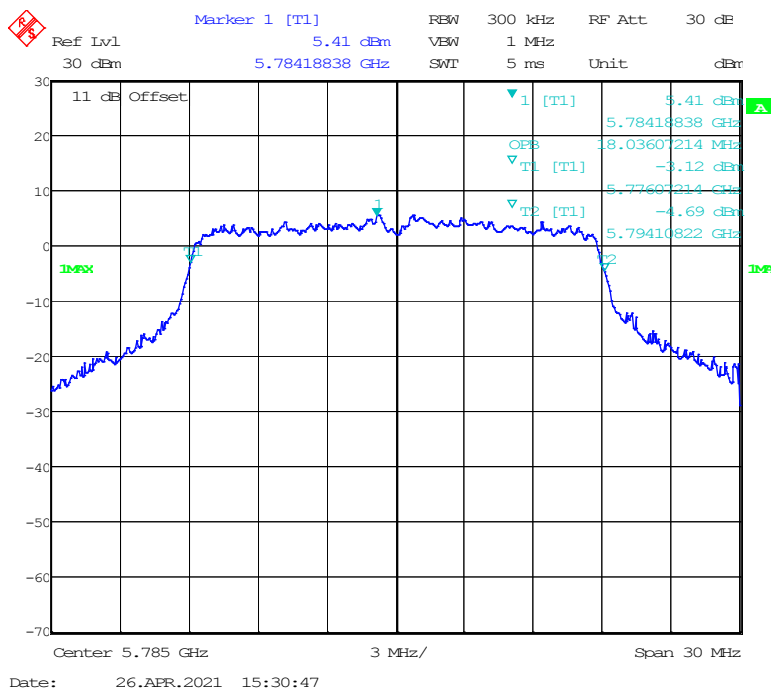
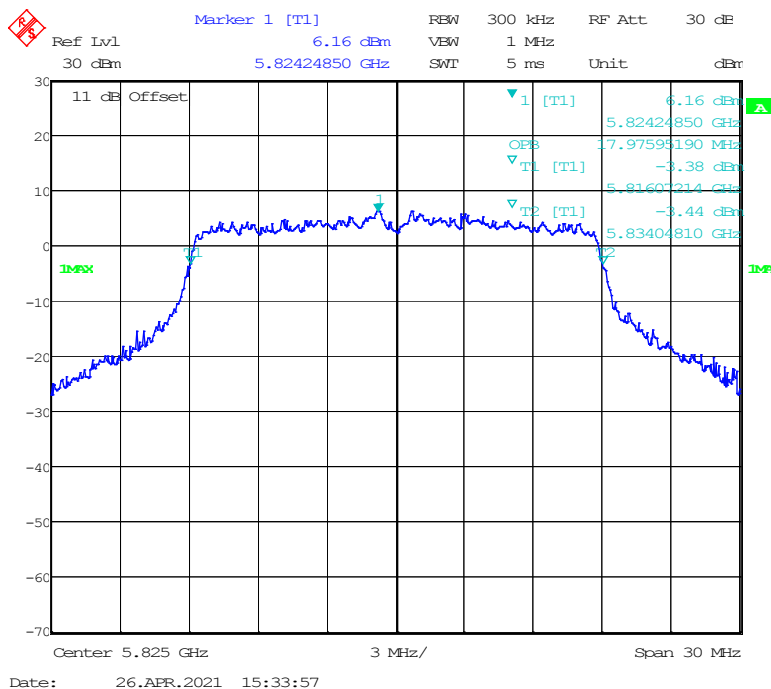
802.11a mode, 5825MHz**802.11ac20 mode, 5745MHz**

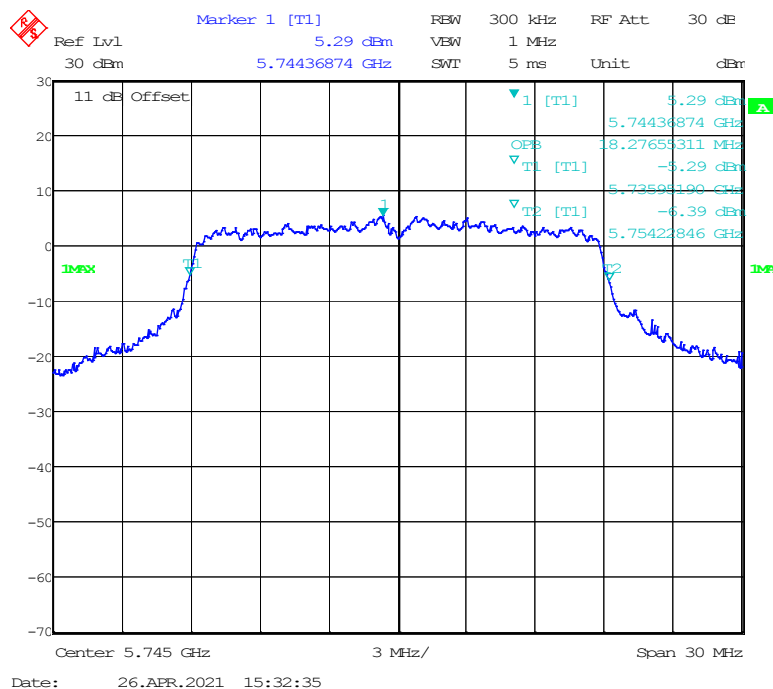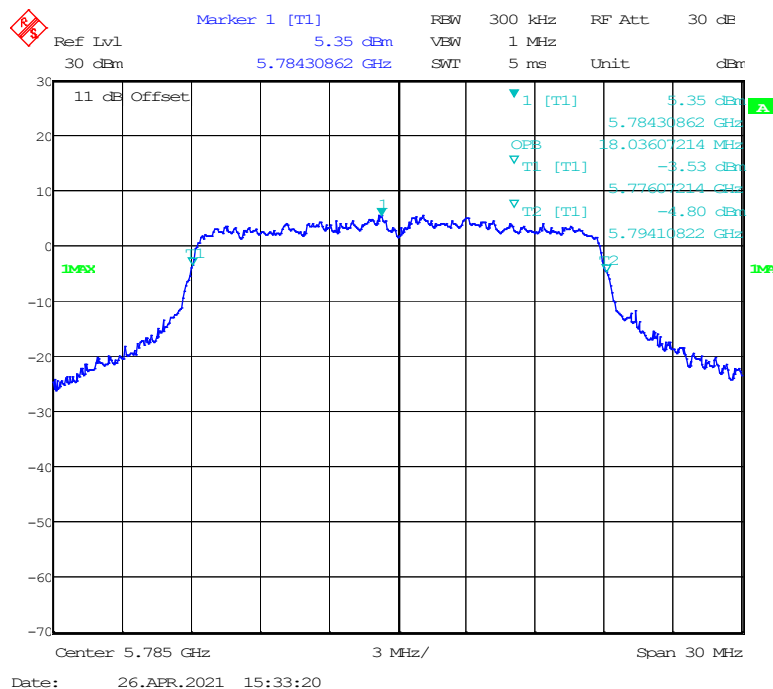802.11ac20 mode, 5785MHz**802.11ac20 mode, 5825MHz**

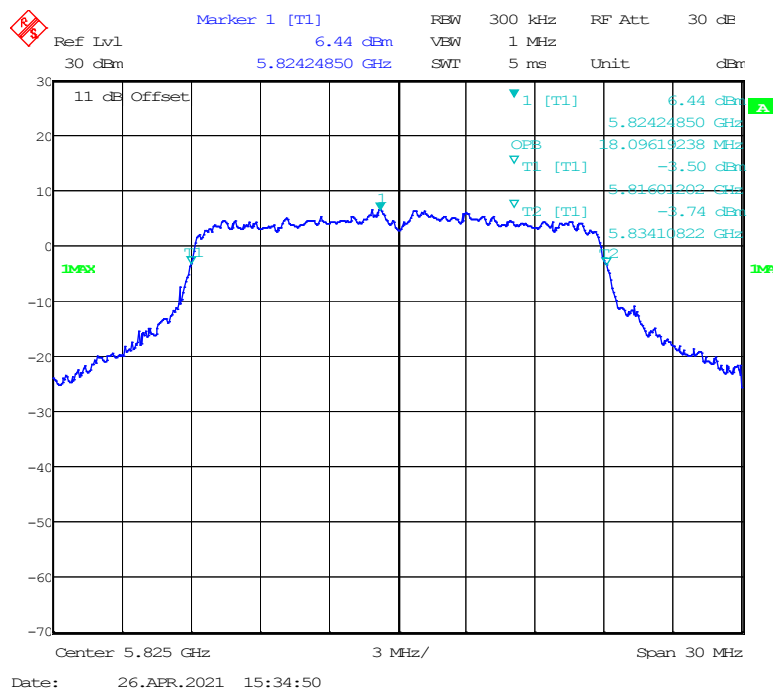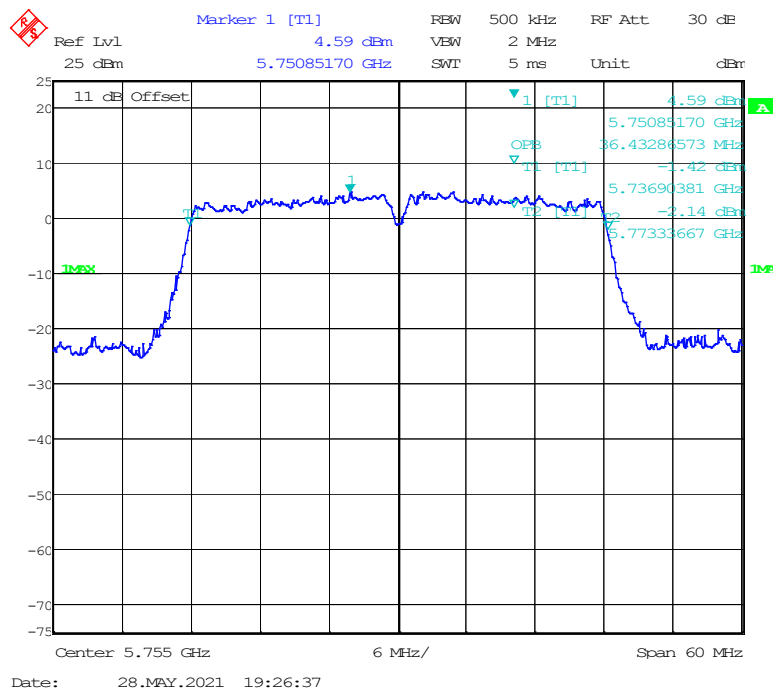802.11n-HT20 mode, 5745MHz**802.11n-HT20 mode, 5785MHz**

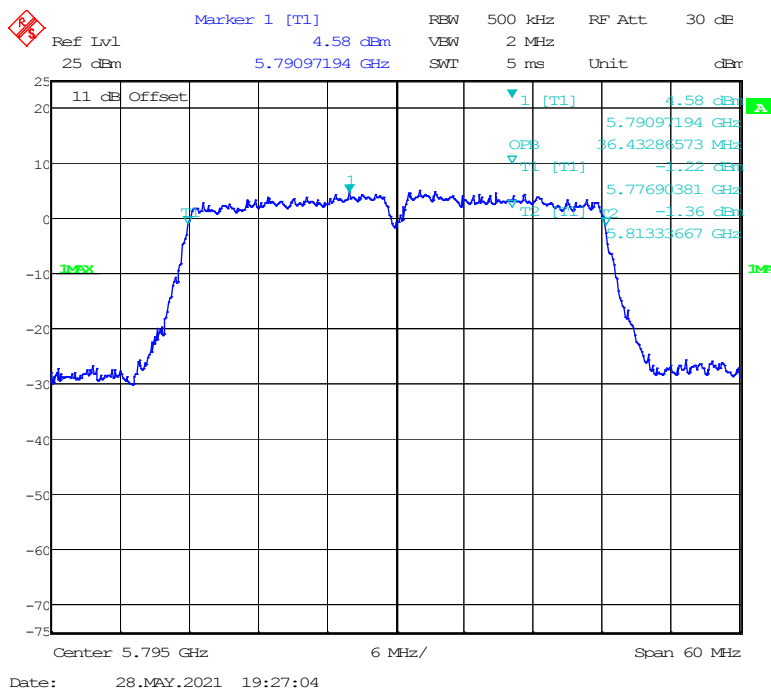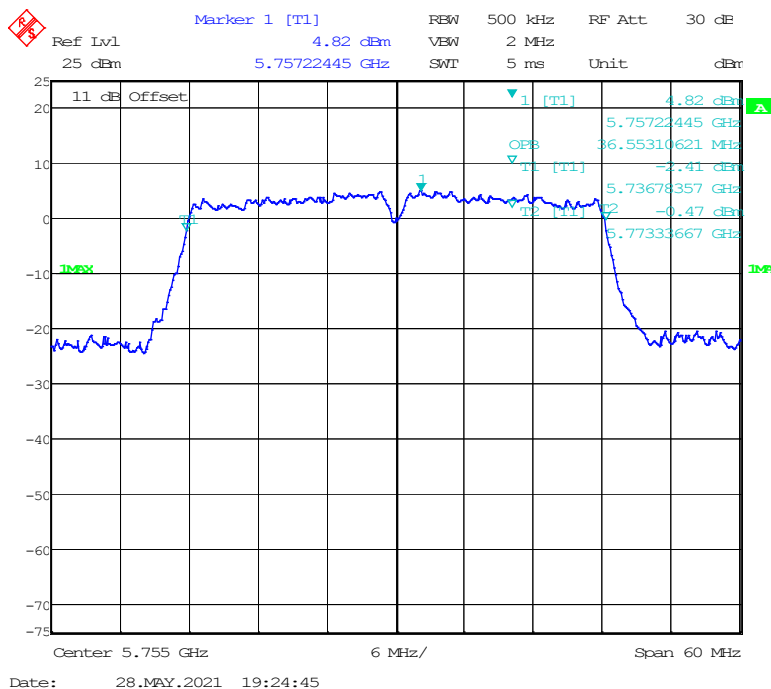802.11n-HT20 mode, 5825MHz**802.11ac40 mode, 5755MHz**

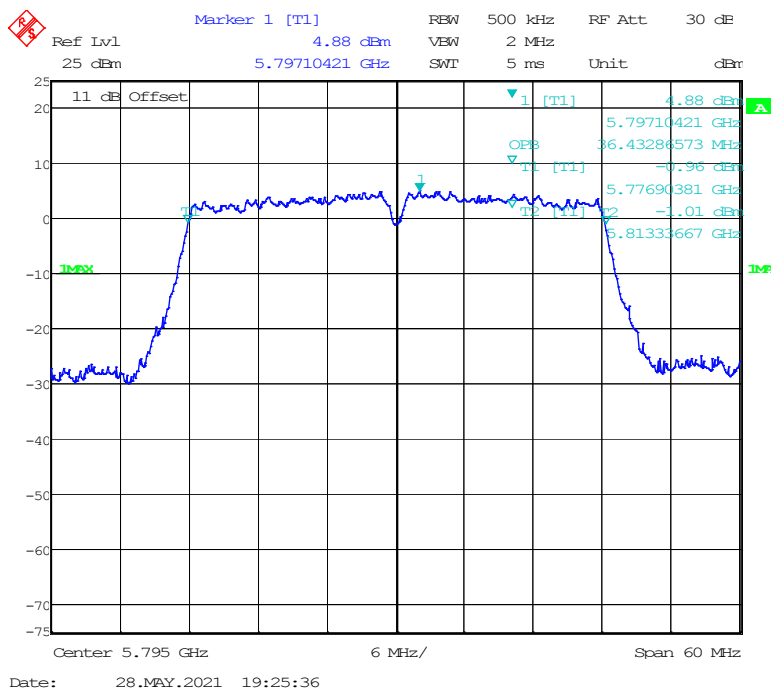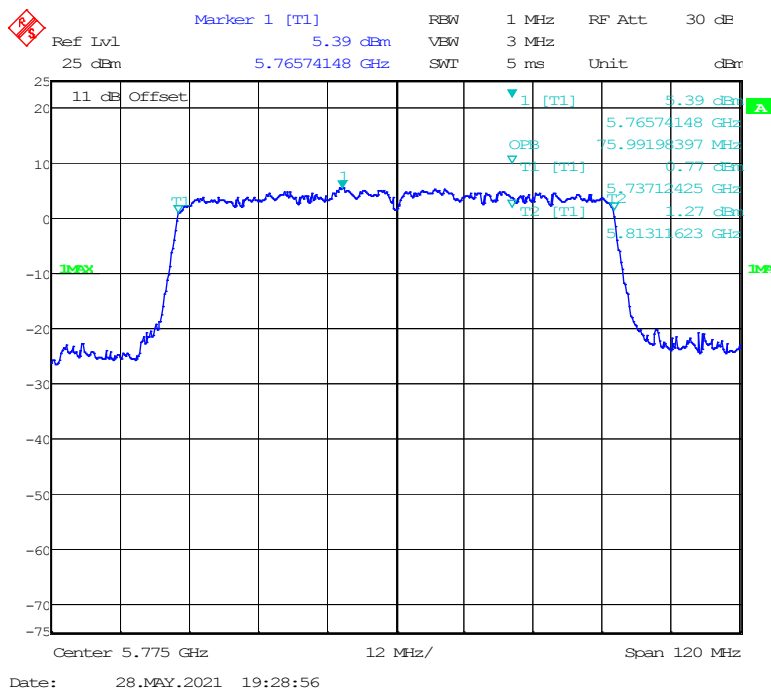802.11ac40 mode, 5795MHz**802.11n-HT40 mode, 5755MHz**

802.11n-HT40 mode, 5795MHz**802.11n-ac80 mode, 5775MHz**

FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

According to §15.407(a)(1)


(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	24.3°C
Relative Humidity:	50 %
ATM Pressure:	101.7 kPa

The testing was performed by Stone Zhang on 2021-04-28.

Test Mode: Transmitting

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5150-5250 MHz	5180	13.30	24	PASS
		5200	12.89	24	PASS
		5240	11.31	24	PASS
802.11ac20	5150-5250 MHz	5180	12.68	24	PASS
		5200	12.38	24	PASS
		5240	10.67	24	PASS
802.11n-HT20	5150-5250 MHz	5180	12.33	24	PASS
		5200	11.91	24	PASS
		5240	10.51	24	PASS
802.11ac40	5150-5250 MHz	5190	11.46	24	PASS
		5230	10.52	24	PASS
802.11n-HT40	5150-5250 MHz	5190	11.58	24	PASS
		5230	10.60	24	PASS
802.11ac80	5150-5250 MHz	5210	8.09	24	PASS

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5725-5850 MHz	5745	9.72	30	PASS
		5785	10.81	30	PASS
		5825	11.86	30	PASS
802.11ac20	5725-5850 MHz	5745	9.40	30	PASS
		5785	10.39	30	PASS
		5825	11.91	30	PASS
802.11n-HT20	5725-5850 MHz	5745	8.84	30	PASS
		5785	9.98	30	PASS
		5825	11.56	30	PASS
802.11ac40	5725-5850 MHz	5755	8.73	30	PASS
		5795	9.95	30	PASS
802.11n-HT40	5725-5850 MHz	5755	9.13	30	PASS
		5795	10.16	30	PASS
802.11ac80	5725-5850 MHz	5775	6.84	30	PASS

Note: The maximum antenna gain is 1.17 dBi.

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

Applicable Standard

According to §15.407(a) (1)

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

The measurements are base on FCC KDB 789033 D02 General UNII Test Proceidyres New Rules v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices section F: Maximum power spectral density (PPSD)

Test Data

Environmental Conditions

Temperature:	24.3~23.7 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.3~101.7 kPa

The testing was performed by Stone Zhang from 2021-04-26 to 2021-05-09.

Test Mode: Transmitting



5150MHz-5250MHz:



Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	Low	5180	5.76	11	PASS
	Middle	5200	5.60	11	PASS
	High	5240	5.22	11	PASS
802.11ac20	Low	5180	5.70	11	PASS
	Middle	5200	5.49	11	PASS
	High	5240	5.40	11	PASS
802.11n-HT20	Low	5180	5.70	11	PASS
	Middle	5200	5.36	11	PASS
	High	5240	4.87	11	PASS
802.11ac40	Low	5190	2.83	11	PASS
	High	5230	2.28	11	PASS
802.11n-HT40	Low	5190	2.77	11	PASS
	High	5230	2.75	11	PASS
802.11ac80	/	5210	0.19	11	PASS



5725MHz-5850MHz:



Mode	Channel	Frequency (MHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	Low	5745	1.31	30	PASS
	Middle	5785	1.77	30	PASS
	High	5825	3.34	30	PASS
802.11ac20	Low	5745	2.09	30	PASS
	Middle	5785	1.57	30	PASS
	High	5825	1.94	30	PASS
802.11n-HT20	Low	5745	2.73	30	PASS
	Middle	5785	2.27	30	PASS
	High	5825	2.66	30	PASS
802.11ac40	Low	5755	-1.03	30	PASS
	High	5795	-0.95	30	PASS
802.11n-HT40	Low	5755	-1.31	30	PASS
	High	5795	-0.51	30	PASS
802.11ac80	/	5775	1.62	30	PASS

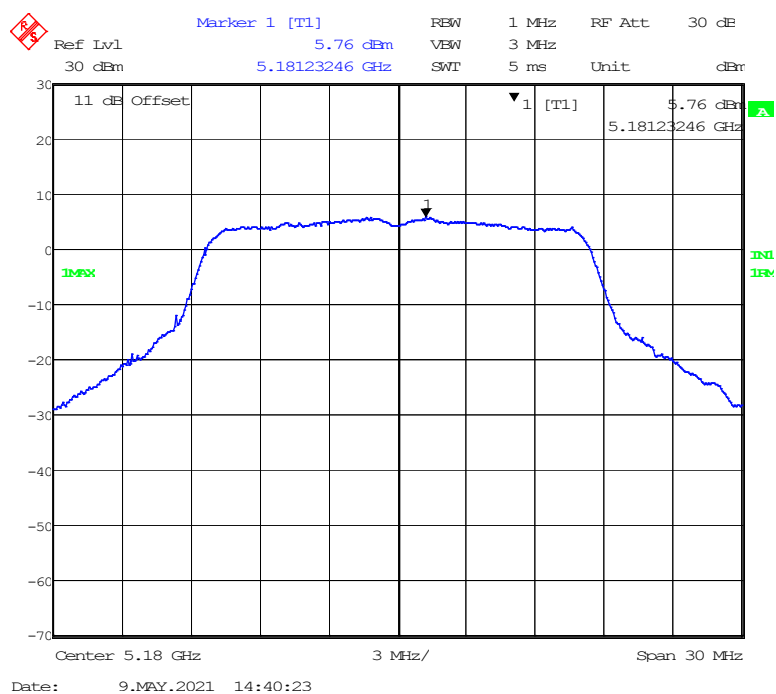
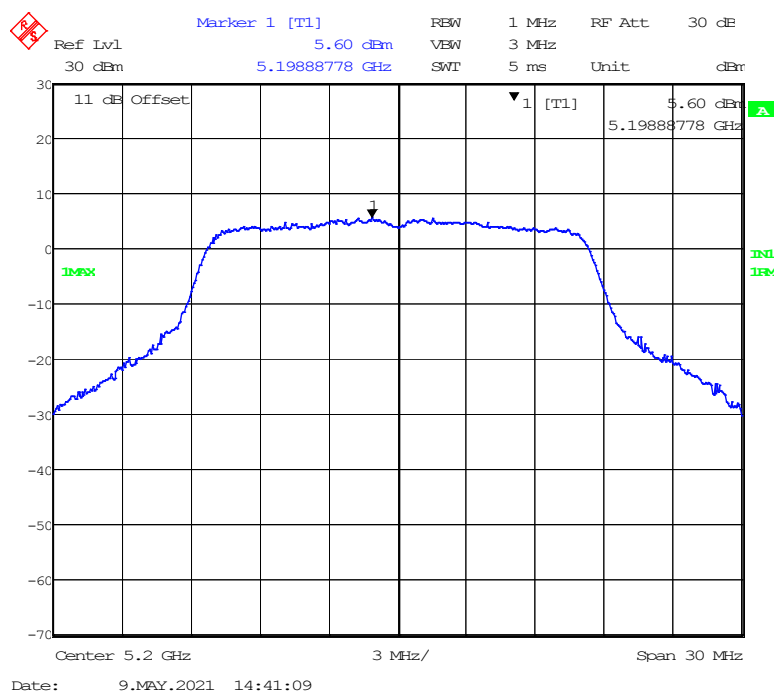
Note: The maximum antenna gain is 1.17 dBi.

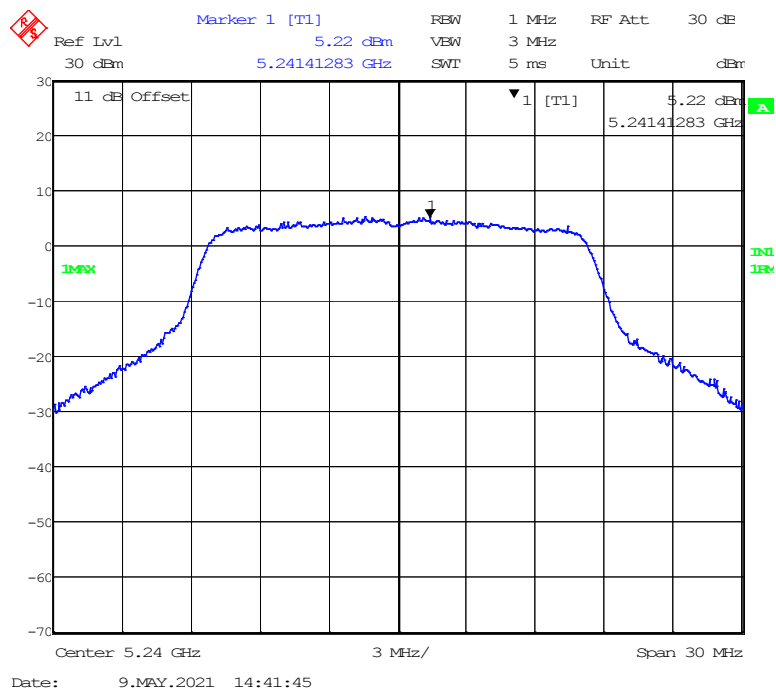
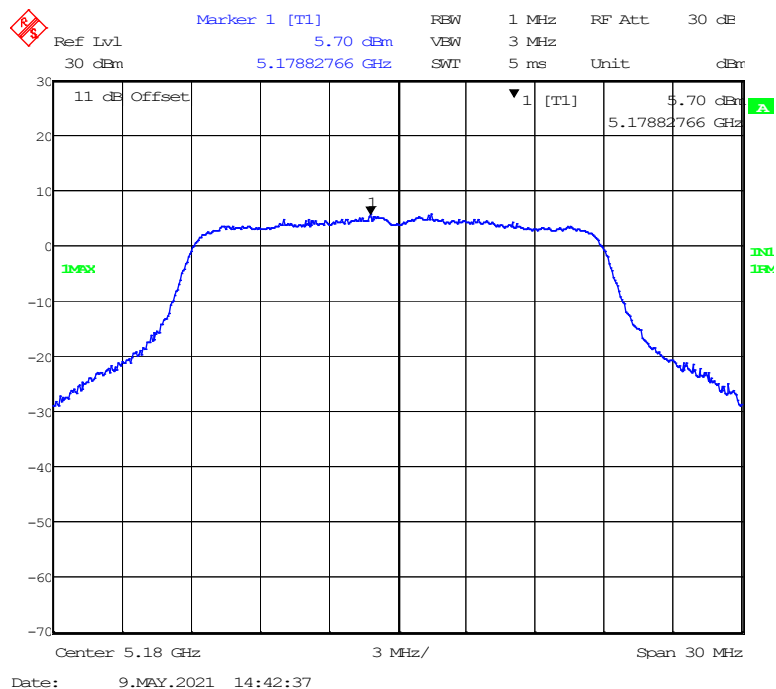
5150MHz-5250MHz Band:**802.11a mode, Power spectral density-5180MHz****802.11a mode, Power spectral density-5200MHz**

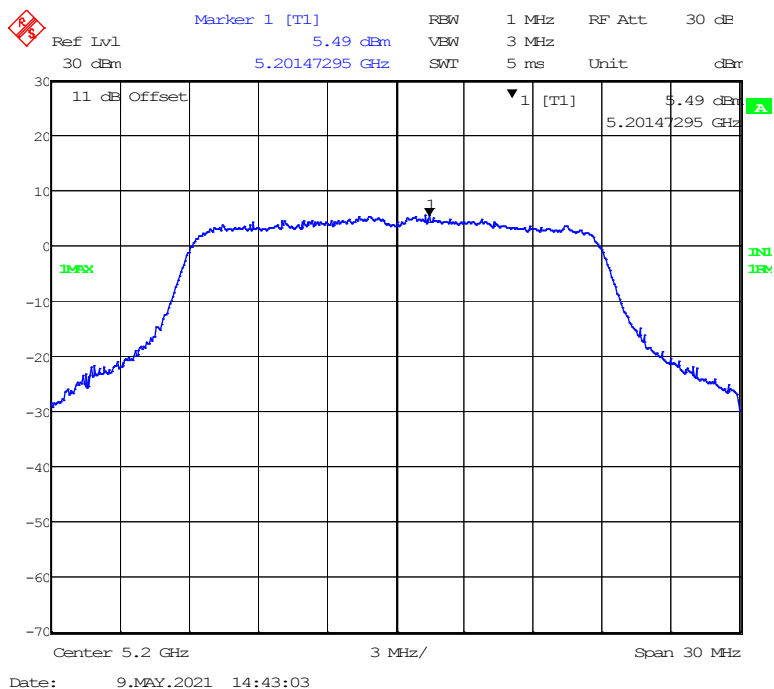
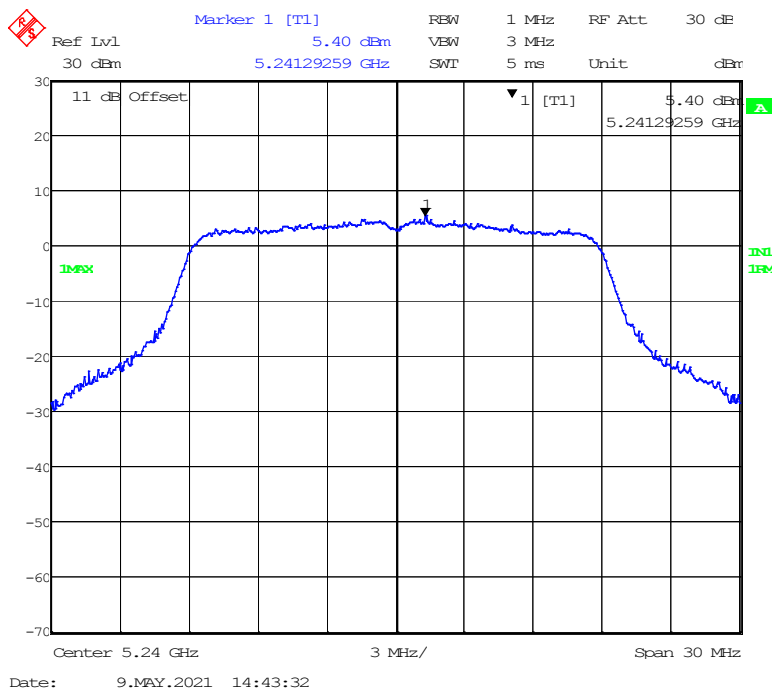
802.11a mode, Power spectral density-5240MHz**802.11ac20 mode, Power spectral density-5180MHz**

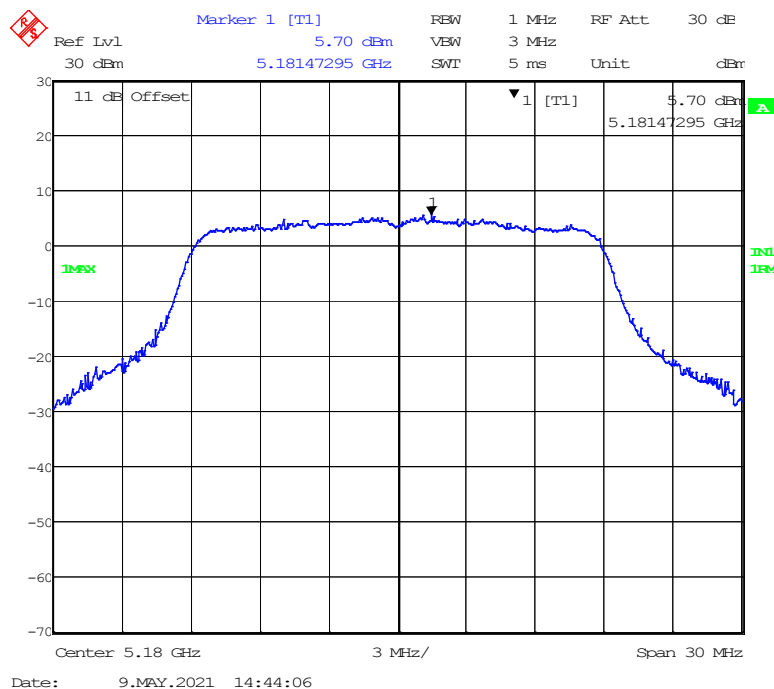
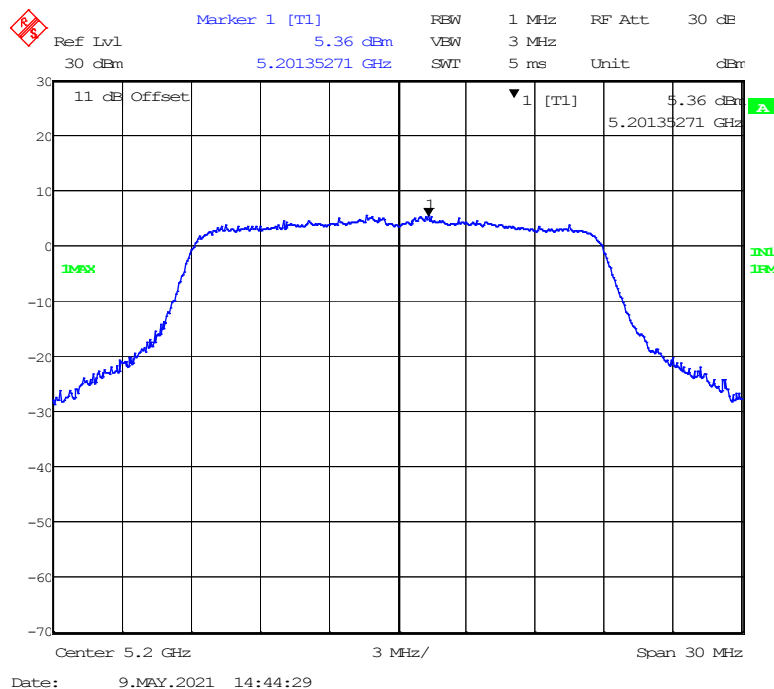
802.11ac20 mode, Power spectral density-5200MHz**802.11ac20 mode, Power spectral density-5240MHz**

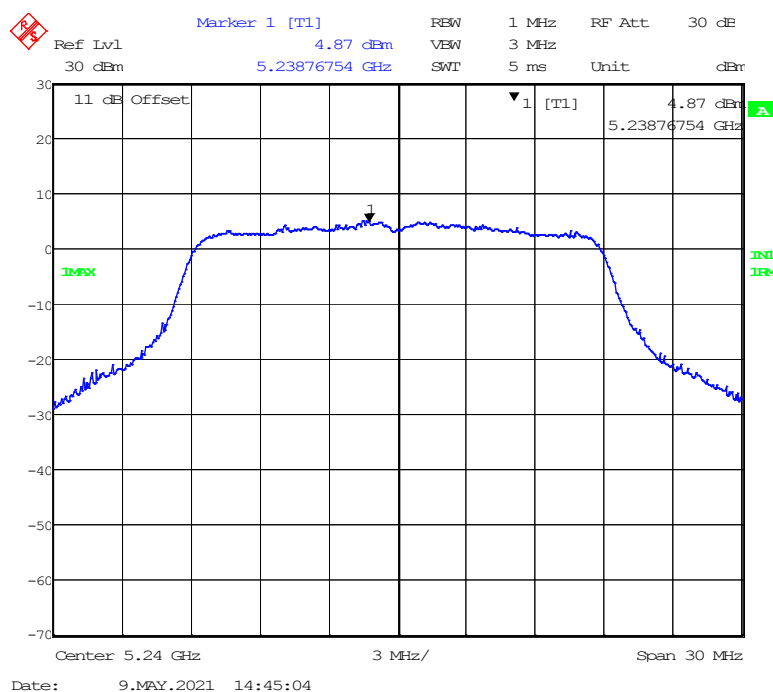
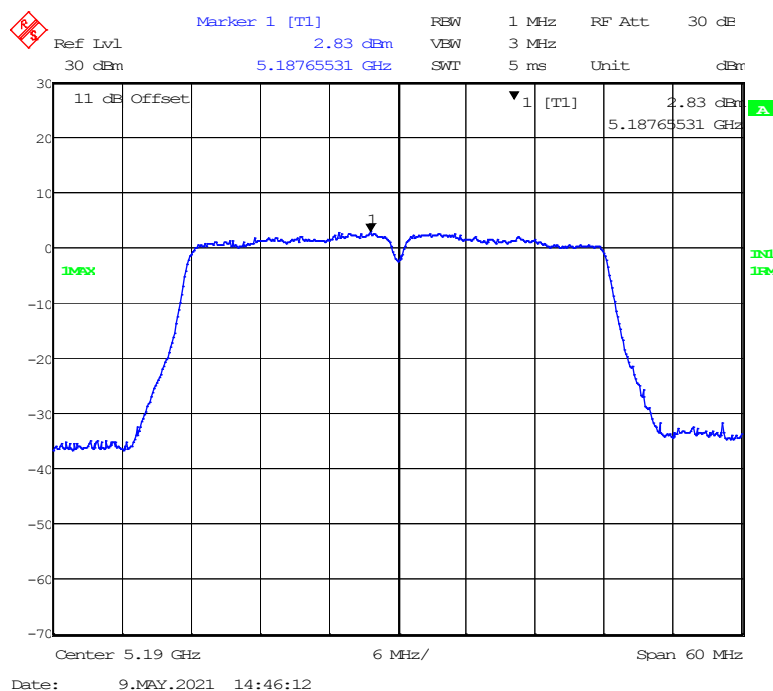
802.11n-HT20 mode, Power spectral density-5180MHz**802.11n-HT20 mode, Power spectral density-5200MHz**

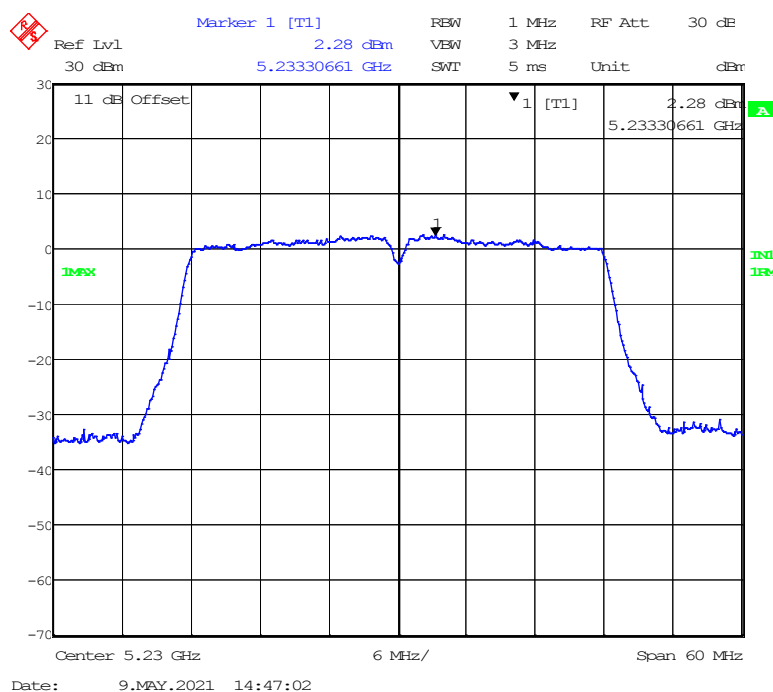
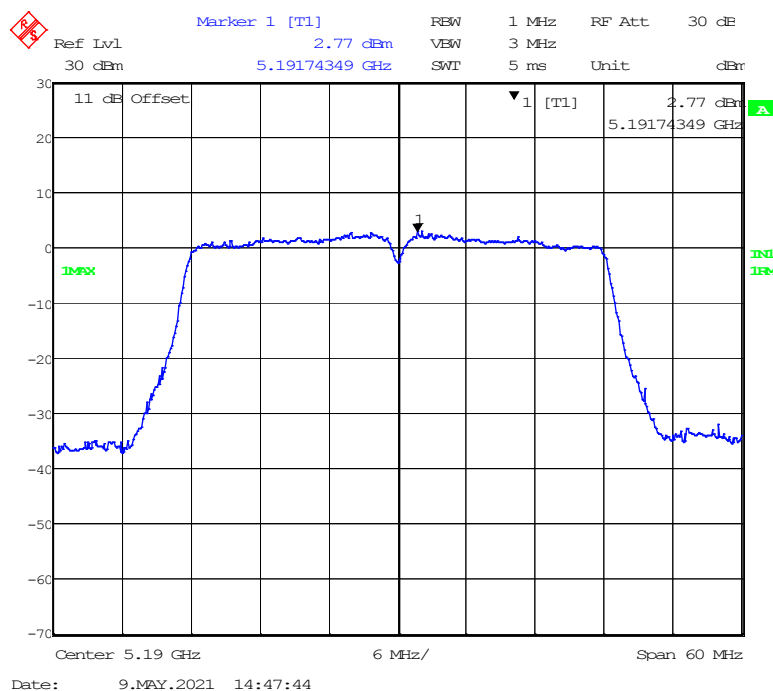
802.11n-HT20 mode, Power spectral density-5240MHz**802.11ac40 mode, Power spectral density-5190MHz**

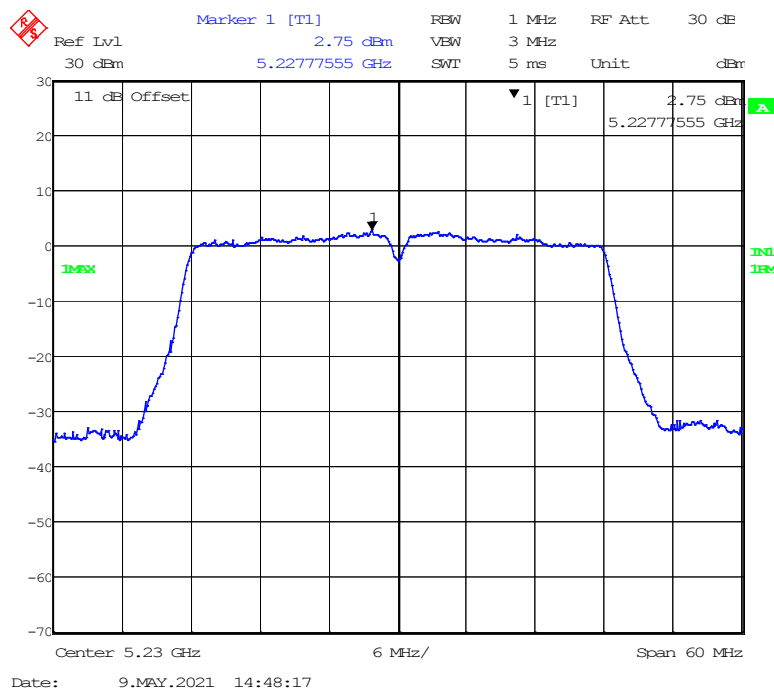
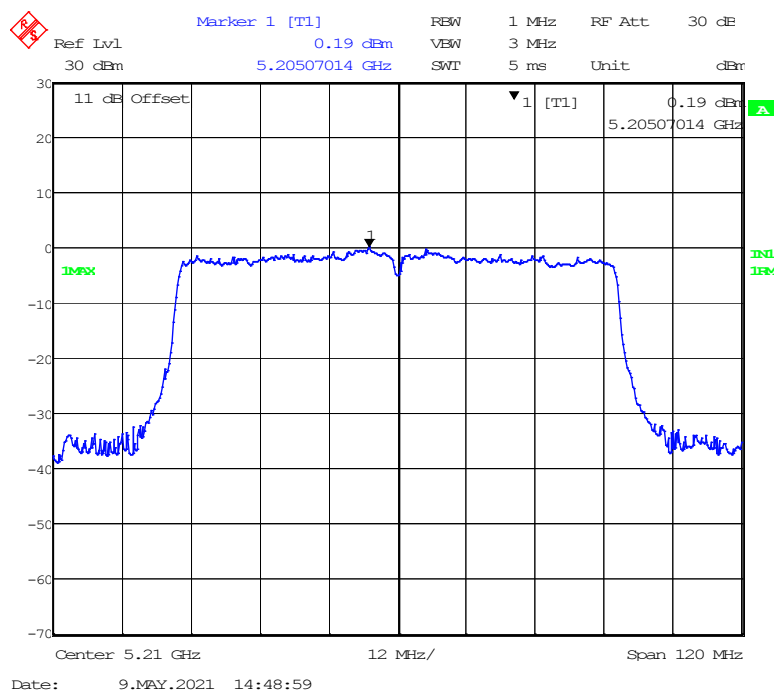
802.11ac40 mode, Power spectral density-5230MHz**802.11n-HT40 mode, Power spectral density-5190MHz**

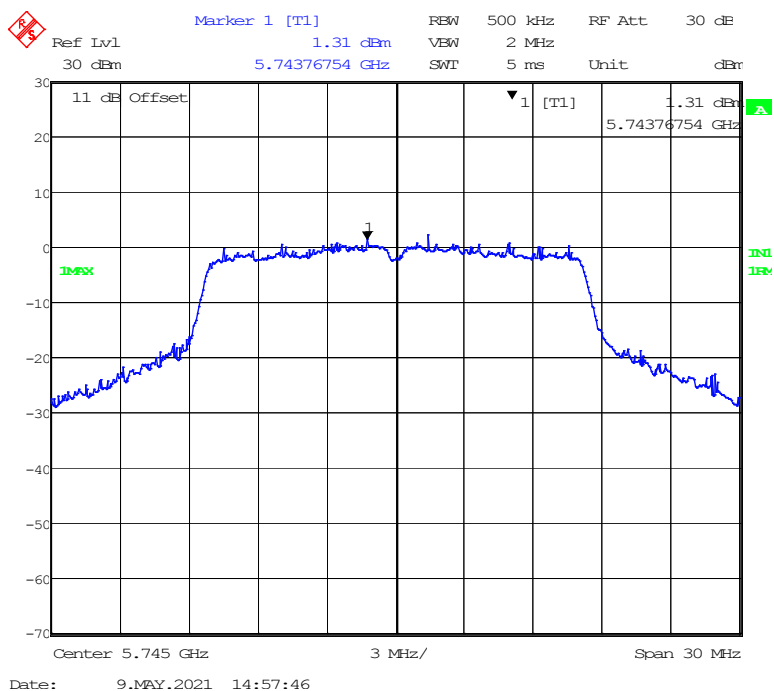
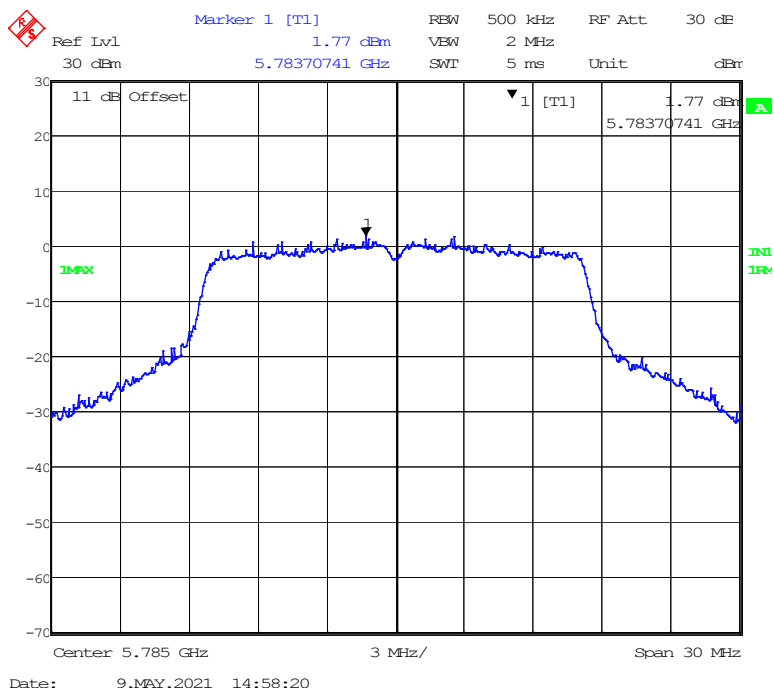
802.11n-HT40 mode, Power spectral density-5230MHz**802.11ac80 mode, Power spectral density-5210MHz**

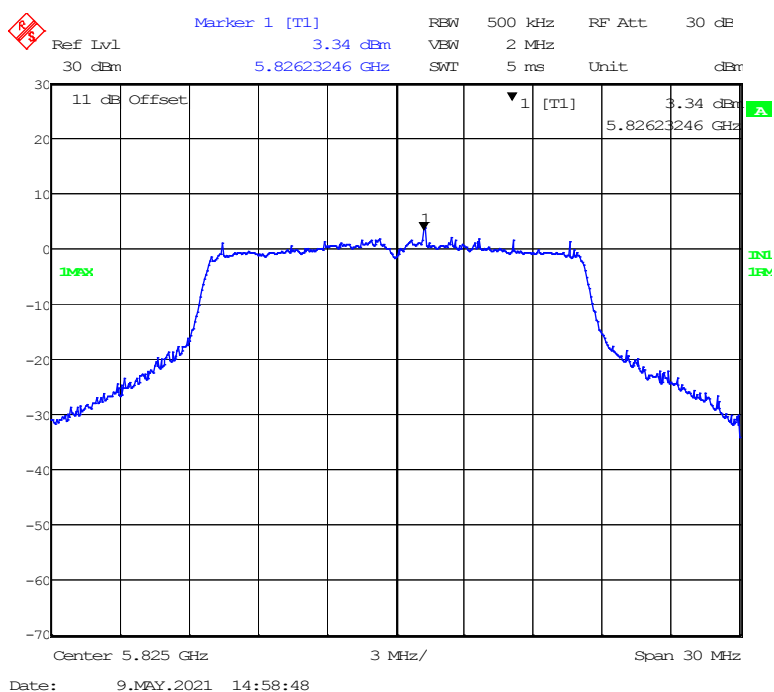
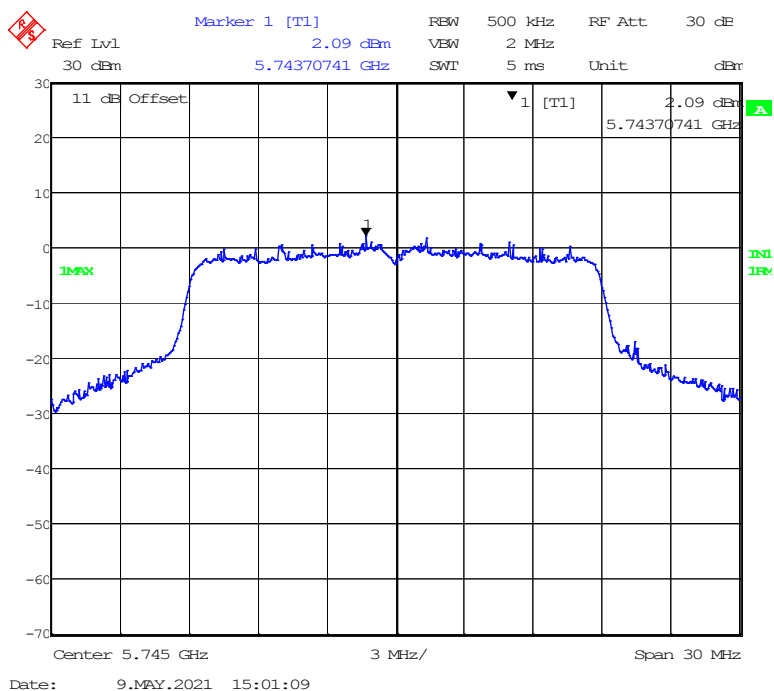
5725MHz-5850 MHz Band:**802.11a mode, Power spectral density-5745MHz****802.11a mode, Power spectral density-5785MHz**

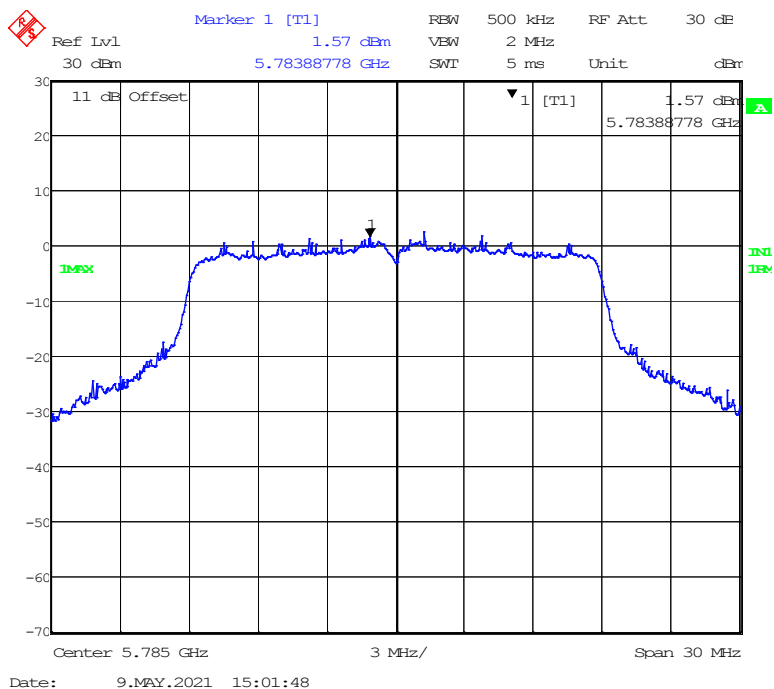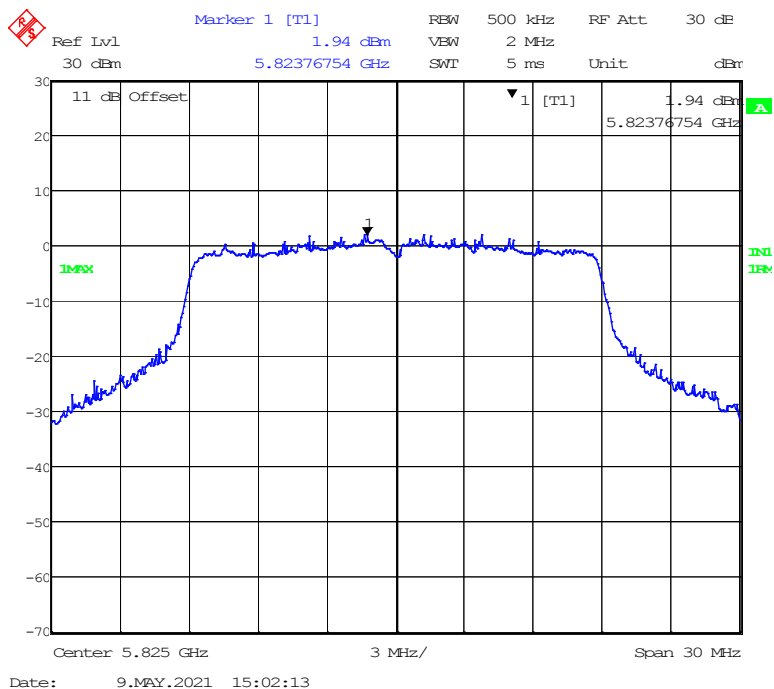802.11a mode, Power spectral density-5825MHz**802.11ac20 mode, Power spectral density-5745MHz**

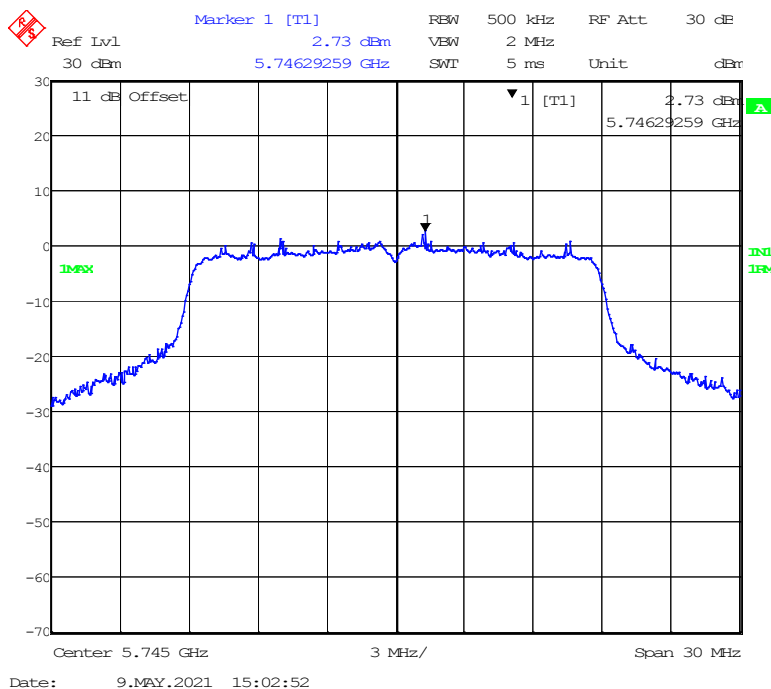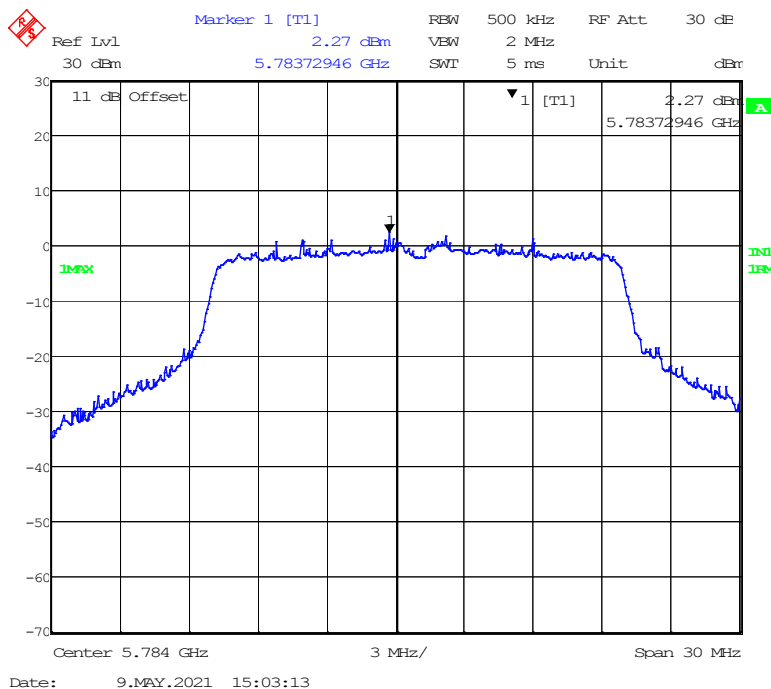802.11ac20 mode, Power spectral density-5785MHz**802.11ac20 mode, Power spectral density-5825MHz**

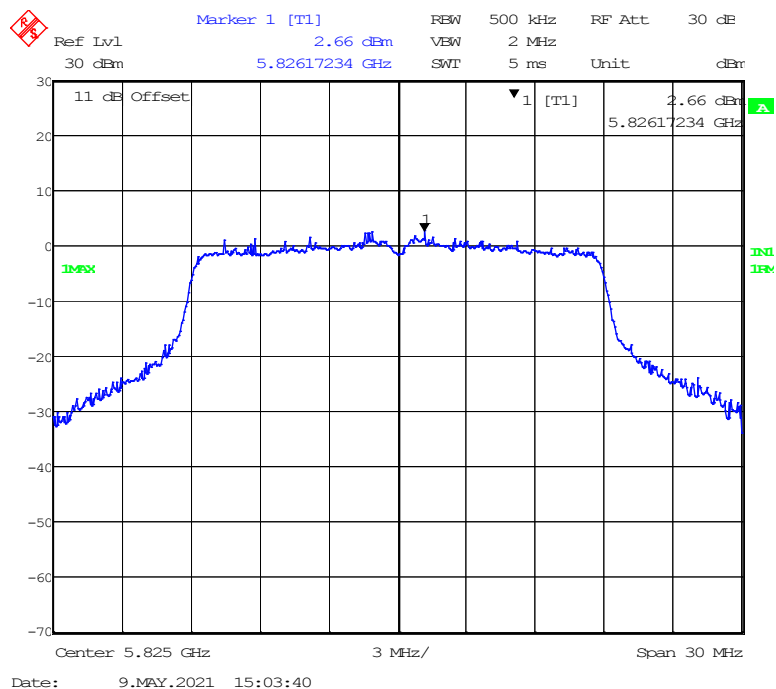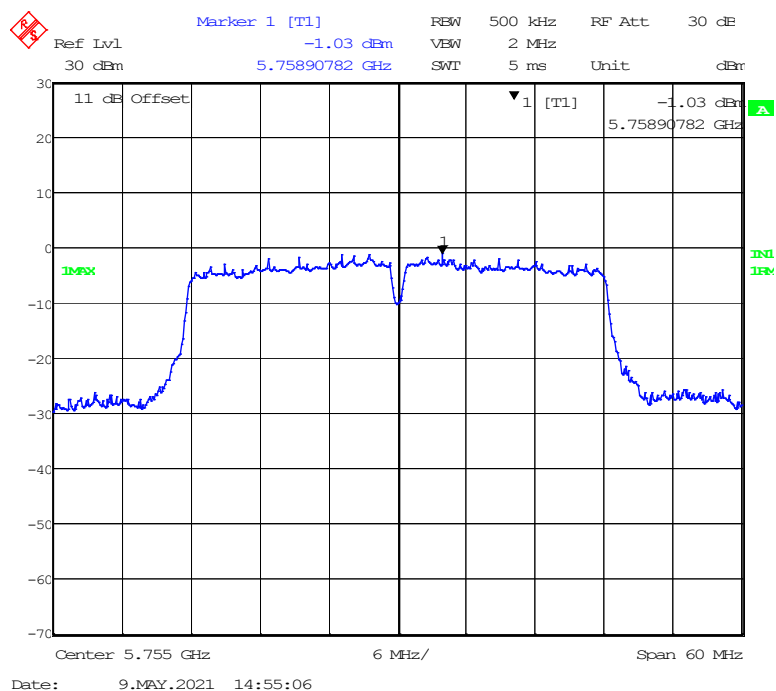802.11n-HT20 mode, Power spectral density-5745MHz**802.11n-HT20 mode, Power spectral density-5785MHz**

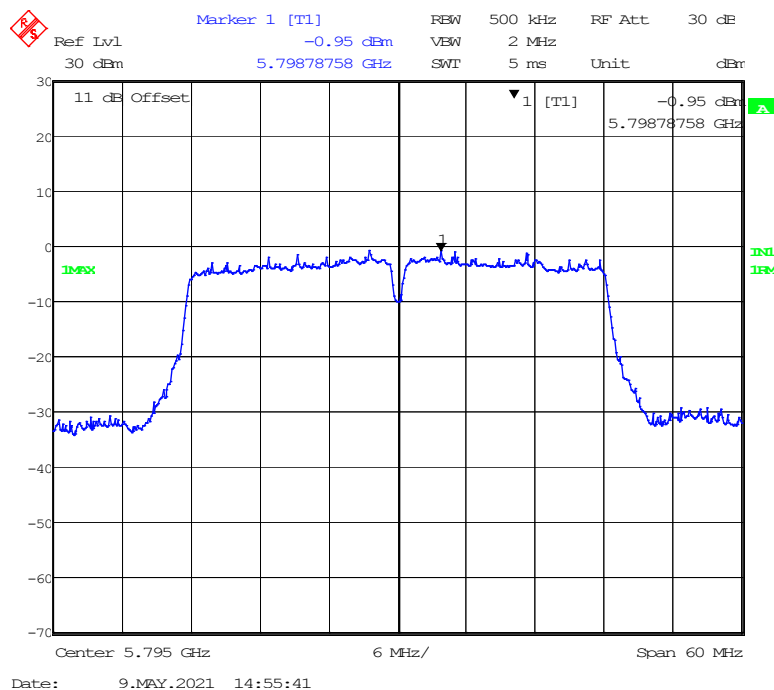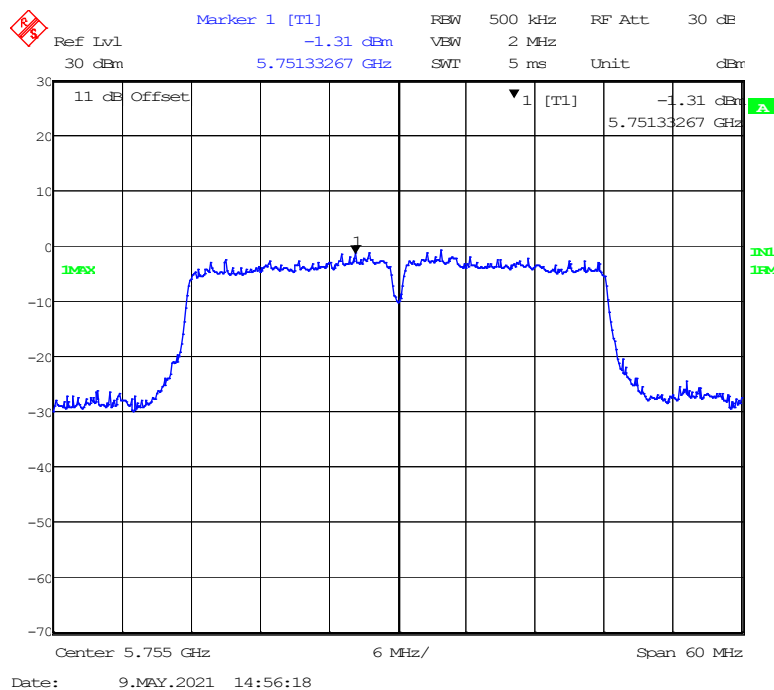802.11n-HT20 mode, Power spectral density-5825MHz**802.11ac40 mode, Power spectral density-5755MHz**

802.11ac40 mode, Power spectral density-5795MHz**802.11n-HT40 mode, Power spectral density-5755MHz**

Marker 1 [T1]
 Ref Lvl -0.51 dBm
 30 dBm 5.80011022 GHz
 RES 500 kHz RF Att 30 dB
 VBW 2 MHz
 SWT 5 ms Unit dBm

11 dB Offset
 1 [T1]
 -0.51 dBm
 5.80011022 GHz

IMPR
 INI
 IFR

Center 5.795 GHz 6 MHz/ Span 60 MHz

Date: 9.MAY.2021 14:56:50

Marker 1 [T1]
1.62 dBm
5.78257515 GHz

Ref Lvl
30 dBm

RESW 500 kHz
VEW 2 MHz
SWT 5 ms

RF Att 30 dB
Unit dBm

11 dB Offset

1 [T1]
1.62 dBm
5.78257515 GHz

IMPR

Center 5.775 GHz
12 MHz/
Span 120 MHz

Date: 26.APR.2021 16:00:49

Declarations

- 1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
- 2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5: This report cannot be reproduced except in full, without prior written approval of the Company.
- 6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******