

July 20, 2021

Breathe with B
2010 3rd St. #209
Santa Monica, CA

Dear Eric Chesbrough,

Enclosed is the EMC Wireless test report for compliance testing of the Breathe with B, B as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators.

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if we can be of further service to you, please feel free to contact me.

Sincerely yours,
EUROFINS E&E NORTH AMERICA



Michelle Tawmging
Documentation Department

Reference: (\Breathe with B\WIRS 110865 -FCC247 Rev 1)



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance

Electromagnetic Compatibility Criteria Test Report

for the

**Breathe with B
B**

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators

Report: WIRS 110865 -FCC247 Rev 1

July 20, 2021

Prepared For:

**Breathe with B
2010 3rd St. #209
Santa Monica, CA**

Prepared By:
Eurofins E&E North America
3162 Belick Street
Santa Clara, CA 95054

Electromagnetic Compatibility Criteria Test Report

for the


Breathe with B
B

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators



Arsalan Hasan
Manager, Wireless Laboratory

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Eleazar Zuniga, PhD.
Director, Wireless Technologies

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	April 27, 2021	Initial Issue (Draft).
1	July 20, 2021	TCB Updates

Table of Contents

I.	Executive Summary	1
A.	Purpose of Test.....	2
B.	Executive Summary	2
II.	Equipment Configuration.....	3
A.	Overview	4
B.	References.....	4
C.	Test Site.....	5
D.	Measurement Uncertainty	5
E.	Description of Test Sample	5
F.	Equipment Configuration.....	5
G.	Support Equipment.....	6
H.	Ports and Cabling Information	6
I.	Mode of Operation During Testing	6
J.	Method of Monitoring EUT Operation	6
K.	Modifications	7
a)	Modifications to EUT	7
b)	Modifications to Test Standard.....	7
L.	Disposition of EUT	7
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	8
§ 15.203	Antenna Requirement	9
§ 15.207(a)	Conducted Emissions Limits	10
§ 15.247(a)(a)	6 dB and 99% Bandwidth	11
§ 15.247(b)	Peak Power Output.....	14
§ 15.247(d)	Radiated Spurious Emissions Requirements and Band Edge	17
§ 15.247(d)	RF Conducted Spurious Emissions Requirements and Band Edge	26
§ 15.247(e)	Peak Power Spectral Density.....	33
IV.	Test Equipment	36

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

1.1 Purpose of Test

An EMC Wireless evaluation was performed to determine compliance of the Breathe with B, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the B. Breathe with B should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the B, has been **permanently** discontinued.

1.2 Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Breathe with B, purchase order number #001. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference 47 CFR Part 15.247:2005	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Not Applicable
Title 47 of the CFR, Part 15 §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RF Conducted Band Edge	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	Peak Power Spectral Density	Compliant

Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

2.1 Overview

Eurofins MET Laboratories, Inc. was contracted by Breathe with B to perform testing on the B, under Breathe with B's purchase order number #001.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Breathe with B, B.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	B	
Model(s) Covered:	B	
Filing Status:	Original	
EUT Specifications:	Primary Power: 3.7 VDC	
	Type of Modulations:	GFSK
	Equipment Code:	DTS
	Technology:	BLE
	Output Power:	4.038 dBm
	Frequency Range:	2402 MHz- 2480 MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Arsalan Hasan	
Date(s):	July 20, 2021	

EUT Summary Table

2.2 References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

References

2.3 Test Site

All testing was performed at Eurofins MET Laboratories, Inc., 3162 Belick Street, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Eurofins MET Labs is an ISO/IEC 17025 accredited site by A2LA, #0591.02.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

2.4 Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.32 dB	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%

Measurement Uncertainty


2.5 Description of Test Sample

The EUT senses breathing. Device transmits data over Bluetooth Low Energy to/from mobile application. Device can be charged via Micro USB port. Device also has a vibration motor and multiple LED lights to guide user in breathing patterns.

2.6 Equipment Configuration

Ref. ID	Slot#	Name/Description	Model Number	Part Number	Serial Number	Rev. #
001	N/A	b device	001	N/A	N/A	001

EUT List

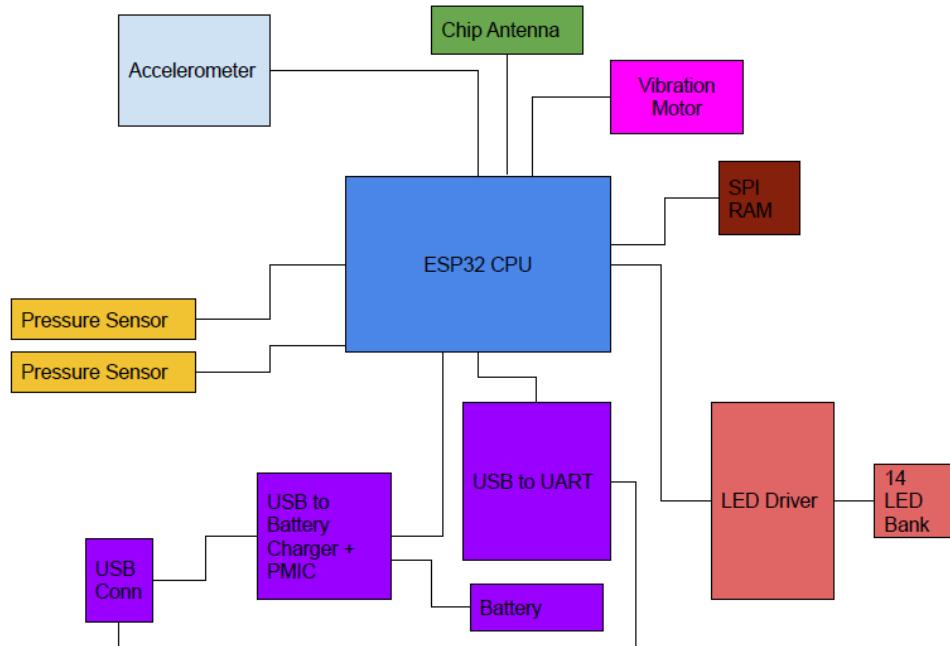

Bloc k Diagram of Test Configuration

2.7 Support Equipment

No support equipment utilized in testing.

2.8 Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Desc. or reason for none	QTY	Length as tested (m)	Max Length (m)	Shielded?	Termination Box ID & Port Name
001	Micro USB Port	Flat Micro USB Cable for charging device (CE & ROHS Certified)	1	0.3	0.3	No	

Ports and Cabling Information

2.9 Mode of Operation During Testing

Device will be running maximum operations simultaneously during the EUT tests: LEDs will be flashing, pressure sensors will be detecting breathing, vibration motor will continuously be vibrating and the Bluetooth radio will be fully transmitting.

2.10 Method of Monitoring EUT Operation

Blinking LEDs and vibrating motors are indicative of maximum operation and lack thereof is indicative of not running at maximum intensity.

2.11 Modifications

2.11.1 Modifications to EUT

No modifications were made to the EUT.

2.11.2 Modifications to Test Standard

No modifications were made to the test standard.

2.12 Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Breathe with B upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Conformance: The EUT **conformed** to the requirements of this section.

Test Engineer(s): Arsalan Hasan

Test Date(s): **April 10, 2021**

Peak Gain	Frequency Range	Type	Polarization	Impedance
2.72 dBi	2.4 – 2.5 GHz	Chip	Linear	50 Ω

Antenna Requirement

“Note: Antenna specs are referenced from antenna datasheet provided by the antenna manufacturer. This antenna data sheet is available for review along with this test report and other exhibits in the submitted TCB package”

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207(a) Conducted Emissions Limits

Test Requirement(s): **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure:

The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

Test Result:

This test was not applicable. EUT is battery-powered.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB Bandwidth

Test Requirements: **§ 15.247(a)(2):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.


Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using an RBW approximately 1% of the total emission bandwidth, $VBW > RBW$. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.


Test Results The EUT **completed testing** to the requirements of § 15.247 (a)(2). No anomalies noted.

The 6 dB Bandwidth was determined from the plots on the following pages.


Test Engineer(s): Arsalan Hasan

Test Date(s): April 10, 2021

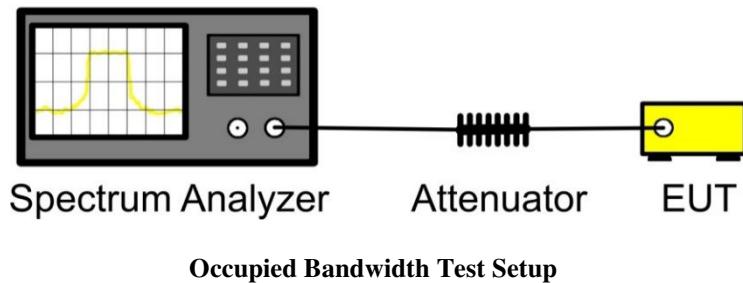


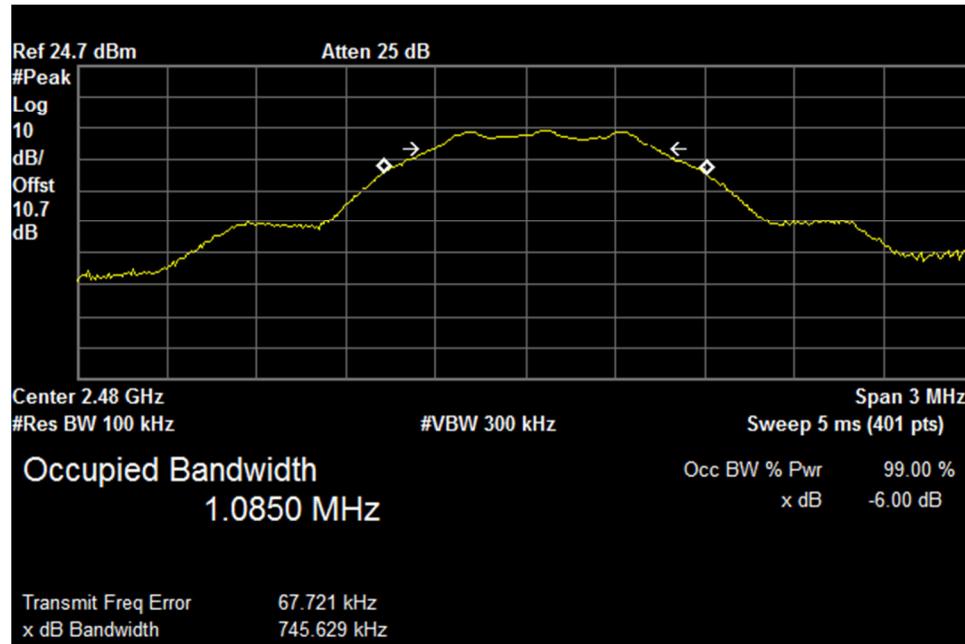

Occupied Bandwidth, High Channel, 2480MHz

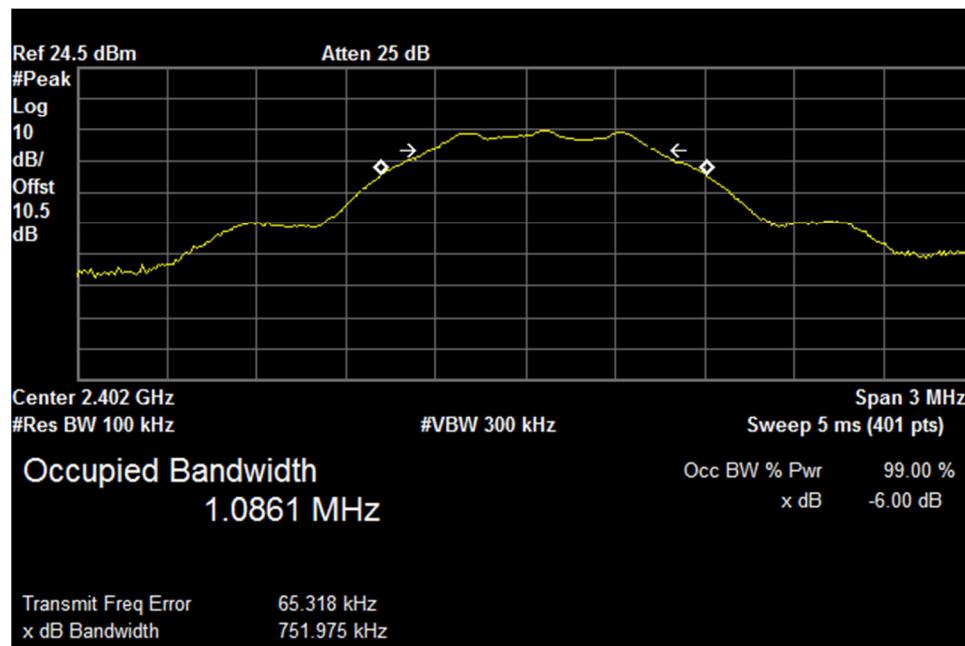

Occupied Bandwidth, Low Channel, 2402MHz

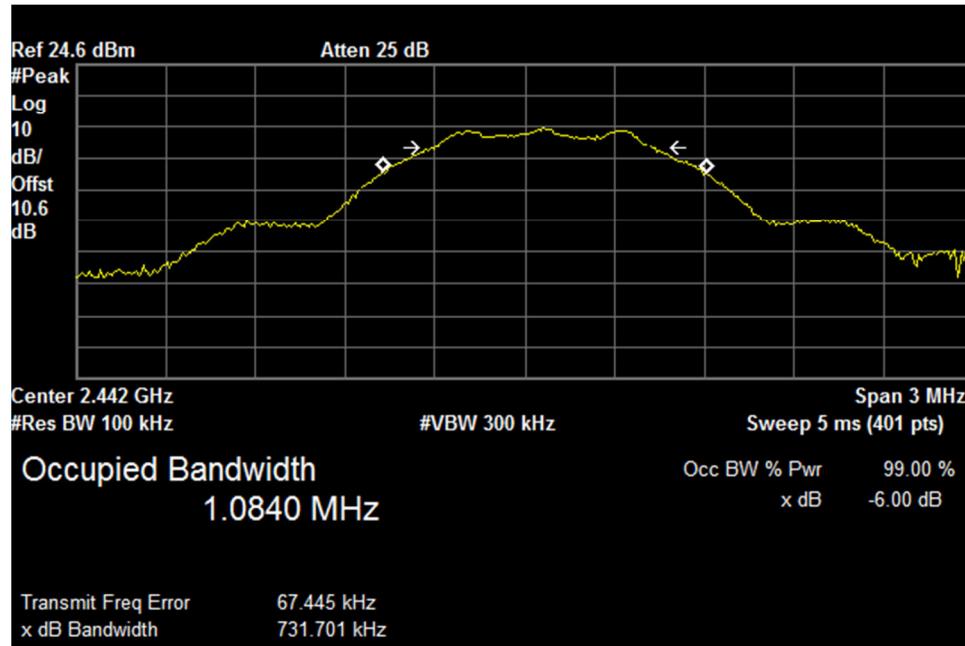

Occupied Bandwidth, Mid Channel, 2442MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements: **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 14, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.


Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band at the maximum power level.

Test Results: The EUT **completed testing** to the requirements of **§15.247(b)**. No anomalies noted.

Test Engineer(s): Arsalan Hasan


Test Date(s): **April 10, 2021**

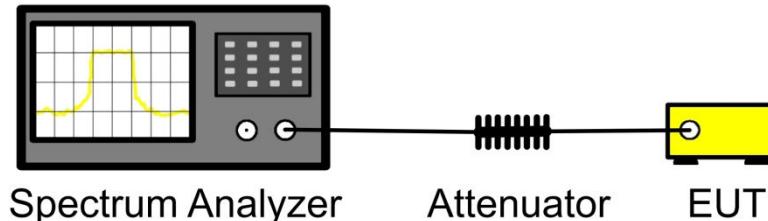


Peak Power Output Test Setup

Output Power			
Carrier Channel	Frequency (MHz)	Measured Conducted Power (dBm)	Limit (dBm)
Low	2402	4.038	30
Mid	2442	3.999	30
High	2480	4.012	30


Peak Power Output, Test Data

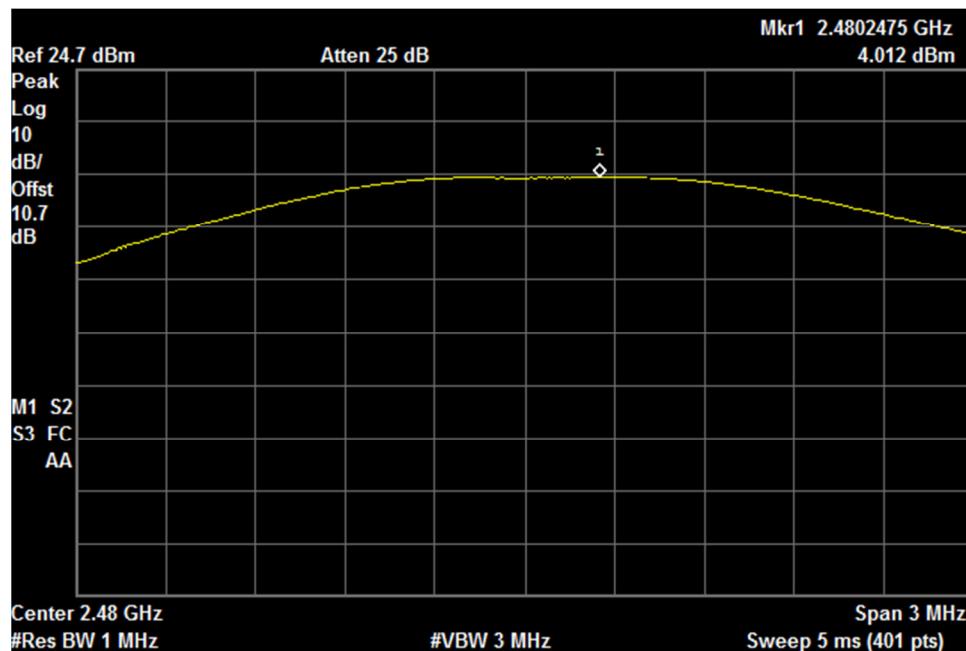

Peak Power Output, High Channel, 2480MHz

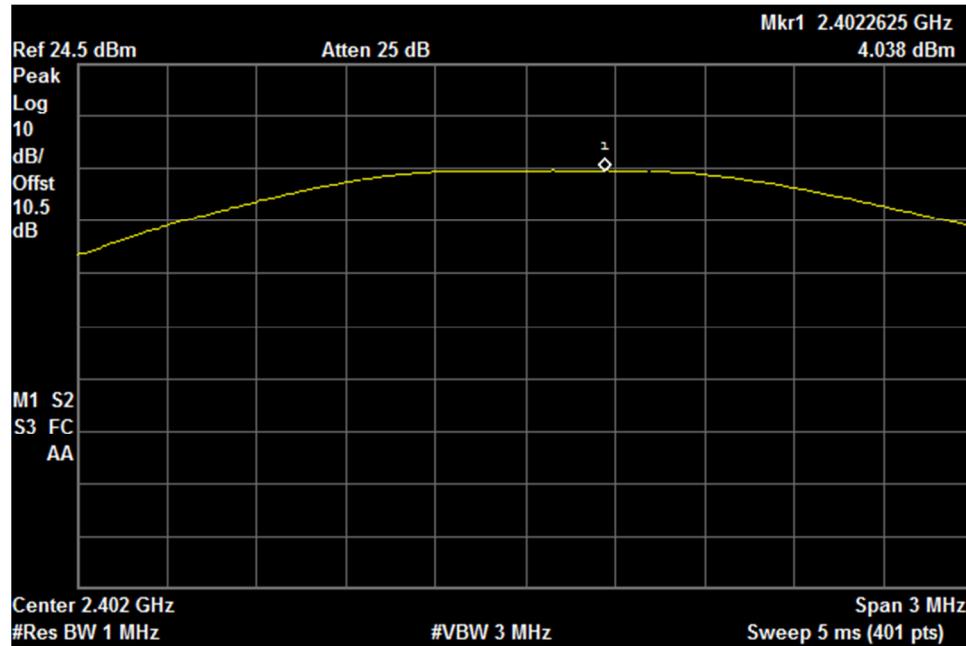

Peak Power Output, Low Channel, 2402MHz

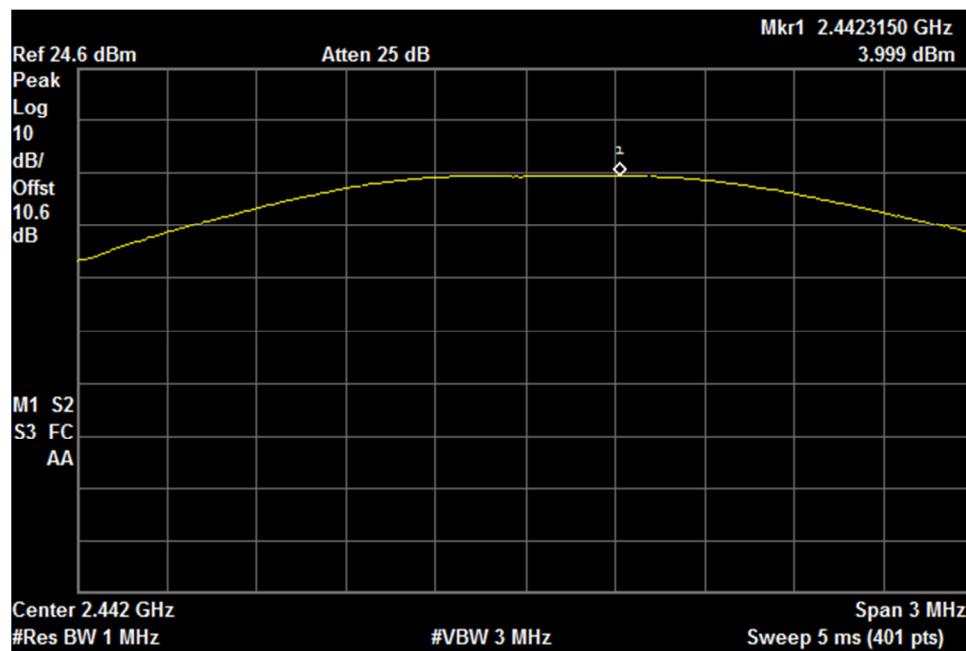

Peak Power Output, Mid Channel, 2442MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 17:

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB μ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00


Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured below 30 MHz and above 18 GHz.


Test Results: The EUT **completed testing** to the requirements of **§ 15.247(d)**. No anomalies noted.

Test Engineer(s): Arsalan Hasan

Test Date(s): **April 10, 2021; July 21, 2021**

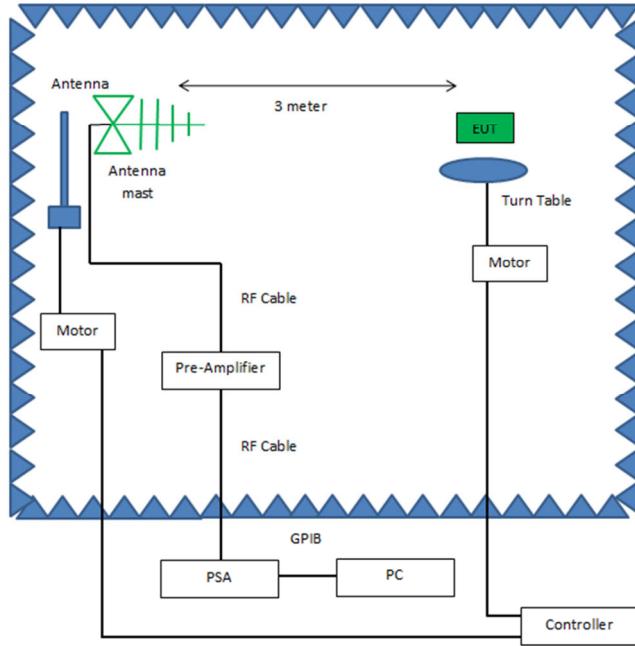

Radiated Emissions, Below 1GHz, Test Setup

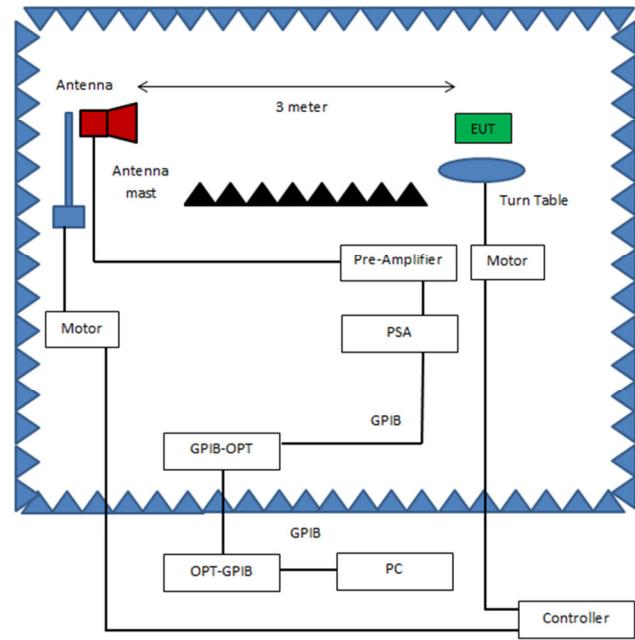


Radiated Emissions, Above 1GHz, Test Setup


Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
32.92	H	0	100	-4.99	22.148	0	1.251	0	18.409	40	-21.591
43.96	V	191	100	-4.74	14.32	0	1.415	0	10.995	40	-29.005
327.68	H	0	100	-8.33	18.7	0	3.347	0	13.717	46	-32.283
873	H	0	100	-7.12	26	0	5.293	0	24.173	46	-21.827
934.52	H	0	100	-7.03	26.6	0	5.534	0	25.104	46	-20.896
989.12	H	0	100	-7.01	27.3	0	5.569	0	25.859	54	-28.141

Note(s): * - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.


The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

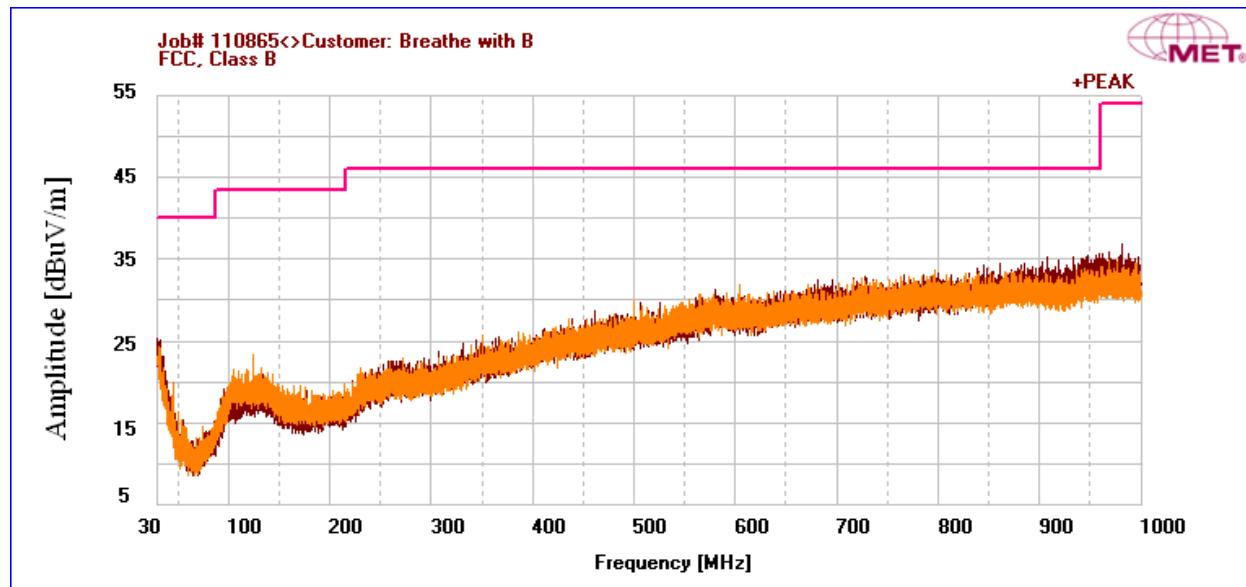


Radiated Spurious Emissions, 30MHz – 1GHz, Worst Case

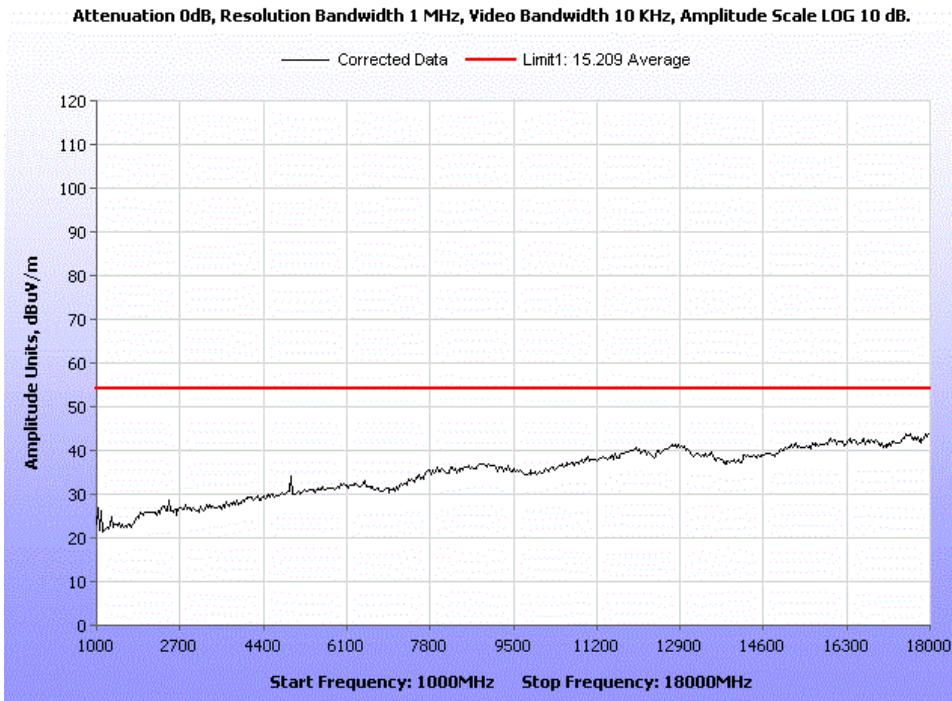


Radiated Spurious Emissions, High Channel, 2480MHz, Average.

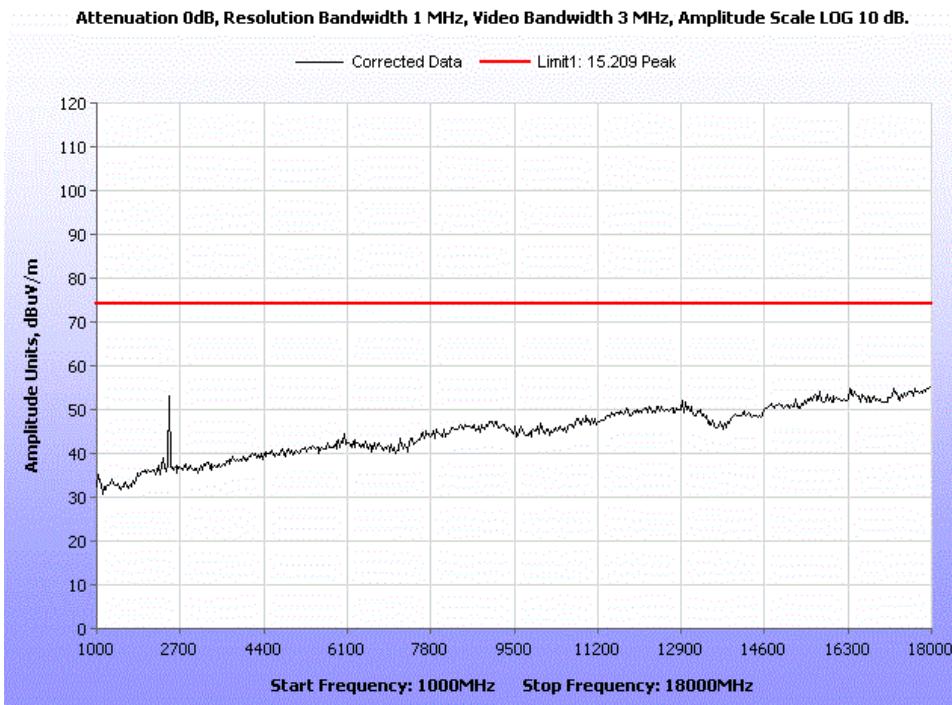


Radiated Spurious Emissions, High Channel, 2480MHz, Peak.

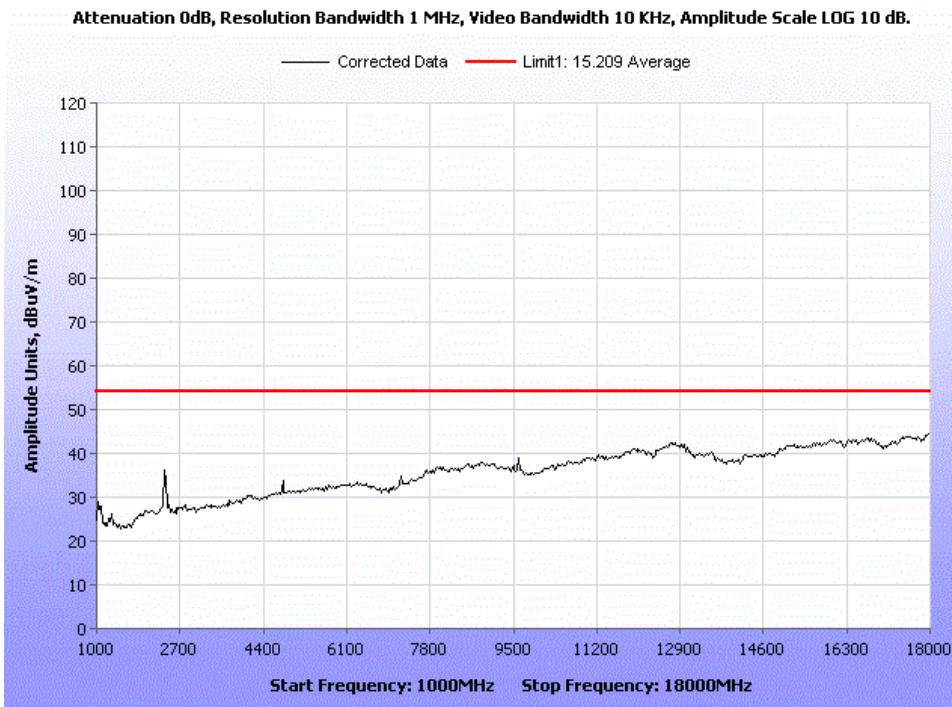


Radiated Spurious Emissions, Low Channel, 2402MHz, Average.

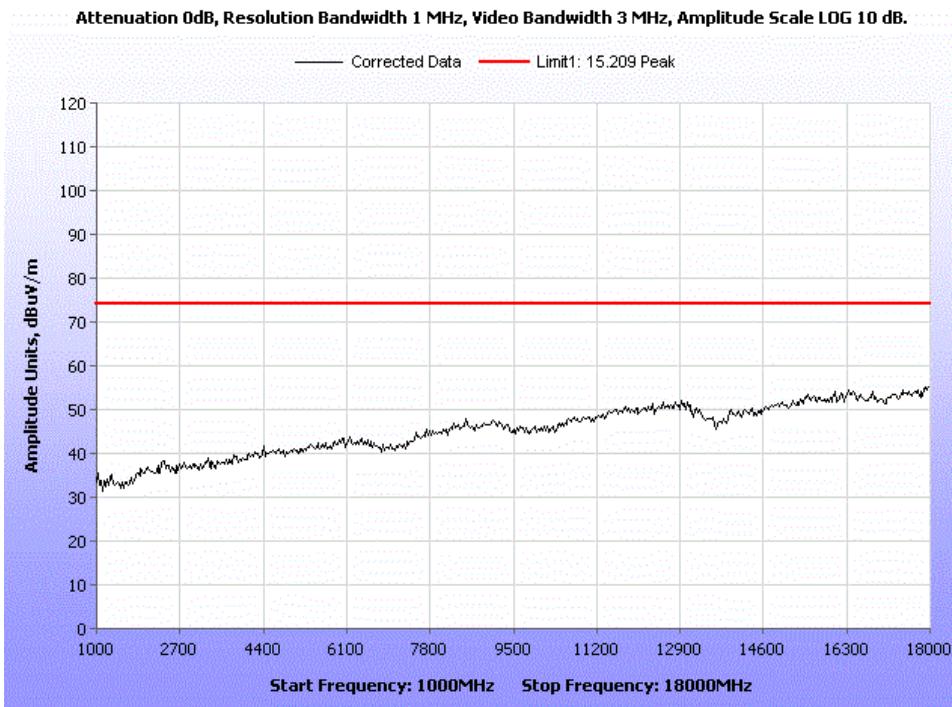


Radiated Spurious Emissions, Low Channel, 2402MHz, Peak.

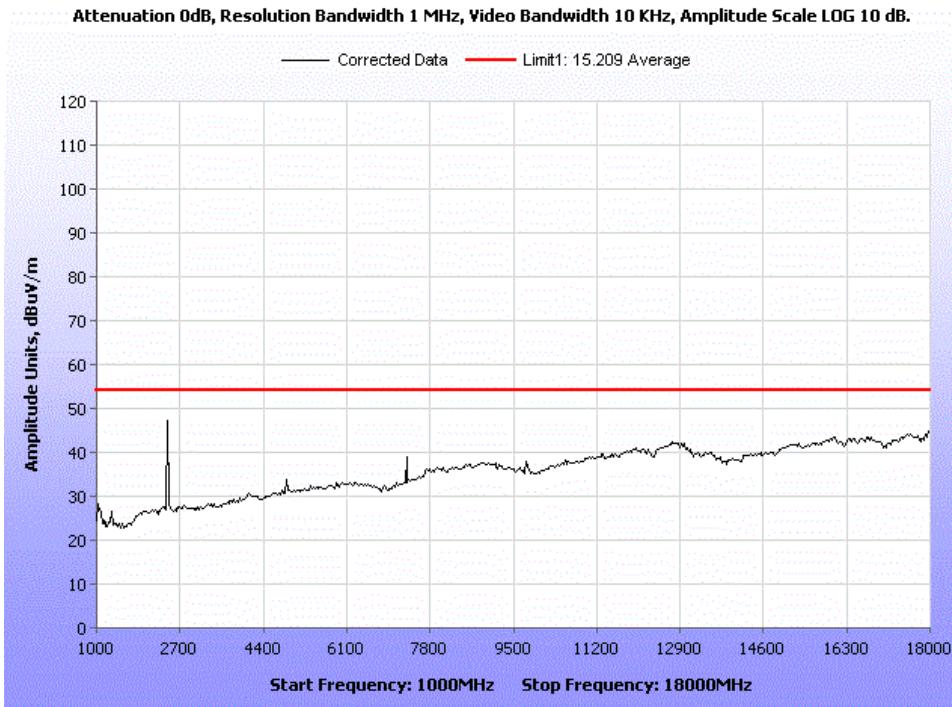


Radiated Spurious Emissions, Mid Channel, 2442MHz, Average.

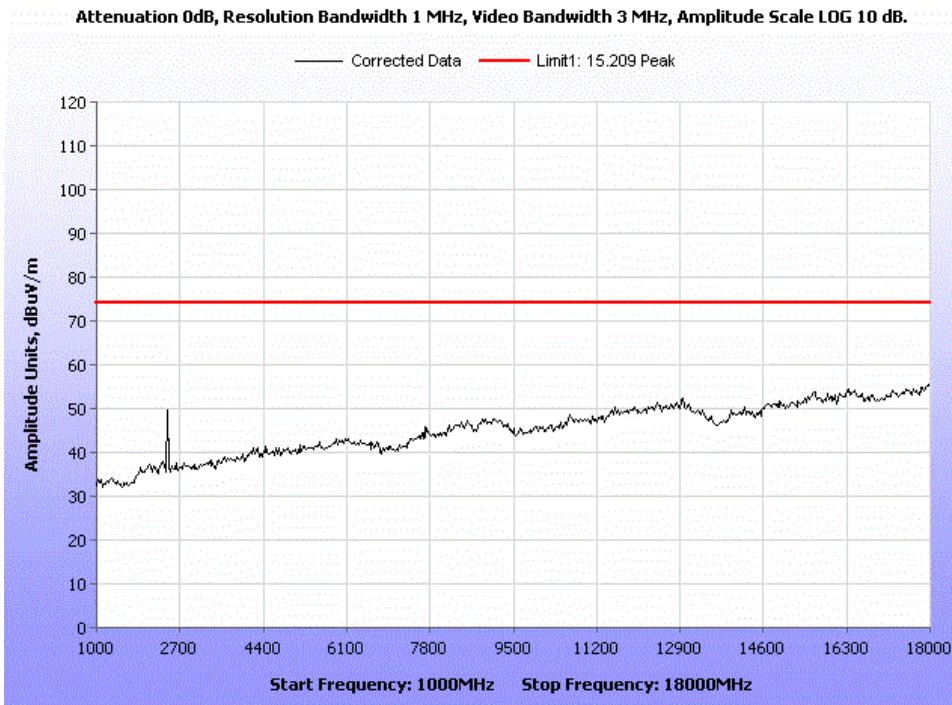


Radiated Spurious Emissions, Mid Channel, 2442MHz, Peak.

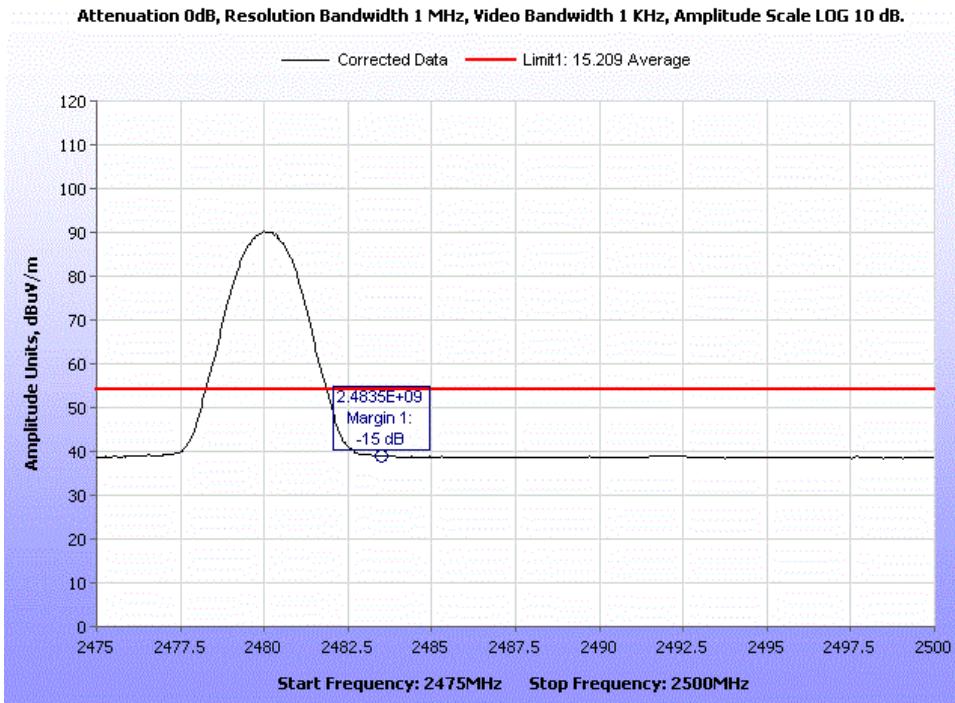


Radiated Band Edge, High Channel, 2480MHz, Average.

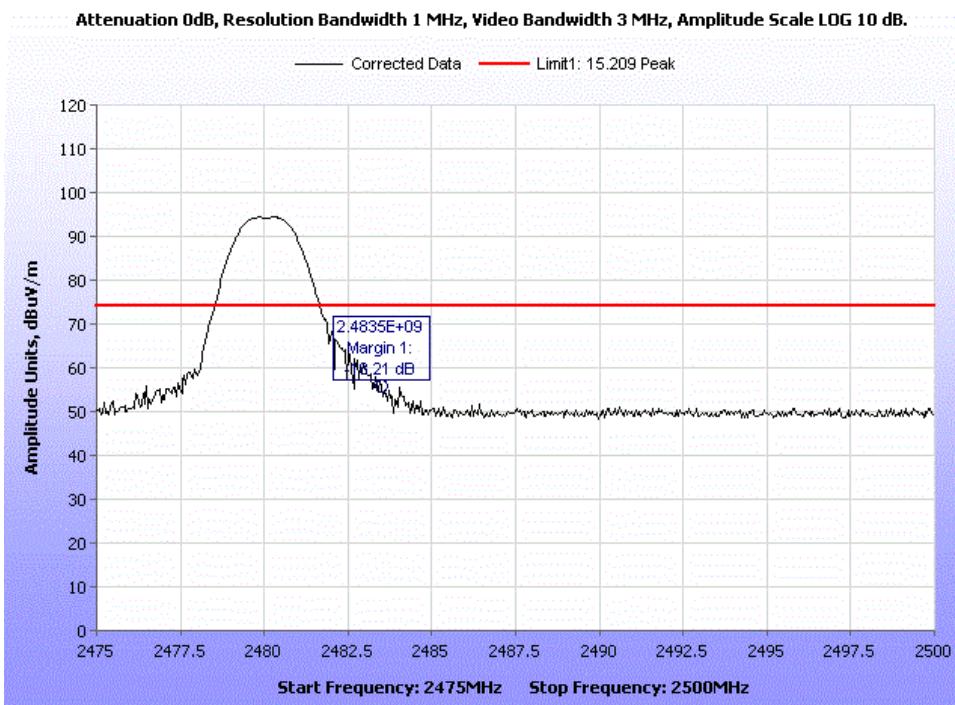

Radiated Band Edge, High Channel, 2480MHz, Peak.

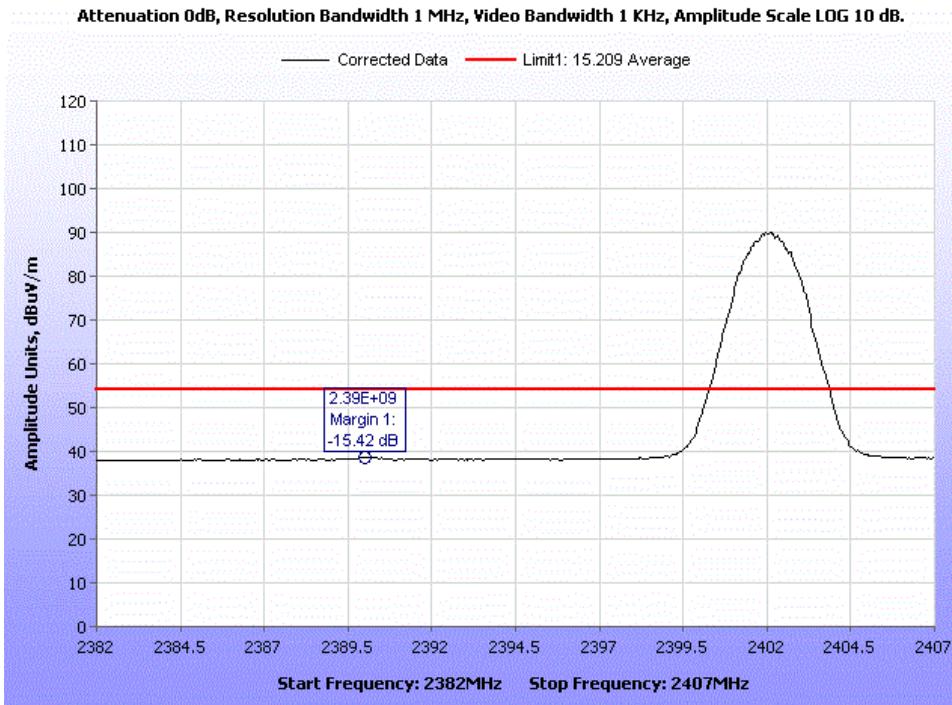

Radiated Band Edge, Low Channel, 2402MHz, Average.

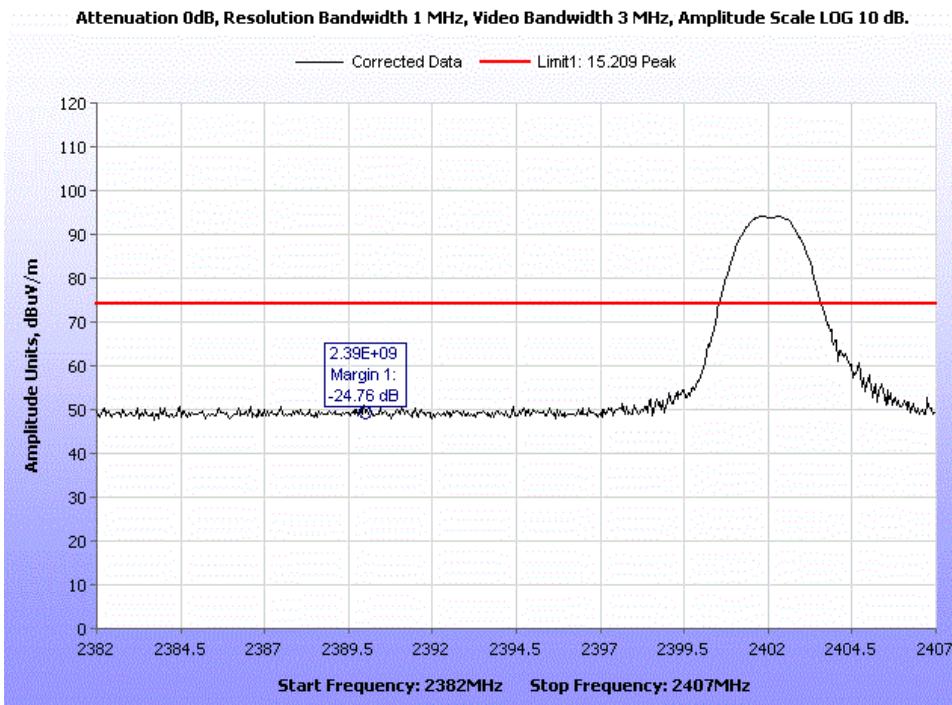

Radiated Band Edge, Low Channel, 2402MHz, Peak.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.


Since the EUT had an integral antenna, conducted measurements could not be performed. Measurements needed to be taken radiated. An antenna was located 3 m away from the EUT and plots were taken. The EUT was rotated through all three orthogonal axes. The plots were corrected for both antenna correction factor and cable loss.


See following pages for detailed test results with RF Conducted Spurious Emissions.

Test Results: The EUT **completed testing** to the requirements of **§15.247(d)**. No anomalies noted.


Test Engineer(s): Arsalan Hasan

Test Date(s): April 10, 2021

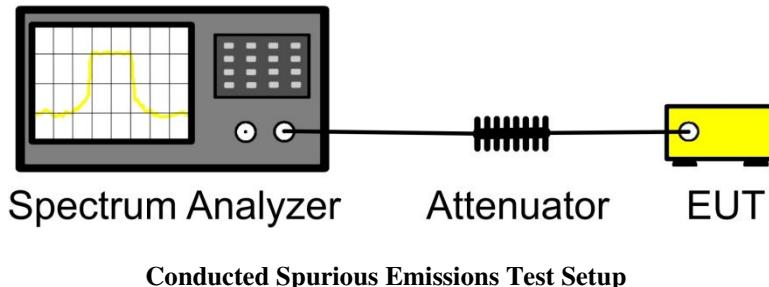


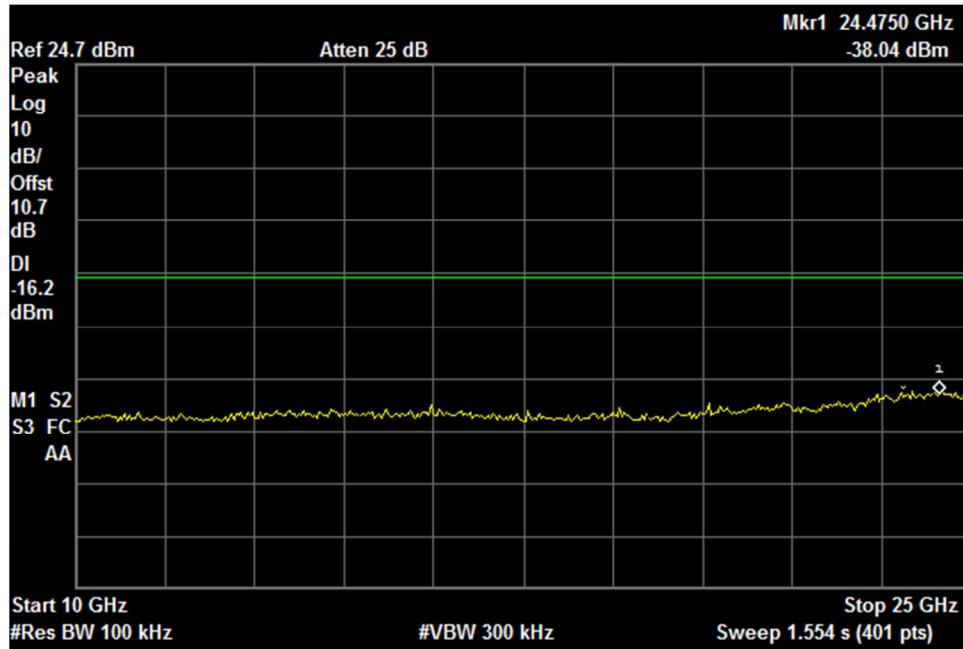


Spurious Conducted Emissions, High Channel, 2480MHz, 10GHz-25GHz

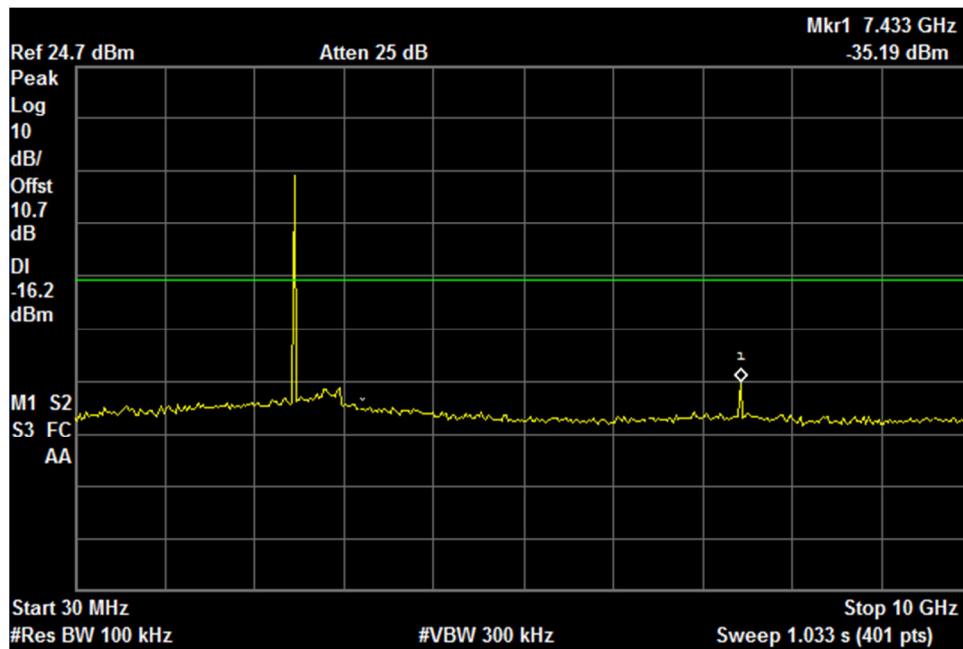


Spurious Conducted Emissions, High Channel, 2480MHz, 30MHz-10GHz

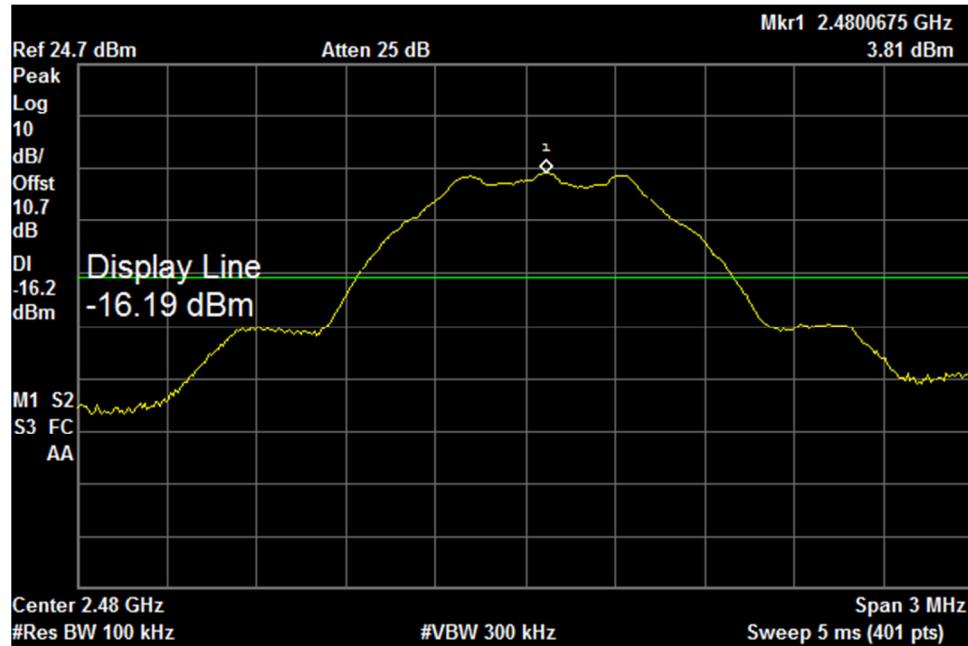


Spurious Conducted Emissions, High Channel, 2480MHz

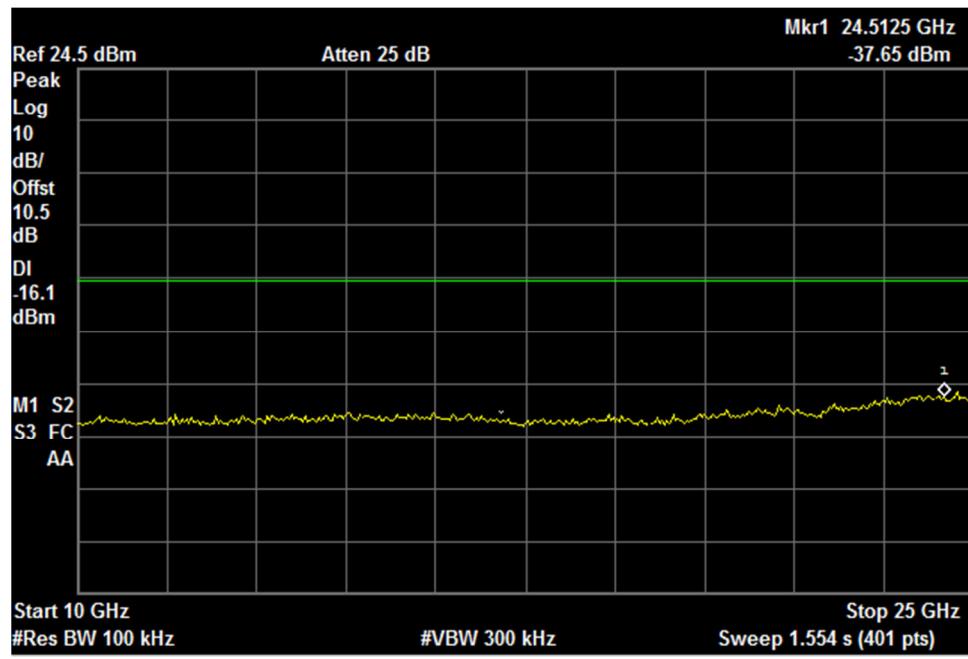


Spurious Conducted Emissions, Low Channel, 2402MHz, 10GHz-25GHz

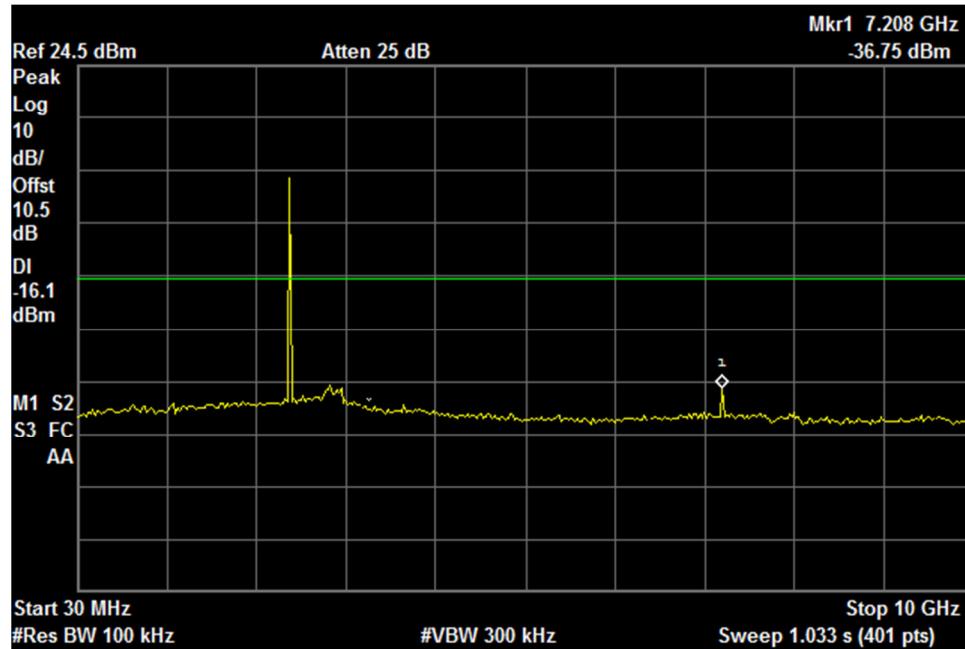


Spurious Conducted Emissions, Low Channel, 2402MHz, 30MHz-10GHz

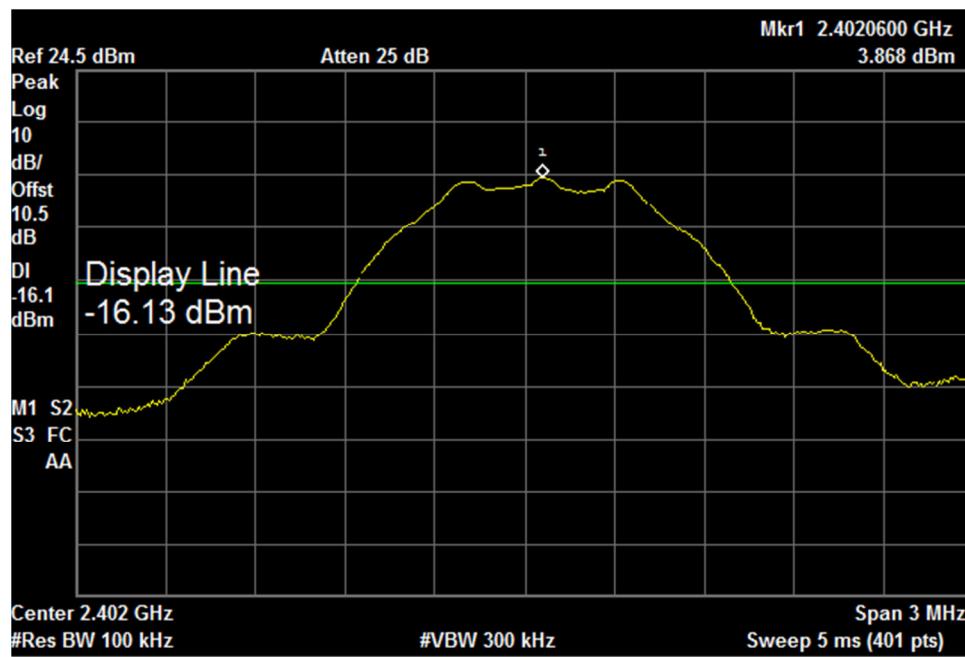


Spurious Conducted Emissions, Low Channel, 2402MHz

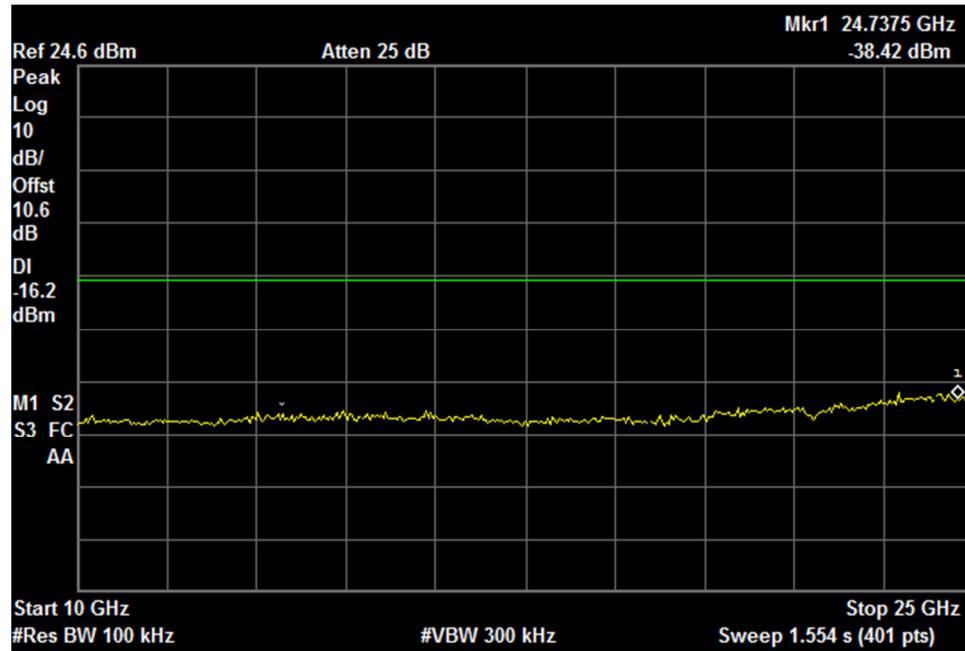


Spurious Conducted Emissions, Mid Channel, 2442MHz, 10GHz-25GHz

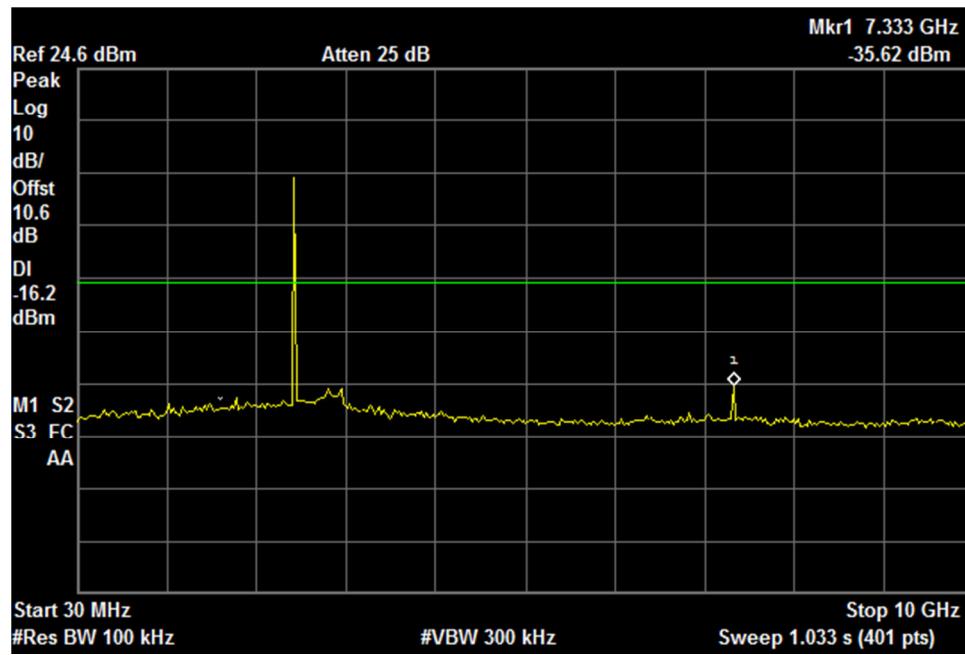


Spurious Conducted Emissions, Mid Channel, 2442MHz, 30MHz-10GHz

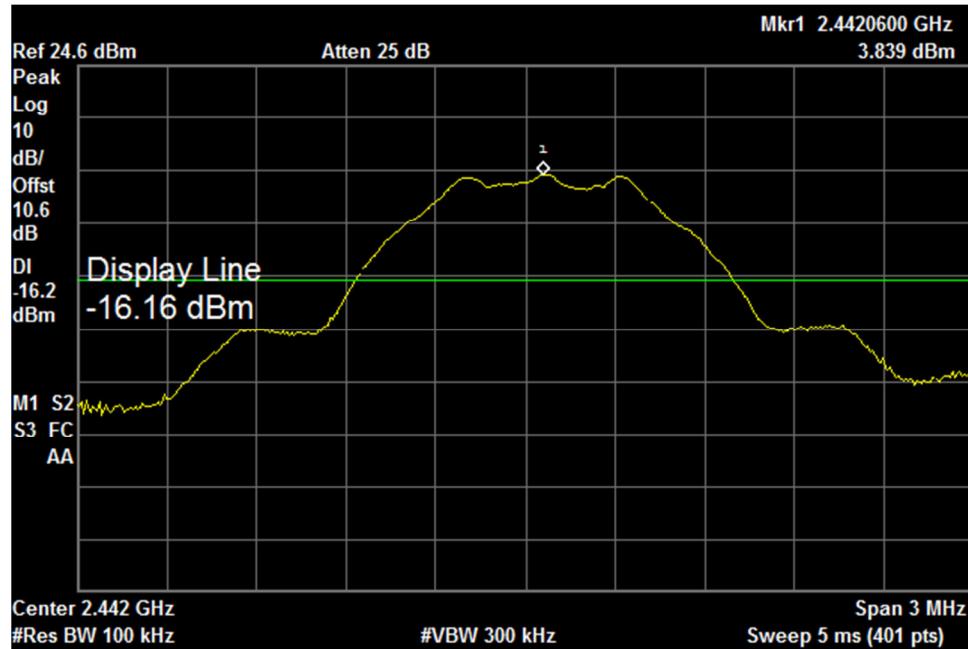

Spurious Conducted Emissions, Mid Channel, 2442MHz

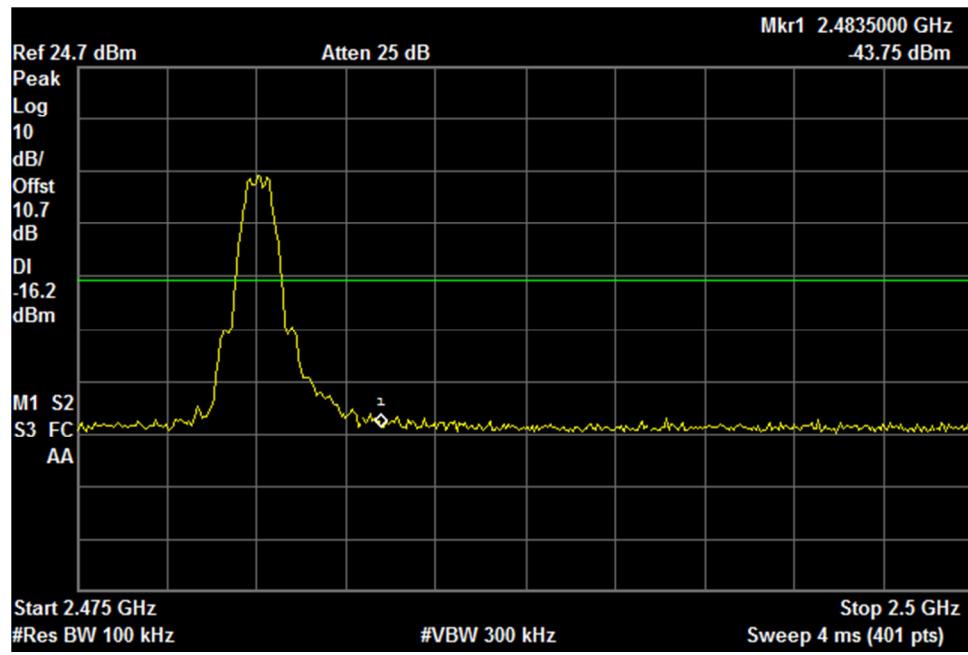

Conducted Band Edge, High Channel, 2480MHz

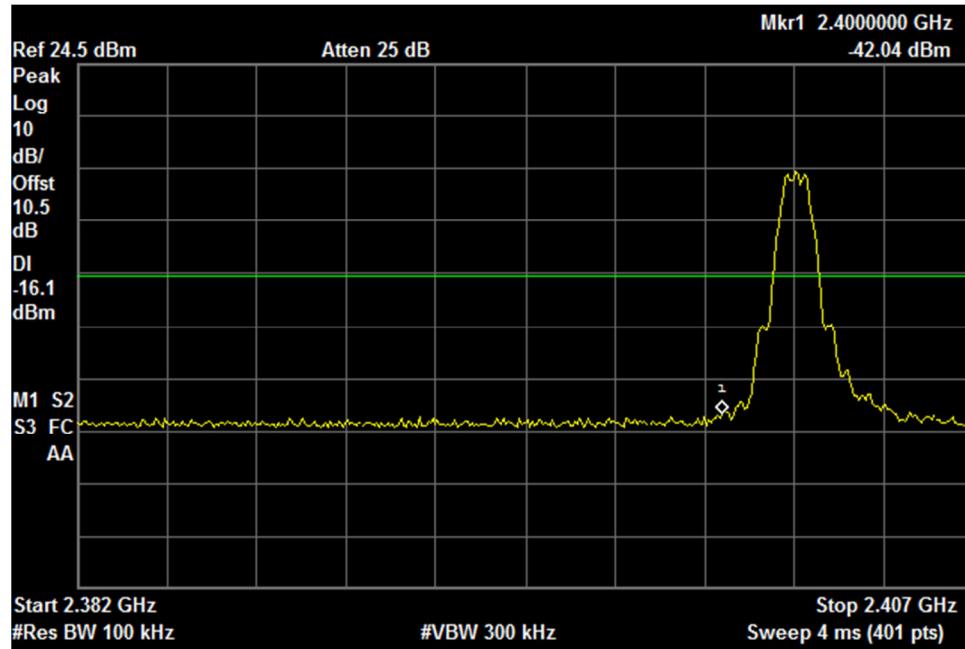

Conducted Band Edge, Low Channel, 2402MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level throughout each of the 100 sweeps of power averaging. The RBW was set to 3 kHz and a VBW set to 9 kHz or greater. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT completed testing to the requirements of § 15.247 (e). No anomalies noted.


The peak power spectral density was determined from plots on the following page(s).

Test Engineer(s): Arsalan Hasan


Test Date(s): April 10, 2021

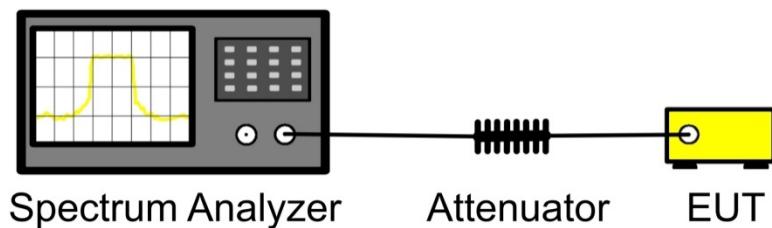


Block Diagram, Power Spectral Density Test Setup

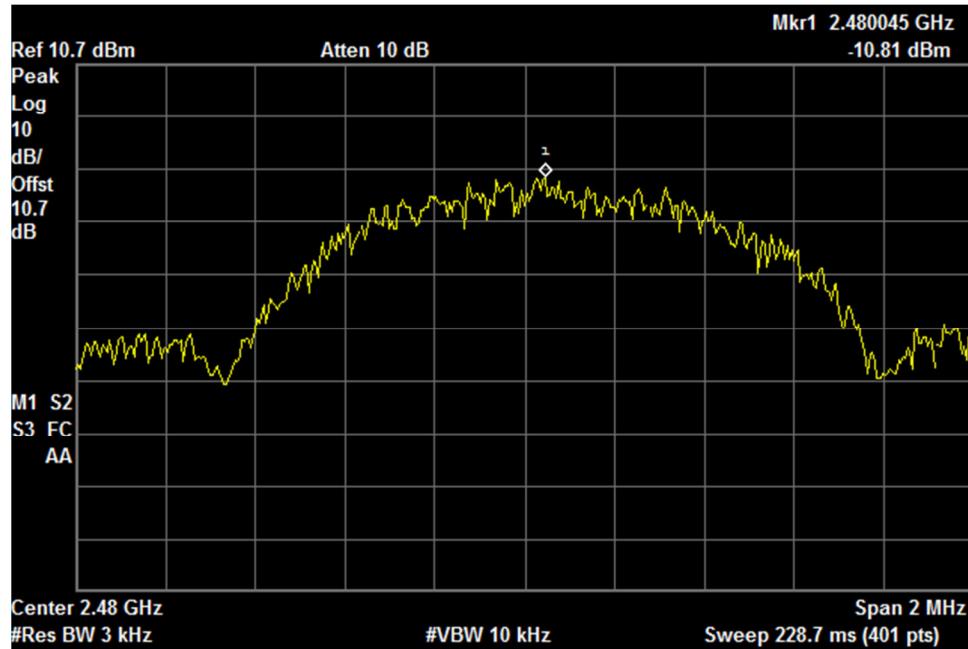

Peak Power Spectral Density, High Channel, 2480MHz

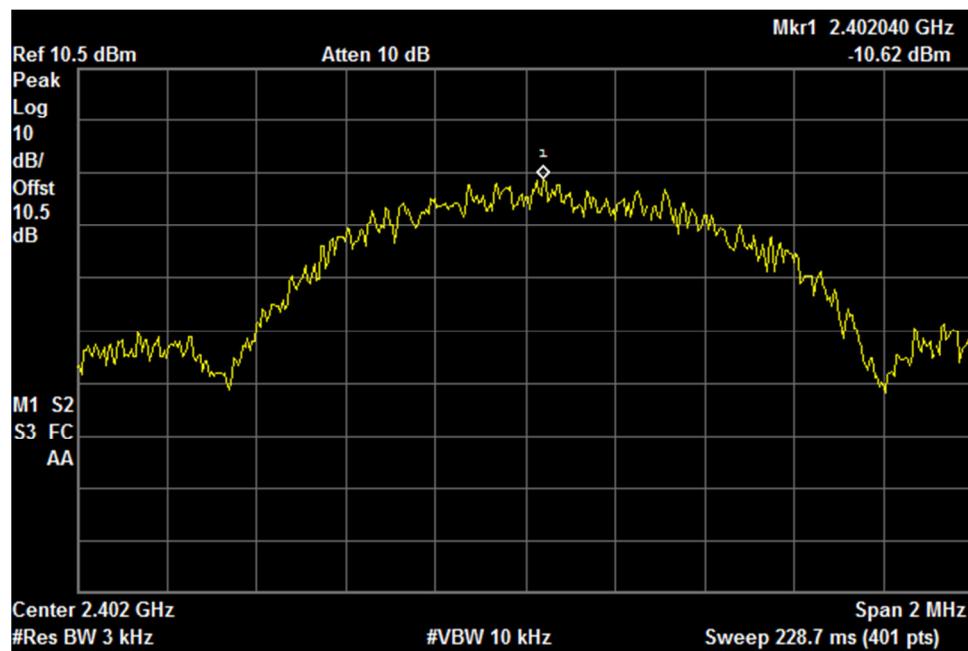

Peak Power Spectral Density, Low Channel, 2402MHz

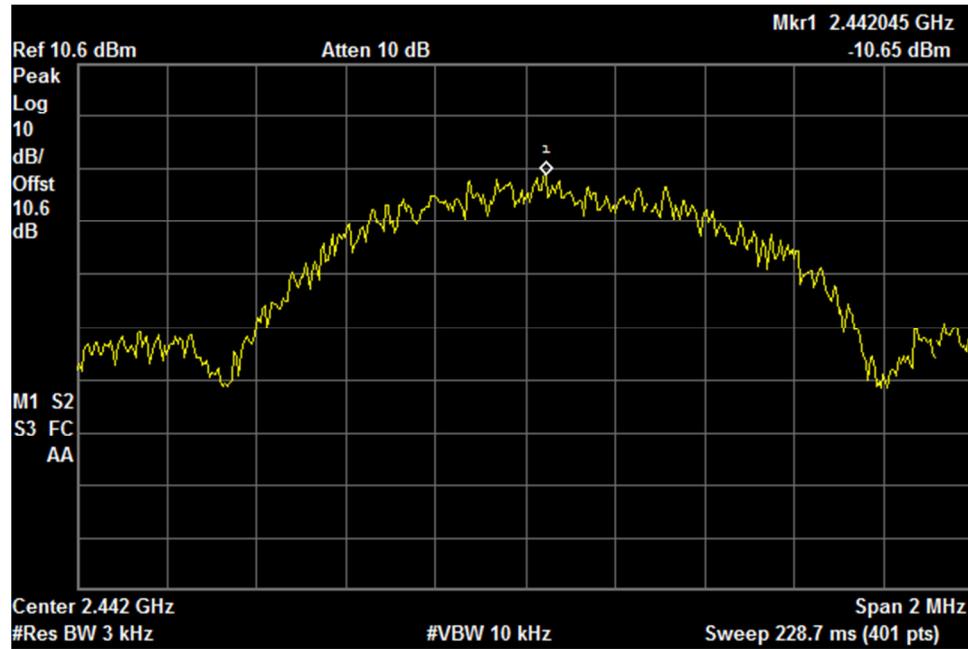

Peak Power Spectral Density, Mid Channel, 2442MHz

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

ASSET #	EQUIPMENT	MANUFACTURER	MODEL	CAL DATE	CAL DUE DATE
1S2399	TURNTABLE/MAST CONTROLLER	SUNOL SCIENCES	SC99V	SEE NOTE 1	
1S2600	BILOG ANTENNA	TESEQ	CBL6112D	03/19/2021	03/19/2022
1S3826	DRG HORN ANTENNA	ETS-LINDGREN	3117	12/03/2020	12/03/2022
1S3892	SPECTRUM ANALYZER	AGILENT	E4407B	07/11/2020	01/11/2022
1U3962	SPECTRUM ANALYZER	AGILENT	E4448A	07/31/2021	07/31/2022
1S2587	PRE AMPLIFIER	AML COMMUNICATIONS	AML0126L3801	SEE NOTE 1	
1S2653	AMPLIFIER	SONOMA INSTRUMENT	310 N	SEE NOTE 1	
1S2486	5 METER CHAMBER	PANASHIELD - ETS	5M	SEE NOTE 2	

Test Equipment List

Note 1: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Note 2: Latest NSA and VSWR data available upon request.

End of Report