


Features

(1)Installation mode	Onboard antenna
(2)Antenna type	PCB antenna
(3)Antenna length	27.5mm
(4)Antenna width	0.5mm
(5)Frequency	2.4G
(6)Manufacturer	ShLinearenzhen Xichen Technology

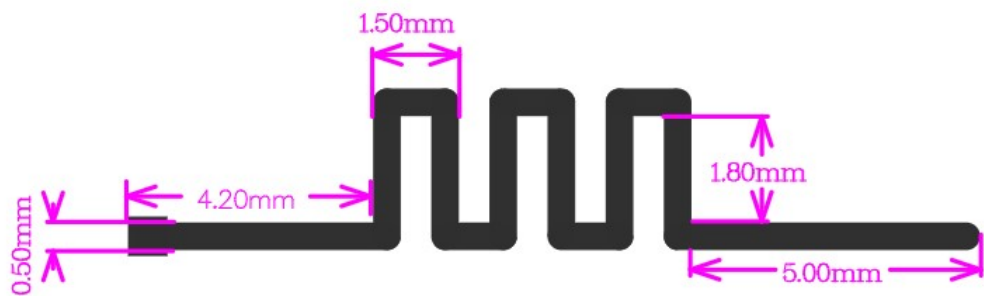


Electrical Specification

(1)Working Frequency Range	2400~2500 MHz
(2)Peak Gain	2.95dBi
(3)Impedance	50 Ohm
(4)VSWR	2.5(Max)
(5)Polarization	Linear


(6)Azimuth Beamwidth

Omni-directional

S11 Figure

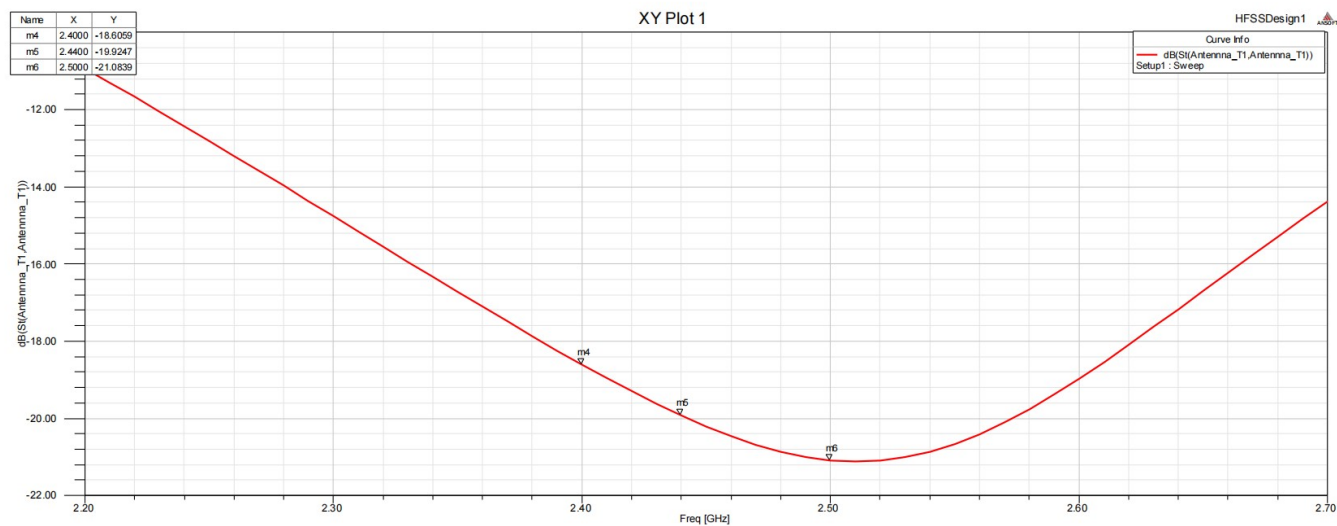

Radiation Figure

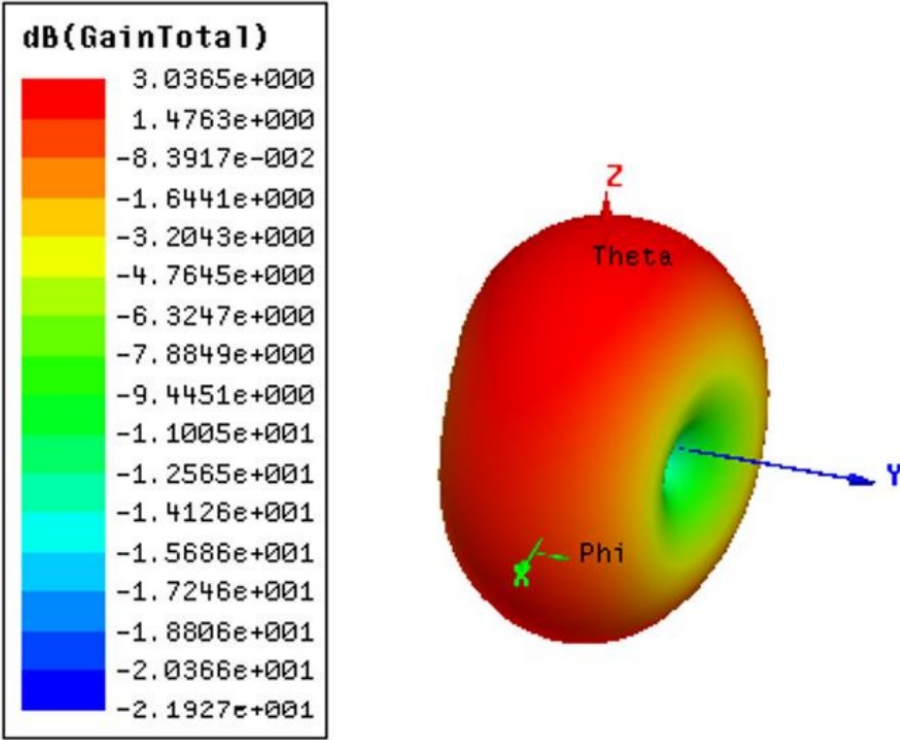

Antenna Radiation Pattern

	ZX plane		ZY plane		XY plane	
Frequency	Max Value	Average	Max Value	Average	Max Value	Average
[MHz]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]
2400	2.91	2.09	2.93	-3.00	2.67	-4.14
2450	2.83	2.13	2.78	-3.12	2.81	-4.13
2500	2.95	2.07	2.87	-3.00	2.89	-4.05
Radiation Pattern XOZ		Radiation Pattern YOZ		Radiation Pattern XOY		
XOZ HFSSDes Curve Info max Freq=2.45GHz: Phi=0deg 2.908 Freq=2.4GHz: Phi=0deg 2.833 Freq=2.5GHz: Phi=0deg 2.948		YOZ HFSSDesign Curve Info max Freq=2.45GHz: Phi=90deg 2.9354 Freq=2.4GHz: Phi=90deg 2.7809 Freq=2.5GHz: Phi=90deg 2.8698		XOY HFSSDesign Curve Info max Freq=2.45GHz: Theta=90deg 2.6711 Freq=2.4GHz: Theta=90deg 2.8128 Freq=2.5GHz: Theta=90deg 2.8940		