




深圳市佳宇创科技有限公司
ShenZhenShi JiaYuChuang Technology Co.,Ltd

线圈概述：Coil Overview:

一、平面结构图：（公差 $\pm 1\%$ ）单位：MM

Planar structure Picture:(tolerance (allowed error) $\pm 1\%$) unit:MM

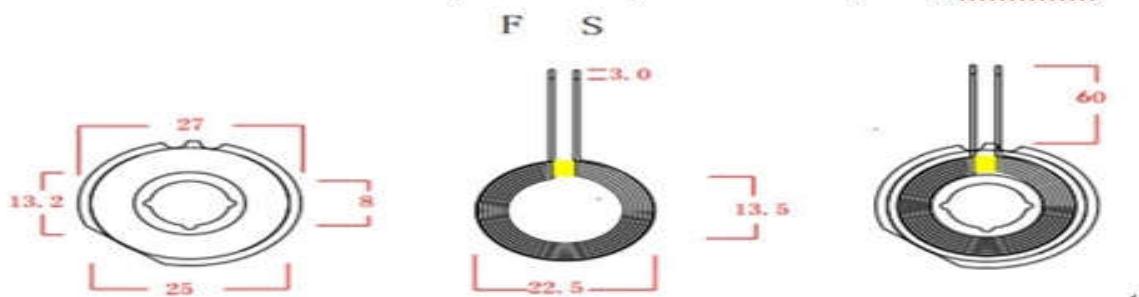

二、产品参数：

受控文件请勿外传 Do not distribute controlled documents.

脚位 foot position	线径 Wire Diameter	圈数 number of laps	备注 Remark
S—F	0.05*75P	14TS	丝包线 silk yarn

三、技术要求：Technical Requirements

- 线圈对应的位置贴上 5MM 的高温胶纸，固定好线头，防止线松。
5MM high-temperature adhesive paper is pasted on the corresponding position of the coil to fix the thread and prevent it from loosening.
- 按客户要求把过长的线头剪掉，镀上锡，镀锡深度统一为 2 \pm 1MM。
According to the customer's request to cut off the excessively long threads, tin-plated, tin-plated depth of uniformity for 2 \pm 1MM.
- 在磁片上点上适当的白胶，贴上线圈，过程中要保护产品表面干净。
Dot the appropriate white glue on the magnetic sheet, affix the coil, the process to protect the product surface is clean.
- 所用磁片型号尺寸为 27 \times 8 \times 3.0,无破损。
The size of the magnetic disk used is 27 \times 8 \times 3.0, without damage.

四、电性参数：Electrical parameters

1. 电感值 Inductance

以上电感值以铨华 1062 仪器，100KHZ/1Vrms 为标准或同等仪器。

The above inductance value is based on Quan Hua 1062 instrument, 100KHZ/1Vrms as a standard or equivalent instrument.

客户承认 Customer Approval		
承认 Accepted	审核 Checked	核准 Approved

佳宇创科技 Ji ayuchuang Technology		
作成 Made	确认 Checked	审核 Approved

