

承认书

SPECIFICATION FOR APPROVAL

客 户:
CUSTOMER:

深圳市永丰旺科技有限公司
Shenzhen Yongfengwang Technology Co.Ltd

客 户 料 号:
CUST P/N:

煜 耀 料 号:
YUYAO P/N:

YY-251166

产 品 型 号:
D E S T:

Ø17*0.08*24P*2P*11TS-6.8UH-15mm/43.5*1.0

日 期:
DATE:

2024.5.20

版 本:
VERSION:

V1

制 定 PREPARED BY	审 核 CHECKED BY	批 准 APPROVED BY	客 户 承 认 CUSTOMER APPROVE
郑少东Shaodong Zheng	姚振东Zhendong Yao	曹前程Qiancheng Chao	



东莞市煜耀电子科技有限公司

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

Factory Address: Building 21, Xintaiyangcheng industrial park, No.1 xinxinyang Road, Lin Village, Tangxia, Dongguan, China

TEL: 13717089408

FAX: 0769-82866409

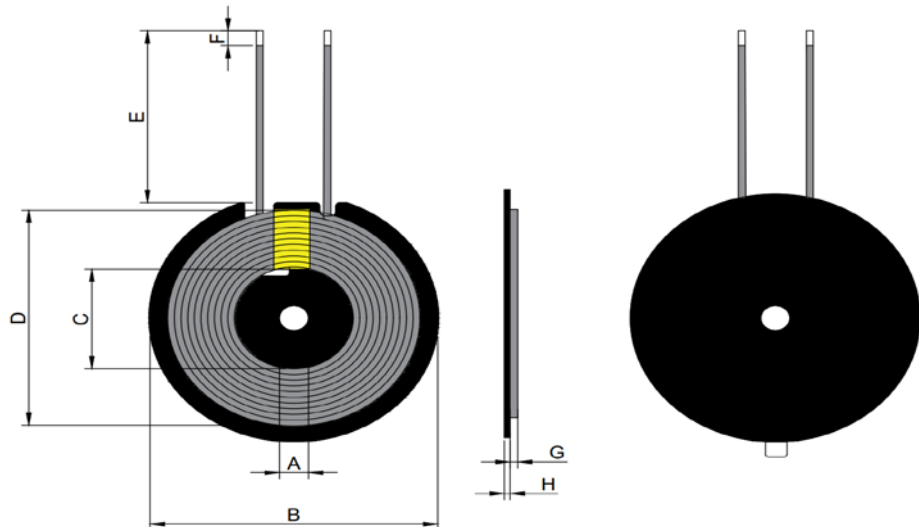
DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409 DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

版本变更履历

Version Change History

版本 Rev	变更前 Before Change	变更后 After Change	变更日期 Change Date	批准 Approved By
A.1	新发行	Newly issued	2024.6.20	

产品型号: D E S T:	Ø17*0.08*24P*2P*11TS-6.8UH- 15mm/43.5*1.0	版 本: VERSION:	V0	客 户: CUSTOMER:	Shenzhen Yongfengwang Technology Co.Ltd	
				客 户 料 号: CUST P/N:	0	
				煜 耀 料 号: YUYAO P/N:	YY-251166	
一、尺寸 DIMENSION:(mm)  Remarks: two leads are intersected, 7mm high temperature tape is wrapped between the two lines, the back of the magnetic sheet 贴0.1MM 双面胶 0.1 MM double-sided adhesive 2.磁片为43.5*5.3*0.8MMT厚带双槽硬磁 2. The magnetic sheet is 43.5*5.3*0.8MMT thick with double-slot hard magnet.					A	5.3±0.3
					B	43.5±0.5
					C	17±0.5
					D	38±1
					E	200MM+2.5/-1
					F	3±1.5
					G	1.5MAX
					H	0.8±0.1
					I	
					J	
					K	
					L	
					制定/日期 PREPARED BY/DATE	
zheng shao dong/2024.6.20		yao zheng dong/2024.6.20				

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409

SPECIFICATION APPROVAL

产品型号: D E S T:	Ø17*0.08*24P*2P*11TS-6.8UH-15mm/43.5*1.0	版 本: VERSION:	V0	客 户: CUSTOMER:	Shenzhen Yongfengwang Technology Co.Ltd
				客 户 料 号: CUST P/N:	0
				煜 耀 料 号: YUYAO P/N:	YY-251166
二、原理图 SCHEMATIC DIAGRAM:					
					
三、绕线参数 WINDING SPECIFICATION:					
序号 NO	端子 TERMINAL		线径 WIRE	圈数 TURNS	绕线方向 WINDING DIRECTION
1	S	F	0.08*24P*2P热风自粘线	11TS	逆时针
四、电气特性 ELECTRICAL CHARACTERISTICS:					
温度 TEMPERATURE:25°C±10°C,湿度 RELATIVE HUMIDITY:65±20%					
序号 NO	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	3.8UH±10%单线圈	100KHZ/1V	LCZ METER1062B
2	IND	S-F	6.5-6.8UH带磁片	100KHZ/1V	LCZ METER1062B
3	DCR	S-F	75mΩ MAX	1KHZ/1V	TH2810
4	Q值	S-F	33MIN	100KHZ/1V	LCZ METER1062B
制定/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE		
zheng shao dong/2024.6.20			yao zheng dong/2024.6.20		

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409

