



东莞市煜耀电子科技有限公司

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

一、平面结构图： 单位:MM I. Plane structure plan: Unit:MM

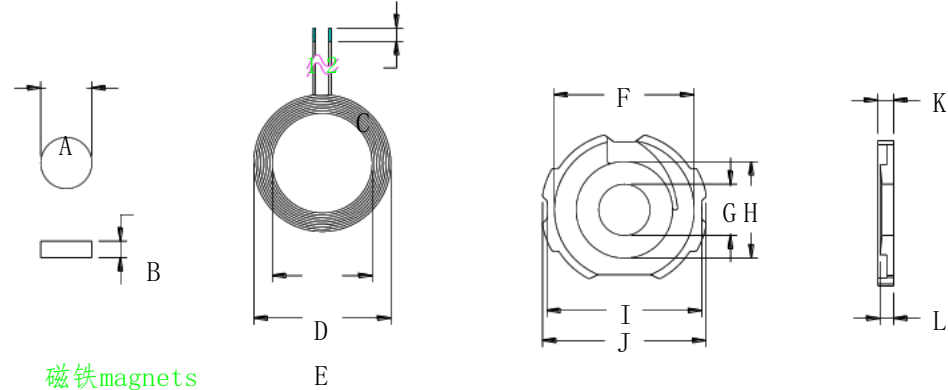

磁铁magnets



A	7.4±0.1
B	2.0±0.1
C	2±1
D	14±0.2
E	20.7±0.3
F	21±0.2
G	7.5±0.1
H	13.5±0.2
I	23.5±0.3
J	25±0.3
K	2.6±0.15
L	2.4±0.1 中柱高度
M	60±2

中柱高度Center column height

二、产品参数： II. Product parameters:

脚 位Foot Position	线 径Wire Diameter	圈 数 Number of laps	备 注 Remarks
1 - 2	0.08*48P	9T	热风绞合线Hot air stranded wire

三、技术要求： III. Technical requirements:

1. 附加工序（按客户要求）：于成品中间圆孔装上 7.4x2.0mm 的磁铁并在成品背后加贴 513-13*13 方形双面胶，后包装

1. Additional process (according to customer's requirements): install 7.4x2.0mm magnet in the middle hole of the finished product and put 513-13*13 square double-sided tape on the back of the product.

513-13*13 square double sided tape on the back of the product, and then pack it.

四、电性参数: IV. Electrical parameters:

1.电感值, Q 值: 1. Inductance, Q value:

PIN 1-2 = 4.0uH $\pm$ 0.2UH

Q 值 $\geq$ 25 Q value

以上电感值以铨华 1062A 仪器, 以 10KHZ/0.3Vrms 为标准或等同仪器。

Q 值以铨华 1062A 仪器, 以 100KHZ/0.3Vrms 为标准或等同仪器

The above inductance values are based on a Quanhua 1062A instrument at 10KHZ/0.3Vrms or equivalent.

Q value by Ambrose 1062A instrument, 100KHZ/0.3Vrms as standard or equivalent.