

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: 2AY6A-C6

Product: SMART PHONE

Trade Mark: CLOUD MOBILE

Model Number: Typhoon_C6

Family Model: N/A

Report No.: STR210301001006E

Prepared for

Cloud Mobile Holding LLC

1149 S. HILL ST. SUITE H400, LOS ANGELES, CA 90015

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street

Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320

0090 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION


Applicant's name	Cloud Mobile Holding LLC
Address.....	1149 S. HILL ST. SUITE H400, LOS ANGELES, CA 90015
Manufacturer's Name	Cloud Mobile Holding LLC
Address.....	1149 S. HILL ST. SUITE H400, LOS ANGELES, CA 90015
Product name.....	SMART PHONE
Model and/or type reference ..	Typhoon_C6
Family Model:	N/A
Standards	FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure	ANSI C63.26:2015 ANSI/TIA-603-E-2016
This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.	
Date of Test	
Date (s) of performance of tests.....	Mar 03. 2021 ~Mar 24, 2021
Date of Issue	Mar 24, 2021
Test Result.....	Pass

Testing Engineer :



(Cheng Jiawen)

Technical Manager :



(Jason Chen)

Authorized Signatory :



(Alex Li)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
MEASUREMENT UNCERTAINTY	6
1.5 SPECIAL ACCESSORIES.....	7
1.6 WORST-CASE CONFIGURATION AND MODE.....	7
1.6 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP	10
3.TEST AND MEASUREMENT EQUIPMENT	11
4. OUTPUT POWER.....	13
4.1 OUTPUT POWER MEASUREMENT	13
6. BANDEDGE AND EMISSION MASK	16
7. OUT OF BAND EMISSIONS	17
7.1 MEASUREMENT METHOD	18
8. RADIATED MEASUREMENT	19
8.1. RADIATED POWER (ERP & EIRP).....	19
8.2 LTE BAND 2.....	20
8.3 LTE BAND 4.....	24
8.4 LTE BAND 5.....	28

8.5 LTE BAND 7.....	30
8.5 LTE BAND 12	32
8.6 LTE BAND 17	34
8.7 LTE BAND 66	36
9. SPURIOUS RADIATION EMISSION	40
9.1 LTE BAND 2.....	42
9.2 LTE BAND 4.....	44
9.3 LTE BAND 5.....	46
9.4 LTE BAND 7.....	48
9.5 LTE BAND 12	50
9.6 LTE BAND 17	52
9.7 LTE BAND 66	54
10. FREQUENCY STABILITY	56
10.1 LTE BAND 2	57
10.2 LTE BAND 4	59
10.3 LTE BAND 5	61
10.4 LTE BAND 7	63
10.5 LTE BAND 12	65
10.6 LTE BAND 17	67
10.7 LTE BAND 66	69
11. PEAK-TO-AVERAGE RATIO.....	71
11.1 Description of the PAR Measurement.....	71
11.2 Measuring Instruments	71
11.3 Test Procedures.....	71
11.4 Test Setup.....	71

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	SMART PHONE
Trade Mark	CLOUD MOBILE
Model Name	Typhoon_C6
Family Model	N/A
Model Difference	N/A
FCC ID:	2AY6A-C6
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2, 4, 5, 7, 12, 17, 66
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz; LTE FDD Band 66 Uplink: 1710MHz-1780MHz, Downlink: 2110MHz-2200MHz;
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	PIFA Antenna
Antenna gain:	Band 2: 2.36dBi, Band 4: 2.24dBi, Band 5: 2.18dBi, Band 7: 2.92dBi, Band 12: 1.94dBi, Band 17: 1.88dBi, Band 66: 2.26dBi
Power Supply:	DC 3.7V/ 2500mAh from battery or DC 5V from Adapter.
Adapter:	Model: JML-0500100NZ-LW Input: AC 100-240V~50/60Hz 0.3A Output: DC 5V---1.0A
Extreme Vol. Limits:	DC 3.4V to DC 4.2V (Nominal DC 3.7V) (Note 1)
HW Version	AL_A5_MB_V20

SW Version	A5_Typhoon_C6_v1.1
** Note1: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AY6A-C6** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB
2	Conducted Emission Test	$\pm 1.38\text{dB}$
3	RF power, conducted	$\pm 0.16\text{dB}$
4	Spurious emissions, conducted	$\pm 0.21\text{dB}$
5	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 12, Band 17, Band 66

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	

24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
Remark: 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test. 3. No modifications are made to the EUT during all test items.			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	SMART PHONE	Typhoon_C6	FCC ID: 2AY6A-C6	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power



For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

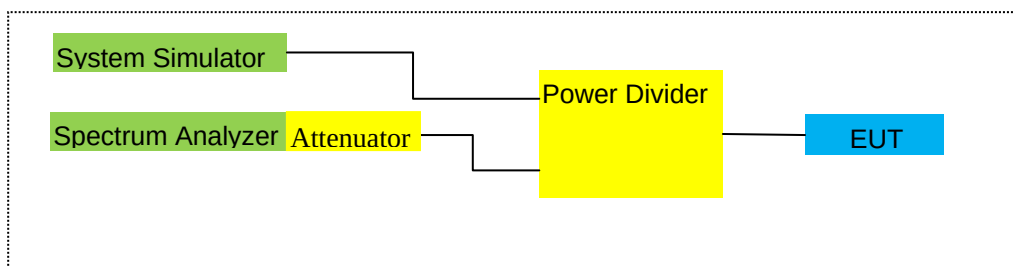

For Frequency Stability

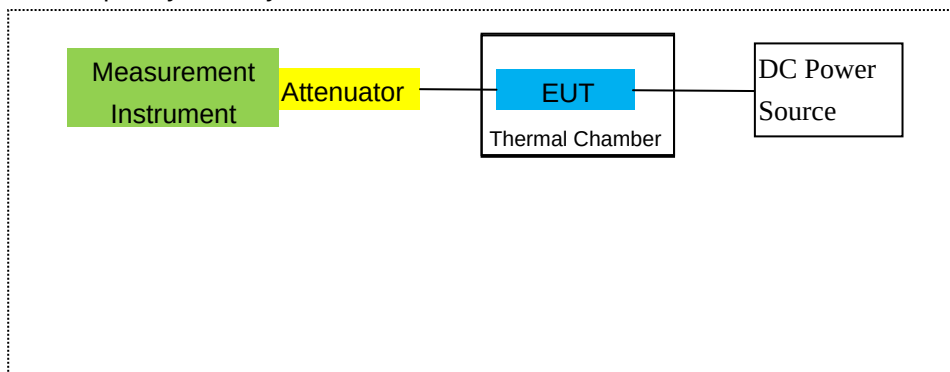

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2020.07.13	2021.07.12	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2020.11.20	2021.11.19	1 year
7	Amplifier	EM	EM-30180	060538	2020.07.13	2021.07.12	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
9	Power Meter	R&S	NRVS	100696	2020.07.13	2021.07.12	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
15	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
16	LISN	EMCO	3816/2	00042990	2020.05.11	2021.05.10	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2020.05.11	2021.05.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.04.11	2021.04.10	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2021.05.10	1 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2020.05.11	2021.05.10	1 year
24	test receiver	R&S	ESCI	a0304218	2020.05.11	2021.05.10	1 year
25	Communication Tester	R&S	CMU200	A0304247	2020.07.13	2021.07.12	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2020.07.13	2021.07.12	1 year
29	Communication Tester	R&S	CMW500	148500	2020.05.11	2021.05.10	1 year
30	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2020.07.13	2021.07.12	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".³

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- ☐ LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- ☐ LTE Band 2/4/5/7/12/17/66

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- ☐ Set display line
- ☐ Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- ☐ LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

- ☐ LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP	Polarization Of Max. ERP	
							Average (mW)		
1.4MHz Band QPSK	1/#Mid	1850.7	-1.11	3.76	28.24	23.37	217.270	Horizontal	Pass
		1880	0.17	3.91	28.22	24.48	280.543	Horizontal	Pass
		1909.3	-1.36	3.93	28.20	22.91	195.434	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	0.09	3.77	28.23	24.55	285.102	Horizontal	Pass
		1880	-0.40	3.91	28.24	23.93	247.172	Horizontal	Pass
		1908.5	-0.80	3.94	28.25	23.51	224.388	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-1.12	3.77	28.31	23.42	219.786	Horizontal	Pass
		1880	-0.74	3.91	28.22	23.57	227.510	Horizontal	Pass
		1907.5	0.16	3.94	28.20	24.42	276.694	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	-0.48	3.79	28.33	24.06	254.683	Horizontal	Pass
		1880	-0.43	3.95	28.22	23.84	242.103	Horizontal	Pass
		1905	0.11	3.97	28.19	24.33	271.019	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-1.28	3.79	28.34	23.27	212.324	Horizontal	Pass
		1880	0.30	3.95	28.22	24.57	286.418	Horizontal	Pass
		1902.5	0.41	3.97	28.18	24.62	289.734	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	-0.12	3.81	28.35	24.42	276.694	Horizontal	Pass
		1880	-1.04	3.96	28.22	23.22	209.894	Horizontal	Pass
		1900	-0.15	4.00	28.16	24.01	251.768	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	-0.54	3.76	28.24	23.94	247.742	Vertical	Pass
		1880	0.37	3.91	28.22	24.68	293.765	Vertical	Pass
		1909.3	-0.46	3.93	28.20	23.81	240.436	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-0.85	3.77	28.23	23.61	229.615	Vertical	Pass
		1880	-0.36	3.91	28.24	23.97	249.459	Vertical	Pass
		1908.5	0.44	3.94	28.25	24.75	298.538	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-0.18	3.77	28.31	24.36	272.898	Vertical	Pass
		1880	0.47	3.91	28.22	24.78	300.608	Vertical	Pass
		1907.5	0.32	3.94	28.20	24.58	287.078	Vertical	Pass
10.0MHz Band	1/#Mid	1855	-0.67	3.79	28.33	23.87	243.781	Vertical	Pass
		1880	-1.18	3.95	28.22	23.09	203.704	Vertical	Pass

QPSK		1905	-1.56	3.97	28.19	22.66	184.502	Vertical	Pass
15.0MH	1/#Mid	1857.5	-1.46	3.79	28.34	23.09	203.704	Vertical	Pass
z Band		1880	-0.55	3.95	28.22	23.72	235.505	Vertical	Pass
QPSK		1902.5	-0.78	3.97	28.18	23.43	220.293	Vertical	Pass
20.0MH	1/#Mid	1860	-1.39	3.81	28.35	23.15	206.538	Vertical	Pass
z Band		1880	-1.26	3.96	28.22	23.00	199.526	Vertical	Pass
QPSK		1900	0.67	4.00	28.16	24.83	304.089	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP	Polarization Of Max. ERP	
							Average		
							(mW)		
1.4MHz Band 16 QAM	1/#Mid	1850.7	-1.66	3.76	28.24	22.82	191.426	Horizontal	Pass
		1880	-1.32	3.91	28.22	22.99	199.067	Horizontal	Pass
		1909.3	-0.94	3.93	28.20	23.33	215.278	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-1.90	3.77	28.23	22.56	180.302	Horizontal	Pass
		1880	-1.14	3.91	28.24	23.19	208.449	Horizontal	Pass
		1908.5	-1.33	3.94	28.25	22.98	198.609	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-1.71	3.77	28.31	22.83	191.867	Horizontal	Pass
		1880	-1.41	3.91	28.22	22.90	194.984	Horizontal	Pass
		1907.5	-0.91	3.94	28.20	23.35	216.272	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-1.61	3.79	28.33	22.93	196.336	Horizontal	Pass
		1880	-1.45	3.95	28.22	22.82	191.426	Horizontal	Pass
		1905	-0.81	3.97	28.19	23.41	219.280	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-1.74	3.79	28.34	22.81	190.985	Horizontal	Pass
		1880	-1.28	3.95	28.22	22.99	199.067	Horizontal	Pass
		1902.5	-1.23	3.97	28.18	22.98	198.609	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1860	-1.42	3.81	28.35	23.12	205.116	Horizontal	Pass
		1880	-0.86	3.96	28.22	23.40	218.776	Horizontal	Pass
		1900	-0.91	4.00	28.16	23.25	211.349	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1850.7	-1.91	3.76	28.24	22.57	180.717	Vertical	Pass
		1880	-0.93	3.91	28.22	23.38	217.771	Vertical	Pass
		1909.3	-0.88	3.93	28.20	23.39	218.273	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-1.56	3.77	28.23	22.90	194.984	Vertical	Pass
		1880	-1.44	3.91	28.24	22.89	194.536	Vertical	Pass
		1908.5	-1.16	3.94	28.25	23.15	206.538	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-1.12	3.77	28.31	23.42	219.786	Vertical	Pass
		1880	-1.74	3.91	28.22	22.57	180.717	Vertical	Pass
		1907.5	-0.93	3.94	28.20	23.33	215.278	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-1.33	3.79	28.33	23.21	209.411	Vertical	Pass
		1880	-1.44	3.95	28.22	22.83	191.867	Vertical	Pass
		1905	-1.45	3.97	28.19	22.77	189.234	Vertical	Pass
15.0MHz Band 16	1/#Mid	1857.5	-1.10	3.79	28.34	23.45	221.309	Vertical	Pass
		1880	-1.91	3.95	28.22	22.36	172.187	Vertical	Pass

QAM		1902.5	-0.93	3.97	28.18	23.28	212.814	Vertical	Pass
20.0MHz	1/#Mid	1860	-0.78	3.81	28.35	23.76	237.684	Vertical	Pass
Band 16		1880	-0.89	3.96	28.22	23.37	217.270	Vertical	Pass
QAM		1900	-0.99	4.00	28.16	23.17	207.491	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss	Antenna Gain	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
			(dBm)	(dBm)	(dB)	Average (dBm)	Average (mW)		
1.4MHz Band QPSK	1/#Mid	1710.7	0.31	3.12	27.58	24.77	299.916	Horizontal	Pass
		1732.5	0.64	3.27	27.61	24.98	314.775	Horizontal	Pass
		1754.3	0.22	3.29	27.63	24.56	285.759	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-0.83	3.13	27.61	23.65	231.739	Horizontal	Pass
		1732.5	-1.41	3.27	27.61	22.93	196.336	Horizontal	Pass
		1753.5	-1.66	3.30	27.62	22.66	184.502	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-0.31	3.13	27.63	24.19	262.422	Horizontal	Pass
		1732.5	-1.52	3.27	27.61	22.82	191.426	Horizontal	Pass
		1752.5	0.57	3.30	27.60	24.87	306.902	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-0.28	3.15	27.64	24.21	263.633	Horizontal	Pass
		1732.5	0.45	3.31	27.61	24.75	298.538	Horizontal	Pass
		1750	0.78	3.33	27.59	25.04	319.154	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-0.79	3.15	27.65	23.71	234.963	Horizontal	Pass
		1732.5	0.53	3.31	27.61	24.83	304.089	Horizontal	Pass
		1747.5	0.30	3.33	27.57	24.54	284.446	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-0.98	3.17	27.66	23.51	224.388	Horizontal	Pass
		1732.5	0.52	3.32	27.61	24.81	302.691	Horizontal	Pass
		1745	0.09	3.36	27.56	24.29	268.534	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	0.43	3.12	27.58	24.89	308.319	Vertical	Pass
		1732.5	-0.79	3.27	27.61	23.55	226.464	Vertical	Pass
		1754.3	-0.92	3.29	27.63	23.42	219.786	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	0.51	3.13	27.61	24.99	315.500	Vertical	Pass
		1732.5	0.33	3.27	27.61	24.67	293.089	Vertical	Pass
		1753.5	0.28	3.30	27.62	24.60	288.403	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-1.07	3.13	27.63	23.43	220.293	Vertical	Pass
		1732.5	0.05	3.27	27.61	24.39	274.789	Vertical	Pass
		1752.5	-0.81	3.30	27.60	23.49	223.357	Vertical	Pass
10.0MHz Band	1/#Mid	1715	-0.80	3.15	27.64	23.69	233.884	Vertical	Pass
		1732.5	-1.00	3.31	27.61	23.30	213.796	Vertical	Pass

QPSK		1750	0.57	3.33	27.59	24.83	304.089	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-0.72	3.15	27.65	23.78	238.781	Vertical	Pass
		1732.5	-0.38	3.31	27.61	23.92	246.604	Vertical	Pass
		1747.5	-0.54	3.33	27.57	23.70	234.423	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1720	0.10	3.17	27.66	24.59	287.740	Vertical	Pass
		1732.5	0.57	3.32	27.61	24.86	306.196	Vertical	Pass
		1745	0.85	3.36	27.56	25.05	319.890	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-0.60	3.12	27.58	23.86	243.220	Horizontal	Pass
		1732.5	-0.78	3.27	27.61	23.56	226.986	Horizontal	Pass
		1754.3	-0.65	3.29	27.63	23.69	233.884	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-0.65	3.13	27.61	23.83	241.546	Horizontal	Pass
		1732.5	-1.82	3.27	27.61	22.52	178.649	Horizontal	Pass
		1753.5	-0.64	3.30	27.62	23.68	233.346	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-0.73	3.13	27.63	23.77	238.232	Horizontal	Pass
		1732.5	-0.92	3.27	27.61	23.42	219.786	Horizontal	Pass
		1752.5	-0.13	3.30	27.60	24.17	261.216	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-0.54	3.15	27.64	23.95	248.313	Horizontal	Pass
		1732.5	-0.85	3.31	27.61	23.45	221.309	Horizontal	Pass
		1750	-1.13	3.33	27.59	23.13	205.589	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-0.91	3.15	27.65	23.59	228.560	Horizontal	Pass
		1732.5	-0.56	3.31	27.61	23.74	236.592	Horizontal	Pass
		1747.5	-0.37	3.33	27.57	23.87	243.781	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-0.74	3.17	27.66	23.75	237.137	Horizontal	Pass
		1732.5	0.20	3.32	27.61	24.49	281.190	Horizontal	Pass
		1745	-0.51	3.36	27.56	23.69	233.884	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-0.41	3.12	27.58	24.05	254.097	Vertical	Pass
		1732.5	-0.11	3.27	27.61	24.23	264.850	Vertical	Pass
		1754.3	-0.70	3.29	27.63	23.64	231.206	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-1.00	3.13	27.61	23.48	222.844	Vertical	Pass
		1732.5	-1.71	3.27	27.61	22.63	183.231	Vertical	Pass
		1753.5	-0.75	3.30	27.62	23.57	227.510	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-0.68	3.13	27.63	23.82	240.991	Vertical	Pass
		1732.5	-0.74	3.27	27.61	23.60	229.087	Vertical	Pass
		1752.5	-0.91	3.30	27.60	23.39	218.273	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-0.40	3.15	27.64	24.09	256.448	Vertical	Pass
		1732.5	-0.63	3.31	27.61	23.67	232.809	Vertical	Pass
		1750	-0.04	3.33	27.59	24.22	264.241	Vertical	Pass
15.0MHz Band 16	1/#Mid	1717.5	-0.23	3.15	27.65	24.27	267.301	Vertical	Pass
		1732.5	-0.81	3.31	27.61	23.49	223.357	Vertical	Pass

QAM		1747.5	0.10	3.33	27.57	24.34	271.644	Vertical	Pass
20.0MHz	1/#Mid	1720	0.12	3.17	27.66	24.61	289.068	Vertical	Pass
Band 16		1732.5	-0.34	3.32	27.61	23.95	248.313	Vertical	Pass
QAM		1745	-0.06	3.36	27.56	24.14	259.418	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/ RB SIZE	Freque ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. ERP Averag e (dBm)	Max. ERP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band QPSK	1/#Mi d	824.7	9.92	2.01	19.68	2.15	25.44	349.945	Horizontal	Pass
		836.5	9.48	2.01	19.77	2.15	25.09	322.849	Horizontal	Pass
		848.3	9.89	2.02	19.82	2.15	25.54	358.096	Horizontal	Pass
3.0MHz Band QPSK	1/#Mi d	825.5	9.45	2.01	19.70	2.15	24.99	315.500	Horizontal	Pass
		836.5	9.44	2.01	19.77	2.15	25.05	319.890	Horizontal	Pass
		847.5	9.79	2.02	19.81	2.15	25.43	349.140	Horizontal	Pass
5.0MHz Band QPSK	1/#Mi d	826.5	9.38	2.01	19.71	2.15	24.93	311.172	Horizontal	Pass
		836.5	9.83	2.01	19.77	2.15	25.44	349.945	Horizontal	Pass
		846.5	9.41	2.02	19.79	2.15	25.03	318.420	Horizontal	Pass
10.0MH z Band QPSK	1/#Mi d	829	9.72	2.01	19.73	2.15	25.29	338.065	Horizontal	Pass
		836.5	9.96	2.01	19.77	2.15	25.57	360.579	Horizontal	Pass
		844	9.81	2.02	19.78	2.15	25.42	348.337	Horizontal	Pass
1.4MHz Band QPSK	1/#Mi d	824.7	10.20	2.01	19.68	2.15	25.72	373.250	Vertical	Pass
		836.5	9.41	2.01	19.77	2.15	25.02	317.687	Vertical	Pass
		848.3	9.72	2.02	19.82	2.15	25.37	344.350	Vertical	Pass
3.0MHz Band QPSK	1/#Mi d	825.5	9.56	2.01	19.70	2.15	25.10	323.594	Vertical	Pass
		836.5	9.37	2.01	19.77	2.15	24.98	314.775	Vertical	Pass
		847.5	9.23	2.02	19.81	2.15	24.87	306.902	Vertical	Pass
5.0MHz Band QPSK	1/#Mi d	826.5	10.17	2.01	19.71	2.15	25.72	373.250	Vertical	Pass
		836.5	9.07	2.01	19.77	2.15	24.68	293.765	Vertical	Pass
		846.5	10.21	2.02	19.79	2.15	25.83	382.825	Vertical	Pass
10.0MH z Band QPSK	1/#Mi d	829	9.99	2.01	19.73	2.15	25.56	359.749	Vertical	Pass
		836.5	10.24	2.01	19.77	2.15	25.85	384.592	Vertical	Pass
		844	9.77	2.02	19.78	2.15	25.38	345.144	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/ RB SIZE	Freque ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. ERP Averag e (dBm)	Max. ERP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mi d	824.7	8.81	2.01	19.68	2.15	24.33	271.019	Horizontal	Pass
		836.5	8.04	2.01	19.77	2.15	23.65	231.739	Horizontal	Pass
		848.3	8.17	2.02	19.82	2.15	23.82	240.991	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mi d	825.5	8.01	2.01	19.70	2.15	23.55	226.464	Horizontal	Pass
		836.5	8.35	2.01	19.77	2.15	23.96	248.886	Horizontal	Pass
		847.5	8.45	2.02	19.81	2.15	24.09	256.448	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mi d	826.5	7.89	2.01	19.71	2.15	23.44	220.800	Horizontal	Pass
		836.5	7.99	2.01	19.77	2.15	23.60	229.087	Horizontal	Pass
		846.5	8.32	2.02	19.79	2.15	23.94	247.742	Horizontal	Pass
10.0MH z Band 16 QAM	1/#Mi d	829	8.34	2.01	19.73	2.15	23.91	246.037	Horizontal	Pass
		836.5	7.94	2.01	19.77	2.15	23.55	226.464	Horizontal	Pass
		844	7.68	2.02	19.78	2.15	23.29	213.304	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mi d	824.7	8.23	2.01	19.68	2.15	23.75	237.137	Vertical	Pass
		836.5	7.32	2.01	19.77	2.15	22.93	196.336	Vertical	Pass
		848.3	7.68	2.02	19.82	2.15	23.33	215.278	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mi d	825.5	7.26	2.01	19.70	2.15	22.80	190.546	Vertical	Pass
		836.5	7.91	2.01	19.77	2.15	23.52	224.905	Vertical	Pass
		847.5	7.86	2.02	19.81	2.15	23.50	223.872	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mi d	826.5	7.31	2.01	19.71	2.15	22.86	193.197	Vertical	Pass
		836.5	8.12	2.01	19.77	2.15	23.73	236.048	Vertical	Pass
		846.5	8.17	2.02	19.79	2.15	23.79	239.332	Vertical	Pass
10.0MH z Band 16 QAM	1/#Mi d	829	7.84	2.01	19.73	2.15	23.41	219.280	Vertical	Pass
		836.5	8.82	2.01	19.77	2.15	24.43	277.332	Vertical	Pass
		844	7.63	2.02	19.78	2.15	23.24	210.863	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Mid	2502.5	0.75	4.54	27.75	23.96	248.886	Horizontal	Pass
		2535	1.33	4.69	27.72	24.36	272.898	Horizontal	Pass
		2567.5	1.25	4.71	27.71	24.25	266.073	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	0.80	4.55	27.76	24.01	251.768	Horizontal	Pass
		2535	0.05	4.69	27.72	23.08	203.236	Horizontal	Pass
		2565	0.41	4.72	27.70	23.39	218.273	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	1.19	4.55	27.77	24.41	276.058	Horizontal	Pass
		2535	1.02	4.69	27.72	24.05	254.097	Horizontal	Pass
		2562.5	0.65	4.72	27.69	23.62	230.144	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	-0.03	4.57	27.78	23.18	207.970	Horizontal	Pass
		2535	0.18	4.73	27.72	23.17	207.491	Horizontal	Pass
		2560	1.44	4.75	27.68	24.37	273.527	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	0.41	4.54	27.75	23.62	230.144	Vertical	Pass
		2535	0.21	4.69	27.72	23.24	210.863	Vertical	Pass
		2567.5	-0.12	4.71	27.71	22.88	194.089	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	0.92	4.55	27.76	24.13	258.821	Vertical	Pass
		2535	0.80	4.69	27.72	23.83	241.546	Vertical	Pass
		2565	-0.13	4.72	27.70	22.85	192.752	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	0.62	4.55	27.77	23.84	242.103	Vertical	Pass
		2535	0.20	4.69	27.72	23.23	210.378	Vertical	Pass
		2562.5	0.70	4.72	27.69	23.67	232.809	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	0.80	4.57	27.78	24.01	251.768	Vertical	Pass
		2535	1.28	4.73	27.72	24.27	267.301	Vertical	Pass
		2560	1.50	4.75	27.68	24.43	277.332	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	2502.5	-0.85	4.54	27.75	22.36	172.187	Horizontal	Pass
		2535	-0.16	4.69	27.72	22.87	193.642	Horizontal	Pass
		2567.5	0.15	4.71	27.71	23.15	206.538	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-0.12	4.55	27.76	23.09	203.704	Horizontal	Pass
		2535	0.11	4.69	27.72	23.14	206.063	Horizontal	Pass
		2565	-0.17	4.72	27.70	22.81	190.985	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-0.14	4.55	27.77	23.08	203.236	Horizontal	Pass
		2535	0.00	4.69	27.72	23.03	200.909	Horizontal	Pass
		2562.5	0.25	4.72	27.69	23.22	209.894	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	0.09	4.57	27.78	23.30	213.796	Horizontal	Pass
		2535	0.25	4.73	27.72	23.24	210.863	Horizontal	Pass
		2560	-0.79	4.75	27.68	22.14	163.682	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	-0.80	4.54	27.75	22.41	174.181	Vertical	Pass
		2535	-0.27	4.69	27.72	22.76	188.799	Vertical	Pass
		2567.5	-0.50	4.71	27.71	22.50	177.828	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-0.81	4.55	27.76	22.40	173.780	Vertical	Pass
		2535	-1.33	4.69	27.72	21.70	147.911	Vertical	Pass
		2565	0.28	4.72	27.70	23.26	211.836	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-0.10	4.55	27.77	23.12	205.116	Vertical	Pass
		2535	0.22	4.69	27.72	23.25	211.349	Vertical	Pass
		2562.5	-0.18	4.72	27.69	22.79	190.108	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	0.45	4.57	27.78	23.66	232.274	Vertical	Pass
		2535	0.42	4.73	27.72	23.41	219.280	Vertical	Pass
		2560	-0.03	4.75	27.68	22.90	194.984	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Antenna Gain	Correction	Max. ERP	Max. ERP	Polarization Of	
			(dBm)	(dBm)	(dB)	(dB)	Average	Average	Max. ERP	
							(dBm)	(mW)		
1.4MHz Band QPSK	1/#Mid	699.7	9.37	1.91	19.21	2.15	24.52	283.139	Vertical	Pass
		707.5	8.24	1.91	19.26	2.15	23.44	220.800	Vertical	Pass
		715.3	7.46	1.93	19.34	2.15	22.72	187.068	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	700.5	8.87	1.91	19.21	2.15	24.02	252.348	Vertical	Pass
		707.5	8.60	1.91	19.26	2.15	23.80	239.883	Vertical	Pass
		714.5	7.66	1.93	19.34	2.15	22.92	195.884	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	701.5	8.07	1.91	19.23	2.15	23.24	210.863	Vertical	Pass
		707.5	9.07	1.91	19.26	2.15	24.27	267.301	Vertical	Pass
		713.5	7.86	1.92	19.33	2.15	23.12	205.116	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	704	8.93	1.91	19.25	2.15	24.12	258.226	Vertical	Pass
		707.5	9.15	1.91	19.26	2.15	24.35	272.270	Vertical	Pass
		711	8.79	1.92	19.32	2.15	24.04	253.513	Vertical	Pass
1.4MHz Band QPSK	1/#Mid	699.7	8.96	1.91	19.21	2.15	24.11	257.632	Horizontal	Pass
		707.5	8.51	1.91	19.26	2.15	23.71	234.963	Horizontal	Pass
		715.3	8.51	1.93	19.34	2.15	23.77	238.232	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	700.5	8.74	1.91	19.21	2.15	23.89	244.906	Horizontal	Pass
		707.5	8.73	1.91	19.26	2.15	23.93	247.172	Horizontal	Pass
		714.5	8.65	1.93	19.34	2.15	23.91	246.037	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	701.5	9.05	1.91	19.23	2.15	24.22	264.241	Horizontal	Pass
		707.5	9.06	1.91	19.26	2.15	24.26	266.686	Horizontal	Pass
		713.5	9.08	1.92	19.33	2.15	24.34	271.644	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	704	9.42	1.91	19.25	2.15	24.61	289.068	Horizontal	Pass
		707.5	7.85	1.91	19.26	2.15	23.05	201.837	Horizontal	Pass
		711	8.15	1.92	19.32	2.15	23.40	218.776	Horizontal	Pass

Radiated Power (EIRP) for Band 12										
Mode	RB/ RB SIZE	Freque ncy	Result							Conclu sion
			SG Level	Cable Loss	Anten na Gain	Corre ction	Max. ERP	Max. ERP	Polarizati on Of Max. ERP	
			(dBm)	(dBm)	(dB)	(dB)	Averag e	Averag e		
1.4MHz Band 16 QAM	1/#Mi d	699.7	7.75	1.91	19.21	2.15	22.90	194.984	Vertical	Pass
		707.5	7.43	1.91	19.26	2.15	22.63	183.231	Vertical	Pass
		715.3	6.68	1.93	19.34	2.15	21.94	156.315	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mi d	700.5	7.85	1.91	19.21	2.15	23.00	199.526	Vertical	Pass
		707.5	7.81	1.91	19.26	2.15	23.01	199.986	Vertical	Pass
		714.5	7.29	1.93	19.34	2.15	22.55	179.887	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mi d	701.5	7.66	1.91	19.23	2.15	22.83	191.867	Vertical	Pass
		707.5	7.84	1.91	19.26	2.15	23.04	201.372	Vertical	Pass
		713.5	7.89	1.92	19.33	2.15	23.15	206.538	Vertical	Pass
10.0MH z Band 16 QAM	1/#Mi d	704	8.04	1.91	19.25	2.15	23.23	210.378	Vertical	Pass
		707.5	7.73	1.91	19.26	2.15	22.93	196.336	Vertical	Pass
		711	8.39	1.92	19.32	2.15	23.64	231.206	Vertical	Pass
1.4MHz Band 16 QAM	1/#Mi d	699.7	7.75	1.91	19.21	2.15	22.90	194.984	Horizontal	Pass
		707.5	8.16	1.91	19.26	2.15	23.36	216.770	Horizontal	Pass
		715.3	7.96	1.93	19.34	2.15	23.22	209.894	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mi d	700.5	8.17	1.91	19.21	2.15	23.32	214.783	Horizontal	Pass
		707.5	8.09	1.91	19.26	2.15	23.29	213.304	Horizontal	Pass
		714.5	8.06	1.93	19.34	2.15	23.32	214.783	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mi d	701.5	7.99	1.91	19.23	2.15	23.16	207.014	Horizontal	Pass
		707.5	7.78	1.91	19.26	2.15	22.98	198.609	Horizontal	Pass
		713.5	6.81	1.92	19.33	2.15	22.07	161.065	Horizontal	Pass
10.0MH z Band 16 QAM	1/#Mi d	704	7.53	1.91	19.25	2.15	22.72	187.068	Horizontal	Pass
		707.5	8.55	1.91	19.26	2.15	23.75	237.137	Horizontal	Pass
		711	8.07	1.92	19.32	2.15	23.32	214.783	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 17

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Midd	706.5	8.15	1.91	19.23	2.15	23.32	214.783	Vertical	Pass
		710	8.73	1.91	19.26	2.15	23.93	247.172	Vertical	Pass
		713.5	9.15	1.92	19.33	2.15	24.41	276.058	Vertical	Pass
10.0MHz Band QPSK	1/#Midd	709	7.12	1.91	19.25	2.15	22.31	170.216	Vertical	Pass
		710	8.54	1.91	19.26	2.15	23.74	236.592	Vertical	Pass
		711	9.61	1.92	19.32	2.15	24.86	306.196	Vertical	Pass
5.0MHz Band QPSK	1/#Midd	706.5	8.96	1.91	19.23	2.15	24.13	258.821	Horizontal	Pass
		710	9.56	1.91	19.26	2.15	24.76	299.226	Horizontal	Pass
		713.5	8.50	1.92	19.33	2.15	23.76	237.684	Horizontal	Pass
10.0MHz Band QPSK	1/#Midd	709	9.13	1.91	19.25	2.15	24.32	270.396	Horizontal	Pass
		710	9.15	1.91	19.26	2.15	24.35	272.270	Horizontal	Pass
		711	9.27	1.92	19.32	2.15	24.52	283.139	Horizontal	Pass

Radiated Power (ERP) for Band 17										
Mode	RB/ RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	706.5	8.03	1.91	19.23	2.15	23.20	208.930	Vertical	Pass
		710	8.25	1.91	19.26	2.15	23.45	221.309	Vertical	Pass
		713.5	7.95	1.92	19.33	2.15	23.21	209.411	Vertical	Pass
10.0MHz z Band 16 QAM	1/#Mid	709	7.75	1.91	19.25	2.15	22.94	196.789	Vertical	Pass
		710	6.89	1.91	19.26	2.15	22.09	161.808	Vertical	Pass
		711	7.92	1.92	19.32	2.15	23.17	207.491	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	706.5	6.97	1.91	19.23	2.15	22.14	163.682	Horizontal	Pass
		710	7.95	1.91	19.26	2.15	23.15	206.538	Horizontal	Pass
		713.5	7.82	1.92	19.33	2.15	23.08	203.236	Horizontal	Pass
10.0MHz z Band 16 QAM	1/#Mid	709	7.51	1.91	19.25	2.15	22.70	186.209	Horizontal	Pass
		710	8.59	1.91	19.26	2.15	23.79	239.332	Horizontal	Pass
		711	8.40	1.92	19.32	2.15	23.65	231.739	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.7 LTE BAND 66

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	1710.7	0.15	3.12	27.58	24.61	289.068	Horizontal	Pass
		1745	0.74	3.27	27.61	25.08	322.107	Horizontal	Pass
		1779.3	0.26	3.29	27.63	24.60	288.403	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-0.72	3.13	27.61	23.76	237.684	Horizontal	Pass
		1745	-1.05	3.27	27.61	23.29	213.304	Horizontal	Pass
		1778.5	-1.49	3.30	27.62	22.83	191.867	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-0.06	3.13	27.63	24.44	277.971	Horizontal	Pass
		1745	-1.47	3.27	27.61	22.87	193.642	Horizontal	Pass
		1777.5	0.60	3.30	27.60	24.90	309.030	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-0.17	3.15	27.64	24.32	270.396	Horizontal	Pass
		1745	0.53	3.31	27.61	24.83	304.089	Horizontal	Pass
		1775	0.73	3.33	27.59	24.99	315.500	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-0.67	3.15	27.65	23.83	241.546	Horizontal	Pass
		1745	0.46	3.31	27.61	24.76	299.226	Horizontal	Pass
		1772.5	0.23	3.33	27.57	24.47	279.898	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-0.86	3.17	27.66	23.63	230.675	Horizontal	Pass
		1745	0.55	3.32	27.61	24.84	304.789	Horizontal	Pass
		1770	0.09	3.36	27.56	24.29	268.534	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	0.64	3.12	27.58	25.10	323.594	Vertical	Pass
		1745	-0.68	3.27	27.61	23.66	232.274	Vertical	Pass
		1779.3	-0.85	3.29	27.63	23.49	223.357	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	0.42	3.13	27.61	24.90	309.030	Vertical	Pass
		1745	0.45	3.27	27.61	24.79	301.301	Vertical	Pass
		1778.5	0.51	3.30	27.62	24.83	304.089	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-0.69	3.13	27.63	23.81	240.436	Vertical	Pass
		1745	-0.14	3.27	27.61	24.20	263.027	Vertical	Pass
		1777.5	-0.83	3.30	27.60	23.47	222.331	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1715	-0.59	3.15	27.64	23.90	245.471	Vertical	Pass
		1745	-1.12	3.31	27.61	23.18	207.970	Vertical	Pass
		1775	0.44	3.33	27.59	24.70	295.121	Vertical	Pass

15.0MH z Band QPSK	1/#Mid	1717.5	-0.56	3.15	27.65	23.94	247.742	Vertical	Pass
		1745	-0.36	3.31	27.61	23.94	247.742	Vertical	Pass
		1772.5	-0.57	3.33	27.57	23.67	232.809	Vertical	Pass
20.0MH z Band QPSK	1/#Mid	1720	0.04	3.17	27.66	24.53	283.792	Vertical	Pass
		1745	0.92	3.32	27.61	25.21	331.894	Vertical	Pass
		1770	0.66	3.36	27.56	24.86	306.196	Vertical	Pass

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-0.55	3.12	27.58	23.91	246.037	Horizontal	Pass
		1745	-0.80	3.27	27.61	23.54	225.944	Horizontal	Pass
		1779.3	-0.81	3.29	27.63	23.53	225.424	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-0.75	3.13	27.61	23.73	236.048	Horizontal	Pass
		1745	-1.88	3.27	27.61	22.46	176.198	Horizontal	Pass
		1778.5	-0.58	3.30	27.62	23.74	236.592	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-0.71	3.13	27.63	23.79	239.332	Horizontal	Pass
		1745	-0.87	3.27	27.61	23.47	222.331	Horizontal	Pass
		1777.5	-0.13	3.30	27.60	24.17	261.216	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-0.80	3.15	27.64	23.69	233.884	Horizontal	Pass
		1745	-0.57	3.31	27.61	23.73	236.048	Horizontal	Pass
		1775	-1.00	3.33	27.59	23.26	211.836	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-0.86	3.15	27.65	23.64	231.206	Horizontal	Pass
		1745	-0.70	3.31	27.61	23.60	229.087	Horizontal	Pass
		1772.5	-0.37	3.33	27.57	23.87	243.781	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-0.66	3.17	27.66	23.83	241.546	Horizontal	Pass
		1745	0.03	3.32	27.61	24.32	270.396	Horizontal	Pass
		1770	-0.75	3.36	27.56	23.45	221.309	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-0.24	3.12	27.58	24.22	264.241	Vertical	Pass
		1745	-0.19	3.27	27.61	24.15	260.016	Vertical	Pass
		1779.3	-0.74	3.29	27.63	23.60	229.087	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-0.81	3.13	27.61	23.67	232.809	Vertical	Pass
		1745	-1.90	3.27	27.61	22.44	175.388	Vertical	Pass
		1778.5	-0.80	3.30	27.62	23.52	224.905	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-0.83	3.13	27.63	23.67	232.809	Vertical	Pass
		1745	-0.74	3.27	27.61	23.60	229.087	Vertical	Pass
		1777.5	-0.93	3.30	27.60	23.37	217.270	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-0.19	3.15	27.64	24.30	269.153	Vertical	Pass
		1745	-0.78	3.31	27.61	23.52	224.905	Vertical	Pass
		1775	-0.08	3.33	27.59	24.18	261.818	Vertical	Pass
15.0MHz Band 16	1/#Mid	1717.5	-0.28	3.15	27.65	24.22	264.241	Vertical	Pass
		1745	-0.65	3.31	27.61	23.65	231.739	Vertical	Pass

QAM		1772.5	-0.09	3.33	27.57	24.15	260.016	Vertical	Pass
20.0MHz	1/#Mid	1720	-0.19	3.17	27.66	24.30	269.153	Vertical	Pass
Band 16		1745	-0.41	3.32	27.61	23.88	244.343	Vertical	Pass
QAM		1770	0.03	3.36	27.56	24.23	264.850	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10} (P \text{ [Watts]})$.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10} (P \text{ [Watts]})$, where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- ☐ LTE Band 2
LTE Band 4
- ☐ LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 17
LTE Band 66

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-52.29	4.04	33.51	-22.82	-13	-9.82	Horizontal
3701.4	-52.12	4.04	33.51	-22.65	-13	-9.65	Vertical
5552.1	-48.53	5.24	35.84	-17.93	-13	-4.93	Vertical
5552.1	-56.37	5.24	35.84	-25.77	-13	-12.77	Horizontal
87.7	-38.84	1.45	16.79	-23.50	-13	-10.50	Vertical
204.9	-43.81	1.48	16.14	-29.15	-13	-16.15	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-53.83	4.04	33.56	-24.31	-13	-11.31	Horizontal
3760.0	-48.97	4.04	33.56	-19.45	-13	-6.45	Vertical
5640.0	-53.33	5.24	35.91	-22.66	-13	-9.66	Vertical
5640.0	-51.62	5.24	35.91	-20.95	-13	-7.95	Horizontal
212.0	-44.50	1.30	15.54	-30.26	-13	-17.26	Vertical
273.3	-41.54	1.53	17.83	-25.24	-13	-12.24	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-51.72	4.04	34.00	-21.76	-13	-8.76	Horizontal
3818.6	-52.64	4.04	34.00	-22.68	-13	-9.68	Vertical
5727.9	-54.60	5.24	36.04	-23.80	-13	-10.80	Vertical
5727.9	-56.39	5.24	36.04	-25.59	-13	-12.59	Horizontal
179.5	-39.49	1.66	15.44	-25.71	-13	-12.71	Vertical
274.6	-40.66	1.77	15.84	-26.59	-13	-13.59	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-48.61	4.07	33.54	-19.14	-13	-6.14	Horizontal
3720.0	-50.52	4.07	33.54	-21.05	-13	-8.05	Vertical
5580.0	-53.04	5.28	35.86	-22.46	-13	-9.46	Vertical
5580.0	-55.07	5.28	35.86	-24.49	-13	-11.49	Horizontal
153.0	-47.85	1.47	17.26	-32.06	-13	-19.06	Vertical
260.2	-46.24	1.31	17.18	-30.37	-13	-17.37	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-51.26	4.04	33.56	-21.74	-13	-8.74	Horizontal
3760.0	-55.52	4.04	33.56	-26.00	-13	-13.00	Vertical
5640.0	-56.13	5.24	35.91	-25.46	-13	-12.46	Vertical
5640.0	-53.76	5.24	35.91	-23.09	-13	-10.09	Horizontal
199.2	-38.98	1.45	15.42	-25.01	-13	-12.01	Vertical
272.0	-46.58	1.37	17.19	-30.76	-13	-17.76	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-55.06	4.04	34.00	-25.10	-13	-12.10	Horizontal
3800.0	-53.97	4.04	34.00	-24.01	-13	-11.01	Vertical
5700.0	-51.92	5.24	36.04	-21.12	-13	-8.12	Vertical
5700.0	-55.19	5.24	36.04	-24.39	-13	-11.39	Horizontal
168.3	-38.03	1.56	16.47	-23.12	-13	-10.12	Vertical
176.1	-45.76	1.76	16.69	-30.83	-13	-17.83	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-52.87	4.02	29.80	-27.09	-13	-14.09	Horizontal
3421.4	-53.12	4.02	29.80	-27.34	-13	-14.34	Vertical
5132.1	-47.98	5.24	35.84	-17.38	-13	-4.38	Vertical
5132.1	-55.16	5.24	35.84	-24.56	-13	-11.56	Horizontal
250.7	-38.85	1.74	16.49	-24.10	-13	-11.10	Vertical
169.6	-48.07	1.65	17.65	-32.07	-13	-19.07	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-52.48	4.03	30.00	-26.51	-13	-13.51	Horizontal
3465.0	-50.87	4.03	30.00	-24.90	-13	-11.90	Vertical
5197.5	-54.30	5.25	35.86	-23.69	-13	-10.69	Vertical
5197.5	-51.10	5.25	35.86	-20.49	-13	-7.49	Horizontal
135.9	-44.50	1.46	16.87	-29.09	-13	-16.09	Vertical
237.2	-43.18	1.73	15.32	-29.59	-13	-16.59	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-51.19	4.05	30.01	-25.23	-13	-12.23	Horizontal
3508.6	-54.25	4.05	30.01	-28.29	-13	-15.29	Vertical
5262.9	-52.47	5.26	35.86	-21.87	-13	-8.87	Vertical
5262.9	-57.44	5.26	35.86	-26.84	-13	-13.84	Horizontal
188.2	-47.29	1.73	16.50	-32.52	-13	-19.52	Vertical
227.1	-41.01	1.39	15.26	-27.14	-13	-14.14	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-45.96	4.02	29.80	-20.18	-13	-7.18	Horizontal
3440.0	-52.65	4.02	29.80	-26.87	-13	-13.87	Vertical
5160.0	-51.41	5.24	35.84	-20.81	-13	-7.81	Vertical
5160.0	-52.91	5.24	35.84	-22.31	-13	-9.31	Horizontal
246.6	-40.60	1.55	17.20	-24.95	-13	-11.95	Vertical
87.3	-48.38	1.63	17.63	-32.38	-13	-19.38	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-53.19	4.03	30.00	-27.22	-13	-14.22	Horizontal
3465.0	-51.12	4.03	30.00	-25.15	-13	-12.15	Vertical
5197.5	-48.04	5.25	35.86	-17.43	-13	-4.43	Vertical
5197.5	-54.04	5.25	35.86	-23.43	-13	-10.43	Horizontal
197.9	-40.45	1.50	16.74	-25.21	-13	-12.21	Vertical
158.7	-44.62	1.74	15.25	-31.11	-13	-18.11	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-56.60	2.91	27.68	-31.83	-13	-18.83	Horizontal
3490.0	-49.64	2.91	27.68	-24.87	-13	-11.87	Vertical
5235.0	-57.33	5.26	35.86	-26.73	-13	-13.73	Vertical
5235.0	-54.73	5.26	35.86	-24.13	-13	-11.13	Horizontal
237.1	-40.96	1.63	16.59	-26.00	-13	-13.00	Vertical
173.4	-41.50	1.55	17.99	-25.06	-13	-12.06	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-51.02	2.78	27.50	-26.30	-13	-13.30	Horizontal
1649.4	-46.02	2.78	27.50	-21.30	-13	-8.30	Vertical
2474.1	-45.12	2.90	27.80	-20.22	-13	-7.22	Vertical
2474.1	-50.65	2.90	27.80	-25.75	-13	-12.75	Horizontal
199.5	-38.83	1.75	15.26	-25.32	-13	-12.32	Vertical
80.4	-48.09	1.39	16.80	-32.68	-13	-19.68	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-47.56	2.80	27.48	-22.88	-13	-9.88	Horizontal
1673.0	-50.04	2.80	27.48	-25.36	-13	-12.36	Vertical
2509.5	-47.10	2.91	27.70	-22.31	-13	-9.31	Vertical
2509.5	-49.26	2.91	27.70	-24.47	-13	-11.47	Horizontal
252.1	-41.21	1.72	16.52	-26.41	-13	-13.41	Vertical
160.8	-40.74	1.63	17.75	-24.62	-13	-11.62	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-45.24	2.82	27.43	-20.63	-13	-7.63	Horizontal
1696.6	-44.31	2.82	27.43	-19.70	-13	-6.70	Vertical
2544.9	-49.98	2.92	27.74	-25.16	-13	-12.16	Vertical
2544.9	-42.11	2.92	27.74	-17.29	-13	-4.29	Horizontal
101.9	-40.99	1.34	15.37	-26.96	-13	-13.96	Vertical
256.3	-40.20	1.33	16.96	-24.57	-13	-11.57	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-49.86	2.78	27.50	-25.14	-13	-12.14	Horizontal
1658.0	-45.49	2.78	27.50	-20.77	-13	-7.77	Vertical
2487.0	-46.97	2.90	27.80	-22.07	-13	-9.07	Vertical
2487.0	-46.93	2.90	27.80	-22.03	-13	-9.03	Horizontal
157.2	-44.04	1.78	15.03	-30.79	-13	-17.79	Vertical
119.1	-44.00	1.42	15.61	-29.81	-13	-16.81	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-49.12	2.80	27.48	-24.44	-13	-11.44	Horizontal
1673.0	-49.94	2.80	27.48	-25.26	-13	-12.26	Vertical
2509.5	-53.08	2.91	27.70	-28.29	-13	-15.29	Vertical
2509.5	-49.96	2.91	27.70	-25.17	-13	-12.17	Horizontal
223.8	-40.08	1.78	17.78	-24.08	-13	-11.08	Vertical
101.4	-37.69	1.71	16.36	-23.04	-13	-10.04	Horizontal
Test Results for High Channel 844MHz							
1688.0	-46.16	2.82	27.43	-21.55	-13	-8.55	Horizontal
1688.0	-47.21	2.82	27.43	-22.60	-13	-9.60	Vertical
2532.0	-46.64	2.92	27.74	-21.82	-13	-8.82	Vertical
2532.0	-39.78	2.92	27.74	-14.96	-13	-1.96	Horizontal
159.7	-41.79	1.39	15.07	-28.11	-13	-15.11	Vertical
192.8	-46.70	1.47	17.10	-31.07	-13	-18.07	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

. Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-64.19	5.23	35.81	-33.61	-25	-8.61	Horizontal
5005.0	-62.55	5.23	35.81	-31.97	-25	-6.97	Vertical
7507.5	-67.49	5.67	36.85	-36.31	-25	-11.31	Vertical
7507.5	-64.55	5.67	36.85	-33.37	-25	-8.37	Horizontal
393.8	-53.64	1.52	16.18	-38.98	-25	-13.98	Vertical
348.0	-54.16	1.63	17.07	-38.72	-25	-13.72	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-64.72	5.23	35.82	-34.13	-25	-9.13	Horizontal
5070.0	-59.82	5.23	35.82	-29.23	-25	-4.23	Vertical
7605.0	-60.51	5.67	36.85	-29.33	-25	-4.33	Vertical
7605.0	-65.49	5.67	36.85	-34.31	-25	-9.31	Horizontal
351.8	-55.36	1.72	16.25	-40.83	-25	-15.83	Vertical
454.7	-52.01	1.42	17.51	-35.92	-25	-10.92	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-66.72	5.24	35.83	-36.13	-25	-11.13	Horizontal
5135.0	-64.22	5.24	35.83	-33.63	-25	-8.63	Vertical
7702.5	-65.46	5.68	36.87	-34.27	-25	-9.27	Vertical
7702.5	-70.02	5.68	36.87	-38.83	-25	-13.83	Horizontal
526.0	-54.99	1.53	17.92	-38.60	-25	-13.60	Vertical
365.7	-55.60	1.39	16.22	-40.77	-25	-15.77	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-71.20	5.23	35.82	-40.61	-25	-15.61	Horizontal
5020.0	-70.60	5.23	35.82	-40.01	-25	-15.01	Vertical
7530.0	-73.09	5.67	36.86	-41.90	-25	-16.90	Vertical
7530.0	-71.60	5.67	36.86	-40.41	-25	-15.41	Horizontal
344.7	-50.83	1.47	15.18	-37.12	-25	-12.12	Vertical
368.4	-52.84	1.35	15.31	-38.88	-25	-13.88	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-63.30	5.23	35.82	-32.71	-25	-7.71	Horizontal
5070.0	-64.77	5.23	35.82	-34.18	-25	-9.18	Vertical
7605.0	-70.03	5.67	36.85	-38.85	-25	-13.85	Vertical
7605.0	-68.88	5.67	36.85	-37.70	-25	-12.70	Horizontal
232.9	-57.91	1.59	16.00	-43.50	-25	-18.50	Vertical
553.5	-60.60	1.69	17.97	-44.32	-25	-19.32	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-61.31	5.24	35.83	-30.72	-25	-5.72	Horizontal
5120.0	-66.98	5.24	35.83	-36.39	-25	-11.39	Vertical
7680.0	-64.64	5.70	36.88	-33.46	-25	-8.46	Vertical
7680.0	-64.04	5.70	36.88	-32.86	-25	-7.86	Horizontal
134.4	-57.35	1.33	17.18	-41.50	-25	-16.50	Vertical
404.4	-50.45	1.47	16.46	-35.46	-25	-10.46	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-45.13	2.60	27.20	-20.53	-13	-7.53	Horizontal
1399.4	-50.97	2.60	27.20	-26.37	-13	-13.37	Vertical
2099.1	-54.70	2.85	27.54	-30.01	-13	-17.01	Vertical
2099.1	-51.34	2.85	27.54	-26.65	-13	-13.65	Horizontal
223.0	-47.97	1.68	17.12	-32.53	-13	-19.53	Vertical
159.2	-39.98	1.70	17.03	-24.65	-13	-11.65	Horizontal
Test Results For Mid Channel 707.5MHz							
1415.0	-51.50	2.61	27.28	-26.83	-13	-13.83	Horizontal
1415.0	-48.09	2.61	27.28	-23.42	-13	-10.42	Vertical
2122.5	-47.56	2.87	27.59	-22.84	-13	-9.84	Vertical
2122.5	-51.89	2.87	27.59	-27.17	-13	-14.17	Horizontal
124.5	-41.23	1.77	16.16	-26.84	-13	-13.84	Vertical
259.0	-46.86	1.58	17.78	-30.66	-13	-17.66	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-43.45	2.63	27.28	-18.80	-13	-5.80	Horizontal
1430.6	-50.39	2.63	27.28	-25.74	-13	-12.74	Vertical
2145.9	-50.27	2.88	27.60	-25.55	-13	-12.55	Vertical
2145.9	-45.74	2.88	27.60	-21.02	-13	-8.02	Horizontal
168.6	-46.53	1.78	17.88	-30.43	-13	-17.43	Vertical
232.6	-42.79	1.80	15.29	-29.30	-13	-16.30	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408.0	-48.71	2.61	27.26	-24.06	-13	-11.06	Horizontal
1408.0	-47.56	2.61	27.26	-22.91	-13	-9.91	Vertical
2112.0	-50.67	2.87	27.58	-25.96	-13	-12.96	Vertical
2112.0	-42.15	2.87	27.58	-17.44	-13	-4.44	Horizontal
214.8	-44.96	1.61	17.78	-28.79	-13	-15.79	Vertical
130.2	-39.67	1.74	15.77	-25.64	-13	-12.64	Horizontal
Test Results for Mid Channel 707.5MHz							
1415.0	-49.06	2.61	27.28	-24.39	-13	-11.39	Horizontal
1415.0	-45.97	2.61	27.28	-21.30	-13	-8.30	Vertical
2122.5	-42.00	2.87	27.59	-17.28	-13	-4.28	Vertical
2122.5	-41.26	2.87	27.59	-16.54	-13	-3.54	Horizontal
170.3	-46.72	1.42	17.63	-30.51	-13	-17.51	Vertical
218.0	-41.27	1.49	17.19	-25.57	-13	-12.57	Horizontal
Test Results for High Channel 711MHz							
1422.0	-50.18	2.62	27.28	-25.52	-13	-12.52	Horizontal
1422.0	-47.23	2.62	27.28	-22.57	-13	-9.57	Vertical
2133.0	-42.85	2.87	27.60	-18.12	-13	-5.12	Vertical
2133.0	-46.01	2.87	27.60	-21.28	-13	-8.28	Horizontal
146.2	-47.70	1.62	16.76	-32.56	-13	-19.56	Vertical
146.7	-41.06	1.77	16.93	-25.90	-13	-12.90	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + AR_{pl}(dBm)$

. Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.6 LTE BAND 17

QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413.0	-48.51	2.61	27.28	-23.84	-13	-10.84	Horizontal
1413.0	-46.82	2.61	27.28	-22.15	-13	-9.15	Vertical
2119.5	-49.54	2.87	27.59	-24.82	-13	-11.82	Vertical
2119.5	-46.68	2.87	27.59	-21.96	-13	-8.96	Horizontal
138.5	-44.43	1.66	16.53	-29.56	-13	-16.56	Vertical
214.8	-44.62	1.53	16.82	-29.33	-13	-16.33	Horizontal
Test Results For Mid Channel 710MHz							
1420.0	-51.56	2.62	27.30	-26.88	-13	-13.88	Horizontal
1420.0	-48.21	2.62	27.30	-23.53	-13	-10.53	Vertical
2130.0	-43.55	2.87	27.62	-18.80	-13	-5.80	Vertical
2130.0	-43.49	2.87	27.62	-18.74	-13	-5.74	Horizontal
125.0	-39.94	1.34	15.31	-25.97	-13	-12.97	Vertical
269.7	-45.15	1.78	15.86	-31.07	-13	-18.07	Horizontal
Test Results for High Channel 713.5MHz							
1427.0	-43.51	2.66	27.28	-18.89	-13	-5.89	Horizontal
1427.0	-51.07	2.66	27.28	-26.45	-13	-13.45	Vertical
2140.5	-43.44	2.88	27.60	-18.72	-13	-5.72	Vertical
2140.5	-47.83	2.88	27.60	-23.11	-13	-10.11	Horizontal
119.8	-45.14	1.63	16.83	-29.94	-13	-16.94	Vertical
184.0	-38.85	1.58	16.01	-24.42	-13	-11.42	Horizontal

QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418.0	-50.28	2.62	27.30	-25.60	-13	-12.60	Horizontal
1418.0	-49.99	2.62	27.30	-25.31	-13	-12.31	Vertical
2127.0	-47.89	2.87	27.62	-23.14	-13	-10.14	Vertical
2127.0	-48.34	2.87	27.62	-23.59	-13	-10.59	Horizontal
204.4	-39.11	1.60	15.04	-25.67	-13	-12.67	Vertical
265.7	-39.76	1.74	15.06	-26.44	-13	-13.44	Horizontal
Test Results for Mid Channel 710MHz							
1420.0	-48.90	2.62	27.30	-24.22	-13	-11.22	Horizontal
1420.0	-45.00	2.62	27.30	-20.32	-13	-7.32	Vertical
2130.0	-52.52	2.87	27.62	-27.77	-13	-14.77	Vertical
2130.0	-47.90	2.87	27.62	-23.15	-13	-10.15	Horizontal
277.9	-38.85	1.37	16.84	-23.38	-13	-10.38	Vertical
85.8	-38.63	1.80	17.12	-23.31	-13	-10.31	Horizontal
Test Results for High Channel 711MHz							
1422.0	-42.80	2.62	27.30	-18.12	-13	-5.12	Horizontal
1422.0	-48.42	2.62	27.30	-23.74	-13	-10.74	Vertical
2133.0	-52.13	2.87	27.62	-27.38	-13	-14.38	Vertical
2133.0	-51.19	2.87	27.62	-26.44	-13	-13.44	Horizontal
147.1	-39.20	1.56	15.66	-25.10	-13	-12.10	Vertical
234.2	-39.40	1.36	16.85	-23.91	-13	-10.91	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.7 LTE BAND 66

QPSK EIRP POWER FOR LTE BAND 66 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-54.20	4.02	29.80	-28.42	-13	-15.42	Horizontal
3421.4	-55.01	4.02	29.80	-29.23	-13	-16.23	Vertical
5132.1	-54.10	5.24	35.84	-23.50	-13	-10.50	Vertical
5132.1	-50.45	5.24	35.84	-19.85	-13	-6.85	Horizontal
231.4	-44.20	1.75	17.57	-28.38	-13	-15.38	Vertical
90.9	-41.50	1.73	17.83	-25.40	-13	-12.40	Horizontal
Test Results for Mid Channel 1745MHz							
3490.0	-54.14	4.03	30.00	-28.17	-13	-15.17	Horizontal
3490.0	-49.67	4.03	30.00	-23.70	-13	-10.70	Vertical
5235.0	-51.47	5.25	35.86	-20.86	-13	-7.86	Vertical
5235.0	-49.46	5.25	35.86	-18.85	-13	-5.85	Horizontal
120.8	-44.78	1.32	17.55	-28.55	-13	-15.55	Vertical
141.7	-44.89	1.38	15.33	-30.94	-13	-17.94	Horizontal
Test Results for High Channel 1779.3MHz							
3558.6	-57.09	4.05	30.01	-31.13	-13	-18.13	Horizontal
3558.6	-51.95	4.05	30.01	-25.99	-13	-12.99	Vertical
5337.9	-48.96	5.26	35.86	-18.36	-13	-5.36	Vertical
5337.9	-54.06	5.26	35.86	-23.46	-13	-10.46	Horizontal
130.3	-46.52	1.59	16.17	-31.94	-13	-18.94	Vertical
168.2	-46.48	1.58	16.03	-32.03	-13	-19.03	Horizontal

QPSK EIRP POWER FOR LTE BAND 66 (20MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-48.48	4.02	29.80	-22.70	-13	-9.70	Horizontal
3440.0	-49.82	4.02	29.80	-24.04	-13	-11.04	Vertical
5160.0	-50.46	5.24	35.84	-19.86	-13	-6.86	Vertical
5160.0	-52.06	5.24	35.84	-21.46	-13	-8.46	Horizontal
138.5	-43.92	1.70	16.89	-28.73	-13	-15.73	Vertical
172.4	-47.02	1.66	16.15	-32.53	-13	-19.53	Horizontal
Test Results for Mid Channel 1745MHz							
3490.0	-54.77	4.03	30.00	-28.80	-13	-15.80	Horizontal
3490.0	-51.23	4.03	30.00	-25.26	-13	-12.26	Vertical
5235.0	-52.58	5.25	35.86	-21.97	-13	-8.97	Vertical
5235.0	-53.23	5.25	35.86	-22.62	-13	-9.62	Horizontal
200.1	-47.66	1.36	16.06	-32.96	-13	-19.96	Vertical
216.3	-46.45	1.37	15.18	-32.64	-13	-19.64	Horizontal
Test Results for High Channel 1770MHz							
3540.0	-49.64	2.91	27.68	-24.87	-13	-11.87	Horizontal
3540.0	-53.38	2.91	27.68	-28.61	-13	-15.61	Vertical
5310.0	-49.54	5.26	35.86	-18.94	-13	-5.94	Vertical
5310.0	-58.08	5.26	35.86	-27.48	-13	-14.48	Horizontal
168.8	-46.74	1.31	16.12	-31.93	-13	-18.93	Vertical
183.9	-40.59	1.52	15.32	-26.79	-13	-13.79	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- ☐ Temp. = -30° to $+50^{\circ}\text{C}$
- ☐ Voltage = low voltage, DC 3.4V, Normal, DC 3.7V and High voltage, DC 4.2V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- ☐ LTE Band 2
LTE Band 4
- ☐ LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 17
LTE Band 66

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	-12.9	-0.006840	2.5
3.7	1880	-8.3	-0.004431	2.5
4.2	1880	14.3	0.007585	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	21.7	0.011548	2.5
Extreme (50C)	1880	1.6	0.000824	2.5
Extreme (40C)	1880	24.0	0.012766	2.5
Extreme (30C)	1880	25.0	0.013303	2.5
Extreme (10C)	1880	-30.4	-0.016144	2.5
Extreme (0C)	1880	-7.8	-0.004149	2.5
Extreme (-10C)	1880	5.2	0.002766	2.5
Extreme (-20C)	1880	-7.3	-0.003878	2.5
Extreme (-30C)	1880	9.4	0.005011	2.5

Band 2 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	21.0	0.011154	2.5
3.7	1880	29.5	0.015670	2.5
4.2	1880	-6.7	-0.003580	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	-12.8	-0.006809	2.5
Extreme (50C)	1880	-20.5	-0.010926	2.5
Extreme (40C)	1880	-9.6	-0.005112	2.5
Extreme (30C)	1880	-12.0	-0.006362	2.5
Extreme (10C)	1880	-7.3	-0.003894	2.5
Extreme (0C)	1880	10.6	0.005649	2.5
Extreme (-10C)	1880	27.6	0.014670	2.5
Extreme (-20C)	1880	-14.3	-0.007580	2.5
Extreme (-30C)	1880	-18.7	-0.009931	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	-6.6	-0.003792	2.5
3.7	1732.5	-20.4	-0.011798	2.5
4.2	1732.5	17.9	0.010355	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	13.7	0.007908	2.5
Extreme (50C)	1732.5	22.9	0.013206	2.5
Extreme (40C)	1732.5	-24.4	-0.014095	2.5
Extreme (30C)	1732.5	22.5	0.012981	2.5
Extreme (10C)	1732.5	-14.0	-0.008098	2.5
Extreme (0C)	1732.5	-5.7	-0.003302	2.5
Extreme (-10C)	1732.5	-3.8	-0.002176	2.5
Extreme (-20C)	1732.5	19.5	0.011273	2.5
Extreme (-30C)	1732.5	-12.6	-0.007284	2.5

Band 4 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	-20.7	-0.011931	2.5
3.7	1732.5	9.7	0.005622	2.5
4.2	1732.5	-28.4	-0.016381	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	7.5	0.004335	2.5
Extreme (50C)	1732.5	-4.6	-0.002632	2.5
Extreme (40C)	1732.5	-14.8	-0.008543	2.5
Extreme (30C)	1732.5	-26.7	-0.015388	2.5
Extreme (10C)	1732.5	-1.7	-0.001004	2.5
Extreme (0C)	1732.5	-0.9	-0.000508	2.5
Extreme (-10C)	1732.5	27.2	0.015700	2.5
Extreme (-20C)	1732.5	26.3	0.015169	2.5
Extreme (-30C)	1732.5	-14.4	-0.008289	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	-17.8	-0.021255	2.5
3.7	836.5	23.8	0.028488	2.5
4.2	836.5	7.9	0.009468	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	-17.0	-0.020263	2.5
Extreme (50C)	836.5	6.1	0.007268	2.5
Extreme (40C)	836.5	-1.7	-0.002044	2.5
Extreme (30C)	836.5	29.8	0.035601	2.5
Extreme (10C)	836.5	-15.7	-0.018745	2.5
Extreme (0C)	836.5	-18.5	-0.022152	2.5
Extreme (-10C)	836.5	16.8	0.020060	2.5
Extreme (-20C)	836.5	-18.7	-0.022355	2.5
Extreme (-30C)	836.5	24.2	0.028978	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	-14.2	-0.016999	2.5
3.7	836.5	-9.1	-0.010903	2.5
4.2	836.5	24.8	0.029588	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	-15.7	-0.018733	2.5
Extreme (50C)	836.5	12.5	0.014991	2.5
Extreme (40C)	836.5	17.2	0.020574	2.5
Extreme (30C)	836.5	-17.1	-0.020466	2.5
Extreme (10C)	836.5	-13.6	-0.016270	2.5
Extreme (0C)	836.5	16.3	0.019438	2.5
Extreme (-10C)	836.5	13.1	0.015637	2.5
Extreme (-20C)	836.5	-33.0	-0.039486	2.5
Extreme (-30C)	836.5	1.9	0.002307	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	21.2	0.008351	2.5
3.7	2535	1.5	0.000576	2.5
4.2	2535	-15.6	-0.006138	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	-11.2	-0.004422	2.5
Extreme (50C)	2535	17.7	0.006982	2.5
Extreme (40C)	2535	27.6	0.010899	2.5
Extreme (30C)	2535	-32.1	-0.012643	2.5
Extreme (10C)	2535	-9.4	-0.003720	2.5
Extreme (0C)	2535	13.8	0.005428	2.5
Extreme (-10C)	2535	-17.4	-0.006876	2.5
Extreme (-20C)	2535	-17.6	-0.006923	2.5
Extreme (-30C)	2535	-25.0	-0.009846	2.5

Band 7 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	-14.3	-0.005641	2.5
3.7	2535	27.6	0.010895	2.5
4.2	2535	-4.0	-0.001586	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	19.1	0.007550	2.5
Extreme (50C)	2535	4.4	0.001720	2.5
Extreme (40C)	2535	-9.5	-0.003728	2.5
Extreme (30C)	2535	-3.6	-0.001416	2.5
Extreme (10C)	2535	9.7	0.003834	2.5
Extreme (0C)	2535	-21.4	-0.008454	2.5
Extreme (-10C)	2535	-17.1	-0.006734	2.5
Extreme (-20C)	2535	7.6	0.002978	2.5
Extreme (-30C)	2535	-10.4	-0.004107	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

Band 12 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	707.5	16.4	0.023208	2.5
3.7	707.5	-28.7	-0.040594	2.5
4.2	707.5	-29.5	-0.041640	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	11.6	0.016367	2.5
Extreme (50C)	707.5	-18.5	-0.026078	2.5
Extreme (40C)	707.5	-10.7	-0.015166	2.5
Extreme (30C)	707.5	32.5	0.045951	2.5
Extreme (10C)	707.5	-5.5	-0.007731	2.5
Extreme (0C)	707.5	-18.9	-0.026770	2.5
Extreme (-10C)	707.5	-16.4	-0.023194	2.5
Extreme (-20C)	707.5	-20.5	-0.028919	2.5
Extreme (-30C)	707.5	-11.3	-0.016028	2.5

Band 12 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	707.5	-24.7	-0.034912	2.5
3.7	707.5	-26.5	-0.037470	2.5
4.2	707.5	-9.8	-0.013908	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	-11.1	-0.015717	2.5
Extreme (50C)	707.5	7.5	0.010601	2.5
Extreme (40C)	707.5	3.2	0.004452	2.5
Extreme (30C)	707.5	-12.1	-0.017046	2.5
Extreme (10C)	707.5	7.2	0.010191	2.5
Extreme (0C)	707.5	18.3	0.025823	2.5
Extreme (-10C)	707.5	-2.4	-0.003378	2.5
Extreme (-20C)	707.5	-5.0	-0.007067	2.5
Extreme (-30C)	707.5	19.7	0.027859	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 17

Band 17 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710.0	9.4	0.013268	2.5
3.7	710.0	-20.5	-0.028817	2.5
4.2	710.0	-10.8	-0.015211	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710.0	18.7	0.026338	2.5
Extreme (50C)	710.0	-6.0	-0.008451	2.5
Extreme (40C)	710.0	2.4	0.003437	2.5
Extreme (30C)	710.0	10.0	0.014127	2.5
Extreme (10C)	710.0	-13.3	-0.018690	2.5
Extreme (0C)	710.0	15.9	0.022451	2.5
Extreme (-10C)	710.0	-15.2	-0.021451	2.5
Extreme (-20C)	710.0	14.1	0.019817	2.5
Extreme (-30C)	710.0	3.6	0.005042	2.5

Band 17 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710.0	-2.6	-0.003648	2.5
3.7	710.0	11.0	0.015437	2.5
4.2	710.0	1.7	0.002394	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710.0	12.5	0.017549	2.5
Extreme (50C)	710.0	11.5	0.016141	2.5
Extreme (40C)	710.0	-3.6	-0.005127	2.5
Extreme (30C)	710.0	-21.1	-0.029676	2.5
Extreme (10C)	710.0	26.2	0.036930	2.5
Extreme (0C)	710.0	18.2	0.025690	2.5
Extreme (-10C)	710.0	-17.5	-0.024620	2.5
Extreme (-20C)	710.0	16.0	0.022465	2.5
Extreme (-30C)	710.0	-13.2	-0.018648	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.7 LTE BAND 66

Band 66 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1745	-3.5	-0.002011	2.5
3.7	1745	-19.3	-0.011037	2.5
4.2	1745	15.3	0.008739	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1745	4.9	0.002791	2.5
Extreme (50C)	1745	0.2	0.000138	2.5
Extreme (40C)	1745	8.9	0.005089	2.5
Extreme (30C)	1745	21.6	0.012395	2.5
Extreme (10C)	1745	-11.5	-0.006607	2.5
Extreme (0C)	1745	15.5	0.008860	2.5
Extreme (-10C)	1745	-14.6	-0.008384	2.5
Extreme (-20C)	1745	-0.6	-0.000344	2.5
Extreme (-30C)	1745	22.2	0.012699	2.5

Band 66 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1745	-9.2	-0.005295	2.5
3.7	1745	-2.5	-0.001444	2.5
4.2	1745	-18.5	-0.010596	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1745	23.1	0.013255	2.5
Extreme (50C)	1745	-6.1	-0.003507	2.5
Extreme (40C)	1745	-11.4	-0.006504	2.5
Extreme (30C)	1745	-21.1	-0.012086	2.5
Extreme (10C)	1745	-20.2	-0.011564	2.5
Extreme (0C)	1745	23.5	0.013490	2.5
Extreme (-10C)	1745	-29.2	-0.016745	2.5
Extreme (-20C)	1745	-11.6	-0.006648	2.5
Extreme (-30C)	1745	-16.1	-0.009198	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

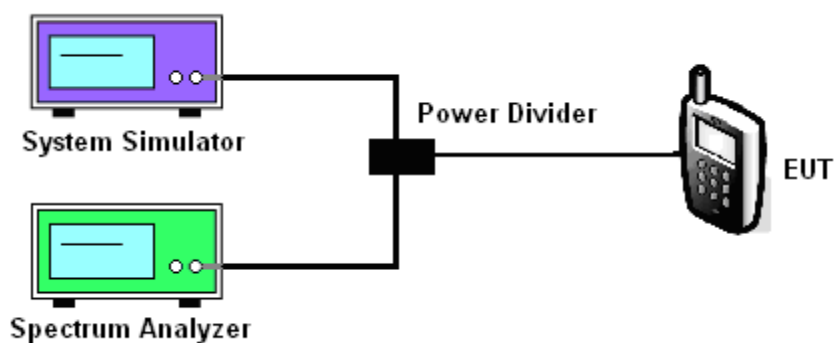

MODES TESTED

☒ LTE Band 2/4/5/7/12/17/66

☐

Test data reference attachment.

----END OF REPORT----