

TEST REPORT

Applicant: Shenzhen Fengzhiya Culture Media Co., Ltd.
Address of Applicant: A502, Huafeng Internet Creative Park, Xixiang Street, Baoan District, Shenzhen, China
Manufacturer: Shenzhen Fengzhiya Culture Media Co., Ltd.
Address of Manufacturer: A502, Huafeng Internet Creative Park, Xixiang Street, Baoan District, Shenzhen, China
Equipment Under Test (EUT)
Product Name: MMDVM hotspot
Model No.: MMDVM-01
MMDVM-02
Trade Mark: N/A
FCC ID: 2AY6M-MMDVM
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.231
Date of sample receipt: Mar. 06, 2021
Date of Test: Mar. 06, 2021 - Mar. 11, 2021
Date of report issued: Mar. 11, 2021
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Mar. 11, 2021	Original

Prepared By:



Date:

Mar. 11, 2021

Project Engineer

Check By:



Date:

Mar. 11, 2021

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 DEVIATION FROM STANDARDS	6
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.6 TEST FACILITY	6
5.7 TEST LOCATION	6
5.8 ADDITIONAL INSTRUCTIONS	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT.....	9
7.2 CONDUCTED EMISSIONS	10
7.3 RADIATED EMISSION METHOD.....	13
7.3.1 Spurious emissions.....	15
7.4 20dB OCCUPY BANDWIDTH.....	22
7.5 CALCULATION OF AVERAGE FACTOR.....	24
7.6 DWELL TIME	26
8 TEST SETUP PHOTO	28
9 EUT CONSTRUCTIONAL DETAILS	30

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Fundamental & Radiated Spurious Emission Measurement	15.209, 15.231b	Pass
Occupy Bandwidth	15.231c	Pass
Dwell time	15.231a	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	N/A

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	MMDVM hotspot
Model No.:	MMDVM-01 MMDVM-02
Test Model:	MMDVM-01
Hardware Version:	HV01
Software Version:	SV01
Test sample(s) ID:	GTSL202103000085F01
Sample(s) Status	Engineered sample
Operation Frequency:	431.55-439.55MHz
Channel numbers:	5
Modulation type:	ASK
Antenna Type:	External antenna
Antenna gain:	2.5dBi(declare by applicant)
Power supply:	DC 5V

Operation Frequency each of channel	
Channel	Frequency MHz
1	431.550
2	433.050
3	433.150
4	433.550
5	439.550

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	Mode
The lowest channel	431.550	ASK
The middle channel	433.550	
The Highest channel	439.550	

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

5.3 Description of Support Units

Description	Manufacturer	Model	Rating
Adapter (Provide by test lab):	HAIWEI /	HW-0501000E	I/P: AC 100-240V 50/60Hz O/P: DC 5V 1A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383. ● IC —Registration No.: 9079A The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0d by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0
--

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.231 requirement: For intentional device, according to 15.203:an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.	
EUT Antenna:	
<i>The antenna is external antenna, the best case gain of the antenna is 2.5dBi, reference to the appendix II for details</i>	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
	* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane <i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i>						
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	/						
Test results:	Pass						

Remark: Both high and low voltages and all channel have been tested to show only the worst low voltages test data(120V, Low channel).


Measurement data

Line:

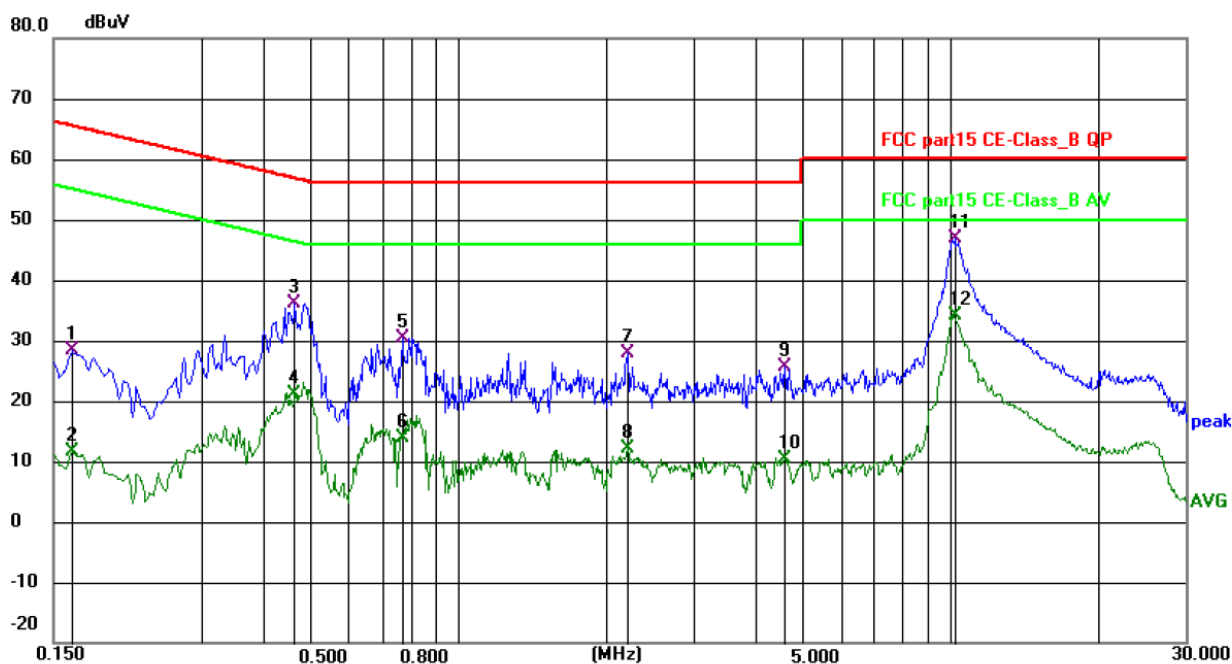

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1635	17.97	10.32	28.29	65.28	36.99	QP	P	
2	0.1635	1.42	10.32	11.74	55.28	43.54	AVG	P	
3	0.4650	26.91	9.26	36.17	56.60	20.43	QP	P	
4	0.4650	11.89	9.26	21.15	46.60	25.45	AVG	P	
5	0.7709	20.91	9.54	30.45	56.00	25.55	QP	P	
6	0.7709	4.44	9.54	13.98	46.00	32.02	AVG	P	
7	2.2109	17.92	10.06	27.98	56.00	28.02	QP	P	
8	2.2109	2.17	10.06	12.23	46.00	33.77	AVG	P	
9	4.6005	15.48	10.10	25.58	56.00	30.42	QP	P	
10	4.6005	0.37	10.10	10.47	46.00	35.53	AVG	P	
11 *	10.1940	36.43	10.33	46.76	60.00	13.24	QP	P	
12	10.1940	23.91	10.33	34.24	50.00	15.76	AVG	P	

Neutral:

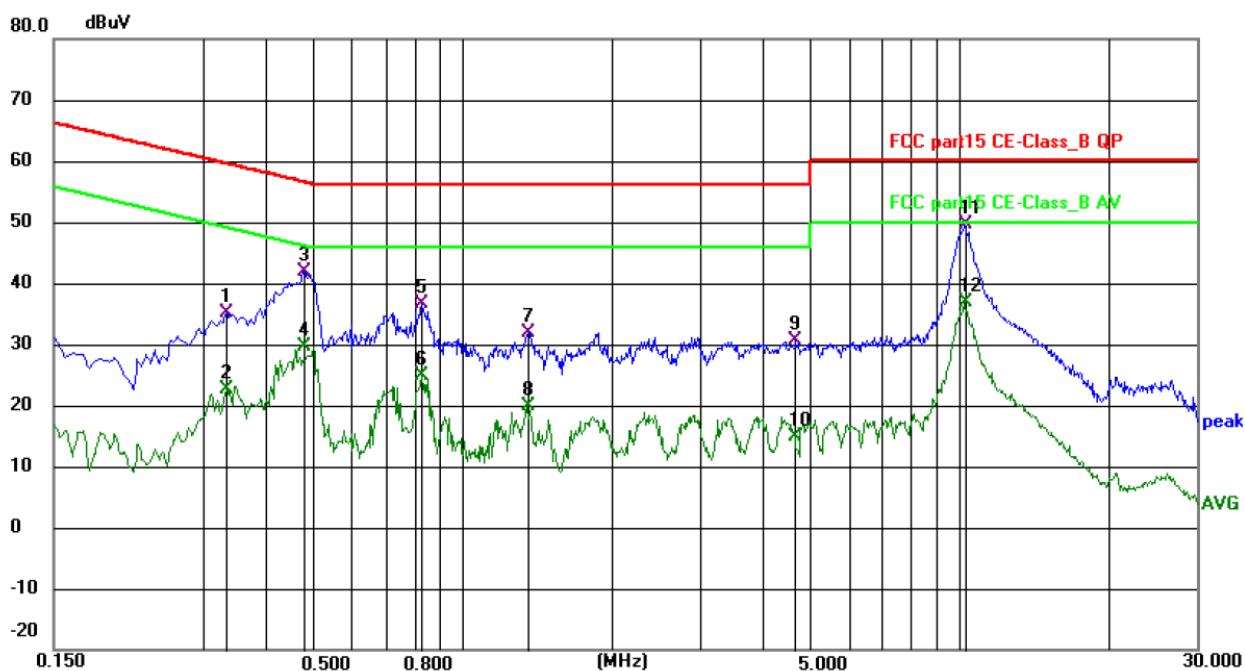




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3345	25.83	9.21	35.04	59.34	24.30	QP	P	
2	0.3345	13.52	9.21	22.73	49.34	26.61	AVG	P	
3	0.4785	32.48	9.44	41.92	56.37	14.45	QP	P	
4	0.4785	20.23	9.44	29.67	46.37	16.70	AVG	P	
5	0.8294	27.02	9.54	36.56	56.00	19.44	QP	P	
6	0.8294	15.41	9.54	24.95	46.00	21.05	AVG	P	
7	1.3559	21.93	10.04	31.97	56.00	24.03	QP	P	
8	1.3559	9.89	10.04	19.93	46.00	26.07	AVG	P	
9	4.6725	20.33	10.25	30.58	56.00	25.42	QP	P	
10	4.6725	4.62	10.25	14.87	46.00	31.13	AVG	P	
11 *	10.2480	39.02	10.52	49.54	60.00	10.46	QP	P	
12	10.2480	26.30	10.52	36.82	50.00	13.18	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + Factor (LISN Factor + Cable Loss)
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

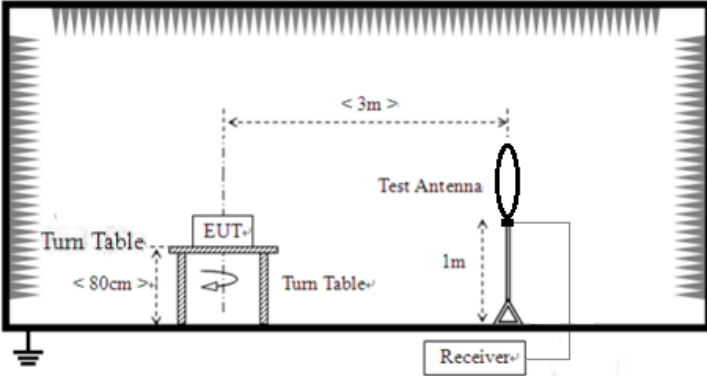Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 6GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	431.55MHz		100.75		Peak Value
			80.75		Average Value
Limit: (Spurious Emissions)	Fundamental Frequency (MHz)		Field Strength of fundamental (microvolts/meter)		Field Strength of Unwanted Emissions (microvolts/meter)
	40.66-40.70		2250		225
	70-130		1250		125
	130-174		1250 to 3750		125 to 1,375**
	174-260		3750		375
	260-470		3750 to 12500 **		375 to 1250**
	Above 470		12500		1250
	Frequency (MHz)		Class B(dBuV/m @3m)		
			Peak	Average	
	Above 1000		74	54	
	Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits higher field strength.				
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
Test setup:	For radiated emissions from 30MHz to 1GHz				

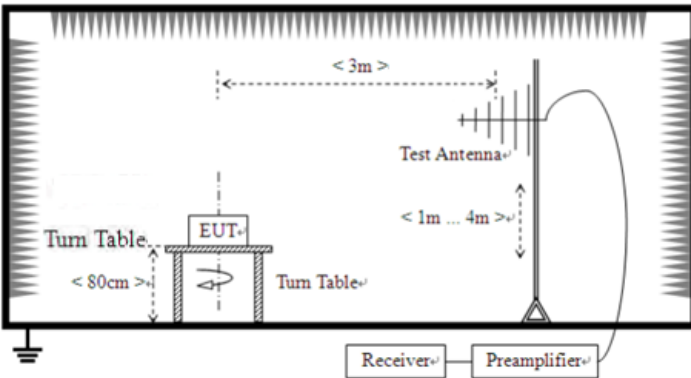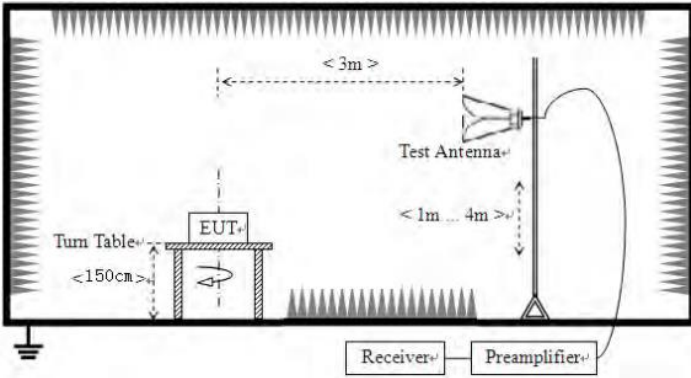	 For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1012mbar
Test voltage:	DC 5V
Test results:	Pass

Measurement data:


7.3.1 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ Below 1GHz

Test channel:	Lowest channel
---------------	----------------

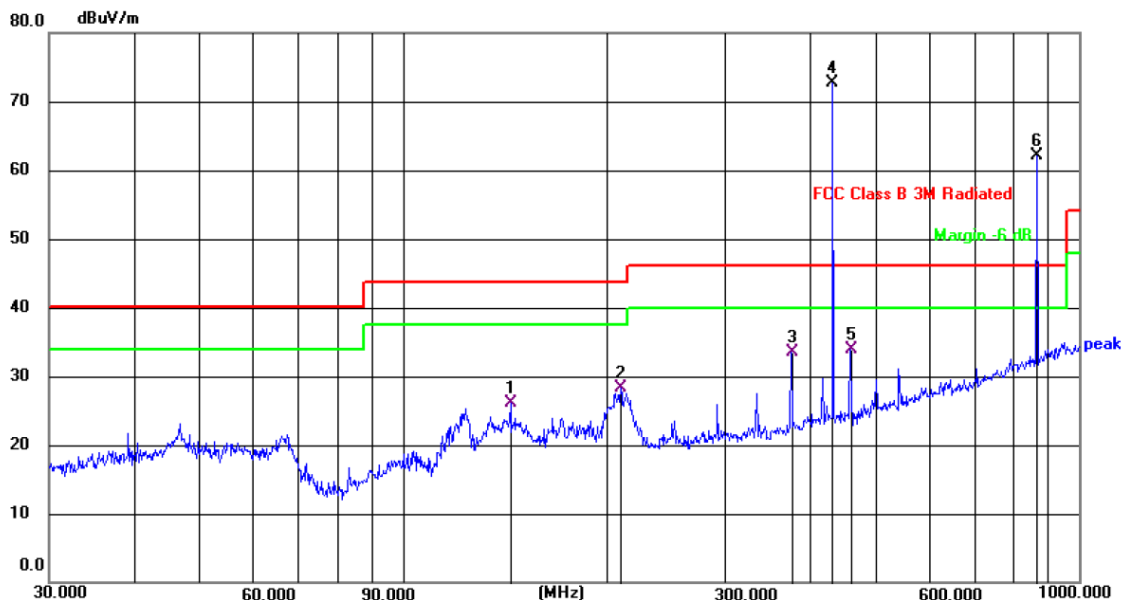

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector	Comment
1		144.3347	44.85	-18.70	26.15	43.50	17.35	QP	
2		210.0481	43.54	-15.33	28.21	43.50	15.29	QP	
3		375.9385	44.62	-11.16	33.46	46.00	12.54	QP	
4	*	431.5500	82.67	-10.01	72.66	46.00	-26.66	peak	
5		459.1144	43.33	-9.51	33.82	46.00	12.18	QP	
6	X	863.1000	61.33	-2.30	59.03	46.00	-13.03	peak	


For average Emission

Frequency MHz	Peak Measurement Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit PK	Limit Average	Margin PK	Margin Average	Polarization
431.55	72.66	-3.16	69.50	100.75	80.75	-28.09	-11.25	Horizontal
863.10	59.03	-3.16	55.87	80.75	60.75	-21.72	-4.88	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 7.5.

Test channel:	Lowest channel
---------------	----------------

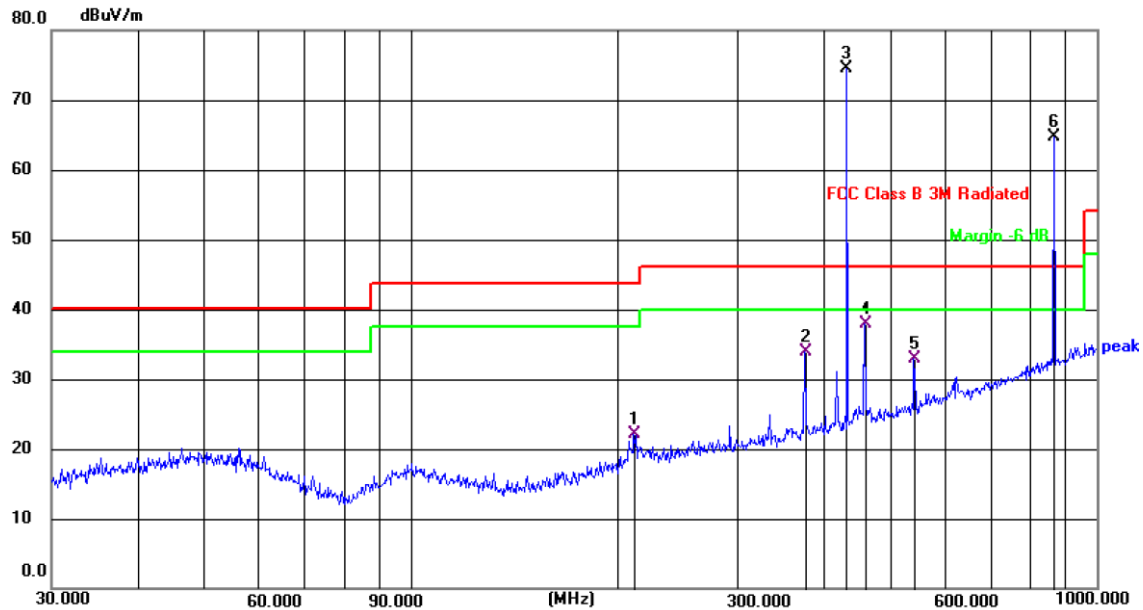

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector	Comment
1		211.5264	37.32	-15.28	22.04	43.50	21.46	QP	
2		375.9385	45.16	-11.16	34.00	46.00	12.00	QP	
3	*	431.5500	84.51	-10.01	74.50	46.00	-28.50	peak	
4		459.1144	47.44	-9.51	37.93	46.00	8.07	QP	
5		541.3725	40.89	-7.94	32.95	46.00	13.05	QP	
6	X	863.1000	61.96	-2.30	59.66	46.00	-13.66	peak	

For average Emission


Frequency MHz	Peak Measurement Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit PK	Limit Average	Margin PK	Margin Average	Polarization
431.55	74.50	-3.16	71.34	100.75	80.75	-26.25	-9.41	Vertical
863.10	59.66	-3.16	56.50	80.75	60.75	-21.09	-4.25	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 7.5.

Test channel:

Middle channel

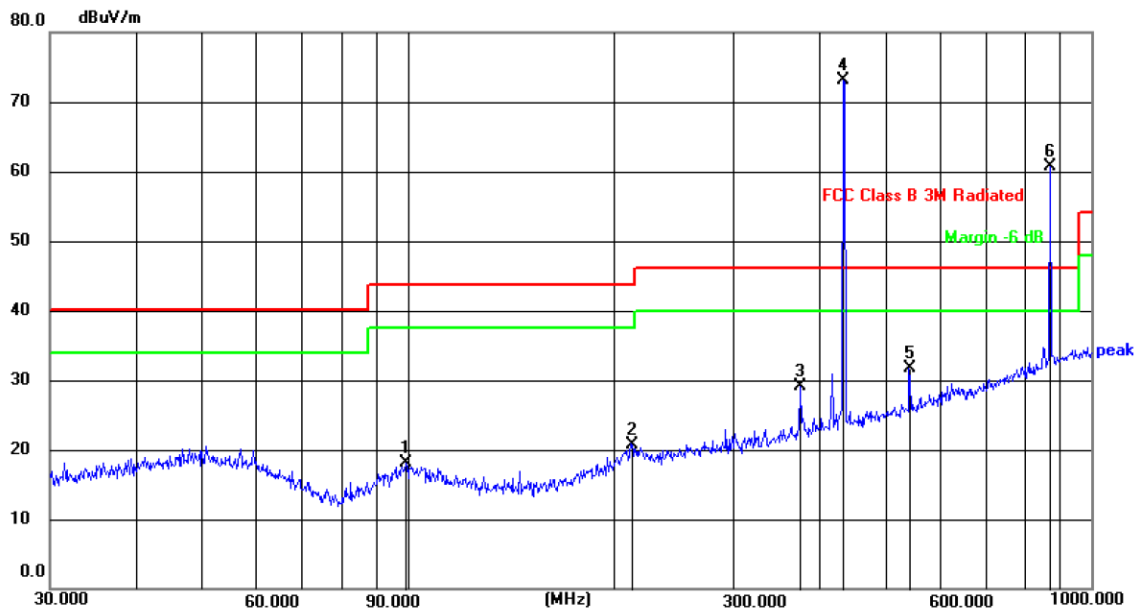

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector	Comment
1	99.5279	33.91	-15.83	18.08	43.50	25.42	QP	
2	212.2693	36.06	-15.26	20.80	43.50	22.70	QP	
3	375.9384	40.35	-11.16	29.19	46.00	16.81	QP	
4 *	433.5500	83.00	-9.98	73.02	46.00	-27.02	peak	
5	541.3724	39.67	-7.94	31.73	46.00	14.27	QP	
6 X	867.1000	63.01	-2.24	60.77	46.00	-14.77	peak	

For average Emission


Frequency MHz	Peak Measurement Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit PK	Limit Average	Margin PK	Margin Average	Polarization
433.55	73.02	-3.16	69.86	100.75	80.75	-27.73	-10.89	Horizontal
867.10	60.77	-3.16	57.61	80.75	60.75	-19.98	-3.14	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 7.5.

Test channel:

Middle channel

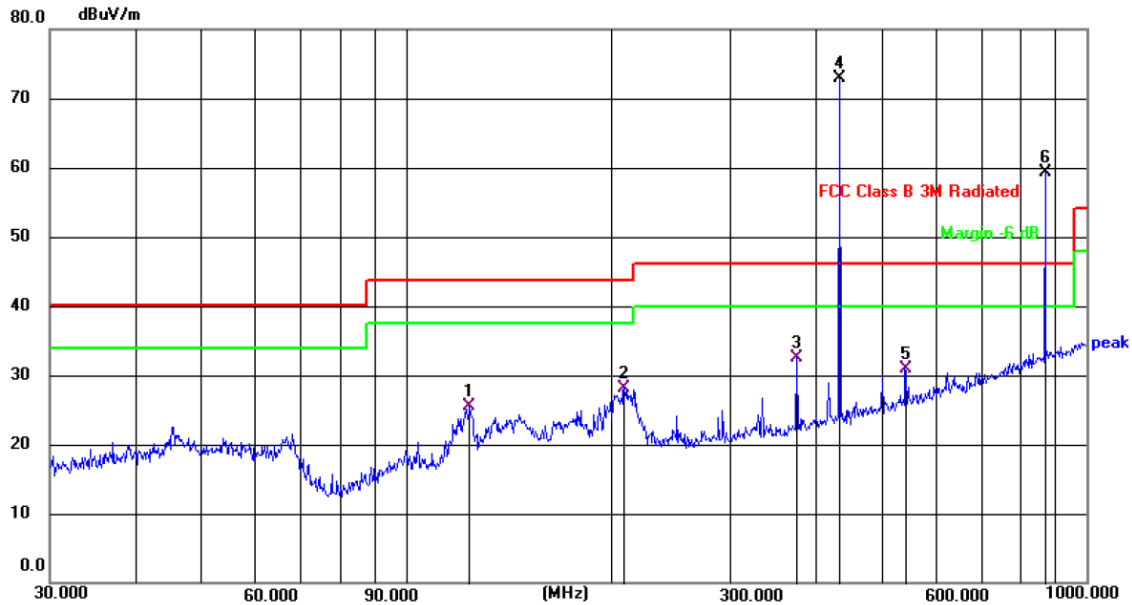

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector	Comment
1		124.1329	43.39	-17.95	25.44	43.50	18.06	QP	
2		209.3129	43.48	-15.35	28.13	43.50	15.37	QP	
3		374.6225	43.71	-11.20	32.51	46.00	13.49	QP	
4	*	433.5500	82.81	-9.98	72.83	46.00	-26.83	peak	
5		541.3725	38.93	-7.94	30.99	46.00	15.01	QP	
6	X	867.1000	61.52	-2.24	59.28	46.00	-13.28	peak	


For average Emission

Frequency MHz	Peak Measurement Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit PK	Limit Average	Margin PK	Margin Average	Polarization
433.55	72.83	-3.16	69.67	100.75	80.75	-27.92	-11.08	Vertical
867.10	59.28	-3.16	56.12	80.75	60.75	-21.47	-4.63	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 7.5.

Test channel:	Highest channel
---------------	-----------------

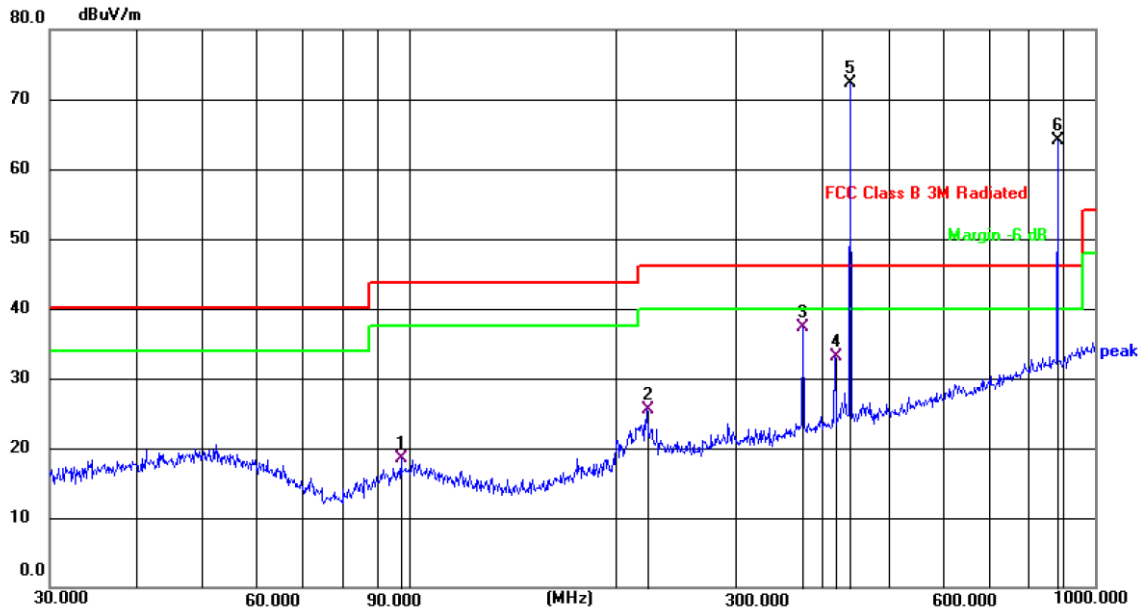

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector	Comment
1		97.4560	34.73	-16.22	18.51	43.50	24.99	QP	
2		222.1698	40.43	-14.93	25.50	46.00	20.50	QP	
3		375.9385	48.47	-11.16	37.31	46.00	8.69	QP	
4		417.6411	43.39	-10.27	33.12	46.00	12.88	QP	
5	*	439.5500	82.22	-9.87	72.35	46.00	-26.35	peak	
6	X	879.1000	58.16	-2.06	56.10	46.00	-10.10	peak	

For average Emission


Frequency MHz	Peak Measurement Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit PK	Limit Average	Margin PK	Margin Average	Polarization
439.55	72.35	-3.16	69.19	100.75	80.75	-28.40	-11.56	Horizontal
879.10	56.10	-3.16	52.94	80.75	60.75	-24.65	-7.81	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 7.5.

Test channel:

Highest channel

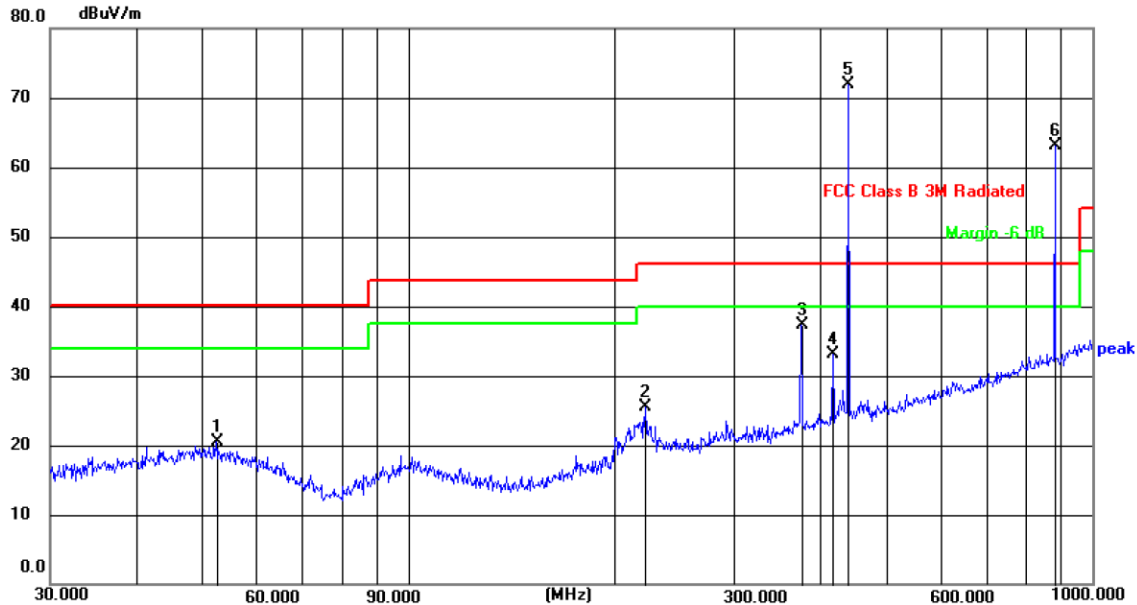

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector	Comment
1		52.3912	34.38	-13.84	20.54	40.00	19.46	peak	
2		222.1697	40.43	-14.93	25.50	46.00	20.50	peak	
3		375.9385	48.47	-11.16	37.31	46.00	8.69	peak	
4		417.6409	43.39	-10.27	33.12	46.00	12.88	peak	
5	*	439.5500	81.72	-9.87	71.85	46.00	-25.85	peak	
6	X	879.1000	60.16	-2.06	58.10	46.00	-12.10	peak	

For average Emission

Frequency MHz	Peak Measurement Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit PK	Limit Average	Margin PK	Margin Average	Polarization
439.55	71.85	-3.16	68.69	100.75	80.75	-28.90	-12.06	Vertical
879.10	58.10	-3.16	54.94	80.75	60.75	-22.65	-5.81	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 7.5.

■ Above 1GHz

Test Channel	Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
					PK	AV	PK	AV	
Lowest channel	1294.65	52.97	-3.16	49.81	74.00	54.00	-21.03	-4.19	Vertical
	1726.20	51.89	-3.16	48.73	74.00	54.00	-22.11	-5.27	Vertical
	2157.75	51.68	-3.16	48.52	74.00	54.00	-22.32	-5.48	Vertical
	2589.30	50.32	-3.16	47.16	74.00	54.00	-23.68	-6.84	Vertical
	3020.85	49.39	-3.16	46.23	74.00	54.00	-24.61	-7.77	Vertical
	3452.40	48.52	-3.16	45.36	74.00	54.00	-25.48	-8.64	Vertical
	1294.65	52.92	-3.16	49.76	74.00	54.00	-21.08	-4.24	Horizontal
	1726.20	51.26	-3.16	48.10	74.00	54.00	-22.74	-5.90	Horizontal
	2157.75	51.77	-3.16	48.61	74.00	54.00	-22.23	-5.39	Horizontal
	2589.30	50.95	-3.16	47.79	74.00	54.00	-23.05	-6.21	Horizontal
	3020.85	49.82	-3.16	46.66	74.00	54.00	-24.18	-7.34	Horizontal
	3452.40	48.90	-3.16	45.74	74.00	54.00	-25.10	-8.26	Horizontal
Middle channel	1300.65	53.54	-3.16	50.38	74.00	54.00	-20.46	-3.62	Vertical
	1734.20	52.79	-3.16	49.63	74.00	54.00	-21.21	-4.37	Vertical
	2167.75	51.87	-3.16	48.71	74.00	54.00	-22.13	-5.29	Vertical
	2601.30	50.06	-3.16	46.90	74.00	54.00	-23.94	-7.10	Vertical
	3034.85	49.31	-3.16	46.15	74.00	54.00	-24.69	-7.85	Vertical
	3468.40	48.82	-3.16	45.66	74.00	54.00	-25.18	-8.34	Vertical
	1300.65	53.83	-3.16	50.67	74.00	54.00	-20.17	-3.33	Horizontal
	1734.20	51.97	-3.16	48.81	74.00	54.00	-22.03	-5.19	Horizontal
	2167.75	51.47	-3.16	48.31	74.00	54.00	-22.53	-5.69	Horizontal
	2601.30	50.94	-3.16	47.78	74.00	54.00	-23.06	-6.22	Horizontal
	3034.85	49.97	-3.16	46.81	74.00	54.00	-24.03	-7.19	Horizontal
	3468.40	48.72	-3.16	45.56	74.00	54.00	-25.28	-8.44	Horizontal
Highest channel	1318.65	52.78	-3.16	49.62	74.00	54.00	-21.22	-4.38	Vertical
	1758.20	51.02	-3.16	47.86	74.00	54.00	-22.98	-6.14	Vertical
	2197.75	50.90	-3.16	47.74	74.00	54.00	-23.10	-6.26	Vertical
	2637.30	49.09	-3.16	45.93	74.00	54.00	-24.91	-8.07	Vertical
	3076.85	48.19	-3.16	45.03	74.00	54.00	-25.81	-8.97	Vertical
	3516.40	48.01	-3.16	44.85	74.00	54.00	-25.99	-9.15	Vertical
	1318.65	52.87	-3.16	49.71	74.00	54.00	-21.13	-4.29	Horizontal
	1758.20	51.70	-3.16	48.54	74.00	54.00	-22.30	-5.46	Horizontal
	2197.75	51.50	-3.16	48.34	74.00	54.00	-22.50	-5.66	Horizontal
	2637.30	49.27	-3.16	46.11	74.00	54.00	-24.73	-7.89	Horizontal
	3076.85	48.94	-3.16	45.78	74.00	54.00	-25.06	-8.22	Horizontal
	3516.40	48.14	-3.16	44.98	74.00	54.00	-25.86	-9.02	Horizontal

Notes: 1.Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 7.5.

3. Pulse Desensitization Correction Factor

Pulse Width (PW) = 3.72s


$2/PW = 2/3.72ms = 0.538kHz$

RBW (100 kHz) > 2/PW (0.538kHz)

Therefore PDCF is not needed

4. Other harmonics emissions are lower than 20dB below the allowable limit.


7.4 20dB Occupy Bandwidth

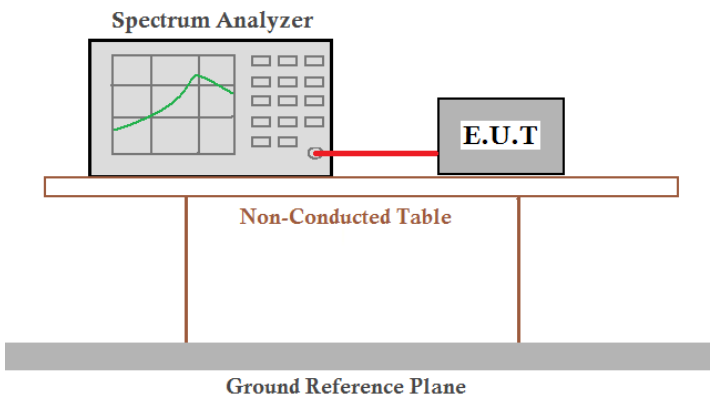Test Requirement:	FCC Part15 C Section 15.231
Test Method:	ANSI C63.10:2013
Limit:	According to FCC 15.231(c) requirement: The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 431.55MHz = 1.07888MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(KHz)	Limit(MHz)	Result
Lowest	276.4	1078.88	Pass
Middle	273.1	1078.88	Pass
Highest	277.3	1078.88	Pass


Test plot as follows:

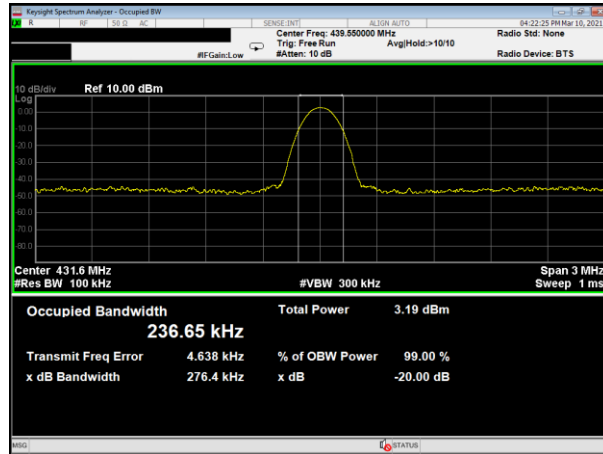

Lowest channel

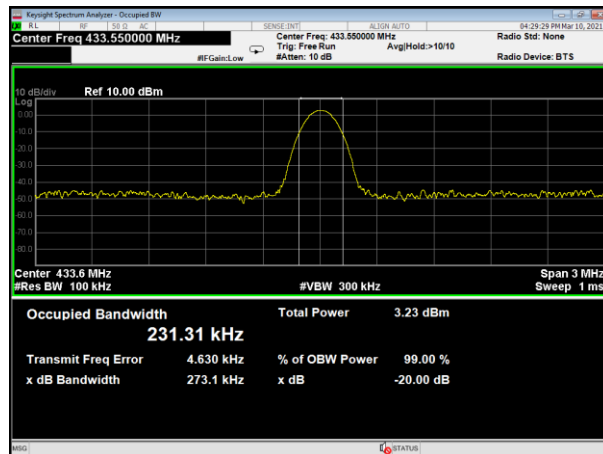

Middle channel

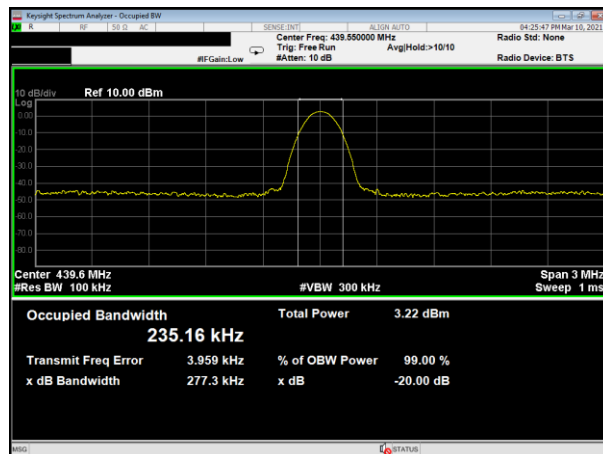

Highest channel

7.5 CALCULATION OF AVERAGE FACTOR

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

Averaging factor in dB = $20\log(\text{duty cycle})$

The duration of one cycle = 65.40ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle = $(0.947\text{ms} \times 28 + 1.577\text{ms} \times 12) / 65.40\text{ms}$

= $45.44\text{ms} / 65.40\text{ms}$

= 0.695


Therefore, the averaging factor is found by $20\log 0.695 = -3.16\text{dB}$

Test plot as follows:



Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.

Measurement Data


Cycle

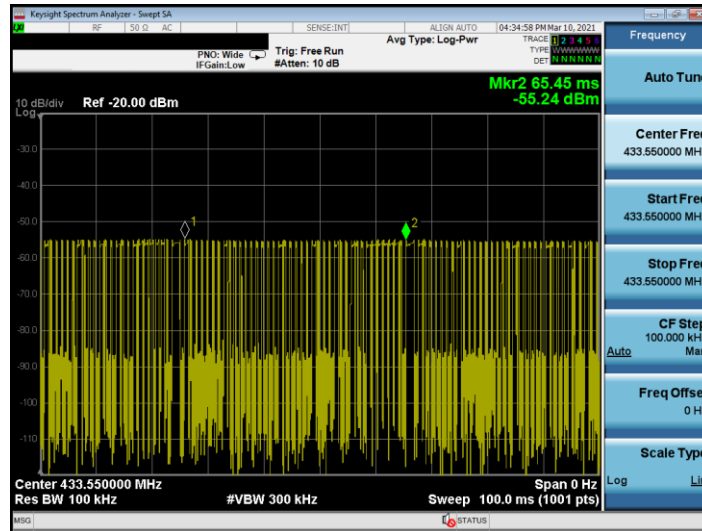

Pulse

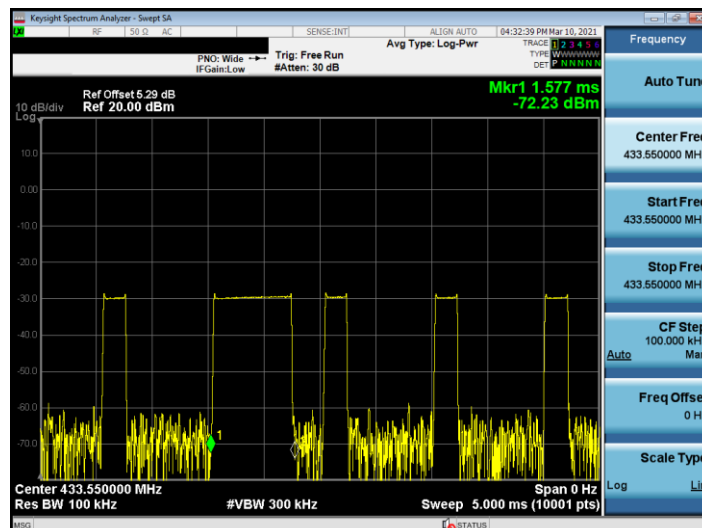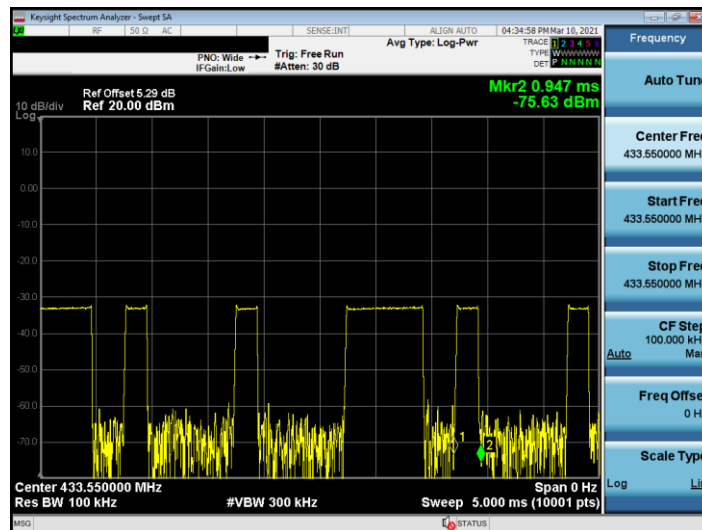


7.6 DWELL TIME

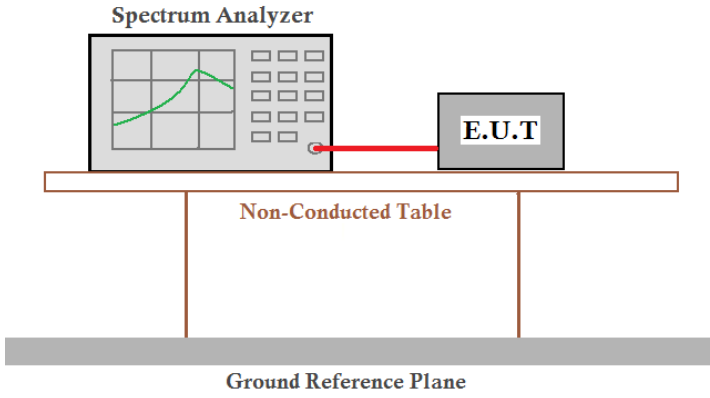Test Requirement:	FCC Part15 C Section 15.231
Test Method:	ANSI C63.10:2013
Limit:	According to FCC 15.231(a) requirement: A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Test Procedure - Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. - Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge. - Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - Repeat above procedures until all measured frequencies were complete.
Test results:	Pass


Measurement Data

Dwell time (second)	Limit (second)	Result
3.72s	<5s	Pass

Test plot as follows:


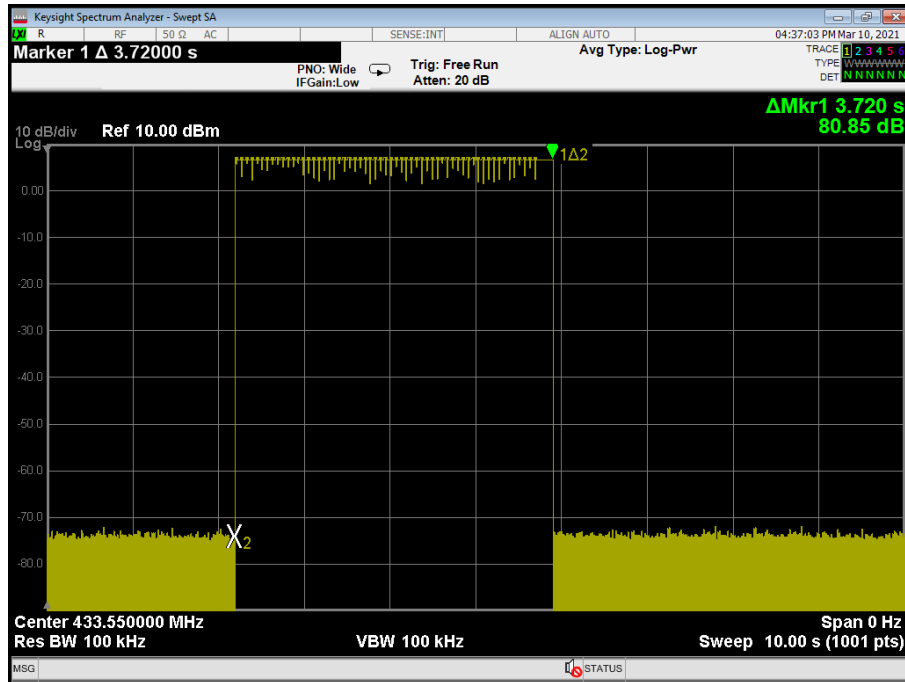



8 Test Setup Photo

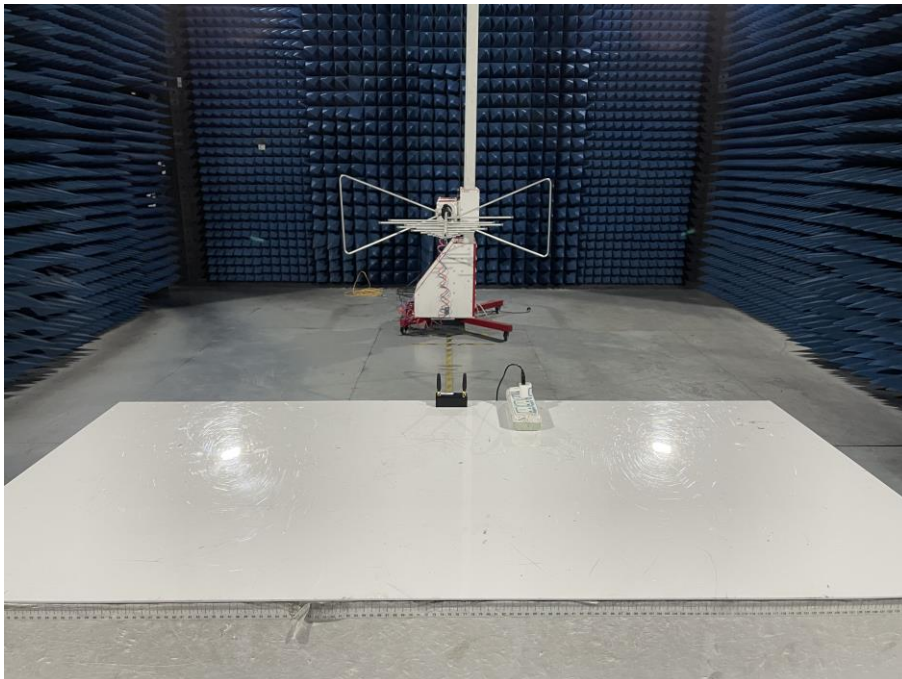



9 EUT Constructional Details

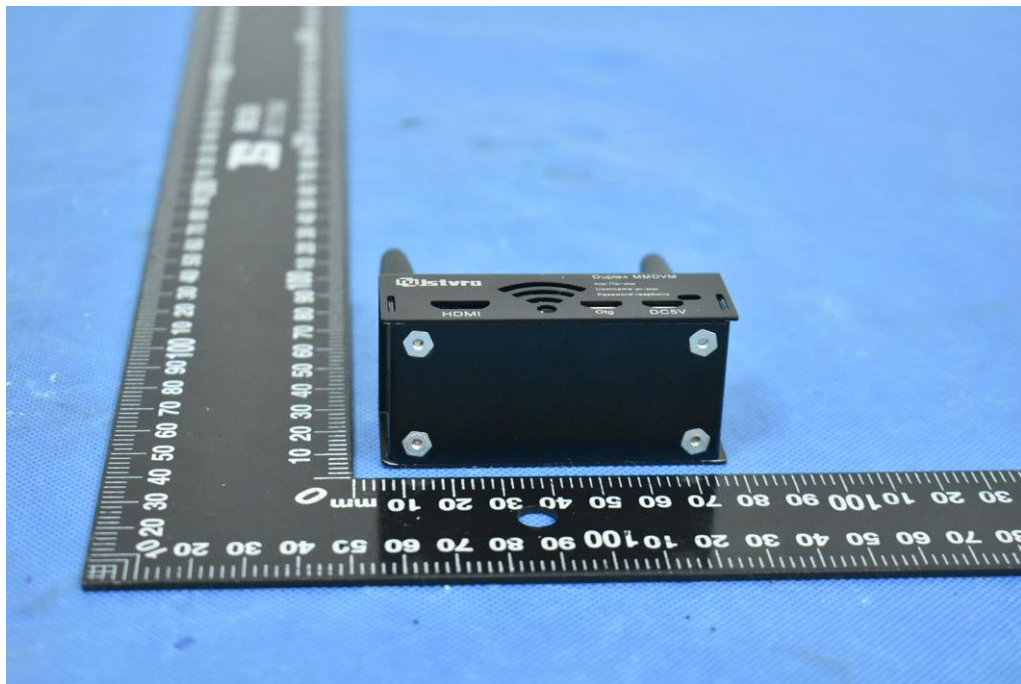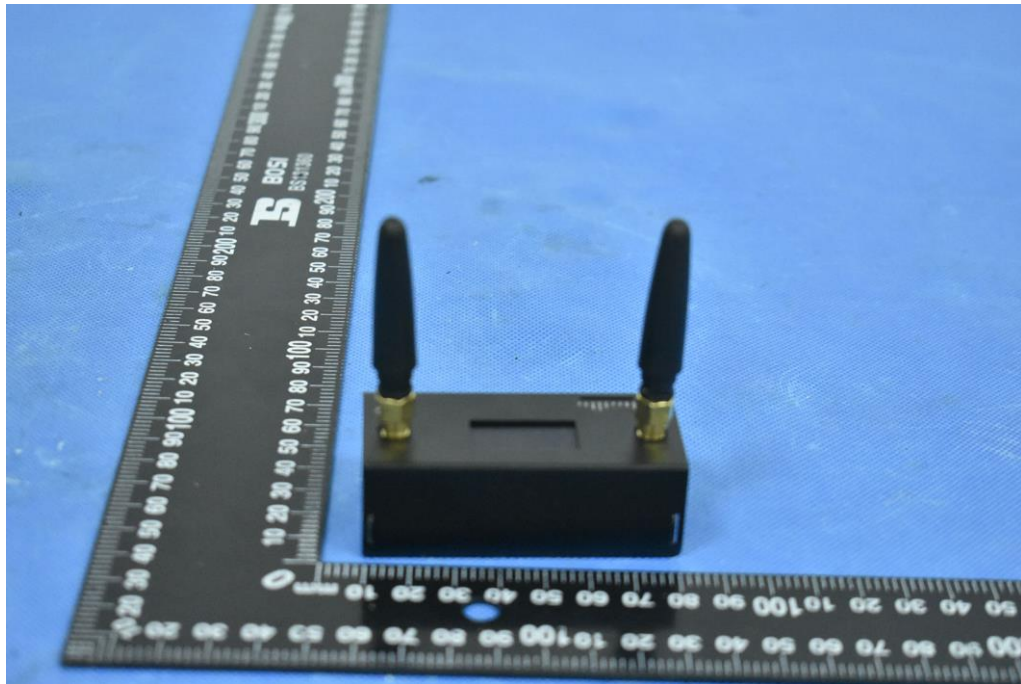

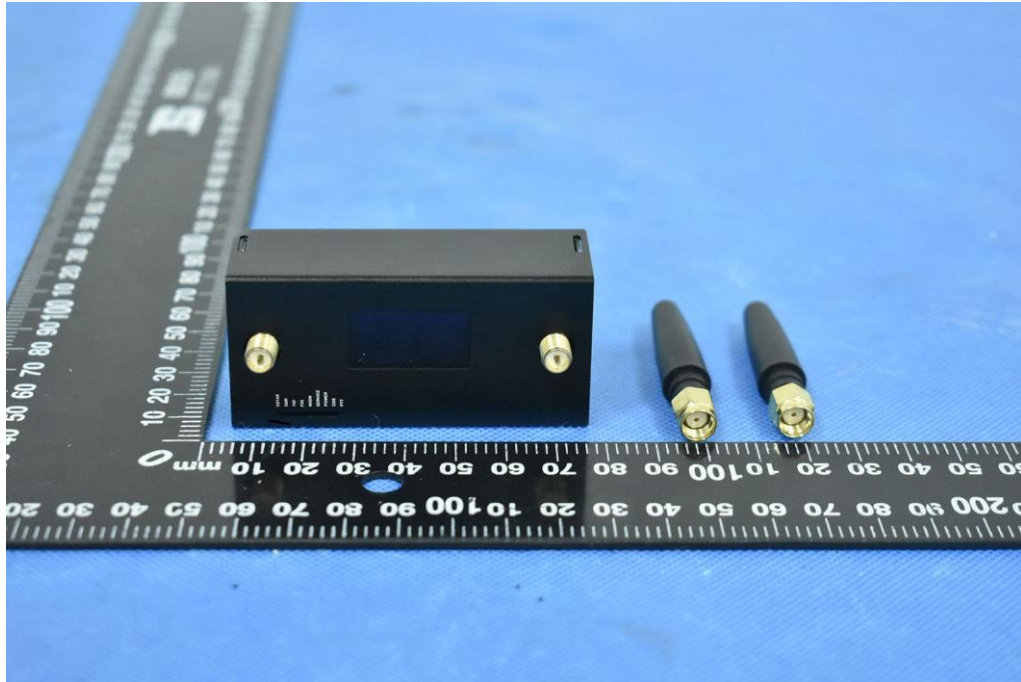

-----End-----