


Mark	Version	Change content	Date	Changer
	A	New version released	2022.03.06	goren

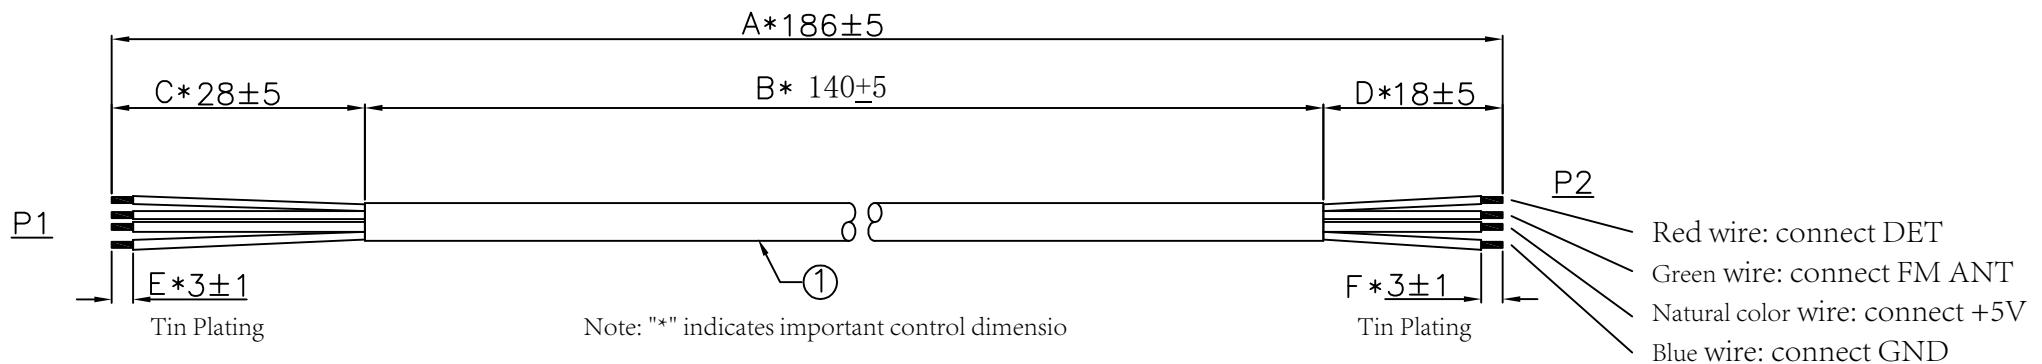

Requirement:

1. The wires are free of dirt, stains, scratches, damage, color differences and other defects.
2. Tin plating has no copper wire forks, tin tips, residual tin slag in the insulation layer and other defects.
3. The dimensions are accurate and do not exceed the tolerance range.
4. Electrical test: 100% continuity test, no short circuit, open circuit, misalignment, etc.

On-resistance: 2 MAX. Insulation resistance: 5M MIN.

Test voltage: DC300V.

5. All materials comply with "RoHS" environmental standards.

Gain:0dBi

All measurements were performed radiated and therefore additional antenna gain documentation is not required.

①	Wire	Enameled wire (10*0.08mm)*2C (red,green)+(30*0.08mm)*2C (natural color, blue) Black TPE 70PA outer quill;OD=2.0mm;L=186mm	1PCS		
Serial Number	Name	Specification	Dosage	Remark	