


1、Plane structure diagram: Unit :MM

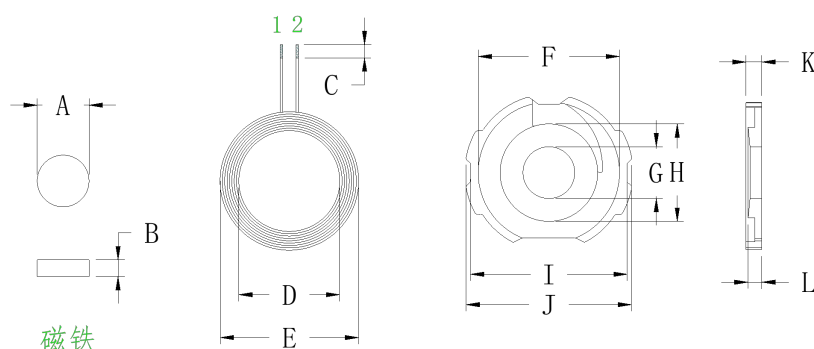

A	7.7 ± 0.05
B	2.0 ± 0.05
C	2 ± 1
D	15 ± 0.2
E	20.5 ± 0.5
F	21 ± 0.1
G	7.7 ± 0.05
H	13.5 ± 0.1
I	23.5 ± 0.2
J	25 ± 0.2
K	2.55 ± 0.1
L	2.25 ± 0.1
M	8 ± 1

2. Product parameters:

foot position	Wire diameter	number of turns	remark
1 - 2	0.08*24P	12	Hot air stranding wire

3. Technical requirements:

- Secure the cable end to prevent loose cables
- According to customer requirements, the long thread is cut and tinned, and the tinning depth is 2 ± 1 MM
- Point the appropriate white glue on the soft magnetic sheet, paste the coil, and ensure that the product surface is clean and tidy in the process
- The soft magnetic sheet used is with round holes, without damage
- Additional process (according to customer requirements) : Install 7.7x2.0mm magnet in the middle of the finished product round hole and in the finished product Put 14mm circular double-sided tape on the back and pack it after

4. electrical parameters:

$$\text{PIN } 1 - 2 = 7.6\mu\text{H} \pm 0.2\mu\text{H}$$

1. Inductance value, Q value:

$$Q \geq 35$$

Quasi or equivalent instrument.

Q value is based on Quanhua 1062A instrument,
100KHZ/0.3Vrms as the standard or equivalent instrument

Dongguan city DFL Electronic Technology Co.,LTD
No. 107, Xinfeng West Road, Shijie Town, Dongguan City