

承认书

SPECIFICATION FOR APPROVAL

客户名称

CUSTOMER NAME:

产品名称

PRODUCTNAME: 433MHZ天线

客户料号

CUSTOMER P /N:

电子料号

P/N:

REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKEDBY:		
AUDITORBY:		
APPROVEDBY:		
DATE:	2025. 05. 13	

Contents

Item Description

一、-----规格表

二、-----成品图

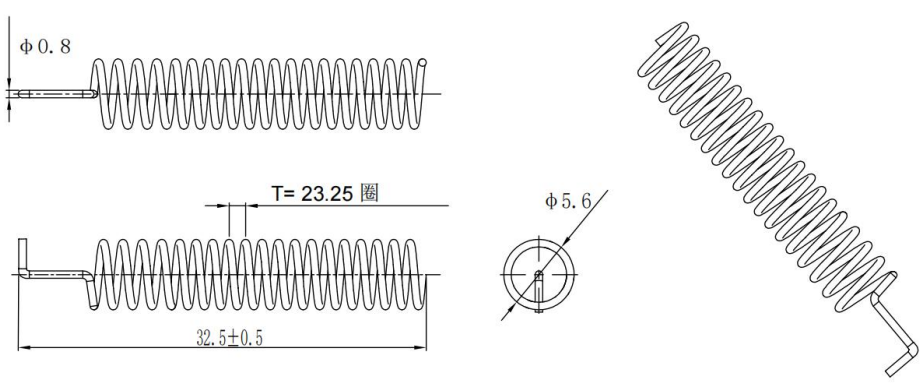
三、-----测试报告

一、规格表：

产品主要技术参数

主要技术指标		Main technicalspecifications		
频率范围（MHz）	433	FrequencyRange (MHz)	433	
特性阻抗(Ω)	50	Impedance(Ω)	50	
增益(dBi)	0	Gain(dBi)	0	
输出电压驻波比	≦ 13	VSWR	≦ 13	
最大功率	10W	Admitted Power	10W	
极化方式	线极化	Polarization	Linear	
方向性	全向性	Radiation	Omni-directional	
连接方式	SMA	Connector Type	SMA	
物理性能		Physical Properties		
天线外套材料	/	Antennacover	/	
工作温度	-20℃~+70℃	Operating Temp	-20℃~+70℃	
保存温度	-20℃~+70℃	StorageTemp	-20℃~+70℃	

二、成品图：

RoHS Compatible		CUSTOMER	REV.	DESCRIPTION	DATE															
PART NO.			△	首次发行	2022-5-6															
																				
備註： 1. 材质：磷铜，圈数T=23.25圈 线径Φ0.8mm。 2. 尺寸：帶*為重點尺寸。 3. 公差：未標注公差參照標準公差。			<table border="1"><tr><td colspan="3">PART NAME: 磷铜天线 0.8*5.6*32.5长 23.25N</td></tr><tr><td colspan="2">PART NO.: JLYX029W.0800.WRS1</td><td>DATE: 2022-5-6</td></tr><tr><td>APPROVED BY</td><td>CHECKED BY</td><td>DESIGNED BY</td></tr><tr><td></td><td></td><td></td></tr><tr><td colspan="2">UNITS: mm SCALE: 1/1 REVISION: A</td><td>Tolerance X.X ±0.30 X.XX ±0.15 X° ±3°</td></tr></table>			PART NAME: 磷铜天线 0.8*5.6*32.5长 23.25N			PART NO.: JLYX029W.0800.WRS1		DATE: 2022-5-6	APPROVED BY	CHECKED BY	DESIGNED BY				UNITS: mm SCALE: 1/1 REVISION: A		Tolerance X.X ±0.30 X.XX ±0.15 X° ±3°
PART NAME: 磷铜天线 0.8*5.6*32.5长 23.25N																				
PART NO.: JLYX029W.0800.WRS1		DATE: 2022-5-6																		
APPROVED BY	CHECKED BY	DESIGNED BY																		
UNITS: mm SCALE: 1/1 REVISION: A		Tolerance X.X ±0.30 X.XX ±0.15 X° ±3°																		
1	2	3	4	5	6	7	8													