



Certificate # 2861.01

GRG TEST

TEST REPORT

Verified Code: 853607

Report No.:	E202101295124-4		Application No.:	E202101295124		
Client:	DMAI, Inc.					
Address:	10940 Wilshire Blvd #1100, Los Angeles, CA 90024, USA					
Sample Description:	Education tablet, a preschool learning system					
Model:	X4C-US21					
Test Specification:	ANSI Std C95.1-1992 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz - 300 GHz.(IEEE Std C95.1-1991) IEEE Std 1528-2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques					
Receipt Date:	2021-02-20					
Test Date:	2021-03-15 to 2021-03-16					
Issue Date:	2021-05-17					
Test Result:	Pass					
Prepared By: Test Engineer <i>Xie Fang</i>	Reviewed By: Technical Manager <i>Wu Haotong</i>	Approved By: Manager <i>John Lee</i>				
Other Aspects:						
Note: Note						
Abbreviations: ok / P = passed; fail / F = failed; n.a. / N = not applicable;						
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.						



DIRECTIONS OF TEST

- 1. This company carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.**
- 2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.**
- 3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.**

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 DETAILS OF CLIENT	5
1.2 TEST LABORATORY.....	5
1.3 ACCREDITATIONS.....	5
1.4 DESCRIPTION OF EUT.....	6
1.5 TEST ENVIRONMENT	7
2. GENERAL INFORMATION	8
2.1 STATEMENT OF COMPLIANCE	8
2.2 LABORATORY ENVIRONMENT	8
3. LABORATORY AND ACCREDITATIONS	9
3.1 LABORATORY.....	9
3.2 ACCREDITATIONS.....	9
3.3 MEASUREMENT UNCERTAINTY	9
4. SAR MEASUREMENTS SYSTEM.....	10
4.1 DEFINITION OF SPECIFIC ABSORPTION RATE (SAR).....	10
4.2 SAR SYSTEM.....	11
4.3 E-FIELD PROBE	12
4.4 DATA ACQUISITION ELECTRONICS (DAE).....	13
4.5 ROBOT.....	14
4.6 MEASUREMENT SERVER	15
4.7 PHANTOM	16
4.8 DEVICE HOLDER	17
4.9 DATA STORAGE AND EVALUATION	18
5. TEST EQUIPMENT LIST	20
6. SYSTEM VERIFICATION PROCEDURE	21
6.1 TISSUE VERIFICATION	21
6.2 SYSTEM CHECK PROCEDURE	22
7. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	24
7.1 SAR MEASUREMENT VARIABILITY	24
7.2 MEASUREMENT UNCERTAINTY	24
8. EUT TESTING POSITION.....	25
8.1 BODY WORN POSITION	25
9. MEASUREMENT PROCEDURES.....	26
9.1 SPATIAL PEAK SAR EVALUATION	26
9.2 POWER REFERENCE MEASUREMENT	26
9.3 AREA SCAN PROCEDURES.....	26
9.4 ZOOM SCAN PROCEDURES	28
9.5 VOLUME SCAN PROCEDURES	28
9.6 POWER DRIFT MONITORING	28
10. CONDUCTED POWER.....	29
11. ANTENNA LOCATION	33
12. SAR TEST RESULTS SUMMARY.....	34
12.1 BODY SAR RESULTS.....	34
13. SIMULTANEOUS TRANSMISSION ANALYSIS	36
APPENDIX A. SYSTEM CHECKING SCANS	37

APPENDIX B. MEASUREMENT SCANS	41
APPENDIX C. RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	46
APPENDIX D: PHOTOGRAPH OF SET UP	47
APPENDIX E: PHOTOGRAPH OF THE EUT	49

1. General Information

1.1 Details of Client

Applicant Name	DMAI, Inc.
Applicant Address	10940 Wilshire Blvd #1100, Los Angeles, CA 90024, USA
Manufacturer Name	DMAI, Inc.
Manufacturer Address	10940 Wilshire Blvd #1100, Los Angeles, CA 90024, USA
Factory Name	Shenzhen Valley Ventures Inc
Factory Address	9F-10F, Block 4, Cloud Park, Xuegang North Road, Bantian Street, Longgang district Shenzhen, 518129, China
Standard(s)	<p>ANSI Std C95.1-1992 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz - 300 GHz.(IEEE Std C95.1-1991)</p> <p>IEEE Std 1528-2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p>KDB447498 D01 General RF Exposure Guidance v06</p> <p>KDB648474 D04 Handset SAR v01r03</p> <p>KDB248227 D01 802. 11 Wi-Fi SAR v02r02</p> <p>KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04</p> <p>KDB865664 D02 SAR Reporting v01r02</p> <p>KDB690783 D01 SAR Listings on Grants v01r03</p> <p>KDB616217 D04 SAR for laptop and tablets v01r02</p>

1.2 Test Laboratory

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of Guangzhou GRG Metrology & Test Co., Ltd.

Add.: No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District Shenzhen, 518110, People's Republic of China.

P.C.: 518000

Tel : 0755-61180008

Fax: 0755-61180008

1.3 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to GB/T 27025(ISO/IEC 17025:2017)

USA A2LA(Certificate #:2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada Industry Canada

USA FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.grgtest.com>

1.4 Description of EUT

Product Name	Education tablet,a preschool learning system						
Brand Name	AILA Sit & Play TM Animal Island Learning Adventure TM DMAI TM						
Model Name	X4C-US21						
Series Model	/						
Model Difference	/						
FCC ID	2AYDJ-X4C-US21						
Device Type	Portable device						
Hardware Version	MT8168-P71-V1.1						
Software Version	ys_mssi_t_64_userdebug_10_QP1A.190711.020mp3v4104 test-keys						
Frequency Range	Band	Tx Range (MHz)		Rx Range (MHz)			
	Bluetooth	2402-2480		2402-2480			
	WIFI	2412-2462		2412-2462			
		5150-5250		5150-5250			
		5250-5350		5250-5350			
		5470-5725		5470-5725			
		5725-5850		5725-5850			
Modulation Mode	Bluetooth	GFSK, $\pi/4$ -DQPSK, 8DPSK					
	WIFI	DSSS, OFDM					
Device Class	B						
Antenna Specification:	FPC Antenna						
Operating Mode:	Maximum continuous output						
Test Channels (low-mid-high):	0-39-78 (BT)						
	0-19-39 (BLE)						
	1-6-11 (2.4G WIFI 802.11b/g/n HT20)						
	3-6-9 (2.4G WIFI 802.11n HT40)						
	5G WIFI	5.2G	5.3G	5.5G			
	a/n HT20/ ac HT20	36-40-44-48	52-56-60-64	100-104-108-11 2-116-132-136-1 40			
	n HT40/ ac HT40	38-46	54-62	102-134			
Antenna Gain	ac VH80	42	58	106-138			
	Band		ANT Gain(dBi)				
	BT		2.8				
	WIFI 2.4G		2.8				
Other Information		WIFI 5G					
		1.9					
Adapter	Model	AS1201A-0502000USU					
	Input	100-240V~50/60Hz 0.35A Max					

	Output	DC5V, 2000mA
Note	The adapter have two color of appearance: White, Green.	

1.5 Test Environment

Temperature	Min. = 18 °C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

2. GENERAL INFORMATION

2.1 STATEMENT OF COMPLIANCE

Frequency Band	Highest Reported Body 1g-SAR(W/Kg)	SAR Test Limit (W/Kg)
2.4G WIFI	1.041	1.6
5.2G WIFI	0.590	
5.3G WIFI	0.978	
5.5G WIFI	1.420	
5.8G WIFI	0.755	
Test Result	PASS	

Note:

- 1) This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and IEC 62209-2:2019.

2.2 LABORATORY ENVIRONMENT

Temperature	Min. = 18 °C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω

Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of Guangzhou GRG Metrology & Test Co., Ltd.	
Add.:	No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District Shenzhen, 518110, People's Republic of China.
Telephone:	518000
Fax:	0755-61180008

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to GB/T 27025(ISO/IEC 17025:2017)

USA A2LA(Certificate #:2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada Industry Canada

USA FCC

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.grgtest.com>

3.3 MEASUREMENT UNCERTAINTY

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

4. SAR MEASUREMENTS SYSTEM

4.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue;

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 SAR SYSTEM

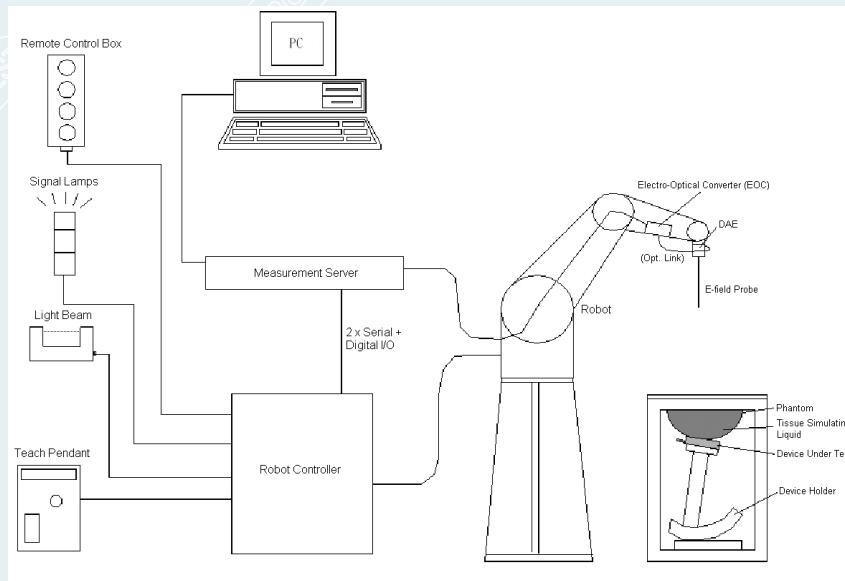

DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Components are described in details in the following sub-sections.

4.3 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ **E-Field Probe Specification**
<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Photo of EX3DV4

➤ **E-Field Probe Calibration**

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.4 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Photo of DAE

4.5 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

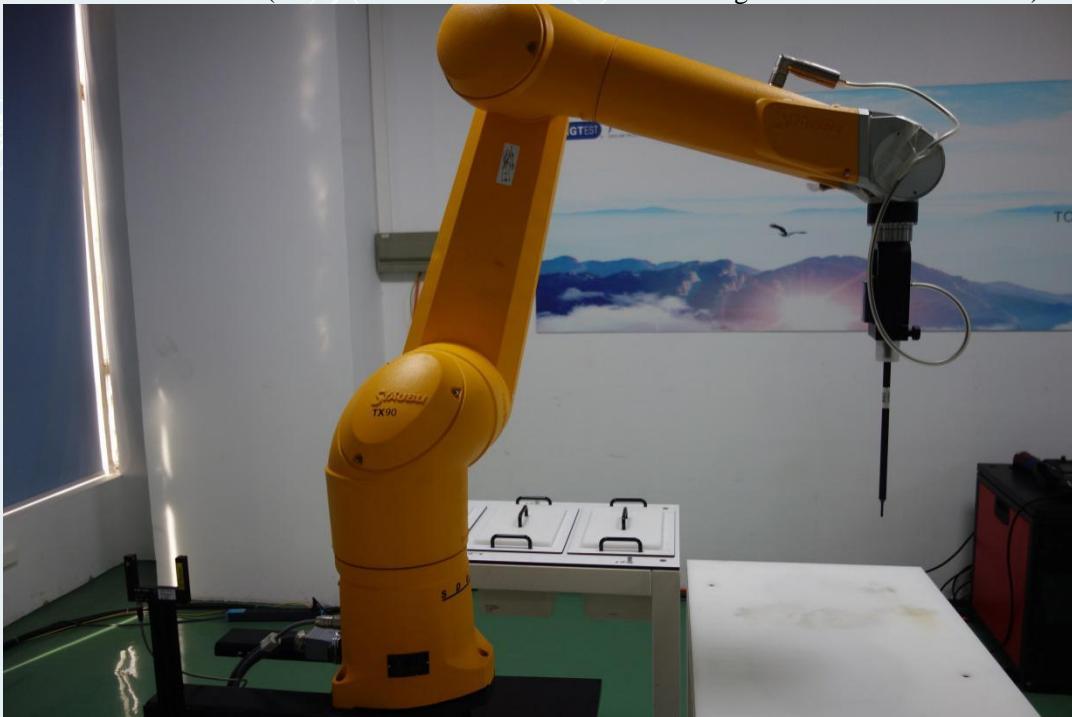


Photo of DASY5

4.6 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chip disk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5

4.7 Phantom

<SAM Twin Phantom>

Shell Thickness	2 \pm 0.2 mm; Center ear point: 6 \pm 0.2 mm	 <p>Photo of SAM Phantom</p>
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

4.8 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.9 Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

U_i = input signal of channel i , ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } \mathbf{H}_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [$\text{Siemens}/\text{m}$]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5. TEST EQUIPMENT LIST

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
2450MHz Dipole	SPEAG	D2450V2	903	2019.10.15	2022.10.14
5GHz Dipole	SPEAG	D5GHzV2	1203	2019.12.20	2022.12.19
Dosimetric E-Field Probe	SPEAG	EX3DV4	SN 7514	2020.09.01	2021.08.31
Data Acquisition Electronics	SPEAG	DAE4	SN 796	2020.05.06	2021.05.05
ENA Series Network Analyzer	Keysight	85032F	MY53202597	2020.09.25	2021.09.24
DAK	SPEAG	DAK-3.5	1056	N/A	N/A
Twin SAM Phantom1	SPEAG	QD000P40CD	1743	N/A	N/A
SAM Twin Phantom2	SPEAG	QD000P40CD	1745	N/A	N/A
2mm Triple Flat Phantom	SPEAG	QD000P51CA	1134/3	N/A	N/A
Power Meter	Anritsu	ML2495A	1204003	2020.04.14	2021.04.13
Power Sensor	Anritsu	MA2411B	1126150	2020.04.14	2021.04.13
Spectrum Analyzer	Keysight	N9010A	MY55370330	2020.12.16	2021.12.15
Signal generator	R&S	SMA100A	100434	2020.10.09	2021.10.08

Remark:

1. "N/A" denotes no model name, serial No. or calibration specified.
2. * These test equipments have been recalibrated between the test periods. All these test equipments were within the valid period when the tests were performed.
3. Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured atleast annually is within 5Ω from the previous measurement.

6. SYSTEM VERIFICATION PROCEDURE

6.1 TISSUE VERIFICATION

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:



Photo of 2450HSL Liquid Height for Head SAR

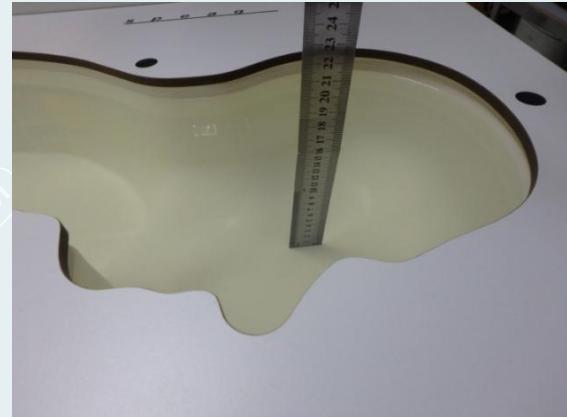


Photo of 5000HSL Liquid Height for Head SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Prevento I (%)	DGBE (%)	Conductivity (σ)	Permittivity (er)
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2
5200	78.6	0	0	0	0	30.4	4.66	36.00
5400	78.6	0	0	0	0	30.4	4.86	35.80
5800	78.6	0	0	0	0	30.4	5.27	35.30

The following table shows the measuring results for simulating liquid.

Tissue Type	Measured Frequency (MHz)	Target Value ($\pm 10\%$)		Measured Value		Tissue temperature (°C)	Measured Date
		er	σ (S/M)	er	σ (S/M)		
2450 HSL	2450	39.20 (35.28~43.12)	1.80 (1.62~1.98)	39.58	1.82	19.6	2021/03/15
5200 HSL	5250	36.00 (32.40~39.60)	4.66 (4.19~5.13)	35.69	4.97	19.3	2021/03/16
5400 HSL	5600	35.80 (32.22~39.38)	4.86 (4.37~5.35)	34.49	5.31	19.3	2021/03/16
5800 HSL	5750	35.30 (31.77~38.83)	5.27 (4.74~5.80)	34.37	5.45	19.3	2021/03/16

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol

requirements.

- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

6.2 SYSTEM CHECK PROCEDURE


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ **Purpose of System Performance check**

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ **System Setup**

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

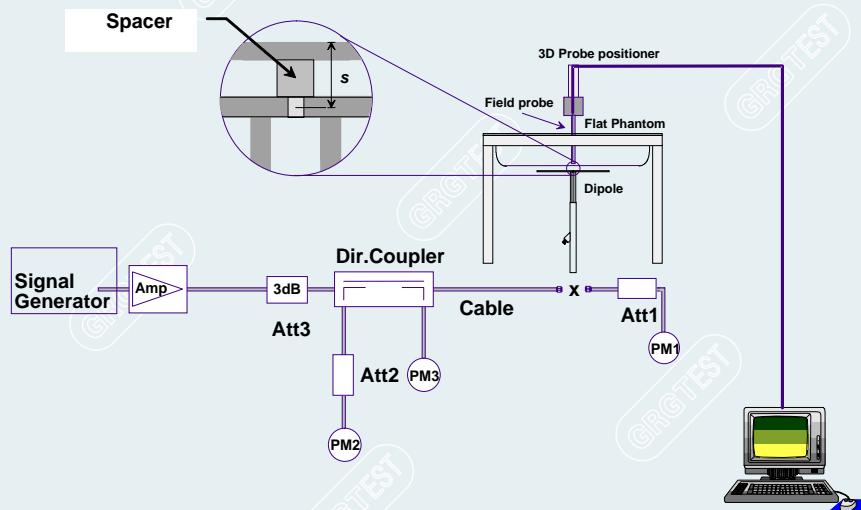

System Setup for System Evaluation

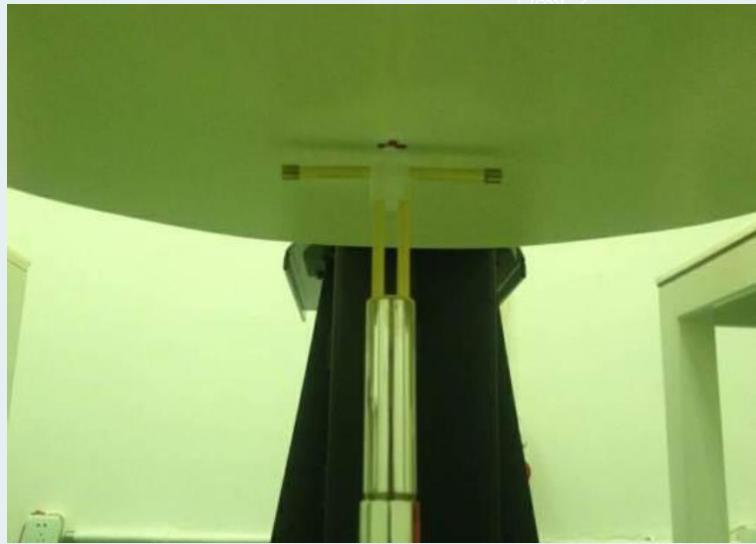


Photo of Dipole Setup

➤ **Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Dipole	Tissue Type	Target Value(W/Kg) ($\pm 10\%$) (Normalized to 1W)		Measured Value (W/Kg)(1W)		Tissue temperature (°C)	Measured Date		
		1g	10g	1g	10g				
D2450 V2	2450 HSL	51.10 (45.99~56.21)	23.40 (21.06~25.74)	49.30	22.90	19.6	2021/03/15		
Dipole	Tissue Type	Target Value(W/Kg) ($\pm 10\%$) (Normalized to 1W)		Measured Value (W/Kg)(100m W)	Normalized to 1W (W/Kg)		Tissue temperature (°C)		
		1g	10g	1g	10g	1g			
D5GHz V2	5250 HSL	75.50 (67.95~83.05)	21.50 (19.35~23.65)	8.10	2.09	81.00	20.90	19.3	2021/03/16
	5600 HSL	80.00 (72.00~88.00)	22.80 (20.52~25.08)	8.48	2.16	84.80	21.60	19.3	2021/03/16
	5750 HSL	77.80 (70.02~85.58)	22.10 (19.89~24.31)	8.51	2.22	85.10	22.20	19.3	2021/03/16

Target and Measurement SAR after Normalized

7. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

7.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Chapter 12.

7.2 Measurement Uncertainty


Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/Kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

8. EUT TESTING POSITION

8.1 Body Worn Position

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

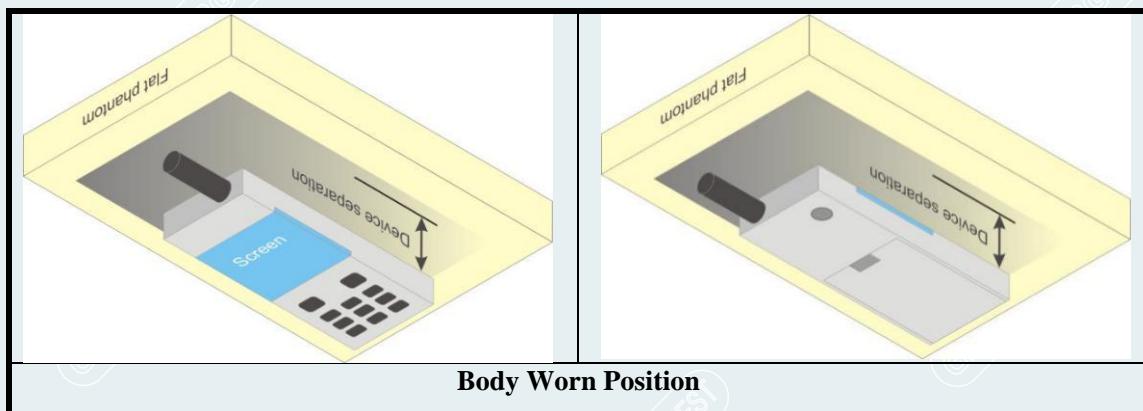

Body Worn Position

9. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in

IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$ graded grid	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface $\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 4 mm $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

10. Conducted Power

<WIFI 2.4GHz Conducted Power>

Band	Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)	Test Data Rate
2.4G	802.11b	1	2412	11.95	1 Mbps
		6	2437	11.87	1 Mbps
		11	2462	12.06	1 Mbps
	802.11g	1	2412	11.73	6 Mbps
		6	2437	11.67	6 Mbps
		11	2462	11.74	6 Mbps
	802.11n20	1	2412	11.54	MCS0
		6	2437	11.75	MCS0
		11	2462	11.62	MCS0
	802.11n40	3	2422	11.77	MCS0
		6	2437	11.83	MCS0
		9	2462	11.90	MCS0

Note:

- Per KDB 447498 D01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 $f(\text{GHz})$ is the RF channel transmit frequency in GHz
Power and distance are rounded to the nearest mW and mm before calculation
The result is rounded to one decimal place for comparison
- Per KDB 447498 D01 Chapter 4.3.1, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Band	Mode	Frequency (GHz)	Max. Power (dBm)	Max. Power (mW)	Calculate distance (mm)	Result	exclusion thresholds for 1-g SAR	SAR test required
2.4G	802.11b	2462	12.06	16.07	5	5.04	3.0	Yes

- Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.

<WIFI 5GHz Conducted Power>

Band	Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)	Test Data Rate
5.2G	802.11a	36	5180	9.85	MCS0
		40	5200	9.74	MCS0
		48	5240	9.72	MCS0
	802.11n20	36	5180	9.72	MCS0
		40	5200	9.61	MCS0
		48	5240	9.44	MCS0
	802.11n40	38	5190	9.46	MCS0
		46	5230	9.40	MCS0
	802.11AC20	36	5180	9.58	MCS0
		40	5200	9.62	MCS0
		48	5240	9.61	MCS0
	802.11AC40	38	5190	9.50	MCS0
		46	5230	9.36	MCS0
	802.11AC80	42	5210	9.00	MCS0
5.3G	802.11a	52	5260	9.68	MCS0
		60	5300	9.42	MCS0
		64	5320	9.50	MCS0
	802.11n20	52	5260	9.45	MCS0
		60	5300	9.55	MCS0
		64	5320	9.41	MCS0
	802.11n40	54	5270	9.30	MCS0
		62	5310	9.22	MCS0
	802.11AC20	52	5260	9.47	MCS0
		60	5300	9.50	MCS0
		64	5320	9.30	MCS0
	802.11AC40	54	5270	9.30	MCS0
		62	5310	9.20	MCS0
	802.11AC80	58	5290	8.95	MCS0
5.5G	802.11a	100	5500	10.15	MCS0
		116	5580	10.50	MCS0
		140	5700	10.12	MCS0
	802.11n20	100	5500	10.04	MCS0
		116	5580	10.39	MCS0
		140	5700	9.98	MCS0
	802.11n40	102	5510	9.85	MCS0
		110	5550	10.05	MCS0
		134	5670	9.78	MCS0
	802.11AC20	100	5500	10.10	MCS0
		116	5580	10.22	MCS0
		140	5700	9.89	MCS0
	802.11AC40	102	5510	9.90	MCS0
		110	5550	10.10	MCS0
		134	5670	9.97	MCS0
	802.11AC80	106	5530	9.60	MCS0
		122	5610	9.91	MCS0
5.8G	802.11a	149	5745	10.11	MCS0
		157	5785	10.00	MCS0
		165	5825	10.03	MCS0
	802.11n20	149	5745	10.02	MCS0
		157	5785	9.85	MCS0
		165	5825	9.85	MCS0
	802.11n40	151	5755	9.72	MCS0

	802.11AC20	159	5795	9.70	MCS0
		149	5745	9.77	MCS0
		157	5785	9.80	MCS0
		165	5825	9.75	MCS0
	802.11AC40	151	5755	9.82	MCS0
		159	5795	9.66	MCS0
	802.11AC80	155	5775	9.46	MCS0

Note:

1. Per KDB 447498 D01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where}$$

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

2. Per KDB 447498 D01 Chapter 4.3.1, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Band	Mode	Frequency (GHz)	Max. Power (dBm)	Max. Power (mW)	Calculate distance (mm)	Result	exclusion thresholds for 1-g SAR	SAR test required
5.2G	802.11a	5180	9.85	9.66	5	4.40	3.0	Yes
5.3G	802.11a	5260	9.68	9.29	5	4.26	3.0	Yes
5.5G	802.11a	5580	10.50	11.22	5	5.30	3.0	Yes
5.8G	802.11a	5745	10.11	10.26	5	4.92	3.0	Yes

3. Per KDB 248227 D01 Chapter 5.3.3, choose the highest output power channel for initial test position to test SAR and determine further SAR exclusion.

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
GFSK	00	2402	3.94
	39	2441	4.28
	78	2480	4.16
$\pi/4$ DQPSK	00	2402	0.82
	39	2441	1.22
	78	2480	1.30
8DPSK	00	2402	0.84
	39	2441	1.23
	78	2480	1.24
BLE 1M	00	2402	-4.79
	19	2440	-4.41
	39	2480	-4.42
BLE 2M	00	2402	-7.01
	19	2440	-6.60
	39	2480	-6.67

Note:

1. Per KDB 447498 D01 Chapter 4.3.1, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \{ \sqrt{f(\text{GHz})} \} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

f(GHz) is the RF channel transmit frequency in GHz


Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

Band	Mode	Frequency (GHz)	Max. Power (dBm)	Max. Power (mW)	Calculate distance (mm)	Result	exclusion thresholds for 1-g SAR	SAR test required
Bluetooth	GFSK	2441	4.28	2.68	5	0.84	3.0	No

2. Per KDB 447498 D01 Chapter 4.3.1, when the minimum test separation distance is $<$ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.84 which is \leq 3, SAR test for BT mode is not required.

11. Antenna Location

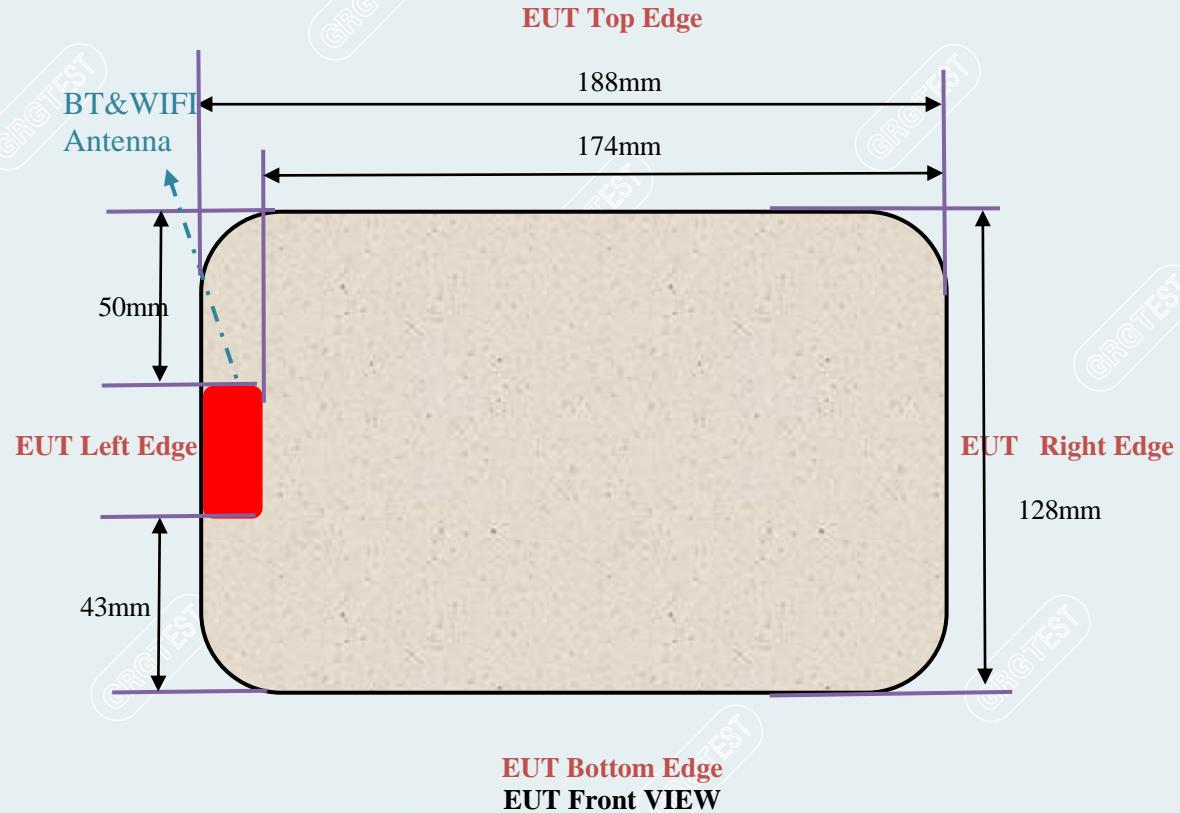

Distance of The Antenna to the EUT surface and edge						
Antennas	Front	Rear	Top Side	Bottom Side	Left Side	Right Side
WIFI/BT	/	/	>25mm	>25mm	<25mm	>25mm

General Note:

Referring to KDB 941225 D06, When the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, SAR must be measured for all sides and surfaces with a transmitting antenna located with 25mm from that surface or edge.

12.SAR Test Results Summary

General Note:

1. Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

*Reported SAR(W/kg) = Measured SAR(W/kg) * Scaling Factor*

2. Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported $SAR \leq 0.8 \text{ W/kg}$, other channels SAR testing are not necessary

12.1Body SAR Results

<WIFI 2.4GHz>

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)	Plot No.
WIFI 2.4GHz	802.11b	Front Face	0	1	2412	11.95	12.50	1.14	0.00	0.848	0.962	
WIFI 2.4GHz	802.11b	Front Face	0	6	2437	11.87	12.50	1.16	-0.07	0.778	0.899	
WIFI 2.4GHz	802.11b	Front Face	0	11	2462	12.06	12.50	1.11	0.05	0.941	1.041	#1
WIFI 2.4GHz	802.11b	Back Face	0	1	2412	11.95	12.50	1.14	0.08	0.0197	0.0225	
WIFI 2.4GHz	802.11b	Left Side	0	1	2412	11.95	12.50	1.14	-0.15	0.689	0.782	
WIFI 2.4GHz	802.11b	Left Side	0	6	2437	11.87	12.50	1.16	-0.11	0.731	0.845	
WIFI 2.4GHz	802.11b	Left Side	0	11	2462	12.06	12.50	1.11	-0.03	0.790	0.874	

<WIFI 5GHz>

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)	Plot No.
WIFI 5.2GHz	802.11a	Front Face	0	36	5180	9.85	10.00	1.03	-0.04	0.570	0.590	#2
WIFI 5.2GHz	802.11a	Back Face	0	36	5180	9.85	10.00	1.03	-0.11	0.0210	0.0216	
WIFI 5.2GHz	802.11a	Left Side	0	36	5180	9.85	10.00	1.03	-0.07	0.479	0.496	
WIFI 5.3GHz	802.11a	Front Face	0	52	5260	9.68	10.00	1.08	-0.06	0.806	0.868	
WIFI 5.3GHz	802.11a	Front Face	0	60	5300	9.42	10.00	1.14	0.06	0.847	0.968	
WIFI 5.3GHz	802.11a	Front Face	0	64	5320	9.50	10.00	1.12	0.09	0.872	0.978	#3
WIFI 5.3GHz	802.11a	Back Face	0	52	5260	9.68	10.00	1.08	-0.06	0.00731	0.00789	
WIFI 5.3GHz	802.11a	Left Side	0	52	5260	9.68	10.00	1.08	-0.01	0.759	0.817	
WIFI 5.5GHz	802.11a	Front Face	0	100	5500	10.15	10.50	1.08	-0.08	1.31	1.420	#4
WIFI 5.5GHz	802.11a	Front Face	0	116	5580	10.50	10.50	1.00	0.00	0.922	0.922	
WIFI 5.5GHz	802.11a	Front Face	0	140	5700	10.12	10.50	1.09	-0.07	0.633	0.691	
WIFI 5.5GHz	802.11a	Back Face	0	116	5580	10.50	10.50	1.00	0.03	0.0294	0.0294	
WIFI 5.5GHz	802.11a	Left Side	0	116	5580	10.50	10.50	1.00	-0.05	0.729	0.729	
WIFI 5.8GHz	802.11a	Front Face	0	149	5745	10.11	10.50	1.09	-0.09	0.690	0.755	#5
WIFI 5.8GHz	802.11a	Back Face	0	149	5745	10.11	10.50	1.09	-0.06	0.0185	0.0202	
WIFI 5.8GHz	802.11a	Left Side	0	149	5745	10.11	10.50	1.09	-0.09	0.502	0.549	

<Repeated SAR>

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)	Plot No.
WIFI 2.4GHz	802.11b	Front Face	0	11	2462	12.06	12.50	1.11	-0.09	0.937	1.037	
WIFI 5.3GHz	802.11a	Front Face	0	64	5320	9.50	10.00	1.12	-0.07	0.828	0.929	
WIFI 5.5GHz	802.11a	Front Face	0	100	5500	10.15	10.50	1.08	-0.02	1.210	1.312	

Note:

1. Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.

13. Simultaneous Transmission Analysis

For that Bluetooth and WiFi share the same antenna and can't transmit at the same time, simultaneous transmission analysis is not available.

Appendix A. SYSTEM CHECKING SCANS

2450MHz Head System Check

Communication System: UID 0, CW (0); Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.576$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.18, 7.18, 7.18); Calibrated: 2020/9/1;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Front Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 64.4 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 188.7 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 99.8 W/kg

SAR(1 g) = 49.3 W/kg; SAR(10 g) = 22.9 W/kg

Maximum value of SAR (measured) = 65.2 W/kg

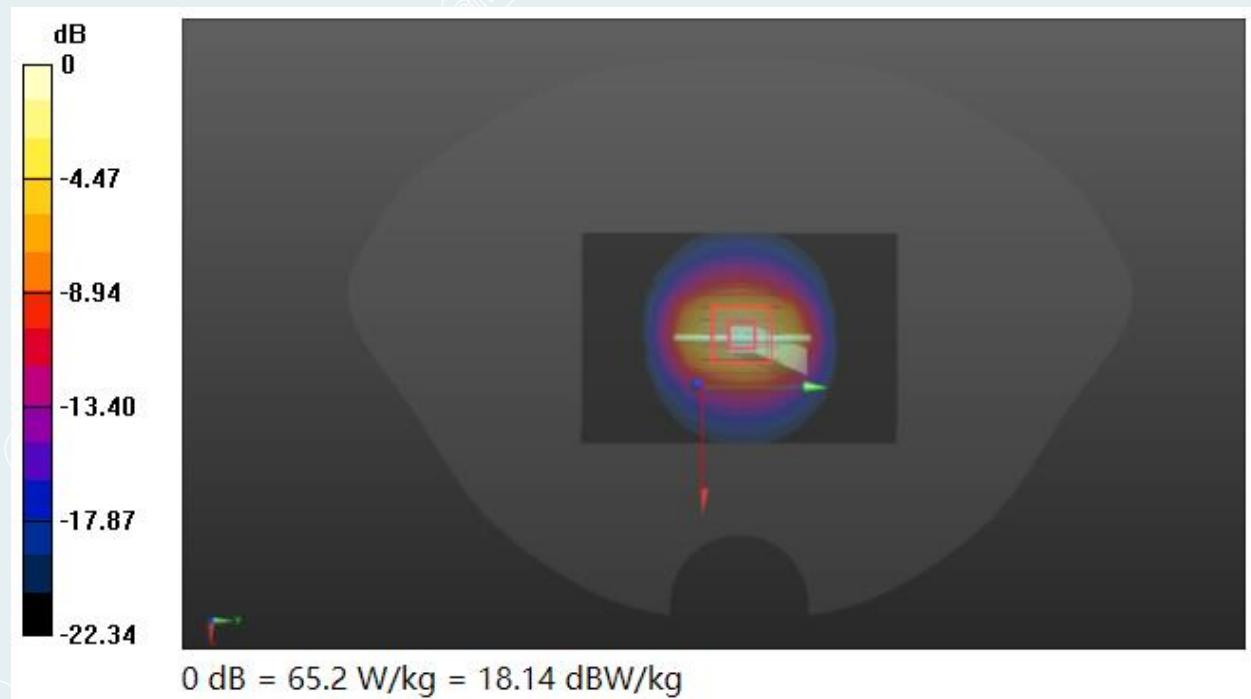

5250MHz Head System Check


Communication System: UID 0, CW (0); Frequency: 5250 MHz
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.966$ S/m; $\epsilon_r = 35.691$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(5.14, 5.14, 5.14); Calibrated: 2020/9/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Configuration/Body 100mW/Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 12.1 W/kg

Configuration/Body 100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 60.55 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 35.2 W/kg
SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.09 W/kg
Maximum value of SAR (measured) = 17.3 W/kg

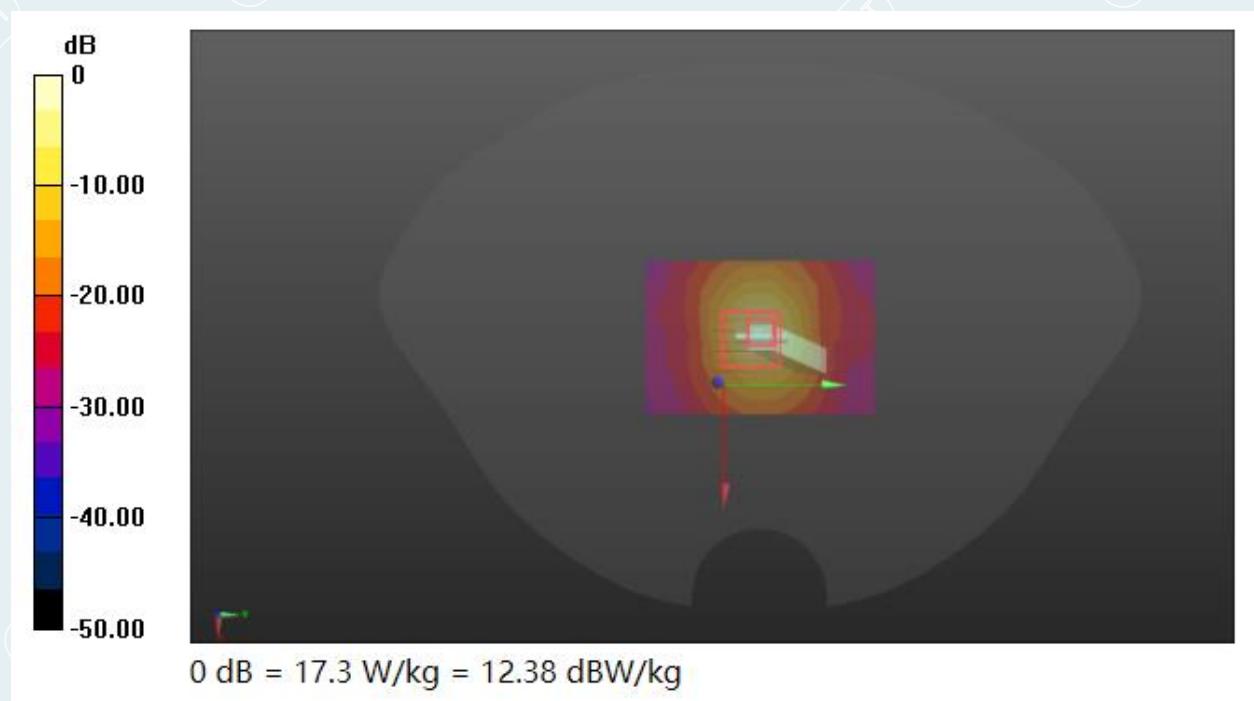

5600MHz Head System Check


Communication System: UID 0, CW (0); Frequency: 5600 MHz
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.309$ S/m; $\epsilon_r = 34.492$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(4.6, 4.6, 4.6); Calibrated: 2020/9/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Configuration/Body 100mW/Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 13.7 W/kg

Configuration/Body 100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 60.72 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 39.8 W/kg
SAR(1 g) = 8.48 W/kg; SAR(10 g) = 2.16 W/kg
Maximum value of SAR (measured) = 18.3 W/kg

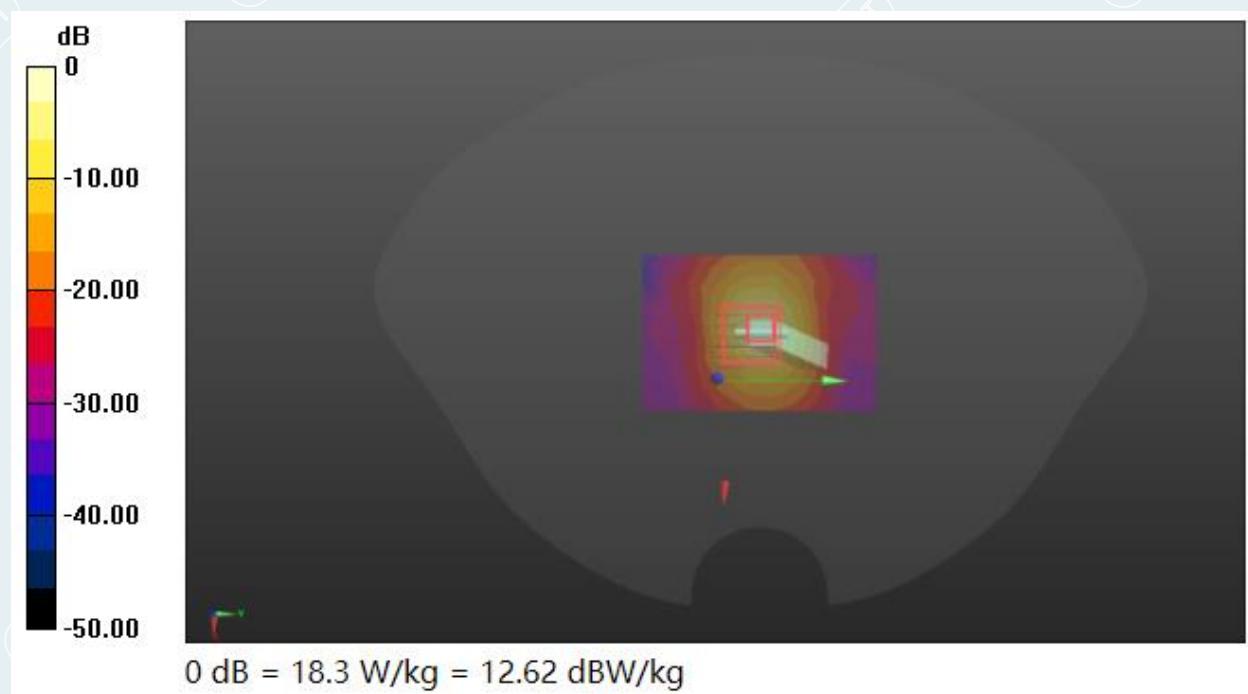

5750MHz Head System Check

Communication System: UID 0, CW (0); Frequency: 5750 MHz
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.453$ S/m; $\epsilon_r = 34.369$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(4.56, 4.56, 4.56); Calibrated: 2020/9/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)


Configuration/Body 100mW/Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 14.1 W/kg

Configuration/Body 100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 61.03 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 42.8 W/kg

SAR(1 g) = 8.51 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

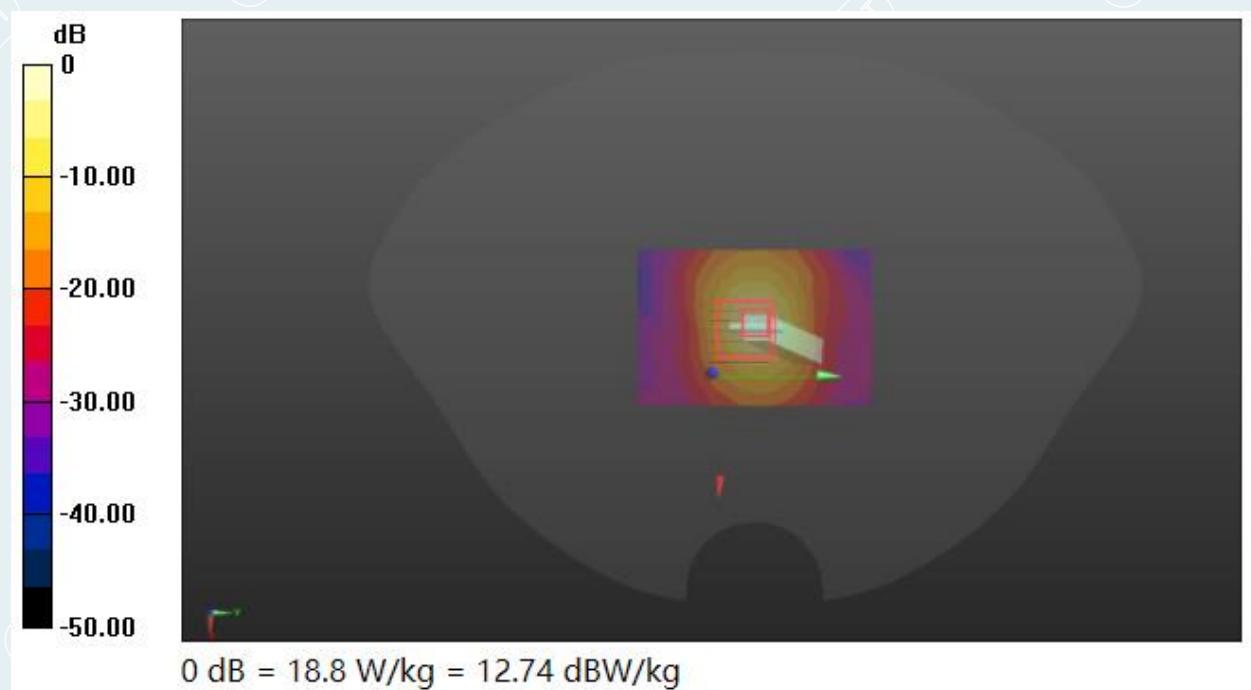

Appendix B. MEASUREMENT SCANS

WiFi2.4G_802.11b_Front Face_Ch11

#1

Communication System: UID 0, WLAN (0); Frequency: 2462 MHz

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 39.516$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.18, 7.18, 7.18); Calibrated: 2020/9/1;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Front Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/Front Face High/Area Scan (17x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.27 W/kg


Body/Front Face High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.638 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

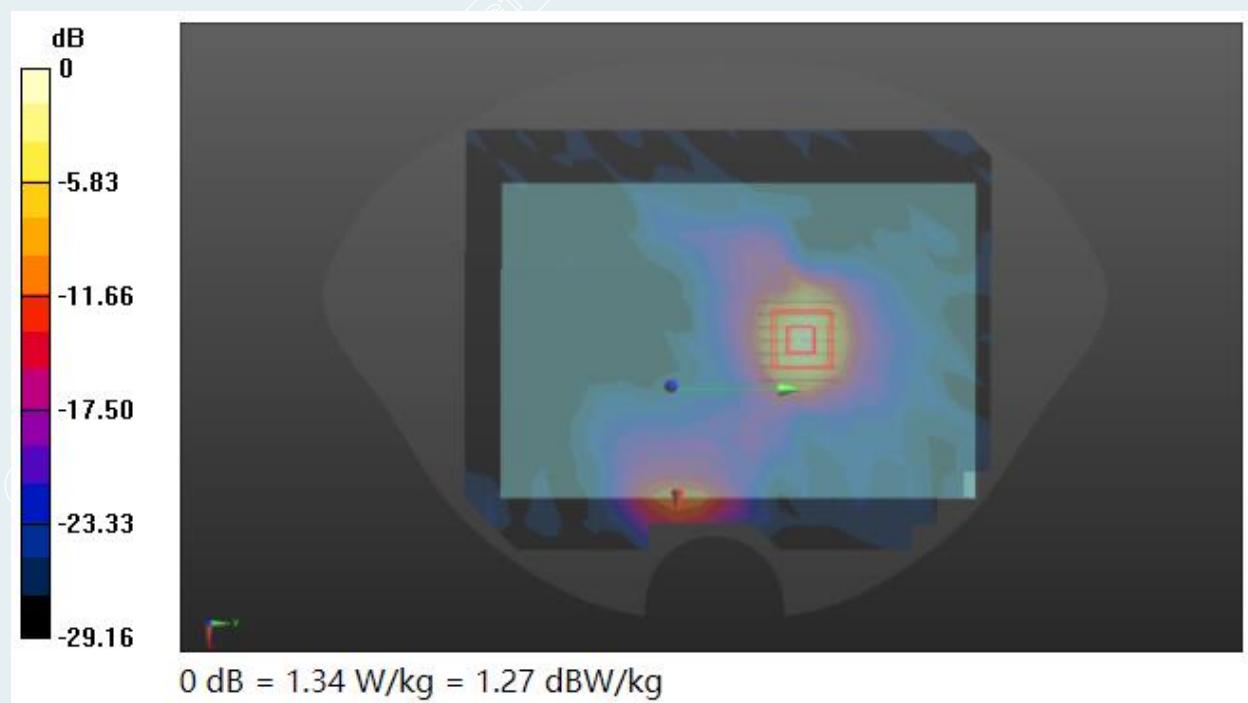

WiFi5.2G_802.11a_Front Face_Ch36

#2

Communication System: UID 0, WLAN (0); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.82$ S/m; $\epsilon_r = 35.397$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 - SN7514; ConvF(5.26, 5.26, 5.26); Calibrated: 2020/9/1;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/Front Face Low/Area Scan (17x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.889 W/kg**Body/Front Face Low/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 1.080 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

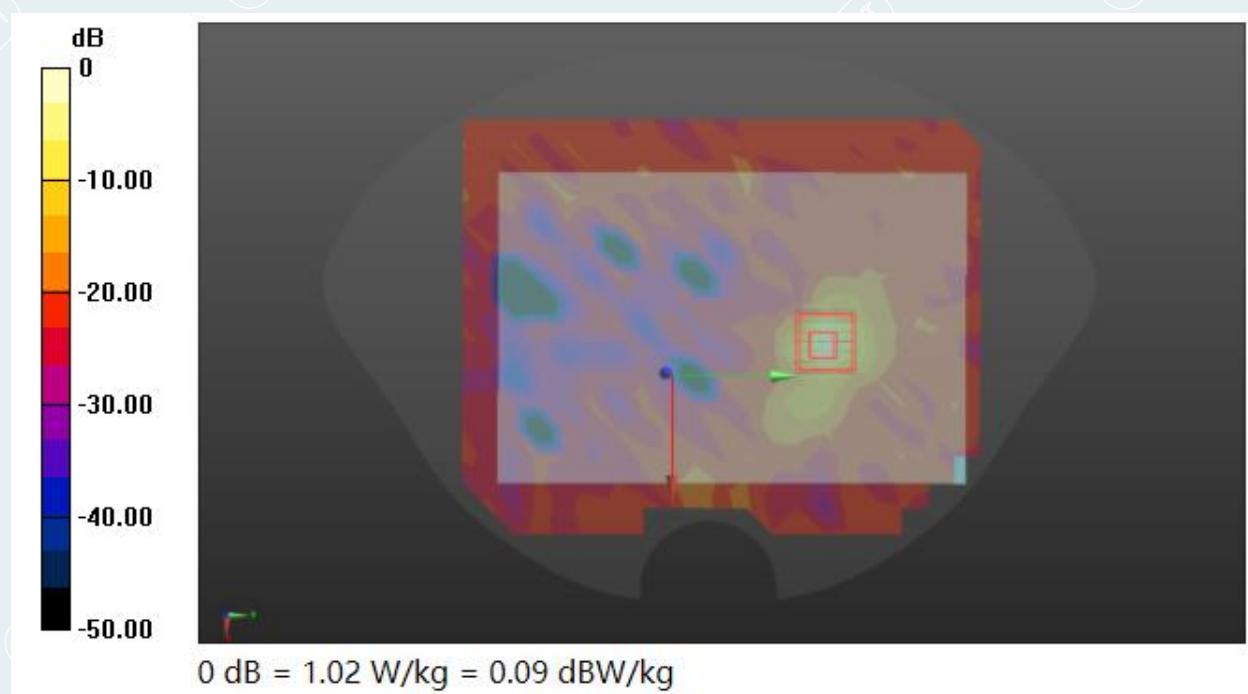

WiFi5.3G_802.11a_Front Face_Ch64

#3


Communication System: UID 0, WLAN (0); Frequency: 5320 MHz
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.916$ S/m; $\epsilon_r = 34.333$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(5.14, 5.14, 5.14); Calibrated: 2020/9/1;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/Front Face High/Area Scan (17x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.18 W/kg

Body/Front Face High/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.4180 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 4.72 W/kg
SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.183 W/kg.
Maximum value of SAR (measured) = 2.00 W/kg

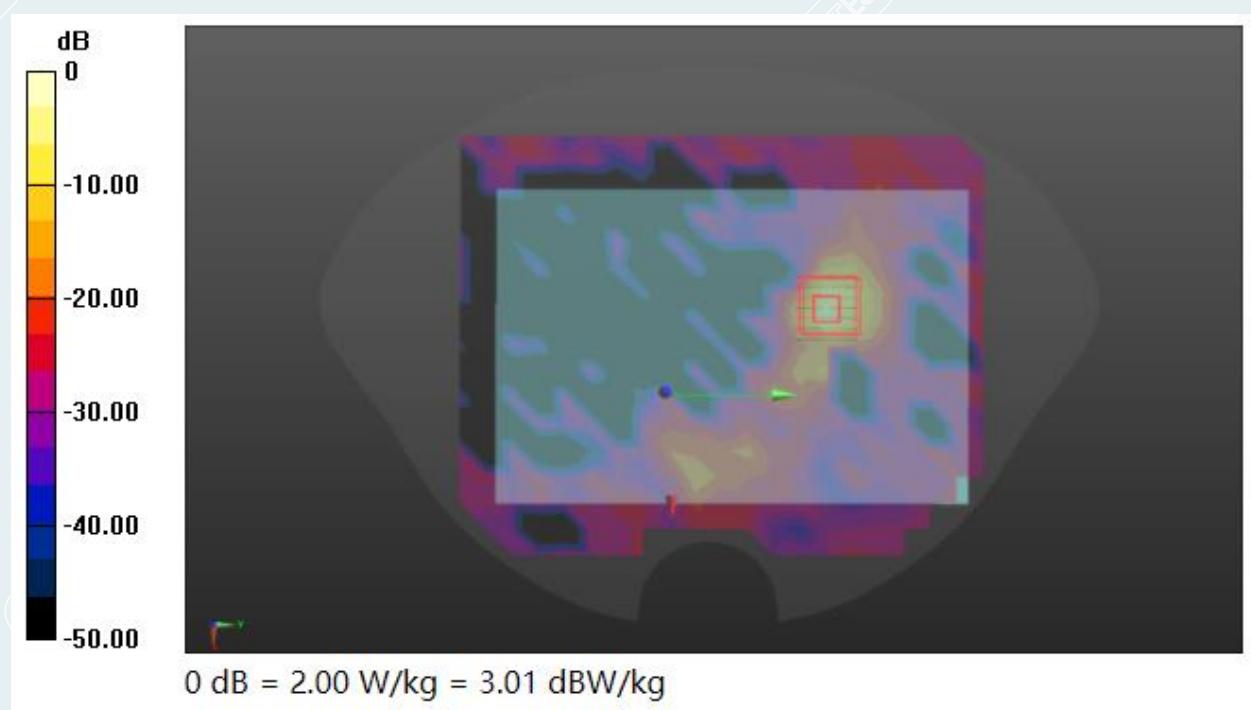

WiFi5.5G_802.11a_Front Face_Ch100

#4


Communication System: UID 0, WLAN (0); Frequency: 5500 MHz
Medium parameters used: $f = 5500$ MHz; $\sigma = 5.378$ S/m; $\epsilon_r = 46.978$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(4.24, 4.24, 4.24); Calibrated: 2020/9/1;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/Front Face Low/Area Scan (17x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.85 W/kg

Body/Front Face Low/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 1.013 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 7.11 W/kg
SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.278 W/kg
Maximum value of SAR (measured) = 2.95 W/kg

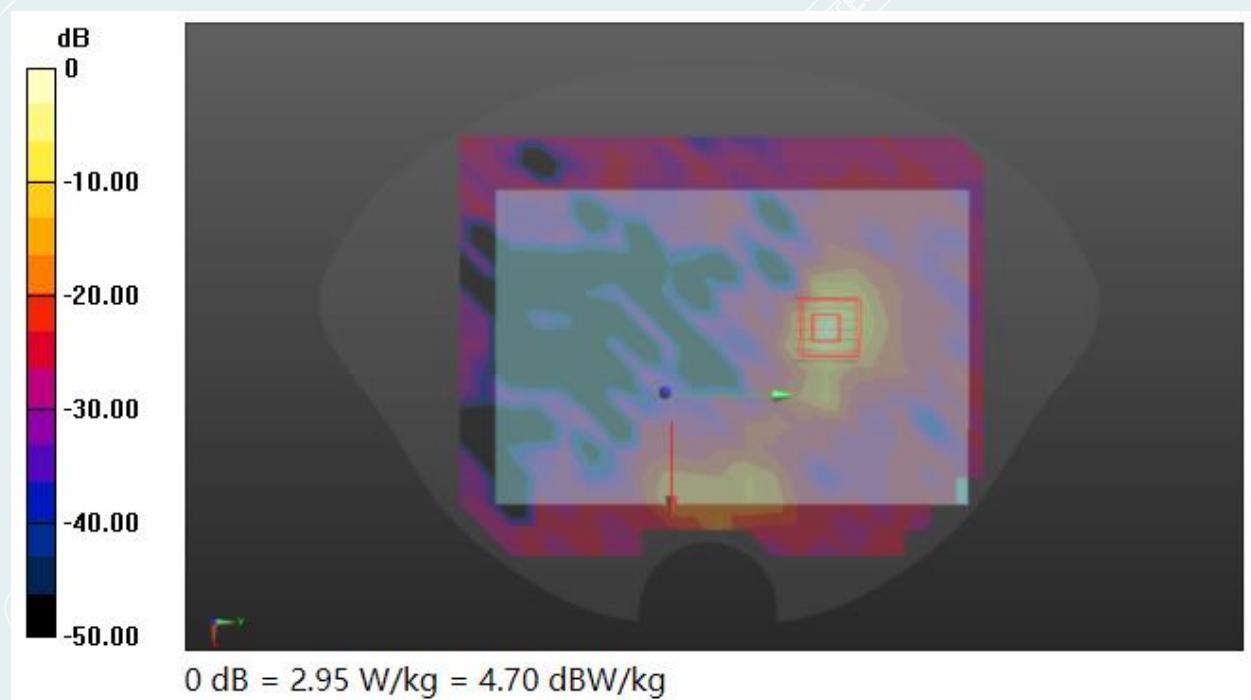

WiFi5.8G_802.11a_Front Face_Ch149

#5

Communication System: UID 0, WLAN (0); Frequency: 5745 MHz
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.432$ S/m; $\epsilon_r = 34.278$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(4.56, 4.56, 4.56); Calibrated: 2020/9/1;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn796; Calibrated: 2020/5/6
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/Front Face High/Area Scan (17x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.932 W/kg

Body/Front Face High/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.8540 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 4.45 W/kg
SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.142 W/kg
Maximum value of SAR (measured) = 1.64 W/kg

