

Part No. 1002298-A01

Wi-Fi / BT Dual Band Stamped Metal Embedded Antenna

2.4 / 5 GHz



Ethertronics' Stamped Metal antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for WLAN enabled devices, media players, routers, and other wireless devices.

Stamped Metal Wi-Fi / BT Embedded Antenna

2.4 GHz; 5 GHz

Greater Flexibility

Ethertronics' first-in-class technology enables you to develop concept designs that are more advanced and that deliver superior performance in reception critical applications.

Electrical Specifications

Typical performance on 75 x 75 mm PCB

Frequency (GHz)	2.400 – 2.485	5.150 – 5.825
Peak Gain	3.6 dBi	5.1 dBi
Average Efficiency	78%	70%
VSWR Match	2.0:1 max	
Feed Point Impedance	50 ohms unbalanced	
Polarization	Linear	
Power Handling	0.5 Watt CW	

KEY BENEFITS

Stay-in-Tune

Ethertronics antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Reliability

Products are the latest RoHS version compliant.

APPLICATIONS

- Embedded design
- Cellular, Headsets, Tablets
- Gateway, Access Point
- Handheld
- Telematics Tracking
- Healthcare M2M, Industrial devices
- Smart Grid
- OBD-II

Mechanical Specifications & Ordering Part Number

Ordering Part #	1002298-A01
Dimensions (mm)	16.1 x 17.95 x 10.55
Mounting Type	SMT (P&P)
Plating	Au
Weight (grams)	0.85
Packaging	Tape & Reel, 150 pcs/Reel




2.4 GHz / 5 GHz Stamped Metal Ethertronics' Embedded Antenna Specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Antenna Dimensions

Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)
1002298-A01	16.1 ± 0.4	17.95 ± 0.3	10.55 ± 0.4

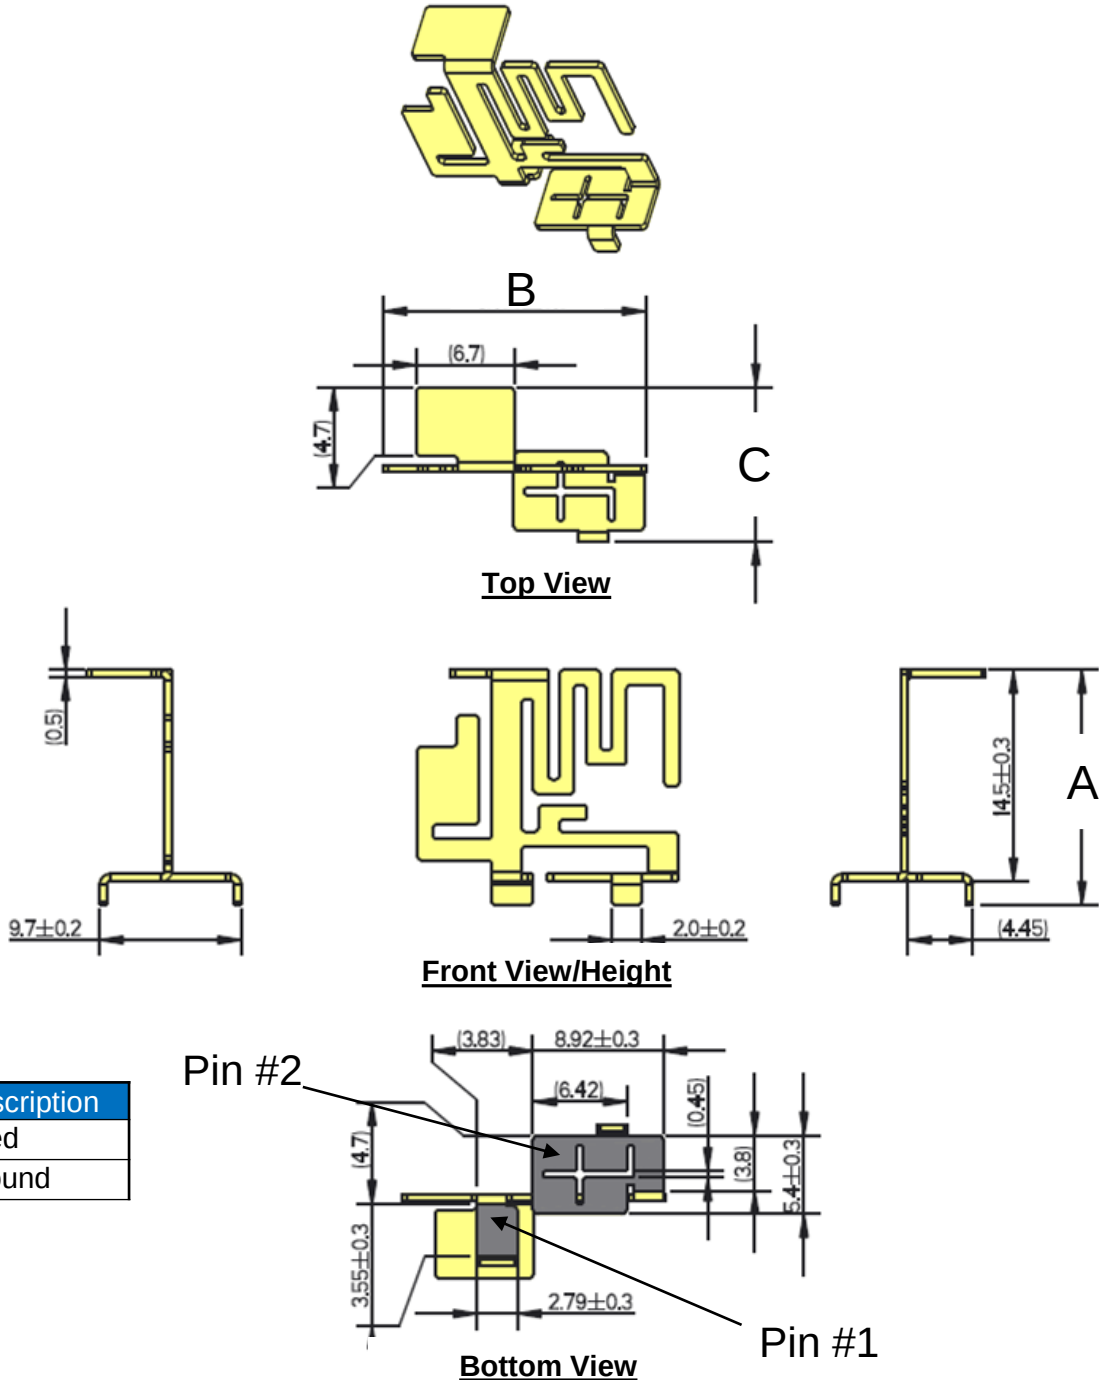


Pin#	Description
1	Feed
2	Ground




2.4 GHz / 5 GHz Stamped Metal Ethertronics' Embedded Antenna Specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

VSWR and Efficiency Plots


Typical performance on 75 x 75 mm PCB

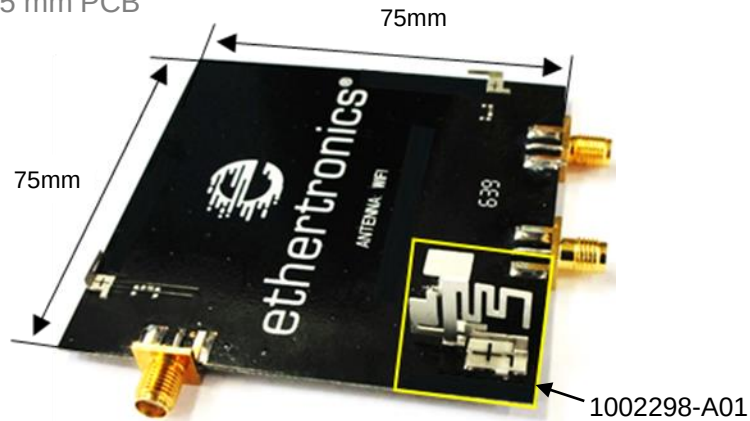


2.4 GHz VSWR

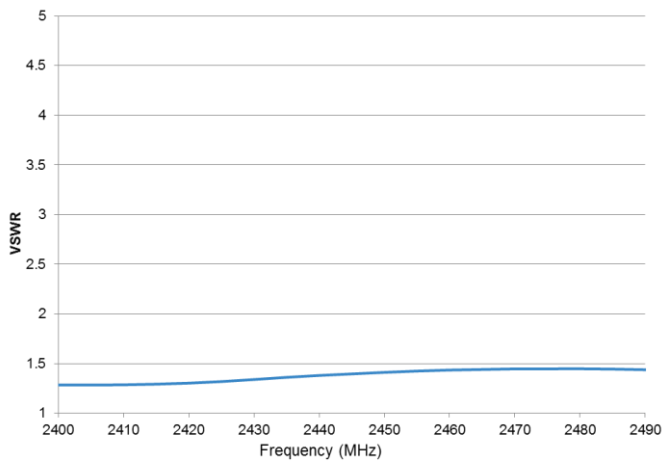


5 GHz VSWR

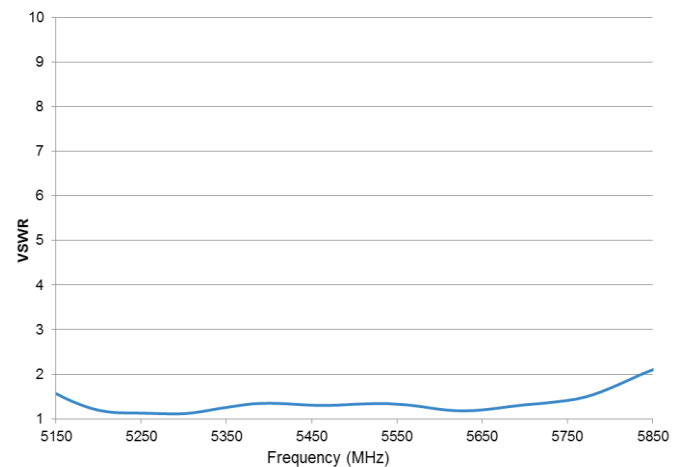

2.4 GHz Efficiency

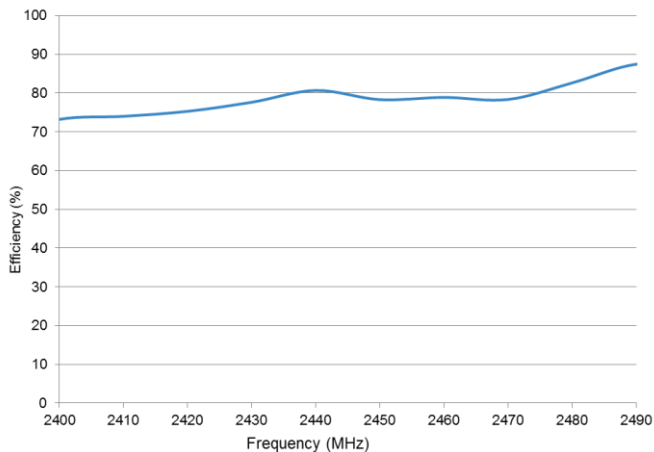

5 GHz Efficiency

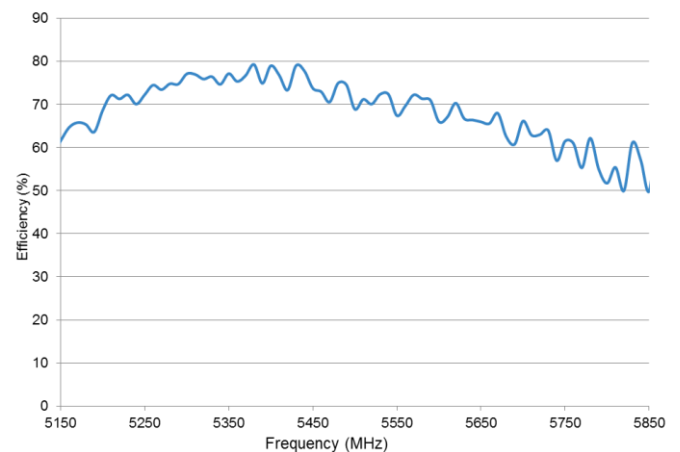




2.4 GHz / 5 GHz Stamped Metal Ethertronics' Embedded Antenna Specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.




Antenna Radiation Patterns

Typical performance on 75 x 75 mm PCB




Measured @ 2.450, 5.220, 5.780 GHz

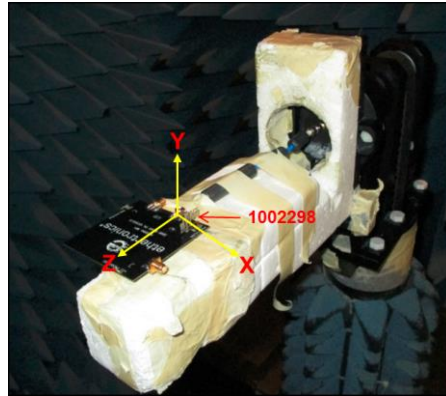

Measured at 2.45 GHz

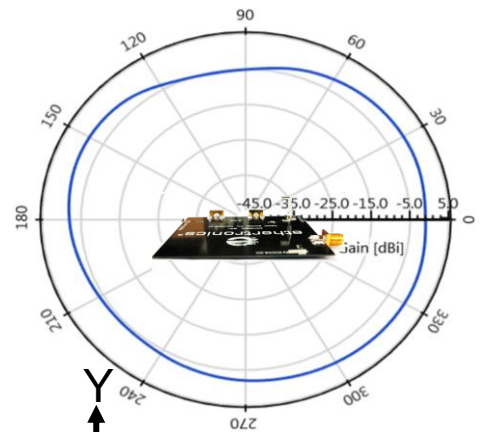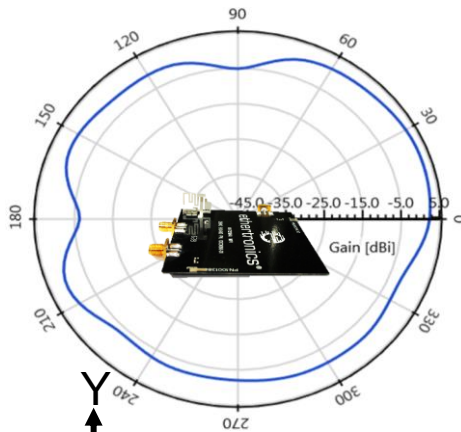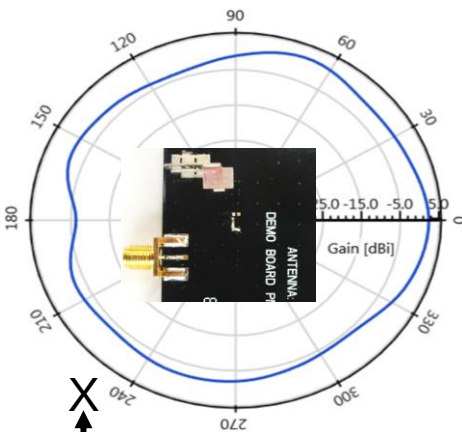

Measured at 5.220 & 5.780 GHz

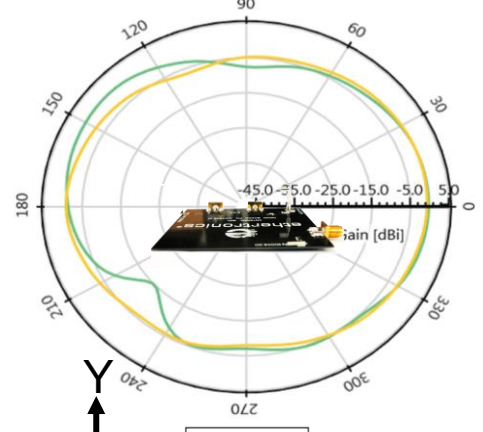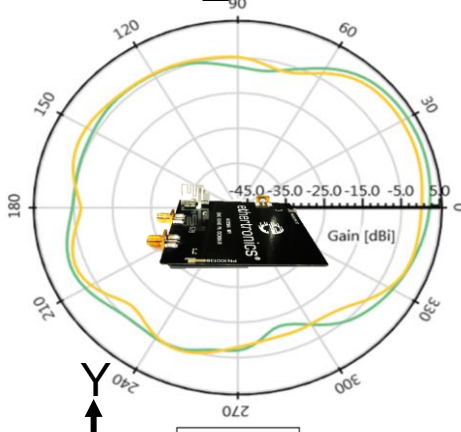
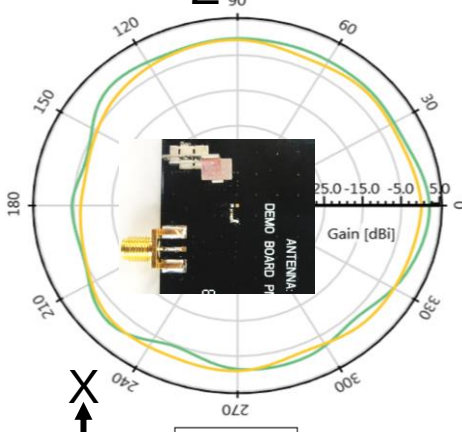




2.4 GHz / 5 GHz Stamped Metal Ethertronics' Embedded Antenna Specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout

Typical layout dimensions (mm)

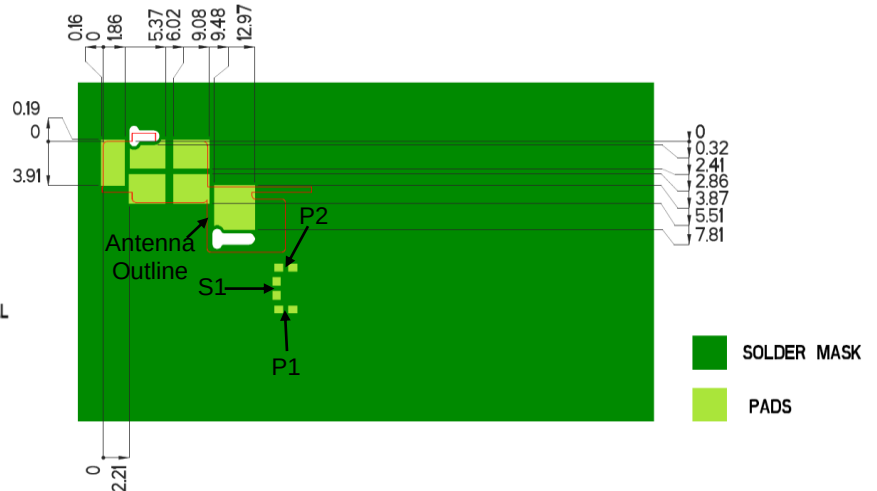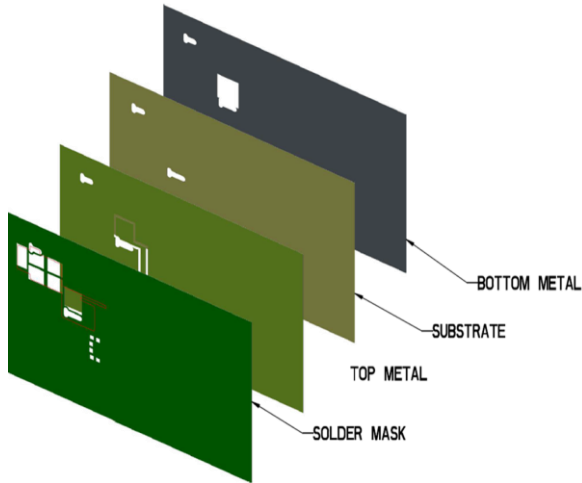

* VIAS: Diam. 0.2mm, (no vias on transmission lines).
Via holes must be covered by solder mask




Pin Descriptions

Pin#	Description
1	Feed
2	Ground

Matching Pi Network (Demo Board)

Component	Value	Tolerance
P1	DNI	N/A
S1	0.8nH	$\pm 0.1\text{nH}$
P2	0.2pF	$\pm 0.05\text{pF}$

*Actual matching values depend on customer design

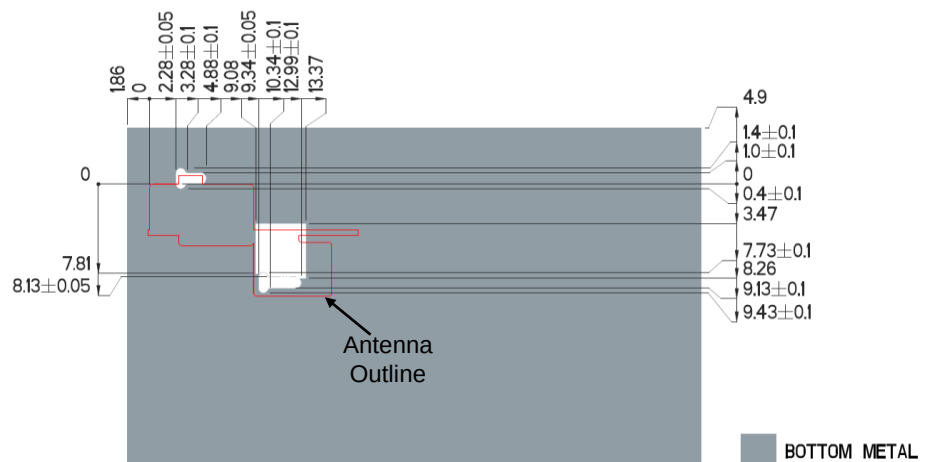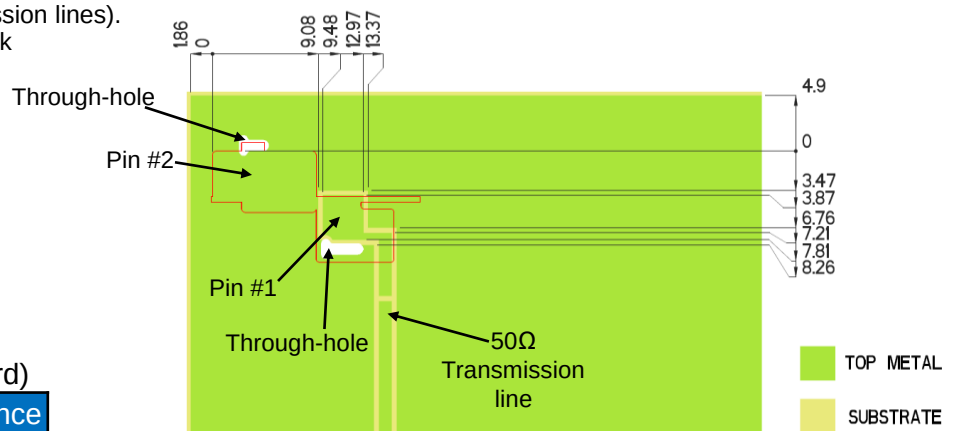




2.4 GHz / 5 GHz Stamped Metal Ethertronics' Embedded Antenna Specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


Antenna Layout cont. (SMT Mounting, Through-hole for Stabilization)

Typical layout dimensions (mm)

Exploded View

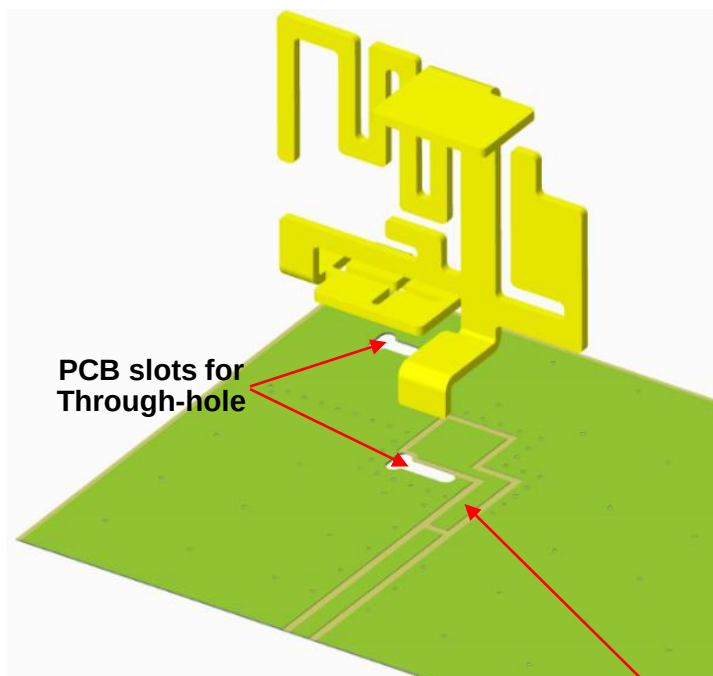

Assembled View

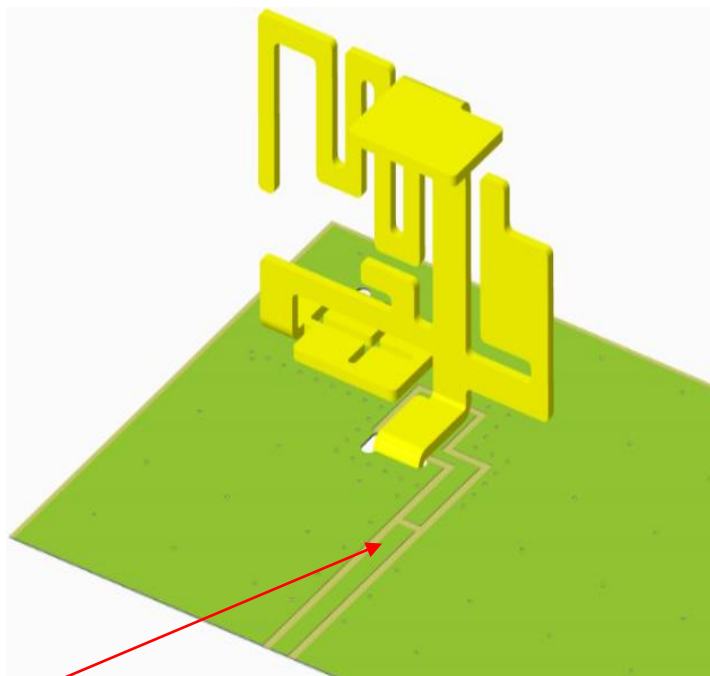

A 50 ohm transmission line needs to be designed and connected at this location

Bottom View

