

# Limited Test report

**410508-2TRFWL**

Date of issue: April 6, 2021

Applicant:

**SYNG, Inc.**

Product:

**Cell Alpha - Main Logic Board**

Model:

**SC21001**

**FCC ID: 2AYDT-SC21001**

**IC: 26794-SC21001**

Specifications:

- ◆ **FCC 47 CFR Part 15, Subpart C – §15.247**  
Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, 5727 – 5850 MHz
- ◆ **Industry Canada RSS-247, Issue 2**  
Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

#### Lab and test locations

|                    |                                                                                   |
|--------------------|-----------------------------------------------------------------------------------|
| Company name       | Nemko USA Inc.                                                                    |
| Address            | 2210 Faraday Ave, Suite 150                                                       |
| City               | Carlsbad                                                                          |
| State              | California                                                                        |
| Postal code        | 92008                                                                             |
| Country            | USA                                                                               |
| Telephone          | +1 760 444 3500                                                                   |
| Website            | www.nemko.com                                                                     |
| FCC Site Number    | Test Firm Registration Number: 392943 Designation Number: US5058                  |
| ISED Test Site     | 2040B-3                                                                           |
| Tested by          | David Hewitt, EMC Specialist                                                      |
| Reviewed by        | James Cunningham, EMC/MIL/WL Supervisor                                           |
| Review date        | April 6, 2021                                                                     |
| Reviewer signature |  |

#### Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko USA's ISO/IEC 17025 accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

#### Copyright notification

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.  
© Nemko USA Inc.

## Table of Contents

|                                                                                          |           |
|------------------------------------------------------------------------------------------|-----------|
| <b>Table of Contents</b>                                                                 | <b>3</b>  |
| <b>Section 1 Report summary</b>                                                          | <b>4</b>  |
| 1.1 Applicant                                                                            | 4         |
| 1.2 Manufacturer                                                                         | 4         |
| 1.3 Test specifications                                                                  | 4         |
| 1.4 Test methods                                                                         | 4         |
| 1.5 Exclusions                                                                           | 4         |
| 1.6 Statement of compliance                                                              | 4         |
| 1.7 Test report revision history                                                         | 4         |
| <b>Section 2 Summary of test results</b>                                                 | <b>5</b>  |
| 2.1 FCC Part 15 Subpart C, general requirements                                          | 5         |
| 2.2 FCC Part 15.247                                                                      | 5         |
| 2.3 IC RSS-247, Issue 2                                                                  | 5         |
| 2.4 IC RSS-GEN, Issue 5                                                                  | 5         |
| 2.5 Scope of limited testing                                                             | 6         |
| <b>Section 3 Equipment under test (EUT) details</b>                                      | <b>7</b>  |
| 3.1 Sample information                                                                   | 7         |
| 3.2 EUT information                                                                      | 7         |
| 3.3 Technical information                                                                | 7         |
| 3.4 EUT exercise and monitoring details                                                  | 8         |
| 3.5 EUT setup diagram                                                                    | 8         |
| <b>Section 4 Engineering considerations</b>                                              | <b>9</b>  |
| 4.1 Modifications incorporated in the EUT                                                | 9         |
| 4.2 Technical judgment                                                                   | 9         |
| 4.3 Deviations from laboratory tests procedures                                          | 9         |
| <b>Section 5 Test conditions</b>                                                         | <b>10</b> |
| 5.1 Atmospheric conditions                                                               | 10        |
| 5.2 Power supply range                                                                   | 10        |
| <b>Section 6 Measurement uncertainty</b>                                                 | <b>11</b> |
| 6.1 Uncertainty of measurement                                                           | 11        |
| <b>Section 7 Test Equipment</b>                                                          | <b>12</b> |
| <b>Section 8 Testing data</b>                                                            | <b>13</b> |
| 8.1 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements | 13        |
| 8.2 FCC 15.247(d) and RSS-247 5.5 Radiated restricted band-edges and spurious emission   | 15        |
| <b>Section 9 Block diagrams of test set-ups</b>                                          | <b>34</b> |
| 9.1 Radiated emissions set-up                                                            | 34        |

## Section 1 Report summary

### 1.1 Applicant

|                 |                  |
|-----------------|------------------|
| Company name    | SYNG, Inc.       |
| Address         | 120 Mildred Ave. |
| City            | Venice           |
| State           | CA               |
| Postal/Zip code | 90291            |
| Country         | USA              |

### 1.2 Manufacturer

|                 |                  |
|-----------------|------------------|
| Company name    | SYNG, Inc.       |
| Address         | 120 Mildred Ave. |
| City            | Venice           |
| State           | CA               |
| Postal/Zip code | 90291            |
| Country         | USA              |

### 1.3 Test specifications

|                                         |                                                                                                                              |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| FCC 47 CFR Part 15, Subpart C – §15.247 | Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz                                                   |
| IC RSS-247 Issue 2                      | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

### 1.4 Test methods

|                                                           |                                                                                                               |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| ANSI C63.10-2013                                          | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                |
| 558074 D01 DTS Measurement Guidance v03r02 (June 5, 2014) | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |

### 1.5 Exclusions

Testing only includes Radiated Spurious and Restricted Band Edge measurements and limited maximum peak conducted power measurements.

### 1.6 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.7 Test report revision history

**Table 1.7-1: Test report revision history**

| Revision #    | Details of changes made to test report |
|---------------|----------------------------------------|
| 410508-2TRFWL | Original report issued                 |

Notes:

## Section 2 Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements

| Part       | Test description          | Verdict    |
|------------|---------------------------|------------|
| §15.207(a) | Conducted limits          | Not tested |
| §15.31(e)  | Variation of power source | Not tested |
| §15.203    | Antenna requirement       | Not tested |

Notes: EUT is AC powered

The antenna is located within the protective cover of EUT on PCB

### 2.2 FCC Part 15.247

| Part               | Test description                                                                                                           | Verdict           |
|--------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------|
| §15.247(a)(1)(i)   | Frequency hopping systems operating in the 902–928 MHz band                                                                | Not applicable    |
| §15.247(a)(1)(ii)  | Frequency hopping systems operating in the 5725–5850 MHz band                                                              | Not applicable    |
| §15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band                                                            | Not tested        |
| §15.247(a)(2)      | Minimum 6 dB bandwidth for systems using digital modulation techniques                                                     | Not tested        |
| §15.247(b)(1)      | Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band        | Not tested        |
| §15.247(b)(2)      | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band                                   | Not applicable    |
| §15.247(b)(3)      | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Pass <sup>1</sup> |
| §15.247(b)(4)      | Transmitting antennas of directional gain greater than 6 dBi                                                               | Not applicable    |
| §15.247(c)(1)      | Fixed point-to-point operation with directional antenna gains greater than 6 dBi                                           | Not applicable    |
| §15.247(c)(2)      | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams                                    | Not applicable    |
| §15.247(d)         | Spurious emissions                                                                                                         | Pass              |
| §15.247(e)         | Power spectral density for digitally modulated devices                                                                     | Not tested        |
| §15.247(f)         | Time of occupancy for hybrid systems                                                                                       | Not tested        |

<sup>1</sup> Limited testing only

### 2.3 IC RSS-247, Issue 2

| Part    | Test description                                                                       | Verdict           |
|---------|----------------------------------------------------------------------------------------|-------------------|
| 5.1 (a) | Bandwidth of a frequency hopping channel                                               | Not tested        |
| 5.1 (b) | Minimum channel spacing for frequency hopping systems                                  | Not tested        |
| 5.1 (c) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable    |
| 5.1 (d) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not tested        |
| 5.1 (e) | Frequency hopping systems operating in the 5725–5850 MHz band                          | Not applicable    |
| 5.2 (a) | Minimum 6 dB bandwidth                                                                 | Not tested        |
| 5.2 (b) | Maximum power spectral density                                                         | Not tested        |
| 5.3 (a) | Digital modulation turned off                                                          | Not tested        |
| 5.3 (b) | Frequency hopping turned off                                                           | Not tested        |
| 5.4 (a) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable    |
| 5.4 (b) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not tested        |
| 5.4 (c) | Frequency hopping systems operating in the 5725–5850 MHz                               | Not applicable    |
| 5.4 (d) | Systems employing digital modulation techniques                                        | Pass <sup>1</sup> |
| 5.4 (e) | Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band                       | Not tested        |
| 5.4 (f) | Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not tested        |
| 5.5     | Out-of-band emissions                                                                  | Pass              |

<sup>1</sup> Limited testing only

### 2.4 IC RSS-GEN, Issue 5

| Part | Test description                                                         | Verdict        |
|------|--------------------------------------------------------------------------|----------------|
| 7.3  | Receiver radiated emission limits                                        | Not applicable |
| 7.4  | Receiver conducted emission limits                                       | Not applicable |
| 8.8  | Power Line Conducted Emissions Limits for License-Exempt Radio Apparatus | Not tested     |

## 2.5 Scope of limited testing

The EUT supports the following wireless technologies:

- IEEE 802.11b
- IEEE 802.11g,
- IEEE 802.11n (SISO and MIMO)
- IEEE 802.11ac (SISO and MIMO).

The following table summarizes the scope of the limited testing performed:

| Clause                                                | Tests                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| §15.247(b)(1) Maximum peak output power               | IEEE 802.11ac (SISO), Channel 1 (2412 MHz)<br>IEEE 802.11ac (SISO), Channel 11 (2462 MHz)<br>IEEE 802.11n (SISO) Channel 1 (2412 MHz)<br>IEEE 802.11n (SISO) Channel 6 (2437 MHz)<br>IEEE 802.11n (SISO) Channel 11 (2462 MHz)                                                                                                                                                                                          |
| §15.247(d) Restricted band edges                      | IEEE 802.11b, High and Low band edge<br>IEEE 802.11g, High and Low band edge<br>IEEE 802.11n (SISO), High and Low band edge<br>IEEE 802.11n (MIMO), High and Low band edge<br>IEEE 802.11ac (SISO), High and Low band edge<br>IEEE 802.11ac (MIMO), High and Low band edge                                                                                                                                              |
| §15.247(d) Radiated spurious emissions, 30 – 1000 MHz | IEEE 802.11n (MIMO), Channel 6 (2437 MHz) – identified as the worst case operating mode                                                                                                                                                                                                                                                                                                                                 |
| §15.247(d) Radiated spurious emissions, 1 – 18 GHz    | IEEE 802.11b, Channel 1 (2412 MHz)<br>IEEE 802.11b, Channel 6 (2437 MHz)<br>IEEE 802.11b, Channel 11 (2462 MHz)<br>IEEE 802.11g, Channel 1 (2412 MHz)<br>IEEE 802.11g, Channel 6 (2437 MHz)<br>IEEE 802.11g, Channel 11 (2462 MHz)<br>IEEE 802.11n (SISO), Channel 6 (2437 MHz)<br>IEEE 802.11n (MIMO), Channel 1 (2412 MHz)<br>IEEE 802.11n (MIMO), Channel 6 (2437 MHz)<br>IEEE 802.11n (MIMO), Channel 11 (2462 MHz) |
| §15.247(d) Radiated spurious emissions, 18 – 26 GHz   | IEEE 802.11b, Channel 1 (2412 MHz)<br>IEEE 802.11b, Channel 6 (2437 MHz)<br>IEEE 802.11b, Channel 11 (2462 MHz)<br>IEEE 802.11g, Channel 1 (2412 MHz)<br>IEEE 802.11g, Channel 6 (2437 MHz)<br>IEEE 802.11g, Channel 11 (2462 MHz)<br>IEEE 802.11n (MIMO), Channel 1 (2412 MHz)<br>IEEE 802.11n (MIMO), Channel 6 (2437 MHz)<br>IEEE 802.11n (MIMO), Channel 11 (2462 MHz)                                              |

## Section 3 Equipment under test (EUT) details

---

### 3.1 Sample information

---

|                        |               |
|------------------------|---------------|
| Receipt date           | March 9, 2021 |
| Nemko sample ID number | NEx: 410508   |

### 3.2 EUT information

---

|               |                               |
|---------------|-------------------------------|
| Product name  | Cell Alpha - Main Logic Board |
| Model         | SC21001                       |
| Serial number | 306390016                     |
| Part number   | 830-00012-09                  |

### 3.3 Technical information

---

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Used IC test site(s) reg. number | 2040A                                    |
| RSS number and issue             | RSS-247 issue 2 (February 2017)          |
| Frequency band                   | 2400 – 2483.5 MHz                        |
| Minimum frequency (MHz)          | 2402                                     |
| Maximum frequency (MHz)          | 2480                                     |
| Type of modulation               | 802.11b, 802.11g, 802.11n, 802.11ac, BLE |
| Emission classification          | F1D                                      |
| Power requirements               | 16-24 V <sub>DC</sub> ; 1 A              |
| Antenna information              | 3.6 dBi gain, PCB SMT Antenna            |

### 3.4 EUT exercise and monitoring details

EUT was tested in 802.11b/.11g/.11n/.11ac wireless network specifications, using SISO and MIMO antenna configurations as applicable, on the low, mid, and high channels.

**Table 3.4-1: EUT sub assemblies**

| Description | Brand name | Model/Part number | Serial number | Rev. |
|-------------|------------|-------------------|---------------|------|
|             |            |                   |               |      |

**Table 3.4-2: EUT interface ports**

| Description | Qty. |
|-------------|------|
|             |      |

**Table 3.4-3: Support equipment**

| Description | Brand name | Model/Part number | Serial number | Rev. |
|-------------|------------|-------------------|---------------|------|
| Laptop      | Dell       | E7470             | 12258194222   | --   |

**Table 3.4-4: Inter-connection cables**

| Cable description | From | To | Length (m) |
|-------------------|------|----|------------|
| --                | --   | -- | --         |

### 3.5 EUT setup diagram



**Figure 3.5-1: Setup diagram**

## Section 4 Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

## Section 5 Test conditions

---

### 5.1 Atmospheric conditions

---

|                   |            |
|-------------------|------------|
| Temperature       | 15-30 °C   |
| Relative humidity | 20-75 %    |
| Air pressure      | 86–106 kPa |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6 Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

| Test name                     | Measurement uncertainty, dB |
|-------------------------------|-----------------------------|
| Radiated spurious emissions   | 3.78                        |
| Powerline conducted emissions | 1.38                        |
| All antenna port measurements | 0.55                        |
| Conducted spurious emissions  | 1.13                        |

## Section 7 Test Equipment

**Table 6.1-1: Test Equipment List**

| Equipment                   | Manufacturer          | Model no.           | Asset no. | Cal cycle | Next cal.   |
|-----------------------------|-----------------------|---------------------|-----------|-----------|-------------|
| EMI Test Receiver           | Rohde & Schwarz       | ESU40               | E1121     | 1 yr      | 1 Dec 2021  |
| System Controller           | Sunol Sciences        | SC104V              | E1191     | NCR       | NCR         |
| Bilog Antenna (30-1000 MHz) | Schaffner             | CBL 6111D           | 1763      | 2 yr      | 18 Feb 2022 |
| DRG Horn (1-18 GHz)         | ETS-Lindgren          | 3117-PA             | E1139     | 2 yr      | 21 Mar 2021 |
| Horn antenna (18-26 GHz)    | Sage Millimeter, Inc. | SAR-2309-42-S2      | E1143     | 2 yr      | 13 Nov 2022 |
| Low Noise Pre Amp           | Sage Millimeter, Inc. | SBL-1834034030-KFKF | E1228     | NCR       | NCR         |
| Notch Filter (2.4 GHz)      | Micro-Tonics          | HPM50110-01         | E1142     | NCR       | NCR         |
| DC power supply             | BK Precision          | 1697                | E1190     | NCR       | NCR         |

Notes: NCR - no calibration required

**Table 6.1-2: Test Software**

| Manufacturer of Software | Details                               |
|--------------------------|---------------------------------------|
| Rohde & Schwarz          | EMC 32 V10.60.15 (radiated emissions) |

Notes: None

## Section 8 Testing data

### 8.1 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

#### 8.1.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(b)(2) / (3)

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one-Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
  - (4) The conducted output power limit specified in paragraph (b) of this Section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this Section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this Section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
    - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

RSS-247 → §5.4(d)

- (d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

#### 8.1.2 Test summary

|               |                              |                   |           |
|---------------|------------------------------|-------------------|-----------|
| Verdict       | Pass                         |                   |           |
| Test date     | March 24, 2021               | Temperature       | 21 °C     |
| Test engineer | David Hewitt, EMC Specialist | Air pressure      | 1015 mbar |
| Test location | Wireless bench               | Relative humidity | 45 %      |

#### 8.1.3 Notes

Testing was performed in Tx mode and the EUT transmitting on a fixed channel at full power.

The attenuation of the interconnecting cable was included in the power meter software as a correction factor.

The antenna gain is 3.6 dBi per client declaration.

EIRP = Conducted Power + Declared Antenna Gain

#### 8.1.4 Setup details

|                         |                                      |
|-------------------------|--------------------------------------|
| EUT setup configuration | Table top                            |
| Test facility           | Nemko San Diego                      |
| Measurement method      | ANSI C63.10 §11.9.2.3.1 Method AVGPM |

## 8.1.5 Test data

Table 8.1-1: Output power

| Operating Mode                   | Test Frequency (MHz) | Maximum Conducted Power (dBm) | Conducted Limit (dBm) | Declared Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) |
|----------------------------------|----------------------|-------------------------------|-----------------------|-----------------------------|------------|------------------|
| IEEE 802.11ac (SISO), Channel 1  | 2412                 | 15.51                         | 30.0                  | 3.6                         | 19.11      | 36.0             |
| IEEE 802.11ac (SISO), Channel 11 | 2462                 | 16.31                         | 30.0                  | 3.6                         | 19.91      | 36.0             |
| IEEE 802.11n (SISO) Channel 1    | 2412                 | 12.56                         | 30.0                  | 3.6                         | 16.16      | 36.0             |
| IEEE 802.11n (SISO) Channel 6    | 2437                 | 17.22                         | 30.0                  | 3.6                         | 20.82      | 36.0             |
| IEEE 802.11n (SISO) Channel 11   | 2462                 | 13.62                         | 30.0                  | 3.6                         | 17.22      | 36.0             |

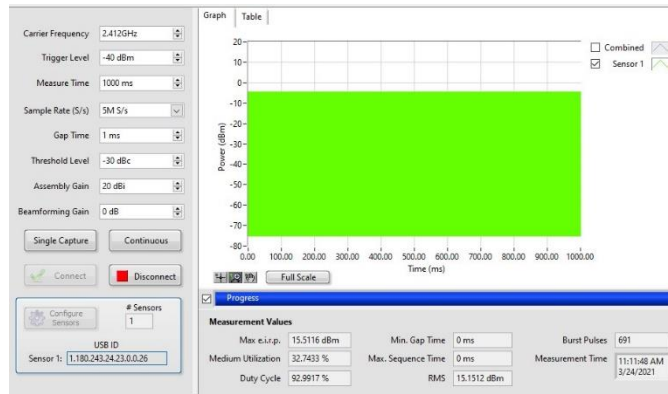


Figure 8.1-1: Maximum conducted power, 802.11ac (SISO), low channel

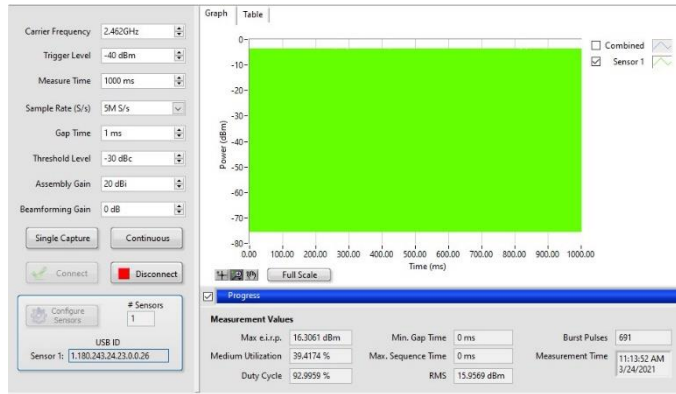


Figure 8.1-2: Maximum conducted power, 802.11ac (SISO), high channel

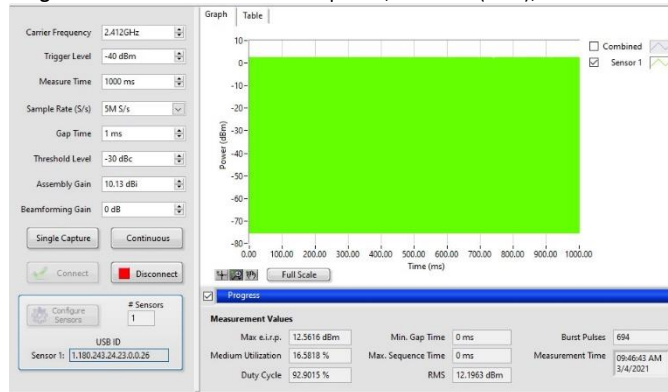


Figure 8.1-3: Maximum conducted power, 802.11n (SISO), low channel

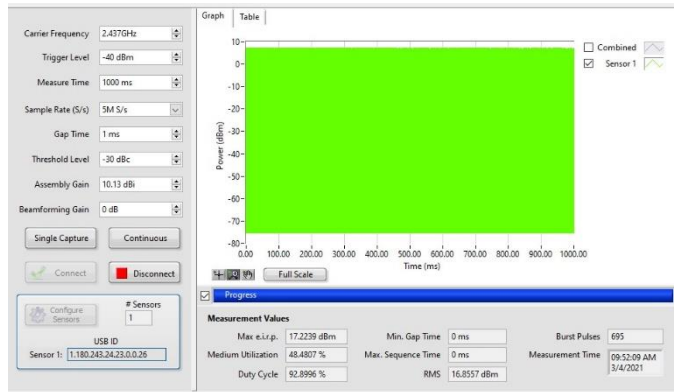


Figure 8.1-4: Maximum conducted power, 802.11n (SISO), mid channel

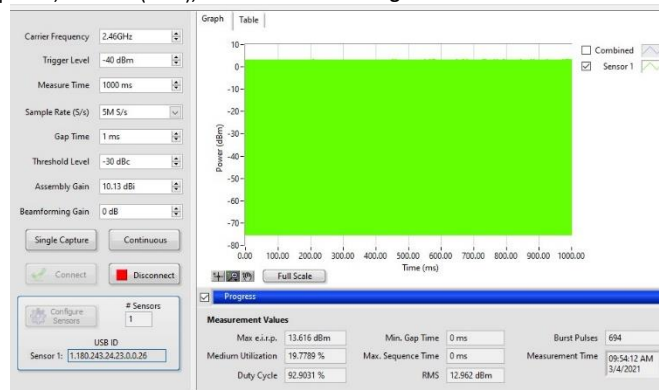


Figure 8.1-5: Maximum conducted power, 802.11n (SISO), high channel

## 8.2 FCC 15.247(d) and RSS-247 5.5 Radiated restricted band-edges and spurious emission

### 8.2.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(d)

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 → §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

**Table 8.2-1: FCC §15.209— Radiated emission limits**

| Frequency,<br>MHz | Field strength of emissions |                                 | Measurement distance, m |
|-------------------|-----------------------------|---------------------------------|-------------------------|
|                   | μV/m                        | dBμV/m                          |                         |
| 0.009–0.490       | 2400/F                      | $67.6 - 20 \times \log_{10}(F)$ | 300                     |
| 0.490–1.705       | 24000/F                     | $87.6 - 20 \times \log_{10}(F)$ | 30                      |
| 1.705–30.0        | 30                          | 29.5                            | 30                      |
| 30–88             | 100                         | 40.0                            | 3                       |
| 88–216            | 150                         | 43.5                            | 3                       |
| 216–960           | 200                         | 46.0                            | 3                       |
| above 960         | 500                         | 54.0                            | 3                       |

Notes: In the emission table above, the tighter limit applies at the band edges.  
For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

**Table 8.2-2: FCC restricted frequency bands**

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110       | 16.42–16.423        | 399.9–410     | 4.5–5.15    |
| 0.495–0.505       | 16.69475–16.69525   | 608–614       | 5.35–5.46   |
| 2.1735–2.1905     | 16.80425–16.80475   | 960–1240      | 7.25–7.75   |
| 4.125–4.128       | 25.5–25.67          | 1300–1427     | 8.025–8.5   |
| 4.17725–4.17775   | 37.5–38.25          | 1435–1626.5   | 9.0–9.2     |
| 4.20725–4.20775   | 73–74.6             | 1645.5–1646.5 | 9.3–9.5     |
| 6.215–6.218       | 74.8–75.2           | 1660–1710     | 10.6–12.7   |
| 6.26775–6.26825   | 108–121.94          | 1718.8–1722.2 | 13.25–13.4  |
| 6.31175–6.31225   | 123–138             | 2200–2300     | 14.47–14.5  |
| 8.291–8.294       | 149.9–150.05        | 2310–2390     | 15.35–16.2  |
| 8.362–8.366       | 156.52475–156.52525 | 2483.5–2500   | 17.7–21.4   |
| 8.37625–8.38675   | 156.7–156.9         | 2690–2900     | 22.01–23.12 |
| 8.41425–8.41475   | 162.0125–167.17     | 3260–3267     | 23.6–24.0   |
| 12.29–12.293      | 167.72–173.2        | 3332–3339     | 31.2–31.8   |
| 12.51975–12.52025 | 240–285             | 3345.8–3358   | 36.43–36.5  |
| 12.57675–12.57725 | 322–335.4           | 3600–4400     | Above 38.6  |
| 13.36–13.41       |                     |               |             |

### 8.2.2 Test summary

|               |                                     |                   |           |
|---------------|-------------------------------------|-------------------|-----------|
| Verdict       | Pass                                |                   |           |
| Test date     | March 9, 2021                       | Temperature       | 21 °C     |
| Test engineer | David Hewitt, EMC Specialist        | Air pressure      | 1012 mbar |
| Test location | 3m semi-anechoic chamber (Radiated) | Relative humidity | 48 %      |
| Test date     | March 10, 2021                      | Temperature       | 20 °C     |
| Test engineer | David Hewitt, EMC Specialist        | Air pressure      | 1011 mbar |
| Test location | 3m semi-anechoic chamber (Radiated) | Relative humidity | 48 %      |

### 8.2.3 Notes

The EUT was configured to transmit continuously on the lowest, middle and highest channels.

The spectrum was search from 30 MHz to 26 GHz (above the 10<sup>th</sup> harmonic of the highest transmit frequency of 2480 MHz).

Radiated measurements were performed at a 3 m measurement distance.

### 8.2.4 Setup details

|                         |                                                                        |
|-------------------------|------------------------------------------------------------------------|
| EUT setup configuration | Tabletop                                                               |
| Test facility           | Nemko San Diego                                                        |
| Measurement details     | Radiated spurious emissions measurement performed as per C63.10 §11.12 |

Receiver settings for radiated measurements within restricted bands below 1 GHz:

|                      |                                                                |
|----------------------|----------------------------------------------------------------|
| Resolution bandwidth | 120 kHz                                                        |
| Video bandwidth      | 300 kHz                                                        |
| Detector mode        | Peak (preview measurements)<br>Quasi-Peak (final measurements) |
| Trace mode           | Max Hold                                                       |
| Measurement time     | 5 s (final measurements)                                       |

Receiver settings for radiated measurements within restricted bands above 1 GHz:

|                      |                                       |
|----------------------|---------------------------------------|
| Resolution bandwidth | 1 MHz                                 |
| Video bandwidth      | 3 MHz                                 |
| Detector mode        | Average and peak (final measurements) |
| Trace mode           | Max Hold                              |
| Measurement time     | 5 s (final measurements)              |

## 8.2.5 Test data

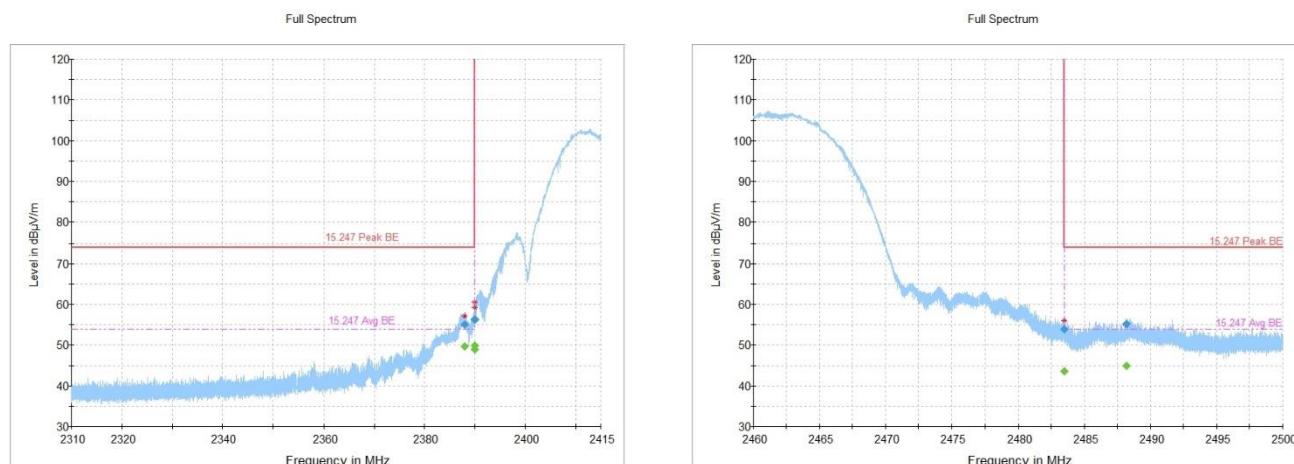


Figure 8.2-1: Radiated emissions, restricted band edge, 802.11b

Table 8.2-2: Radiated emissions, restricted band edge, 802.11b low channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2387.976500     | ---              | 49.66             | 53.90          | 4.24        | 5000.0          | 1000.000        | 127.0       | V   | 50.0          | -10.1        |
| 2387.976500     | 55.01            | ---               | 73.90          | 18.89       | 5000.0          | 1000.000        | 127.0       | V   | 50.0          | -10.1        |
| 2389.912000     | 56.33            | ---               | 73.90          | 17.57       | 5000.0          | 1000.000        | 135.0       | H   | 34.0          | -10.1        |
| 2389.912000     | ---              | 48.98             | 53.90          | 4.92        | 5000.0          | 1000.000        | 135.0       | H   | 34.0          | -10.1        |
| 2390.000000     | 56.25            | ---               | 73.90          | 17.65       | 5000.0          | 1000.000        | 139.0       | H   | 33.0          | -10.1        |
| 2390.000000     | ---              | 49.82             | 53.90          | 4.08        | 5000.0          | 1000.000        | 139.0       | H   | 33.0          | -10.1        |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Table 8.2-3: Radiated emissions, restricted band edge, 802.11b high channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2483.500000     | ---              | 43.60             | 53.90          | 10.30       | 5000.0          | 1000.000        | 137.0       | V   | 213.0         | 0.5          |
| 2483.500000     | 53.91            | ---               | 73.90          | 19.99       | 5000.0          | 1000.000        | 137.0       | V   | 213.0         | 0.5          |
| 2488.180000     | ---              | 44.94             | 53.90          | 8.96        | 5000.0          | 1000.000        | 124.0       | V   | 166.0         | 0.6          |
| 2488.180000     | 55.28            | ---               | 73.90          | 18.62       | 5000.0          | 1000.000        | 124.0       | V   | 166.0         | 0.6          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

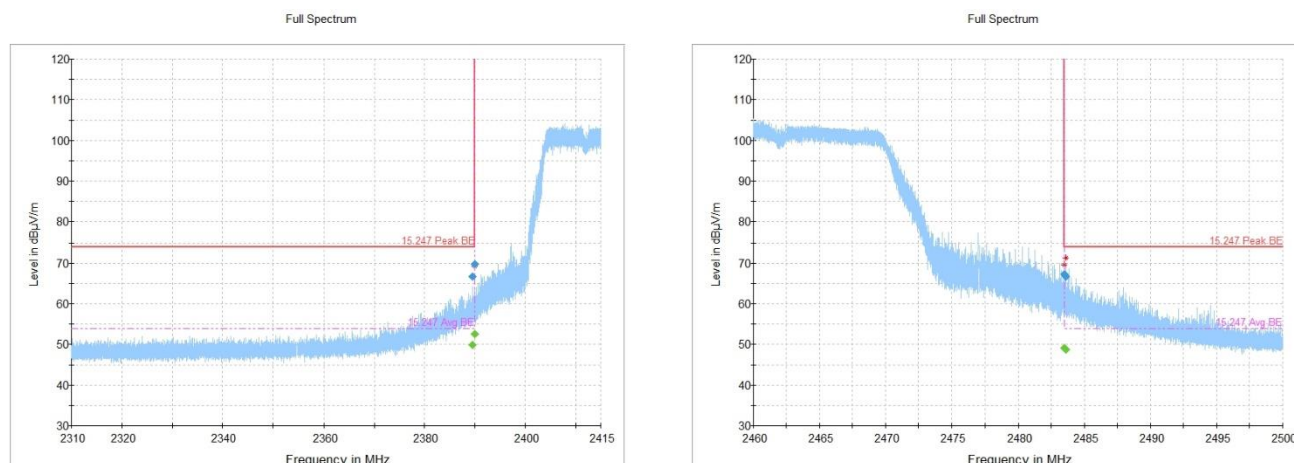


Figure 8.2-2: Radiated emissions, restricted band edge, 802.11g

Table 8.2-4: Radiated emissions, restricted band edge, 802.11g low channel


| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2389.593500     | 66.67            | ---               | 73.90          | 7.23        | 5000.0          | 1000.000        | 153.0       | V   | 166.0         | -0.1         |
| 2389.593500     | ---              | 49.93             | 53.90          | 3.97        | 5000.0          | 1000.000        | 153.0       | V   | 166.0         | -0.1         |
| 2390.000000     | 69.73            | ---               | 73.90          | 4.17        | 5000.0          | 1000.000        | 141.0       | H   | 45.0          | -0.1         |
| 2390.000000     | ---              | 52.47             | 53.90          | 1.43        | 5000.0          | 1000.000        | 141.0       | H   | 45.0          | -0.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Table 8.2-5: Radiated emissions, restricted band edge, 802.11g high channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2483.500000     | ---              | 49.17             | 53.90          | 4.73        | 5000.0          | 1000.000        | 126.0       | V   | 82.0          | 0.5          |
| 2483.500000     | 67.30            | ---               | 73.90          | 6.60        | 5000.0          | 1000.000        | 126.0       | V   | 82.0          | 0.5          |
| 2483.588000     | ---              | 48.66             | 53.90          | 5.24        | 5000.0          | 1000.000        | 136.0       | V   | 88.0          | 0.5          |
| 2483.588000     | 66.60            | ---               | 73.90          | 7.30        | 5000.0          | 1000.000        | 136.0       | V   | 88.0          | 0.5          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

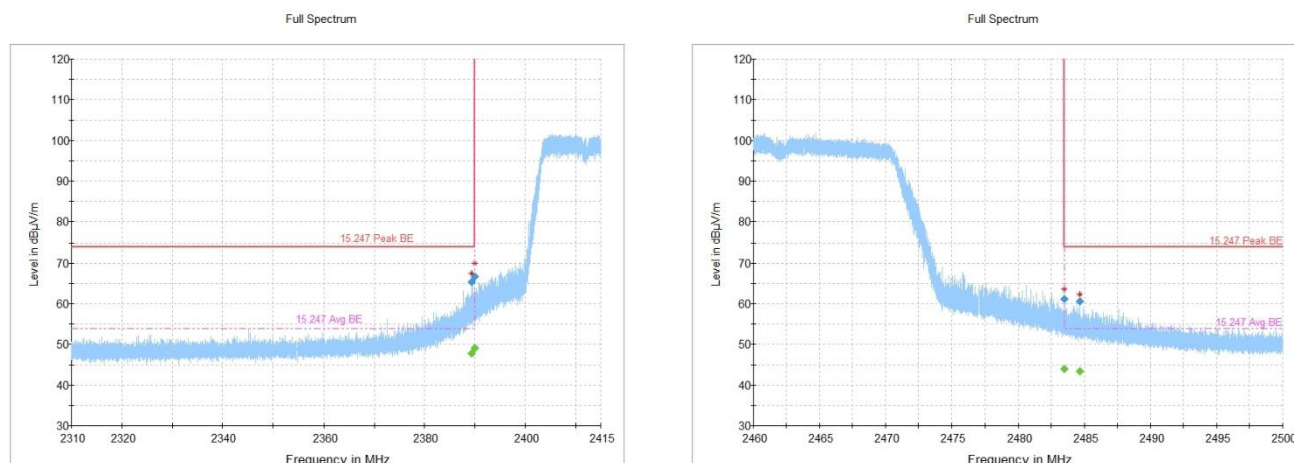

**Figure 8.2-3:** Radiated emissions, restricted band edge, 802.11n, SISO antenna configuration

**Table 8.2-6:** Radiated emissions, restricted band edge, 802.11n, SISO antenna configuration, low channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2389.415000     | 65.33            | ---               | 73.90          | 8.57        | 5000.0          | 1000.000        | 136.0       | V   | 83.0          | -0.1         |
| 2389.415000     | ---              | 47.80             | 53.90          | 6.10        | 5000.0          | 1000.000        | 136.0       | V   | 83.0          | -0.1         |
| 2390.000000     | 66.77            | ---               | 73.90          | 7.13        | 5000.0          | 1000.000        | 137.0       | H   | 21.0          | -0.1         |
| 2390.000000     | ---              | 49.15             | 53.90          | 4.75        | 5000.0          | 1000.000        | 137.0       | H   | 21.0          | -0.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

**Table 8.2-7:** Radiated emissions, restricted band edge, 802.11n, SISO antenna configuration, high channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2483.500000     | ---              | 44.00             | 53.90          | 9.90        | 5000.0          | 1000.000        | 141.0       | V   | 210.0         | 0.5          |
| 2483.500000     | 61.08            | ---               | 73.90          | 12.82       | 5000.0          | 1000.000        | 141.0       | V   | 210.0         | 0.5          |
| 2484.648000     | ---              | 43.38             | 53.90          | 10.52       | 5000.0          | 1000.000        | 140.0       | V   | 88.0          | 0.5          |
| 2484.648000     | 60.62            | ---               | 73.90          | 13.28       | 5000.0          | 1000.000        | 140.0       | V   | 88.0          | 0.5          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

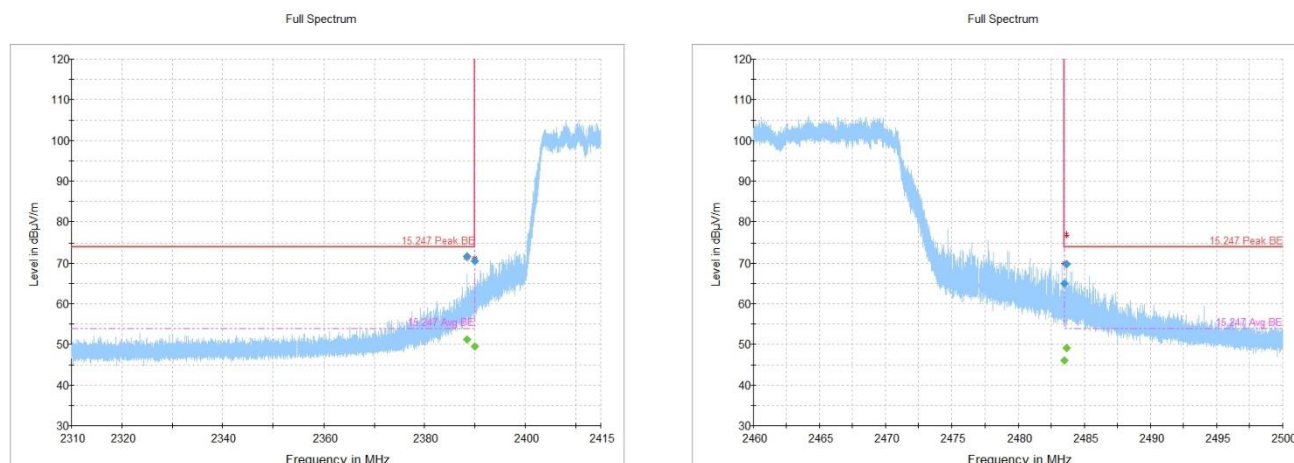


Figure 8.2-4: Radiated emissions, restricted band edge, 802.11n, MIMO antenna configuration

Table 8.2-8: Radiated emissions, restricted band edge, 802.11n, MIMO antenna configuration, low channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2388.424500     | 71.73            | ---               | 73.90          | 2.17        | 5000.0          | 1000.000        | 158.0       | V   | 209.0         | -0.1         |
| 2388.424500     | ---              | 51.24             | 53.90          | 2.66        | 5000.0          | 1000.000        | 158.0       | V   | 209.0         | -0.1         |
| 2390.000000     | 70.53            | ---               | 73.90          | 3.37        | 5000.0          | 1000.000        | 118.0       | H   | 21.0          | -0.1         |
| 2390.000000     | ---              | 49.45             | 53.90          | 4.45        | 5000.0          | 1000.000        | 118.0       | H   | 21.0          | -0.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)


<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Table 8.2-9: Radiated emissions, restricted band edge, 802.11n, MIMO antenna configuration, high channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2483.500000     | ---              | 45.96             | 53.90          | 7.94        | 5000.0          | 1000.000        | 102.0       | V   | 211.0         | 0.5          |
| 2483.500000     | 64.88            | ---               | 73.90          | 9.02        | 5000.0          | 1000.000        | 102.0       | V   | 211.0         | 0.5          |
| 2483.625333     | 69.82            | ---               | 73.90          | 4.08        | 5000.0          | 1000.000        | 136.0       | H   | 298.0         | 0.5          |
| 2483.625333     | ---              | 49.09             | 53.90          | 4.81        | 5000.0          | 1000.000        | 136.0       | H   | 298.0         | 0.5          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

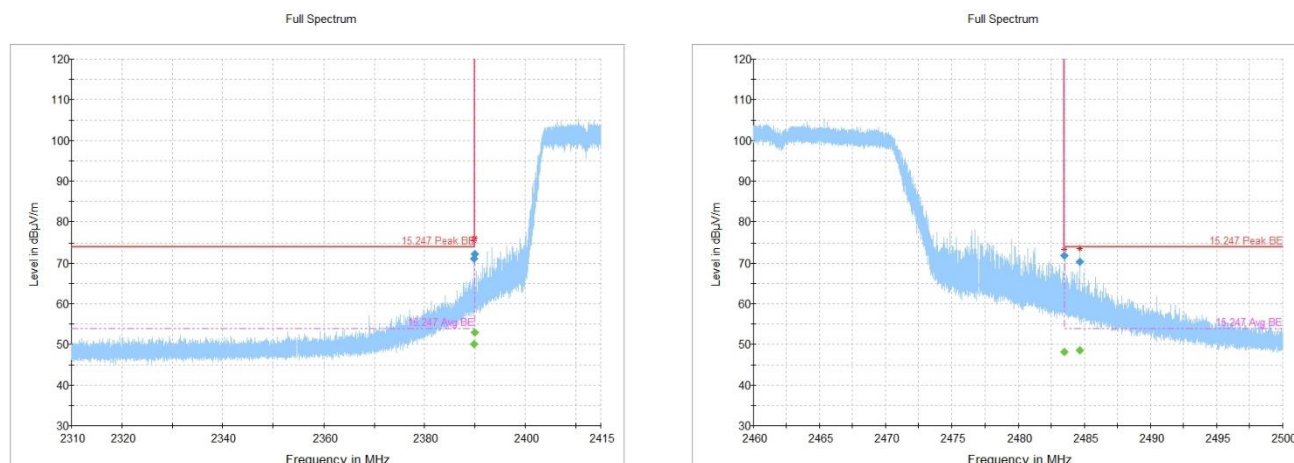

**Figure 8.2-5:** Radiated emissions, restricted band edge, 802.11ac, SISO antenna configuration

**Table 8.2-10:** Radiated emissions, restricted band edge, 802.11ac, SISO antenna configuration, low channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2389.775500     | 71.10            | ---               | 73.90          | 2.80        | 5000.0          | 1000.000        | 147.0       | V   | 89.0          | -0.1         |
| 2389.775500     | ---              | 50.13             | 53.90          | 3.77        | 5000.0          | 1000.000        | 147.0       | V   | 89.0          | -0.1         |
| 2390.000000     | 72.23            | ---               | 73.90          | 1.67        | 5000.0          | 1000.000        | 141.0       | H   | 34.0          | -0.1         |
| 2390.000000     | ---              | 52.87             | 53.90          | 1.03        | 5000.0          | 1000.000        | 141.0       | H   | 34.0          | -0.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)


<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

**Table 8.2-11:** Radiated emissions, restricted band edge, 802.11ac, SISO antenna configuration, high channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2483.500000     | ---              | 48.11             | 53.90          | 5.79        | 5000.0          | 1000.000        | 127.0       | V   | 323.0         | 0.5          |
| 2483.500000     | 71.76            | ---               | 73.90          | 2.14        | 5000.0          | 1000.000        | 127.0       | V   | 323.0         | 0.5          |
| 2484.664000     | ---              | 48.45             | 53.90          | 5.45        | 5000.0          | 1000.000        | 140.0       | V   | 90.0          | 0.5          |
| 2484.664000     | 70.35            | ---               | 73.90          | 3.55        | 5000.0          | 1000.000        | 140.0       | V   | 90.0          | 0.5          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

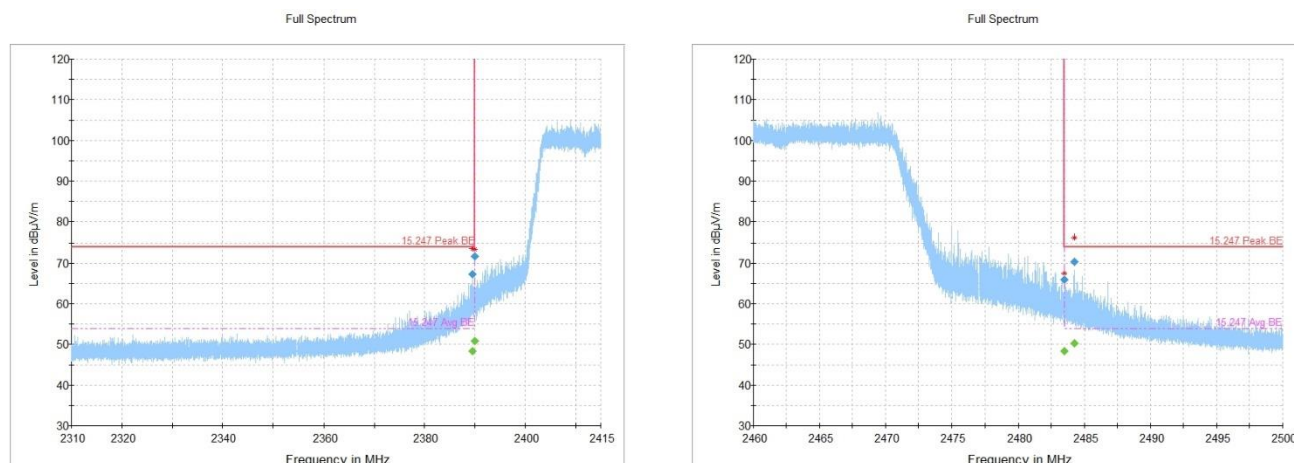

**Figure 8.2-6:** Radiated emissions, restricted band edge, 802.11ac, MIMO antenna configuration

**Table 8.2-12:** Radiated emissions, restricted band edge, 802.11ac, MIMO antenna configuration, low channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2389.478000     | 67.31            | ---               | 73.90          | 6.59        | 5000.0          | 1000.000        | 159.0       | V   | 215.0         | -0.1         |
| 2389.478000     | ---              | 48.42             | 53.90          | 5.48        | 5000.0          | 1000.000        | 159.0       | V   | 215.0         | -0.1         |
| 2390.000000     | 71.61            | ---               | 73.90          | 2.29        | 5000.0          | 1000.000        | 129.0       | H   | 32.0          | -0.1         |
| 2390.000000     | ---              | 50.79             | 53.90          | 3.11        | 5000.0          | 1000.000        | 129.0       | H   | 32.0          | -0.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)


**Table 8.2-13:** Radiated emissions, restricted band edge, 802.11ac, MIMO antenna configuration, high channel

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2483.500000     | 66.01            | ---               | 73.90          | 7.89        | 5000.0          | 1000.000        | 102.0       | V   | 341.0         | 0.5          |
| 2483.500000     | ---              | 48.32             | 53.90          | 5.58        | 5000.0          | 1000.000        | 102.0       | V   | 341.0         | 0.5          |
| 2484.214667     | 70.41            | ---               | 73.90          | 3.49        | 5000.0          | 1000.000        | 112.0       | H   | 305.0         | 0.5          |
| 2484.214667     | ---              | 50.16             | 53.90          | 3.74        | 5000.0          | 1000.000        | 112.0       | H   | 305.0         | 0.5          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

## Full Spectrum

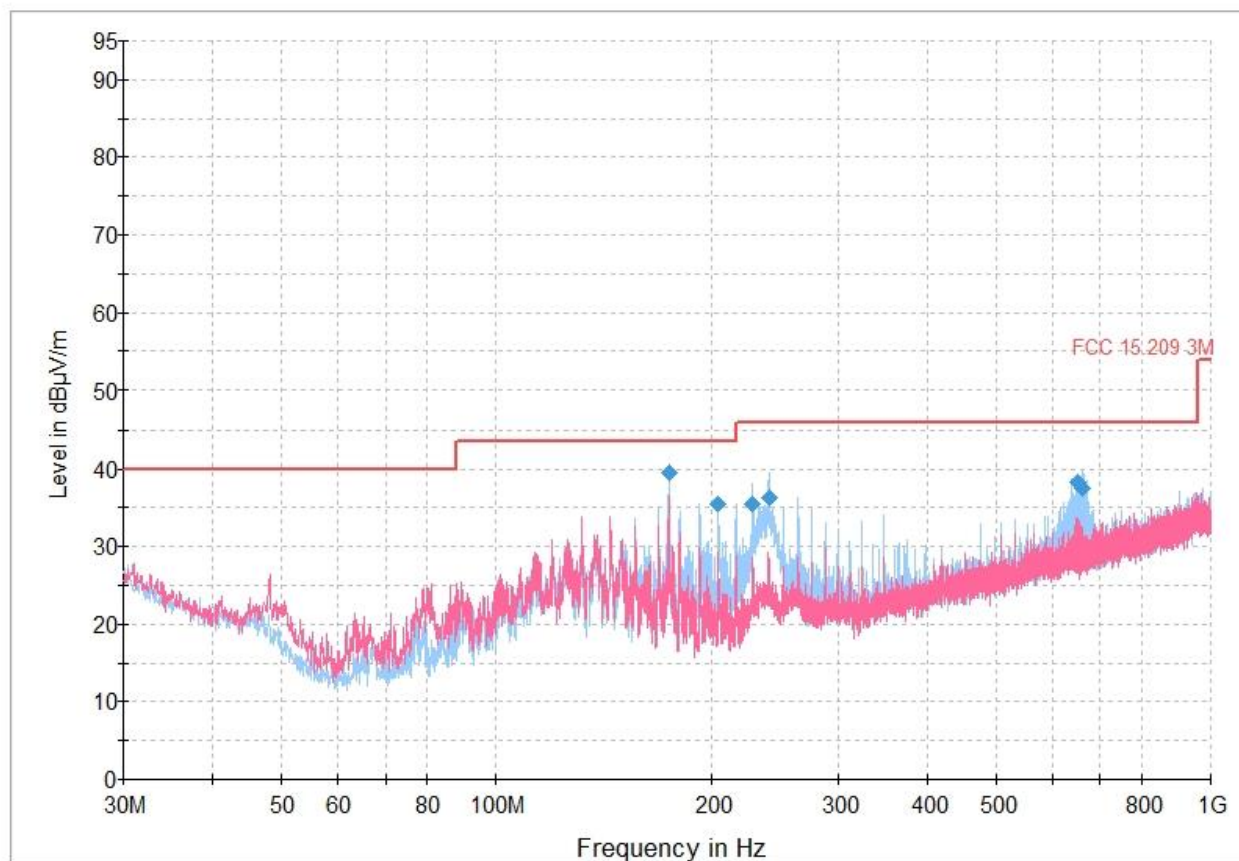

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

**Figure 8.2-7:** Radiated emissions, 802.11n, MIMO antenna configuration, mid channel, 30 – 1000 MHz spectral plot

**Table 8.2-14:** Radiated emissions, 802.11n, MIMO antenna configuration, mid channel, 30 – 1000 MHz (Quasi-Peak) results

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 173.723333      | 39.54              | 43.50          | 3.96        | 1000.0          | 120.000         | 136.0       | H   | 111.0         | 17.5         |
| 203.913333      | 35.43              | 43.50          | 8.07        | 1000.0          | 120.000         | 145.0       | H   | 300.0         | 18.0         |
| 228.040000      | 35.53              | 46.00          | 10.47       | 1000.0          | 120.000         | 110.0       | H   | 98.0          | 18.7         |
| 240.005000      | 36.30              | 46.00          | 9.70        | 1000.0          | 120.000         | 118.0       | H   | 99.0          | 19.9         |
| 649.382500      | 38.36              | 46.00          | 7.64        | 1000.0          | 120.000         | 126.0       | H   | 0.0           | 29.7         |
| 660.675000      | 37.48              | 46.00          | 8.52        | 1000.0          | 120.000         | 116.0       | H   | 0.0           | 29.8         |

Notes:

<sup>1</sup> Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

<sup>2</sup> Correction factor = antenna factor ACF (dB) + cable loss (dB)

<sup>3</sup> The maximum measured value observed over a period of 5 seconds was recorded.

<sup>4</sup> Limits converted to dBµV/m and an inverse proportionality factor of 20 dB per decade has been used to normalize the specification limit to a measurement distance of 3 meters to determine compliance.

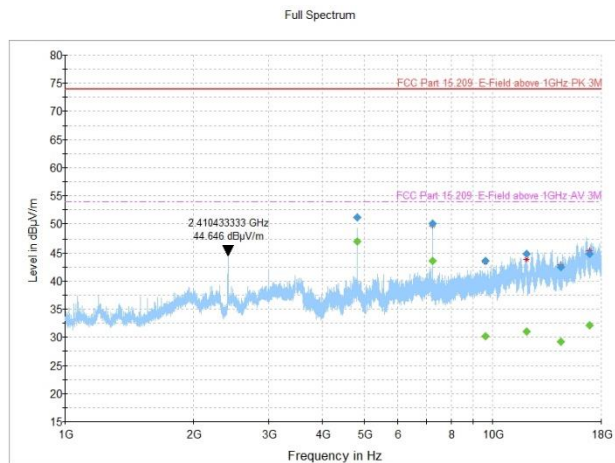


Figure 8.2-8: Radiated spurious emissions, 802.11b, low channel

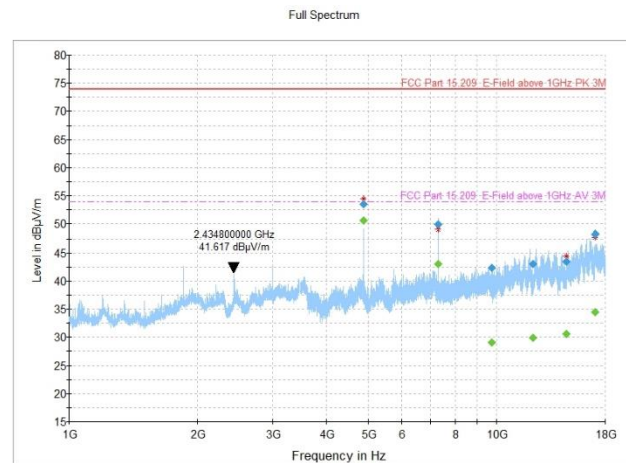


Figure 8.2-9: Radiated spurious emissions, 802.11b, mid channel

Table 8.2-15: Radiated spurious emissions, 802.11b, low channel, 1-18 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 4823.866667     | 51.20            | ---               | 73.90          | 22.70       | 5000.0          | 1000.000        | 127.0       | V   | 90.0          | -1.7         |
| 4823.866667     | ---              | 47.01             | 53.90          | 6.89        | 5000.0          | 1000.000        | 127.0       | V   | 90.0          | -1.7         |
| 7233.866667     | 50.10            | ---               | 73.90          | 23.80       | 5000.0          | 1000.000        | 178.0       | V   | 219.0         | 0.7          |
| 7233.866667     | ---              | 43.58             | 53.90          | 10.32       | 5000.0          | 1000.000        | 178.0       | V   | 219.0         | 0.7          |
| 9651.600000     | 43.50            | ---               | 73.90          | 30.40       | 5000.0          | 1000.000        | 201.0       | V   | 304.0         | 4.1          |
| 9651.600000     | ---              | 30.23             | 53.90          | 23.67       | 5000.0          | 1000.000        | 201.0       | V   | 304.0         | 4.1          |
| 12058.000000    | ---              | 31.05             | 53.90          | 22.85       | 5000.0          | 1000.000        | 148.0       | V   | 129.0         | 6.4          |
| 12058.000000    | 44.77            | ---               | 73.90          | 29.13       | 5000.0          | 1000.000        | 148.0       | V   | 129.0         | 6.4          |
| 14470.800000    | ---              | 29.25             | 53.90          | 24.65       | 5000.0          | 1000.000        | 222.0       | H   | 0.0           | 9.3          |
| 14470.800000    | 42.47            | ---               | 73.90          | 31.43       | 5000.0          | 1000.000        | 222.0       | H   | 0.0           | 9.3          |
| 16884.400000    | 44.88            | ---               | 73.90          | 29.02       | 5000.0          | 1000.000        | 315.0       | H   | 228.0         | 12.8         |
| 16884.400000    | ---              | 32.11             | 53.90          | 21.79       | 5000.0          | 1000.000        | 315.0       | H   | 228.0         | 12.8         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Table 8.2-16: Radiated spurious emissions, 802.11b, mid channel, 1-18 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 4874.133333     | 53.56            | ---               | 73.90          | 20.34       | 5000.0          | 1000.000        | 110.0       | V   | 223.0         | -1.9         |
| 4874.133333     | ---              | 50.63             | 53.90          | 3.27        | 5000.0          | 1000.000        | 110.0       | V   | 223.0         | -1.9         |
| 7311.833333     | ---              | 43.06             | 53.90          | 10.84       | 5000.0          | 1000.000        | 116.0       | V   | 11.0          | 0.9          |
| 7311.833333     | 49.92            | ---               | 73.90          | 23.98       | 5000.0          | 1000.000        | 116.0       | V   | 11.0          | 0.9          |
| 9751.600000     | 42.35            | ---               | 73.90          | 31.55       | 5000.0          | 1000.000        | 233.0       | H   | 351.0         | 3.7          |
| 9751.600000     | ---              | 29.02             | 53.90          | 24.88       | 5000.0          | 1000.000        | 233.0       | H   | 351.0         | 3.7          |
| 12189.800000    | ---              | 29.89             | 53.90          | 24.01       | 5000.0          | 1000.000        | 138.0       | H   | 296.0         | 6.8          |
| 12189.800000    | 43.08            | ---               | 73.90          | 30.82       | 5000.0          | 1000.000        | 138.0       | H   | 296.0         | 6.8          |
| 14623.200000    | ---              | 30.60             | 53.90          | 23.30       | 5000.0          | 1000.000        | 265.0       | H   | 276.0         | 9.6          |
| 14623.200000    | 43.50            | ---               | 73.90          | 30.40       | 5000.0          | 1000.000        | 265.0       | H   | 276.0         | 9.6          |
| 17067.000000    | ---              | 34.49             | 53.90          | 19.41       | 5000.0          | 1000.000        | 331.0       | V   | 92.0          | 13.2         |
| 17067.000000    | 48.26            | ---               | 73.90          | 25.64       | 5000.0          | 1000.000        | 331.0       | V   | 92.0          | 13.2         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

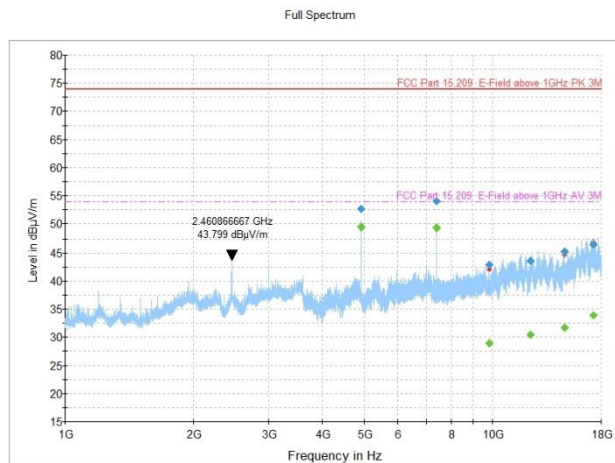


Figure 8.2-10: Radiated spurious emissions, 802.11b, high channel

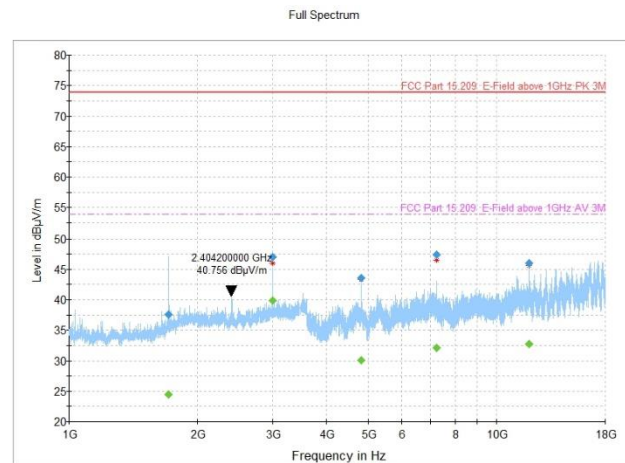


Figure 8.2-11: Radiated spurious emissions, 802.11g, low channel

**Table 8.2-17: Radiated spurious emissions, 802.11b, high channel, 1-18 GHz**

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 4924.000000     | ---              | 49.47             | 53.90          | 4.43        | 5000.0          | 1000.000        | 128.0       | V   | 210.0         | -2.1         |
| 4924.000000     | 52.68            | ---               | 73.90          | 21.22       | 5000.0          | 1000.000        | 128.0       | V   | 210.0         | -2.1         |
| 7386.900000     | ---              | 49.31             | 53.90          | 4.59        | 5000.0          | 1000.000        | 180.0       | V   | 223.0         | 1.0          |
| 7386.900000     | 54.08            | ---               | 73.90          | 19.82       | 5000.0          | 1000.000        | 180.0       | V   | 223.0         | 1.0          |
| 9854.800000     | 42.81            | ---               | 73.90          | 31.09       | 5000.0          | 1000.000        | 180.0       | H   | 224.0         | 3.5          |
| 9854.800000     | ---              | 28.90             | 53.90          | 25.00       | 5000.0          | 1000.000        | 180.0       | H   | 224.0         | 3.5          |
| 12307.200000    | 43.56            | ---               | 73.90          | 30.34       | 5000.0          | 1000.000        | 277.0       | H   | 333.0         | 7.2          |
| 12307.200000    | ---              | 30.39             | 53.90          | 23.51       | 5000.0          | 1000.000        | 277.0       | H   | 333.0         | 7.2          |
| 14770.000000    | ---              | 31.65             | 53.90          | 22.25       | 5000.0          | 1000.000        | 377.0       | H   | 75.0          | 10.1         |
| 14770.000000    | 45.25            | ---               | 73.90          | 28.65       | 5000.0          | 1000.000        | 377.0       | H   | 75.0          | 10.1         |
| 17238.800000    | ---              | 33.88             | 53.90          | 20.02       | 5000.0          | 1000.000        | 287.0       | V   | 153.0         | 14.7         |
| 17238.800000    | 46.47            | ---               | 73.90          | 27.43       | 5000.0          | 1000.000        | 287.0       | V   | 153.0         | 14.7         |

Notes: <sup>1</sup> Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)**Table 8.2-18: Radiated spurious emissions, 802.11g, low channel, 1-18 GHz**

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 1711.433333     | 37.56            | ---               | 73.90          | 36.34       | 5000.0          | 1000.000        | 321.0       | V   | 91.0          | -10.8        |
| 1711.433333     | ---              | 24.49             | 53.90          | 29.41       | 5000.0          | 1000.000        | 321.0       | V   | 91.0          | -10.8        |
| 2999.766667     | ---              | 39.92             | 53.90          | 13.98       | 5000.0          | 1000.000        | 117.0       | V   | 196.0         | -5.8         |
| 2999.766667     | 47.04            | ---               | 73.90          | 26.86       | 5000.0          | 1000.000        | 117.0       | V   | 196.0         | -5.8         |
| 4824.733333     | ---              | 30.13             | 53.90          | 23.77       | 5000.0          | 1000.000        | 148.0       | V   | 74.0          | -1.9         |
| 4824.733333     | 43.55            | ---               | 73.90          | 30.35       | 5000.0          | 1000.000        | 148.0       | V   | 74.0          | -1.9         |
| 7238.800000     | ---              | 32.12             | 53.90          | 21.78       | 5000.0          | 1000.000        | 126.0       | V   | 11.0          | 1.5          |
| 7238.800000     | 47.40            | ---               | 73.90          | 26.50       | 5000.0          | 1000.000        | 126.0       | V   | 11.0          | 1.5          |
| 11948.400000    | 45.97            | ---               | 73.90          | 27.93       | 5000.0          | 1000.000        | 107.0       | H   | 245.0         | 10.5         |
| 11948.400000    | ---              | 32.71             | 53.90          | 21.19       | 5000.0          | 1000.000        | 107.0       | H   | 245.0         | 10.5         |

Notes: <sup>1</sup> Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

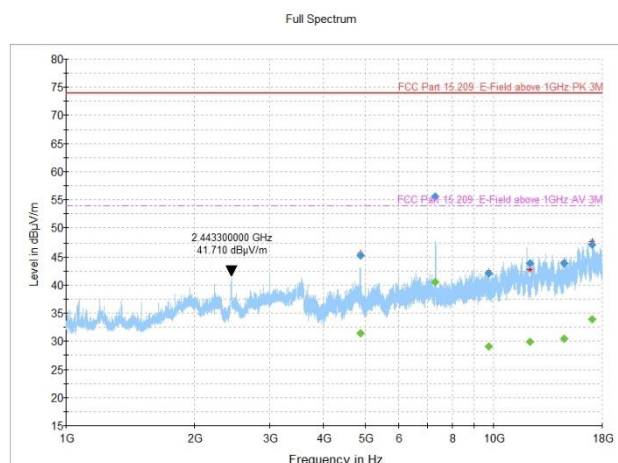


Figure 8.2-12: Radiated spurious emissions, 802.11g, mid channel

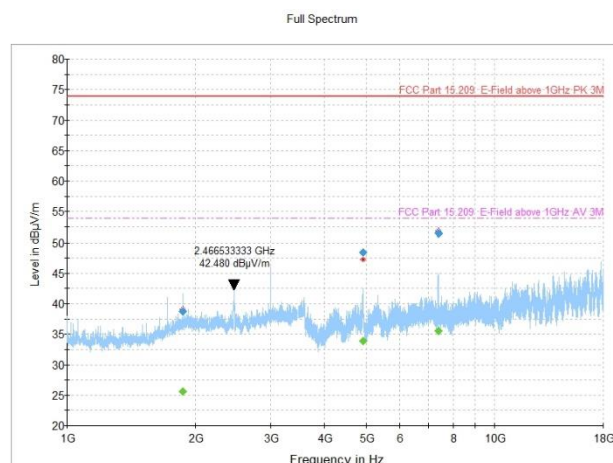


Figure 8.2-13: Radiated spurious emissions, 802.11g, high channel

Table 8.2-19: Radiated spurious emissions, 802.11g, mid channel, 1-18 GHz


| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 4876.833333     | 45.18            | ---               | 73.90          | 28.72       | 5000.0          | 1000.000        | 138.0       | H   | 42.0          | -1.9         |
| 4876.833333     | ---              | 31.39             | 53.90          | 22.51       | 5000.0          | 1000.000        | 138.0       | H   | 42.0          | -1.9         |
| 7305.100000     | ---              | 40.59             | 53.90          | 13.31       | 5000.0          | 1000.000        | 183.0       | V   | 226.0         | 0.9          |
| 7305.100000     | 55.57            | ---               | 73.90          | 18.33       | 5000.0          | 1000.000        | 183.0       | V   | 226.0         | 0.9          |
| 9753.600000     | ---              | 29.13             | 53.90          | 24.77       | 5000.0          | 1000.000        | 371.0       | V   | 242.0         | 3.7          |
| 9753.600000     | 41.99            | ---               | 73.90          | 31.91       | 5000.0          | 1000.000        | 371.0       | V   | 242.0         | 3.7          |
| 12187.800000    | ---              | 29.93             | 53.90          | 23.97       | 5000.0          | 1000.000        | 371.0       | H   | 201.0         | 6.8          |
| 12187.800000    | 43.81            | ---               | 73.90          | 30.10       | 5000.0          | 1000.000        | 371.0       | H   | 201.0         | 6.8          |
| 14629.600000    | ---              | 30.45             | 53.90          | 23.45       | 5000.0          | 1000.000        | 202.0       | H   | 72.0          | 9.6          |
| 14629.600000    | 43.80            | ---               | 73.90          | 30.10       | 5000.0          | 1000.000        | 202.0       | H   | 72.0          | 9.6          |
| 17059.400000    | 47.17            | ---               | 73.90          | 26.73       | 5000.0          | 1000.000        | 365.0       | H   | 0.0           | 13.1         |
| 17059.400000    | ---              | 33.87             | 53.90          | 20.03       | 5000.0          | 1000.000        | 365.0       | H   | 0.0           | 13.1         |

Notes: <sup>1</sup> Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)


Table 8.2-20: Radiated spurious emissions, 802.11g, high channel, 1-18 GHz

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 1871.900000     | ---              | 25.64             | 53.90          | 28.26       | 5000.0          | 1000.000        | 171.0       | H   | 75.0          | -9.4         |
| 1871.900000     | 38.78            | ---               | 73.90          | 35.12       | 5000.0          | 1000.000        | 171.0       | H   | 75.0          | -9.4         |
| 4926.600000     | ---              | 33.88             | 53.90          | 20.02       | 5000.0          | 1000.000        | 138.0       | V   | 290.0         | -1.7         |
| 4926.600000     | 48.45            | ---               | 73.90          | 25.45       | 5000.0          | 1000.000        | 138.0       | V   | 290.0         | -1.7         |
| 7388.933333     | ---              | 35.60             | 53.90          | 18.30       | 5000.0          | 1000.000        | 254.0       | V   | 225.0         | 1.7          |
| 7388.933333     | 51.49            | ---               | 73.90          | 22.41       | 5000.0          | 1000.000        | 254.0       | V   | 225.0         | 1.7          |

Notes: <sup>1</sup> Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

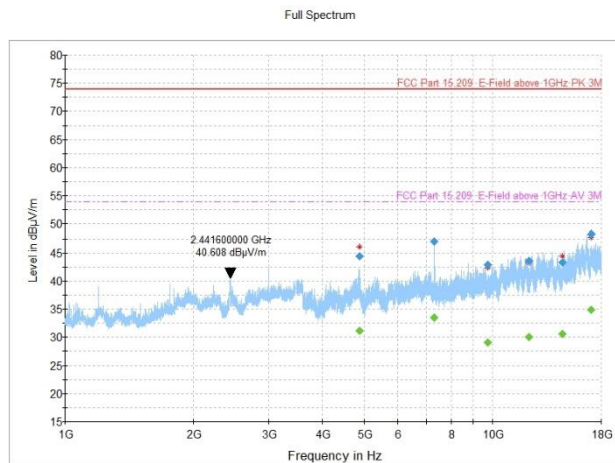

**Figure 8.2-14:** Radiated spurious emissions, 802.11n, SISO antenna configuration, mid channel

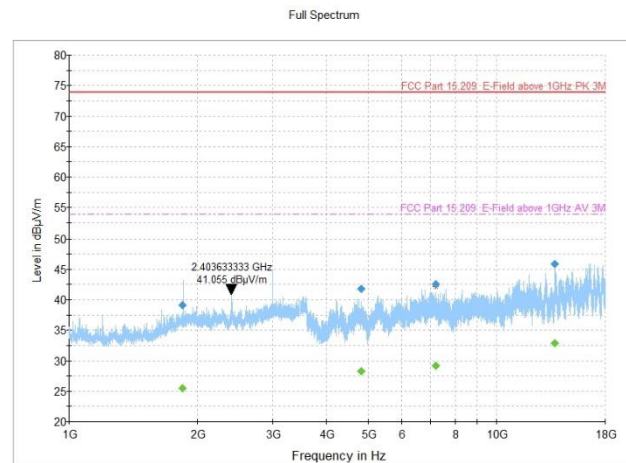

**Figure 8.2-15:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, low channel

**Table 8.2-21:** Radiated spurious emissions, 802.11n, SISO antenna configuration, mid channel, 1-18 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 4874.166667     | ---              | 31.11             | 53.90          | 22.79       | 5000.0          | 1000.000        | 161.0       | H   | 41.0          | -1.9         |
| 4874.166667     | 44.40            | ---               | 73.90          | 29.50       | 5000.0          | 1000.000        | 161.0       | H   | 41.0          | -1.9         |
| 7311.433333     | 47.04            | ---               | 73.90          | 26.86       | 5000.0          | 1000.000        | 108.0       | V   | 12.0          | 0.9          |
| 7311.433333     | ---              | 33.46             | 53.90          | 20.44       | 5000.0          | 1000.000        | 108.0       | V   | 12.0          | 0.9          |
| 9751.200000     | 42.82            | ---               | 73.90          | 31.08       | 5000.0          | 1000.000        | 110.0       | V   | 254.0         | 3.7          |
| 9751.200000     | ---              | 29.13             | 53.90          | 24.77       | 5000.0          | 1000.000        | 110.0       | V   | 254.0         | 3.7          |
| 12185.400000    | ---              | 29.99             | 53.90          | 23.91       | 5000.0          | 1000.000        | 402.0       | V   | 190.0         | 6.8          |
| 12185.400000    | 43.55            | ---               | 73.90          | 30.35       | 5000.0          | 1000.000        | 402.0       | V   | 190.0         | 6.8          |
| 14624.400000    | 43.35            | ---               | 73.90          | 30.55       | 5000.0          | 1000.000        | 242.0       | V   | 338.0         | 9.6          |
| 14624.400000    | ---              | 30.65             | 53.90          | 23.25       | 5000.0          | 1000.000        | 242.0       | V   | 338.0         | 9.6          |
| 17059.800000    | 48.21            | ---               | 73.90          | 25.69       | 5000.0          | 1000.000        | 160.0       | V   | 12.0          | 13.1         |
| 17059.800000    | ---              | 34.92             | 53.90          | 18.98       | 5000.0          | 1000.000        | 160.0       | V   | 12.0          | 13.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)


<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

**Table 8.2-22:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, low channel, 1-18 GHz


| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 1846.333333     | ---              | 25.54             | 53.90          | 28.36       | 5000.0          | 1000.000        | 149.0       | H   | 24.0          | -9.6         |
| 1846.333333     | 39.11            | ---               | 73.90          | 34.79       | 5000.0          | 1000.000        | 149.0       | H   | 24.0          | -9.6         |
| 4818.433333     | ---              | 28.30             | 53.90          | 25.60       | 5000.0          | 1000.000        | 98.0        | H   | 40.0          | -1.9         |
| 4818.433333     | 41.78            | ---               | 73.90          | 32.12       | 5000.0          | 1000.000        | 98.0        | H   | 40.0          | -1.9         |
| 7215.766667     | 42.60            | ---               | 73.90          | 31.30       | 5000.0          | 1000.000        | 309.0       | V   | 349.0         | 1.4          |
| 7215.766667     | ---              | 29.17             | 53.90          | 24.73       | 5000.0          | 1000.000        | 309.0       | V   | 349.0         | 1.4          |
| 13731.300000    | 45.87            | ---               | 73.90          | 28.03       | 5000.0          | 1000.000        | 108.0       | H   | 56.0          | 12.7         |
| 13731.300000    | ---              | 32.86             | 53.90          | 21.04       | 5000.0          | 1000.000        | 108.0       | H   | 56.0          | 12.7         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

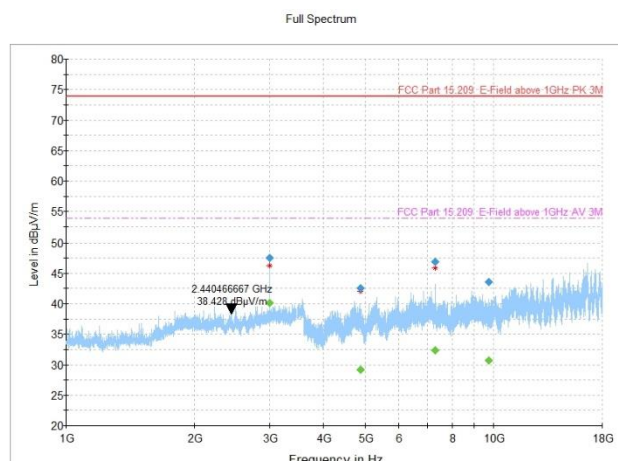

**Figure 8.2-16:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, mid channel

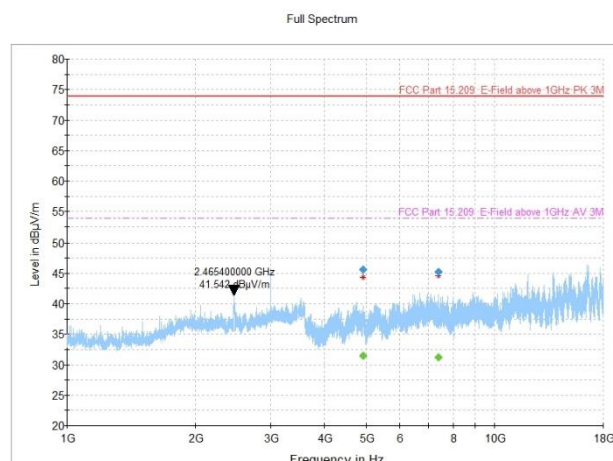

**Figure 8.2-17:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, high channel

**Table 8.2-23:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, mid channel, 1-18 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 3000.000000     | 47.50            | ---               | 73.90          | 26.40       | 5000.0          | 1000.000        | 117.0       | V   | 195.0         | -5.8         |
| 3000.000000     | ---              | 40.09             | 53.90          | 13.81       | 5000.0          | 1000.000        | 117.0       | V   | 195.0         | -5.8         |
| 4879.866667     | 42.54            | ---               | 73.90          | 31.36       | 5000.0          | 1000.000        | 98.0        | H   | 344.0         | -1.8         |
| 4879.866667     | ---              | 29.19             | 53.90          | 24.71       | 5000.0          | 1000.000        | 98.0        | H   | 344.0         | -1.8         |
| 7313.866667     | ---              | 32.33             | 53.90          | 21.57       | 5000.0          | 1000.000        | 138.0       | V   | 11.0          | 1.7          |
| 7313.866667     | 46.89            | ---               | 73.90          | 27.01       | 5000.0          | 1000.000        | 138.0       | V   | 11.0          | 1.7          |
| 9748.366667     | ---              | 30.76             | 53.90          | 23.14       | 5000.0          | 1000.000        | 159.0       | V   | 355.0         | 6.3          |
| 9748.366667     | 43.62            | ---               | 73.90          | 30.28       | 5000.0          | 1000.000        | 159.0       | V   | 355.0         | 6.3          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

**Table 8.2-24:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, high channel, 1-18 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 4922.766667     | ---              | 31.51             | 53.90          | 22.39       | 5000.0          | 1000.000        | 128.0       | V   | 224.0         | -1.7         |
| 4922.766667     | 45.66            | ---               | 73.90          | 28.24       | 5000.0          | 1000.000        | 128.0       | V   | 224.0         | -1.7         |
| 7384.900000     | ---              | 31.23             | 53.90          | 22.67       | 5000.0          | 1000.000        | 127.0       | V   | 294.0         | 1.7          |
| 7384.900000     | 45.24            | ---               | 73.90          | 28.66       | 5000.0          | 1000.000        | 127.0       | V   | 294.0         | 1.7          |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

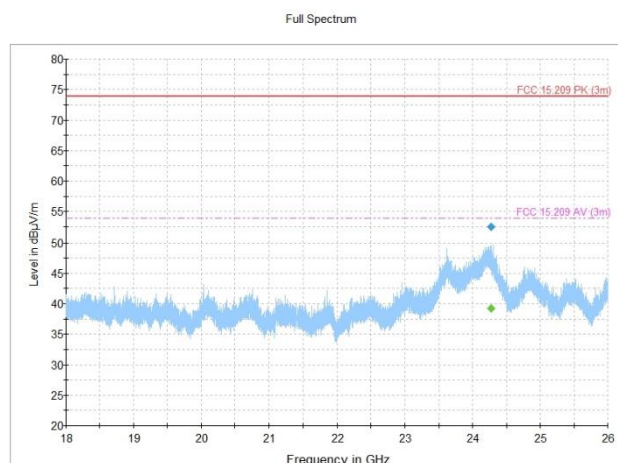


Figure 8.2-18: Radiated spurious emissions, 802.11b, low channel

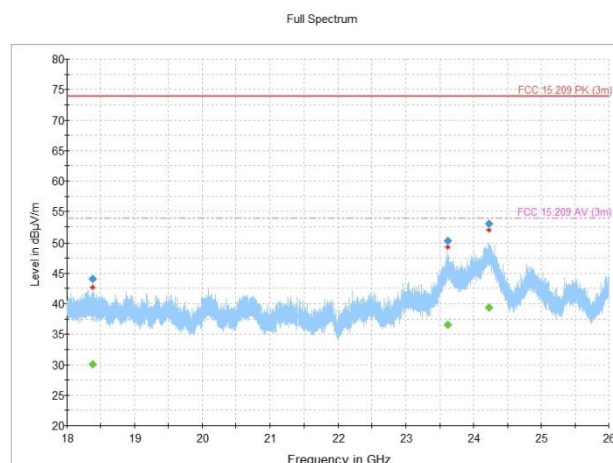


Figure 8.2-19: Radiated spurious emissions, 802.11b, mid channel

Table 8.2-25: Radiated spurious emissions, 802.11b, low channel, 18-26 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 24274.900000    | ---              | 39.27             | 53.90          | 14.63       | 5000.0          | 1000.000        | 150.0       | H   | 326.0         | 28.7         |
| 24274.900000    | 52.43            | ---               | 73.90          | 21.47       | 5000.0          | 1000.000        | 150.0       | H   | 326.0         | 28.7         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Table 8.2-26: Radiated spurious emissions, 802.11b, mid channel, 18-26 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 18382.100000    | 44.04            | ---               | 73.90          | 29.86       | 5000.0          | 1000.000        | 385.0       | H   | 43.0          | 17.2         |
| 18382.100000    | ---              | 30.02             | 53.90          | 23.88       | 5000.0          | 1000.000        | 385.0       | H   | 43.0          | 17.2         |
| 23616.233333    | 50.27            | ---               | 73.90          | 23.63       | 5000.0          | 1000.000        | 190.0       | H   | 213.0         | 25.8         |
| 23616.233333    | ---              | 36.55             | 53.90          | 17.35       | 5000.0          | 1000.000        | 190.0       | H   | 213.0         | 25.8         |
| 24227.700000    | ---              | 39.34             | 53.90          | 14.56       | 5000.0          | 1000.000        | 344.0       | H   | 337.0         | 29.1         |
| 24227.700000    | 52.96            | ---               | 73.90          | 20.94       | 5000.0          | 1000.000        | 344.0       | H   | 337.0         | 29.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

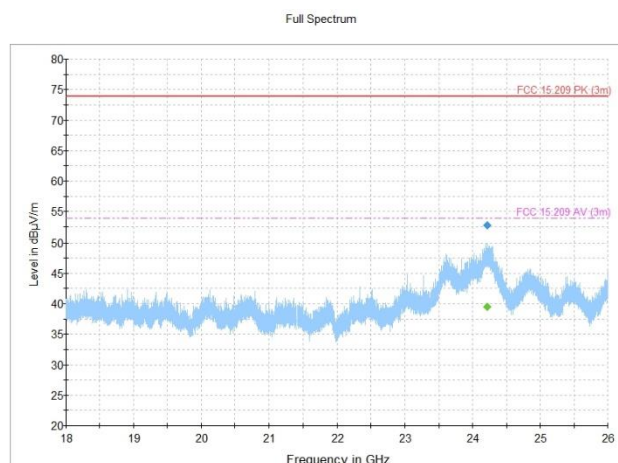


Figure 8.2-20: Radiated spurious emissions, 802.11b, high channel

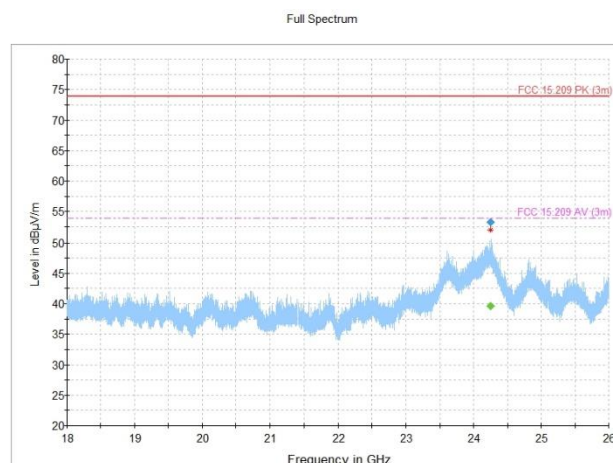


Figure 8.2-21: Radiated spurious emissions, 802.11g, low channel

**Table 8.2-27: Radiated spurious emissions, 802.11b, high channel, 18-26 GHz**

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 24217.833333    | ---              | 39.54             | 53.90          | 14.36       | 5000.0          | 1000.000        | 209.0       | H   | 68.0          | 29.1         |
| 24217.833333    | 52.71            | ---               | 73.90          | 21.19       | 5000.0          | 1000.000        | 209.0       | H   | 68.0          | 29.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)**Table 8.2-28: Radiated spurious emissions, 802.11g, low channel, 18-26 GHz**

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 24247.566667    | ---              | 39.63             | 53.90          | 14.27       | 5000.0          | 1000.000        | 314.0       | H   | 107.0         | 29.0         |
| 24247.566667    | 53.31            | ---               | 73.90          | 20.59       | 5000.0          | 1000.000        | 314.0       | H   | 107.0         | 29.0         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

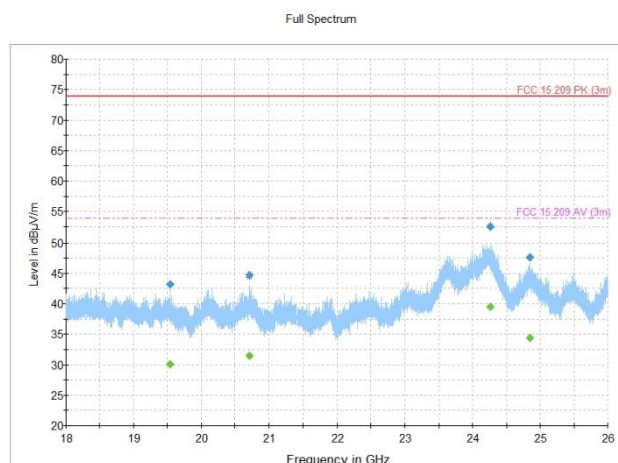


Figure 8.2-22: Radiated spurious emissions, 802.11g, mid channel

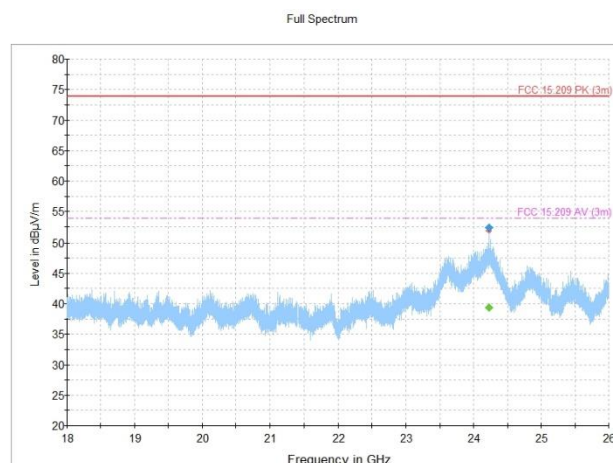


Figure 8.2-23: Radiated spurious emissions, 802.11g, high channel

Table 8.2-29: Radiated spurious emissions, 802.11g, mid channel, 18-26 GHz


| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 19544.433333    | ---              | 30.03             | 53.90          | 23.87       | 5000.0          | 1000.000        | 110.0       | V   | 128.0         | 18.1         |
| 19544.433333    | 43.17            | ---               | 73.90          | 30.73       | 5000.0          | 1000.000        | 110.0       | V   | 128.0         | 18.1         |
| 20712.233333    | ---              | 31.45             | 53.90          | 22.45       | 5000.0          | 1000.000        | 111.0       | V   | 290.0         | 20.2         |
| 20712.233333    | 44.73            | ---               | 73.90          | 29.17       | 5000.0          | 1000.000        | 111.0       | V   | 290.0         | 20.2         |
| 24269.033333    | 52.44            | ---               | 73.90          | 21.46       | 5000.0          | 1000.000        | 121.0       | H   | 20.0          | 28.8         |
| 24269.033333    | ---              | 39.51             | 53.90          | 14.39       | 5000.0          | 1000.000        | 121.0       | H   | 20.0          | 28.8         |
| 24848.300000    | 47.67            | ---               | 73.90          | 26.23       | 5000.0          | 1000.000        | 107.0       | H   | 232.0         | 24.7         |
| 24848.300000    | ---              | 34.37             | 53.90          | 19.53       | 5000.0          | 1000.000        | 107.0       | H   | 232.0         | 24.7         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)


Table 8.2-30: Radiated spurious emissions, 802.11g, high channel, 18-26 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 24227.966667    | ---              | 39.33             | 53.90          | 14.57       | 5000.0          | 1000.000        | 297.0       | H   | 190.0         | 29.1         |
| 24227.966667    | 52.34            | ---               | 73.90          | 21.56       | 5000.0          | 1000.000        | 297.0       | H   | 190.0         | 29.1         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

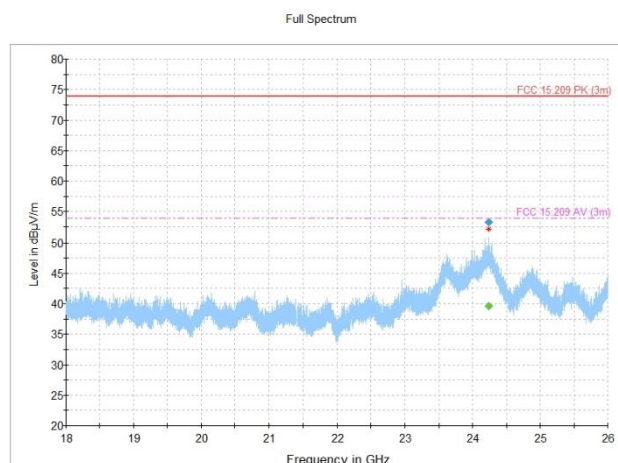

**Figure 8.2-24:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, low channel

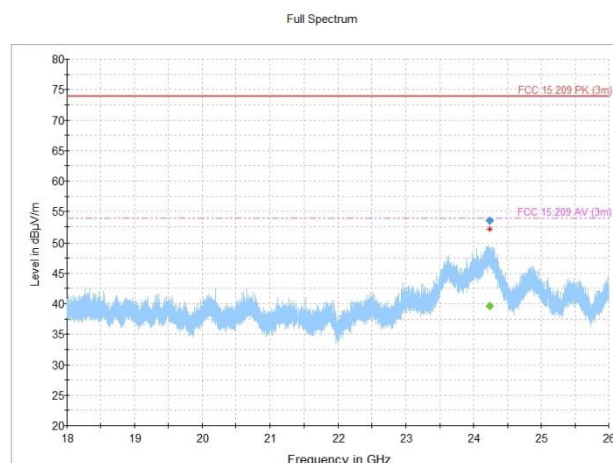

**Figure 8.2-25:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, mid channel

**Table 8.2-31:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, low channel, 18-26 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 24242.566667    | ---              | 39.59             | 53.90          | 14.31       | 5000.0          | 1000.000        | 146.0       | V   | 345.0         | 29.0         |
| 24242.566667    | 53.31            | ---               | 73.90          | 20.59       | 5000.0          | 1000.000        | 146.0       | V   | 345.0         | 29.0         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)


<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

**Table 8.2-32:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, mid channel, 18-26 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 24239.700000    | ---              | 39.60             | 53.90          | 14.30       | 5000.0          | 1000.000        | 312.0       | H   | 10.0          | 29.0         |
| 24239.700000    | 53.50            | ---               | 73.90          | 20.40       | 5000.0          | 1000.000        | 312.0       | H   | 10.0          | 29.0         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

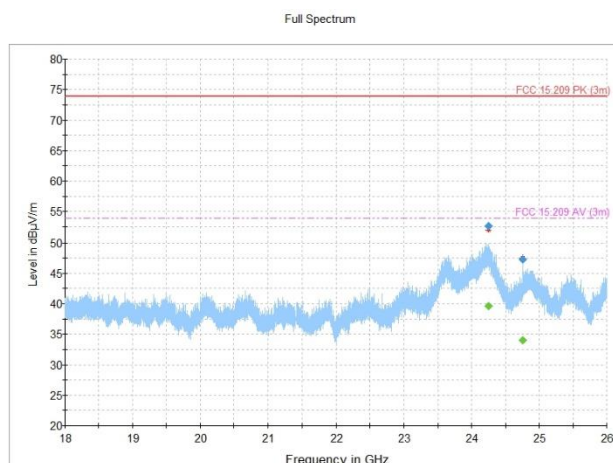

**Figure 8.2-26:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, high channel

**Table 8.2-33:** Radiated spurious emissions, 802.11n, MIMO antenna configuration, high channel, 18-26 GHz

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 24252.100000    | 52.63            | ---               | 73.90          | 21.27       | 5000.0          | 1000.000        | 377.0       | H   | 224.0         | 29.0         |
| 24252.100000    | ---              | 39.59             | 53.90          | 14.31       | 5000.0          | 1000.000        | 377.0       | H   | 224.0         | 29.0         |
| 24763.633333    | 47.26            | ---               | 73.90          | 26.64       | 5000.0          | 1000.000        | 371.0       | H   | 110.0         | 24.6         |
| 24763.633333    | ---              | 34.08             | 53.90          | 19.82       | 5000.0          | 1000.000        | 371.0       | H   | 110.0         | 24.6         |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

## Section 9 Block diagrams of test set-ups

### 9.1 Radiated emissions set-up

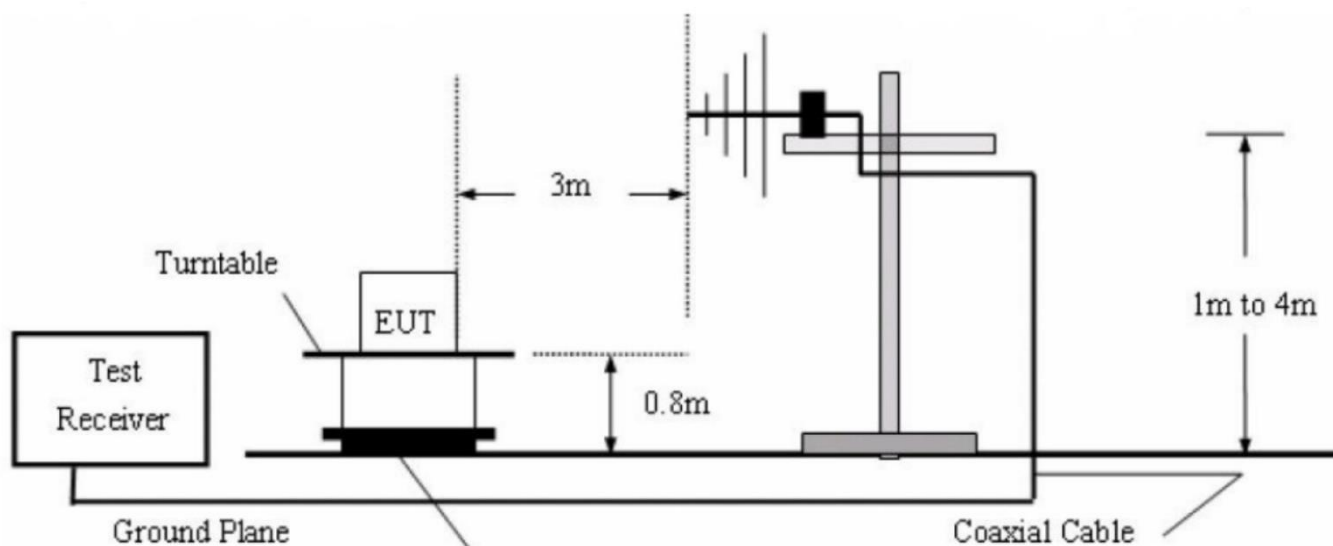


Figure 9.1-1: 30 MHz - 1000 MHz Setup

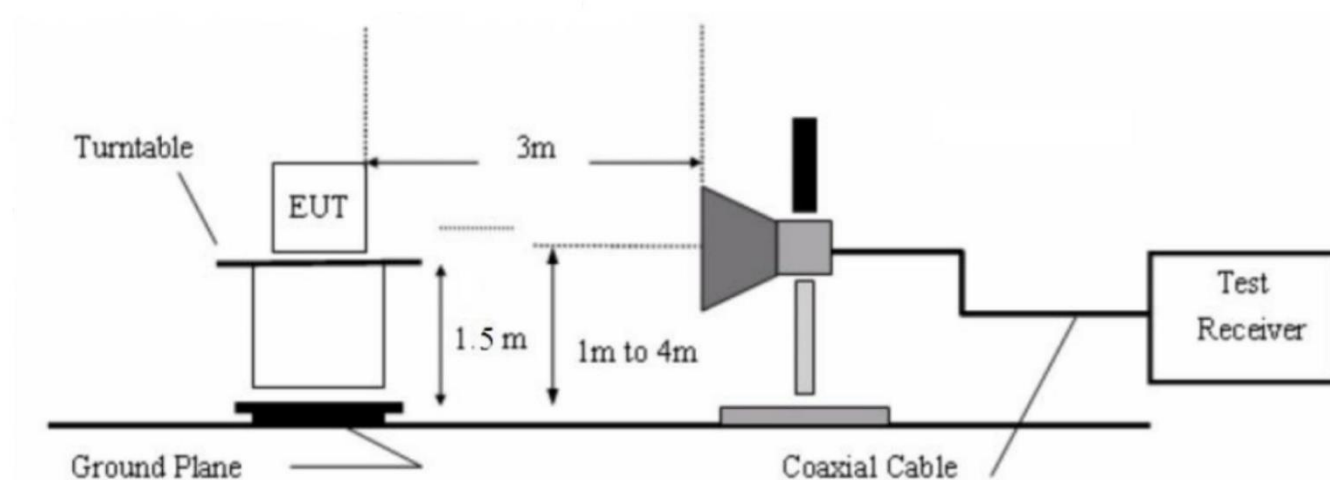


Figure 9.1-2: 1 GHz - 26 GHz Setup