




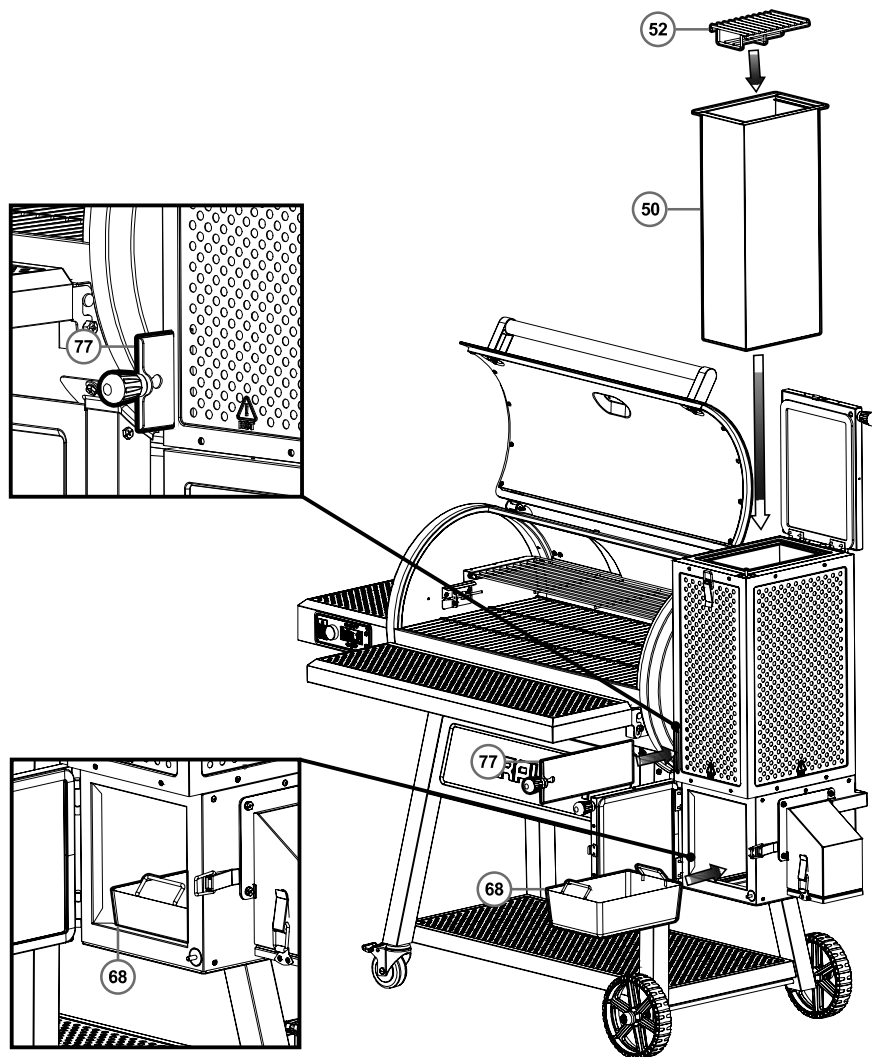


STEP 22

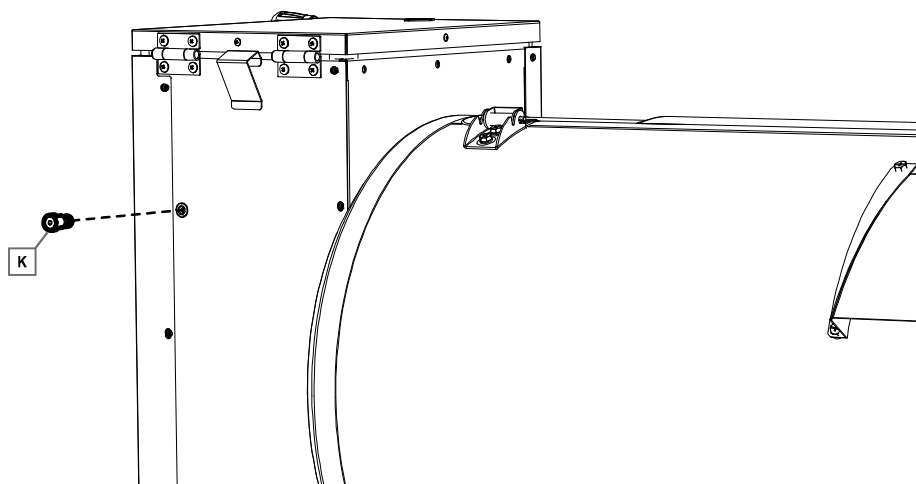

STEP 23




STEP 24

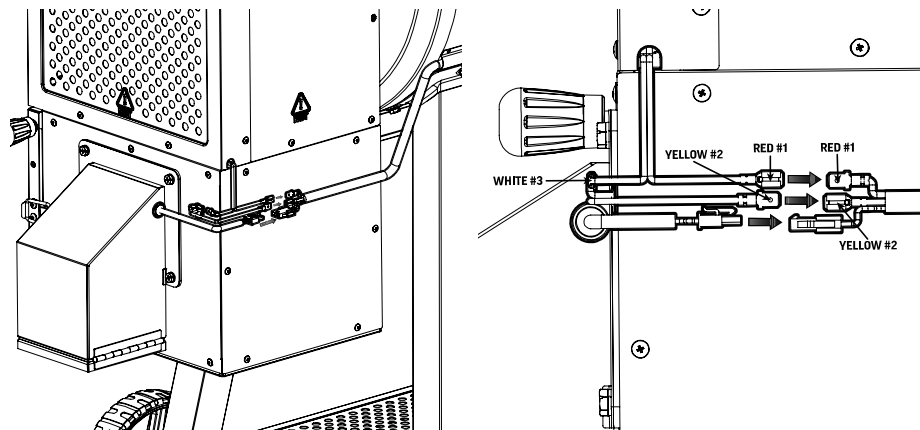





STEP 25A

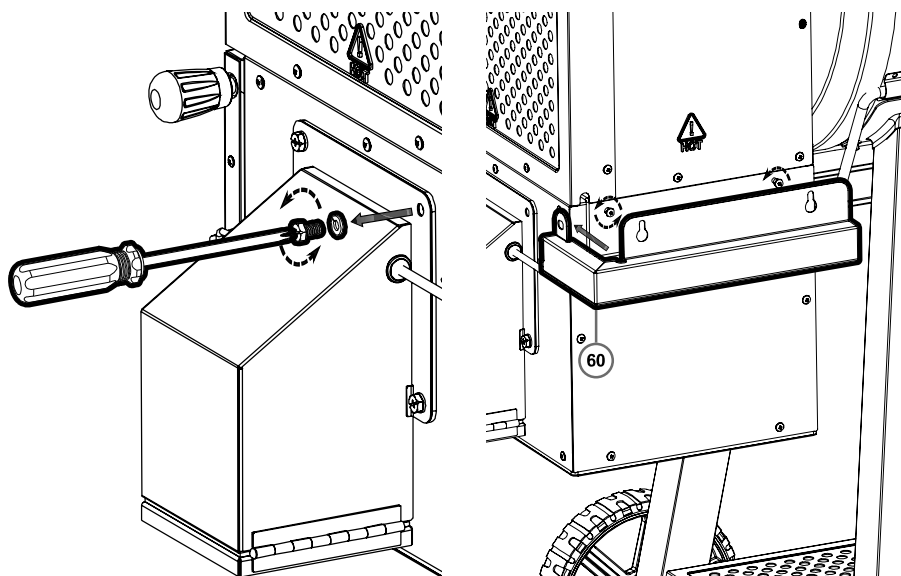


STEP 25B

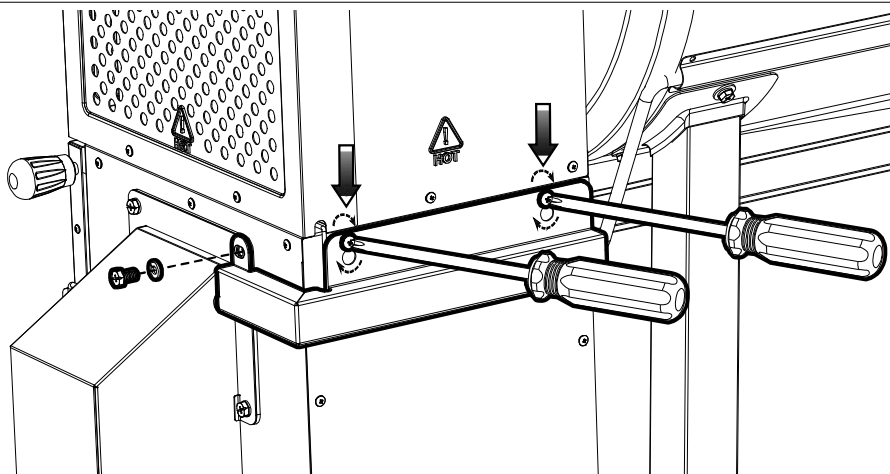

STEP 26

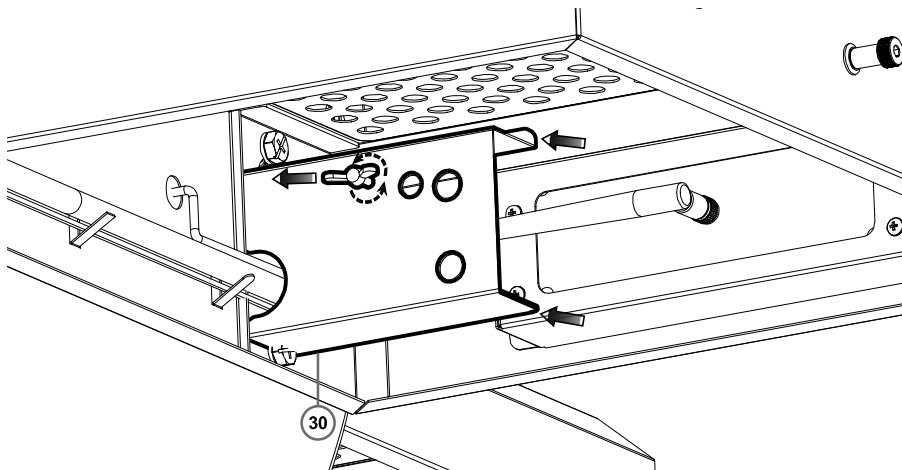


STEP 27

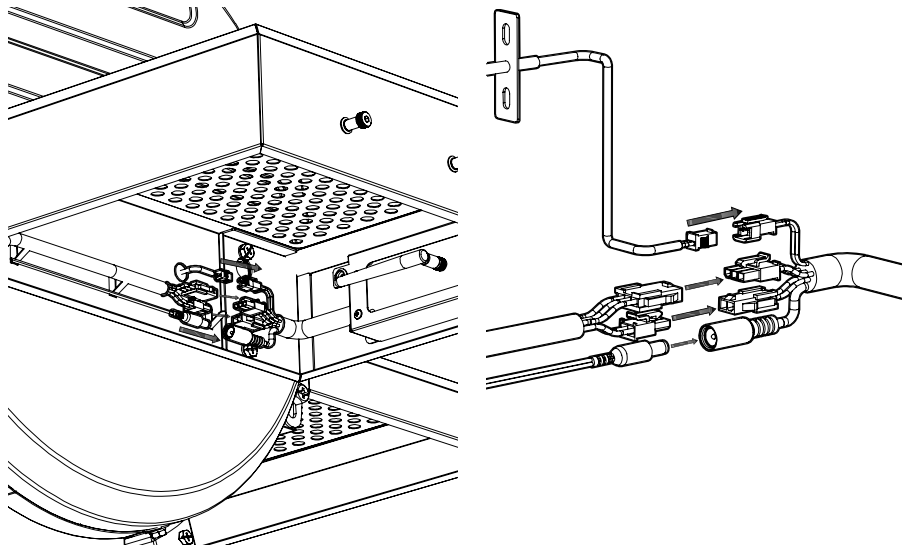




STEP 28A

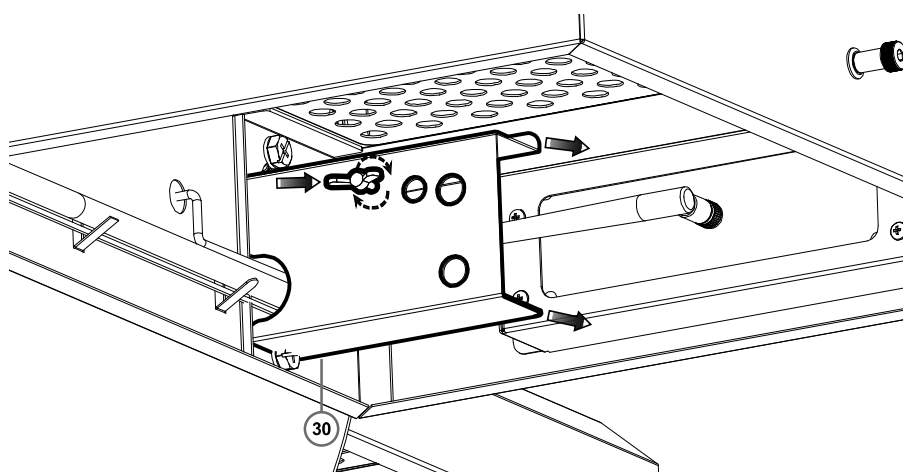

STEP 28B

Note: All cable connections must be placed behind Controller Cable Cover.

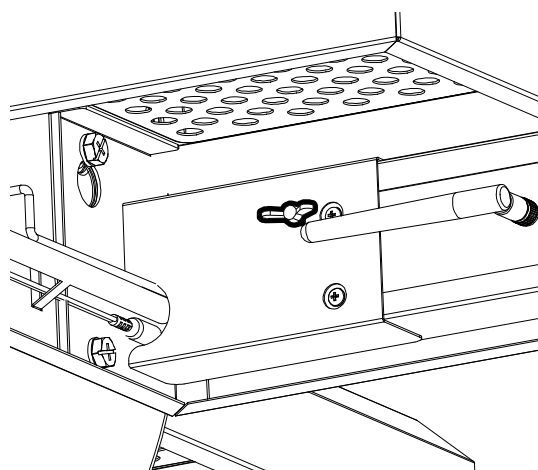

FULLY ASSEMBLED

To ensure sturdy assembly, tighten all NUTS and BOLTS.



OPERATING INSTRUCTIONS


Setting Up

This grill is designed for use outdoors, away from any flammable materials. It is important that there are no overhead obstructions and that there is a minimum distance of 12 feet (~4 meters) from the grill. It is important that the ventilation openings of the grill are not obstructed.

The grill must be used on a level, stable surface. The grill should be protected from direct drafts and positioned or protected against direct penetration by any trickling water (e.g. rain). Do not move grill while hot and do not leave unattended during operation.


Follow basic electrical safety precautions for outdoor appliances including: 1) Use only approved GFCI electrical outlet. 2) Do not plug appliance in until fully assembled and ready for use. 3) Do not expose electrical connections to rain or water at any time. 4) Place cords to avoid tripping hazards. 5) Ensure all extension cords are rated for outdoor use. 6) Employ a licensed electrical contractor to address any additional concerns for safe installation and operation.

NEVER EXCEED **700°F** BECAUSE THIS WILL DAMAGE THE FINISH AND
CONTRIBUTE TO RUST. PAINT IS NOT WARRANTED AND WILL REQUIRE TOUCH-UP.
THIS UNIT IS NOT WARRANTED AGAINST RUST.






Important Safety Notes

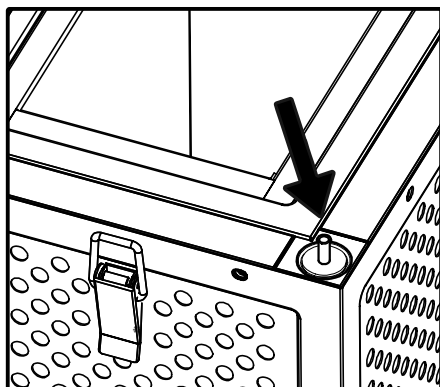

HOPPER LID

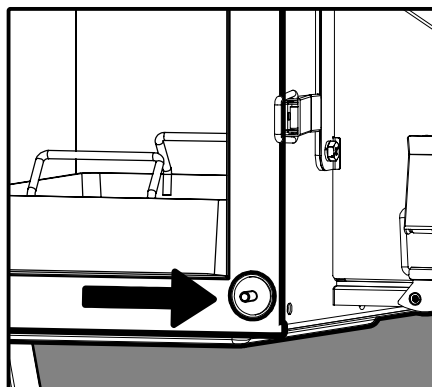


ASH PAN DOOR

GRAVITY 980 SAFETY SWITCHES

- Your Gravity 980 is equipped with safety switches on the hopper lid and ash pan door
- Before your grill can begin temperature control, the hopper lid and ash pan door **MUST** be closed
- If the fan is not coming on, please check first that both safety switches have been activated by closing each of these doors

Using the Gravity 980 Digital Controller

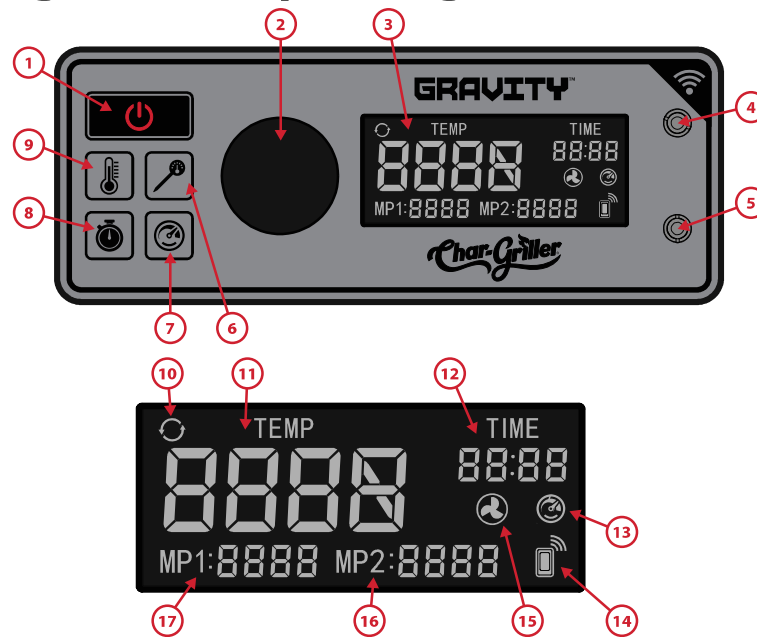

- 1 **Power On / Off:** Press 1 second to turn on. Press and hold for 2 seconds to turn off
- 2 **Control Dial:** Rotate to make a selection up or down. Press the center of the dial to confirm
- 3 **Status Screen**
- 4 **Meat Probe 1 Jack**
- 5 **Meat Probe 2 Jack**
- 6 **Set Meat Probe Temperature Goal**
- 7 **Turbo Fan Setting**
- 8 **Set Countdown Timer**
- 9 **Set Grill Temperature Goal**
- 10 **Door Open Indicator**
- 11 **Grill Temperature Display**
- 12 **Countdown Timer**
- 13 **Turbo Mode Enabled**
- 14 **Paired with Phone:** Will light up when a smartphone is paired with the controller
- 15 **Fan Speed Display:** Shows if the fan is running and at what speed
- 16 **Meat Probe 2 Temperature**
- 17 **Meat Probe 1 Temperature**