

Page 54 of 96

he test results

Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

NO	Simultaneous state	Portable I	Handset
NO	Simultaneous state	Body-worn	Hotspot
1	GSM(voice)+ WLAN 2.4GHz (data)	Yes	\O
2	GSM(voice)+ Bluetooth(data)	Yes	-
3	GSM (Data) + WLAN 2.4GHz (data)	Yes	Yes
4	GSM (Data) + Bluetooth(data)	Yes	Yes
5 🏻	WCDMA+ WLAN 2.4GHz (data)	Yes	Yes
6	WCDMA+ Bluetooth(data)	Yes	Yes
7	LTE + WLAN 2.4GHz (data)	Yes	Yes
8	LTE + Bluetooth(data)	Yes	Yes

NOTE:

- 1. WIFI and BT share the same antenna, and cannot transmit simultaneously.
- 2. Simultaneous with every transmitter must be the same test position.
- 3. KDB 447498 D01, BT SAR is excluded as below table.
- 4. KDB 447498 D01, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for body-worn SAR.
- 5. According to KDB 447498 D01 4.3.1, Standalone SAR test exclusion is as follow: For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] • [$\sqrt{f(GHz)}$] ≤ 3.0 for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR³⁰, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation³¹
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below

The test exclusions are applicable only when the minimum test separation distance is \leq 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.

- 6. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- 7. According to KDB 447498 D01 4.3.2, simultaneous transmission SAR test exclusion is as follow:
 - (1) Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.
 - (2) Any transmitters and antennas should be considered when calculating simultaneous mode.
 - (3) For mobile phone and PC, it's the sum of all transmitters and antennas at the same mode with same position in each applicable exposure condition
 - (4)When the standalone SAR test exclusion of section 4.3.2 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to det

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(GHz)/x}$] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Fest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGF presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 55 of 96

8. When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The ratio is determined by (SAR1 + SAR2)1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Estimated SAR			luding Tune-up ance	Separation Distance (mm)	Estimated SAR
		dBm	mW	Distance (min)	(W/kg)
ВТ	Body	4	2.512	0	0.104



Page 56 of 96

Sum of the SAR for GSM 850 &Wi-Fi & BT:

RF Exposure	Test	Simultaneous Transmission Scenario			Σ1-g SAR	SPLSR
Conditions	Position	GSM 850	WI-Fi DTS Band	Bluetooth	(W/Kg)	(Yes/No)
	Rear	0.389	0.132		0.521	No
Body-worn	Rear	0.389		0.104	0.493	No
(voice)	- Craus	0.385	0.106		0.491	No
	Front	0.385		0.104	0.489	No
®	Door	0.449		0.104	0.553	No
Body-worn	Rear	0.449	0.132		0.581	No
(Data)	Frant	0.444		0.104	0.548	No
Front	Front	0.444	0.106		0.550	No
Body-worn	Edge 1	0.052	0.085		0.137	No
(Hotspot)	Edge 1	0.052		0.104	0.156	No

Note:

- -According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- ·SPLSR mean is "The SAR to Peak Location Separation Ratio"



Page 57 of 96

Sum of the SAR for GSM 1900 &Wi-Fi & BT:

DE Evpoure	Test	Simultaneous Transmission Scenario			Σ1-g SAR	SPLSR
RF Exposure Conditions	Position	PCS 1900	WI-Fi DTS Band	Bluetooth	(W/Kg)	(Yes/No)
	Deer	0.089	0.132		0.221	No
Body-worn	Rear	0.089		0.104	0.193	No
(voice) Front	Cront	0.046	0.106		0.152	No
	Front	0.046		0.104	0.150	No
8	Dear	0.100		0.104	0.204	No
Body-worn	Rear	0.100	0.132		0.232	No
(Data)	J Frant	0.056		0.104	0.160	No
Front	Front	0.056	0.106		0.162	No
Body-worn	Edge 1	0.001	0.085		0.086	No
(Hotspot)	Edge 1	0.001		0.104	0.105	No

Note:

- -According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



Page 58 of 96

Sum of the SAR for WCDMA Band II &Wi-Fi & BT:

RF Exposure	Test	Simultaneous Transmission Scenario			Σ1-g SAR	SPLSR
Conditions	Position	WCDMA Band II	Wi-Fi DTS Band	Bluetooth	(W/Kg)	(Yes/No)
	Rear	0.107	0.132		0.239	No
	Front	0.058	0.106		0.164	No
Deduces	Edge 1	0.001	0.085		0.086	No
Body-worn	Rear	0.107		0.104	0.211	No
	Front	0.058		0.104	0.162	No
- C	Edge 1	0.001		0.104	0.105	No

Note:

- -According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- ·SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 59 of 96

Sum of the SAR for WCDMA Band V &Wi-Fi & BT:

RF Exposure Test		Simultaneo	Simultaneous Transmission Scenario			SPLSR
Conditions	Position	WCDMA Band V	Wi-Fi DTS Band	Bluetooth	Σ1-g SAR (W/Kg)	(Yes/No)
	Rear	0.252	0.132		0.384	No
	Front	0.271	0.106		0.377	No
Dody worn	Edge 1	0.026	0.085		0.111	No
Body-worn	Rear	0.252		0.104	0.356	No
	Front	0.271		0.104	0.375	No
-C	Edge 1	0.026		0.104	0.130	No

Note:

- -According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- ·SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 60 of 96

Sum of the SAR for LTE Band 4 &Wi-Fi & BT:

RF Exposure Test		Simultaneo	Simultaneous Transmission Scenario			SPLSR
Conditions	Position	LTE Band 4	Wi-Fi DTS Band	Bluetooth	Σ1-g SAR (W/Kg)	(Yes/No)
	Rear	0.129	0.132		0.261	No
	Front	0.071	0.106		0.177	No
Dody worn	Edge 1	0.001	0.085		0.086	No
Body-worn	Rear	0.129		0.104	0.233	No
	Front	0.071		0.104	0.175	No
-C	Edge 1	0.001		0.104	0.105	No

Note:

- -According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- ·SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 61 of 96

Sum of the SAR for LTE Band 7 &Wi-Fi & BT:

RF Exposure Test		Simultaneo	Simultaneous Transmission Scenario			SPLSR
Conditions	Position	LTE Band 7	Wi-Fi DTS Band	Bluetooth	Σ1-g SAR (W/Kg)	
	Rear	1.080	0.132		1.212	No
	Front	0.788	0.106		0.894	No
Dody worn	Edge 1	0.097	0.085		0.182	No
Body-worn	Rear	1.080		0.104	1.184	No
	Front	0.788		0.104	0.892	No
-C	Edge 1	0.097		0.104	0.201	No

Note:

- -According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- ·SPLSR mean is "The SAR to Peak Location Separation Ratio "



Page 62 of 96

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab Date: Dec. 20,2020

System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.26 Frequency: 835 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.91$ mho/m; $\epsilon r = 41.52$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):20.3, Liquid temperature (°C): 20.1

SATIMO Configuration:


• Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom


Measurement SW: OpenSAR V4_02_35

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

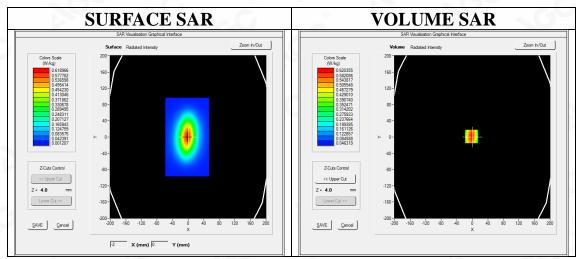



Maximum location: X=-2.00, Y=1.00 SAR Peak: 0.88 W/kg

	8
SAR 10g (W/Kg)	0.371843
SAR 1g (W/Kg)	0.591762





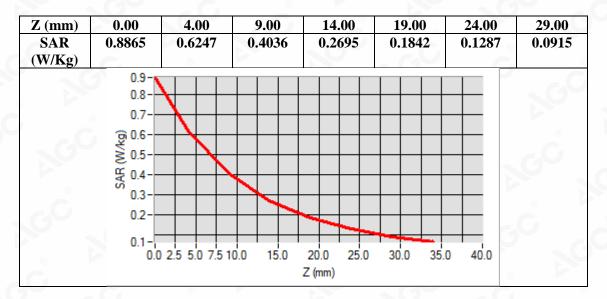

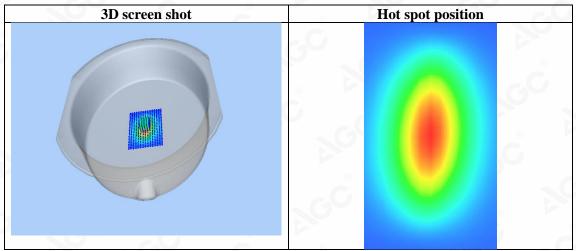



Date: Dec. 27,2020

Page 64 of 96

he test results

Test Laboratory: AGC Lab System Check Head 1750MHz

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.48 Frequency: 1750 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.35 \text{ mho/m}$; $\epsilon r = 39.65$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.4

SATIMO Configuration:


Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

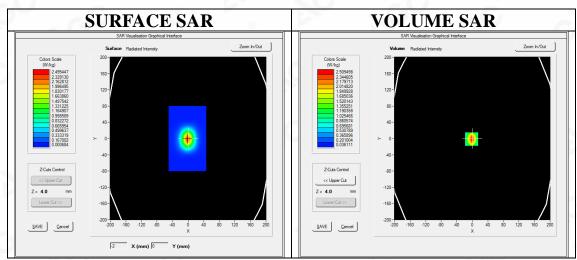


Maximum location: X=-2.00, Y=-1.00 SAR Peak: 4.01 W/kg

SAR 10g (W/Kg)	1.194928
SAR 1g (W/Kg)	2.350714



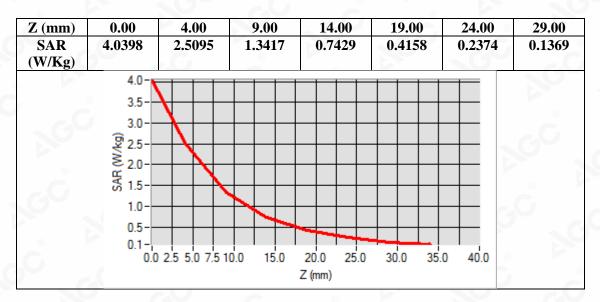

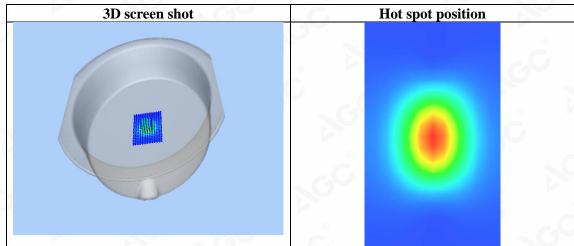



Date: Dec. 26,2020

Page 66 of 96

he test report.

Test Laboratory: AGC Lab System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.72 Frequency: 1900 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.39$ mho/m; $\epsilon r = 39.51$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section: Input Power=18dBm

Ambient temperature (°C):20.3, Liquid temperature (°C): 20.1

SATIMO Configuration:


Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4 02 35


Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

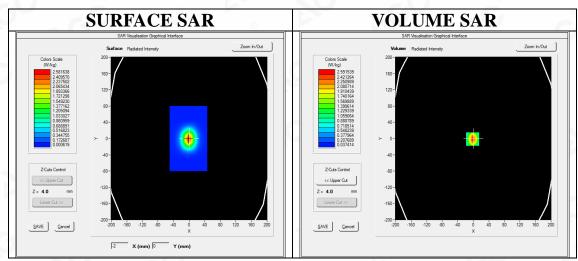


Maximum location: X=-2.00, Y=-1.00 SAR Peak: 4.14 W/kg

SAR 10g (W/Kg)	1.235872
SAR 1g (W/Kg)	2.427634



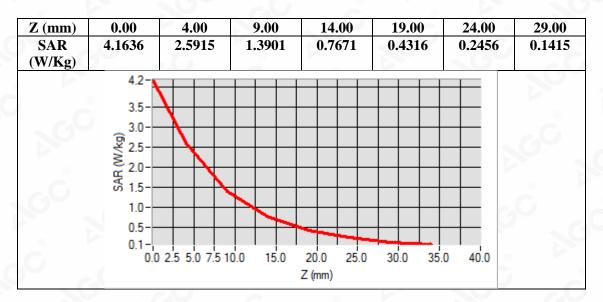

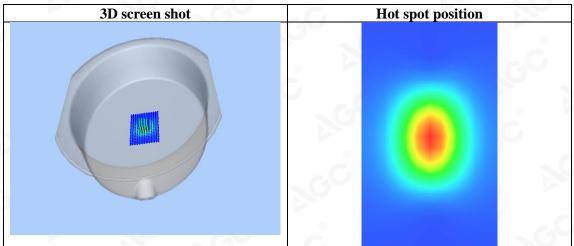



Date: Dec. 25,2020

Page 68 of 96

Test Laboratory: AGC Lab System Check Head 2450 MHz

DUT: Dipole 2450 MHz Type: SID 2450

Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.23 Frequency: 2450 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.82$ mho/m; $\epsilon r = 38.13$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C):20.6, Liquid temperature ($^{\circ}$ C): 20.3

SATIMO Configuration


· Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/System Check 2450MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 2450MHz Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

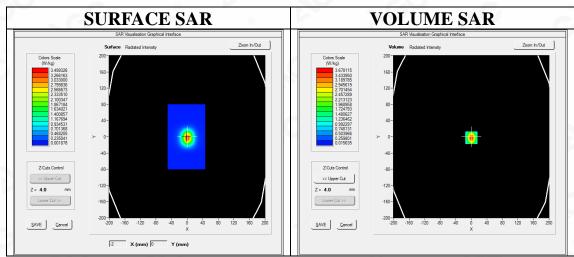


Maximum location: X=0.00, Y=-2.00 SAR Peak: 6.40 W/kg

SAR 10g (W/Kg)	1.519256
SAR 1g (W/Kg)	3.382448



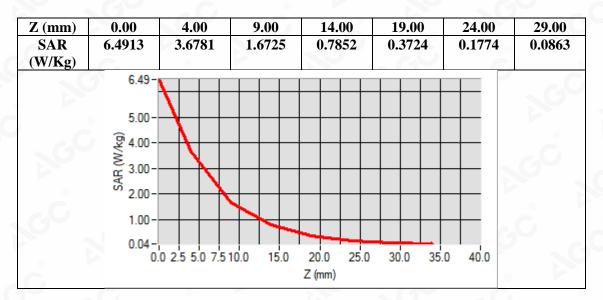

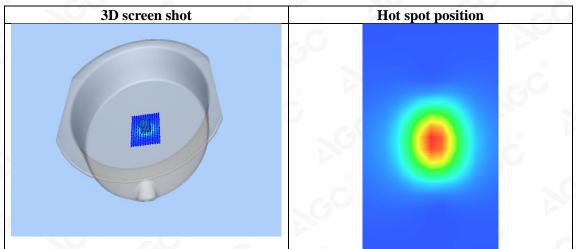



Date: Dec. 27,2020

Page 70 of 96

Test Laboratory: AGC Lab System Check Head 2600MHz

DUT: Dipole 2600 MHz; Type: SID 2600

Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=3.81 Frequency:2600 MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.91$ mho/m; $\epsilon r = 38.72$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:


Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom


Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

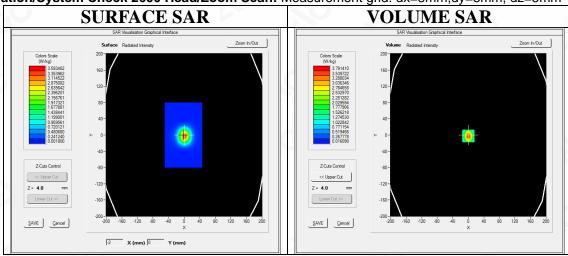



Maximum location: X=0.00, Y=-2.00 SAR Peak: 6.60 W/kg

SAR 10g (W/Kg)	1.564743
SAR 1g (W/Kg)	3.488466





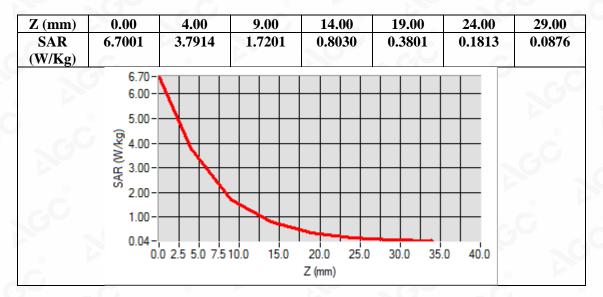

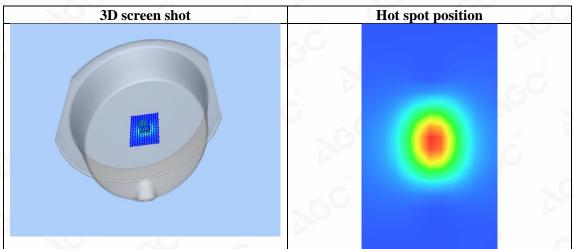



Page 72 of 96

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab Date: Dec. 20,2020

GSM 850 Mid- Body- Back (MS)<SIM 1> DUT: Tablet PC; Type: MT-1010OF

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.26; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.93$ mho/m; $\epsilon r = 40.66$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.3, Liquid temperature (°C): 20.1

SATIMO Configuration:

· Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/GSM 850 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 850 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


dx=8mm dy=8mm, h= 5.00 mm
5x5x7,dx=8mm dy=8mm dz=5mm,Complete
ELLI
Body Back
GSM 850
Middle
TDMA (Crest factor: 8.0)

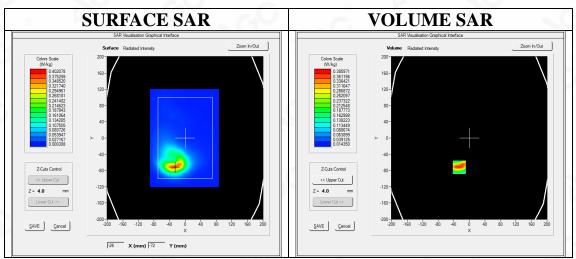


Maximum location: X=-26.00, Y=-72.00 SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.198256
SAR 1g (W/Kg)	0.368957



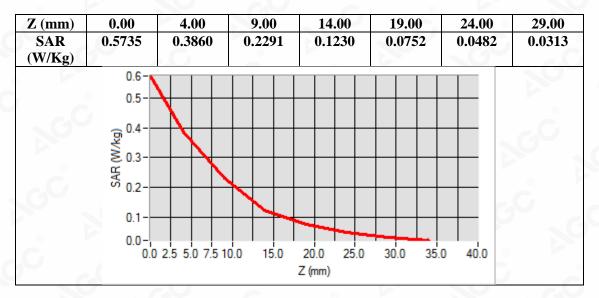

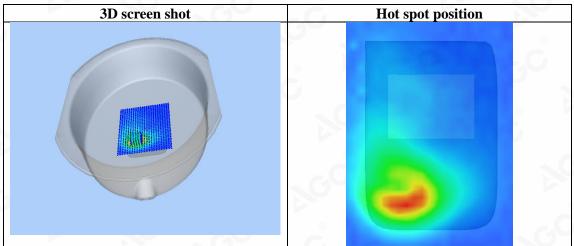



Page 74 of 96

Test Laboratory: AGC Lab

Date: Dec. 20,2020
GPRS 850 Mid- Body- Back (3up)

DUT: Tablet PC; Type: MT-1010OF

Communication System: GPRS-3 Slot; Communication System Band: GSM 850; Duty Cycle: 1:2.7; Conv.F=5.26; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.93$ mho/m; $\epsilon r = 40.66$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.3, Liquid temperature ($^{\circ}$ C): 20.1

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 850 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GPRS 850 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	GSM 850
Channels	Middle
Signal	TDMA (Crest factor: 2.7)

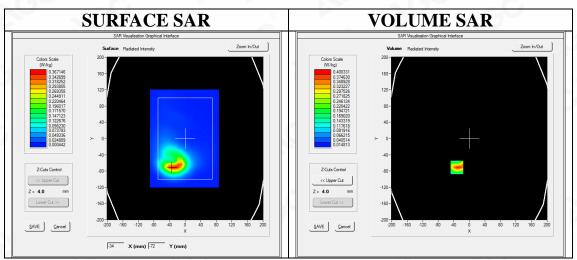



Maximum location: X=-32.00, Y=-71.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.200281
SAR 1g (W/Kg)	0.373757



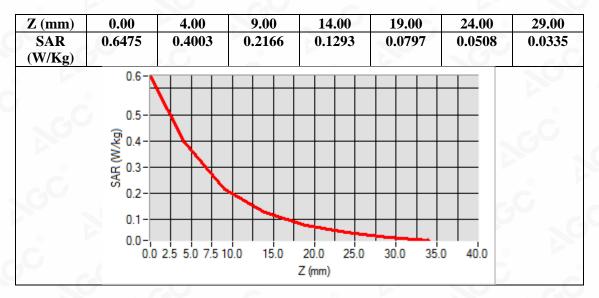

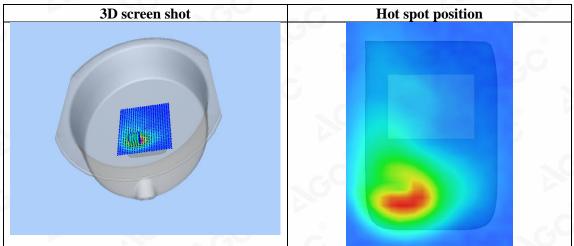



Date: Dec. 26,2020

Page 76 of 96

Test Laboratory: AGC Lab

PCS 1900 Mid-Body-Back (MS)<SIM 1> DUT: Tablet PC; Type: MT-10100F

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.36$ mho/m; $\epsilon = 40.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.3, Liquid temperature ($^{\circ}$ C): 20.1

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/PCS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

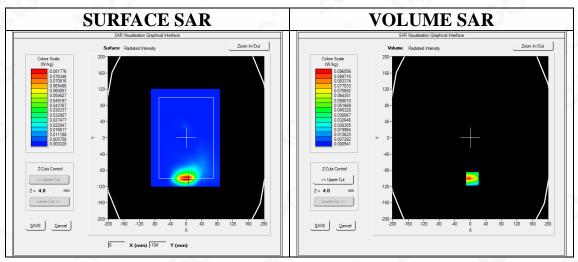


Maximum location: X=5.00, Y=-101.00 SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.041261
SAR 1g (W/Kg)	0.087895



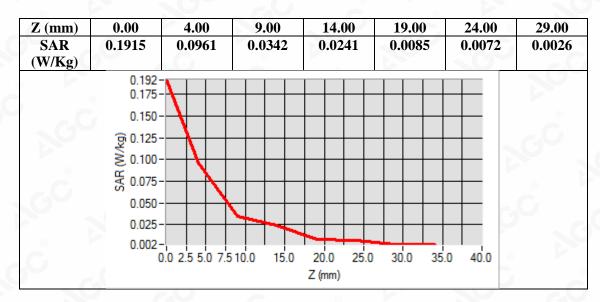

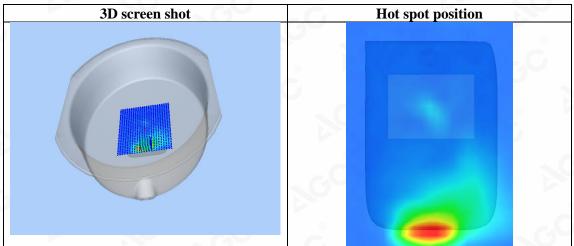



Page 78 of 96

Test Laboratory: AGC Lab

Date: Dec. 26,2020

GPRS 1900 Mid-Body-Back (3up)

GPRS 1900 Mid-Body-Back (3up) DUT: Tablet PC; Type: MT-1010OF

Communication System: GPRS-3Slot; Communication System Band: PCS 1900; Duty Cycle: 1:2.7; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.36$ mho/m; $\epsilon r = 40.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.3, Liquid temperature ($^{\circ}$ C): 20.1

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/GPRS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GPRS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 2.7)

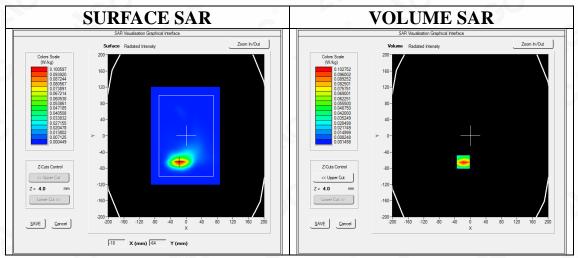


Maximum location: X=-18.00, Y=-65.00 SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.045697
SAR 1g (W/Kg)	0.097176



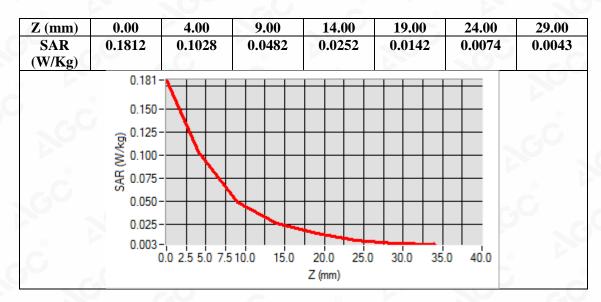

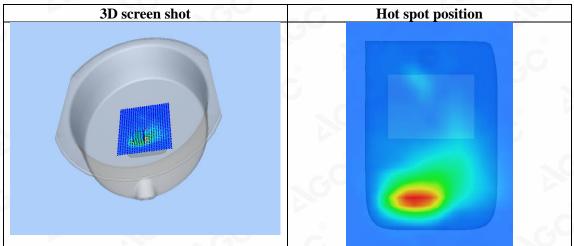



Page 80 of 96

Test Laboratory: AGC Lab Date: Dec. 26,2020

WCDMA Band II Mid-Body-Towards Grounds (RMC 12.2kbps)

DUT: Tablet PC; Type: MT-1010OF

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.36$ mho/m; $\epsilon r = 40.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.3, Liquid temperature ($^{\circ}$ C): 20.1

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA band II Mid-Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA band II Mid-Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

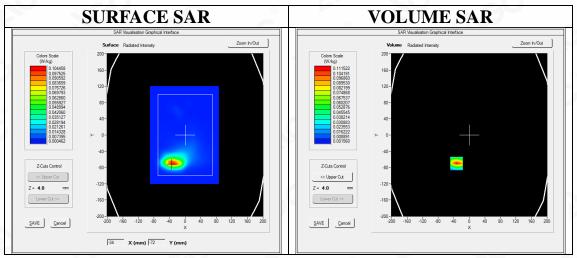


Maximum location: X=-33.00, Y=-70.00 SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.048154
SAR 1g (W/Kg)	0.103513



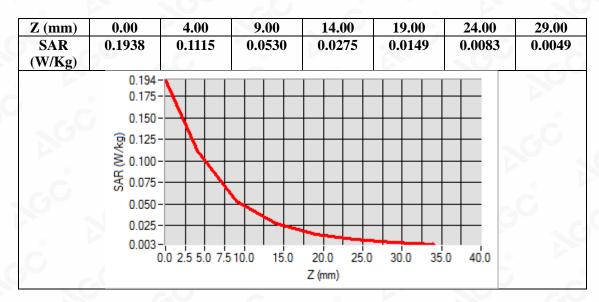

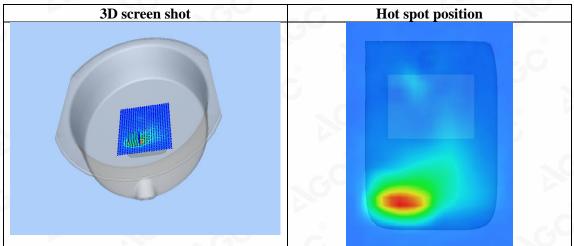



Page 82 of 96

Test Laboratory: AGC Lab Date: Dec. 20,2020

WCDMA Band V Mid-Body-Towards Phantom (RMC)

DUT: Tablet PC; Type: MT-1010OF

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.26; Frequency: 836.4 MHz; Medium parameters used: f = 835MHz; $\sigma = 0.93 \text{ mho/m}$; $\epsilon r = 40.66$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.3, Liquid temperature (°C): 20.1

SATIMO Configuration:

· Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band V Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA Band V Mid-Body- Front/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Front
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

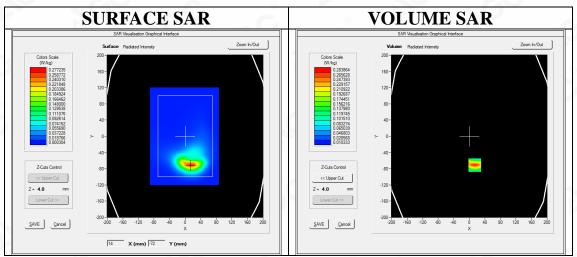


Maximum location: X=14.00, Y=-71.00 SAR Peak: 0.45 W/kg

SAR 10g (W/Kg) 0.143403 SAR 1g (W/Kg) 0.264862



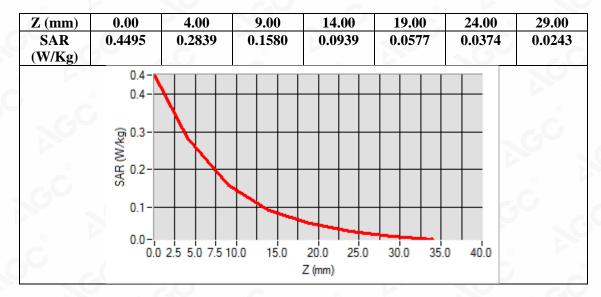

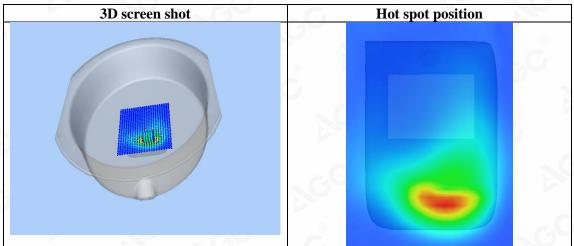



Date: Dec. 27,2020

Page 84 of 96

Test Laboratory: AGC Lab

LTE Band 4 Mid-Body-Back (1 RB#0) DUT: Tablet PC; Type: MT-10100F

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=4.48;

Frequency:1732.5 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.32$ mho/m; $\epsilon r = 40.86$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.4

SATIMO Configuration:

· Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid-Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

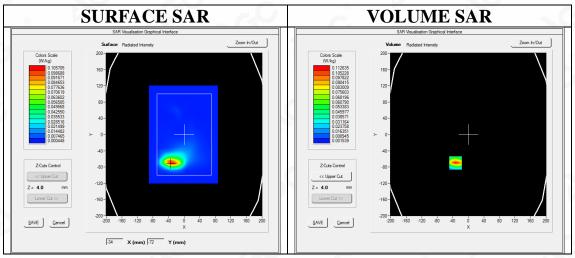



Maximum location: X=-33.00, Y=-70.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.048917
SAR 1g (W/Kg)	0.104672



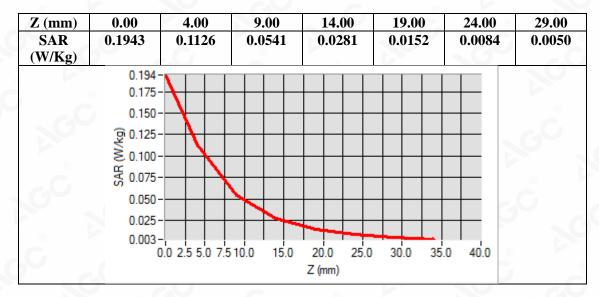

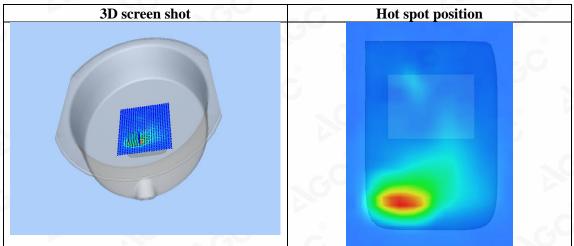



Page 86 of 96

Test Laboratory: AGC Lab Date: Dec. 27,2020

LTE Band 7 Low-Body-Back (1RB#0) DUT: Tablet PC; Type: MT-10100F

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.81 Frequency: 2510MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.86 \text{ mho/m}$; $\epsilon r = 41.29$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.5

SATIMO Configuration:

· Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Low-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Low -Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm


dx=8mm dy=8mm, h= 5.00 mm
7x7x7,dx=5mm dy=5mm dz=5mm
ELLI
Body Back
LTE BAND 7
Low
OFDM (Crest factor: 1.0)

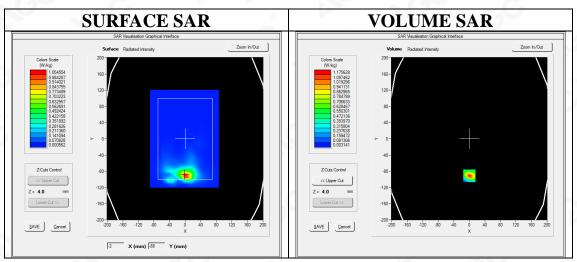


Maximum location: X=0.00, Y=-91.00 SAR Peak: 2.15 W/kg

SAR 10g (W/Kg)	0.460403
SAR 1g (W/Kg)	1.065725



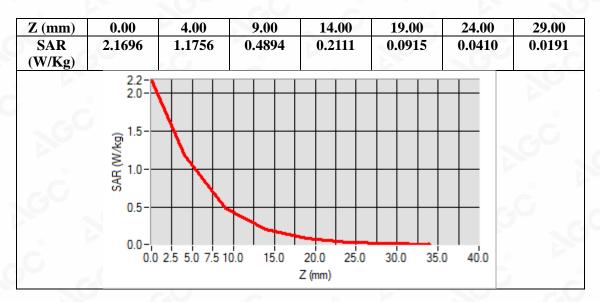

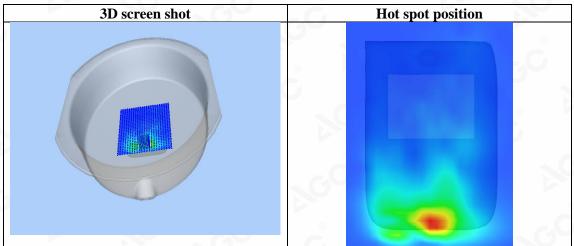



Page 88 of 96

WIFI MODE

Test Laboratory: AGC Lab Date: Dec. 25,2020

802.11b Mid-Body-Worn- Back DUT: Tablet PC; Type: MT-1010OF

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.23;

Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.80$ mho/m; $\epsilon r = 39.43$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$):20.6, Liquid temperature ($^{\circ}$): 20.3

SATIMO Configuration:

· Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Body- Back /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	© ELLI
Device Position	Body Back
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

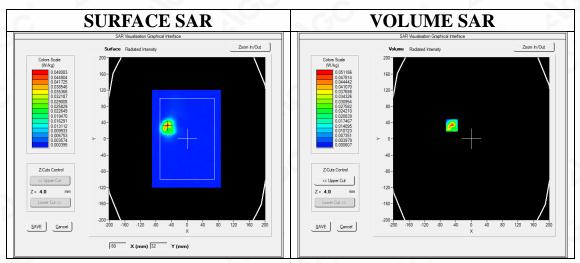


Maximum location: X=-50.00, Y=33.00 SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.017692
SAR 1g (W/Kg)	0.045154



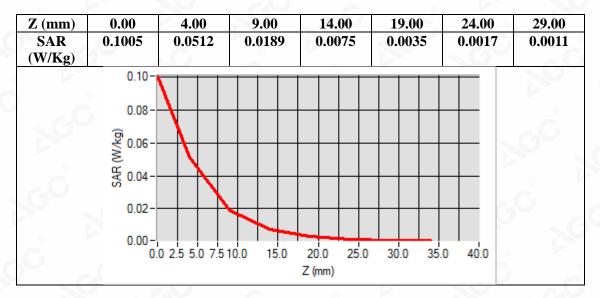

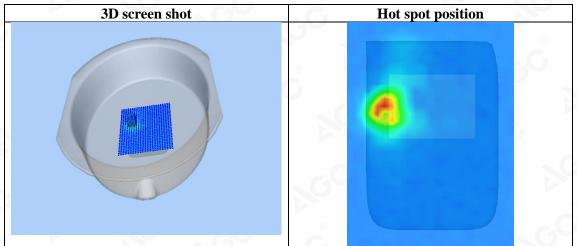



Page 90 of 96

Repeated SAR

Test Laboratory: AGC Lab Date: Dec. 27,2020

LTE Band 7 Low-Body-Back (1RB#0) DUT: Tablet PC; Type: MT-10100F

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.81 Frequency: 2510MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.86 \text{ mho/m}$; $\epsilon r = 41.29$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.5

SATIMO Configuration:

· Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Low-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Low -Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 7
Channels	Low
Signal	OFDM (Crest factor: 1.0)

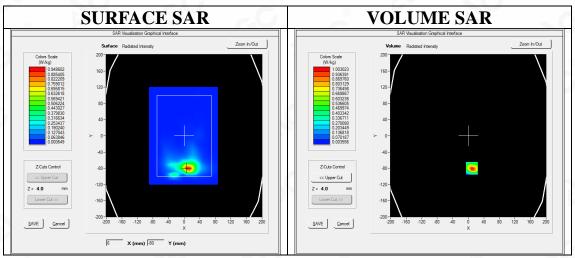



Maximum location: X=9.00, Y=-80.00

SAR Peak: 1.86 W/kg

SAR 10g (W/Kg)	0.402413
SAR 1g (W/Kg)	0.935354



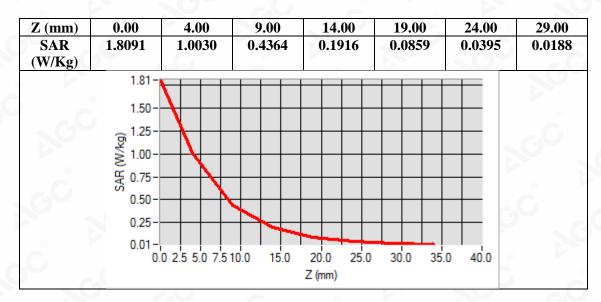

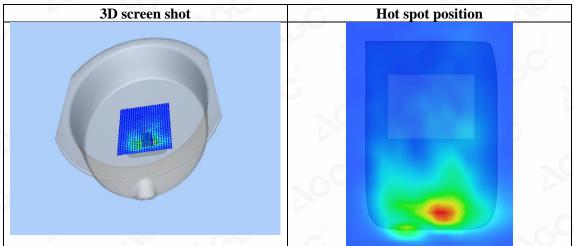




Page 92 of 96

APPENDIX C. TEST SETUP PHOTOGRAPHS


Body Back 0mm

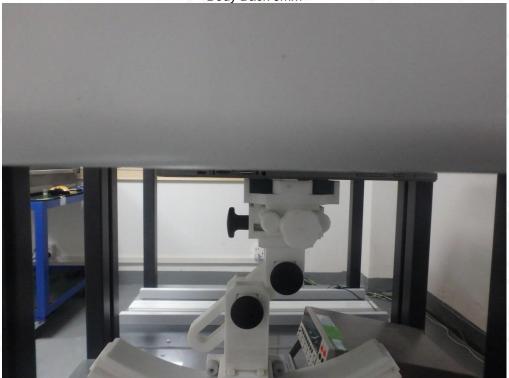

Body Front 0mm



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






Edge 1(Top) 0mm-Hotspot Mode




Edge 2(Right) 0mm-Hotspot Mode

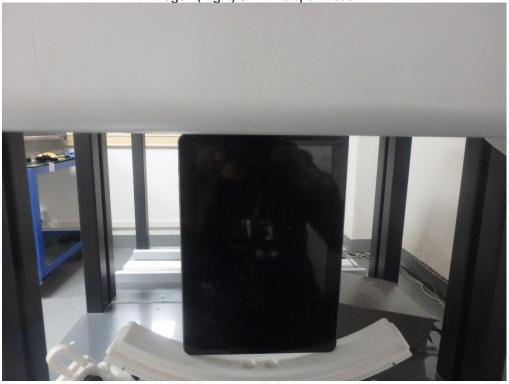



Page 94 of 96







Page 95 of 96

DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2013



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pestamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the presented in the report apply only to the tested sample. g/Inspection he test results the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 96 of 96

APPENDIX D. CALIBRATION DATA

Refer to Attached files.



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

he test report.