



Shenzhen Huatongwei International Inspection Co., Ltd.
Huatongwei 101, No.006, Keji south 12th Road, High-tech zone community, Yuehai Street,
Nanshan District, Shenzhen, Guangdong, China
Phone:86-755-26715499 E-mail: cs@szhtw.com.cn Website:http://www.szhtw.com.cn

TEST REPORT

For WiFi-5GHz Band



Report No. : CHTW24100051 Report Verification:
Project No..... : SHT2407073401W
FCC ID..... : 2AYEZ-MT-100
Applicant's name : Telo Communication (Shenzhen) Co., Ltd
Address..... : 13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Product Name : Smart LTE Terminal
Trade Mark : TELOX
Model No. : MT-100
Listed Model(s) : MT-100L, MT-100M, MT-100X, MT-100P, MT-100K
Standard : FCC CFR Title 47 Part 15 Subpart E § 15.407
Date of receipt of test sample..... : Aug. 15, 2024
Date of testing..... : Aug. 19, 2024- Aug. 29, 2024
Date of issue..... : Oct. 17, 2024
Result..... : PASS

Compiled by
(Position+Printed name+Signature): File administrators Xiaodong Zhao Xiaodong Zhao
Supervised by
(Position+Printed name+Signature): Project Engineer Xiaodong Zhao Xiaodong Zhao
Approved by
(Position+Printed name+Signature): RF Manager Xu yang Xu Yang

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.
Address..... : Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	6
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Test sample information	8
4.5.	Support unit used in test configuration and system	8
4.6.	Testing environmental condition	8
4.7.	Statement of the measurement uncertainty	9
4.8.	Equipment Used during the Test	10
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1.	Antenna Requirement	12
5.2.	AC Conducted Emission	13
5.3.	Maximum Conducted Output Power	16
5.4.	Power Spectral Density	18
5.5.	26dB bandwidth and 99% Occupy bandwidth	20
5.6.	6dB Bandwidth	21
5.7.	Band edge	22
5.8.	Radiated Spurious Emissions	28
5.9.	Frequency stability	37
<u>6.</u>	<u>TEST SETUP PHOTOS.....</u>	<u>38</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS.....</u>	<u>38</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>38</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC CFR Title 47 Part 15 Subpart E § 15.407](#): General technical requirements
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB789033 D02 v02r01](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

1.2. Report version

Revision No.	Date of issue	Description
N/A	2024-10-17	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Chenxin Ling
5.2	AC Conducted Emission	15.207	PASS	Yating Chen
5.3	Maximum Conducted Output Power	15.407(a)	PASS	Chenxin Ling
5.4	Maximum Power Spectral Density	15.407(a)	PASS	Chenxin Ling
5.5	26dB Bandwidth and 99% Occupancy bandwidth	15.407(a)	PASS	Chenxin Ling
5.6	6dB Bandwidth	15.407(a)	PASS	Chenxin Ling
5.7	Band edge	15.407(b)	PASS	Yifan Wang
5.8	Radiated Spurious Emissions	15.209	PASS	Yifan Wang
5.9	Frequency Stability	15.407(g)	PASS	Chenxin Ling

Note:

- The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Manufacturer:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Factory:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China

3.2. Product Description

Main unit information:	
Product Name:	Smart LTE Terminal
Trade Mark:	TELOX
Model No.:	MT-100
Listed Model(s):	MT-100L, MT-100M, MT-100X, MT-100P, MT-100K
Power supply:	DC 3.87V from Battery
Hardware version:	V1.0
Software version:	MT100_US_V1P_20240531
Accessory unit information:	
Battery information:	3.87V 4000mAh 15.48Wh Model: TEB-4000T Limited Charge Voltage: 4.45V
Adapter information:	MODEL: MR-0502000US INPUT:100-240V~50/60Hz 0.3A OUTPUT:DC 5V 2.0A Shen zhen Mao Two Power Co., Ltd

3.3. Radio Specification Description

Support type*1	☒ 802.11a	☒ 802.11n	☐ 802.11ac
Support Bandwidth	20MHz:	802.11n, 802.11a	
	40MHz:	802.11n	
Operation frequency:	☒ U-NII-1 Band:	5150MHz~5250MHz	
	☒ U-NII-2A Band:	5250MHz~5350MHz	
	☒ U-NII-3 Band:	5725MHz~5850MHz	
Modulation:	BPSK, QPSK, 16QAM, 64QAM		
Function:	☐ Outdoor AP	☐ Indoor AP	☐ Fixed P2P
	☒ Client		
DFS type:	☐ Master devices	☐ Slave devices with radar detection	☒ Slave devices without radar detection
Antenna technology:	☒ SISO	☐ MIMO	
Antenna type:	PIFA Antenna		
Antenna gain:	2.56dBi		

Note:

*1: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below.

Band	Test Channel	20MHz		40MHz	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	CH _L	36	5180	38	5190
	CH _M	44	5220	-	-
	CH _H	48	5240	46	5230
U-NII-2A	CH _L	52	5260	54	5270
	CH _M	56	5280	-	-
	CH _H	64	5320	62	5310
U-NII-3	CH _L	149	5745	151	5755
	CH _M	157	5785	-	-
	CH _H	165	5825	159	5795

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11a	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.4. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT24070734001
EMI test items	YPHT24070734001

Note:

RF Conducted test items: Maximum Conducted Output Power, Maximum Power Spectral Density , 26dB Bandwidth and 99% Occupancy bandwidth , 6dB Bandwidth ,Frequency Stability

RF Radiated test items: Band edge, Radiated Spurious Emission

EMI test items: AC Conducted Emission

4.5. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

4.6. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.7. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Maximum Conducted Output Power	1.07
3	Maximum Power Spectral Density	1.07
4	26dB Bandwidth and 99% Occupancy bandwidth	0.002%
5	6dB Bandwidth	0.002%
6	Radiated Band Edge Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
7	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
8	Frequency Stability	0.05ppm

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.8. Equipment Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2024/08/27	2025/08/26
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2024/08/21	2025/08/20
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2024/5/25	2025/5/24
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2024/08/12	2025/08/11
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2024/08/12	2025/08/11
●	Protection Network	SCHWARZBECK	HTWE0567	VTSD9561FN	00899	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0148	FCC-TLISN-T2-02	20371	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0150	FCC-TLISN-T8-02	20375	2024/08/12	2025/08/11
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission – 9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2024/04/08	2027/04/07
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission - 30MHz~1GHz 3M							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	/	2024/5/24	2025/5/23
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- Above 1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/04/17	2026/04/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2024/08/12	2025/08/11
●	Spectrum Analyzer	R&S	HTWE0385	N9020A	MY54486658	2024/08/12	2025/0811
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/02/14	2026/02/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2024/06/06	2025/06/05
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2024/06/06	2025/06/05
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement


FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

☒ Passed ☐ Not Applicable

The antenna type is a PIFA antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

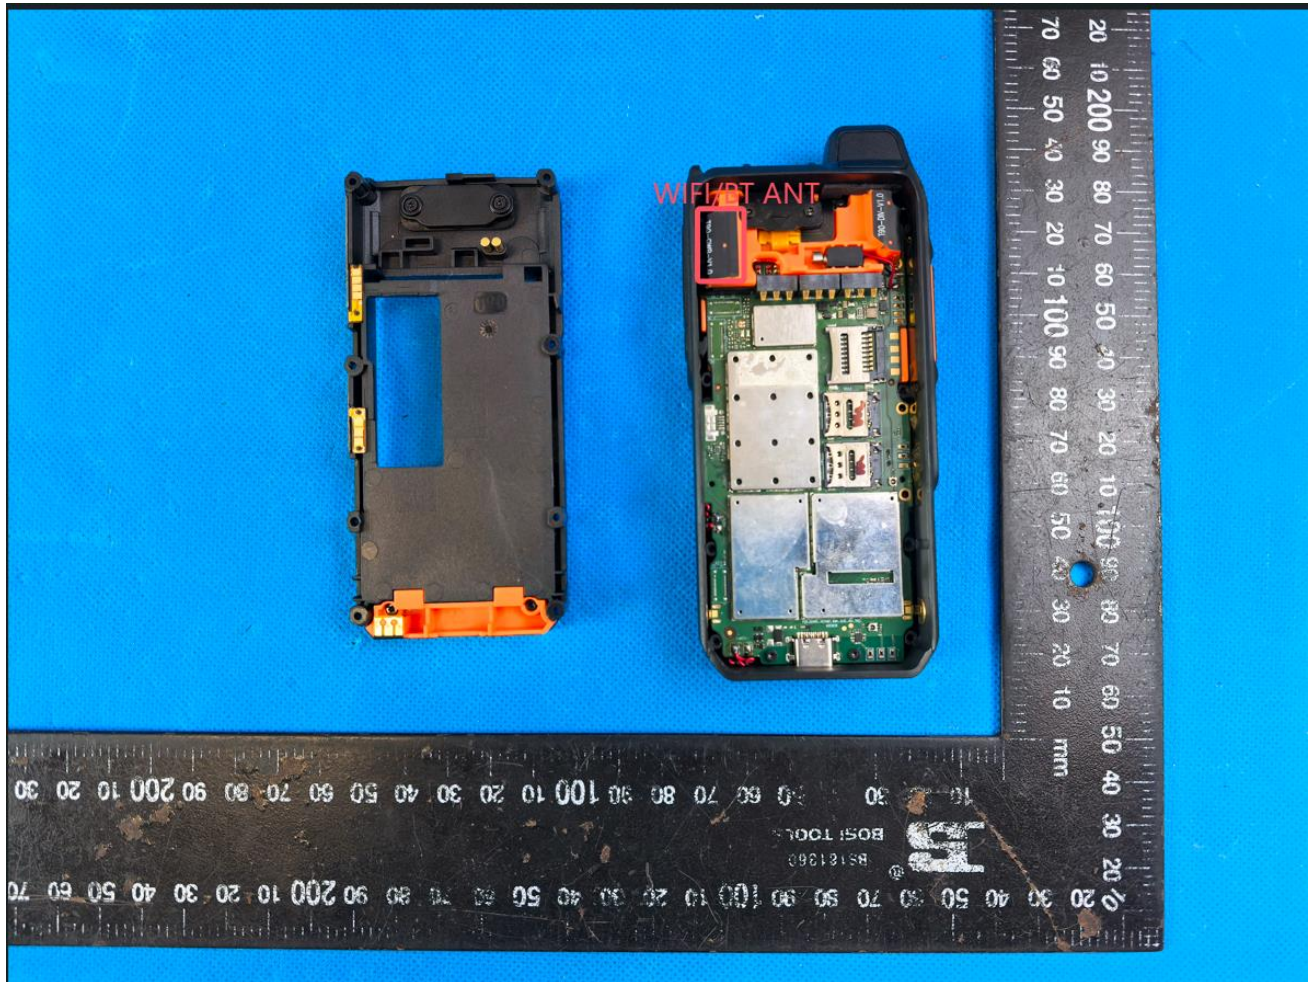

5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

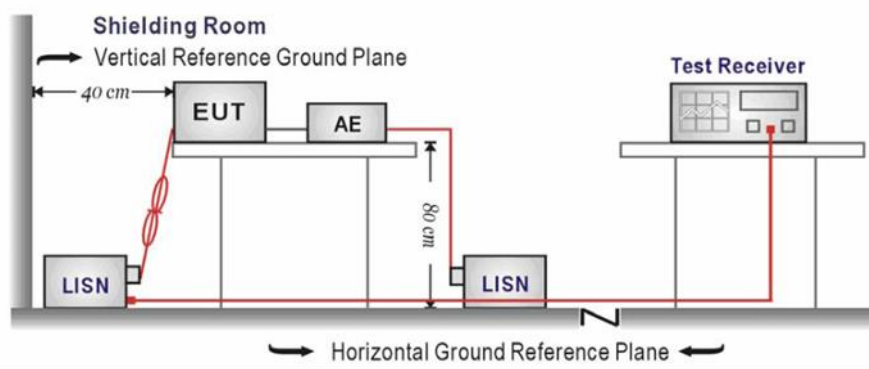

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:

L

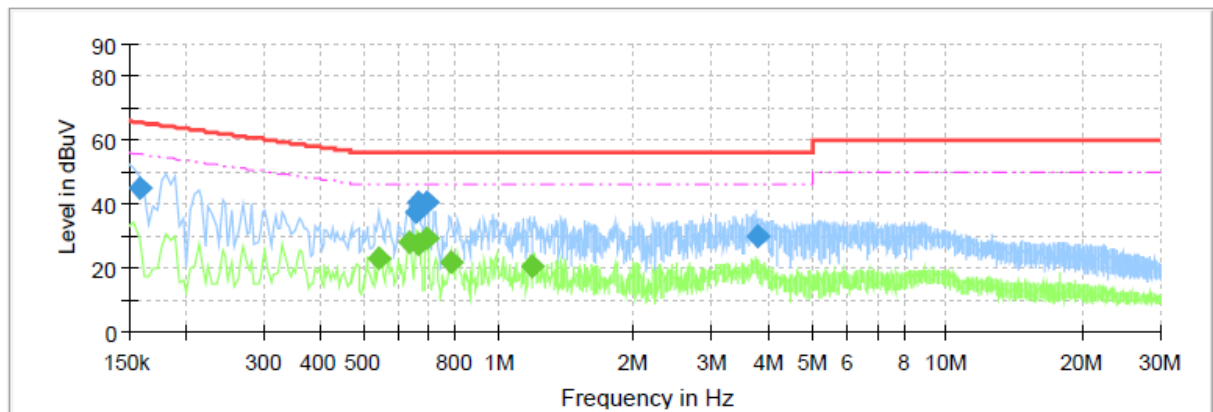


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1595	45.10	---	65.49	20.39	L1	10.9
0.5395	---	22.83	46.00	23.17	L1	11.0
0.6355	---	28.07	46.00	17.93	L1	11.0
0.6565	37.49	---	56.00	18.51	L1	11.0
0.6595	---	27.28	46.00	18.72	L1	11.0
0.6635	40.45	---	56.00	15.55	L1	11.0
0.6915	---	29.62	46.00	16.38	L1	11.0
0.6915	40.48	---	56.00	15.52	L1	11.0
0.7795	---	22.05	46.00	23.95	L1	11.0
1.1915	---	20.76	46.00	25.24	L1	11.0
3.7795	29.96	---	56.00	26.04	L1	11.1

Test Line:

N

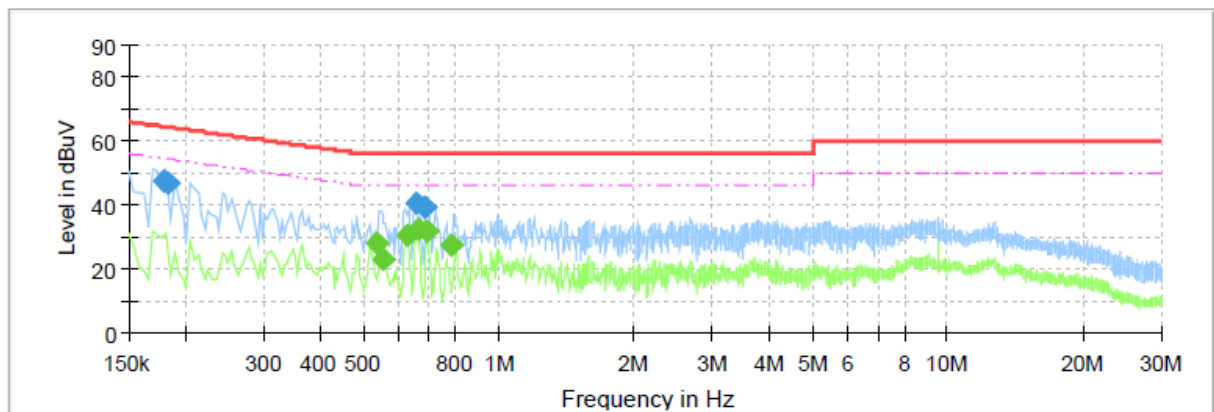

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1795	47.27	---	64.51	17.24	N	10.7
0.1835	46.85	---	64.33	17.48	N	10.7
0.5355	---	28.30	46.00	17.70	N	10.7
0.5555	---	22.87	46.00	23.13	N	10.7
0.6275	---	30.88	46.00	15.12	N	10.8
0.6515	40.77	---	56.00	15.23	N	10.8
0.6595	---	32.31	46.00	13.69	N	10.8
0.6875	39.40	---	56.00	16.60	N	10.8
0.6915	---	31.57	46.00	14.43	N	10.8
0.7875	---	27.47	46.00	18.53	N	10.8

5.3. Maximum Conducted Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

For the 5.15~5.25GHz band:

- Outdoor AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125\text{mW}$ (21dBm)
- Indoor AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.
- Point-to-point AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 23\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 23)$.
- Client devices
The maximum conducted output power (P_{out}) shall not exceed the lesser of 250W (24dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.


For the 5.25~5.35GHz band:

The maximum conducted output power (P_{out}) shall not exceed the lesser of 250mW (24dBm) or 11dBm+10 log B, where B is the 26dB emission bandwidth in MHz.
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.
- Point-to-point systems (P2P)
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).

TEST CONFIGURATION

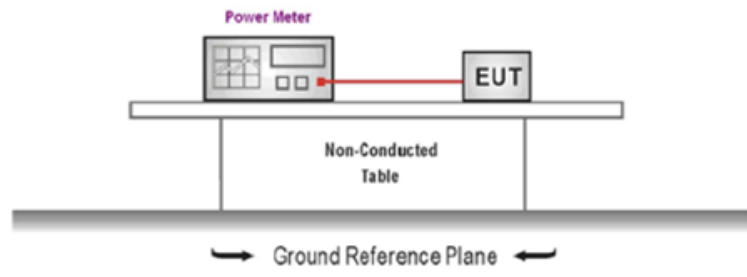

TEST PROCEDURE

1. The EUT was tested according to KDB789033 Section E-3-b)
2. The maximum conducted output power may be measured using a broadband AVG RF power meter.
3. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
4. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
5. Record the measurement data.

6. TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

For the 5.15~5.25GHz band:

- Outdoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Indoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Point-to-point AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 23\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 23)$.
- Client devices
The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.


For the 5.25~5.35GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 30 - (G_{TX} - 6)$.
- Point-to-point systems (P2P)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

TEST CONFIGURATION

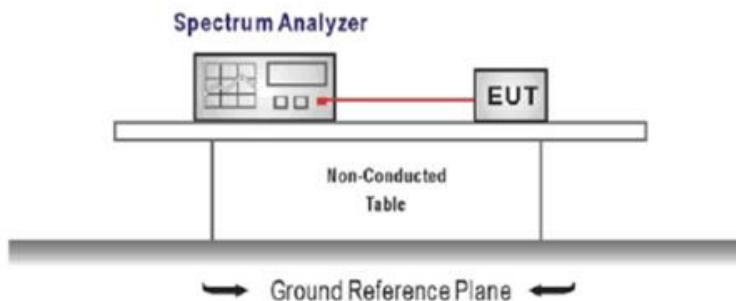

TEST PROCEDURE

1. According KDB 789033 D02 – Section F
2. Analyzer was setting as follow:
Center frequency: test channel
Span was set to encompass the entire emission bandwidth of the signal
RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz
RBW=500kHz for devices operating in the band 5.725-5.85 GHz
VBW ≥ 3 RBW
Number of sweep points $> 2 \times (\text{span}/\text{RBW})$
Sweep time = auto
Detector = Peak
Trigger was set to free run for all modes, trace was averaged over 100 sweeps
3. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.5. 26dB bandwidth and 99% Occupancy bandwidth

LIMIT

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

TEST CONFIGURATION

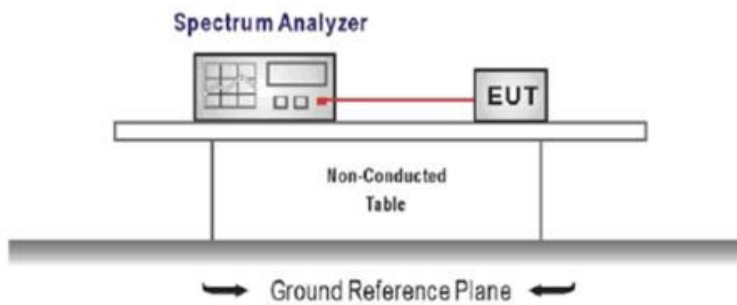

TEST PROCEDURE

1. According KDB 789033 D02 – Section C, 26dB bandwidth test as follow
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. According KDB 789033 D02 – Section D, 99% bandwidth test as follow
 - a). Set center frequency to the nominal EUT channel center frequency.
 - b). Set span = 1.5 times to 5.0 times the OBW.
 - c). Set RBW = 1% to 5% of the OBW
 - d). Set $VBW \geq 3 \times RBW$
 - e). Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
 - f). Use the 99% power bandwidth function of the instrument

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report


5.6. 6dB Bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

TEST CONFIGURATION

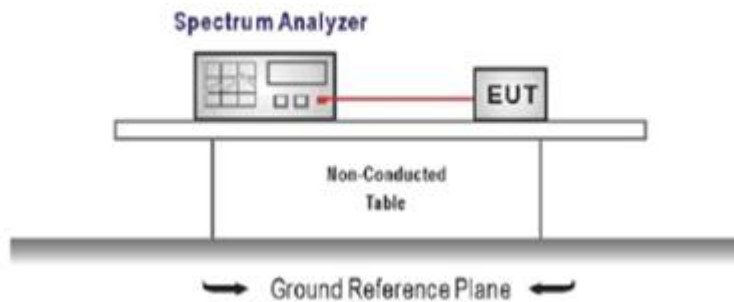

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = test channel center frequency
Span = 2 x emission bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

5.7. Band edge

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(b)


Un-restricted band emissions above 1GHz			
Operating Band	Frequency	EIRP Limit	Value
5150-5250MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
5250-5350MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
5725-5850 MHz	1GHz-5.65GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak
	5.65GHz-5.7GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.2dBuV/m)	Peak
	5.7GHz-5.72GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)	Peak
	5.72GHz-5.725GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to* 122.2dBuV/m)	Peak
	5.85GHz-5.855GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)	Peak
	5.855GHz-5.875GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.2* dBuV/m)	Peak
	5.875GHz-5.925GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)	Peak
	Above 5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak

* Increase/Decreases with the linearity of the frequency.

For emission above 1GHz and in restricted band, according to FCC KDB 789033 D02 General UNII Test Procedure, all emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit. $E[dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

TEST CONFIGURATION

Radiated:

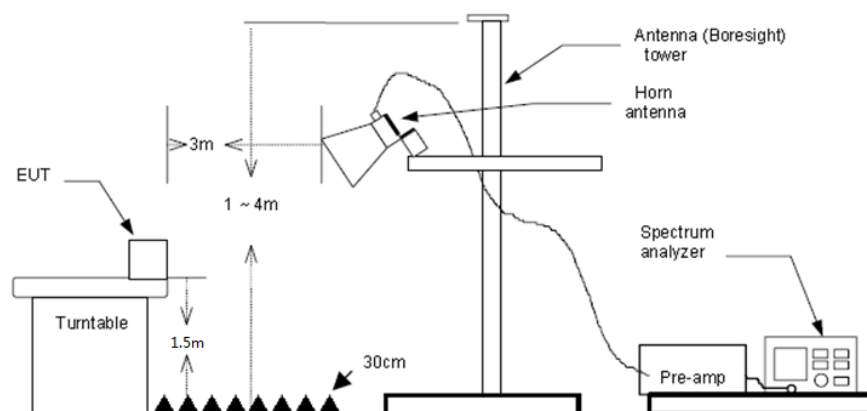

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA

U-NII-1 & U-NII-2A			Worst mode: 802.11a				Test channel: CH _L			
Polarization:					Horizontal					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	45.07	31.90	6.12	40.02	10.00	53.07	68.20	-15.13	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	34.19	31.90	6.12	40.02	10.00	42.19	54.00	-11.81	Average
Polarization:					Vertical					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	46.85	31.90	6.12	40.02	10.00	54.85	68.20	-13.35	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	35.51	31.90	6.12	40.02	10.00	43.51	54.00	-10.49	Average

U-NII-1 & U-NII-2A			Worst mode: 802.11a				Test channel: CH _H			
Polarization:					Horizontal					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	46.68	31.40	6.28	39.83	10.00	54.53	68.20	-13.67	Peak
2	5459.99	43.93	31.80	6.37	39.74	10.00	52.36	68.20	-15.84	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	33.90	31.40	6.28	39.83	10.00	41.75	54.00	-12.25	Average
2	5459.99	32.19	31.80	6.37	39.74	10.00	40.62	54.00	-13.38	Average
Polarization:					Vertical					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	46.53	31.40	6.28	39.83	10.00	54.38	68.20	-13.82	Peak
2	5459.99	44.43	31.80	6.37	39.74	10.00	52.86	68.20	-15.34	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	35.64	31.40	6.28	39.83	10.00	43.49	54.00	-10.51	Average
2	5459.99	32.47	31.80	6.37	39.74	10.00	40.90	54.00	-13.10	Average

U-NII-1 & U-NII-2A			Worst mode: 802.11n(HT40)				Test channel: CH _L			
Polarization:					Horizontal					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	48.09	31.90	6.12	40.02	10.00	56.09	68.20	-12.11	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	36.22	31.90	6.12	40.02	10.00	44.22	54.00	-9.78	Average
Polarization:					Vertical					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	54.15	31.90	6.12	40.02	10.00	62.15	68.20	-6.05	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5150.07	42.02	31.90	6.12	40.02	10.00	50.02	54.00	-3.98	Average

U-NII-1 & U-NII-2A			Worst mode: 802.11n(HT40)				Test channel: CH _H			
Polarization:					Horizontal					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	49.76	31.40	6.28	39.83	10.00	57.61	68.20	-10.59	Peak
2	5459.99	41.22	31.80	6.37	39.74	10.00	49.65	68.20	-18.55	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	36.53	31.40	6.28	39.83	10.00	44.38	54.00	-9.62	Average
2	5459.99	31.26	31.80	6.37	39.74	10.00	39.69	54.00	-14.31	Average
Polarization:					Vertical					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	53.66	31.40	6.28	39.83	10.00	61.51	68.20	-6.69	Peak
2	5459.99	41.83	31.80	6.37	39.74	10.00	50.26	68.20	-17.94	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5349.93	38.82	31.40	6.28	39.83	10.00	46.67	54.00	-7.33	Average
2	5459.99	31.73	31.80	6.37	39.74	10.00	40.16	54.00	-13.84	Average

U-NII-3			Worst mode: 802.11a					Test channel: CH _L		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Test value	Polarization
5650	43.6	31.6	6.56	39.51	10	52.25	68.2	-15.95	Vertical	Peak
5700.007	43.31	31.8	6.62	39.43	10	52.3	105.2	-52.9	Vertical	Peak
5720.045	45.55	31.84	6.64	39.4	10	54.63	110.8	-56.17	Vertical	Peak
5725.011	56.05	31.85	6.64	39.4	10	65.14	122.2	-57.06	Vertical	Peak
5650	44.31	31.6	6.56	39.51	10	52.96	68.2	-15.24	Horizontal	Peak
5700.007	44.47	31.8	6.62	39.43	10	53.46	105.2	-51.74	Horizontal	Peak
5720.045	46.21	31.84	6.64	39.4	10	55.29	110.8	-55.51	Horizontal	Peak
5725.011	58.36	31.85	6.64	39.4	10	67.45	122.2	-54.75	Horizontal	Peak
U-NII-3			Worst mode: 802.11a					Test channel: CH _H		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Test value	Polarization
5849.961	44.23	32.2	6.71	39.28	10	53.86	122.2	-68.34	Vertical	Peak
5875.003	43.33	32.25	6.71	39.27	10	53.02	105.2	-52.18	Vertical	Peak
5925.008	43.39	32.3	6.71	39.25	10	53.15	68.2	-15.05	Vertical	Peak
5849.961	45.08	32.2	6.71	39.28	10	54.71	122.2	-67.49	Horizontal	Peak
5875.003	43.64	32.25	6.71	39.27	10	53.33	105.6	-52.27	Horizontal	Peak
5925.008	42.83	32.3	6.71	39.25	10	52.59	68.2	-15.61	Horizontal	Peak

U-NII-3		Worst mode: 802.11n(HT40)					Test channel: CH _L			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Test value	Polarization
5650	43.34	31.6	6.56	39.51	10	51.99	68.2	-16.21	Vertical	Peak
5700.007	49.78	31.8	6.62	39.43	10	58.77	105.2	-46.43	Vertical	Peak
5720.045	57.32	31.84	6.64	39.4	10	66.4	110.8	-44.4	Vertical	Peak
5725.011	63.59	31.85	6.64	39.4	10	72.68	122.2	-49.52	Vertical	Peak
5650	43.39	31.6	6.56	39.51	10	52.04	68.2	-16.16	Horizontal	Peak
5700.007	46.98	31.8	6.62	39.43	10	55.97	105.2	-49.23	Horizontal	Peak
5720.045	59.35	31.84	6.64	39.4	10	68.43	110.8	-42.37	Horizontal	Peak
5725.011	61.35	31.85	6.64	39.4	10	70.44	122.2	-51.76	Horizontal	Peak
U-NII-3		Worst mode: 802.11n(HT40)					Test channel: CH _H			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Test value	Polarization
5849.961	42.61	32.2	6.71	39.28	10	52.24	122.2	-69.96	Vertical	Peak
5875.003	42.89	32.25	6.71	39.27	10	52.58	105.2	-52.62	Vertical	Peak
5925.008	43.34	32.3	6.71	39.25	10	53.1	68.2	-15.1	Vertical	Peak
5849.961	45.93	32.2	6.71	39.28	10	55.56	122.2	-66.64	Horizontal	Peak
5875.003	43.16	32.25	6.71	39.27	10	52.85	105.2	-52.35	Horizontal	Peak
5925.008	43.34	32.3	6.71	39.25	10	53.1	68.2	-15.1	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Test 802.11a, 802.11n mode all modulations have been tested, only worst case is reported

5.8. Radiated Spurious Emissions

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209 and Part 15 Subpart E Section 15.407

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Unwanted emissions below 1GHz and Restricted band emissions above 1GHz		
Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9KHz ~30MHz

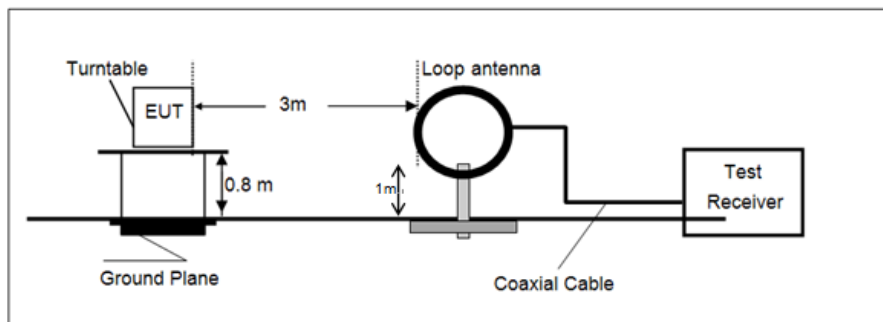

- 30MHz ~ 1GHz

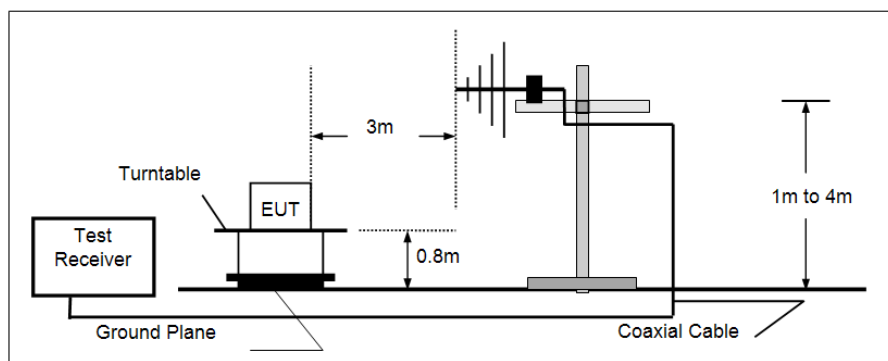

➤ Above 1GHz

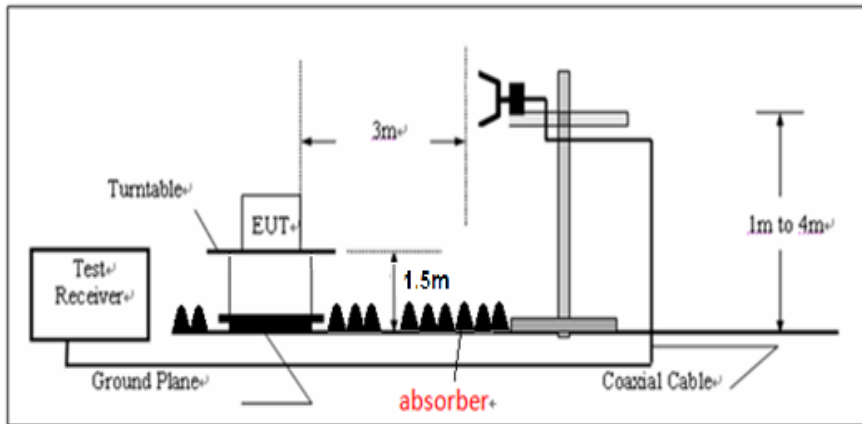**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA


FOR 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

FOR 30MHz-1GHz

Polarization:


Horizontal

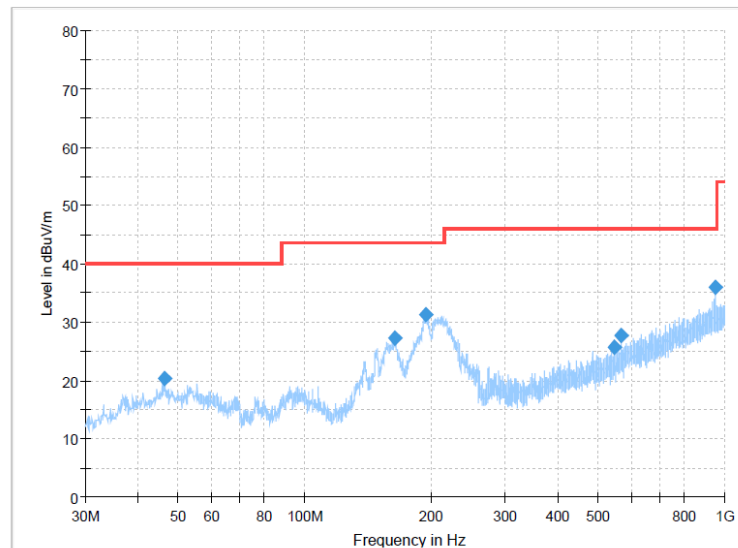**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.4900	20.40	40.00	19.60	100.0	H	76.0	-8.3
163.9813	27.21	43.50	16.29	100.0	H	130.0	-12.9
194.0513	31.18	43.50	12.32	100.0	H	130.0	-9.9
545.6763	25.63	46.00	20.37	100.0	H	0.0	-0.5
564.9550	27.73	46.00	18.27	100.0	H	172.0	-0.2
948.4688	35.98	46.00	10.02	100.0	H	355.0	7.5

Polarization:

Vertical

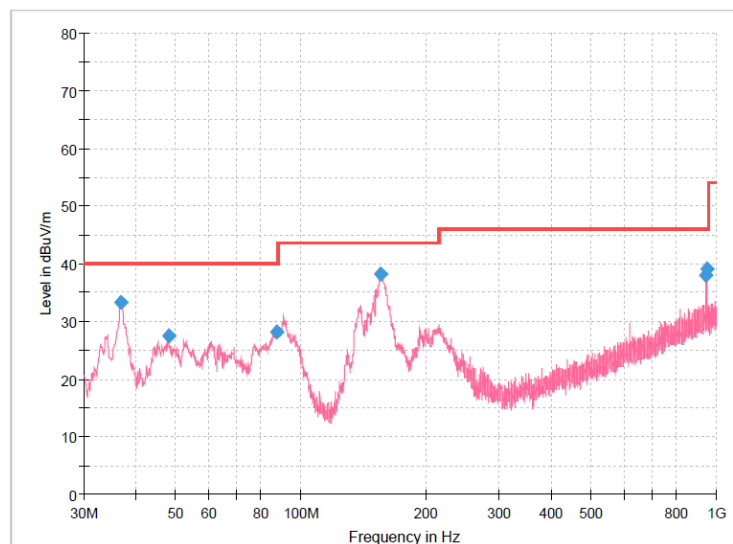**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.9113	33.40	40.00	6.60	100.0	V	278.0	-10.5
47.9450	27.55	40.00	12.45	100.0	V	40.0	-8.4
87.7150	28.25	40.00	11.75	100.0	V	304.0	-13.3
155.3725	38.29	43.50	5.21	100.0	V	84.0	-13.4
945.3163	37.90	46.00	8.10	100.0	V	320.0	7.5
948.4688	39.08	46.00	6.92	100.0	V	304.0	7.5

Remark:

Transd=Cable lose+ Antenna factor- Pre-amplifier; Margin=Limit -Level

FOR Above 1GHz

U-NII-1		Worst mode: 802.11a				Test channel: CH _L			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	6001.77	40.41	32.40	6.70	39.23	40.28	68.20	-27.92	Peak
2	8229.29	42.90	36.54	8.10	39.97	47.57	68.20	-20.63	Peak
3	9111.35	43.41	38.35	8.44	39.96	50.24	68.20	-17.96	Peak
4	11515.68	41.24	40.47	9.22	40.22	50.71	68.20	-17.49	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5112.49	40.74	31.97	6.09	40.07	38.73	68.20	-29.47	Peak
2	6662.01	41.78	34.18	7.37	39.29	44.04	68.20	-24.16	Peak
3	8462.98	41.66	36.98	8.22	40.17	46.69	68.20	-21.51	Peak
4	11486.41	40.67	40.49	9.19	40.21	50.14	68.20	-18.06	Peak

U-NII-1		Worst mode: 802.11a				Test channel: CH _M			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4096.88	39.69	29.90	5.56	40.22	34.93	68.20	-33.27	Peak
2	5047.83	40.46	31.69	6.04	40.15	38.04	68.20	-30.16	Peak
3	7604.87	40.47	36.09	7.87	39.96	44.47	68.20	-23.73	Peak
4	10348.05	39.79	39.74	8.88	40.11	48.30	68.20	-19.90	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4785.08	39.60	31.27	5.87	40.29	36.45	68.20	-31.75	Peak
2	6561.03	39.86	34.12	7.19	39.26	41.91	68.20	-26.29	Peak
3	8549.59	41.13	37.30	8.26	40.18	46.51	68.20	-21.69	Peak
4	11515.68	38.86	40.47	9.22	40.22	48.33	68.20	-19.87	Peak

U-NII-1		Worst mode: 802.11a				Test channel: CH _H			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4034.78	40.01	29.87	5.48	40.28	35.08	68.20	-33.12	Peak
2	5125.52	39.70	31.95	6.10	40.05	37.70	68.20	-30.50	Peak
3	7961.43	41.21	36.92	8.03	39.95	46.21	68.20	-21.99	Peak
4	11486.41	40.44	40.49	9.19	40.21	49.91	68.20	-18.29	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2942.64	41.59	28.50	4.53	40.99	33.63	68.20	-34.57	Peak
2	5112.49	39.24	31.97	6.09	40.07	37.23	68.20	-30.97	Peak
3	6577.75	40.08	34.16	7.22	39.26	42.20	68.20	-26.00	Peak
4	11515.68	39.28	40.47	9.22	40.22	48.75	68.20	-19.45	Peak

U-NII-1		Worst mode: 802.11n(HT40)				Test channel: CH _L			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5060.69	41.35	31.76	6.05	40.13	39.03	68.20	-29.17	Peak
2	8313.51	42.07	36.43	8.14	40.04	46.60	68.20	-21.60	Peak
3	10374.42	40.07	39.82	8.90	40.12	48.67	68.20	-19.53	Peak
4	11399.03	40.91	40.40	9.12	40.30	50.13	68.20	-18.07	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5164.81	40.34	31.81	6.14	40.01	38.28	68.20	-29.92	Peak
2	6974.36	45.58	35.00	7.38	39.46	48.50	68.20	-19.70	Peak
3	9441.91	44.26	39.02	8.58	39.82	52.04	68.20	-16.16	Peak
4	10944.09	41.12	40.50	8.82	40.64	49.80	68.20	-18.40	Peak

U-NII-1		Worst mode: 802.11n(HT40)				Test channel: CH _H			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5138.58	41.23	31.92	6.11	40.04	39.22	68.20	-28.98	Peak
2	7099.75	41.63	35.70	7.42	39.57	45.18	68.20	-23.02	Peak
3	9275.16	40.32	39.15	8.51	39.89	48.09	68.20	-20.11	Peak
4	11515.68	40.39	40.47	9.22	40.22	49.86	68.20	-18.34	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	7009.96	42.35	35.14	7.37	39.48	45.38	68.20	-22.82	Peak
2	8973.25	41.81	37.95	8.39	40.01	48.14	68.20	-20.06	Peak
3	9784.47	40.12	39.30	8.60	39.86	48.16	68.20	-20.04	Peak
4	11486.41	41.39	40.49	9.19	40.21	50.86	68.20	-17.34	Peak

U-NII-2A		Worst mode: 802.11a				Test channel: CH _L			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4055.37	39.52	29.90	5.51	40.26	34.67	68.20	-33.53	Peak
2	5352.19	39.12	31.41	6.29	39.82	37.00	68.20	-31.20	Peak
3	7981.72	39.77	36.96	8.03	39.94	44.82	68.20	-23.38	Peak
4	11457.21	39.17	40.46	9.17	40.24	48.56	68.20	-19.64	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4086.46	39.05	29.90	5.55	40.23	34.27	68.20	-33.93	Peak
2	5099.49	40.11	32.00	6.08	40.08	38.11	68.20	-30.09	Peak
3	7566.25	40.79	36.10	7.84	39.95	44.78	68.20	-23.42	Peak
4	11370.05	39.06	40.31	9.10	40.33	48.14	68.20	-20.06	Peak

U-NII-2A		Worst mode: 802.11a				Test channel: CH _M			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3709.69	40.94	29.24	5.22	40.74	34.66	68.20	-33.54	Peak
2	5138.58	39.52	31.92	6.11	40.04	37.51	68.20	-30.69	Peak
3	7961.43	40.13	36.92	8.03	39.95	45.13	68.20	-23.07	Peak
4	11486.41	39.46	40.49	9.19	40.21	48.93	68.20	-19.27	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3308.19	41.94	28.30	4.84	40.80	34.28	68.20	-33.92	Peak
2	5204.40	39.92	31.58	6.17	39.96	37.71	68.20	-30.49	Peak
3	7941.19	39.86	36.85	8.03	39.95	44.79	68.20	-23.41	Peak
4	10916.26	40.37	40.50	8.83	40.62	49.08	68.20	-19.12	Peak

U-NII-2A		Worst mode: 802.11a				Test channel: CH _H			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5151.68	41.43	31.89	6.12	40.02	39.42	68.20	-28.78	Peak
2	6992.14	40.90	35.07	7.37	39.47	43.87	68.20	-24.33	Peak
3	8527.85	43.51	37.26	8.25	40.19	48.83	68.20	-19.37	Peak
4	11515.68	41.39	40.47	9.22	40.22	50.86	68.20	-17.34	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2854.11	43.42	28.41	4.42	41.05	35.20	68.20	-33.00	Peak
2	5112.49	40.52	31.97	6.09	40.07	38.51	68.20	-29.69	Peak
3	7470.56	41.87	36.20	7.76	39.92	45.91	68.20	-22.29	Peak
4	11515.68	40.44	40.47	9.22	40.22	49.91	68.20	-18.29	Peak

U-NII-2A		Worst mode: 802.11n(HT40)				Test channel: CH _L			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5164.81	41.40	31.81	6.14	40.01	39.34	68.20	-28.86	Peak
2	7432.62	41.23	36.20	7.73	39.91	45.25	68.20	-22.95	Peak
3	9685.35	39.07	39.27	8.60	39.84	47.10	68.20	-21.10	Peak
4	10944.09	40.20	40.50	8.82	40.64	48.88	68.20	-19.32	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5177.97	39.95	31.73	6.15	39.99	37.84	68.20	-30.36	Peak
2	6799.06	40.02	34.20	7.42	39.36	42.28	68.20	-25.92	Peak
3	9809.40	39.55	39.32	8.60	39.86	47.61	68.20	-20.59	Peak
4	11341.14	39.98	40.22	9.07	40.36	48.91	68.20	-19.29	Peak

U-NII-2A		Worst mode: 802.11n(HT40)					Test channel: CH _H		
Polarization:				Horizontal					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5138.58	39.00	31.92	6.11	40.04	36.99	68.20	-31.21	Peak
2	6747.34	39.69	34.10	7.43	39.33	41.89	68.20	-26.31	Peak
3	9042.04	39.02	38.08	8.42	39.98	45.54	68.20	-22.66	Peak
4	11370.05	40.06	40.31	9.10	40.33	49.14	68.20	-19.06	Peak
Polarization:				Vertical					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5191.17	39.73	31.65	6.16	39.97	37.57	68.20	-30.63	Peak
2	6251.26	39.23	32.80	6.80	39.20	39.63	68.20	-28.57	Peak
3	8022.46	40.13	37.00	8.04	39.93	45.24	68.20	-22.96	Peak
4	10971.98	40.11	40.50	8.81	40.67	48.75	68.20	-19.45	Peak

U-NII-3			Worst mode: 802.11a			Test channel: CH _L			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5125.52	41.30	31.95	6.10	40.05	39.30	68.20	-28.90	Peak
2	7376.08	41.43	36.20	7.68	39.88	45.43	68.20	-22.77	Peak
3	9275.16	40.60	39.15	8.51	39.89	48.37	68.20	-19.83	Peak
4	11515.00	32.86	40.47	9.22	40.22	42.33	54.00	-11.67	Average
5	11515.68	43.54	40.47	9.22	40.22	53.01	68.20	-15.19	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5420.74	40.86	31.68	6.34	39.77	39.11	68.20	-29.09	Peak
2	6992.14	46.30	35.07	7.37	39.47	49.27	68.20	-18.93	Peak
3	9834.41	41.35	39.37	8.60	39.87	49.45	68.20	-18.75	Peak
4	11515.00	31.92	40.47	9.22	40.22	41.39	54.00	-12.61	Average
5	11515.68	42.59	40.47	9.22	40.22	52.06	68.20	-16.14	Peak

U-NII-3			Worst mode: 802.11a				Test channel: CH _M		
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5086.52	41.79	31.92	6.07	40.10	39.68	68.20	-28.52	Peak
2	7045.74	41.59	35.28	7.37	39.51	44.73	68.20	-23.47	Peak
3	9065.08	41.18	38.16	8.43	39.97	47.80	68.20	-20.40	Peak
4	11574.00	33.44	40.35	9.29	40.30	42.78	54.00	-11.22	Average
5	11574.46	42.81	40.35	9.29	40.30	52.15	68.20	-16.05	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5060.69	40.62	31.76	6.05	40.13	38.30	68.20	-29.90	Peak
2	7413.73	42.04	36.20	7.72	39.91	46.05	68.20	-22.15	Peak
3	8859.77	42.21	37.90	8.36	40.06	48.41	68.20	-19.79	Peak
4	11574.00	32.51	40.35	9.29	40.30	41.85	54.00	-12.15	Average
5	11574.46	42.46	40.35	9.29	40.30	51.80	68.20	-16.40	Peak

U-NII-3			Worst mode: 802.11a			Test channel: CH _H			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5138.58	41.16	31.92	6.11	40.04	39.15	68.20	-29.05	Peak
2	7981.72	42.47	36.96	8.03	39.94	47.52	68.20	-20.68	Peak
3	9465.98	41.03	38.97	8.59	39.81	48.78	68.20	-19.42	Peak
4	11663.19	41.88	40.05	9.40	40.43	50.90	68.20	-17.30	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5177.97	41.34	31.73	6.15	39.99	39.23	68.20	-28.97	Peak
2	7470.56	41.97	36.20	7.76	39.92	46.01	68.20	-22.19	Peak
3	9251.58	40.35	39.10	8.50	39.90	48.05	68.20	-20.15	Peak
4	11399.03	40.70	40.40	9.12	40.30	49.92	68.20	-18.28	Peak

U-NII-3		Worst mode: 802.11n(HT40)				Test channel: CH _L			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3815.03	40.72	29.46	5.27	40.57	34.88	68.20	-33.32	Peak
2	5151.68	39.59	31.89	6.12	40.02	37.58	68.20	-30.62	Peak
3	7900.86	41.24	36.61	8.02	39.96	45.91	68.20	-22.29	Peak
4	11341.14	40.44	40.22	9.07	40.36	49.37	68.20	-18.83	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2868.67	42.34	28.44	4.44	41.04	34.18	68.20	-34.02	Peak
2	5191.17	40.34	31.65	6.16	39.97	38.18	68.20	-30.02	Peak
3	8022.46	39.73	37.00	8.04	39.93	44.84	68.20	-23.36	Peak
4	11515.68	40.07	40.47	9.22	40.22	49.54	68.20	-18.66	Peak

U-NII-3		Worst mode: 802.11n(HT40)				Test channel: CH _H			
Polarization:					Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5125.52	41.63	31.95	6.10	40.05	39.63	68.20	-28.57	Peak
2	8549.59	45.10	37.30	8.26	40.18	50.48	68.20	-17.72	Peak
3	9157.86	43.64	38.55	8.46	39.94	50.71	68.20	-17.49	Peak
4	10944.09	42.12	40.50	8.82	40.64	50.80	68.20	-17.40	Peak
Polarization:					Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5204.40	41.71	31.58	6.17	39.96	39.50	68.20	-28.70	Peak
2	7451.57	42.15	36.20	7.75	39.92	46.18	68.20	-22.02	Peak
3	9441.91	42.06	39.02	8.58	39.82	49.84	68.20	-18.36	Peak
4	11515.68	40.66	40.47	9.22	40.22	50.13	68.20	-18.07	Peak

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Measuring frequencies from 1 GHz to 40GHz.
4. Test 802.11a, 802.11n, 802.11ac mode, all modulations have been tested, only worst case is reported

5.9. Frequency stability

LIMIT

Within Operation Band

TEST CONFIGURATION

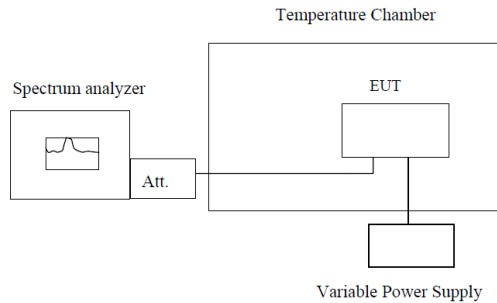

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external power supply.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached..

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

Refer to the appendix report on the section 8

6. TEST SETUP PHOTOS

Refer to the test report No.: CHTW24100048

7. EXTERNAL AND INTERNAL PHOTOS

Refer to the test report No.: CHTW24100045

8. APPENDIX REPORT

APPENDIX REPORT

Project No.	SHT2407073401W	Radio Specification	WIFI 5G
Test sample No.	YPHT24070734003	Model No.	MT-100
Start test date	2024-08-22	Finish date	2024-09-30
Temperature	24.9℃	Humidity	54%
Test Engineer	Chenxin Ling	Auditor	Xiaodong Zheo

Appendix clause	Test item	Result
A	Maximum Conducted Output Power	Pass
B	Maximum Power Spectral Density	Pass
C	26 dB Bandwidth	Pass
D	99% Occupy bandwidth	Pass
E	6 dB Bandwidth	Pass
F	Frequency stability	Pass

Appendix A: Maximum Conducted Output Power


Band	Bandwidth (MHz)	Type	Channel	Reading (dBm)	Duty cycle (%)	Duty cycle factor (dB)	Conducted Output Power (dBm)	Limit (dBm)	Result
I	20	802.11n	CH _L	13.97	88.19	0.55	14.52	24.00	Pass
			CH _M	13.10	88.19	0.55	13.65		
			CH _H	13.61	88.18	0.55	14.16		
		802.11a	CH _L	14.28	88.97	0.51	14.79	24.00	Pass
			CH _M	14.05	88.90	0.51	14.56		
			CH _H	13.84	88.97	0.51	14.35		
	40	802.11n	CH _L	10.61	78.73	1.04	11.65	24.00	Pass
			CH _H	10.49	78.79	1.04	11.53		
II	20	802.11n	CH _L	13.39	88.19	0.55	13.94	24.00	Pass
			CH _M	13.26	88.19	0.55	13.81		
			CH _H	12.80	88.19	0.55	13.35		
		802.11a	CH _L	13.65	88.98	0.51	14.16	24.00	Pass
			CH _M	13.68	88.90	0.51	14.19		
			CH _H	13.07	88.97	0.51	13.58		
	40	802.11n	CH _L	10.59	78.79	1.04	11.63	24.00	Pass
			CH _H	9.95	78.79	1.04	10.99		
IV	20	802.11n	CH _L	13.09	88.19	0.55	13.64	30.00	Pass
			CH _M	12.69	88.18	0.55	13.24		
			CH _H	12.86	88.10	0.55	13.41		
		802.11a	CH _L	13.01	88.97	0.51	13.52	30.00	Pass
			CH _M	13.17	88.97	0.51	13.68		
			CH _H	13.03	88.97	0.51	13.54		
	40	802.11n	CH _L	9.75	78.79	1.04	10.79	30.00	Pass
			CH _H	9.49	78.81	1.03	10.52		

NOTE: duty cycle factor = 10LOG(1/ duty cycle)


Appendix B: Maximum Power Spectral Density

Band	Bandwidth (MHz)	Type	Channel	Reading (dBm)	Duty cycle (%)	Duty cycle factor (dB)	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
I	20	802.11n	CH _L	3.01	88.19	0.55	3.56	11.00	Pass
			CH _M	1.44	88.19	0.55	1.99		
			CH _H	2.27	88.18	0.55	2.82		
		802.11a	CH _L	2.99	88.97	0.51	3.50	11.00	Pass
			CH _M	2.72	88.90	0.51	3.23		
			CH _H	2.44	88.97	0.51	2.95		
	40	802.11n	CH _L	-1.10	78.73	1.04	-0.06	11.00	Pass
			CH _H	-1.61	78.79	1.04	-0.57		
II	20	802.11n	CH _L	1.99	88.19	0.55	2.54	11.00	Pass
			CH _M	1.93	88.19	0.55	2.48		
			CH _H	1.26	88.19	0.55	1.81		
		802.11a	CH _L	2.20	88.98	0.51	2.71	11.00	Pass
			CH _M	2.36	88.90	0.51	2.87		
			CH _H	1.58	88.97	0.51	2.09		
	40	802.11n	CH _L	-1.79	78.79	1.04	-0.75	11.00	Pass
			CH _H	-2.28	78.79	1.04	-1.24		
IV	20	802.11n	CH _L	-1.39	88.19	0.55	-0.84	11.00	Pass
			CH _M	-1.33	88.18	0.55	-0.78		
			CH _H	-1.53	88.10	0.55	-0.98		
		802.11a	CH _L	-1.50	88.97	0.51	-0.99	11.00	Pass
			CH _M	-0.83	88.97	0.51	-0.32		
			CH _H	-1.36	88.97	0.51	-0.85		
	40	802.11n	CH _L	-5.31	78.79	1.04	-4.27	11.00	Pass
			CH _H	-5.95	78.81	1.03	-4.92		

Test plot as follows:

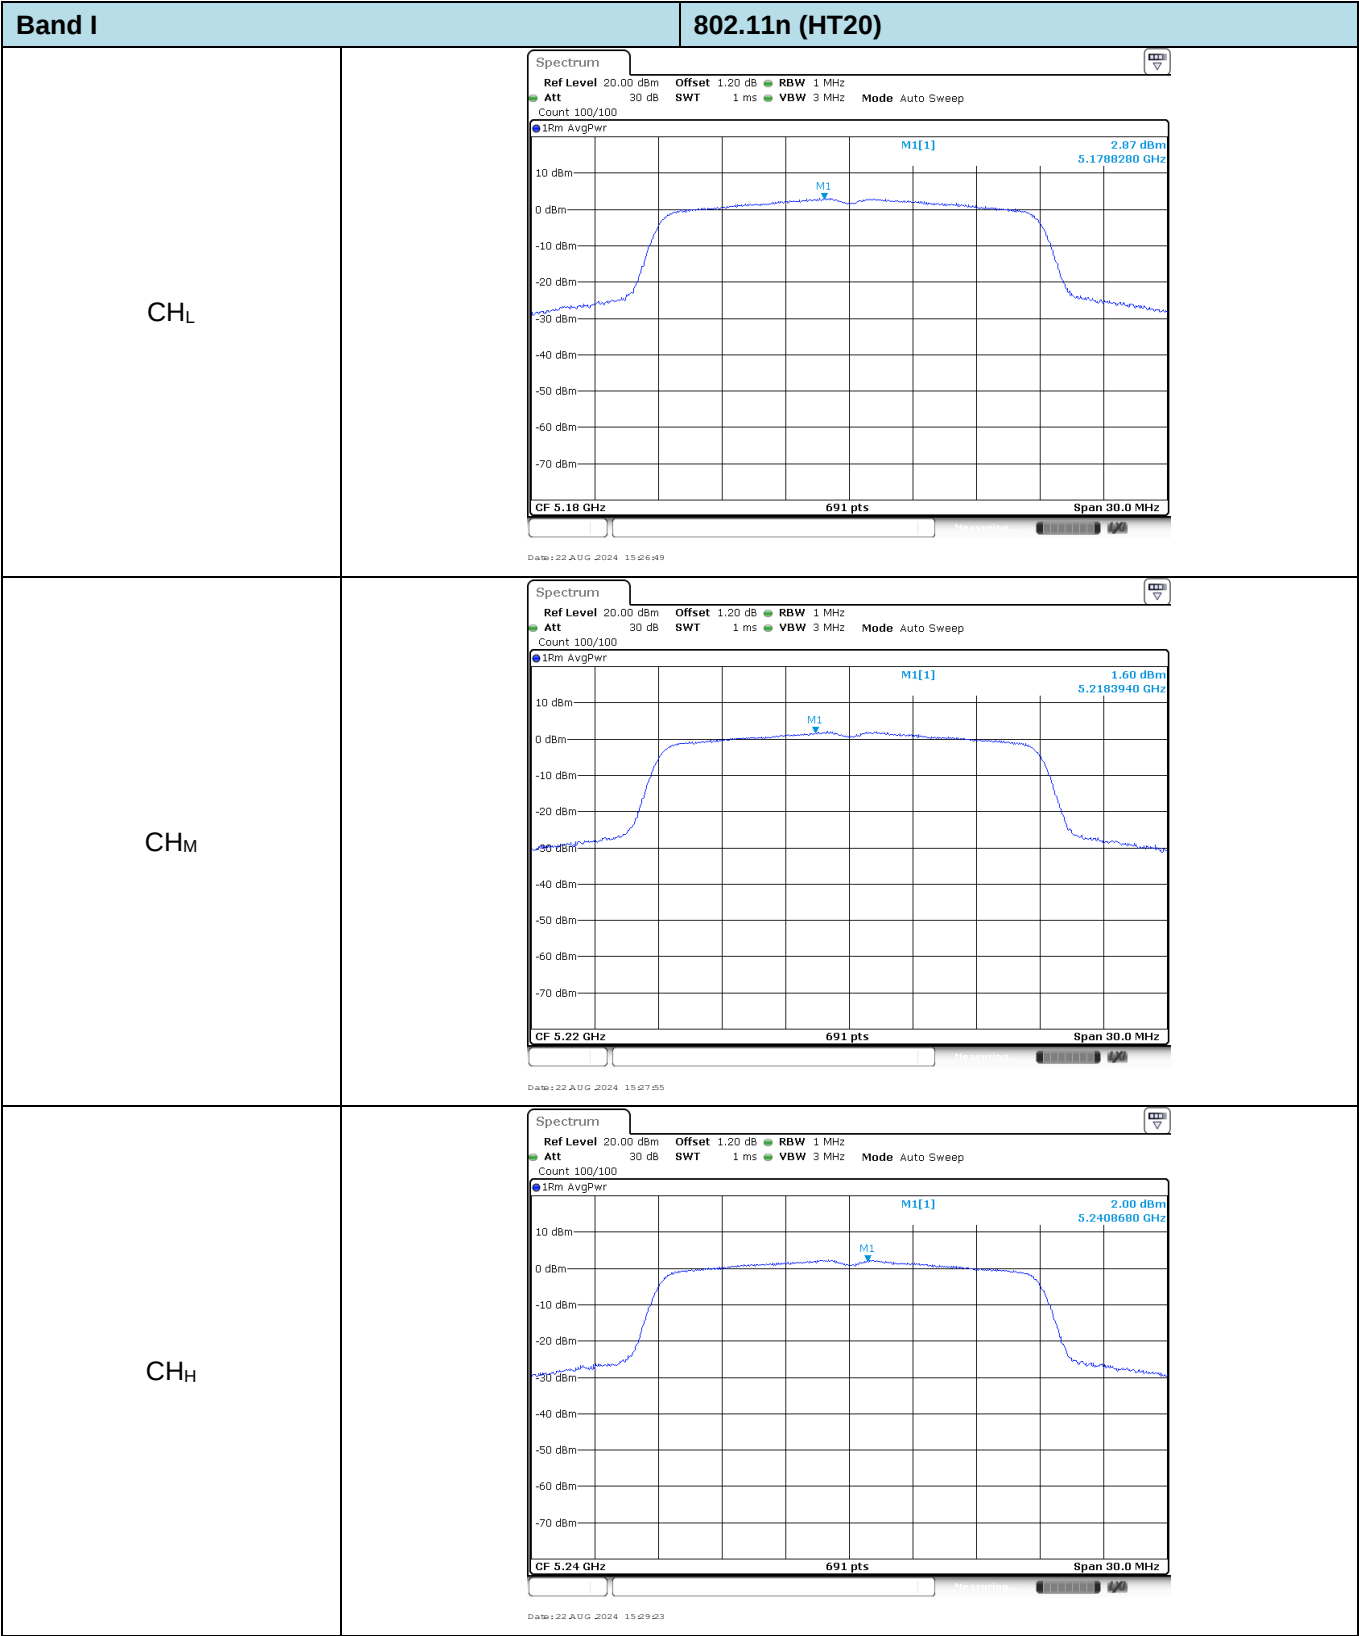


Band I		802.11a
CH _L	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M1[1] 3.16 dBm 5.1811720 GHz CF 5.18 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:22:16	
CH _M	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M1[1] 2.68 dBm 5.2191320 GHz CF 5.22 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:23:44	
CH _H	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M1[1] 2.47 dBm 5.2387840 GHz CF 5.24 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:25:07	

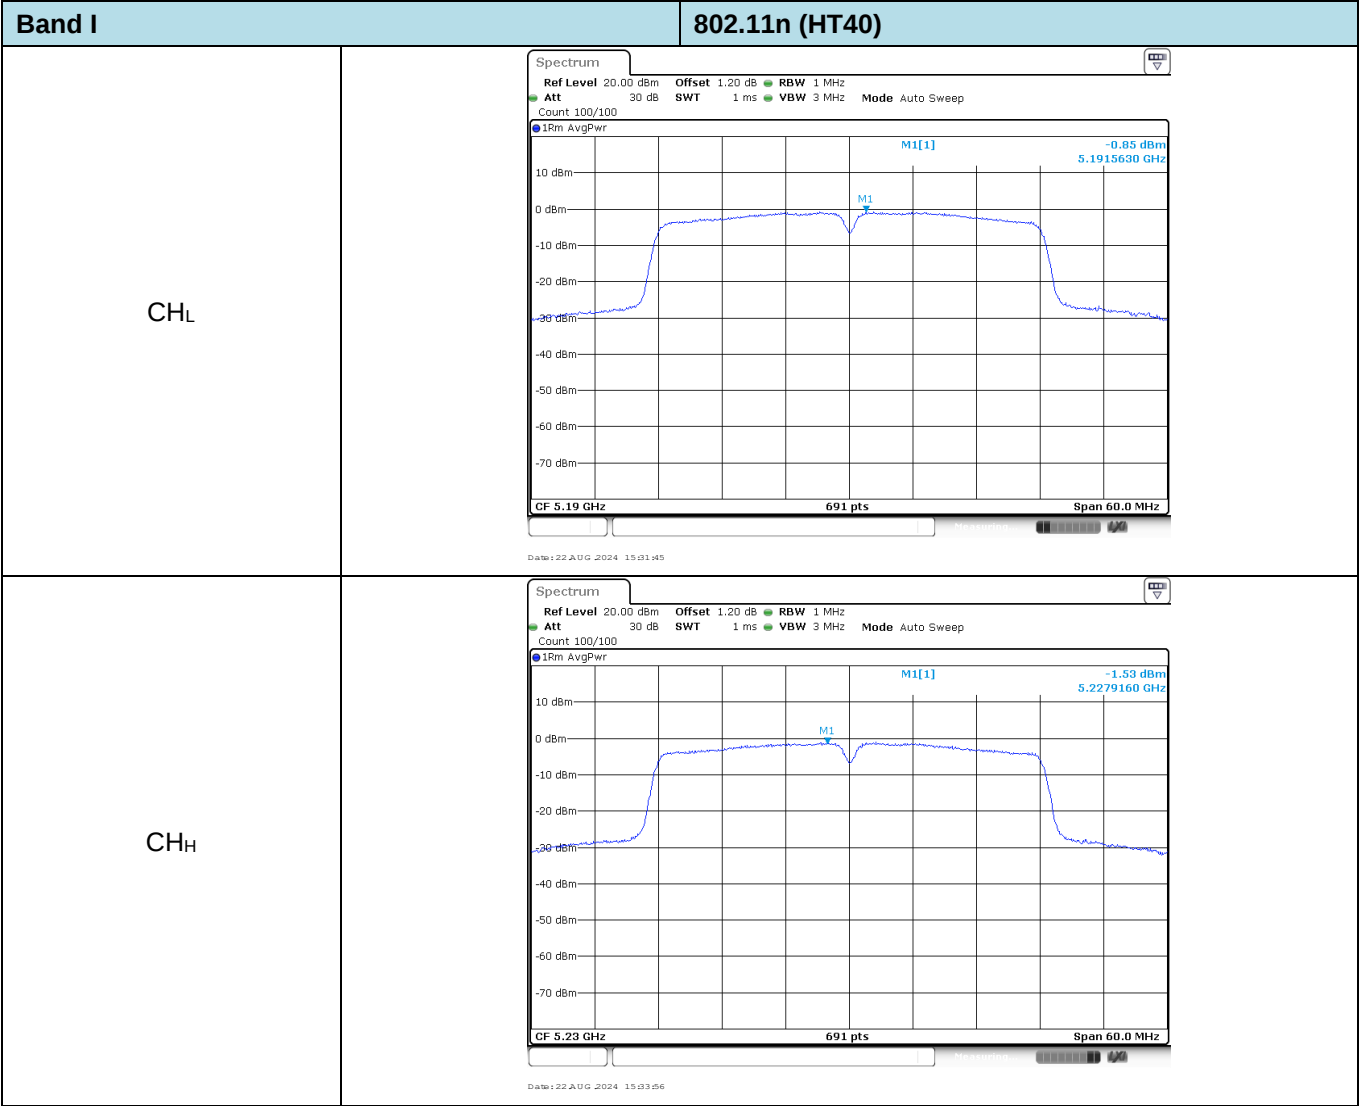


Band II		802.11n (HT20)
CH _L	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] 1.88 dBm 5.2586540 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.26 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:58:34	
CH _M	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] 2.19 dBm 5.2814760 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.28 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:59:48	
CH _H	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] 1.13 dBm 5.3191750 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.32 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 16:01:07	

Band II		802.11a
CH _L	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] 2.39 dBm 5.2590010 GHz CF 5.26 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:53:21	
CH _M	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] 2.18 dBm 5.2790010 GHz CF 5.28 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:55:50	
CH _H	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 1 MHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] 1.86 dBm 5.3189150 GHz CF 5.32 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 15:57:04	

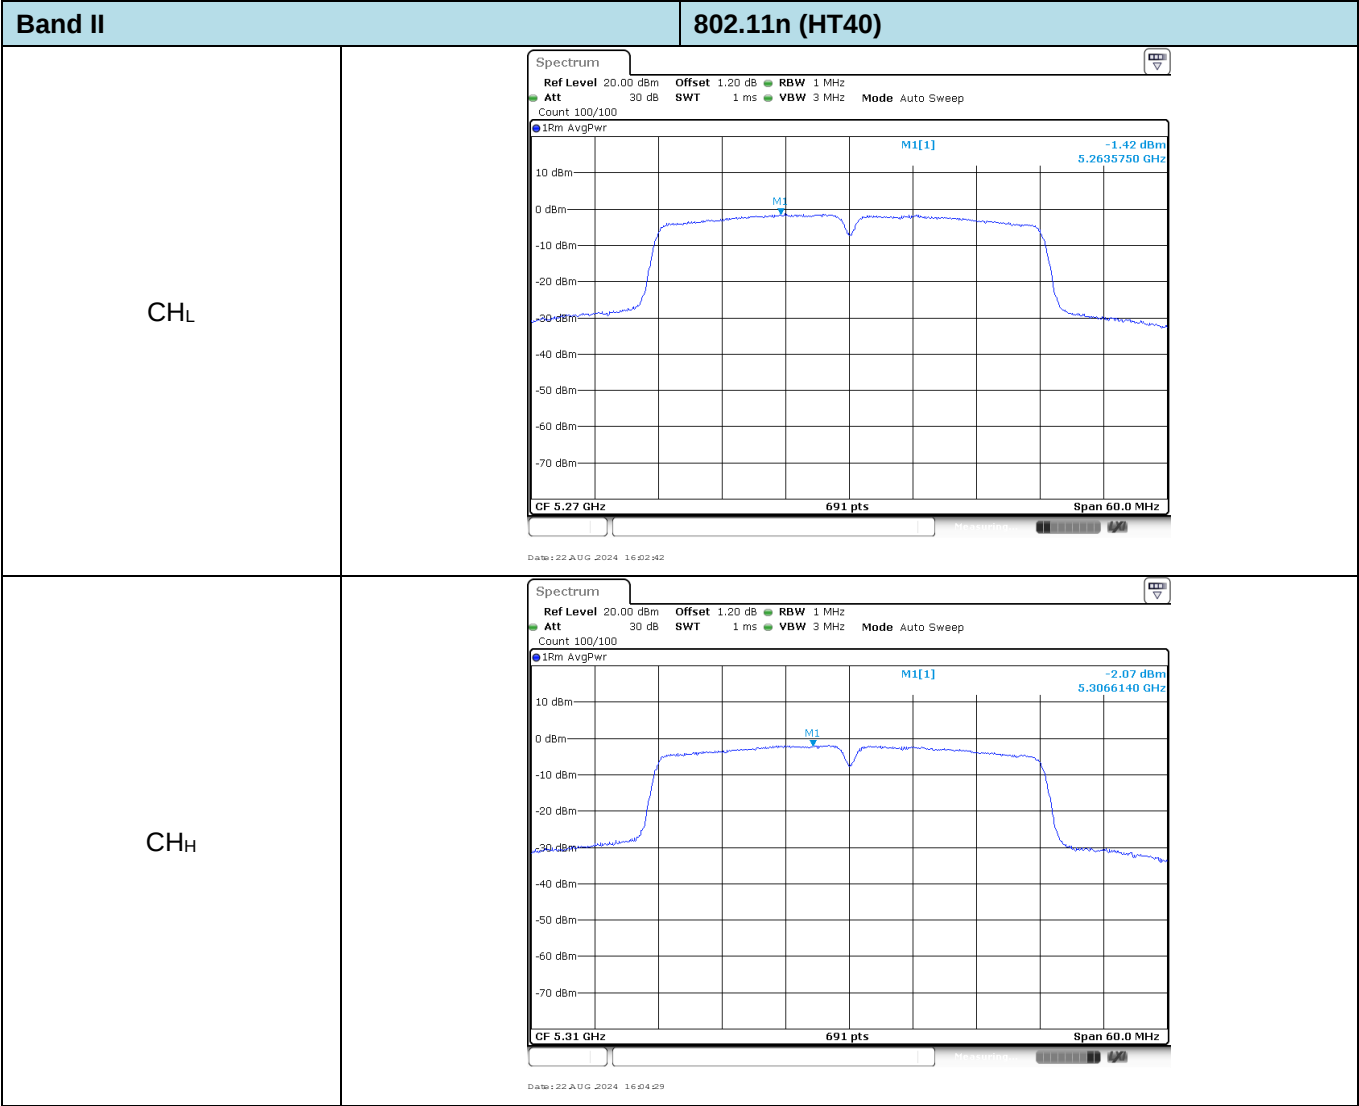

Band IV		802.11n (HT20)	
CH _L	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] -1.43 dBm 5.7441750 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.745 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 16:43:54		
CH _M	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] -1.75 dBm 5.7843050 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.785 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 16:45:29		
CH _H	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1 M1[1] -1.30 dBm 5.8240010 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.825 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 16:46:45		


Band IV		802.11a
CH _L	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1[1] -1.65 dBm 5.7461720 GHz M1 -30 dBm -20 dBm -10 dBm 0 dBm 10 dBm CF 5.745 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 16:08:24	
CH _M	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1[1] -1.03 dBm 5.7841320 GHz M1 -30 dBm -20 dBm -10 dBm 0 dBm 10 dBm CF 5.785 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 16:40:12	
CH _H	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 3 MHz Mode Auto Sweep Count 100/100 1Rm AvgPwr M1[1] -1.23 dBm 5.8259550 GHz M1 -30 dBm -20 dBm -10 dBm 0 dBm 10 dBm CF 5.825 GHz 691 pts Span 30.0 MHz Date: 22 AUG 2024 16:41:30	

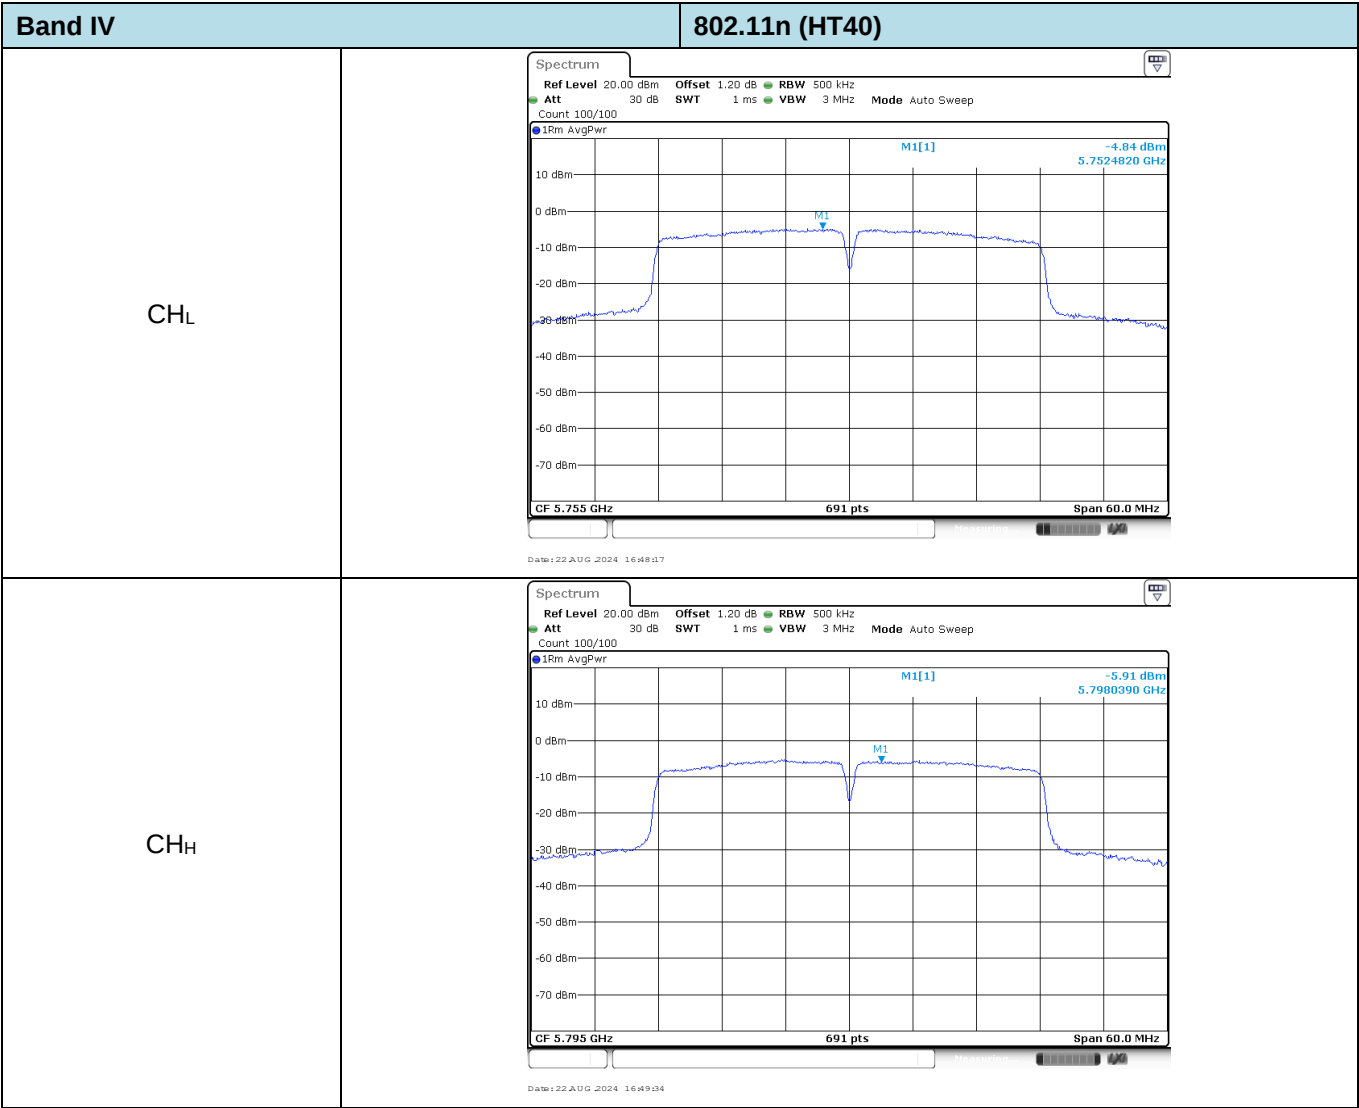


Appendix C: 26dB bandwidth


Band	Bandwidth (MHz)	Type	Channel	26dB bandwidth (MHz)	Result
I	20	802.11n	CH _L	25.65	Pass
			CH _M	22.47	
			CH _H	22.80	
		802.11a	CH _L	22.92	Pass
			CH _M	21.42	
			CH _H	20.70	
	40	802.11n	CH _L	59.22	Pass
			CH _H	57.06	
II	20	802.11n	CH _L	20.76	Pass
			CH _M	21.81	
			CH _H	23.61	
		802.11a	CH _L	22.95	Pass
			CH _M	23.34	
			CH _H	21.57	
	40	802.11n	CH _L	55.20	Pass
			CH _H	59.46	


Appendix report page: 14 of 35

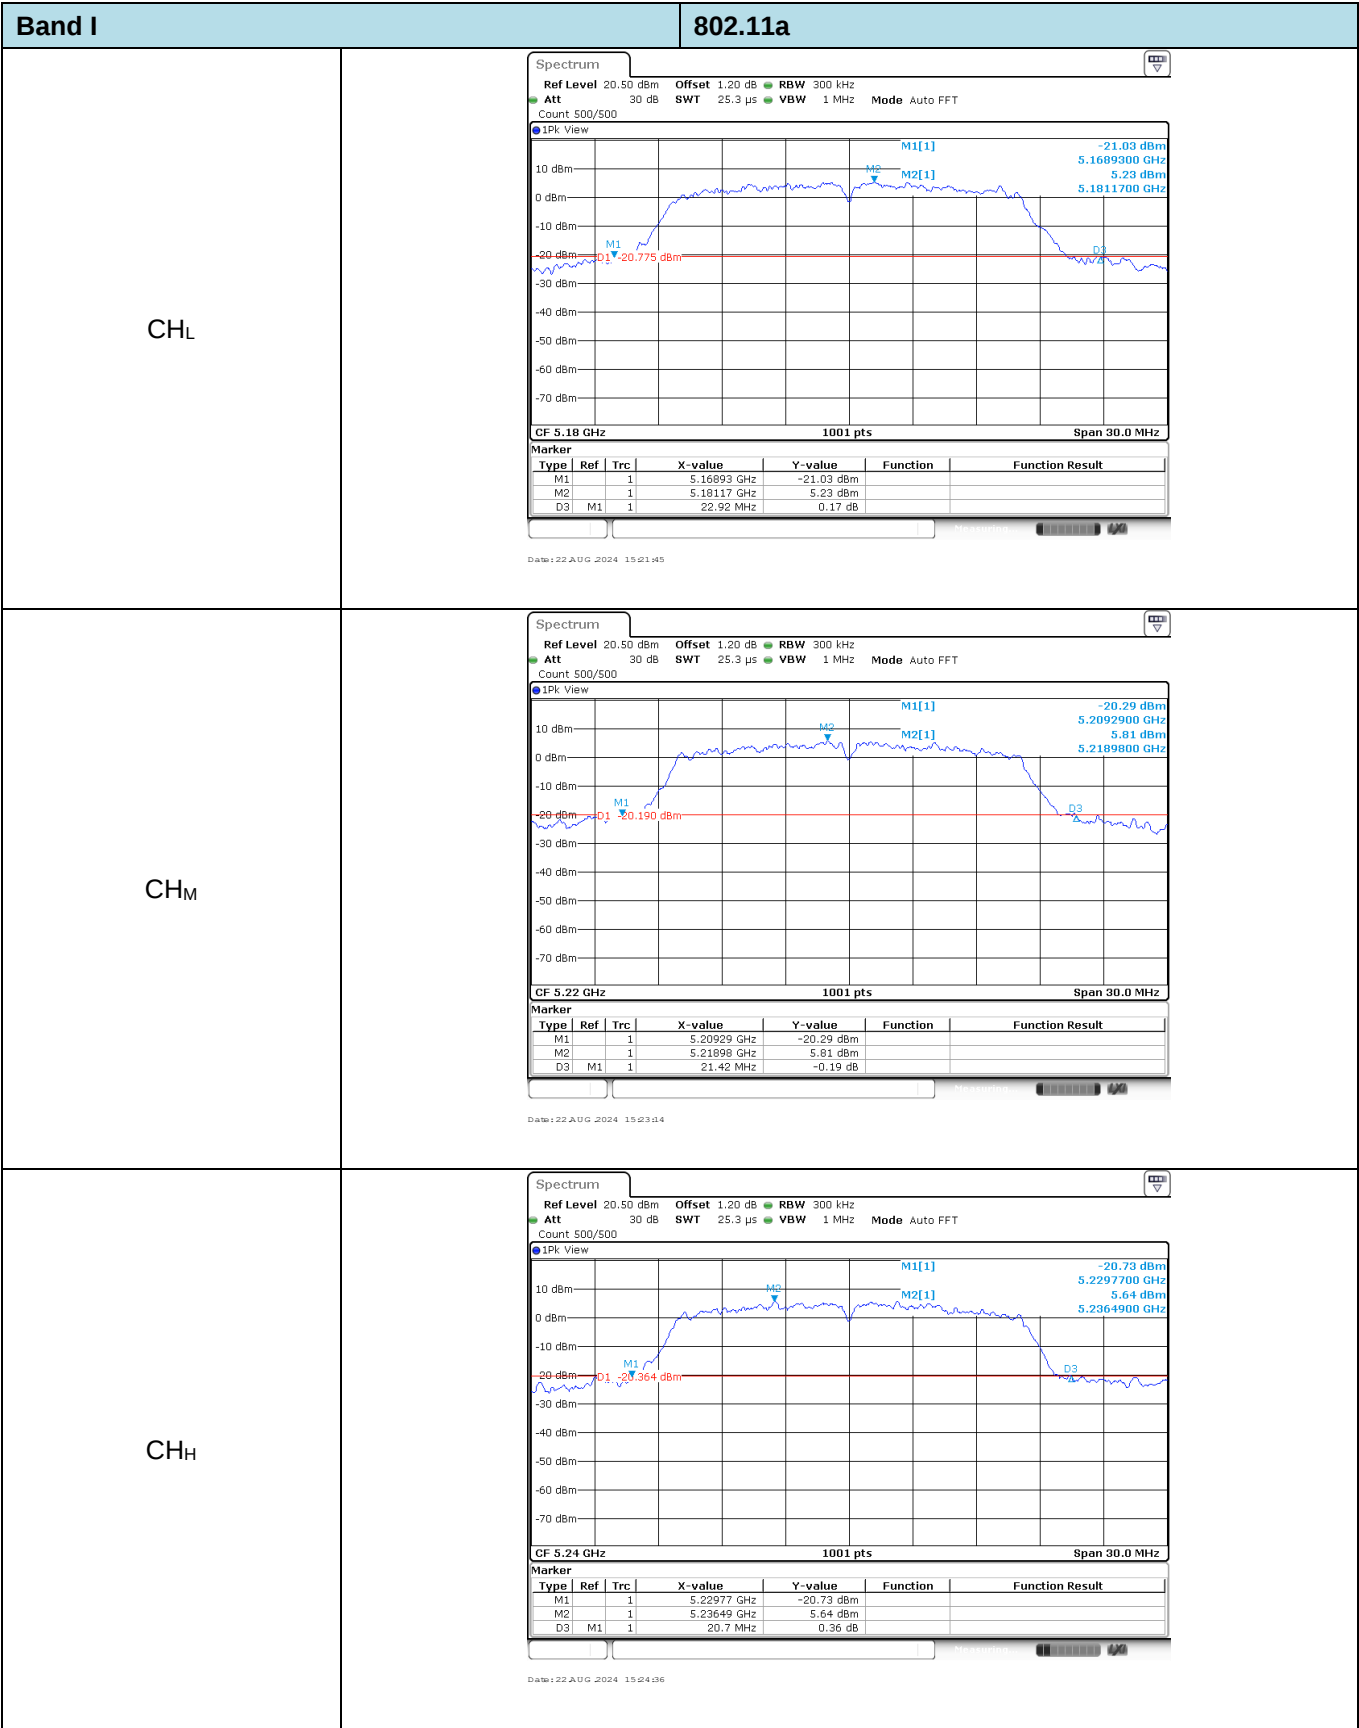

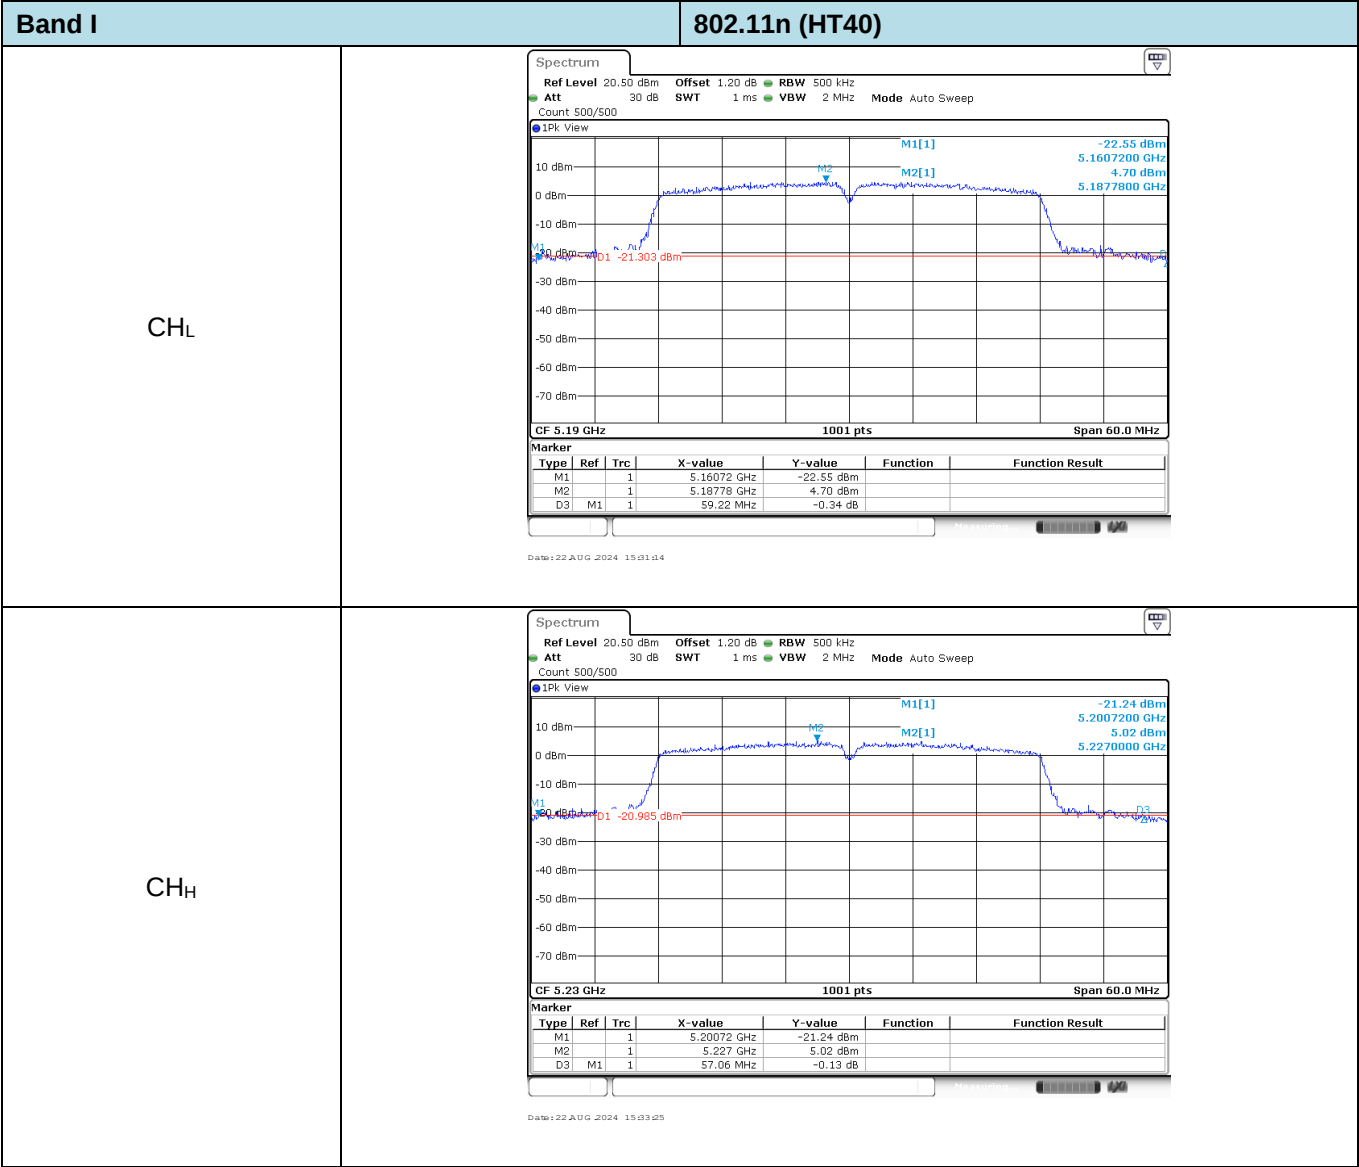

Appendix report page: 17 of 35

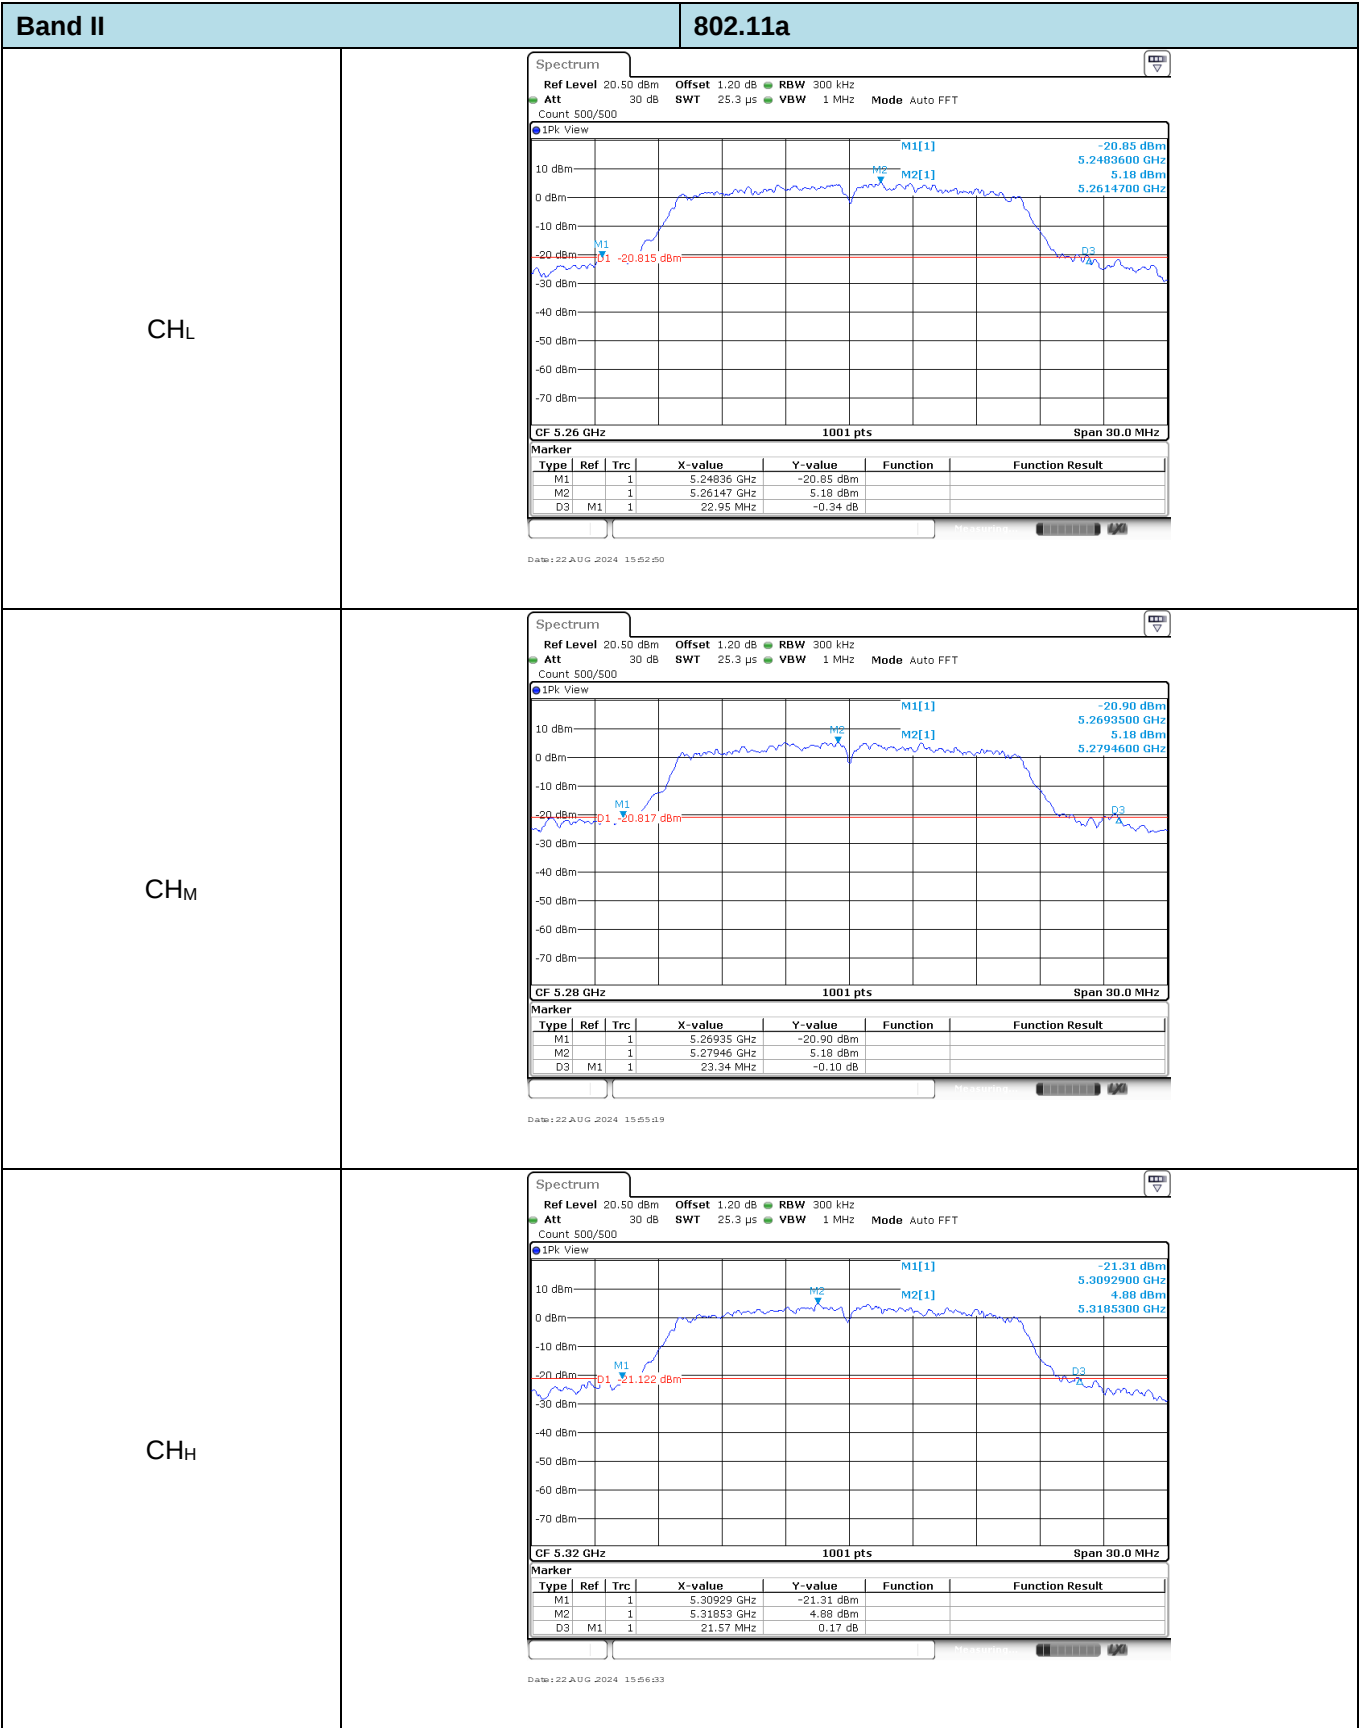

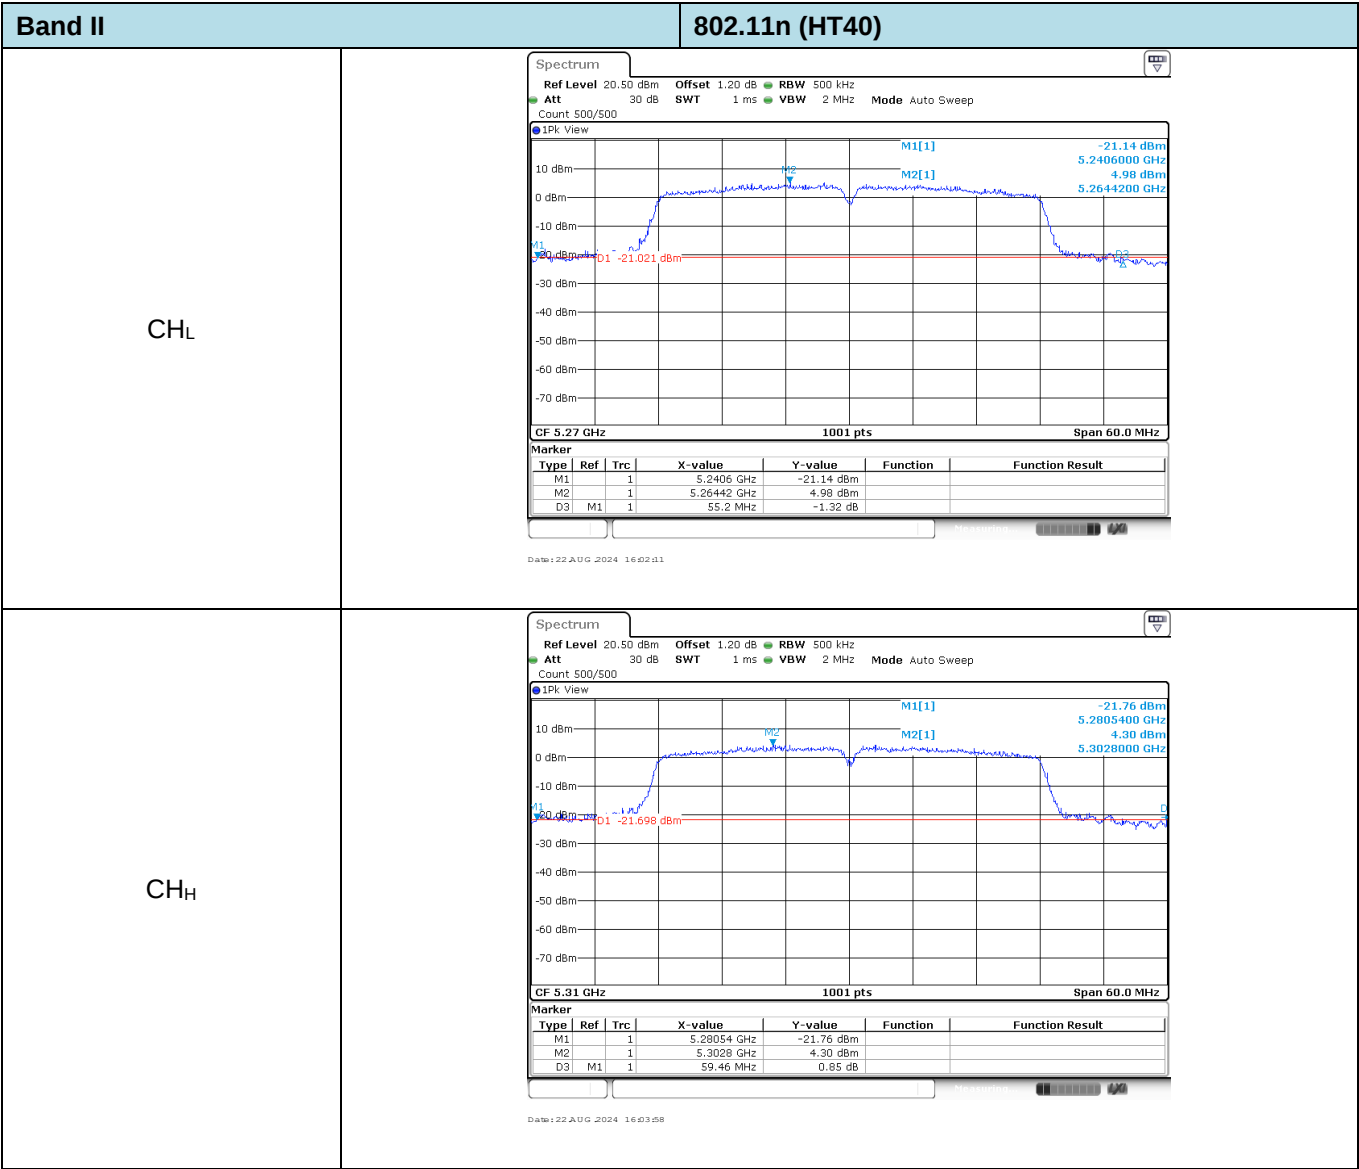

Appendix D: 99% Occupy bandwidth

Band	Bandwidth (MHz)	Type	Channel	99% Occupy bandwidth (MHz)	Result
I	20	802.11n	CH _L	17.74	Pass
			CH _M	17.77	
			CH _H	17.71	
		802.11a	CH _L	16.69	Pass
			CH _M	16.84	
			CH _H	16.90	
	40	802.11n	CH _L	36.20	Pass
			CH _H	36.26	
II	20	802.11n	CH _L	17.80	Pass
			CH _M	17.77	
			CH _H	17.59	
		802.11a	CH _L	16.78	Pass
			CH _M	16.84	
			CH _H	16.84	
	40	802.11n	CH _L	36.26	Pass
			CH _H	36.32	
IV	20	802.11n	CH _L	18.01	Pass
			CH _M	17.89	
			CH _H	17.71	
		802.11a	CH _L	16.93	Pass
			CH _M	16.90	
			CH _H	16.93	
	40	802.11n	CH _L	36.90	Pass
			CH _H	36.47	

Band I		802.11n (HT20)	
CH _L	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] 5.42 dBm 5.1816480 GHz 17.742257742 MHz M1 Occ Bw CF 5.18 GHz 1001 pts Span 30.0 MHz Date: 22 AUG 2024 15:26:11		
CH _M	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] 4.61 dBm 5.2187410 GHz 17.772227772 MHz M1 Occ Bw CF 5.22 GHz 1001 pts Span 30.0 MHz Date: 22 AUG 2024 15:27:18		
CH _H	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] 5.62 dBm 5.2392510 GHz 17.712287712 MHz M1 Occ Bw CF 5.24 GHz 1001 pts Span 30.0 MHz Date: 22 AUG 2024 15:28:45		

Band I		802.11a
CH _L	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] 5.89 dBm 5.1810190 GHz 16.693306693 MHz Occ Bw M1 M2 CF 5.18 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:21:38	
CH _M	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] 5.73 dBm 5.2160140 GHz 16.843156843 MHz Occ Bw M1 M2 CF 5.22 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:23:07	
CH _H	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] 5.50 dBm 5.2410190 GHz 16.903096903 MHz Occ Bw M1 M2 CF 5.24 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:24:29	

Band I		802.11n (HT40)
CH _L	Spectrum Ref Level 20.50 dBm Offset 1.20 dB RBW 500 kHz Att 30 dB SWT 1 ms VBW 2 MHz Mode Auto Sweep Count 300/300 1Pk View M1[1] 5.39 dBm 5.1922780 GHz 36.203796204 MHz T M1 Occ Bw 2 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.19 GHz 1001 pts Span 60.0 MHz Date: 22 AUG 2024 15:01:06	
CH _H	Spectrum Ref Level 20.50 dBm Offset 1.20 dB RBW 500 kHz Att 30 dB SWT 1 ms VBW 2 MHz Mode Auto Sweep Count 300/300 1Pk View M1[1] 4.84 dBm 5.2217880 GHz 36.263736264 MHz T M1 Occ Bw 2 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.23 GHz 1001 pts Span 60.0 MHz Date: 22 AUG 2024 15:03:17	



Band II		802.11n (HT20)	
CH _L	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1 M1[1] Occ Bw 4.61 dBm 5.2587410 GHz 17.802197802 MHz CF 5.26 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:57:56		
CH _M	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1 M1[1] Occ Bw 5.75 dBm 5.2785310 GHz 17.772227772 MHz CF 5.28 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:59:10		
CH _H	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1 M1[1] Occ Bw 4.76 dBm 5.3210190 GHz 17.592407592 MHz CF 5.32 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 16:00:29		

Band II		802.11a
CH _L	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] Occ Bw 4.85 dBm 5.2608390 GHz 16.783216783 MHz CF 5.26 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:52:43	
CH _M	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] Occ Bw 5.44 dBm 5.2808690 GHz 16.843156843 MHz CF 5.28 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:55:13	
CH _H	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT 1Pk View M1[1] Occ Bw 3.95 dBm 5.3187410 GHz 16.843156843 MHz CF 5.32 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 15:56:26	

Appendix report page: 26 of 35

Band IV		802.11n (HT20)
CH _L	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT IPk View M1 M1[1] Occ Bw 4.85 dBm 5.7441610 GHz 18.011988012 MHz CF 5.745 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 16:43:15	
CH _M	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT IPk View M1 M1[1] Occ Bw 4.97 dBm 5.7857790 GHz 17.892107892 MHz CF 5.785 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 16:44:49	
CH _H	Spectrum Ref Level 20.50 dBm Att 30 dB Count 300/300 Offset 1.20 dB SWT 25.3 μs RBW 300 kHz VBW 1 MHz Mode Auto FFT IPk View M1 M1[1] Occ Bw 4.54 dBm 5.8258690 GHz 17.712287712 MHz CF 5.825 GHz 1001 pts Span 30.0 MHz Date: 22 AUG. 2024 16:46:08	


Appendix report page: 28 of 35

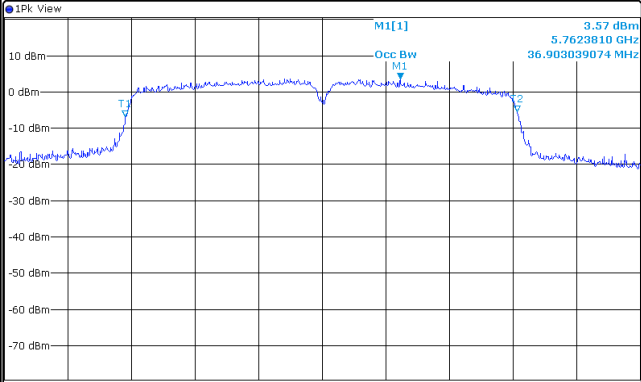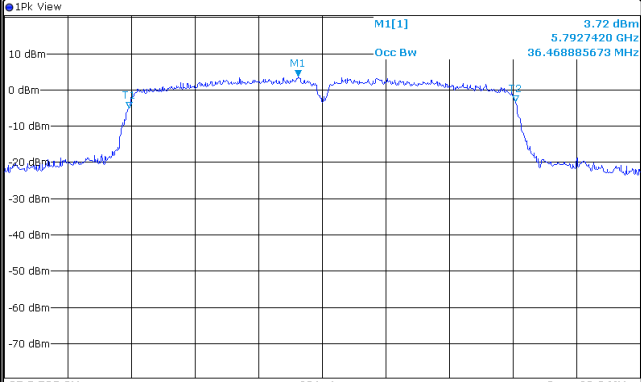Band IV		802.11n (HT40)	
CH _L	Spectrum Ref Level 20.50 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 2 MHz Mode Auto Sweep Count 300/300 IPk View  CF 5.755 GHz 691 pts Span 60.0 MHz Date: 23 AUG 2024 08:57:11		
	CH _H	Spectrum Ref Level 20.50 dBm Att 30 dB Offset 1.20 dB SWT 1 ms RBW 500 kHz VBW 2 MHz Mode Auto Sweep Count 300/300 IPk View  CF 5.795 GHz 691 pts Span 60.0 MHz Date: 22 AUG 2024 16:48:57	

Appendix E: 6dB Bandwidth

Band	Bandwidth (MHz)	Type	Channel	6dB bandwidth (MHz)	Result
IV	20	802.11n	CH _L	15.12	Pass
			CH _M	15.69	
			CH _H	17.58	
		802.11a	CH _L	14.43	Pass
			CH _M	15.72	
			CH _H	14.46	
	40	802.11n	CH _L	35.30	Pass
			CH _H	35.30	


Appendix report page: 31 of 35

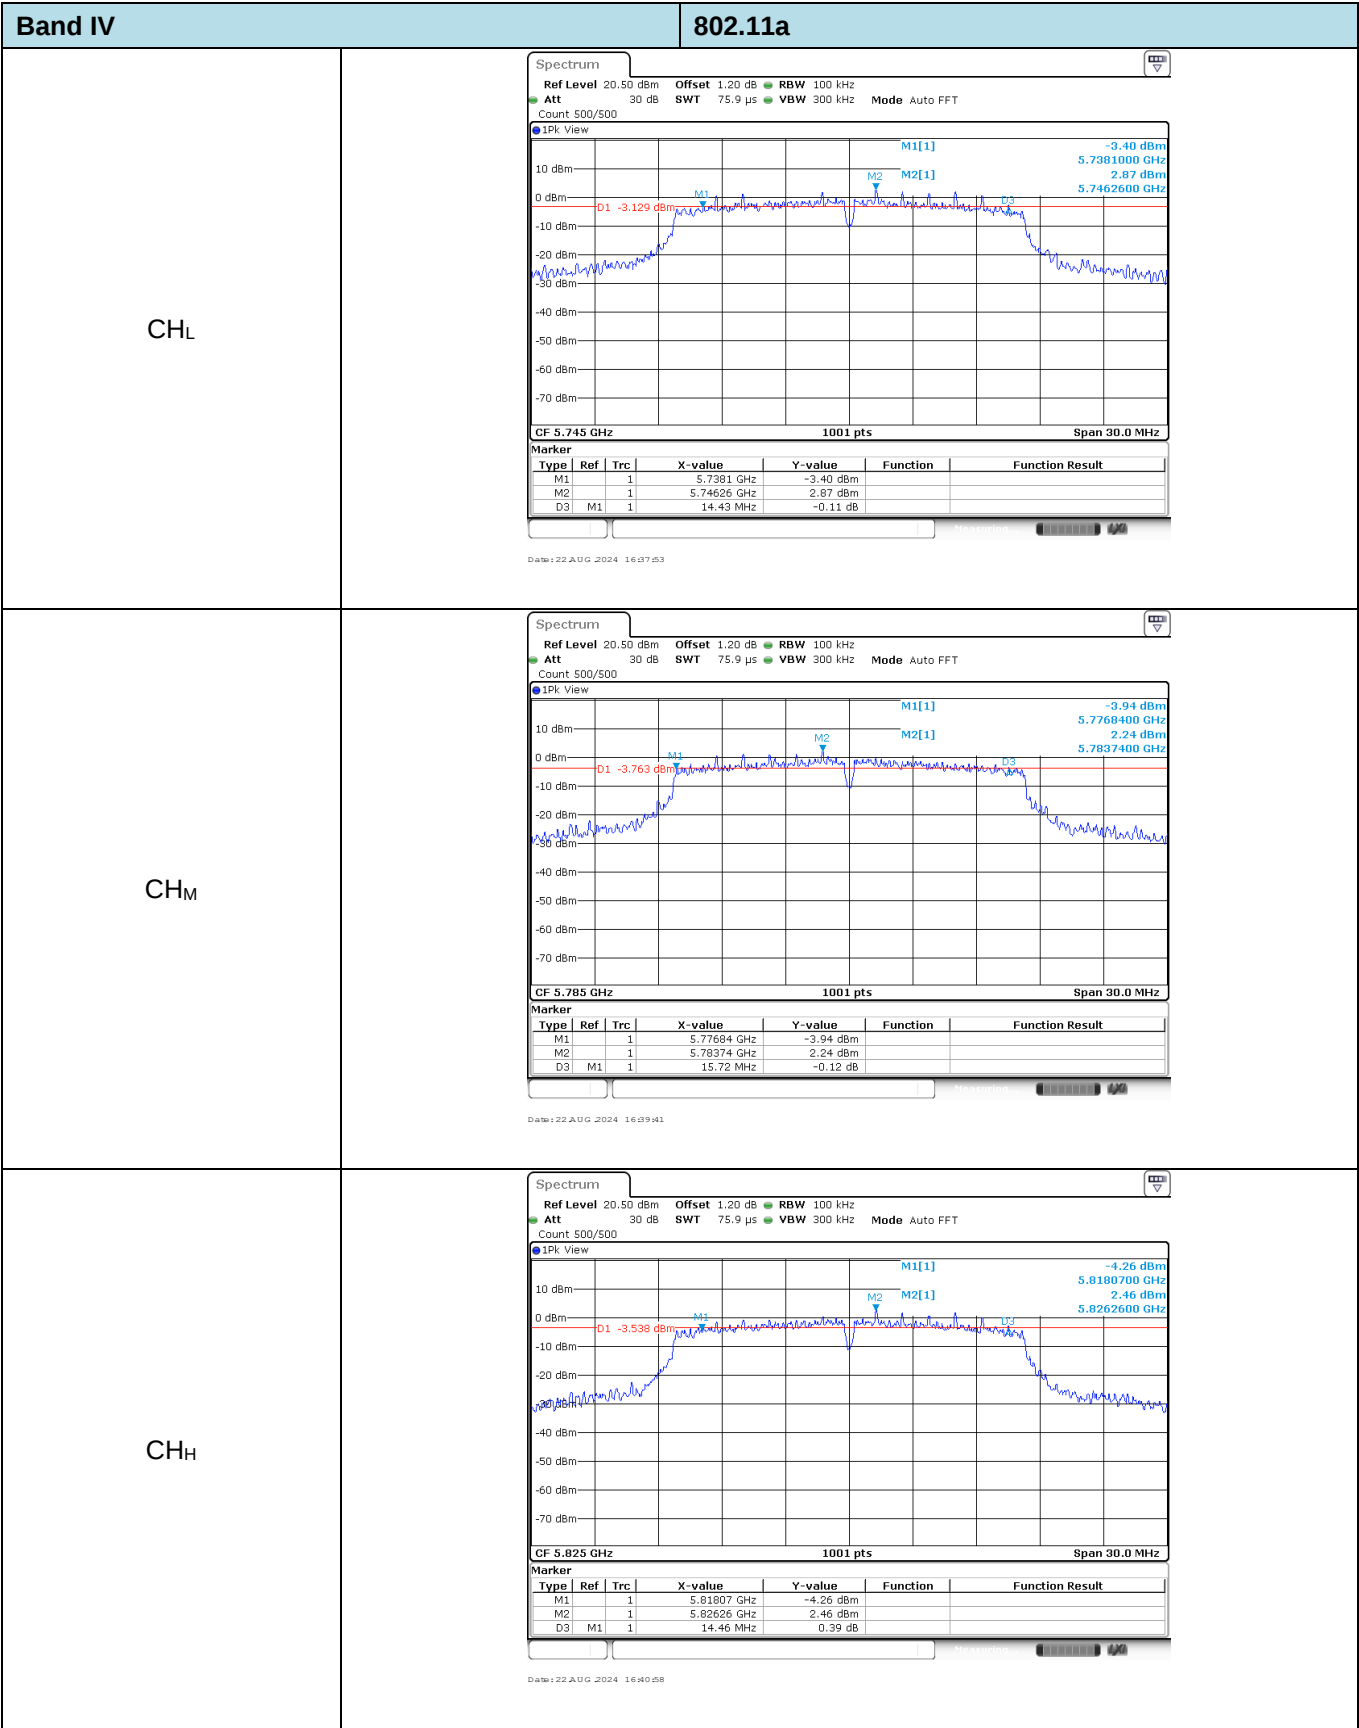


Band IV

802.11n (HT40)

CH_L

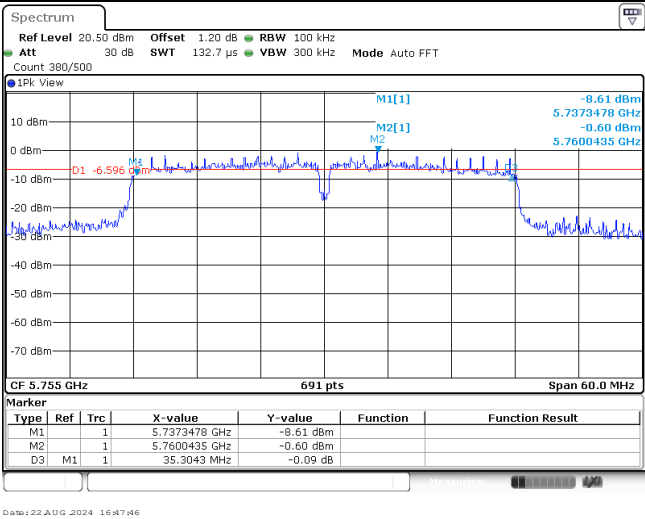

CH_H

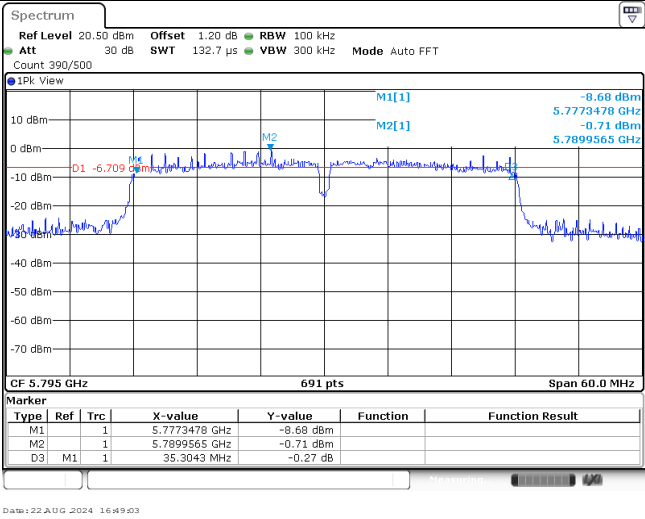

Appendix F: Frequency stability**Voltage VS Frequency stability**

Band: I			Test Frequency: 5180.00MHz	
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
T _N	V _L	1000.00	0.19305	PASS
T _N	V _N	1000.00	0.19305	PASS
T _N	V _H	1000.00	0.19305	PASS

Band: II			Test Frequency: 5260.00MHz	
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
T _N	V _L	5000.00	0.95057	PASS
T _N	V _N	5000.00	0.95057	PASS
T _N	V _H	4000.00	0.76046	PASS

Band: IV			Test Frequency: 5745.00MHz	
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
T _N	V _L	2000.00	0.34813	PASS
T _N	V _N	2000.00	0.34813	PASS
T _N	V _H	2000.00	0.34813	PASS

Temperature VS Frequency stability

Band: I			Test Frequency: 5180.00MHz	
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
V _N	-20	1000.00	0.19305	PASS
V _N	-10	1000.00	0.19305	PASS
V _N	0	1000.00	0.19305	PASS
V _N	10	0.00	0.00000	PASS
V _N	20	0.00	0.00000	PASS
V _N	30	0.00	0.00000	PASS
V _N	40	0.00	0.00000	PASS
V _N	50	0.00	0.00000	PASS

Band: II			Test Frequency: 5260.00MHz	
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
V _N	-20	3000.00	0.57034	PASS
V _N	-10	3000.00	0.57034	PASS
V _N	0	3000.00	0.57034	PASS
V _N	10	3000.00	0.57034	PASS
V _N	20	2000.00	0.38023	PASS
V _N	30	2000.00	0.38023	PASS
V _N	40	2000.00	0.38023	PASS
V _N	50	2000.00	0.38023	PASS

Band: IV			Test Frequency: 5745.00MHz	
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
V _N	-20	1000.00	0.17406	PASS
V _N	-10	1000.00	0.17406	PASS
V _N	0	1000.00	0.17406	PASS
V _N	10	1000.00	0.17406	PASS
V _N	20	1000.00	0.17406	PASS
V _N	30	1000.00	0.17406	PASS
V _N	40	1000.00	0.17406	PASS
V _N	50	0.00	0.00000	PASS

-----End of Report-----