

FCC Test Report

Report No.: OKA-ESH-P21050486B-3

FCC ID: 2AYF8-YBEA10A

Product: Electric Scooter

Test Model: EA10A

Received Date: May.25, 2021

Test Date: May.25 to Jul.11.2021

Issued Date: Jul.12.2021

Applicant: Zhejiang Okai Vehicle Co., Ltd.

Address: No. 9, Xinxing Road, Xinbi Town, Jinyun County, Zhejiang, China

Manufacturer: Zhejiang Okai Vehicle Co., Ltd.

Address: No. 9, Xinxing Road, Xinbi Town, Jinyun County, Zhejiang, China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Address: No. 829, Xinzhuang Road, Shanghai, P.R.China (201612)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Test Instruments	7
2.2 Measurement Uncertainty	8
2.3 Modification Record	8
3 General Information	9
3.1 General Description of EUT	9
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability:	11
3.2.2 Test Condition:	12
3.3 Description of Support Units	13
3.4 General Description of Applied Standards	13
4 Test Procedure and Results	14
4.1 AC Power Conducted Emission	14
4.1.1 Limits	14
4.1.2 Test Procedures	14
4.1.3 Deviation from Test Standard	14
4.1.4 Test Setup	15
4.1.5 EUT Operating Conditions	15
4.1.6 Test Results	16
4.2 20dB and 99%OBW Spectrum Bandwidth Measurement	20
4.2.1 Limit	20
4.2.2 Test Setup	20
4.2.3 Test Procedures	20
4.2.4 Deviation of Test Standard	20
4.2.5 Test Results	21
4.3 Frequency Stability Measurement	22
4.3.1 Limit	22
4.3.2 Test Setup	22
4.3.3 Test Procedures	22
4.3.4 Deviation of Test Standard	22

4.3.5	Test Results	23
4.4	Field Strength of Fundamental Emissions and Mask Measurement.....	24
4.4.1	Test Limit	24
4.4.2	Test Setup.....	24
4.5	Radiated Emissions Measurement	26
4.5.1	Test Procedure Reference.....	27
4.5.2	Test Procedures.....	27
4.5.3	Deviation from Test Standard	28
4.5.4	Test Setup.....	28
4.5.5	Test Results	30
5	Pictures of Test Arrangements	33



Release Control Record

Issue No.	Description	Date Issued
OKA-ESH-P21050486B-3	Original release	Jul.12.2021

1 Certificate of Conformity

Product: Electric Scooter

Brand: OKAI

Test Model: EA10A

Applicant: Zhejiang Okai Vehicle Co., Ltd.

Test Date: May.25 to Jul.11.2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.225)
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :


Yuan ZHANG

, Date:

Jul.12.2021

Project Engineer

Approved by :


Daniel SUN
EMC Lab Manager

, Date:

Jul.12.2021

2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.215(c)	20dB Spectrum Bandwidth	PASS	Meet the requirement of limit.
15.225(e)	Frequency Stability	PASS	Meet the requirement of limit.
15.225(a)(b)(c)	Field Strength of Fundamental Emissions	PASS	Meet the requirement of limit.
15.225 / 15.209 /	Radiated Emissions Measurement	PASS	Meet the requirement of limit.

2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid Antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Jul.29, 20	Jul.28, 22
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.25, 20	Aug.24, 22
Double Ridge Horn Antenna(18G-40G)	COM-POWER	AH-840	E1A1040	Jul.15, 20	Jul.14, 22
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Apr.19, 21	Apr.18, 22
Pre-Amplifier(0.5GHz-18GHz)	EMCI	EMC184045SE	E1A2009	Jul.05, 21	Jul.04, 22
Pre-Amplifier(18GHz-40GHz)	EMCI	EMC051845SE	E1A2008	Jul.05, 21	Jul.04, 22
EMI test receiver	R&S	ESR7	E1R1005	Apr.19, 21	Apr.18, 22
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.23, 20	Jul.22, 21
Spectrum Analyzer	Keysight	N9020A	E1S1004	Mar.02, 21	Mar.01, 22
EMI test receiver	R&S	ESCS30	E1R1001	May.11, 21	May.10, 22
LISN	R&S	ENV216	E1L1011	May.11, 21	May.10, 22
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr. 02, 21	Apr. 01, 22
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	ADT	ADT_COND_V7 .3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A
Test Software	Toscend	JS1120-3	N/A	N/A	N/A

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Electric Scooter
Brand	OKAI
Test Model	EA10A
Power Rating	Powered by battery; AC Adaptor for battery: INPUT: 100-240Vac,50/60Hz 2A OUTPUT: 42Vdc,2A
Modulation Type	ASK
Modulation Technology	NFC
Operating Frequency	13.56MHz
Number of Channel	1
Antenna Type	Coil Antenna
Antenna Connector	--

Note:

1. For more details, please refer to the User's manual of the EUT.

3.2 Description of Test Modes

CHANNEL	FREQUENCY	MODULATION TYPE
1	13.56 MHz	ASK

3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE (9 kHz~30MHz)	RE (30MHz~1GHz)	PLC	BW	
-	√	√	√	√	-

Where **RE≥1G:** Radiated Emission above 1GHz **RE< 1G:** Radiated Emission below 1GHz

PLC: Power Line Conducted Emission **BW:** 20dB Spectrum Bandwidth

NOTE:

Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.

Radiated Emission Test RE (9 kHz~30MHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	NFC TX	13.56MHz	13.56MHz	ASK

Radiated Emission Test RE (30MHz~1GHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	NFC TX	13.56MHz	13.56MHz	ASK

Power Line Conducted Emission Test:

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	NFC TX	13.56MHz	13.56MHz	ASK

20dB Spectrum Bandwidth

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	NFC TX	13.56MHz	13.56MHz	ASK

3.2.2 Test Condition:

Applicable to	Normal Environmental Conditions	Normal Input Power
RE (9 kHz~30MHz)	23deg. C, 58%RH	Working mode: Powered by battery
RE (30MHz~1GHz)	23deg. C, 58%RH	Working mode: Powered by battery
PLC	23deg. C, 58%RH	Charging mode: 100-240Vac,50/60Hz
BW	25deg. C, 60%RH	Working mode: Powered by battery

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

FCC Part 15, Subpart C (15.225)

ANSI C63.10:2013

All relaxed test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 AC Power Conducted Emission

4.1.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.1.3 Deviation from Test Standard

No deviation.

4.1.4 Test Setup

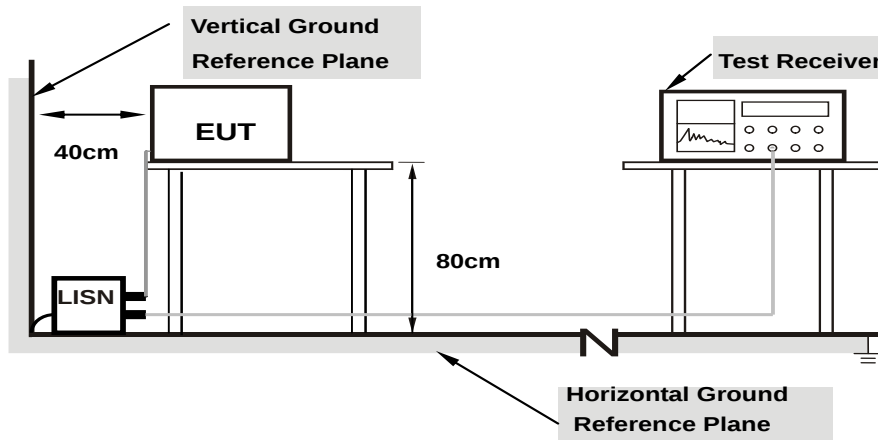

Note: 1.Support units were connected to second LISN.


For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT Operating Conditions

Same as 4.1.6.

4.1.6 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz		

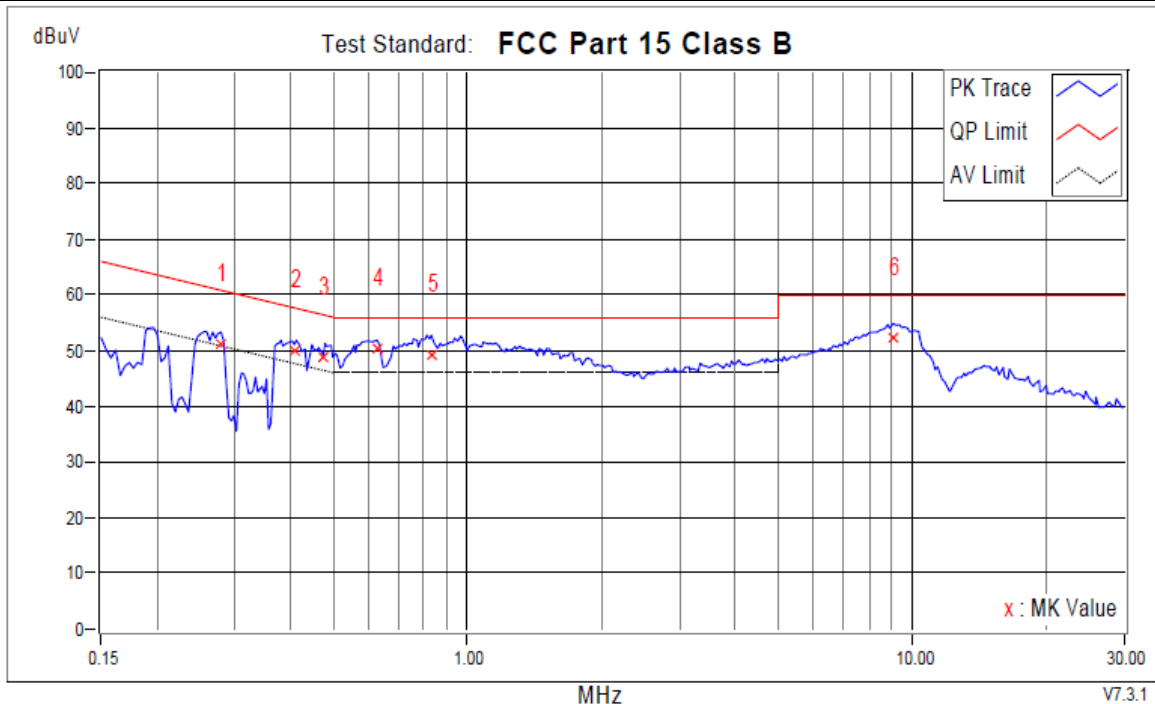


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.27903	9.76	41.30	27.63	51.06	37.39	60.84	50.84	-9.78	-13.45	
2	0.40806	9.75	40.08	27.33	49.83	37.08	57.69	47.69	-7.86	-10.61	
3	0.47453	9.75	38.97	24.24	48.72	33.99	56.43	46.43	-7.71	-12.44	
+4	0.62702	9.67	40.53	25.51	50.20	35.18	56.00	46.00	-5.80	-10.82	
5	0.83034	9.61	39.65	24.55	49.26	34.16	56.00	46.00	-6.74	-11.84	
6	9.09370	10.35	41.88	33.67	52.23	44.02	60.00	50.00	-7.77	-5.98	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz		

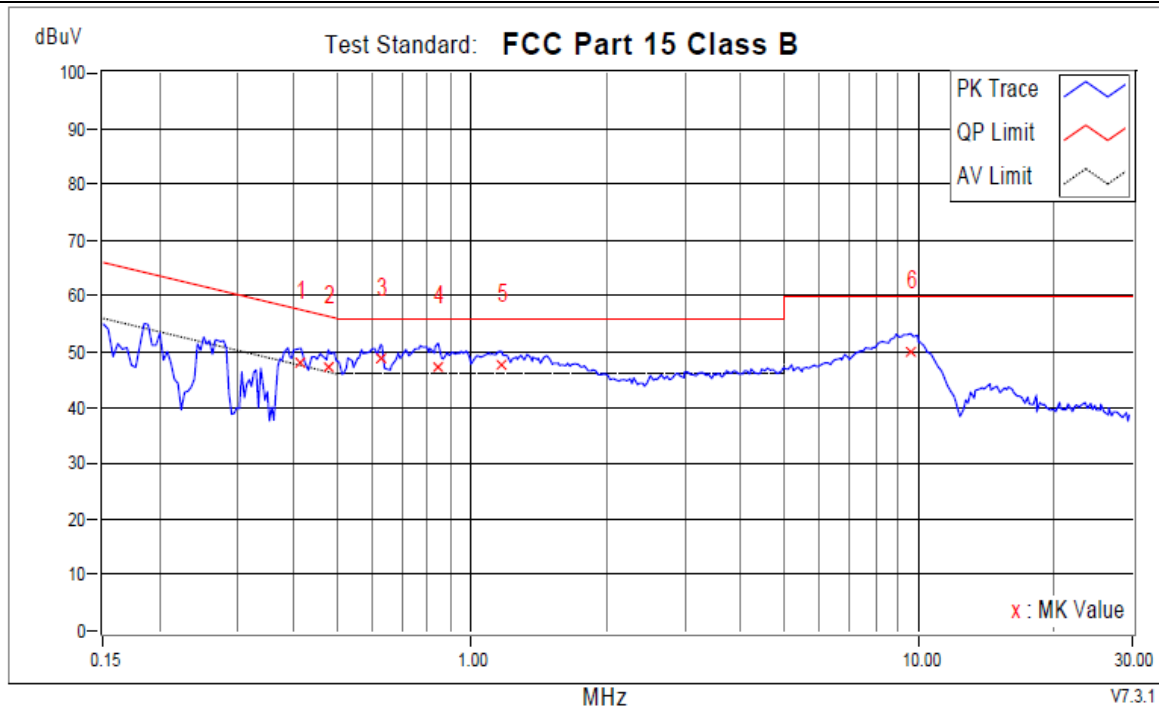


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.41588	9.89	38.15	24.78	48.04	34.67	57.53	47.53	-9.49	-12.86	
2	0.47844	9.88	37.53	22.92	47.41	32.80	56.37	46.37	-8.96	-13.57	
+3	0.62702	9.84	39.07	24.72	48.91	34.56	56.00	46.00	-7.09	-11.44	
4	0.84207	9.91	37.55	20.75	47.46	30.66	56.00	46.00	-8.54	-15.34	
5	1.16813	9.92	37.73	22.88	47.65	32.80	56.00	46.00	-8.35	-13.20	
6	9.60982	10.41	39.64	31.35	50.05	41.76	60.00	50.00	-9.95	-8.24	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz		

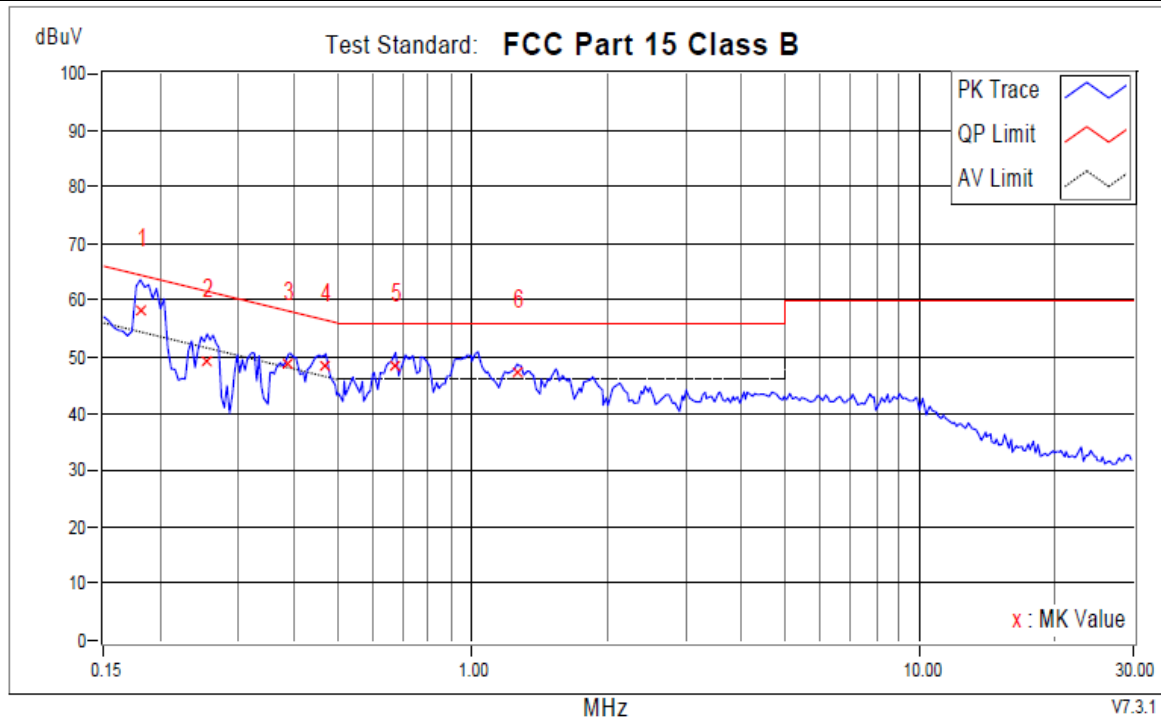


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.18128	9.88	48.49	32.16	58.37	42.04	64.43	54.43	-6.05	-12.38	
2	0.25557	9.80	39.50	20.84	49.30	30.64	61.57	51.57	-12.27	-20.93	
3	0.38851	9.75	38.98	26.90	48.73	36.65	58.10	48.10	-9.37	-11.45	
4	0.47062	9.75	38.51	24.33	48.26	34.08	56.50	46.50	-8.24	-12.42	
5	0.67394	9.64	38.73	22.84	48.37	32.48	56.00	46.00	-7.63	-13.52	
6	1.26197	9.66	37.80	24.92	47.46	34.58	56.00	46.00	-8.54	-11.42	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz		

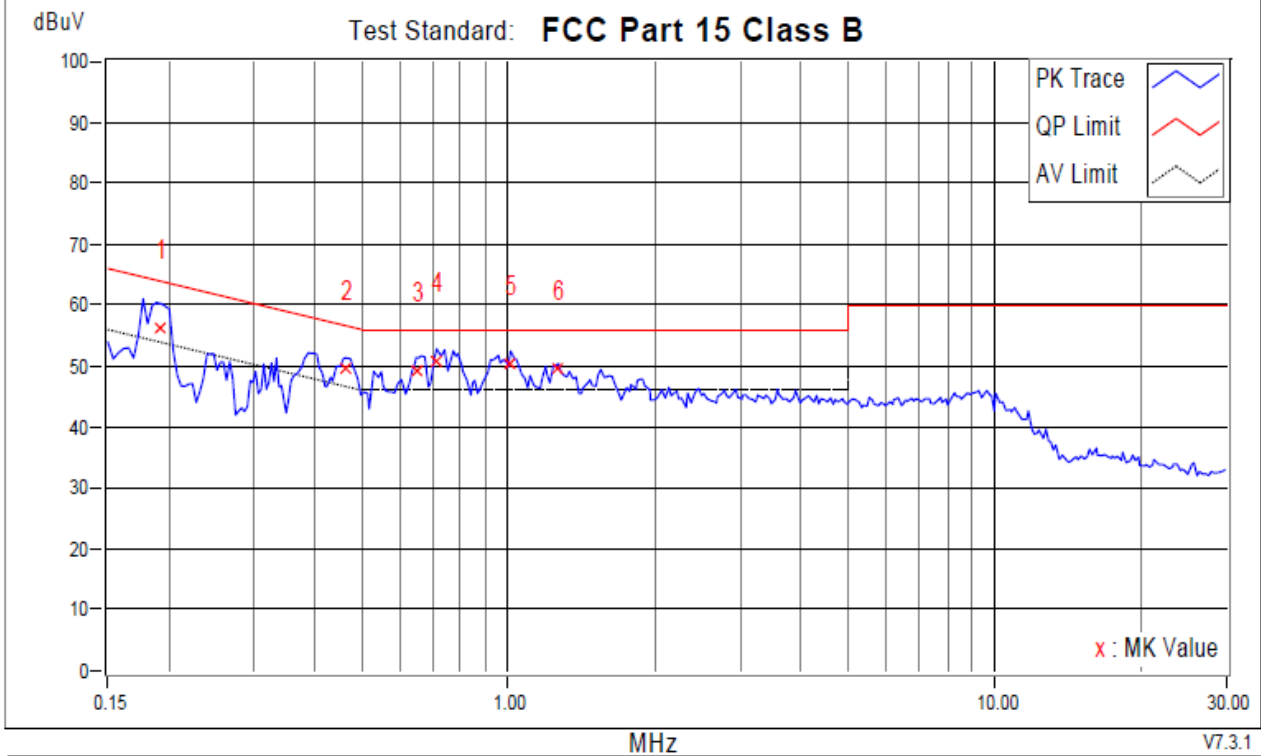

	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.19301	9.84	46.35	33.58	56.19	43.42	63.91	53.91	-7.72	-10.49	
2	0.46280	9.88	39.87	26.61	49.75	36.49	56.64	46.64	-6.89	-10.15	
3	0.64657	9.84	39.36	25.26	49.20	35.10	56.00	46.00	-6.80	-10.90	
+4	0.71304	9.84	40.89	27.82	50.73	37.66	56.00	46.00	-5.27	-8.34	
5	1.01173	9.91	40.60	26.05	50.51	35.96	56.00	46.00	-5.49	-10.04	
6	1.26979	9.92	39.63	26.09	49.55	36.01	56.00	46.00	-6.45	-9.99	

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.2 20dB Spectrum Bandwidth Measurement

4.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB emission bandwidth in the specific band 13.553 ~ 13.567MHz.

4.2.2 Test Setup

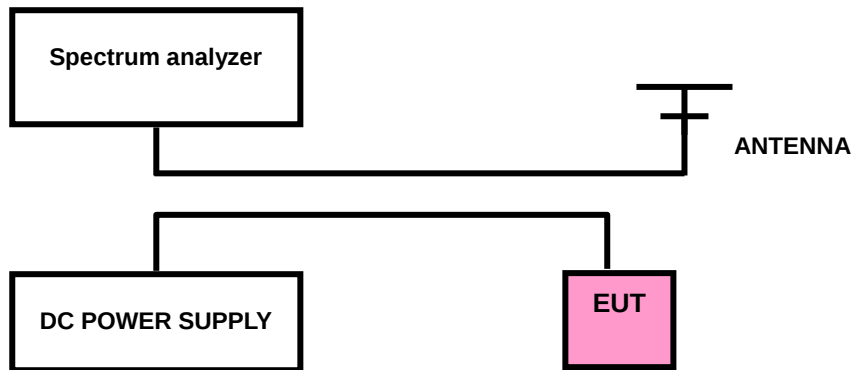

4.2.3 Test Procedures


1. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
2. EUT in peak Max hold mode.
3. Measured the spectrum width with power higher than 20dB below carrier.

4.2.4 Deviation of Test Standard

No deviation.

4.2.5 Test Results

20dB bandwidth (kHz)	F _L (MHz)	F _H (MHz)	Limit(MHz)	Result
2.51	13.5596	13.5621	13.553 ~ 13.567MHz	Pass

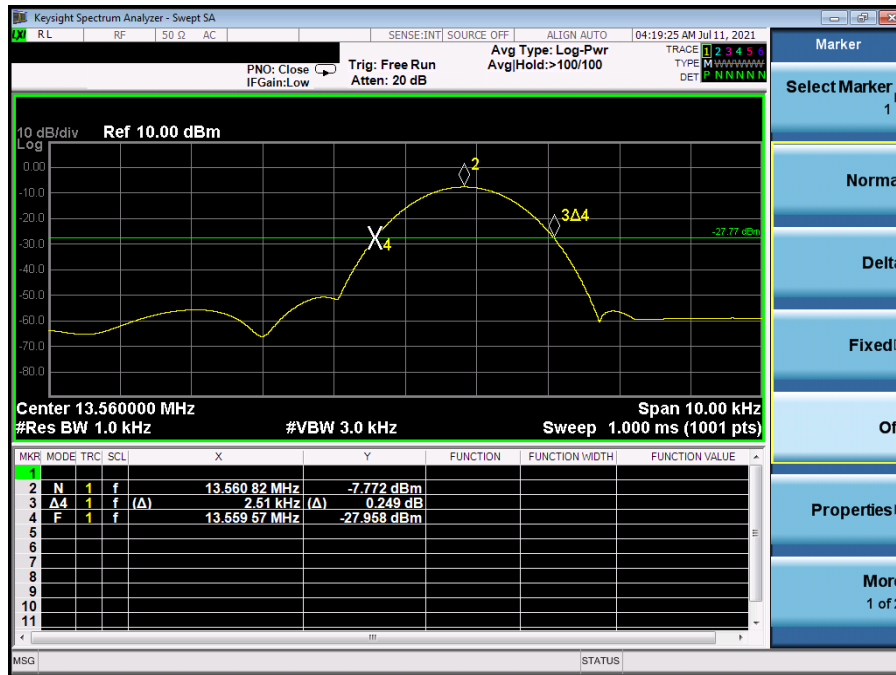


4.3 Frequency Stability Measurement

4.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

4.3.2 Test Setup

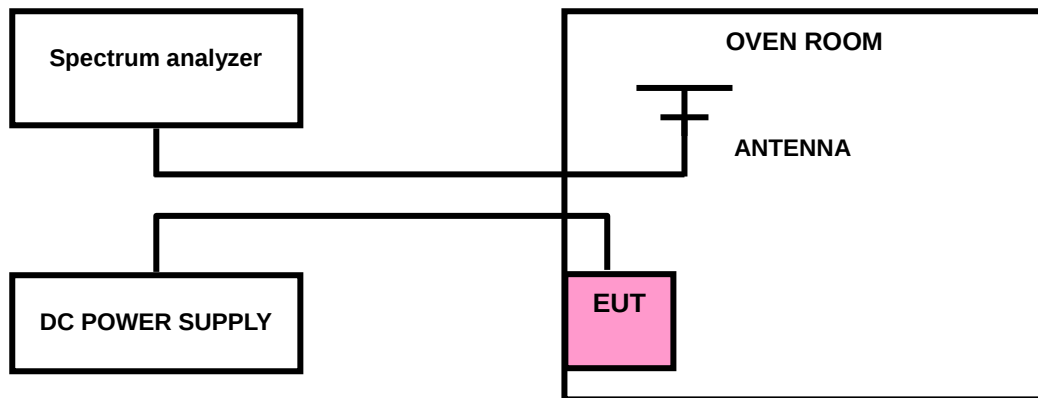

4.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
3. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
4. Extreme temperature rule is -20°C~50°C

4.3.4 Deviation of Test Standard

No deviation.

4.3.5 Test Results

Nominal Operation Frequency: 13.56MHz

Test Conditions		Test Result (MHz)	Deviation (kHz)	Limit (kHz)	Result
Temp (°C)	Volt (V DC)				
T _{nom} (-20)	V _{nom} (36)	13.56002	0.02	±0.01% (1.3560kHz)	Pass
T _{nom} (-10)	V _{nom} (36)	13.56003	0.03		Pass
T _{nom} (0)	V _{nom} (36)	13.56004	0.04		Pass
T _{nom} (10)	V _{nom} (36)	13.56003	0.03		Pass
T _{nom} (20)	V _{nom} (36)	13.56003	0.03		Pass
T _{nom} (30)	V _{nom} (36)	13.56002	0.02		Pass
T _{nom} (40)	V _{nom} (36)	13.56003	0.03		Pass
T _{nom} (50)	V _{nom} (36)	13.56001	0.01		Pass
T _{nom} (20)	V _{min} (30.6)	13.56002	0.02		Pass
	V _{max} (41.4)	13.56004	0.04		Pass


Note: Deviation (kHz) = (Test Result-13.56MHz)*1000

4.4 Field Strength of Fundamental Emissions and Mask Measurement

4.4.1 Test Limit


Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ($\mu\text{V/m}$) at 30m	Field Strength ($\text{dB}\mu\text{V/m}$) at 30m	Field Strength ($\text{dB}\mu\text{V/m}$) at 10m	Field Strength ($\text{dB}\mu\text{V/m}$) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

4.4.2 Test Setup

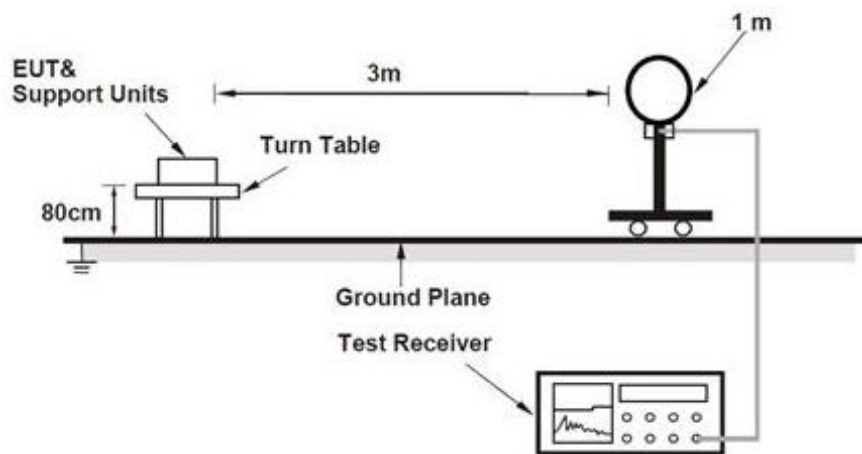


4.4.3 Test Results

Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
13.56	40.50	20.08	60.58	124	63.42	V

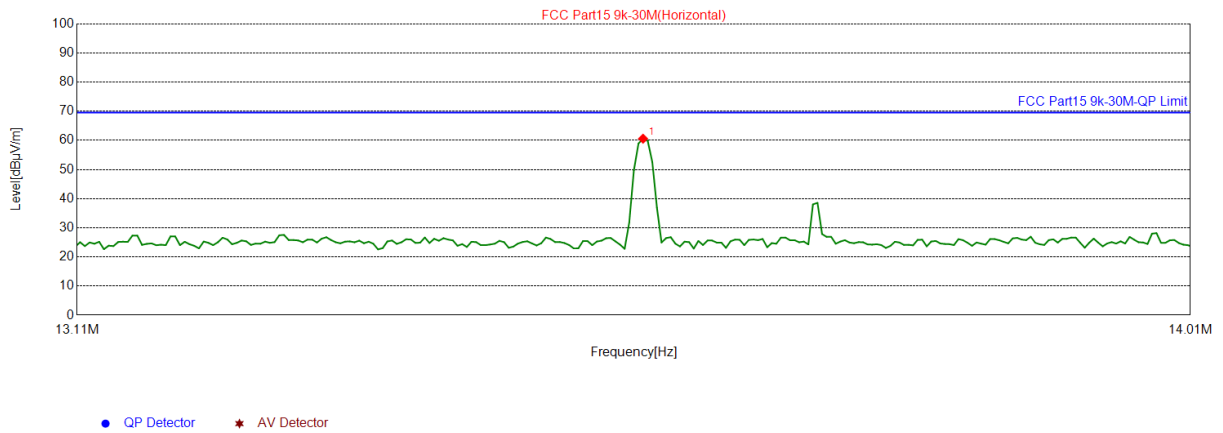

Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
13.56	40.90	20.08	60.98	124	63.02	H

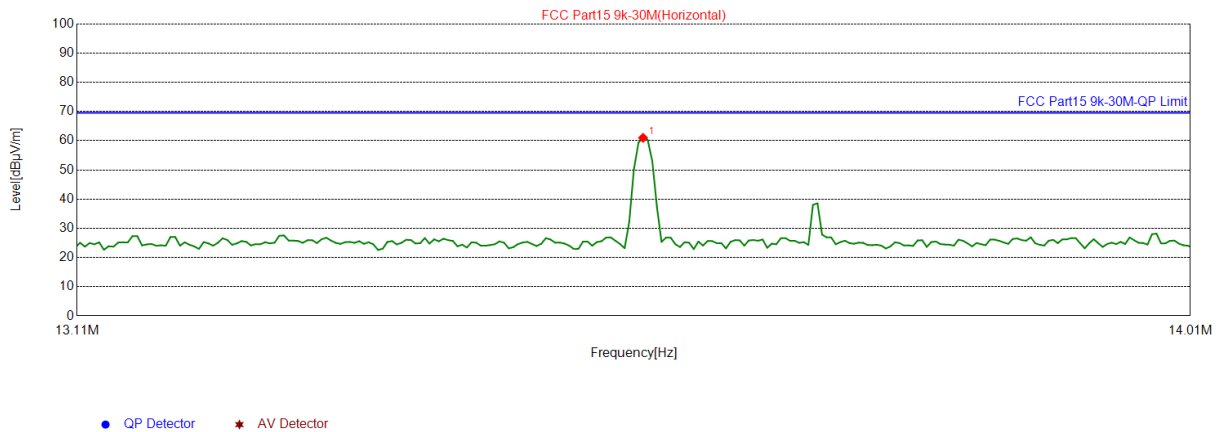

Margin [dB] = Limit [dBμV/m] – Level [dBμV/m]

4.5 Radiated Emissions Measurement

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209

Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

4.5.1 Test Procedure Reference

ANSI C63.10 Section 6.3 (General Requirements)

4.5.2 Test Procedures

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degree to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

For Radiated emission above 30MHz


- The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

4.5.3 Deviation from Test Standard


No deviation.

4.5.4 Test Setup

For Radiated emission below 30MHz

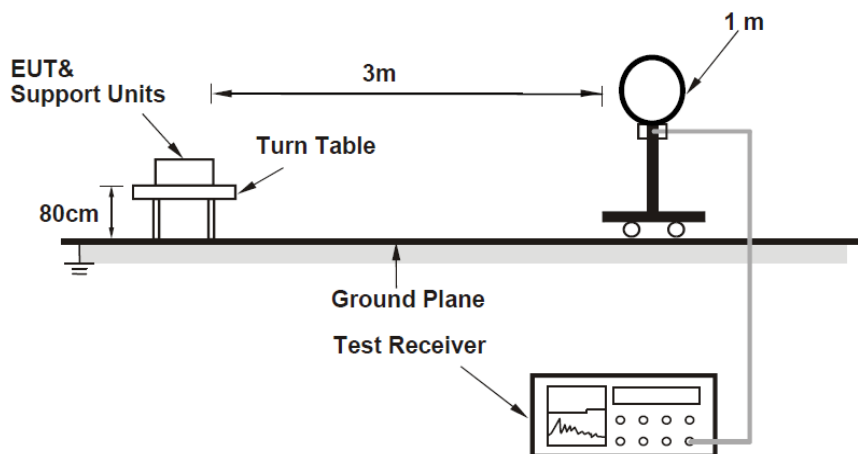

For Radiated emission 30MHz to 1GHz

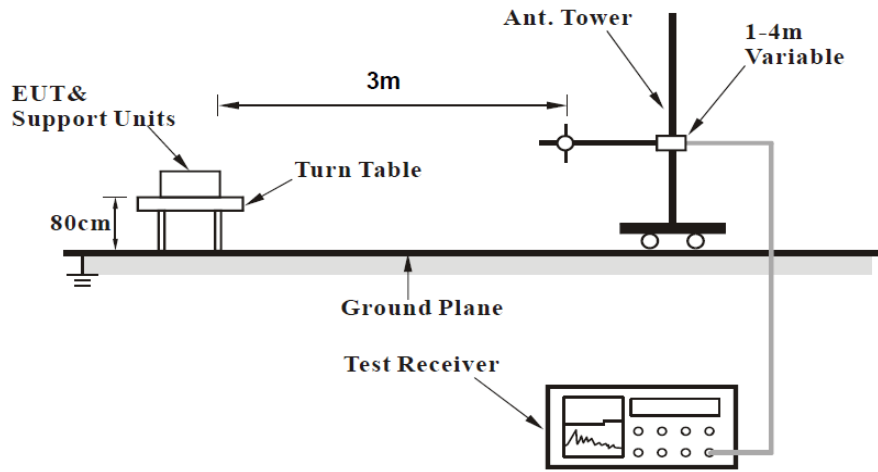


For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.5.5 Test Results

Radiated Emissions Range 9kHz~30MHz

Channel	NFC	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 30MHz		

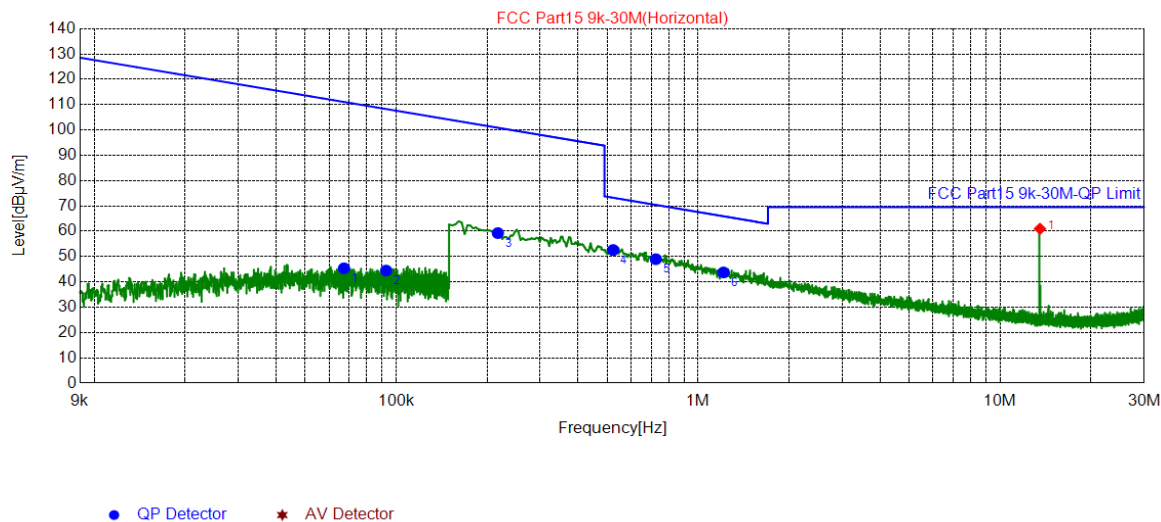

Final Data List


NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height[c m]	Angle [°]
1	0.0672	25.22	20.14	45.36	111.06	65.70	100	286
2	0.0927	24.37	20.11	44.48	108.26	63.78	100	231
3	0.2172	39.27	20.01	59.28	100.87	41.59	100	153
4	0.5231	32.59	20.01	52.60	73.23	20.63	100	158
5	0.7246	28.95	20.01	48.96	70.40	21.44	100	158
6	1.2134	23.74	20.01	43.75	65.92	22.17	100	23

Radiated Emissions Range 30MHz~1GHz

Below is the worst test data

Channel	NFC	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal

Test Plot:

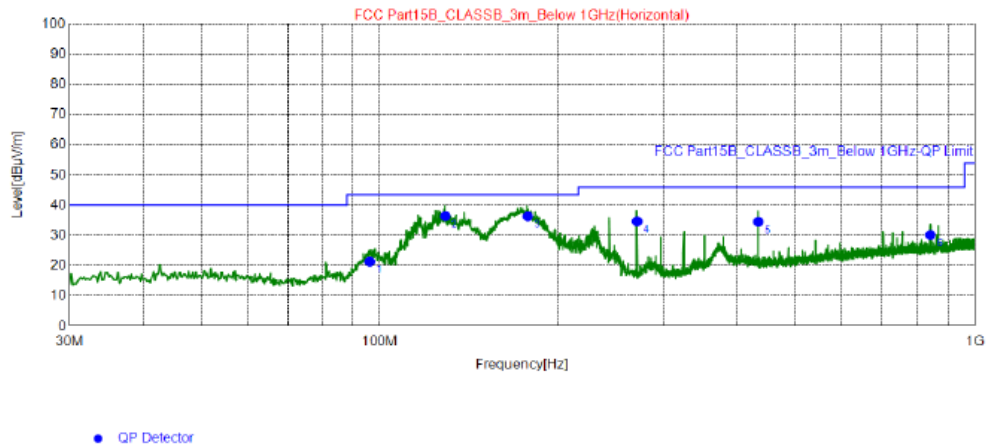

Final Data List


NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	96.15	36.68	-15.33	21.35	43.50	22.15	200	69	Horizontal
2	128.9	47.93	-11.53	36.40	43.50	7.10	200	226	Horizontal
3	177.4	47.08	-10.75	36.33	43.50	7.17	200	222	Horizontal
4	271.1	44.25	-9.59	34.66	46.00	11.34	200	204	Horizontal
5	433.9	40.04	-5.51	34.53	46.00	11.47	200	230	Horizontal
6	840.9	30.03	0.18	30.21	46.00	15.79	200	207	Horizontal

REMARKS:

- Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Limit value – Emission Level

Channel	NFC	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical

Test Plot:

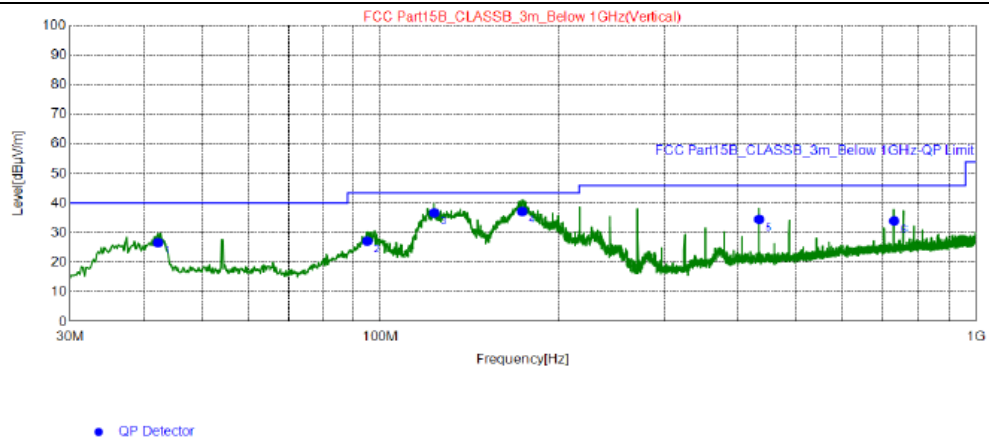

Final Data List

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.22	36.91	-10.27	26.64	40.00	13.36	100	242	Vertical
2	94.99	42.64	-15.43	27.21	43.50	16.29	100	81	Vertical
3	123.1	48.84	-12.16	36.68	43.50	6.82	100	242	Vertical
4	173.1	47.76	-10.51	37.25	43.50	6.25	100	250	Vertical
5	433.9	40.06	-5.51	34.55	46.00	11.45	100	122	Vertical
6	732.2	34.94	-0.97	33.97	46.00	12.03	100	27	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

--- END ---