



FCC Test Report

Report No.: OKA-ESH-P21050486B-2

FCC ID: 2AYF8-YBEA10A

Product: Electric Scooter

Model: EA10A

Received Date: May.25, 2021

Test Date: May.25 to Jul.11.2021

Issued Date: Jul.12.2021

Applicant: Zhejiang Okai Vehicle Co., Ltd.

Address: No. 9, Xinxing Road, Xinbi Town, Jinyun County, Zhejiang, China

Manufacturer: Zhejiang Okai Vehicle Co., Ltd.

Address: No. 9, Xinxing Road, Xinbi Town, Jinyun County, Zhejiang, China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Address: No. 829, Xinzhuang Road, Shanghai, P.R.China (201612)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Test Instruments	7
2.2 Measurement Uncertainty	8
2.3 Modification Record	8
3 General Information	9
3.1 General Description of EUT	9
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability:	11
3.2.2 Test Condition:	12
3.3 Description of Support Units	13
3.4 General Description of Applied Standards	13
4 Test Procedure and Results	14
4.1 AC Power Conducted Emission	14
4.1.1 Limits	14
4.1.2 Test Procedures	14
4.1.3 Deviation from Test Standard	14
4.1.4 Test Setup	15
4.1.5 EUT Operating Conditions	15
4.1.6 Test Results	16
4.2 Minimum 6dB Bandwidth	20
4.2.1 Limit	20
4.2.2 Test Setup	20
4.2.3 Test Procedures	20
4.2.4 Deviation of Test Standard	20
4.2.5 Test Results	21
4.3 Conducted Output Power	24
4.3.1 Limit	24
4.3.2 Test Setup	24
4.3.3 Test Procedures	24
4.3.4 Deviation of Test Standard	24
4.3.5 Test Results	25

4.4	Power Spectral Density	28
4.4.1	Limit	28
4.4.2	Test Setup.....	28
4.4.3	Test Procedures.....	28
4.4.4	Deviation of Test Standard	28
4.4.5	Test Results	29
4.5	Conducted Band Edges Measurement	32
4.5.1	Limit	32
4.5.2	Test Setup.....	32
4.5.3	Test Procedures.....	32
4.5.4	Deviation of Test Standard	32
4.5.5	Test Results	33
4.6	Conducted Spurious Emissions	36
4.6.1	Limit	36
4.6.2	Test Setup.....	36
4.6.3	Test Procedures.....	36
4.6.4	Deviation of Test Standard	36
4.6.5	Test Results	37
4.7	Emissions in restricted frequency bands	44
4.7.1	Test Limit	44
4.7.2	Test Procedure Reference.....	45
4.7.3	Test Procedures.....	45
4.7.4	Test Setup.....	46
4.7.5	Test Results	47
4.8	Radiated Emission Measurement	51
4.8.1	Limits	51
4.8.2	Test Procedures.....	51
4.8.3	Deviation from Test Standard	52
4.8.4	Test Setup.....	53
4.8.5	EUT Operating Conditions.....	54
4.8.6	Test Results	54
5	Pictures of Test Arrangements	64



Release Control Record

Issue No.	Description	Date Issued
OKA-ESH-P21050486B-2	Original release	Jul.12, 2021

1 Certificate of Conformity

Product: Electric Scooter

Brand: OKAI

Model: EA10A

Applicant: Zhejiang Okai Vehicle Co., Ltd.

Test Date: May.25 to Jul.11.2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :




, Date:

Jul.12.2021

Yuan ZHANG

Project Engineer

Approved by :



, Date:

Jul.12.2021

Daniel SUN

EMC Lab Manager



2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	Minimum 6dB Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Conducted Band Edges Measurement	PASS	Meet the requirement of limit.
15.247(d)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
15.247(d)	Emissions in restricted frequency bands	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions Measurement	PASS	Meet the requirement of limit.

2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid Antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Jul.29, 20	Jul.28, 22
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.25, 20	Aug.24, 22
Double Ridge Horn Antenna(18G-40G)	COM-POWER	AH-840	E1A1040	Jul.15, 20	Jul.14, 22
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Apr.19, 21	Apr.18, 22
Pre-Amplifier(0.5GHz-18GHz)	EMCI	EMC184045SE	E1A2009	Jul.05, 21	Jul.04, 22
Pre-Amplifier(18GHz-40GHz)	EMCI	EMC051845SE	E1A2008	Jul.05, 21	Jul.04, 22
EMI test receiver	R&S	ESR7	E1R1005	Apr.19, 21	Apr.18, 22
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.23, 20	Jul.22, 21
Spectrum Analyzer	Keysight	N9020A	E1S1004	Mar.02, 21	Mar.01, 22
EMI test receiver	R&S	ESCS30	E1R1001	May.11, 21	May.10, 22
LISN	R&S	ENV216	E1L1011	May.11, 21	May.10, 22
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr. 02, 21	Apr. 01, 22
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	ADT	ADT_COND_V7 .3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A
Test Software	Toscend	JS1120-3	N/A	N/A	N/A

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Electric Scooter
Brand	OKAI
Test Model	EA10A
Power Rating	Powered by battery; AC Adaptor for battery: INPUT: 100-240Vac,50/60Hz 2A OUTPUT: 42Vdc,2A
Modulation Type	GFSK
Modulation Technology	Bluetooth Low Energy 4.2&5.0
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	40
Antenna Type	PCB Antenna
Antenna Connector	--
Antenna Gain	Ant:3.32dBi

Note:

1. For more details, please refer to the User's manual of the EUT.
2. The cable loss of the cable from EUT will be compensated in the test data.

3.2 Description of Test Modes

40 channels are provided for Bluetooth LE.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	20	2442 MHz
1	2404 MHz	21	2444 MHz
2	2406 MHz	22	2446 MHz
3	2408 MHz	23	2448 MHz
4	2410 MHz	24	2450 MHz
5	2412 MHz	25	2452 MHz
6	2414 MHz	26	2454 MHz
7	2416 MHz	27	2456 MHz
8	2418 MHz	28	2458 MHz
9	2420 MHz	29	2460 MHz
10	2422 MHz	30	2462 MHz
11	2424 MHz	31	2464 MHz
12	2426 MHz	32	2466 MHz
13	2428 MHz	33	2468 MHz
14	2430 MHz	34	2470 MHz
15	2432 MHz	35	2472 MHz
16	2434 MHz	36	2474 MHz
17	2436 MHz	37	2476 MHz
18	2438 MHz	38	2478 MHz
19	2440 MHz	39	2480 MHz

3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	--	√	-

Where **RE ≥ 1G**: Radiated Emission above 1GHz **RE < 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.
- ☒ For different antenna gain, select high gain antenna for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0, 19, 39	GFSK

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0	GFSK

Power Line Conducted Emission Test:

- ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☐ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0	GFSK

Antenna Port Conducted Measurement

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0, 19, 39	GFSK

3.2.2 Test Condition:

Applicable to	Normal Environmental Conditions	Normal Input Power
RE ≥ 1G	23deg. C, 58%RH	Powered by battery
RE < 1G	23deg. C, 58%RH	Powered by battery
PLC	23deg. C, 58%RH	NA
APCM	25deg. C, 60%RH	Powered by battery

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10:2013

All relaxed test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 AC Power Conducted Emission

4.1.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.1.3 Deviation from Test Standard

No deviation.

4.1.4 Test Setup

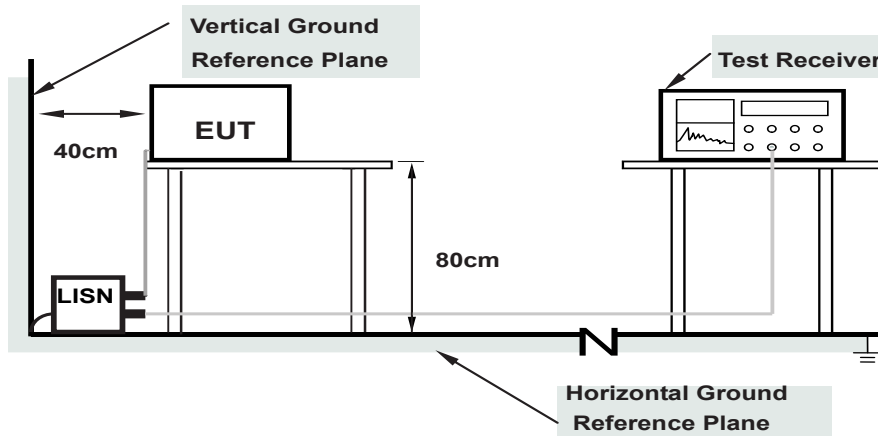

Note: 1.Support units were connected to second LISN.


For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT Operating Conditions

Same as 4.1.6.

4.1.6 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz		

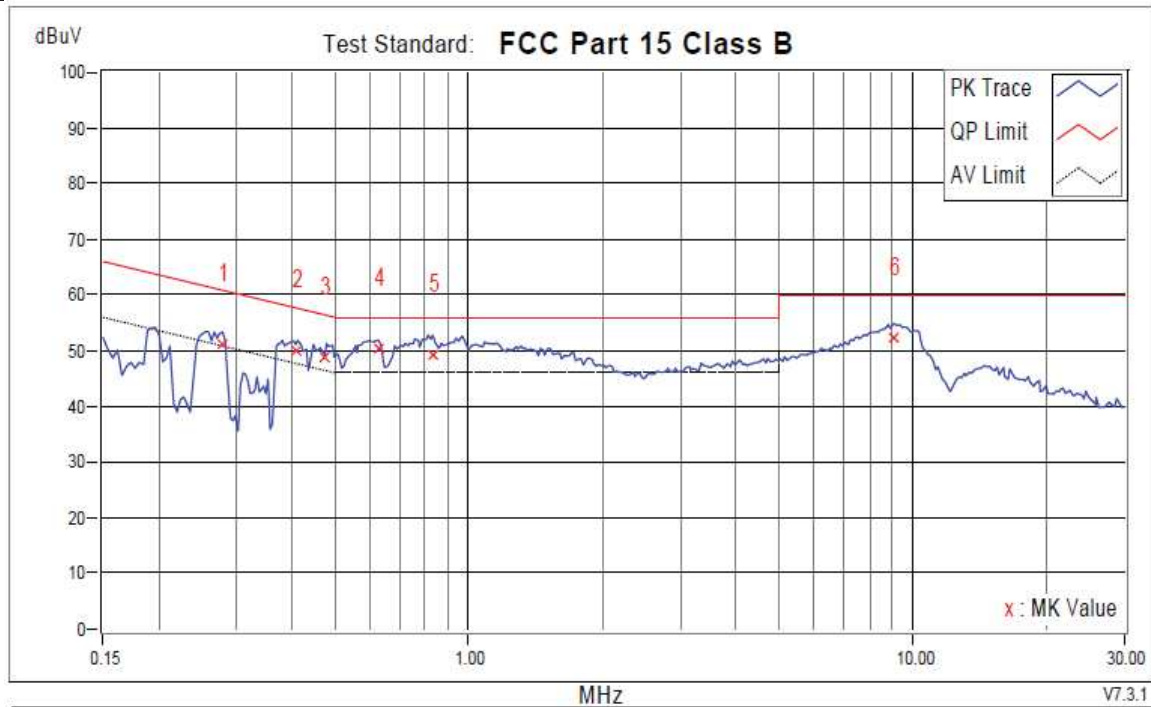


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.27903	9.76	41.30	27.63	51.06	37.39	60.84	50.84	-9.78	-13.45	
2	0.40806	9.75	40.08	27.33	49.83	37.08	57.69	47.69	-7.86	-10.61	
3	0.47453	9.75	38.97	24.24	48.72	33.99	56.43	46.43	-7.71	-12.44	
+4	0.62702	9.67	40.53	25.51	50.20	35.18	56.00	46.00	-5.80	-10.82	
5	0.83034	9.61	39.65	24.55	49.26	34.16	56.00	46.00	-6.74	-11.84	
6	9.09370	10.35	41.88	33.67	52.23	44.02	60.00	50.00	-7.77	-5.98	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz		

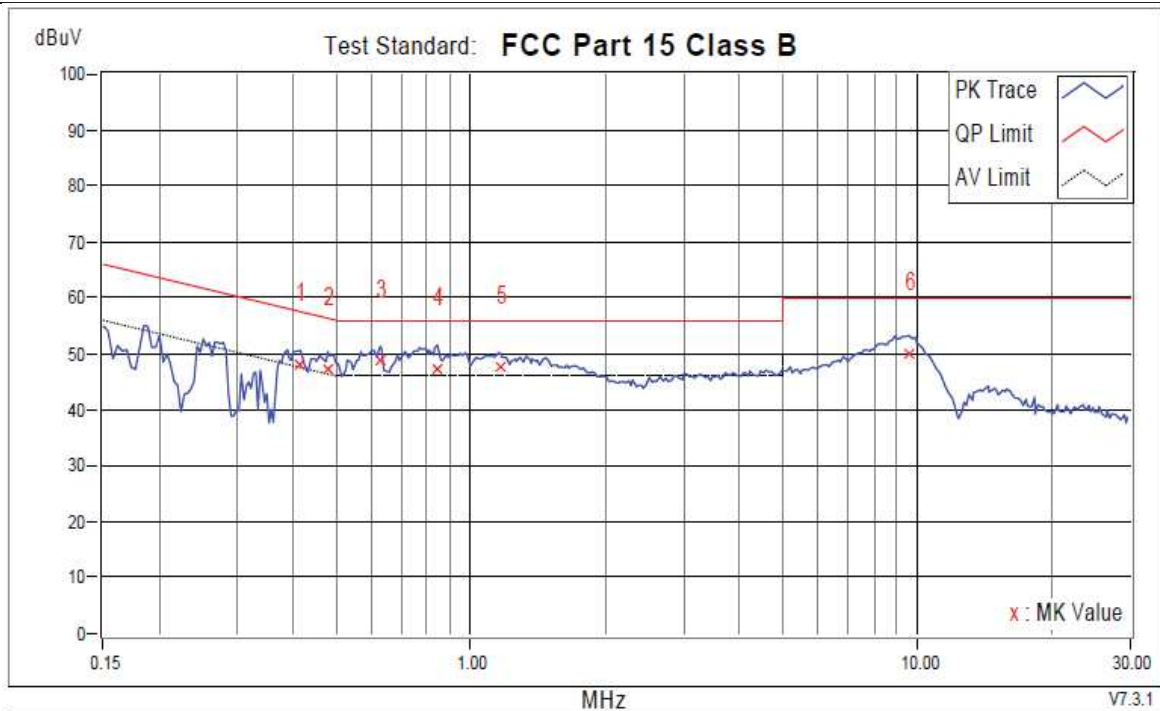


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.41588	9.89	38.15	24.78	48.04	34.67	57.53	47.53	-9.49	-12.86	
2	0.47844	9.88	37.53	22.92	47.41	32.80	56.37	46.37	-8.96	-13.57	
+3	0.62702	9.84	39.07	24.72	48.91	34.56	56.00	46.00	-7.09	-11.44	
4	0.84207	9.91	37.55	20.75	47.46	30.66	56.00	46.00	-8.54	-15.34	
5	1.16813	9.92	37.73	22.88	47.65	32.80	56.00	46.00	-8.35	-13.20	
6	9.60982	10.41	39.64	31.35	50.05	41.76	60.00	50.00	-9.95	-8.24	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz		

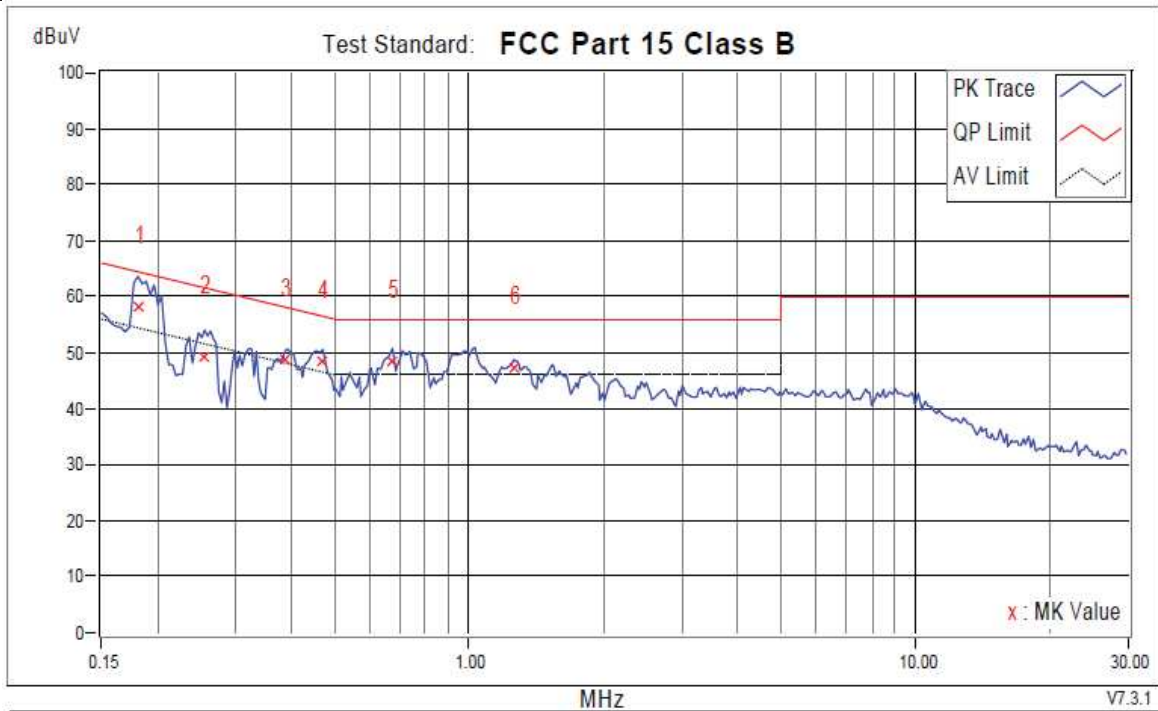


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.18128	9.88	48.49	32.16	58.37	42.04	64.43	54.43	-6.05	-12.38	
2	0.25557	9.80	39.50	20.84	49.30	30.64	61.57	51.57	-12.27	-20.93	
3	0.38851	9.75	38.98	26.90	48.73	36.65	58.10	48.10	-9.37	-11.45	
4	0.47062	9.75	38.51	24.33	48.26	34.08	56.50	46.50	-8.24	-12.42	
5	0.67394	9.64	38.73	22.84	48.37	32.48	56.00	46.00	-7.63	-13.52	
6	1.26197	9.66	37.80	24.92	47.46	34.58	56.00	46.00	-8.54	-11.42	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz		

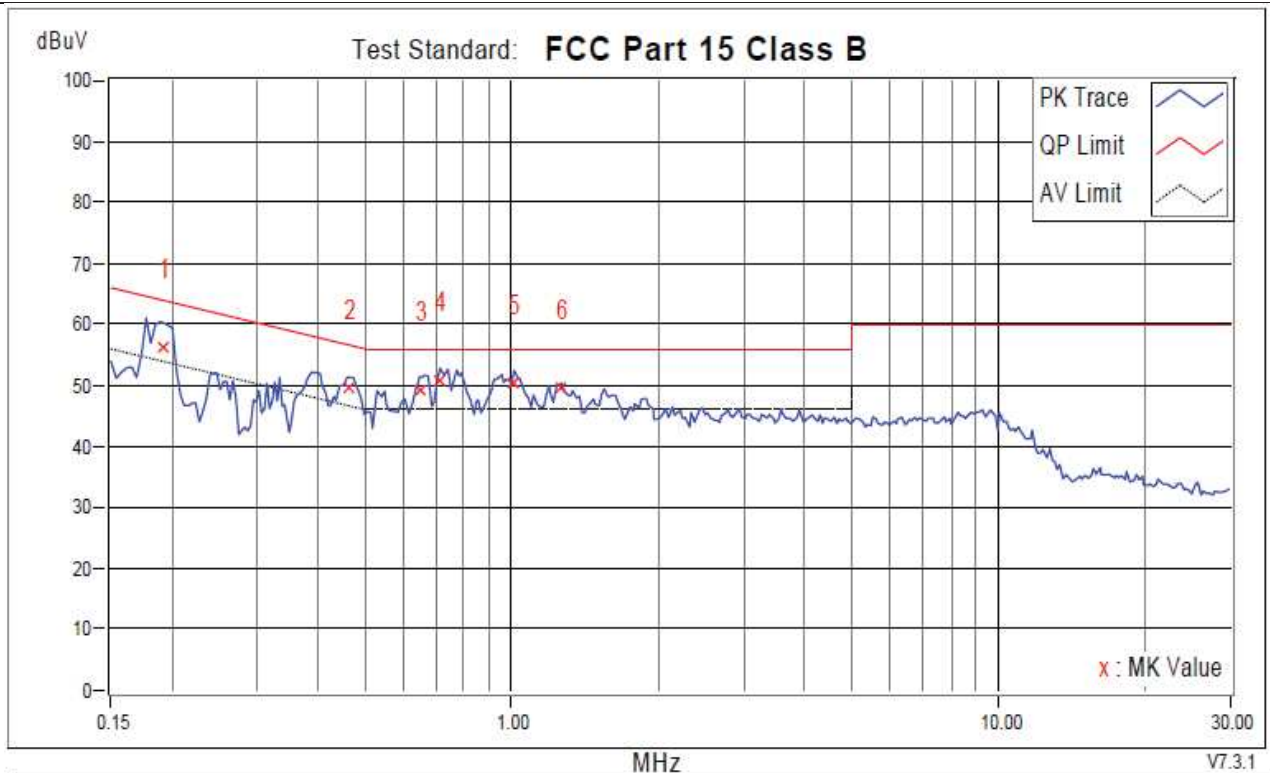

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.19301	9.84	46.35	33.58	56.19	43.42	63.91	53.91	-7.72	-10.49	
2	0.46280	9.88	39.87	26.61	49.75	36.49	56.64	46.64	-6.89	-10.15	
3	0.64657	9.84	39.36	25.26	49.20	35.10	56.00	46.00	-6.80	-10.90	
+4	0.71304	9.84	40.89	27.82	50.73	37.66	56.00	46.00	-5.27	-8.34	
5	1.01173	9.91	40.60	26.05	50.51	35.96	56.00	46.00	-5.49	-10.04	
6	1.26979	9.92	39.63	26.09	49.55	36.01	56.00	46.00	-6.45	-9.99	

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.2 Minimum 6dB Bandwidth

4.2.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.2.2 Test Setup

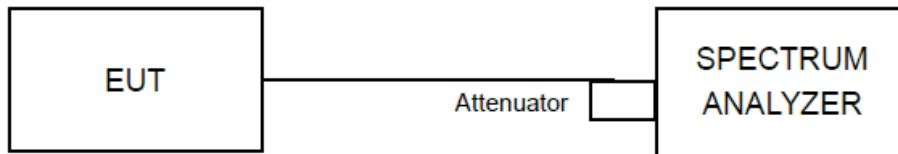

4.2.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., $RBW = 100 \text{ kHz}$, $VBW \geq 3 \cdot RBW$, peak detector with maximum hold) is implemented by the instrumentation function.

4.2.4 Deviation of Test Standard

No deviation.

4.2.5 Test Results

Test Mode	Antenna	Channel [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.690	2401.700	2402.390	≥ 0.5	PASS
		2440	0.762	2439.652	2440.414	≥ 0.5	PASS
		2480	0.702	2479.706	2480.408	≥ 0.5	PASS
BLE_2M	Ant1	2402	1.148	2401.472	2402.620	≥ 0.5	PASS
		2440	1.132	2439.480	2440.612	≥ 0.5	PASS
		2480	1.160	2479.460	2480.620	≥ 0.5	PASS


BLE_1M_Ant1_2402




BLE_1M_Ant1_2440



BLE_1M_Ant1_2480

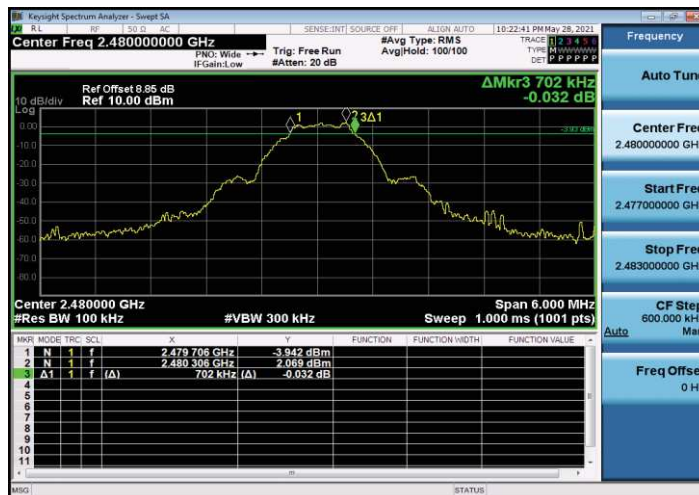

BLE_2M_Ant1_2402

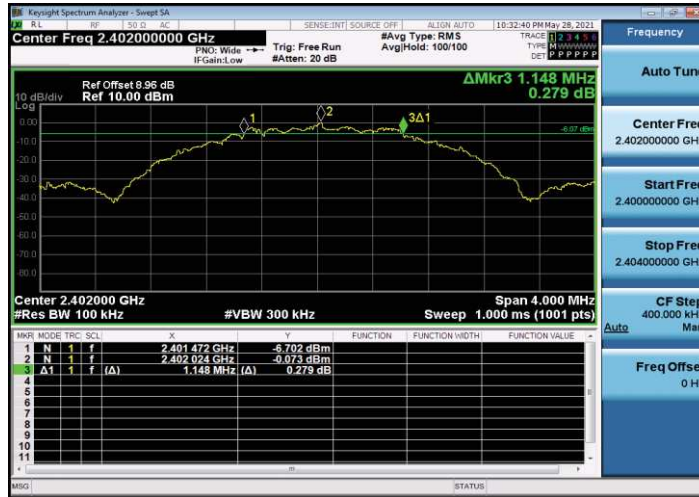

BLE_2M_Ant1_2440



BLE_2M_Ant1_2480




4.3 Conducted Output Power

4.3.1 Limit

For systems using digital modulation in the 2400 – 2483.5 MHz bands: 1 Watt (30 dBm)

4.3.2 Test Setup

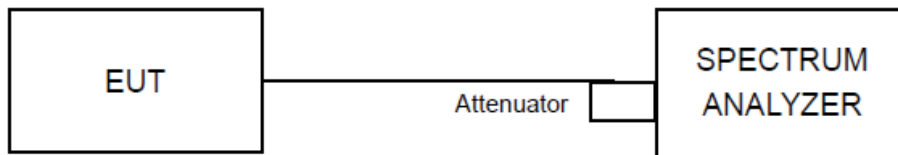

4.3.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 9.2.2.4).

- a) Set RBW $\geq$ DTS bandwidth
- b) Set VBW $\geq$ 3 RBW.
- c) Set Span $\geq$ 3 RBW.
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize
- h) Use peak marker function to determine the peak amplitude level.

4.3.4 Deviation of Test Standard

No deviation.


4.3.5 Test Results

Test Mode	Antenna	Channel [MHz]	Power [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.64	<=30	PASS
		2440	1.35	<=30	PASS
		2480	2.68	<=30	PASS
BLE_2M	Ant1	2402	0.92	<=30	PASS
		2440	1.40	<=30	PASS
		2480	2.62	<=30	PASS


BLE_1M_Ant1_2402




BLE_1M Ant1_2440

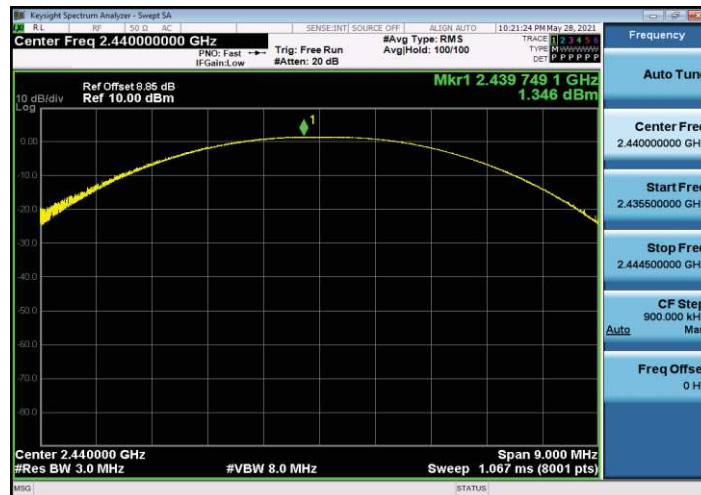

BLE_1M_Ant1_2480

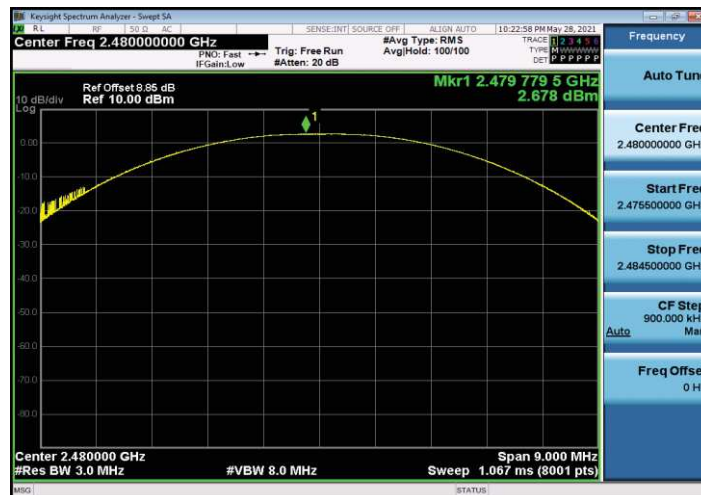


BLE_2M_Ant1_2402

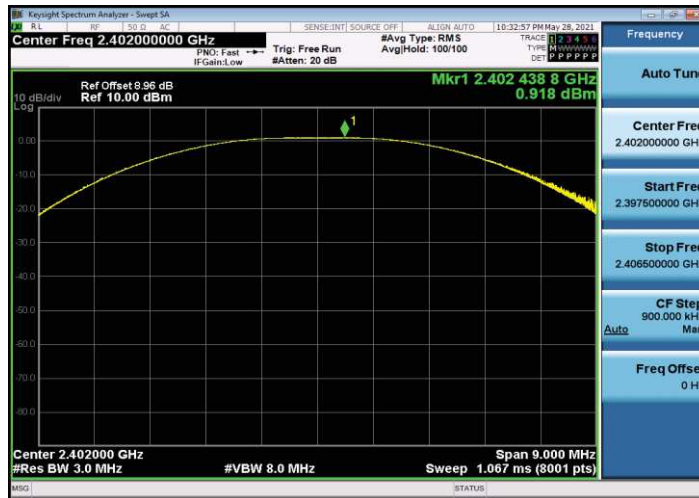

BLE_2M_Ant1_2440



BLE_2M_Ant1_2480

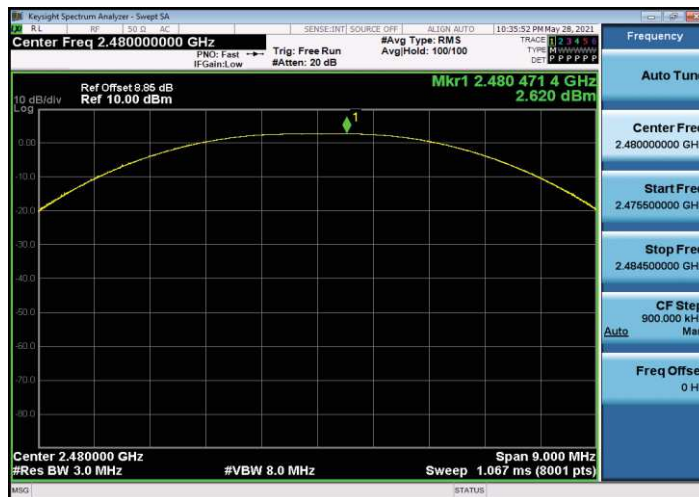


4.4 Power Spectral Density

4.4.1 Limit

The Maximum of Power Spectral Density Measurement is 8 dBm.

4.4.2 Test Setup

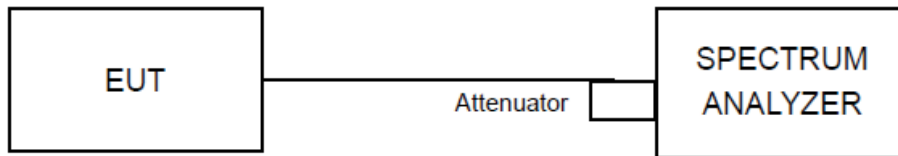

4.4.3 Test Procedures

The power output per FCC § 15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.5) for compliance to FCC 47CFR 15.247 requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.4.4 Deviation of Test Standard

No deviation.

4.4.5 Test Results

Test Mode	Antenna	Channel [MHz]	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-14.81	<=8	PASS
		2440	-14.09	<=8	PASS
		2480	-12.92	<=8	PASS
BLE_2M	Ant1	2402	-16.99	<=8	PASS
		2440	-16.6	<=8	PASS
		2480	-15.4	<=8	PASS

BLE_1M_Ant1_2402




BLE_1M_Ant1_2440



BLE_1M_Ant1_2480




BLE_2M_Ant1_2402

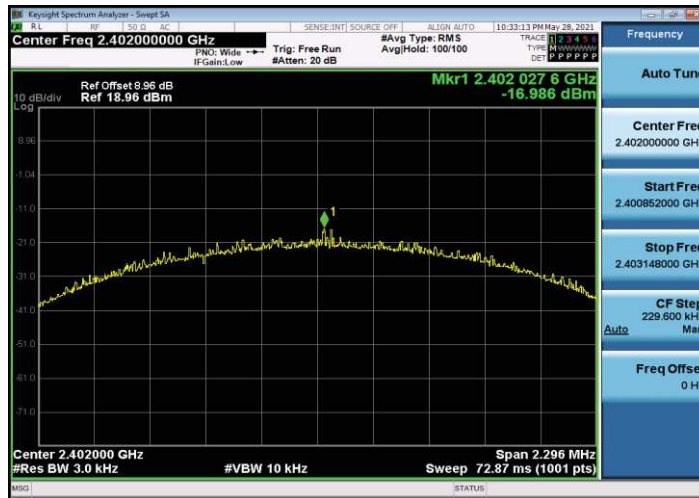

BLE_2M_Ant1_2440



BLE_2M_Ant1_2480

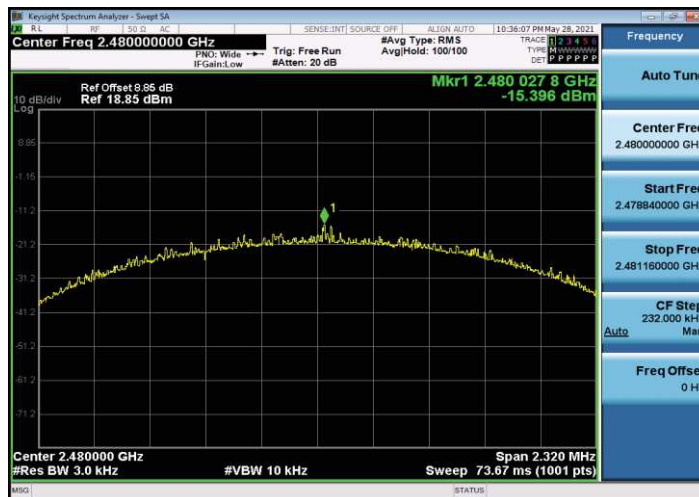


4.5 Conducted Band Edges Measurement

4.5.1 Limit

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.5.2 Test Setup

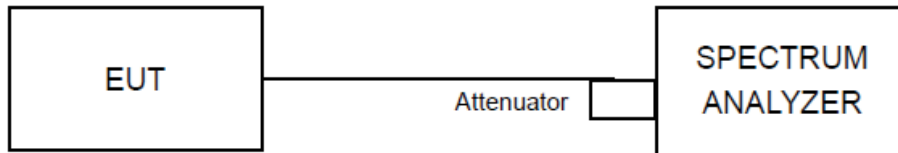

4.5.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


4.5.4 Deviation of Test Standard

No deviation.

4.5.5 Test Results

Test Mode	Antenna	ChName	Channel [MHz]	RefLevel [dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.22	-45.52	<=-20.22	PASS
		High	2480	2.49	-43.81	<=-17.51	PASS
BLE_2M	Ant1	Low	2402	0.23	-32.86	<=-19.77	PASS
		High	2480	2.46	-42.41	<=-17.55	PASS


BLE_1M_Ant1_Low_2402

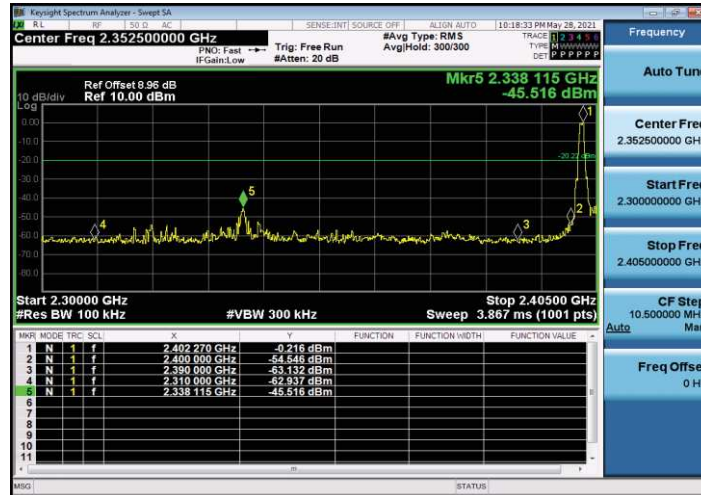


BLE_1M_Ant1_High_2480



BLE_2M_Ant1_Low_2402

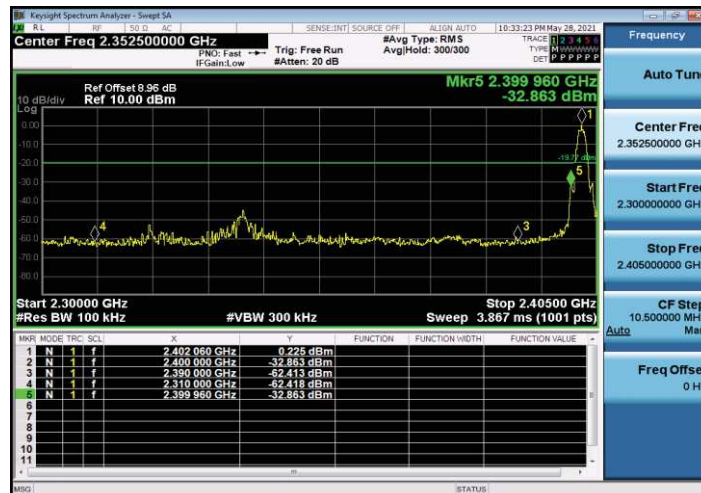

BLE_2M_Ant1_High_2480

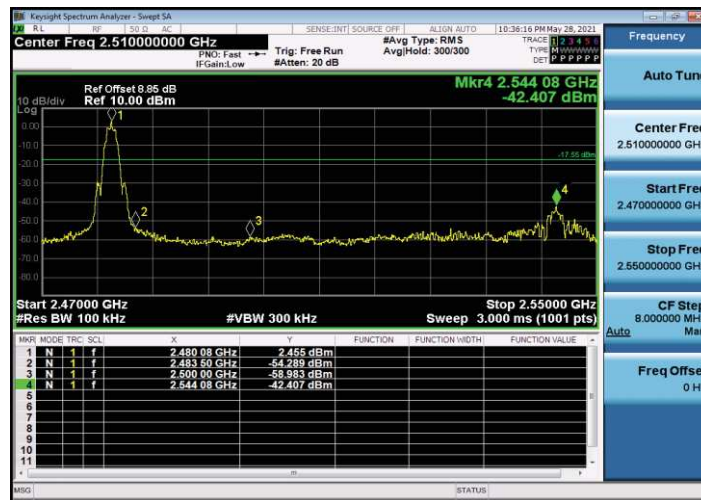


4.6 Conducted Spurious Emissions

4.6.1 Limit

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.6.2 Test Setup

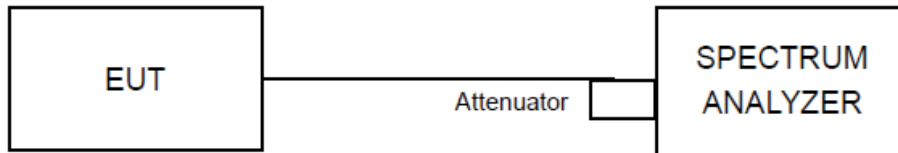

4.6.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.4 Deviation of Test Standard

No deviation.


4.6.5 Test Results

Test Mode	Antenna	Channel [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	Reference	0.70	0.70	---	PASS
			30~1000	0.70	-42.71	<=-19.3	PASS
			1000~26500	0.70	-22.47	<=-19.3	PASS
		2440	Reference	1.32	1.32	---	PASS
			30~1000	1.32	-42.8	<=-18.68	PASS
			1000~26500	1.32	-36.71	<=-18.68	PASS
		2480	Reference	2.72	2.72	---	PASS
			30~1000	2.72	-43.19	<=-17.28	PASS
			1000~26500	2.72	-37.58	<=-17.28	PASS
BLE_2M	Ant1	2402	Reference	-0.06	-0.06	---	PASS
			30~1000	-0.06	-43.09	<=-20.06	PASS
			1000~26500	-0.06	-45.43	<=-20.06	PASS
		2440	Reference	0.80	0.80	---	PASS
			30~1000	0.80	-42.87	<=-19.2	PASS
			1000~26500	0.80	-40.7	<=-19.2	PASS
		2480	Reference	2.73	2.73	---	PASS
			30~1000	2.73	-42.73	<=-17.27	PASS
			1000~26500	2.73	-31.16	<=-17.27	PASS


BLE_1M_Ant1_2402_0~Reference



BLE_1M_Ant1_2402_30~1000

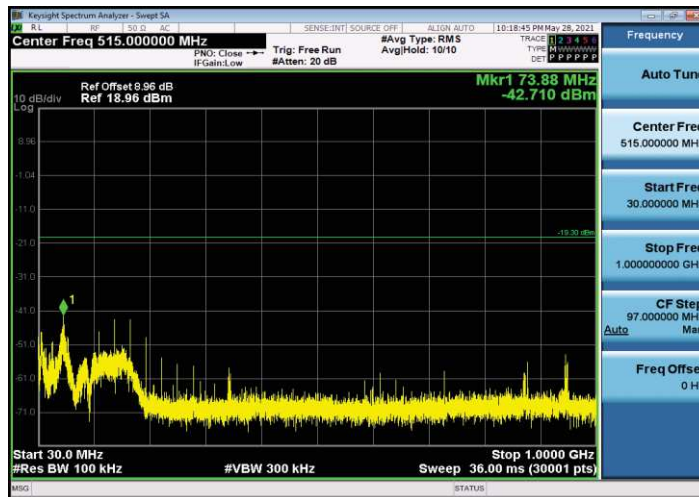


BLE_1M_Ant1_2402_1000~26500

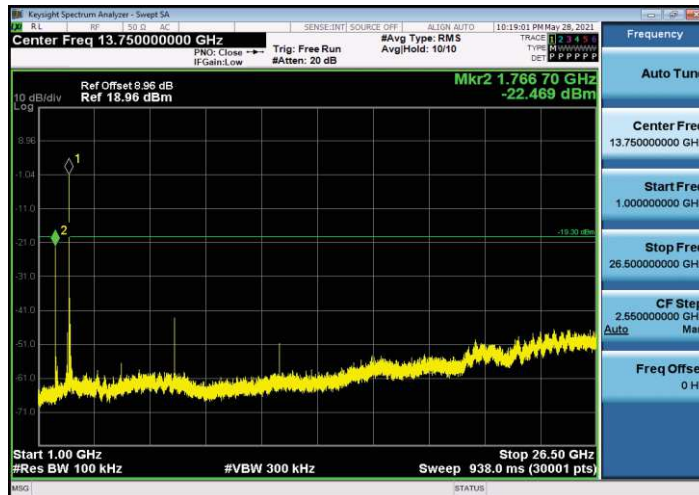


BLE_1M_Ant1_2440_0~Reference



BLE_1M_Ant1_2440_30~1000

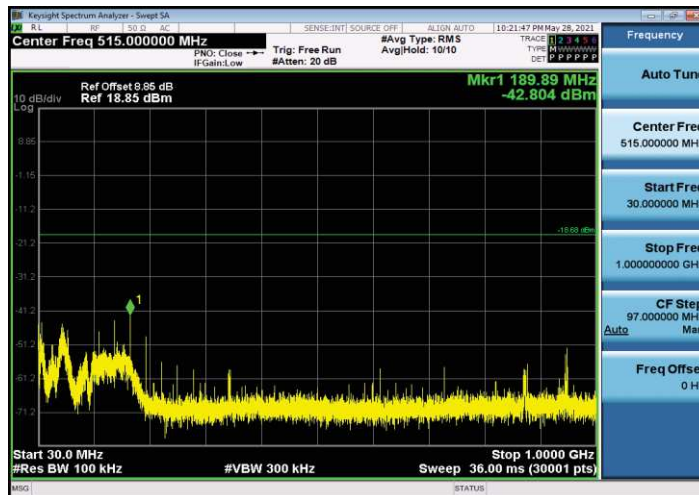


BLE_1M_Ant1_2440_1000~26500

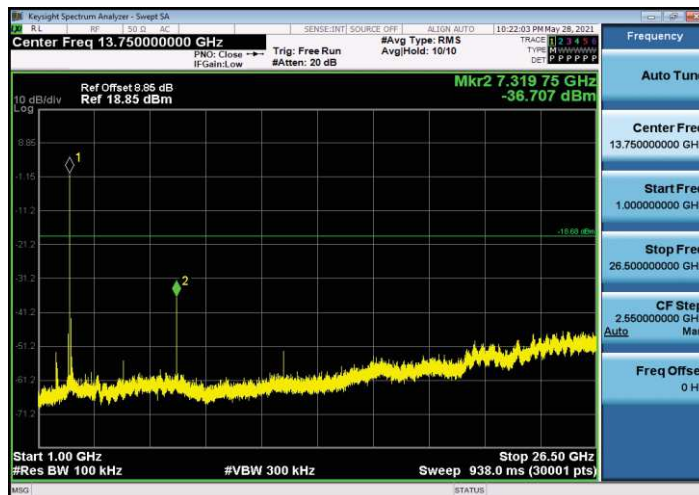


BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

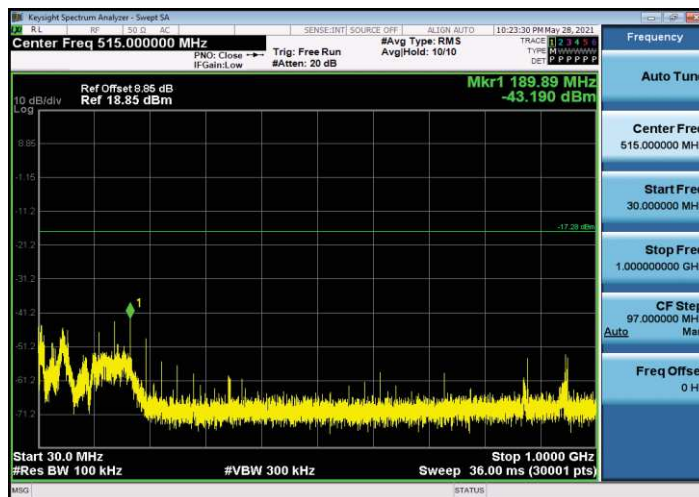


BLE_1M_Ant1_2480_1000~26500

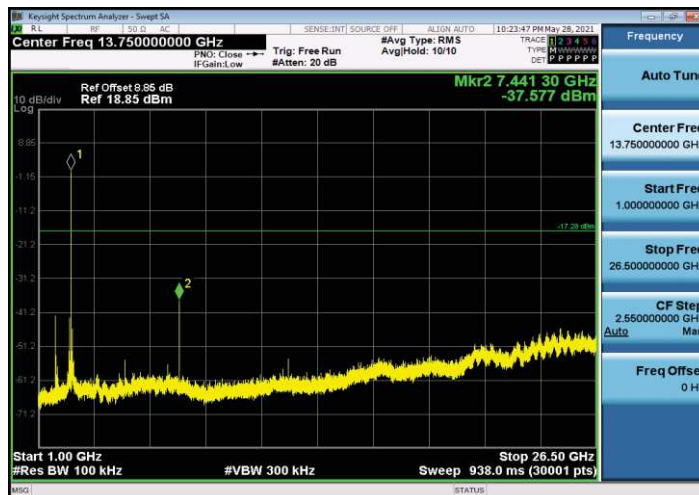


BLE_2M_Ant1_2402_0~Reference



BLE_2M_Ant1_2402_30~1000

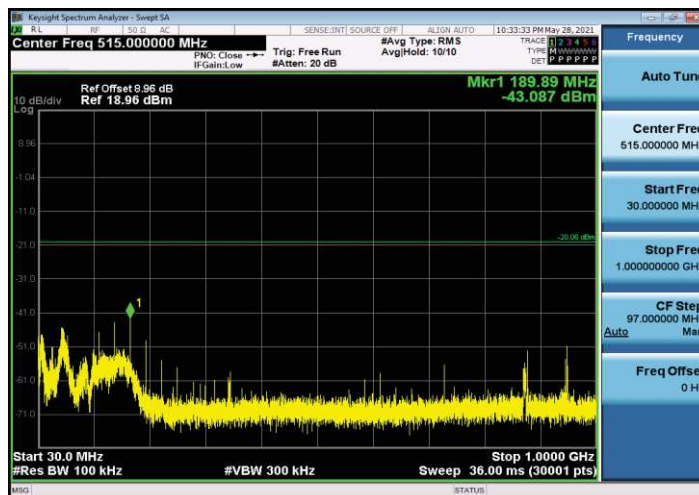


BLE_2M_Ant1_2402_1000~26500

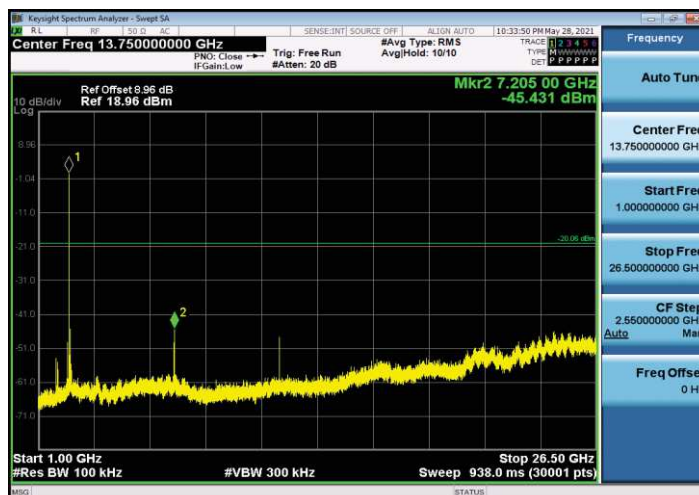


BLE_2M_Ant1_2440_0~Reference



BLE_2M_Ant1_2440_30~1000

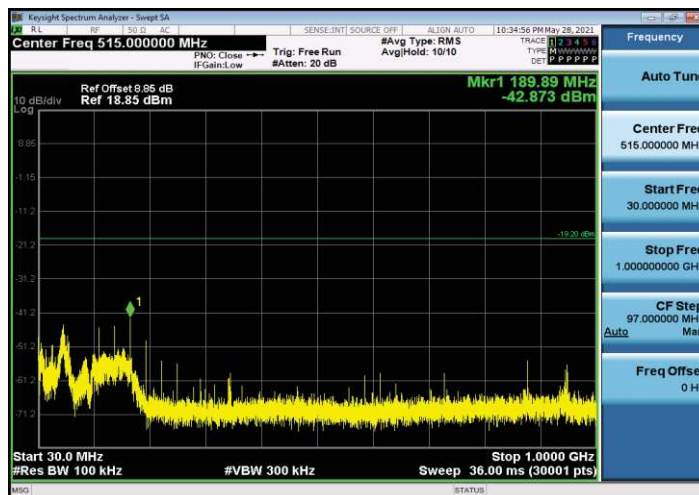


BLE_2M_Ant1_2440_1000~26500

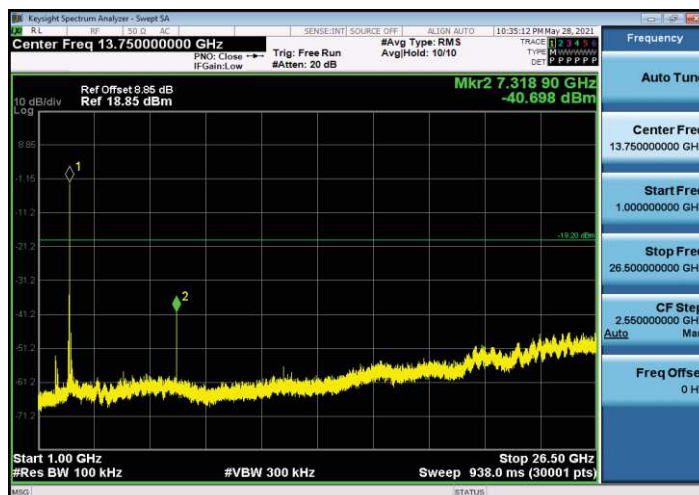


BLE_2M_Ant1_2480_0~Reference



BLE_2M_Ant1_2480_30~1000

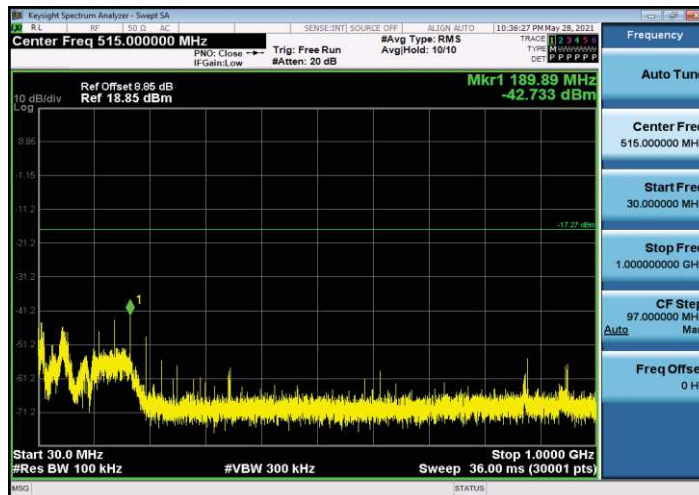

BLE_2M_Ant1_2480_1000~26500

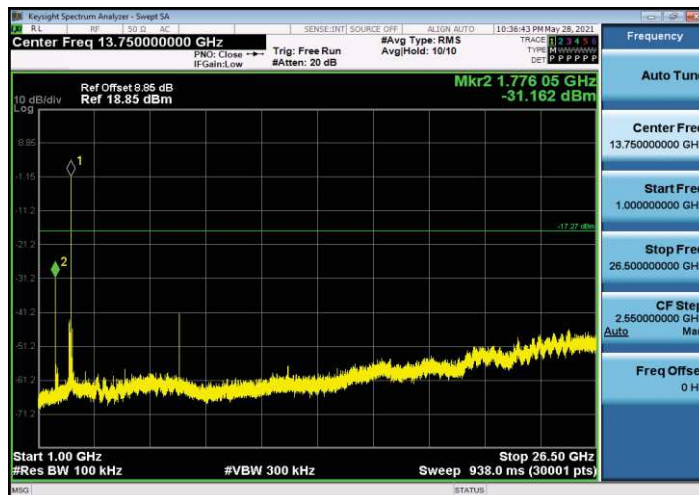

4.7 Emissions in restricted frequency bands

4.7.1 Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part1 5, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41	--	--	--



All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

4.7.2 Test Procedure Reference

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

4.7.3 Test Procedures

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
3. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


4.7.4 Test Setup

For Radiated emission above 1GHz

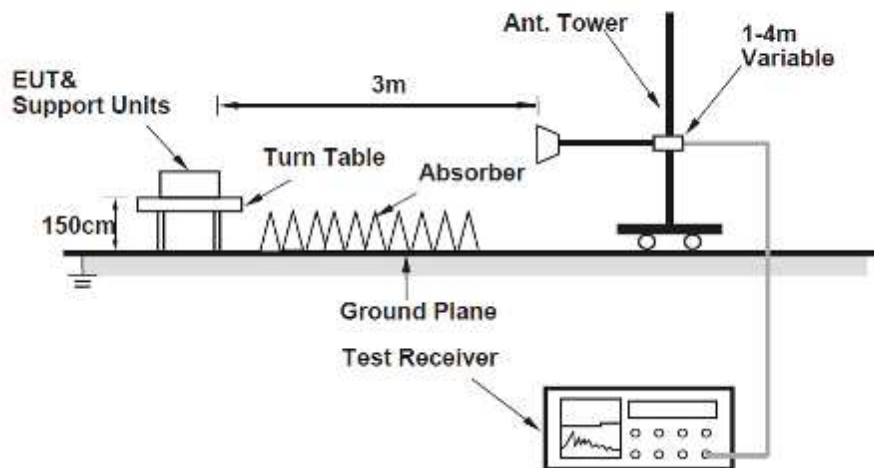

4.7.5 Test Results


BLE_1M_2402_Ant1/ Horizontal

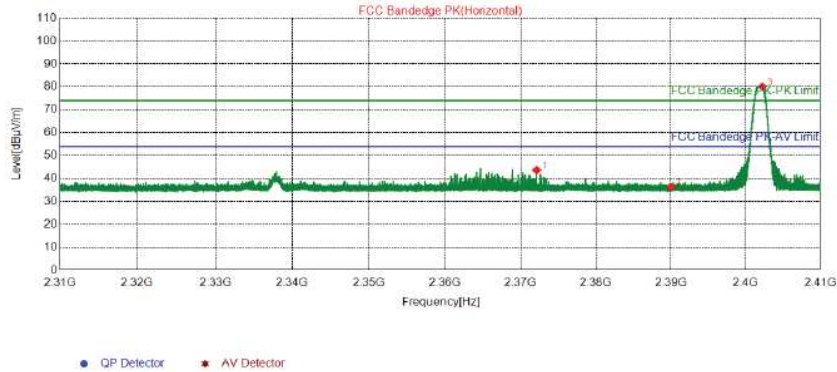

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2372.1500	51.33	43.65	74.00	30.35	380	313	Horizontal	PK
2	2390.0000	43.90	36.33	74.00	37.67	380	205	Horizontal	PK
3	2402.2200	87.63	80.14	74.00	-6.14	300	279	Horizontal	PK


BLE_1M_2402_Ant1/ Vertical

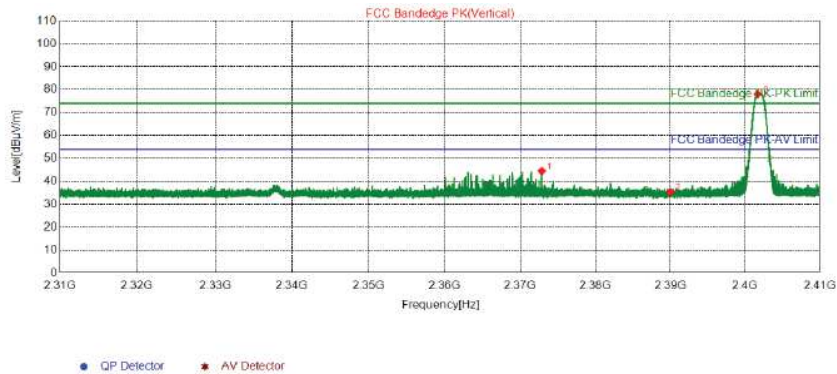

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2372.8850	52.15	44.48	74.00	29.52	380	262	Vertical	PK
2	2390.0000	42.91	35.34	74.00	38.66	380	138	Vertical	PK
3	2401.6850	85.52	78.03	74.00	-4.03	380	138	Vertical	PK


BLE_1M_2480_Ant1/ Horizontal

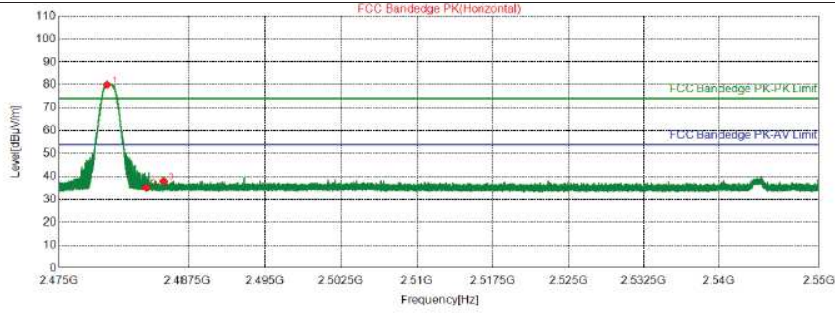

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.6875	87.20	80.12	74.00	-6.12	380	254	Horizontal	PK
2	2483.5013	42.08	35.02	74.00	38.98	380	263	Horizontal	PK
3	2485.2263	44.95	37.90	74.00	36.10	380	64	Horizontal	PK


BLE_1M_2480_Ant1/ Vertical

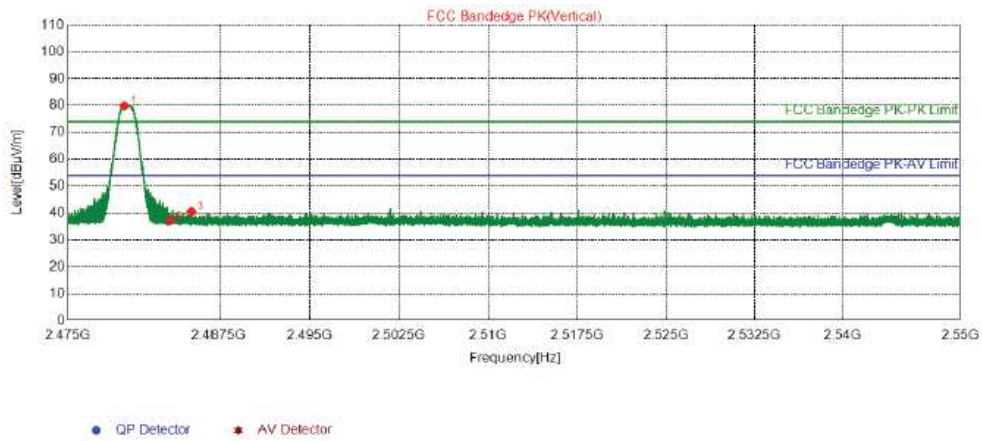

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.6838	86.99	79.91	74.00	-5.91	380	97	Vertical	PK
2	2483.5013	44.23	37.17	74.00	36.83	380	105	Vertical	PK
3	2485.2713	47.57	40.52	74.00	33.48	380	288	Vertical	PK


BLE_2M_2402_Ant1/ Horizontal

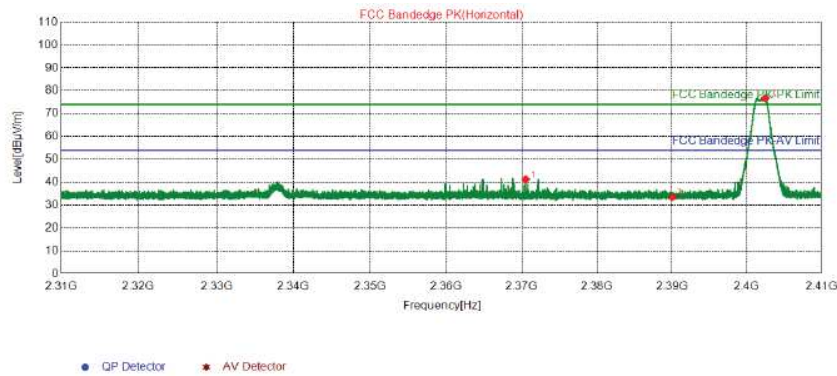

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2370.5550	48.94	41.25	74.00	32.75	380	203	Horizontal	PK
2	2390.0000	41.06	33.49	74.00	40.51	380	38	Horizontal	PK
3	2402.4650	84.22	76.73	74.00	-2.73	380	262	Horizontal	PK


BLE_2M_2402_Ant1/ Vertical

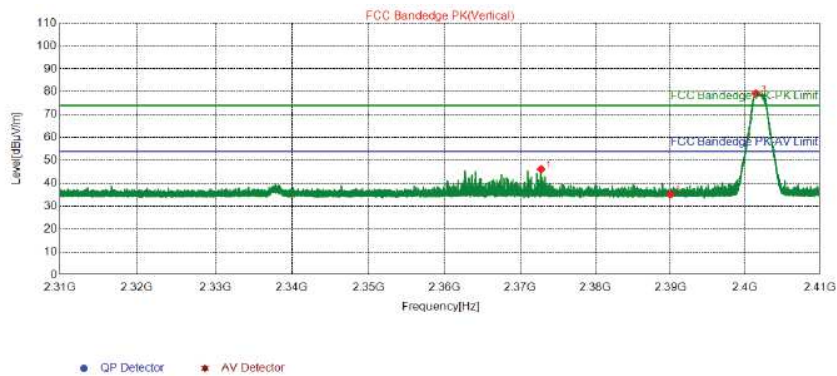

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2372.7900	53.77	46.09	74.00	27.91	380	279	Vertical	PK
2	2390.0000	42.72	35.15	74.00	38.85	380	360	Vertical	PK
3	2401.4350	86.76	79.27	74.00	-5.27	380	139	Vertical	PK


BLE_2M_2480_Ant1/ Horizontal

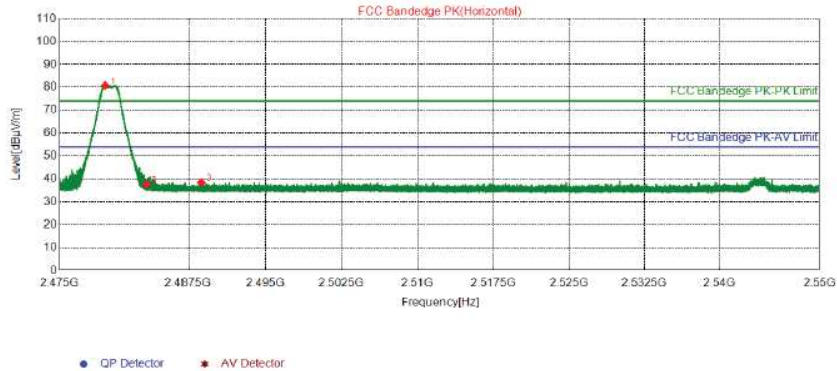

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.4513	87.85	80.77	74.00	-6.77	380	264	Horizontal	PK
2	2483.5013	44.59	37.53	74.00	36.47	380	338	Horizontal	PK
3	2488.7250	45.37	38.33	74.00	35.67	380	189	Horizontal	PK

BLE_2M_2480_Ant1/ Vertical

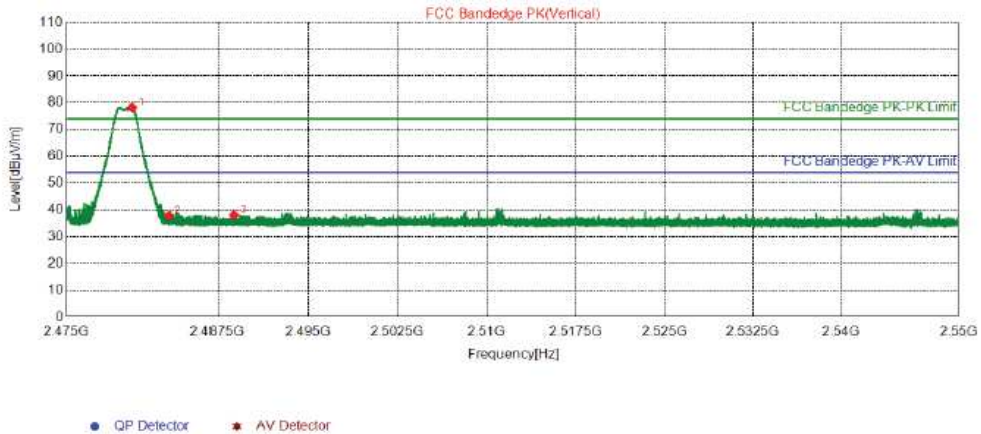

Suspected List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.4600	85.29	78.21	74.00	-4.21	380	89	Vertical	PK
2	2483.5013	44.75	37.69	74.00	36.31	380	97	Vertical	PK
3	2488.8263	45.03	37.99	74.00	36.01	380	130	Vertical	PK

4.8 Radiated Emission Measurement

4.8.1 Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.8.2 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degree to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for RMS Average (Duty cycle < 98 %) for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle $\geq$ 98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup


For Radiated emission below 30MHz

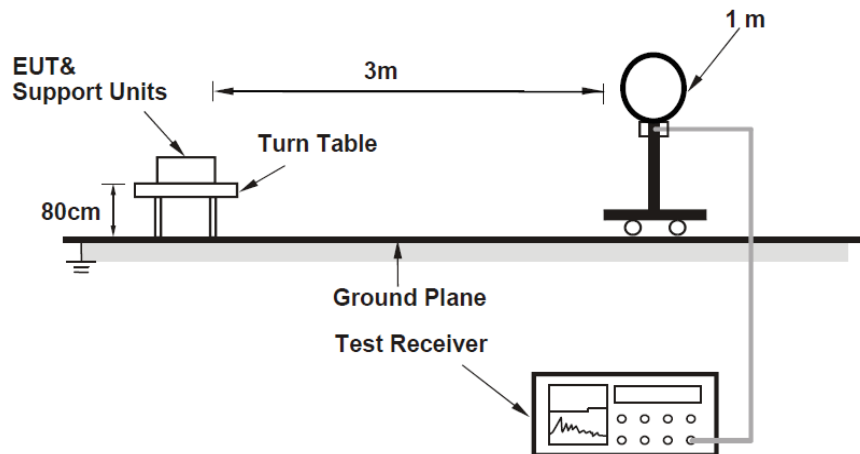

For Radiated emission 30MHz to 1GHz

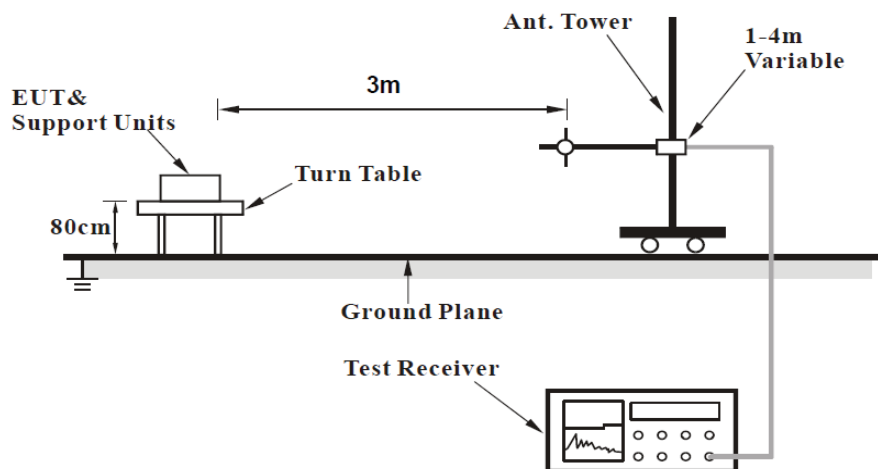

For Radiated emission above 1GHz

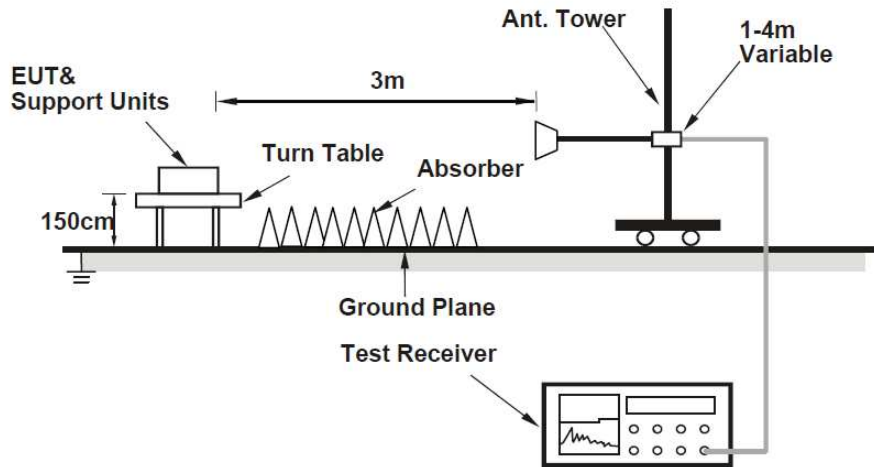

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.8.6 Test Results

Radiated Emissions Range 9kHz~30MHz


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Radiated Emissions Range 30MHz~1GHz

Below is the worst test data

Channel	BLE_2402_Charging mode	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal
Power supply	AC 120V, 60Hz		

Test Plot:

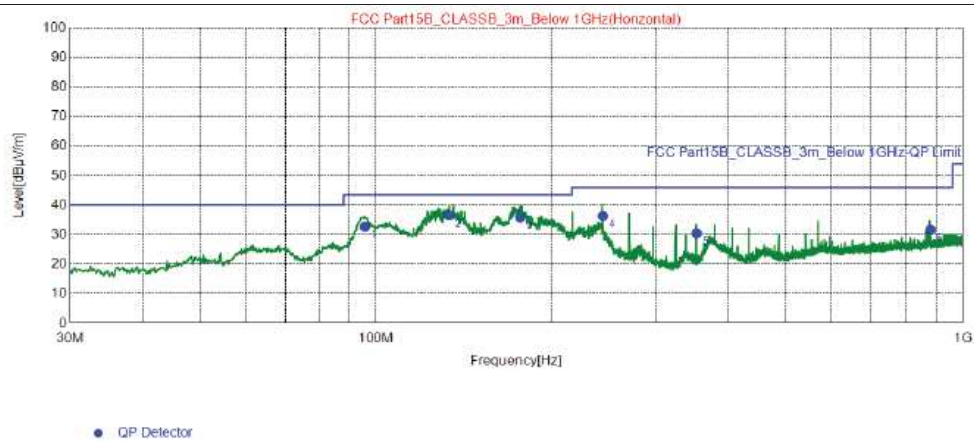

Final Data List

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	95.76	48.12	-15.36	32.76	43.50	10.74	200	215	Horizontal
2	133.4	47.52	-11.04	36.48	43.50	7.02	200	267	Horizontal
3	176.2	46.57	-10.68	35.89	43.50	7.61	200	132	Horizontal
4	243.9	47.19	-10.87	36.32	46.00	9.68	100	0	Horizontal
5	352.6	37.88	-7.36	30.52	46.00	15.48	100	123	Horizontal
6	879.5	31	0.62	31.62	46.00	14.38	100	15	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2402_Charging mode	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical
Power supply	AC 120V, 60Hz		

Test Plot:



Final Data List


NO.	Freq. [MHz]	QP Reading [$\text{dB } \mu\text{V/m}$]	Factor [dB]	QP Value [$\text{dB } \mu\text{V/m}$]	QP Limit [$\text{dB } \mu\text{V/m}$]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.04	47.81	-9.84	37.97	40.00	2.03	100	224	Vertical
2	94.79	56.22	-15.45	40.77	43.50	2.73	100	23	Vertical
3	122.8	53.09	-12.22	40.87	43.50	2.63	100	28.5	Vertical
4	179.7	52.37	-10.88	41.49	43.50	2.01	200	207	Vertical
5	352.6	40.02	-7.36	32.66	46.00	13.34	100	220	Vertical
6	831.4	41.71	0.10	41.81	46.00	4.19	200	61	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2402_Charging mode	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal
Power supply	AC 240V, 50Hz		

Test Plot:

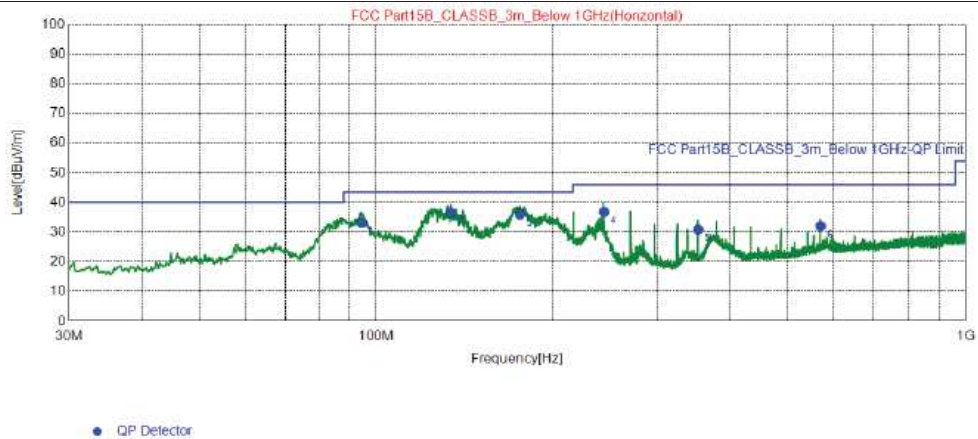

Final Data List


NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	94.40	48.7	-15.49	33.21	43.50	10.29	200	54	Horizontal
2	133.9	47.54	-10.98	36.56	43.50	6.94	200	260	Horizontal
3	175.5	46.59	-10.64	35.95	43.50	7.55	200	107	Horizontal
4	243.9	47.67	-10.87	36.80	46.00	9.20	100	7	Horizontal
5	352.6	38.26	-7.36	30.90	46.00	15.10	100	216	Horizontal
6	569.5	35.24	-3.20	32.04	46.00	13.96	100	48	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2402_Charging mode	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical
Power supply	AC 240V, 50Hz		

Test Plot:

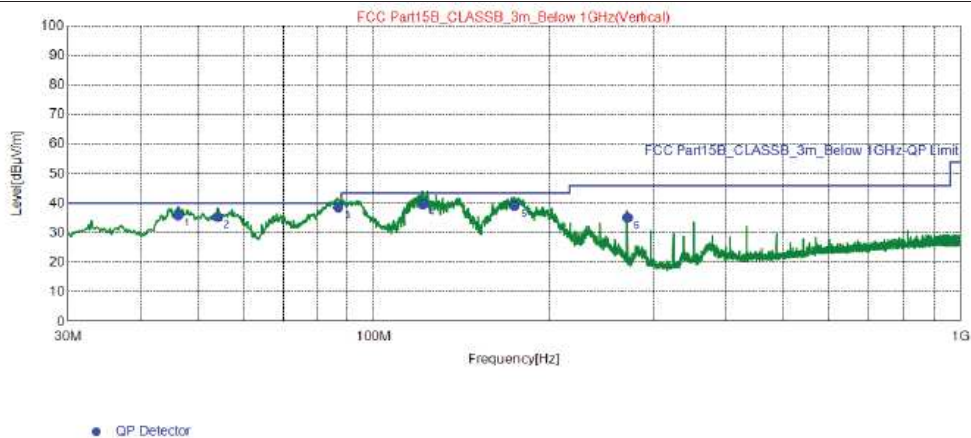

Final Data List


NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.29	45.97	-9.97	36.00	40.00	4.00	100	267	Vertical
2	54.05	45.42	-9.93	35.49	40.00	4.51	100	88	Vertical
3	86.86	53.98	-15.36	38.62	40.00	1.38	105.4	181.6	Vertical
4	121.2	52.00	-12.36	39.64	43.50	3.86	105.5	24.6	Vertical
5	173.7	49.64	-10.54	39.10	43.50	4.40	100	274	Vertical
6	271.1	44.82	-9.59	35.23	46.00	10.77	100	285	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2402_Working mode	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal

Test Plot:

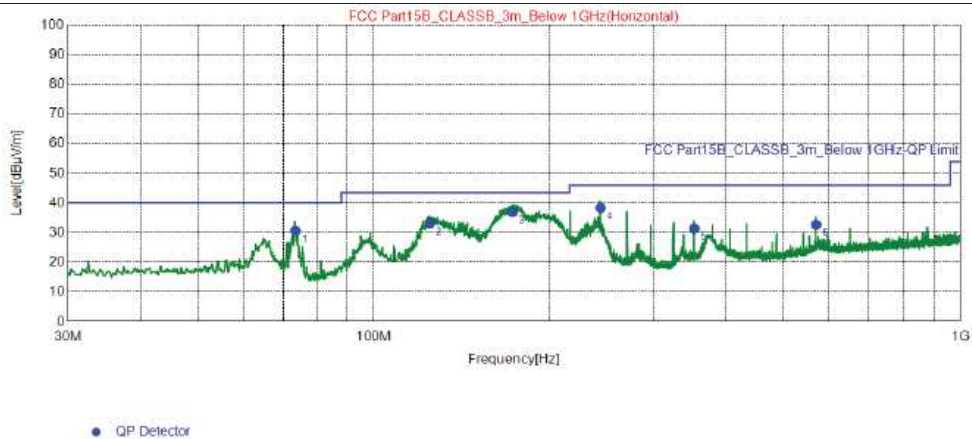

Final Data List


NO.	Freq. [MHz]	QP Reading [dB μV/m]	Factor [dB]	QP Value [dB μV/m]	QP Limit [dB μV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	73.45	43.53	-12.83	30.70	40.00	9.30	100	147	Horizontal
2	124.6	45.1	-11.99	33.11	43.50	10.39	200	283	Horizontal
3	172.3	47.34	-10.46	36.88	43.50	6.62	200	212	Horizontal
4	243.9	49.25	-10.87	38.38	46.00	7.62	100	355	Horizontal
5	352.6	38.7	-7.36	31.34	46.00	14.66	100	224	Horizontal
6	569.5	35.92	-3.20	32.72	46.00	13.28	100	58	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2402_ Working mode	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical

Test Plot:

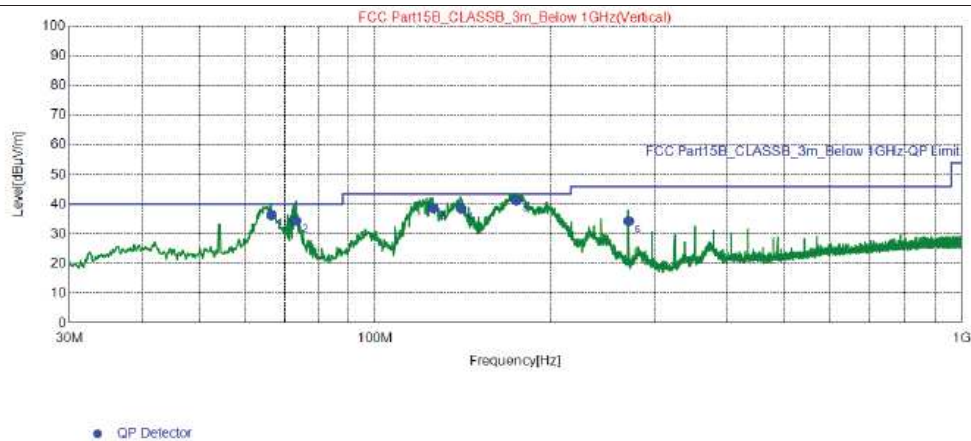

Final Data List

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	66.47	47.74	-11.42	36.32	40.00	3.68	100	185	Vertical
2	73.13	47.24	-12.79	34.45	40.00	5.55	136.9	150.4	Vertical
3	125.6	50.68	-11.89	38.79	43.50	4.71	100	26	Vertical
4	140.1	48.93	-10.32	38.61	43.50	4.89	100	283	Vertical
5	174.2	51.89	-10.57	41.32	43.50	2.18	189.1	196.8	Vertical
6	271.1	43.91	-9.59	34.32	46.00	11.68	100	272	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Radiated Emission Range 1GHz~10th Harmonic

Below is the worst test data

Channel	BLE_1M_2402_Ant1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7206.7000	48.52	74.00	25.48	-0.58	H	PK
2	7206.7000	45.61	54.00	8.39	-0.58	H	AV
3	7206.7000	45.76	74.00	28.24	-0.58	V	PK
4	7206.7000	40.40	54.00	13.60	-0.58	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_1M_2440_Ant1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7320.6000	48.10	74.00	25.90	-0.88	H	PK
2	7320.6000	45.84	54.00	8.16	-0.88	H	AV
3	7320.6000	46.37	74.00	27.63	-0.88	V	PK
4	7320.6000	42.15	54.00	11.85	-0.88	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_1M_2480_Ant1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7441.3000	51.00	74.00	23.00	-1.19	H	PK
2	7441.3000	46.53	54.00	7.47	-1.19	H	AV
3	7439.6000	46.21	74.00	27.79	-1.19	V	PK
4	7441.3000	42.22	54.00	11.78	-1.19	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2M_2402_Ant1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7205.0000	48.08	74.00	25.92	-0.58	H	PK
2	7208.4000	42.81	54.00	11.19	-0.58	H	AV
3	7206.7000	47.34	74.00	26.66	-0.58	V	PK
4	7208.4000	41.17	54.00	12.83	-0.58	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2M_2440_Ant1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7320.6000	47.99	74.00	26.01	-0.88	H	PK
2	7322.3000	41.57	54.00	12.43	-0.88	H	AV
3	7320.6000	47.40	74.00	26.60	-0.88	V	PK
4	7320.6000	40.74	54.00	13.26	-0.88	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Channel	BLE_2M_2480_Ant1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7437.9000	48.17	74.00	25.83	-1.18	H	PK
2	7439.6000	41.54	54.00	12.46	-1.19	H	AV
3	7437.9000	46.82	74.00	27.18	-1.18	V	PK
4	7439.6000	40.21	54.00	13.79	-1.19	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

--- END ---