



FCC&IC TEST REPORT

FCC ID: 2AYG9-TR08A

IC: 26800-TR08A

On Behalf of

SHENZHEN YECON TECHNOLOGY CO., LTD

Face recognition intelligent terminal

Model No.: TR08A

Prepared for : SHENZHEN YECON TECHNOLOGY CO., LTD
Address : 6 floor, East Second, Cuigang Industrial Park, Huai de community,
Fuyong street, Baoan District, Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2012054-C01-R09
Date of Receipt : December 15, 2020
Date of Test : December 15, 2020-January 28, 2021
Date of Report : January 28, 2021
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results -----	6
1.1. Description of Standards and Results -----	6
2. General Information -----	7
2.1. Description of Device (EUT)-----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details -----	8
2.4. Block Diagram of connection between EUT and simulators -----	8
2.5. Test Mode Description -----	8
2.6. Test Conditions -----	9
2.7. Test Facility -----	9
2.8. Measurement Uncertainty -----	9
2.9. Test Equipment List -----	10
3. Spurious Emission -----	11
3.1. Test Limits -----	11
3.2. Test Procedure -----	14
3.3. Test Setup -----	14
3.4. Test Results -----	15
4. Power Line Conducted Emission -----	24
4.1. Test Limits -----	24
4.2. Test Procedure -----	24
4.3. Test Setup -----	24
4.4. Test Results -----	25
5. Conducted Maximum Output Power -----	27
5.1. Test limits -----	27
5.2. Test Procedure -----	27
5.3. Test Setup -----	27
5.4. Test Results -----	27
6. Peak Power Spectral Density -----	28
6.1. Test limits -----	28
6.2. Test Procedure -----	28
6.3. Test Setup -----	28
6.4. Test Results -----	28
7. Bandwidth -----	31
7.1. Test limits -----	31
7.2. Test Procedure -----	31
7.3. Test Setup -----	31
7.4. Test Results -----	31
8. Band Edge Check -----	35
8.1. Test limits -----	35
8.2. Test Procedure -----	35
8.3. Test Setup -----	35
8.4. Test Results -----	35
9. Frequency stability -----	39
9.1. Test limit -----	39
9.2. Test Procedure -----	39

9.3. Test Setup -----	39
9.4. Test Results -----	39
10. Antenna Requirement -----	41
10.1. Standard Requirement -----	41
10.2. Antenna Connected Construction-----	41
10.3. Results -----	41

TEST REPORT DECLARATION

Applicant : SHENZHEN YECON TECHNOLOGY CO., LTD
Address : 6 floor, East Second, Cuigang Industrial Park, Huai de community, Fuyong street, Baoan District, Shenzhen
Manufacturer : SHENZHEN YECON TECHNOLOGY CO., LTD
Address : 6 floor, East Second, Cuigang Industrial Park, Huai de community, Fuyong street, Baoan District, Shenzhen
EUT Description : Face recognition intelligent terminal
(A) Model No. : TR08A
(B) Trademark : /

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247,

RSS-247 Issue 2, RSS-Gen Issue 5, ANSI C63.10:2013, CISPR 16-1-4:2010

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Lucas Pang
Project Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....:

January 28, 2021

Revision History

Revision	Issue Date	Revisions	Revised By
V0	January 28, 2021	Initial released Issue	Lucas Pang

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 RSS-GEN(8.8) ANSI C63.10 :2013	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) RSS-247(5.2 a) ANSI C63.10 :2013	P
Output Power	FCC Part 15: 15.247(b)(3) RSS-247(5.4 d) ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Power Spectral Density	FCC PART 15:15.247(e) RSS-247(5.2 b) ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) RSS-GEN(6.13) ANSI C63.10 :2013	P
Frequency stability	RSS-GEN(6.11)	P
Antenna Requirement	FCC Part 15: 15.203 RSS-GEN(6.8)	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description/PMN : Face recognition intelligent terminal

Model
Number/HVIN(s) : TR08A
Diff. : /

Trademark : /

Test Voltage : DC 12V from adapter

Radio Technology : GFSK for Bluetooth V5.0(BT LE)

Operation frequency : 2402-2480MHz

Channel No. : 40 channels for Bluetooth V5.0 (BT LE)

Channel Separation : 2MHz for Bluetooth V5.0 (BT LE)

Modulation : GFSK for Bluetooth V5.0(BT LE)

Antenna Type : Internal antenna, Maximum Gain is 3.24dBi.

Software Version : V1.0

Hardware
version/FVIN : YT-19-MB-V2.1

Remark:

1. The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for Bluetooth V5.0 BLE function, and there is no other transmitter involved.
2. In this report, the main test model is TR08A, and the main test model serial number is YGKJ20207120345.

2.2.Accessories of Device (EUT)

Accessories1	:	AC/DC ADAPTER
Manufacturer	:	Shenzhen Jiuzhou Power Technology Co., LTD
Model	:	JZB024-120180D
Ratings	:	Input: 100-240V~ 50/60Hz 0.7A Output: 12.0V=1.8A


Accessories2	:	AC ADAPTER
Manufacturer	:	Dongguan Guanjin Electronics Technology Co., Ltd
Model	:	K25V120180E2
Ratings	:	Input: 100-240V~50/60Hz 0.6A Output: 12.0V=1.8A 21.6W

Note: The two power adapters of the product have been tested. This report only reflects the data of the worst power supply (JZB024-120180D).

2.3.Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	N/A	N/A	N/A	N/A	N/A

2.4.Block Diagram of connection between EUT and simulators



2.5.Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low : CH0	2402
	Middle: CH19	2440
	High: CH39	2480

The test software “RFTestTool.app” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode.

2.6.Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	27℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7.Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8.Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9.Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2020.09.02	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2020.09.02	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2020.09.02	1Year
Receiver	R&S	ESCI	101165	2020.09.02	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2020.04.12	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2020.09.02	1Year
Cable	Resenberger	N/A	No.2	2020.09.02	1Year
Cable	Resenberger	N/A	No.3	2020.09.02	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2020.09.02	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2020.09.02	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2020.09.02	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2020.09.02	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2020.09.02	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2019.09.07	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2020.09.02	1 Year
Power Meter	Agilent	E9300A	MY41496625	2020.09.02	1 Year
Temp. &Humid. Chamber	Wei Huang	WHTH-1000-40-880	100631	2020.09.02	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2020.09.02	1 Year

3. SPURIOUS EMISSION

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands ^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4

5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	
Note 1: The peak limit is 20 dB higher than the average limit			
Note 2: Peak limit applies (AVG limit + 20 dB) as well as RSS-247 Section 5.5			

Harmonic emissions limits comply with below 54 $\text{dB}\mu\text{V}/\text{m}$ at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz. The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation.


The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured.


If Peak value comply with QP limit Below 1GHz, the EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

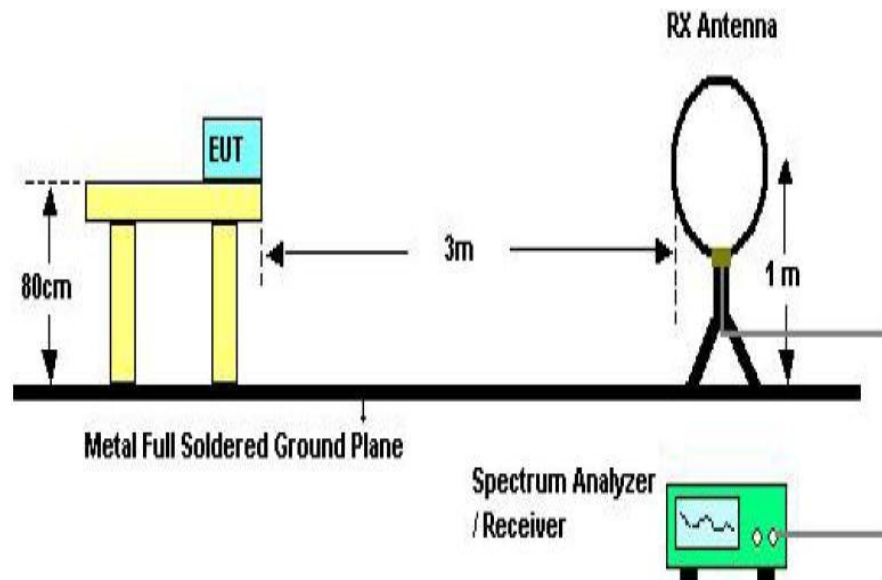

Below 30MHz Test Setup

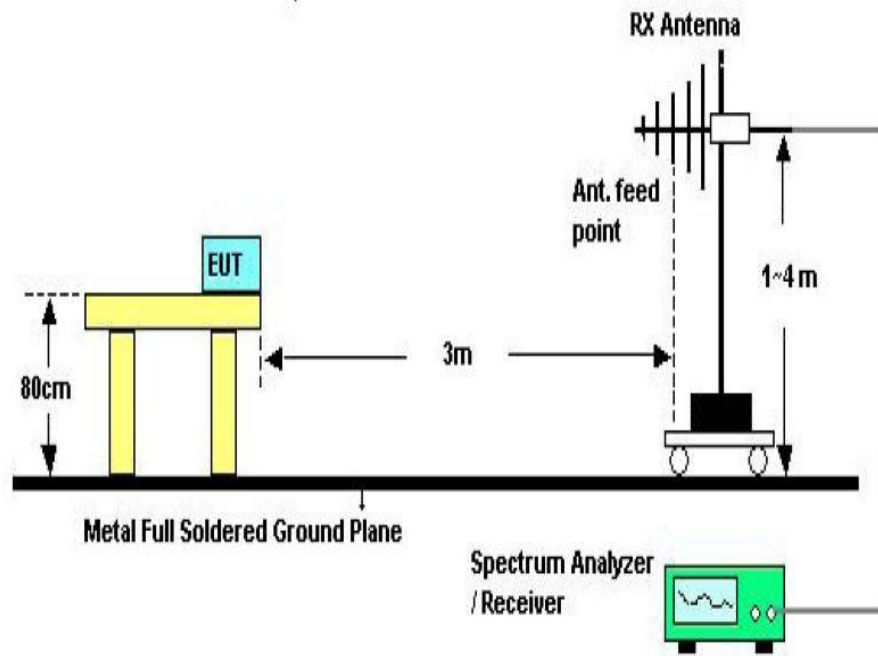

Above 30MHz Test Setup

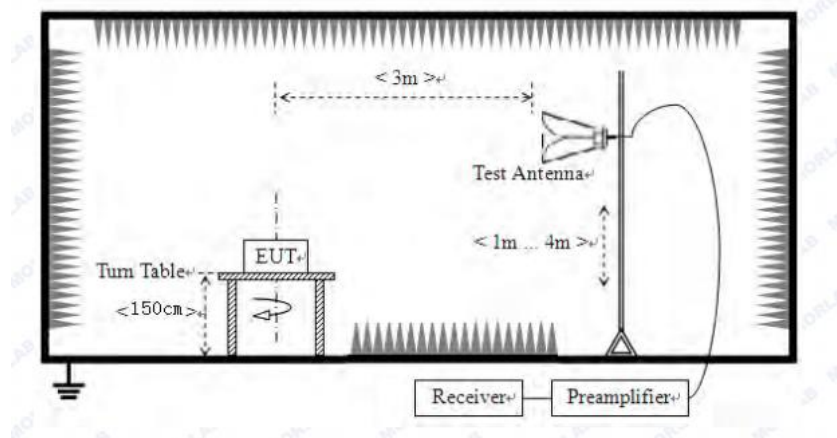

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHZ~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned from 9 kHz to the 10th harmonic of the EUT.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: 1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.Only show the test data of the worst Channel in this report.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

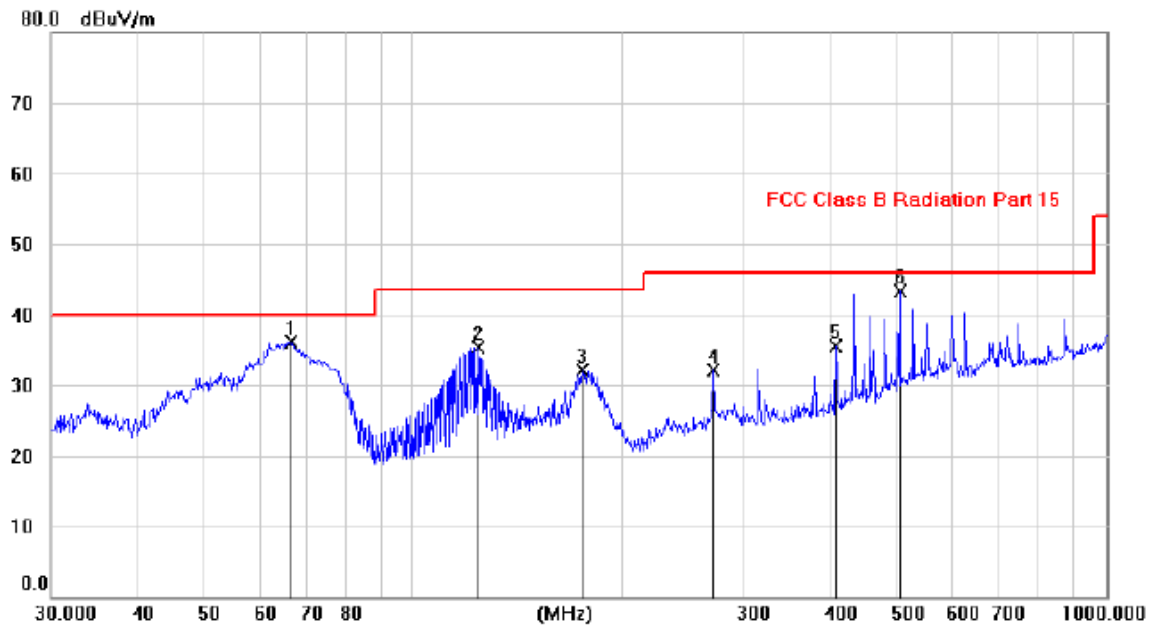

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		66.5456	24.13	11.95	36.08	40.00	-3.92	peak		
2		123.8286	22.04	13.25	35.29	43.50	-8.21	peak		
3		175.2415	18.75	13.34	32.09	43.50	-11.41	peak		
4		271.1976	18.70	13.32	32.02	46.00	-13.98	peak		
5		406.8006	19.10	16.41	35.51	46.00	-10.49	peak		
6	*	504.0577	25.10	18.28	43.38	46.00	-2.62	QP		

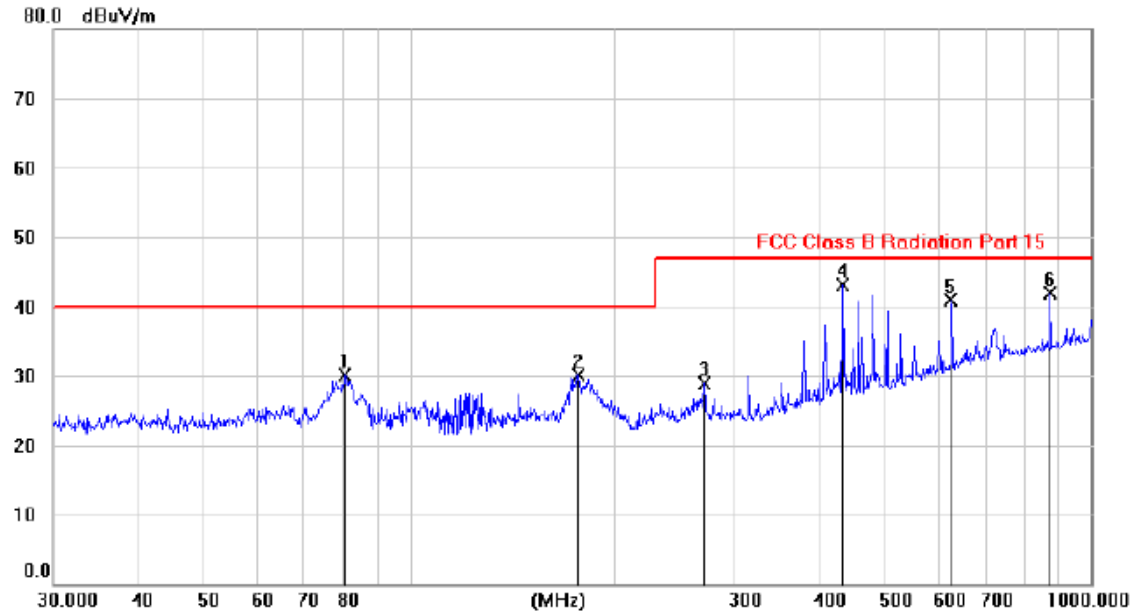Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		80.5688	20.15	9.91	30.06	40.00	-9.94	peak	
2		176.9705	17.00	13.10	30.10	40.00	-9.90	peak	
3		271.2294	15.50	13.32	28.82	47.00	-18.18	peak	
4	*	433.9636	25.83	17.18	43.01	47.00	-3.99	peak	
5		625.0050	20.23	20.72	40.95	47.00	-6.05	peak	
6		875.0424	18.25	23.72	41.97	47.00	-5.03	peak	


Notes: Above is below 1GHz test data. This report only shall the worst case mode for TX 2402MHz.

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.37	V	33.98	10.22	34.25	56.32	74	17.68	PK
4804	35.28	V	33.98	10.22	34.25	45.23	54	8.77	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.37	H	33.98	10.22	34.25	56.32	74	17.68	PK
4804	34.99	H	33.98	10.22	34.25	44.94	54	9.06	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	46.47	V	33.98	10.22	34.25	56.42	74	17.58	PK
4880	36.17	V	33.98	10.22	34.25	46.12	54	7.88	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	46.42	H	33.98	10.22	34.25	56.37	74	17.63	PK
4880	34.89	H	33.98	10.22	34.25	44.84	54	9.16	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	46.10	V	33.98	10.22	34.25	56.05	74	17.95	PK
4960	36.09	V	33.98	10.22	34.25	46.04	54	7.96	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	45.87	H	33.98	10.22	34.25	55.82	74	18.18	PK
4960	35.12	H	33.98	10.22	34.25	45.07	54	8.93	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note: 1, Result = Read level + Antenna factor + cable loss-Amp factor 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-42.38952633858	-20	Pass
NVNT	BLE	2440	Ant 1	-45.96251643658	-20	Pass
NVNT	BLE	2480	Ant 1	-43.22757042885	-20	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

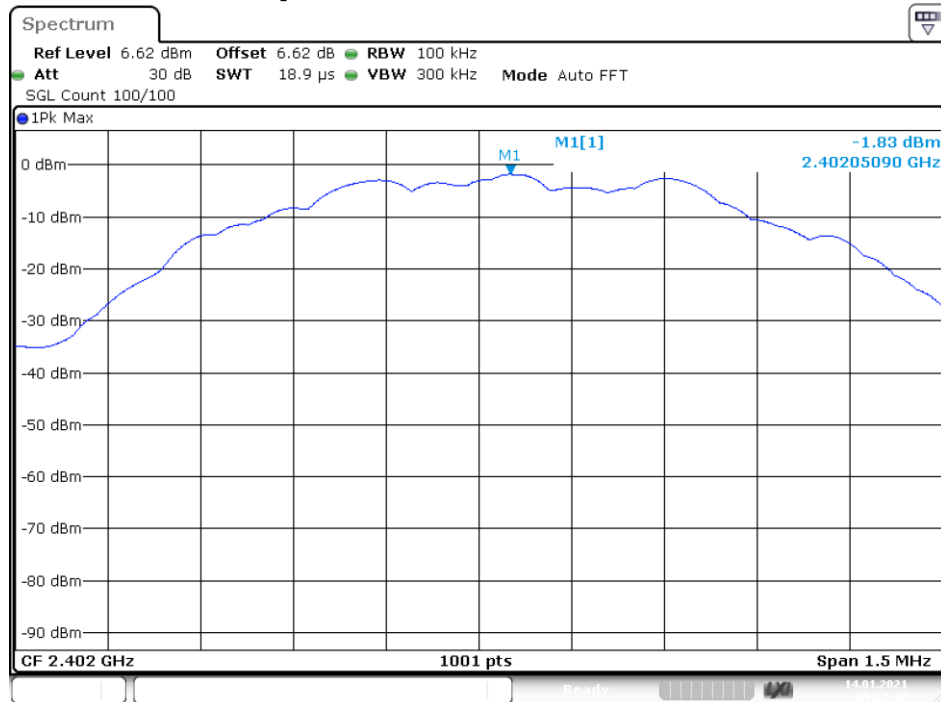


Date: 14.JAN.2021 09:22:47

Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

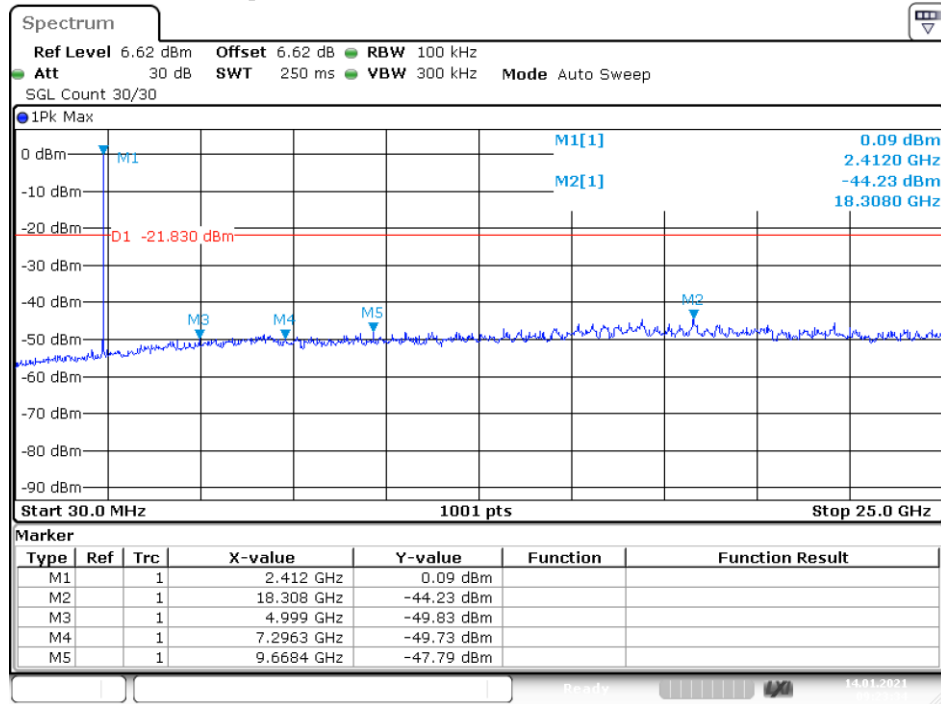


Date: 14.JAN.2021 09:23:33

Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

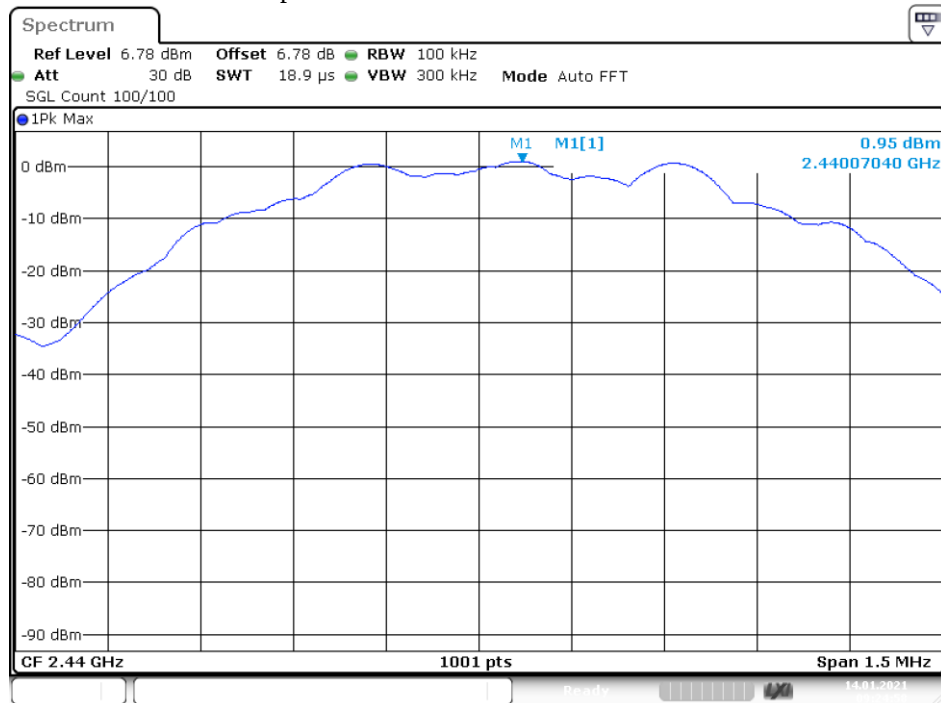


Date: 14.JAN.2021 09:24:58

Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

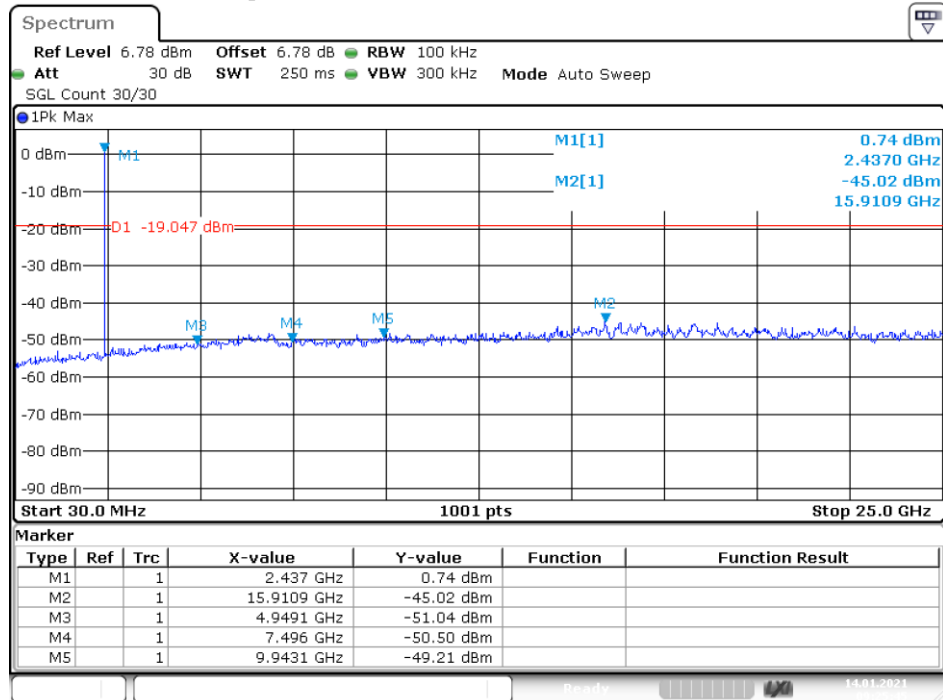


Date: 14.JAN.2021 09:25:44

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

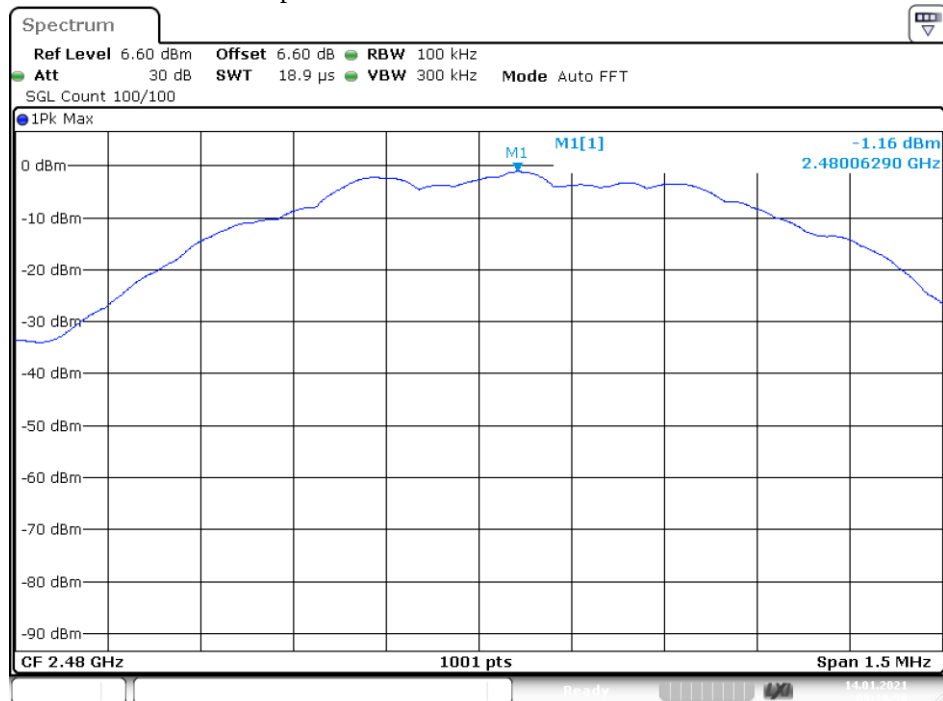

Date: 14.JAN.2021 09:19:50

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

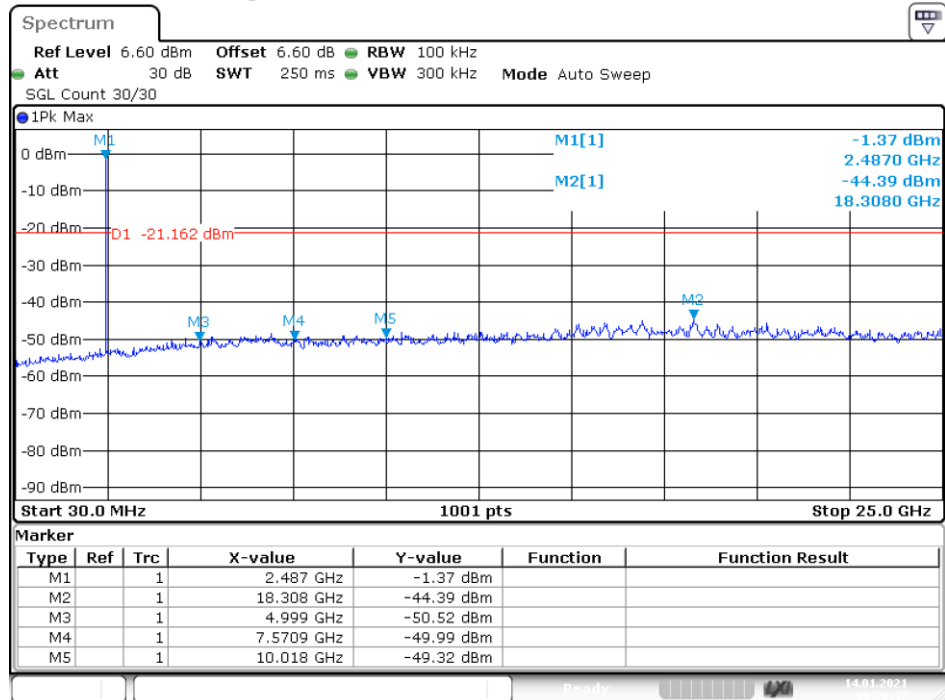

Date: 14.JAN.2021 09:20:36

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


Notes: 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

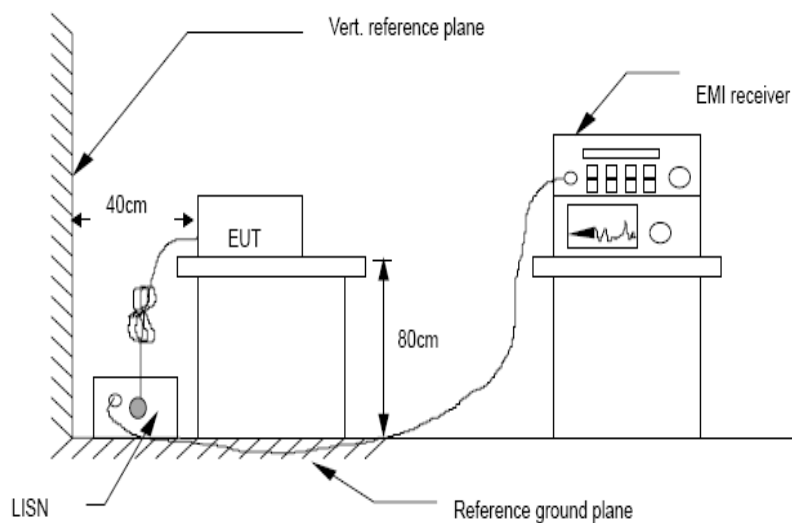


4.4. Test Results

Line:

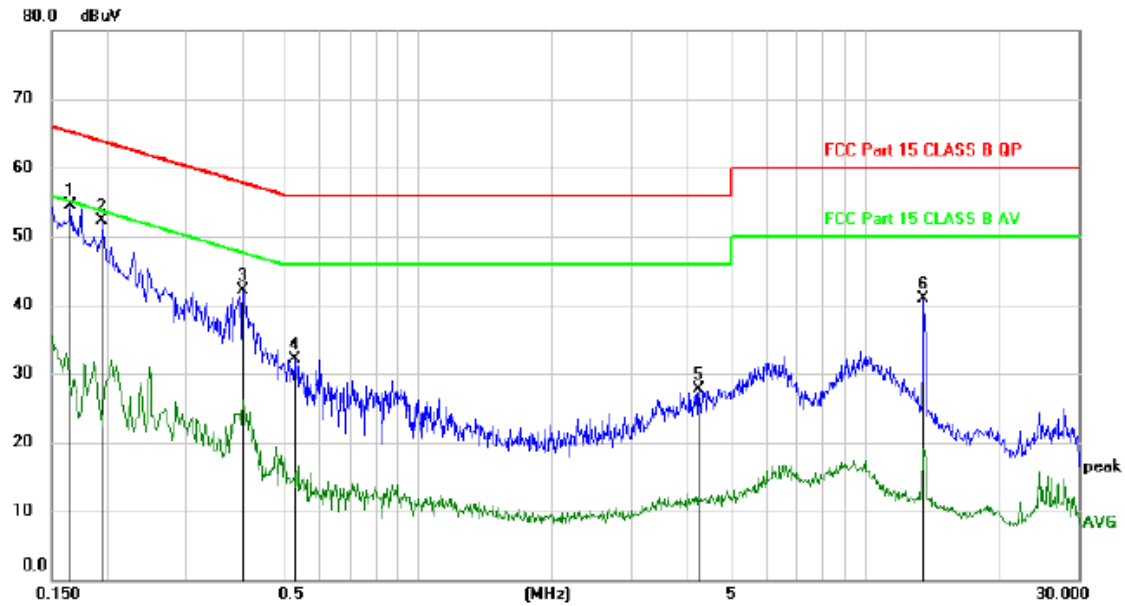

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1650	44.48	9.93	54.41	65.21	-10.80	peak	
2		0.1949	42.47	9.92	52.39	63.83	-11.44	peak	
3		0.4020	32.09	9.94	42.03	57.81	-15.78	peak	
4		0.5250	22.19	9.95	32.14	56.00	-23.86	peak	
5		4.2450	17.73	9.98	27.71	56.00	-28.29	peak	
6		13.5270	30.63	10.29	40.92	60.00	-19.08	peak	

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

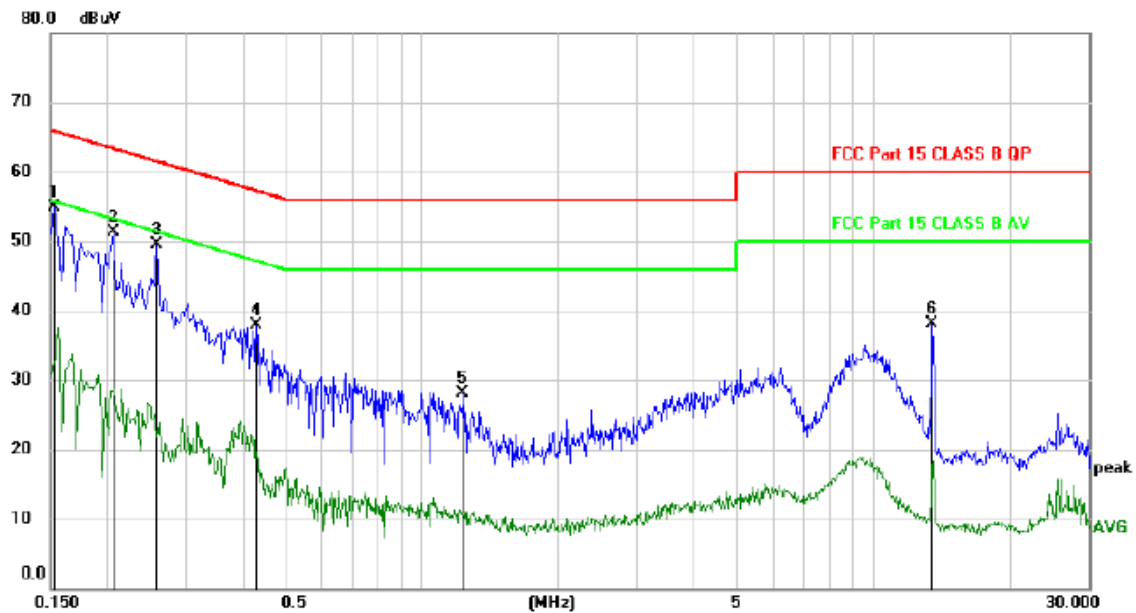Neutral:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1530	44.90	9.94	54.84	65.84	-11.00	peak	
2		0.2070	41.47	9.93	51.40	63.32	-11.92	peak	
3		0.2580	39.48	9.96	49.44	61.50	-12.06	peak	
4		0.4290	28.00	9.95	37.95	57.27	-19.32	peak	
5		1.2300	18.31	9.89	28.20	56.00	-27.80	peak	
6		13.5420	27.88	10.29	38.17	60.00	-21.83	peak	

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz (AC 120V/ 60Hz) was listed in this report.

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer section RSS-247 & 15.247.

5.2. Test Procedure


Details see the KDB558074 D01 Meas Guidance v05r02

5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

Channel	Frequency (MHz)	PK Output Power (dBm)	Limit (dBm)
CH1	2402	-1.151	30
CH20	2440	0.549	30
CH40	2480	-0.567	30
Conclusion: PASS			

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer section RSS-247 & 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as RBW = 3kHz(Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.), VBW = 10kHz(Set the VBW $\geq 3 \times \text{RBW}$), span $\geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


6.3. Test Setup



6.4. Test Results


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-15.544	8	Pass
NVNT	BLE	2440	Ant 1	-12.834	8	Pass
NVNT	BLE	2480	Ant 1	-15.008	8	Pass

PSD NVNT BLE 2402MHz Ant1

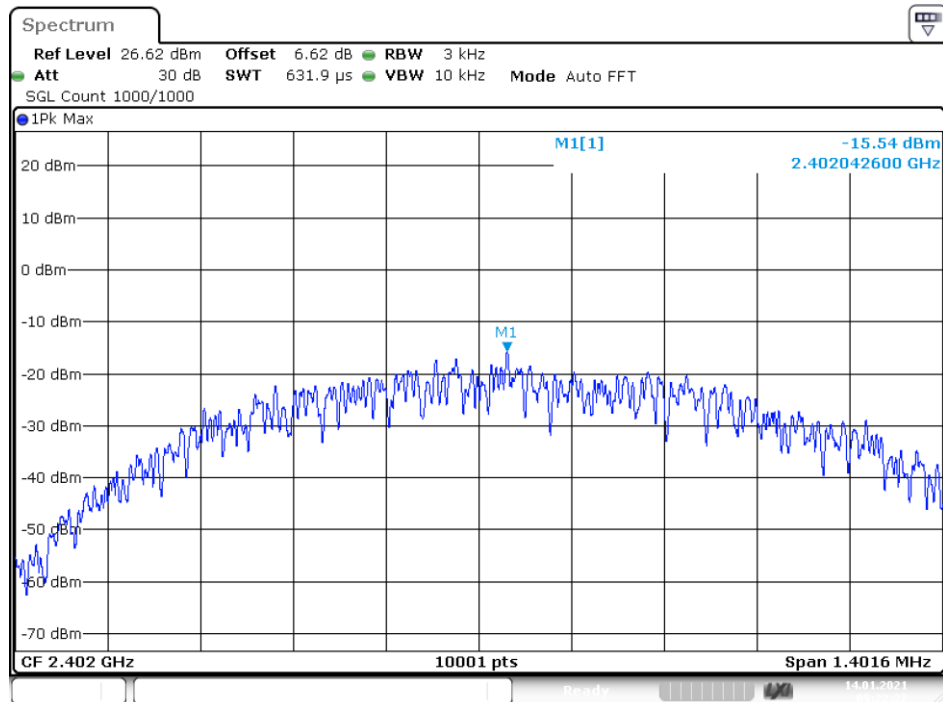


Date: 14.JAN.2021 09:22:27

PSD NVNT BLE 2440MHz Ant1

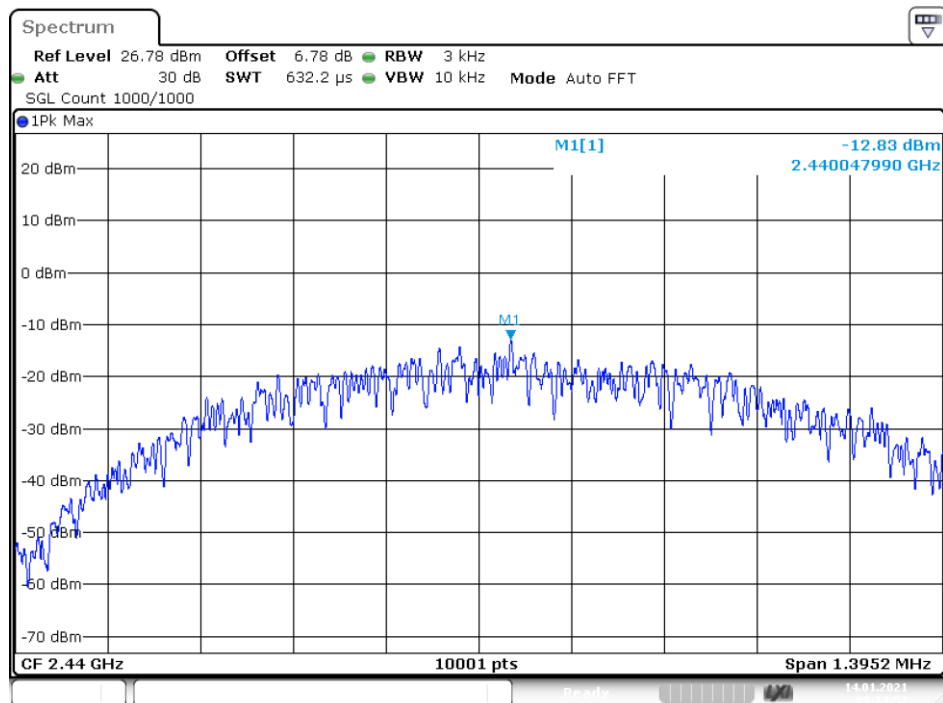

Date: 14.JAN.2021 09:24:52

PSD NVNT BLE 2480MHz Ant1

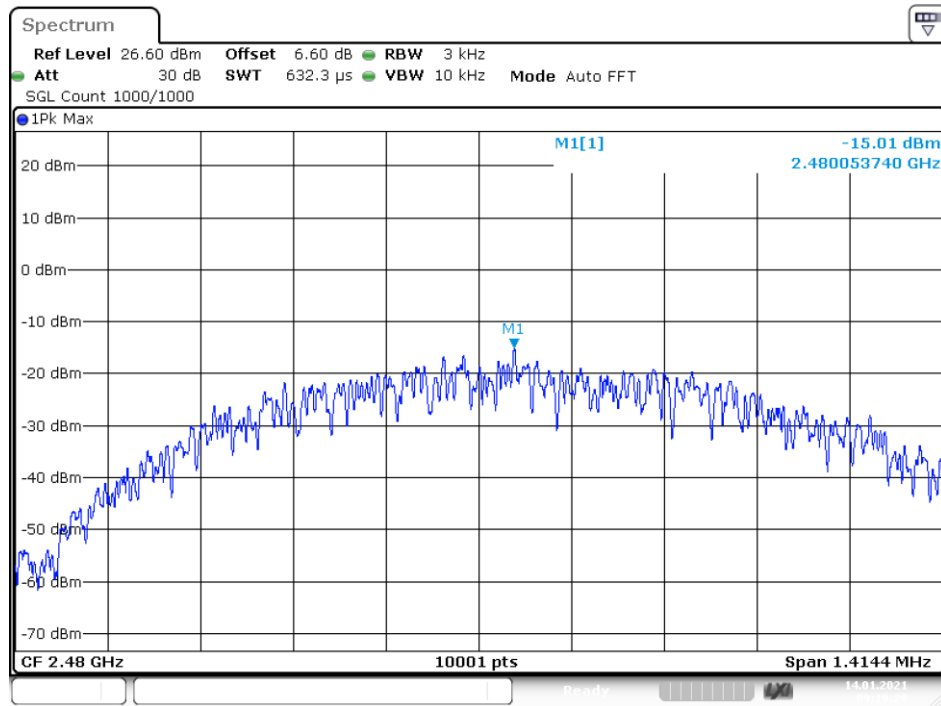

Date: 14.JAN.2021 09:19:28

7. BANDWIDTH

7.1. Test limits

Please refer section RSS-247 & 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW $\geq 3 \times$ RBW = 300kHz, Sweep time set auto, detail see the test plot.


7.3. Test Setup



7.4. Test Results


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	1.0477	0.7008	0.5	Pass
NVNT	BLE	2440	Ant 1	1.0471	0.6976	0.5	Pass
NVNT	BLE	2480	Ant 1	1.0473	0.7072	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

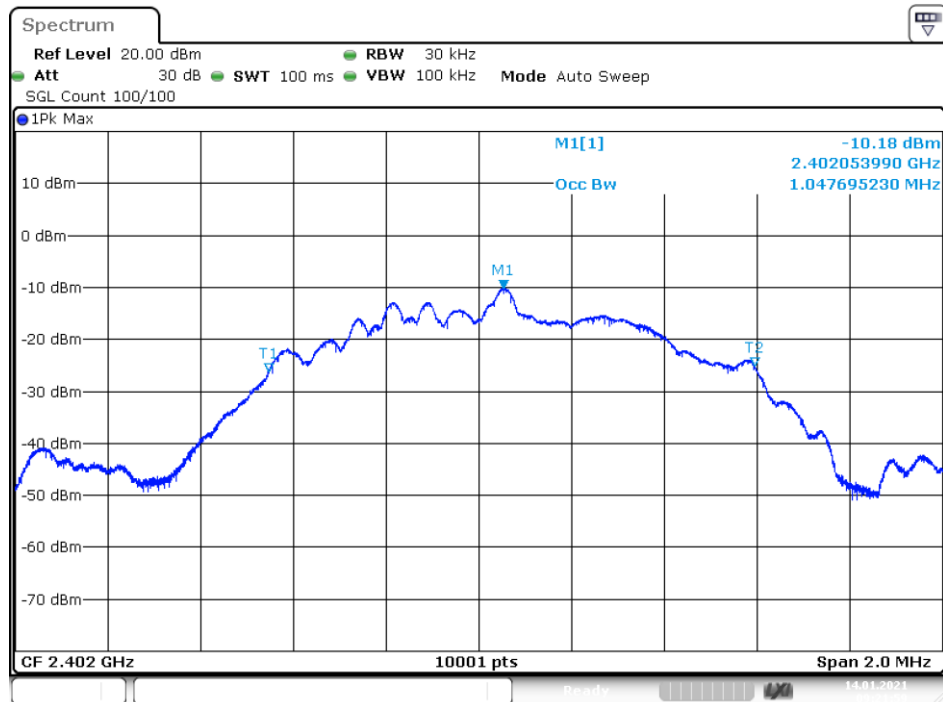


Date: 14.JAN.2021 09:21:58

-6 dB BW NVNT BLE 2402MHz Ant1

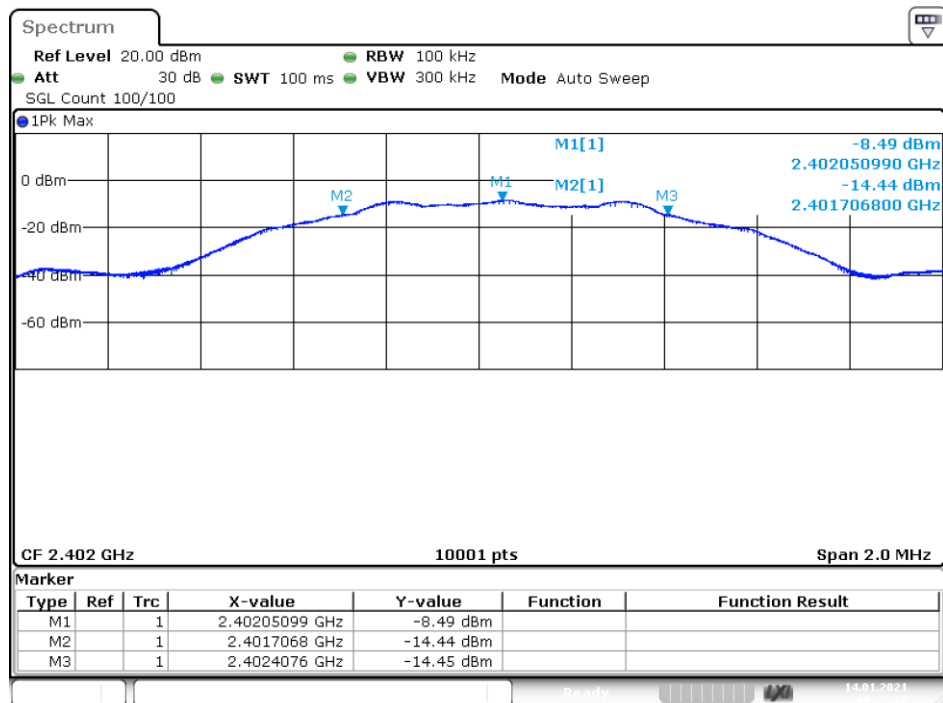


Date: 14.JAN.2021 09:22:12

OBW NVNT BLE 2440MHz Ant1

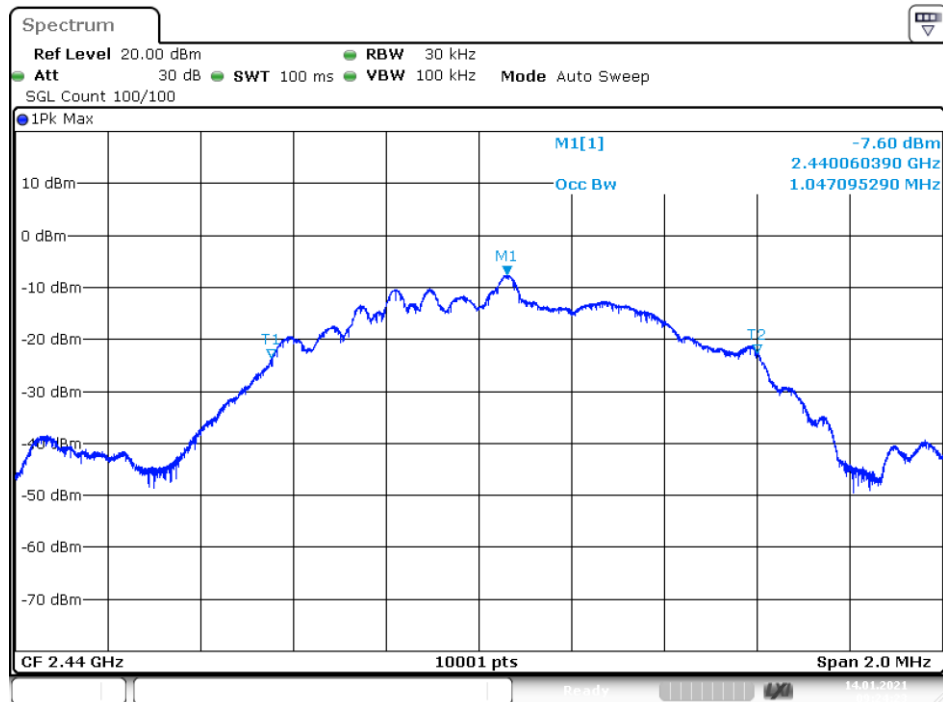


Date: 14.JAN.2021 09:24:23

-6 dB BW NVNT BLE 2440MHz Ant1

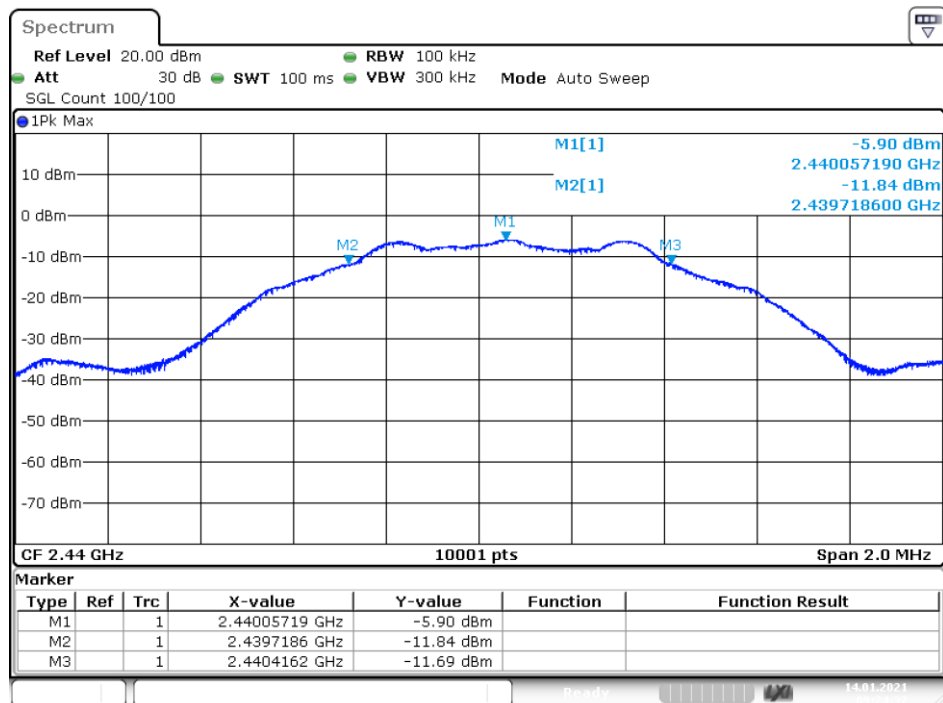


Date: 14.JAN.2021 09:24:37

OBW NVNT BLE 2480MHz Ant1

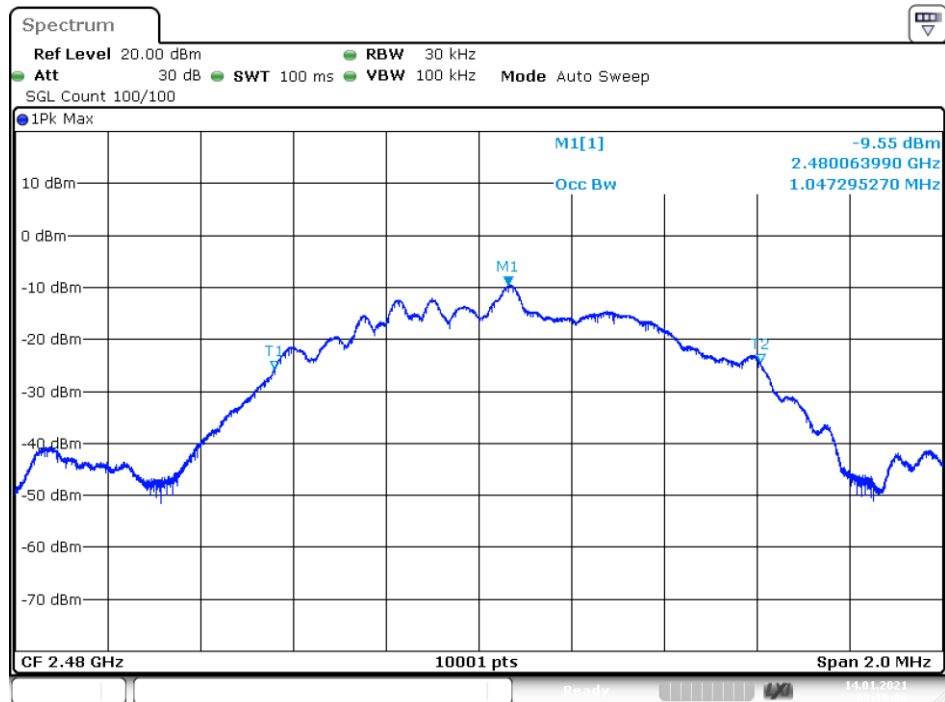

Date: 14.JAN.2021 09:19:00

-6 dB BW NVNT BLE 2480MHz Ant1

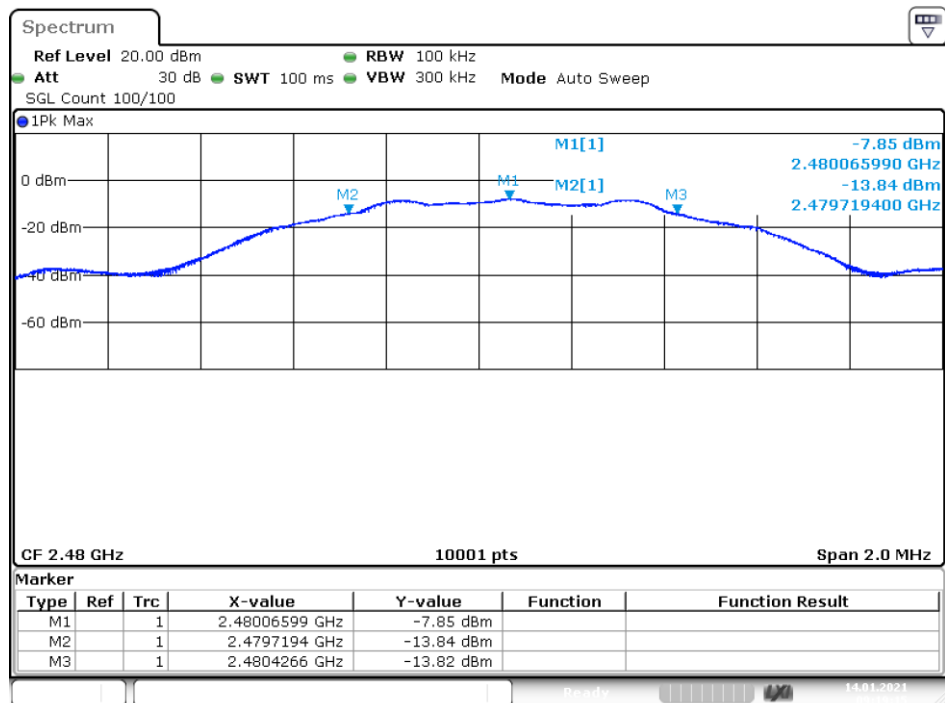

Date: 14.JAN.2021 09:19:14

8. BAND EDGE CHECK

8.1. Test limits

Please refer section RSS-GEN&15.247.

8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

8.2.1 Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz ,VBW 3MHz ,peak detector for peak value , RBW 1MHz ,VBW 3MHz ,RMS detector for AV value.

8.3. Test Setup

Same as 3.3 above 1GHz.


8.4. Test Results

Radiated Method:

Polarization: Vertical

Test Mode:


GFSK-Low

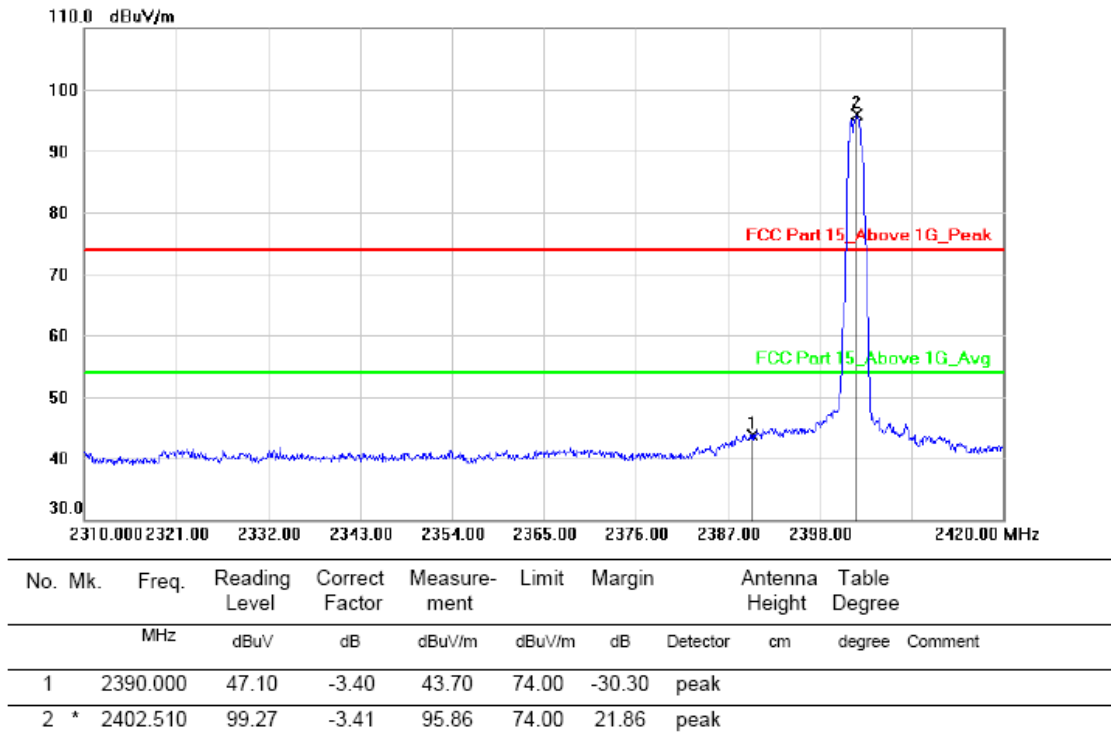

Polarization: Horizontal

Test Mode:


GFSK-Low

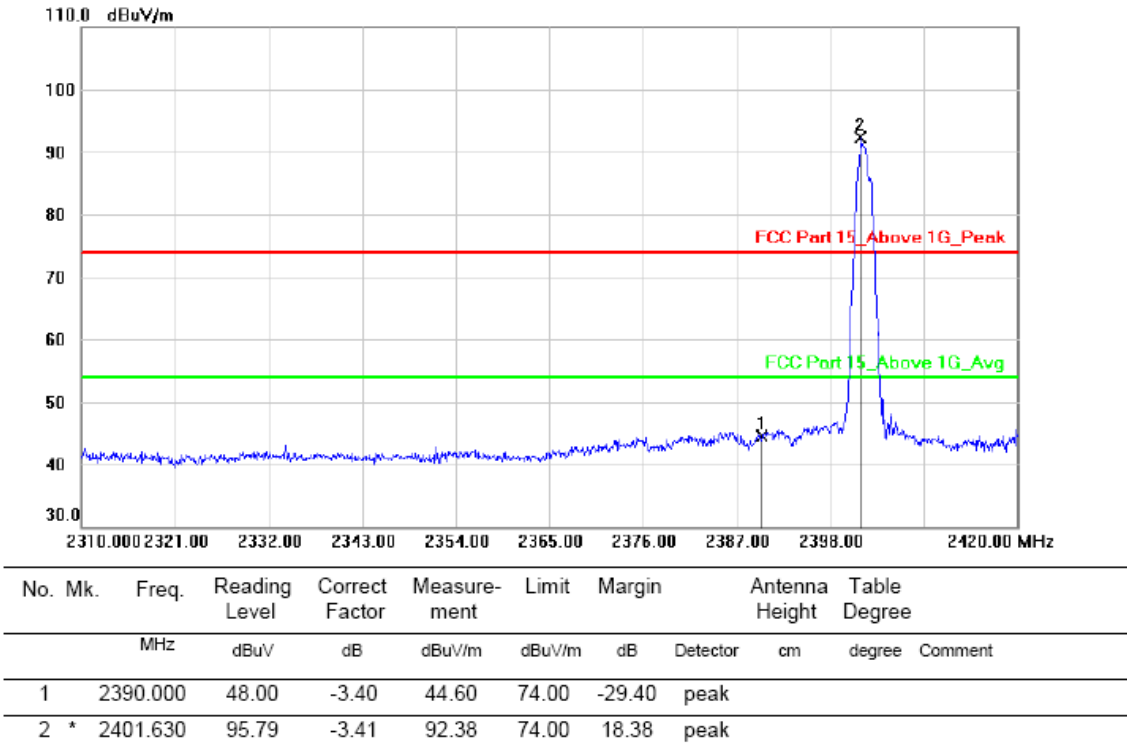

Polarization: Vertical

Test Mode:

GFSK-High

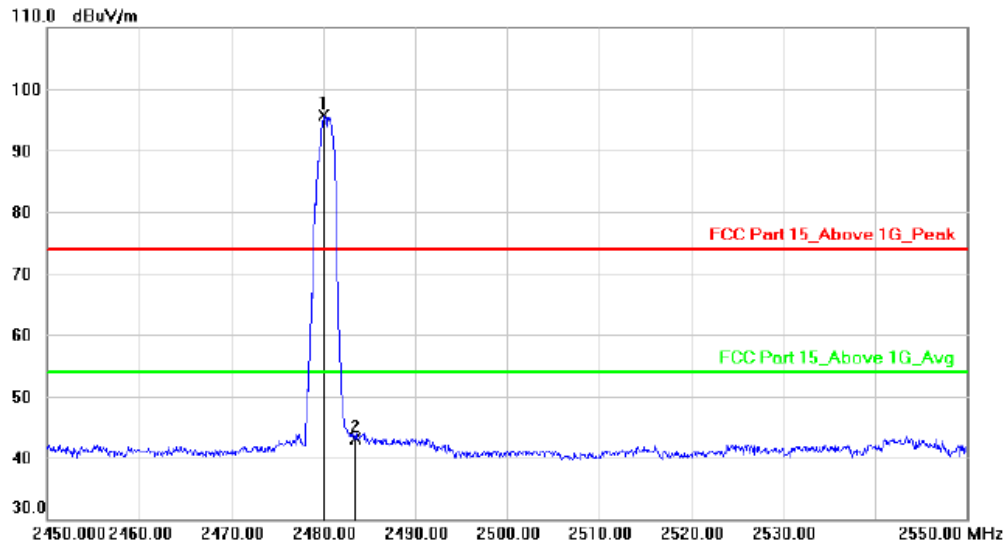


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2480.100	99.04	-3.38	95.66	74.00	21.66	peak		
2		2483.500	46.39	-3.38	43.01	74.00	-30.99	peak		

Polarization: Horizontal

Test Mode:


GFSK-High

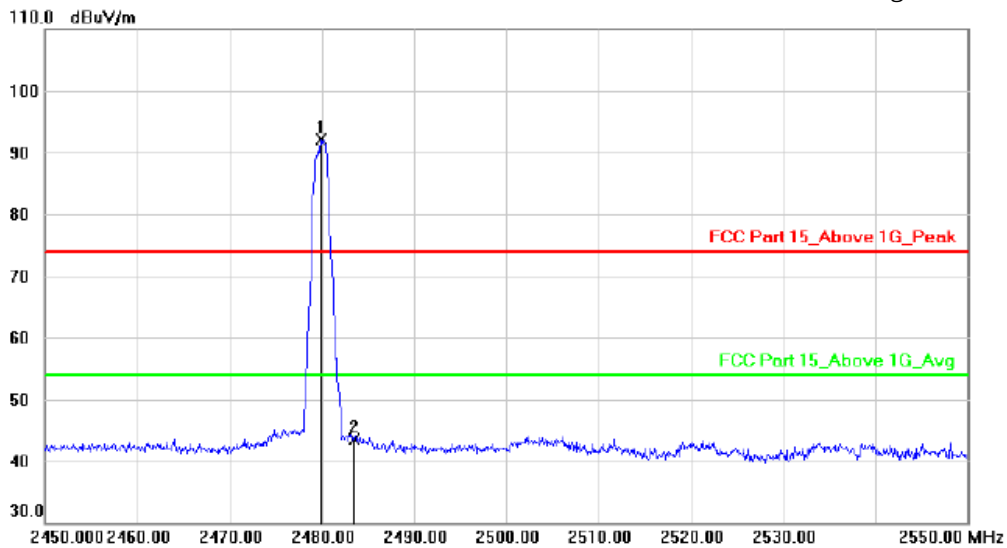


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2479.900	95.44	-3.38	92.06	74.00	18.06	peak		
2		2483.500	46.84	-3.38	43.46	74.00	-30.54	peak		

Conducted Method: GFSK

Lowest channel

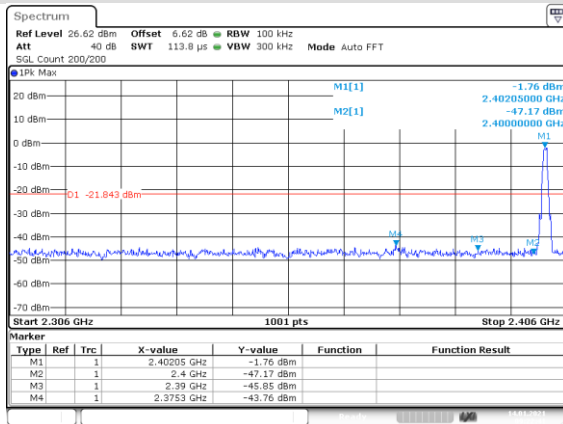

Highest channel

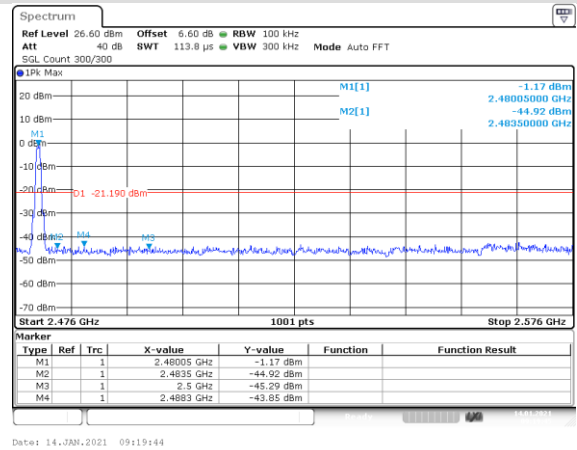

9. FREQUENCY STABILITY

9.1. Test limit


Please refer section RSS-Gen.

Regulation RSS-Gen If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

9.2. Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.3. Test Setup

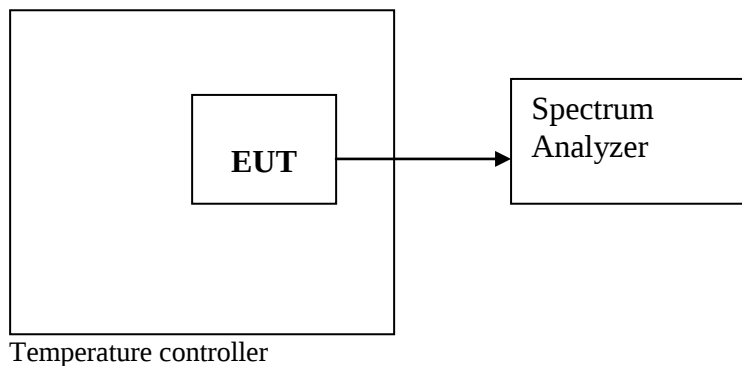

9.4. Test Results

PASS.

Detailed information please see the following page.

Assigned Frequency(MHz): 2402MHz				
Voltage	Temperature	Measured Frequency (MHz)	Frequency stability(MHz)	Limit(MHz)
Low DC 10.8V	+20°C	2401.999	-0.0010	±0.020
Normal DC 12V	-10°C	2402.002	0.0020	±0.020
	-5°C	2401.997	-0.0030	±0.020
	0°C	2402.001	0.0010	±0.020
	+10°C	2401.998	-0.0020	±0.020
	+20°C	2402.001	0.0010	±0.020
	+30°C	2401.998	-0.0020	±0.020
	+40°C	2401.997	-0.0030	±0.020
	+50°C	2401.998	-0.0020	±0.020
	+60°C	2401.996	-0.0040	±0.020
High DC 13.2V	+20°C	2401.995	-0.0050	±0.020

10.ANTENNA REQUIREMENT

10.1.Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

10.2.Antenna Connected Construction

The antenna is Internal antenna and no consideration of replacement. Please see EUT photo for details.

10.3.Results

The EUT antenna is Internal Antenna. It comply with the standard requirement.

-----THE END OF REPORT-----