



FCC&IC TEST REPORT

FCC ID: 2AYG9-TR08D

IC: 26800-TR08D

On Behalf of

SHENZHEN YECON TECHNOLOGY CO., LTD

Face recognition intelligent terminal

Model No.: TR08D

Prepared for : SHENZHEN YECON TECHNOLOGY CO., LTD
Address : 6 floor, East Second, Cuigang Industrial Park, Huai de community,
Fuyong street, Baoan District, Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2011230-C01-R17
Date of Receipt : December 15, 2020
Date of Test : December 15, 2020-January 28, 2021
Date of Report : January 28, 2021
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description.....	9
2.6. Test Conditions	10
2.7. Test Facility	10
2.8. Measurement Uncertainty.....	10
2.9. Test Equipment List	11
3. Maximum Peak Output power	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup.....	12
3.4. Test Result	12
4. Bandwidth.....	13
4.1. Limit	13
4.2. Test Procedure	13
4.3. Test Result	13
5. Carrier Frequency Separation.....	23
5.1. Limit	23
5.2. Test Procedure	23
5.3. Test Result	23
6. Number Of Hopping Channel.....	25
6.1. Limit	25
6.2. Test Procedure	25
6.3. Test Result	25
7. Dwell Time.....	27
7.1. Test limit	27
7.2. Test Procedure	27
7.3. Test Result	27
8. Radiated emissions.....	36
8.1. Limit	36
8.2. Block Diagram of Test setup	39
8.3. Test Procedure	40
8.4. Test Result	40
9. Band Edge Compliance	46

9.1. Block Diagram of Test Setup.....	46
9.2. Limit	46
9.3. Test Procedure	46
9.4. Test Result	46
10. Power Line Conducted Emissions	62
10.1. Block Diagram of Test Setup.....	62
10.2. Limit	62
10.3. Test Procedure	62
10.4. Test Result	63
11. Frequency stability.....	66
11.1. Test limit	66
11.2. Test Procedure	66
11.3. Test Setup.....	66
11.4. Test Results	66
12. Antenna Requirements	68
12.1. Limit	68
12.2. Result	68

TEST REPORT DECLARATION

Applicant : SHENZHEN YECON TECHNOLOGY CO., LTD
Address : 6 floor, East Second, Cuigang Industrial Park, Huai de community, Fuyong street,
Baoan District, Shenzhen
Manufacturer : SHENZHEN YECON TECHNOLOGY CO., LTD
Address : 6 floor, East Second, Cuigang Industrial Park, Huai de community, Fuyong street,
Baoan District, Shenzhen
EUT Description : Face recognition intelligent terminal
(A) Model No. : TR08D
(B) Trademark : /

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247,
RSS-247 Issue 2, RSS-Gen Issue 5, ANSI C63.10:2013, CISPR 16-1-4:2010**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
Project Engineer



Approved by (name + signature).....: Simple Guan
Project Manager



Date of issue..... : January 28, 2021

Revision History

Revision	Issue Date	Revisions	Revised By
V0	January 28, 2021	Initial released Issue	Lucas Pang

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) RSS-247(5.4 b) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 RSS-247(5.1 a) ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) RSS-247(5.1 b) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1) RSS-247(5.1 d) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1) RSS-247(5.1 d) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 RSS-GEN(8.8) ANSI C63.10 :2013	P
Frequency stability	RSS-GEN(6.11)	P
Antenna requirement	FCC Part 15: 15.203 RSS-GEN(6.8)	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description/PMN : Face recognition intelligent terminal

Model : TR08D

Number/HVIN(s)

Diff. : /

Trademark : /

Test Voltage : DC 12V from adapter

Radio Technology : Bluetooth(BDR, EDR)

Operation frequency : 2402-2480MHz

Channel No. : 79 Channels for Bluetooth V5.0 (BDR/EDR)

Channel Separation : 1MHz for Bluetooth V5.0 (BDR/EDR)

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth V5.0(BDR/EDR)

Antenna Type : Internal antenna, Maximum Gain is -1.05dBi.

Software version : V1.0

Hardware Version/
FVIN : YT-23-MB-V2.3

Remark:

1. The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for Bluetooth V5.0 EDR function, and there is no other transmitter involved.
2. In this report, the main test model is TR08D, and the main test model serial number is YGKJ20208110041.

2.2.Accessories of Device (EUT)

Accessories1	:	AC/DC ADAPTER
Manufacturer	:	Shenzhen Jiuzhou Power Technology Co., LTD
Model	:	JZB024-120180D
Ratings	:	Input: 100-240V~ 50/60Hz 0.7A Output: 12.0V=1.8A


Accessories2	:	AC ADAPTER
Manufacturer	:	Dongguan Guanjin Electronics Technology Co., Ltd
Model	:	K25V120180E2
Ratings	:	Input: 100-240V~50/60Hz 0.6A Output: 12.0V=1.8A 21.6W

Note: The two power adapters of the product have been tested. This report only reflects the data of the worst power supply (JZB024-120180D).

2.3.Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	N/A	N/A	N/A	N/A	N/A

2.4.Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

The test software “RFTestTool.app” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8-DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK / 8-DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	25℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9.Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2020.09.02	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2020.09.02	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2020.09.02	1Year
Receiver	R&S	ESCI	101165	2020.09.02	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2020.04.12	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2020.09.02	1Year
Cable	Resenberger	N/A	No.2	2020.09.02	1Year
Cable	Resenberger	N/A	No.3	2020.09.02	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2020.09.02	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2020.09.02	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2020.09.02	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2020.09.02	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2020.09.02	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2019.09.07	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2020.09.02	1 Year
Power Meter	Agilent	E9300A	MY41496625	2020.09.02	1 Year
Temp. &Humid. Chamber	Weihuang	WHTH-1000-40-8 80	100631	2020.09.02	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2020.09.02	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1.Limit


Please refer FCC part 15.247 & RSS-247..

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2.Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3.Test Setup



3.4.Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	0.484	21	Pass
	2441	1.567	21	Pass
	2480	0.336	21	Pass
π /4 DQPSK	2402	-1.936	21	Pass
	2441	-0.063	21	Pass
	2480	-1.565	21	Pass
8- DPSK	2402	-1.304	21	Pass
	2441	0.191	21	Pass
	2480	-1.413	21	Pass
Conclusion: PASS				

4. BANDWIDTH

4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3.Test Result


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant 1	0.9115	1.0388	/	Pass
NVNT	1-DH1	2441	Ant 1	0.9331	0.9772	/	Pass
NVNT	1-DH1	2480	Ant 1	0.9693	1.0412	/	Pass
NVNT	2-DH1	2402	Ant 1	1.2165	1.3354	/	Pass
NVNT	2-DH1	2441	Ant 1	1.1937	1.3412	/	Pass
NVNT	2-DH1	2480	Ant 1	1.2027	1.3298	/	Pass
NVNT	3-DH1	2402	Ant 1	1.1827	1.3018	/	Pass
NVNT	3-DH1	2441	Ant 1	1.1759	1.2848	/	Pass
NVNT	3-DH1	2480	Ant 1	1.1695	1.2802	/	Pass

OBW NVNT 1-DH1 2402MHz Ant1

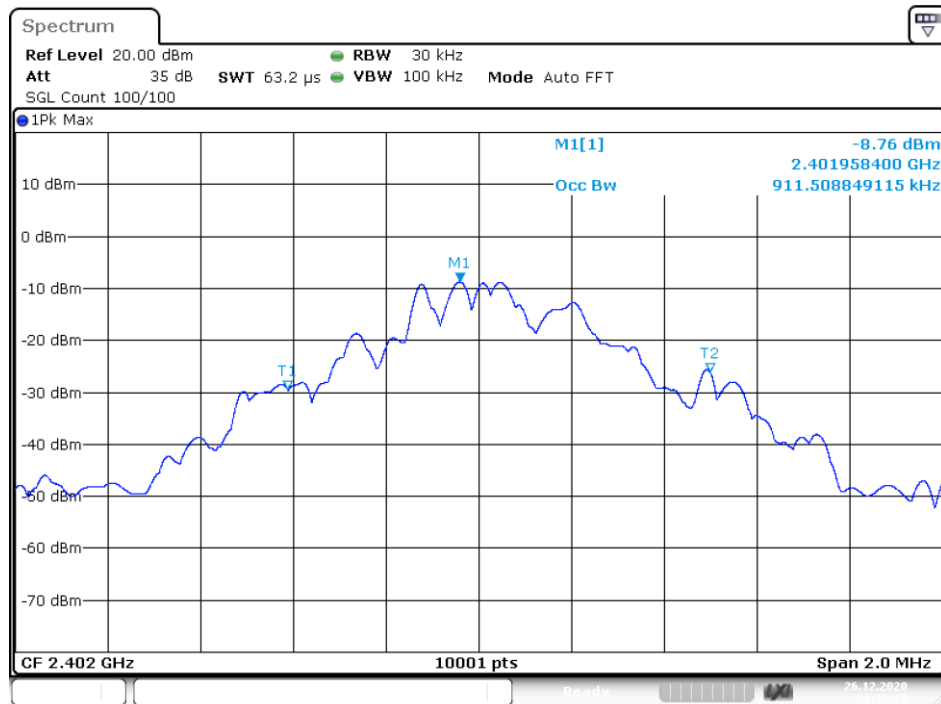


Date: 26.DEC.2020 09:30:10

-20 dB BW NVNT 1-DH1 2402MHz Ant1

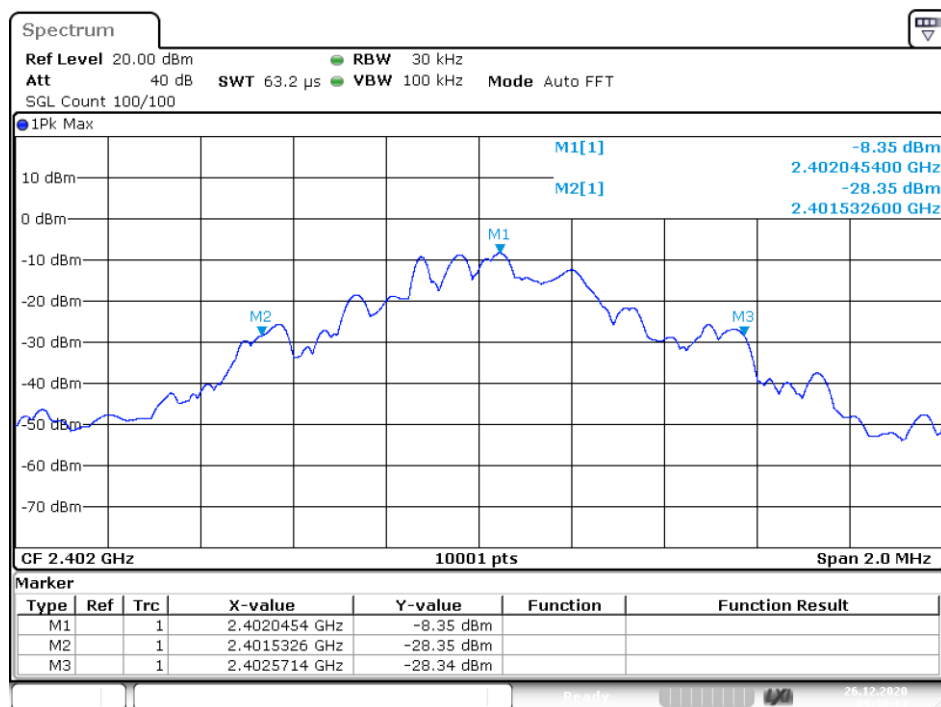


Date: 26.DEC.2020 09:30:13

OBW NVNT 1-DH1 2441MHz Ant1

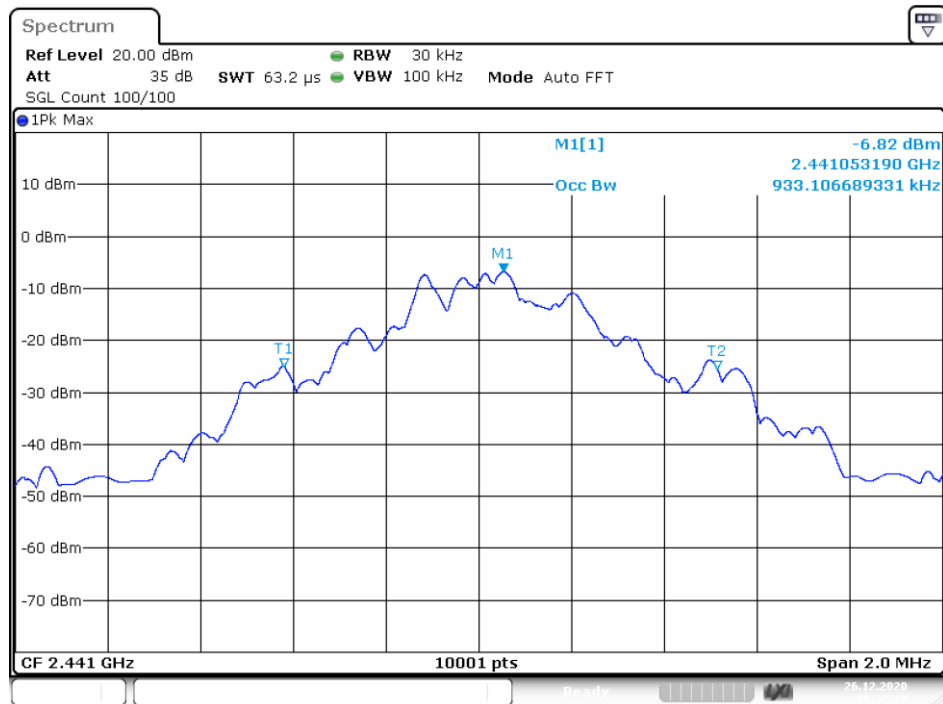


Date: 26.DEC.2020 09:32:10

-20 dB BW NVNT 1-DH1 2441MHz Ant1

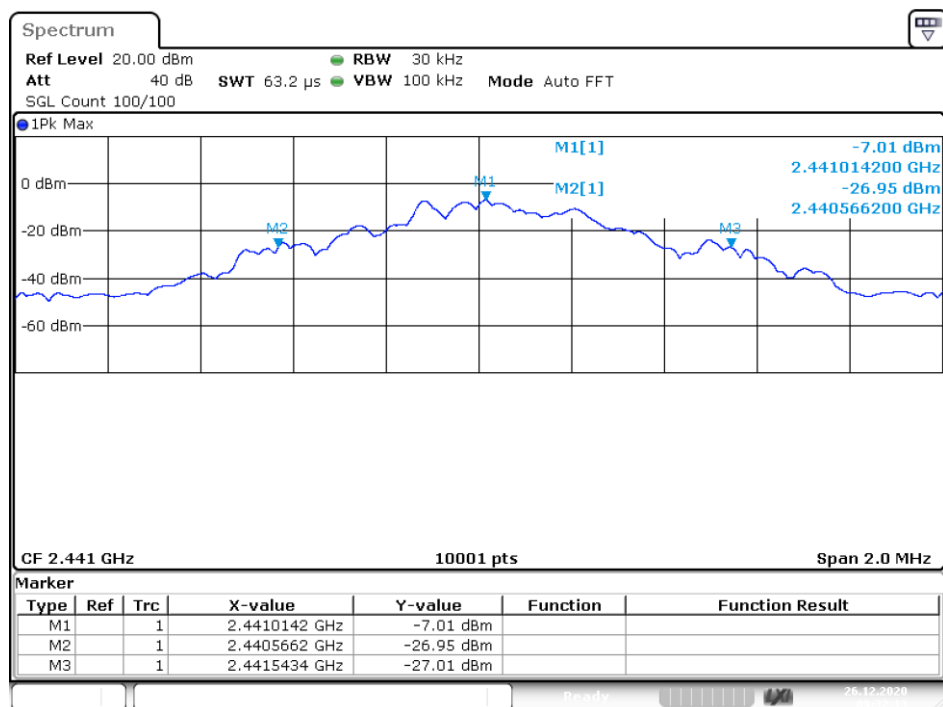


Date: 26.DEC.2020 09:32:13

OBW NVNT 1-DH1 2480MHz Ant1

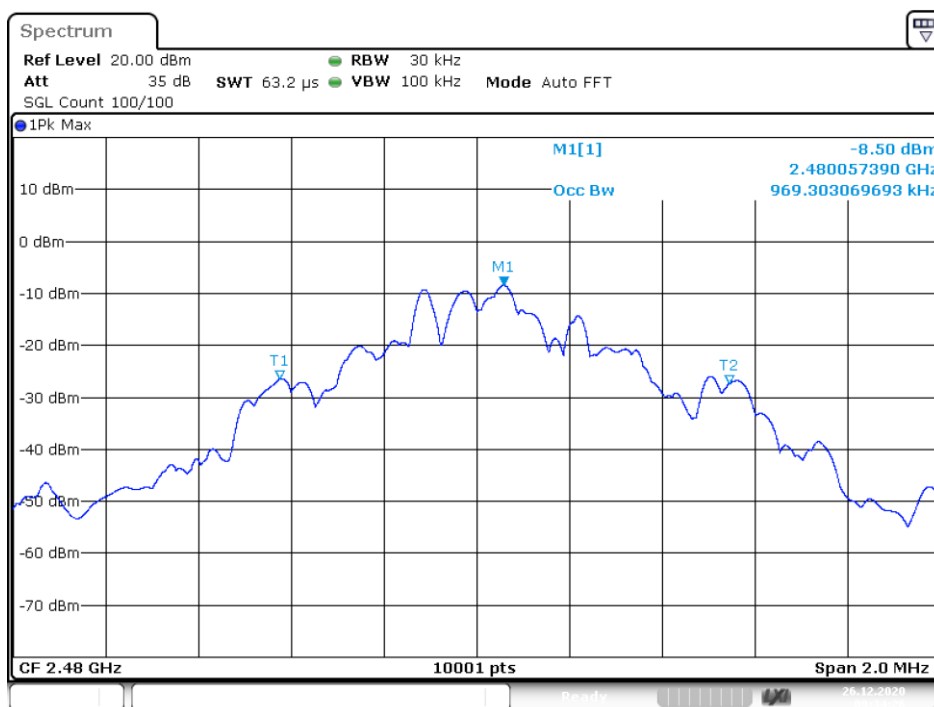


Date: 26.DEC.2020 09:34:25

-20 dB BW NVNT 1-DH1 2480MHz Ant1

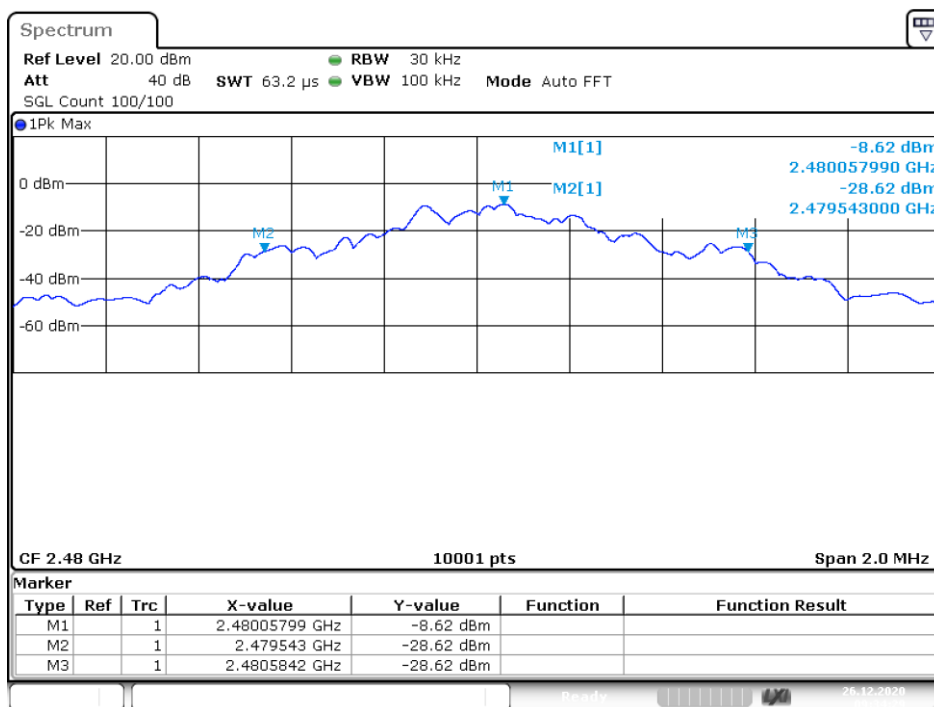


Date: 26.DEC.2020 09:34:28

OBW NVNT 2-DH1 2402MHz Ant1

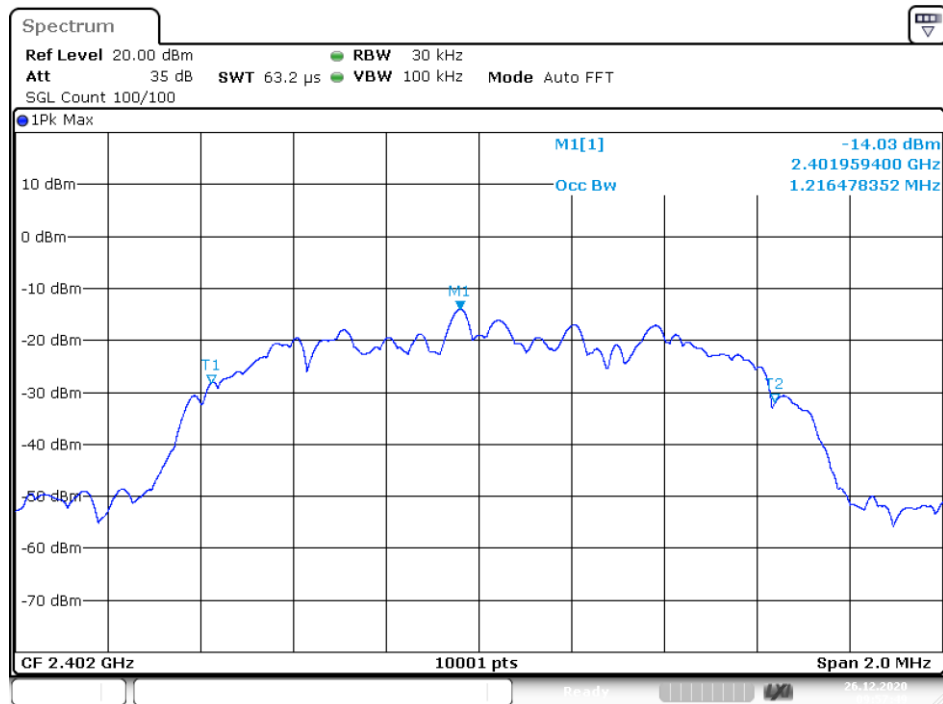


Date: 26.DEC.2020 09:57:48

-20 dB BW NVNT 2-DH1 2402MHz Ant1

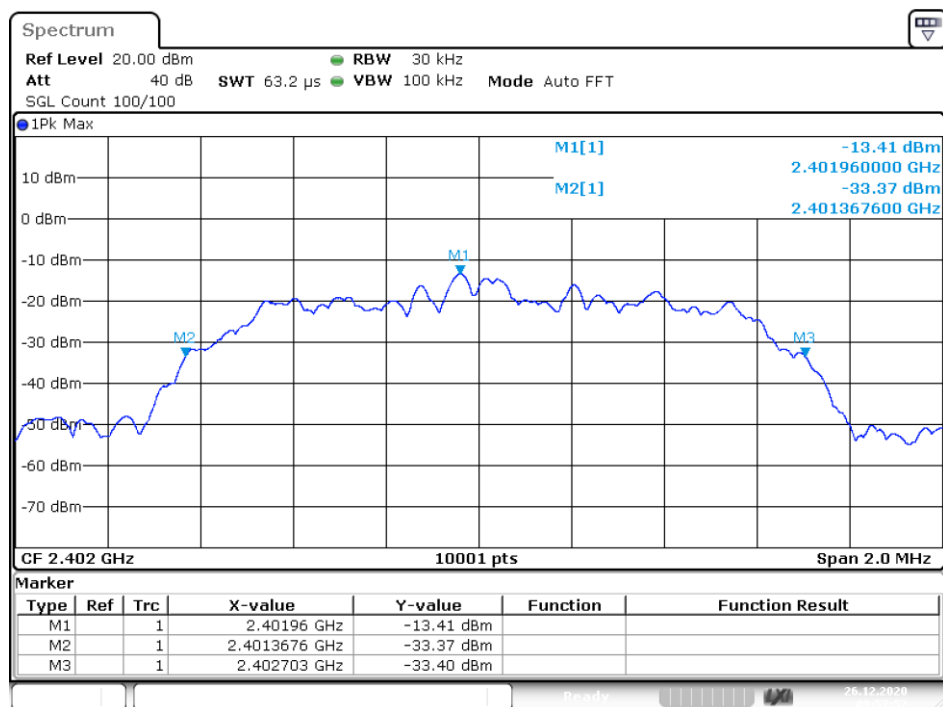


Date: 26.DEC.2020 09:57:52

OBW NVNT 2-DH1 2441MHz Ant1

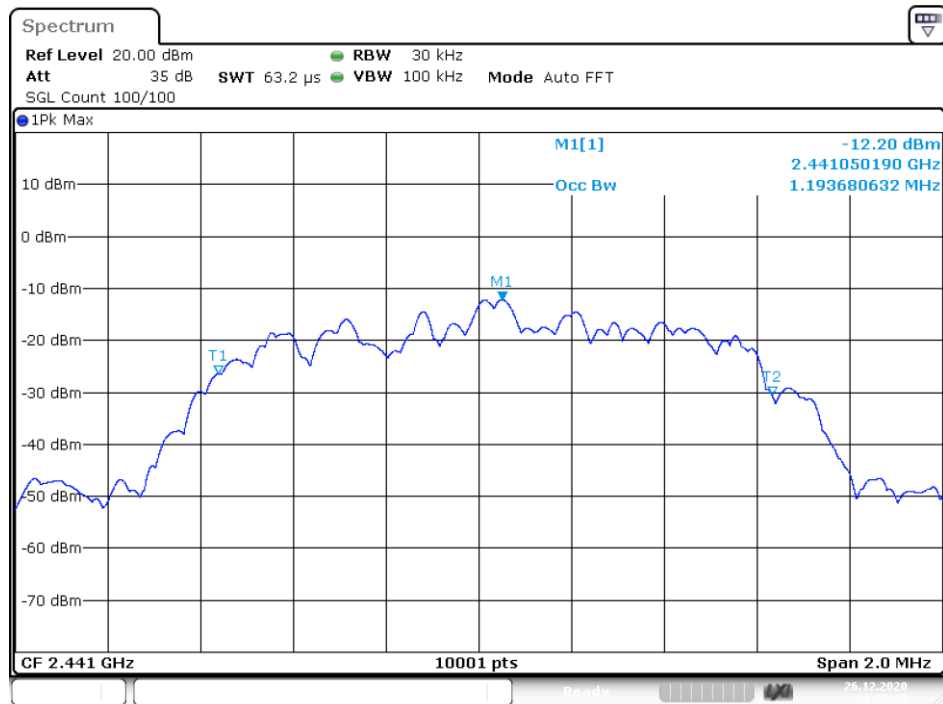


Date: 26.DEC.2020 09:52:22

-20 dB BW NVNT 2-DH1 2441MHz Ant1

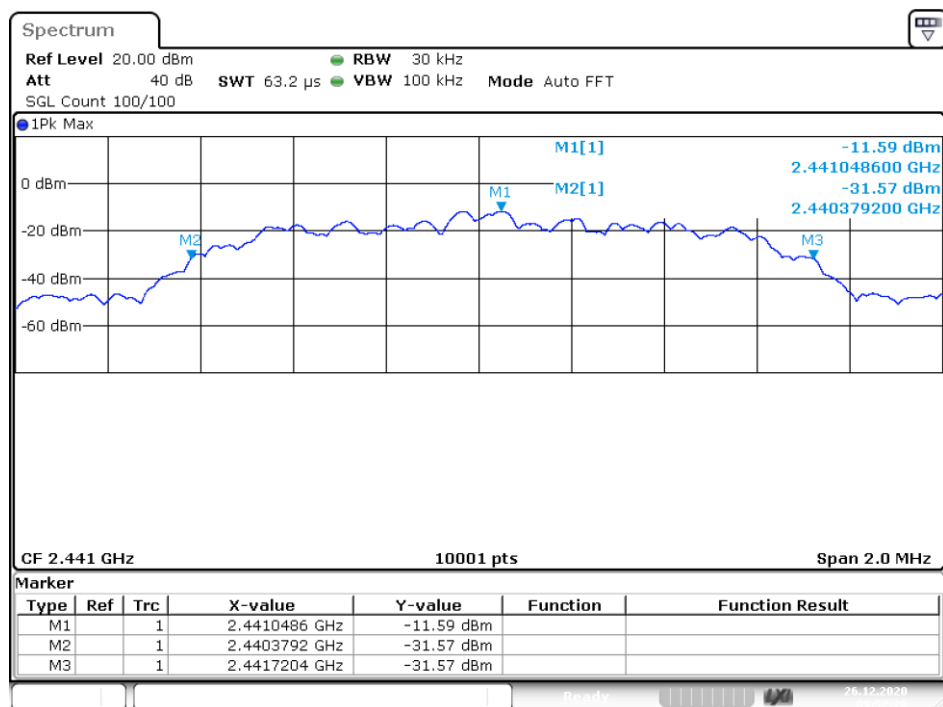


Date: 26.DEC.2020 09:52:25

OBW NVNT 2-DH1 2480MHz Ant1

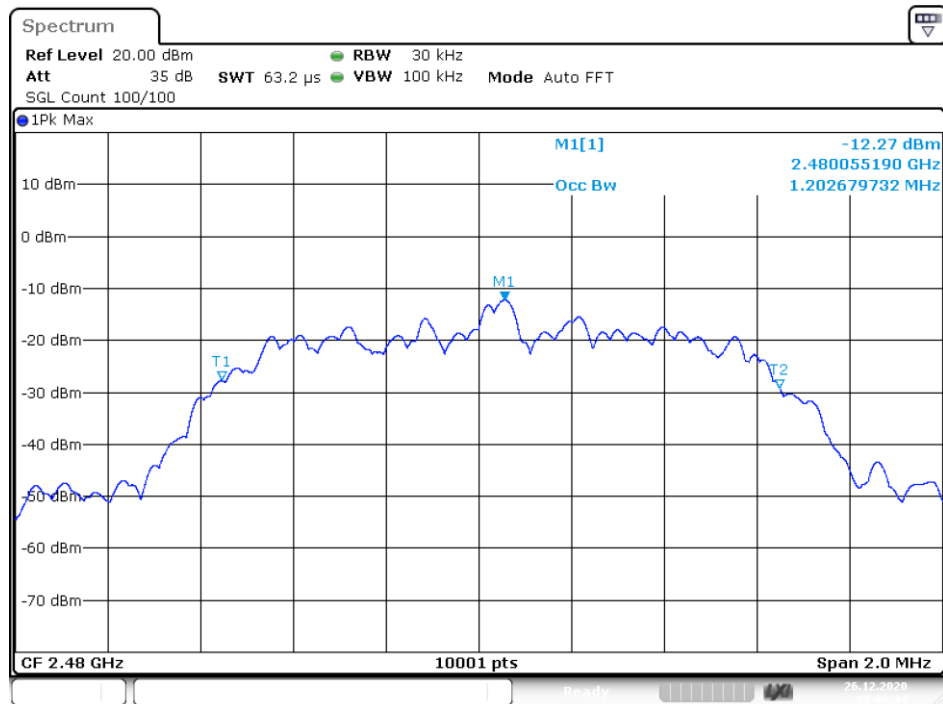


Date: 26.DEC.2020 10:00:33

-20 dB BW NVNT 2-DH1 2480MHz Ant1

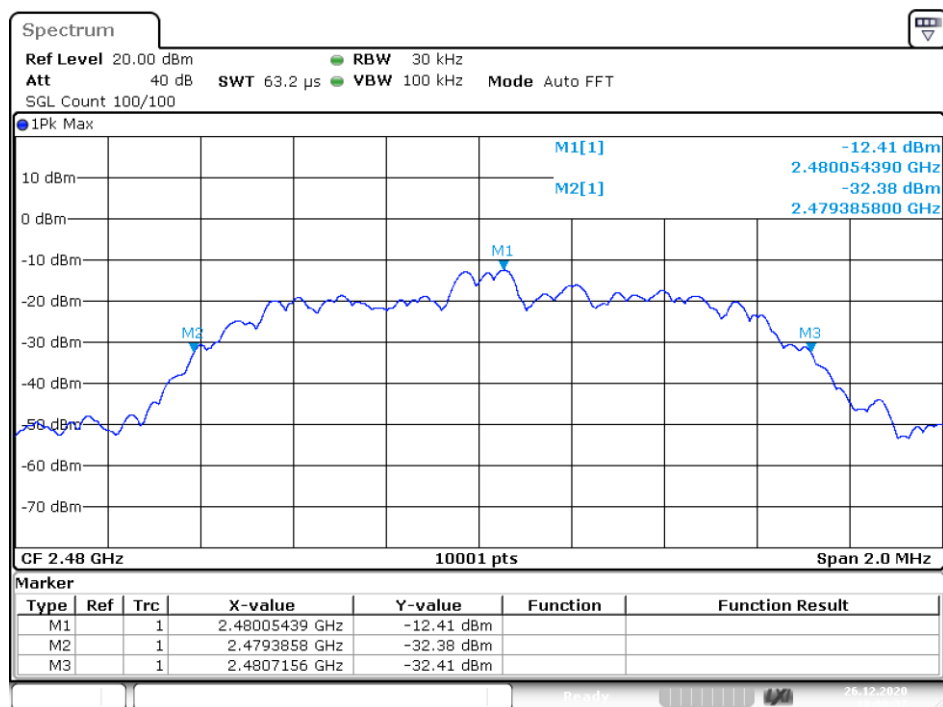


Date: 26.DEC.2020 10:00:37

OBW NVNT 3-DH1 2402MHz Ant1

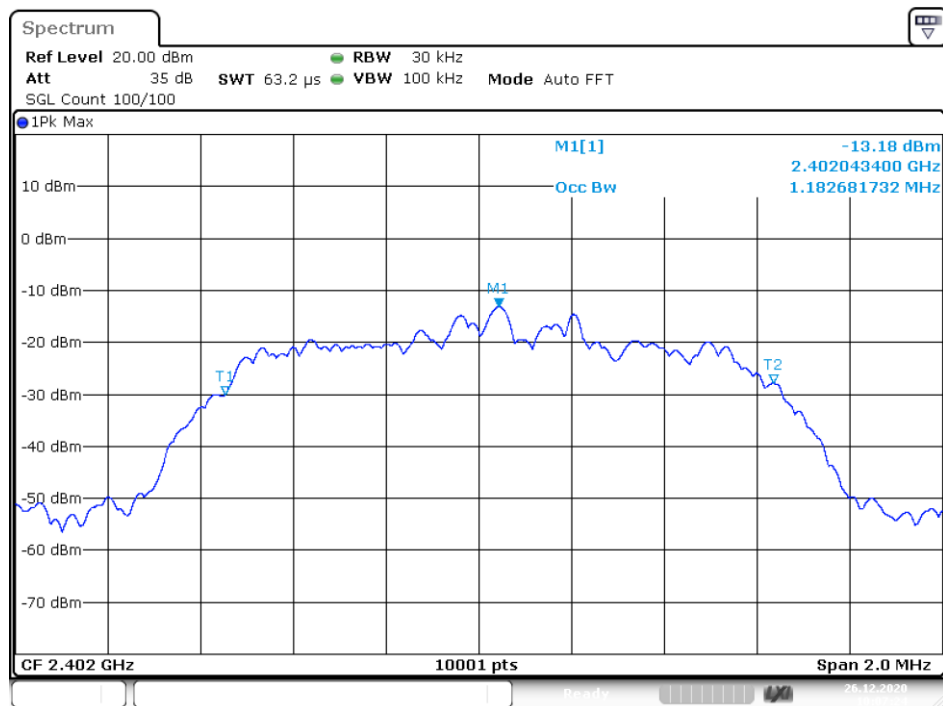


Date: 26.DEC.2020 10:07:24

-20 dB BW NVNT 3-DH1 2402MHz Ant1

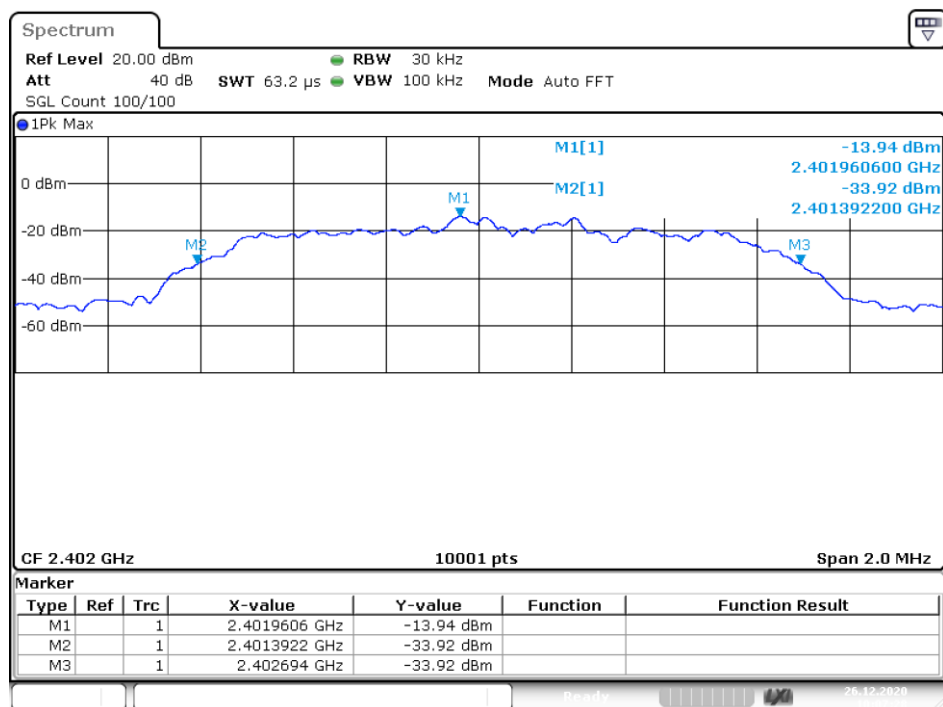


Date: 26.DEC.2020 10:07:27

OBW NVNT 3-DH1 2441MHz Ant1

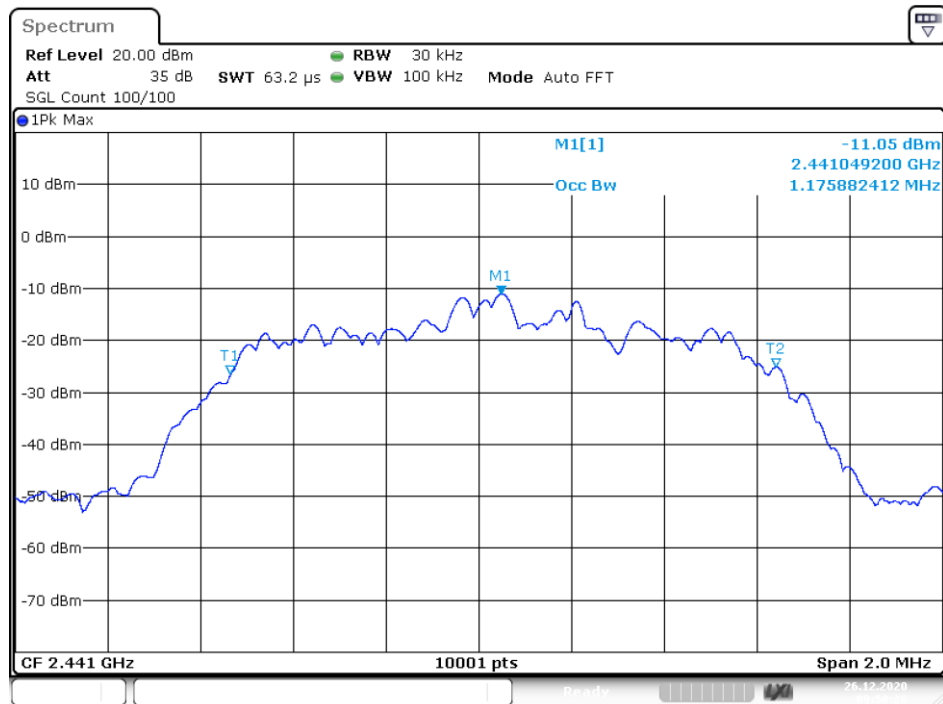


Date: 26.DEC.2020 09:50:28

-20 dB BW NVNT 3-DH1 2441MHz Ant1

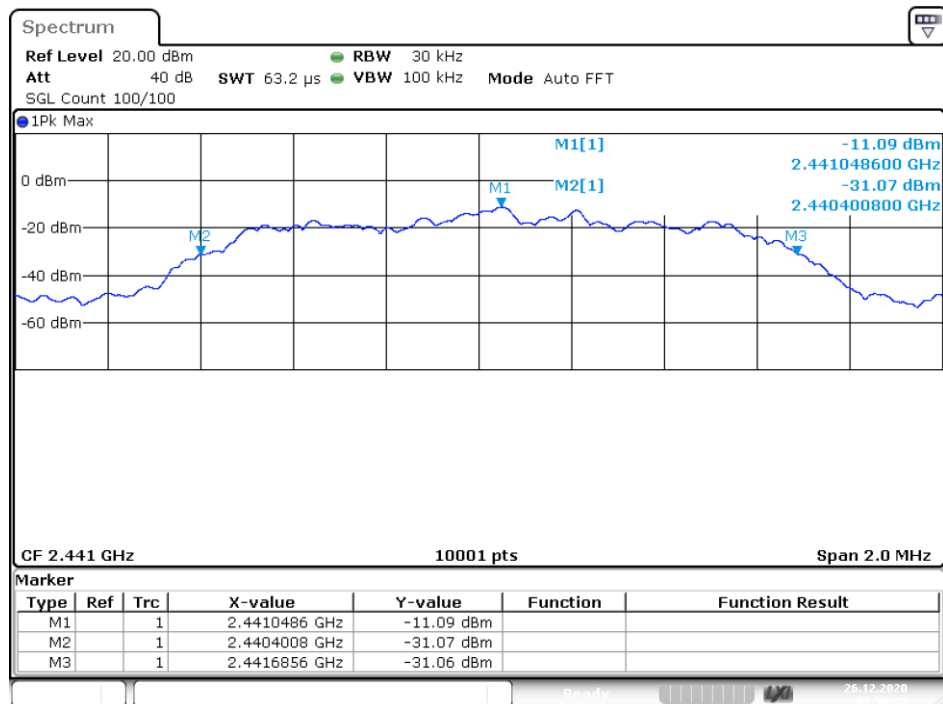


Date: 26.DEC.2020 09:50:31

OBW NVNT 3-DH1 2480MHz Ant1

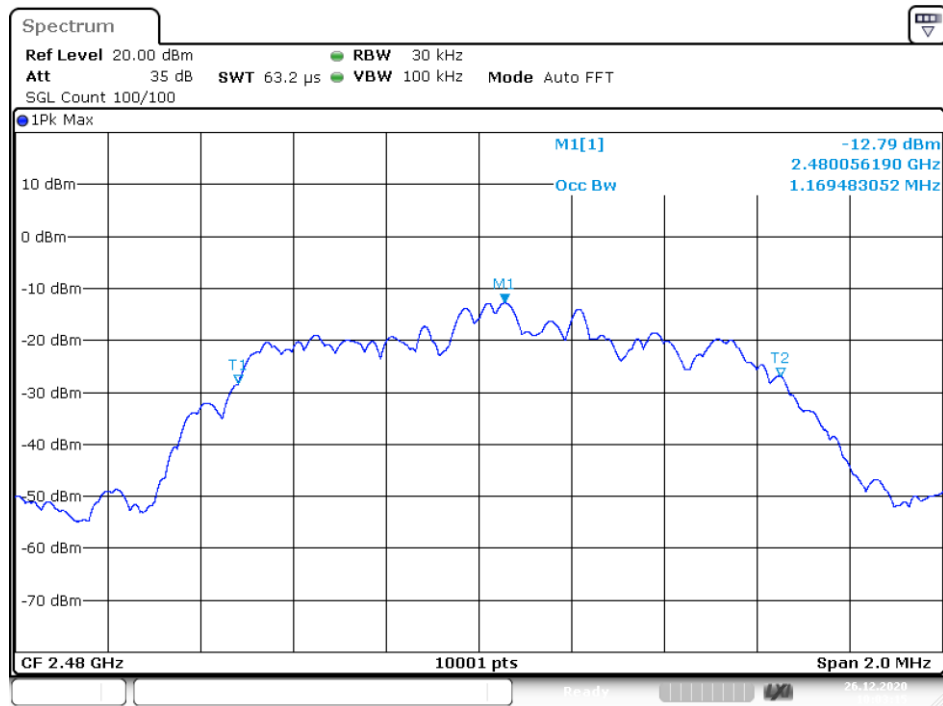

Date: 26.DEC.2020 10:03:15

-20 dB BW NVNT 3-DH1 2480MHz Ant1

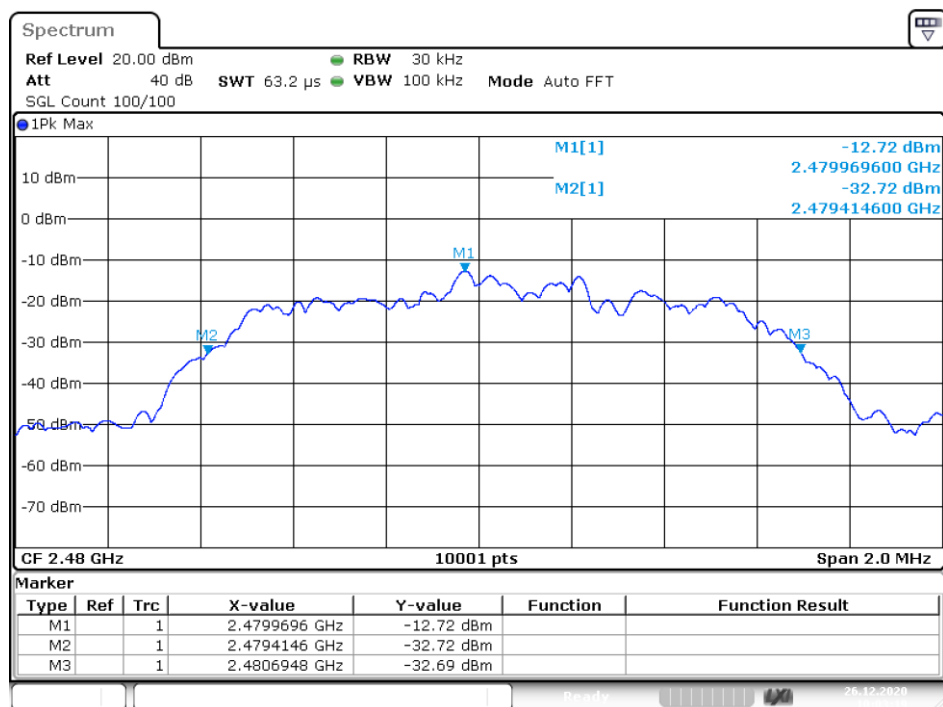

Date: 26.DEC.2020 10:03:18

5. CARRIER FREQUENCY SEPARATION

5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3.Test Result


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2441.202	2442.2	0.998	0.667	Pass
NVNT	2-DH1	2441.042	2442.054	1.012	0.667	Pass
NVNT	3-DH1	2441.044	2442.046	1.002	0.667	Pass

CFS NVNT 1-DH1 2441MHz

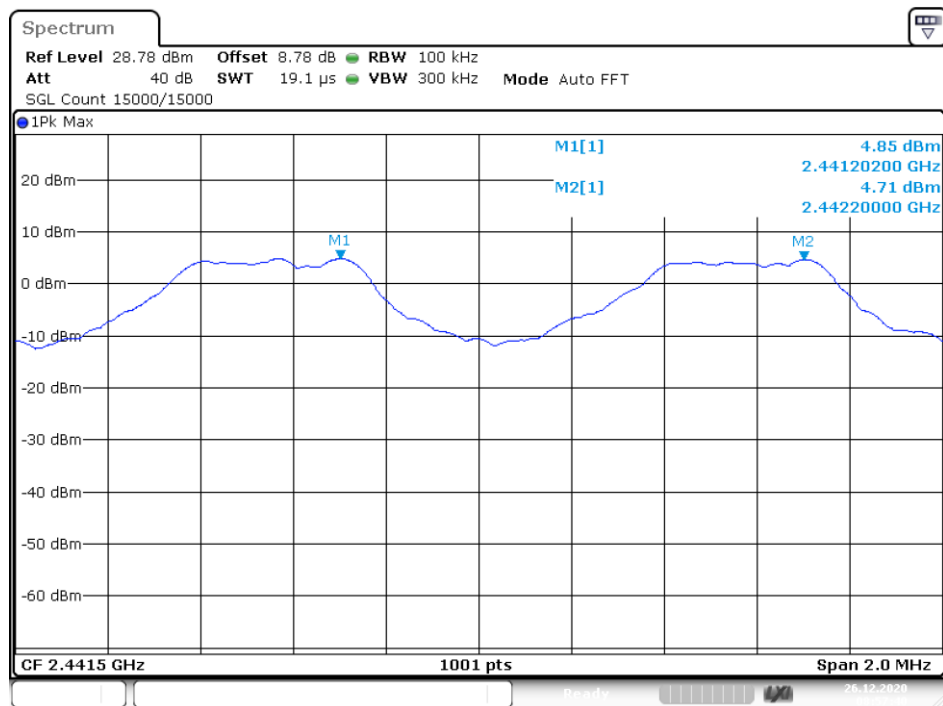


Date: 26.DEC.2020 08:57:40

CFS NVNT 2-DH1 2441MHz

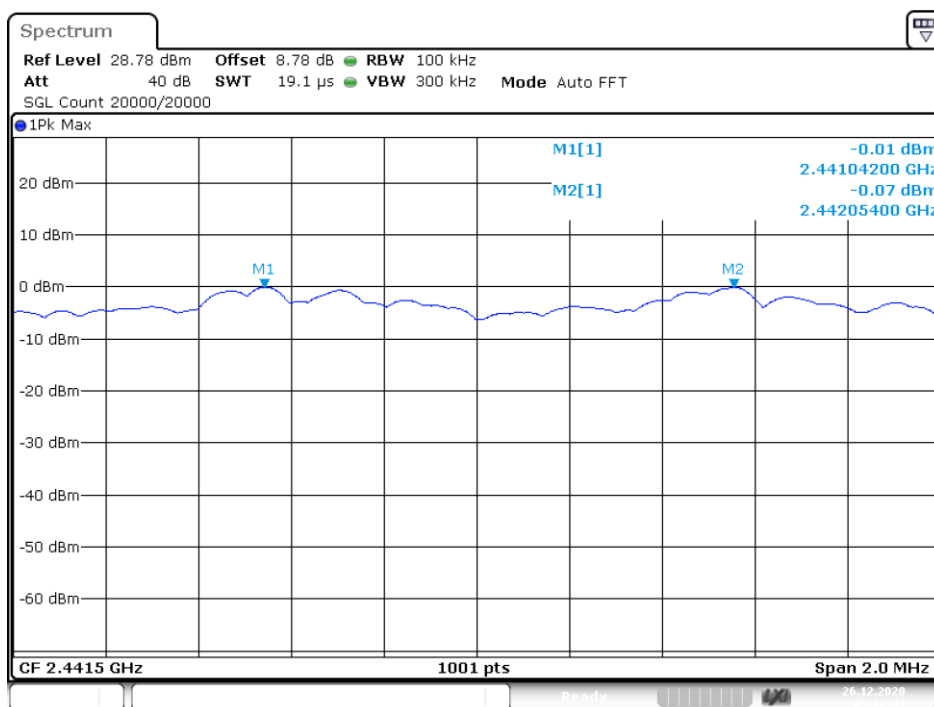

Date: 26.DEC.2020 09:12:41

CFS NVNT 3-DH1 2441MHz

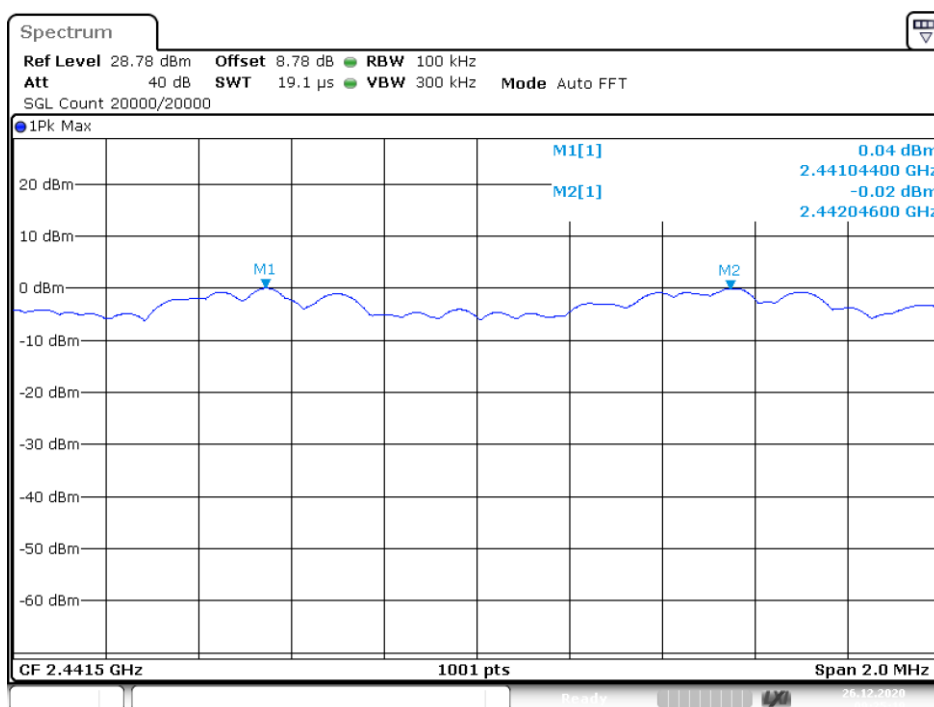

Date: 26.DEC.2020 09:25:19

6. NUMBER OF HOPPING CHANNEL

6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3.Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz

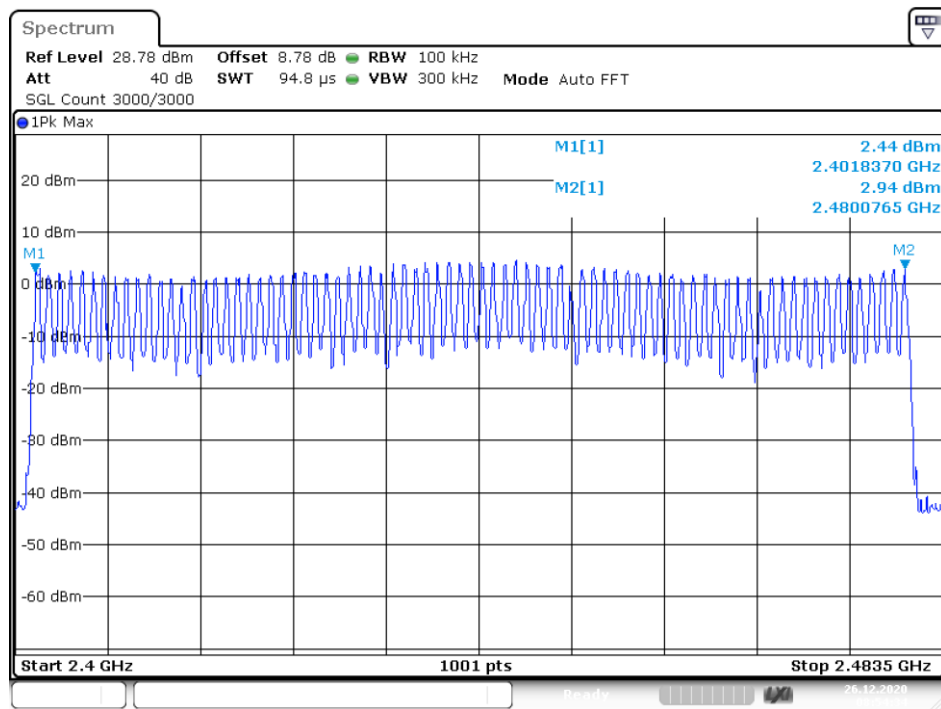


Date: 26.DEC.2020 08:54:33

Hopping No. NVNT 2-DH1 2441MHz

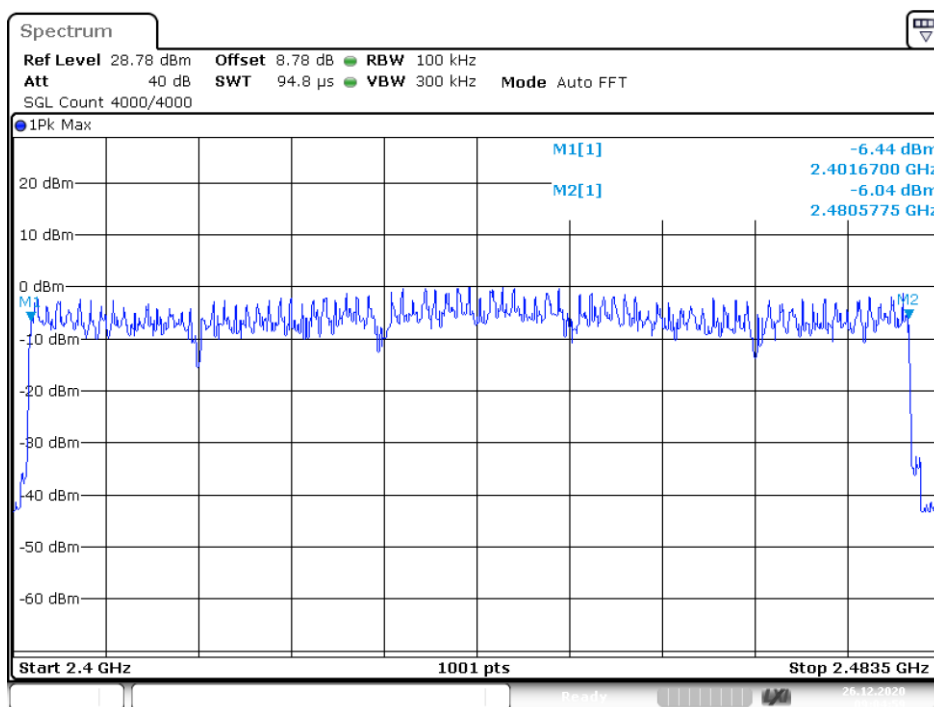

Date: 26.DEC.2020 09:04:59

Hopping No. NVNT 3-DH1 2441MHz

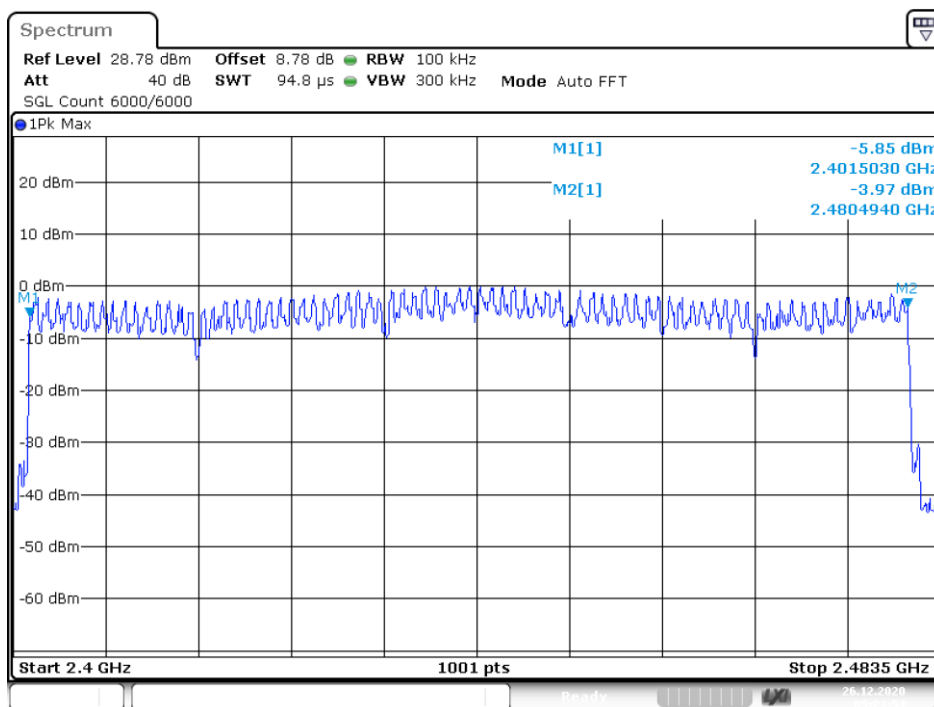

Date: 26.DEC.2020 09:21:54

7. DWELL TIME

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.


7.3. Test Result

PASS.

Detailed information please see the following page.


Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	0.383	121.028	31600	400	Pass
NVNT	1-DH1	2441	0.383	121.091	31600	400	Pass
NVNT	1-DH1	2480	0.383	120.965	31600	400	Pass
NVNT	1-DH3	2441	1.639	258.899	31600	400	Pass
NVNT	1-DH5	2441	2.887	273.669	31600	400	Pass
NVNT	2-DH1	2402	0.383	121.028	31600	400	Pass
NVNT	2-DH1	2441	0.389	122.798	31600	400	Pass
NVNT	2-DH1	2460	0.389	122.798	31600	400	Pass
NVNT	2-DH3	2441	1.634	258.235	31600	400	Pass
NVNT	2-DH5	2441	2.888	273.82	31600	400	Pass
NVNT	3-DH1	2402	0.388	122.734	31600	400	Pass
NVNT	3-DH1	2441	0.388	122.734	31600	400	Pass
NVNT	3-DH1	2480	0.388	122.734	31600	400	Pass
NVNT	3-DH3	2441	1.639	258.994	31600	400	Pass
NVNT	3-DH5	2441	2.89	274.01	31600	400	Pass

Dwell NVNT 1-DH1 2402MHz

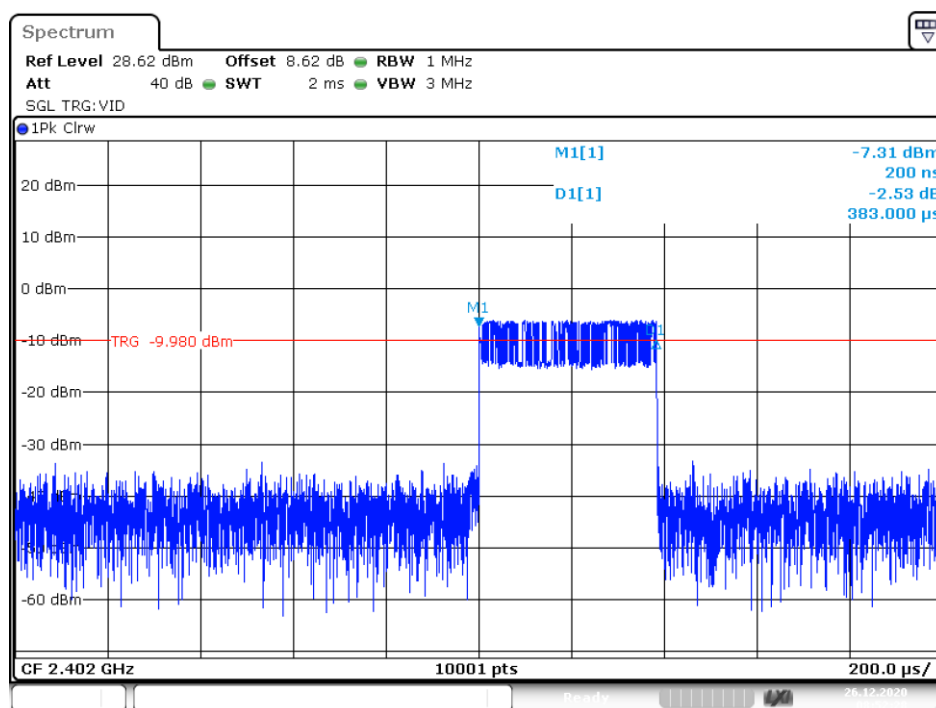


Date: 26.DEC.2020 08:52:28

Dwell NVNT 1-DH1 2441MHz

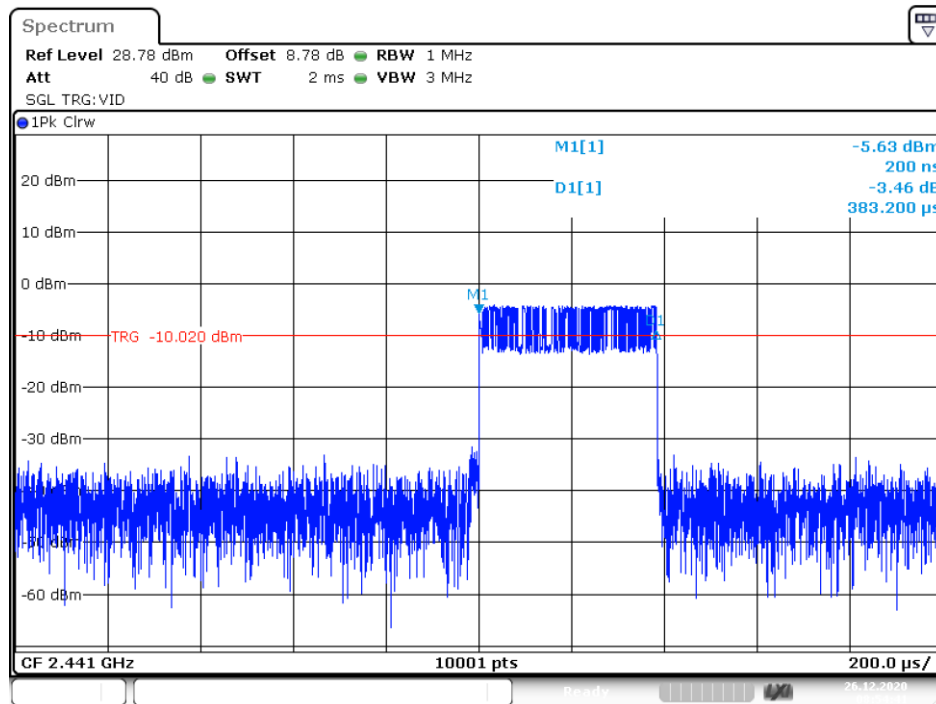


Date: 26.DEC.2020 08:54:40

Dwell NVNT 1-DH1 2480MHz

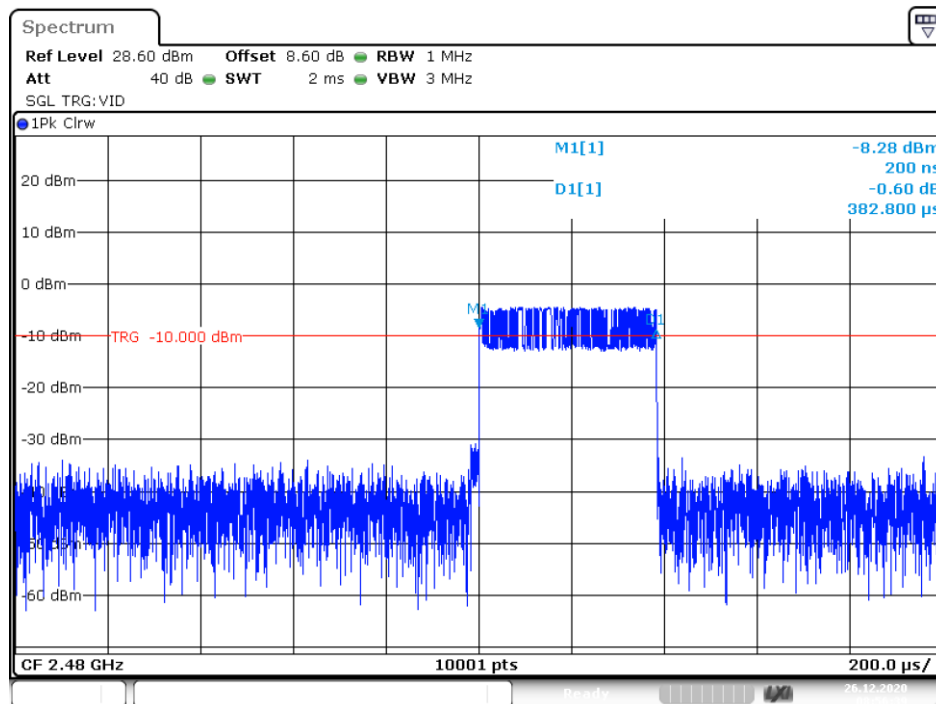


Date: 26.DEC.2020 08:56:38

Dwell NVNT 2-DH1 2402MHz

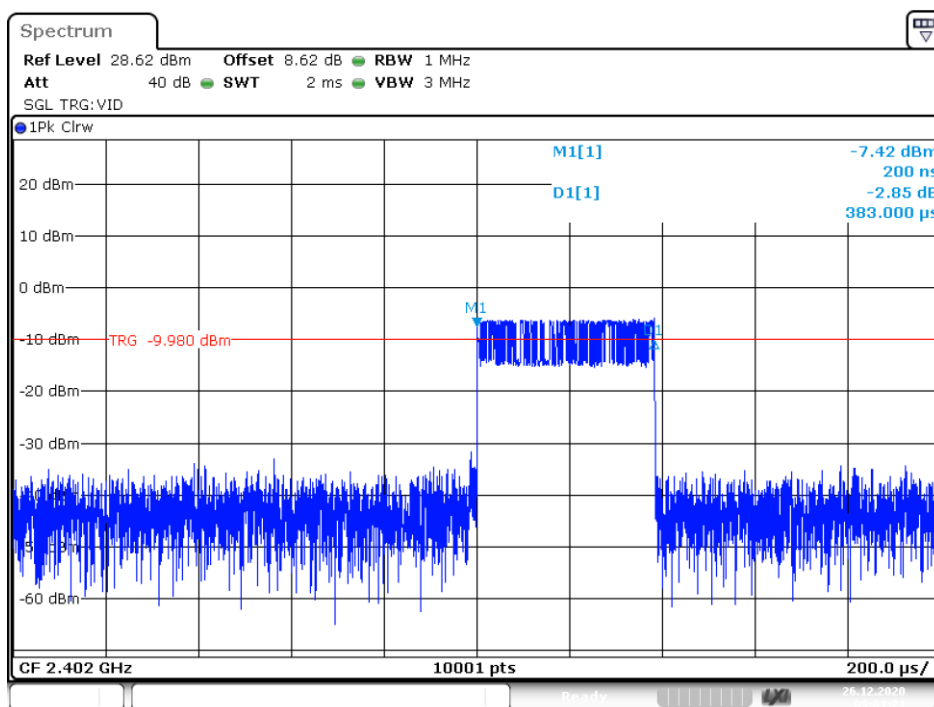


Date: 26.DEC.2020 09:01:21

Dwell NVNT 2-DH1 2441MHz

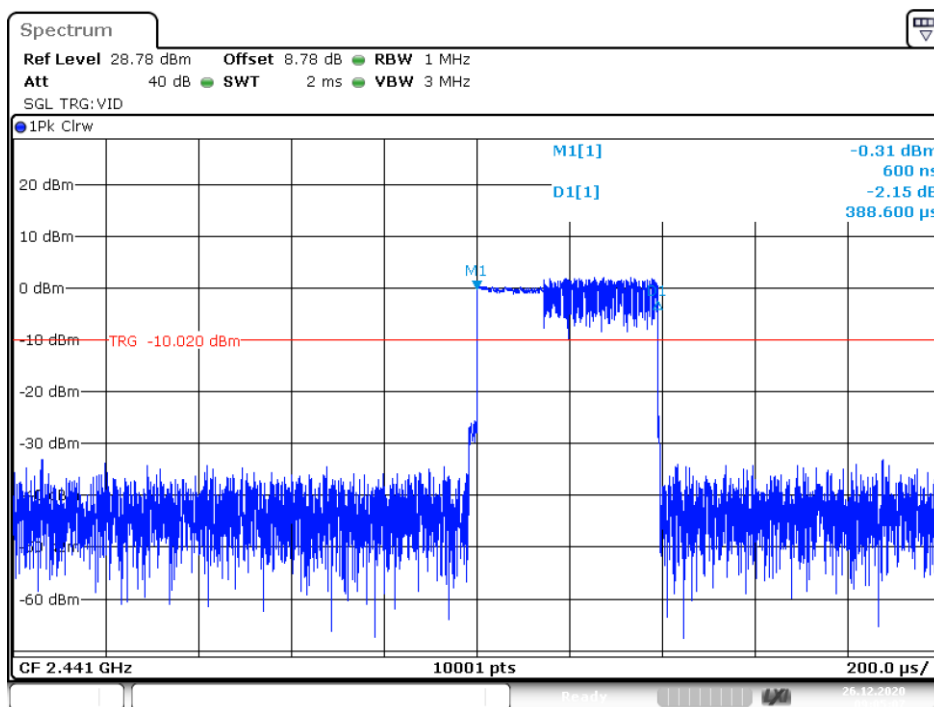


Date: 26.DEC.2020 09:05:07

Dwell NVNT 2-DH1 2460MHz

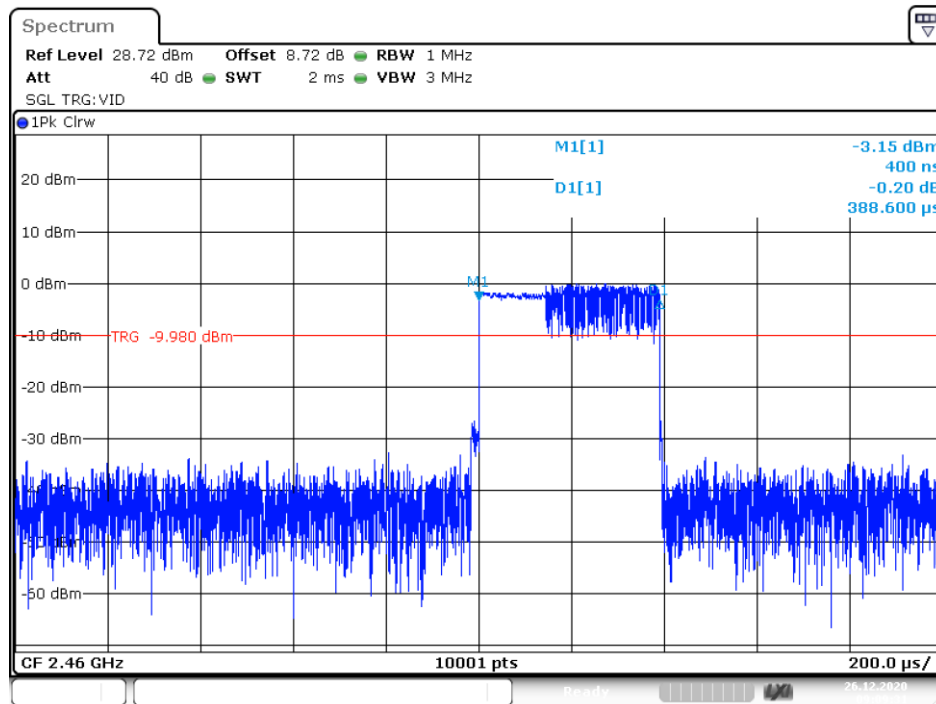


Date: 26.DEC.2020 09:09:30

Dwell NVNT 2-DH3 2441MHz

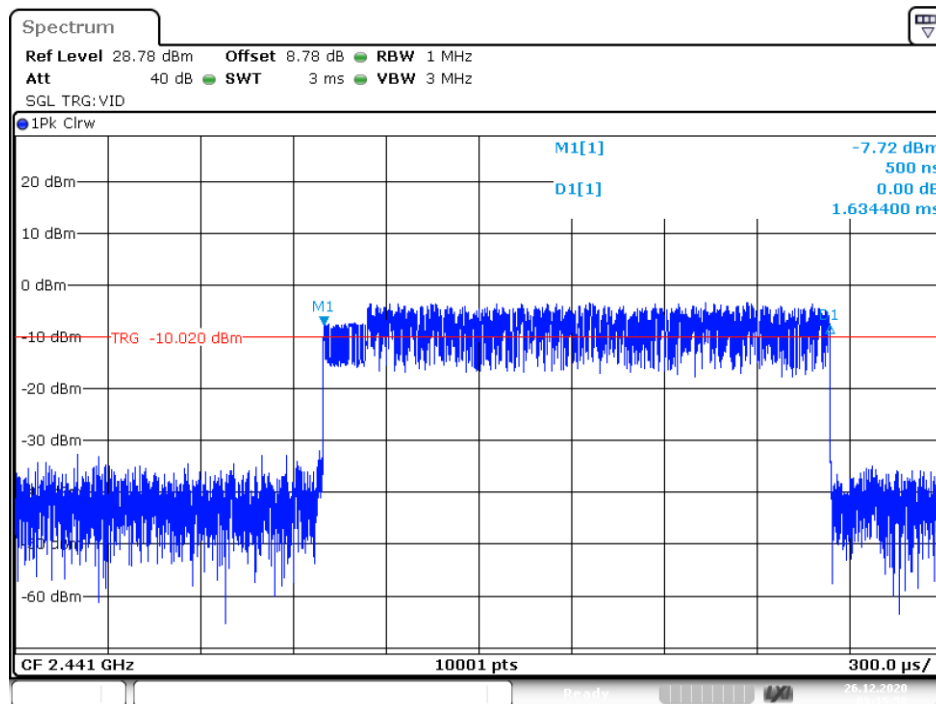


Date: 26.DEC.2020 09:15:58

Dwell NVNT 2-DH5 2441MHz

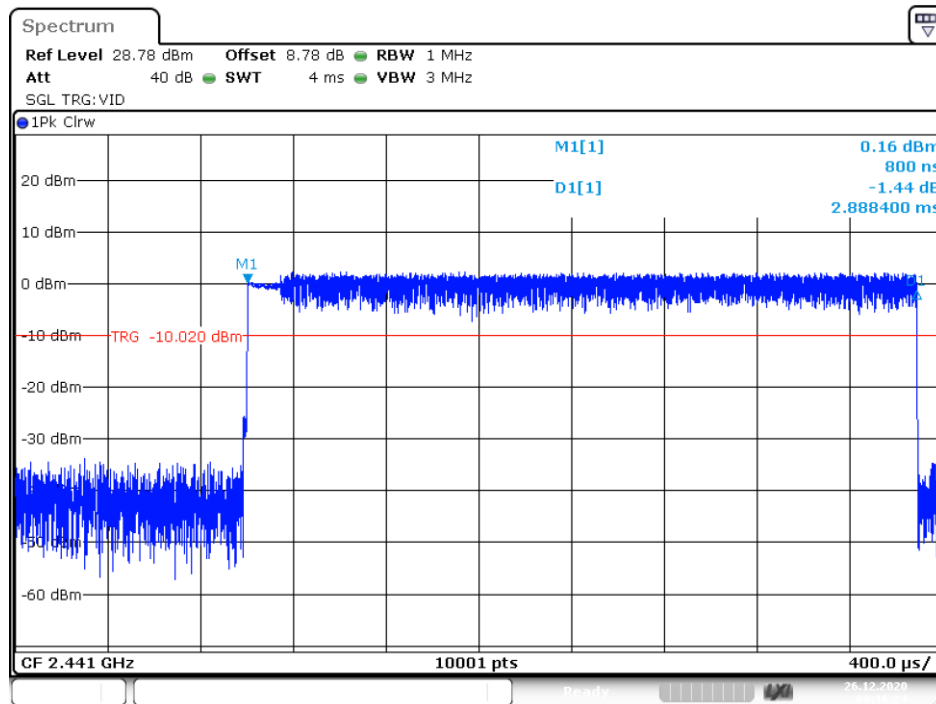


Date: 26.DEC.2020 09:16:24

Dwell NVNT 3-DH1 2402MHz

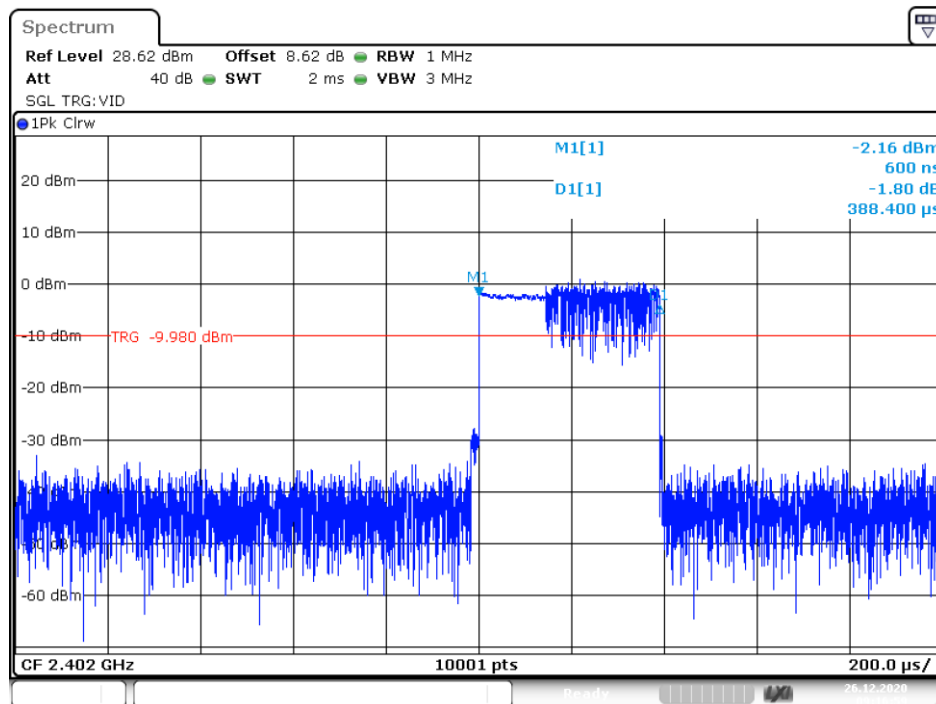


Date: 26.DEC.2020 09:16:59

Dwell NVNT 3-DH1 2441MHz

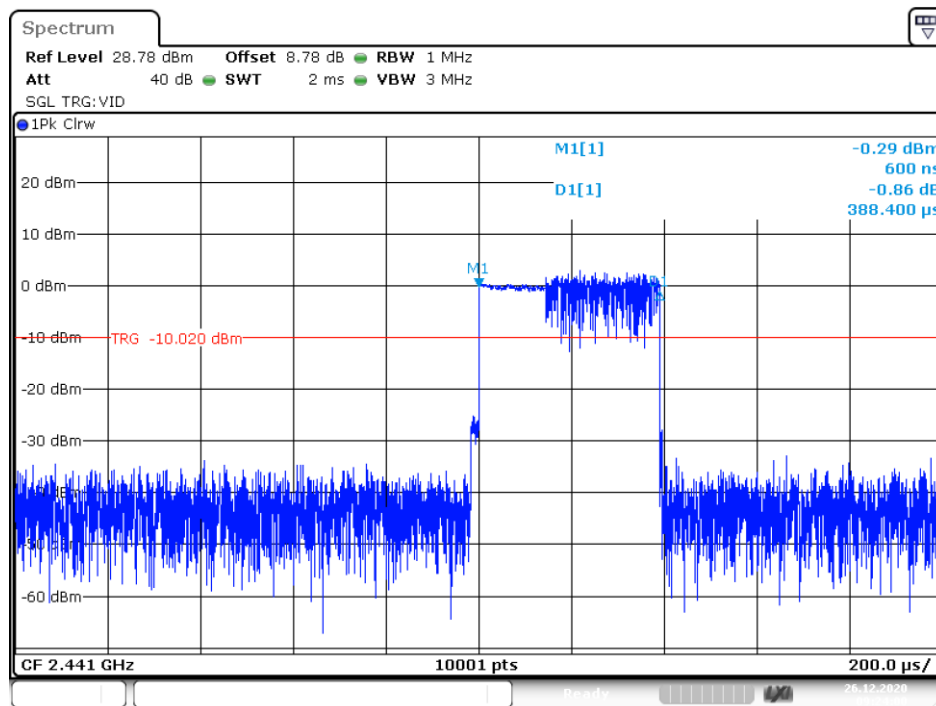


Date: 26.DEC.2020 09:23:59

Dwell NVNT 3-DH1 2480MHz

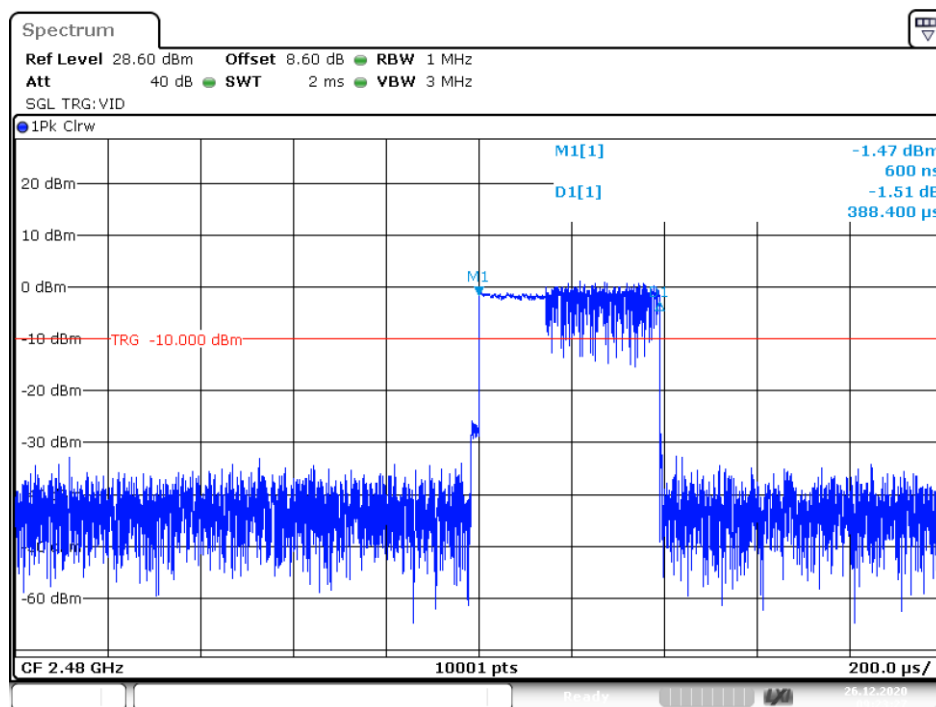


Date: 26.DEC.2020 09:23:27

Dwell NVNT 3-DH3 2441MHz

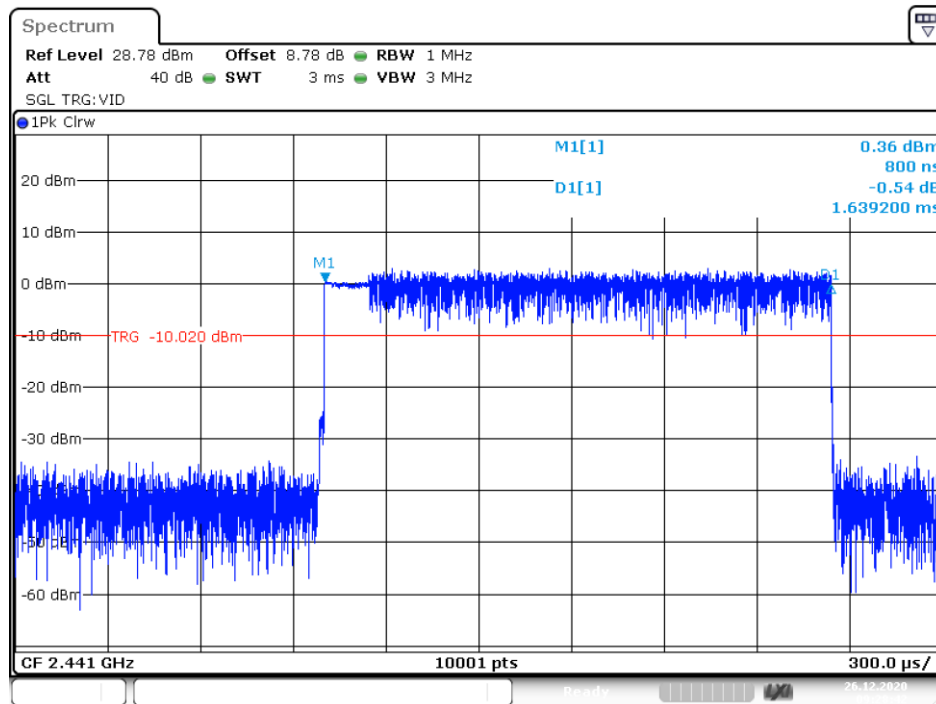

Date: 26.DEC.2020 09:28:42

Dwell NVNT 3-DH5 2441MHz

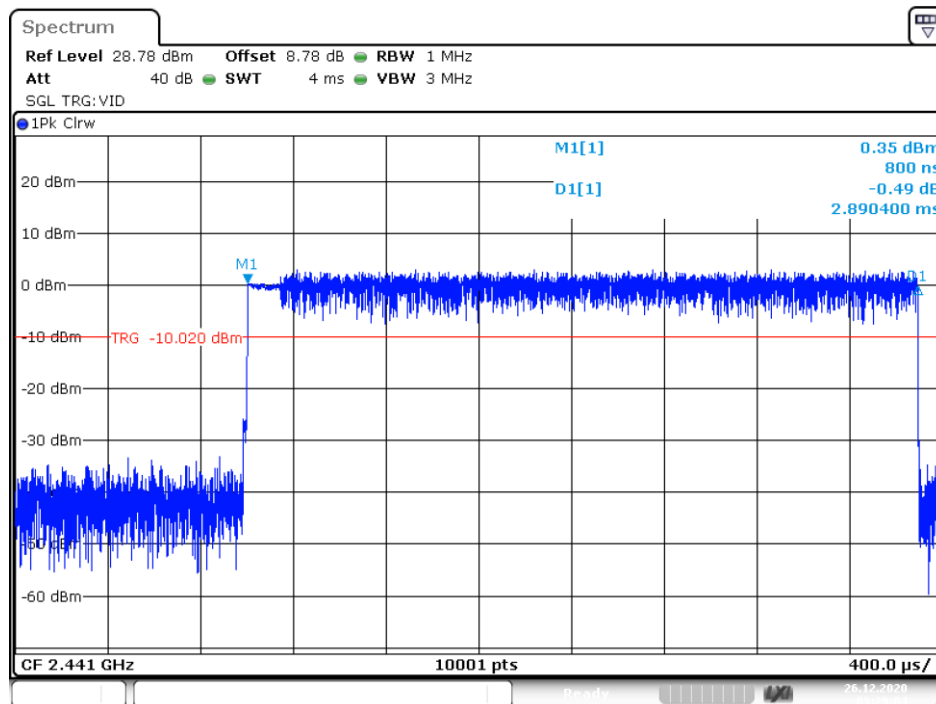

Date: 26.DEC.2020 09:29:04

8. RADIATED EMISSIONS

8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands ^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4

5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/\text{F}(\text{KHz})$	/
0.490-1.705	30	$24000/\text{F}(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/\text{F}$ (F in kHz)	300
490 - 1705 kHz	$63.7/\text{F}$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

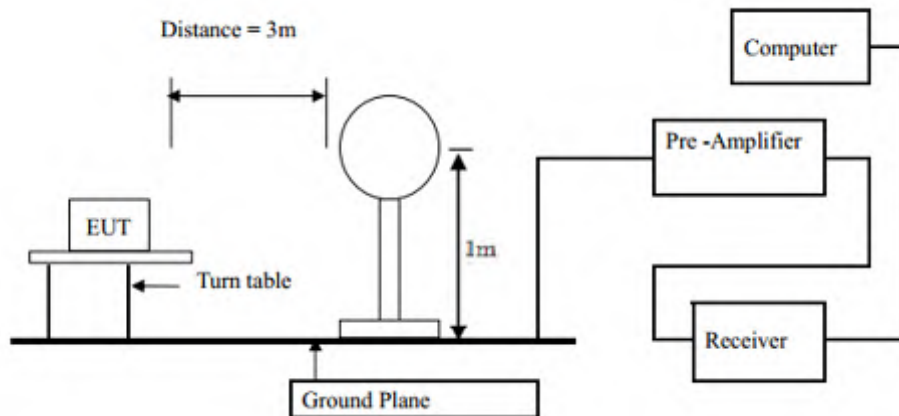

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

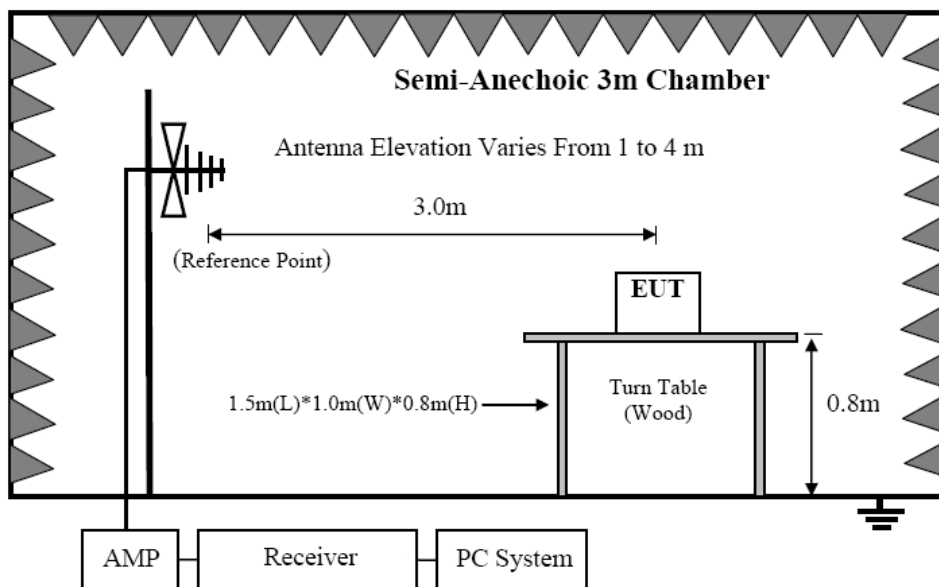

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

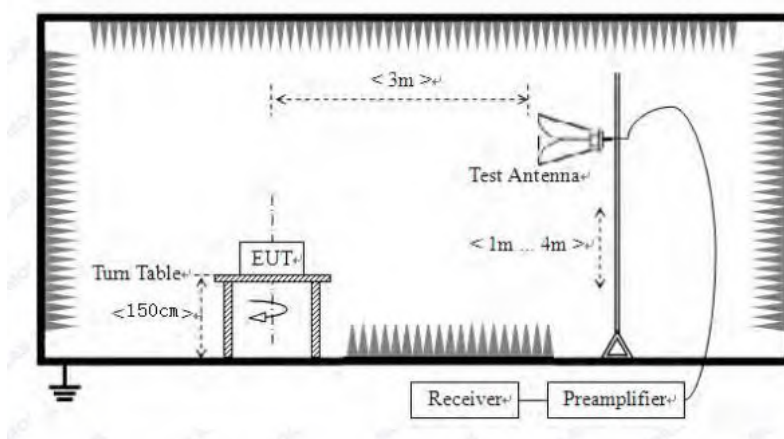

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3.Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4.Test Result


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency. Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

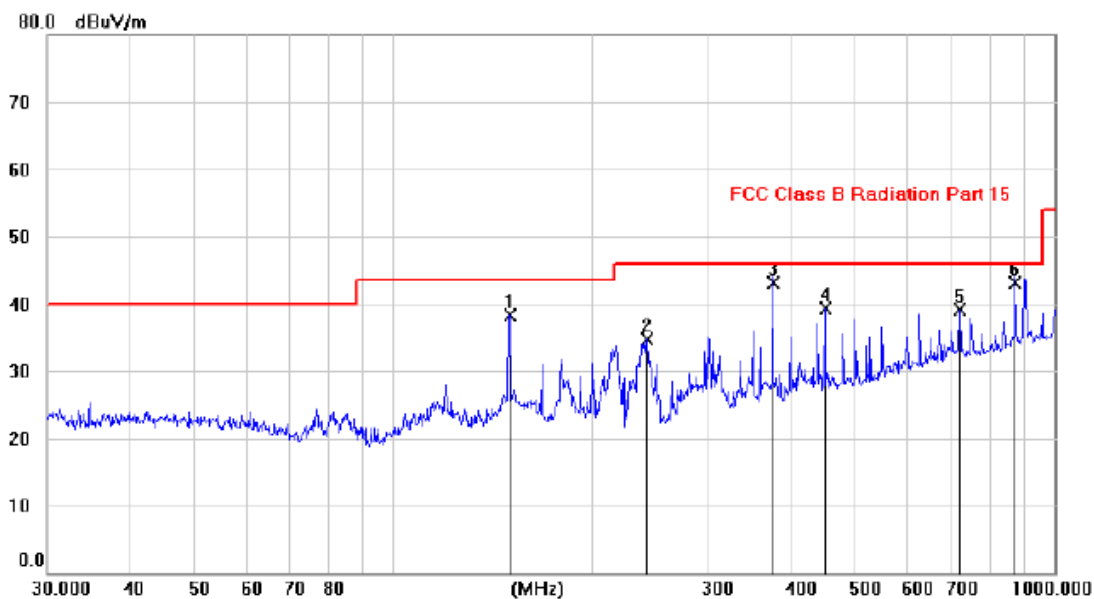

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		150.0108	23.25	15.06	38.31	43.50	-5.19	peak		
2		242.1570	22.20	12.60	34.80	46.00	-11.20	peak		
3	*	375.0169	27.33	15.78	43.11	46.00	-2.89	QP		
4		450.0290	21.74	17.57	39.31	46.00	-6.69	peak		
5		720.0407	17.14	22.02	39.16	46.00	-6.84	peak		
6		874.8378	19.39	23.71	43.10	46.00	-2.90	QP		

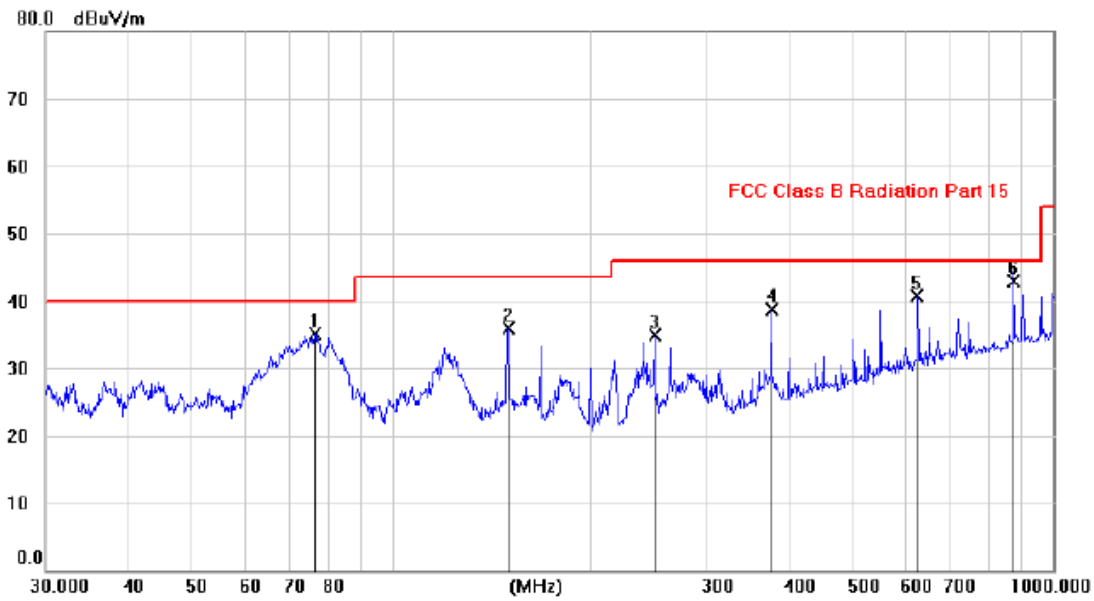Horizontal:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		76.6911	24.73	10.29	35.02	40.00	-4.98	peak		
2		150.0283	20.92	15.06	35.98	43.50	-7.52	peak		
3		250.0380	22.08	12.77	34.85	46.00	-11.15	peak		
4		375.0168	22.90	15.78	38.68	46.00	-7.32	peak		
5		625.0049	19.92	20.72	40.64	46.00	-5.36	peak		
6	*	875.0423	19.25	23.72	42.97	46.00	-3.03	QP		

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2441MHz (AC 120V/ 60Hz) was listed in this report.

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.98	V	33.98	10.22	34.25	56.93	74	17.07	PK
4804	34.99	V	33.98	10.22	34.25	44.94	54	9.06	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.58	H	33.98	10.22	34.25	56.53	74	17.47	PK
4804	33.42	H	33.98	10.22	34.25	43.37	54	10.63	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	46.67	V	33.98	10.22	34.25	56.62	74	17.38	PK
4882	34.79	V	33.98	10.22	34.25	44.74	54	9.26	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	46.32	H	33.98	10.22	34.25	56.27	74	17.73	PK
4882	33.69	H	33.98	10.22	34.25	43.64	54	10.36	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	47.28	V	33.98	10.22	34.25	57.23	74	16.77	PK
4960	34.86	V	33.98	10.22	34.25	44.81	54	9.19	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	46.53	H	33.98	10.22	34.25	56.48	74	17.52	PK
4960	33.34	H	33.98	10.22	34.25	43.29	54	10.71	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: π /4 DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.96	V	33.98	10.22	34.25	56.91	74	17.09	PK
4804	34.88	V	33.98	10.22	34.25	44.83	54	9.17	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.33	H	33.98	10.22	34.25	56.28	74	17.72	PK
4804	33.95	H	33.98	10.22	34.25	43.90	54	10.10	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: π /4 DQPSK TX Mid									
4882	47.15	V	33.98	10.22	34.25	57.10	74	16.90	PK
4882	34.69	V	33.98	10.22	34.25	44.64	54	9.36	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	47.13	H	33.98	10.22	34.25	57.08	74	16.92	PK
4882	33.45	H	33.98	10.22	34.25	43.40	54	10.60	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: π /4 DQPSK TX High									
4960	46.69	V	33.98	10.22	34.25	56.64	74	17.36	PK
4960	35.53	V	33.98	10.22	34.25	45.48	54	8.52	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	46.98	H	33.98	10.22	34.25	56.93	74	17.07	PK
4960	33.17	H	33.98	10.22	34.25	43.12	54	10.88	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode: 8- DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.12	V	33.98	10.22	34.25	57.07	74	16.93	PK
4804	35.28	V	33.98	10.22	34.25	45.23	54	8.77	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.44	H	33.98	10.22	34.25	56.39	74	17.61	PK
4804	34.01	H	33.98	10.22	34.25	43.96	54	10.04	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: 8- DQPSK TX Mid									
4882	46.81	V	33.98	10.22	34.25	56.76	74	17.24	PK
4882	35.14	V	33.98	10.22	34.25	45.09	54	8.91	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	46.39	H	33.98	10.22	34.25	56.34	74	17.66	PK
4882	33.23	H	33.98	10.22	34.25	43.18	54	10.82	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: 8- DQPSK TX High									
4960	46.55	V	33.98	10.22	34.25	56.50	74	17.50	PK
4960	35.66	V	33.98	10.22	34.25	45.61	54	8.39	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	46.84	H	33.98	10.22	34.25	56.79	74	17.21	PK
4960	33.73	H	33.98	10.22	34.25	43.68	54	10.32	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

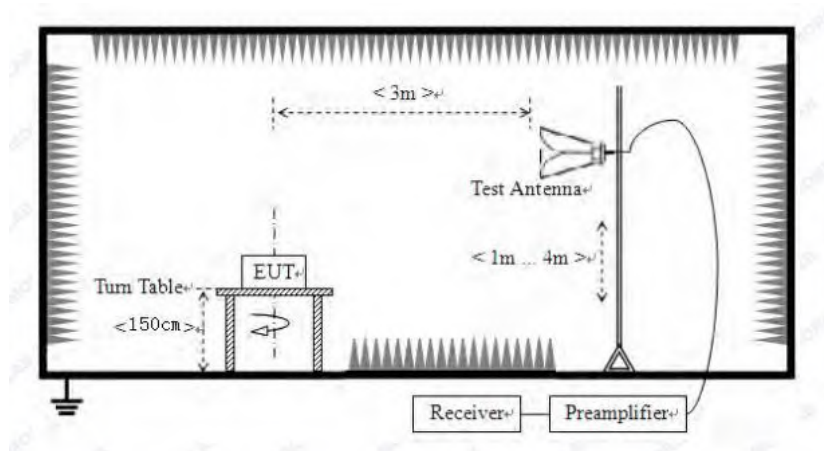

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in FCC part 15.209 and RSS-GEN, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with FCC part 15.209 and RSS-GEN limits.

9.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.

All restriction band and non- restriction band have been tested, only worse case is reported.

9.4. Test Result


PASS. (See below detailed test data)

Radiated Method:

Polarization: Vertical


Test Mode:

GFSK-Low

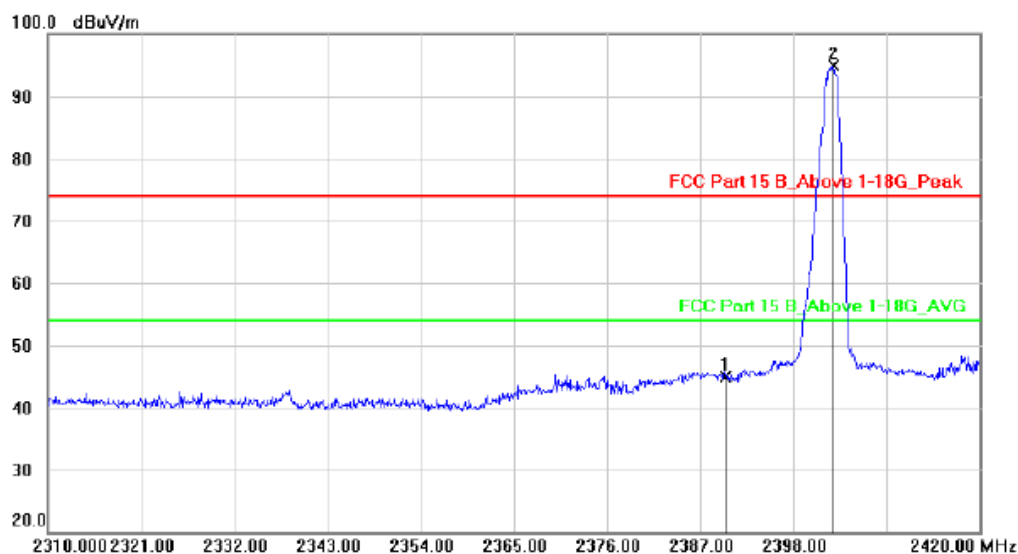

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2390.000	48.21	-3.40	44.81	74.00	-29.19	peak		
2	*	2402.730	98.23	-3.41	94.82	74.00	20.82	peak		

hopping-off

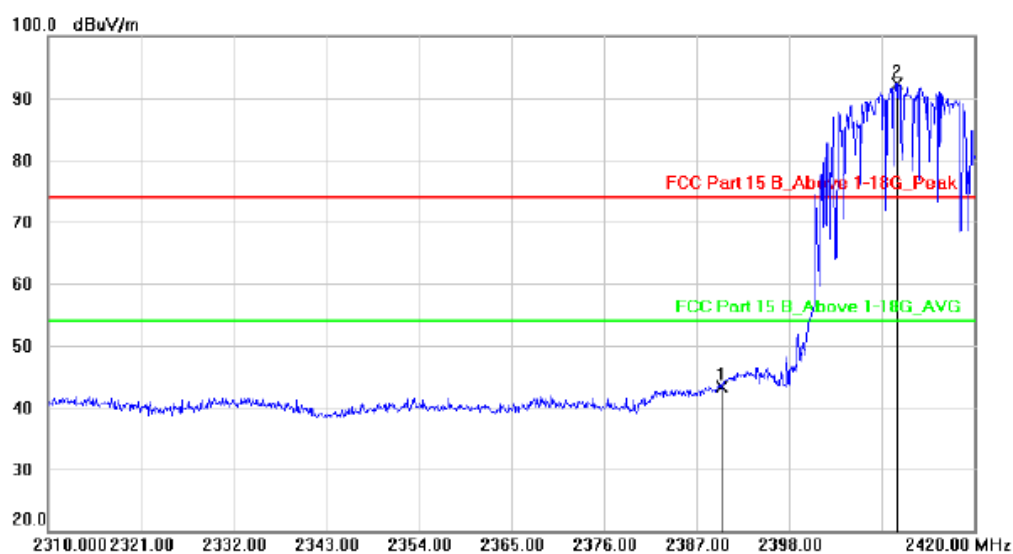


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2390.000	46.64	-3.40	43.24	74.00	-30.76	peak		
2	*	2410.760	95.77	-3.40	92.37	74.00	18.37	peak		

hopping-on

Polarization: Horizontal:


Test Mode:

GFSK-Low

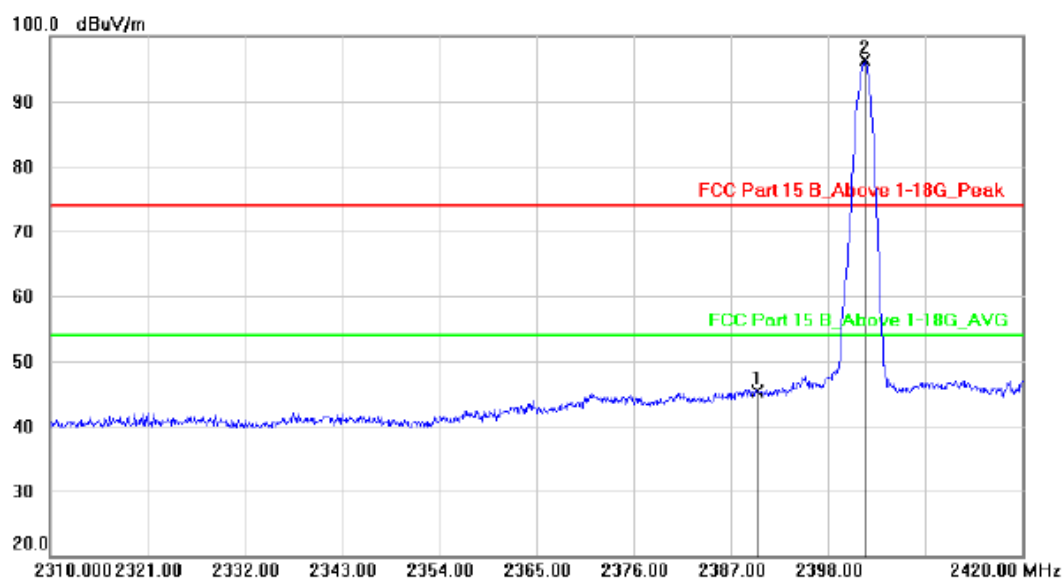

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	48.65	-3.40	45.25	74.00	-28.75	peak		
2	*	2402.180	99.63	-3.41	96.22	74.00	22.22	peak		

hopping-off

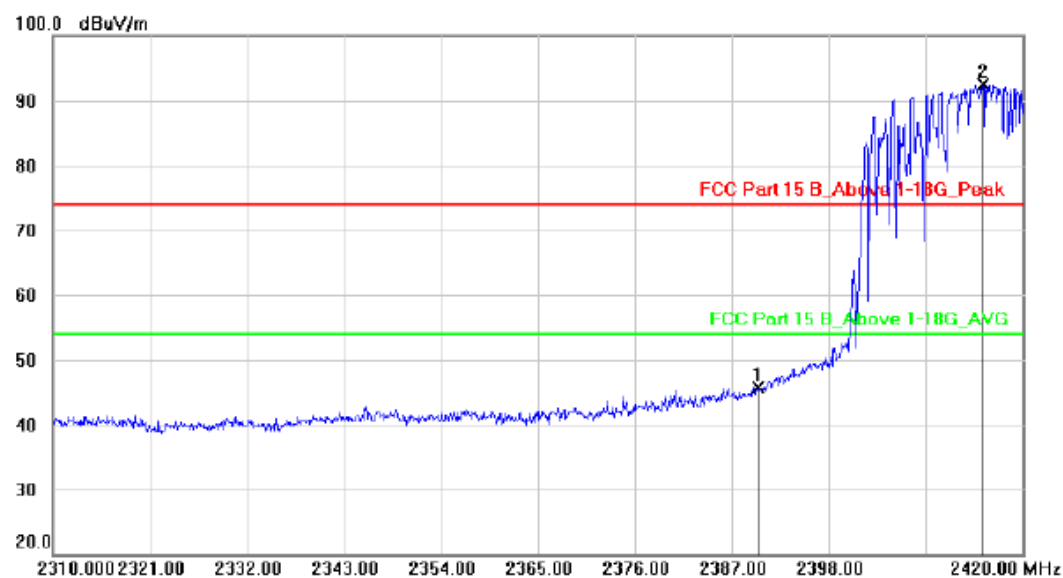


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	49.13	-3.40	45.73	74.00	-28.27	peak		
2	*	2415.490	95.96	-3.41	92.55	74.00	18.55	peak		

hopping-on


Polarization: Vertical

Test Mode: GFSK-High

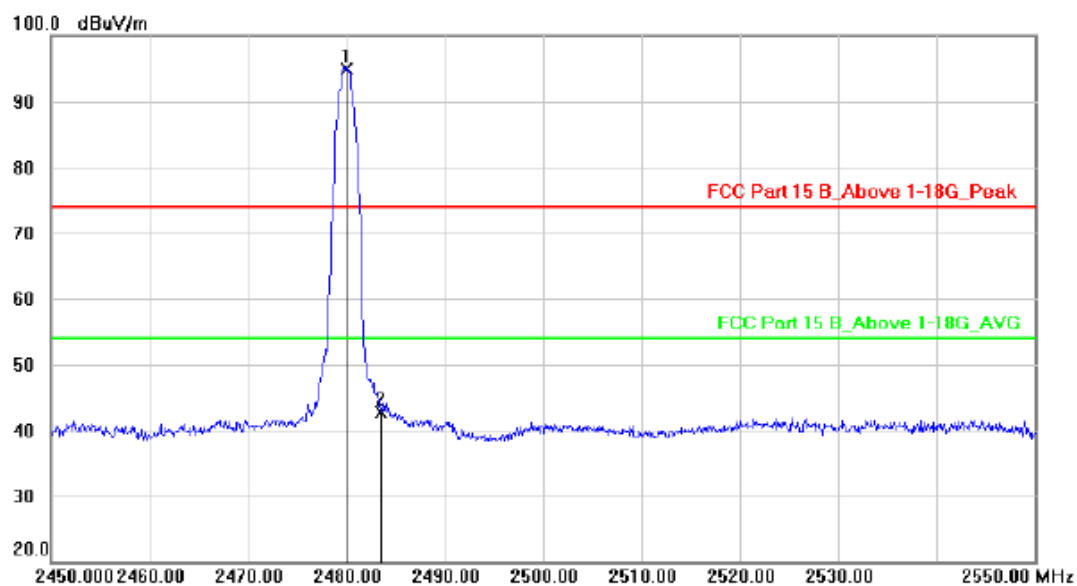

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2480.100	98.25	-3.38	94.87	74.00	20.87	peak		
2		2483.500	46.16	-3.38	42.78	74.00	-31.22	peak		

hopping-off


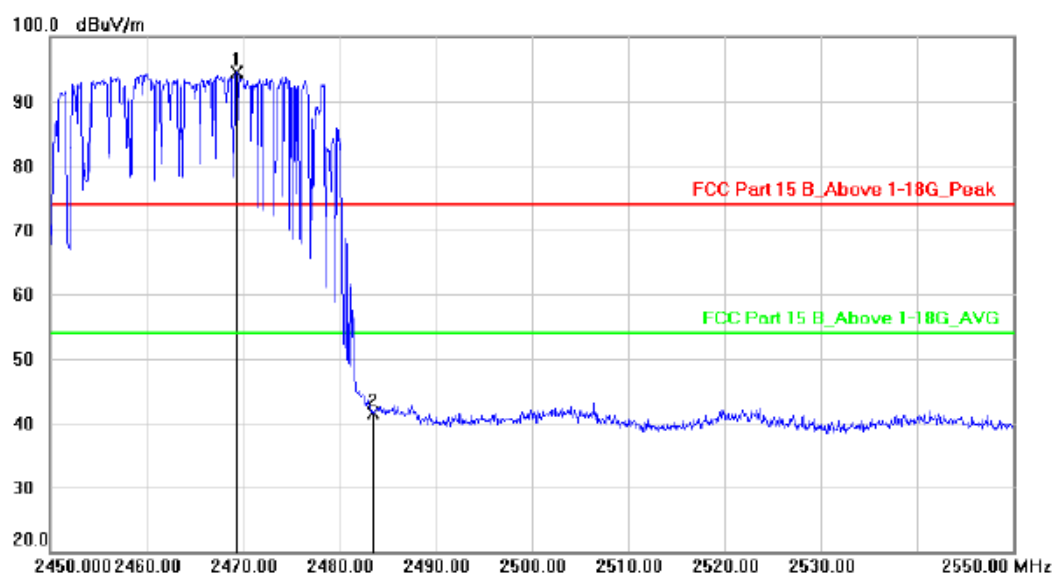


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2469.400	97.80	-3.39	94.41	74.00	20.41	peak		
2		2483.500	44.93	-3.38	41.55	74.00	-32.45	peak		


hopping-on

Polarization: Horizontal

Test Mode: GFSK-High

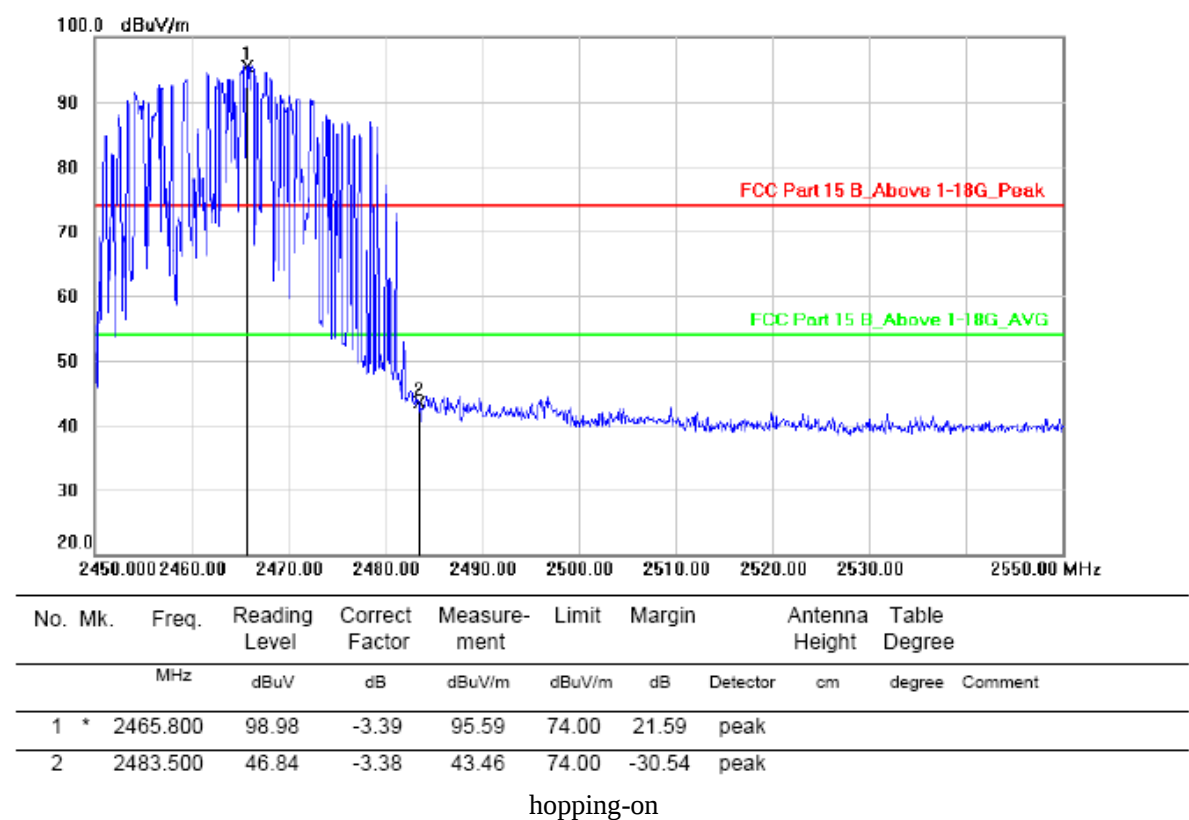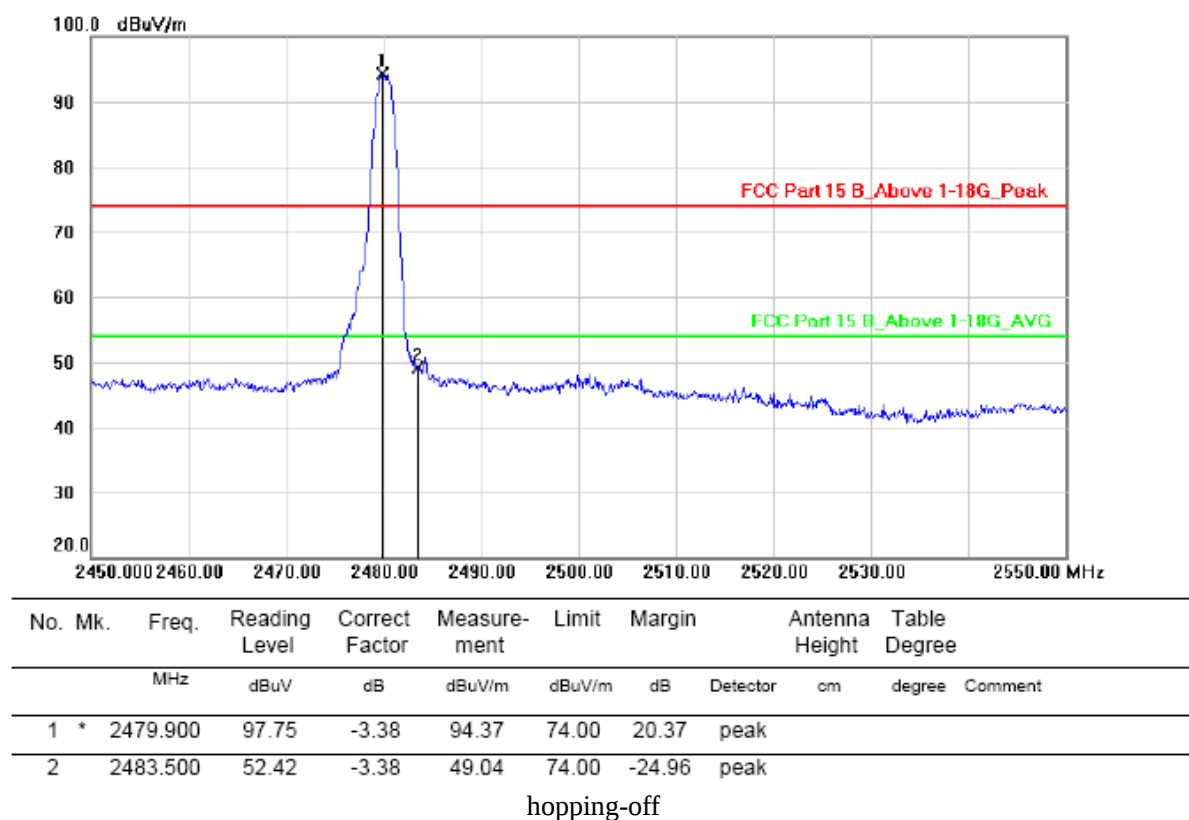


Polarization: Vertical

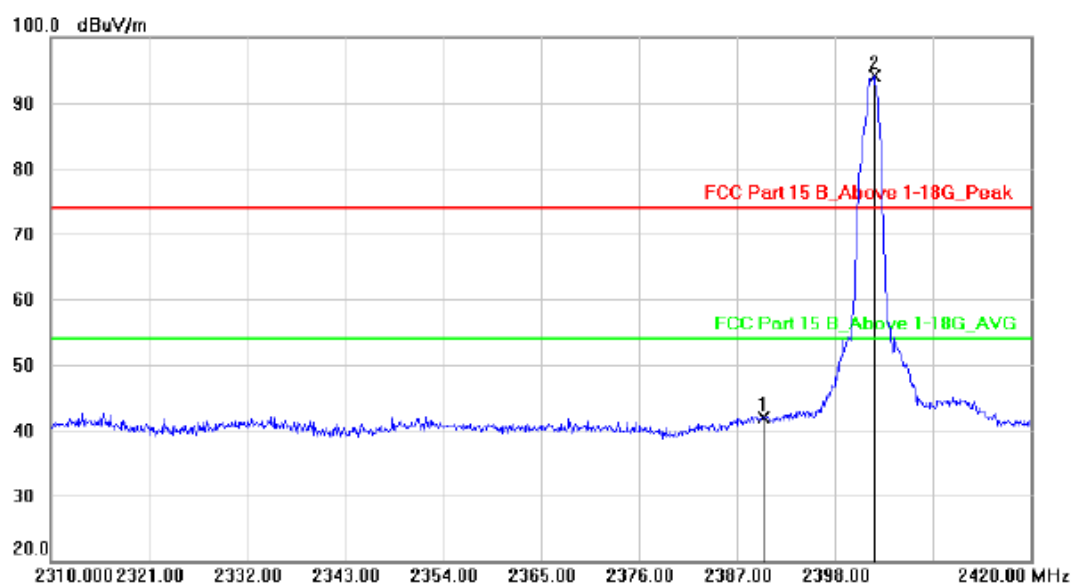Test Mode: $\pi/4$ DQPSK-Low

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	45.28	-3.40	41.88	74.00	-32.12	peak		
2	*	2402.400	97.54	-3.41	94.13	74.00	20.13	peak		


hopping-off

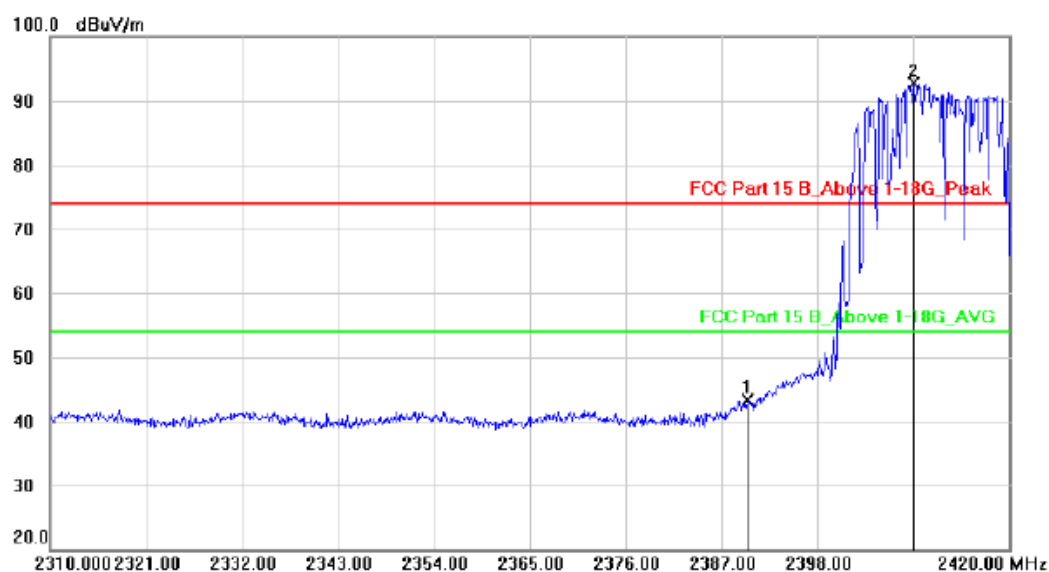


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	46.74	-3.40	43.34	74.00	-30.66	peak		
2	*	2409.110	96.07	-3.40	92.67	74.00	18.67	peak		

hopping-on

Polarization: Horizontal

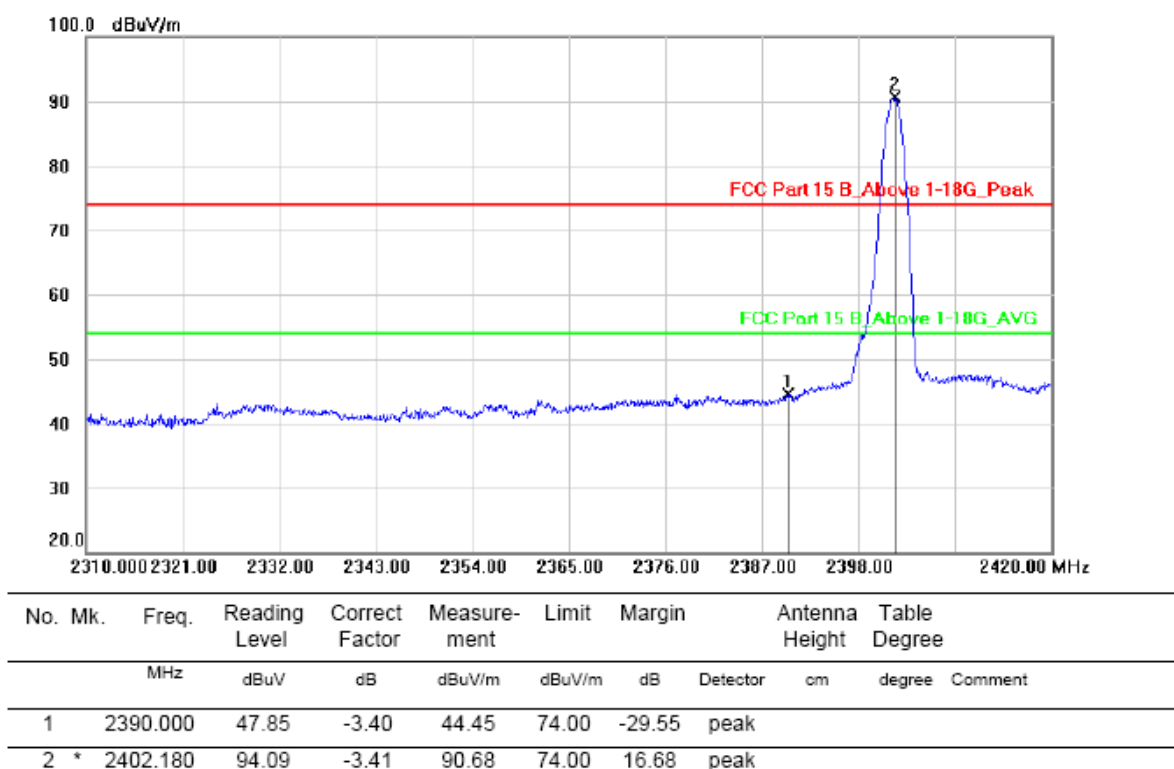
Test Mode: $\pi/4$ DQPSK-Low

hopping-off

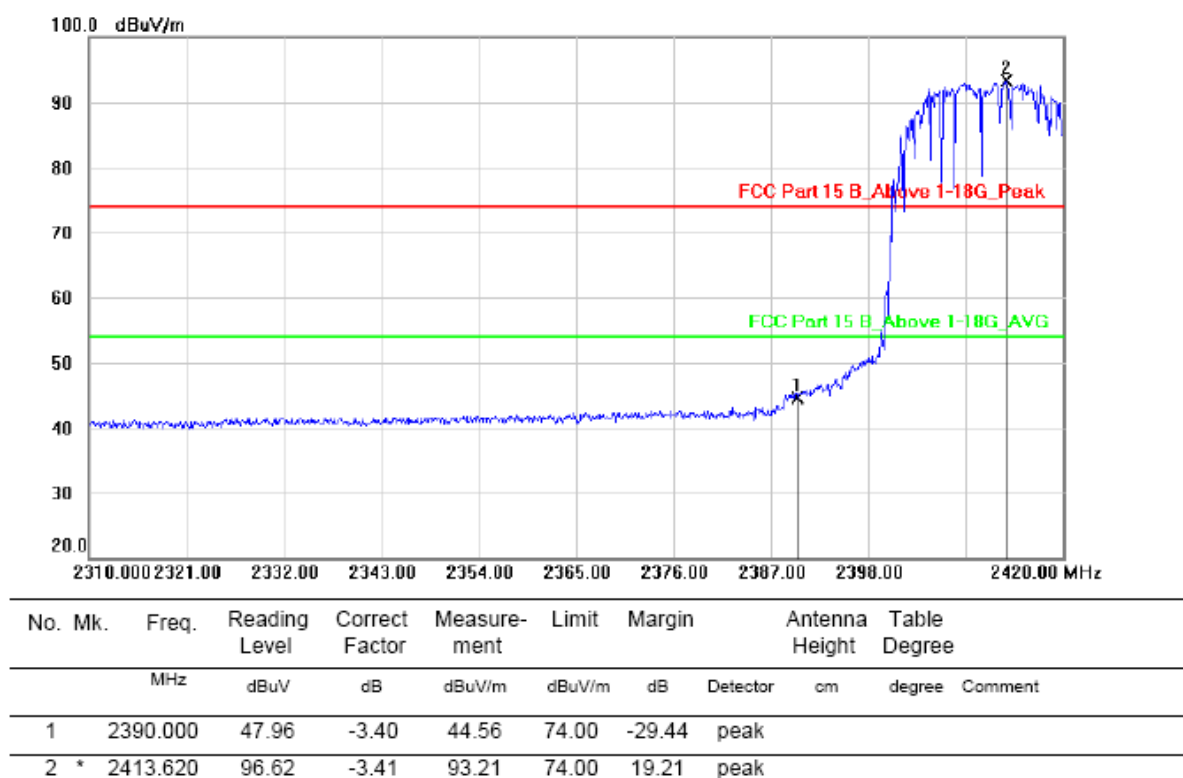


hopping-on

Polarization: Vertical

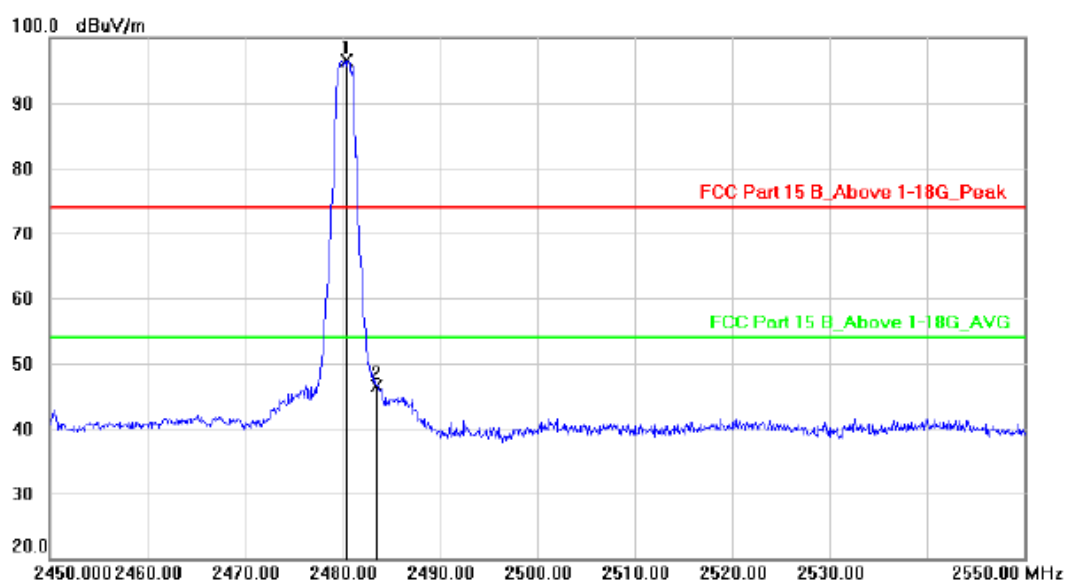Test Mode: $\pi/4$ DQPSK-High

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2480.500	99.92	-3.38	96.54	74.00	22.54	peak		
2		2483.500	49.88	-3.38	46.50	74.00	-27.50	peak		


hopping-off

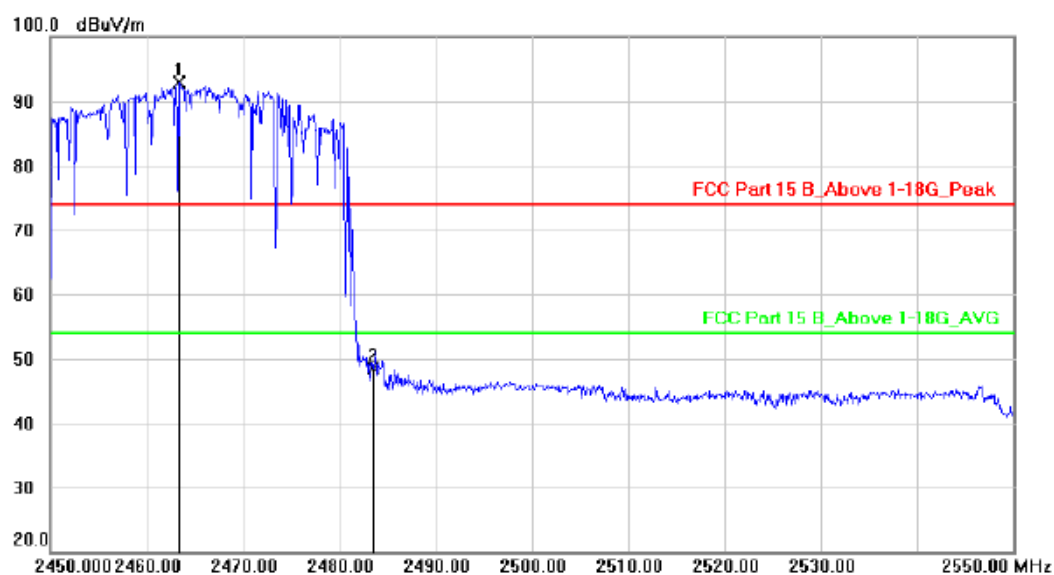


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2463.400	96.29	-3.40	92.89	74.00	18.89	peak		
2		2483.500	51.91	-3.38	48.53	74.00	-25.47	peak		

hopping-on

Polarization: Horizontal

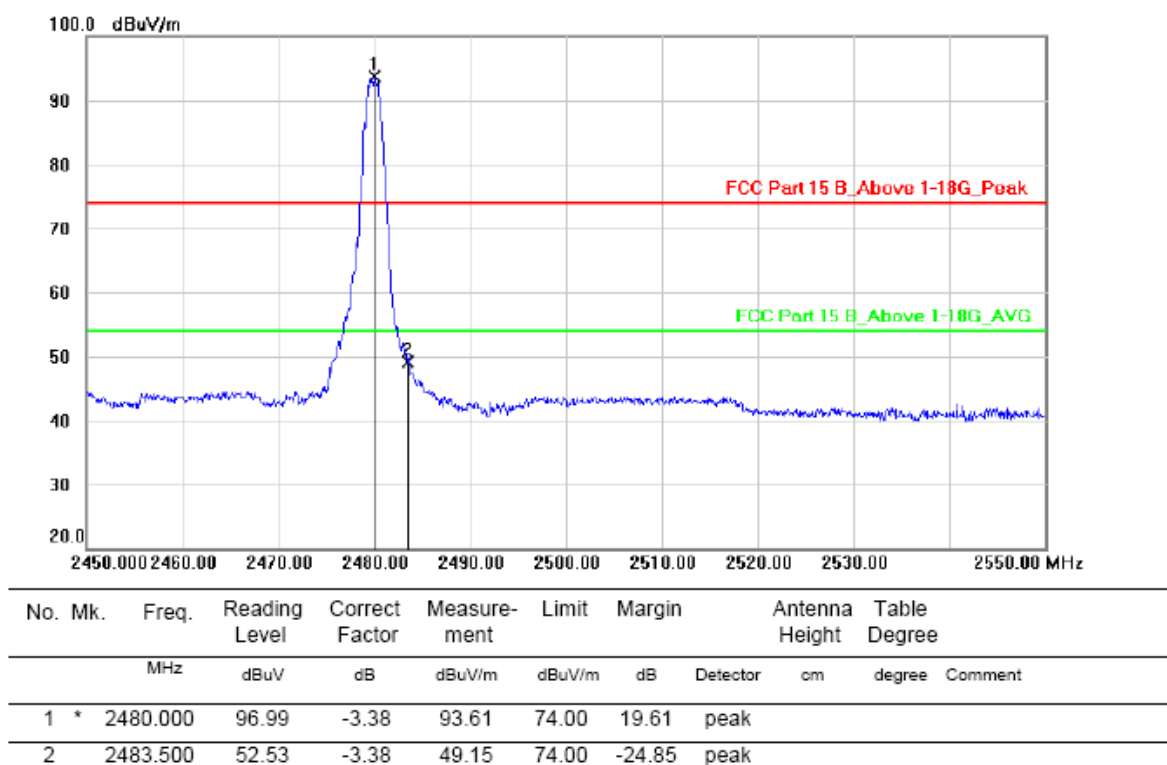Test Mode: $\pi/4$ DQPSK-High


hopping-off

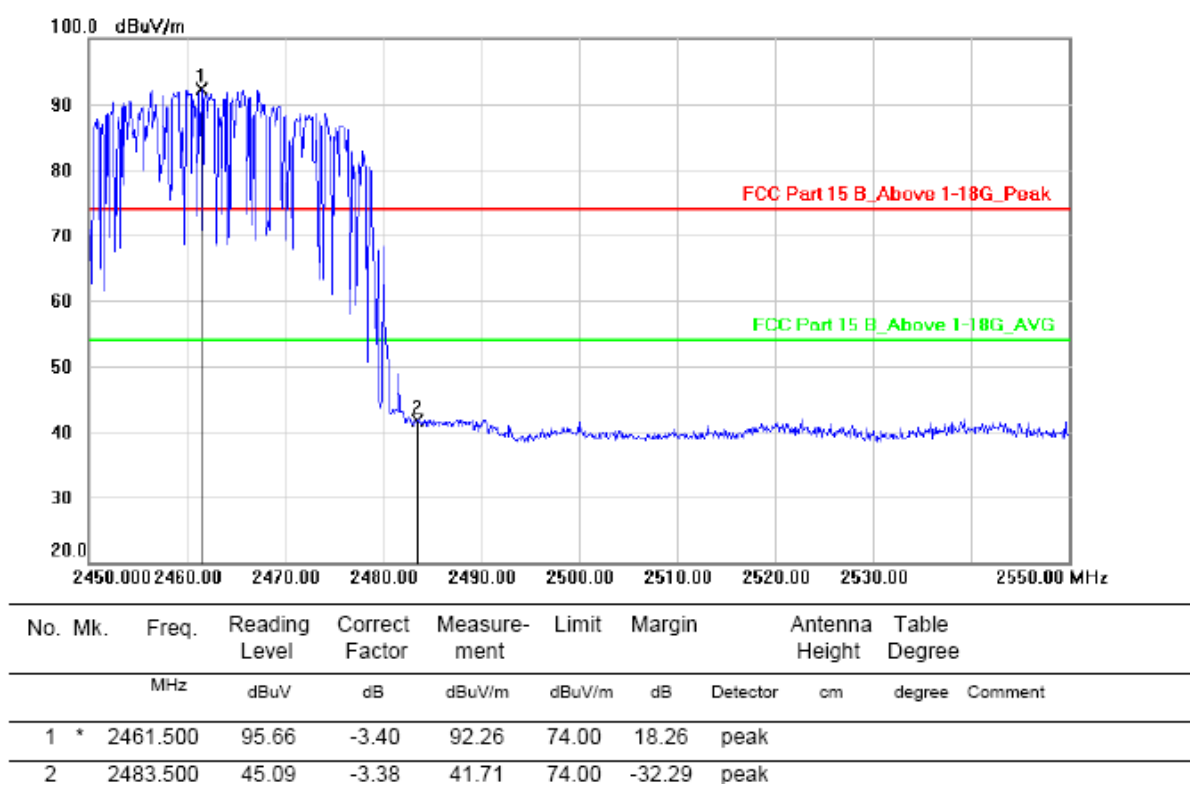

hopping-on


Polarization: Vertical

Test Mode: 8DPSK-Low

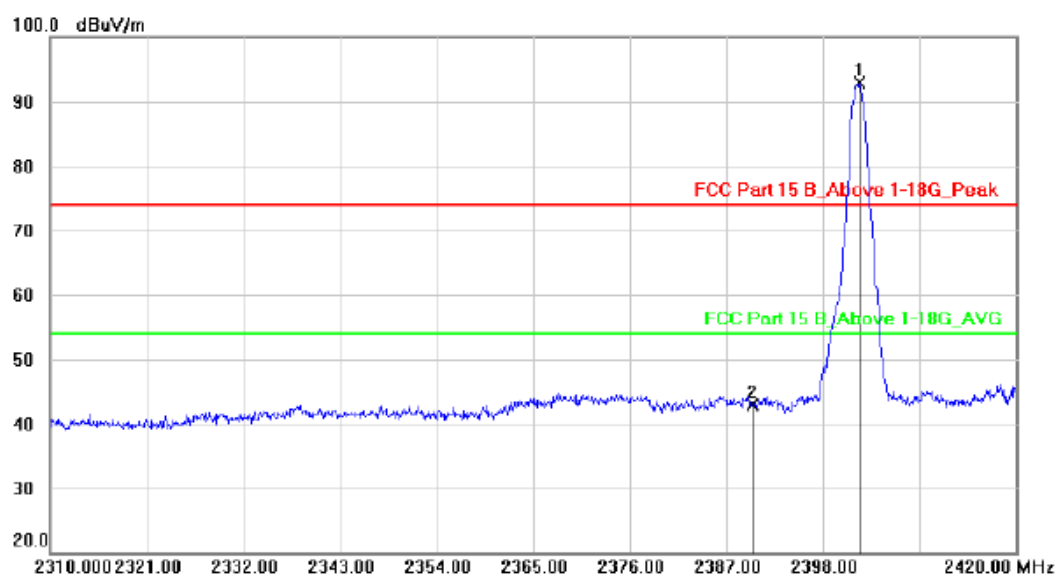

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2402.180	96.35	-3.41	92.94	74.00	18.94	peak		
2		2390.000	46.35	-3.40	42.95	74.00	-31.05	peak		

hopping-off

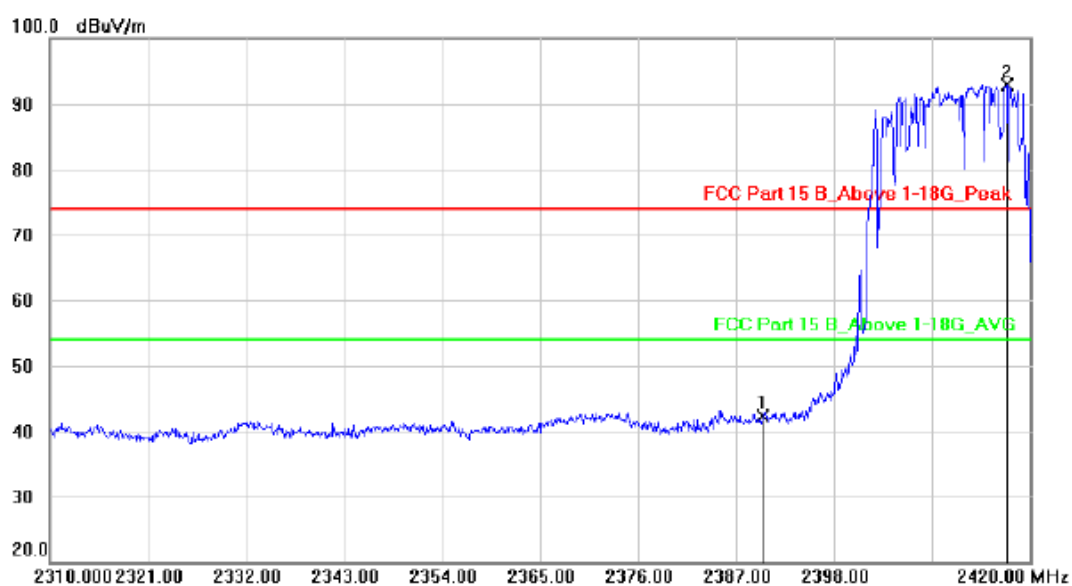


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2390.000	45.74	-3.40	42.34	74.00	-31.66	peak		
2	*	2417.470	96.29	-3.41	92.88	74.00	18.88	peak		

hopping-on


Polarization: Horizontal

Test Mode: 8DPSK-Low

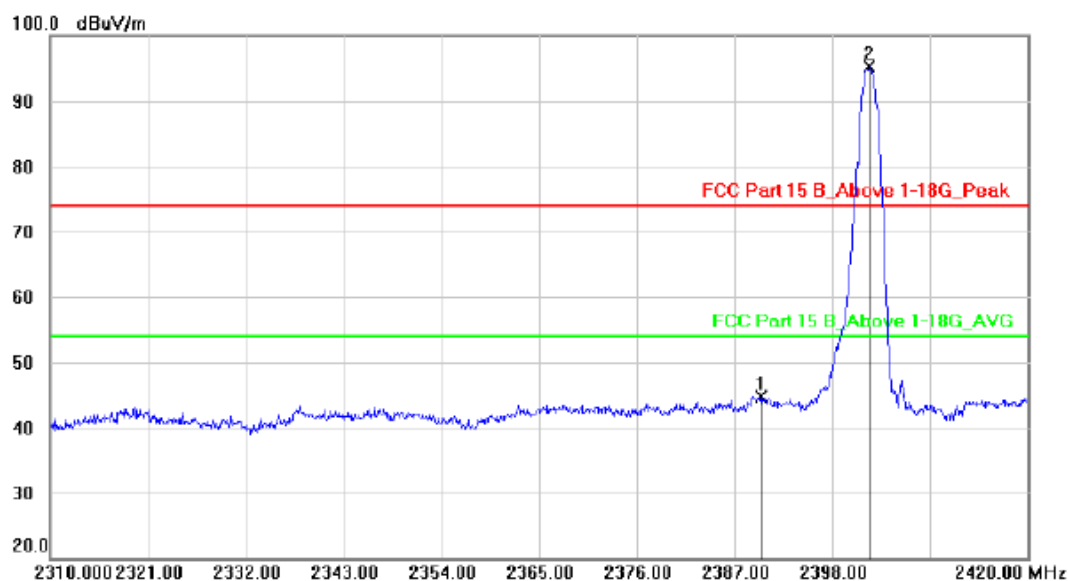

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2390.000	48.02	-3.40	44.62	74.00	-29.38	peak		
2	*	2402.180	98.76	-3.41	95.35	74.00	21.35	peak		

hopping-off

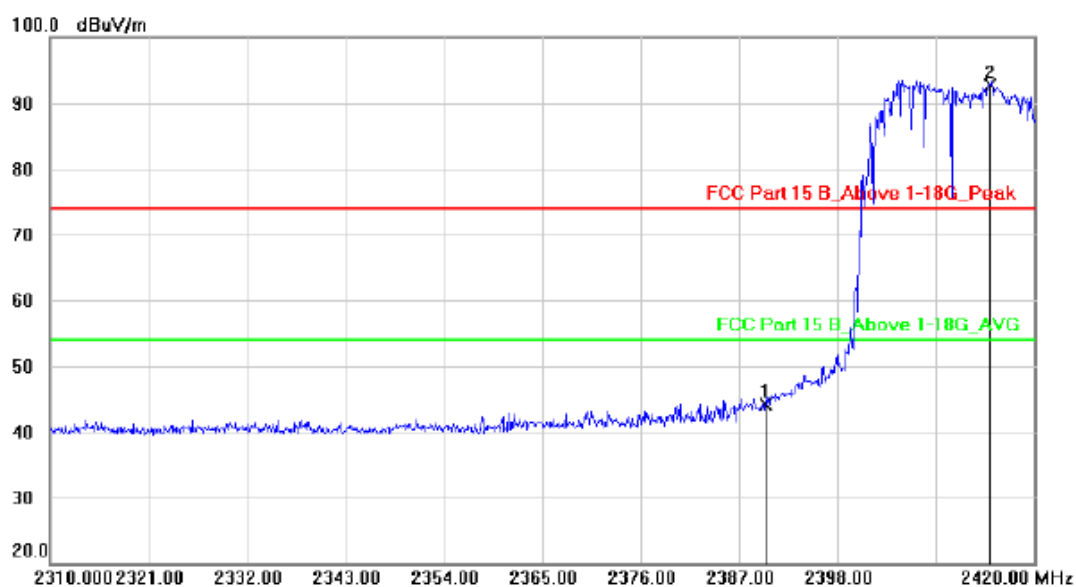


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2390.000	47.46	-3.40	44.06	74.00	-29.94	peak		
2	*	2415.050	96.21	-3.41	92.80	74.00	18.80	peak		

hopping-on


Polarization: Vertical

Test Mode: 8DPSK-High

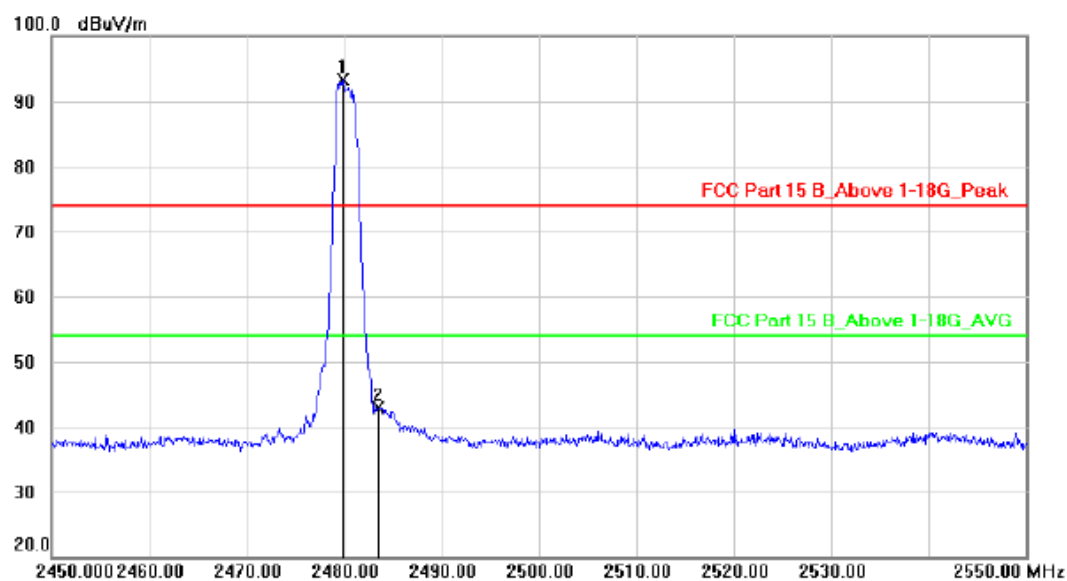

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2479.900	96.61	-3.38	93.23	74.00	19.23	peak		
2		2483.500	46.37	-3.38	42.99	74.00	-31.01	peak		

hopping-off

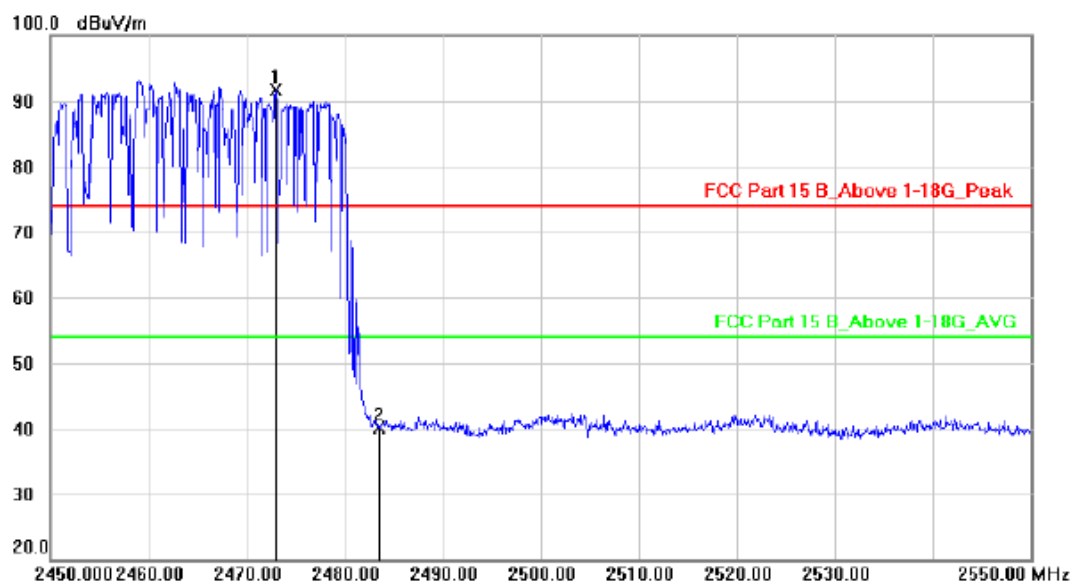


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2473.000	95.12	-3.39	91.73	74.00	17.73	peak		
2		2483.500	43.43	-3.38	40.05	74.00	-33.95	peak		

hopping-on


Polarization: Horizontal

Test Mode: 8DPSK-High

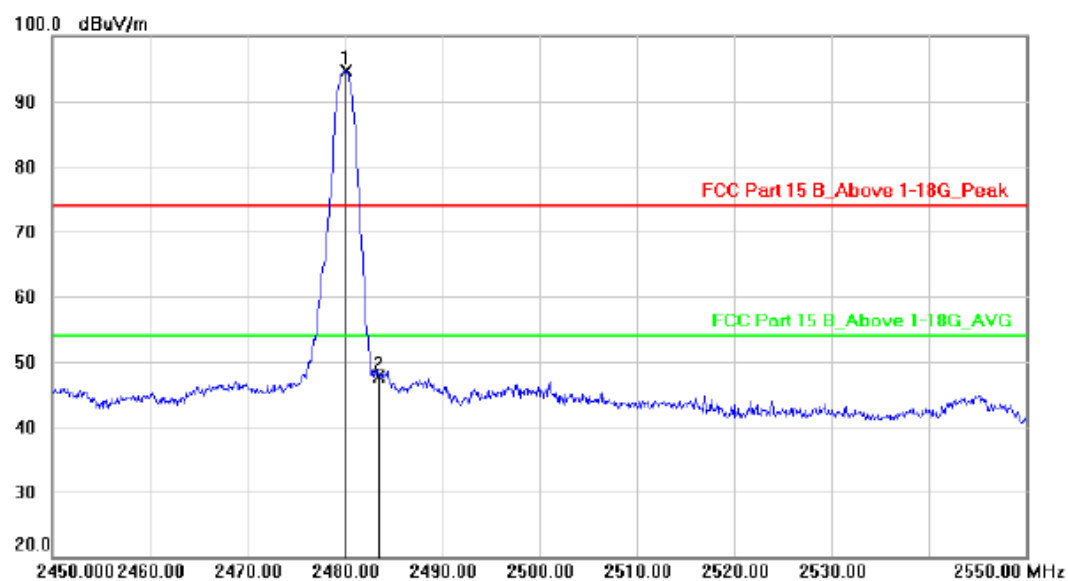

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2480.200	98.09	-3.38	94.71	74.00	20.71	peak		
2		2483.500	51.16	-3.38	47.78	74.00	-26.22	peak		

hopping-off

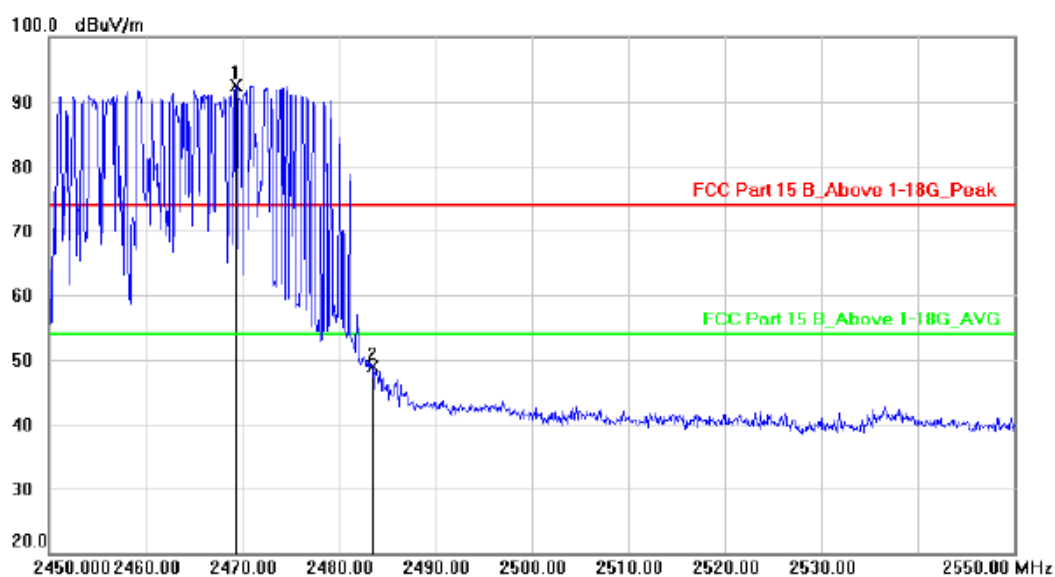

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2469.400	95.84	-3.39	92.45	74.00	18.45	peak		
2		2483.500	52.34	-3.38	48.96	74.00	-25.04	peak		

hopping-on


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

GFSK Mode:

Test channel:	Lowest channel
---------------	----------------

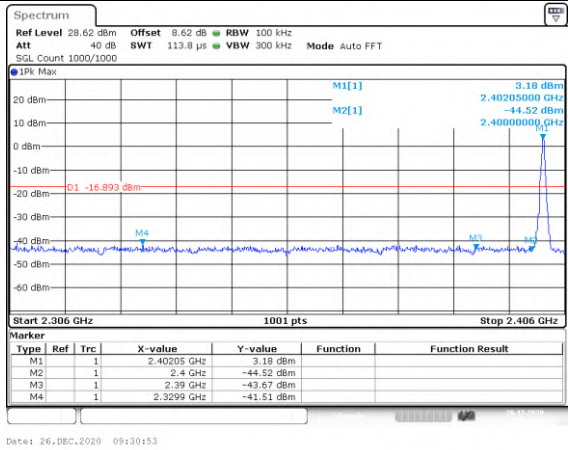


No-hopping mode

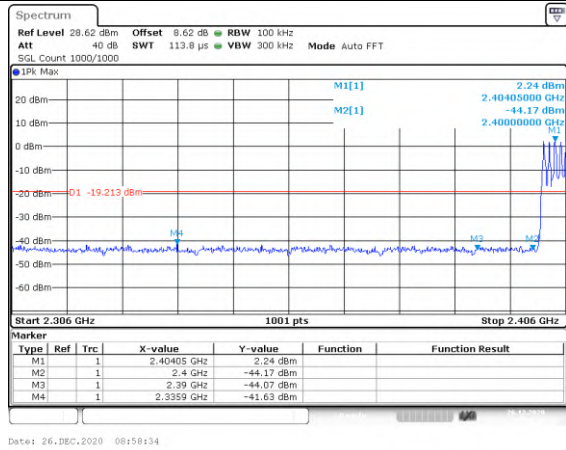


Hopping mode

Test channel:	Highest channel
---------------	-----------------

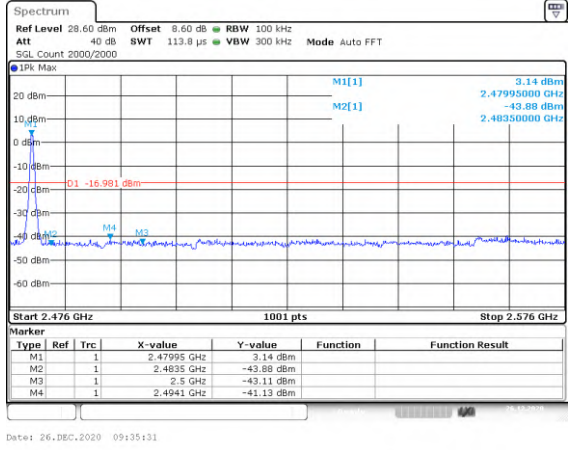


No-hopping mode

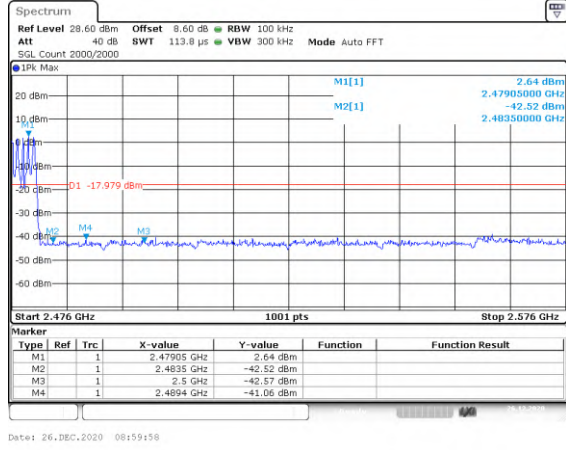

Hopping mode


Pi/4QPSK Mode:

Test channel:

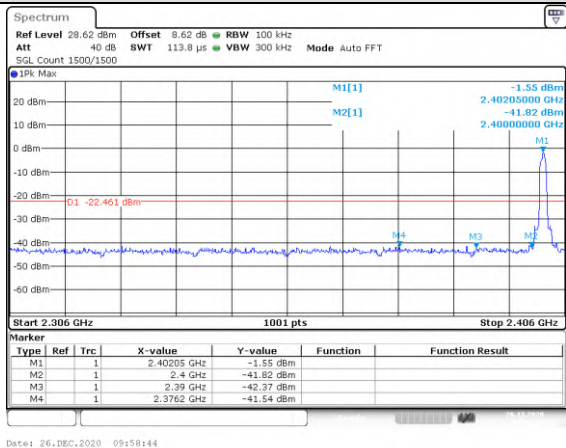


No-hopping mode

Lowest channel

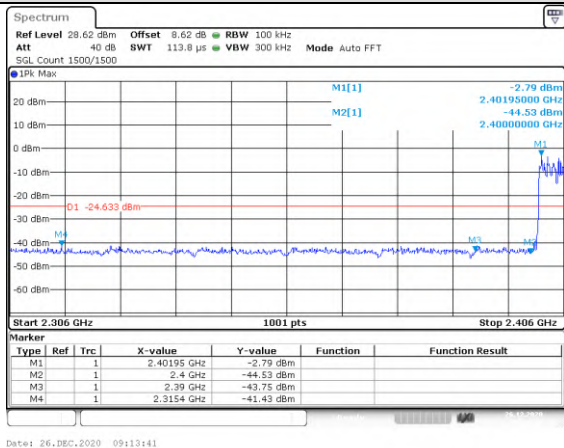


Hopping mode

Test channel:

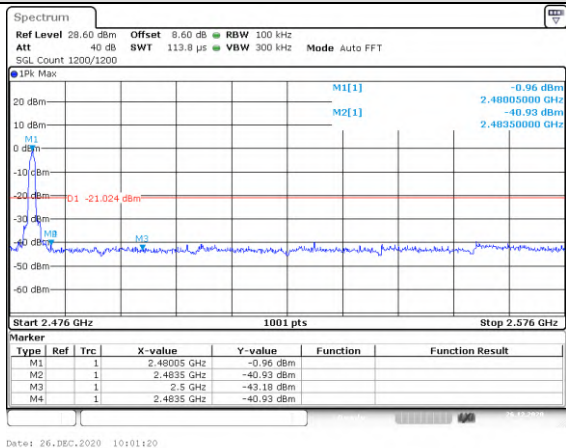

No-hopping mode


Highest channel

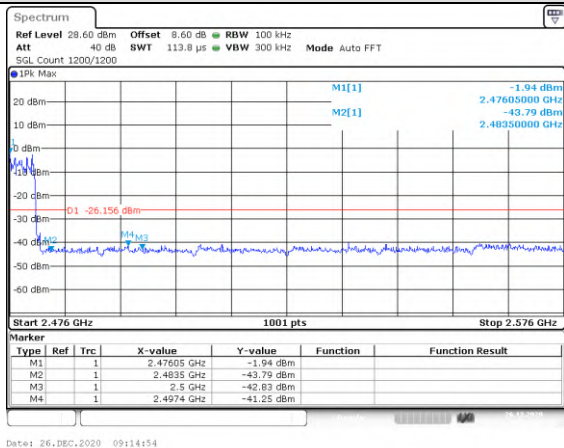

Hopping mode


8DPSK Mode:

Test channel:

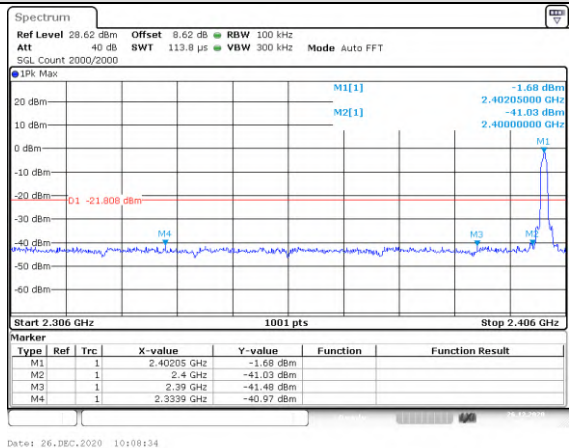


No-hopping mode

Lowest channel

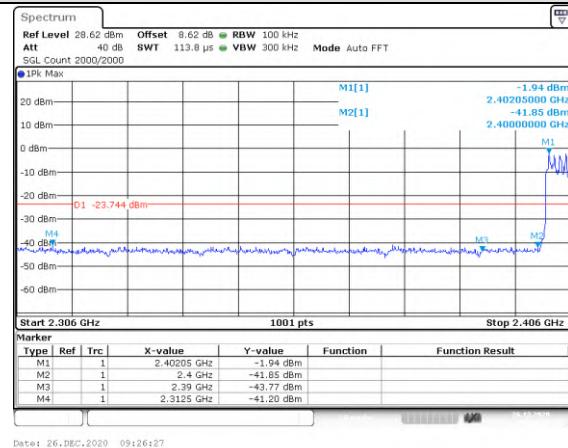


Hopping mode

Test channel:

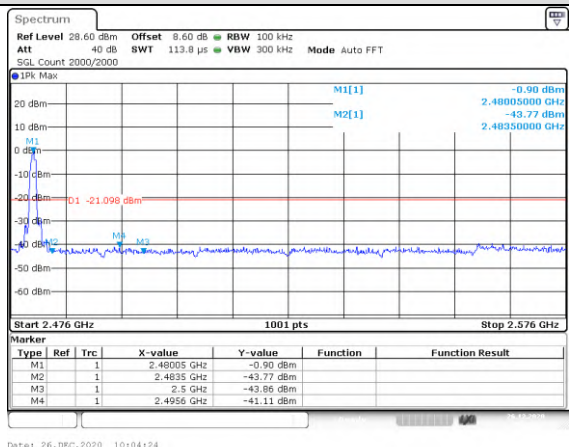

No-hopping mode


Highest channel

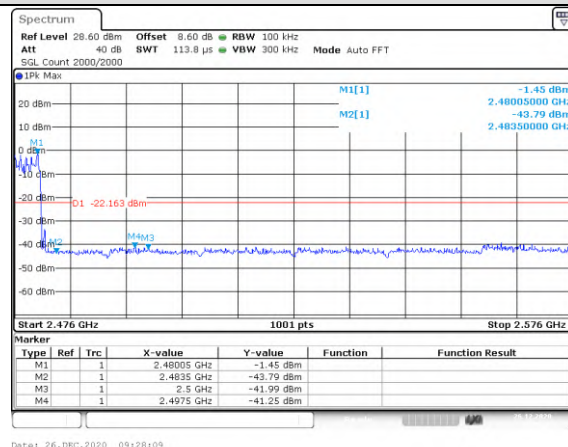

Hopping mode

10. POWER LINE CONDUCTED EMISSIONS

10.1. Block Diagram of Test Setup

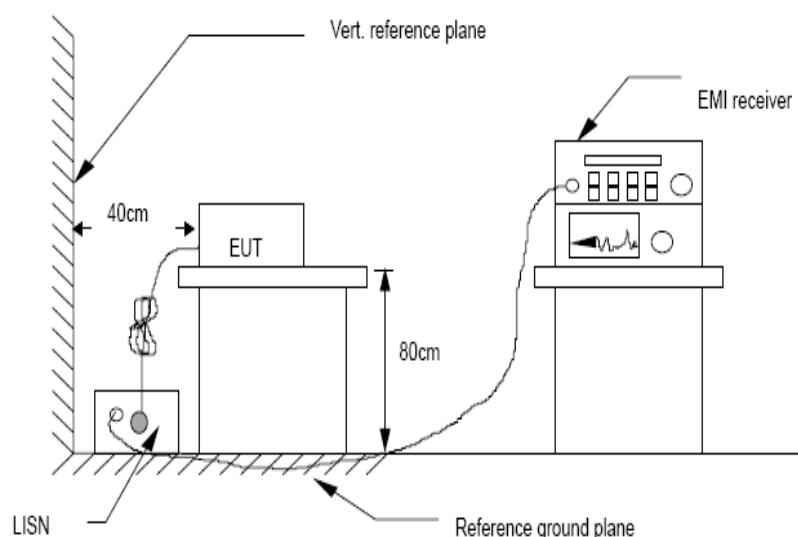

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.


(5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

PASS. (See below detailed test data)


Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

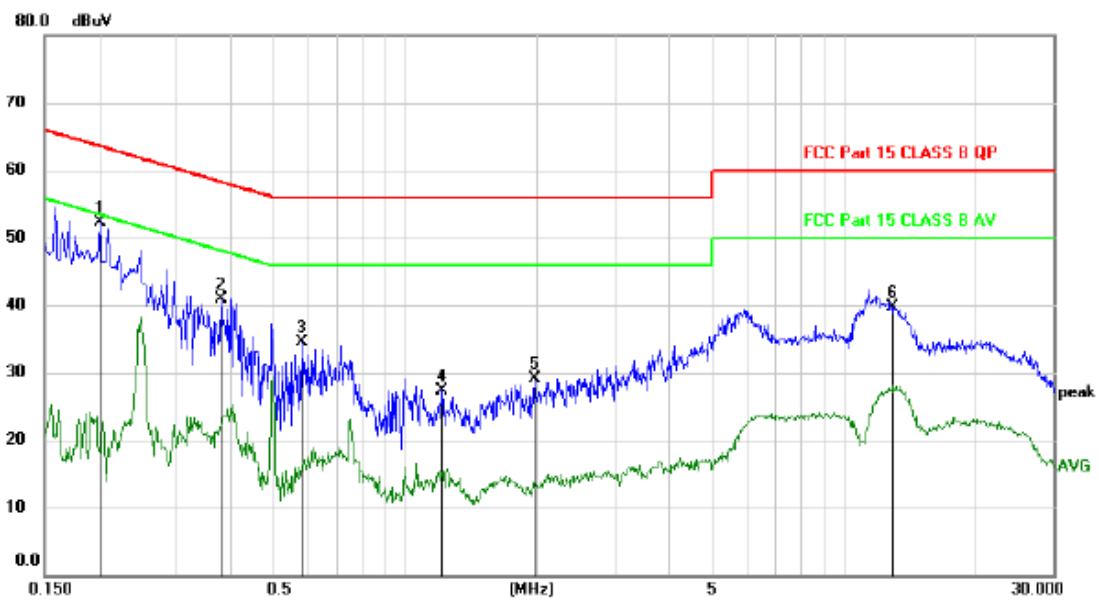

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.2010	42.48	9.92	52.40	63.57	-11.17	peak	
2		0.3810	31.01	9.94	40.95	58.26	-17.31	peak	
3		0.5819	24.63	9.93	34.56	56.00	-21.44	peak	
4		1.2118	17.51	9.89	27.40	56.00	-28.60	peak	
5		1.9800	19.25	9.88	29.13	56.00	-26.87	peak	
6		12.9779	29.45	10.28	39.73	60.00	-20.27	peak	

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

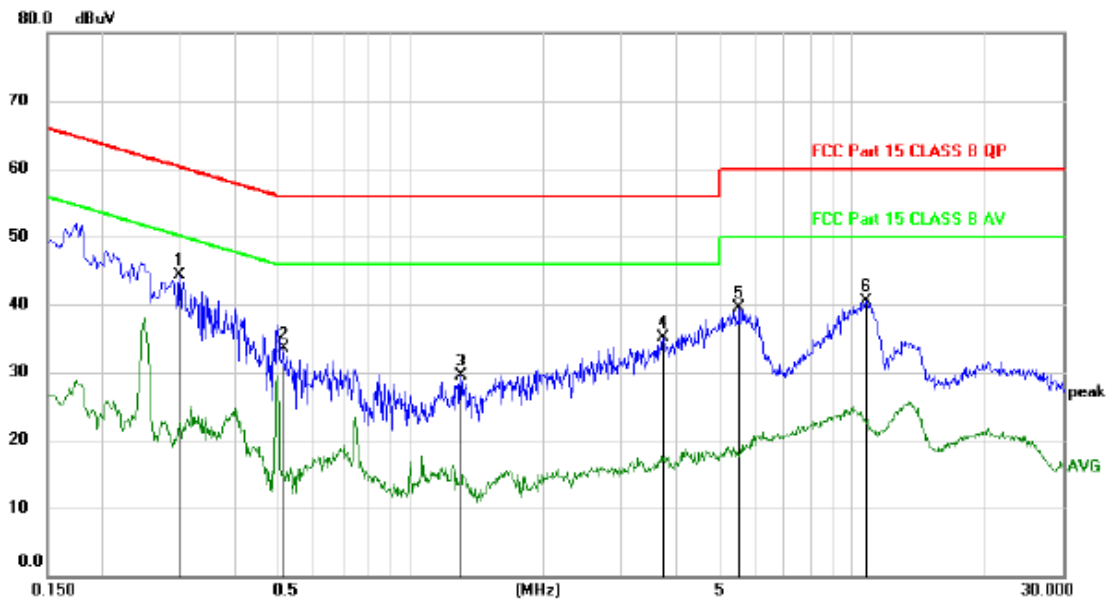Neutral:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.3000	34.36	9.92	44.28	60.24	-15.96	peak	
2		0.5130	23.54	9.95	33.49	56.00	-22.51	peak	
3		1.2987	19.56	9.89	29.45	56.00	-26.55	peak	
4		3.7229	25.04	9.97	35.01	56.00	-20.99	peak	
5		5.5350	29.53	10.06	39.59	60.00	-20.41	peak	
6		10.7339	30.35	10.23	40.58	60.00	-19.42	peak	

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2441MHz (AC 120V/ 60Hz) was listed in this report.

11.FREQUENCY STABILITY

11.1.Test limit


Please refer section RSS-Gen.

Regulation RSS-Gen If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

11.2.Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.Test Setup

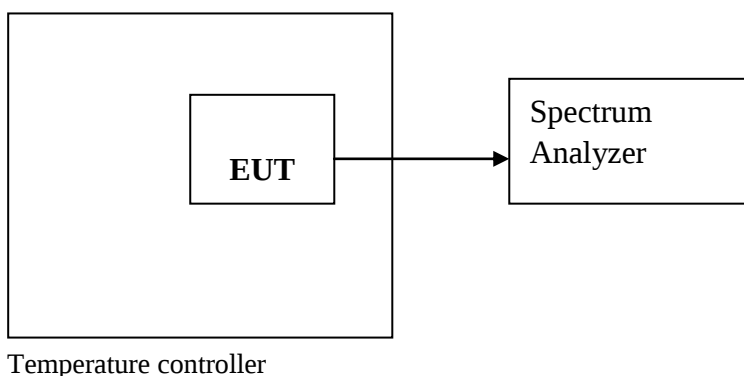

11.4.Test Results

PASS.

Detailed information please see the following page.

Assigned Frequency(MHz): 2402MHz(GFSK)				
Voltage	Temperature	Measured Frequency (MHz)	Frequency stability(MHz)	Limit(MHz)
Low DC 10.8V	+20°C	2402.003	0.0030	±0.020
Normal DC 12V	-10°C	2402.008	0.0080	±0.020
	-5°C	2402.001	0.0010	±0.020
	0°C	2402.000	0.0000	±0.020
	+10°C	2402.004	0.0040	±0.020
	+20°C	2402.000	0.0000	±0.020
	+30°C	2402.003	0.0030	±0.020
	+40°C	2402.002	0.0020	±0.020
	+50°C	2402.004	0.0040	±0.020
	+60°C	2402.005	0.0050	±0.020
High DC 13.2V	+20°C	2402.001	0.0010	±0.020

12.ANTENNA REQUIREMENTS

12.1.Limit

For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2.Result

The EUT antenna is internal antenna. It complies with the standard requirement.

-----THE END OF REPORT-----