



FCC PART 15C TEST REPORT

BLUETOOTH LOW ENERGY (BLE) PART

No. I22Z61952-IOT02

for

Honor Device Co., Ltd.

Smart Phone

Model Name: RMO-NX1

FCC ID: 2AYGCRMO-NX1

with

Hardware Version: HN2RMOM

Software Version: 6.1.0.21(C900E21R1P1)

Issued Date: 2022-11-11

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:ctl_terminals@caict.ac.cn, website: www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z61952-IOT02	Rev.0	1st edition	2022-11-11

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATA	6
1.5. SIGNATURE	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. NORMAL ACCESSORY SETTING	9
3.5. GENERAL DESCRIPTION.....	9
4. REFERENCE DOCUMENTS	10
4.1. DOCUMENTS SUPPLIED BY APPLICANT	10
4.2. REFERENCE DOCUMENTS FOR TESTING	10
5. TEST RESULTS	11
5.1. SUMMARY OF EUT MODE	11
5.2. SUMMARY OF TEST RESULTS.....	11
5.3. STATEMENTS.....	11
5.4. EXPLANATION OF RE-USE OF TEST DATA	11
6. TEST FACILITIES UTILIZED	12
7. MEASUREMENT UNCERTAINTY	13
7.1. PEAK OUTPUT POWER - CONDUCTED.....	13
7.2. FREQUENCY BAND EDGES - CONDUCTED	13
7.3. FREQUENCY BAND EDGES - RADIATED	13
7.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	13
7.5. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	13
7.6. 6dB BANDWIDTH	13
7.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL	14
7.8. AC POWERLINE CONDUCTED EMISSION	14
ANNEX A: EUT PARAMETERS.....	15
ANNEX B: DETAILED TEST RESULTS	16
B.1. MEASUREMENT METHOD	16

B.2. PEAK OUTPUT POWER.....	17
B.3. FREQUENCY BAND EDGES - CONDUCTED.....	18
B.4. FREQUENCY BAND EDGES -RADIATED.....	20
B.5. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	27
B.6. TRANSMITTER SPURIOUS EMISSION - RADIATED	36
B.7. 6dB BANDWIDTH.....	43
B.8. MAXIMUM POWER SPECTRAL DENSITY LEVEL	46
B.9. AC POWERLINE CONDUCTED EMISSION	49
ANNEX C: ACCREDITATION CERTIFICATE	59

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 20-27°C
Relative Humidity: 20-50%

1.4. Project data

Testing Start Date: 2022-10-9
Testing End Date: 2022-11-4

1.5. Signature



Wu Le
(Prepared this test report)



Sun Zhenyu
(Reviewed this test report)



Hu Xiaoyu
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Honor Device Co., Ltd.
Address /Post: Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, China
City: Shenzhen
Postal Code: /
Country: China
Telephone: /
Fax: /

2.2. Manufacturer Information

Company Name: Honor Device Co., Ltd.
Address /Post: Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, China
City: Shenzhen
Postal Code: /
Country: China
Telephone: /
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model Name	RMO-NX1
FCC ID	2AYGCRMO-NX1
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.87V DC by Battery
Antenna gain	-2dBi

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
EUT2	/	HN2RMOM	6.1.0.21(C900E21R1P1)	/
EUT3	/	HN2RMOM	6.1.0.21(C900E21R1P1)	/
EUT4	/	HN2RMOM	6.1.0.21(C900E21R1P1)	/
EUT5	/	HN2RMOM	6.1.0.21(C900E21R1P1)	/

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Name	Model	Manufacturer
AE1-1	Adapter	HW-100400E01	Honor Device Co., Ltd.
AE1-2	Adapter	HW-100400B01	Honor Device Co., Ltd.
AE1-3	Adapter	HW-100400U01	Honor Device Co., Ltd.
AE2-1	USB Cable	WA0052	Broad
AE2-2	USB Cable	CUDU01B-HC385-EH	FOXCONN
AE2-3	USB Cable	L99UC144-CS-H	LUXSHARE
AE2-4	USB Cable	AU2-CRO009HF	Freeport
AE2-5	USB Cable	2120-00062-0	MING JI
AE2-6	USB Cable	2120-00060-0	MING JI
AE2-7	USB Cable	L99UC139-CS-H	LUXSHARE
AE3-1	Headset	1293-3283-3.5mm-339	Quancheng
AE3-2	Headset	EPAB542-2WH05-DH	FOXCONN
AE3-3	Headset	MEND1532B528C00	Lianchuang
AE4-1	Battery	HB506492EFW	Honor Device Co., Ltd. (Sunwoda)
AE4-2	Battery	HB506492EFW	Honor Device Co., Ltd. (Desay)
AE4-3	Battery	HB506492EFW	Honor Device Co., Ltd. (CosMX)
AE5-1	Type-C to 3.5mm	USB042020090AW7	LC
AE5-2	Type-C to 3.5mm	6001-7001-TC-348	QC

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery is used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of Smart Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	2021
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

5. Test Results

5.1. Summary of EUT Mode

Two modes are provided:

Mode	Conditions
Mode A	1Mbps
Mode B	2Mbps

*For the test results, the EUT had been tested all conditions. But only the worst case (Mode B) was shown in test report except the " Peak Output Power " test was shown all conditions.

5.2. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
F Fail, The EUT does not comply with the essential requirements in the standard
NA Not Applicable, The test was not applicable
NP Not Performed, The test was not performed by CTTL
R Re-use test data from basic model report

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	R
Frequency Band Edges- Conducted	15.247 (d)	R
Frequency Band Edges- Radiated	15.247, 15.205, 15.209	R
Transmitter Spurious Emission - Conducted	15.247 (d)	R
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	R
6dB Bandwidth	15.247 (a)(2)	R
Maximum Power Spectral Density Level	15.247(e)	R
AC Powerline Conducted Emission	15.107, 15.207	R

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.3. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

5.4. Explanation of re-use of test data

The Equipment Under Test (EUT) model RMO-NX1 (FCC ID: 2AYGCRMO-NX1) is a variant product of RMO-NX3 (FCC ID: 2AYGCRMO-NX3), according to the declaration of changes provided by the applicant, all the test results are derived from test report No.I22Z61813-IOT02. For detail differences between two models please refer the Declaration of Changes document.

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	R&S	1 year	2023-03-23
2	Test Receiver	ESCI	100344	R&S	1 year	2023-03-21
3	LISN	ENV216	101200	R&S	1 year	2023-06-29
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	R&S	1 year	2023-01-23
2	BiLog Antenna	VULB9163	01223	Schwarzbeck	1 year	2023-07-25
3	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	1 year	2023-02-08
4	EMI Antenna	3115	00167250	ETS-Lindgren	1 year	2023-06-20
5	Antenna	HFH2-Z2	829324/007	R&S	1 year	2022-12-22

7. Measurement Uncertainty

7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.2. Frequency Band Edges - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.3. Frequency Band Edges - Radiated

Measurement Uncertainty:

Measurement Uncertainty (k=2)	/
-------------------------------	---

7.4. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

7.5. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty(dBm) (k=2)
9kHz-30MHz	4.92
30MHz ≤ f ≤ 1GHz	5.18
1GHz ≤ f ≤ 18GHz	5.54
18GHz ≤ f ≤ 40GHz	5.26

7.6. 6dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

7.7. Maximum Power Spectral Density Level

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.8. AC Powerline Conducted Emission

Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.08dB
-------------------------------	--------

ANNEX A: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.


ANNEX B: Detailed Test Results

B.1. Measurement Method

B.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



B.1.2. Radiated Emission Measurements

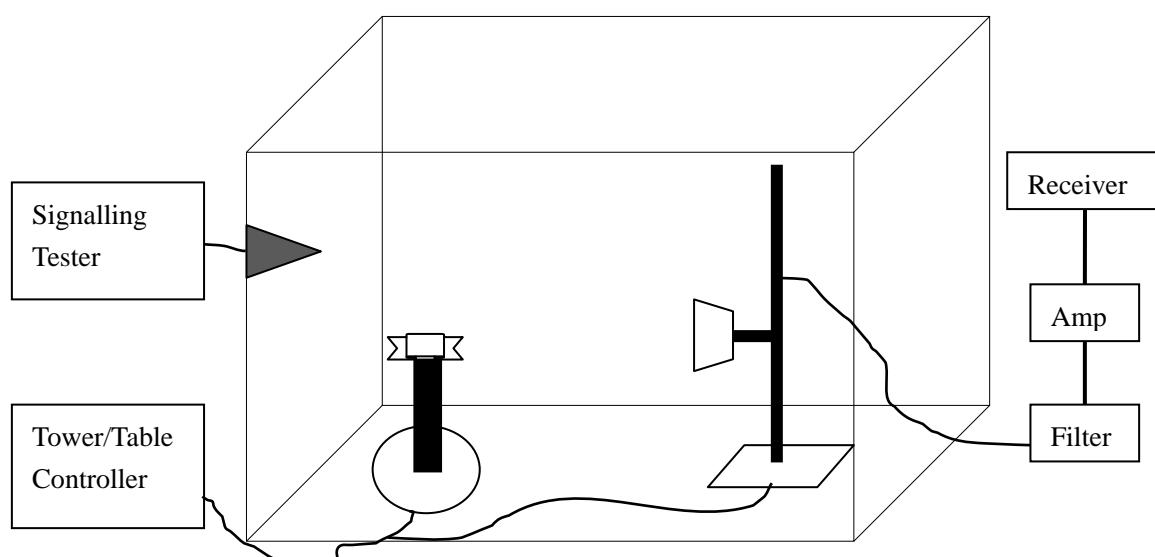
The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;



B.2. Peak Output Power

B.2.1. Peak Output Power - Conducted

Method of Measurement: See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 3 MHz.
- b) Set VBW = 10 MHz.
- c) Set span = 10 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(3)	< 30

Measurement Results:

For GFSK

Sample Rate	Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
1Mbps	0	2402	7.19	P
	19	2440	7.85	P
	39	2480	8.57	P
2Mbps	0	2402	7.30	P
	19	2440	8.01	P
	39	2480	8.73	P

Conclusion: PASS

B.2.2. E.I.R.P.

The radiated E.I.R.P. is listed below:

Antenna gain = -2dBi

For GFSK

Sample Rate	Channel No.	Frequency (MHz)	E.I.R.P. (dBm)	Conclusion
1Mbps	0	2402	5.19	P
	19	2440	5.85	P
	39	2480	6.57	P
2Mbps	0	2402	5.30	P
	19	2440	6.01	P
	39	2480	6.73	P

Note: E.I.R.P. are calculated with the antenna gain.

Conclusion: PASS

B.3. Frequency Band Edges - Conducted

Method of Measurement: See ANSI C63.10-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

Measurement Result:

For GFSK

Channel No.	Frequency (MHz)	Hopping	Band Edge Power (dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-45.08	P
39	2480	Hopping OFF	Fig.2	-57.75	P

Conclusion: PASS

Test graphs as below

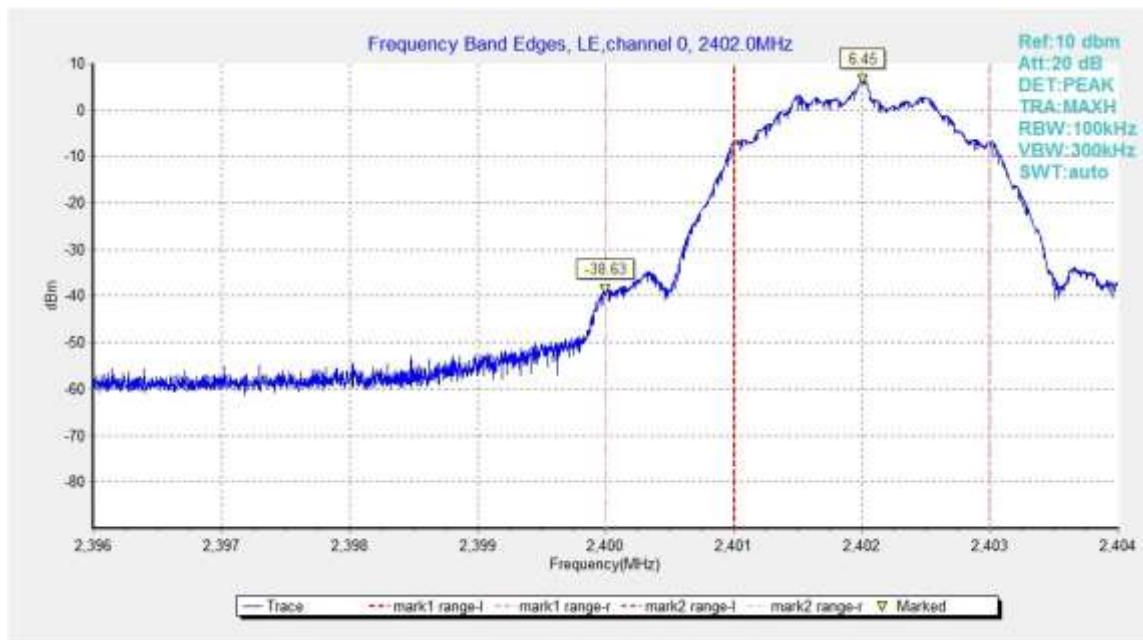


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

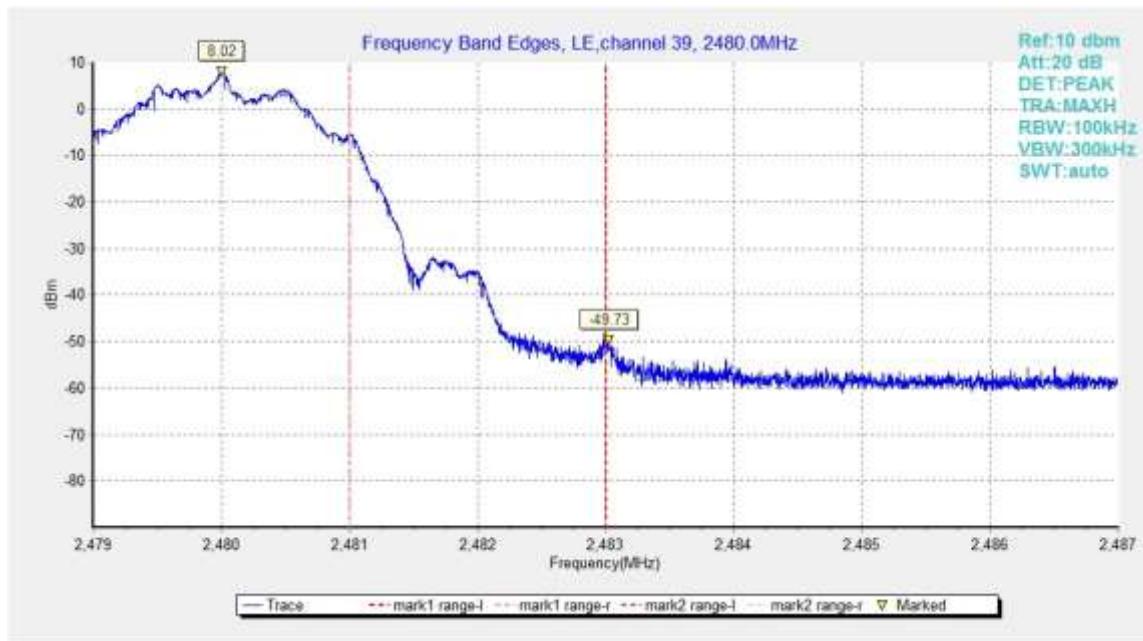


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off

B.4. Frequency Band Edges –Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m and the table height shall be 1.5 m.

The EUT and transmitting antenna shall be centered on the turntable.

Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral

display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

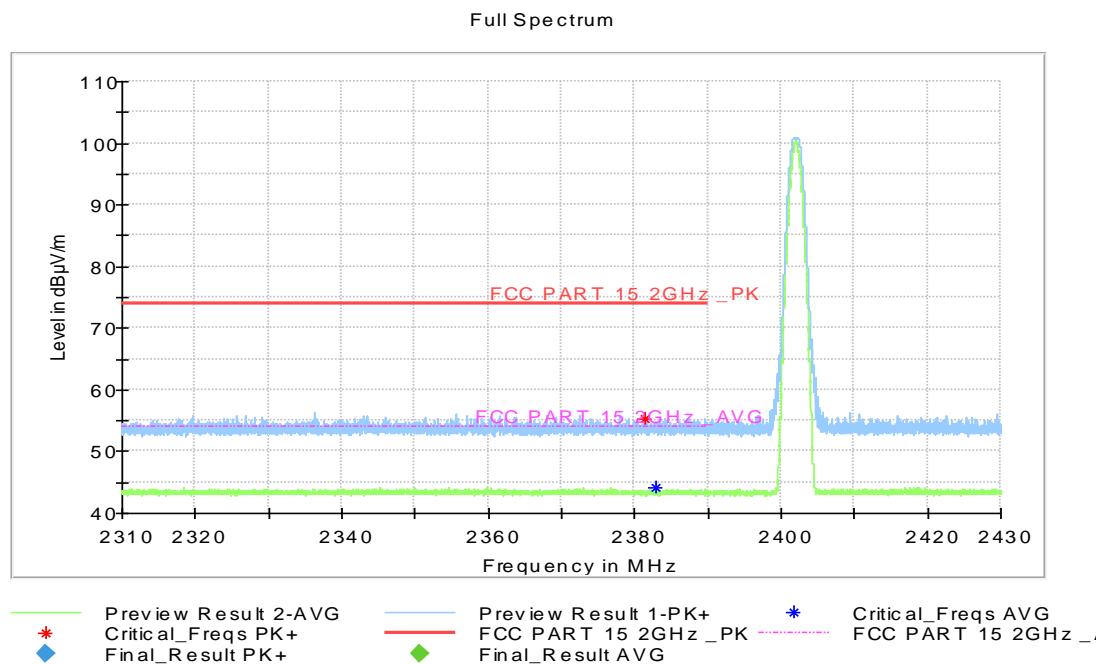
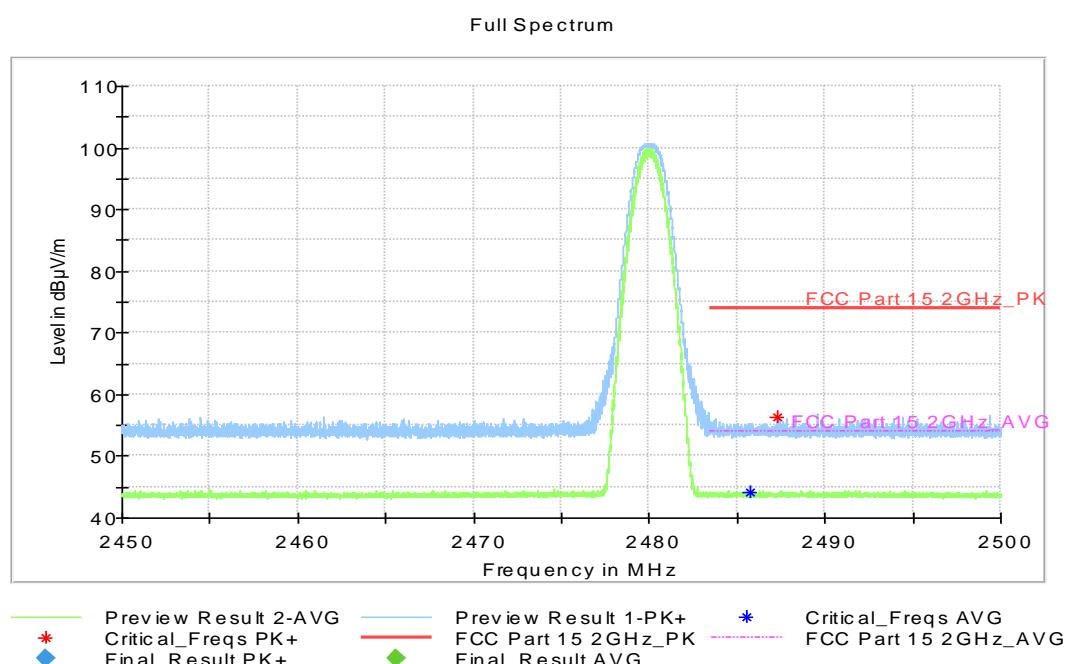
This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

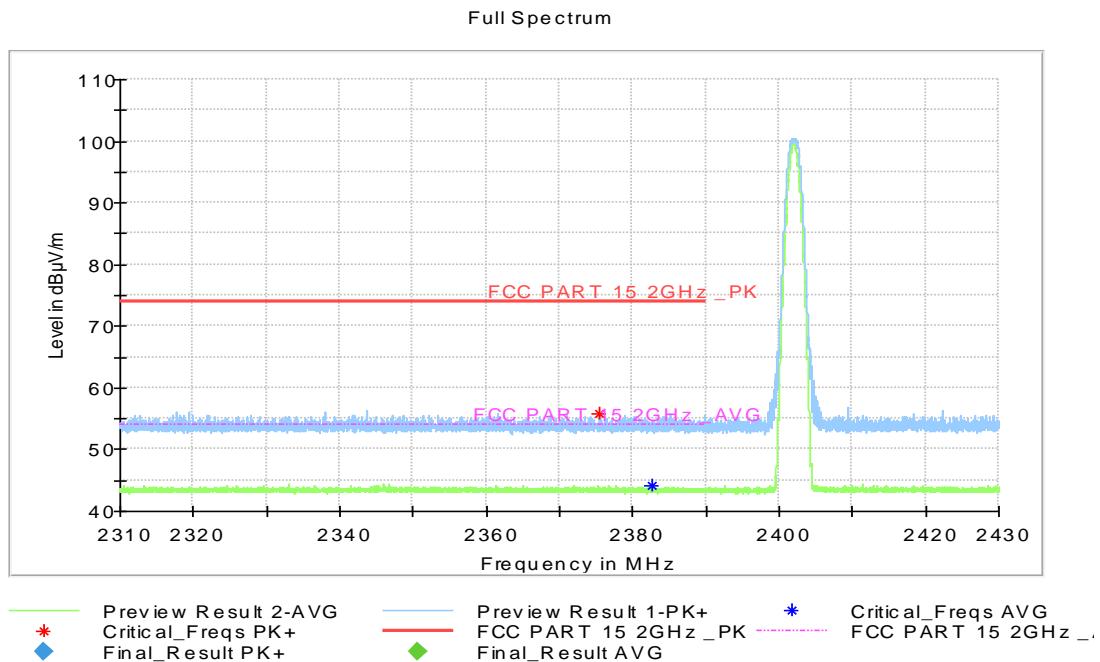
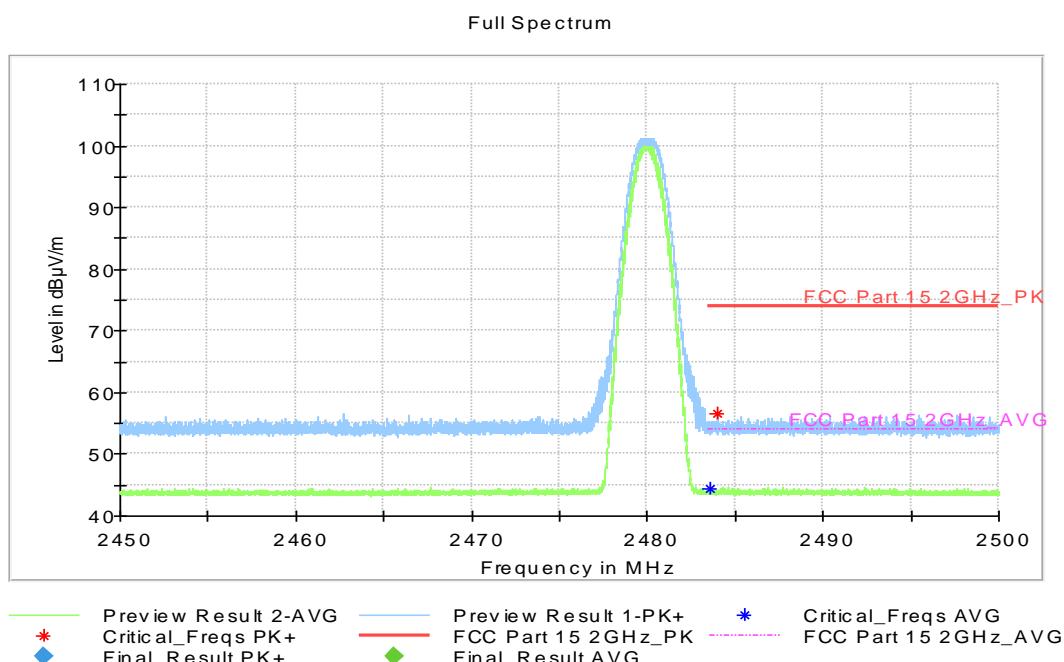
EUT ID: EUT3 + AE2-1
Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.3	P
	39	2.45GHz ~2.5GHz	Fig.4	P

Conclusion: PASS
Test graphs as below

Fig.3. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off, 2.38 GHz – 2.45GHz

Fig.4. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off , 2.45 GHz - 2.50GHz
 Copyright. All rights reserved by CTTL.

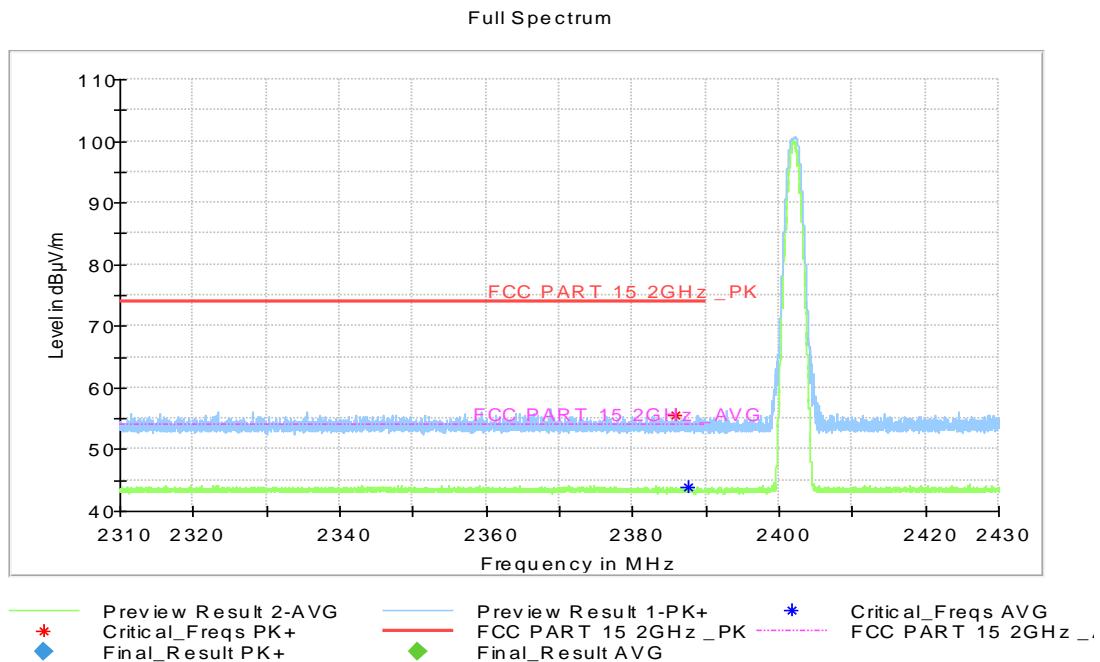
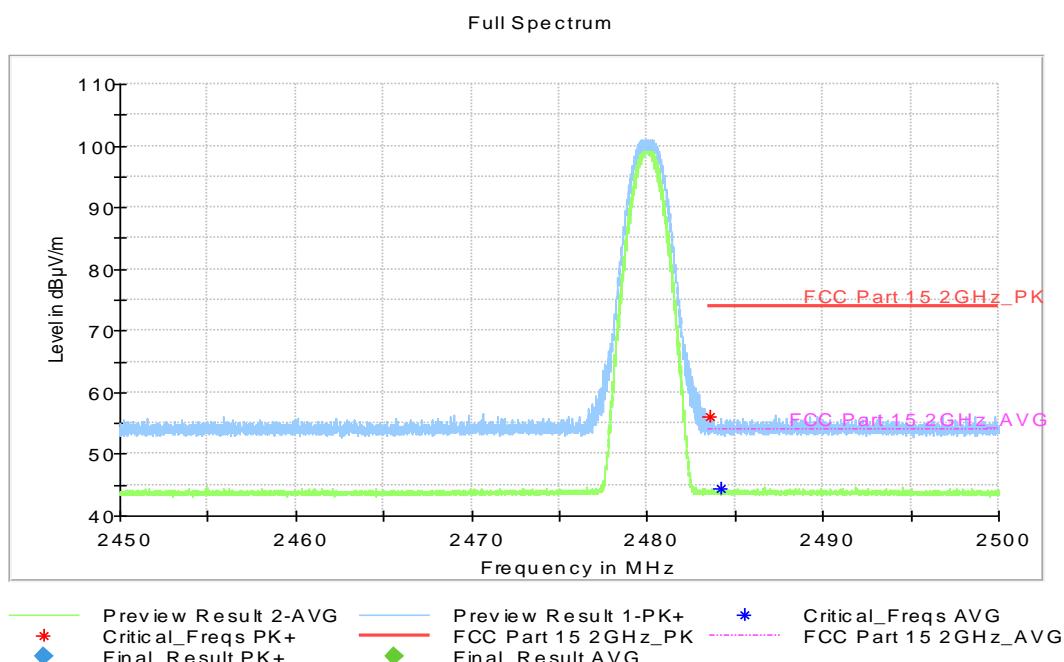
EUT ID: EUT4 + AE2-2
Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.5	P
	39	2.45GHz ~2.5GHz	Fig.6	P

Conclusion: PASS
Test graphs as below

Fig.5. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off, 2.38 GHz – 2.45GHz

Fig.6. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off , 2.45 GHz - 2.50GHz
Copyright. All rights reserved by CTTL.

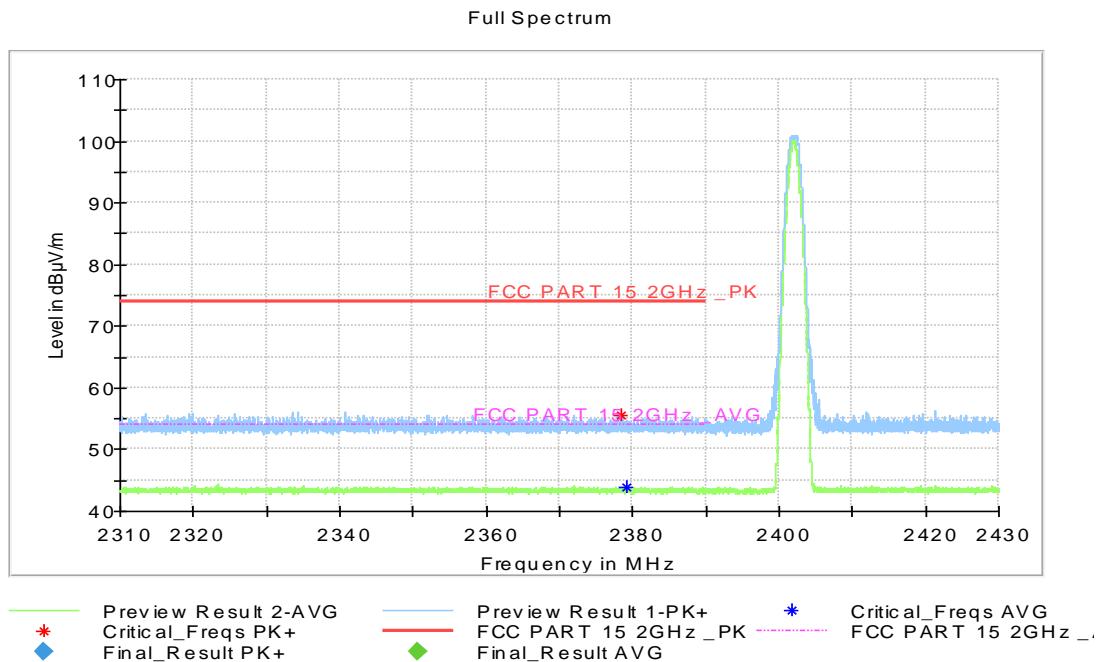
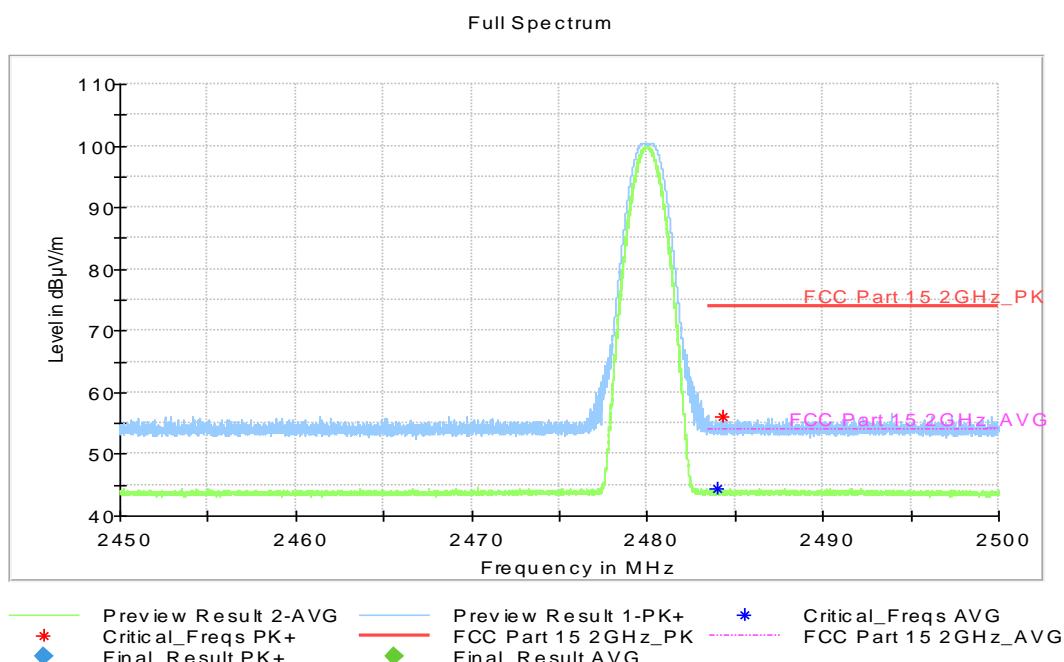
EUT ID: EUT5 + AE2-3
Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.7	P
	39	2.45GHz ~2.5GHz	Fig.8	P

Conclusion: PASS
Test graphs as below

Fig.7. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off, 2.38 GHz – 2.45GHz

Fig.8. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off , 2.45 GHz - 2.50GHz
 Copyright. All rights reserved by CTTL.

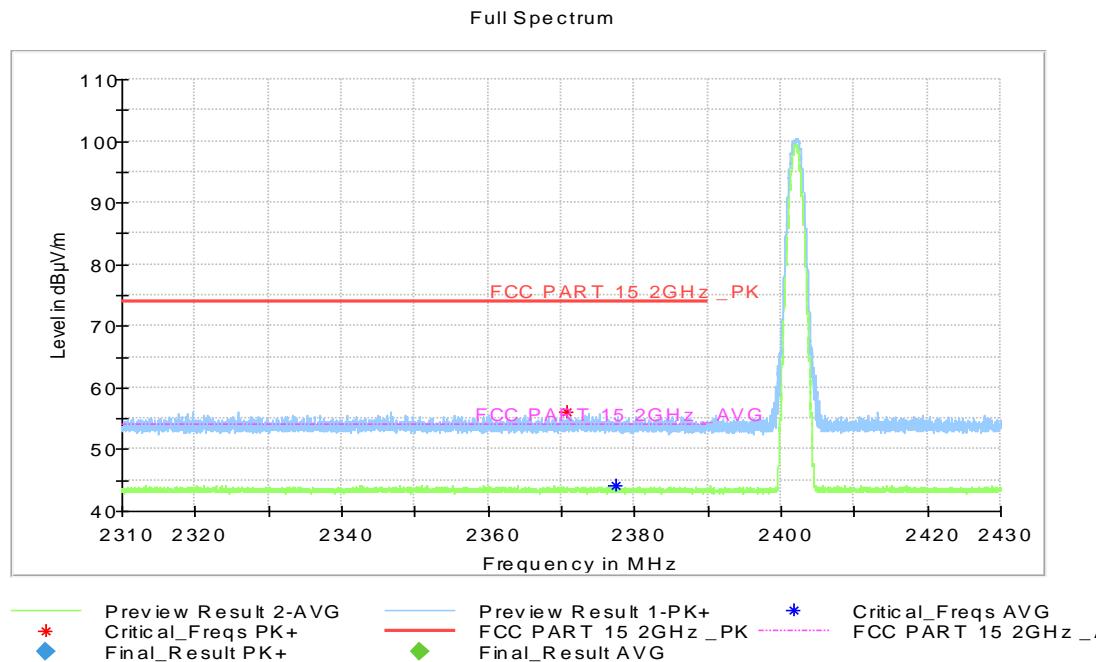
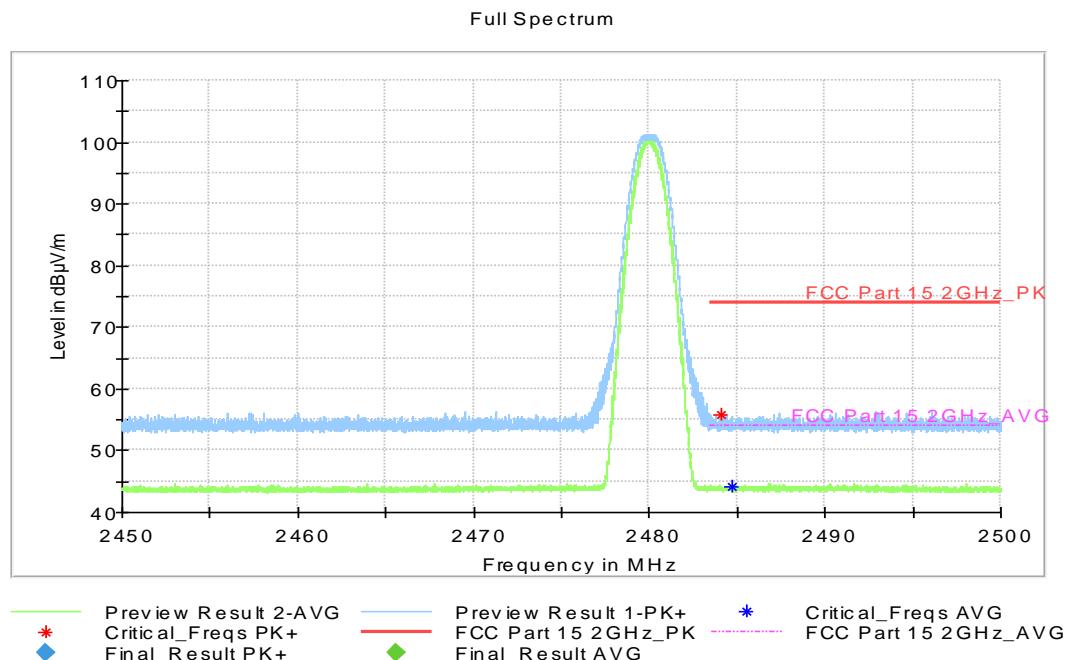
EUT ID: EUT3 + AE2-4
Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.9	P
	39	2.45GHz ~2.5GHz	Fig.10	P

Conclusion: PASS
Test graphs as below

Fig.9. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off, 2.38 GHz – 2.45GHz

Fig.10. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off , 2.45 GHz - 2.50GHz
 Copyright. All rights reserved by CTTL.

EUT ID: EUT4 + AE2-5
Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.11	P
	39	2.45GHz ~2.5GHz	Fig.12	P

Conclusion: PASS
Test graphs as below

Fig.11. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off, 2.38 GHz – 2.45GHz

Fig.12. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off , 2.45 GHz - 2.50GHz

B.5. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 11.11.2 and clause 11.11.3

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to ≥ 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

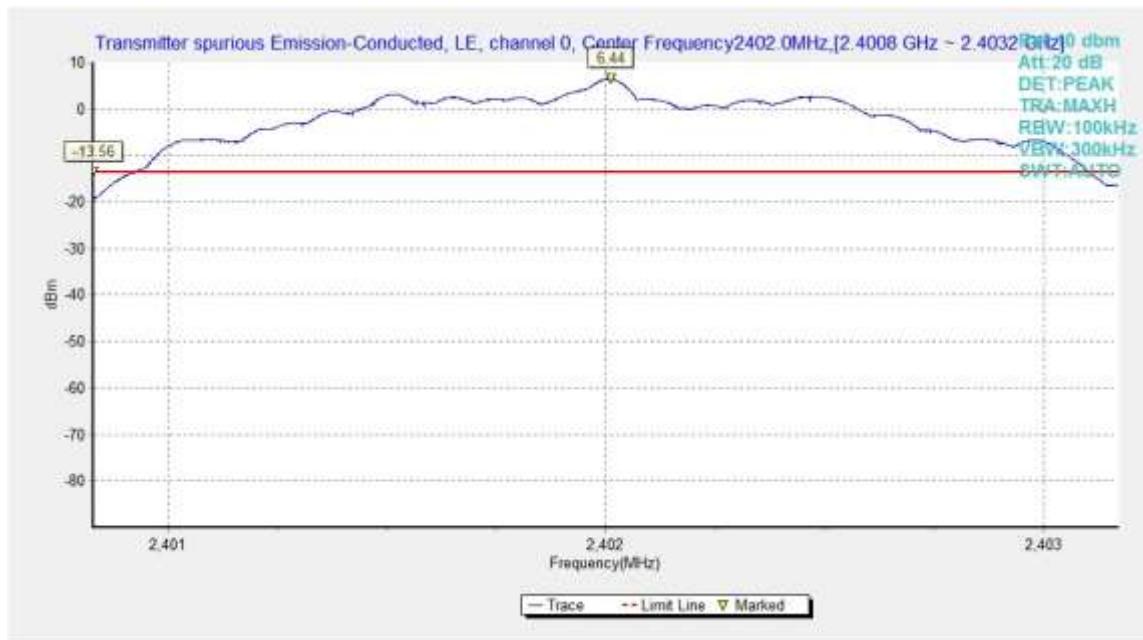
Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:
For GFSK

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3 GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10GHz ~ 26 GHz	Fig.17	P
19	2440	Center Frequency	Fig.18	P
		30 MHz ~ 1 GHz	Fig.19	P
		1 GHz ~ 3 GHz	Fig.20	P
		3 GHz ~ 10 GHz	Fig.21	P
		10GHz ~ 26 GHz	Fig.22	P
39	2480	Center Frequency	Fig.23	P
		30 MHz ~ 1 GHz	Fig.24	P
		1 GHz ~ 3GHz	Fig.25	P
		3 GHz ~ 10 GHz	Fig.26	P
		10 GHz ~ 26 GHz	Fig.27	P

Conclusion: PASS
Test graphs as below

Fig.13. Transmitter Spurious Emission - Conducted: GFSK,2402MHz

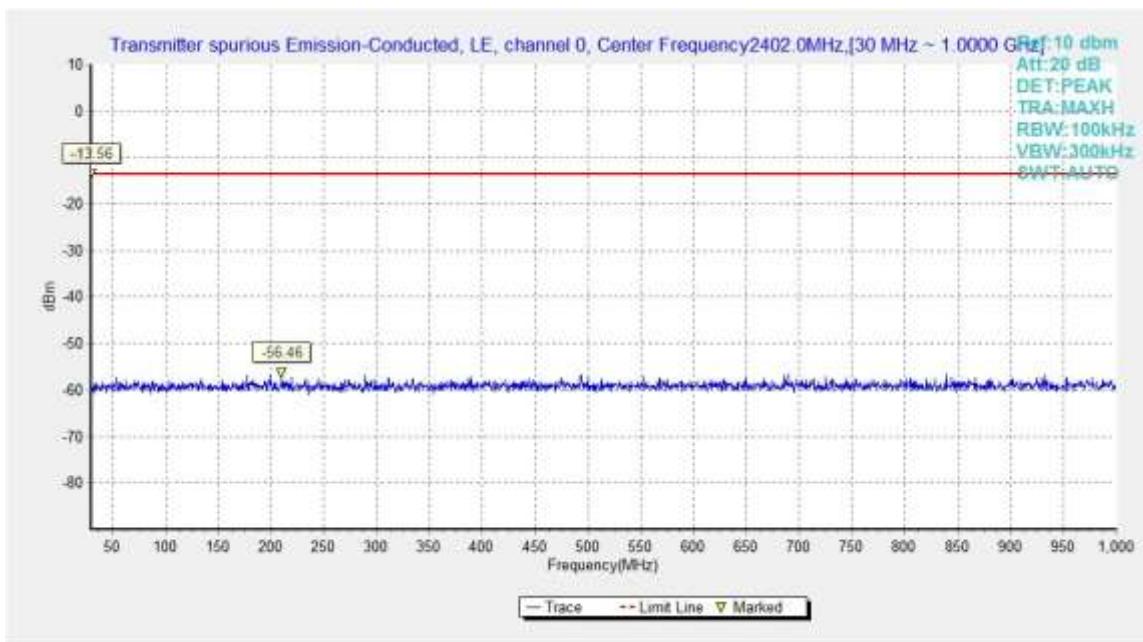


Fig.14. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

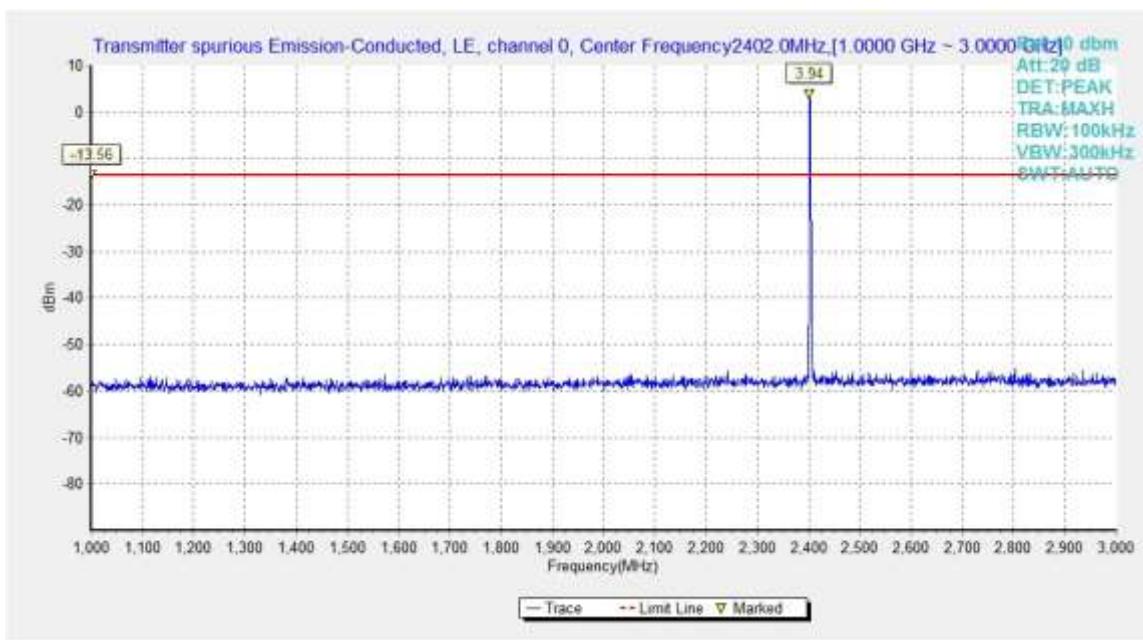


Fig.15. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

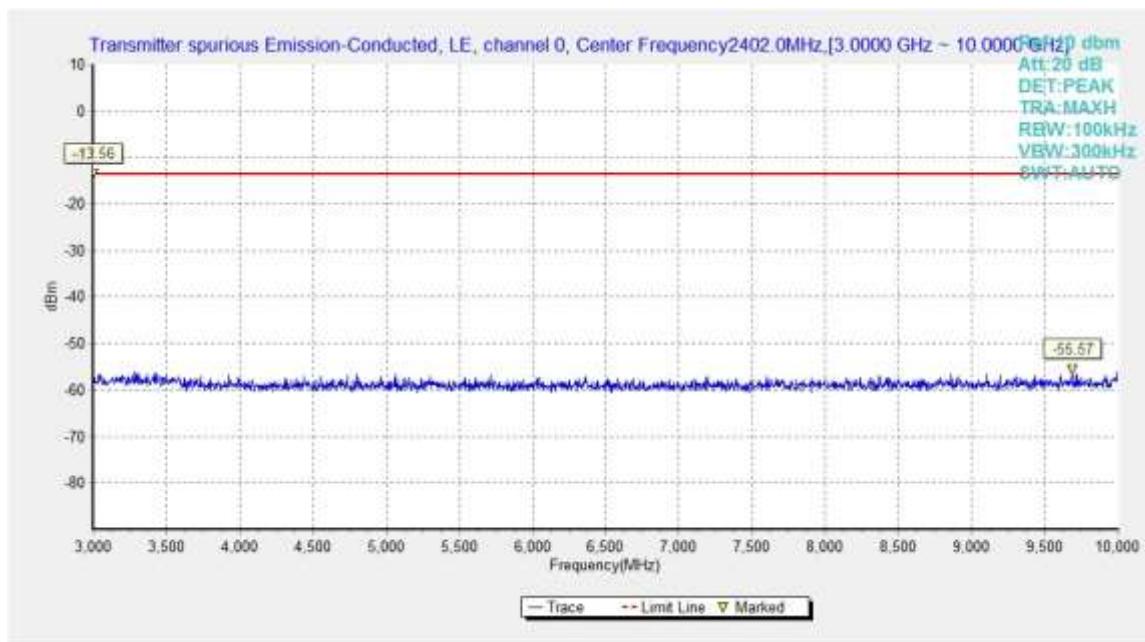


Fig.16. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz,3GHz - 10GHz

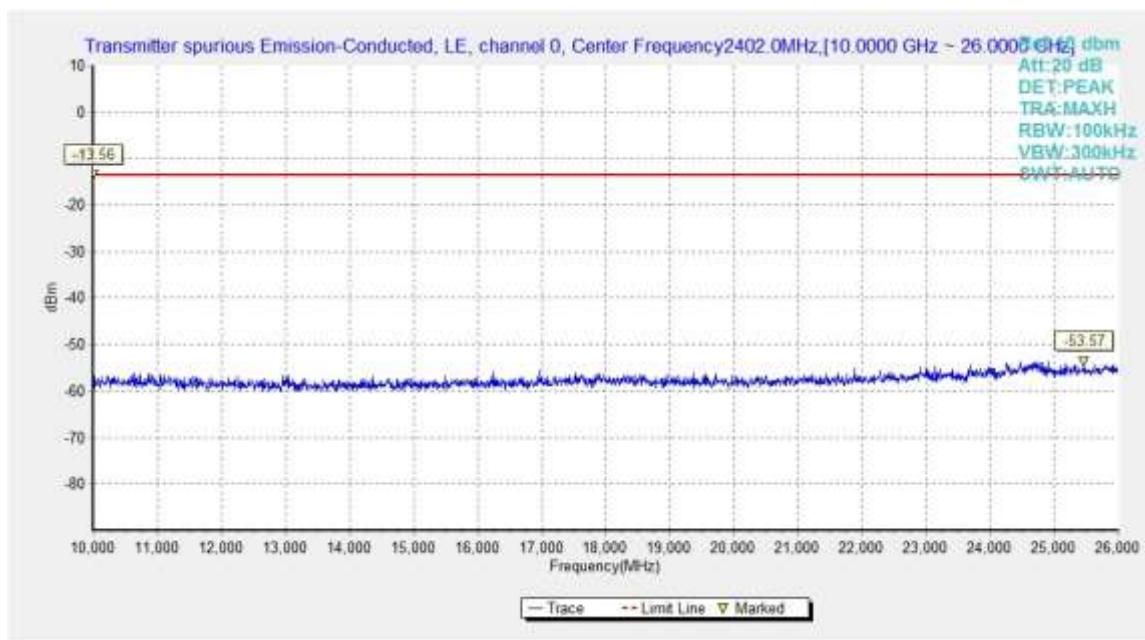


Fig.17. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz,10GHz - 26GHz

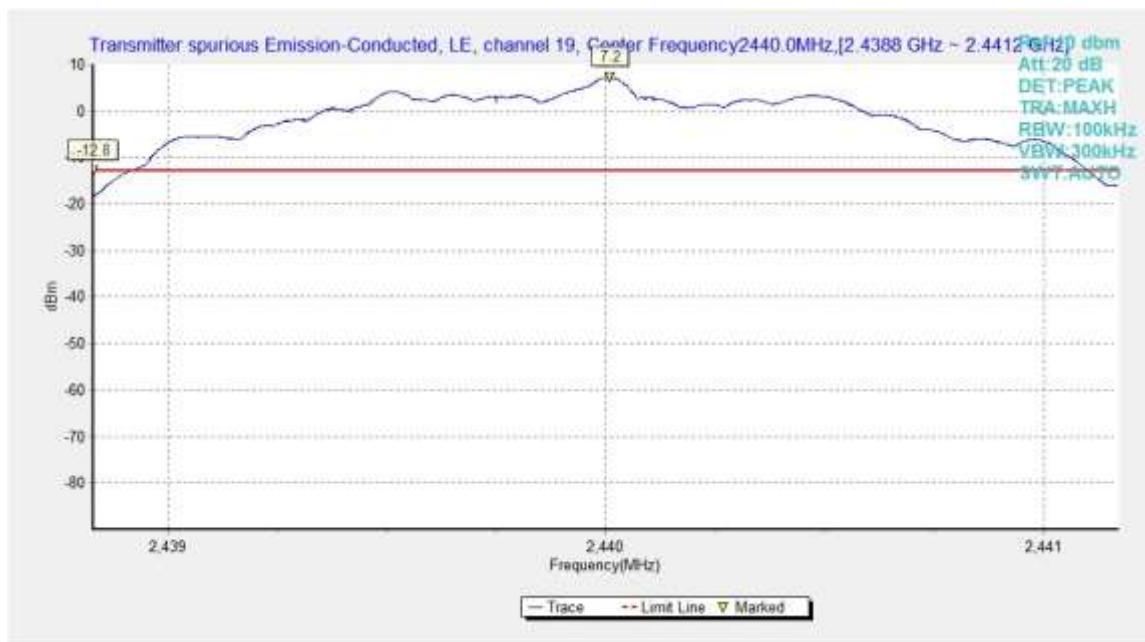


Fig.18. Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

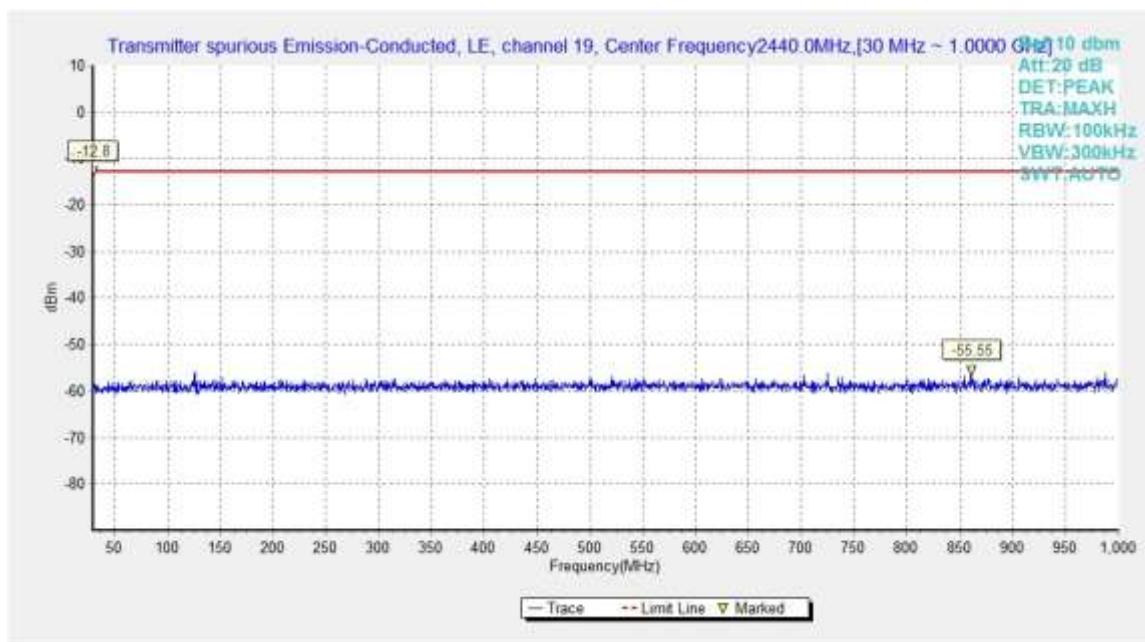


Fig.19. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

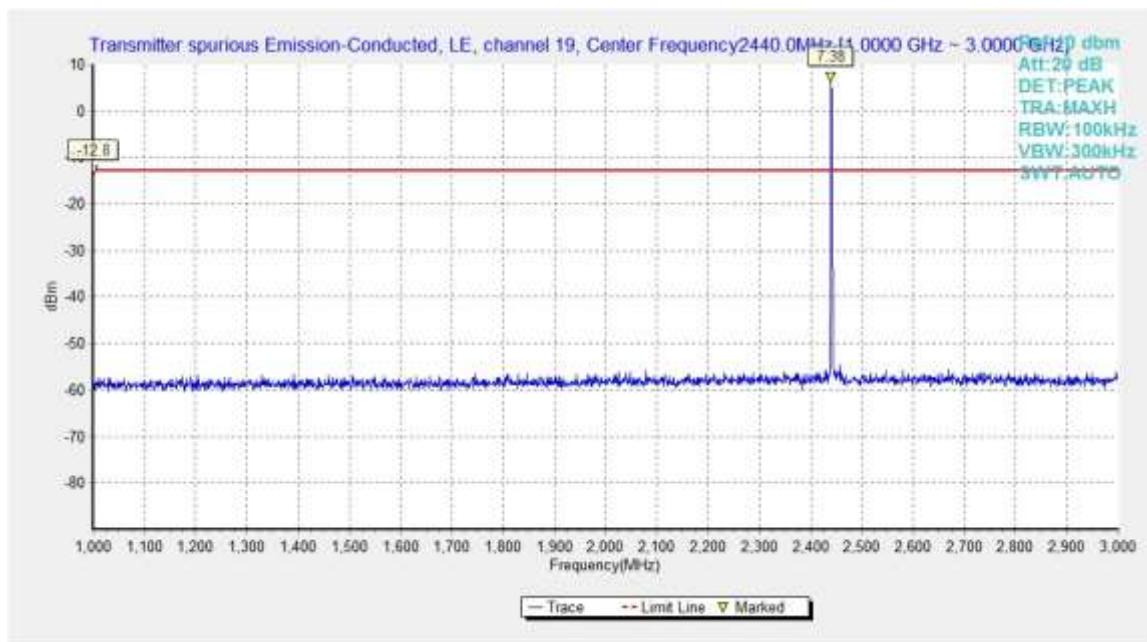


Fig.20. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

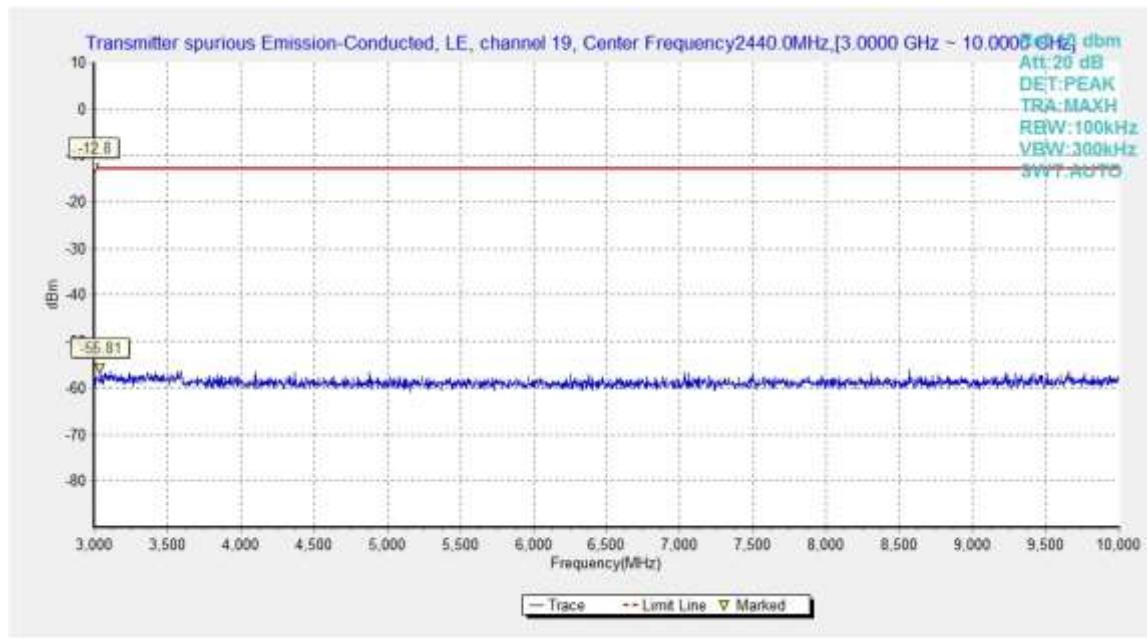


Fig.21. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz

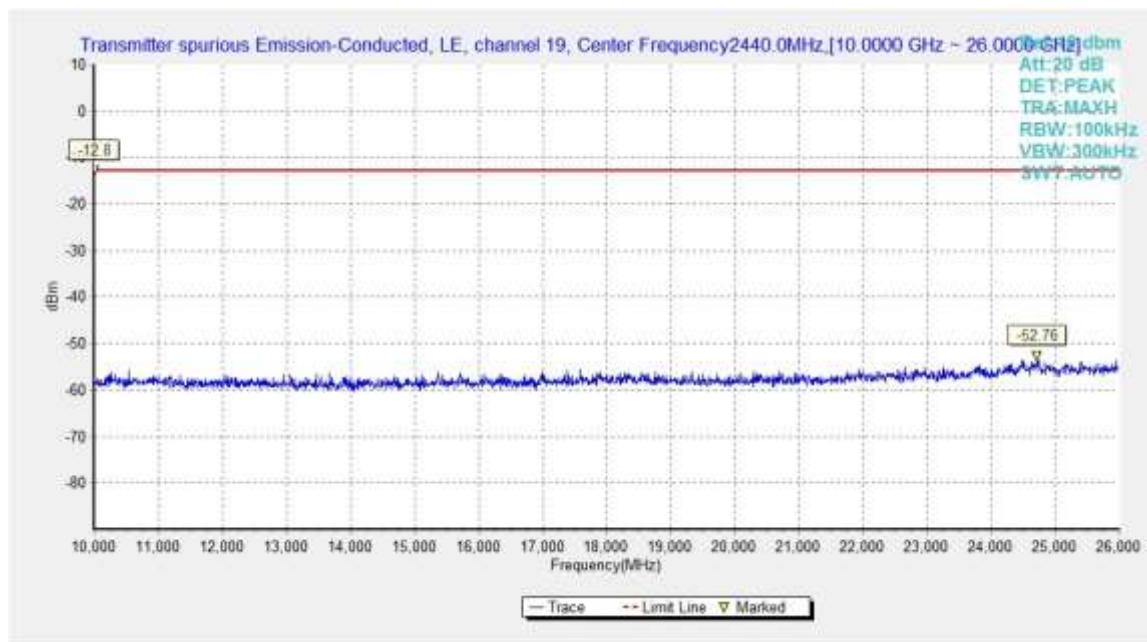


Fig.22. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

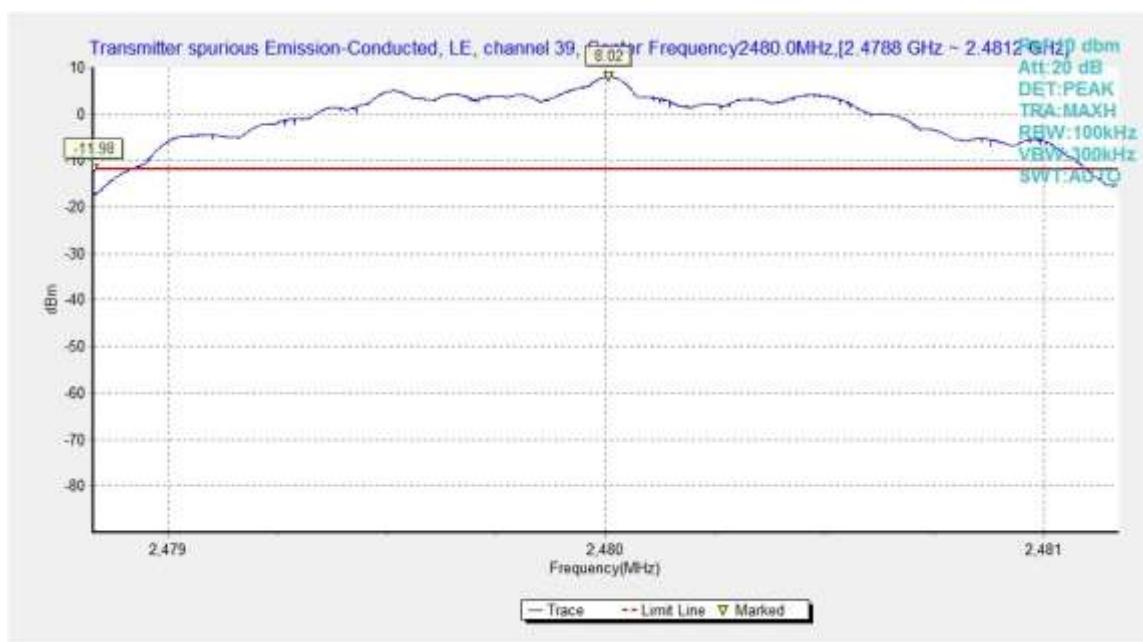


Fig.23. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz

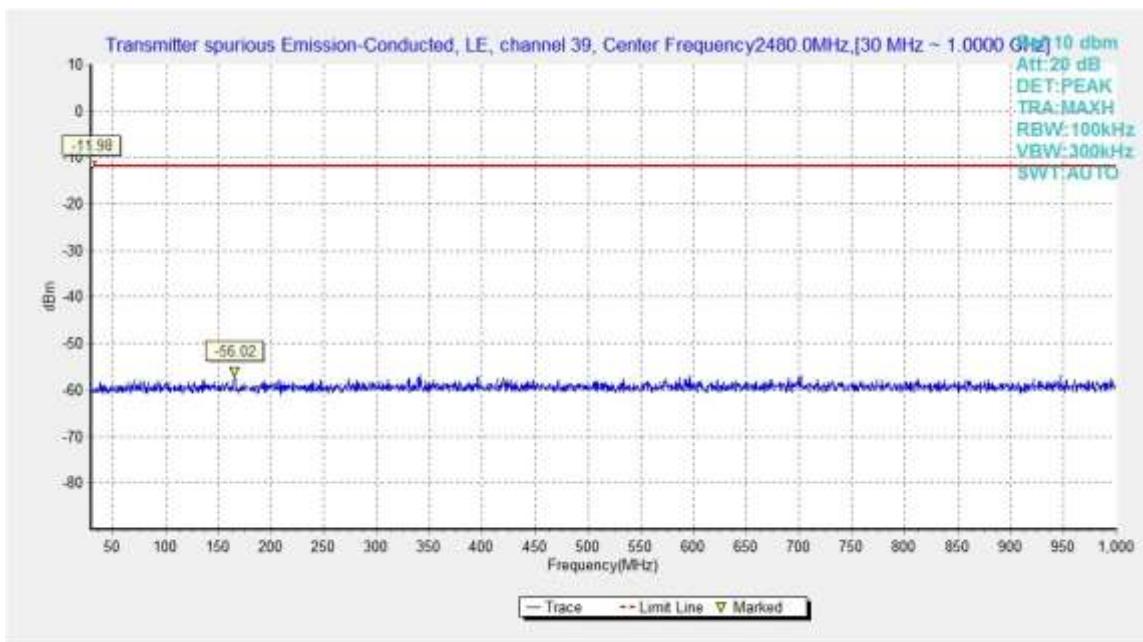


Fig.24. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

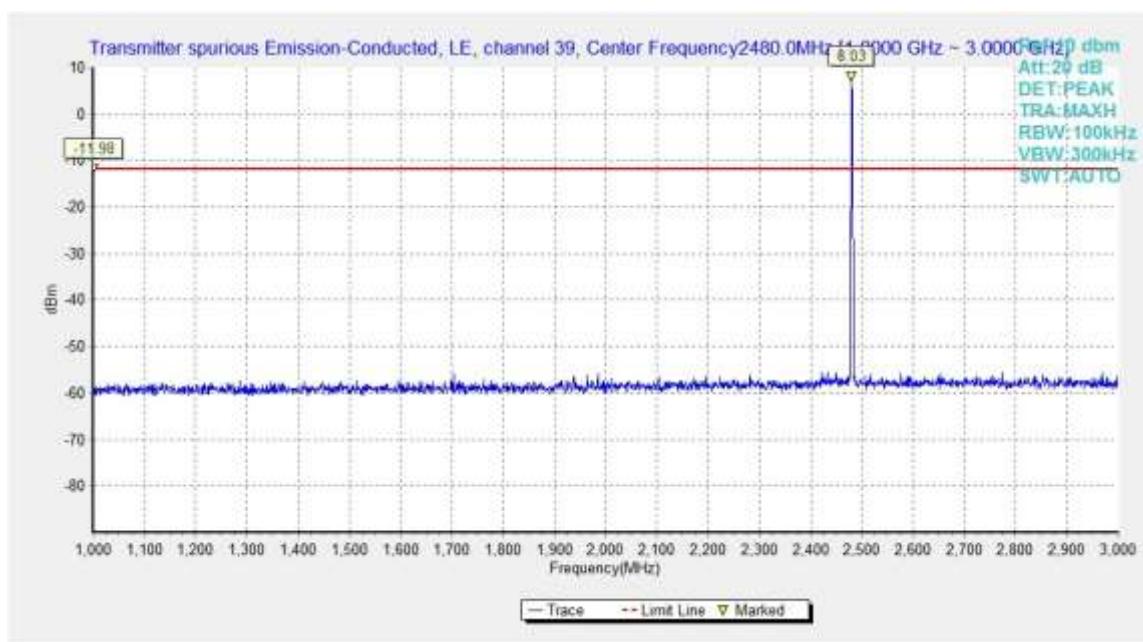


Fig.25. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

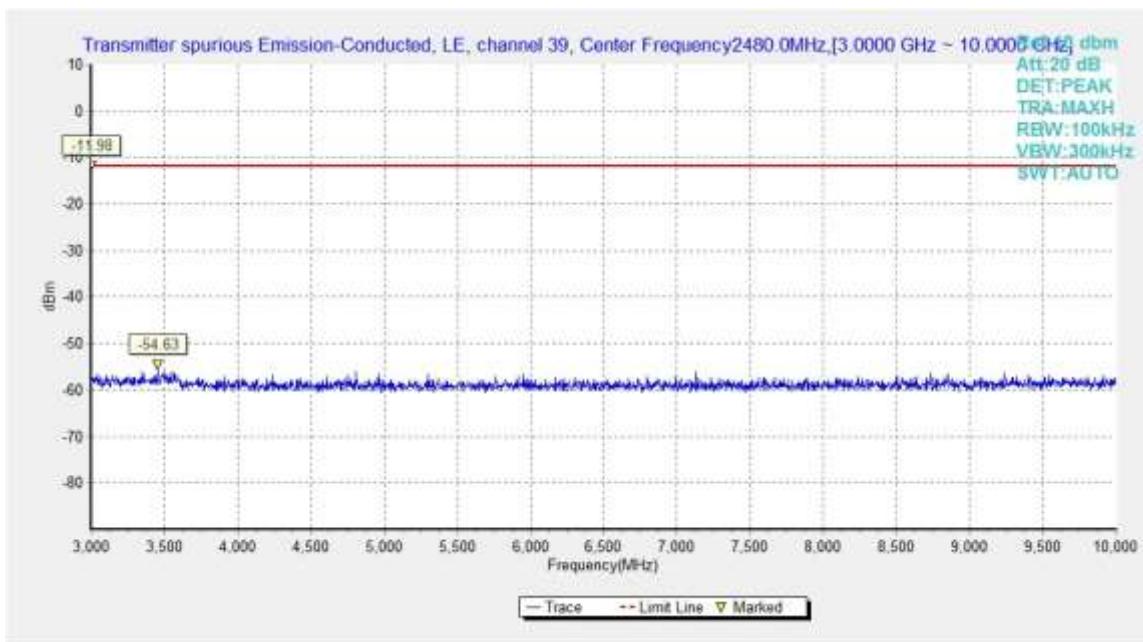


Fig.26. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 3GHz - 10GHz

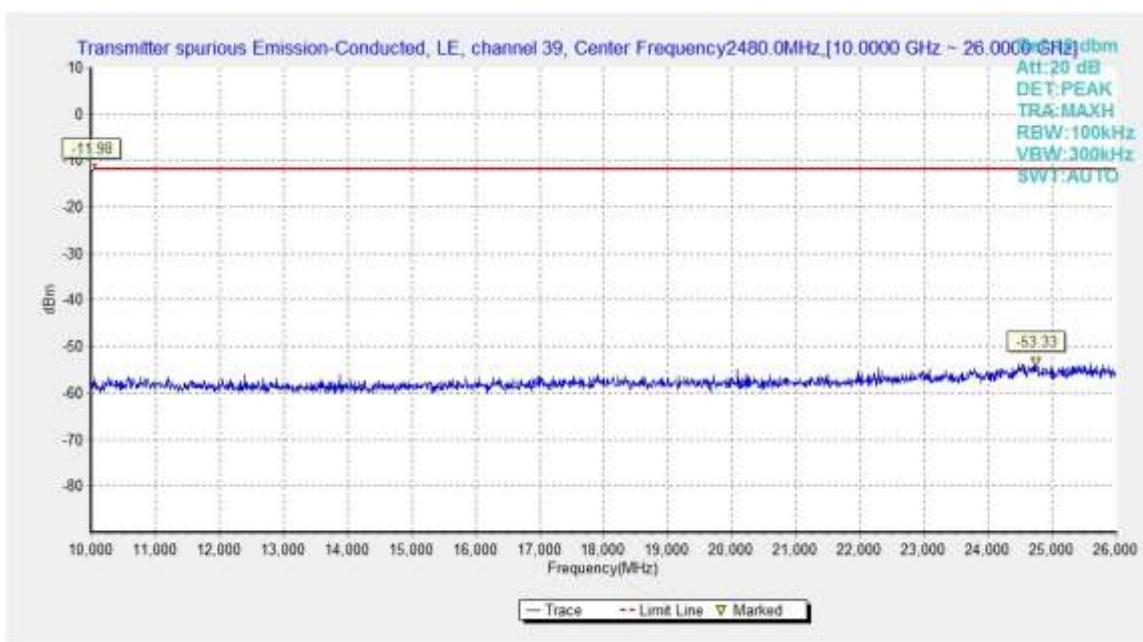


Fig.27. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

B.6. Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

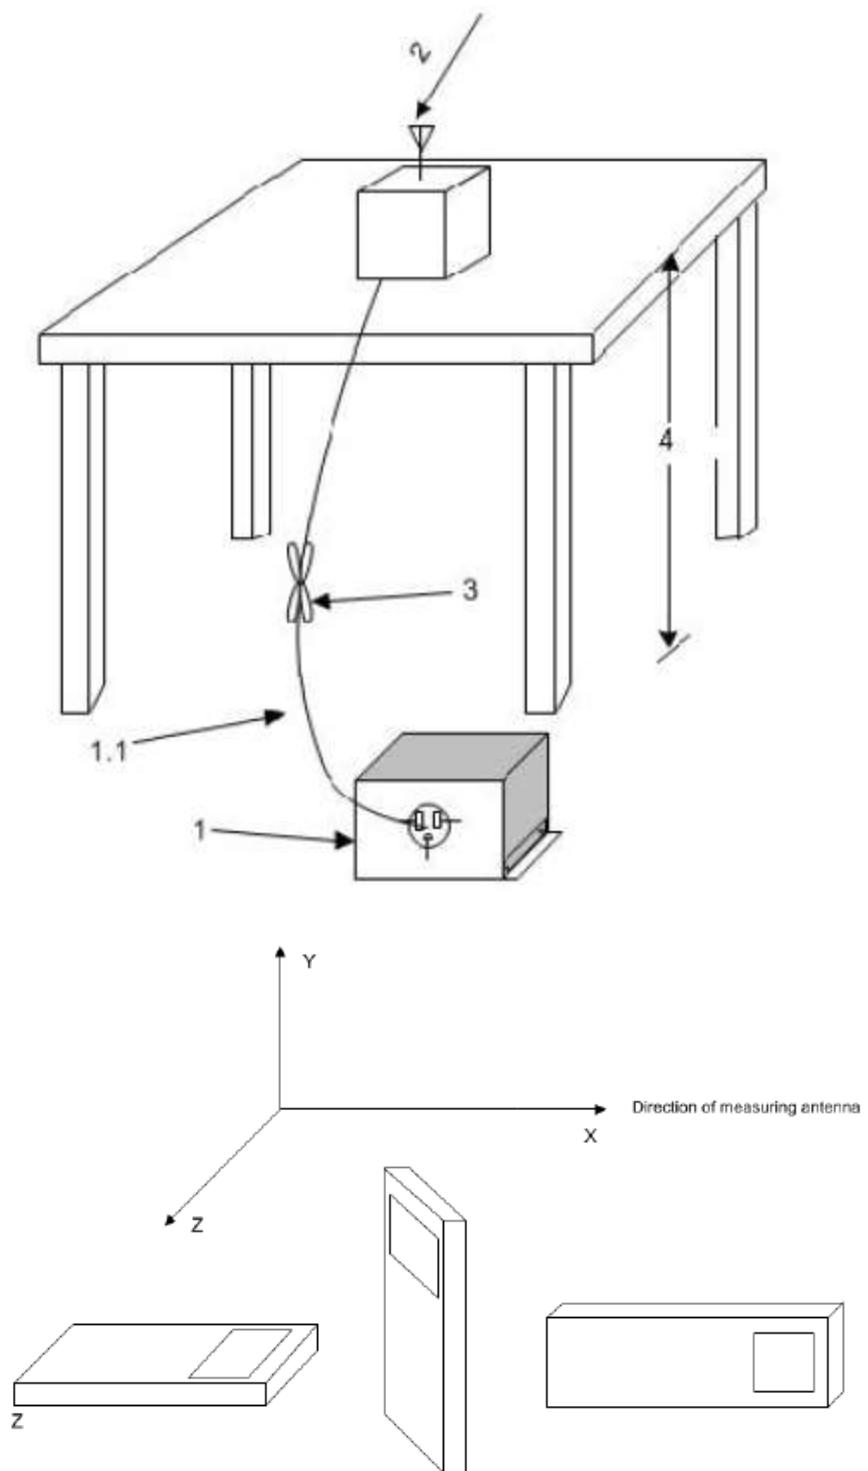
Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

The EUT and transmitting antenna shall be centered on the turntable.



Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the

nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result = P_{Mea} + Cable Loss + Antenna Factor

Where:

P_{Mea} field strength recorded from the instrument

EUT ID: EUT3 + AE2-1

Average Measurement results

GFSK 2402MHz

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17155.500	41.22	-26.60	43.40	24.42	54.00	12.78	V
13735.000	38.88	-29.10	40.90	27.08	54.00	15.12	V
12992.000	36.54	-30.50	39.20	27.84	54.00	17.46	V
8703.000	35.23	-34.40	38.00	31.63	54.00	18.77	V
7314.500	34.49	-35.00	36.50	32.89	54.00	19.51	V
2360.400	44.27	-20.10	28.00	36.27	54.00	9.73	V

GFSK 2440MHz

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17246.500	40.99	-25.90	44.40	22.59	54.00	13.01	V
13726.500	38.57	-29.10	40.90	26.77	54.00	15.43	V
12998.000	36.67	-30.50	39.20	27.97	54.00	17.33	V
8718.000	35.03	-34.40	38.00	31.43	54.00	18.97	V
7312.500	34.30	-35.00	36.50	32.70	54.00	19.70	V
4879.500	30.97	-37.20	33.20	34.97	54.00	23.03	H

GFSK 2480MHz

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17243.500	40.86	-25.90	44.40	22.46	54.00	13.14	V
13700.500	38.75	-29.10	40.90	26.95	54.00	15.25	V
12992.000	36.69	-30.50	39.20	27.99	54.00	17.31	V
8724.500	35.37	-34.40	38.00	31.77	54.00	18.63	V
4960.000	34.48	-37.10	33.30	38.28	54.00	19.52	V
2493.700	44.41	-20.00	28.30	36.11	54.00	9.59	H

Peak Measurement results
GFSK 2402MHz

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17094.500	52.68	-26.60	43.40	35.88	74.00	21.32	V
13696.500	50.79	-29.10	40.90	38.99	74.00	23.21	V
12009.500	47.91	-31.50	39.10	40.31	74.00	26.09	V
8712.500	46.52	-34.40	38.00	42.92	74.00	27.48	H
7822.000	45.78	-35.10	37.00	43.88	74.00	28.22	V
2336.300	56.43	-20.10	28.00	48.53	74.00	17.57	V

GFSK 2440MHz

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17187.500	52.90	-26.60	43.40	36.10	74.00	21.10	H
13933.000	50.53	-29.50	41.30	38.73	74.00	23.47	V
12771.000	48.09	-30.50	39.10	39.49	74.00	25.91	V
8724.500	47.24	-34.40	38.00	43.64	74.00	26.76	H
7426.500	45.92	-35.20	36.70	44.32	74.00	28.08	V
4880.000	42.23	-37.20	33.20	46.23	74.00	31.77	H

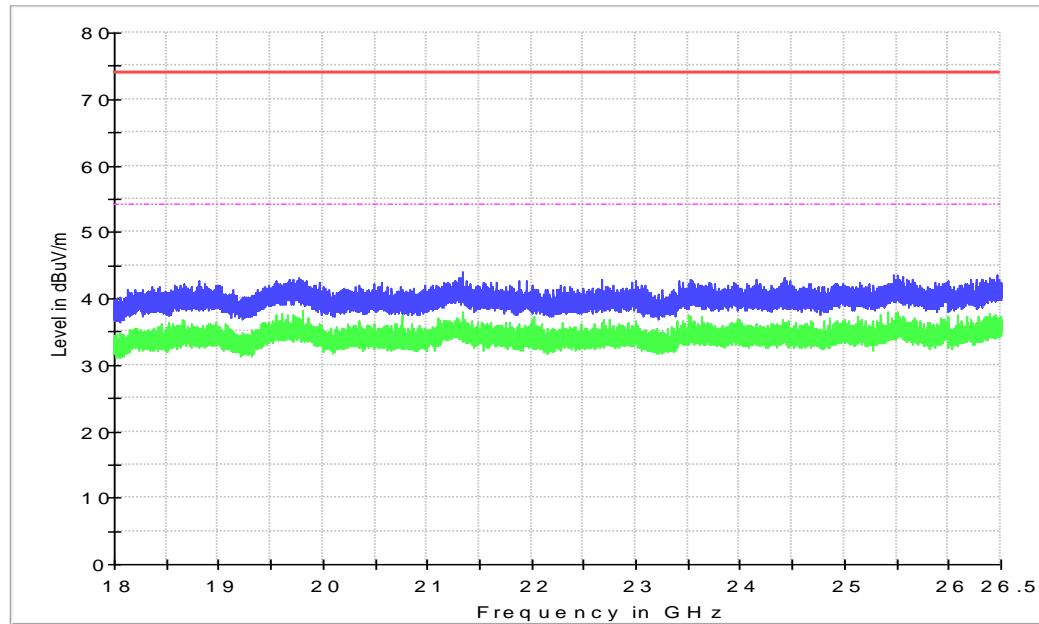
GFSK 2480MHz

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17337.000	53.30	-25.90	44.40	34.90	74.00	20.70	V
14174.000	50.29	-29.00	42.00	37.29	74.00	23.71	V
12853.500	47.37	-30.70	39.10	38.87	74.00	26.63	V
8730.000	46.54	-34.40	38.00	42.94	74.00	27.46	V
7608.000	45.75	-35.00	36.90	43.95	74.00	28.25	V
2489.500	56.92	-20.00	28.30	48.62	74.00	17.08	V

Conclusion: PASS

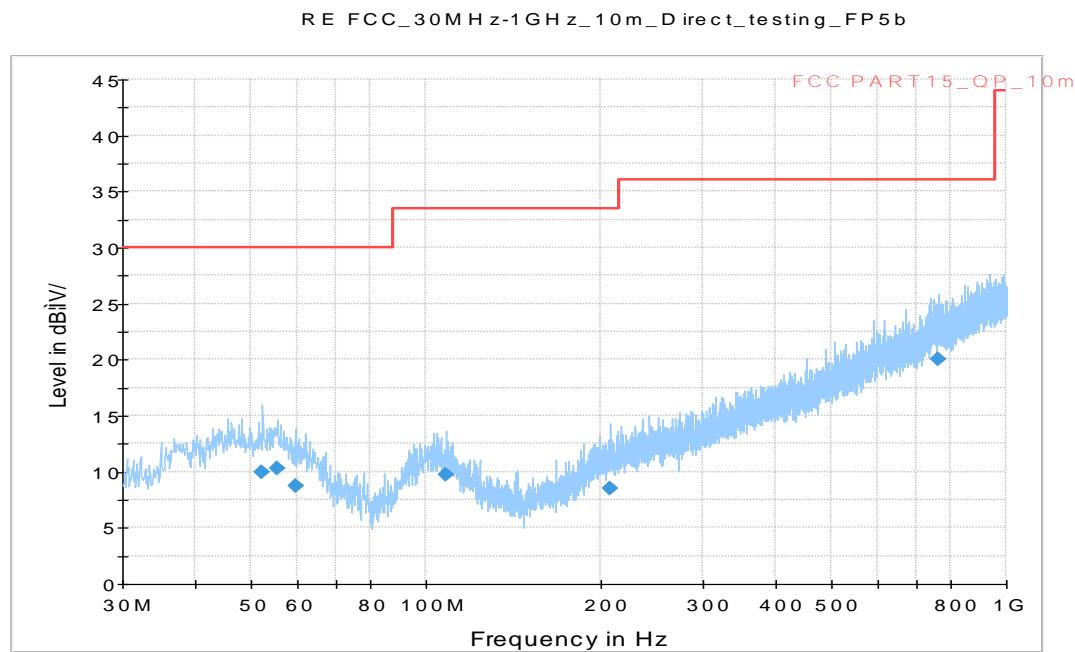
Sample calculation: 17337MHz

$$\text{Peak ERP(dBm)} = P_{\text{Mea}}(32.70 \text{ dBuV/m}) + \text{Cable Loss}(-25.90) + \text{Antenna Factor}(44.40) = 53.30 \text{ dBuV/m}$$

WOSRT CASE 18GHz-26.5 GHz

WOSRT CASE BELOW 1GHz

— FCC Part 15C 30-1G Limit
— Peak Preview Result
◆ Final Result QPK



Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
52.213000	9.9	125.0	H	93.0	-11.2	20.1	30.0
55.414000	10.3	175.0	V	45.0	-11.3	19.7	30.0
59.585000	8.7	275.0	H	-10.0	-11.9	21.3	30.0
108.279000	9.7	100.0	V	225.0	-12.6	23.8	33.5
207.995000	8.5	175.0	H	225.0	-11.5	25.0	33.5
764.678000	20.0	225.0	V	135.0	1.9	16.0	36.0

BELow 30MHz

No emissions were found within 20dB of the limit below 30MHz.

B.7. 6dB Bandwidth

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	>= 500KHz

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)	Conclusion
0	2402	Fig.28	1134.50
19	2440	Fig.29	1143.00
39	2480	Fig.30	1142.50

Conclusion: PASS

Test graphs as below:

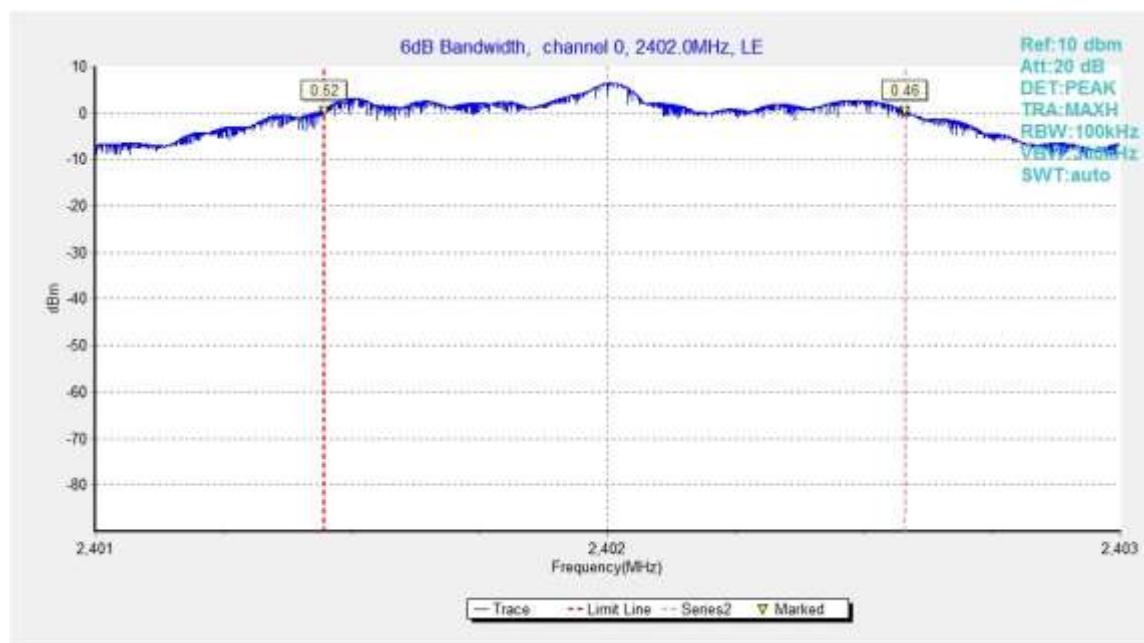


Fig.28. 6dB Bandwidth: GFSK, 2402 MHz

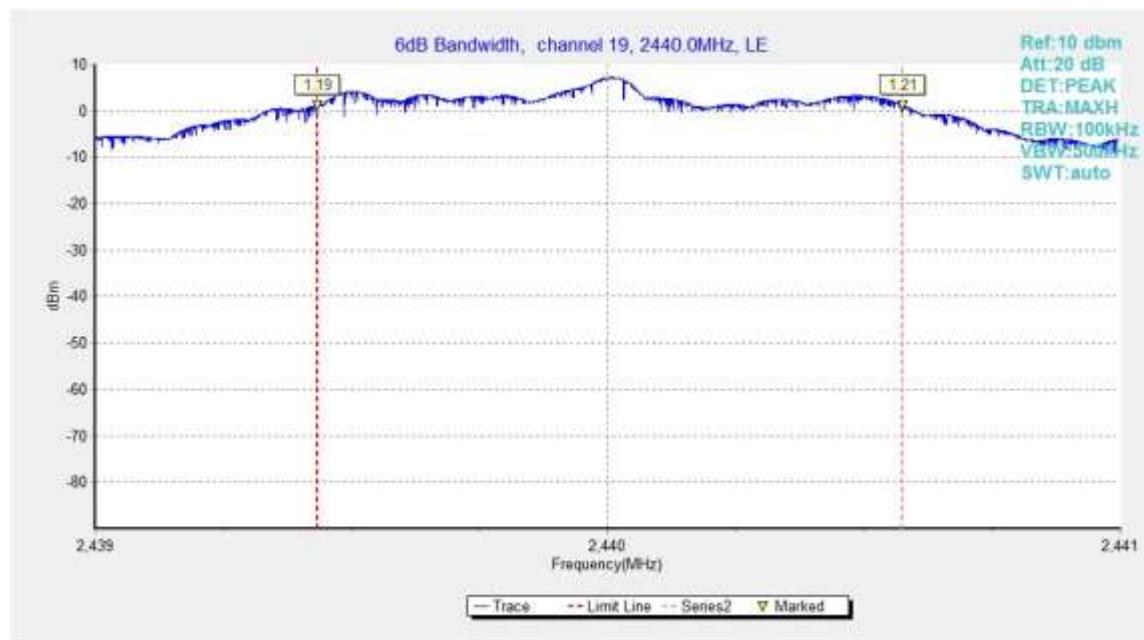


Fig.29. 6dB Bandwidth: GFSK, 2440 MHz

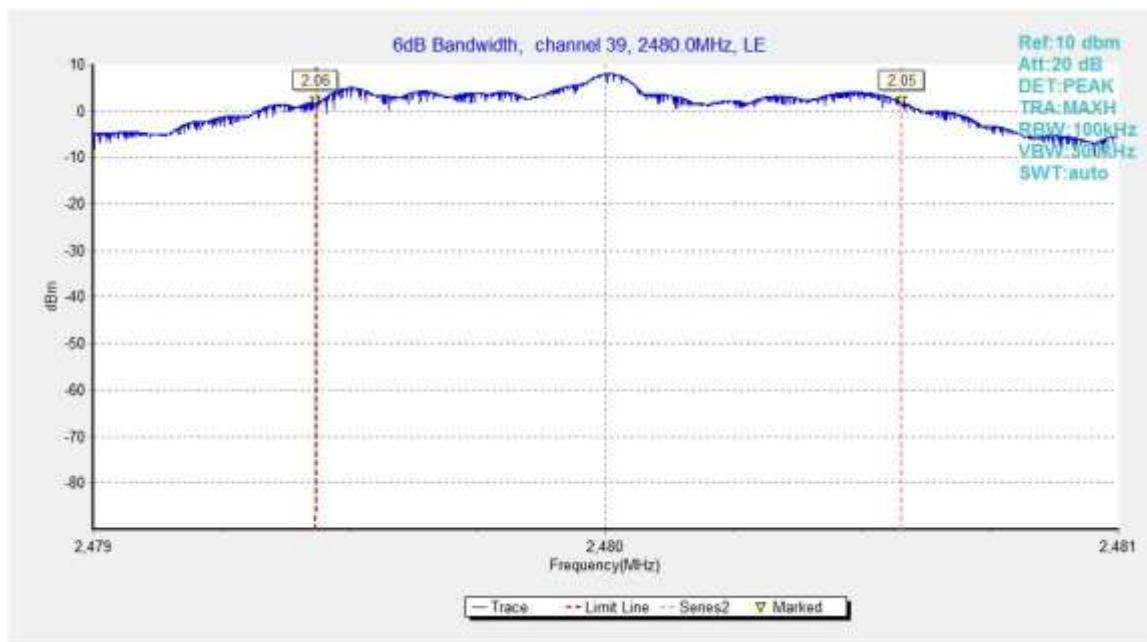


Fig.30. 6dB Bandwidth: GFSK, 2480 MHz

B.8. Maximum Power Spectral Density Level

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW = 10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	<=8.0dBm/3kHz

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)	Conclusion
0	2402	Fig.31	-11.69
19	2440	Fig.32	-10.87
39	2480	Fig.33	-10.18

Test graphs as below:

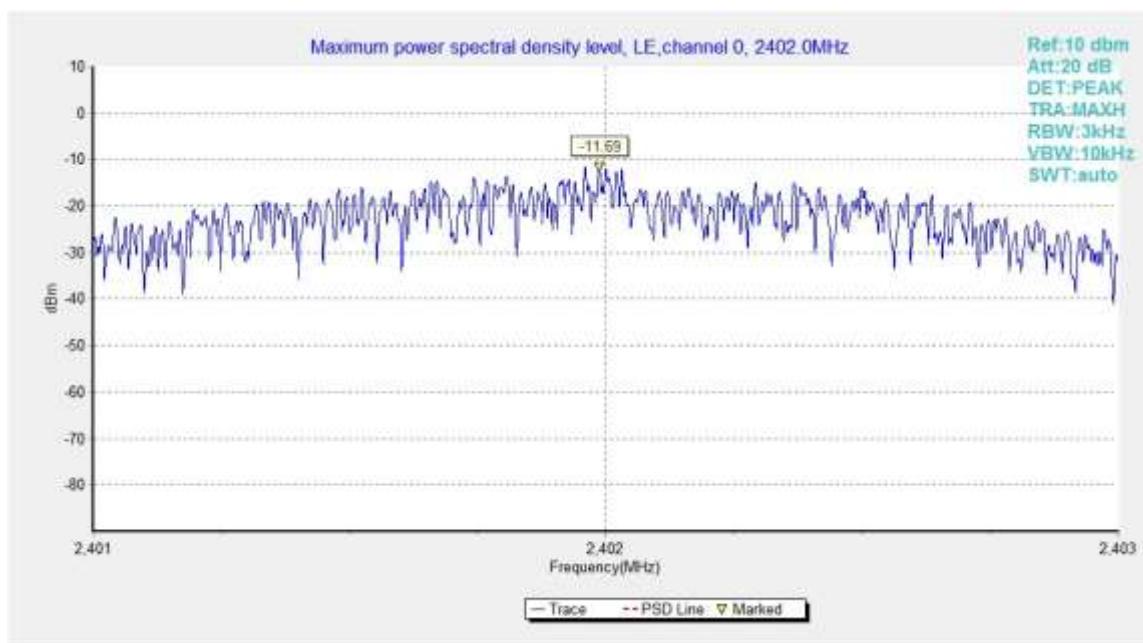


Fig.31. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

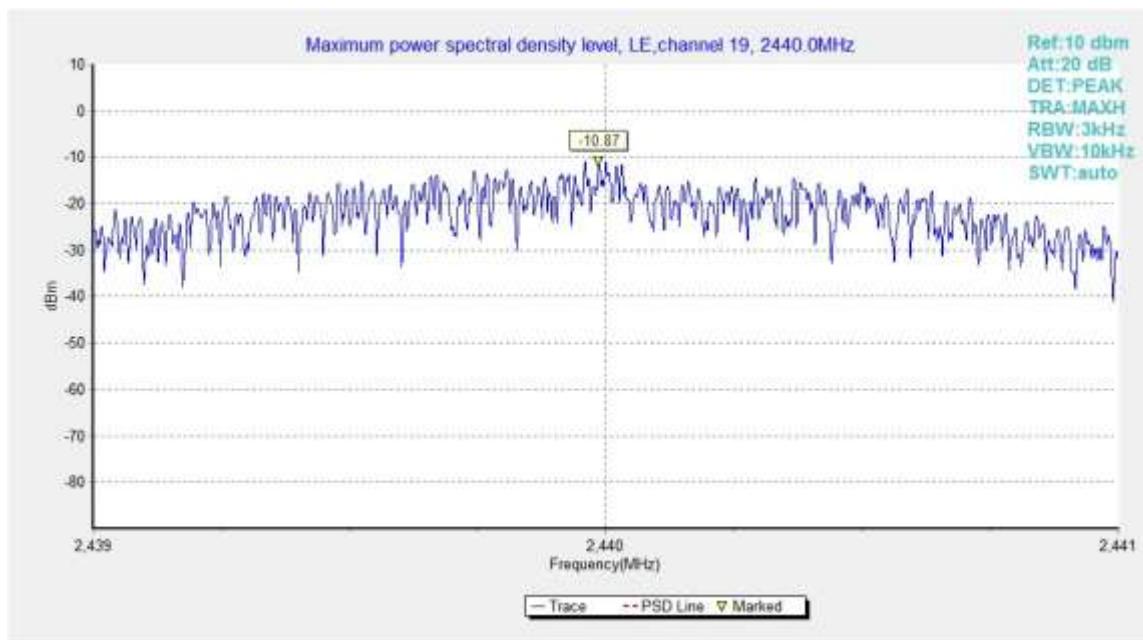


Fig.32. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz



Fig.33. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

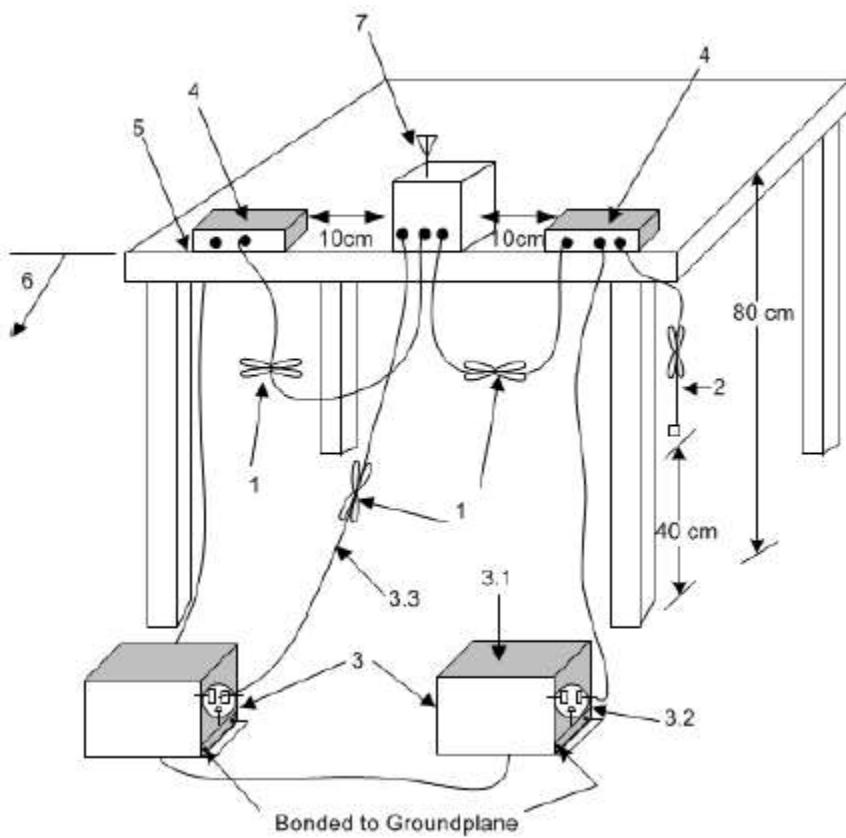
B.9. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

Setup:

A stand-alone EUT shall be placed in the center along the back edge of the tabletop. For multiunit tabletop systems, the EUT shall be centered laterally (left to right facing the tabletop) on the tabletop and its rear shall be flush with the rear of the table.

Accessories that are part of an EUT system tested on a tabletop shall be placed in a test arrangement on one or both sides of the host with a 10 cm separation between the nearest points of the cabinets. The rear of the host and accessories shall be flush with the back of the supporting tabletop unless that would not be typical of normal use. If more than two accessories are present, then an equipment test arrangement shall be chosen that maintains 10 cm spacing between cabinets unless the equipment is normally located closer together.



Exploratory ac power-line conducted emission measurements

Exploratory measurements shall be used to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation shall be performed within the range of likely configurations. For this measurement or series of measurements, the frequency spectrum of interest shall be monitored looking for the emission that has the highest amplitude relative to the limit. Once that emission is found for each current-carrying conductor of each power cord associated with the EUT (but not the cords associated with non-EUT equipment in the overall system), the one configuration and

arrangement and mode of operation that produces the emission closest to the limit over all of the measured conductors shall be recorded.

Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is composed of equipment units that have their own separate ac power connections (e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network), then each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be measured separately. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Note: The EUT has no BT transmit without connected to PC. The AC Powerline Conducted Emission can do the idle only

EUT ID: EUT3 + AE2-1 + AE1-3

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	66 to 56	/	Fig.B.9.1	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	56 o 46	/	Fig.B.9.1	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

EUT ID: EUT4 + AE2-2 + AE1-3

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	67 to 56	/	Fig.B.9.2	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	57 o 46	/	Fig.B.9.2	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

EUT ID: EUT5 + AE2-3 + AE1-3

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	68 to 56	/	Fig.B.9.3	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	58 o 46	/	Fig.B.9.3	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

EUT ID: EUT3 + AE2-4 + AE1-3

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	69 to 56	/	Fig.B.9.4	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	59 o 46	/	Fig.B.9.4	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

EUT ID: EUT4 + AE2-5 + AE1-3

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	70 to 56	/	Fig.B.9.5	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	60 o 46	/	Fig.B.9.5	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

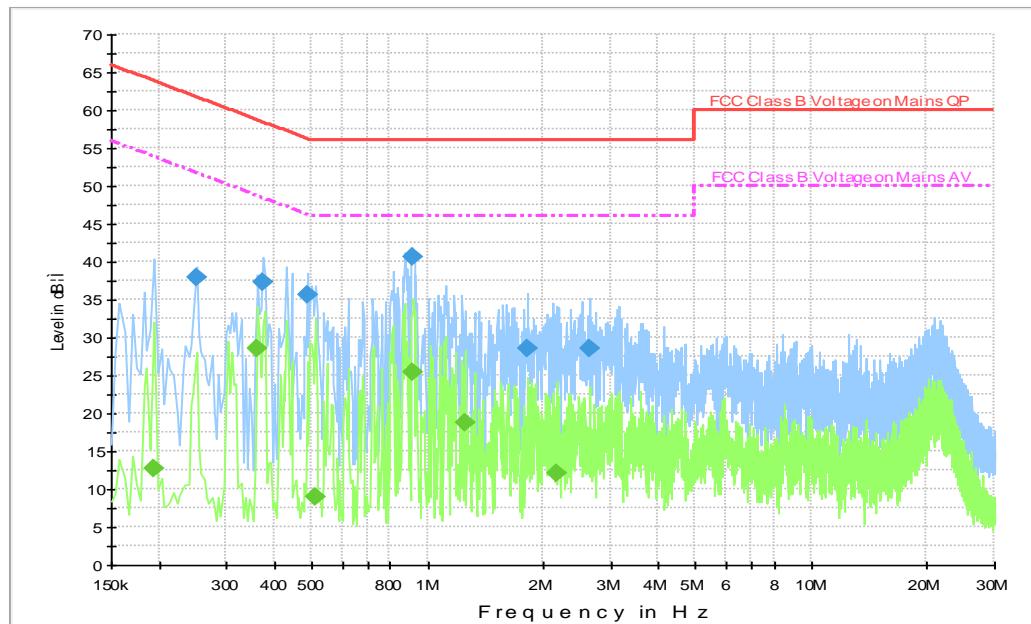


Fig.B.9.1 AC Powerline Conducted Emission-Idle(EUT3 + AE2-1 + AE1-3)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.250000	38.0	1000.0	9.000	On	L1	19.7	23.8	61.8
0.374000	37.2	1000.0	9.000	On	L1	19.7	21.2	58.4
0.486000	35.6	1000.0	9.000	On	L1	19.7	20.6	56.2
0.914000	40.6	1000.0	9.000	On	N	19.6	15.4	56.0
1.818000	28.6	1000.0	9.000	On	L1	19.6	27.4	56.0
2.654000	28.6	1000.0	9.000	On	L1	19.6	27.4	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.194000	12.7	1000.0	9.000	On	L1	19.7	41.2	53.9
0.362000	28.5	1000.0	9.000	On	N	19.6	20.2	48.7
0.510000	9.0	1000.0	9.000	On	N	19.7	37.0	46.0
0.918000	25.5	1000.0	9.000	On	N	19.6	20.5	46.0
1.258000	18.7	1000.0	9.000	On	N	19.6	27.3	46.0
2.166000	12.2	1000.0	9.000	On	L1	19.6	33.8	46.0

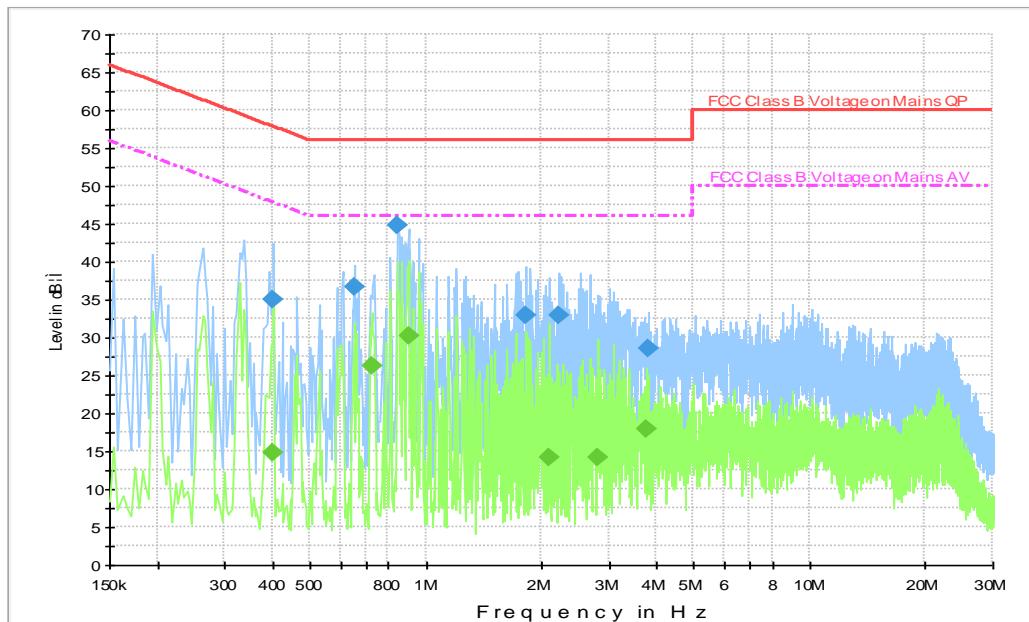


Fig.B.9.2 AC Powerline Conducted Emission-Idle(EUT4 + AE2-2 + AE1-3)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ
0.402000	35.1	1000.0	9.000	On	L1	19.7	22.7	57.8
0.650000	36.6	1000.0	9.000	On	L1	19.7	19.4	56.0
0.846000	44.9	1000.0	9.000	On	N	19.6	11.1	56.0
1.818000	32.8	1000.0	9.000	On	L1	19.6	23.2	56.0
2.214000	33.0	1000.0	9.000	On	L1	19.6	23.0	56.0
3.814000	28.5	1000.0	9.000	On	N	19.6	27.5	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ
0.402000	14.8	1000.0	9.000	On	L1	19.7	33.0	47.8
0.722000	26.1	1000.0	9.000	On	N	19.7	19.9	46.0
0.902000	30.3	1000.0	9.000	On	N	19.6	15.7	46.0
2.094000	14.2	1000.0	9.000	On	L1	19.6	31.8	46.0
2.798000	14.1	1000.0	9.000	On	L1	19.6	31.9	46.0
3.774000	17.9	1000.0	9.000	On	N	19.6	28.1	46.0

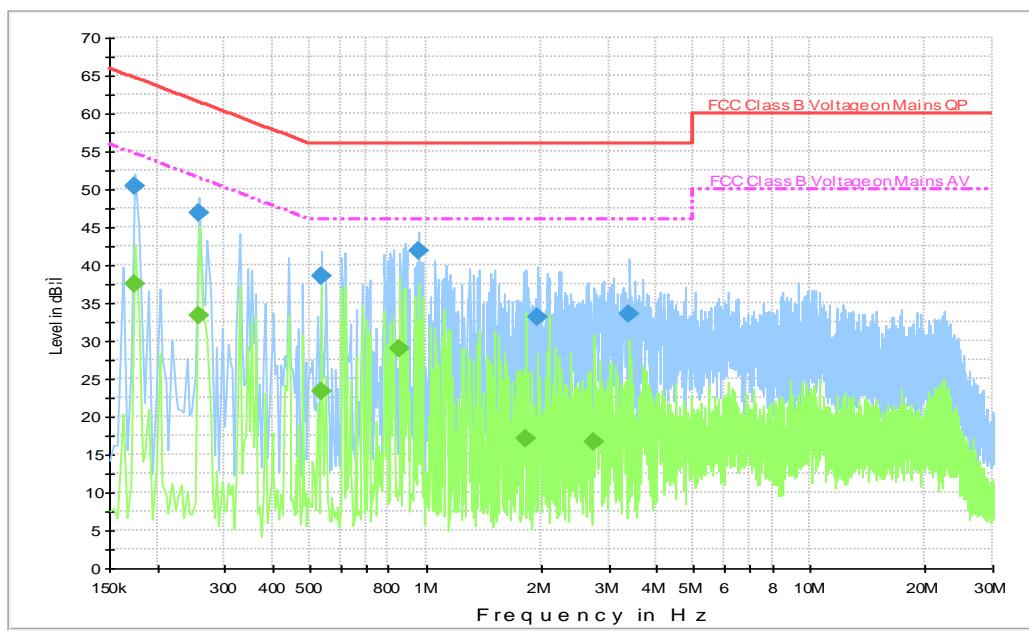


Fig.B.9.3 AC Powerline Conducted Emission-Idle(EUT5 + AE2-3 + AE1-3)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.174000	50.4	1000.0	9.000	On	N	19.7	14.3	64.8
0.258000	46.9	1000.0	9.000	On	N	19.7	14.6	61.5
0.534000	38.6	1000.0	9.000	On	N	19.7	17.4	56.0
0.958000	41.8	1000.0	9.000	On	N	19.6	14.2	56.0
1.950000	33.1	1000.0	9.000	On	N	19.6	22.9	56.0
3.402000	33.6	1000.0	9.000	On	N	19.6	22.4	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.174000	37.4	1000.0	9.000	On	N	19.7	17.4	54.8
0.258000	33.4	1000.0	9.000	On	N	19.7	18.1	51.5
0.534000	23.2	1000.0	9.000	On	N	19.7	22.8	46.0
0.858000	28.9	1000.0	9.000	On	N	19.6	17.1	46.0
1.822000	17.1	1000.0	9.000	On	L1	19.6	28.9	46.0
2.742000	16.7	1000.0	9.000	On	L1	19.6	29.3	46.0

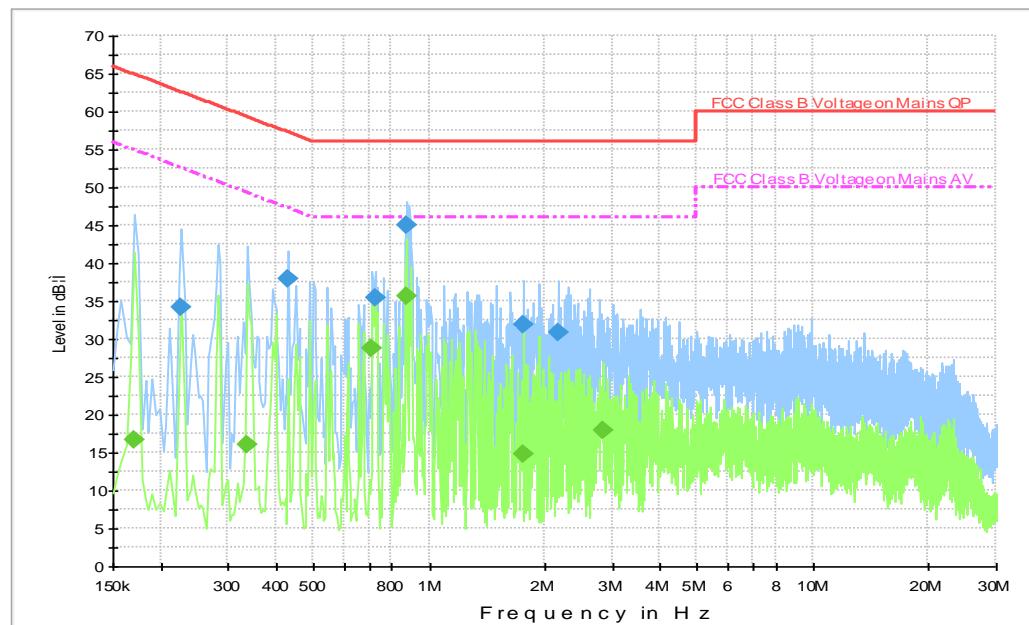


Fig.B.9.4 AC Powerline Conducted Emission-Idle(EUT3 + AE2-4 + AE1-3)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.226000	34.1	1000.0	9.000	On	L1	19.7	28.5	62.6
0.430000	37.9	1000.0	9.000	On	L1	19.7	19.3	57.3
0.722000	35.5	1000.0	9.000	On	N	19.7	20.5	56.0
0.874000	45.1	1000.0	9.000	On	N	19.6	10.9	56.0
1.766000	31.8	1000.0	9.000	On	L1	19.6	24.2	56.0
2.162000	30.9	1000.0	9.000	On	L1	19.6	25.1	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.170000	16.6	1000.0	9.000	On	L1	19.7	38.3	55.0
0.334000	16.1	1000.0	9.000	On	L1	19.7	33.3	49.4
0.710000	28.8	1000.0	9.000	On	N	19.7	17.2	46.0
0.870000	35.7	1000.0	9.000	On	N	19.6	10.3	46.0
1.766000	14.7	1000.0	9.000	On	L1	19.6	31.3	46.0
2.826000	18.0	1000.0	9.000	On	N	19.6	28.0	46.0

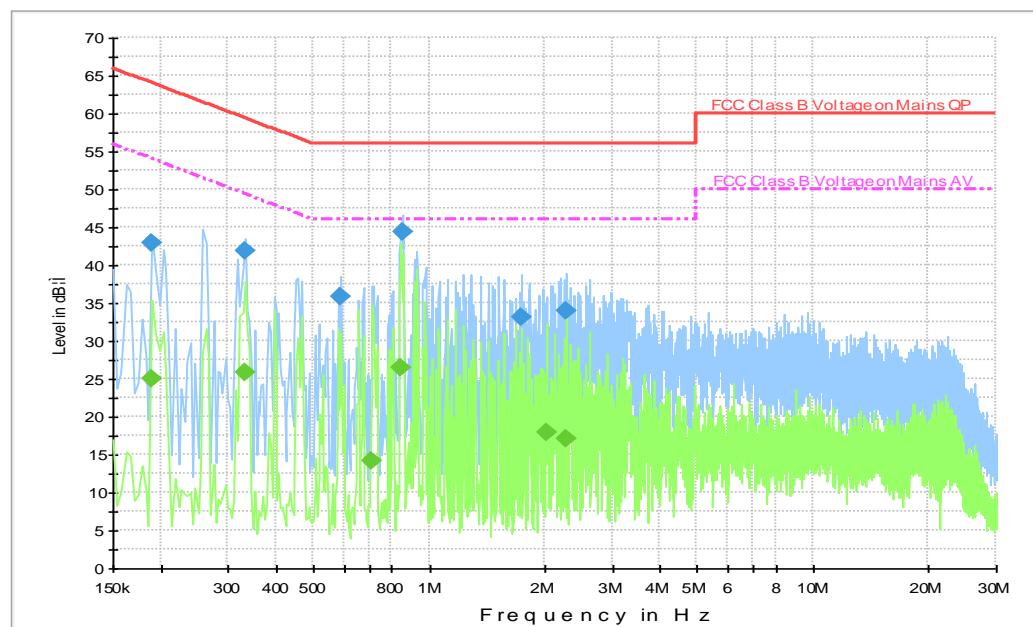


Fig.B.9.5 AC Powerline Conducted Emission-Idle(EUT4 + AE2-5 + AE1-3)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.190000	42.9	1000.0	9.000	On	L1	19.7	21.1	64.0
0.330000	41.8	1000.0	9.000	On	L1	19.7	17.6	59.5
0.590000	35.8	1000.0	9.000	On	L1	19.7	20.2	56.0
0.850000	44.3	1000.0	9.000	On	N	19.6	11.7	56.0
1.734000	33.0	1000.0	9.000	On	L1	19.6	23.0	56.0
2.286000	34.0	1000.0	9.000	On	L1	19.6	22.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ)
0.190000	25.0	1000.0	9.000	On	L1	19.7	29.0	54.0
0.330000	25.8	1000.0	9.000	On	L1	19.7	23.7	49.5
0.710000	14.2	1000.0	9.000	On	N	19.7	31.8	46.0
0.842000	26.5	1000.0	9.000	On	N	19.6	19.5	46.0
2.030000	17.9	1000.0	9.000	On	L1	19.6	28.1	46.0
2.286000	17.1	1000.0	9.000	On	L1	19.6	29.0	46.0

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> <p>NVLAP® </p>	
<h3>Certificate of Accreditation to ISO/IEC 17025:2017</h3>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i></p>	
<p>2022-10-01 through 2023-09-30 Effective Dates</p>	<p> For the National Voluntary Laboratory Accreditation Program</p>

*****END OF REPORT*****