

ANNEX A GRAPH RESULTS

GSM850 Head ANT1

Date: 10/19/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 825$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 42.95$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM850 (0) Frequency: 824.2 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7600 ConvF(10.74, 10.74, 10.74)

Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.198 W/kg



Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.549 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

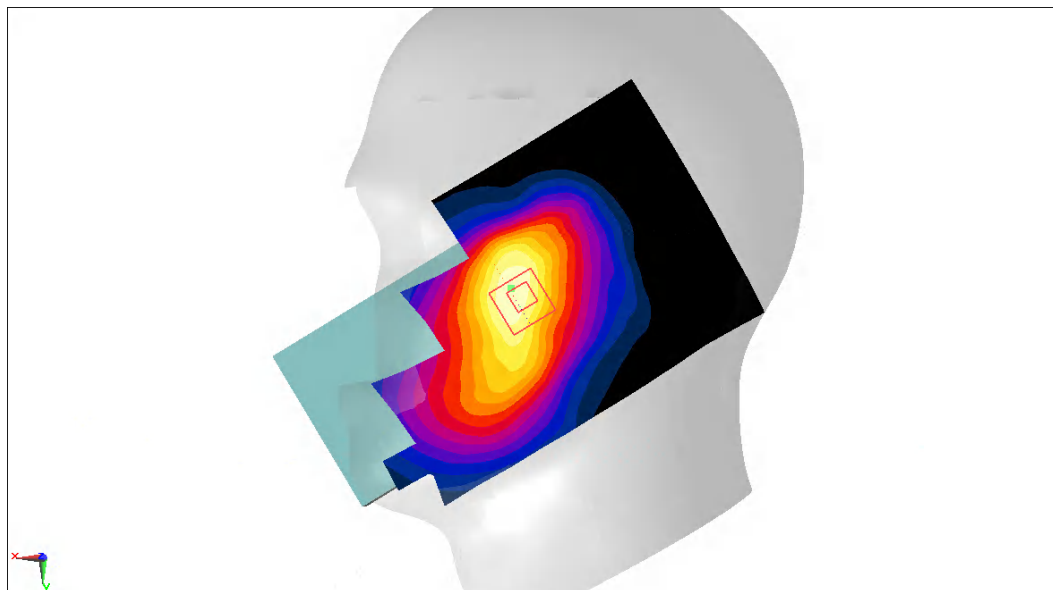

GSM850 Body 10mm ANT1

Date: 10/19/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.03$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM850 (0) Frequency: 836.6 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7600 ConvF(10.74, 10.74, 10.74)

Area Scan (91x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.195 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.23 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

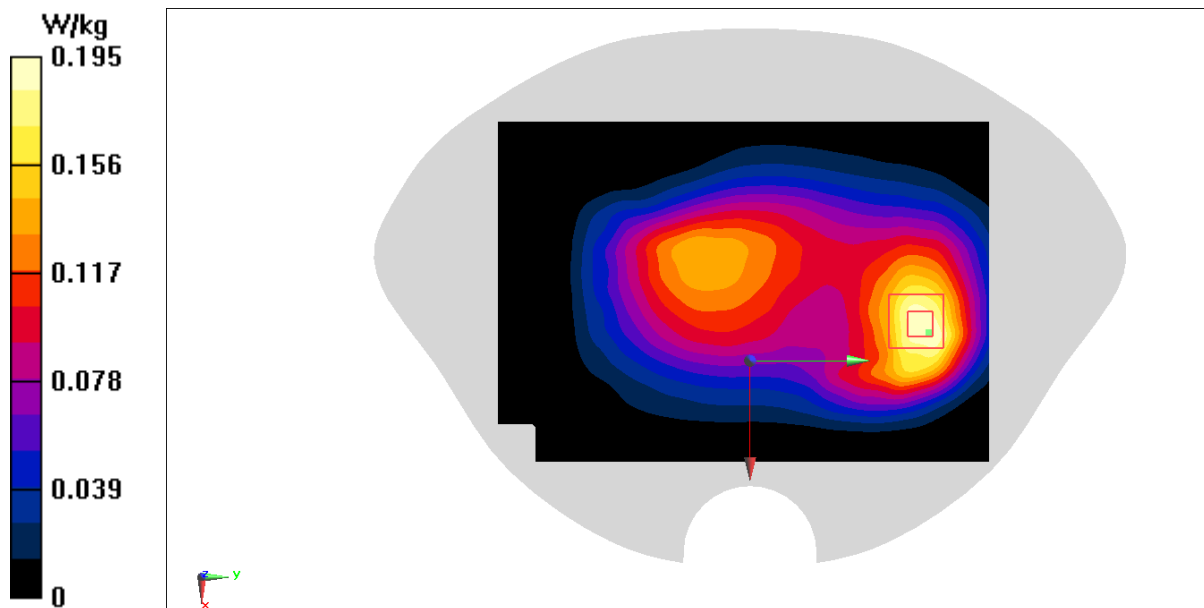

GSM1900 Head ANT0

Date: 10/20/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM1900 (PCS) (0) Frequency: 1909.8 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7600 ConvF(8.54, 8.54, 8.54)

Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.136 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.949 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

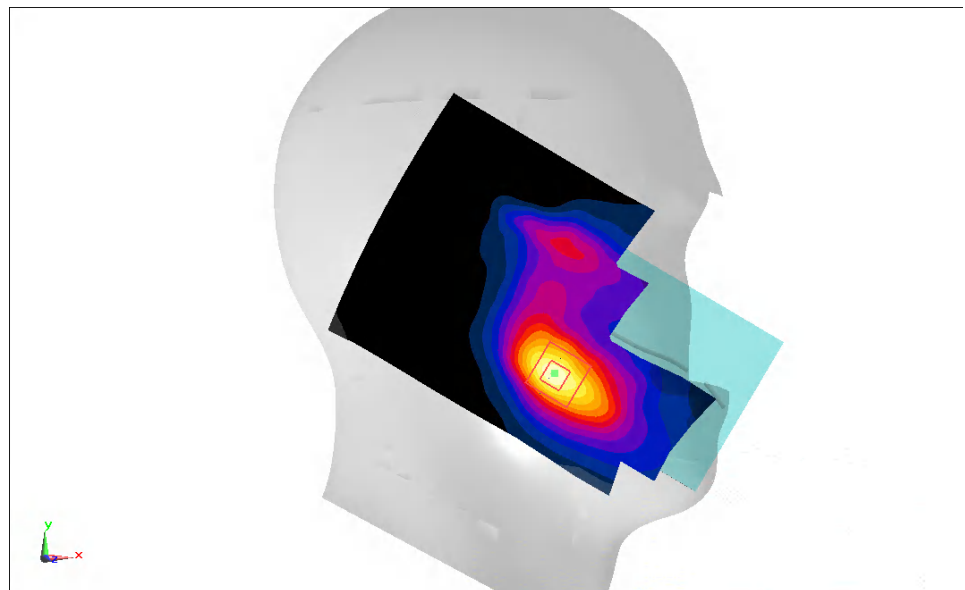

GSM1900 Body 10mm ANT0

Date: 10/20/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM1900 (PCS) (0) Frequency: 1909.8 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7600 ConvF(8.54, 8.54, 8.54)

Area Scan (91x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.509 W/kg



Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.04 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.489 W/kg

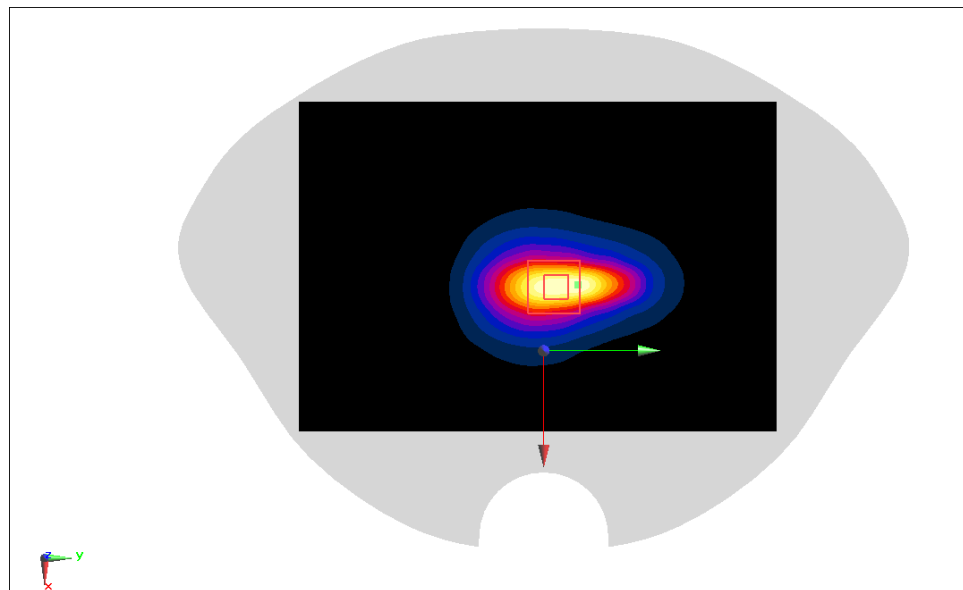

GSM1900 Body 15mm ANT0

Date: 10/20/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM1900 3TX (0) Frequency: 1909.8 MHz Duty Cycle: 1:2.66993

Probe: EX3DV4 - SN7600 ConvF(8.54, 8.54, 8.54)

Area Scan (91x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.281 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.747 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

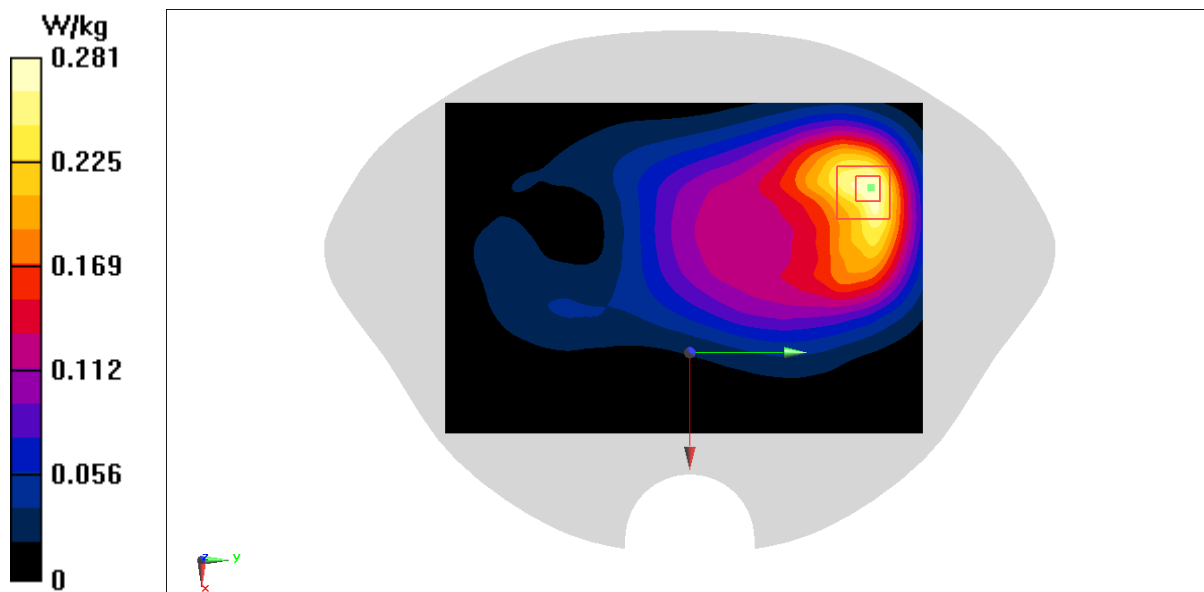

GSM1900 Head ANT2

Date: 10/20/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM1900 (PCS) (0) Frequency: 1909.8 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7600 ConvF(8.54, 8.54, 8.54)

Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.18 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.17 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

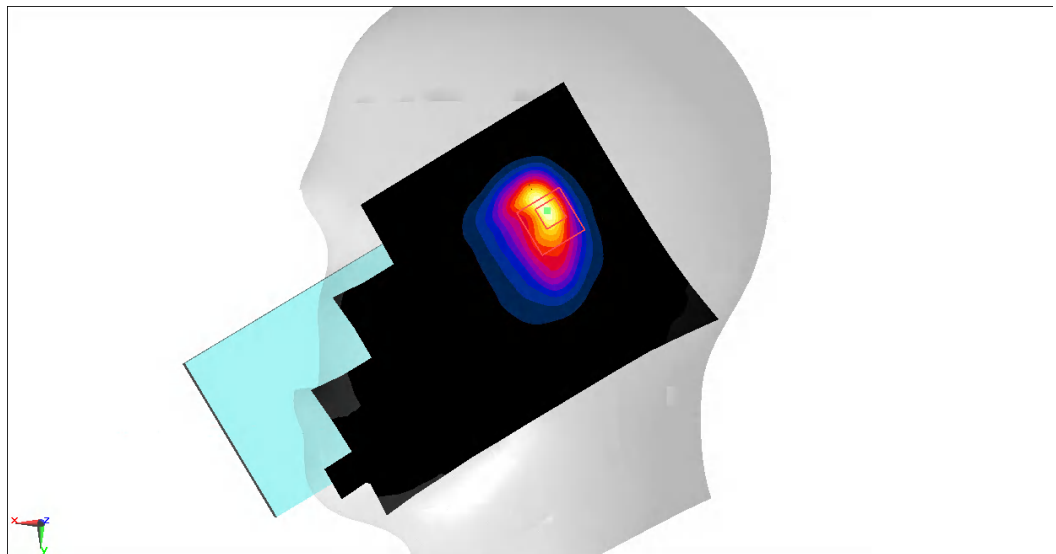

GSM1900 Body 10mm ANT2

Date: 10/20/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM1900 3TX (0) Frequency: 1909.8 MHz Duty Cycle: 1:2.66993

Probe: EX3DV4 - SN7600 ConvF(8.54, 8.54, 8.54)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.292 W/kg


Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.470 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

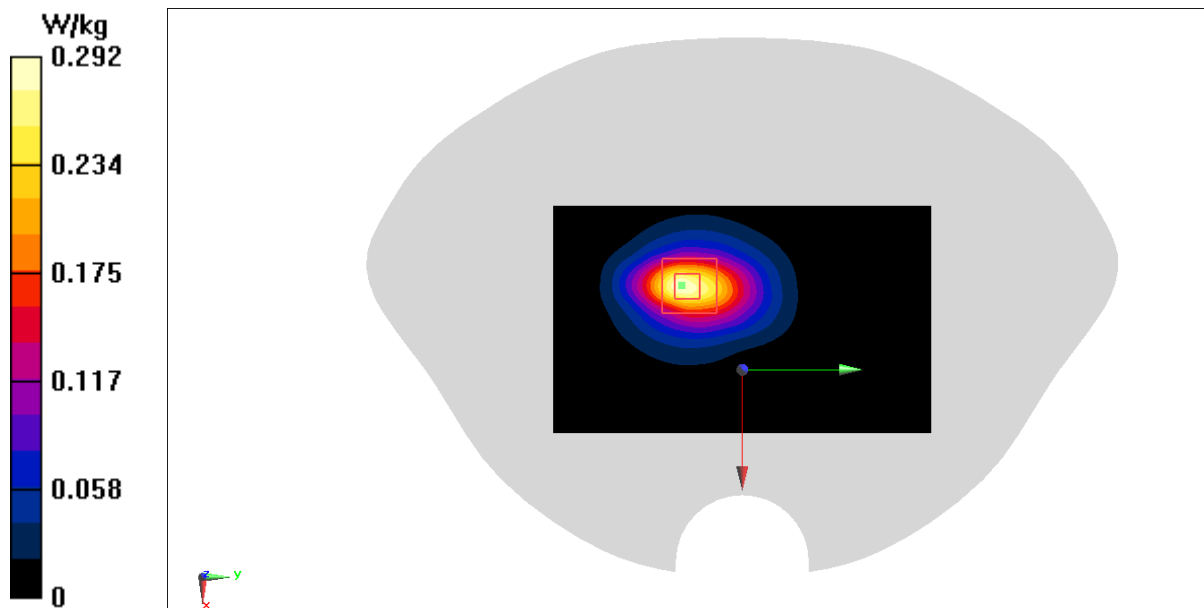

GSM1900 Body 15mm ANT2

Date: 10/20/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, GSM1900 (PCS) (0) Frequency: 1909.8 MHz Duty Cycle: 1:8.30042

Probe: EX3DV4 - SN7600 ConvF(8.54, 8.54, 8.54)

Area Scan (91x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.228 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.870 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

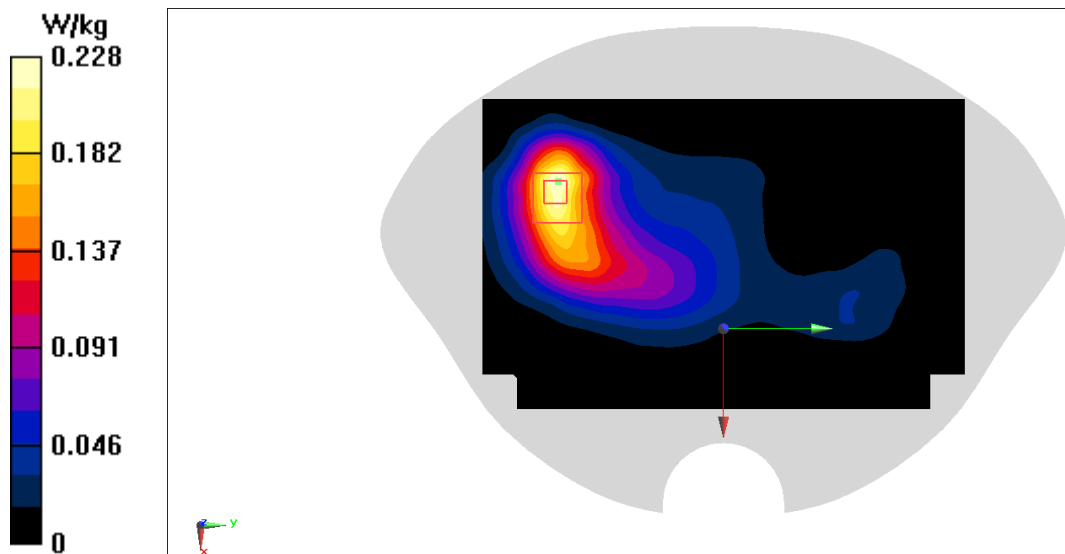

WCDMA850 Head ANT1

Date: 10/19/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.03$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA850(B5) (0) Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(10.74, 10.74, 10.74)

Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.260 W/kg



Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.307 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

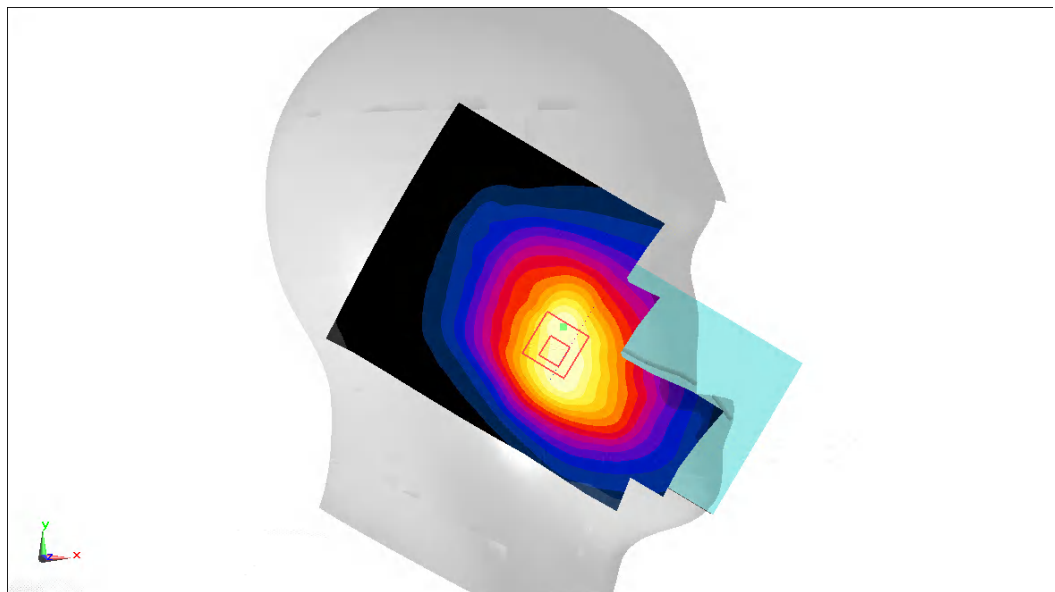

WCDMA850 Body 10mm ANT1

Date: 10/19/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.03$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA850(B5) (0) Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(10.74, 10.74, 10.74)

Area Scan (91x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.412 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.58 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

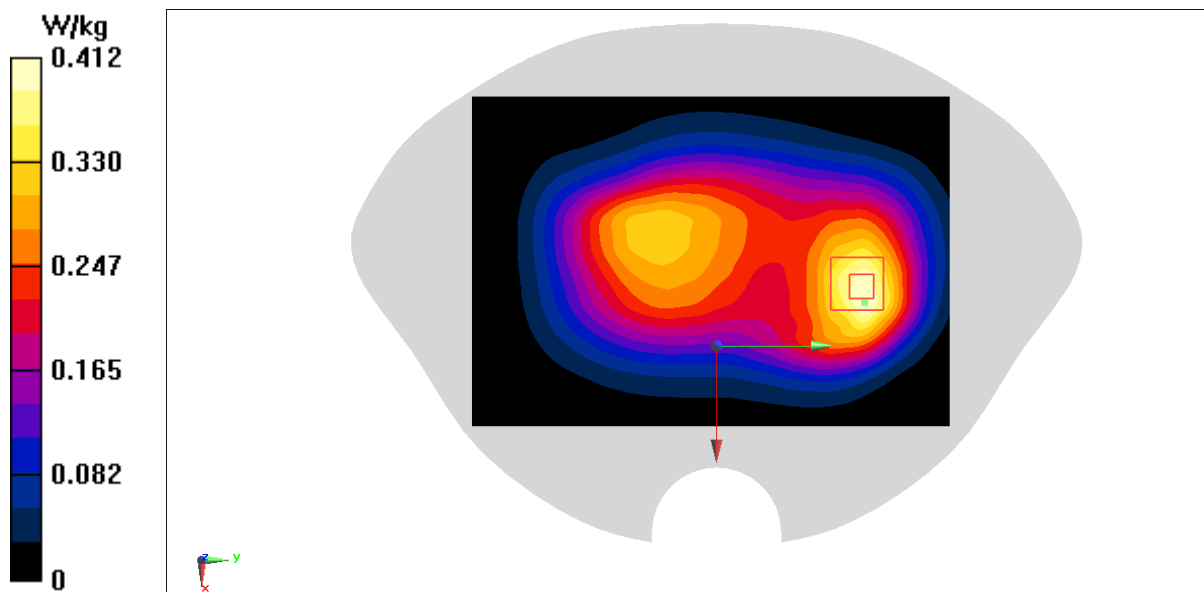

WCDMA850 Body 15mm ANT1

Date: 10/19/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 43.08$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA850(B5) (0) Frequency: 846.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(10.74, 10.74, 10.74)

Area Scan (91x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.236 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.30 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

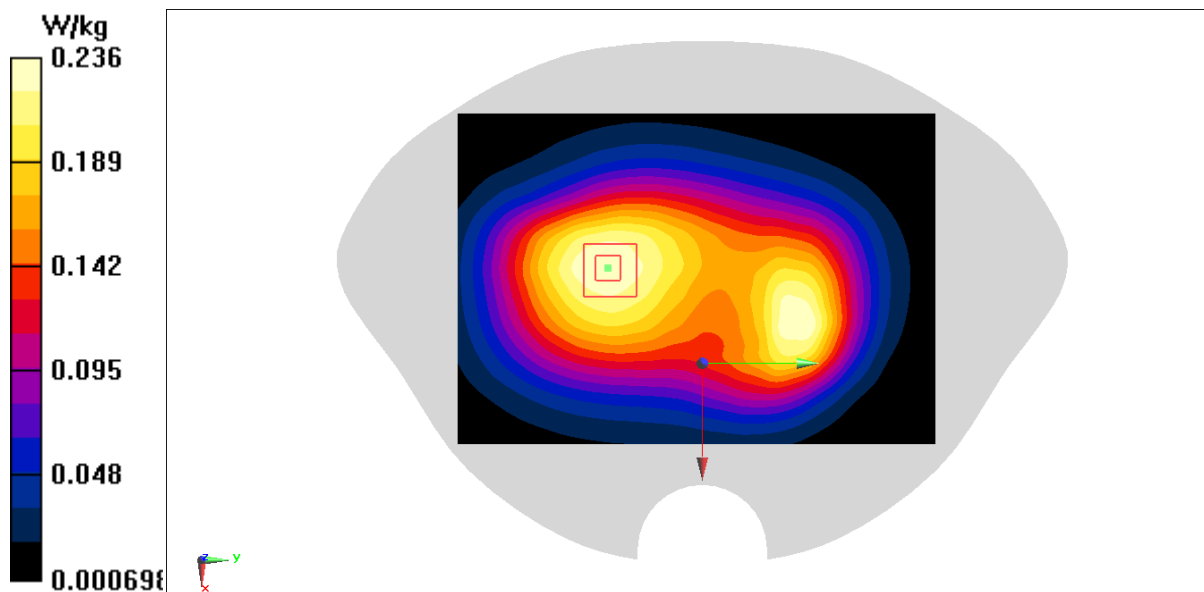

LTE Band7 Head ANT0

Date: 10/23/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7 (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(7.62, 7.62, 7.62)

Area Scan (81x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.288 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.070 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

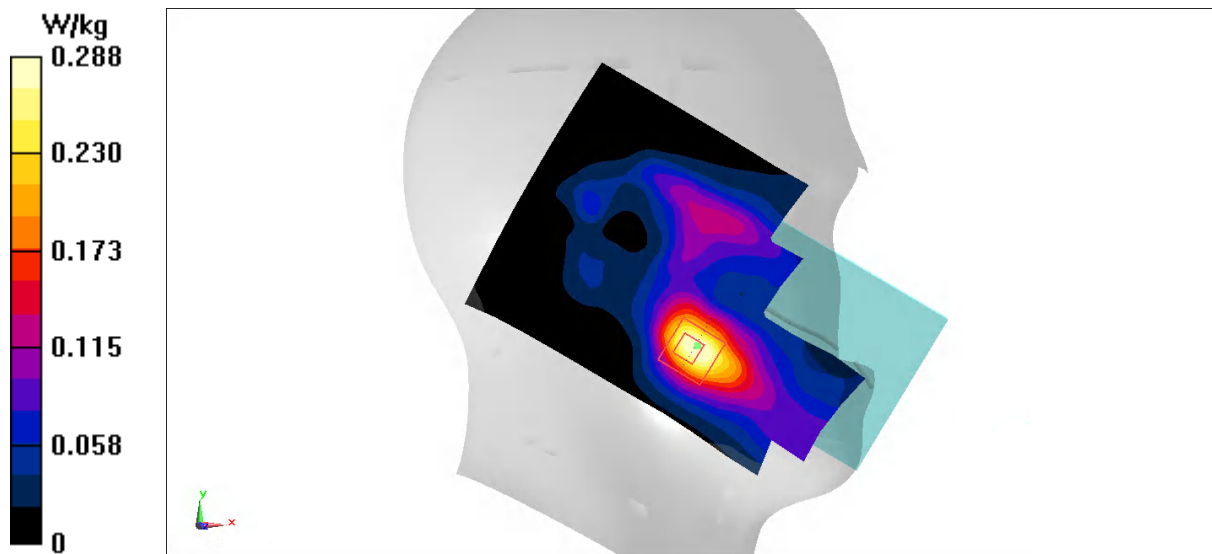

LTE Band7 Body 10mm ANT0

Date: 10/23/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7 (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(7.62, 7.62, 7.62)

Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.748 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.355 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.769 W/kg

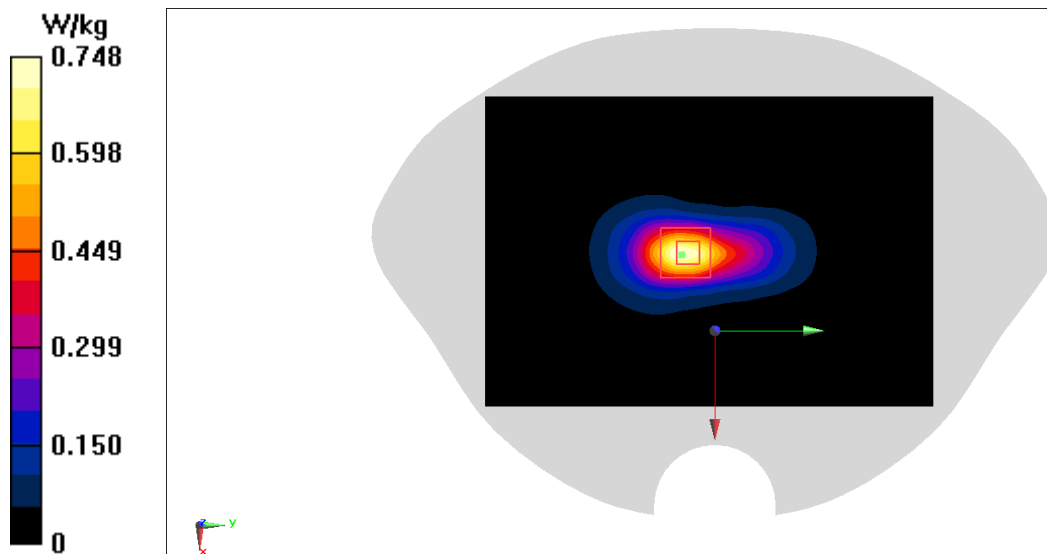

LTE Band7 Body 15mm ANT0

Date: 10/23/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7 (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(7.62, 7.62, 7.62)

Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.450 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.155 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.446 W/kg

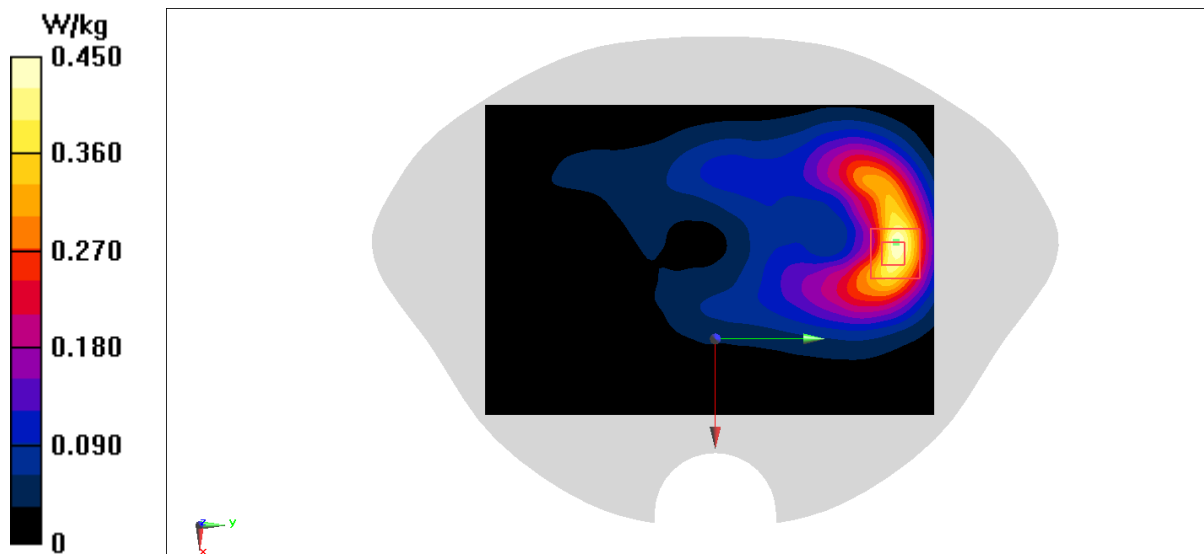

LTE Band7 Head ANT2

Date: 10/23/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 39.47$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7 (0) Frequency: 2535 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7600 ConvF(7.82, 7.82, 7.82)

Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.50 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.17 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

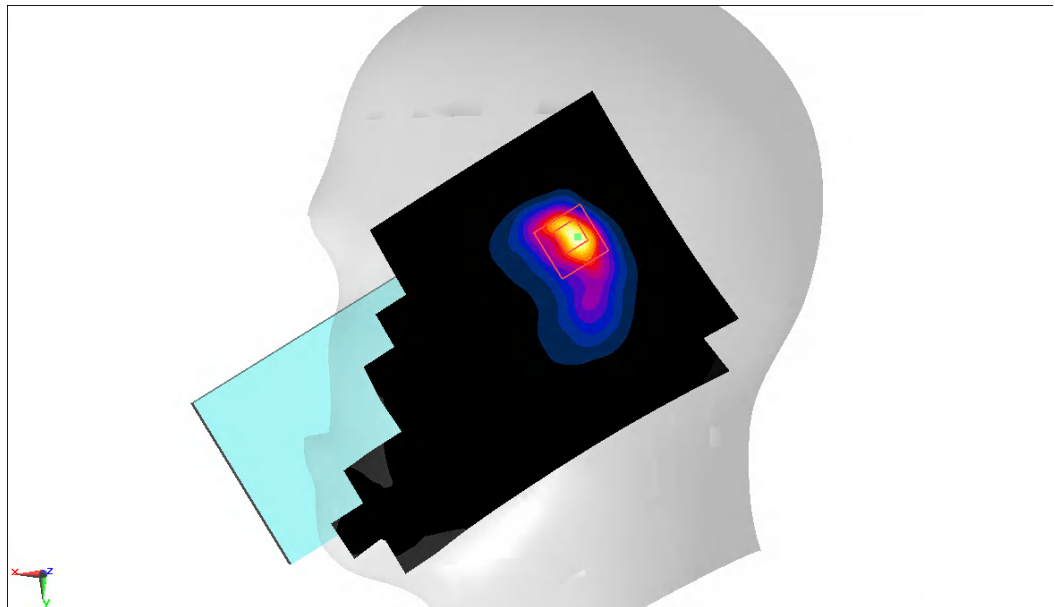

LTE Band7 Body 10mm ANT2

Date: 10/23/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7 (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(7.62, 7.62, 7.62)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.246 W/kg



Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.344 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

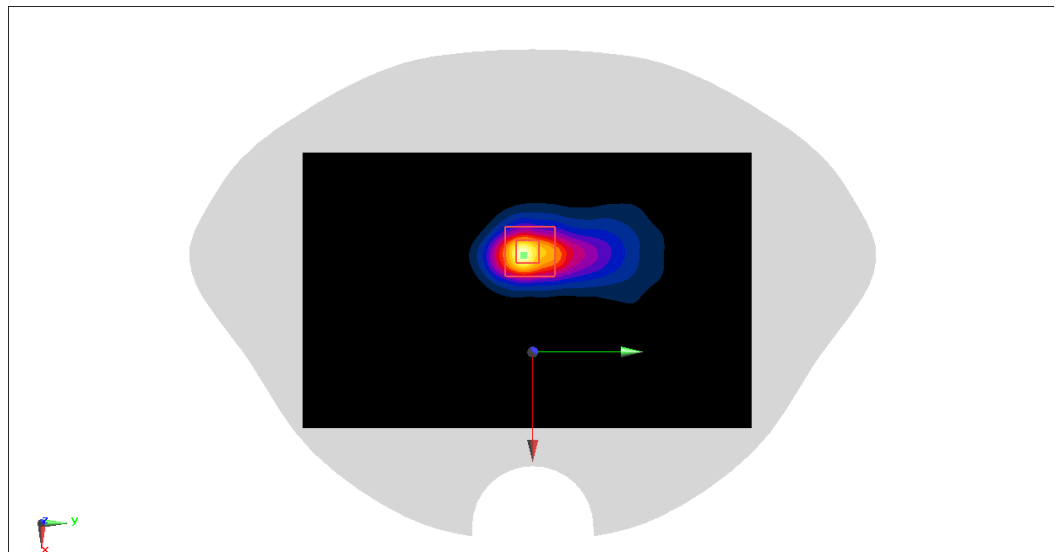

LTE Band7 Body 15mm ANT2

Date: 10/23/2022

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7 (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7600 ConvF(7.62, 7.62, 7.62)

Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.401 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.764 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.371 W/kg

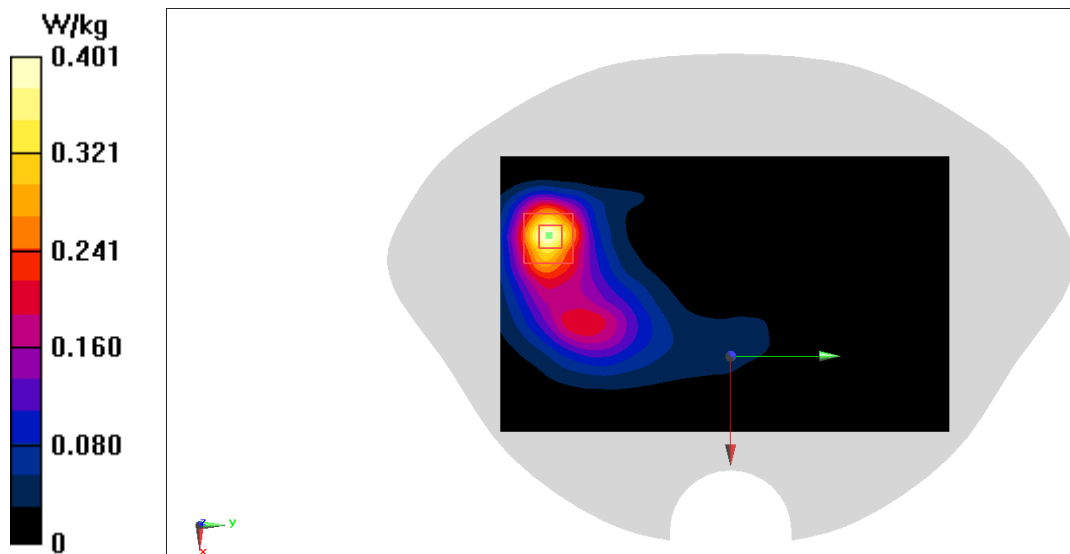

LTE Band38 Head ANT4

Date: 11/9/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 39.67$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2610 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.840 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.44 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.915 W/kg

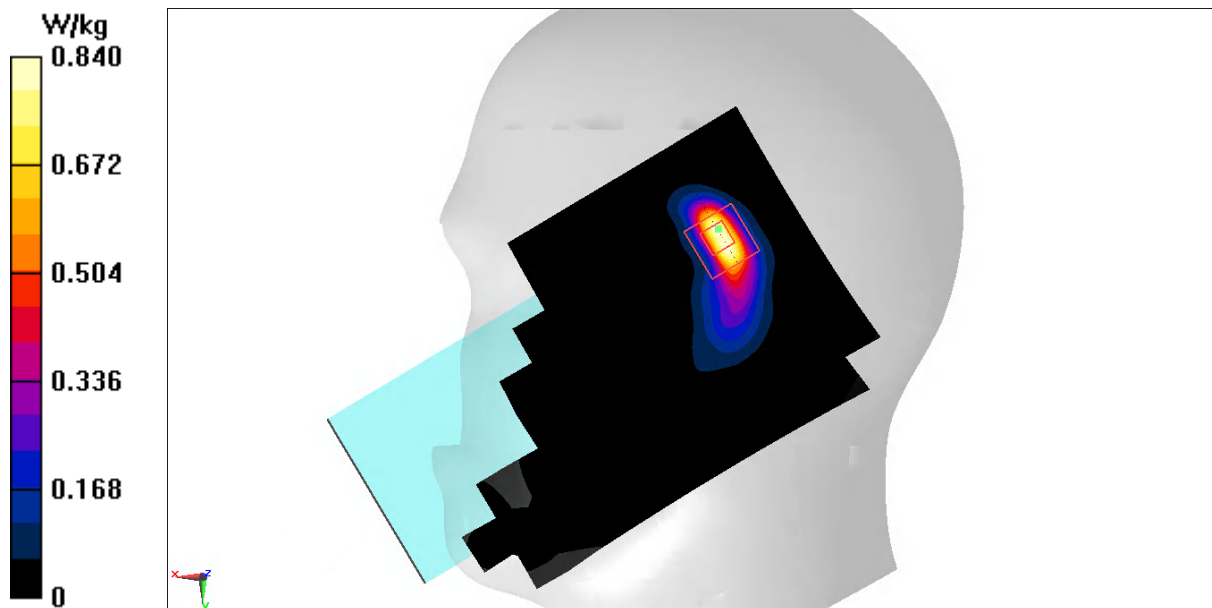

LTE Band38 Body 10mm ANT4

Date: 11/9/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 39.67$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2610 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.188 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.436 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

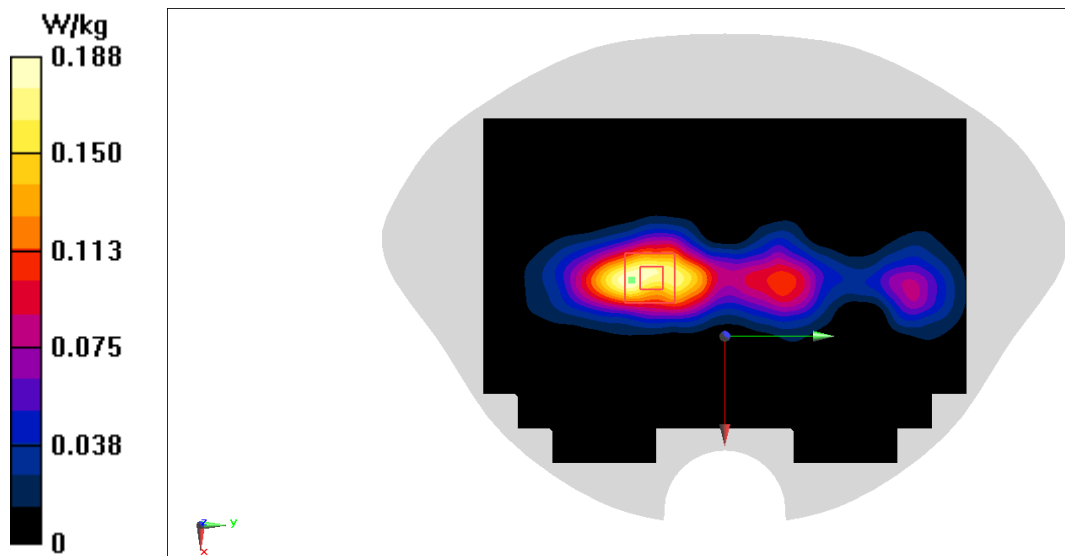

LTE Band38 Body 15mm ANT4

Date: 11/9/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 39.67$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2610 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.256 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.257 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

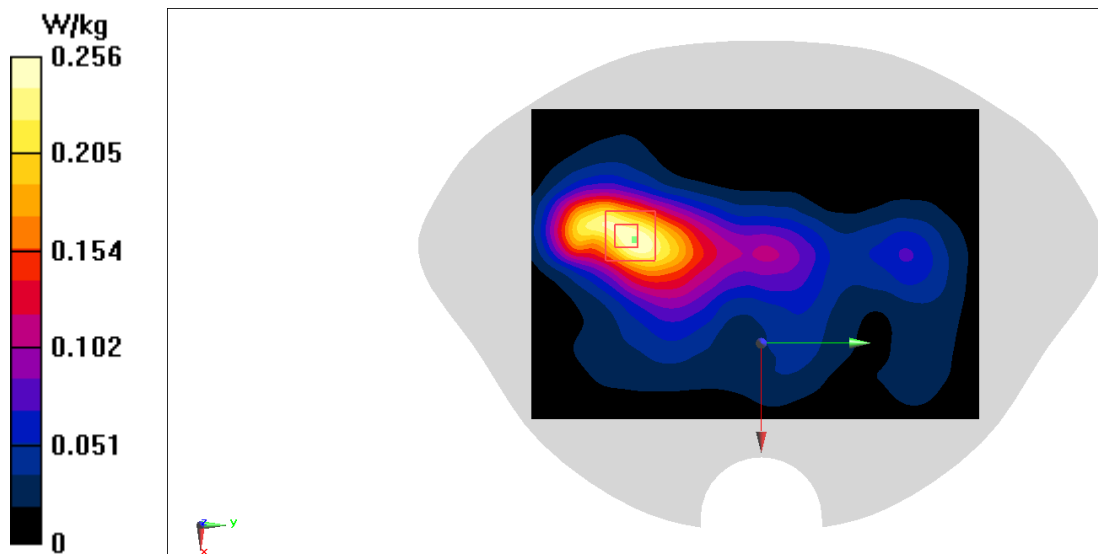

LTE Band38 Head ANT2

Date: 11/9/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.86$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2580 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.08 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.24 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.696 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

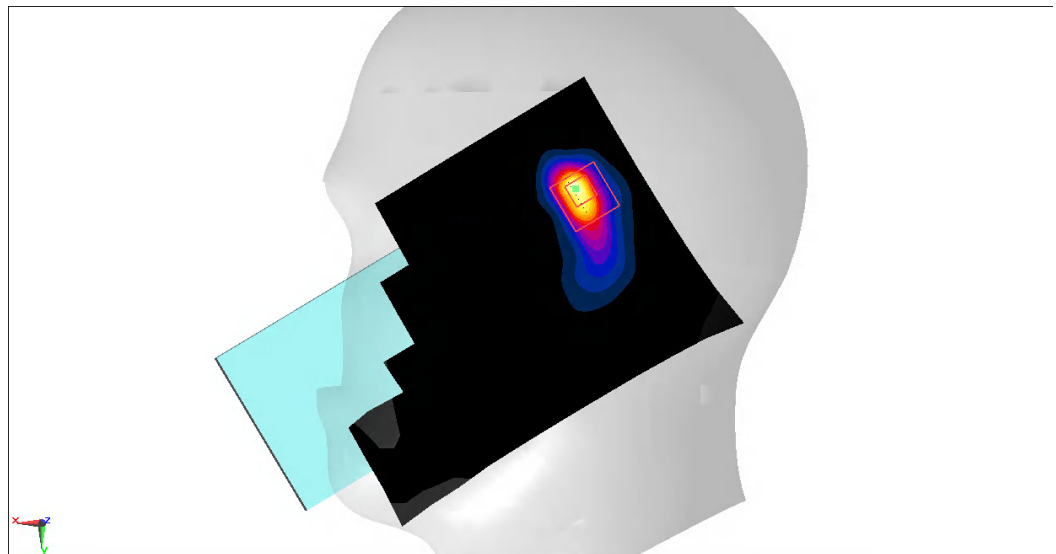

LTE Band38 Body 10mm ANT2

Date: 11/9/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.917$ S/m; $\epsilon_r = 39.76$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2595 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.333 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.444 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

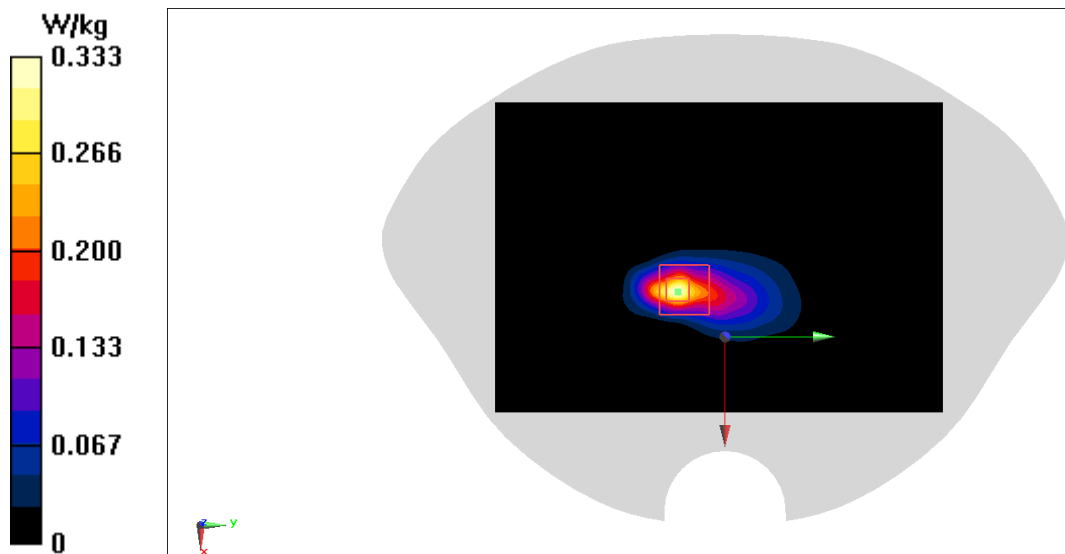

LTE Band38 Body 15mm ANT2

Date: 11/9/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.86$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2580 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.318 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.815 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.311 W/kg

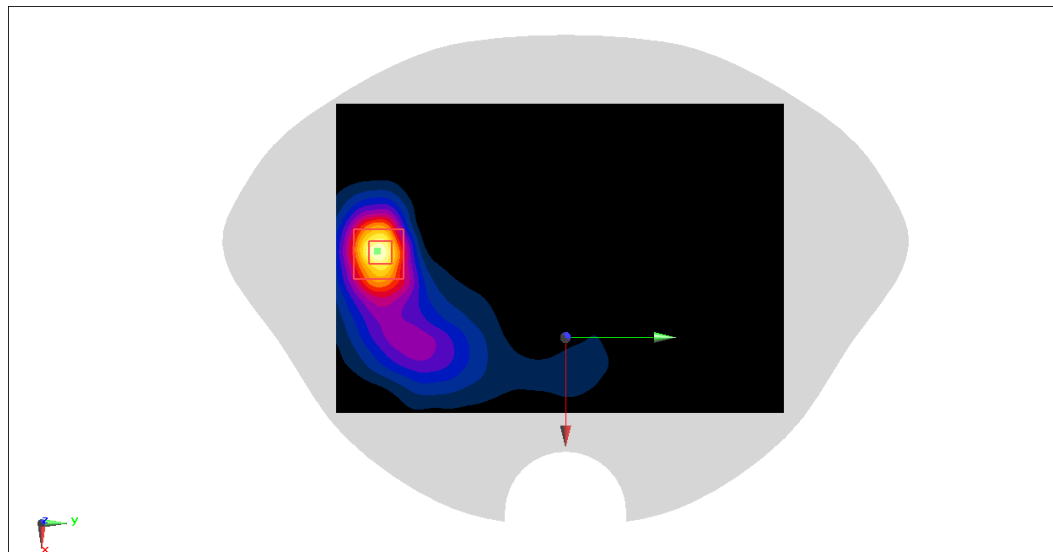

LTE Band38 Head ANT0

Date: 11/6/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2595 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (81x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0677 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.029 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0639 W/kg

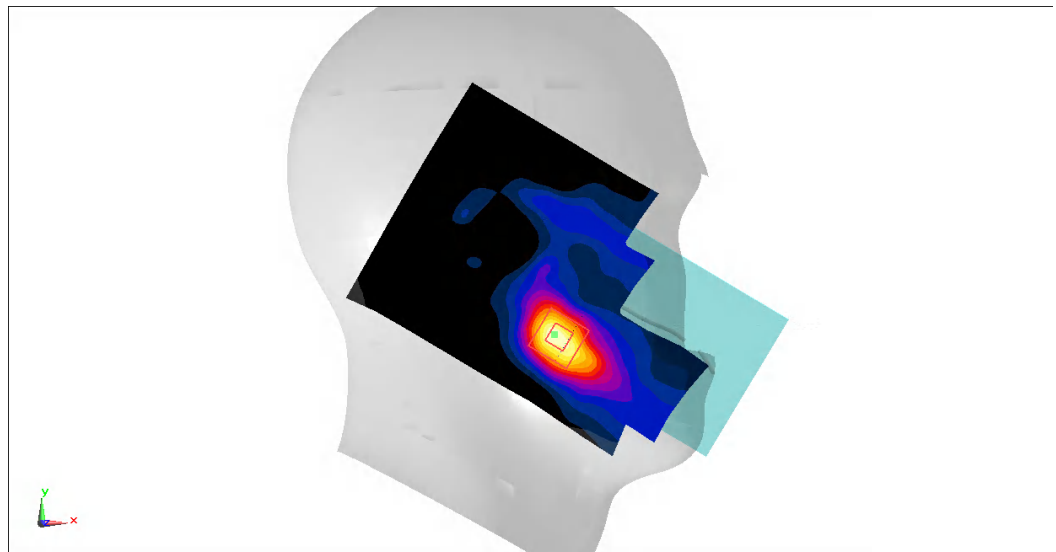

LTE Band38 Body 10mm ANT0

Date: 11/6/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2595 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.175 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.566 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

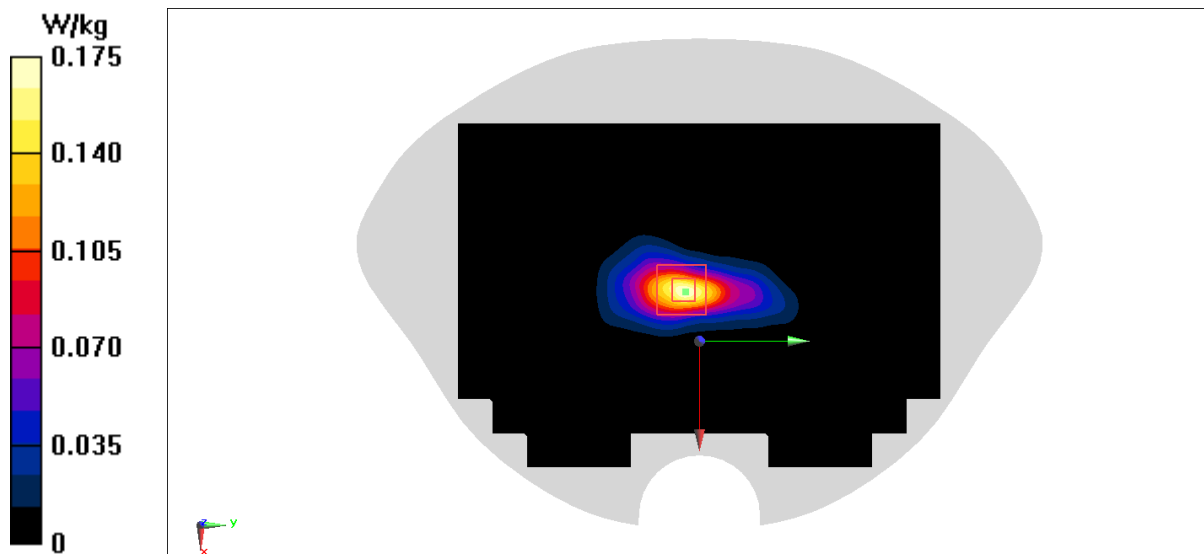

LTE Band38 Body 15mm ANT0

Date: 11/6/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2595 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0870 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.367 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0876 W/kg

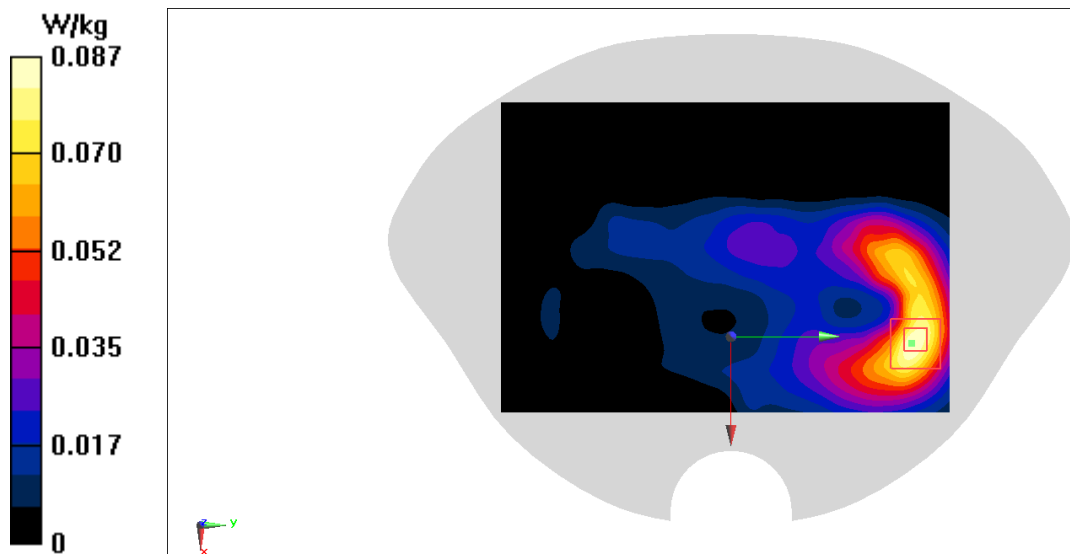

LTE Band38 Head ANT5

Date: 11/6/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 39.88$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2610 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (81x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.684 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.84 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.648 W/kg

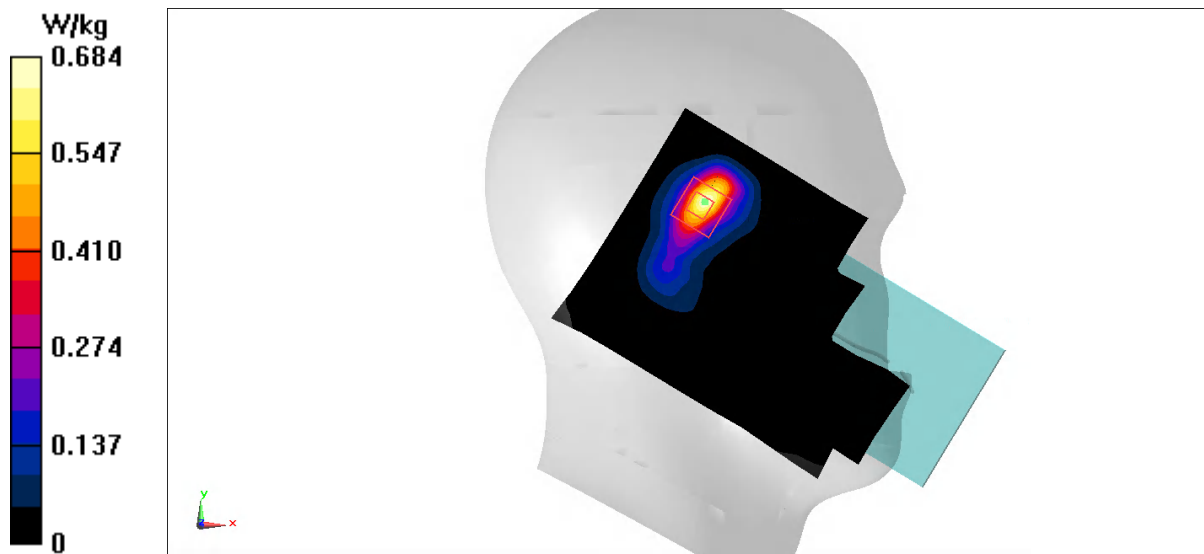

LTE Band38 Body 10mm ANT5

Date: 11/6/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 39.88$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2610 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.131 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.103 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0836 W/kg

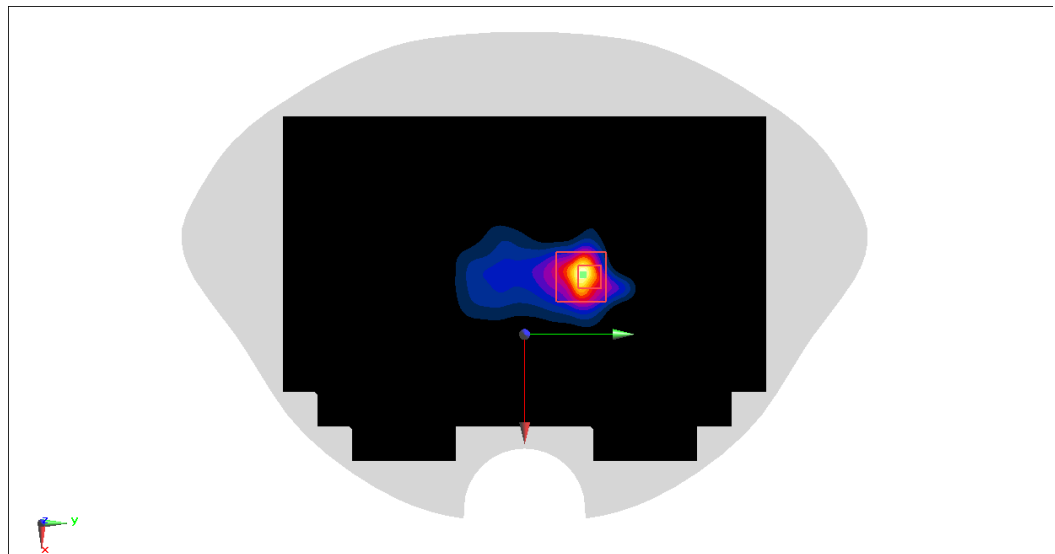

LTE Band38 Body 15mm ANT5

Date: 11/6/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 39.88$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band38 (0) Frequency: 2610 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.129 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.302 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

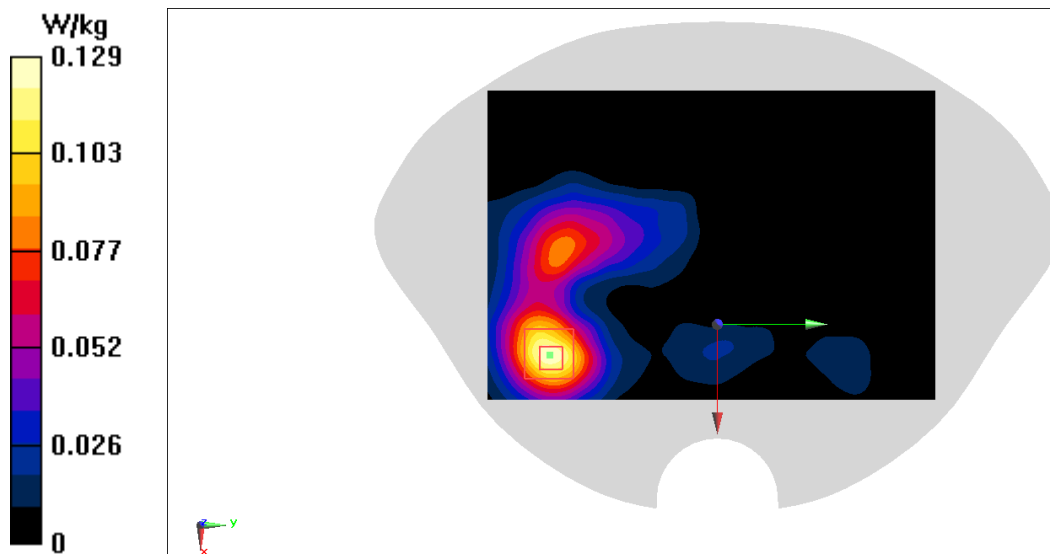

LTE Band41 Head ANT4

Date: 11/8/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2636.5$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 40.17$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2636.5 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.923 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.55 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

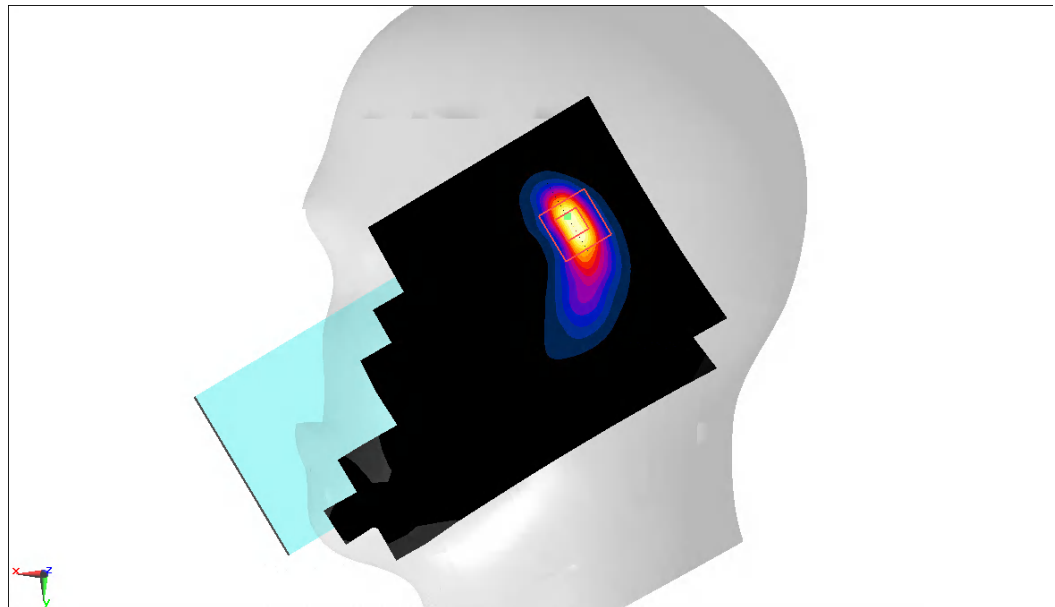

LTE Band41 Body 10mm ANT4

Date: 11/8/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2636.5$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 40.17$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2636.5 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.205 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.852 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

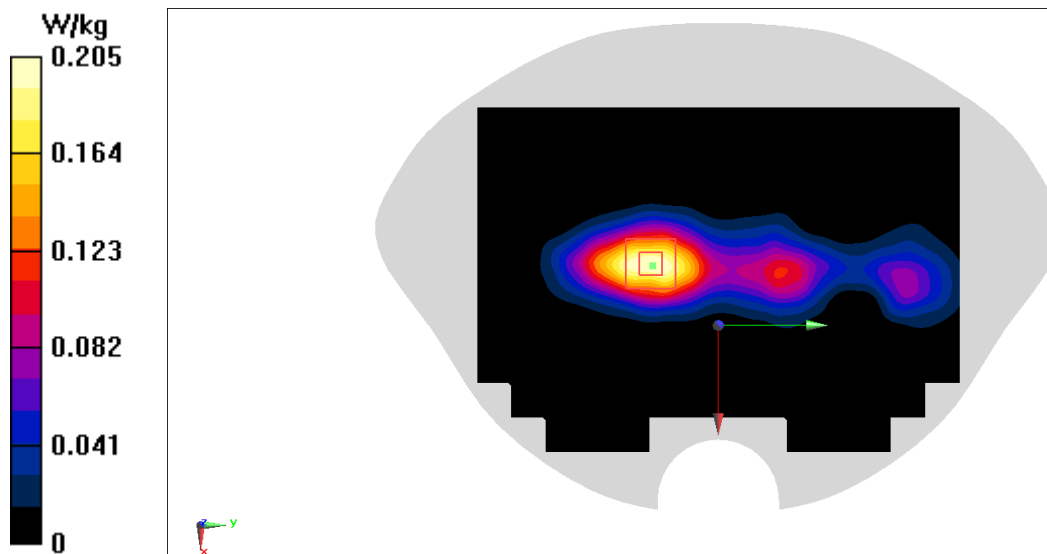

LTE Band41 Body 15mm ANT4

Date: 11/8/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2636.5$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 40.17$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2636.5 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.235 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.728 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

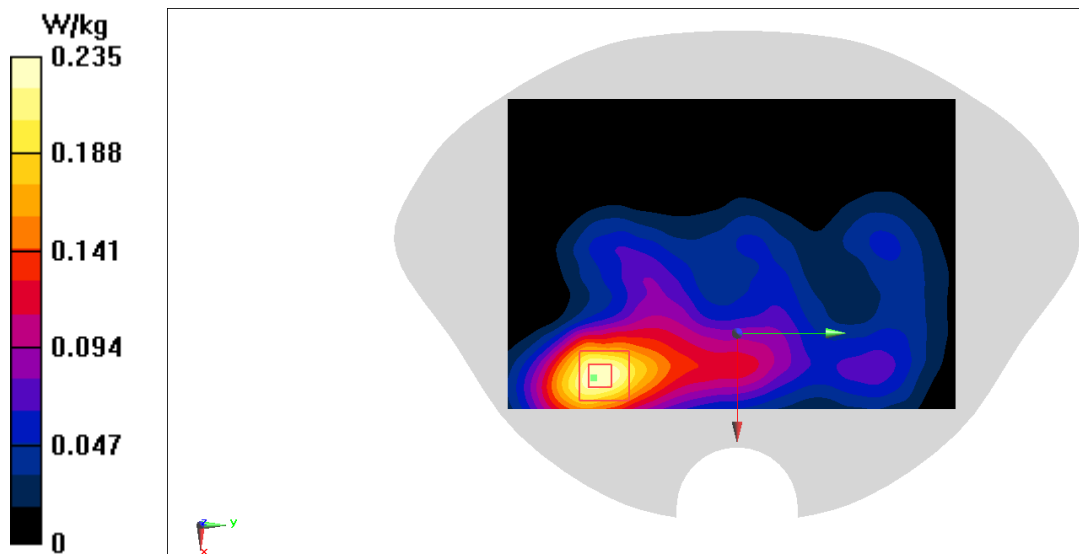

LTE Band41 Head ANT2

Date: 11/8/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 40.21$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2593 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (81x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.21 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.61 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

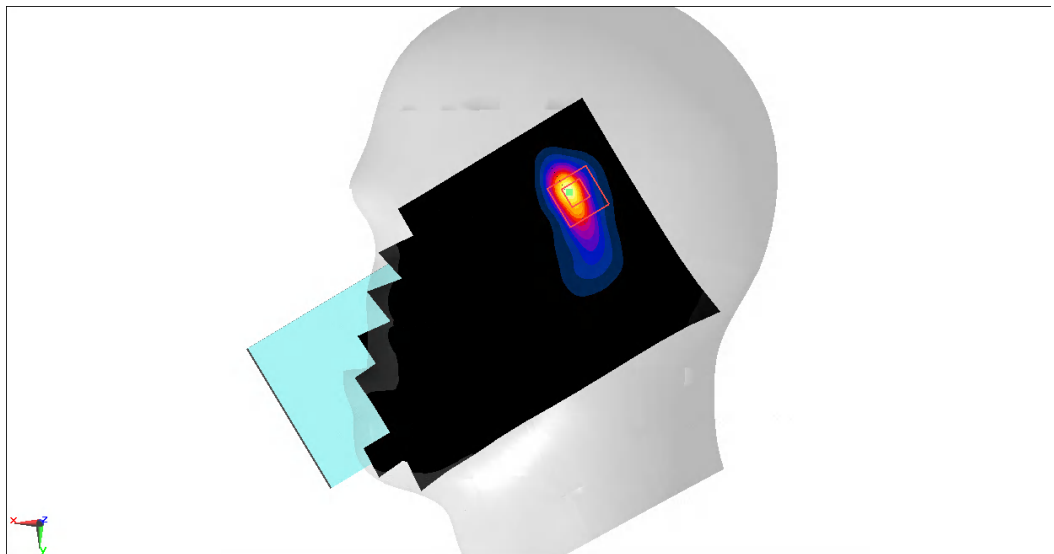

LTE Band41 Body 10mm ANT2

Date: 11/8/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 40.32$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2506 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.198 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.059 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

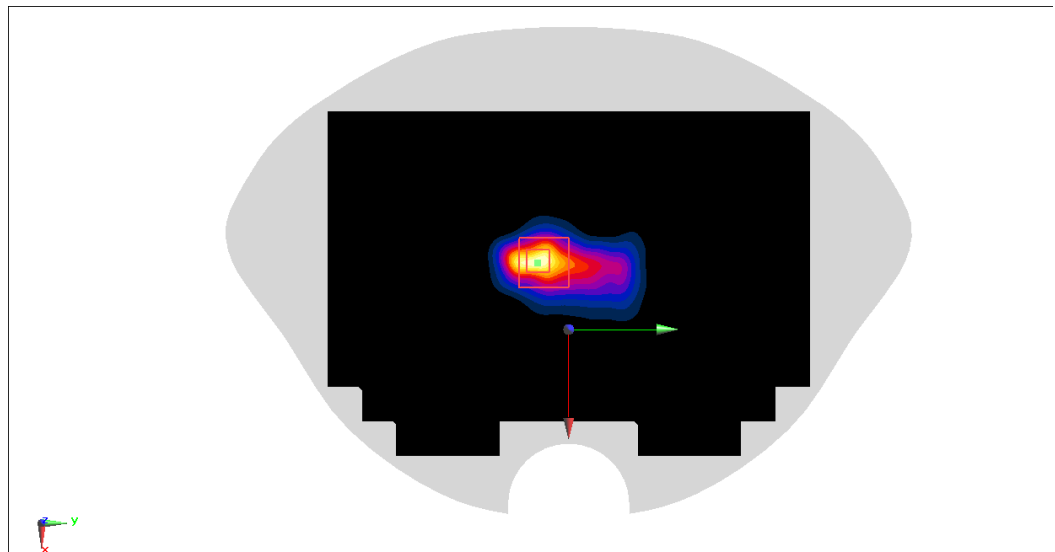

LTE Band41 Body 15mm ANT2

Date: 11/8/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 40.32$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2506 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.219 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.445 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

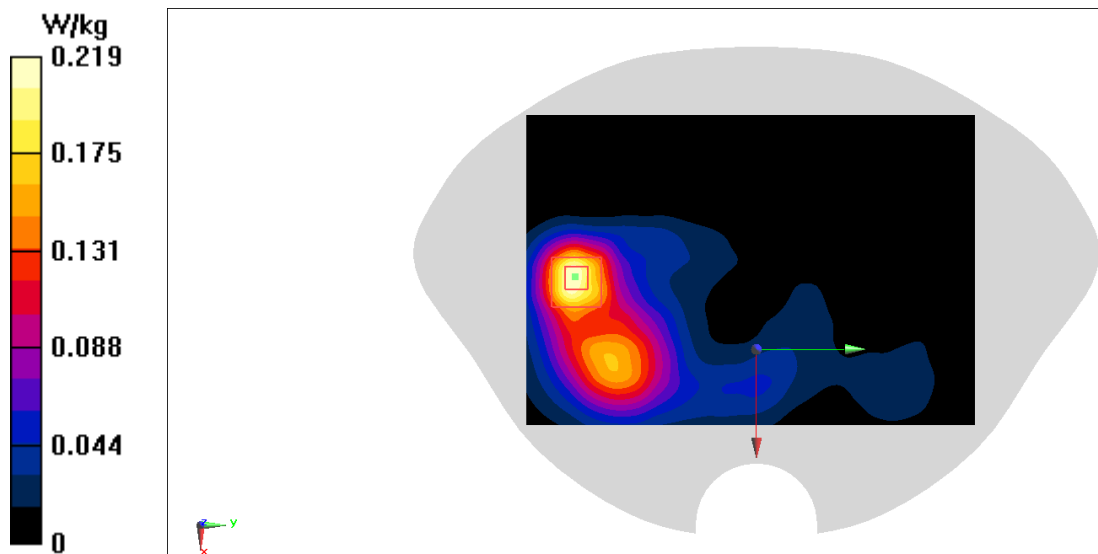

LTE Band41 Head ANT0

Date: 11/7/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2680 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (81x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0992 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.461 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0878 W/kg

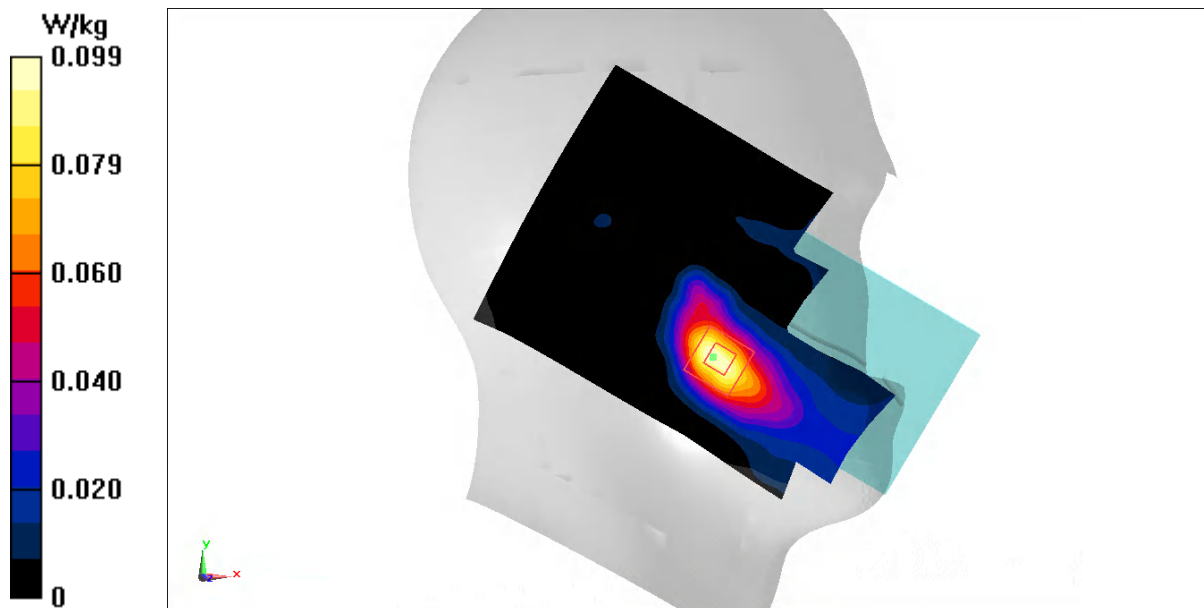

LTE Band41 Body 10mm ANT0

Date: 11/7/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2680 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.200 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.104 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

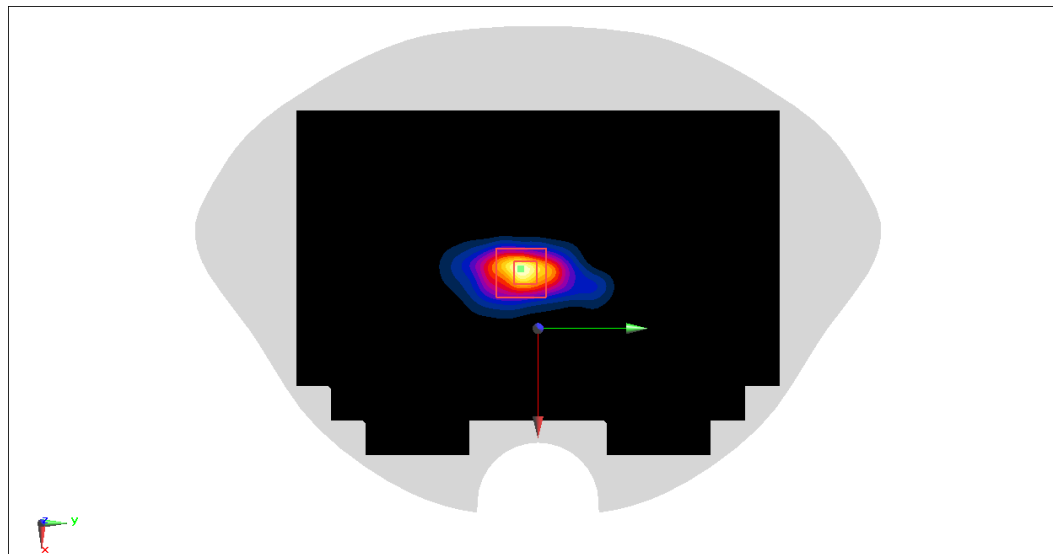

LTE Band41 Body 15mm ANT0

Date: 11/7/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 39.97$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2680 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.121 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.523 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

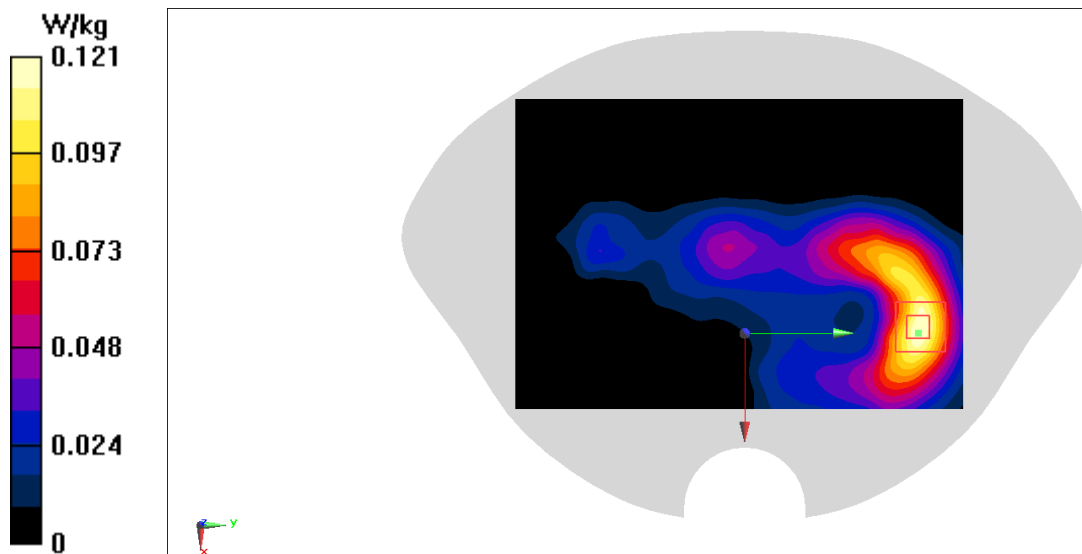

LTE Band41 Head ANT5

Date: 11/7/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 40.09$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2593 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (81x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.653 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.508 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.534 W/kg

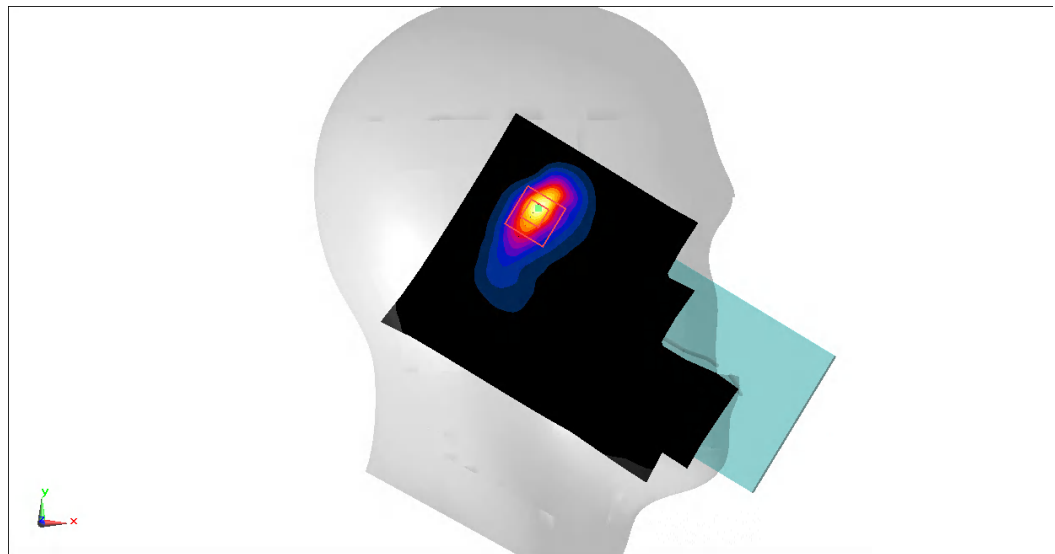

LTE Band41 Body 10mm ANT5

Date: 11/7/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2636.5$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 40.05$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2636.5 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.114 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.853 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0861 W/kg

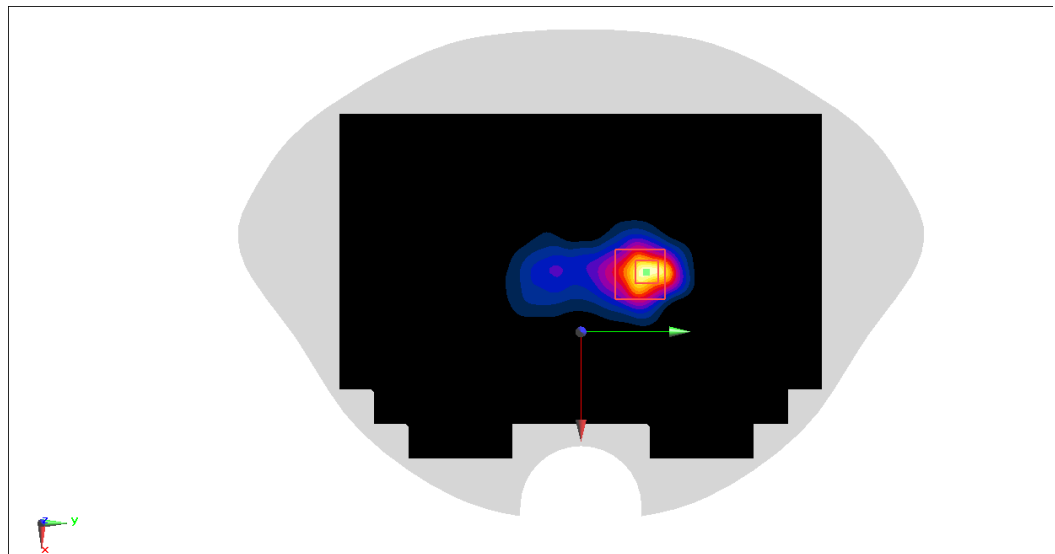

LTE Band41 Body 15mm ANT5

Date: 11/7/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2636.5$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 40.05$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 (0) Frequency: 2636.5 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0774 W/kg



Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.546 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0695 W/kg

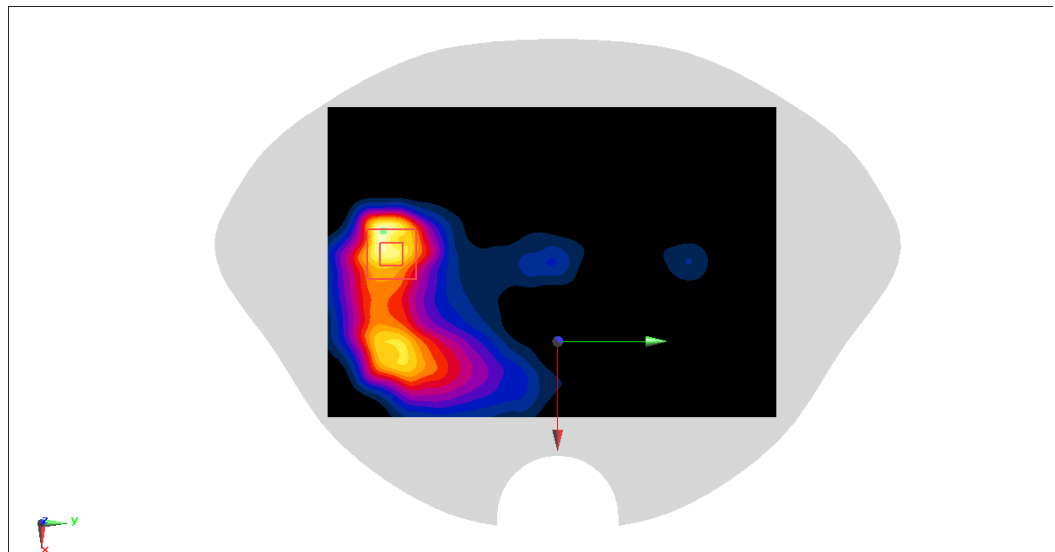

N7 Head ANT0

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2567.5$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2567.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.234 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.904 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

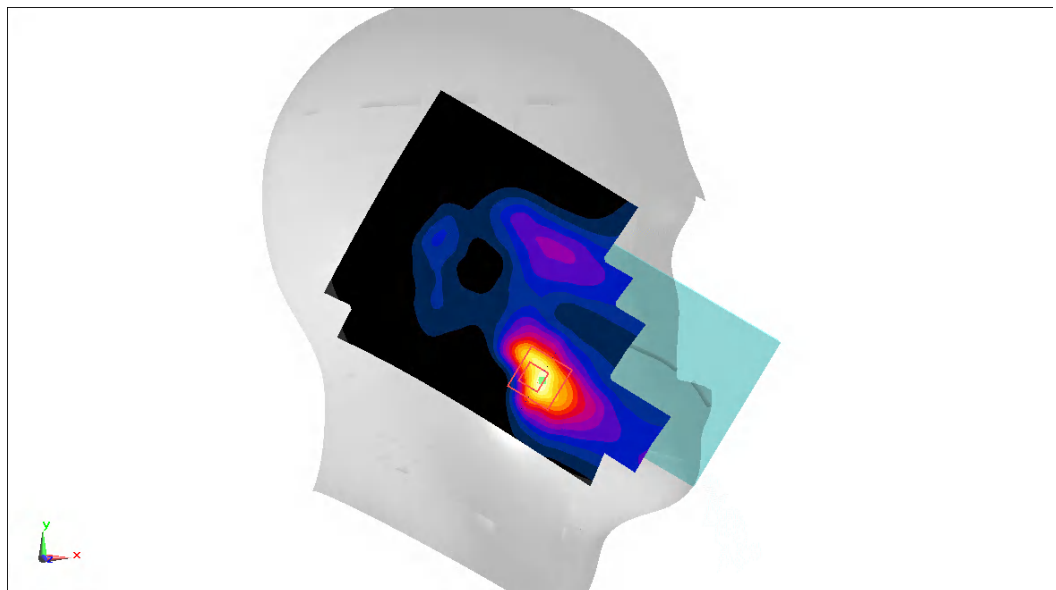

N7 Body 10mm ANT0

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2567.5$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2567.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.645 W/kg



Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.385 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.709 W/kg

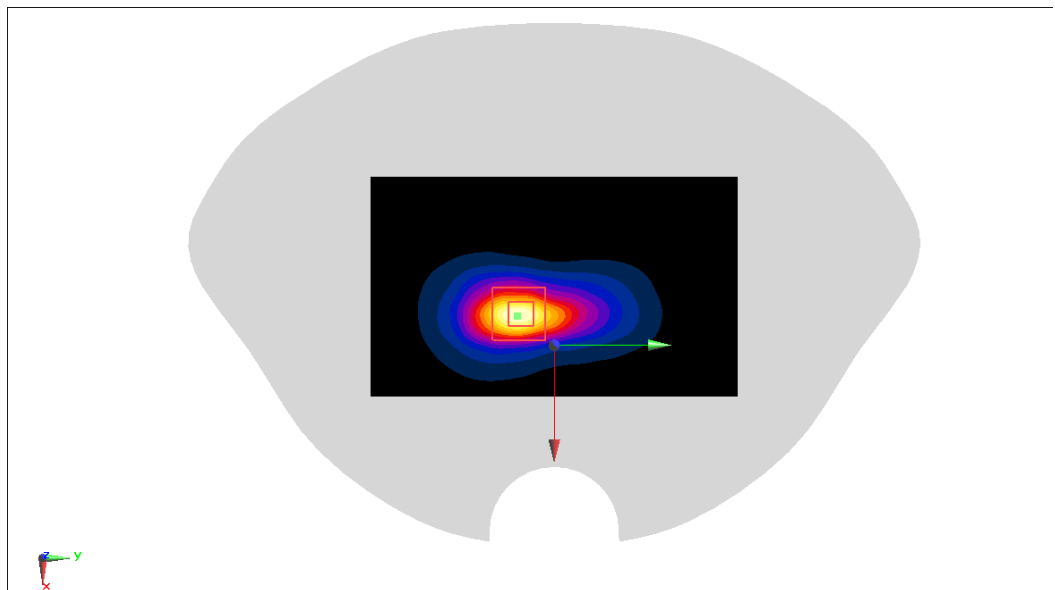

N7 Body 15mm ANT0

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2567.5$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2567.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.239 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.296 W/kg

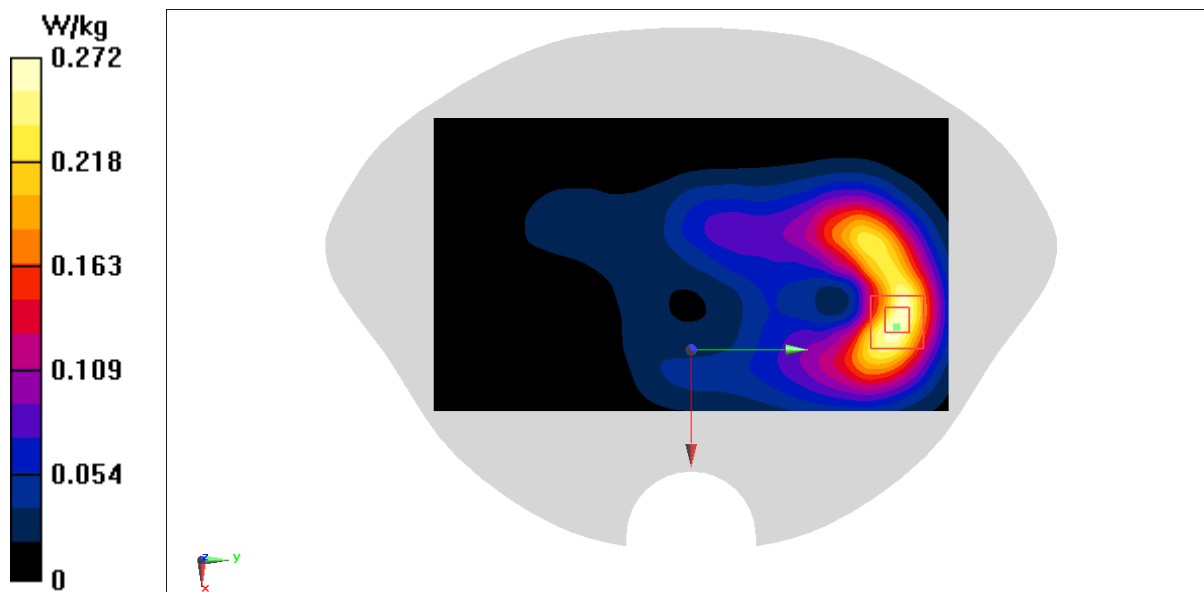

N7 Head ANT2

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2567.5$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2567.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.18 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

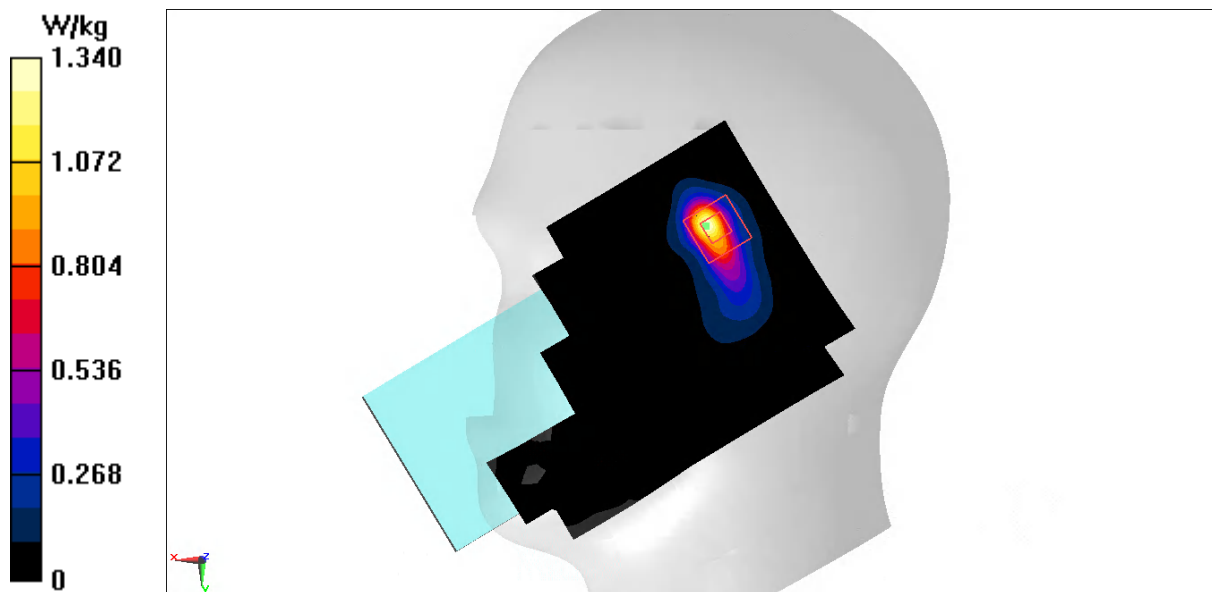

N7 Body 10mm ANT2

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2567.5$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2567.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.279 W/kg


Zoom Scan (5x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.030 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

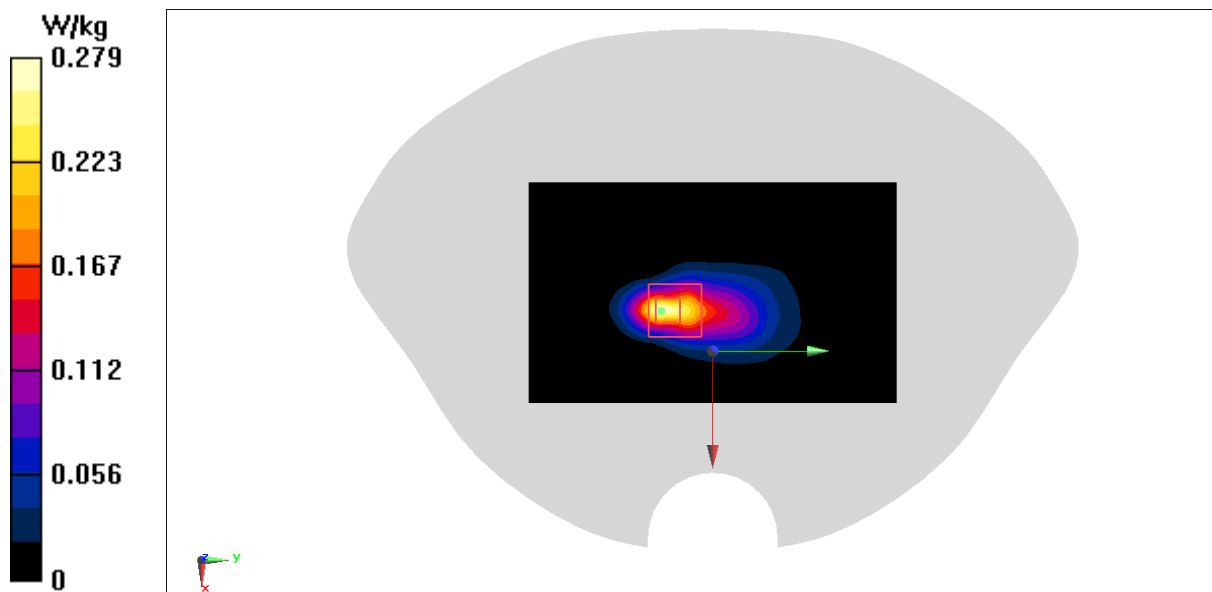

N7 Body 15mm ANT2

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2567.5$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 39.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2567.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.312 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.214 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

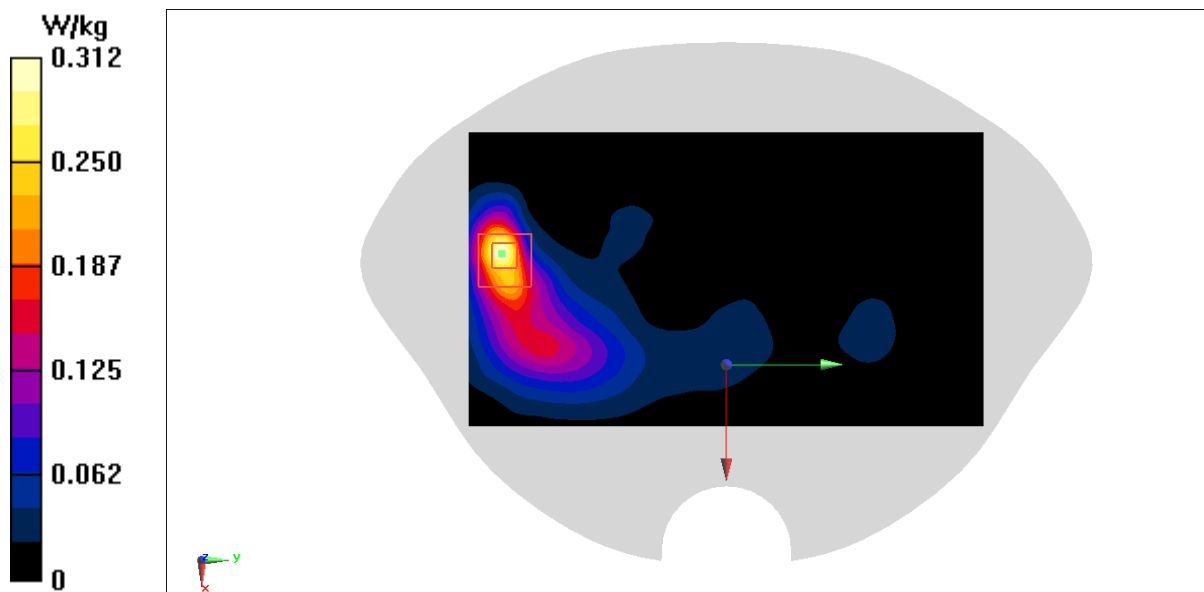

N38 Head ANT4

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 39.65$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.799 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.537 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.703 W/kg

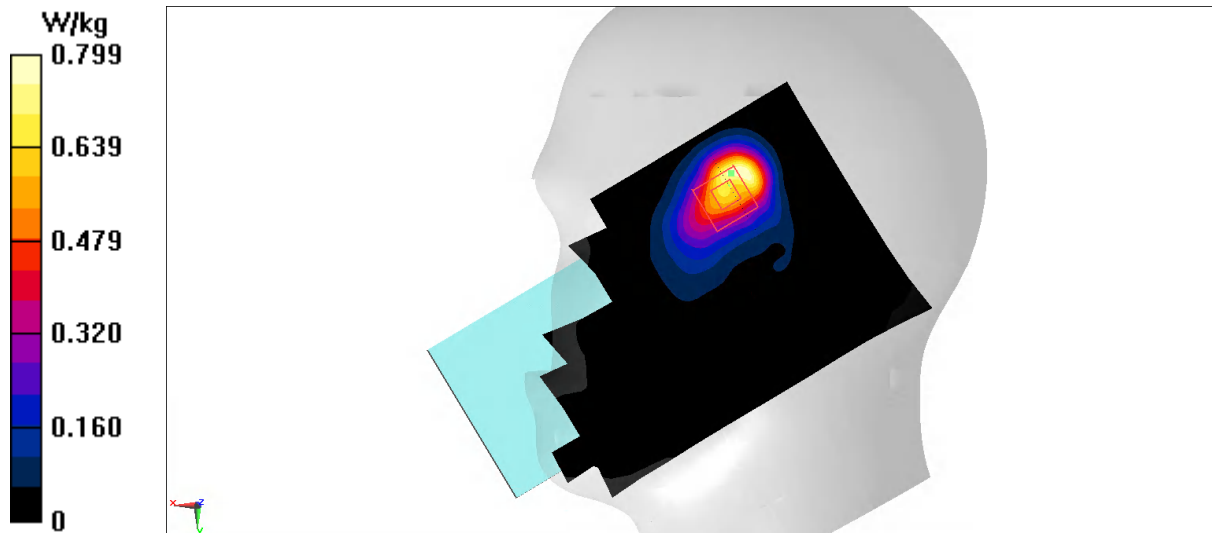

N38 Body 10mm ANT4

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 39.65$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.216 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.941 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

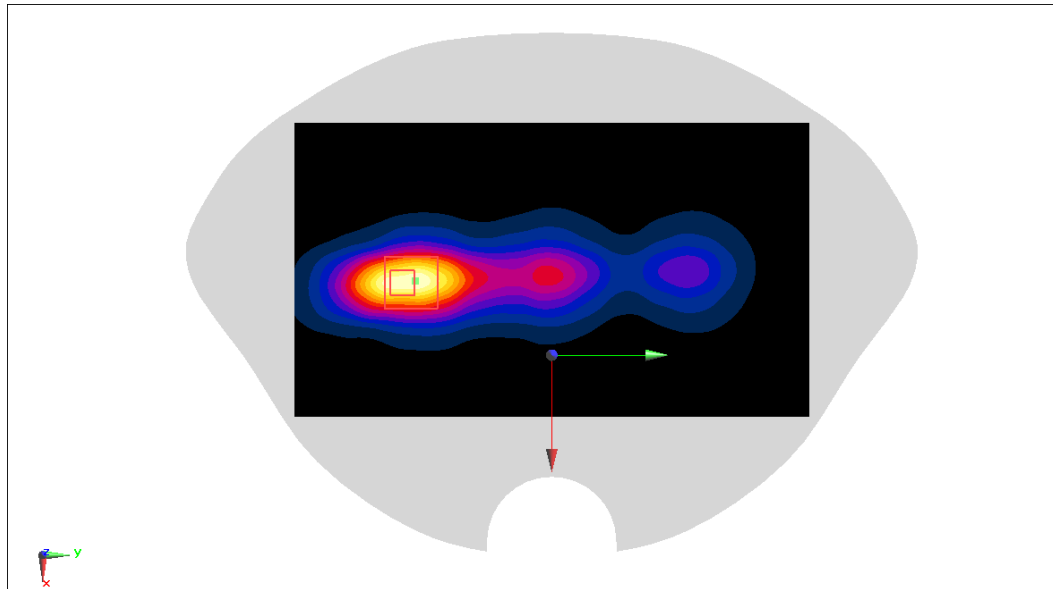

N38 Body 15mm ANT4

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 39.65$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.271 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.802 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

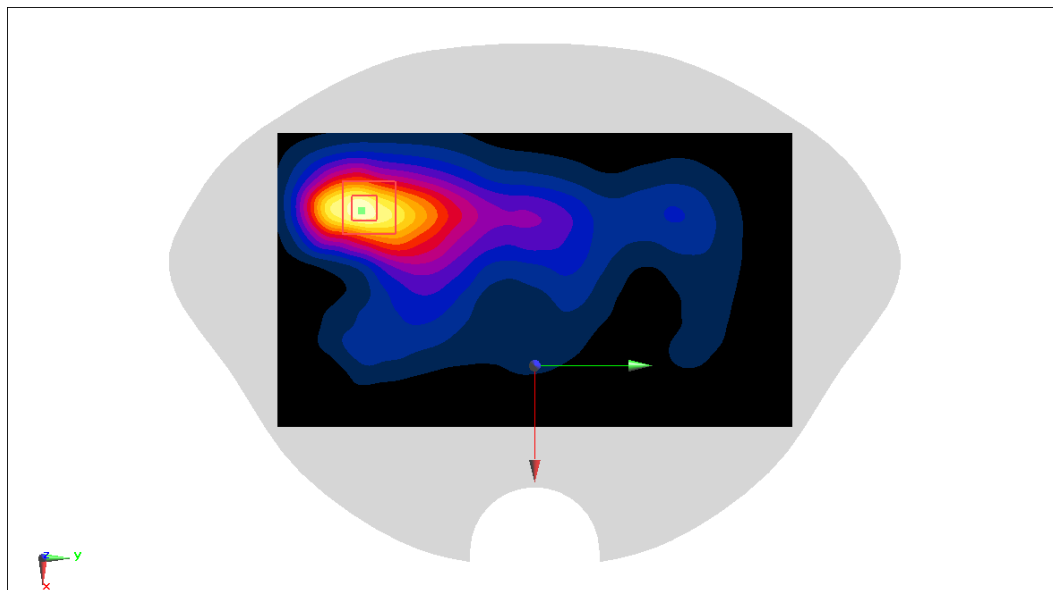

N38 Head ANT2

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 39.65$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.795 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.94 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

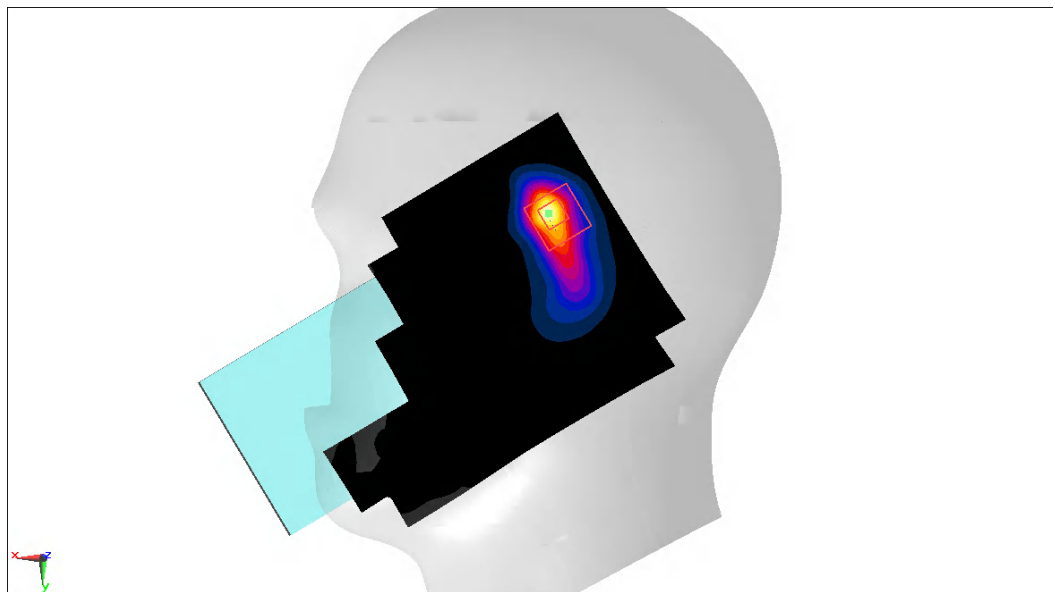

N38 Body 10mm ANT2

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 39.56$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.294 W/kg


Zoom Scan (5x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.844 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

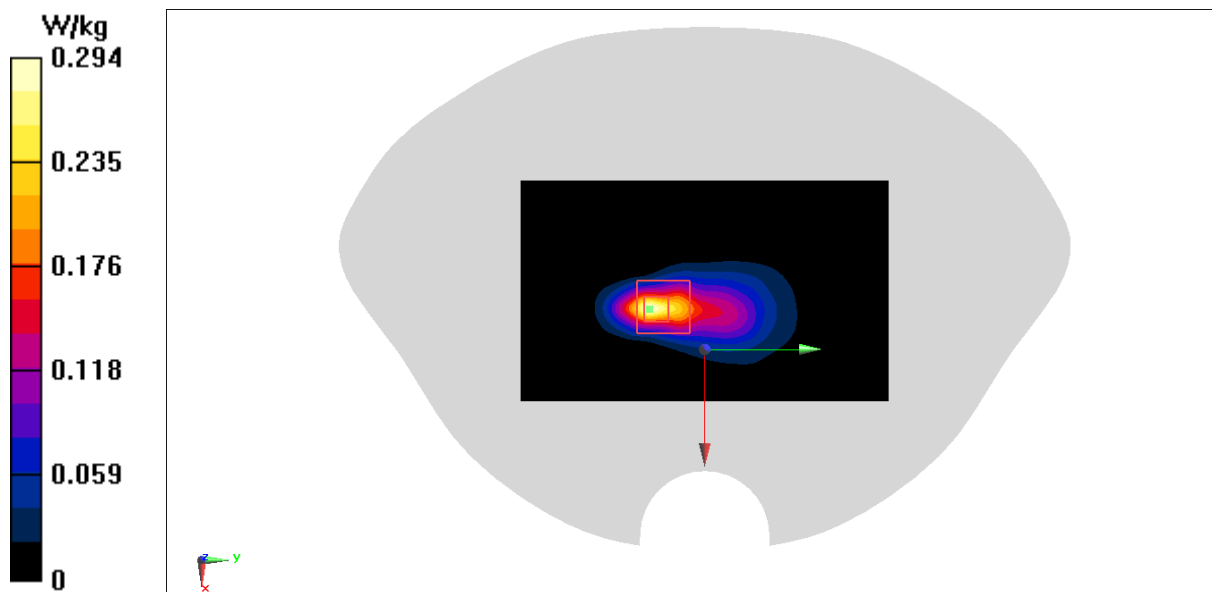

N38 Body 15mm ANT2

Date: 10/18/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 39.65$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.256 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8500 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.244 W/kg

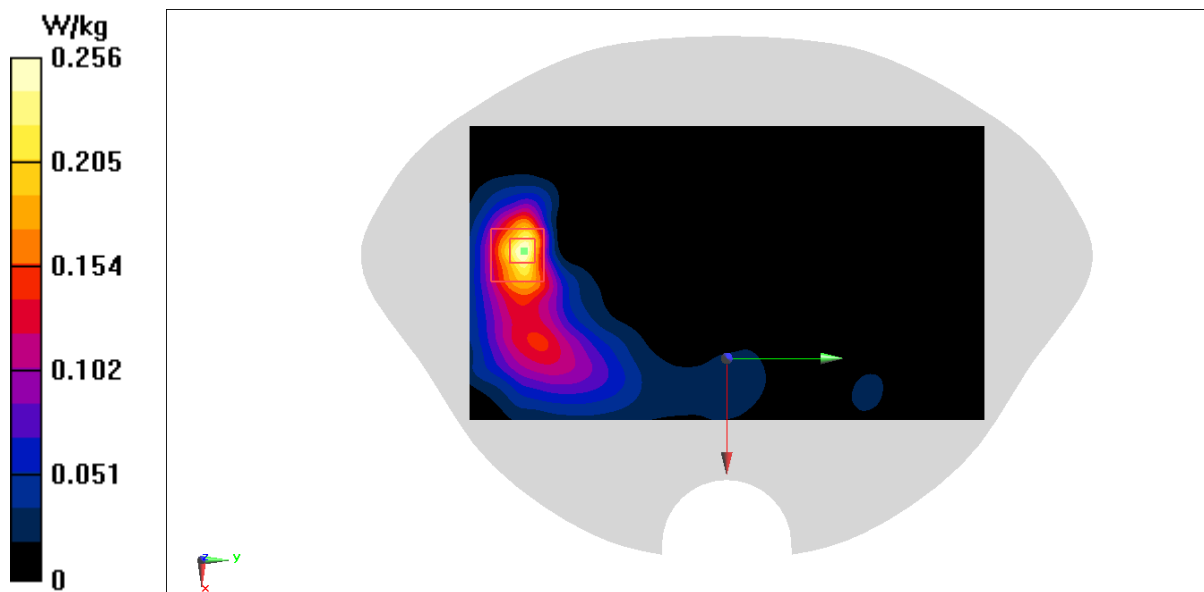

N38 Head ANT0

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 40.29$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2610 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.162 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.935 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

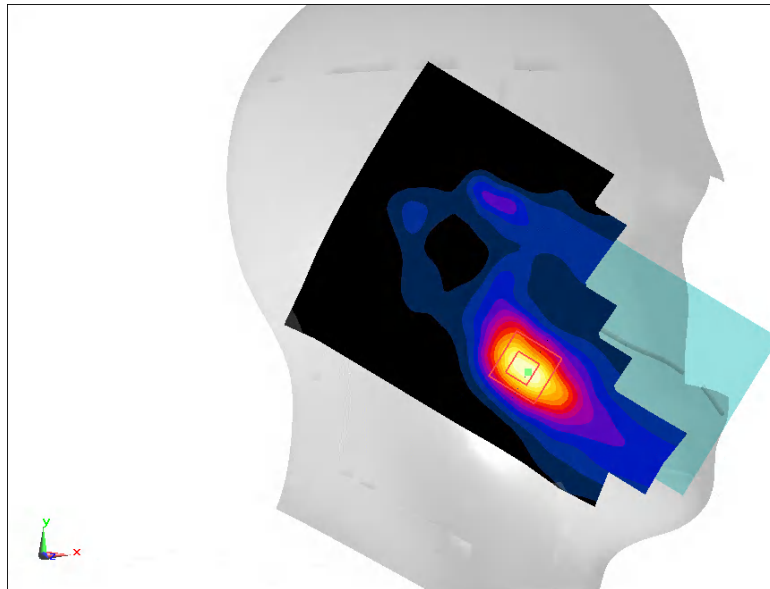

N38 Body 10mm ANT0

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.671 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.505 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

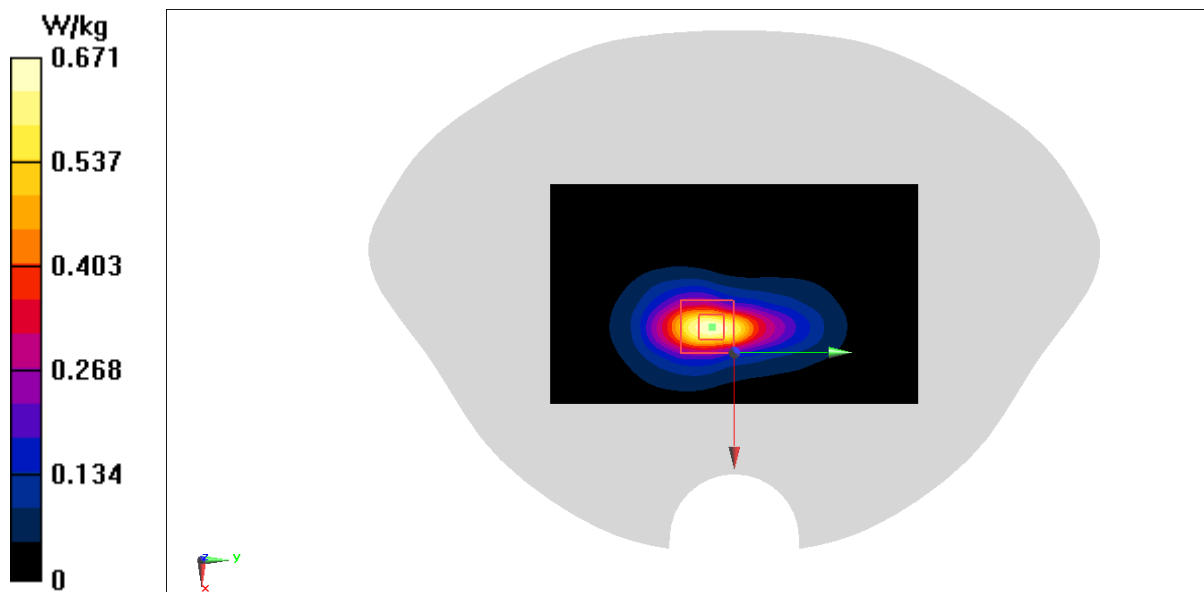

N38 Body 15mm ANT0

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.187 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.043 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

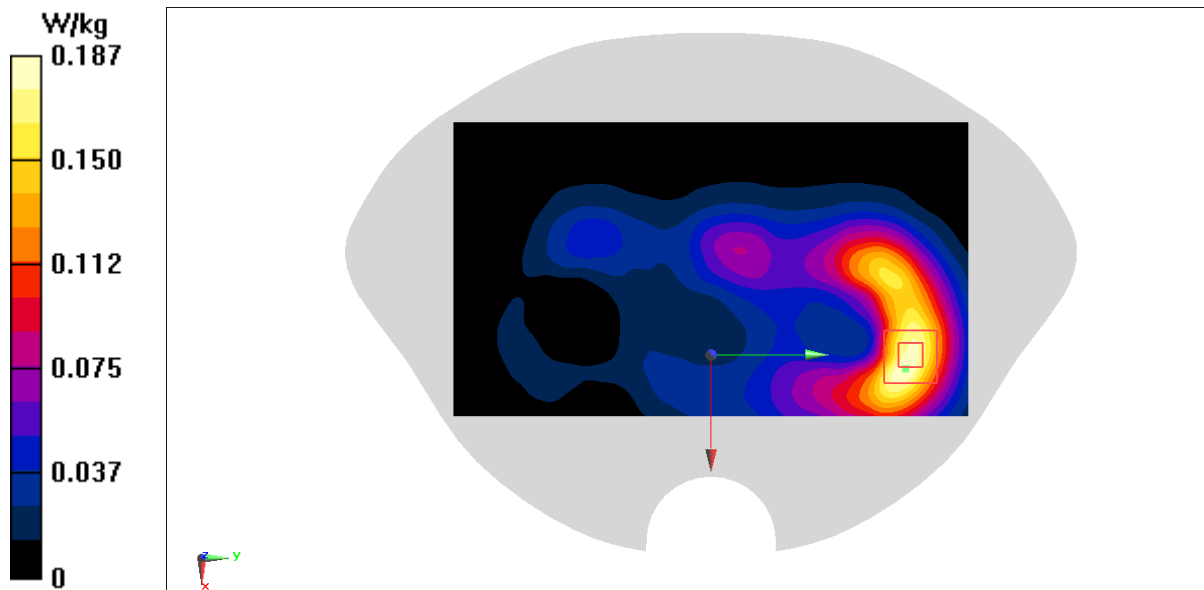

N38 Head ANT5

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.23 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.13 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

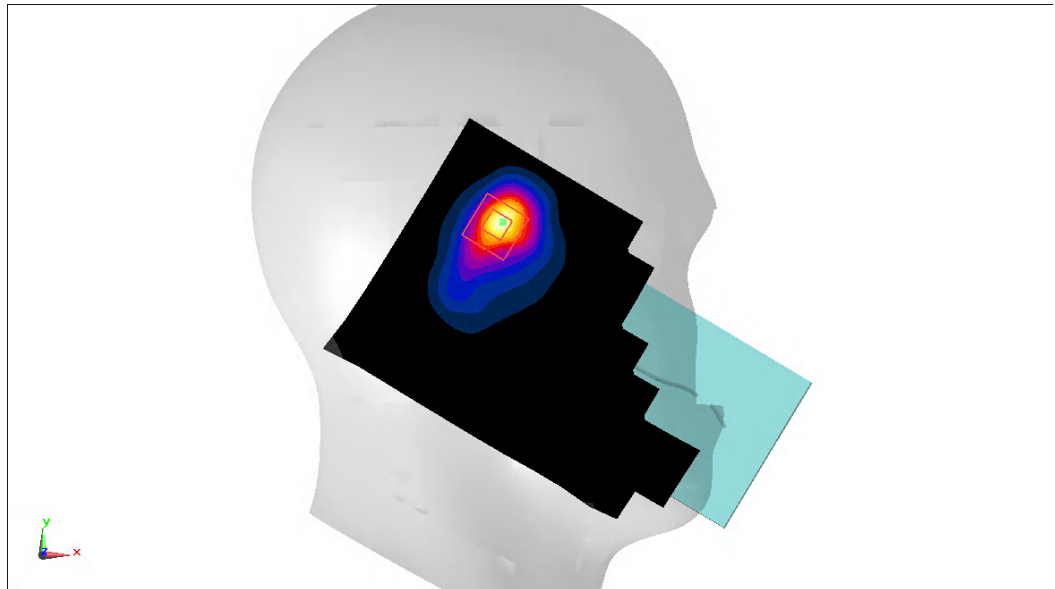

N38 Body 10mm ANT5

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.284 W/kg



Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.097 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

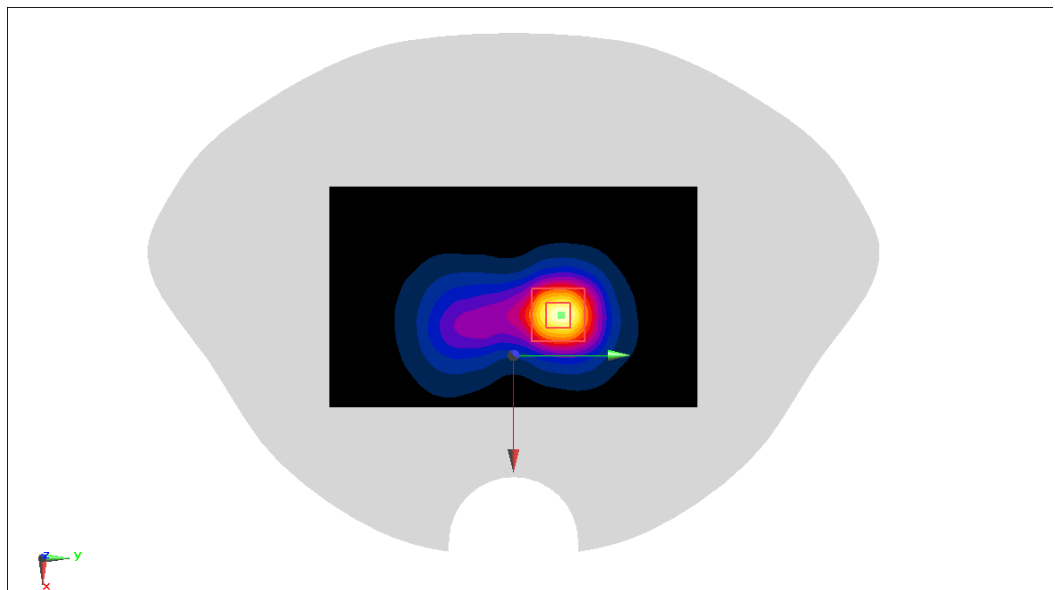

N38 Body 15mm ANT5

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.305 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.406 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

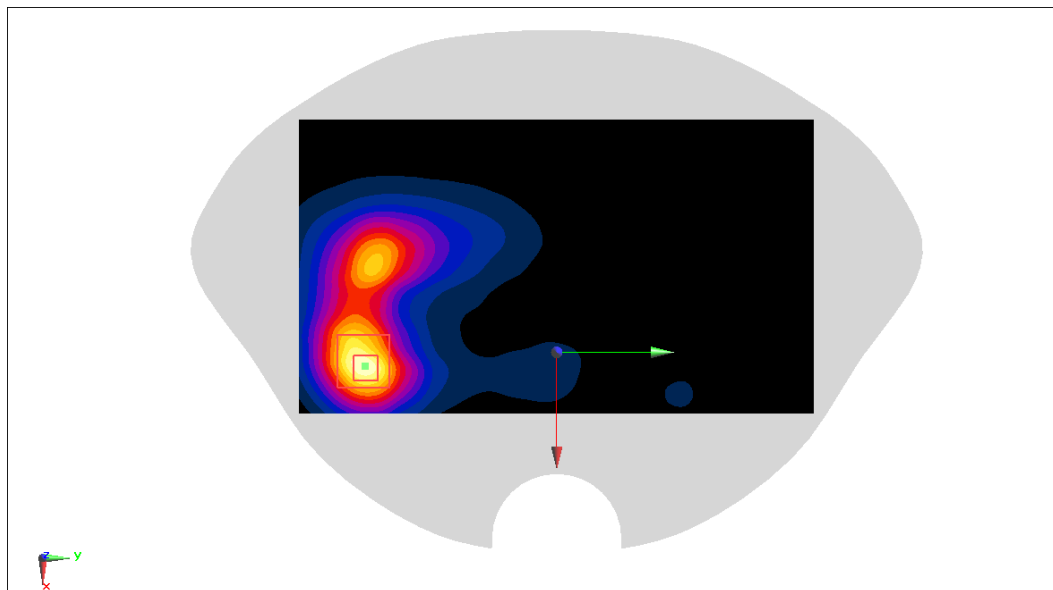

N41 Head ANT4

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.923$ S/m; $\epsilon_r = 40.51$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2549.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.743 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.462 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.644 W/kg

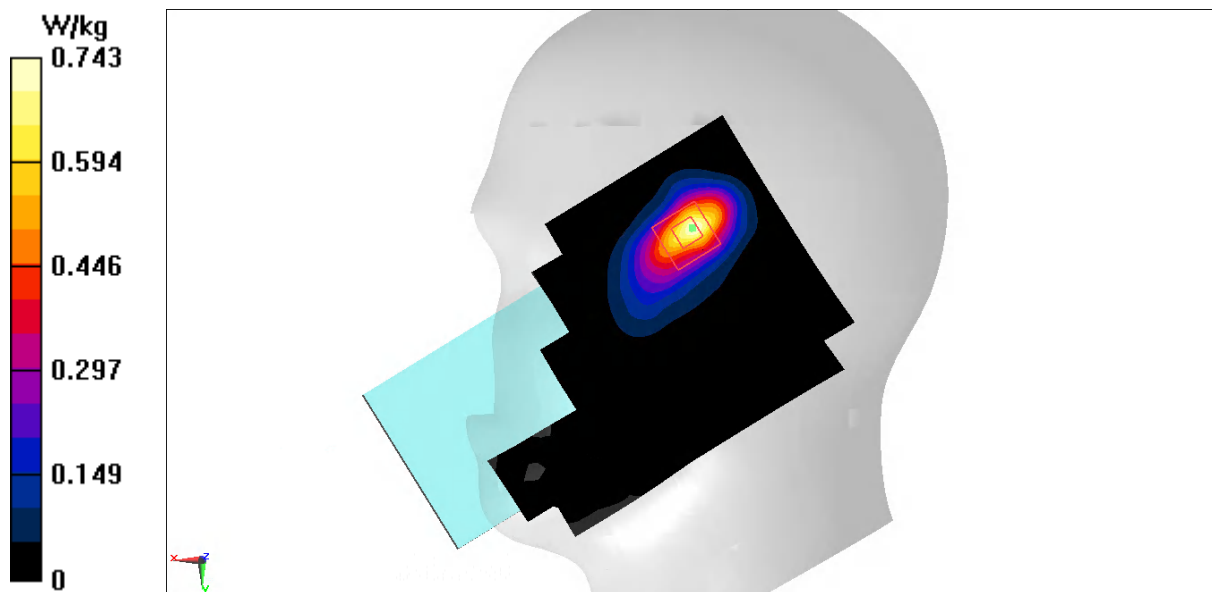

N41 Body 10mm ANT4

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 40.26$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2679.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (51x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.199 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.152 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

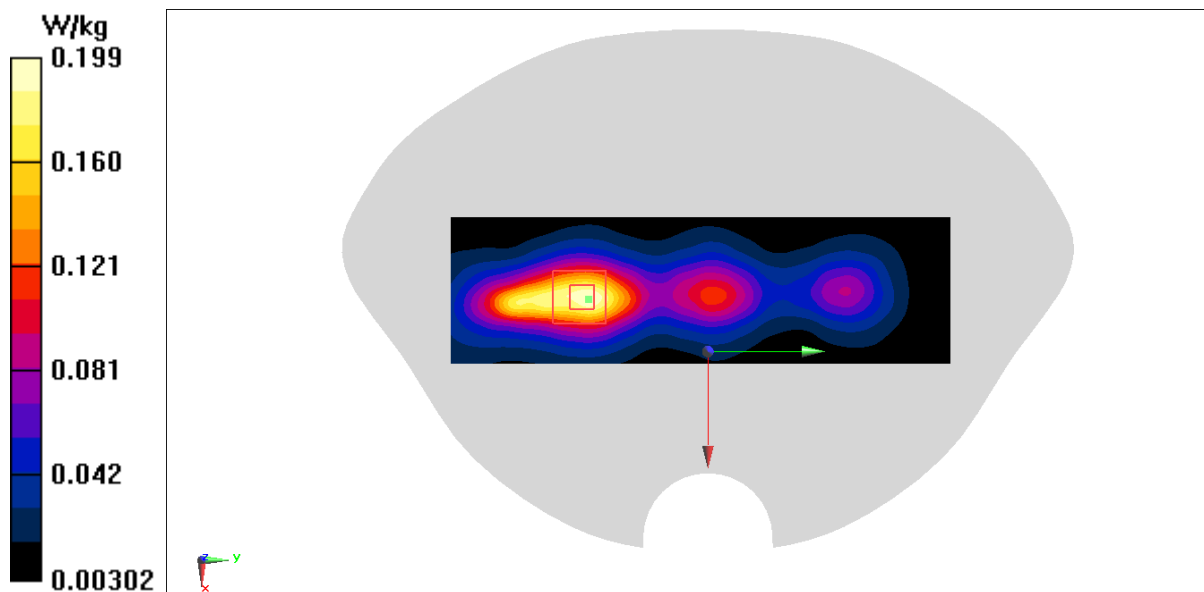

N41 Body 15mm ANT4

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 40.26$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2679.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.289 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.453 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

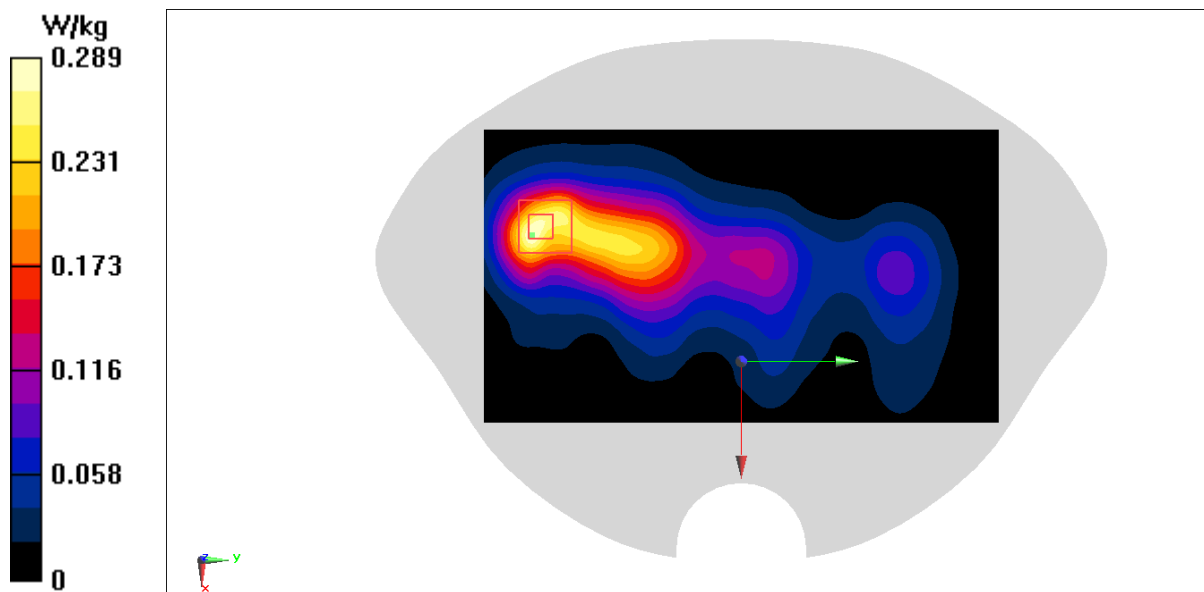

N41 Head ANT2

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x121x1): Interpolated grid: $dx = 1.200$ mm, $dy = 1.200$ mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx = 5$ mm, $dy = 5$ mm, $dz = 5$ mm

Reference Value = 15.76 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

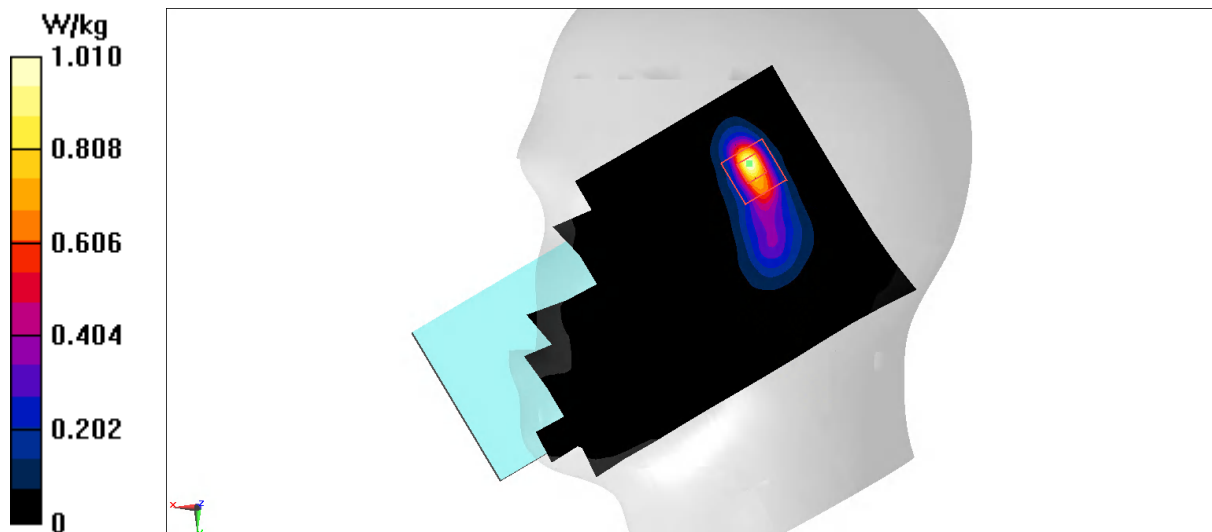

N41 Body 10mm ANT2

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2636.49$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2636.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.232 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.112 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

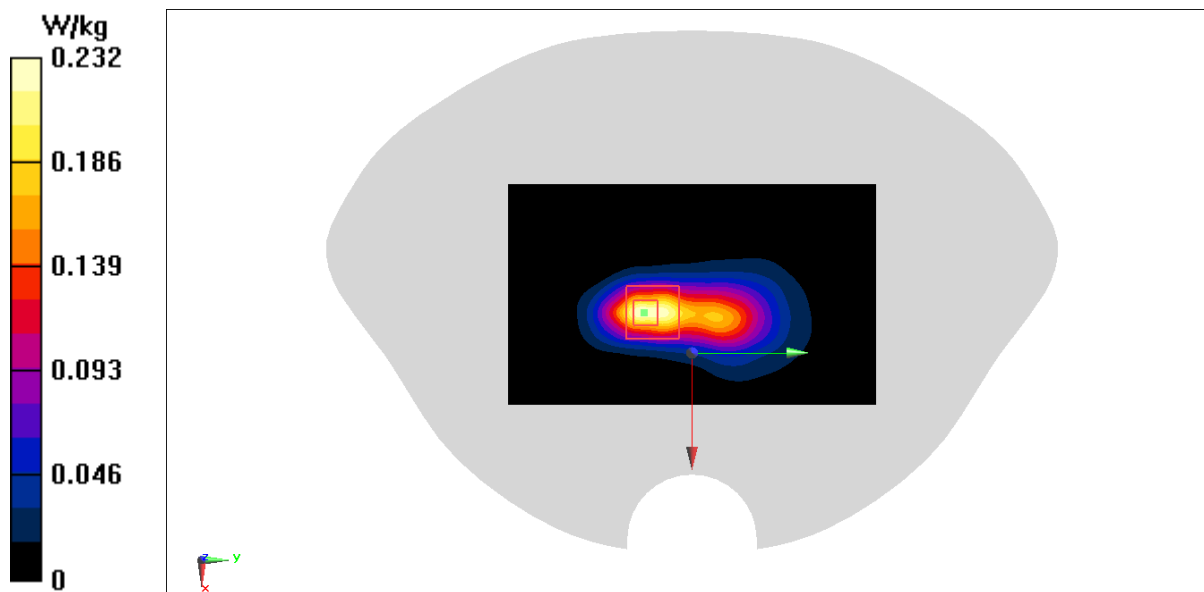

N41 Body 15mm ANT2

Date: 10/19/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2636.49$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2636.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.64, 7.64, 7.64)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.206 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.4920 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

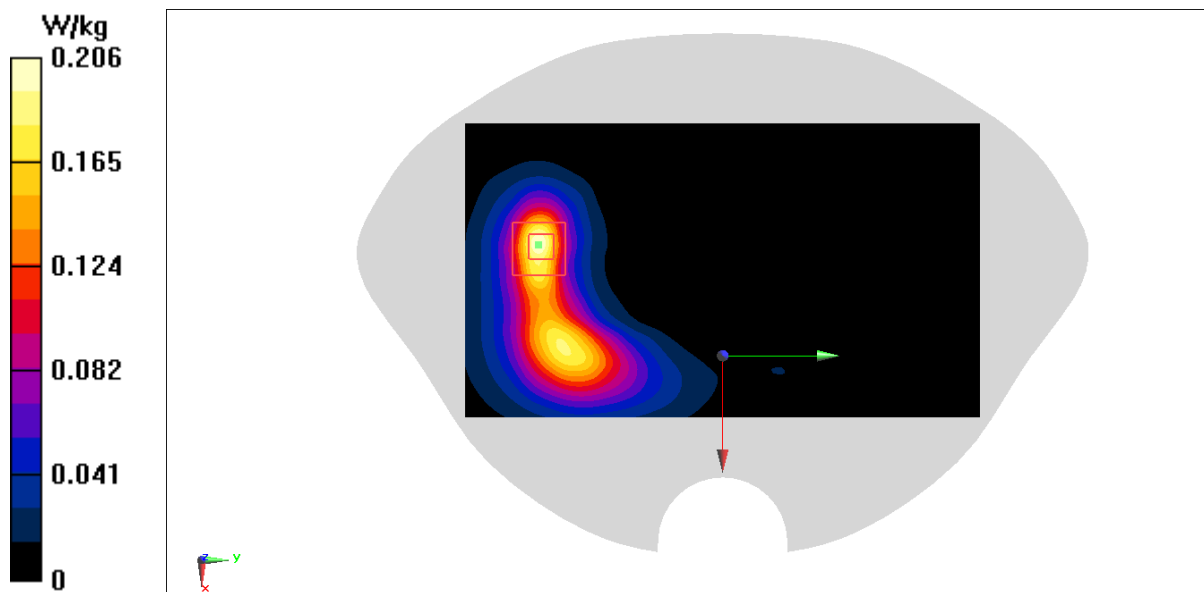

N41 Head ANT0

Date: 10/20/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 40.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2549.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.196 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.173 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

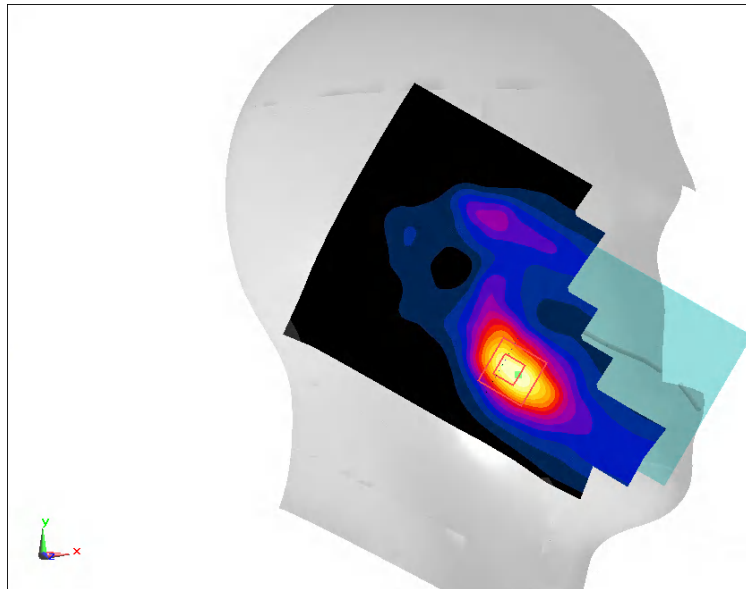

N41 Body 10mm ANT0

Date: 10/20/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 40.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2549.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.717 W/kg



Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.480 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.762 W/kg

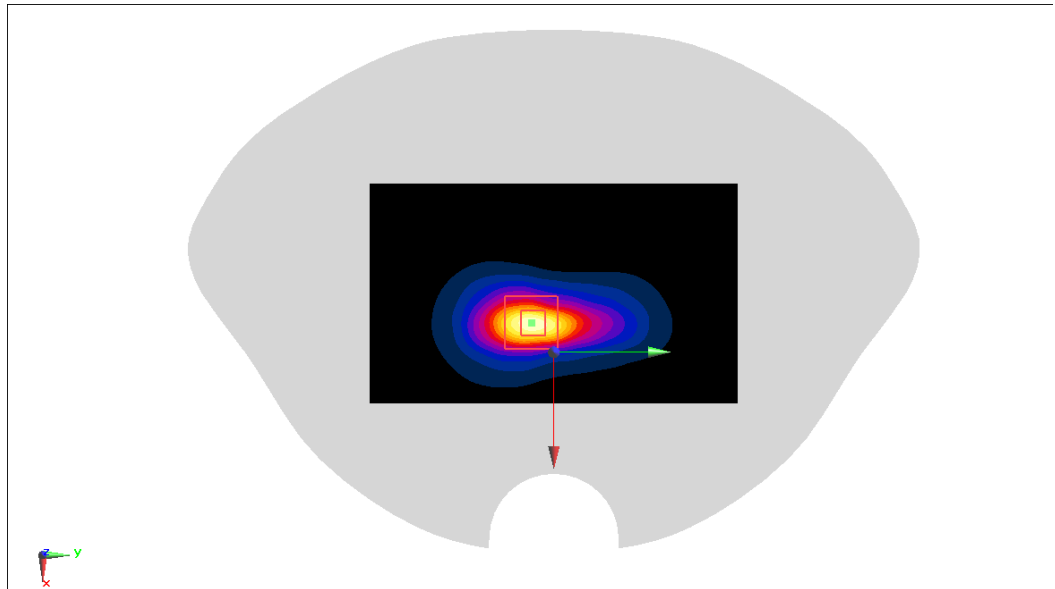

N41 Body 15mm ANT0

Date: 10/20/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 40.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2549.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.266 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.798 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

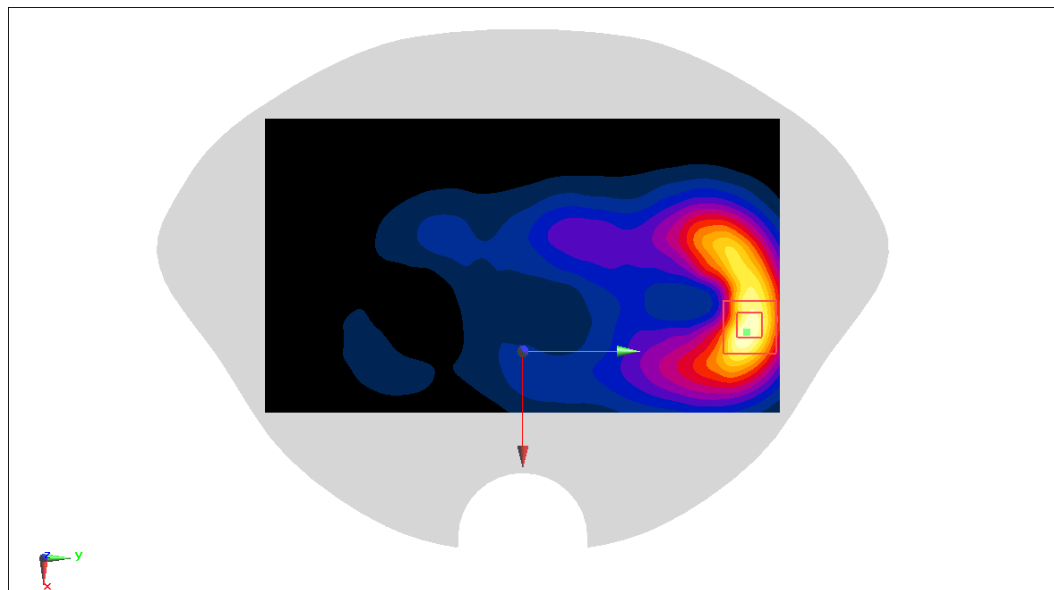

N41 Head ANT5

Date: 10/20/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2506.02$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 40.65$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2506.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.12 W/kg



Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.18 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

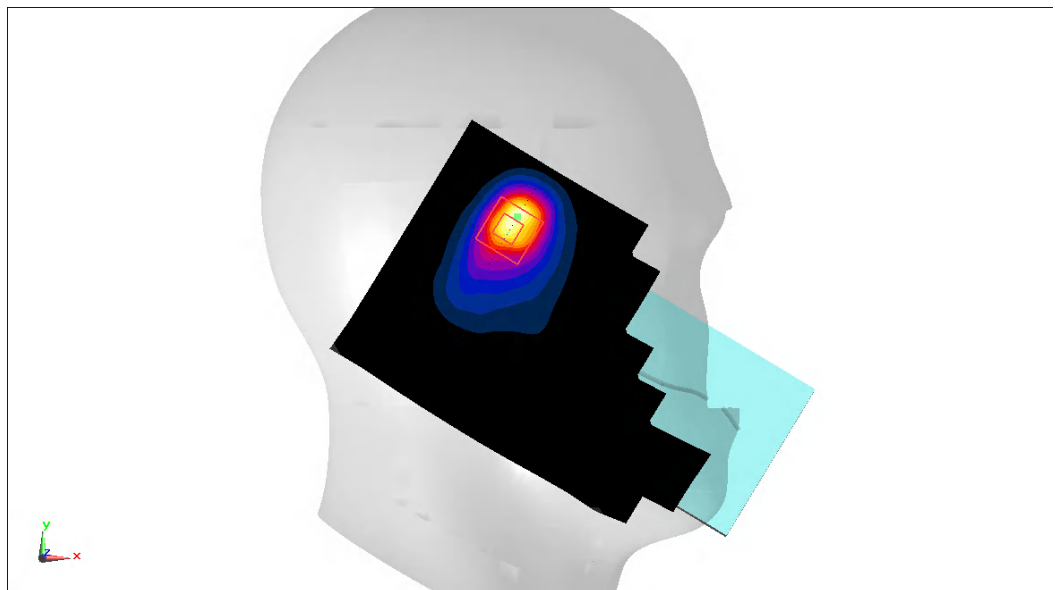

N41 Body 10mm ANT5

Date: 10/20/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 40.54$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.298 W/kg



Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.660 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

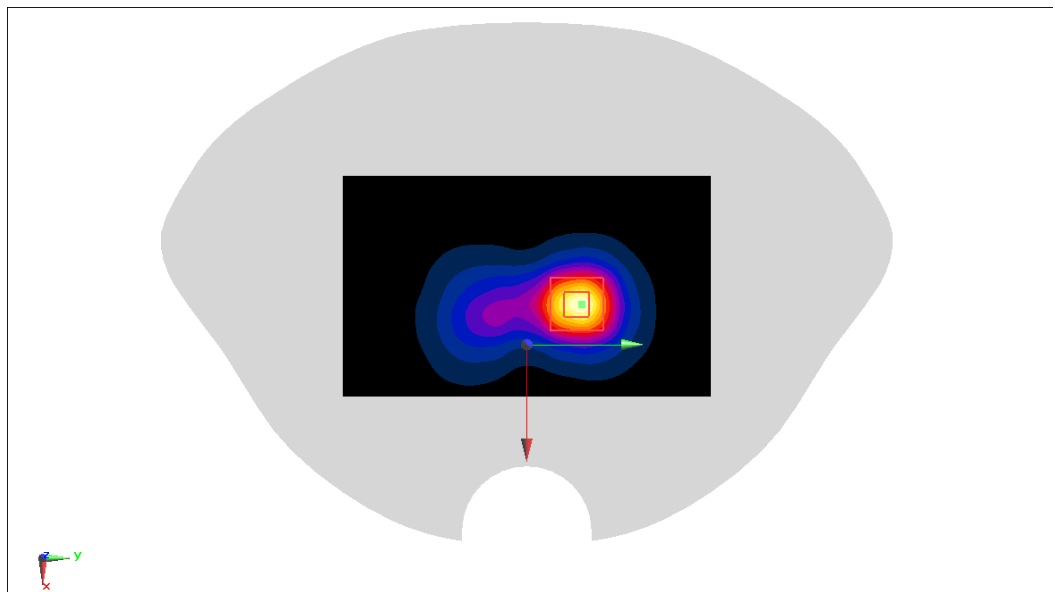

N41 Body 15mm ANT5

Date: 10/20/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2506.02$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 40.65$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 2506.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.332 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.377 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

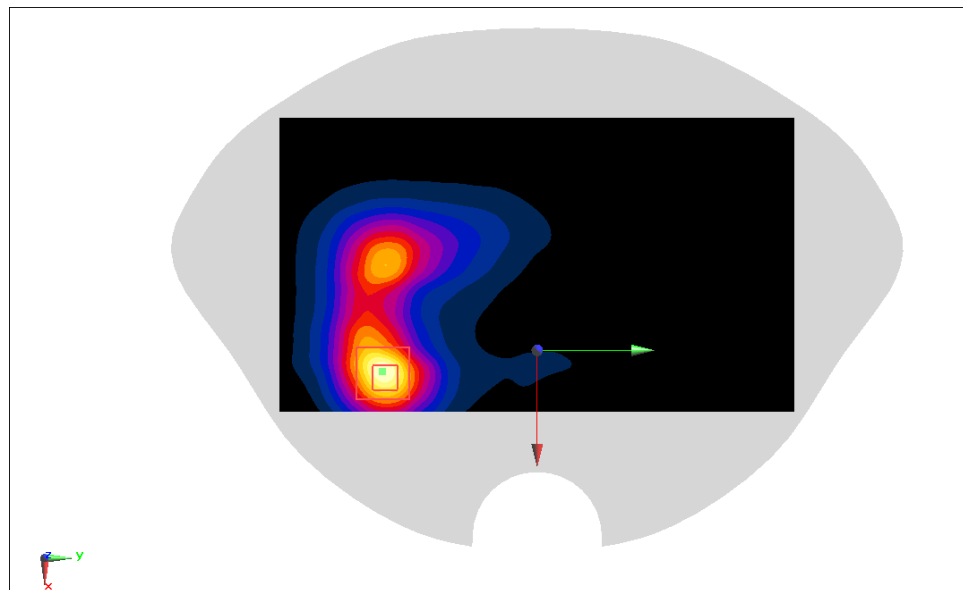

N78 Head ANT8

Date: 10/23/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.912 W/kg



Zoom Scan (9x9x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.877 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.920 W/kg

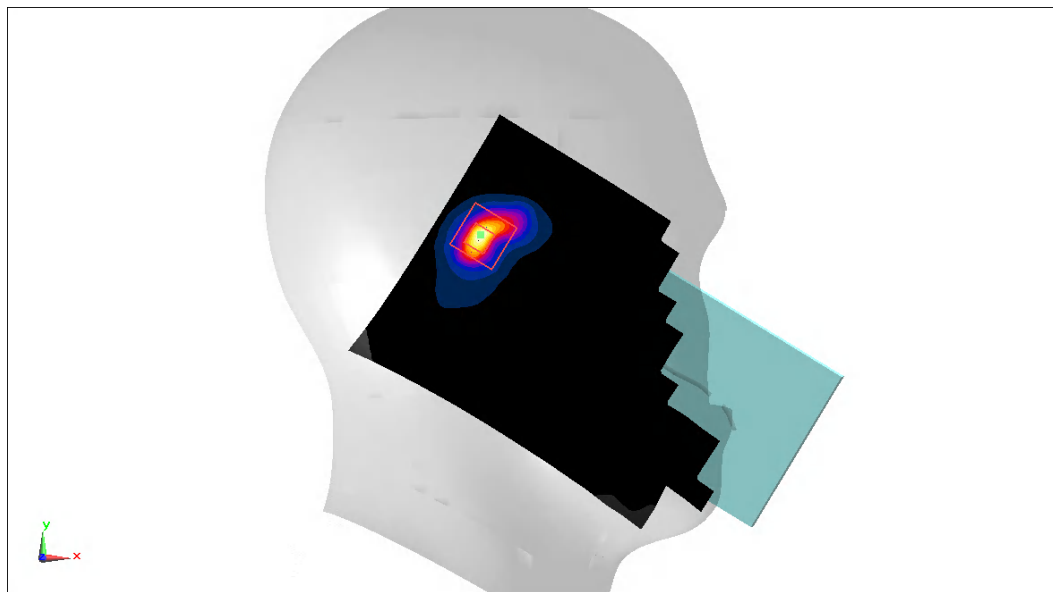

N78 Body 10mm ANT8

Date: 10/23/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (61x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.173 W/kg



Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.018 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

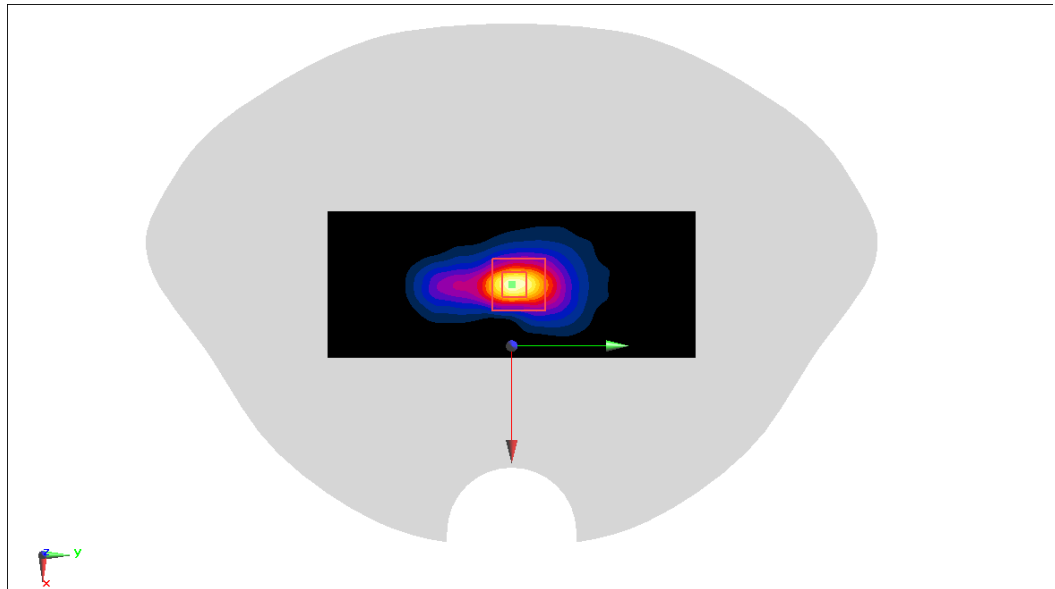

N78 Body 15mm ANT8

Date: 10/23/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.237 W/kg



Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.012 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

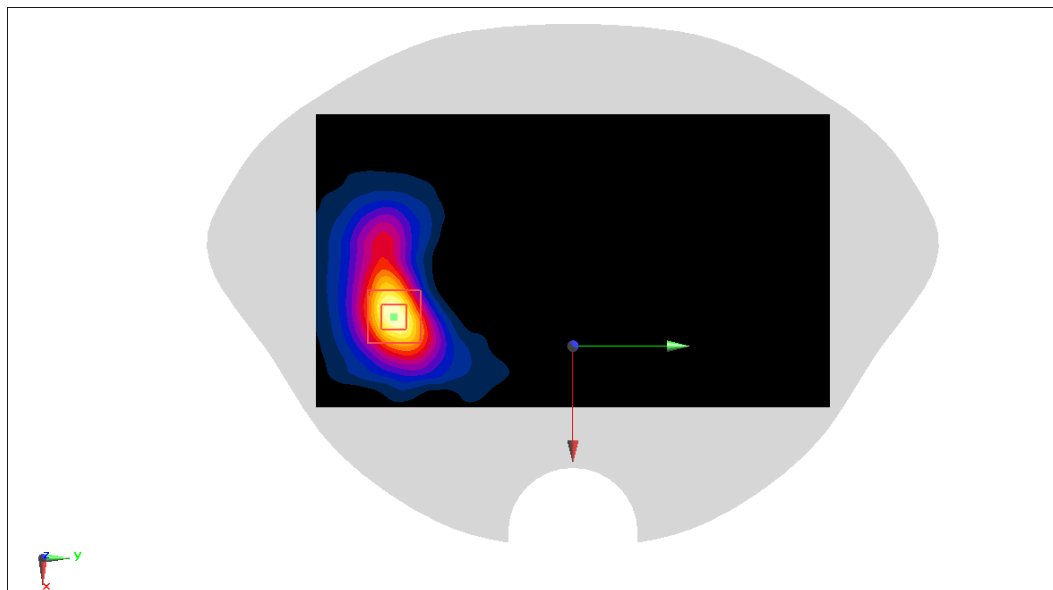

N78 Head ANT10

Date: 10/23/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.853 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.669 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.729 W/kg

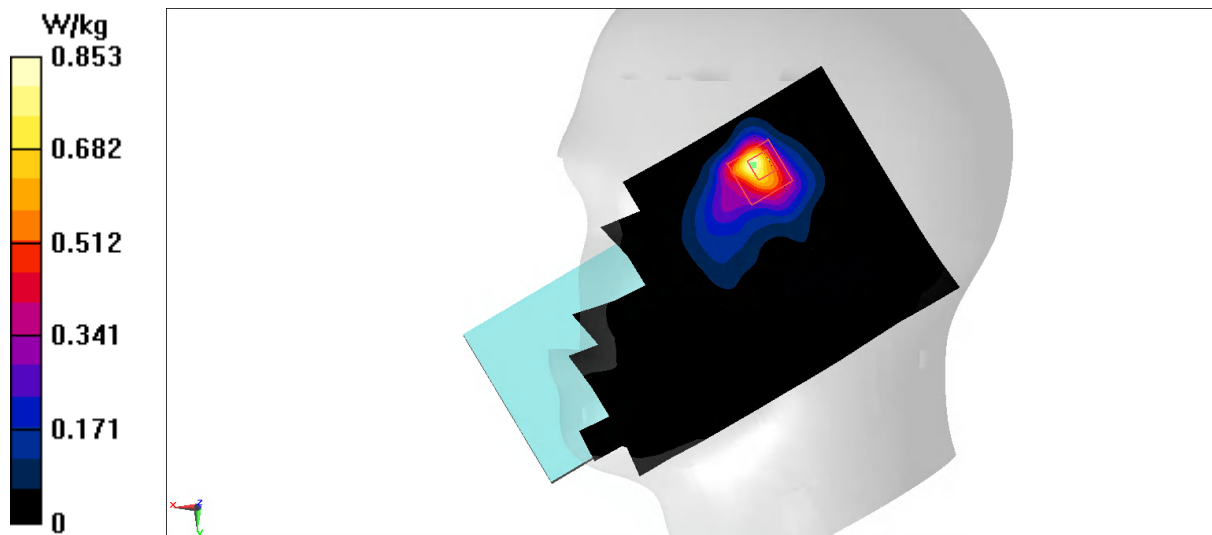

N78 Body 10mm ANT10

Date: 10/23/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (61x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.149 W/kg



Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.621 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

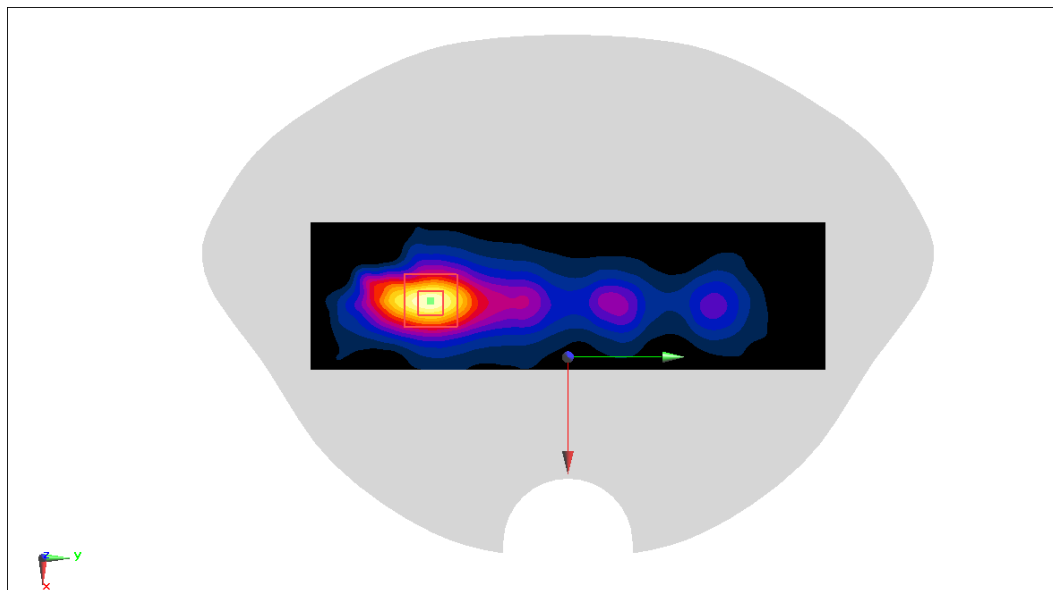

N78 Body 15mm ANT10

Date: 10/23/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3460.02$ MHz; $\sigma = 2.914$ S/m; $\epsilon_r = 39.25$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.153 W/kg



Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.274 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

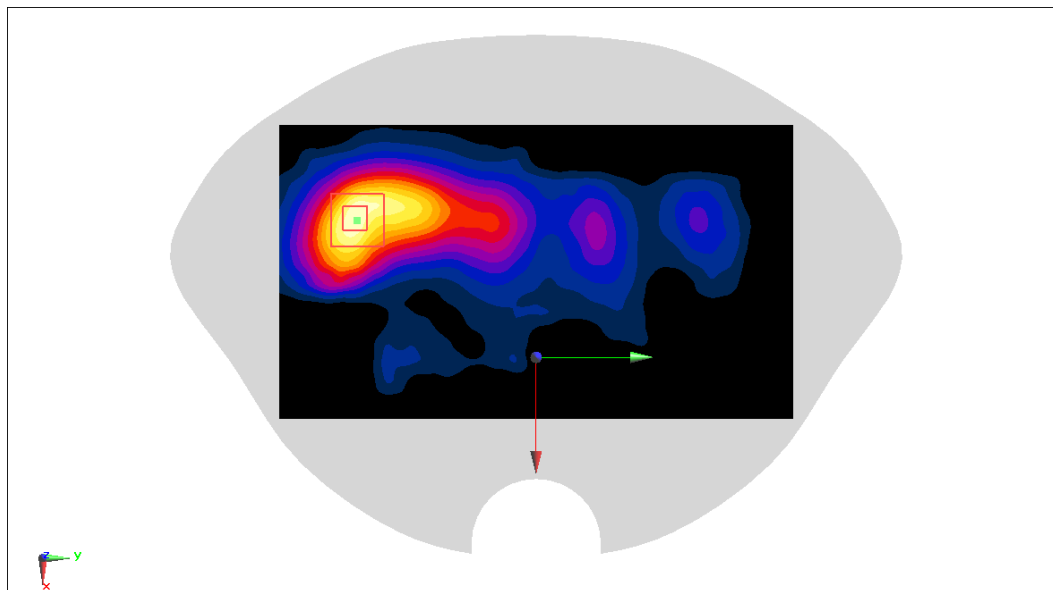

N78 Head ANT7

Date: 10/24/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3460.02$ MHz; $\sigma = 2.776$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.900 W/kg



Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.705 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.880 W/kg

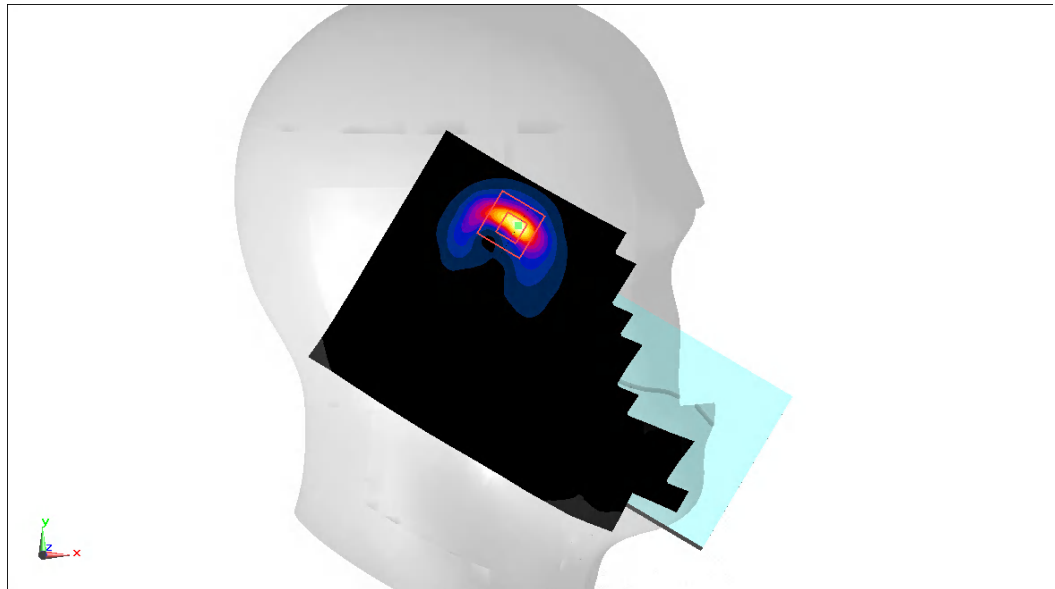

N78 Body 10mm ANT7

Date: 10/24/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3460.02$ MHz; $\sigma = 2.776$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (61x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.278 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.589 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

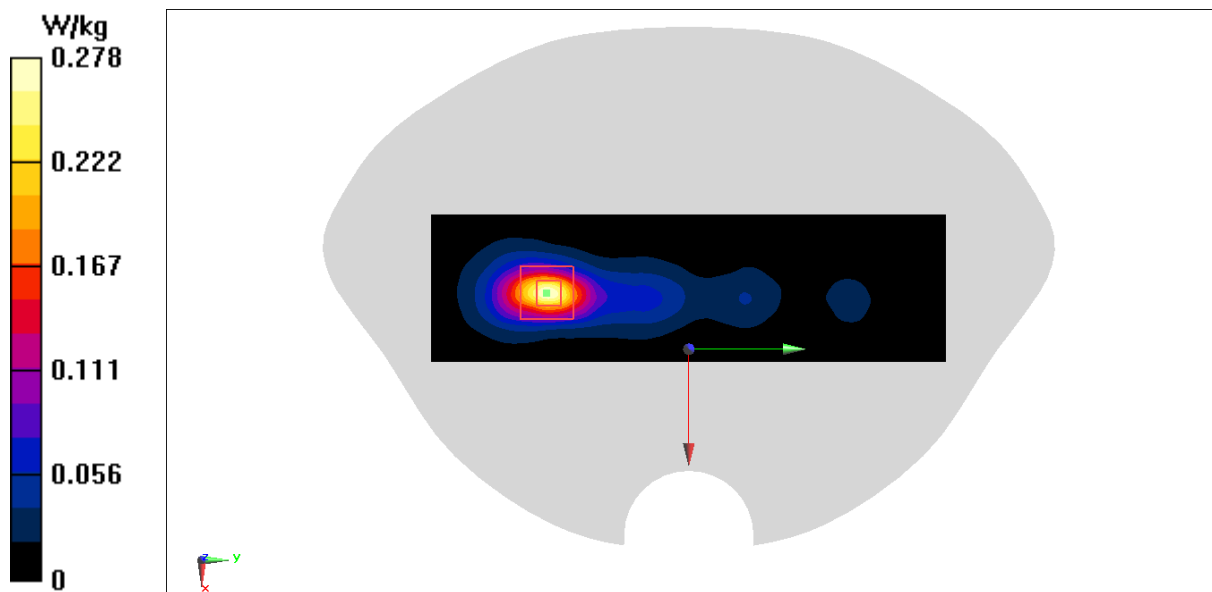

N78 Body 15mm ANT7

Date: 10/24/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3460.02$ MHz; $\sigma = 2.776$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.298 W/kg



Zoom Scan (9x9x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.846 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

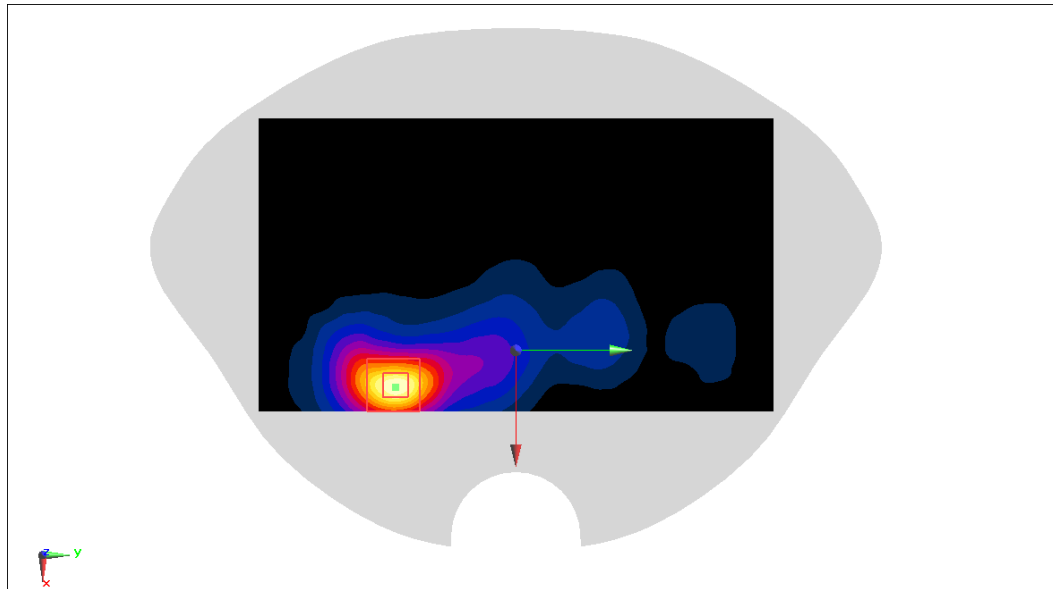

N78 Head ANT2

Date: 10/24/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3460.02$ MHz; $\sigma = 2.776$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.38 W/kg



Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.679 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

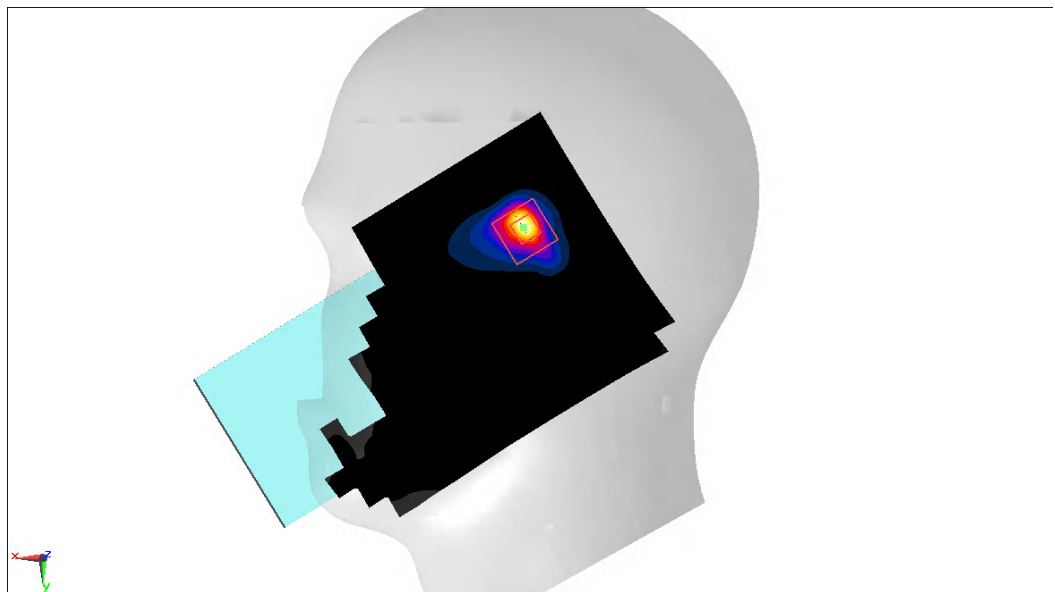

N78 Body 10mm ANT2

Date: 10/24/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.783$ S/m; $\epsilon_r = 39.58$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (61x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.256 W/kg



Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.477 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

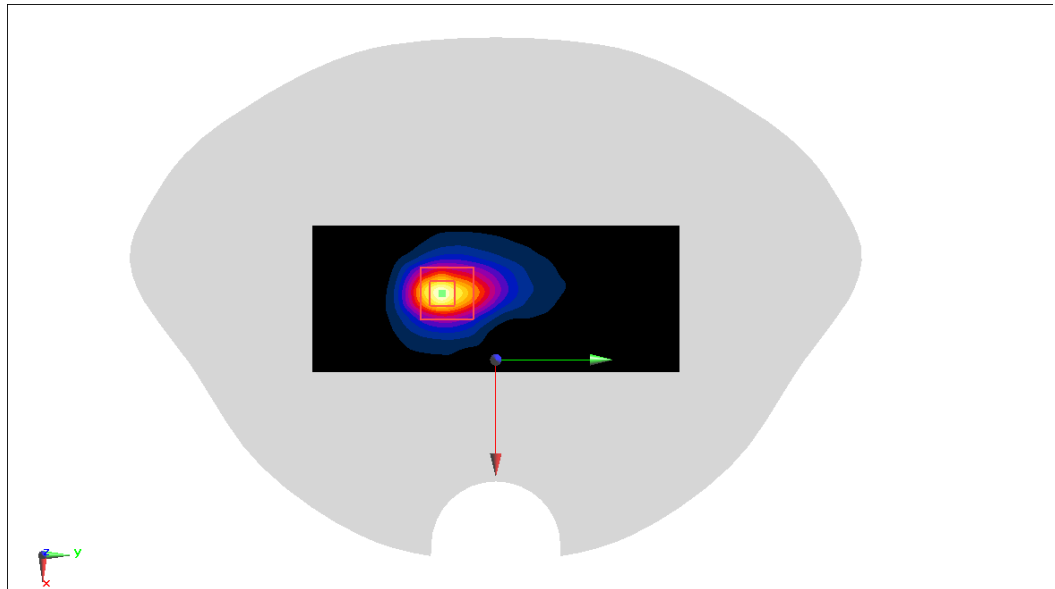

N78 Body 15mm ANT2

Date: 10/24/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.783$ S/m; $\epsilon_r = 39.58$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G NR (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.247 W/kg



Zoom Scan (9x9x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.766 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

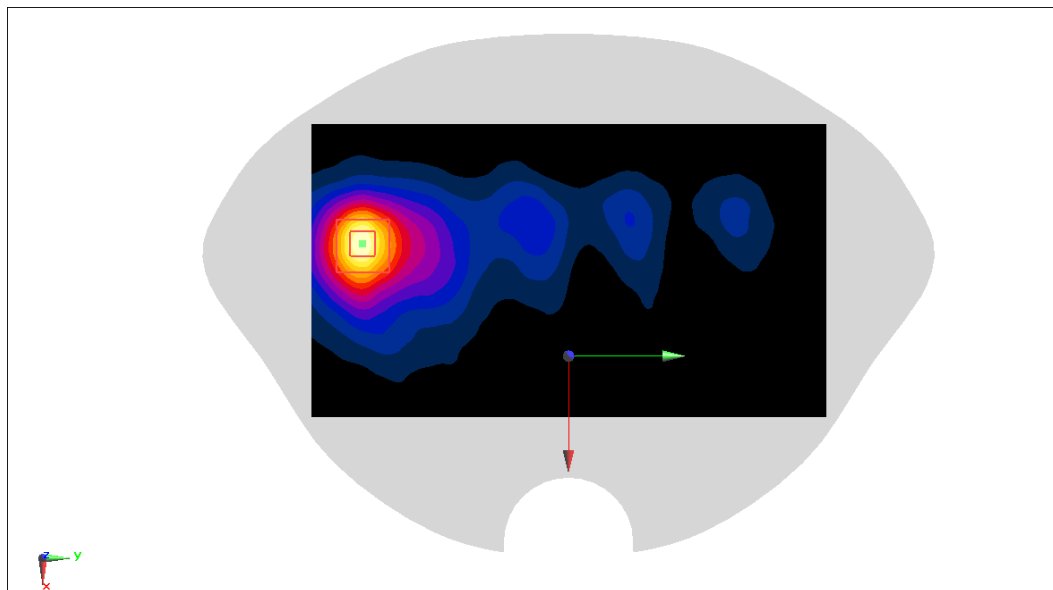

WiFi2.4G Head

Date: 11/8/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 2450 (0) Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.77, 7.77, 7.77)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.399 W/kg



Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.070 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

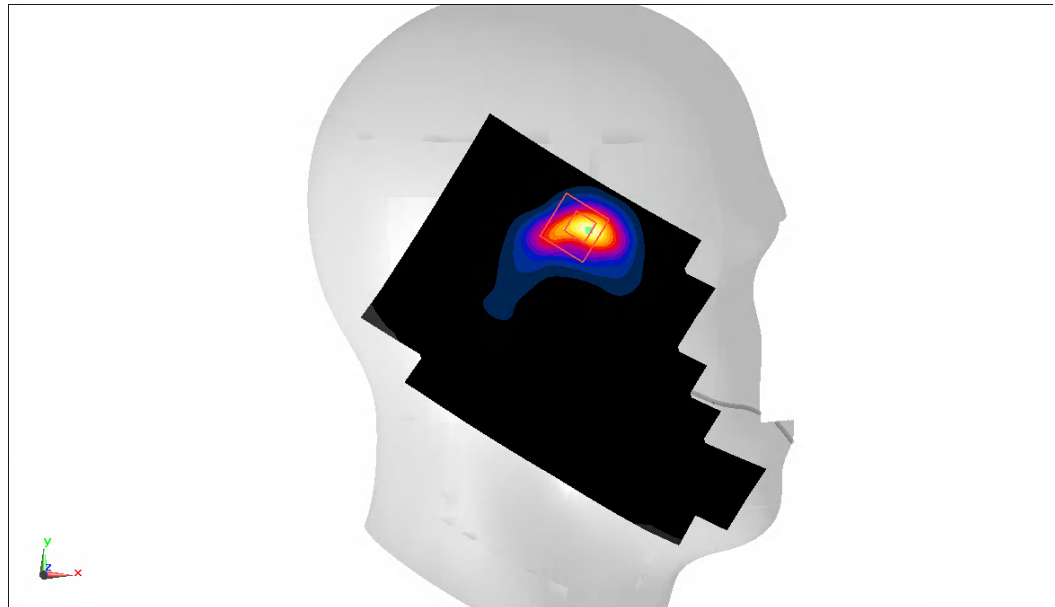

WiFi2.4G Body 10mm

Date: 11/8/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 2450 (0) Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.77, 7.77, 7.77)

Area Scan (81x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.277 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.584 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.305 W/kg

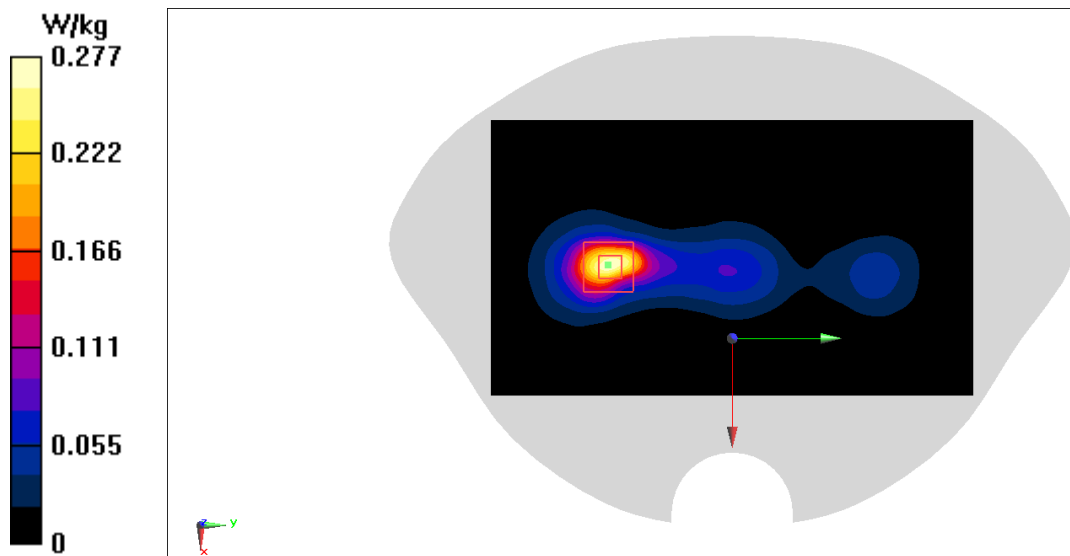

WiFi2.4G Body 15mm

Date: 11/8/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 2450 (0) Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7464 ConvF(7.77, 7.77, 7.77)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.172 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.096 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.182 W/kg

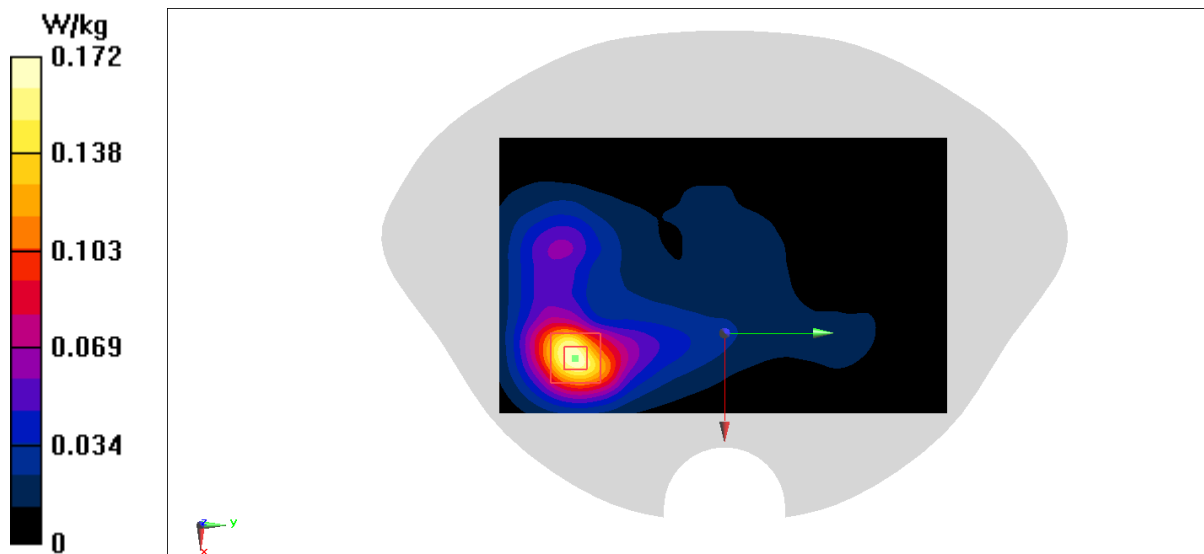

WIFI5G Head

Date: 10/31/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.134$ S/m; $\epsilon_r = 35.02$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 11a (0) Frequency: 5775 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(4.64, 4.64, 4.64)

Area Scan (81x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.944 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.549 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

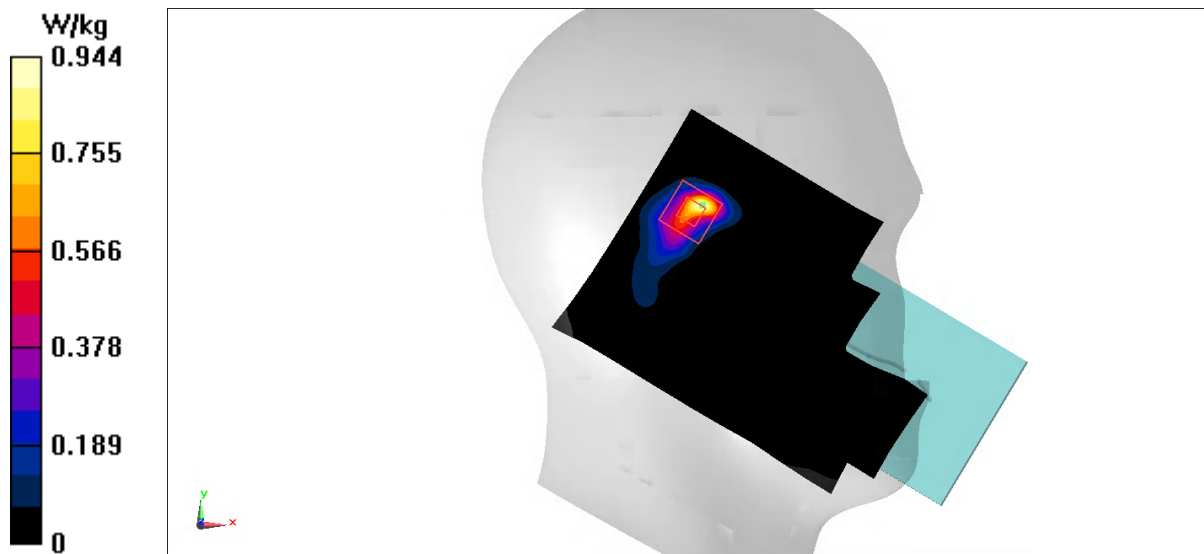

WIFI5G Body 10mm

Date: 10/31/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 5610$ MHz; $\sigma = 4.937$ S/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 11a (0) Frequency: 5610 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(4.57, 4.57, 4.57)

Area Scan (81x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.673 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.363 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.598 W/kg

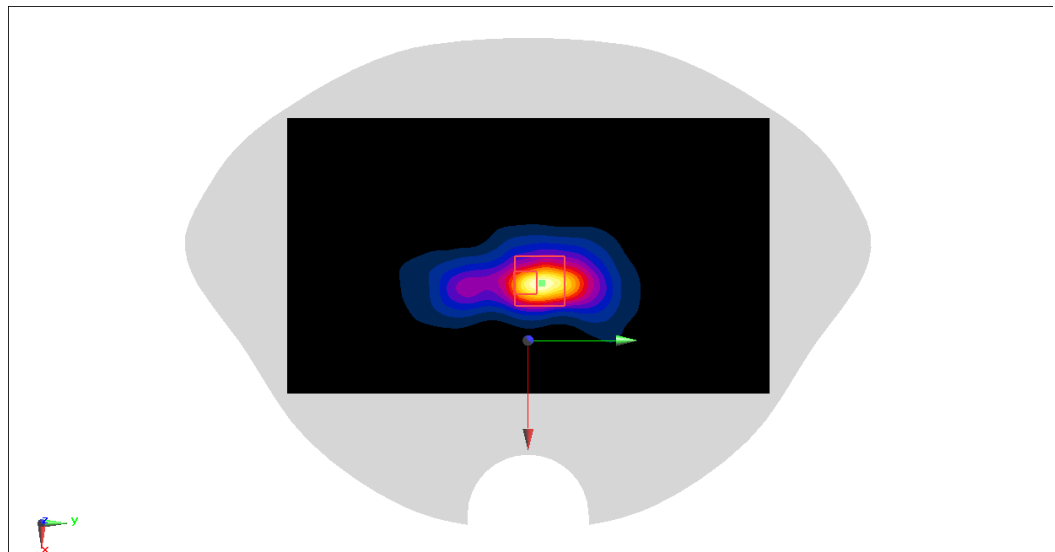

WIFI5G Body 15mm

Date: 10/31/2022

Electronics: DAE4 Sn1331

Medium: H700-6000M

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.134$ S/m; $\epsilon_r = 35.02$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 11a (0) Frequency: 5775 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(4.64, 4.64, 4.64)

Area Scan (81x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.355 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.4720 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

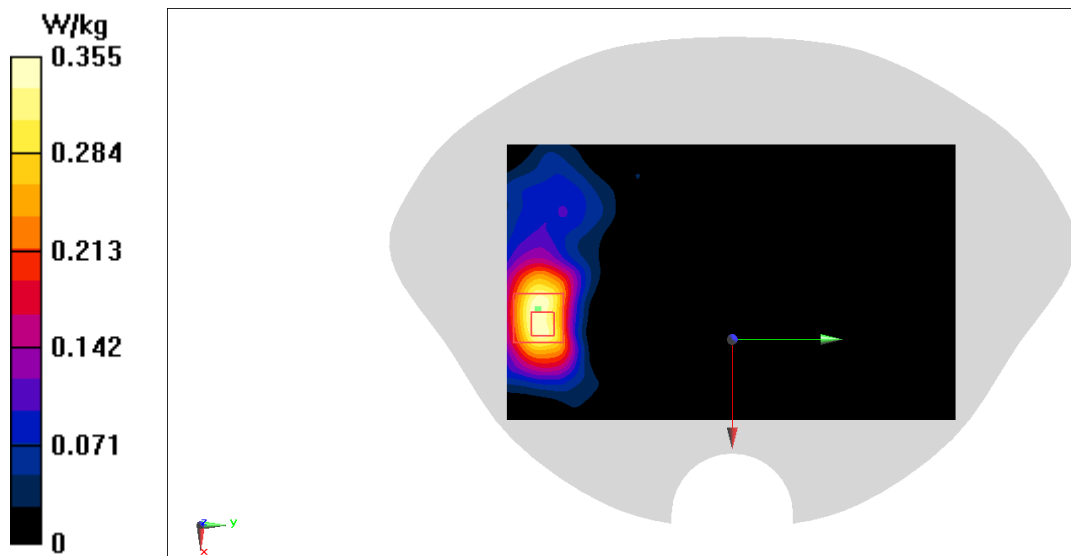

BT Head

Date: 11/8/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 39.72$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, Bluetooth (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (81x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.179 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.748 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

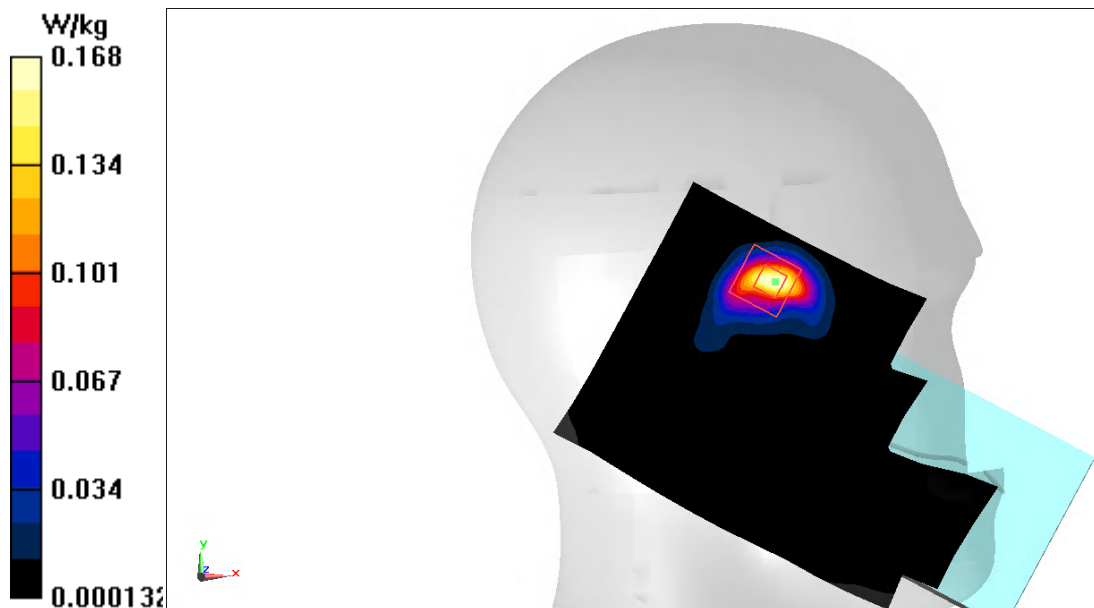

BT Body

Date: 11/8/2022

Electronics: DAE4 Sn1556

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 39.72$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, Bluetooth (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0818 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 0.8850 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0790 W/kg


SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0580 W/kg

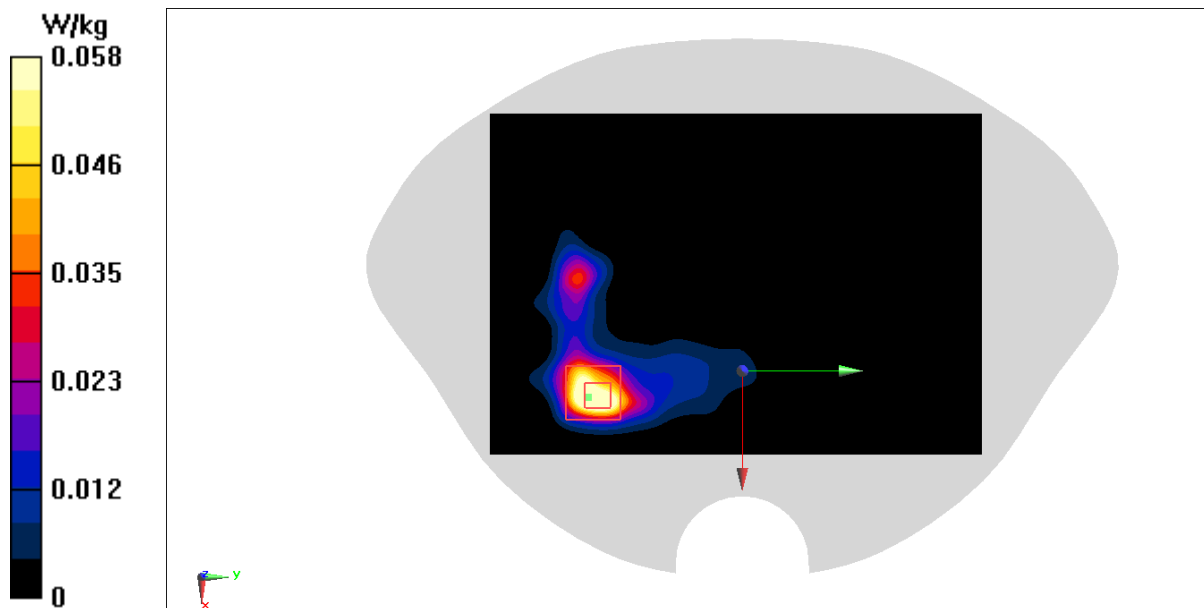

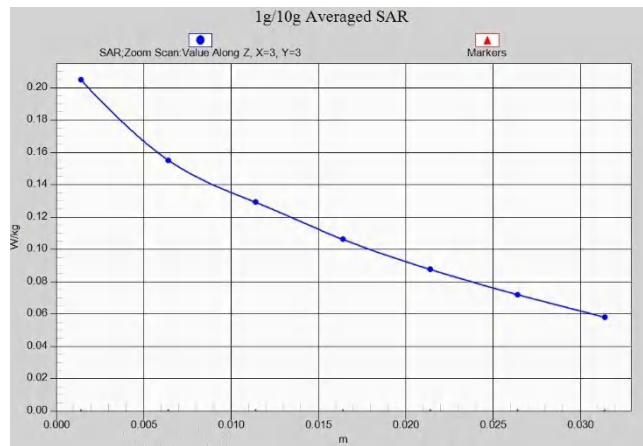


Z-Scan at power reference point (GSM850 ANT1 Head)

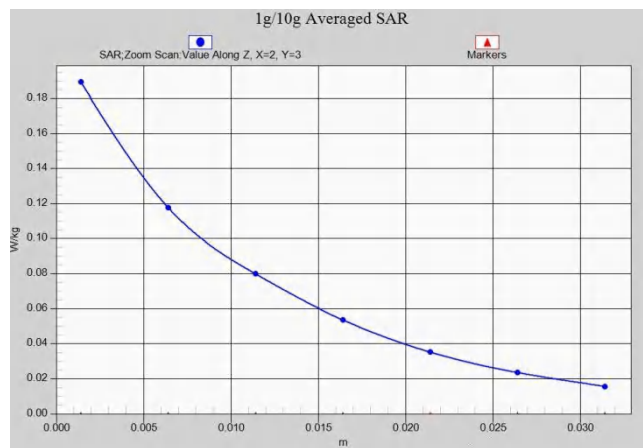


Z-Scan at power reference point (GSM850 ANT1 Body 10mm)




Z-Scan at power reference point (GSM1900 ANT0 Head)

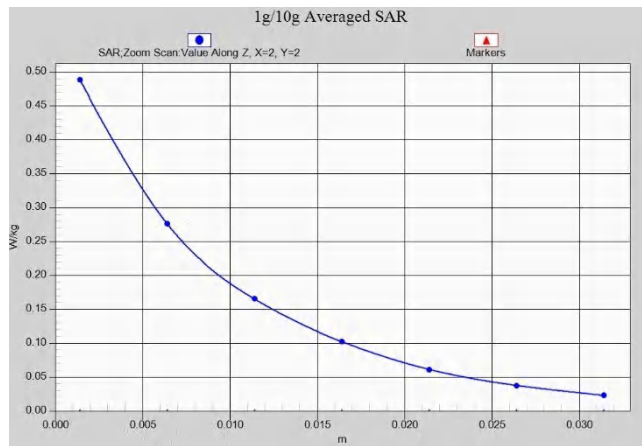


Z-Scan at power reference point (GSM1900 ANT0 Body 10mm)

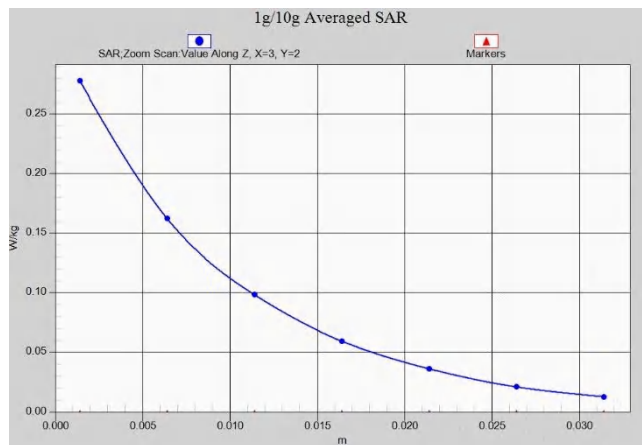


Z-Scan at power reference point (GSM1900 ANT0 Body 15mm)

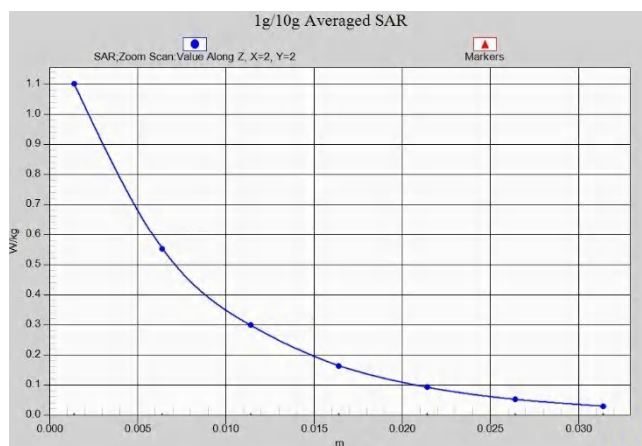


Z-Scan at power reference point (GSM1900 ANT2 Head)

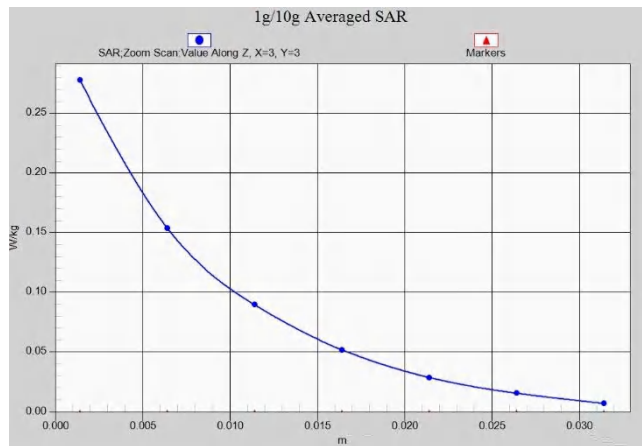


Z-Scan at power reference point (GSM1900 ANT2 Body 10mm)

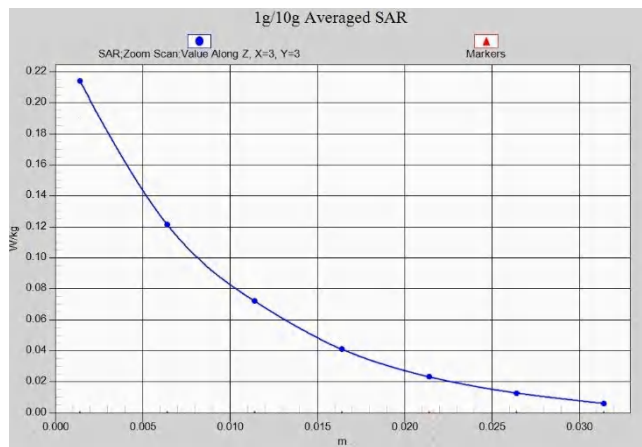


Z-Scan at power reference point (GSM1900 ANT2 Body 15mm)

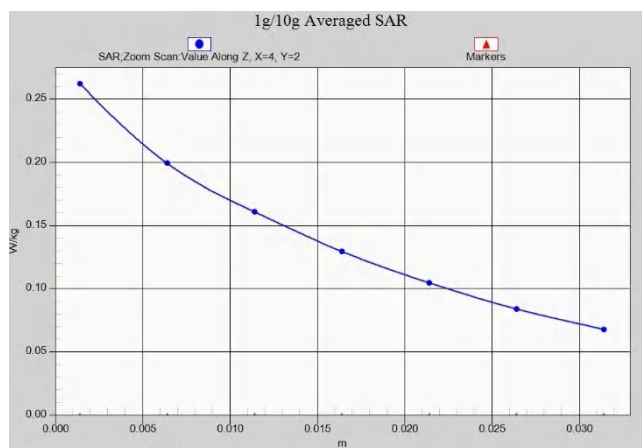


Z-Scan at power reference point (WCDMA850 ANT1 Head)

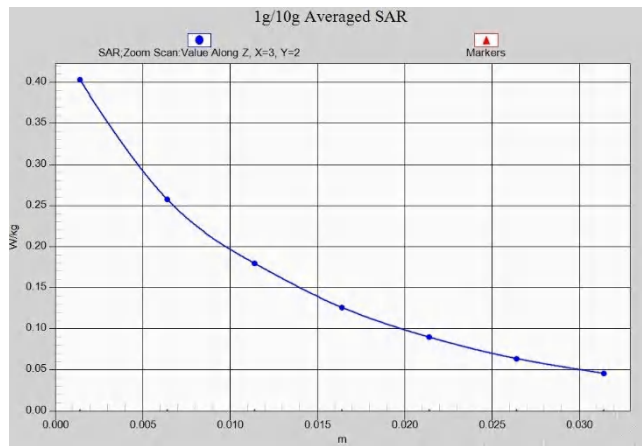


Z-Scan at power reference point (WCDMA850 ANT1 Body 10mm)

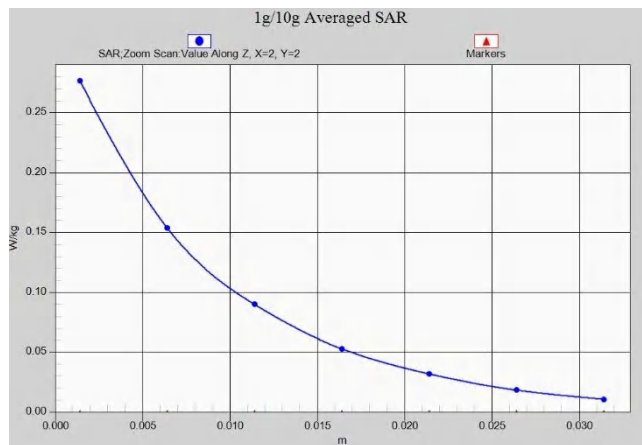


Z-Scan at power reference point (LTE Band7 ANT0 Head)

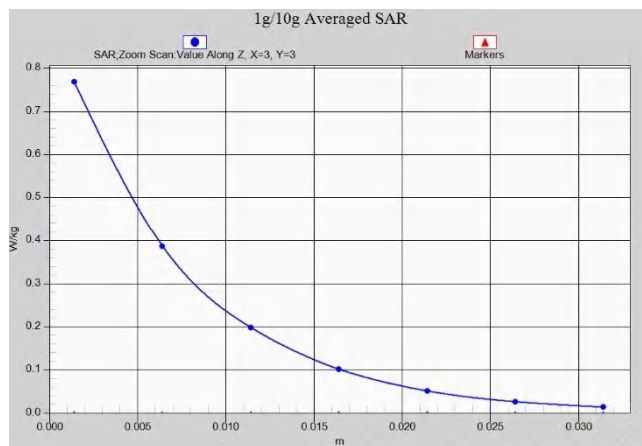


Z-Scan at power reference point (LTE Band7 ANT0 Body 10mm)

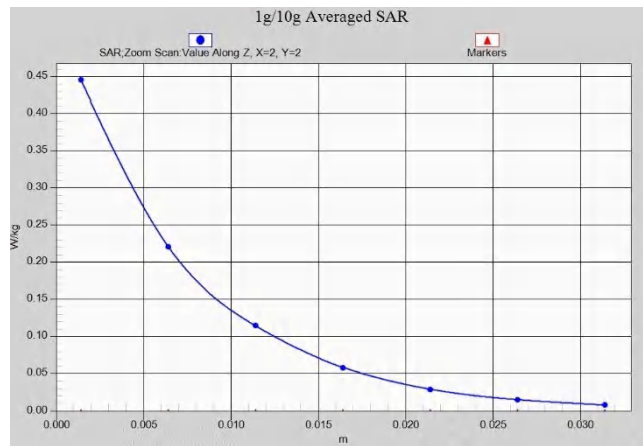


Z-Scan at power reference point (LTE Band7 ANT0 Body 15mm)

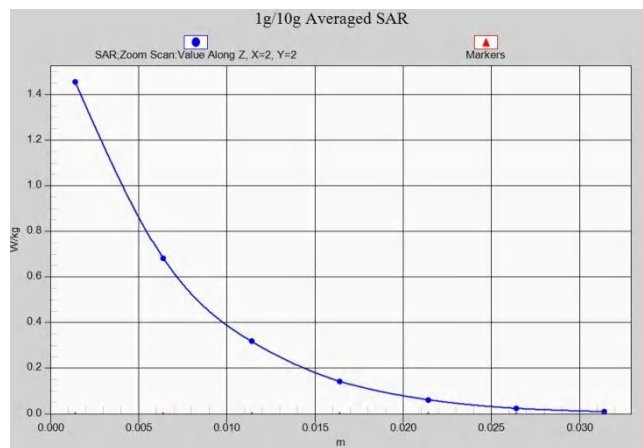


Z-Scan at power reference point (LTE Band7 ANT2 Head)

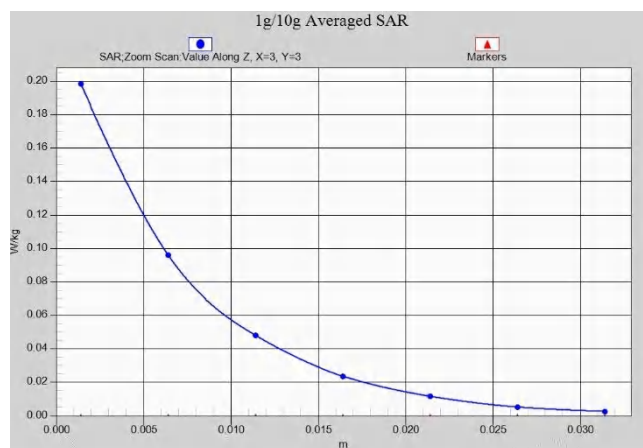


Z-Scan at power reference point (LTE Band7 ANT2 Body 10mm)

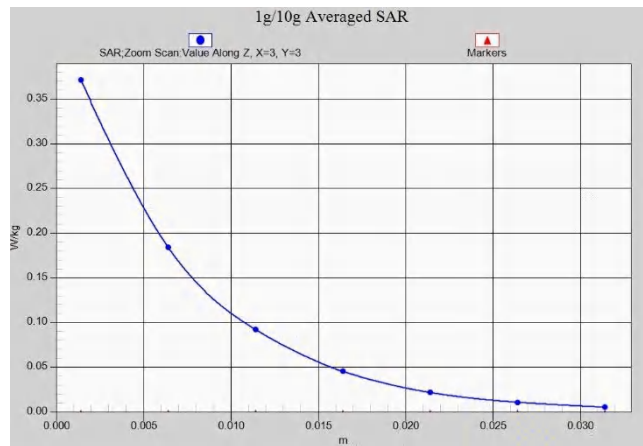


Z-Scan at power reference point (LTE Band7 ANT2 Body 15mm)

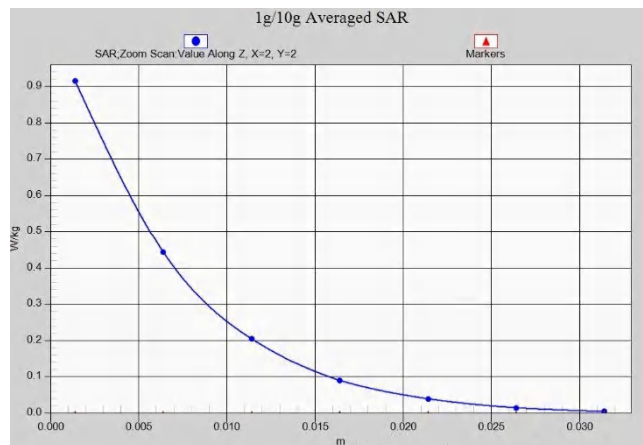


Z-Scan at power reference point (LTE Band38 ANT4 Head)

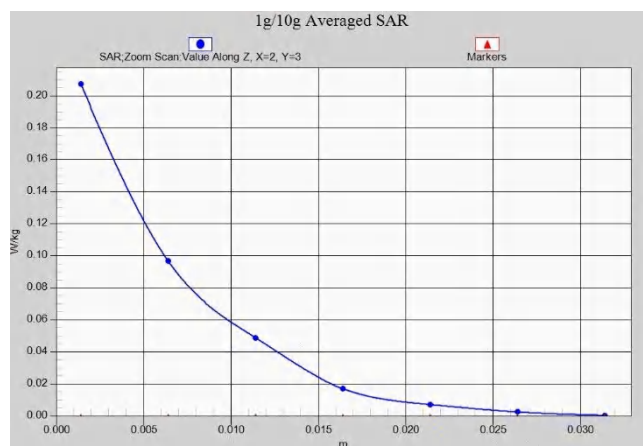


Z-Scan at power reference point (LTE Band38 ANT4 Body 10mm)

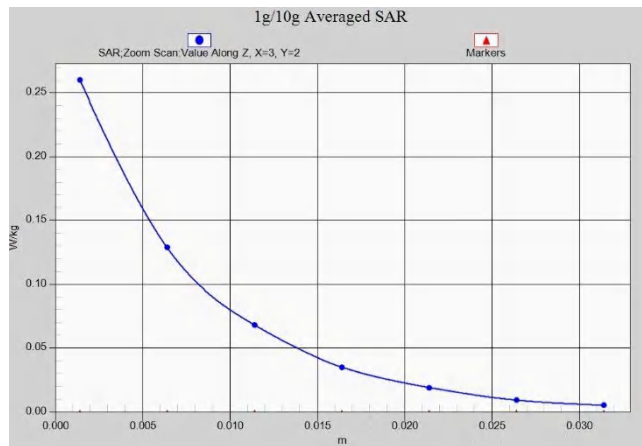


Z-Scan at power reference point (LTE Band38 ANT4 Body 15mm)

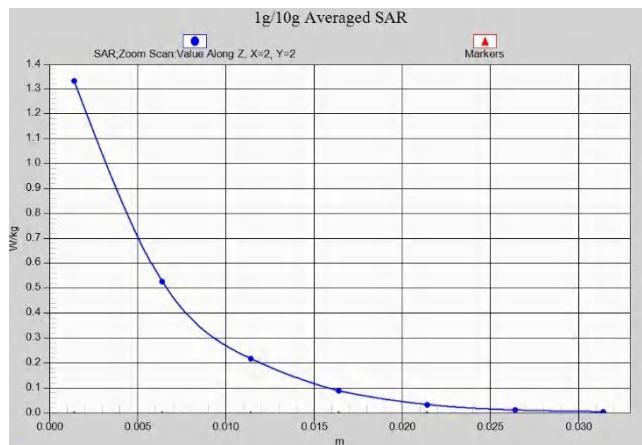


Z-Scan at power reference point (LTE Band38 ANT2 Head)

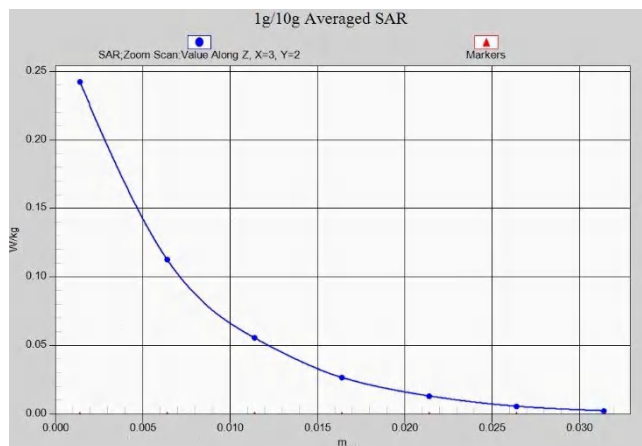


Z-Scan at power reference point (LTE Band38 ANT2 Body 10mm)

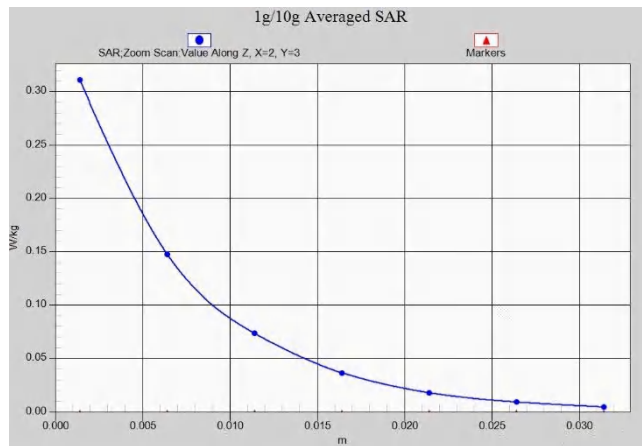


Z-Scan at power reference point (LTE Band38 ANT2 Body 15mm)

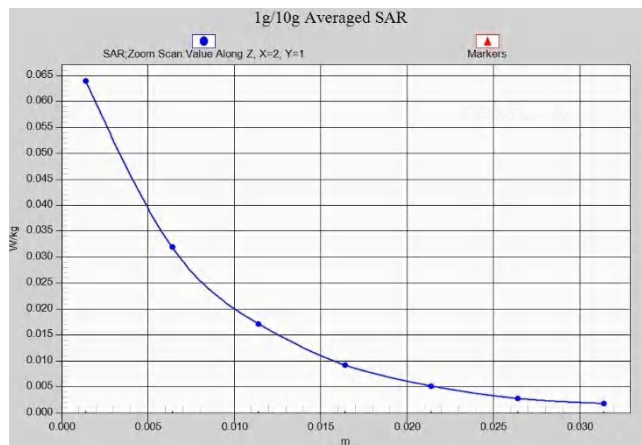


Z-Scan at power reference point (LTE Band38 ANT0 Head)

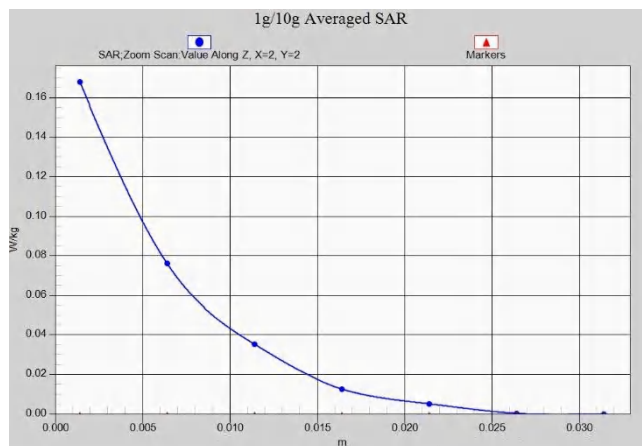


Z-Scan at power reference point (LTE Band38 ANT0 Body 10mm)

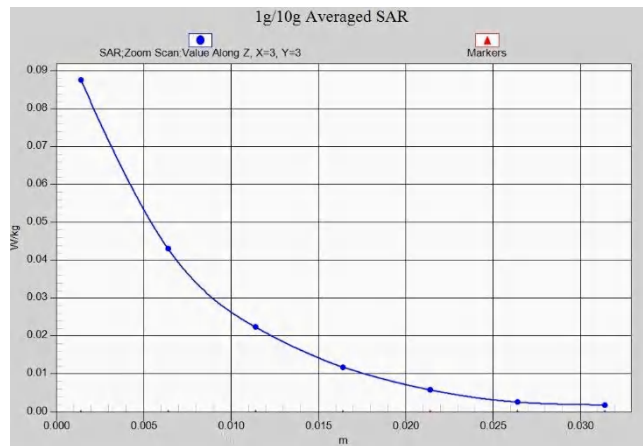


Z-Scan at power reference point (LTE Band38 ANT0 Body 15mm)

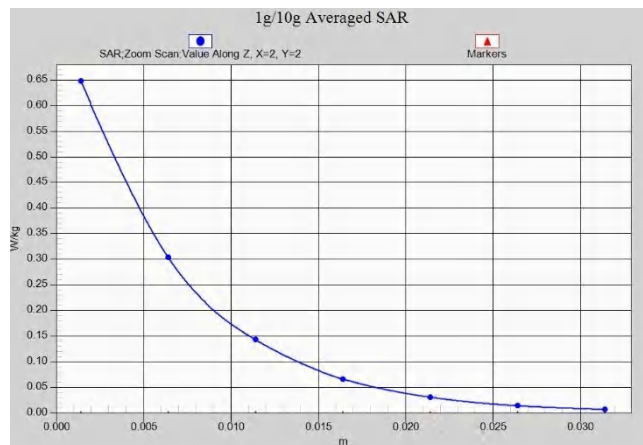


Z-Scan at power reference point (LTE Band38 ANT5 Head)

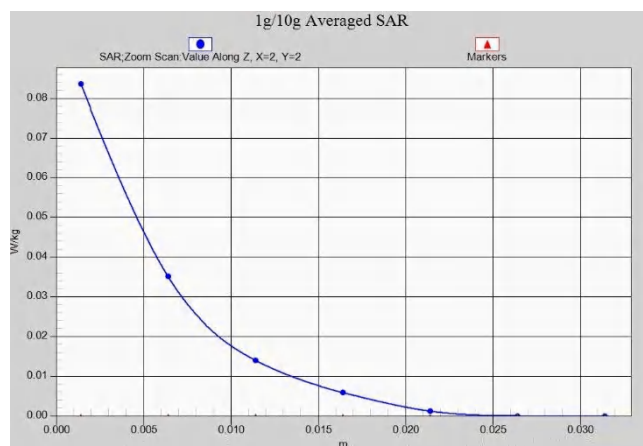


Z-Scan at power reference point (LTE Band38 ANT5 Body 10mm)

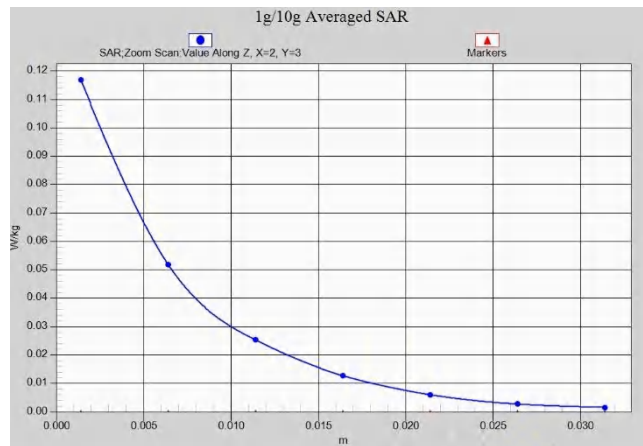


Z-Scan at power reference point (LTE Band38 ANT5 Body 15mm)

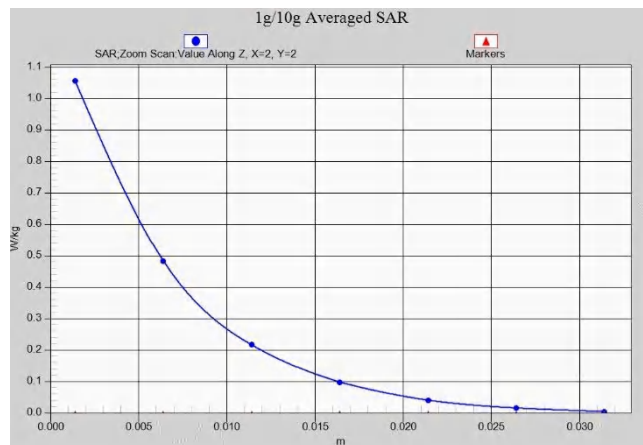


Z-Scan at power reference point (LTE Band41 PC3 ANT4 Head)

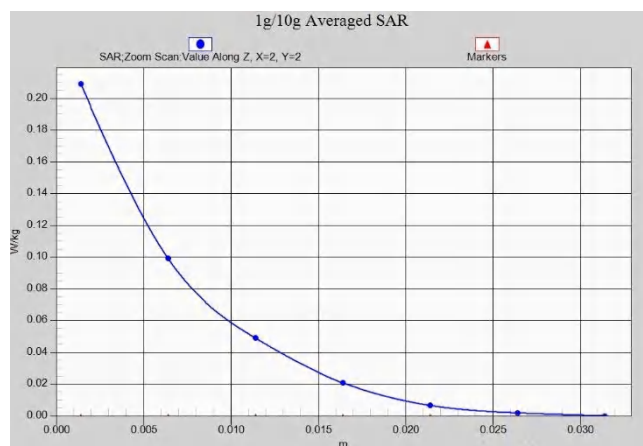


Z-Scan at power reference point (LTE Band41 PC3 ANT4 Body 10mm)

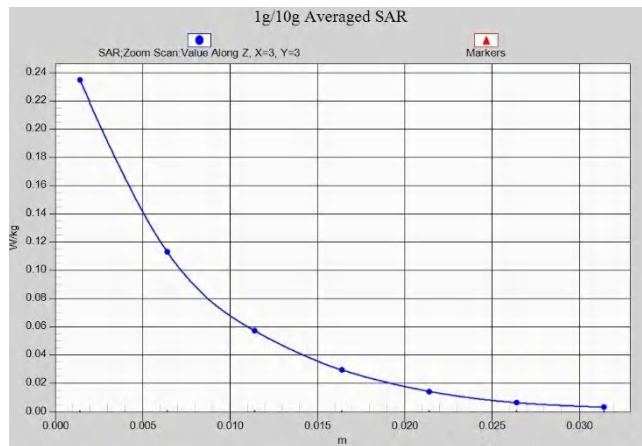


Z-Scan at power reference point (LTE Band41 PC3 ANT4 Body 15mm)

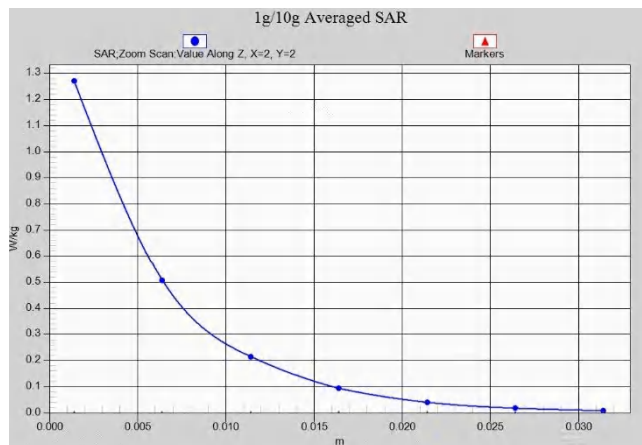


Z-Scan at power reference point (LTE Band41 PC3 ANT2 Head)

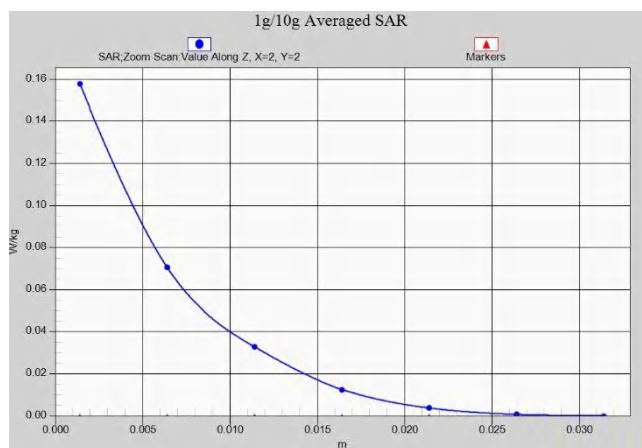


Z-Scan at power reference point (LTE Band41 PC3 ANT2 Body 10mm)

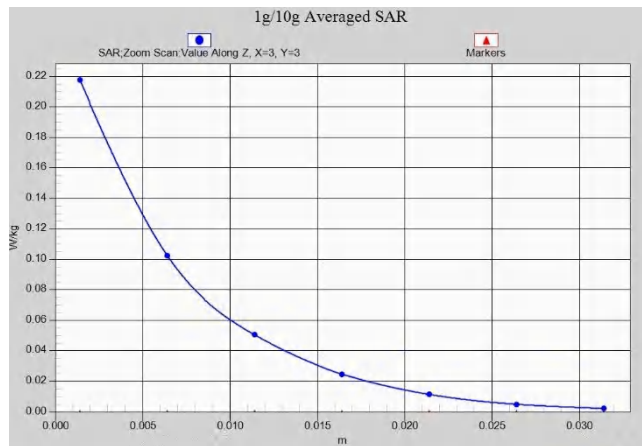


Z-Scan at power reference point (LTE Band41 PC3 ANT2 Body 15mm)

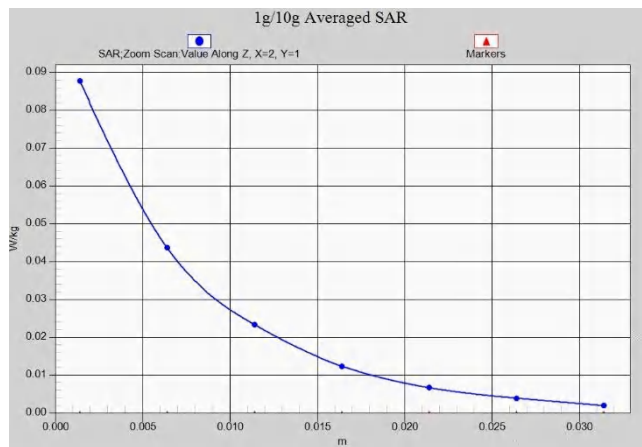


Z-Scan at power reference point (LTE Band41 PC3 ANT0 Head)

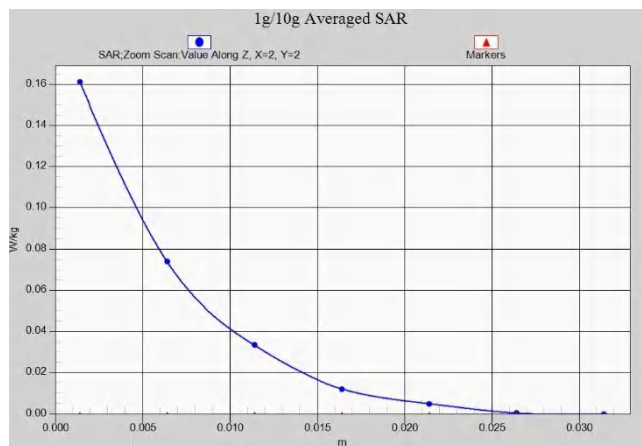


Z-Scan at power reference point (LTE Band41 PC3 ANT0 Body 10mm)

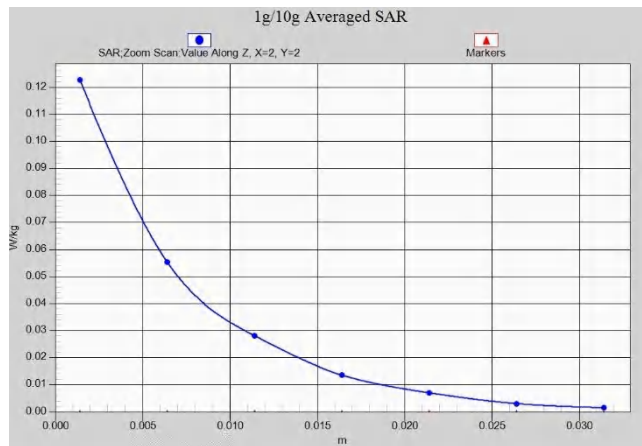


Z-Scan at power reference point (LTE Band41 PC3 ANT0 Body 15mm)

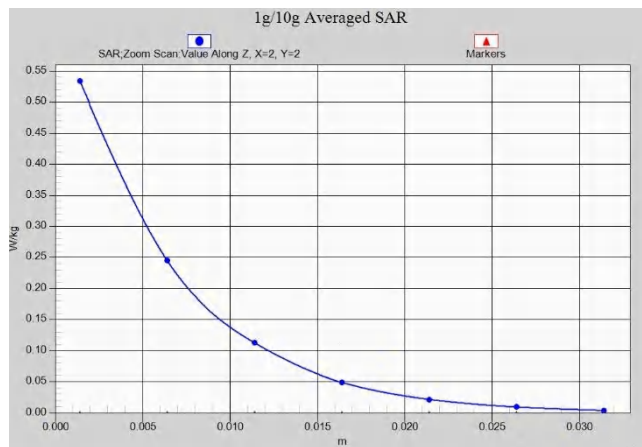


Z-Scan at power reference point (LTE Band41 PC3 ANT5 Head)

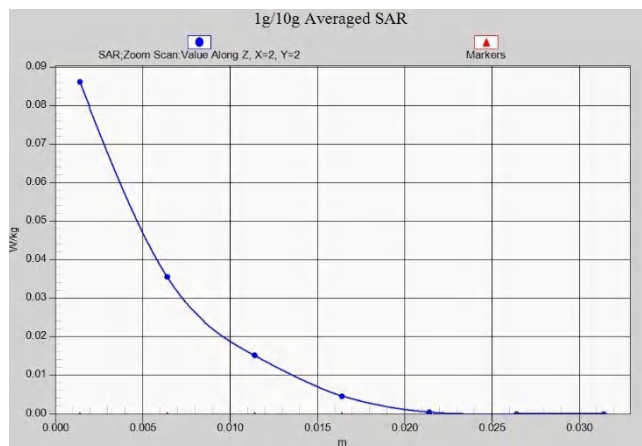


Z-Scan at power reference point (LTE Band41 PC3 ANT5 Body 10mm)

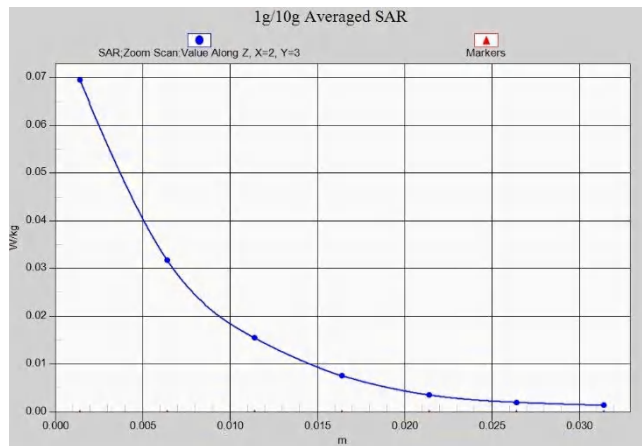


Z-Scan at power reference point (LTE Band41 PC3 ANT5 Body 15mm)

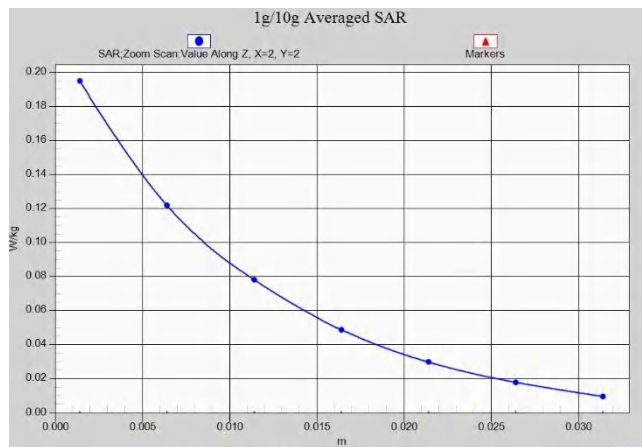


Z-Scan at power reference point (N7 ANT0 Head)

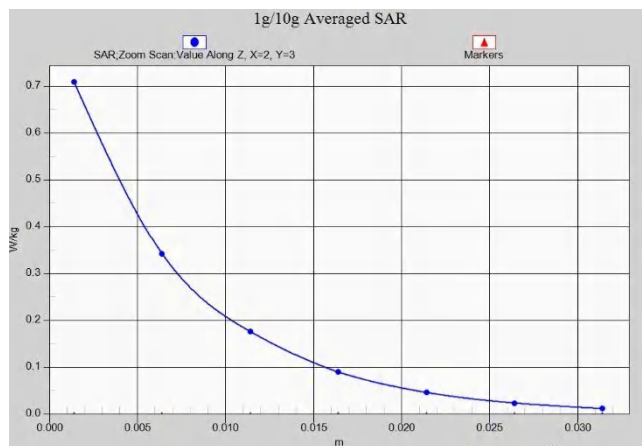


Z-Scan at power reference point (N7 ANT0 Body 10mm)

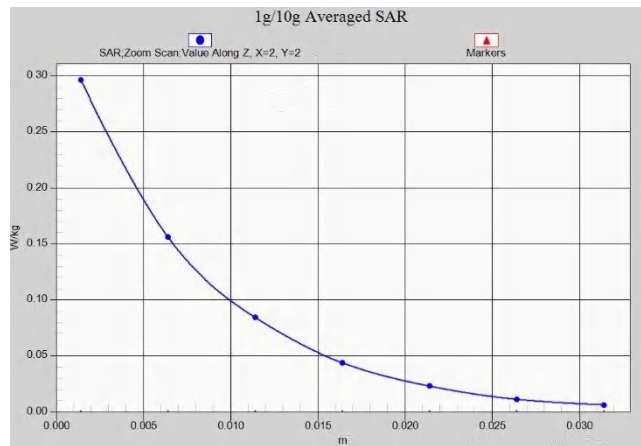


Z-Scan at power reference point (N7 ANT0 Head 15mm)

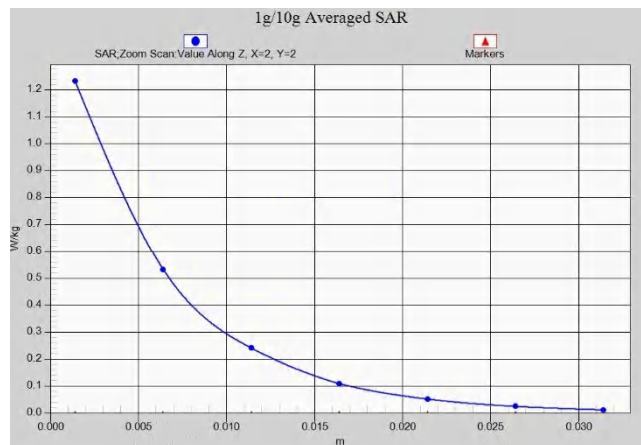


Z-Scan at power reference point (N7 ANT2 Head)

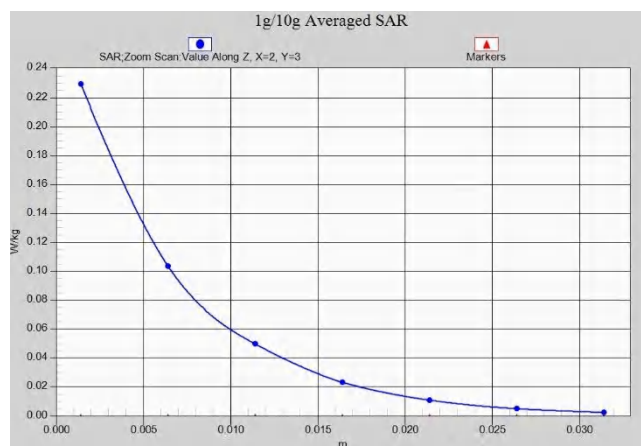


Z-Scan at power reference point (N7 ANT2 Body 10mm)

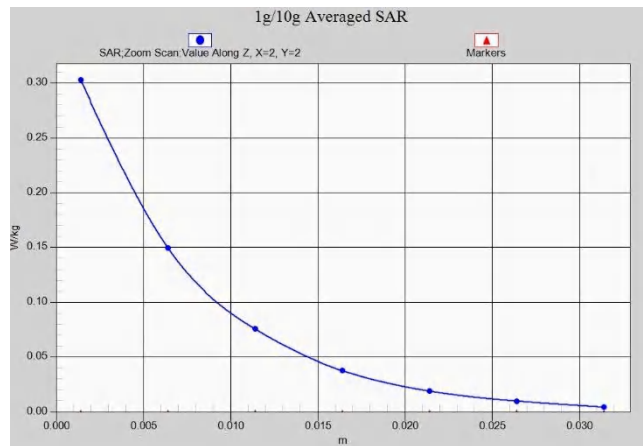


Z-Scan at power reference point (N7 ANT2 Body 15mm)

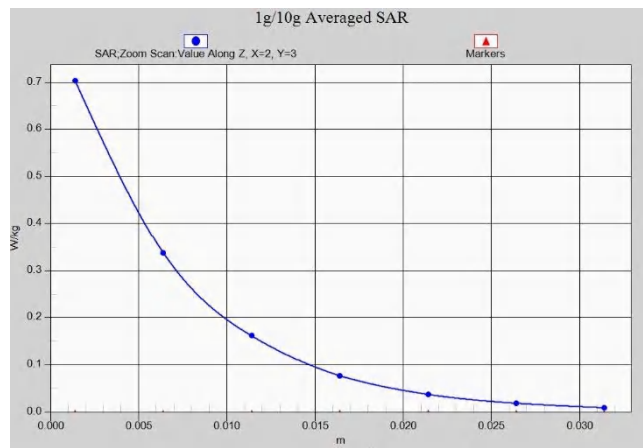


Z-Scan at power reference point (N38 ANT4 Head)

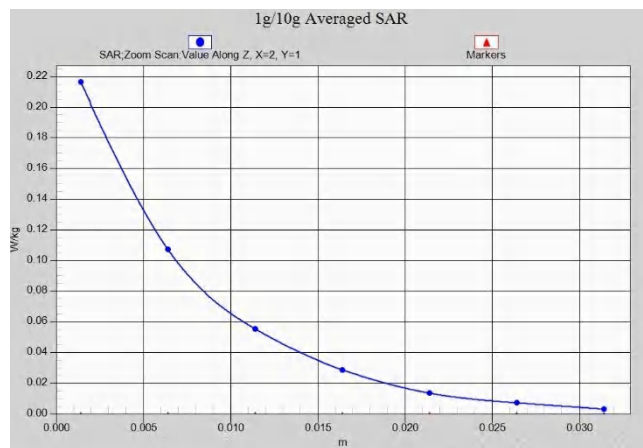


Z-Scan at power reference point (N38 ANT4 Body 10mm)

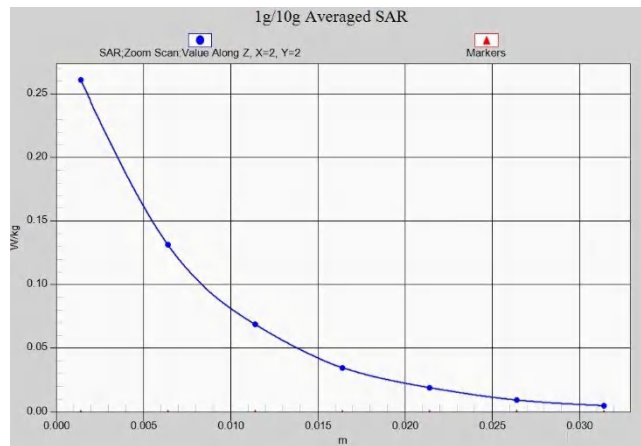


Z-Scan at power reference point (N38 ANT4 Body 15mm)

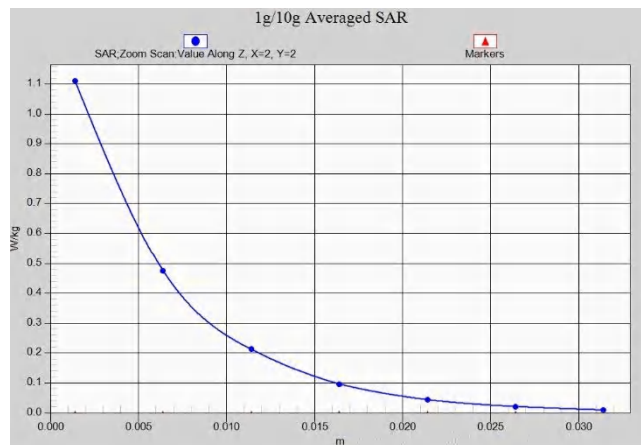


Z-Scan at power reference point (N38 ANT2 Head)

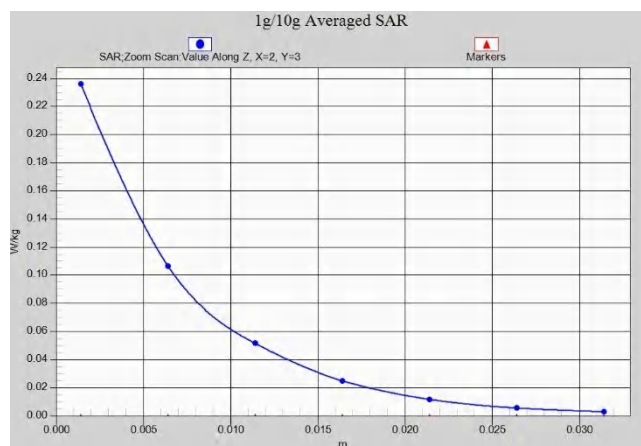


Z-Scan at power reference point (N38 ANT2 Body 10mm)

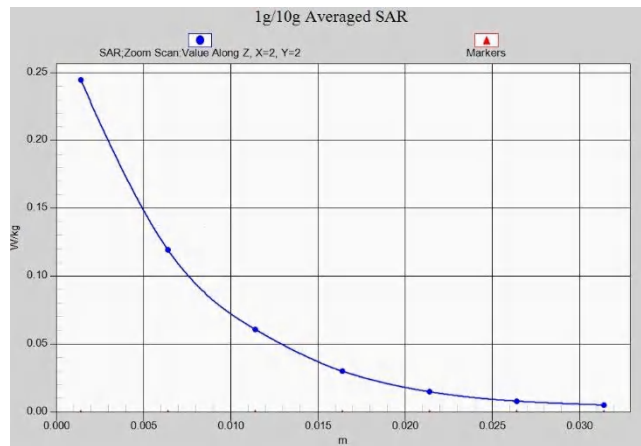


Z-Scan at power reference point (N38 ANT2 Body 15mm)

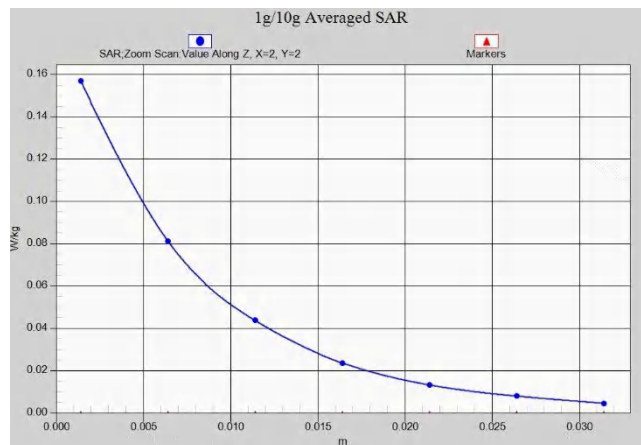


Z-Scan at power reference point (N38 ANT0 Head)

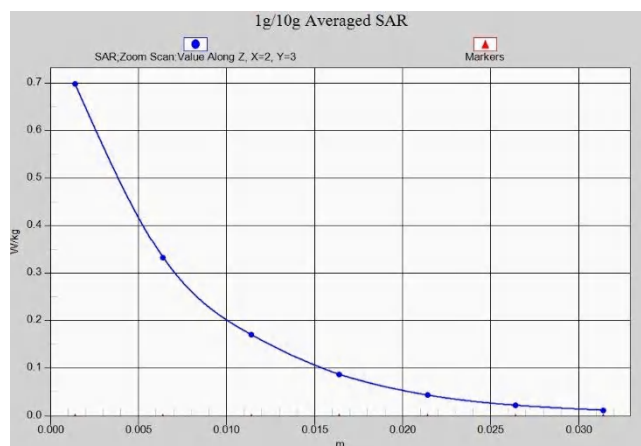


Z-Scan at power reference point (N38 ANT0 Body 10mm)

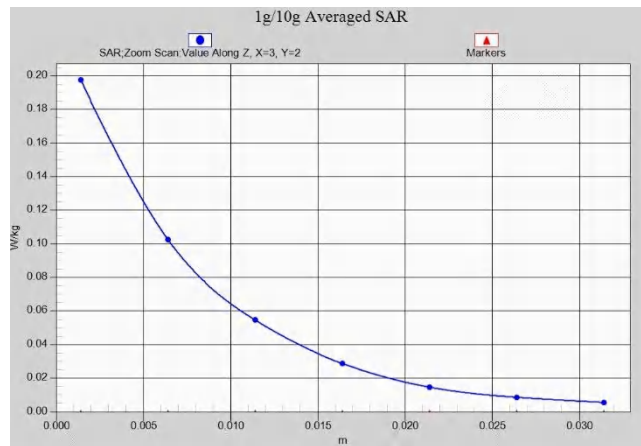


Z-Scan at power reference point (N38 ANT0 Body 15mm)

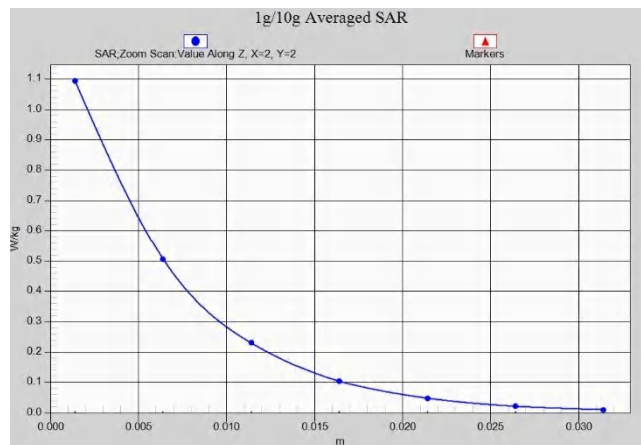


Z-Scan at power reference point (N38 ANT5 Head)

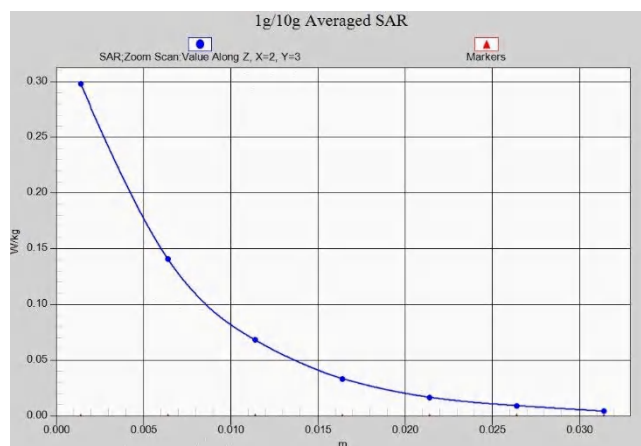


Z-Scan at power reference point (N38 ANT5 Body 10mm)

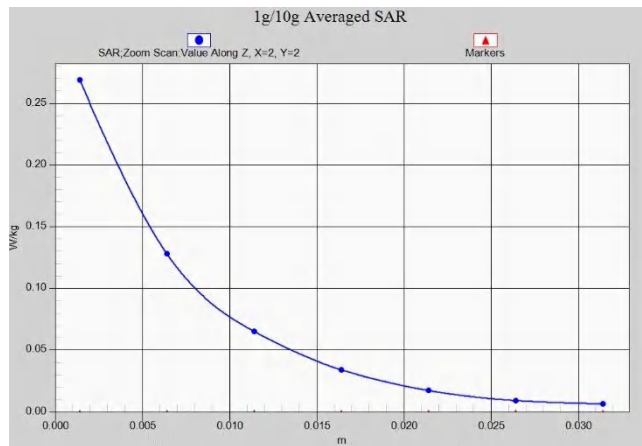


Z-Scan at power reference point (N38 ANT5 Body 15mm)

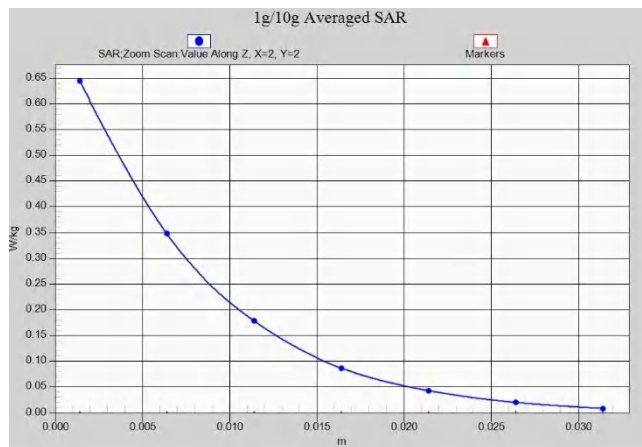


Z-Scan at power reference point (N41 ANT4 Head)

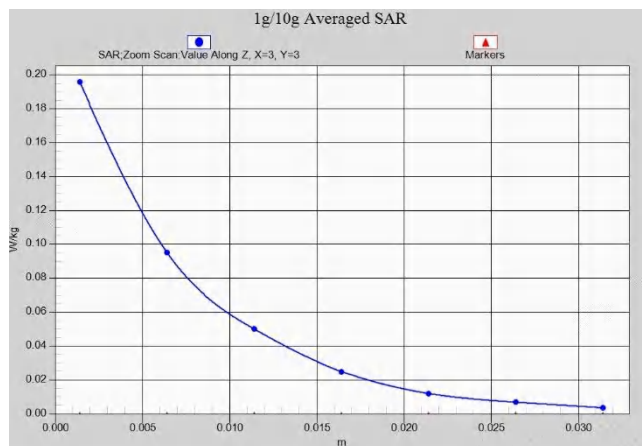


Z-Scan at power reference point (N41 ANT4 Body 10mm)

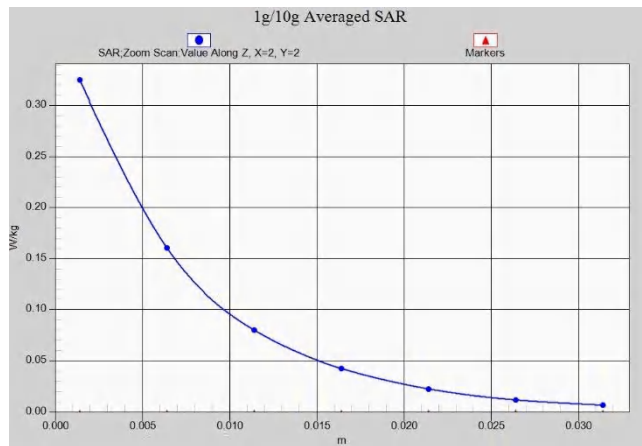


Z-Scan at power reference point (N41 ANT4 Body 15mm)

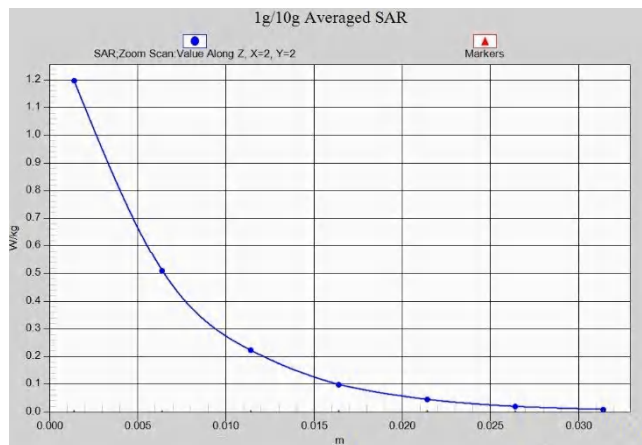


Z-Scan at power reference point (N41 ANT2 Head)

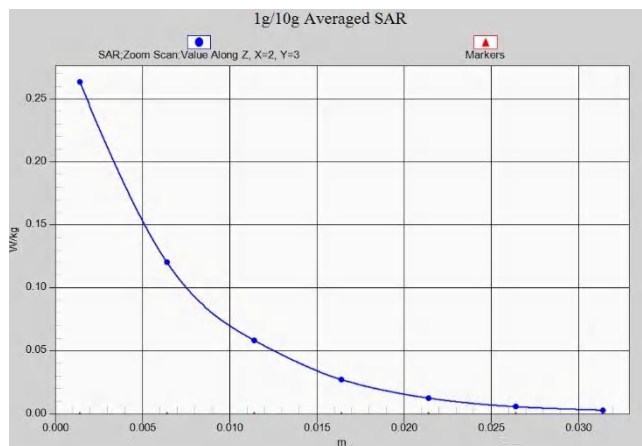


Z-Scan at power reference point (N41 ANT2 Body 10mm)

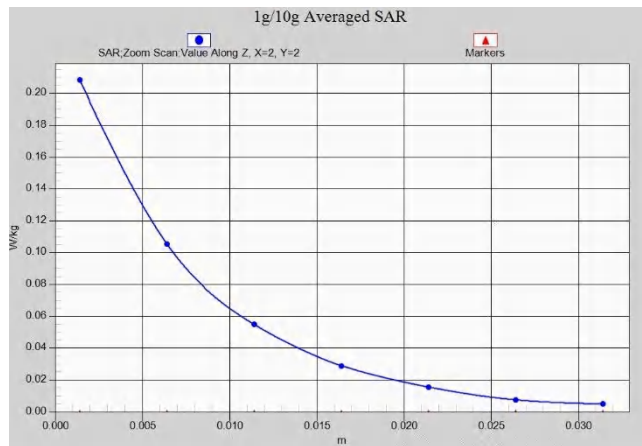


Z-Scan at power reference point (N41 ANT2 Body 15mm)

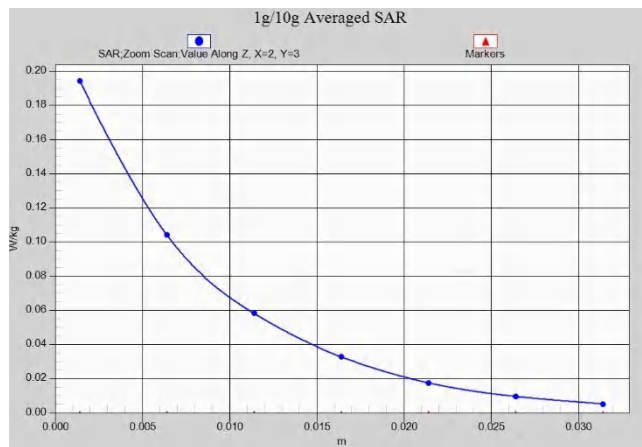


Z-Scan at power reference point (N41 ANT0 Head)

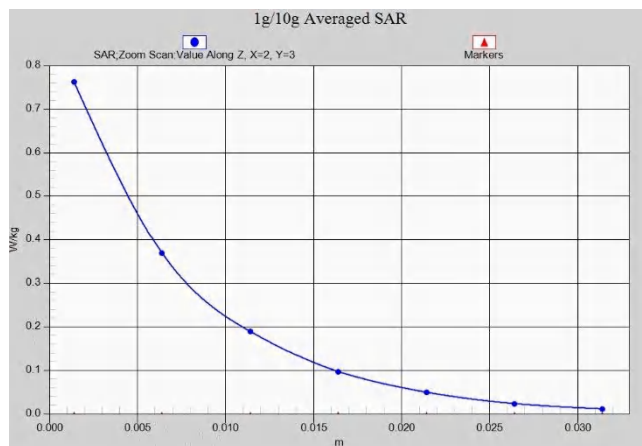


Z-Scan at power reference point (N41 ANT0 Body 10mm)

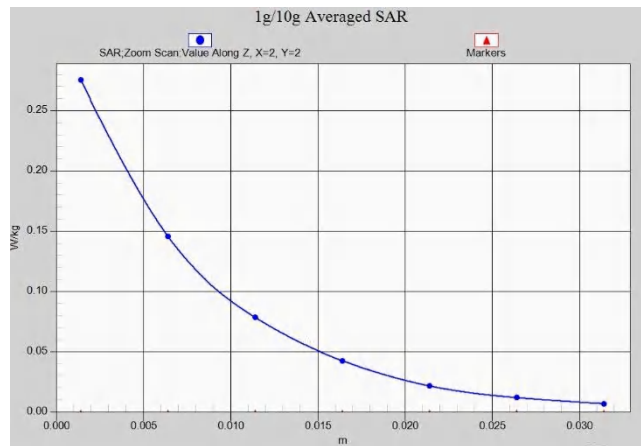


Z-Scan at power reference point (N41 ANT0 Body 15mm)

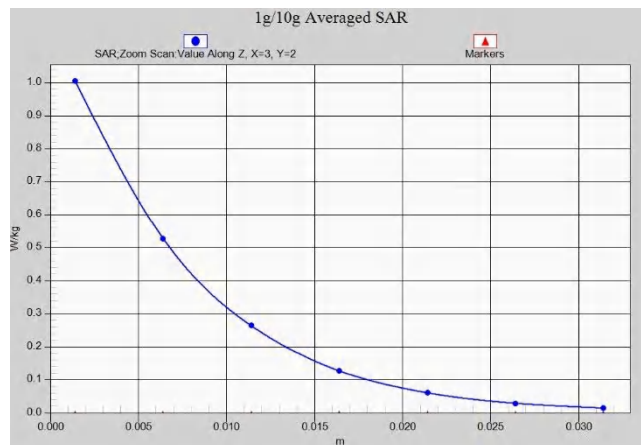


Z-Scan at power reference point (N41 ANT5 Head)

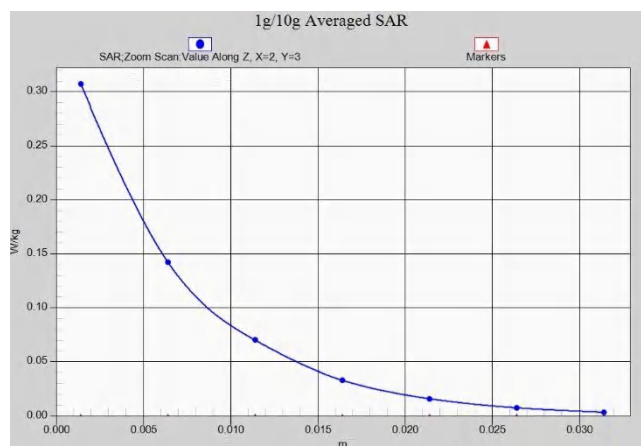


Z-Scan at power reference point (N41 ANT5 Body 10mm)

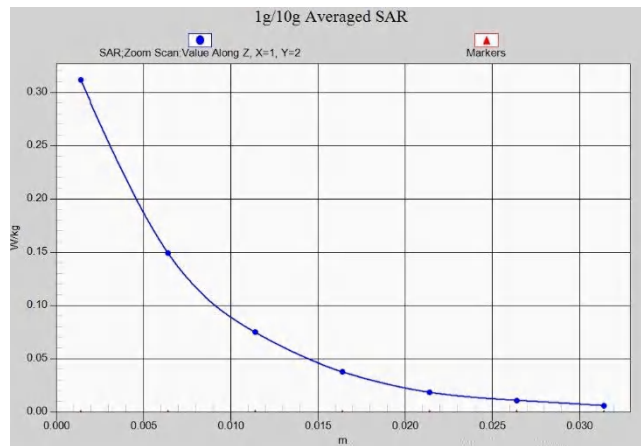


Z-Scan at power reference point (N41 ANT5 Body 15mm)

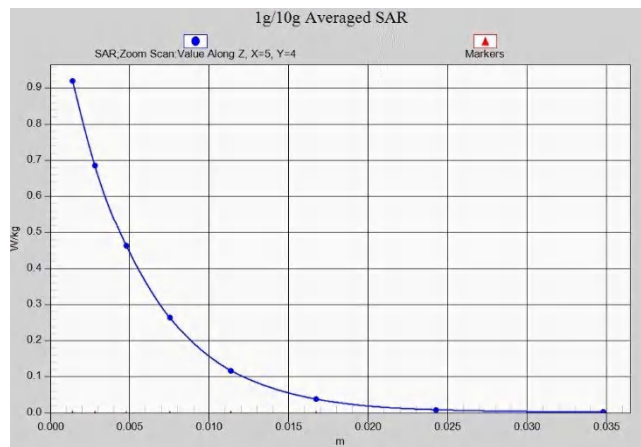


Z-Scan at power reference point (N78 ANT8 Head)

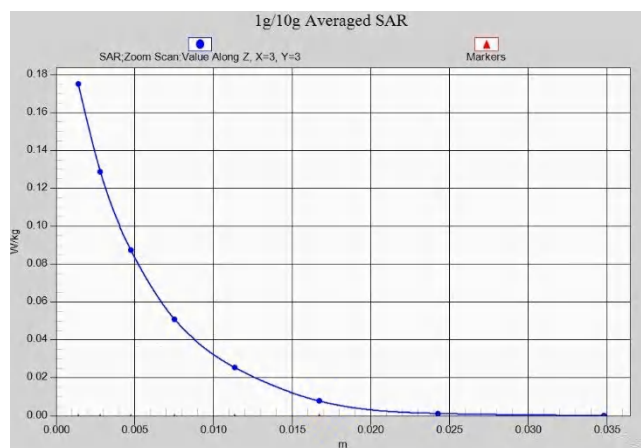


Z-Scan at power reference point (N78 ANT8 Body 10mm)

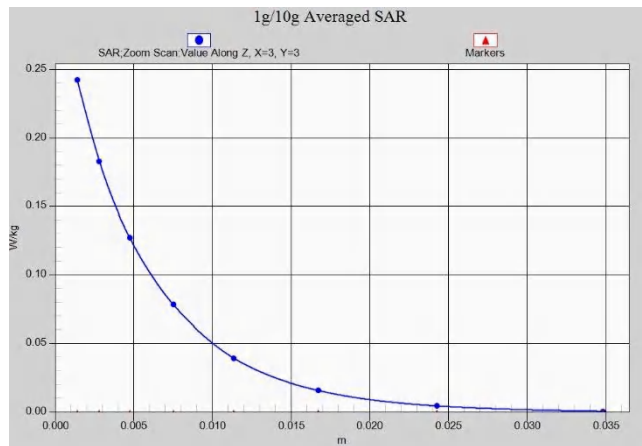


Z-Scan at power reference point (N78 ANT8 Body 15mm)

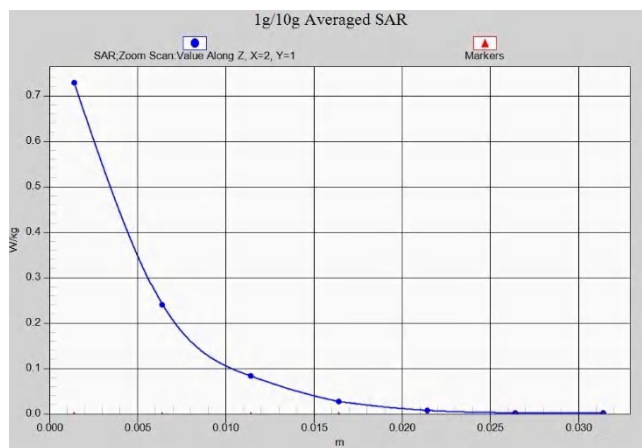


Z-Scan at power reference point (N78 ANT10 Head)

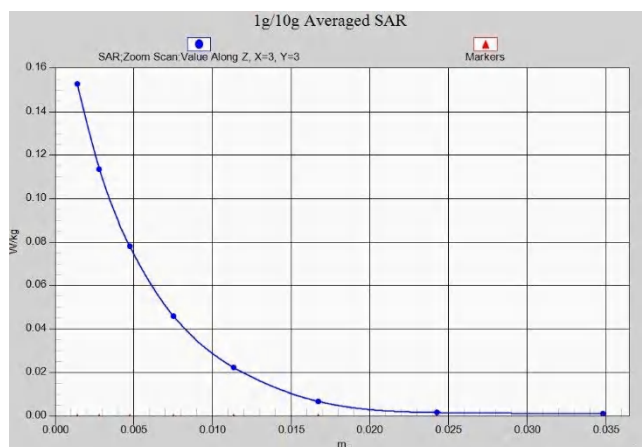


Z-Scan at power reference point (N78 ANT10 Body 10mm)

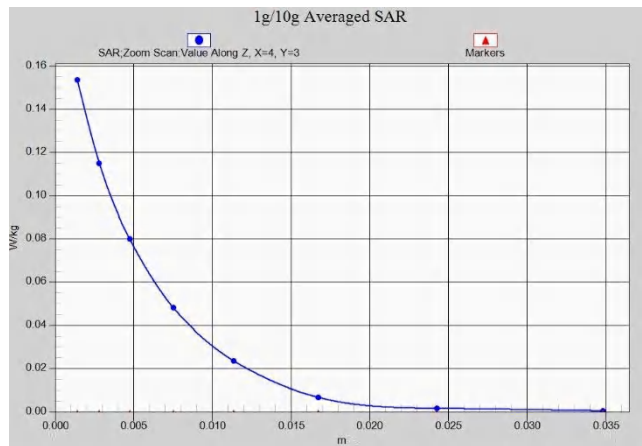


Z-Scan at power reference point (N78 ANT10 Body 15mm)

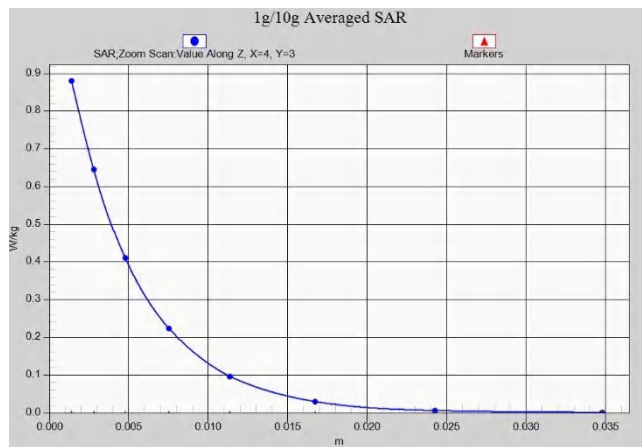


Z-Scan at power reference point (N78 ANT7 Head)

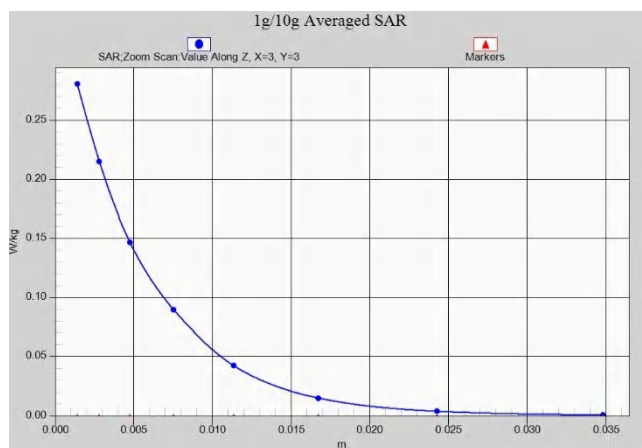


Z-Scan at power reference point (N78 ANT7 Body 10mm)

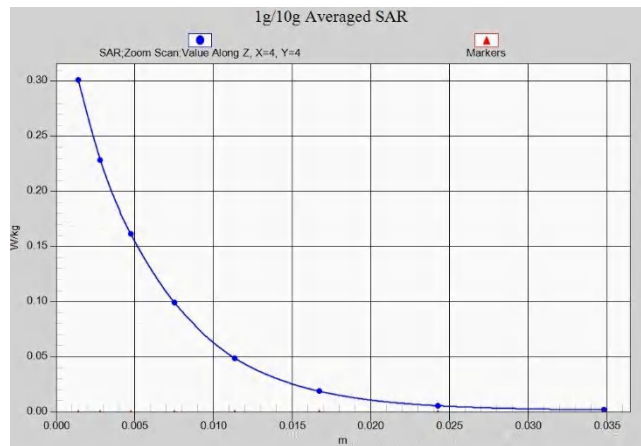


Z-Scan at power reference point (N78 ANT7 Body 15mm)

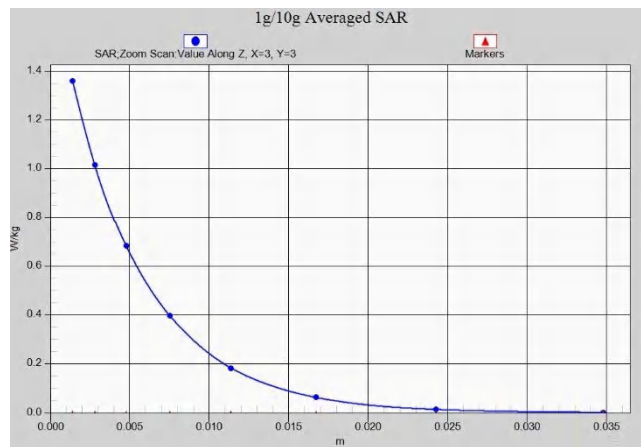


Z-Scan at power reference point (N78 ANT2 Head)

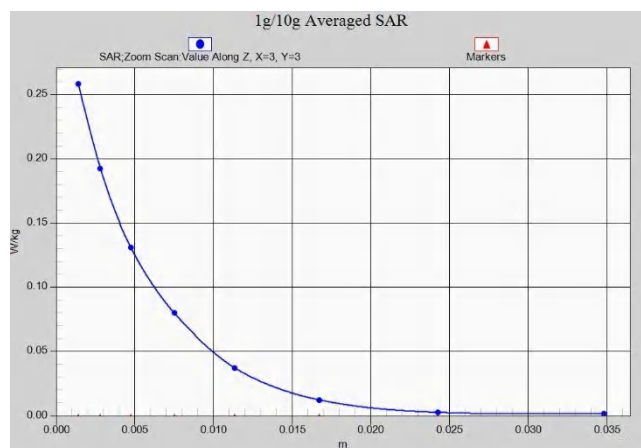


Z-Scan at power reference point (N78 ANT2 Body 10mm)

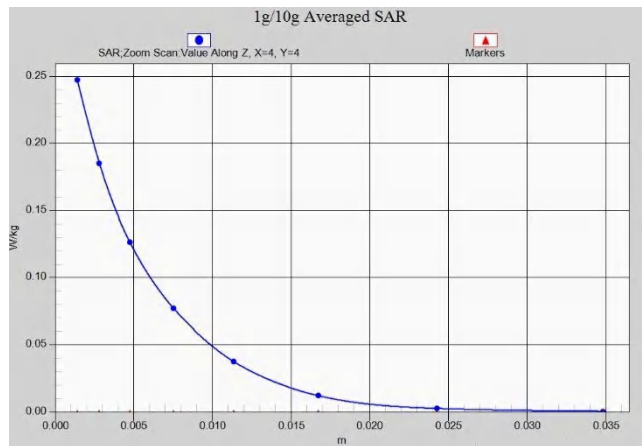


Z-Scan at power reference point (N78 ANT2 Body 15mm)

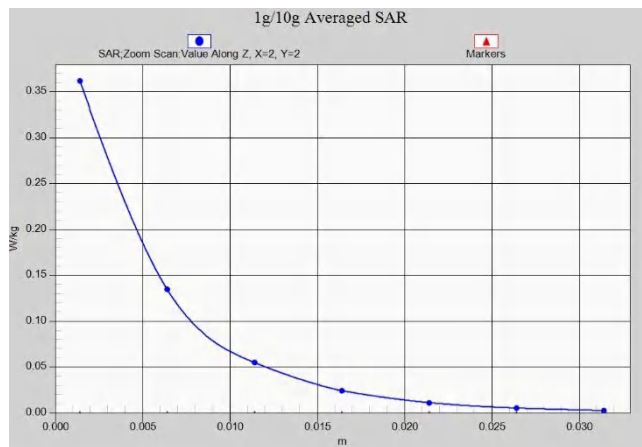


Z-Scan at power reference point (WIFI 2.4G Head)

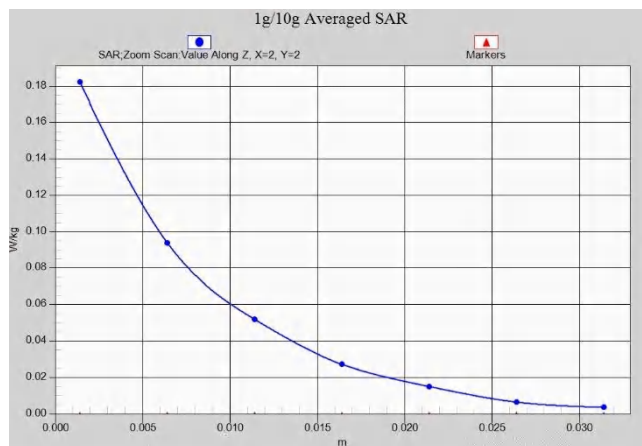


Z-Scan at power reference point (WIFI 2.4G Body 15mm)

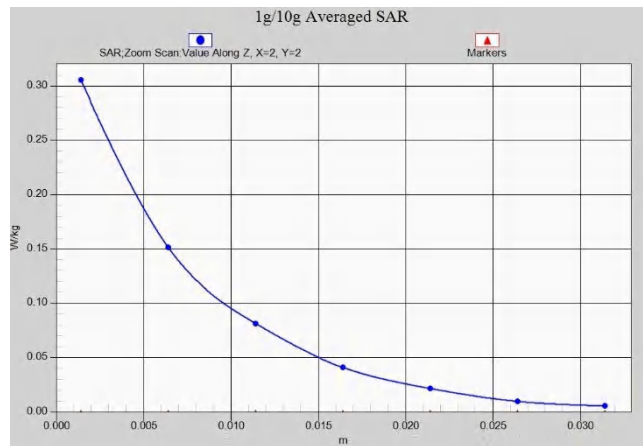


Z-Scan at power reference point (WIFI 2.4G Body 10mm)

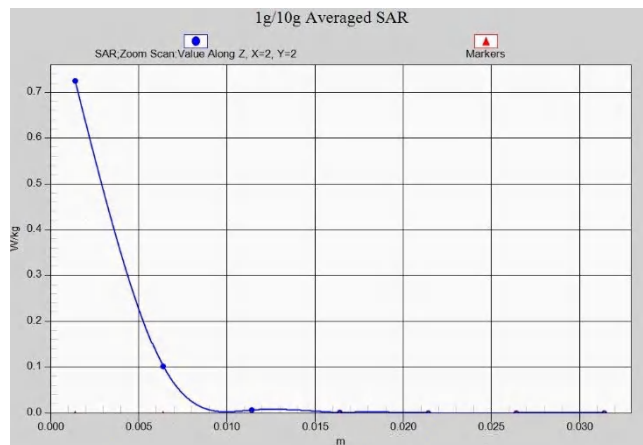


Z-Scan at power reference point (WIFI 5G Head)

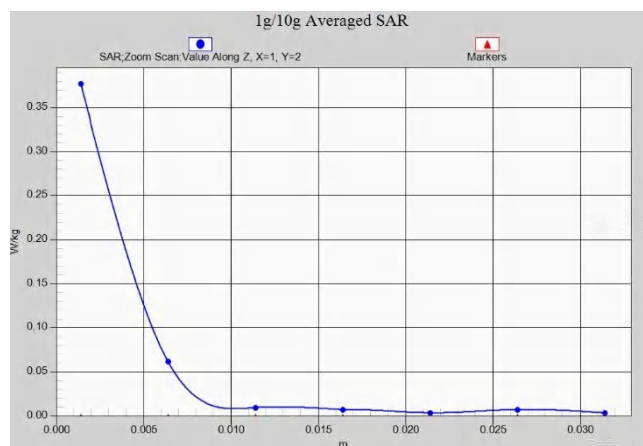


Z-Scan at power reference point (WIFI 5G Body 15mm)

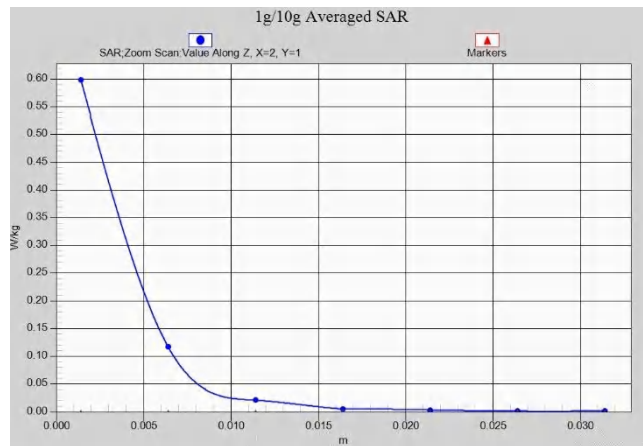

Z-Scan at power reference point (WIFI 5G Body 10mm)

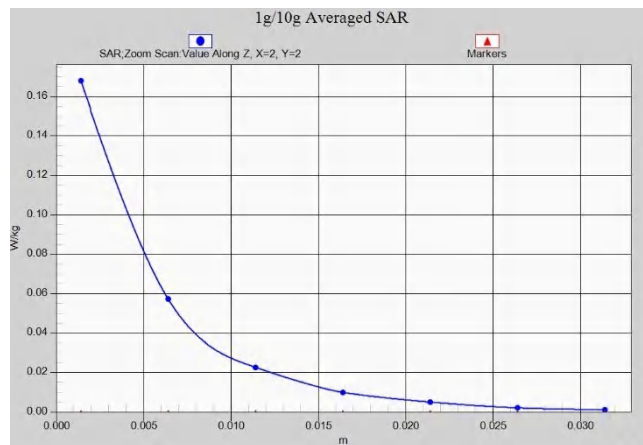

Z-Scan at power reference point (BT Head)

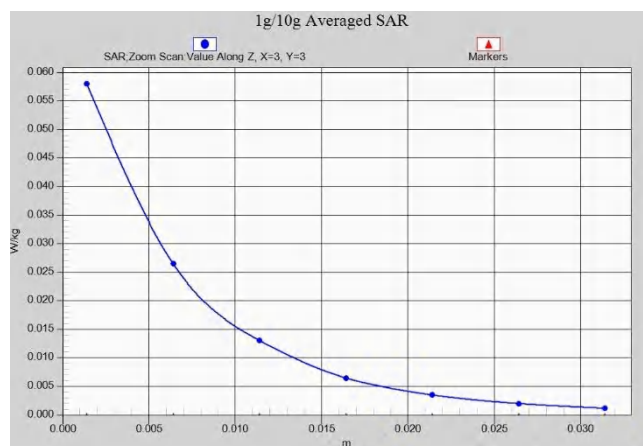

Z-Scan at power reference point (BT Body)