




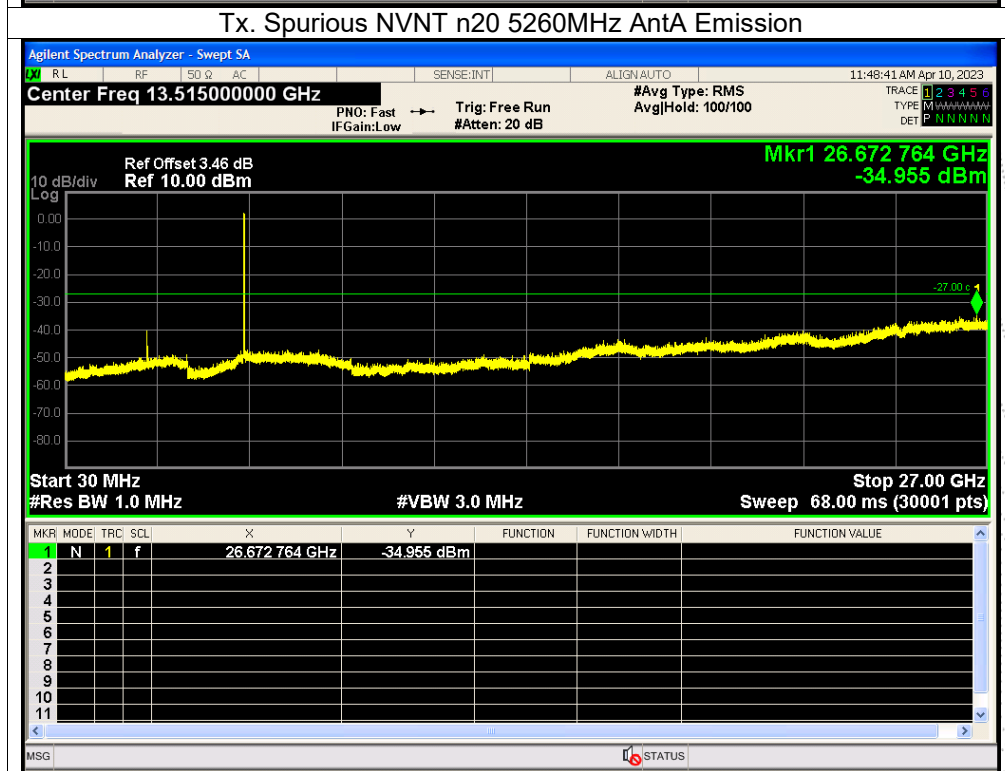
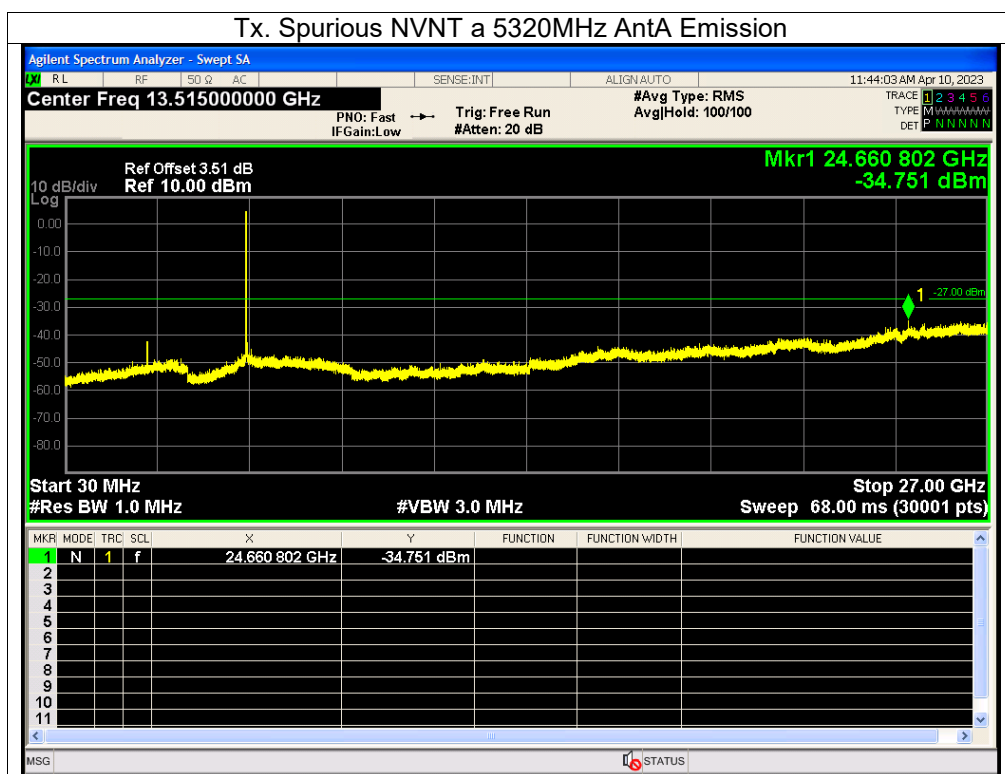
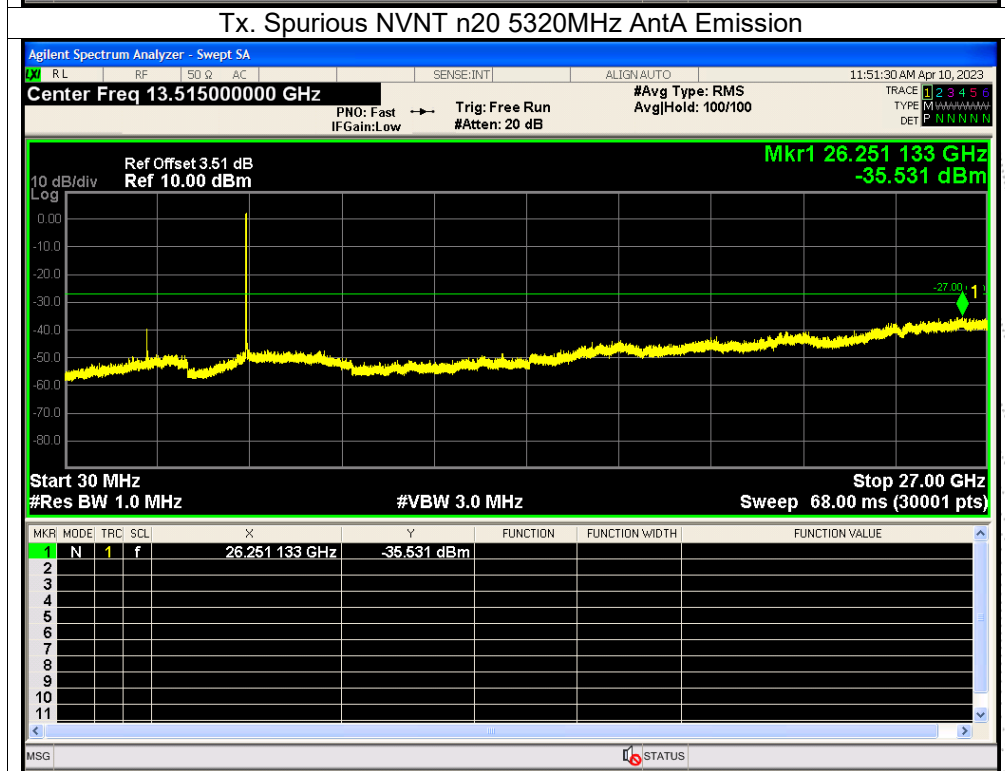
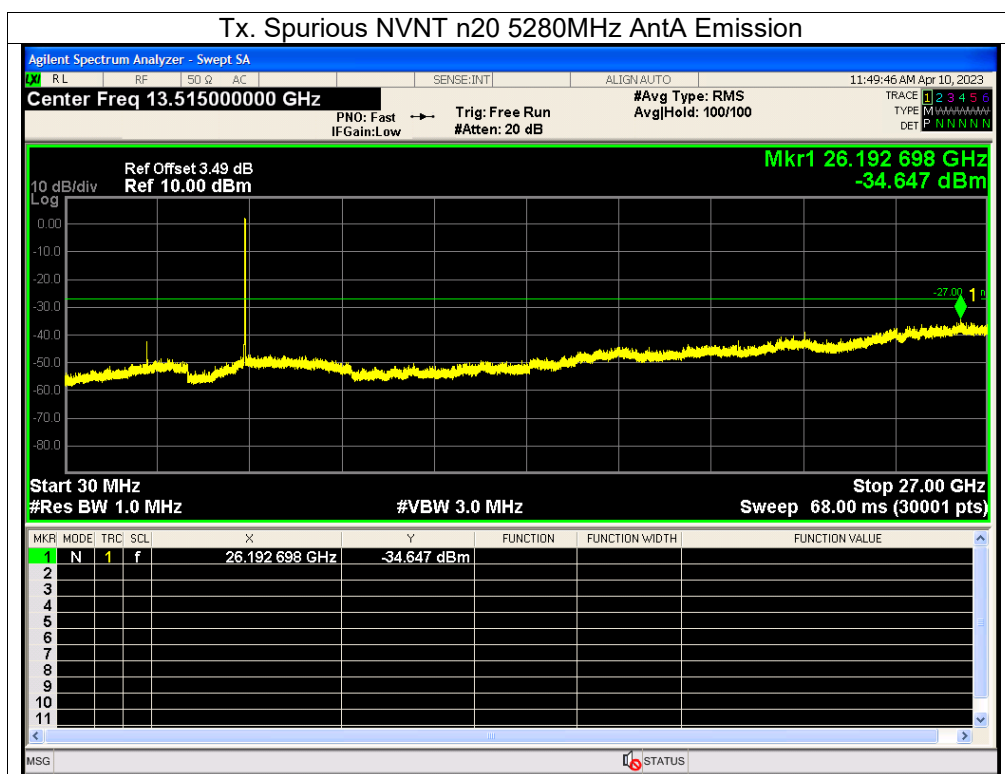
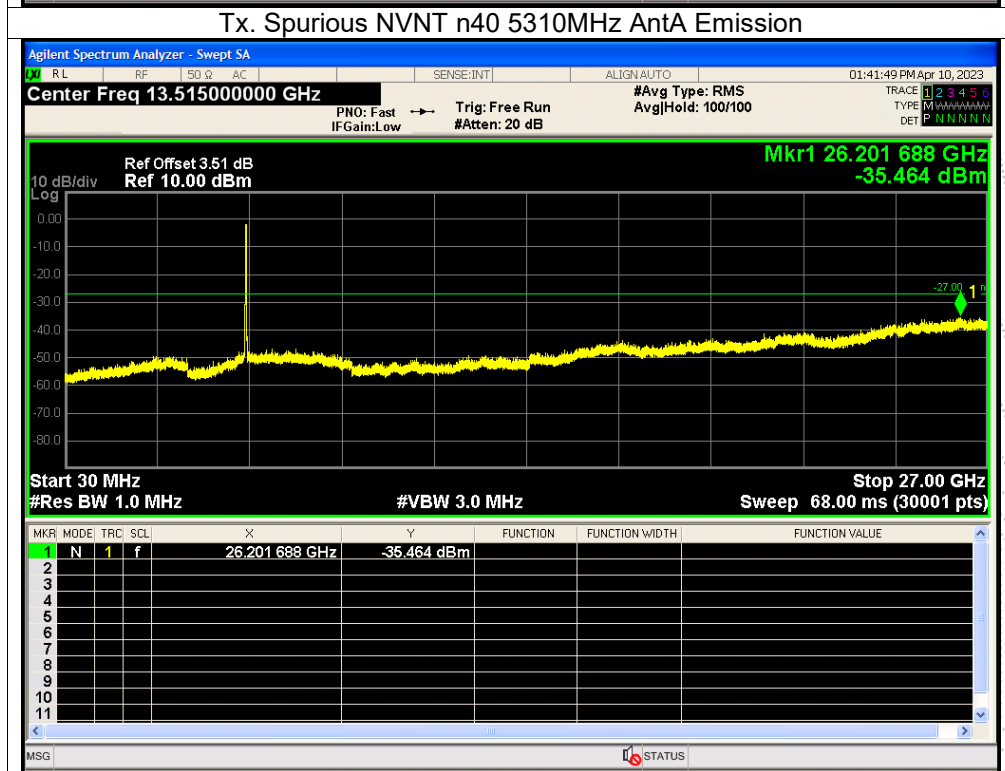



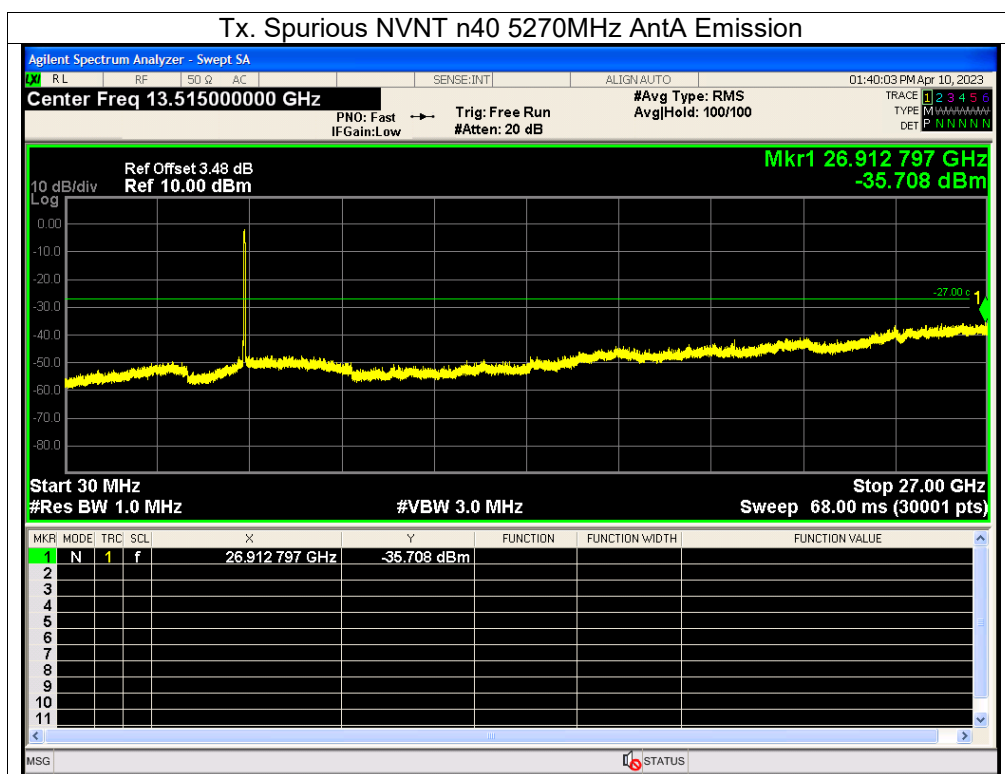


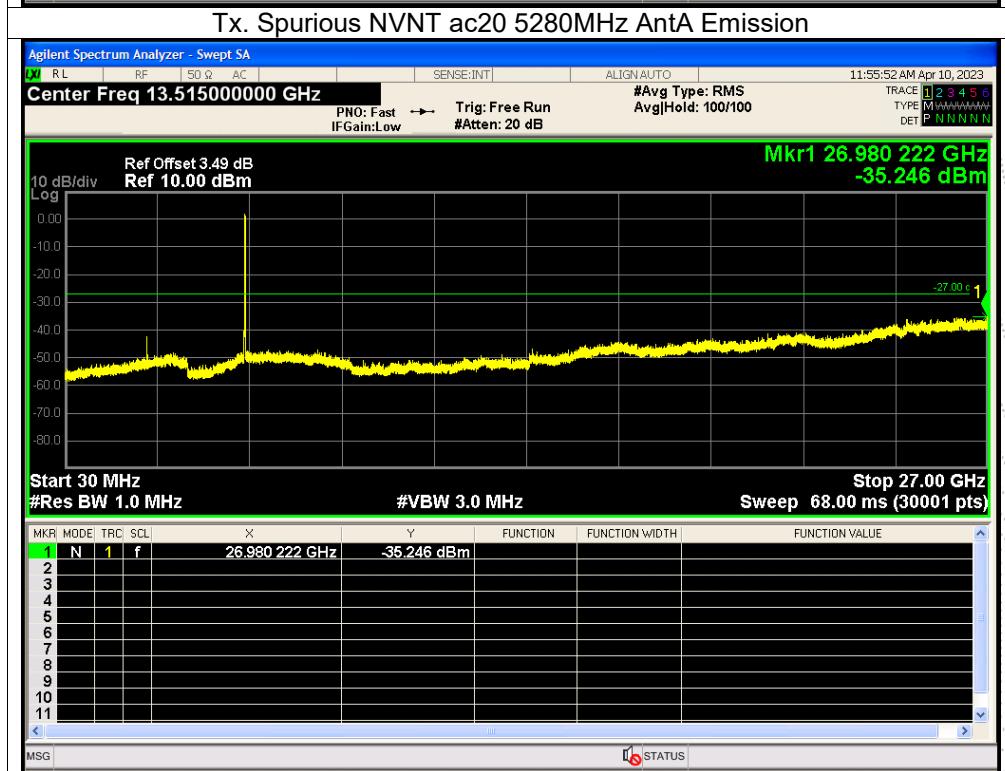

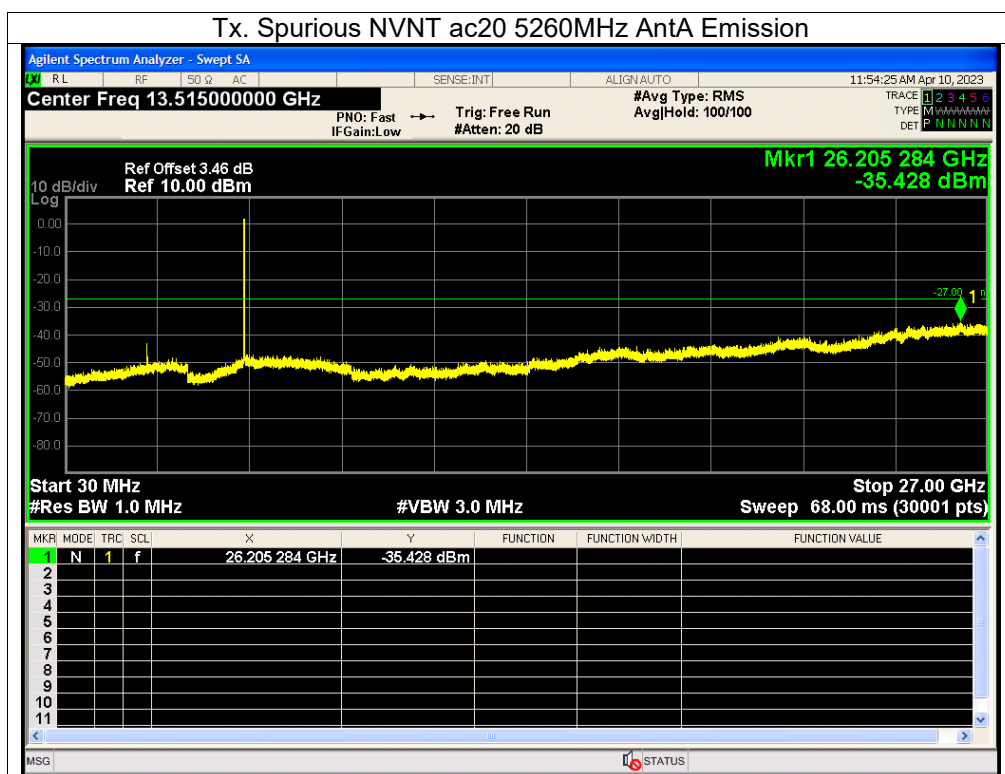



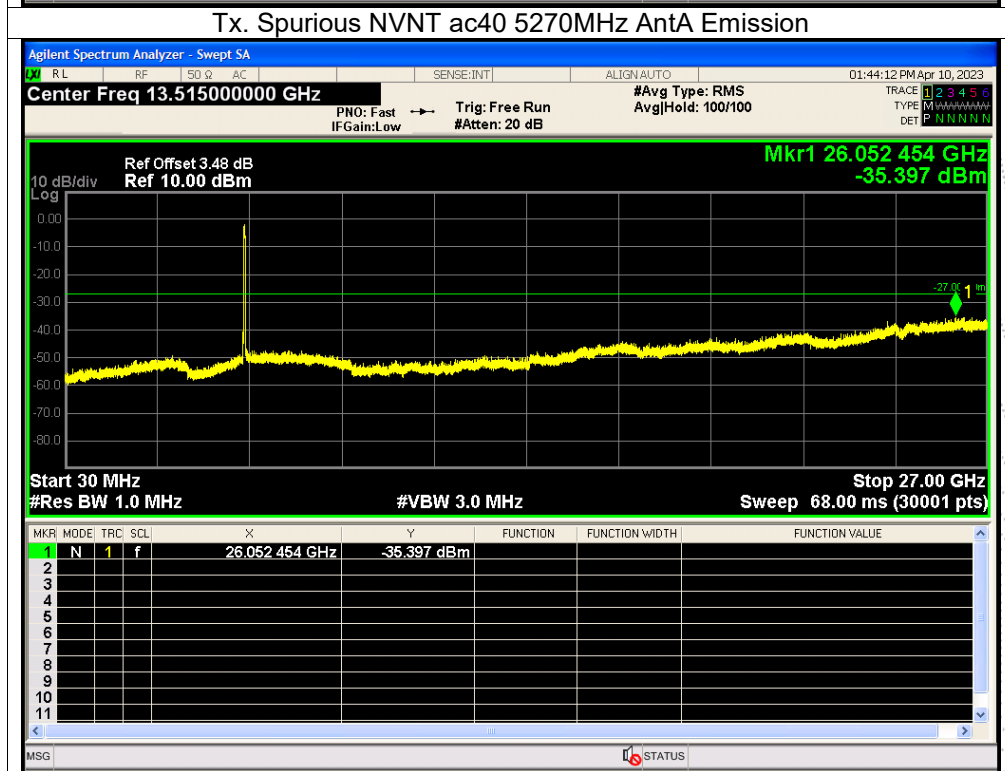



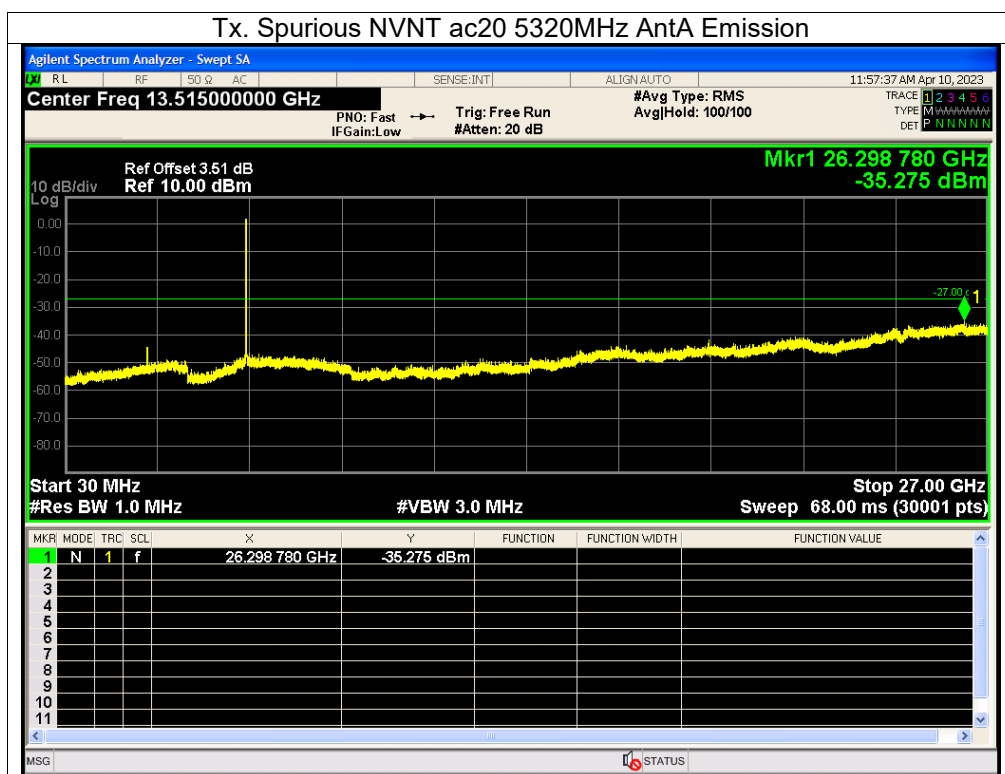


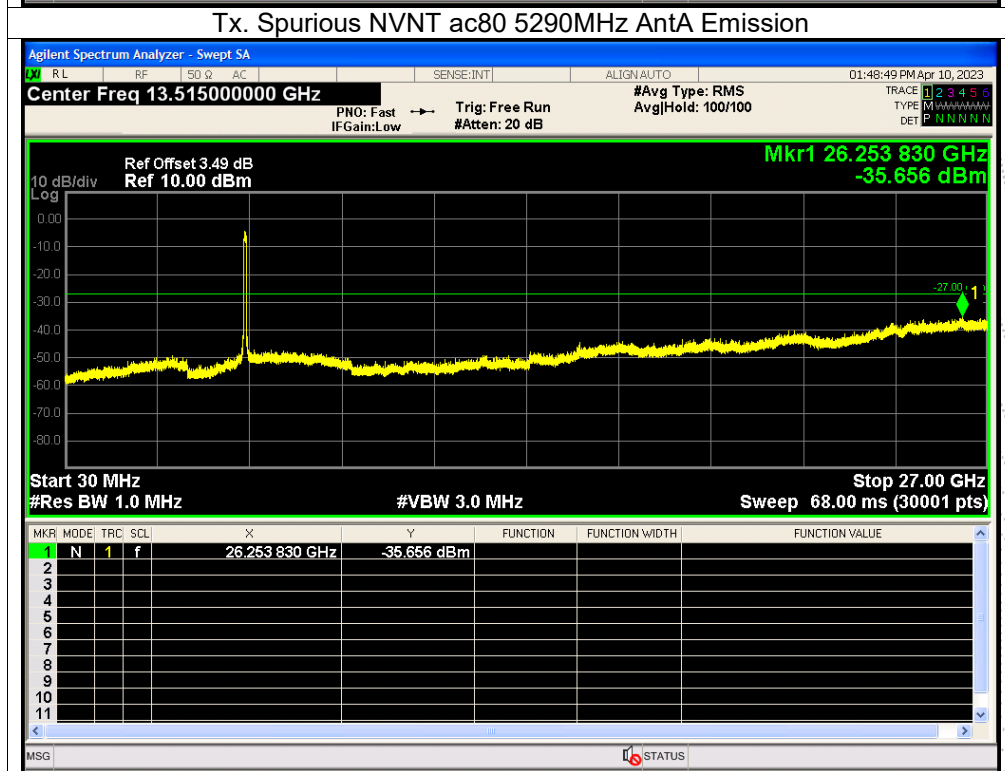
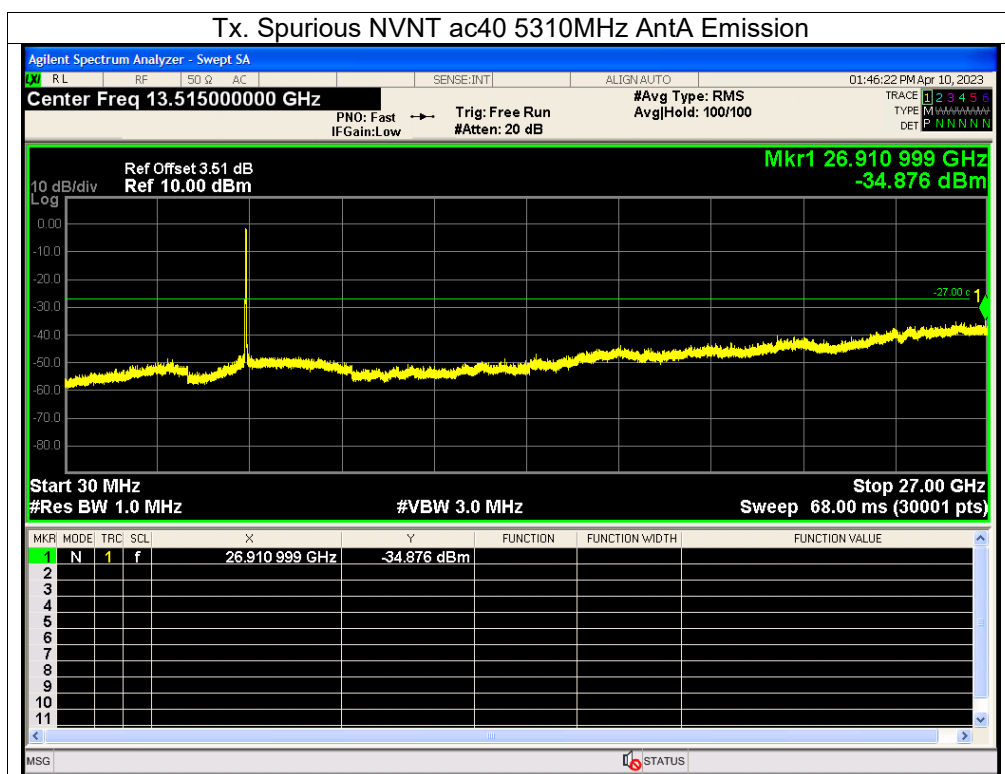




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A.
Antenna A: 5500-5700MHz


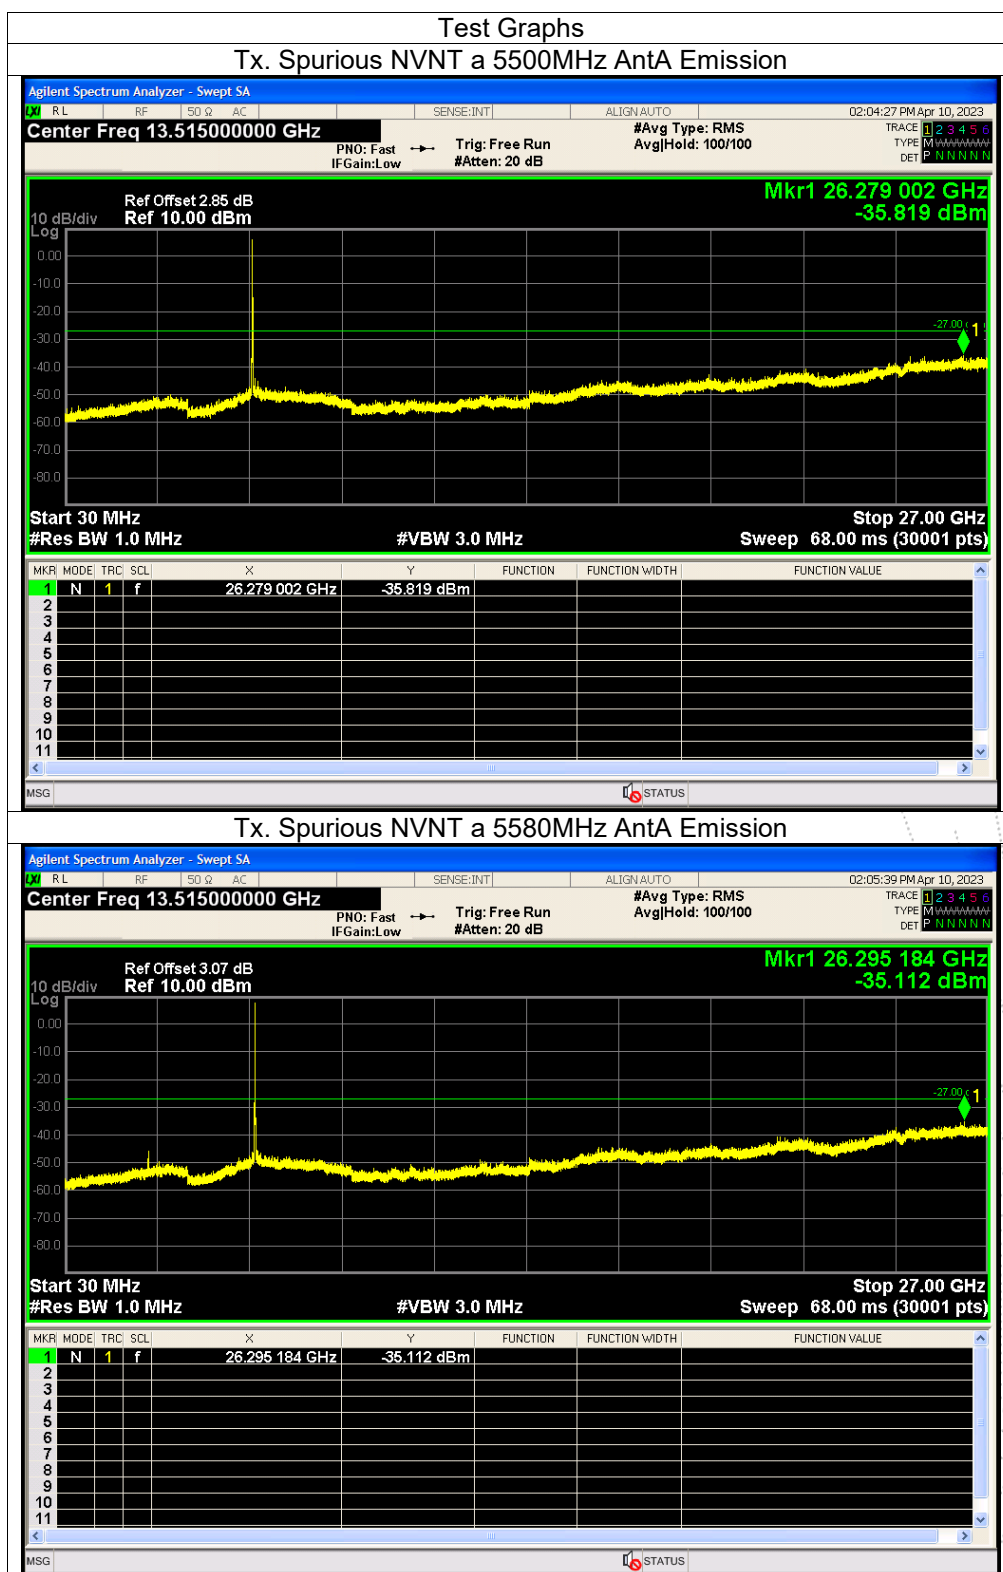


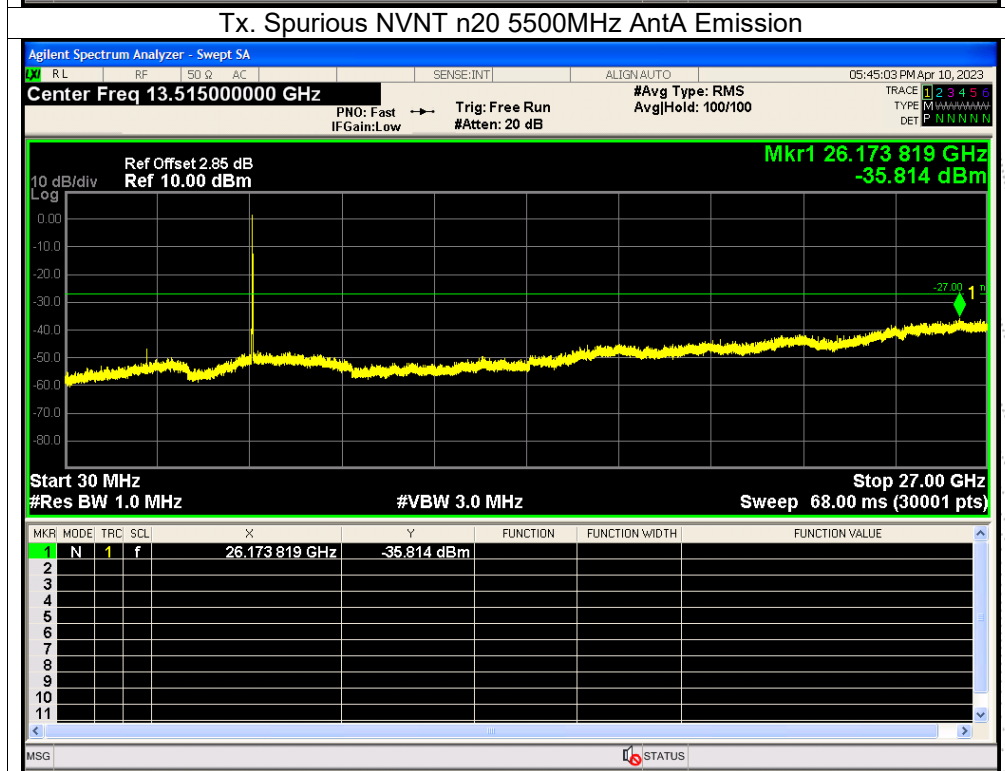
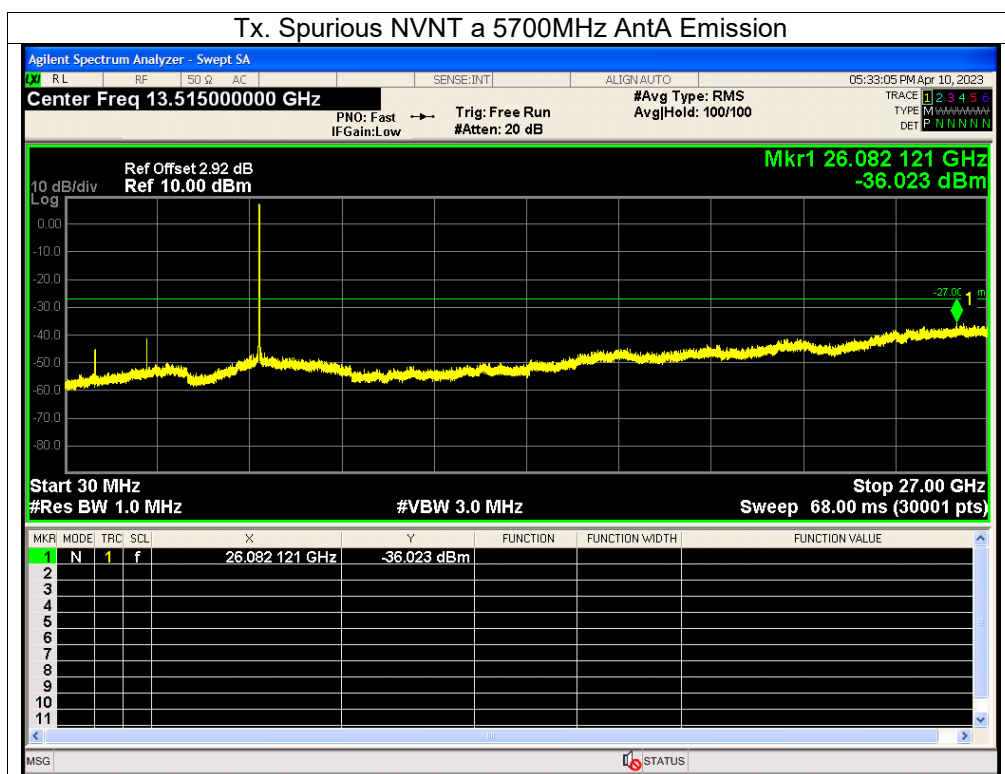


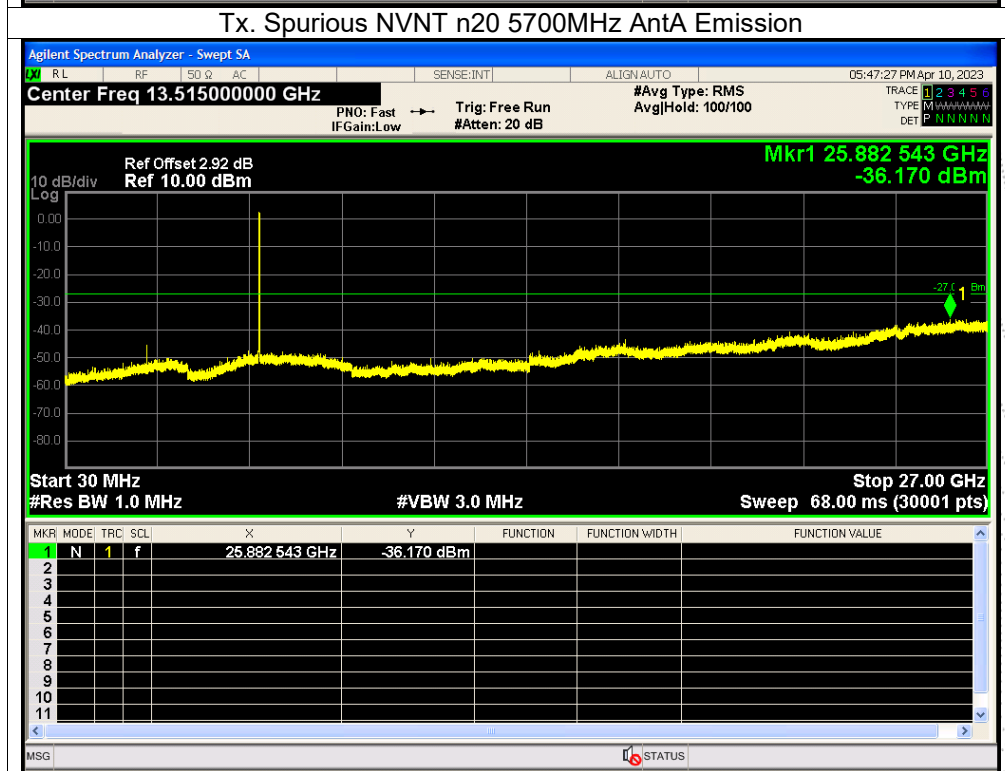
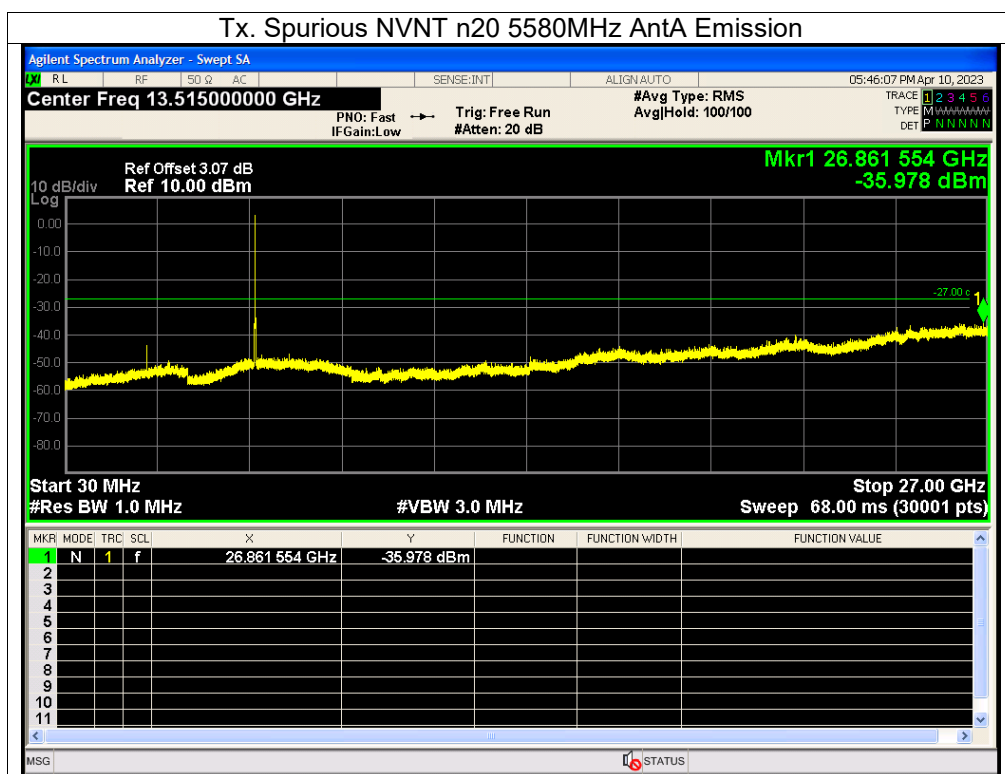


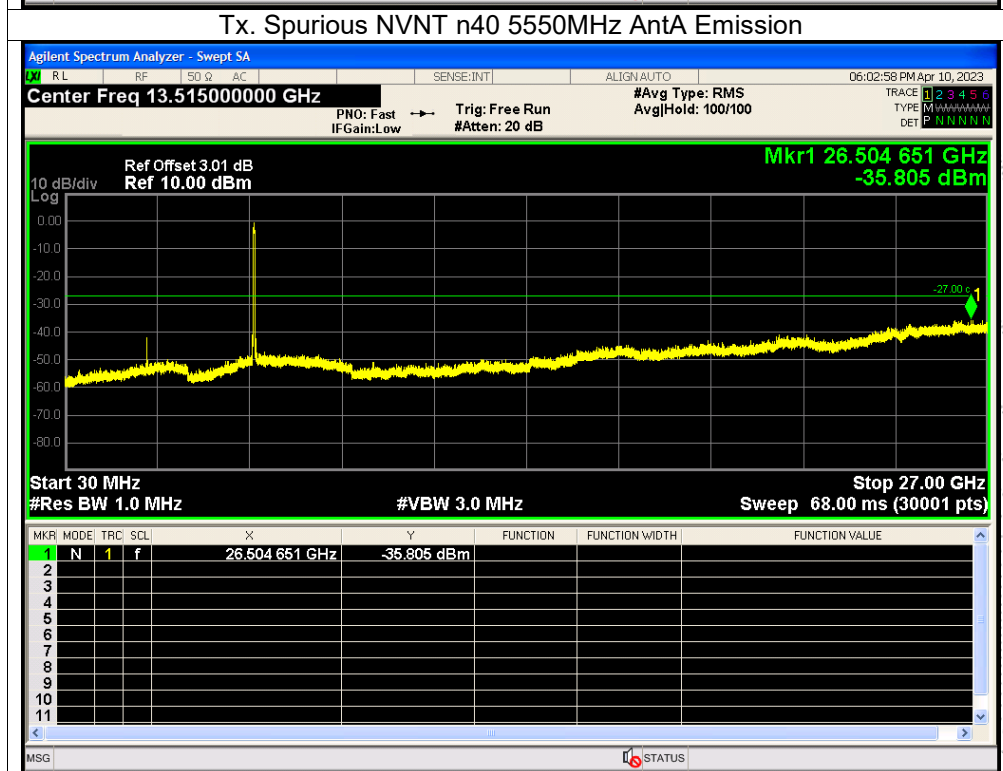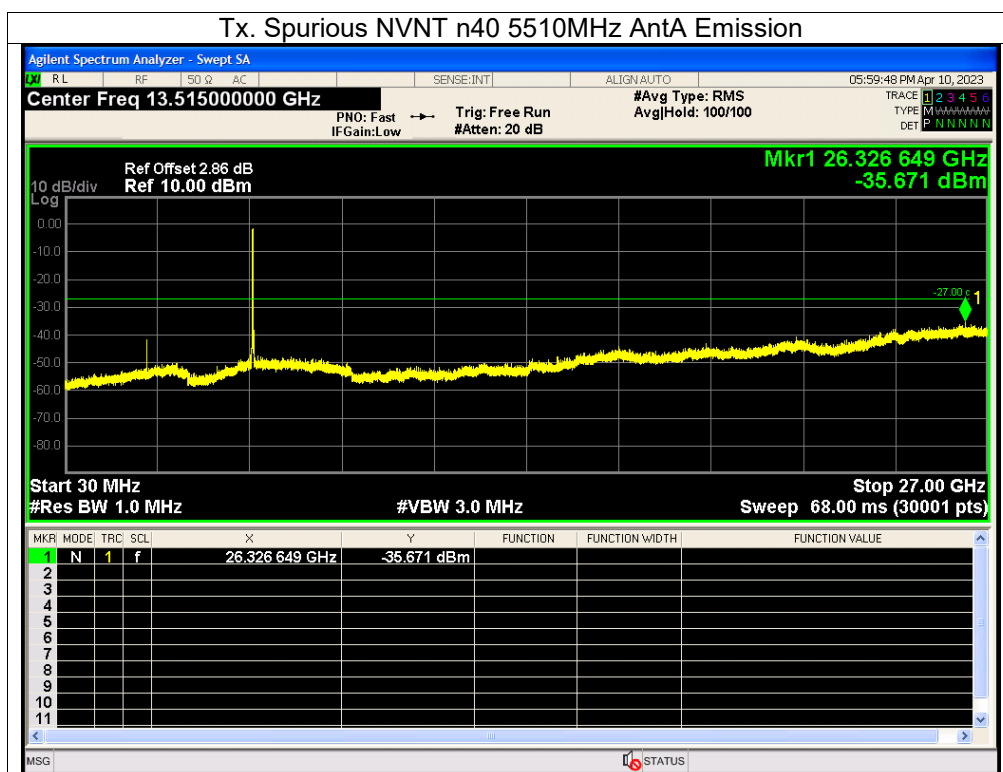

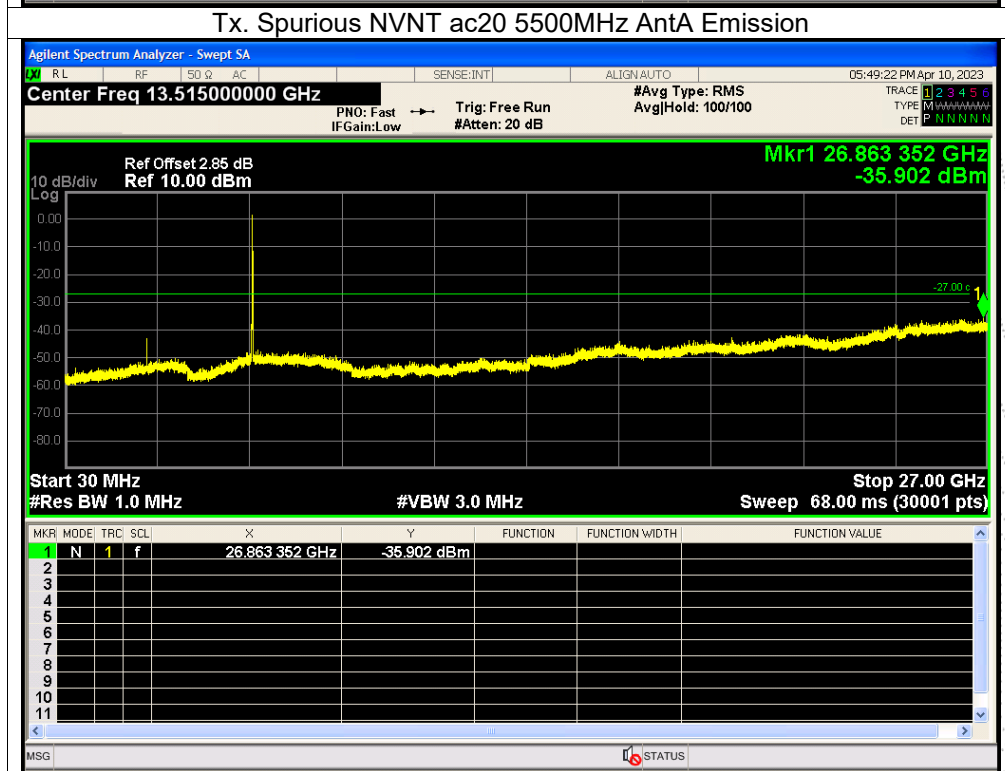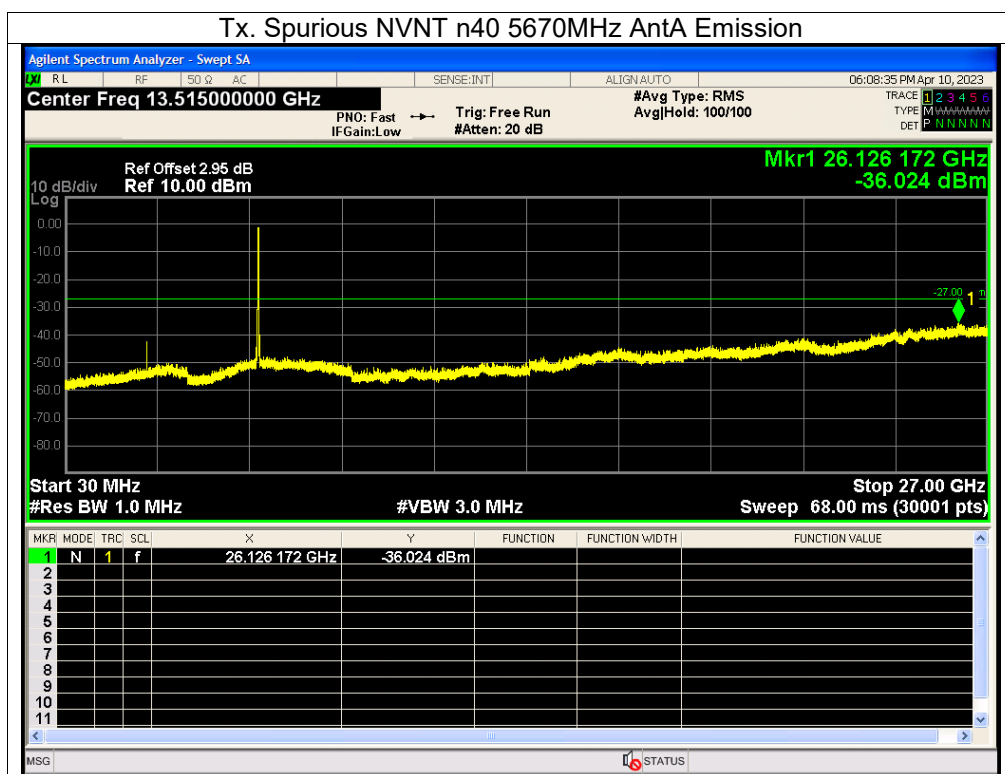


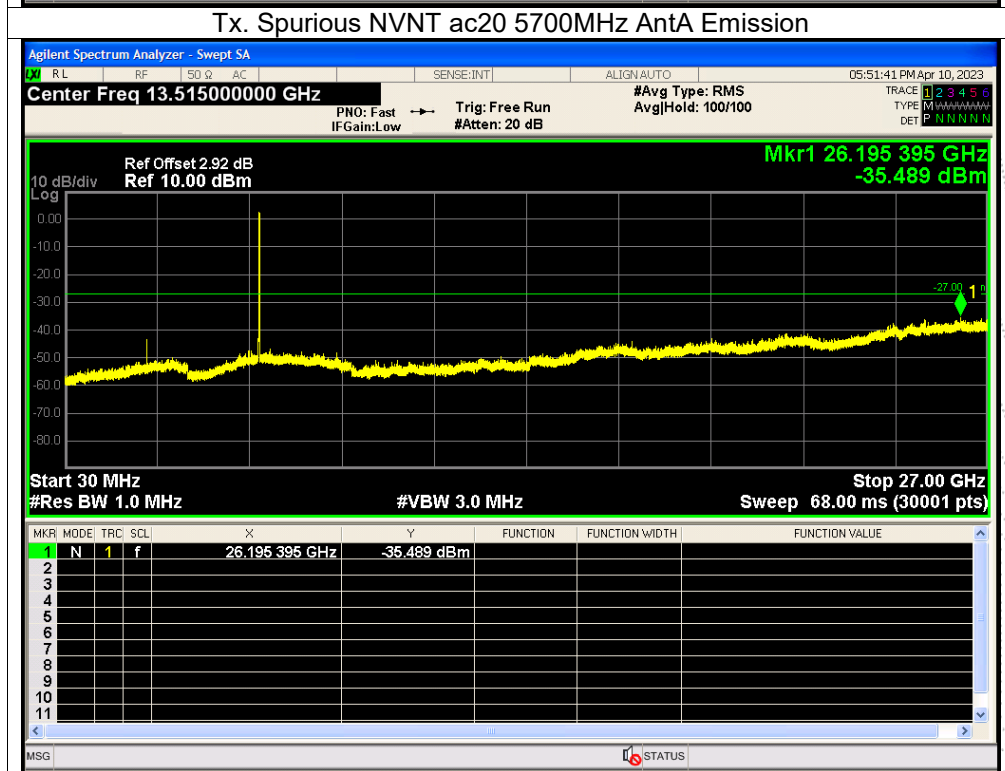
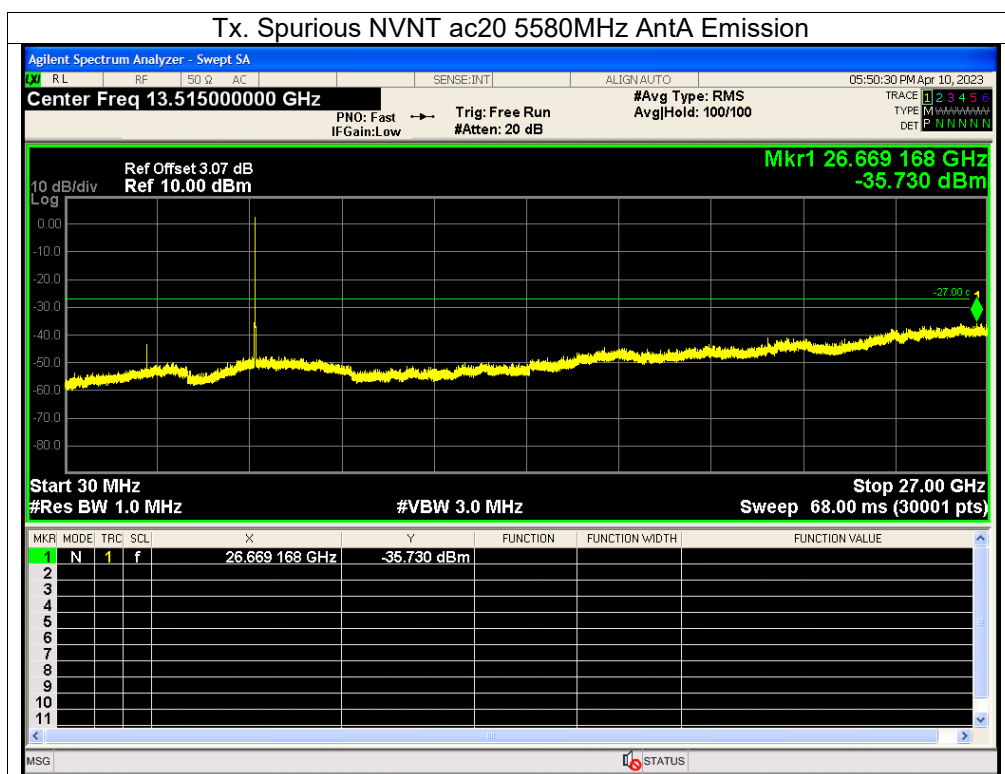


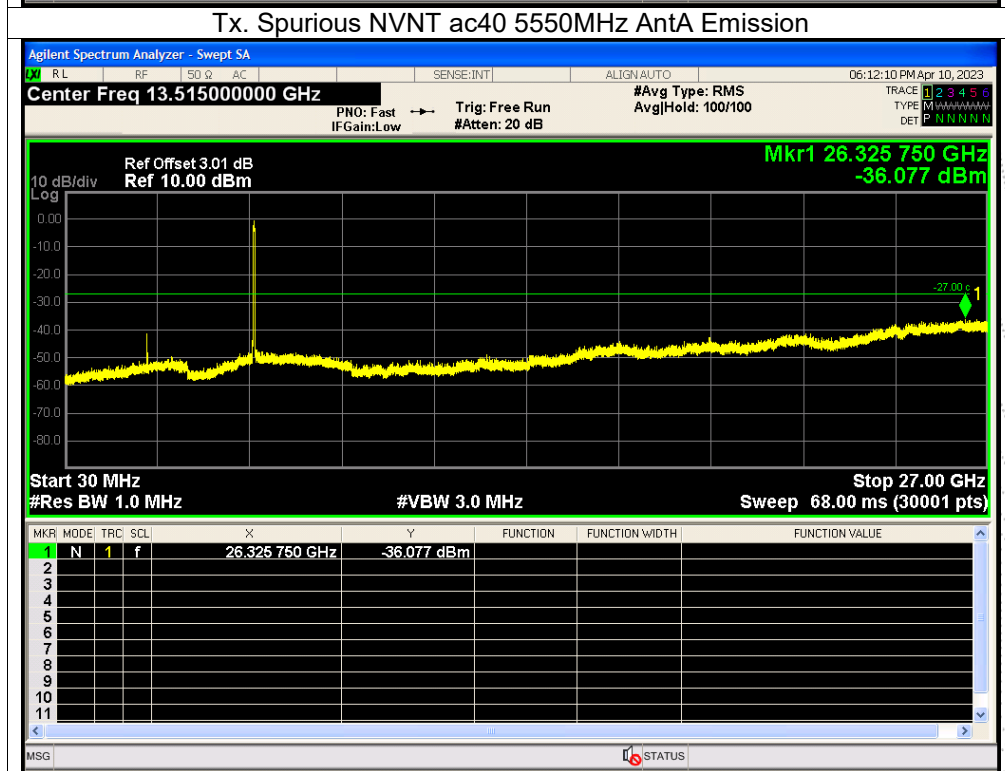
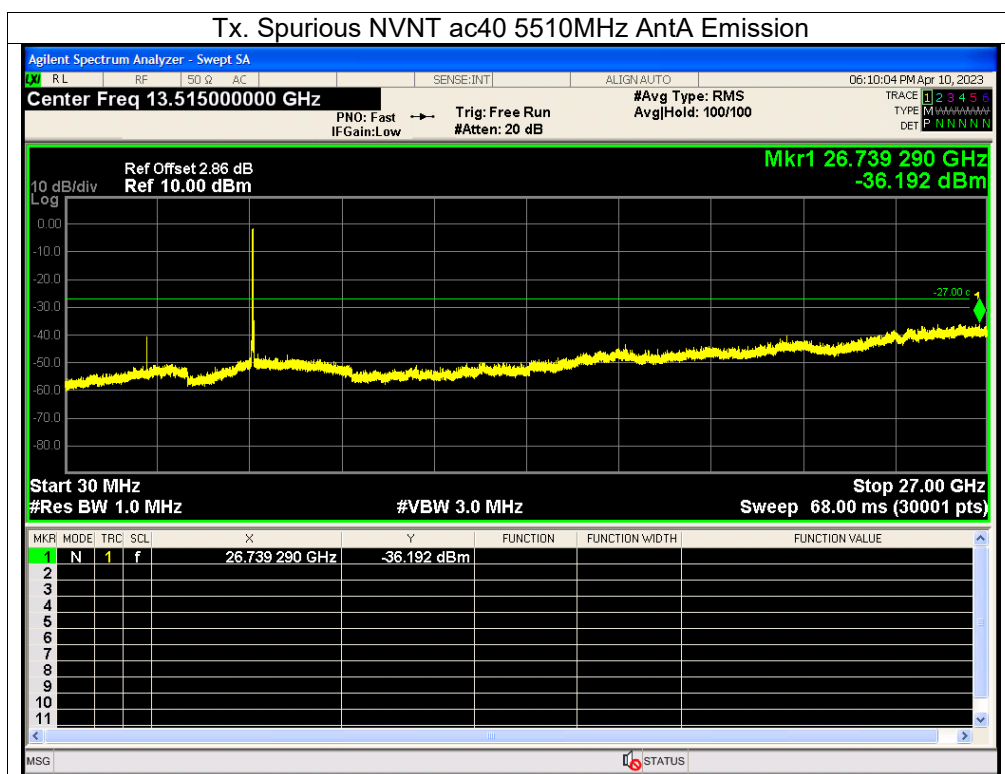


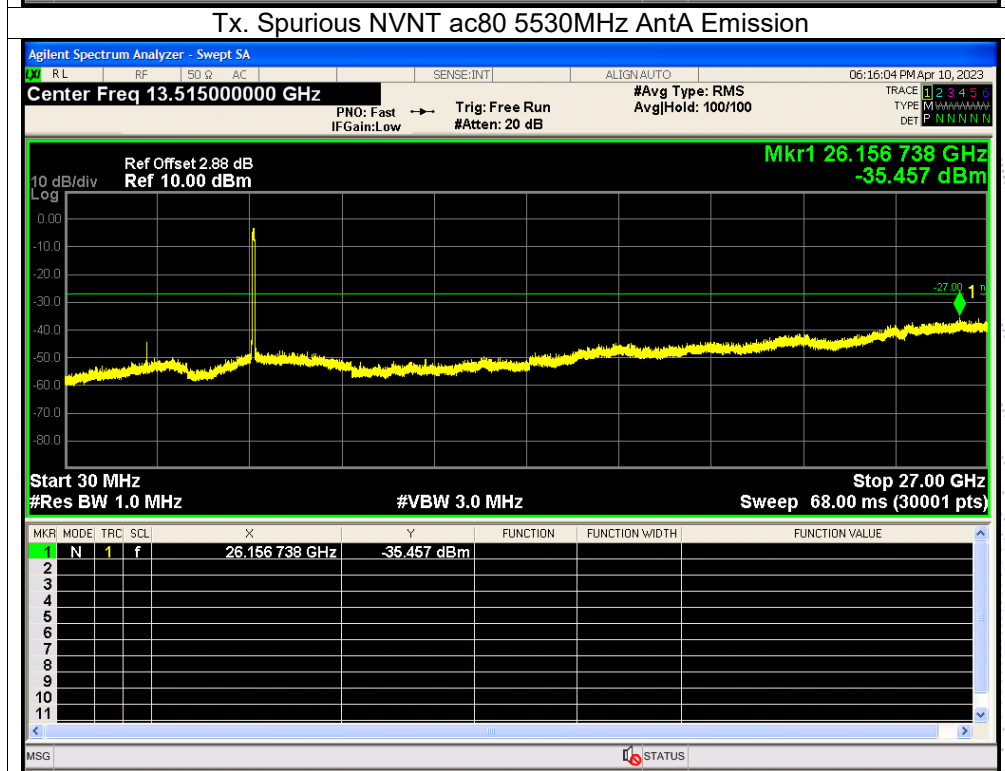
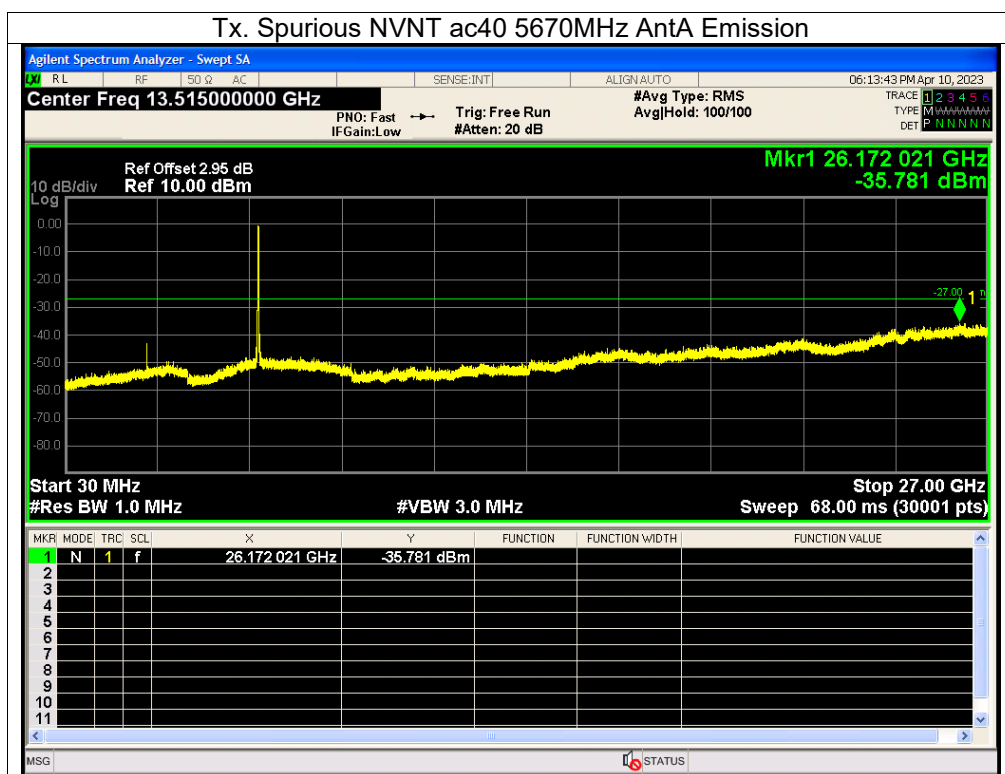




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A.
Antenna A: 5745-58250MHz


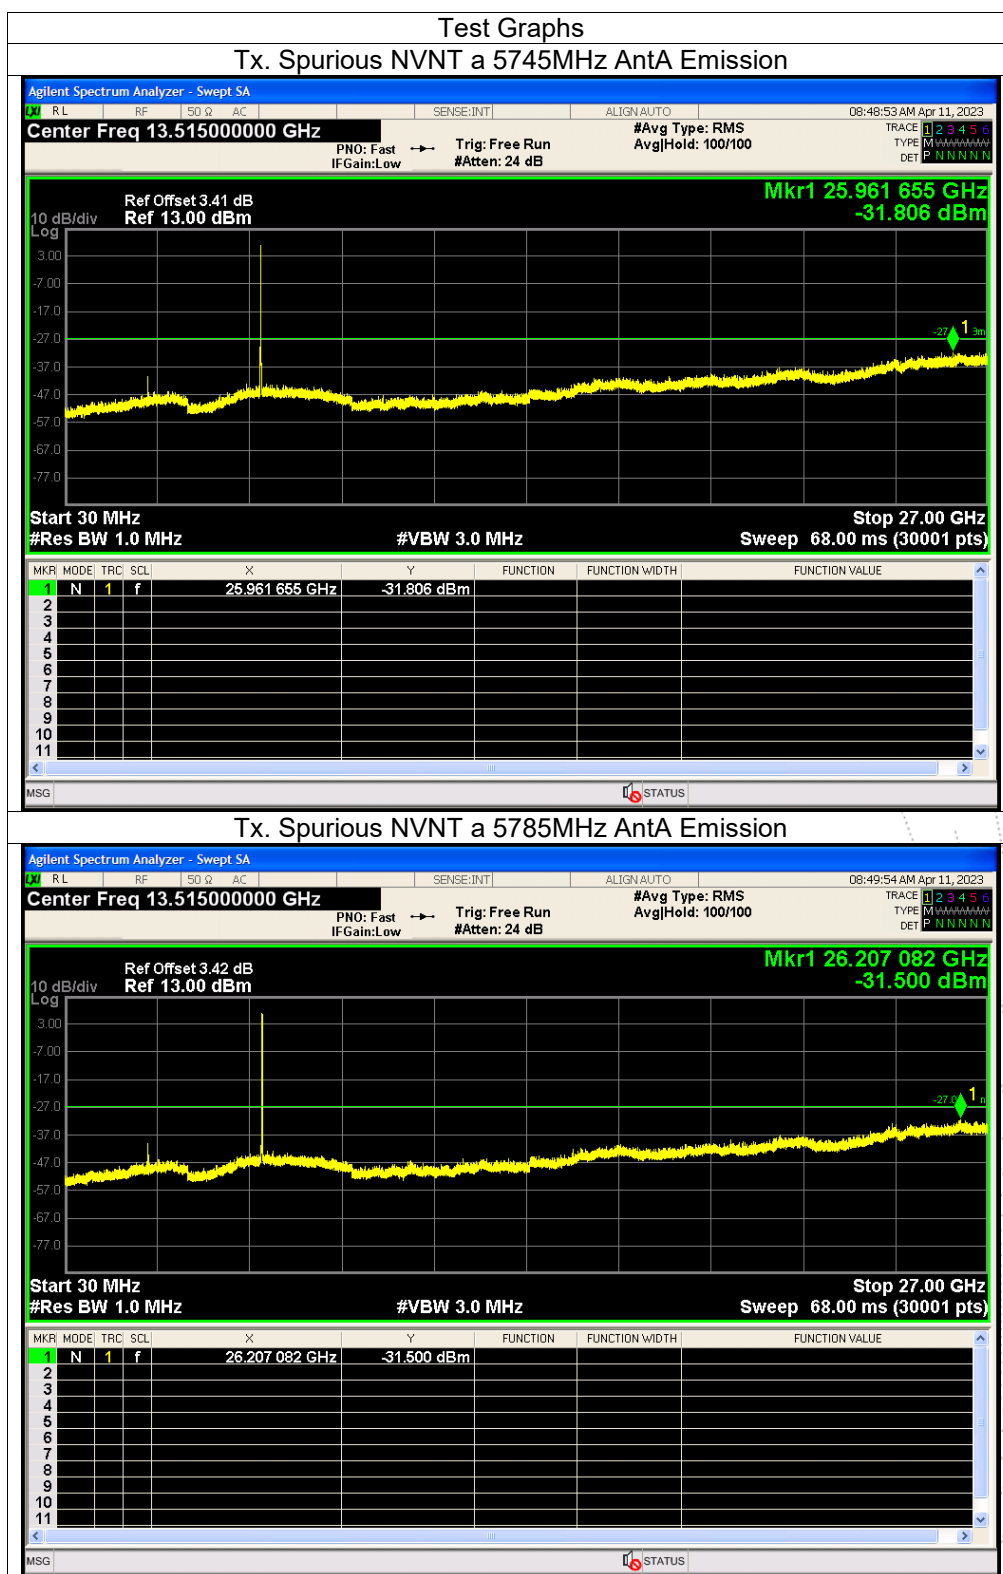


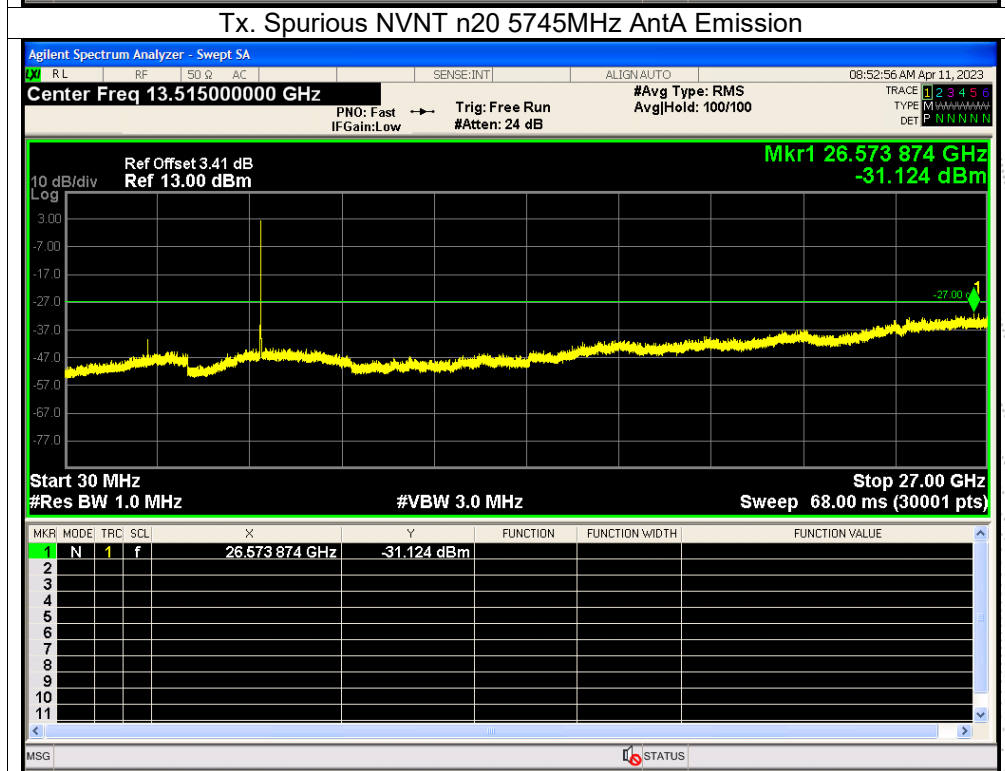
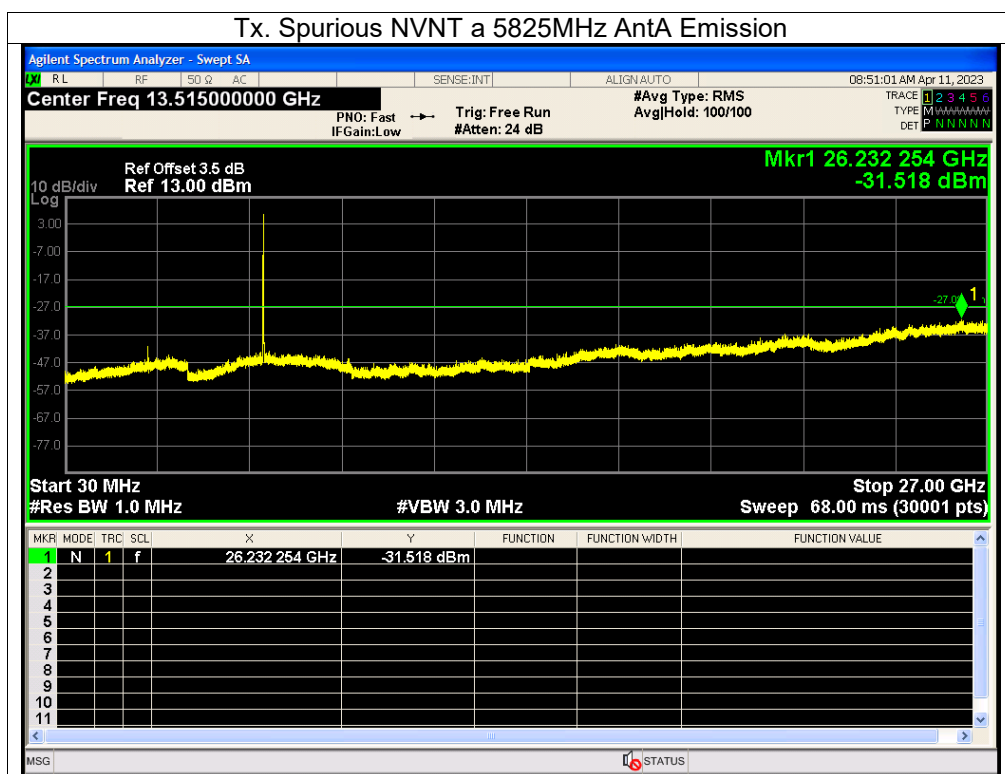


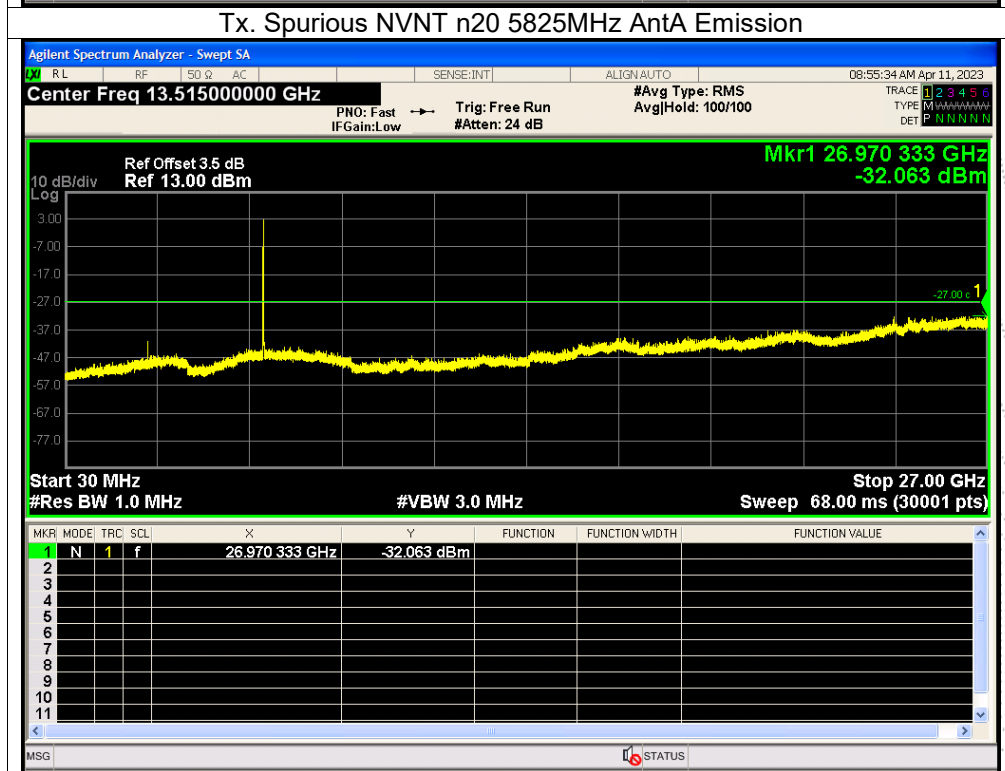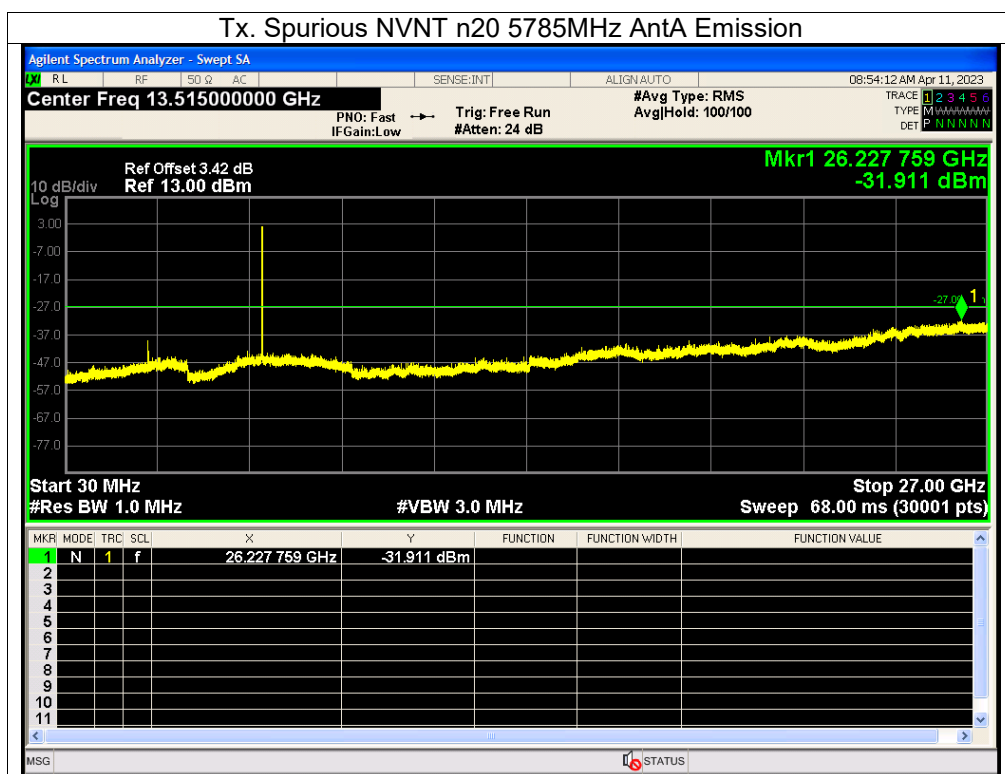

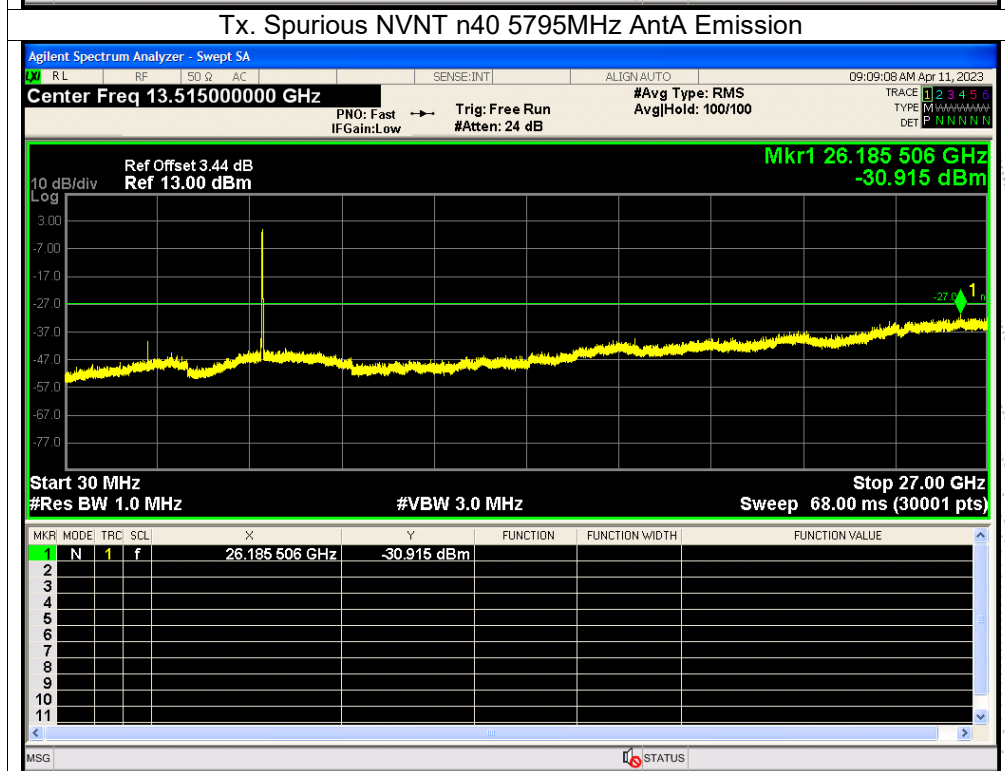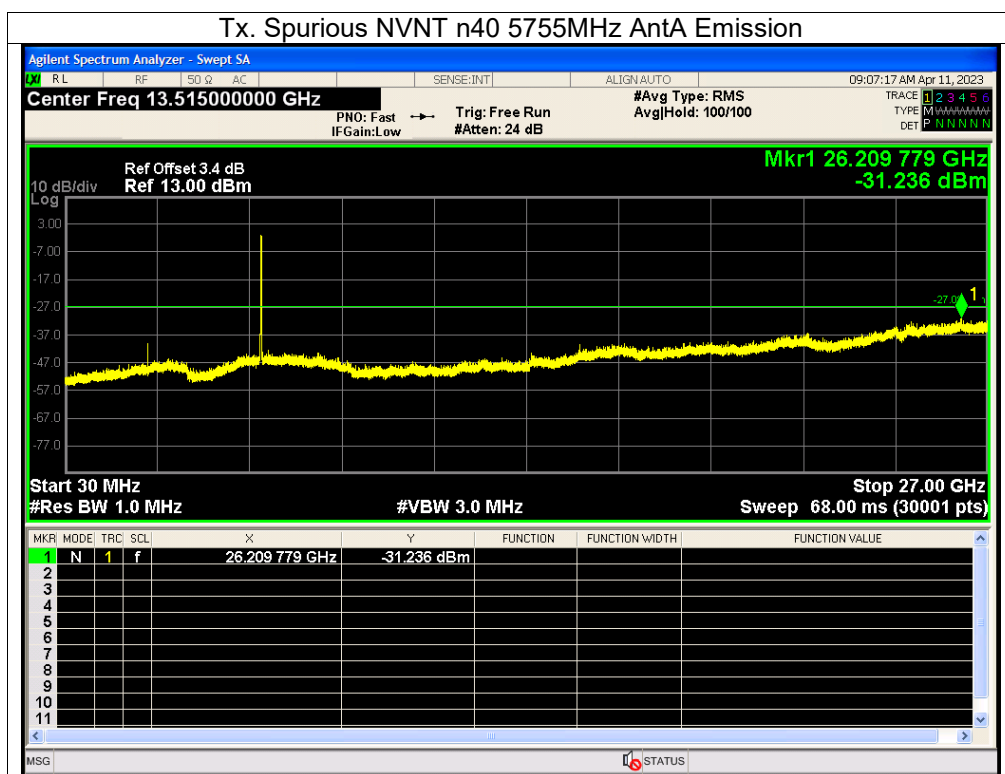

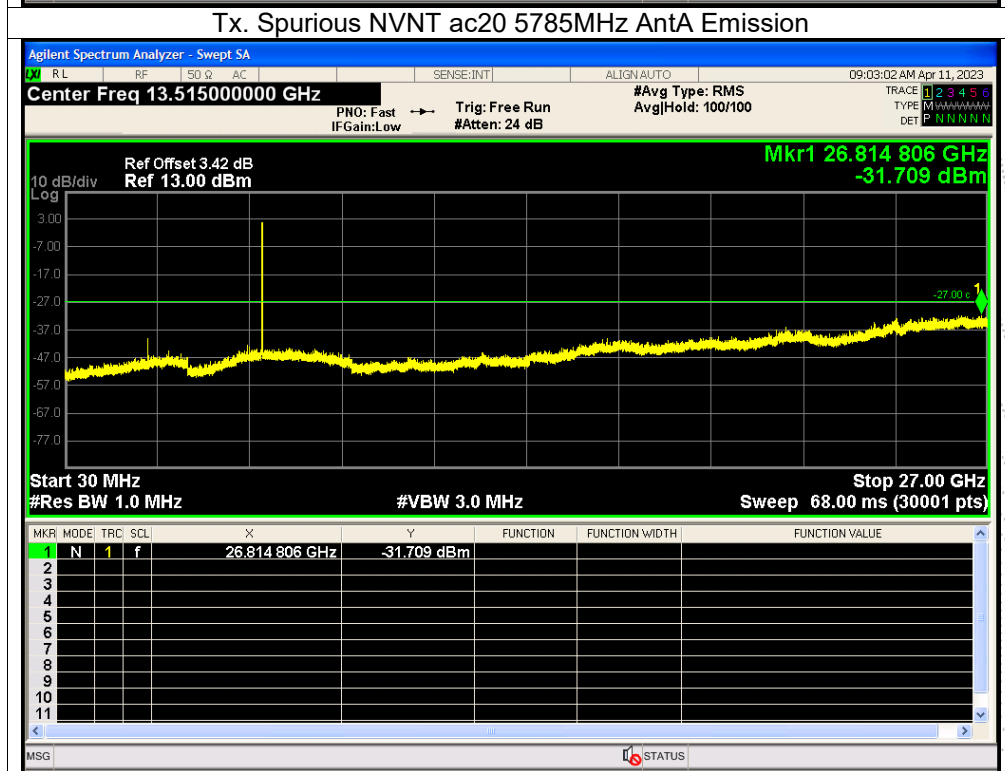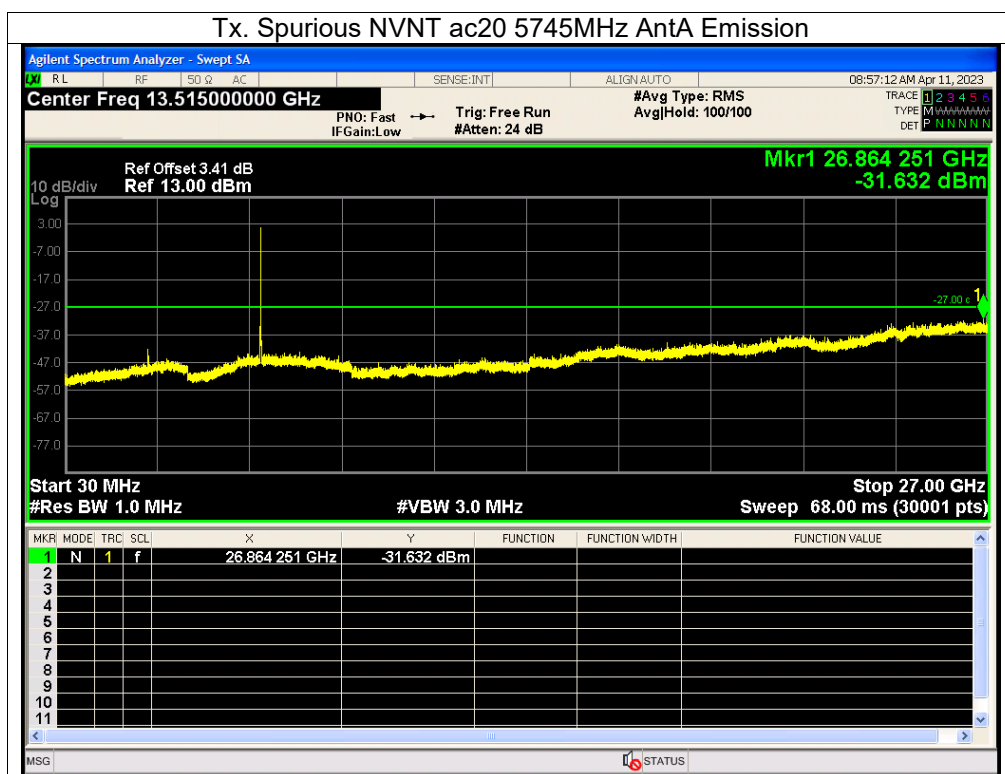


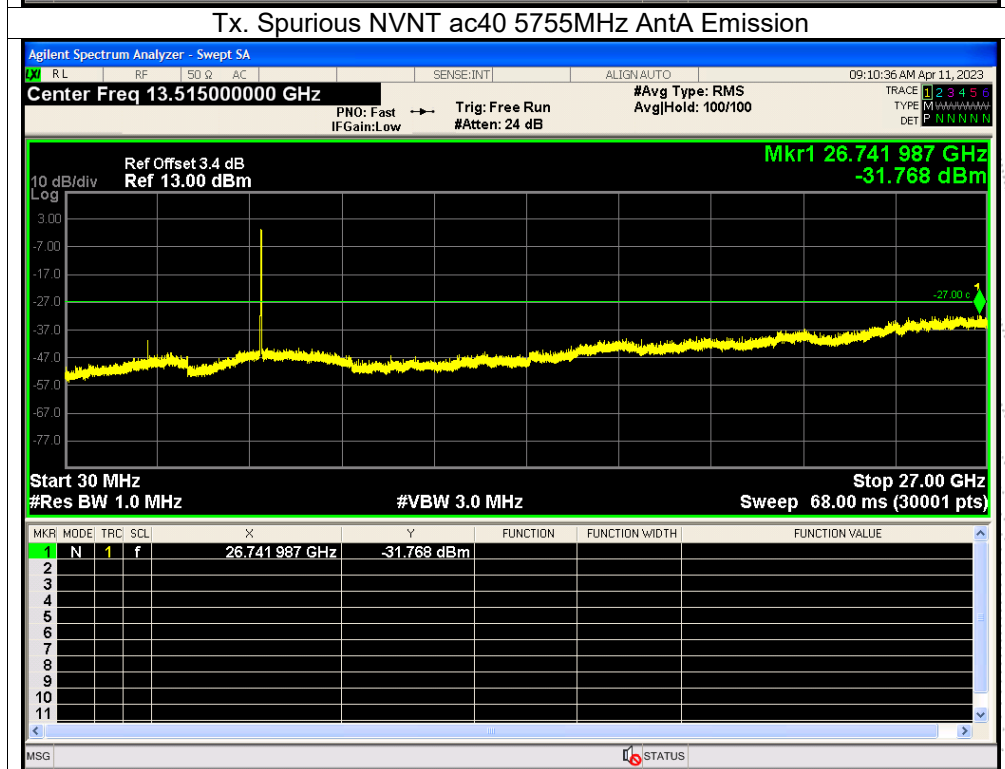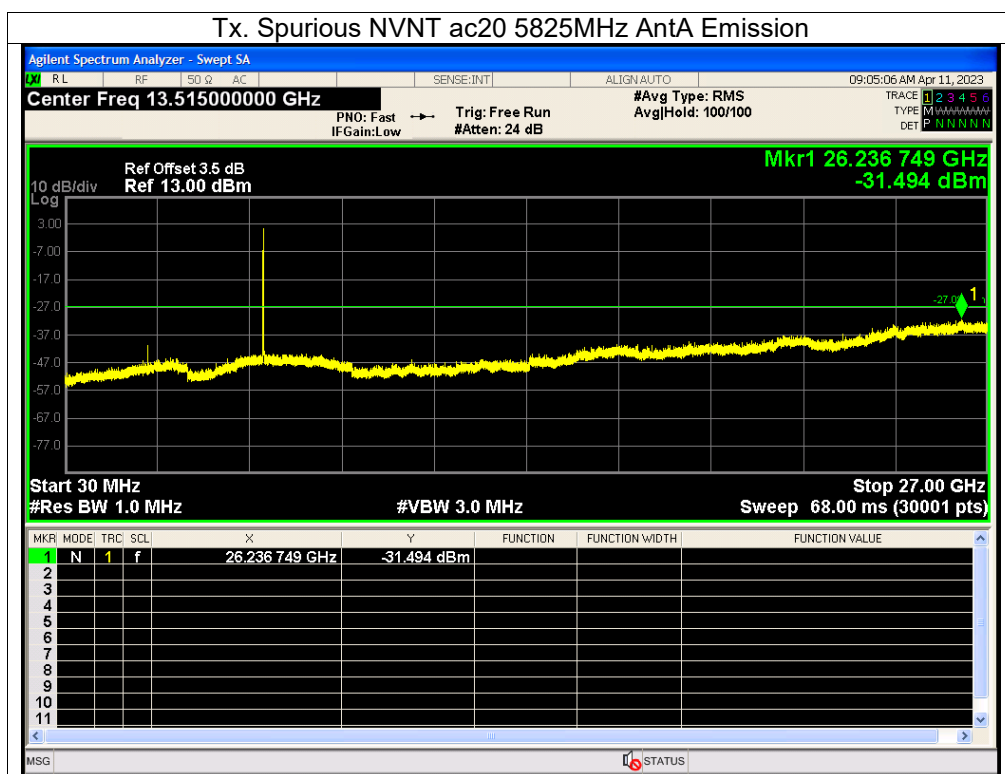

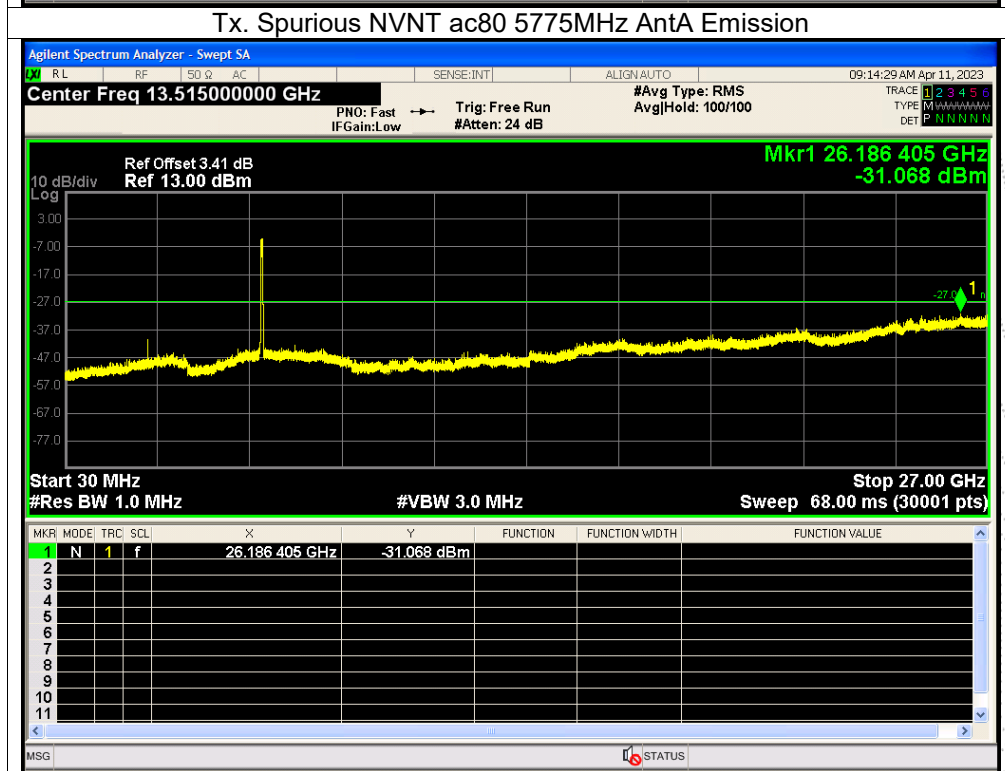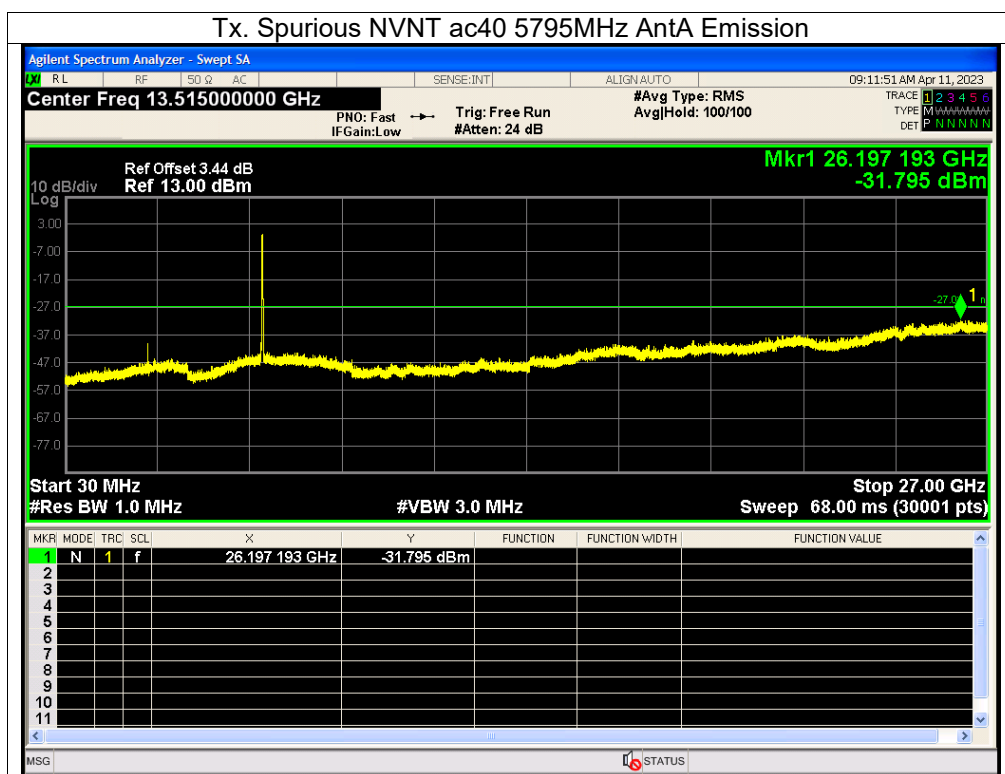

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup

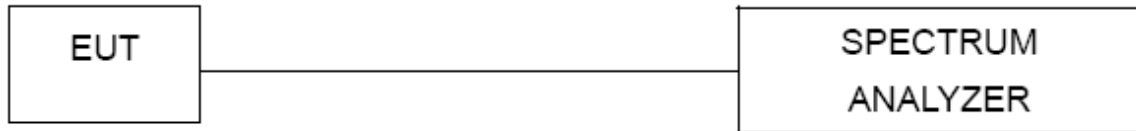

13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11nspecification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0156	5180	0.0156	3.0054
		V max (V)	138.00	5180.0127	5180	0.0127	2.4436
		V min (V)	102.00	5180.0143	5180	0.0143	2.7563
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0087	5180	0.0087	1.6825
		T (°C)	-10	5180.0016	5180	0.0016	0.3161
		T (°C)	0	5180.0094	5180	0.0094	1.8072
		T (°C)	10	5180.0133	5180	0.0133	2.5729
		T (°C)	20	5180.0015	5180	0.0015	0.2895
		T (°C)	30	5180.0076	5180	0.0076	1.4732
		T (°C)	40	5180.0067	5180	0.0067	1.2855
		T (°C)	50	5180.0012	5180	0.0012	0.2272
		T (°C)	60	5180.0101	5180	0.0101	1.9577
		T (°C)	70	5180.0075	5180	0.0075	1.4526
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0058	5200	0.0058	1.1125
		V max (V)	138.00	5200.0099	5200	0.0099	1.9073
		V min (V)	102.00	5200.0006	5200	0.0006	0.1153
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.00698	5200	0.00698	1.3433
		T (°C)	-10	5200.00578	5200	0.00578	1.1113
		T (°C)	0	5200.00321	5200	0.00321	0.6168
		T (°C)	10	5200.01163	5200	0.01163	2.2359
		T (°C)	20	5200.00158	5200	0.00158	0.3043
		T (°C)	30	5200.01106	5200	0.01106	2.1264
		T (°C)	40	5200.00307	5200	0.00307	0.5907
		T (°C)	50	5200.00811	5200	0.00811	1.5601
		T (°C)	60	5200.01288	5200	0.01288	2.4773
		T (°C)	70	5200.00709	5200	0.00709	1.3626
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0054	5240	0.0054	1.0212
		V max (V)	138.00	5240.0079	5240	0.0079	1.5131
		V min (V)	102.00	5240.0093	5240	0.0093	1.7791
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0010	5240	0.0010	0.1826
		T (°C)	-10	5240.0085	5240	0.0085	1.6305
		T (°C)	0	5240.0053	5240	0.0053	1.0035
		T (°C)	10	5240.0103	5240	0.0103	1.9702
		T (°C)	20	5240.0022	5240	0.0022	0.4264
		T (°C)	30	5240.0115	5240	0.0115	2.2039
		T (°C)	40	5240.0124	5240	0.0124	2.3632
		T (°C)	50	5240.0060	5240	0.0060	1.1406
		T (°C)	60	5240.0028	5240	0.0028	0.5435
		T (°C)	70	5240.0069	5240	0.0069	1.3151
Limits				5150-5250 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.3G) Mode Frequency U-NII-2A (5260-5320MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5260.0026	5260	0.0026	0.4891
		V max (V)	138.00	5260.0103	5260	0.0103	1.9505
		V min (V)	102.00	5260.0047	5260	0.0047	0.9019
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5260.0109	5260	0.0109	2.0748
		T (°C)	-10	5260.0125	5260	0.0125	2.3723
		T (°C)	0	5260.0064	5260	0.0064	1.2146
		T (°C)	10	5260.0013	5260	0.0013	0.2452
		T (°C)	20	5260.0058	5260	0.0058	1.1057
		T (°C)	30	5260.0042	5260	0.0042	0.8001
		T (°C)	40	5260.0067	5260	0.0067	1.2755
		T (°C)	50	5260.0075	5260	0.0075	1.4318
		T (°C)	60	5260.0118	5260	0.0118	2.2341
		T (°C)	70	5260.0113	5260	0.0113	2.1460
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5280.0037	5280	0.0037	0.7063
		V max (V)	138.00	5280.0090	5280	0.0090	1.7104
		V min (V)	102.00	5280.0129	5280	0.0129	2.4341
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5280.00526	5280	0.00526	0.9960
		T (°C)	-10	5280.00548	5280	0.00548	1.0374
		T (°C)	0	5280.00575	5280	0.00575	1.0890
		T (°C)	10	5280.00145	5280	0.00145	0.2748
		T (°C)	20	5280.01243	5280	0.01243	2.3532
		T (°C)	30	5280.00076	5280	0.00076	0.1439
		T (°C)	40	5280.00989	5280	0.00989	1.8723
		T (°C)	50	5280.01290	5280	0.01290	2.4430
		T (°C)	60	5280.00906	5280	0.00906	1.7167
		T (°C)	70	5280.00545	5280	0.00545	1.0331
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5320.0060	5320	0.0060	1.1349
		V max (V)	138.00	5320.0079	5320	0.0079	1.4827
		V min (V)	102.00	5320.0098	5320	0.0098	1.8332
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5320.0087	5320	0.0087	1.6300
		T (°C)	-10	5320.0082	5320	0.0082	1.5352
		T (°C)	0	5320.0071	5320	0.0071	1.3261
		T (°C)	10	5320.0119	5320	0.0119	2.2399
		T (°C)	20	5320.0082	5320	0.0082	1.5466
		T (°C)	30	5320.0108	5320	0.0108	2.0356
		T (°C)	40	5320.0015	5320	0.0015	0.2899
		T (°C)	50	5320.0093	5320	0.0093	1.7392
		T (°C)	60	5320.0091	5320	0.0091	1.7117
		T (°C)	70	5320.0012	5320	0.0012	0.2284
Limits				5260-5320 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.6G) Mode Frequency U-NII-2C (5500-5700MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5500.0150	5500	0.0150	2.7357
		V max (V)	138.00	5500.0204	5500	0.0204	3.7171
		V min (V)	102.00	5500.0051	5500	0.0051	0.9234
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5500.0115	5500	0.0115	2.0997
		T (°C)	-10	5500.0061	5500	0.0061	1.1160
		T (°C)	0	5500.0086	5500	0.0086	1.5563
		T (°C)	10	5500.0026	5500	0.0026	0.4779
		T (°C)	20	5500.0106	5500	0.0106	1.9217
		T (°C)	30	5500.0061	5500	0.0061	1.1012
		T (°C)	40	5500.0006	5500	0.0006	0.1163
		T (°C)	50	5500.0016	5500	0.0016	0.2949
		T (°C)	60	5500.0080	5500	0.0080	1.4463
		T (°C)	70	5500.0023	5500	0.0023	0.4115
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5600.0097	5600	0.0097	1.7245
		V max (V)	138.00	5600.0068	5600	0.0068	1.2224
		V min (V)	102.00	5600.0030	5600	0.0030	0.5301
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5600.00752	5600	0.00752	1.3426
		T (°C)	-10	5600.00219	5600	0.00219	0.3905
		T (°C)	0	5600.00300	5600	0.00300	0.5364
		T (°C)	10	5600.00159	5600	0.00159	0.2842
		T (°C)	20	5600.01282	5600	0.01282	2.2895
		T (°C)	30	5600.00595	5600	0.00595	1.0621
		T (°C)	40	5600.00050	5600	0.00050	0.0885
		T (°C)	50	5600.00427	5600	0.00427	0.7630
		T (°C)	60	5600.00034	5600	0.00034	0.0611
		T (°C)	70	5600.00629	5600	0.00629	1.1229
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5700.0026	5700	0.0026	0.4544
		V max (V)	138.00	5700.0000	5700	0.0000	0.0063
		V min (V)	102.00	5700.0085	5700	0.0085	1.4911
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5700.0133	5700	0.0133	2.3382
		T (°C)	-10	5700.0049	5700	0.0049	0.8563
		T (°C)	0	5700.0100	5700	0.0100	1.7499
		T (°C)	10	5700.0085	5700	0.0085	1.4870
		T (°C)	20	5700.0115	5700	0.0115	2.0204
		T (°C)	30	5700.0107	5700	0.0107	1.8710
		T (°C)	40	5700.0049	5700	0.0049	0.8676
		T (°C)	50	5700.0127	5700	0.0127	2.2353
		T (°C)	60	5700.0008	5700	0.0008	0.1390
		T (°C)	70	5700.0067	5700	0.0067	1.1733
Limits				5500-5700 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5745.00077	5745	0.00077	0.1337
		V max (V)	138.00	5745.00525	5745	0.00525	0.9145
		V min (V)	102.00	5745.00593	5745	0.00593	1.0314
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.01352	5745	0.01352	2.3531
		T (°C)	-10	5745.00676	5745	0.00676	1.1773
		T (°C)	0	5745.00416	5745	0.00416	0.7239
		T (°C)	10	5745.00986	5745	0.00986	1.7159
		T (°C)	20	5745.00778	5745	0.00778	1.3536
		T (°C)	30	5745.01209	5745	0.01209	2.1049
		T (°C)	40	5745.00988	5745	0.00988	1.7204
		T (°C)	50	5745.01285	5745	0.01285	2.2375
		T (°C)	60	5745.01260	5745	0.01260	2.1927
		T (°C)	70	5745.00647	5745	0.00647	1.1268
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5785.00037	5785	0.00037	0.0639
		V max (V)	138.00	5785.00185	5785	0.00185	0.3196
		V min (V)	102.00	5785.00416	5785	0.00416	0.7191
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.00918	5785	0.00918	1.5864
		T (°C)	-10	5785.00978	5785	0.00978	1.6900
		T (°C)	0	5785.00459	5785	0.00459	0.7935
		T (°C)	10	5785.00242	5785	0.00242	0.4189
		T (°C)	20	5785.00006	5785	0.00006	0.0105
		T (°C)	30	5785.00494	5785	0.00494	0.8547
		T (°C)	40	5785.00627	5785	0.00627	1.0843
		T (°C)	50	5785.00434	5785	0.00434	0.7505
		T (°C)	60	5785.01322	5785	0.01322	2.2851
		T (°C)	70	5785.01278	5785	0.01278	2.2094
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5825.00990	5825	0.00990	1.6992
		V max (V)	138.00	5825.00134	5825	0.00134	0.2296
		V min (V)	102.00	5825.00487	5825	0.00487	0.8367
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.01078	5825	0.01078	1.8498
		T (°C)	-10	5825.00715	5825	0.00715	1.2281
		T (°C)	0	5825.00829	5825	0.00829	1.4239
		T (°C)	10	5825.00338	5825	0.00338	0.5802
		T (°C)	20	5825.01160	5825	0.01160	1.9921
		T (°C)	30	5825.01139	5825	0.01139	1.9555
		T (°C)	40	5825.00124	5825	0.00124	0.2130
		T (°C)	50	5825.00959	5825	0.00959	1.6470
		T (°C)	60	5825.00457	5825	0.00457	0.7838
		T (°C)	70	5825.00692	5825	0.00692	1.1874
Limits				5725-5850 MHz			
Result				Complies			

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula


Duty Cycle = $T_{on} / (T_{on} + T_{off})$



14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



14.4 Test Result



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	AntA	100	0	0
NVNT	a	5200	AntA	100	0	0
NVNT	a	5240	AntA	100	0	0
NVNT	n20	5180	AntA	100	0	0
NVNT	n20	5200	AntA	100	0	0
NVNT	n20	5240	AntA	100	0	0
NVNT	n40	5190	AntA	100	0	0
NVNT	n40	5230	AntA	100	0	0
NVNT	ac20	5180	AntA	100	0	0
NVNT	ac20	5200	AntA	100	0	0
NVNT	ac20	5240	AntA	100	0	0
NVNT	ac40	5190	AntA	100	0	0
NVNT	ac40	5230	AntA	100	0	0
NVNT	ac80	5210	AntA	100	0	0


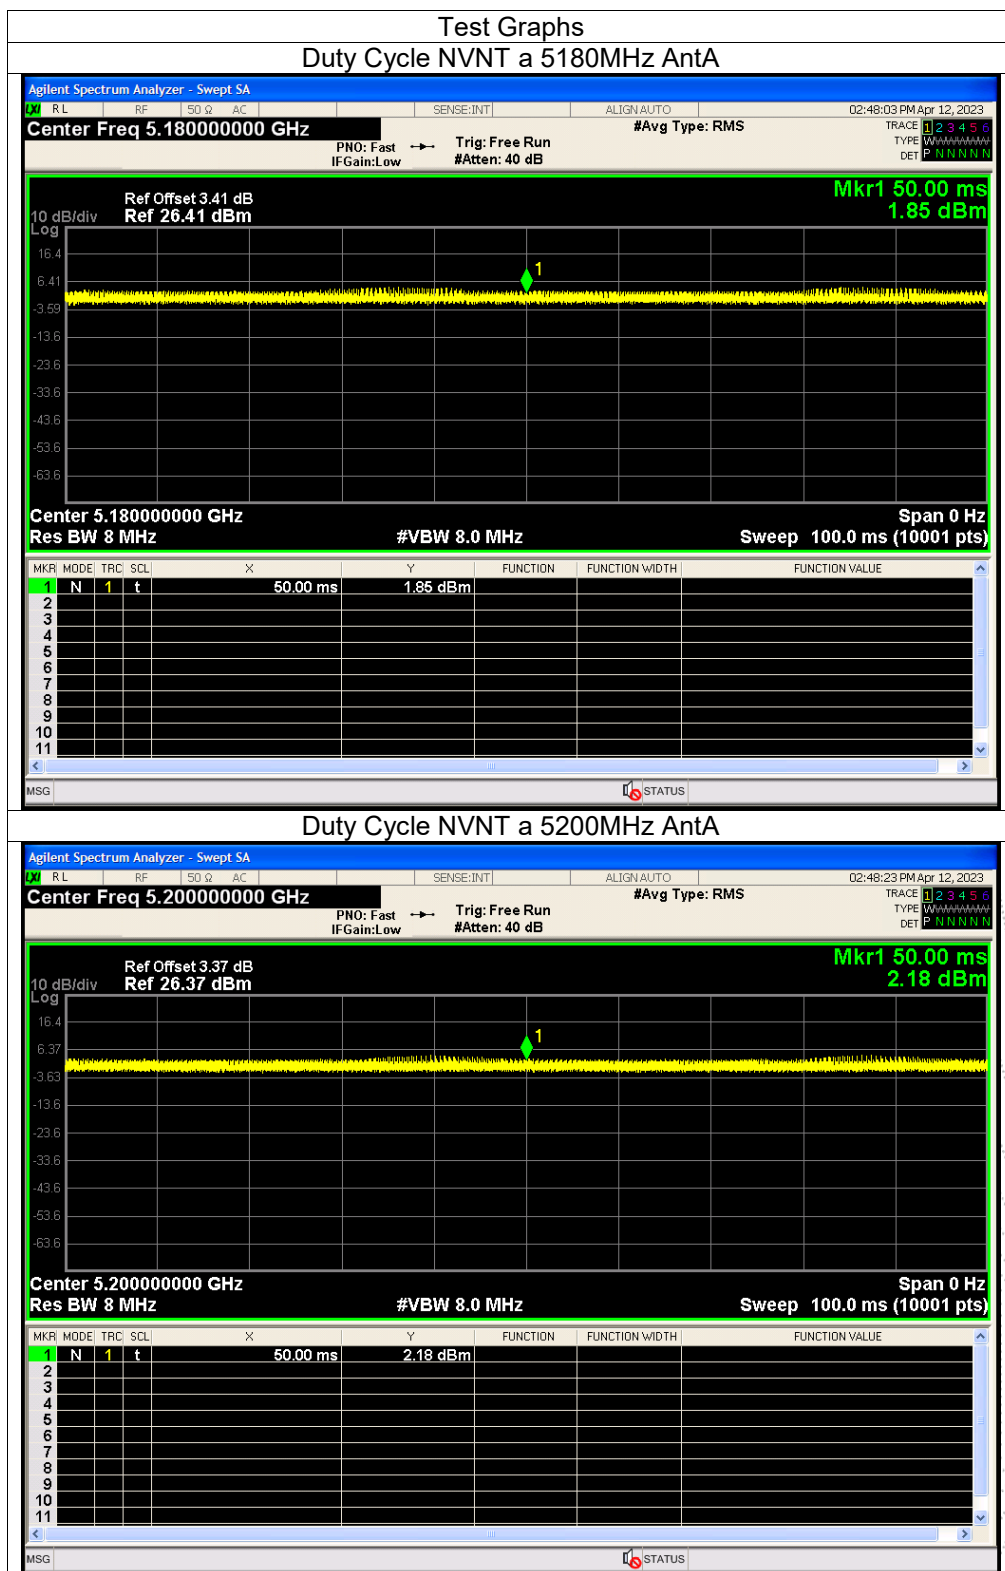


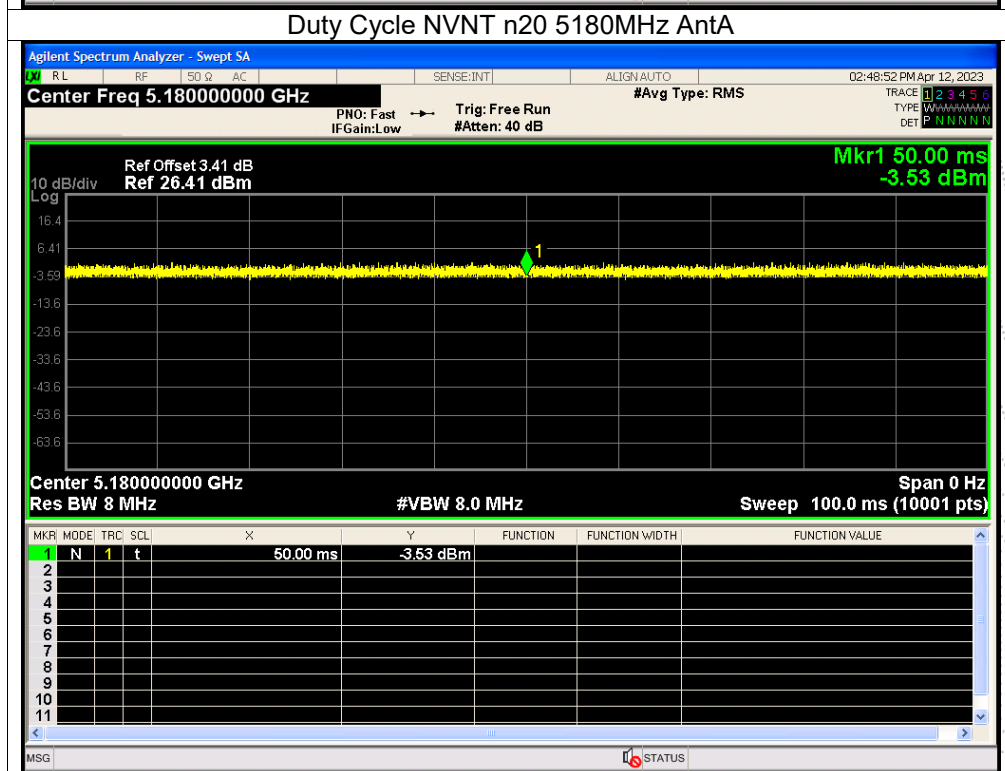
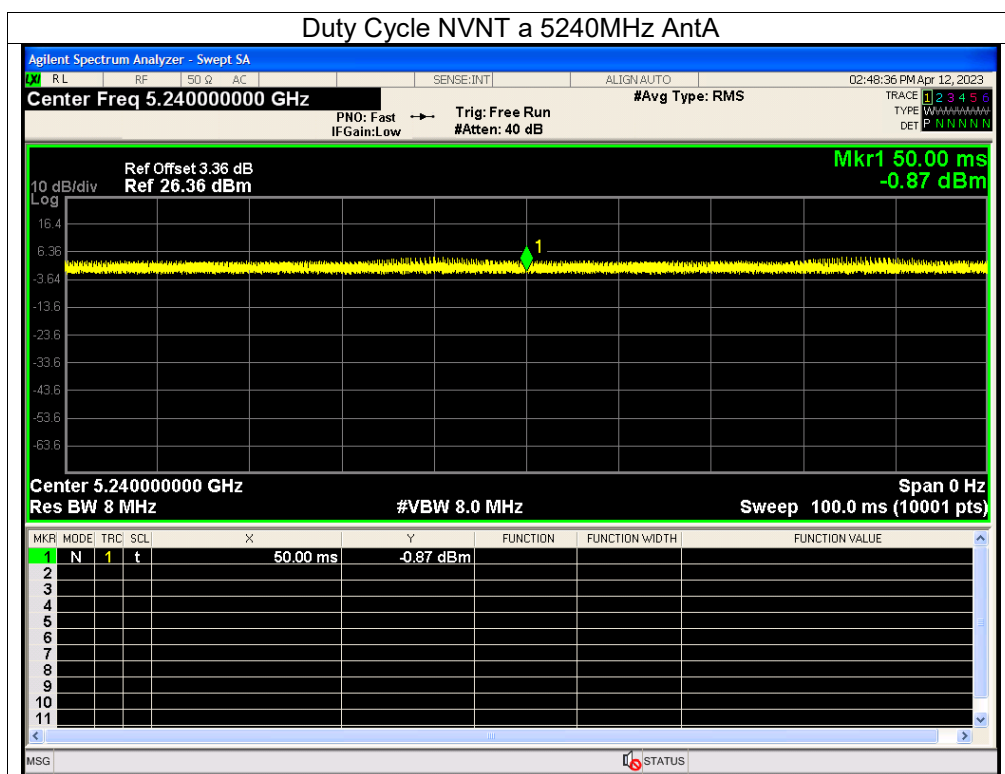


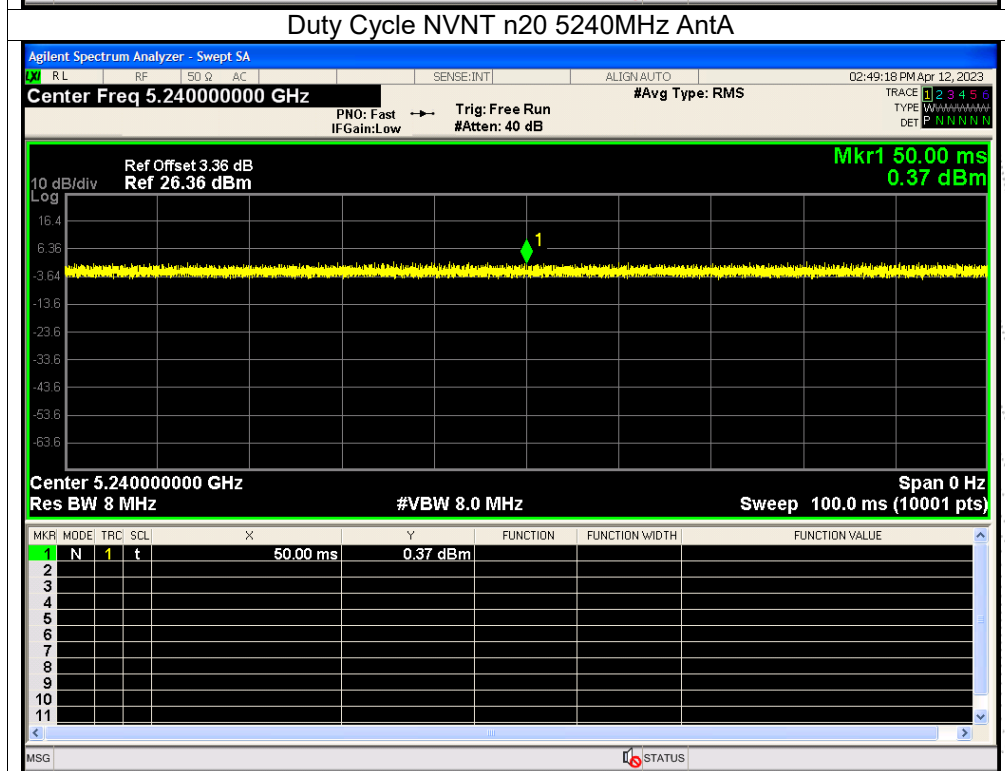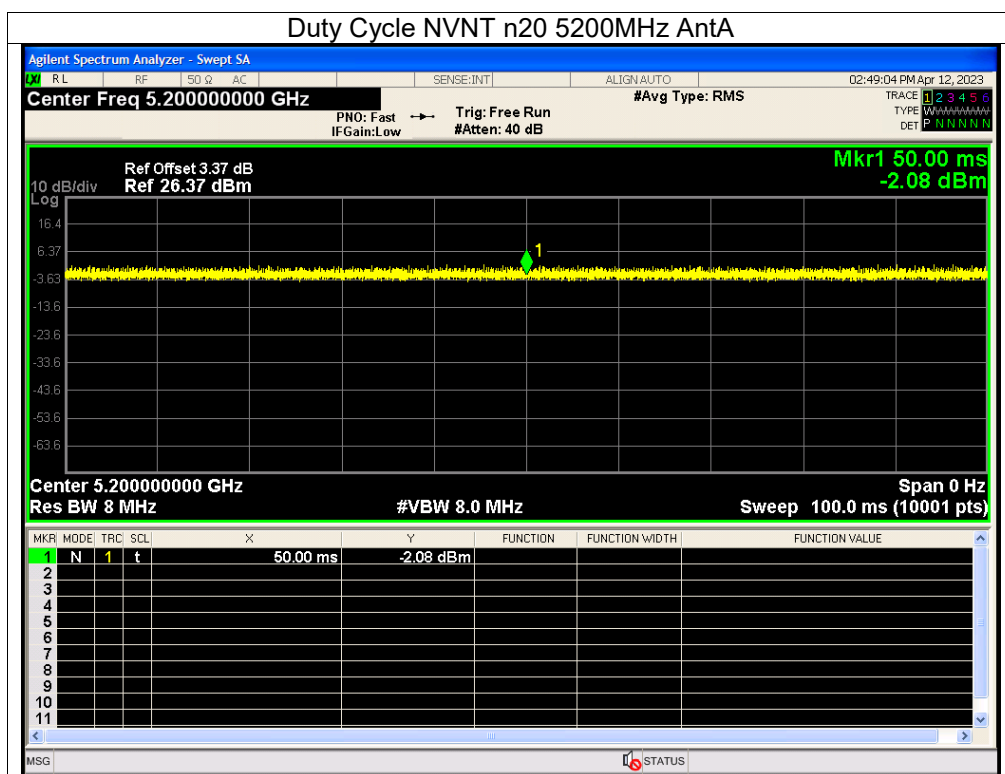

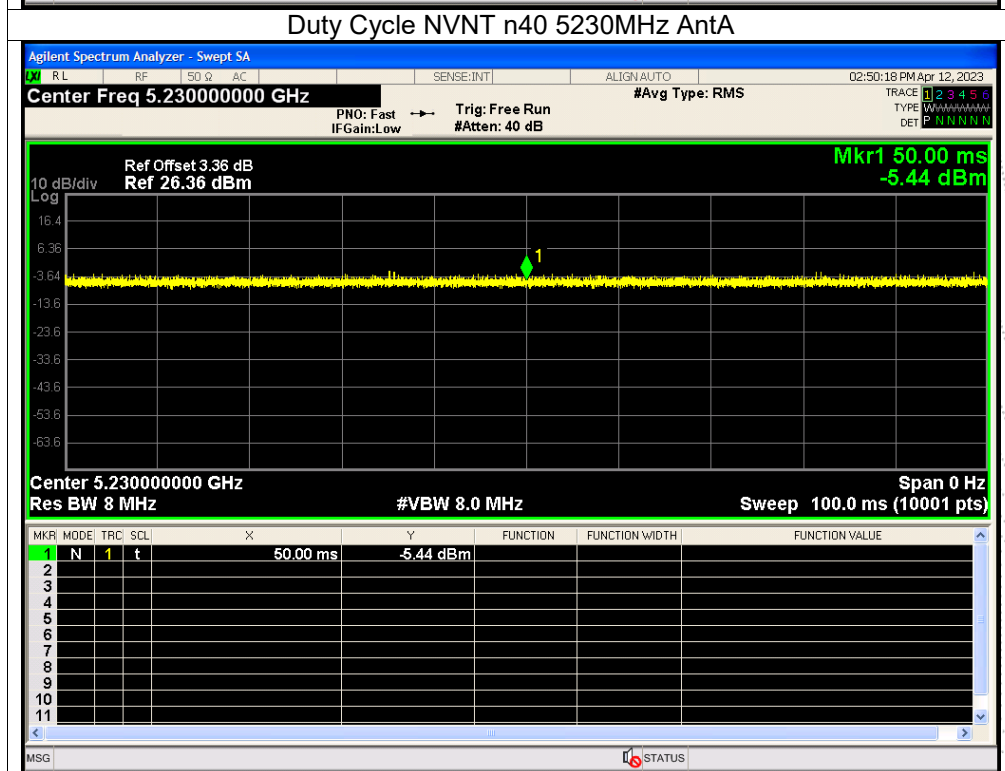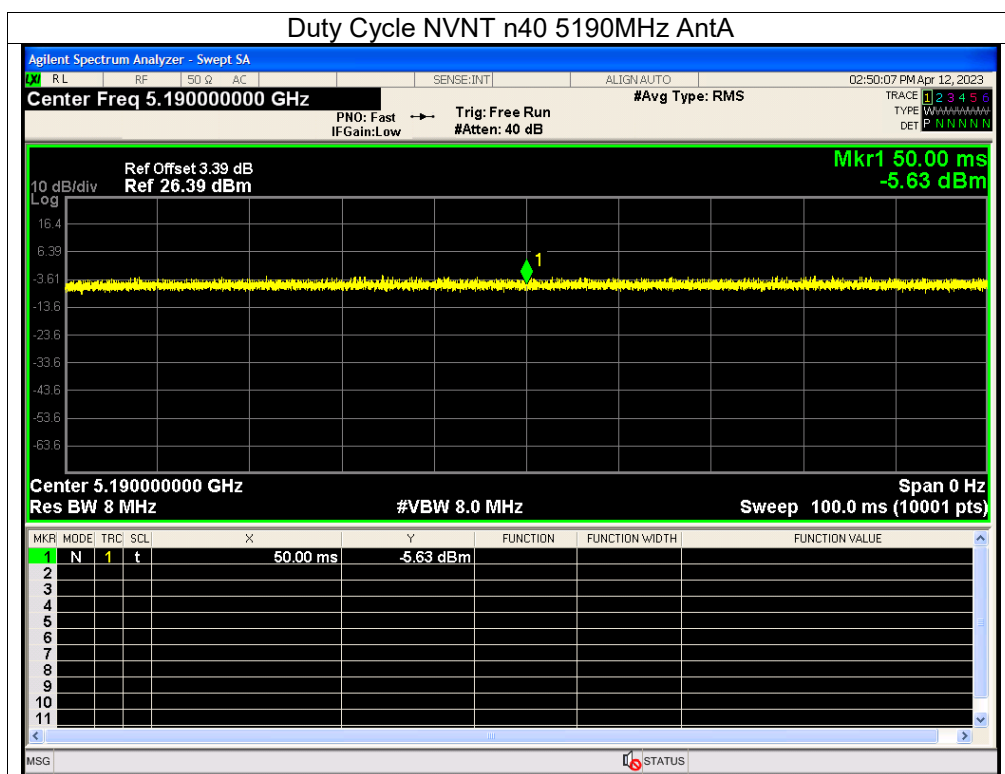


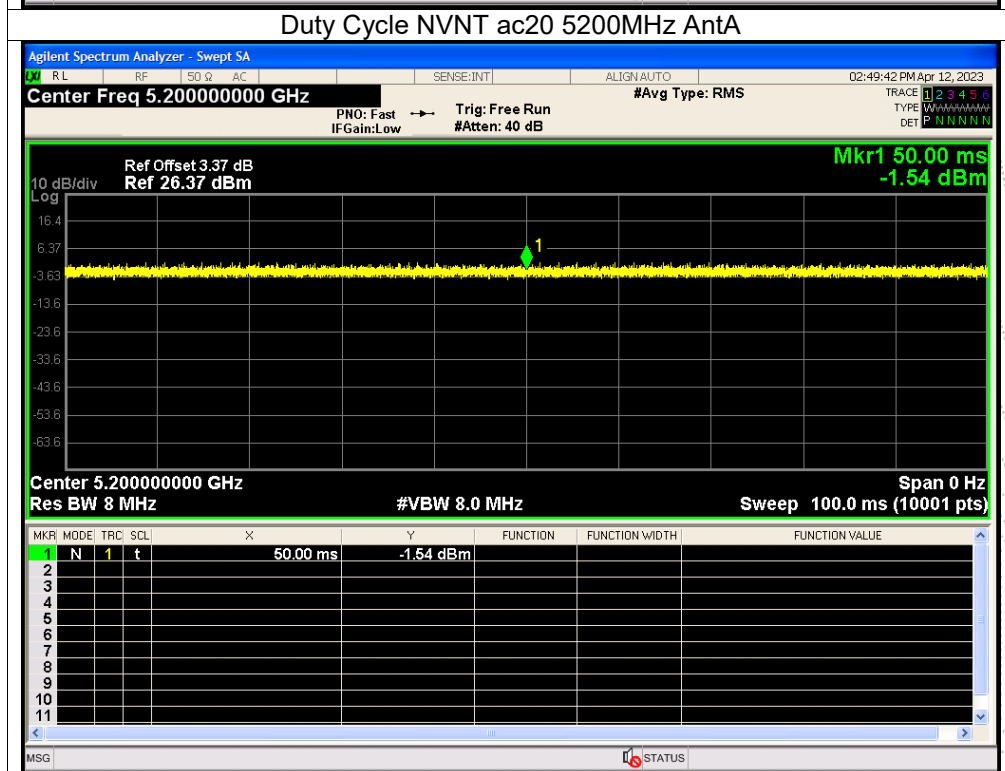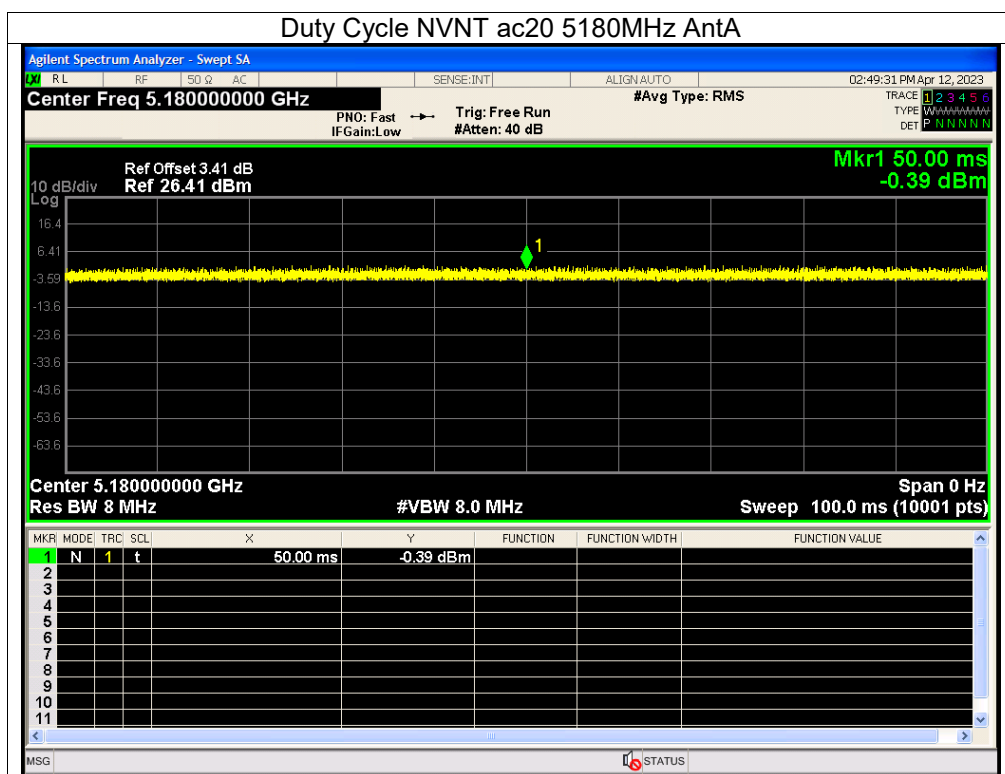


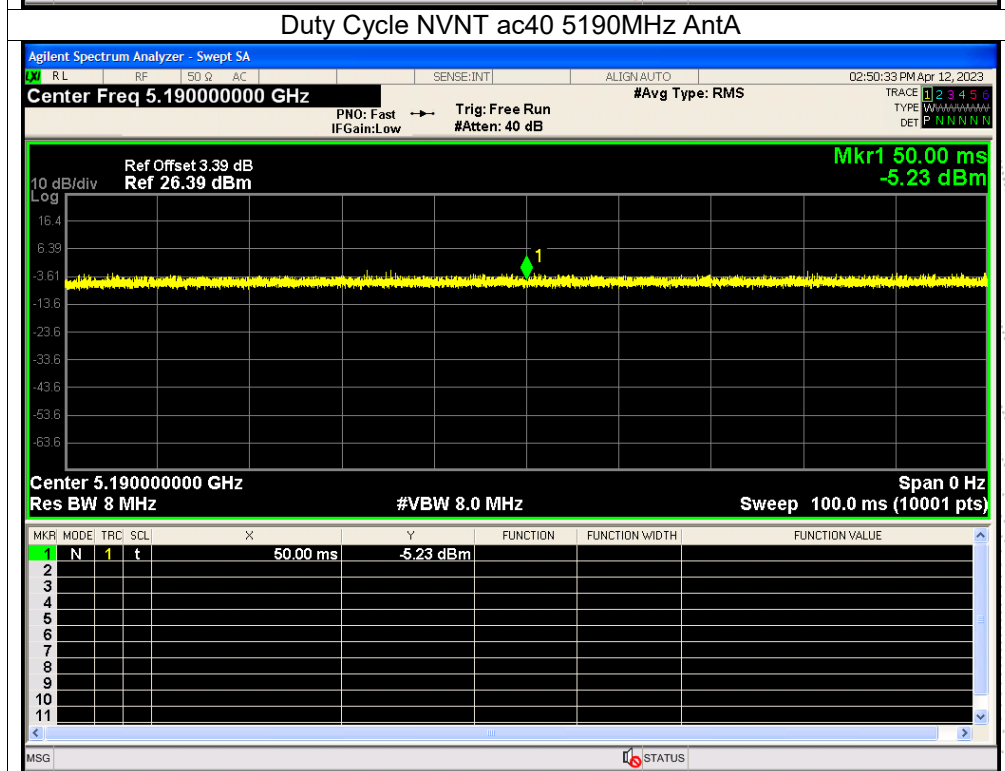
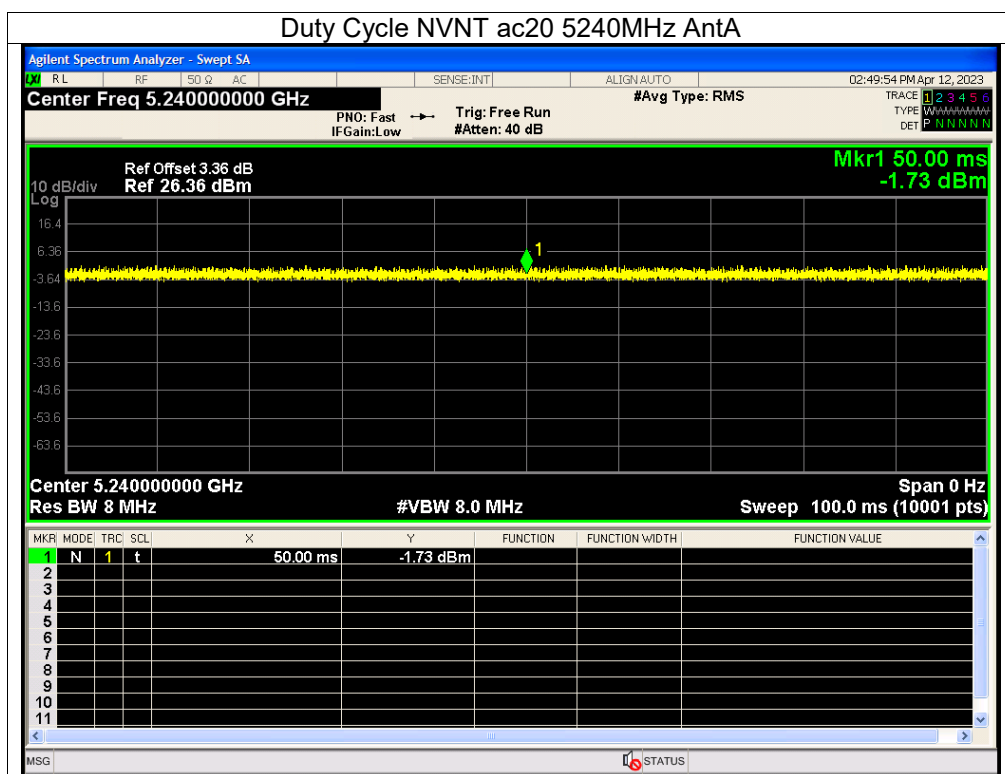


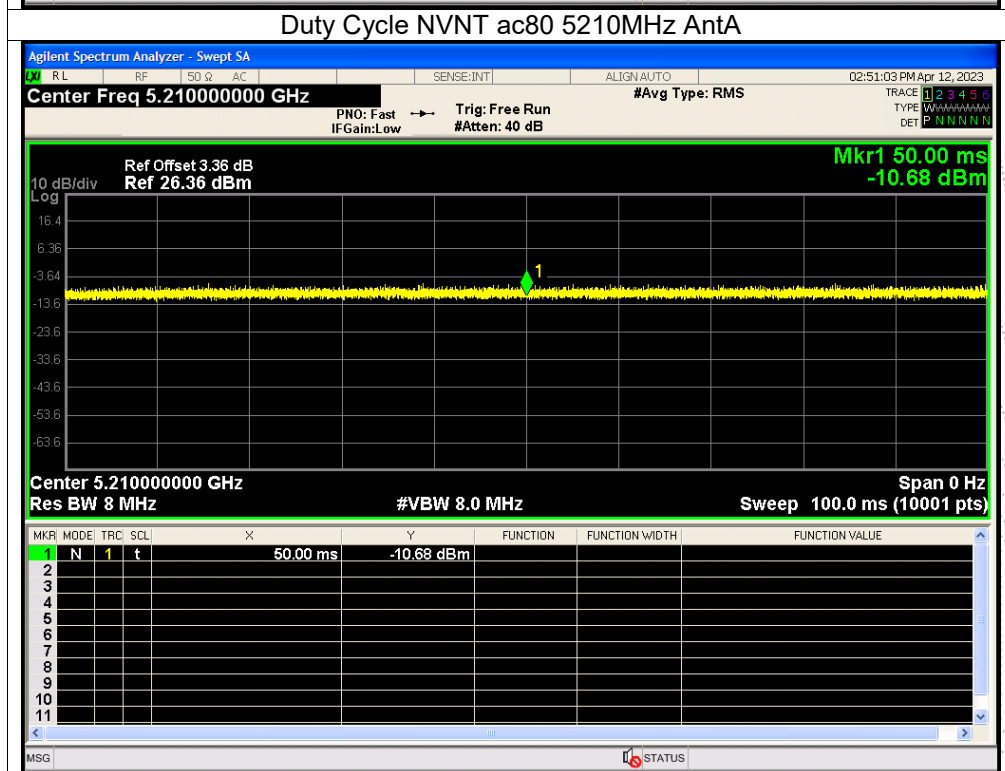
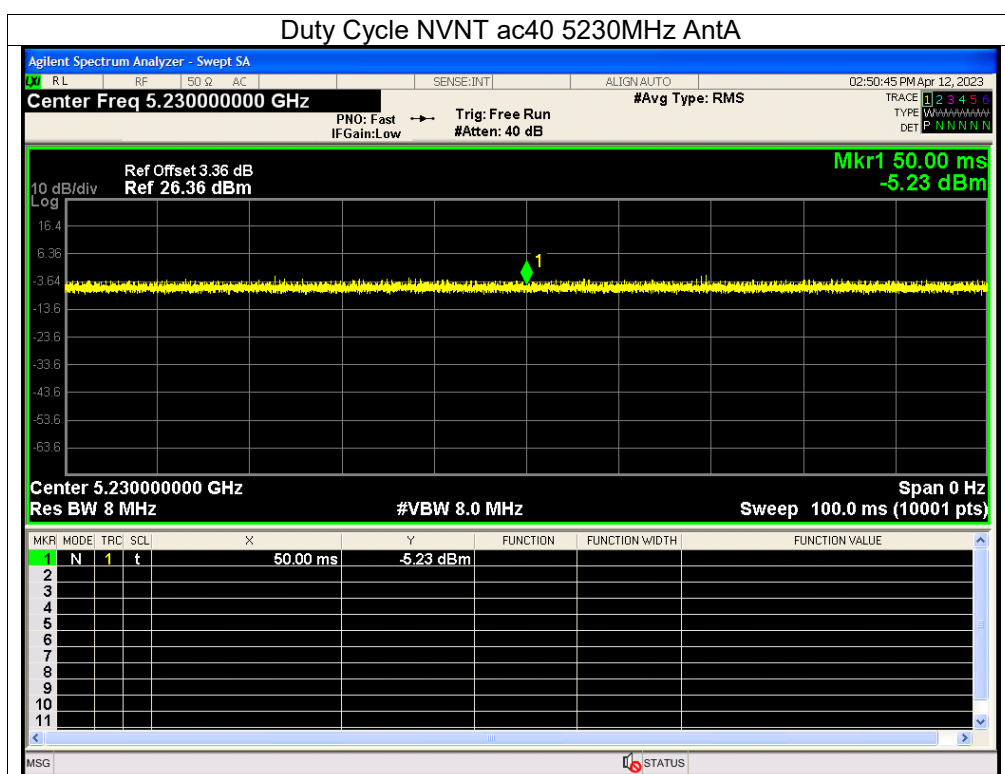




Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	AntB	100	0	0
NVNT	a	5200	AntB	100	0	0
NVNT	a	5240	AntB	100	0	0
NVNT	n20	5180	AntB	100	0	0
NVNT	n20	5200	AntB	100	0	0
NVNT	n20	5240	AntB	100	0	0
NVNT	n40	5190	AntB	100	0	0
NVNT	n40	5230	AntB	100	0	0
NVNT	ac20	5180	AntB	100	0	0
NVNT	ac20	5200	AntB	100	0	0
NVNT	ac20	5240	AntB	100	0	0
NVNT	ac40	5190	AntB	100	0	0
NVNT	ac40	5230	AntB	100	0	0
NVNT	ac80	5210	AntB	100	0	0


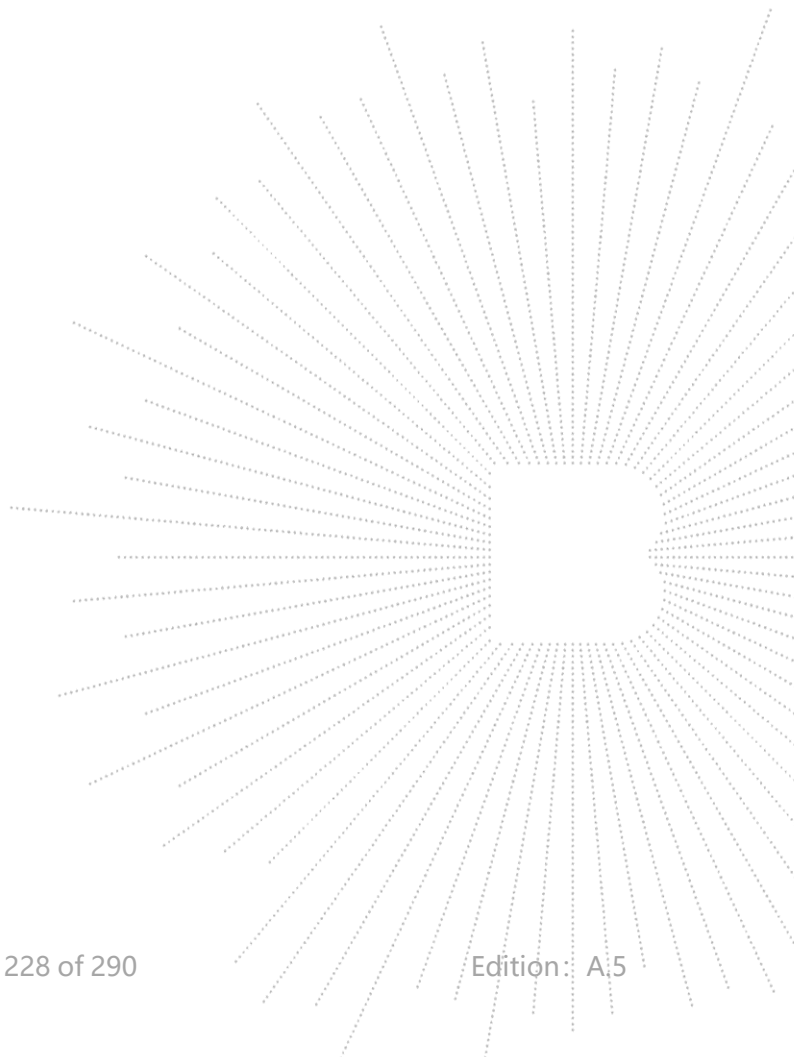



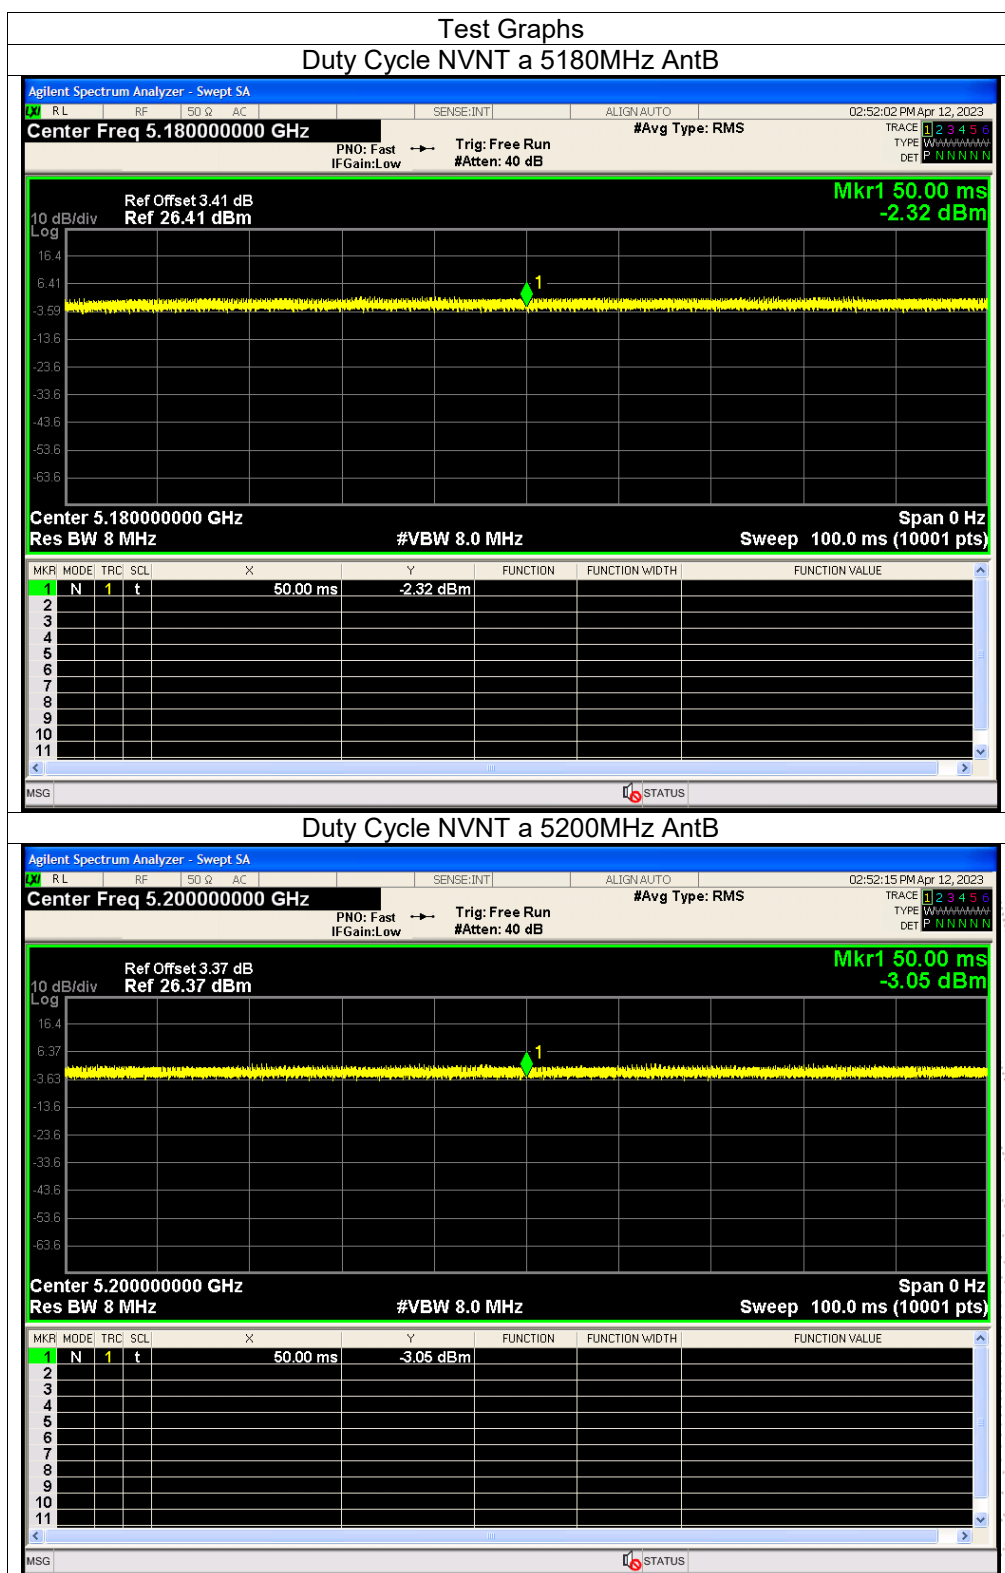


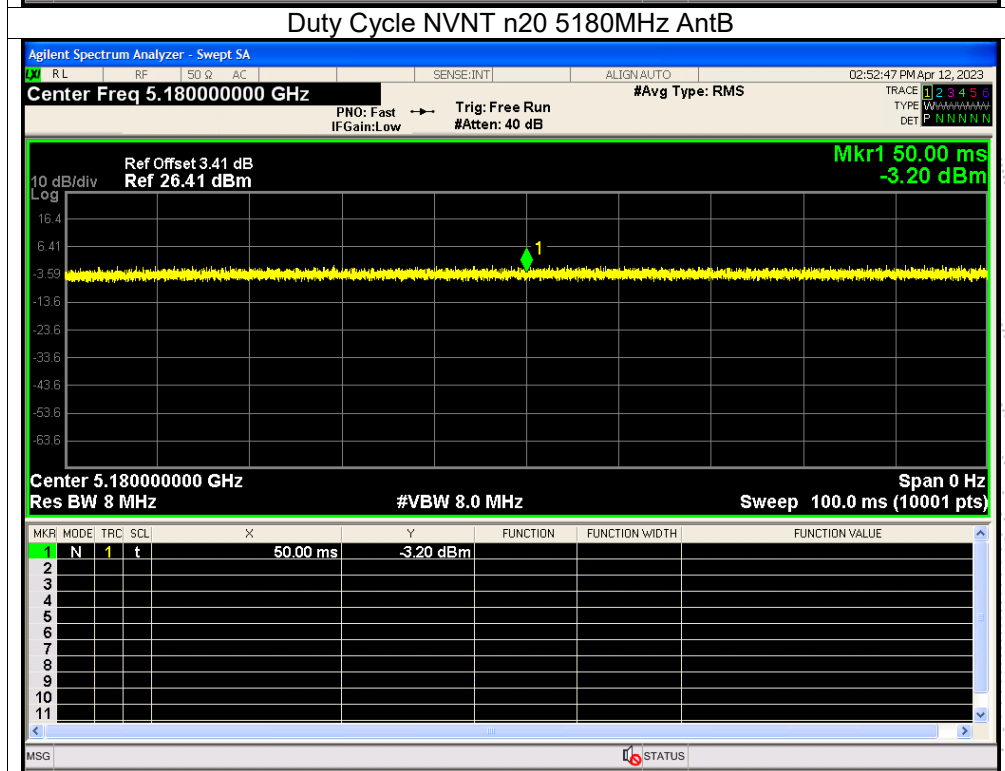
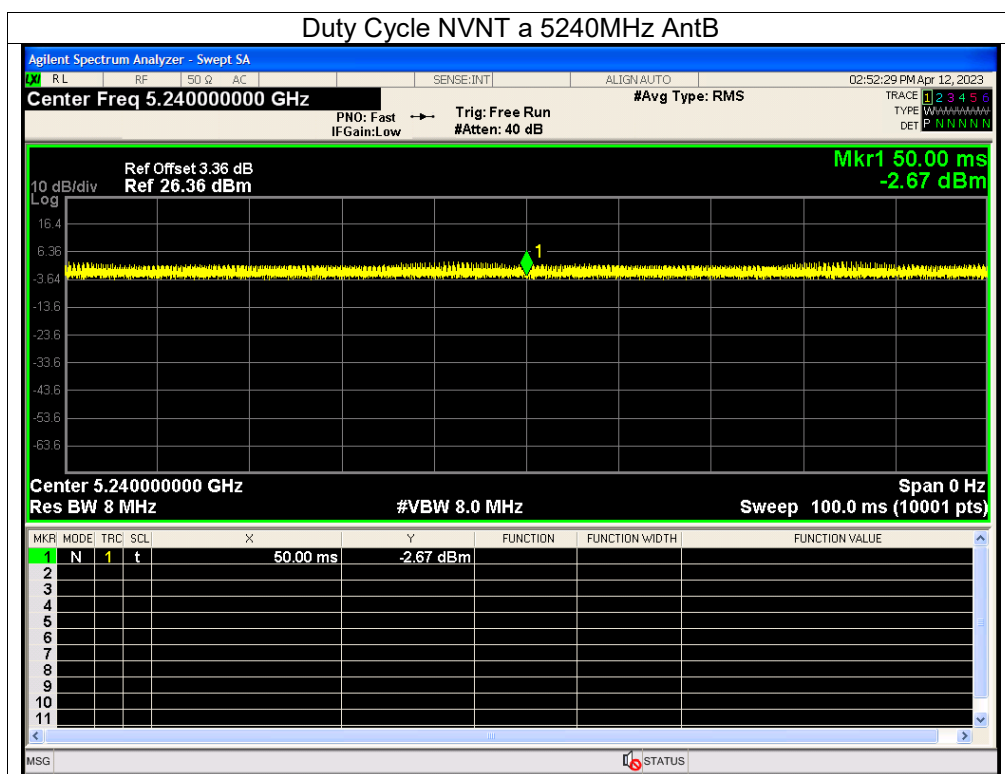


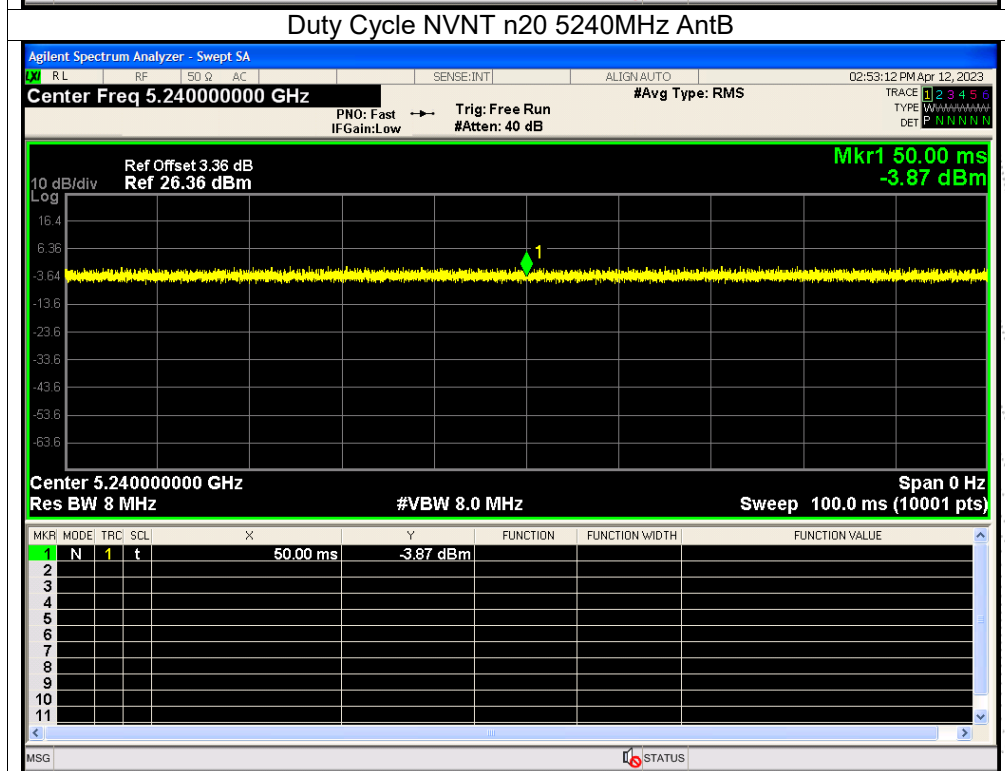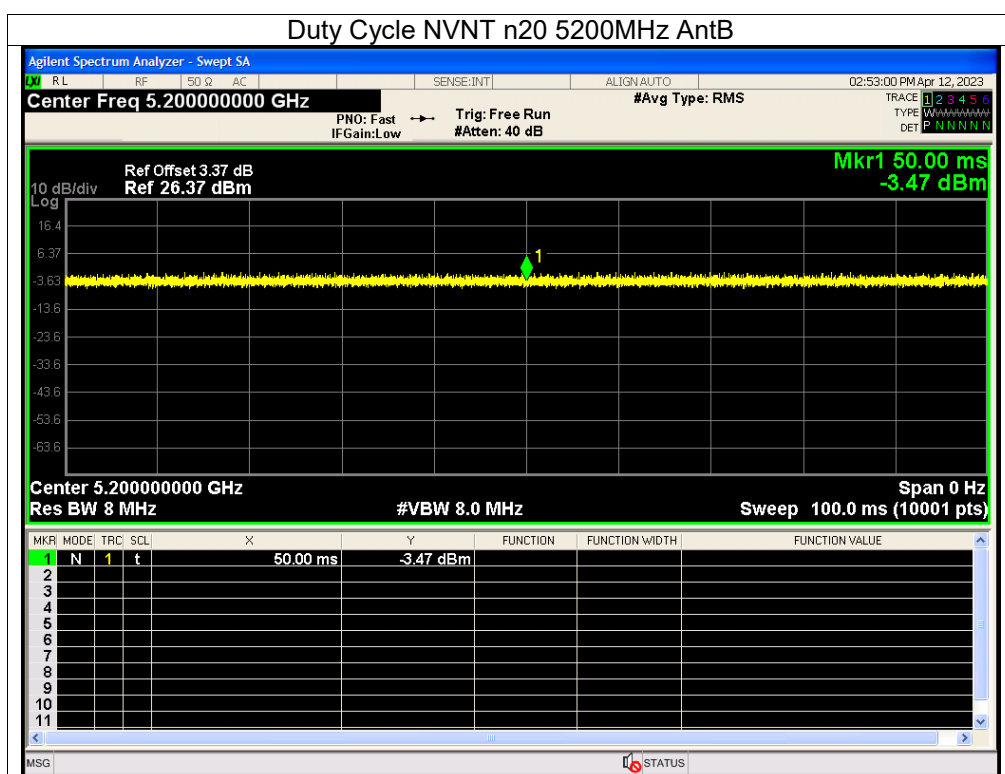

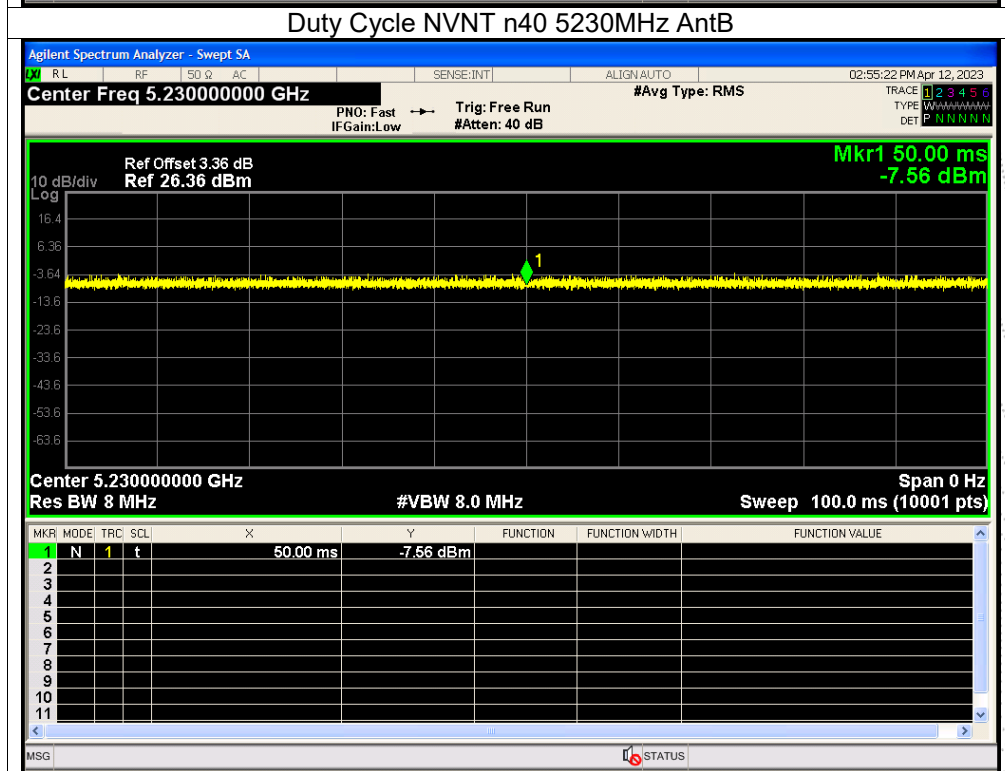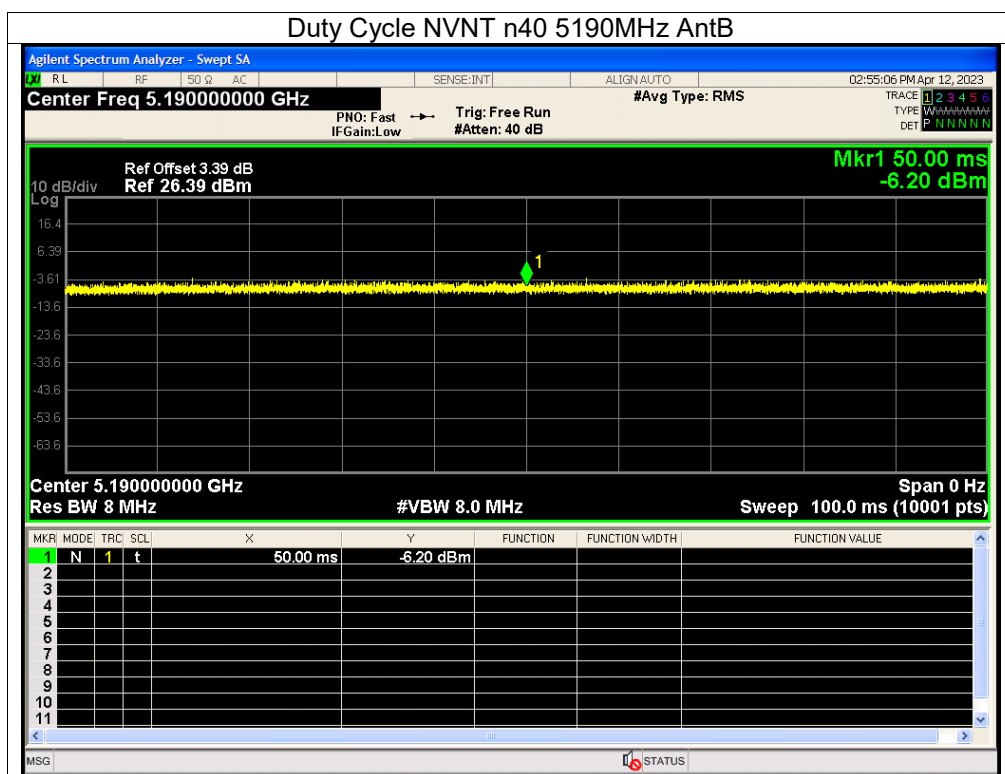


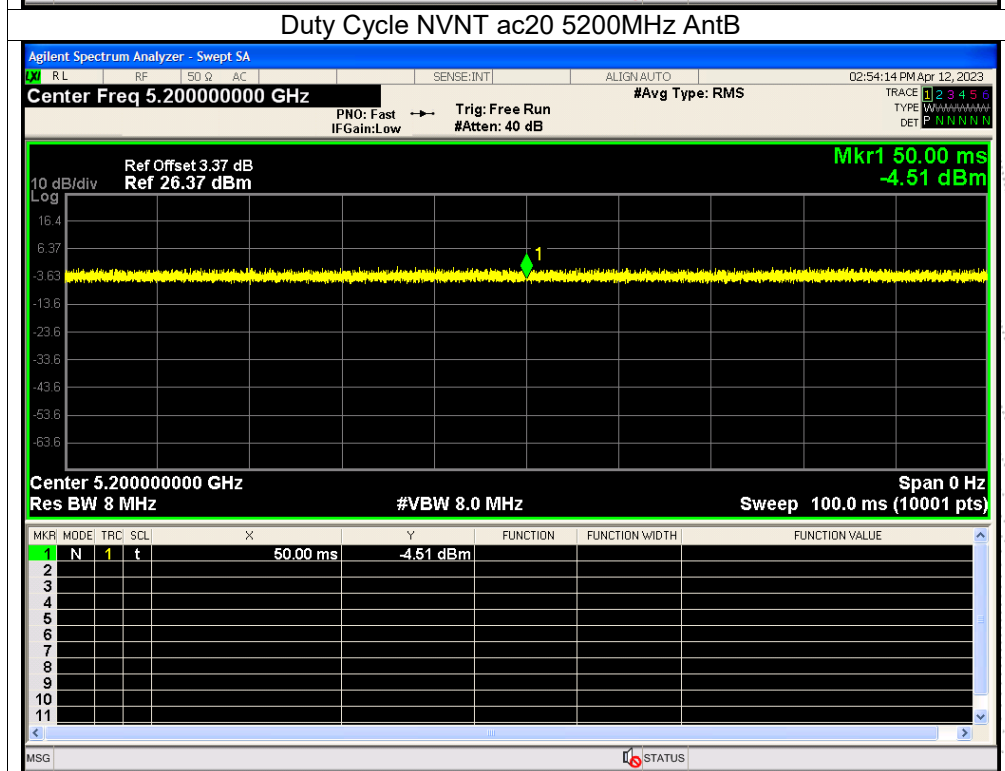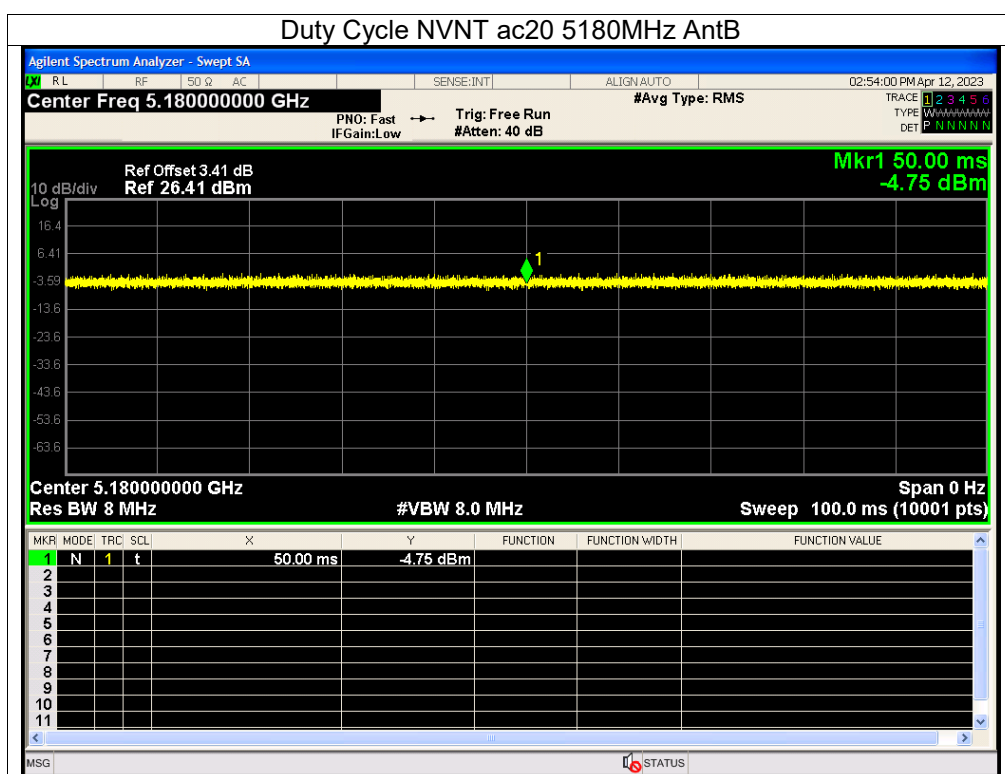


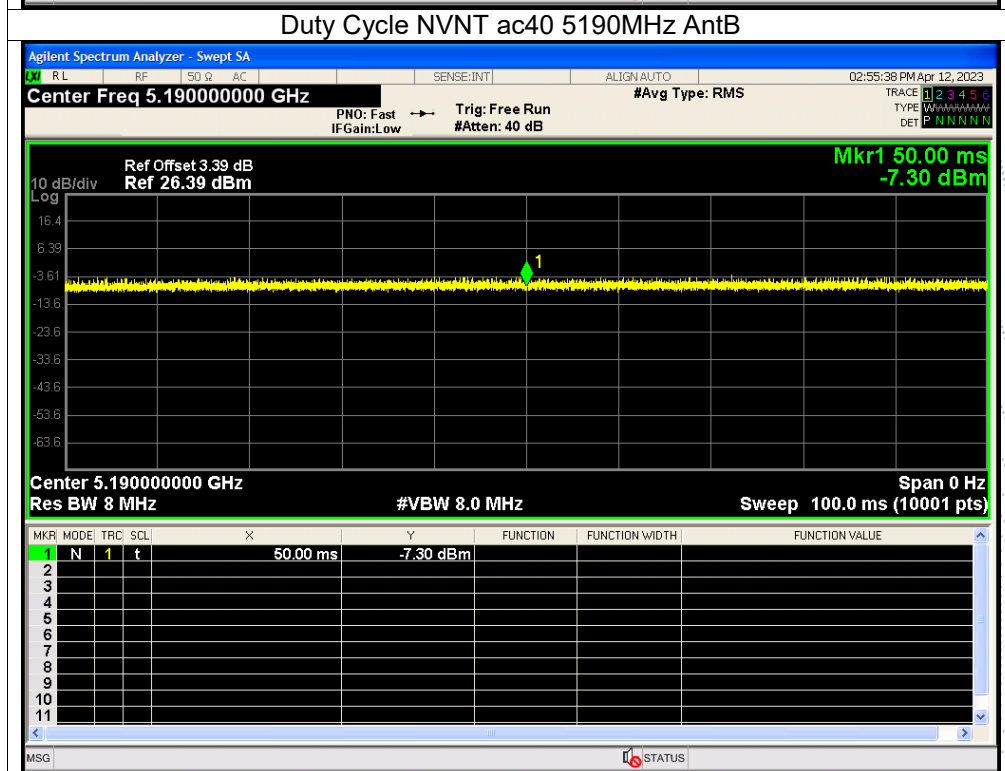
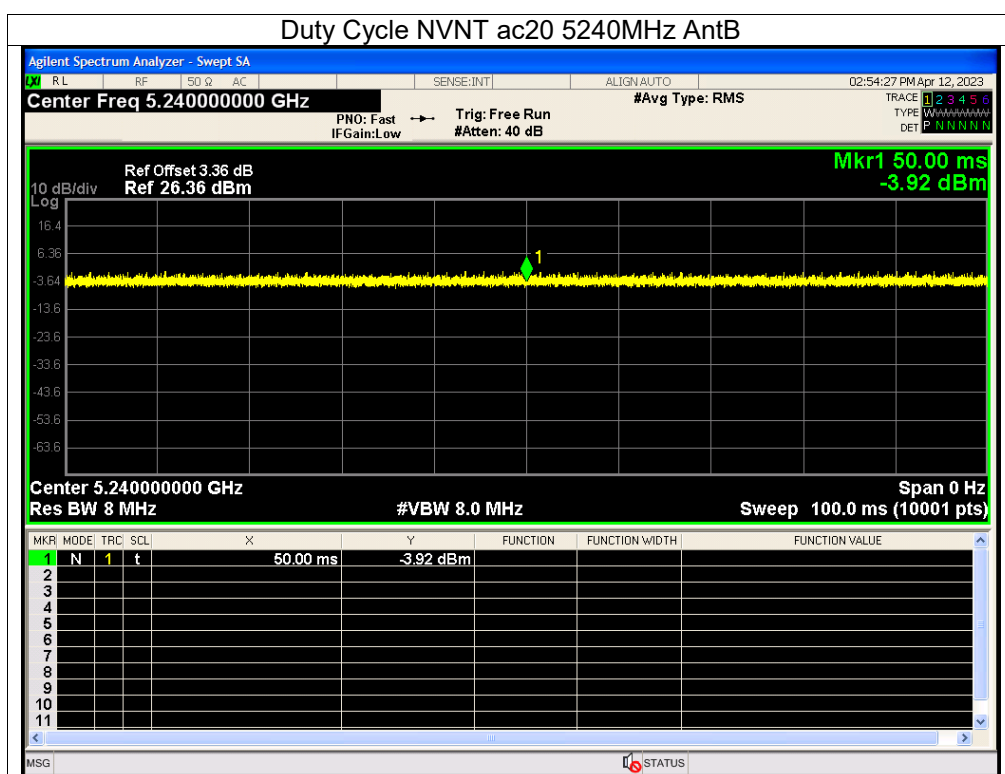


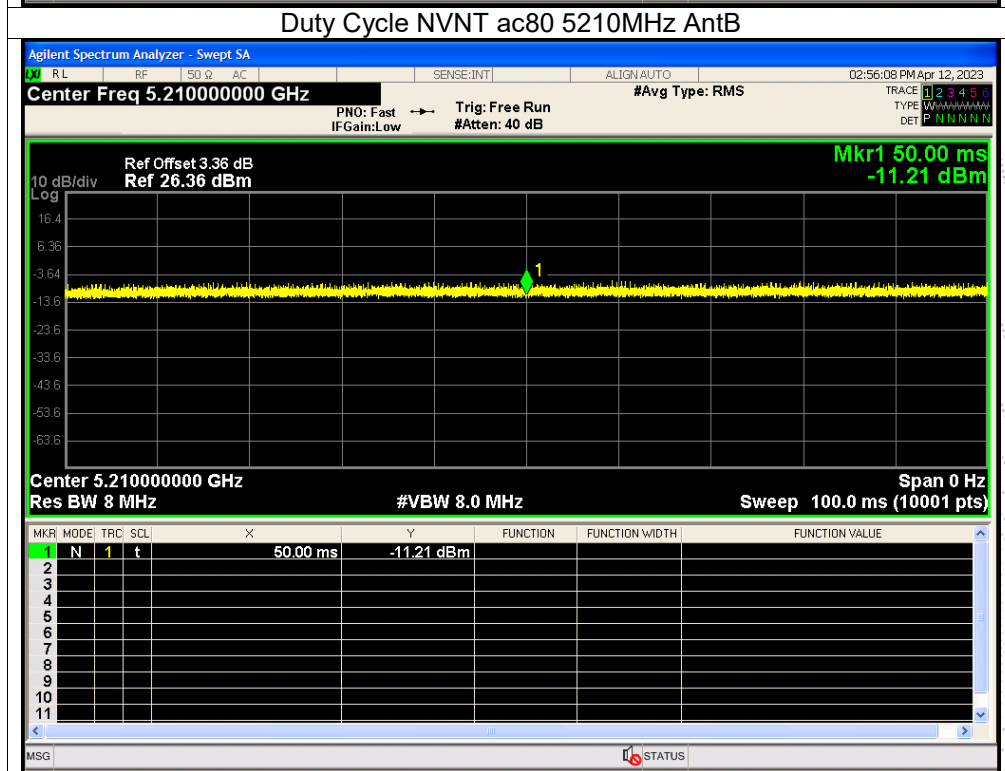
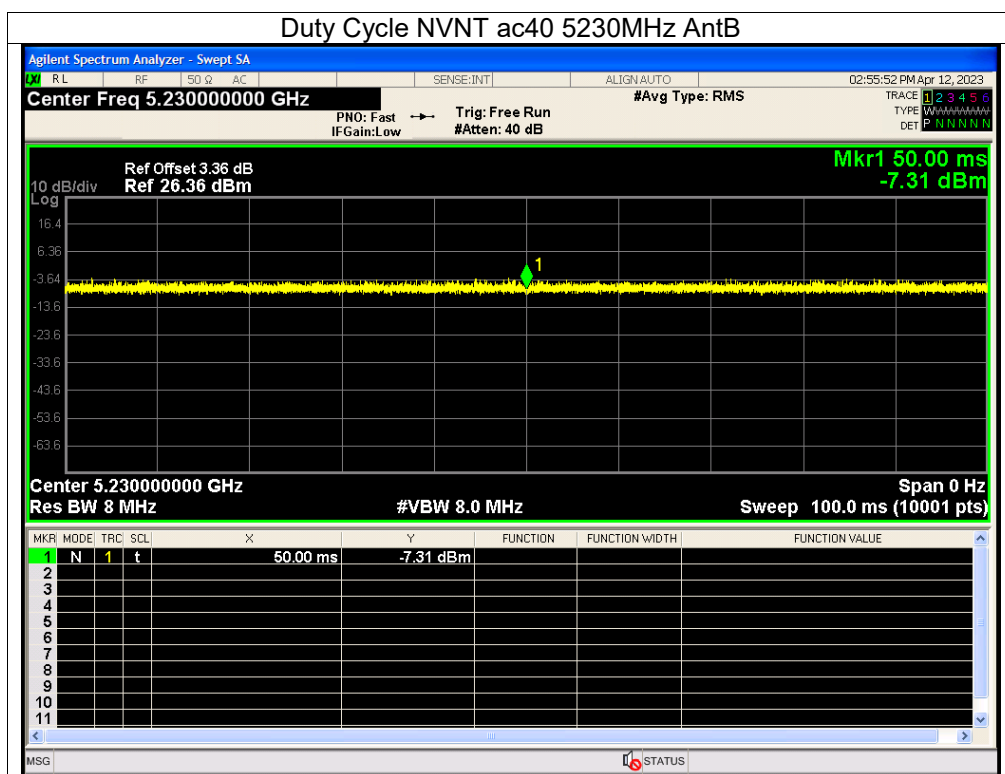




Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	AntA	100	0	0
NVNT	a	5280	AntA	100	0	0
NVNT	a	5320	AntA	100	0	0
NVNT	n20	5260	AntA	100	0	0
NVNT	n20	5280	AntA	100	0	0
NVNT	n20	5320	AntA	100	0	0
NVNT	n40	5270	AntA	100	0	0
NVNT	n40	5310	AntA	100	0	0
NVNT	ac20	5260	AntA	100	0	0
NVNT	ac20	5280	AntA	100	0	0
NVNT	ac20	5320	AntA	100	0	0
NVNT	ac40	5270	AntA	100	0	0
NVNT	ac40	5310	AntA	100	0	0
NVNT	ac80	5290	AntA	100	0	0


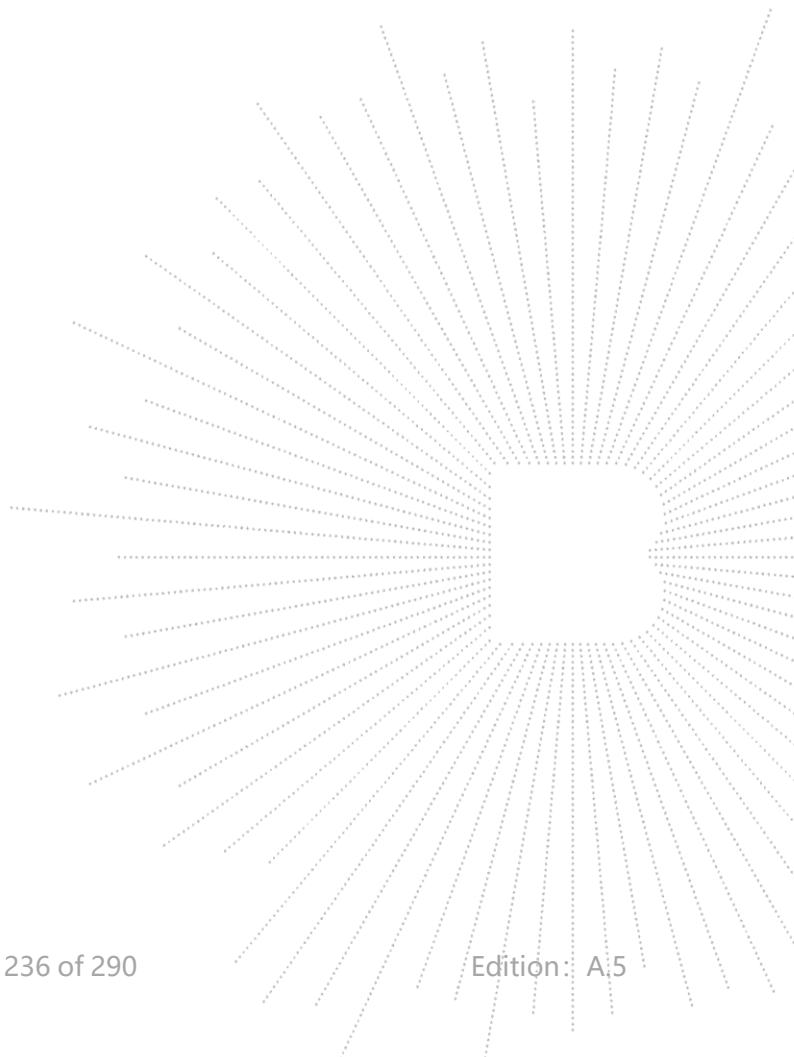



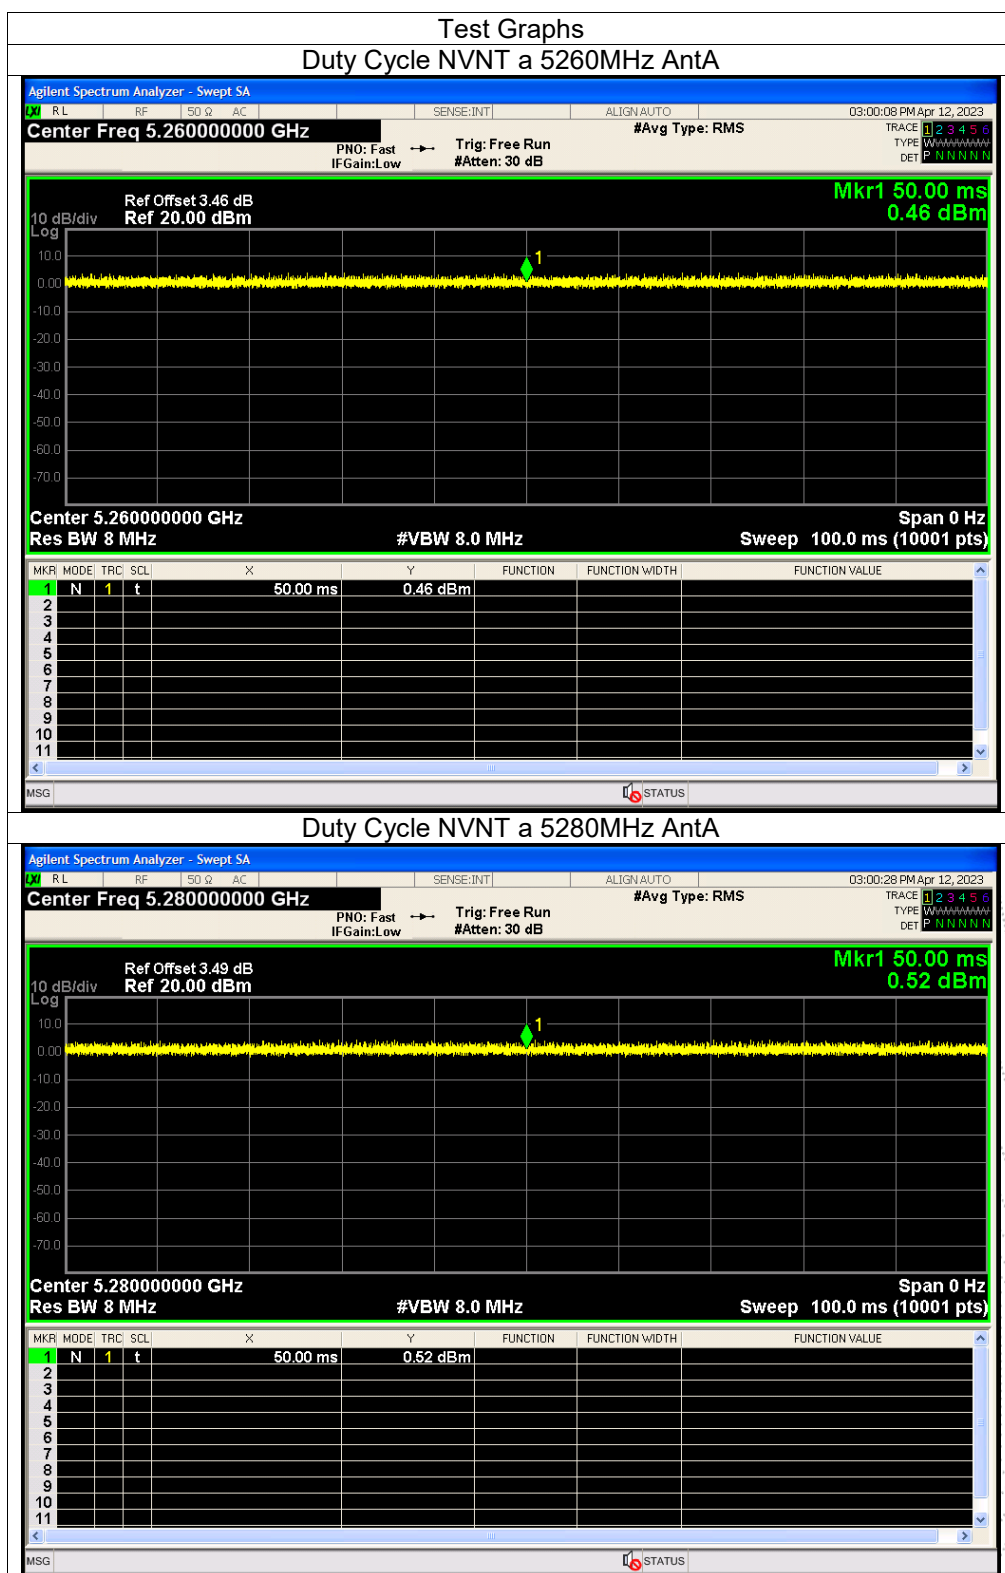


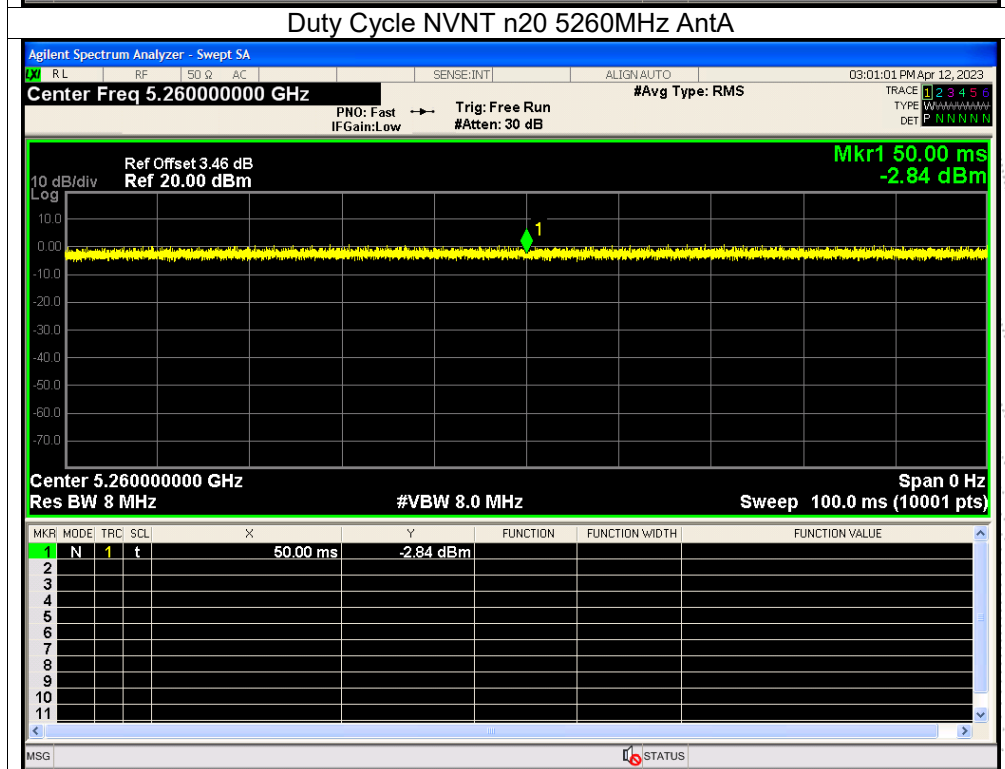
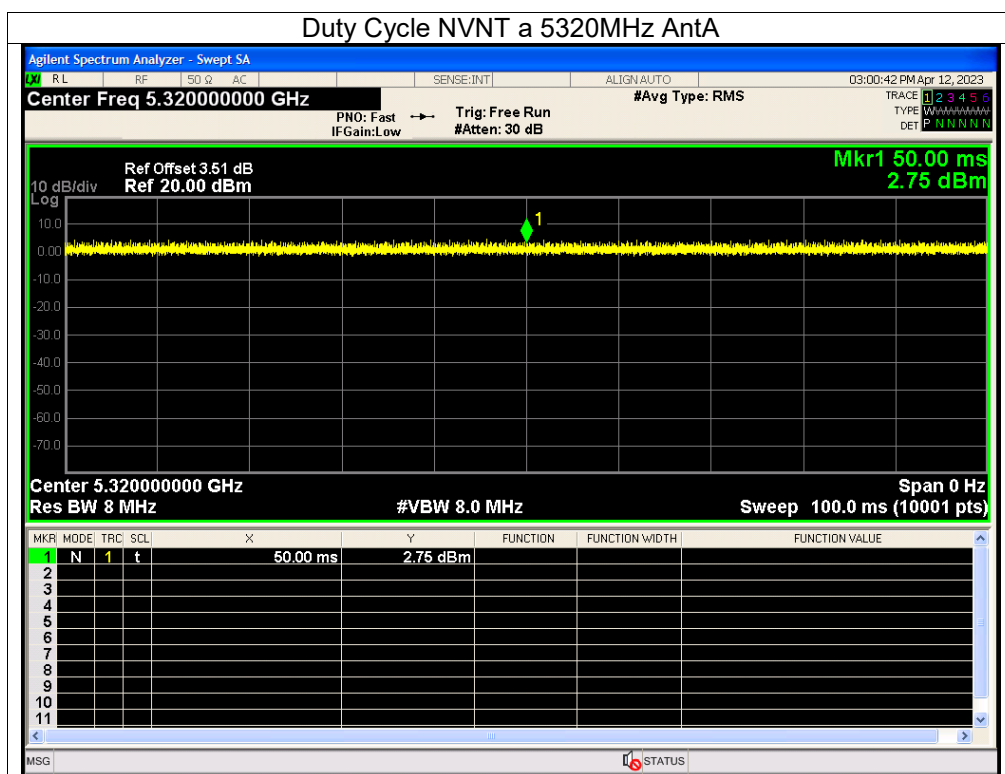


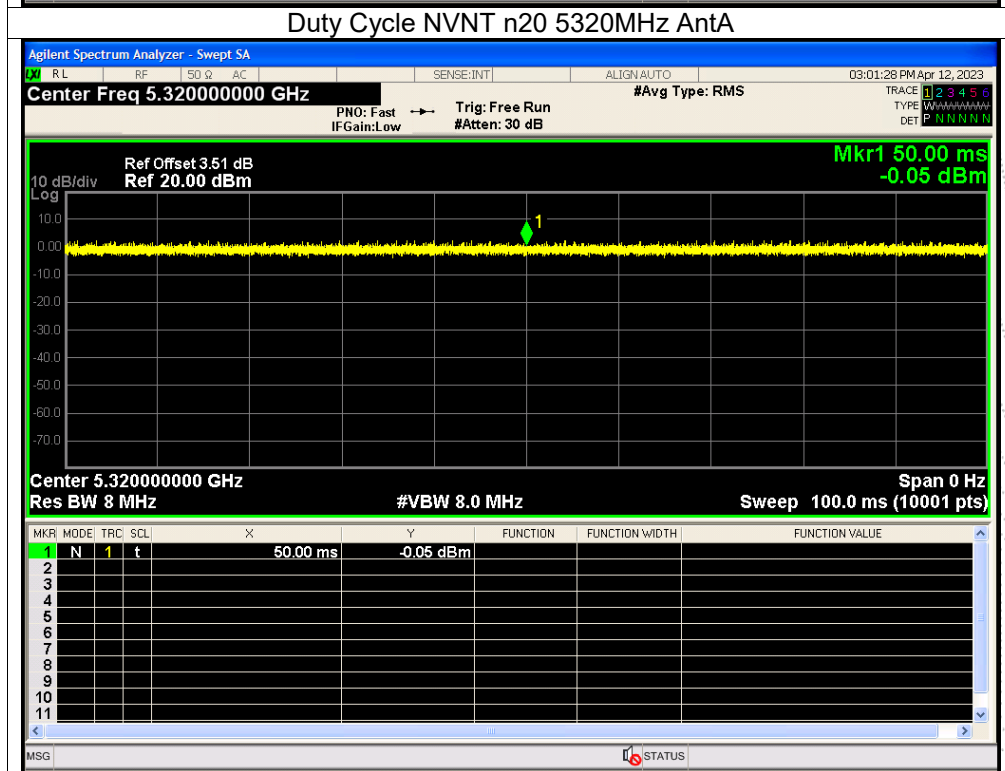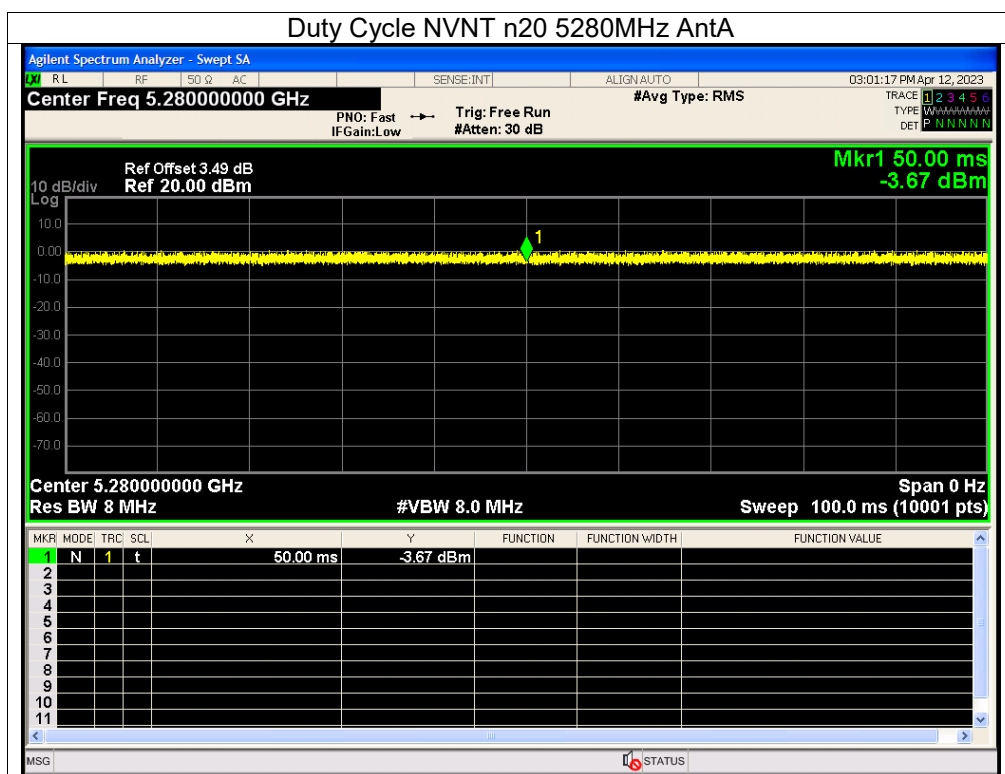

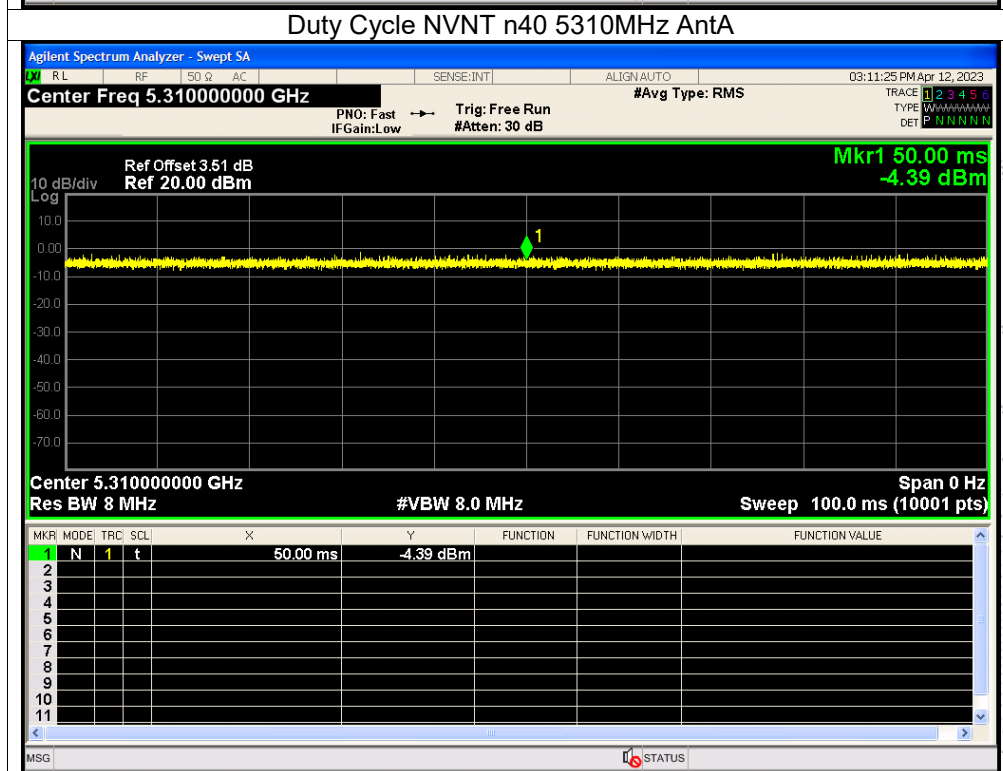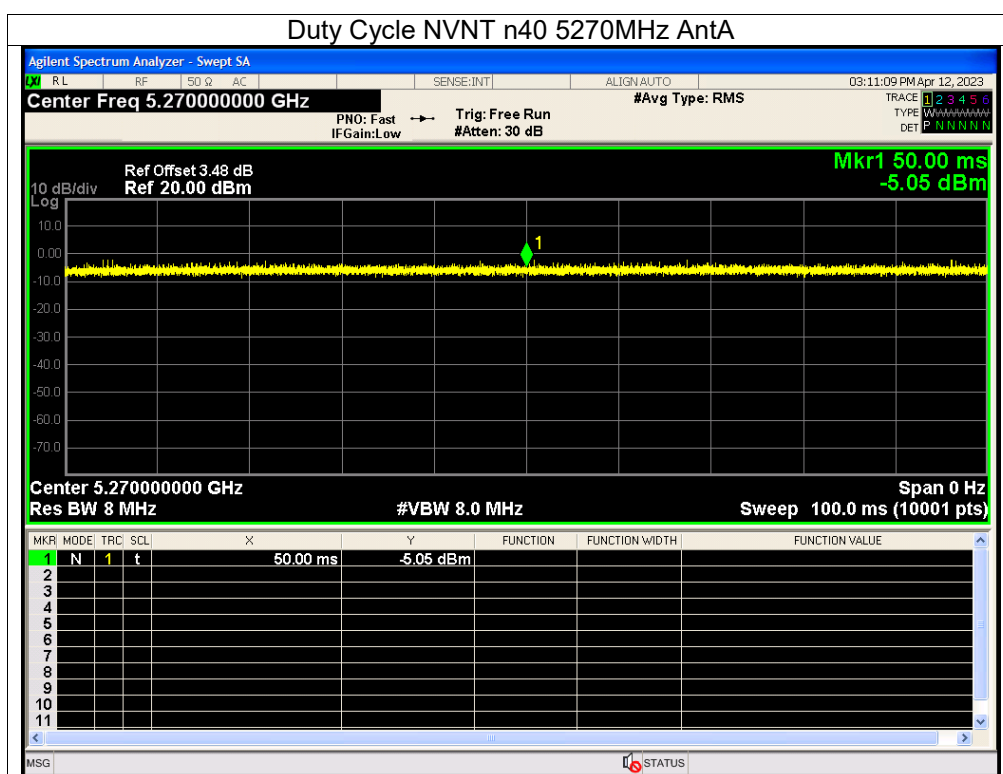

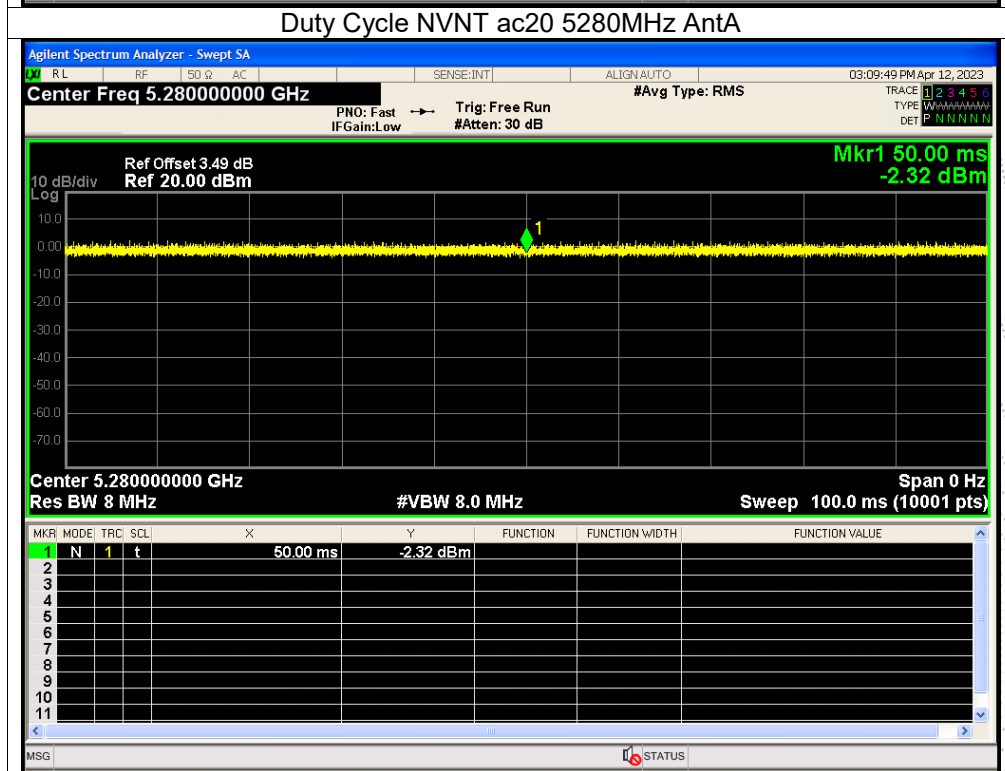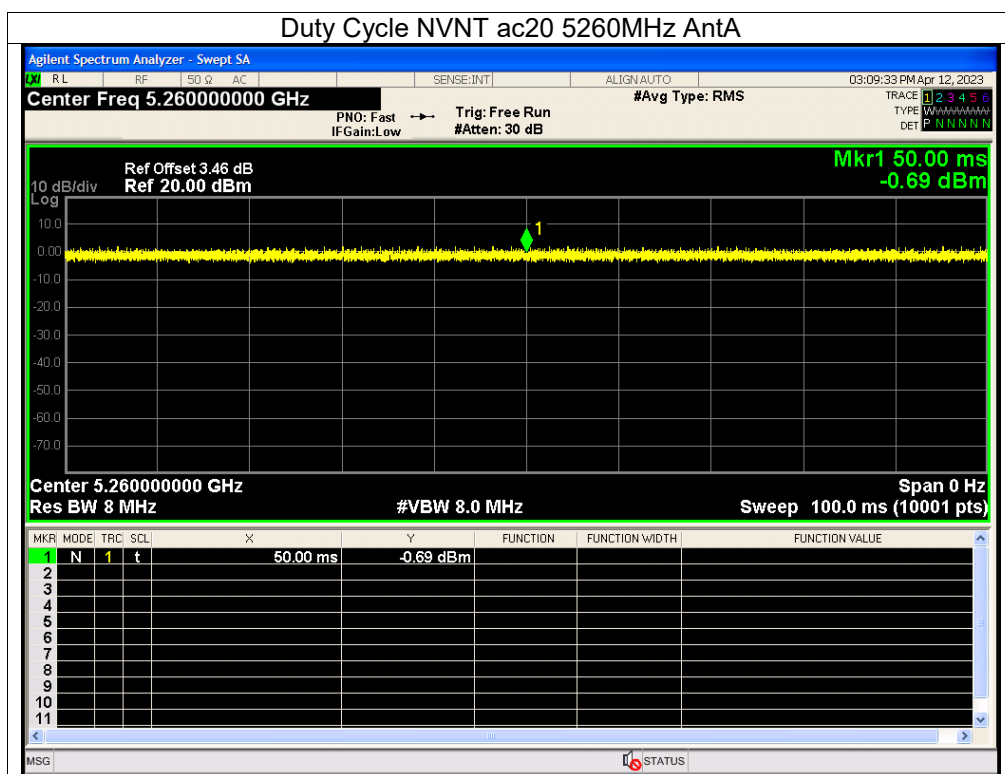

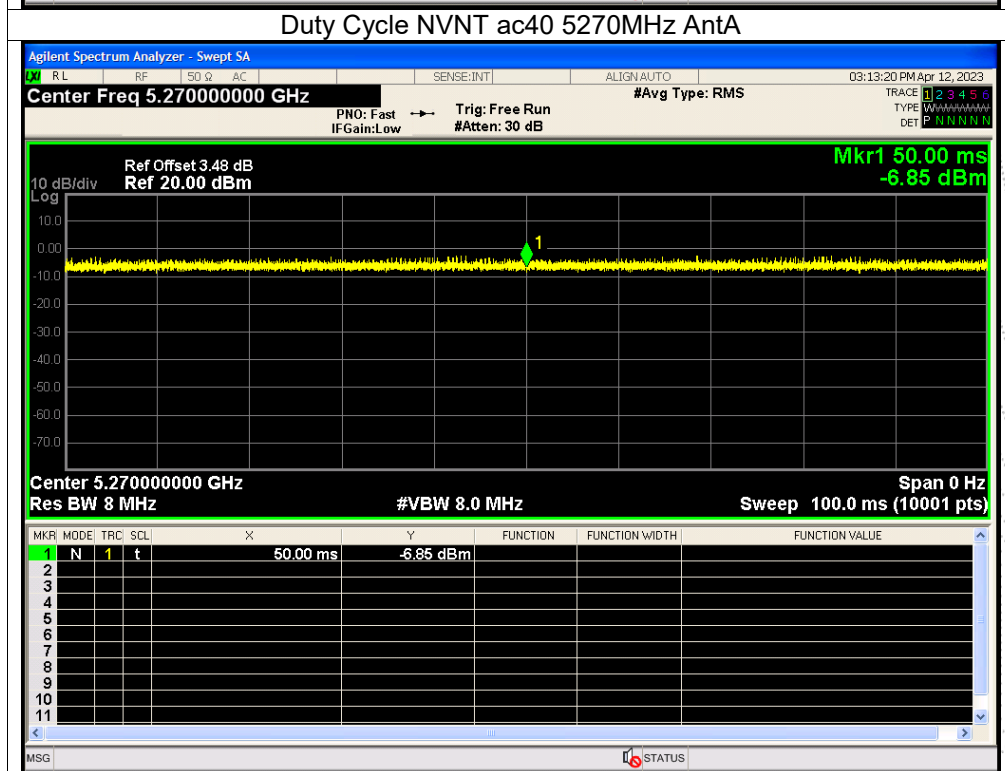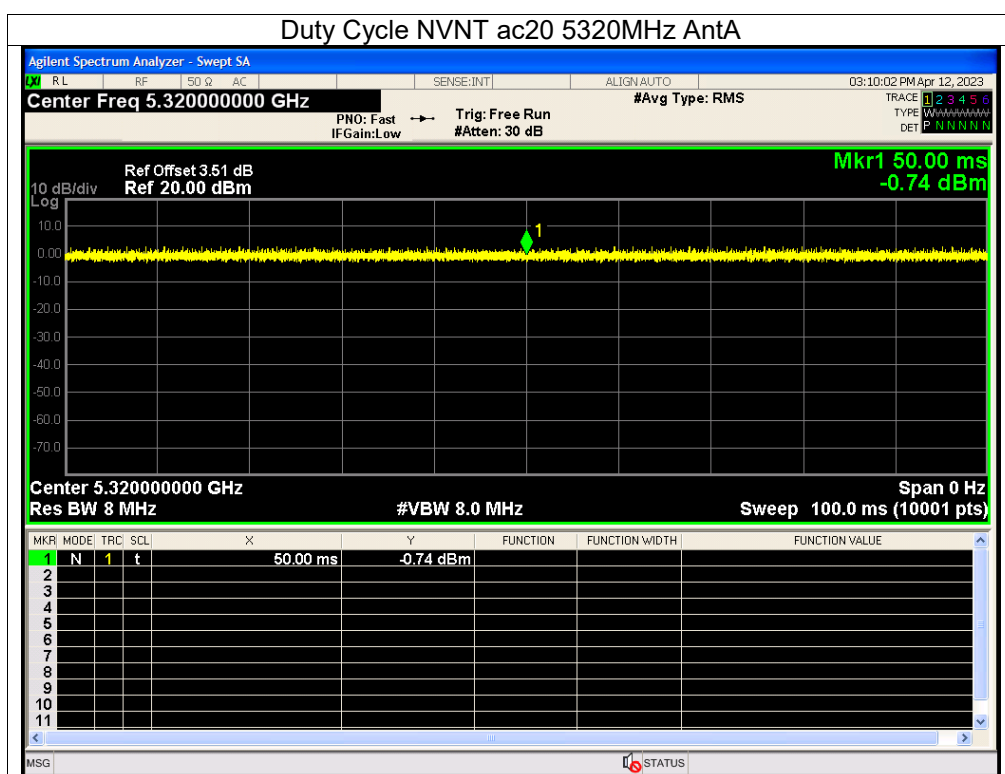

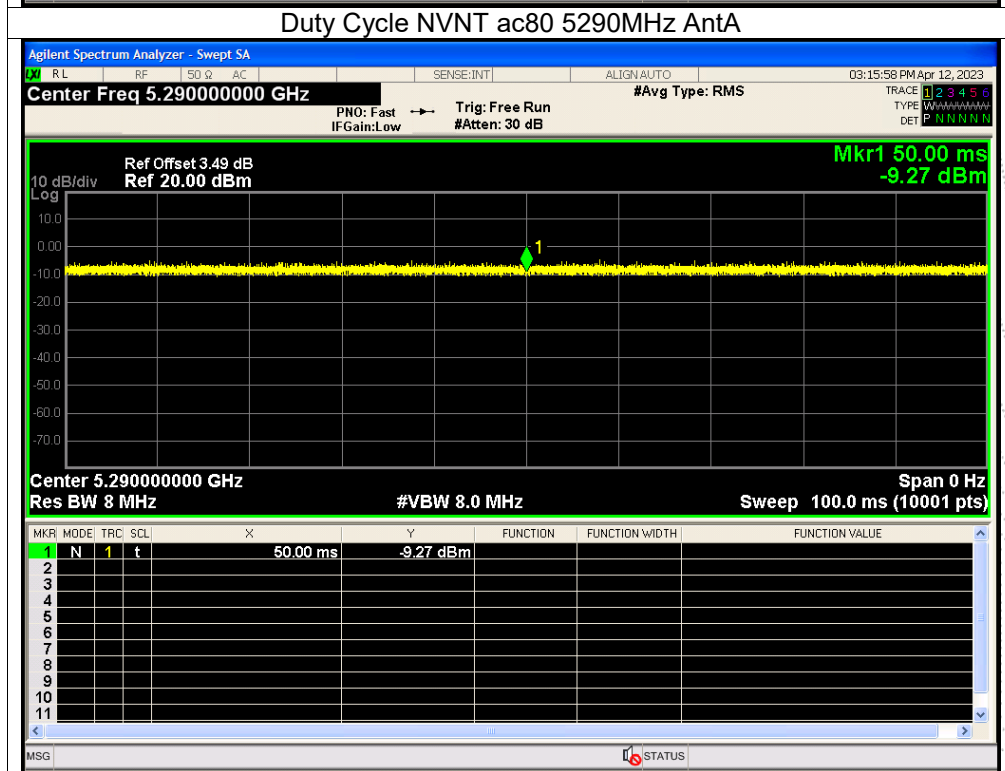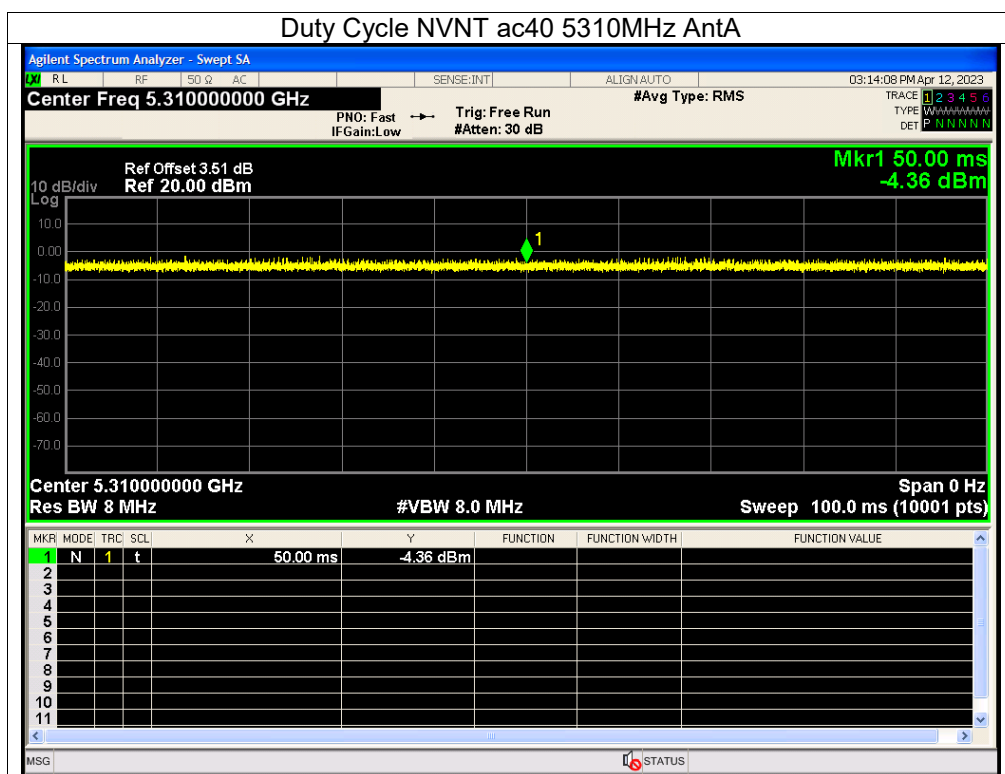

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	AntB	100	0	0
NVNT	a	5280	AntB	100	0	0
NVNT	a	5320	AntB	100	0	0
NVNT	n20	5260	AntB	100	0	0
NVNT	n20	5280	AntB	100	0	0
NVNT	n20	5320	AntB	100	0	0
NVNT	n40	5270	AntB	100	0	0
NVNT	n40	5310	AntB	100	0	0
NVNT	ac20	5260	AntB	100	0	0
NVNT	ac20	5280	AntB	100	0	0
NVNT	ac20	5320	AntB	100	0	0
NVNT	ac40	5270	AntB	100	0	0
NVNT	ac40	5310	AntB	100	0	0
NVNT	ac80	5290	AntB	100	0	0

