

TEST REPORT

Report No.: BCTC2410128129-2E

Applicant: REOLINK INNOVATION LIMITED

Product Name: WiFi module

Test Model: WL1NM1001

Tested Date: 2024-10-31 to 2024-11-15

Issued Date: 2024-11-15

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AYHE-2402A

Product Name: WiFi module

Trademark: 

Model/Type reference: WL1NM1001

Prepared For: REOLINK INNOVATION LIMITED

Address: FLAT/RM 705 7/F FA YUEN COMMERCIAL BUILDING 75-77 FA YUEN STREET MONG KOK KL HONG KONG

Manufacturer: REOLINK INNOVATION LIMITED

Address: FLAT/RM 705 7/F FA YUEN COMMERCIAL BUILDING 75-77 FA YUEN STREET MONG KOK KL HONG KONG

Factory: HUIZHOU GAOSHENGDA TECHNOLOGY CO., LTD

Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Ilui-a Avenue, Huizhou City, Guangdong Province, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-10-31

Sample tested Date: 2024-10-31 to 2024-11-15

Issue Date: 2024-11-15


Report No.: BCTC2410128129-2E

Test Standards: FCC Part15.247
ANSI C63.10-2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	9
4.6 Table Of Parameters Of Text Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 EUT operating Conditions	12
6.5 Test Result	13
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	20
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	33
8.1 Block Diagram Of Test Setup	33
8.2 Limit	33
8.3 Test procedure	34
8.4 EUT Operating Conditions	34
8.5 Test Result	35
9. Antenna Requirement	39
9.1 Limit	39
9.1 Test Result	39
10. EUT Photographs	40
11. EUT Test Setup Photographs	41

(Note: N/A Means Not Applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2410128129-2E	2024-11-15	Original	Valid

2. Test Summary


The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	Radiated Spurious Emission	15.247 (d)	PASS
3	Restricted Band of Operation	15.205	PASS
4	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
5	Antenna Requirement	15.203	PASS


Note: According to the following changes in the product, change the antenna, Therefore, conducted emission and radiation emission, radiation stray and radiation sideband tests were only carried out in this report on the original report (BL-SZ2471080-602)

Product reports two different antennas


Original:

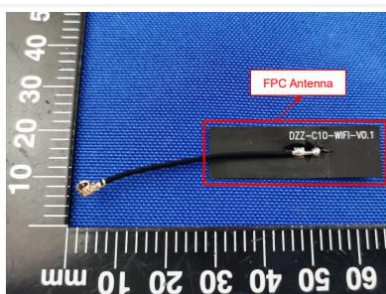

New(ANT 1)

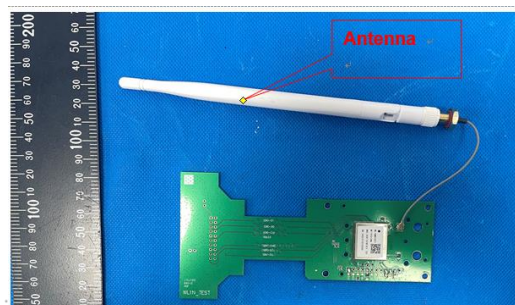

New(ANT 2)

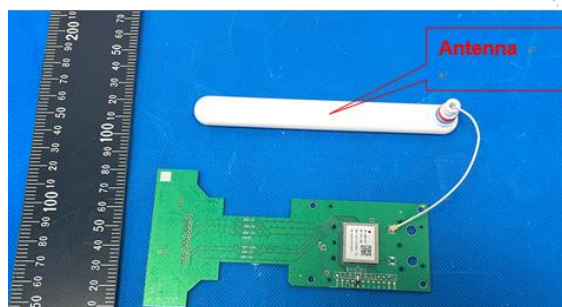

Note: According to the following changes in the original test report (BL-SZ2471080-602), no changes have been made to the product. Only updated test instruments, conducted emission, radiation emission, radiation sideband, radiation spurious, EUT photos, etc.

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup

4.1 Product Information

Model/Type reference:	WL1NM1001
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	802.11b/g/n/ax20MHz:2412~2462 MHz
Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 75Mbps 802.11ax:400Mbps
Type of Modulation:	OFDM/DSSS/OFDMA
Number Of Channel:	802.11b/g/n/ax20MHz:11 CH
Antenna installation:	External antenna Antenna 1: 2.89 dBi, Antennal 2: 3.85 dBi
Antenna Gain:	Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 3.3V

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	WiFi module	Reolink	WL1NM1001	N/A	EUT
E-2	PC	Lenovo	ThinkPad S2	N/A	Auxiliary
E-3	Adapter	---	---	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n/ax (20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	CH 01	802.11ax20
Mode 11	CH 06	
Mode 12	CH 11	
Mode 13	BT Link+WIFI Link(Conducted emission and Radiated emission)	

Notes:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
3. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 11Mbps for 802.11b,6Mbps for 802.11g,13Mbps for 802.11n(H20).

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
	2412 MHz	2437 MHz	2462 MHz
Frequency			
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017


5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

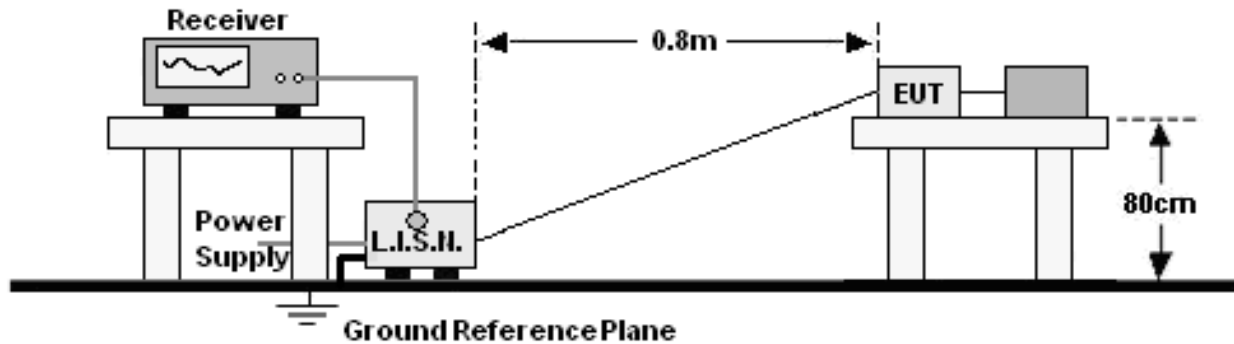

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Antenna 1

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V From PC
Test Mode:	Mode 13	Polarization :	L

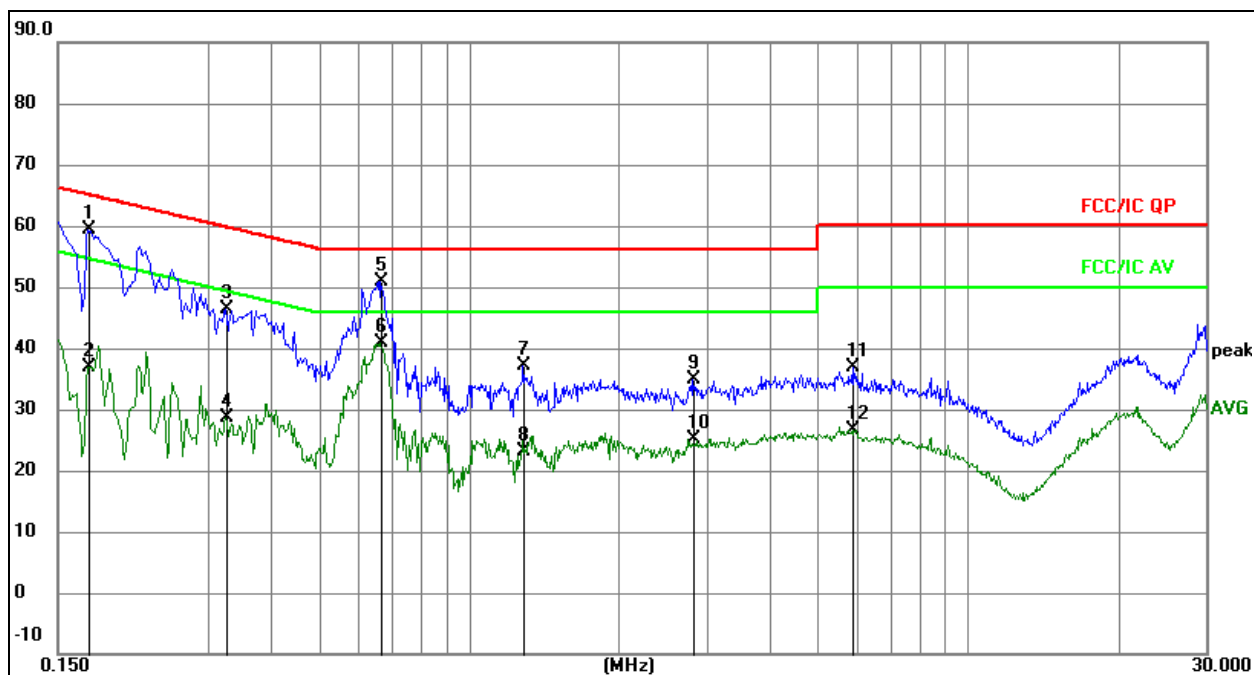


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1725	39.34	20.07	59.41	64.84	-5.43	QP
2		0.1725	16.80	20.07	36.87	54.84	-17.97	AVG
3		0.3255	26.24	20.07	46.31	59.57	-13.26	QP
4		0.3255	8.65	20.07	28.72	49.57	-20.85	AVG
5		0.6675	30.79	20.09	50.88	56.00	-5.12	QP
6	*	0.6675	20.86	20.09	40.95	46.00	-5.05	AVG
7		1.2885	17.04	20.09	37.13	56.00	-18.87	QP
8		1.2885	3.02	20.09	23.11	46.00	-22.89	AVG
9		2.8140	14.70	20.12	34.82	56.00	-21.18	QP
10		2.8140	4.97	20.12	25.09	46.00	-20.91	AVG
11		5.8695	16.80	20.15	36.95	60.00	-23.05	QP
12		5.8695	6.59	20.15	26.74	50.00	-23.26	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V From PC
Test Mode:	Mode 13	Polarization :	N

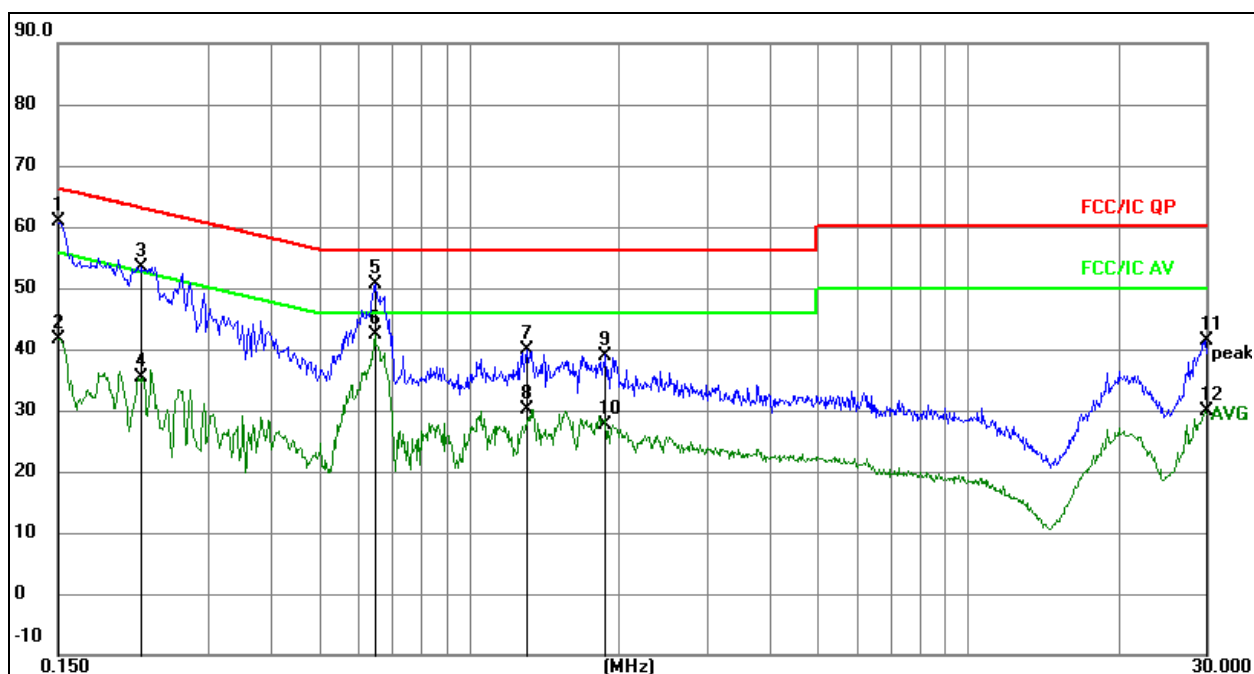

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	40.79	20.07	60.86	66.00	-5.14	QP
2		0.1500	21.66	20.07	41.73	56.00	-14.27	AVG
3		0.2208	33.38	20.07	53.45	62.79	-9.34	QP
4		0.2208	15.39	20.07	35.46	52.79	-17.33	AVG
5		0.6474	30.56	20.09	50.65	56.00	-5.35	QP
6	*	0.6474	22.23	20.09	42.32	46.00	-3.68	AVG
7		1.3098	19.67	20.09	39.76	56.00	-16.24	QP
8		1.3098	10.16	20.09	30.25	46.00	-15.75	AVG
9		1.8779	18.90	20.10	39.00	56.00	-17.00	QP
10		1.8779	7.55	20.10	27.65	46.00	-18.35	AVG
11		29.8415	21.03	20.27	41.30	60.00	-18.70	QP
12		29.8415	9.51	20.27	29.78	50.00	-20.22	AVG

Antenna 2

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V From PC
Test Mode:	Mode 13	Polarization :	L

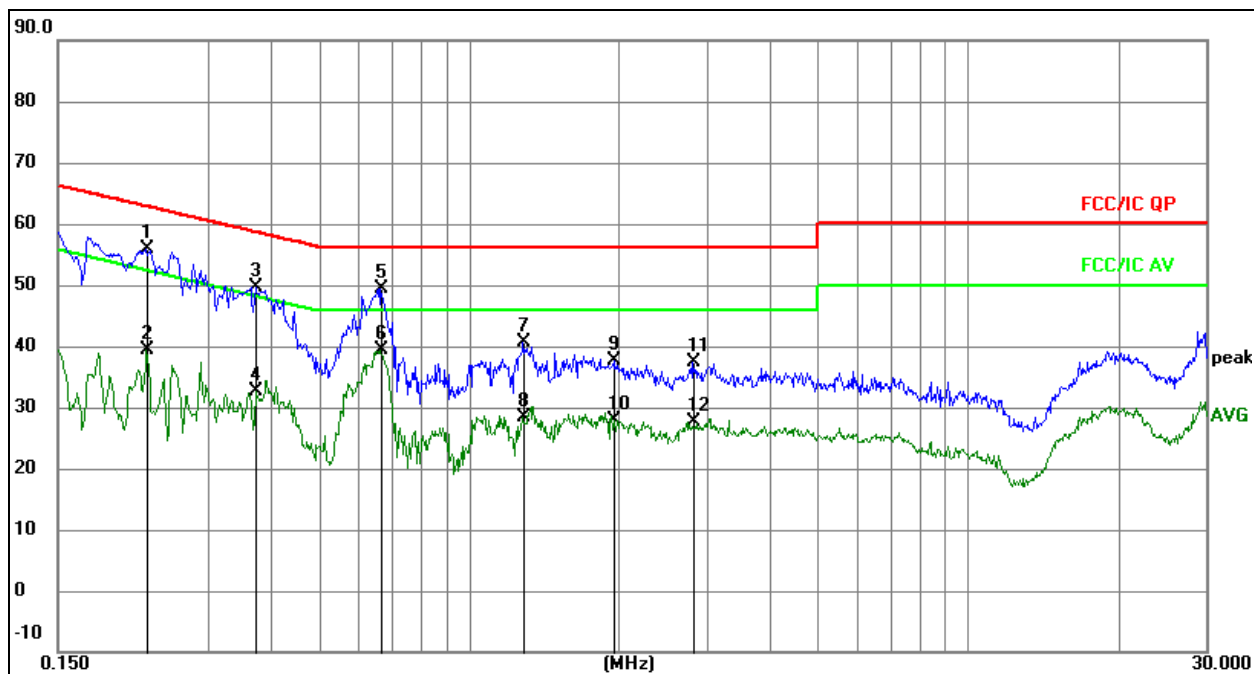


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2265	35.75	20.07	55.82	62.58	-6.76	QP
2		0.2265	19.20	20.07	39.27	52.58	-13.31	AVG
3		0.3750	29.55	20.08	49.63	58.39	-8.76	QP
4		0.3750	12.43	20.08	32.51	48.39	-15.88	AVG
5		0.6673	29.29	20.09	49.38	56.00	-6.62	QP
6	*	0.6673	19.36	20.09	39.45	46.00	-6.55	AVG
7		1.2882	20.54	20.09	40.63	56.00	-15.37	QP
8		1.2882	8.39	20.09	28.48	46.00	-17.52	AVG
9		1.9542	17.62	20.10	37.72	56.00	-18.28	QP
10		1.9542	7.83	20.10	27.93	46.00	-18.07	AVG
11		2.8140	17.20	20.12	37.32	56.00	-18.68	QP
12		2.8140	7.47	20.12	27.59	46.00	-18.41	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V From PC
Test Mode:	Mode 13	Polarization :	N

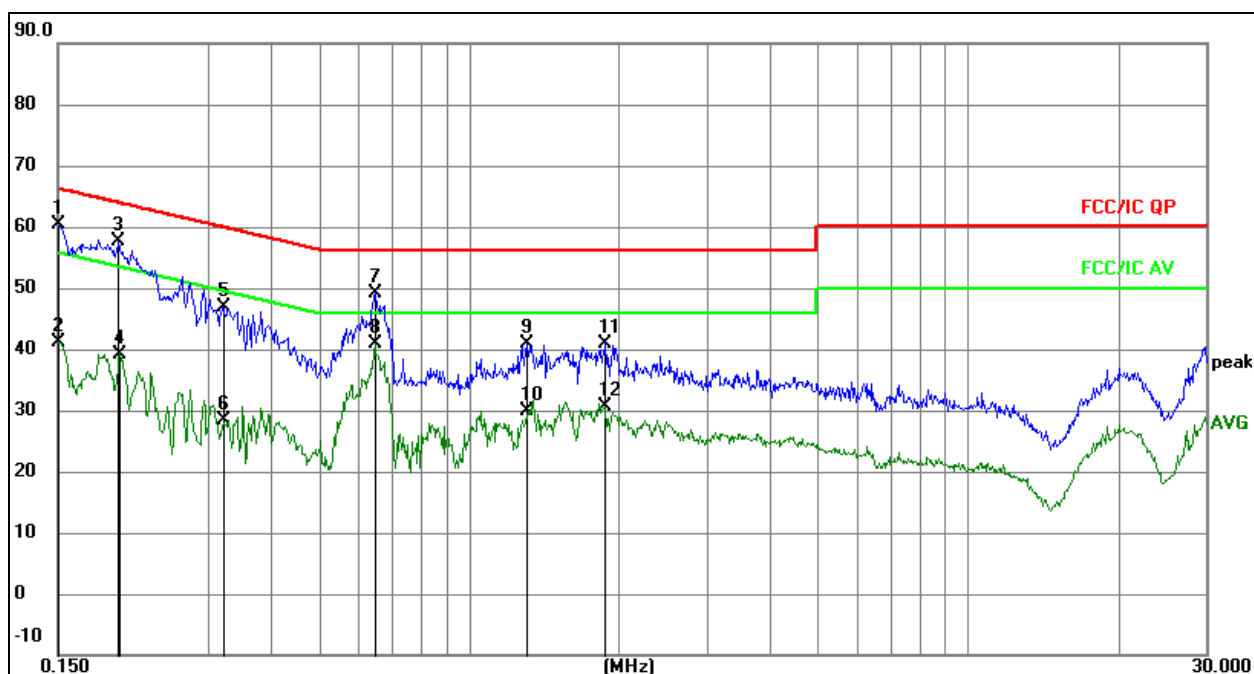

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	40.28	20.07	60.35	66.00	-5.65	QP
2		0.1500	21.16	20.07	41.23	56.00	-14.77	AVG
3		0.1985	37.60	20.07	57.67	63.67	-6.00	QP
4		0.1995	19.18	20.07	39.25	53.63	-14.38	AVG
5		0.3200	26.83	20.07	46.90	59.71	-12.81	QP
6		0.3200	8.43	20.07	28.50	49.71	-21.21	AVG
7		0.6472	29.06	20.09	49.15	56.00	-6.85	QP
8	*	0.6472	20.73	20.09	40.82	46.00	-5.18	AVG
9		1.3098	20.67	20.09	40.76	56.00	-15.24	QP
10		1.3098	9.79	20.09	29.88	46.00	-16.12	AVG
11		1.8777	20.90	20.10	41.00	56.00	-15.00	QP
12		1.8777	10.48	20.10	30.58	46.00	-15.42	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

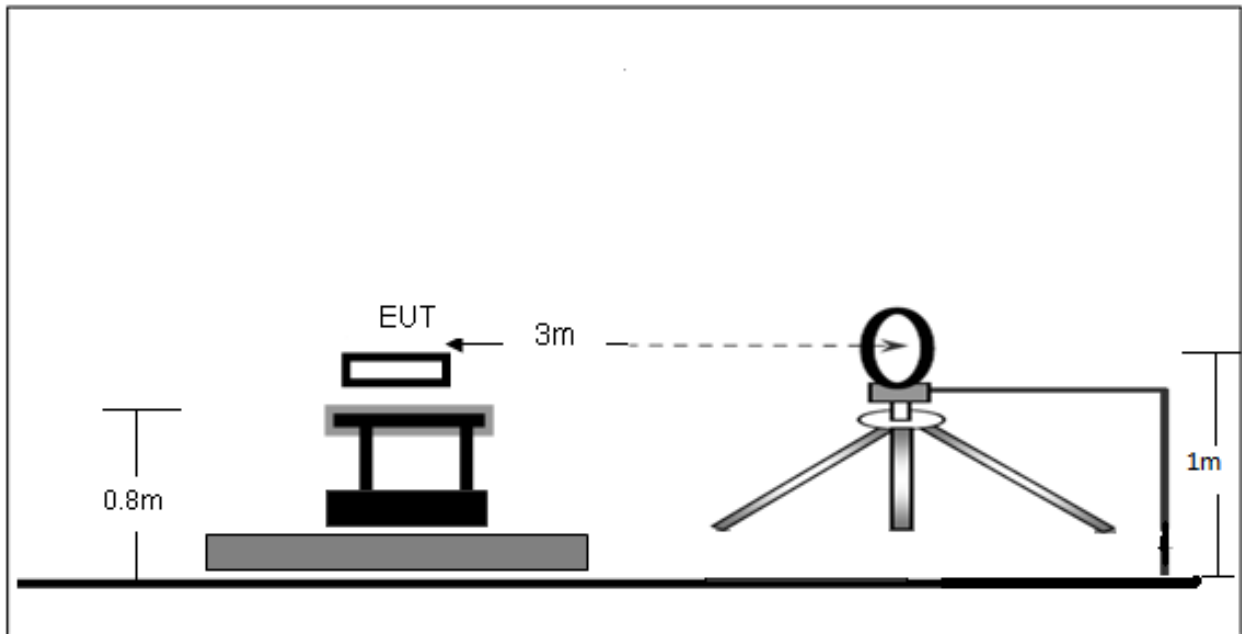

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

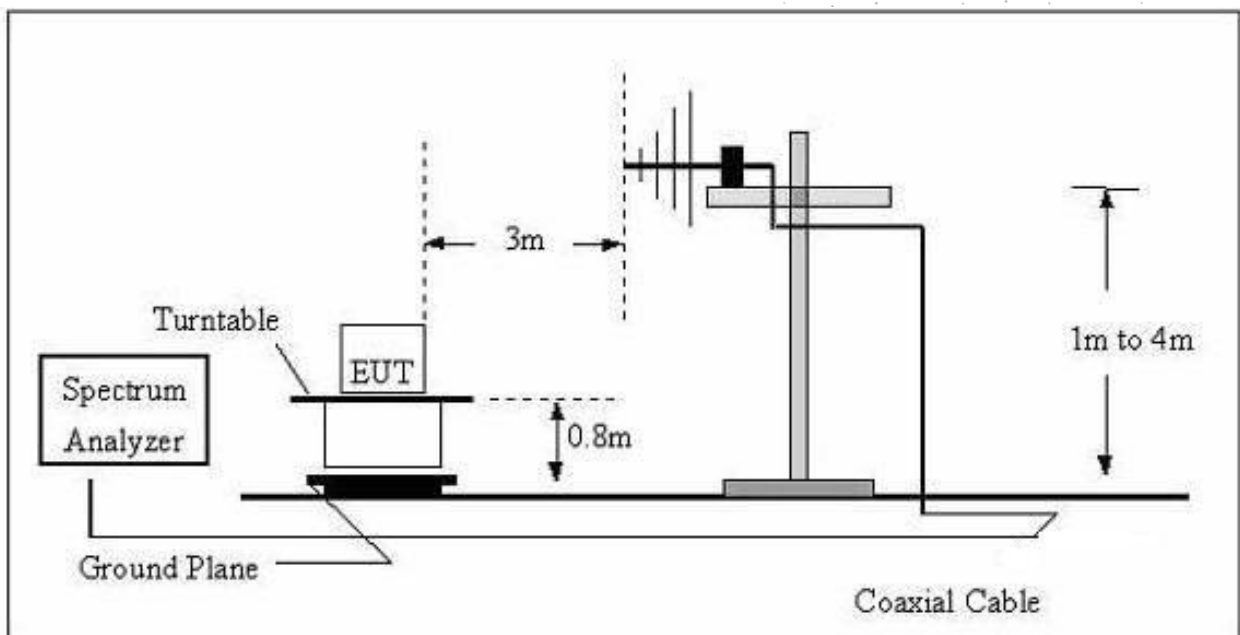

(C) Radiated Emission Test-Up Frequency Above 1GHz

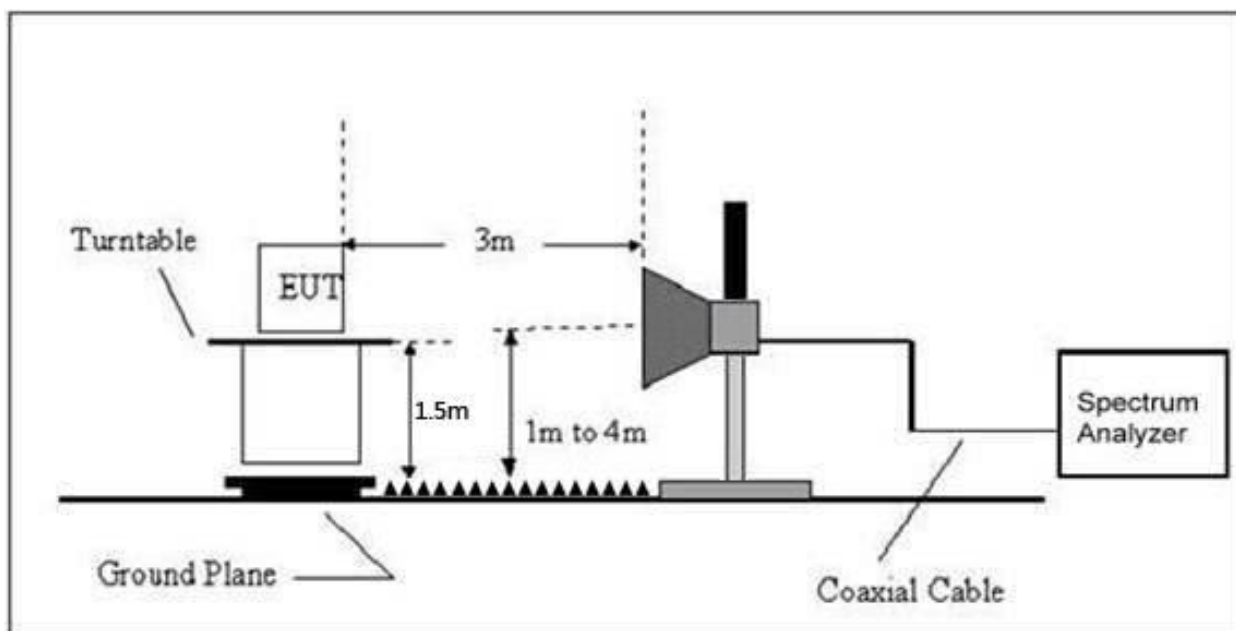

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V From PC
Test Mode:	Mode 13	Polarization:	---

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

Antenna 1

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 13	Remark:	N/A

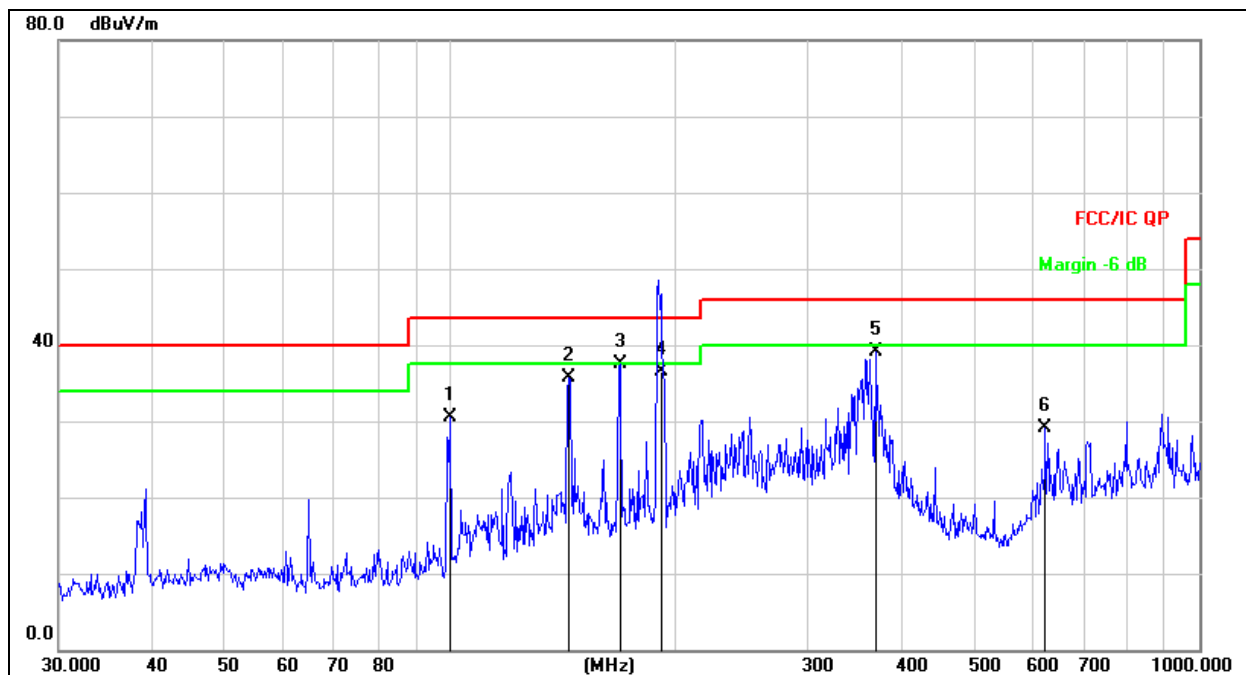


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		99.8777	46.47	-15.95	30.52	43.50	-12.98	QP
2		143.8295	54.70	-19.00	35.70	43.50	-7.80	QP
3	*	168.4138	55.49	-18.06	37.43	43.50	-6.07	QP
4		191.9965	52.74	-16.31	36.43	43.50	-7.07	QP
5		369.4047	50.37	-11.23	39.14	46.00	-6.86	QP
6		622.8900	35.72	-6.63	29.09	46.00	-16.91	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 13	Remark:	N/A

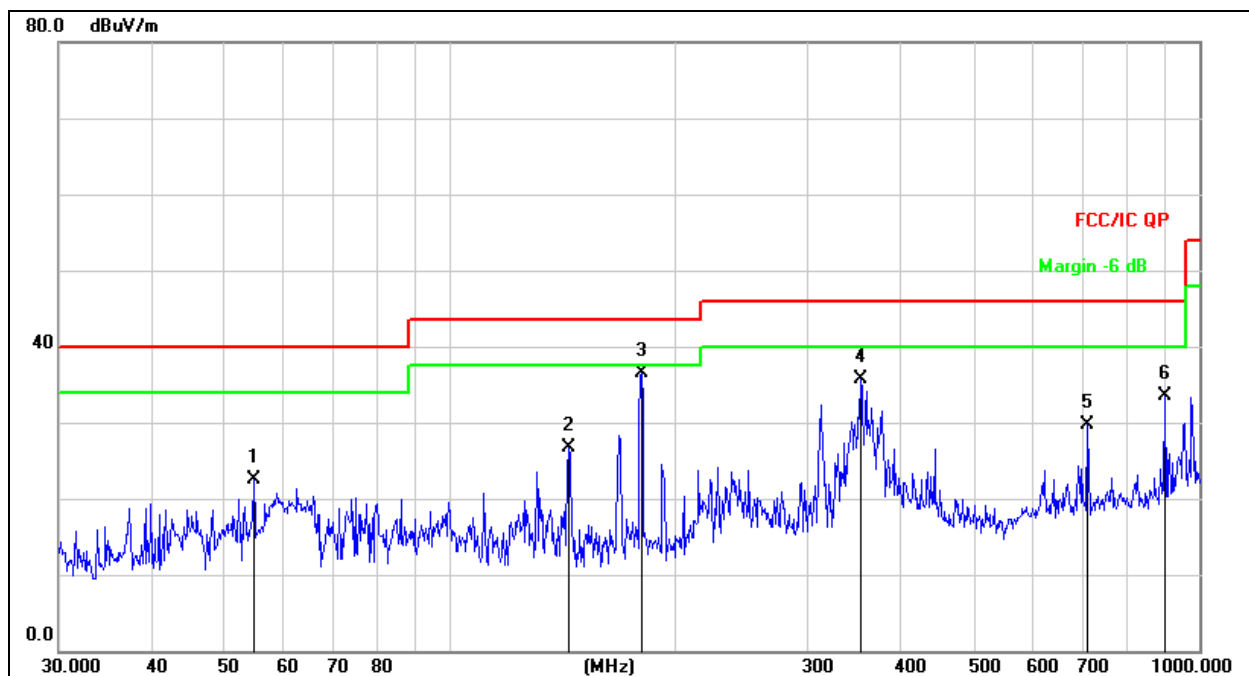

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		54.6429	37.07	-14.53	22.54	40.00	-17.46	QP
2		143.8295	45.79	-19.00	26.79	43.50	-16.71	QP
3	*	180.0165	53.63	-17.20	36.43	43.50	-7.07	QP
4		352.9433	47.07	-11.44	35.63	46.00	-10.37	QP
5		709.1823	35.19	-5.58	29.61	46.00	-16.39	QP
6		900.1474	36.68	-3.12	33.56	46.00	-12.44	QP

Antenna 2

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 13	Remark:	N/A

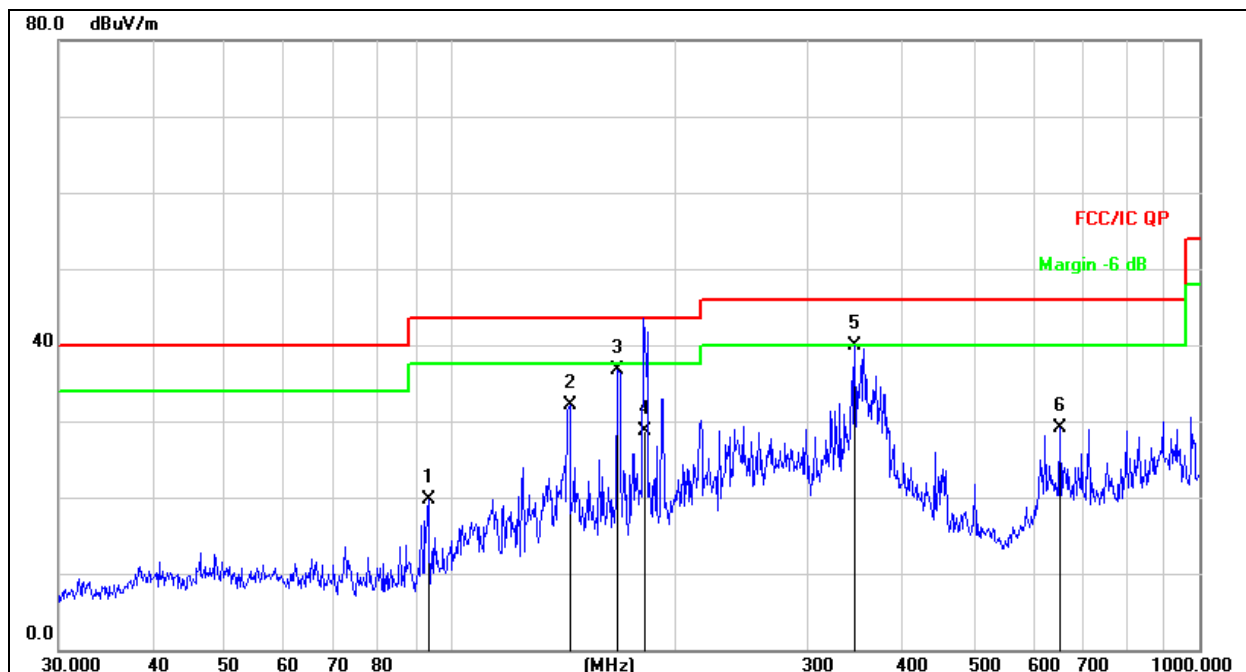


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		93.4402	36.54	-16.89	19.65	43.50	-23.85	QP
2		144.3348	51.12	-19.03	32.09	43.50	-11.41	QP
3		167.2368	54.76	-18.15	36.61	43.50	-6.89	QP
4		182.1478	45.65	-17.04	28.61	43.50	-14.89	QP
5	*	346.8092	51.40	-11.59	39.81	46.00	-6.19	QP
6		651.9417	35.32	-6.14	29.18	46.00	-16.82	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 13	Remark:	N/A

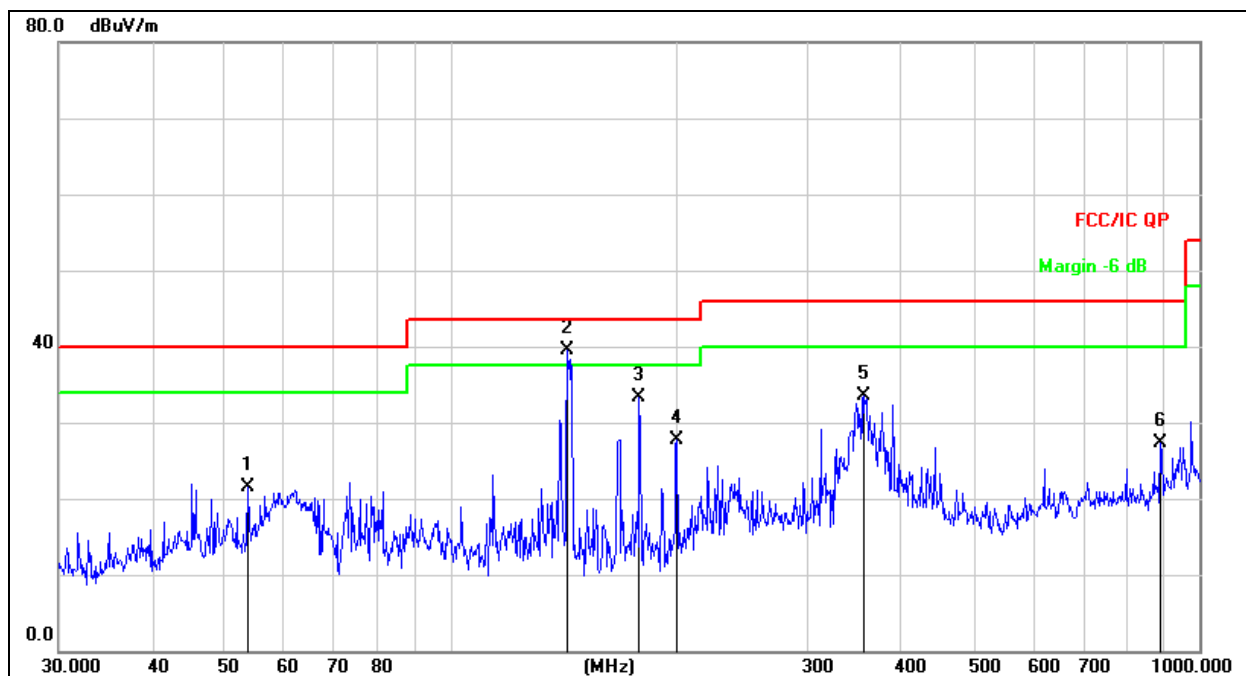

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		53.6932	35.81	-14.40	21.41	40.00	-18.59	QP
2	*	143.3261	58.47	-18.96	39.51	43.50	-3.99	QP
3		178.7584	50.62	-17.30	33.32	43.50	-10.18	QP
4		200.6881	43.47	-15.70	27.77	43.50	-15.73	QP
5		356.6758	44.99	-11.39	33.60	46.00	-12.40	QP
6		887.6099	30.70	-3.33	27.37	46.00	-18.63	QP

Antenna 1

**Between 1GHz – 25GHz
802.11b**

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	68.19	-19.95	48.24	74.00	-25.76	PK
V	4824.00	54.31	-19.95	34.36	54.00	-19.64	AV
V	7236.00	68.12	-14.14	53.98	74.00	-20.02	PK
V	7236.00	57.62	-14.14	43.48	54.00	-10.52	AV
H	4824.00	65.48	-19.95	45.53	74.00	-28.47	PK
H	4824.00	54.53	-19.95	34.58	54.00	-19.42	AV
H	7236.00	64.93	-14.14	50.79	74.00	-23.21	PK
H	7236.00	56.85	-14.14	42.71	54.00	-11.29	AV
Middle channel:2437MHz							
V	4874.00	67.00	-19.85	47.15	74.00	-26.85	PK
V	4874.00	56.27	-19.85	36.42	54.00	-17.58	AV
V	7311.00	69.85	-13.93	55.92	74.00	-18.08	PK
V	7311.00	58.22	-13.93	44.29	54.00	-9.71	AV
H	4874.00	64.96	-19.85	45.11	74.00	-28.89	PK
H	4874.00	57.13	-19.85	37.28	54.00	-16.72	AV
H	7311.00	69.58	-13.93	55.65	74.00	-18.35	PK
H	7311.00	58.06	-13.93	44.13	54.00	-9.87	AV
High channel:2462MHz							
V	4924.00	66.75	-19.75	47.00	74.00	-27.00	PK
V	4924.00	56.05	-19.75	36.30	54.00	-17.70	AV
V	7386.00	66.27	-13.72	52.55	74.00	-21.45	PK
V	7386.00	58.44	-13.72	44.72	54.00	-9.28	AV
H	4924.00	65.05	-19.75	45.30	74.00	-28.70	PK
H	4924.00	57.70	-19.75	37.95	54.00	-16.05	AV
H	7386.00	64.87	-13.72	51.15	74.00	-22.85	PK
H	7386.00	57.16	-13.72	43.44	54.00	-10.56	AV

Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	69.64	-19.95	49.69	74.00	-24.31	PK
V	4824.00	58.14	-19.95	38.19	54.00	-15.81	AV
V	7236.00	68.36	-14.14	54.22	74.00	-19.78	PK
V	7236.00	58.53	-14.14	44.39	54.00	-9.61	AV
H	4824.00	66.06	-19.95	46.11	74.00	-27.89	PK
H	4824.00	55.14	-19.95	35.19	54.00	-18.81	AV
H	7236.00	65.53	-14.14	51.39	74.00	-22.61	PK
H	7236.00	59.85	-14.14	45.71	54.00	-8.29	AV
Middle channel:2437MHz							
V	4874.00	66.83	-19.85	46.98	74.00	-27.02	PK
V	4874.00	55.92	-19.85	36.07	54.00	-17.93	AV
V	7311.00	69.29	-13.93	55.36	74.00	-18.64	PK
V	7311.00	54.74	-13.93	40.81	54.00	-13.19	AV
H	4874.00	65.07	-19.85	45.22	74.00	-28.78	PK
H	4874.00	56.25	-19.85	36.40	54.00	-17.60	AV
H	7311.00	67.01	-13.93	53.08	74.00	-20.92	PK
H	7311.00	54.41	-13.93	40.48	54.00	-13.52	AV
High channel:2462MHz							
V	4924.00	69.48	-19.75	49.73	74.00	-24.27	PK
V	4924.00	57.18	-19.75	37.43	54.00	-16.57	AV
V	7386.00	68.43	-13.72	54.71	74.00	-19.29	PK
V	7386.00	59.11	-13.72	45.39	54.00	-8.61	AV
H	4924.00	64.39	-19.75	44.64	74.00	-29.36	PK
H	4924.00	59.73	-19.75	39.98	54.00	-14.02	AV
H	7386.00	64.97	-13.72	51.25	74.00	-22.75	PK
H	7386.00	58.25	-13.72	44.53	54.00	-9.47	AV

Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	64.34	-19.95	44.39	74.00	-29.61	PK
V	4824.00	56.61	-19.95	36.66	54.00	-17.34	AV
V	7236.00	68.34	-14.14	54.20	74.00	-19.80	PK
V	7236.00	56.05	-14.14	41.91	54.00	-12.09	AV
H	4824.00	68.34	-19.95	48.39	74.00	-25.61	PK
H	4824.00	56.26	-19.95	36.31	54.00	-17.69	AV
H	7236.00	68.14	-14.14	54.00	74.00	-20.00	PK
H	7236.00	56.91	-14.14	42.77	54.00	-11.23	AV
Middle channel:2437MHz							
V	4874.00	66.00	-19.85	46.15	74.00	-27.85	PK
V	4874.00	58.50	-19.85	38.65	54.00	-15.35	AV
V	7311.00	69.24	-13.93	55.31	74.00	-18.69	PK
V	7311.00	57.69	-13.93	43.76	54.00	-10.24	AV
H	4874.00	68.37	-19.85	48.52	74.00	-25.48	PK
H	4874.00	56.76	-19.85	36.91	54.00	-17.09	AV
H	7311.00	65.47	-13.93	51.54	74.00	-22.46	PK
H	7311.00	58.86	-13.93	44.93	54.00	-9.07	AV
High channel:2462MHz							
V	4924.00	68.64	-19.75	48.89	74.00	-25.11	PK
V	4924.00	59.31	-19.75	39.56	54.00	-14.44	AV
V	7386.00	65.43	-13.72	51.71	74.00	-22.29	PK
V	7386.00	59.44	-13.72	45.72	54.00	-8.28	AV
H	4924.00	67.51	-19.75	47.76	74.00	-26.24	PK
H	4924.00	56.21	-19.75	36.46	54.00	-17.54	AV
H	7386.00	64.91	-13.72	51.19	74.00	-22.81	PK
H	7386.00	59.01	-13.72	45.29	54.00	-8.71	AV

Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ax20

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	66.34	-19.95	46.39	74.00	-27.61	PK
V	4824.00	57.06	-19.95	37.11	54.00	-16.89	AV
V	7236.00	58.65	-14.14	44.51	74.00	-29.49	PK
V	7236.00	47.68	-14.14	33.54	54.00	-20.46	AV
H	4824.00	62.54	-19.95	42.59	74.00	-31.41	PK
H	4824.00	51.76	-19.95	31.81	54.00	-22.19	AV
H	7236.00	56.86	-14.14	42.72	74.00	-31.28	PK
H	7236.00	48.94	-14.14	34.80	54.00	-19.20	AV
Middle channel:2437MHz							
V	4874.00	64.65	-19.85	44.80	74.00	-29.20	PK
V	4874.00	57.19	-19.85	37.34	54.00	-16.66	AV
V	7311.00	55.47	-13.93	41.54	74.00	-32.46	PK
V	7311.00	46.97	-13.93	33.04	54.00	-20.96	AV
H	4874.00	61.95	-19.85	42.10	74.00	-31.90	PK
H	4874.00	52.63	-19.85	32.78	54.00	-21.22	AV
H	7311.00	53.50	-13.93	39.57	74.00	-34.43	PK
H	7311.00	45.20	-13.93	31.27	54.00	-22.73	AV
High channel:2462MHz							
V	4924.00	66.76	-19.75	47.01	74.00	-26.99	PK
V	4924.00	57.10	-19.75	37.35	54.00	-16.65	AV
V	7386.00	59.96	-13.72	46.24	74.00	-27.76	PK
V	7386.00	49.99	-13.72	36.27	54.00	-17.73	AV
H	4924.00	64.91	-19.75	45.16	74.00	-28.84	PK
H	4924.00	55.24	-19.75	35.49	54.00	-18.51	AV
H	7386.00	57.84	-13.72	44.12	74.00	-29.88	PK
H	7386.00	50.23	-13.72	36.51	54.00	-17.49	AV

Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Antenna 2

**Between 1GHz – 25GHz
802.11b**

Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low channel:2412MHz							
V	4824.00	68.32	-19.95	48.37	74.00	-25.63	PK
V	4824.00	59.43	-19.95	39.48	54.00	-14.52	AV
V	7236.00	69.16	-14.14	55.02	74.00	-18.98	PK
V	7236.00	58.00	-14.14	43.86	54.00	-10.14	AV
H	4824.00	69.72	-19.95	49.77	74.00	-24.23	PK
H	4824.00	57.42	-19.95	37.47	54.00	-16.53	AV
H	7236.00	68.06	-14.14	53.92	74.00	-20.08	PK
H	7236.00	57.75	-14.14	43.61	54.00	-10.39	AV
Middle channel:2437MHz							
V	4874.00	68.88	-19.85	49.03	74.00	-24.97	PK
V	4874.00	58.40	-19.85	38.55	54.00	-15.45	AV
V	7311.00	66.20	-13.93	52.27	74.00	-21.73	PK
V	7311.00	56.69	-13.93	42.76	54.00	-11.24	AV
H	4874.00	64.92	-19.85	45.07	74.00	-28.93	PK
H	4874.00	55.53	-19.85	35.68	54.00	-18.32	AV
H	7311.00	69.23	-13.93	55.30	74.00	-18.70	PK
H	7311.00	57.03	-13.93	43.10	54.00	-10.90	AV
High channel:2462MHz							
V	4924.00	68.72	-19.75	48.97	74.00	-25.03	PK
V	4924.00	55.40	-19.75	35.65	54.00	-18.35	AV
V	7386.00	66.73	-13.72	53.01	74.00	-20.99	PK
V	7386.00	56.90	-13.72	43.18	54.00	-10.82	AV
H	4924.00	66.96	-19.75	47.21	74.00	-26.79	PK
H	4924.00	55.88	-19.75	36.13	54.00	-17.87	AV
H	7386.00	64.71	-13.72	50.99	74.00	-23.01	PK
H	7386.00	54.48	-13.72	40.76	54.00	-13.24	AV

Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	65.21	-19.95	45.26	74.00	-28.74	PK
V	4824.00	56.89	-19.95	36.94	54.00	-17.06	AV
V	7236.00	68.60	-14.14	54.46	74.00	-19.54	PK
V	7236.00	56.55	-14.14	42.41	54.00	-11.59	AV
H	4824.00	68.07	-19.95	48.12	74.00	-25.88	PK
H	4824.00	57.38	-19.95	37.43	54.00	-16.57	AV
H	7236.00	68.71	-14.14	54.57	74.00	-19.43	PK
H	7236.00	54.69	-14.14	40.55	54.00	-13.45	AV
Middle channel:2437MHz							
V	4874.00	69.75	-19.85	49.90	74.00	-24.10	PK
V	4874.00	57.47	-19.85	37.62	54.00	-16.38	AV
V	7311.00	64.02	-13.93	50.09	74.00	-23.91	PK
V	7311.00	55.18	-13.93	41.25	54.00	-12.75	AV
H	4874.00	66.59	-19.85	46.74	74.00	-27.26	PK
H	4874.00	57.53	-19.85	37.68	54.00	-16.32	AV
H	7311.00	68.81	-13.93	54.88	74.00	-19.12	PK
H	7311.00	59.27	-13.93	45.34	54.00	-8.66	AV
High channel:2462MHz							
V	4924.00	66.02	-19.75	46.27	74.00	-27.73	PK
V	4924.00	58.56	-19.75	38.81	54.00	-15.19	AV
V	7386.00	66.04	-13.72	52.32	74.00	-21.68	PK
V	7386.00	55.69	-13.72	41.97	54.00	-12.03	AV
H	4924.00	67.26	-19.75	47.51	74.00	-26.49	PK
H	4924.00	59.74	-19.75	39.99	54.00	-14.01	AV
H	7386.00	69.40	-13.72	55.68	74.00	-18.32	PK
H	7386.00	54.15	-13.72	40.43	54.00	-13.57	AV

Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	65.68	-19.95	45.73	74.00	-28.27	PK
V	4824.00	56.40	-19.95	36.45	54.00	-17.55	AV
V	7236.00	65.03	-14.14	50.89	74.00	-23.11	PK
V	7236.00	54.94	-14.14	40.80	54.00	-13.20	AV
H	4824.00	68.89	-19.95	48.94	74.00	-25.06	PK
H	4824.00	58.62	-19.95	38.67	54.00	-15.33	AV
H	7236.00	68.85	-14.14	54.71	74.00	-19.29	PK
H	7236.00	54.90	-14.14	40.76	54.00	-13.24	AV
Middle channel:2437MHz							
V	4874.00	66.25	-19.85	46.40	74.00	-27.60	PK
V	4874.00	58.56	-19.85	38.71	54.00	-15.29	AV
V	7311.00	66.54	-13.93	52.61	74.00	-21.39	PK
V	7311.00	59.59	-13.93	45.66	54.00	-8.34	AV
H	4874.00	64.96	-19.85	45.11	74.00	-28.89	PK
H	4874.00	56.21	-19.85	36.36	54.00	-17.64	AV
H	7311.00	67.05	-13.93	53.12	74.00	-20.88	PK
H	7311.00	56.38	-13.93	42.45	54.00	-11.55	AV
High channel:2462MHz							
V	4924.00	66.51	-19.75	46.76	74.00	-27.24	PK
V	4924.00	58.46	-19.75	38.71	54.00	-15.29	AV
V	7386.00	69.76	-13.72	56.04	74.00	-17.96	PK
V	7386.00	55.31	-13.72	41.59	54.00	-12.41	AV
H	4924.00	64.04	-19.75	44.29	74.00	-29.71	PK
H	4924.00	54.65	-19.75	34.90	54.00	-19.10	AV
H	7386.00	69.08	-13.72	55.36	74.00	-18.64	PK
H	7386.00	55.52	-13.72	41.80	54.00	-12.20	AV

Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ax20

Polar (H/V)	Fre- quency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	68.28	-19.95	48.33	74.00	-25.67	PK
V	4824.00	59.50	-19.95	39.55	54.00	-14.45	AV
V	7236.00	57.44	-14.14	43.30	74.00	-30.70	PK
V	7236.00	48.31	-14.14	34.17	54.00	-19.83	AV
H	4824.00	63.34	-19.95	43.39	74.00	-30.61	PK
H	4824.00	52.62	-19.95	32.67	54.00	-21.33	AV
H	7236.00	54.78	-14.14	40.64	74.00	-33.36	PK
H	7236.00	46.22	-14.14	32.08	54.00	-21.92	AV
Middle channel:2437MHz							
V	4874.00	67.11	-19.85	47.26	74.00	-26.74	PK
V	4874.00	59.97	-19.85	40.12	54.00	-13.88	AV
V	7311.00	58.76	-13.93	44.83	74.00	-29.17	PK
V	7311.00	49.41	-13.93	35.48	54.00	-18.52	AV
H	4874.00	62.61	-19.85	42.76	74.00	-31.24	PK
H	4874.00	53.19	-19.85	33.34	54.00	-20.66	AV
H	7311.00	57.50	-13.93	43.57	74.00	-30.43	PK
H	7311.00	49.62	-13.93	35.69	54.00	-18.31	AV
High channel:2462MHz							
V	4924.00	68.47	-19.75	48.72	74.00	-25.28	PK
V	4924.00	57.48	-19.75	37.73	54.00	-16.27	AV
V	7386.00	62.47	-13.72	48.75	74.00	-25.25	PK
V	7386.00	52.96	-13.72	39.24	54.00	-14.76	AV
H	4924.00	65.49	-19.75	45.74	74.00	-28.26	PK
H	4924.00	55.72	-19.75	35.97	54.00	-18.03	AV
H	7386.00	60.65	-13.72	46.93	74.00	-27.07	PK
H	7386.00	53.29	-13.72	39.57	54.00	-14.43	AV


Remark:

- 1.Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

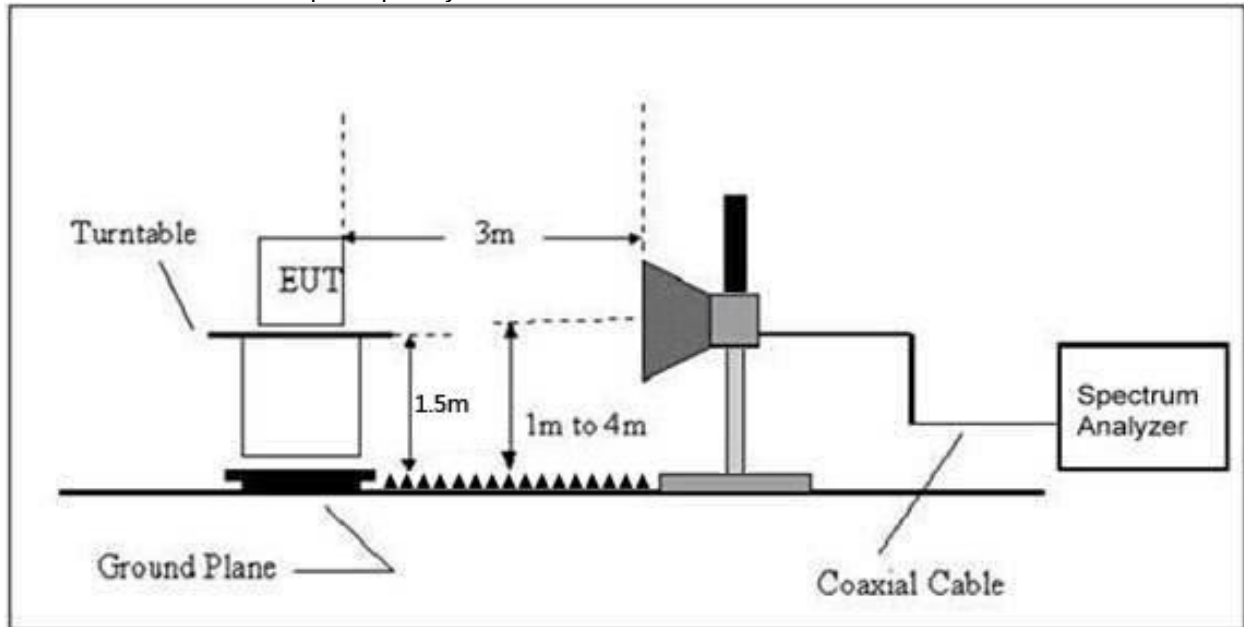

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Antenna 1

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Measure-ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11b	Low Channel 2412MHz								
	H	2390.00	73.98	-25.43	48.55	74.00	54.00	-25.45	PASS
	H	2400.00	72.93	-25.40	47.53	74.00	54.00	-26.47	PASS
	V	2390.00	76.70	-25.43	51.27	74.00	54.00	-22.73	PASS
	V	2400.00	75.41	-25.40	50.01	74.00	54.00	-23.99	PASS
	High Channel 2462MHz								
	H	2483.50	77.40	-25.15	52.25	74.00	54.00	-21.75	PASS
	H	2500.00	72.37	-25.10	47.27	74.00	54.00	-26.73	PASS
	V	2483.50	73.46	-25.15	48.31	74.00	54.00	-25.69	PASS
	V	2500.00	69.50	-25.10	44.40	74.00	54.00	-29.60	PASS
802.11g	Low Channel 2412MHz								
	H	2390.00	72.41	-25.43	46.98	74.00	54.00	-27.02	PASS
	H	2400.00	71.71	-25.40	46.31	74.00	54.00	-27.69	PASS
	V	2390.00	73.89	-25.43	48.46	74.00	54.00	-25.54	PASS
	V	2400.00	74.72	-25.40	49.32	74.00	54.00	-24.68	PASS
	High Channel 2462MHz								
	H	2483.50	75.53	-25.15	50.38	74.00	54.00	-23.62	PASS
	H	2500.00	72.30	-25.10	47.20	74.00	54.00	-26.80	PASS
	V	2483.50	72.26	-25.15	47.11	74.00	54.00	-26.89	PASS
	V	2500.00	72.39	-25.10	47.29	74.00	54.00	-26.71	PASS

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Measurement (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 n20	Low Channel 2412MHz								
	H	2390.00	72.12	-25.43	46.69	74.00	54.00	-27.31	PASS
	H	2400.00	75.49	-25.40	50.09	74.00	54.00	-23.91	PASS
	V	2390.00	71.39	-25.43	45.96	74.00	54.00	-28.04	PASS
	V	2400.00	76.16	-25.40	50.76	74.00	54.00	-23.24	PASS
	High Channel 2462MHz								
	H	2483.50	73.07	-25.15	47.92	74.00	54.00	-26.08	PASS
	H	2500.00	75.70	-25.10	50.60	74.00	54.00	-23.40	PASS
	V	2483.50	74.14	-25.15	48.99	74.00	54.00	-25.01	PASS
	V	2500.00	73.16	-25.10	48.06	74.00	54.00	-25.94	PASS
802.11 ax20	Low Channel 2412MHz								
	H	2390.00	72.49	-25.43	47.06	74.00	54.00	-27.31	PASS
	H	2400.00	77.07	-25.40	51.67	74.00	54.00	-23.91	PASS
	V	2390.00	72.76	-25.43	47.33	74.00	54.00	-28.04	PASS
	V	2400.00	77.17	-25.40	51.77	74.00	54.00	-23.24	PASS
	High Channel 2462MHz								
	H	2483.50	75.88	-25.15	50.73	74.00	54.00	-26.08	PASS
	H	2500.00	69.81	-25.10	44.71	74.00	54.00	-23.40	PASS
	V	2483.50	75.14	-25.15	49.99	74.00	54.00	-25.01	PASS
	V	2500.00	70.92	-25.10	45.82	74.00	54.00	-25.94	PASS
Remark: 1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement - Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

Antenna 2

Antenna 2									
Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Measure-ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11b	Low Channel 2412MHz								
	H	2390.00	74.64	-25.43	49.21	74.00	54.00	-24.79	PASS
	H	2400.00	71.38	-25.40	45.98	74.00	54.00	-28.02	PASS
	V	2390.00	72.48	-25.43	47.05	74.00	54.00	-26.95	PASS
	V	2400.00	76.97	-25.40	51.57	74.00	54.00	-22.43	PASS
	High Channel 2462MHz								
	H	2483.50	75.54	-25.15	50.39	74.00	54.00	-23.61	PASS
	H	2500.00	74.58	-25.10	49.48	74.00	54.00	-24.52	PASS
	V	2483.50	73.03	-25.15	47.88	74.00	54.00	-26.12	PASS
	V	2500.00	70.51	-25.10	45.41	74.00	54.00	-28.59	PASS
802.11g	Low Channel 2412MHz								
	H	2390.00	70.18	-25.43	44.75	74.00	54.00	-29.25	PASS
	H	2400.00	75.39	-25.40	49.99	74.00	54.00	-24.01	PASS
	V	2390.00	73.75	-25.43	48.32	74.00	54.00	-25.68	PASS
	V	2400.00	72.37	-25.40	46.97	74.00	54.00	-27.03	PASS
	High Channel 2462MHz								
	H	2483.50	76.13	-25.15	50.98	74.00	54.00	-23.02	PASS
	H	2500.00	75.54	-25.10	50.44	74.00	54.00	-23.56	PASS
	V	2483.50	71.97	-25.15	46.82	74.00	54.00	-27.18	PASS
	V	2500.00	71.61	-25.10	46.51	74.00	54.00	-27.49	PASS

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Measurement (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 n20	Low Channel 2412MHz								
	H	2390.00	72.92	-25.43	47.49	74.00	54.00	-26.51	PASS
	H	2400.00	74.73	-25.40	49.33	74.00	54.00	-24.67	PASS
	V	2390.00	74.57	-25.43	49.14	74.00	54.00	-24.86	PASS
	V	2400.00	73.21	-25.40	47.81	74.00	54.00	-26.19	PASS
	High Channel 2462MHz								
	H	2483.50	75.48	-25.15	50.33	74.00	54.00	-23.67	PASS
	H	2500.00	76.14	-25.10	51.04	74.00	54.00	-22.96	PASS
	V	2483.50	73.58	-25.15	48.43	74.00	54.00	-25.57	PASS
	V	2500.00	72.35	-25.10	47.25	74.00	54.00	-26.75	PASS
					PK	PK	AV	PK	
802.11 ax20	Low Channel 2412MHz								
	H	2390.00	72.09	-25.43	46.66	74.00	54.00	-27.31	PASS
	H	2400.00	76.13	-25.40	50.73	74.00	54.00	-23.91	PASS
	V	2390.00	71.23	-25.43	45.80	74.00	54.00	-28.04	PASS
	V	2400.00	74.93	-25.40	49.53	74.00	54.00	-23.24	PASS
	High Channel 2462MHz								
	H	2483.50	76.12	-25.15	50.97	74.00	54.00	-26.08	PASS
	H	2500.00	71.29	-25.10	46.19	74.00	54.00	-23.40	PASS
	V	2483.50	74.72	-25.15	49.57	74.00	54.00	-25.01	PASS
	V	2500.00	70.19	-25.10	45.09	74.00	54.00	-25.94	PASS
	Remark: 1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement - Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

9. Antenna Requirement

9.1 Limit


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.1 Test Result


The EUT antenna is External antenna (antenna 1 gain : 2.89 dBi; antenna 2 gain : 3.85 dBi). It comply with the standard requirement.

10. EUT Photographs

EUT Photo 1

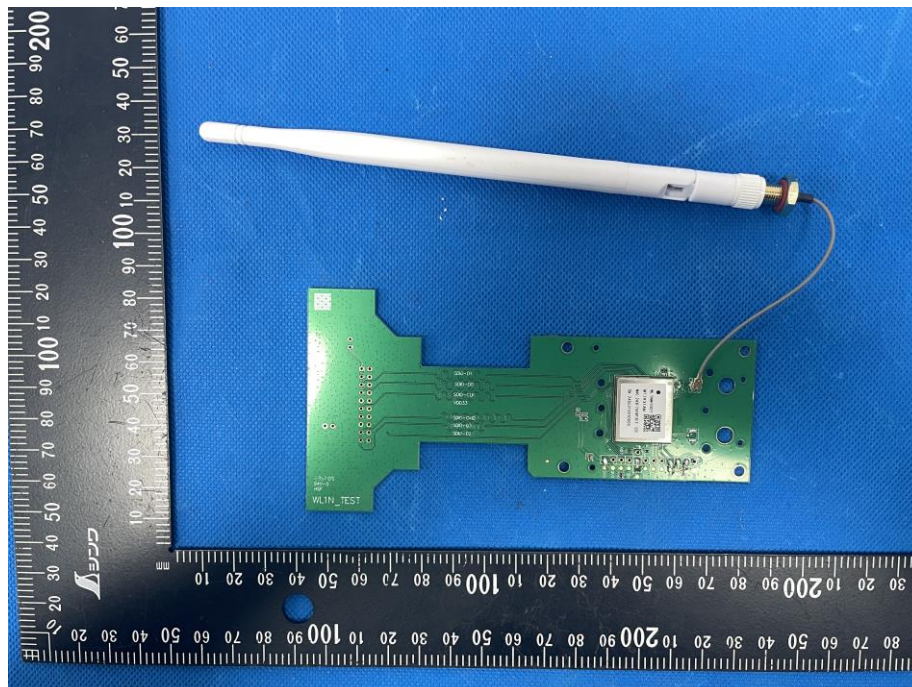


EUT Photo 2

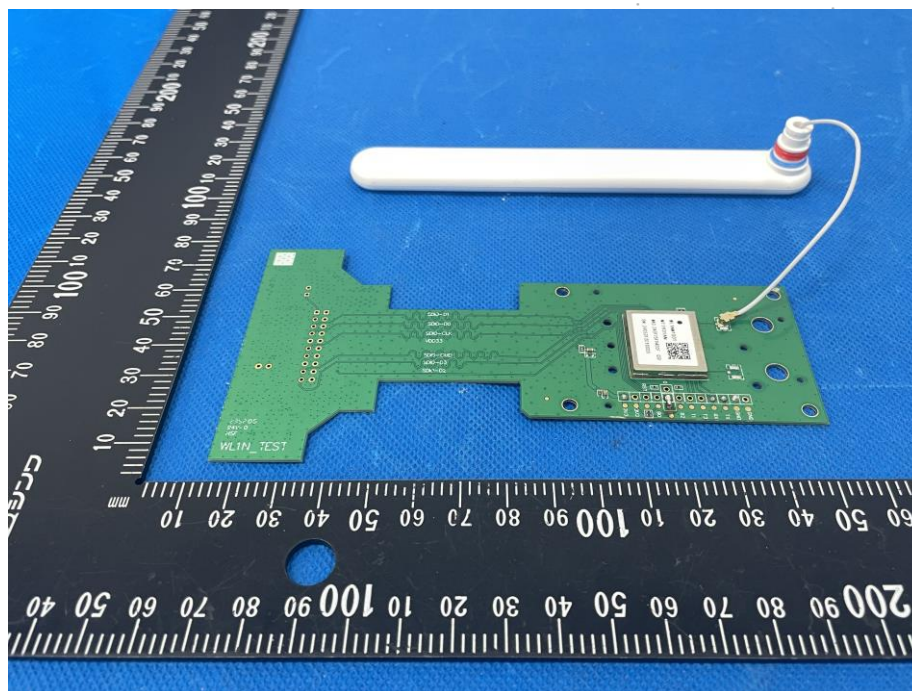



NOTE: Appendix-Photographs Of EUT Constructional Details


11. EUT Test Setup Photographs

Conducted Measurement Photo

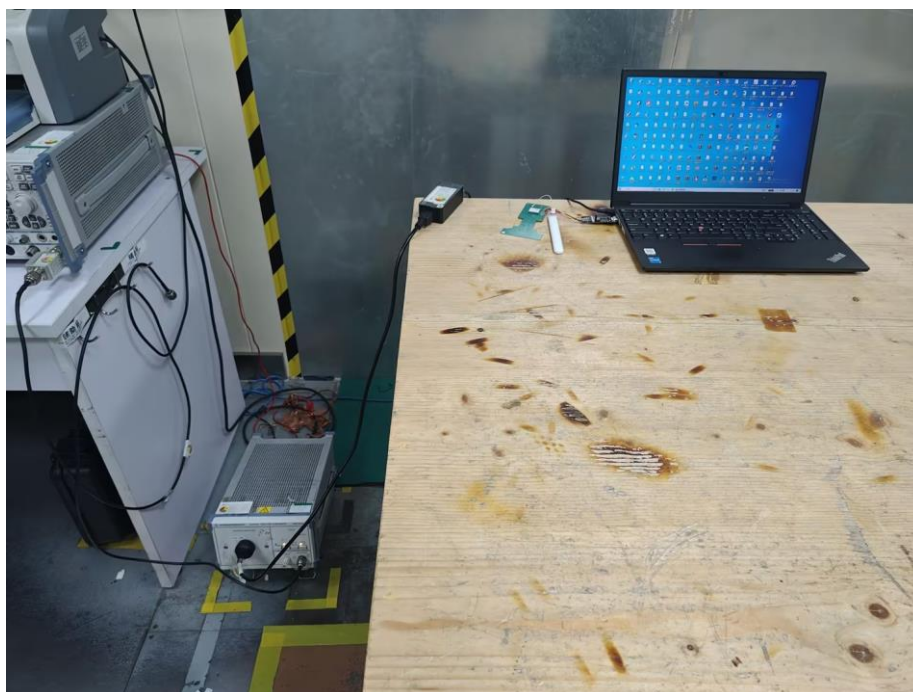

Radiated Measurement Photos

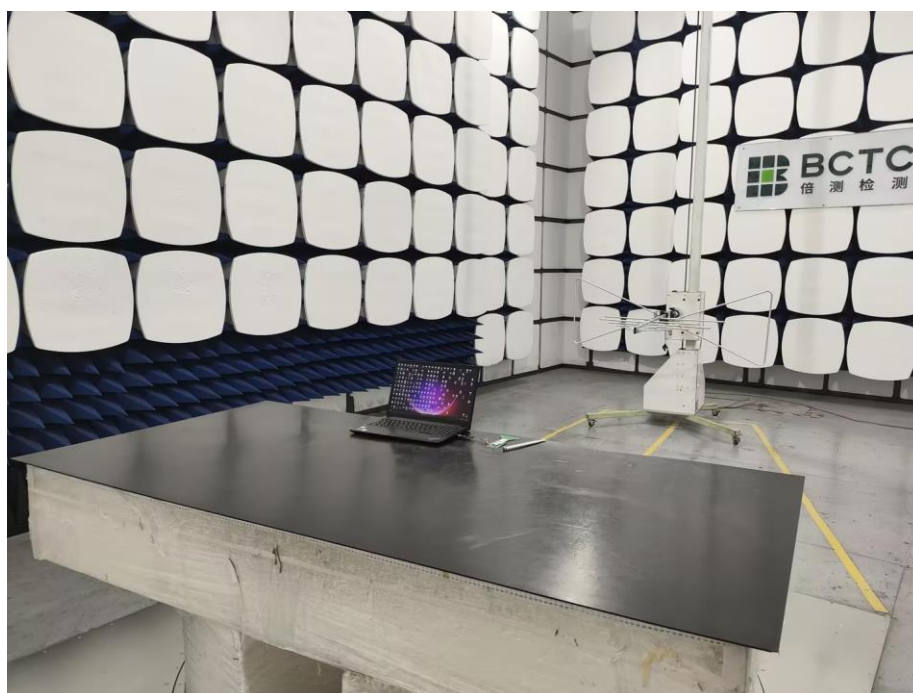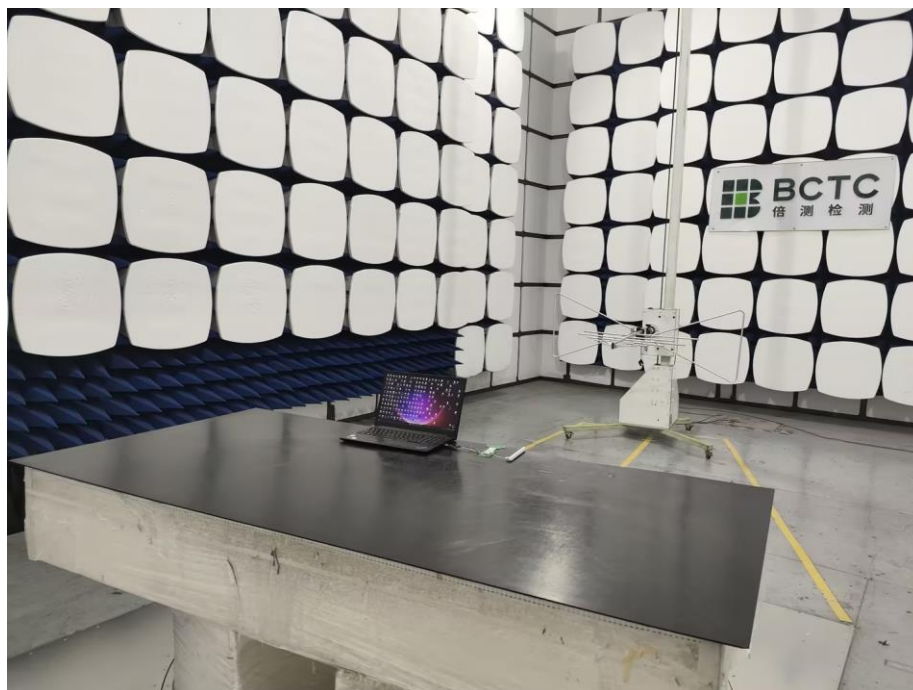

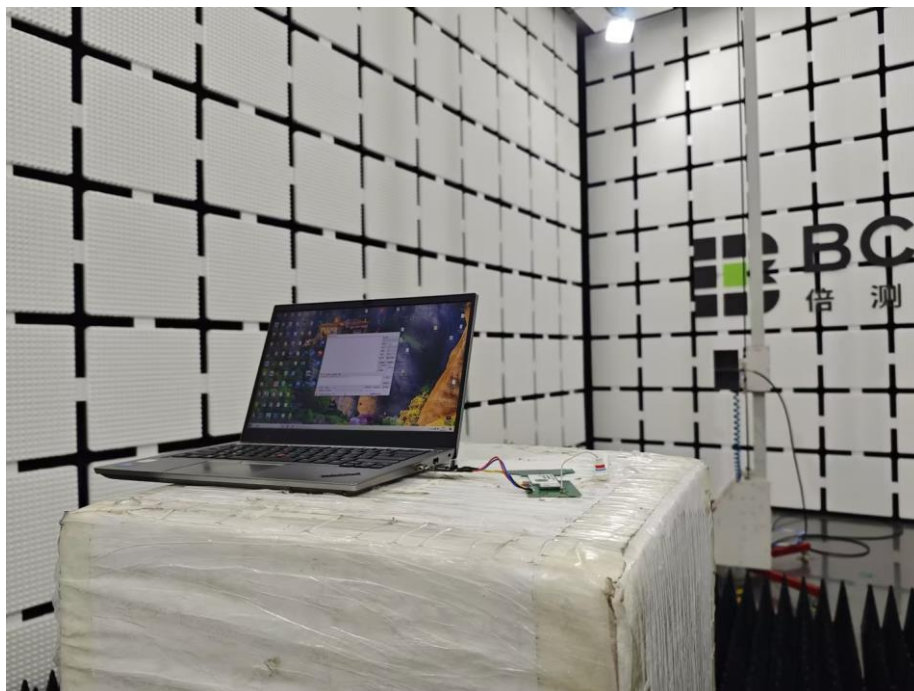

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

※※※※※ END ※※※※※