



FCC TEST REPORT

FCC ID:2AYHLFRL-W5A

Product	:	FARLINK MESH WiFi AC2100
Model Name	:	FRL-W5A
Additional model	:	N/A
Brand	:	N/A
Report No.	:	PTC19102401802E-FC02
Prepared for		
Shenzhen Jetslink Electronic Technology Co., Ltd.		
Room 103-1,Building 3rd,Chao loft Cultural and Creative Park,No150,Huarui Rd,Langkou Neighborhood,Dalang St,Longhua Dist,Shenzhen City.		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.		



1. TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Jetslink Electronic Technology Co., Ltd.
Room 103-1,Building 3rd,Chao loft Cultural and Creative
Address : Park,No150,Huarui Rd,Langkou Neighborhood,Dalang St,Longhua
Dist,Shenzhen City.
Manufacture's name : Shenzhen Jetslink Electronic Technology Co., Ltd.
Room 103-1,Building 3rd,Chao loft Cultural and Creative
Address : Park,No150,Huarui Rd,Langkou Neighborhood,Dalang St,Longhua
Dist,Shenzhen City.
Product name : FARLINK MESH WiFi AC2100
Model name : FRL-W5A
Standards : FCC Part15 Subpart E , Paragraph 15.407
ANSI C63.10: 2013,
Test procedure : KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB662911 D01 Multiple Transmitter Output v02r01
Test Date : Sep. 10, 2020 to Dec. 11, 2020
Date of Issue : Dec. 11, 2020
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Leo Yang / Engineer

Technical Manager:

Chris Du / Manager



Contents

1. TEST RESULT CERTIFICATION.....	2
2. General Information.....	4
2.1. Auxiliary Equipment Used During Test.....	6
2.2. Description of Test Modes.....	6
2.3. List of channels.....	7
2.4. Description Of Test Setup.....	8
2.5. Test Equipment List.....	9
2.6. Measurement Uncertainty.....	10
2.7. Description of Test Facility.....	10
3. Summary of Test Results.....	10
4. Conducted Emission Test.....	11
4.1. Test Standard and Limit.....	11
4.2. Test Setup.....	11
4.3. Test Procedure.....	11
4.4. Test Data.....	11
5. Radiation Spurious Emission and Band Edge.....	14
5.1. Test Standard and Limit.....	14
5.2. Test Setup.....	14
5.3. Test Procedure.....	15
5.4. Test Data.....	16
6. Maximum Peak Output Power Test.....	71
6.1. Test Standard and Limit.....	71
6.2. Test Setup.....	71
6.3. Test Procedure.....	71
6.4. Test Data.....	71
7. Occupy Bandwidth Test.....	77
7.1. Test Standard.....	77
7.2. Test Setup.....	77
7.3. Test Procedure.....	77
7.4. Test Data.....	78
8. Power Spectral Density Test.....	110
8.1. Test Standard and Limit.....	110
8.2. Test Setup.....	110
8.3. Test Procedure.....	110
8.4. Test Data.....	111
9. Antenna Requirement.....	143
9.1. Test Standard and Requirement.....	143
9.2. Antenna Connected Construction.....	144
10. APPENDIX I -- PHOTOGRAPH.....	144

2. General Information

Antenna Information

Ant No	Brand	Model	AntennaType	Connector	Gain(dbi)
1	-	-	PIFA antenna	-	5.43
2	-	-	PIFA antenna	-	5.43
3	-	-	PIFA antenna	-	5.43
4	-	-	PIFA antenna	-	5.43

Note:

- The EUT has four antennas, which can support IEEE802.11A/N20/N40/AC20/AC40/AC80, and can support IEEE802.11N20/N40/AC20/AC40/AC80 with the MIMO function
- According to ANSI C63.10:2013 14.4.3.2.5 a):

$$\text{Directional gain} = 5.43\text{dbi} + 10 \times \log(4/1)\text{db} = 11.45\text{dBi} > 6\text{dBi}$$

**Description of Device (EUT)**

Product Name	:	FARLINK MESH WiFi AC2100
Model Name	:	FRL-W5A
Additional model	:	N/A
Operation Frequency	:	WiFi 5.1G: 5180MHz~5240MHz
Number of Channel	:	4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80)
Type of Modulation	:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
Antenna installation	:	PIFA Antenna
Antenna Gain	:	5.43dBi
The directional gain	:	11.45dBi
Power supply	:	Input:AC100-240V,50/60Hz,Output : DC12V 1.5A
Hardware Version	:	N/A
Software Version	:	N/A

2.1. Auxiliary Equipment Used During Test

Adapter	Model: Input: AC 100-240V, 50-60Hz Output: DC 12.0V, 1.5A,
---------	--

2.2. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20/ac20)	CH 36	5180MHz
	CH 40	5200MHz
	CH 48	5240MHz
OFDM(802.11n40/ac40)	CH 38	5190MHz
	CH 46	5230MHz
OFDM(802.11ac80)	CH 42	5210MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%



2.3.List of channels

802.11a/n20/ac20

Channel	Freq. (MHz)	Channel	Freq. (MHz)
36	5180	44	5220
40	5200	48	5240



802.11n40/ac40

Channel	Freq. (MHz)	Channel	Freq. (MHz)
38	5190	46	5230

802.11ac80

Channel	Freq. (MHz)
42	5210

2.4. Description Of Test Setup

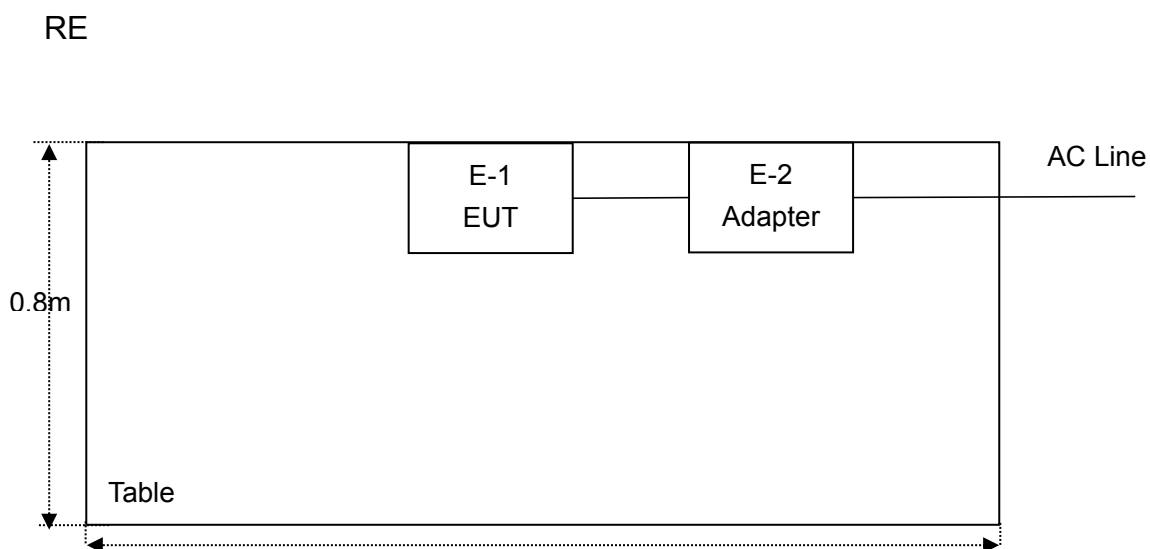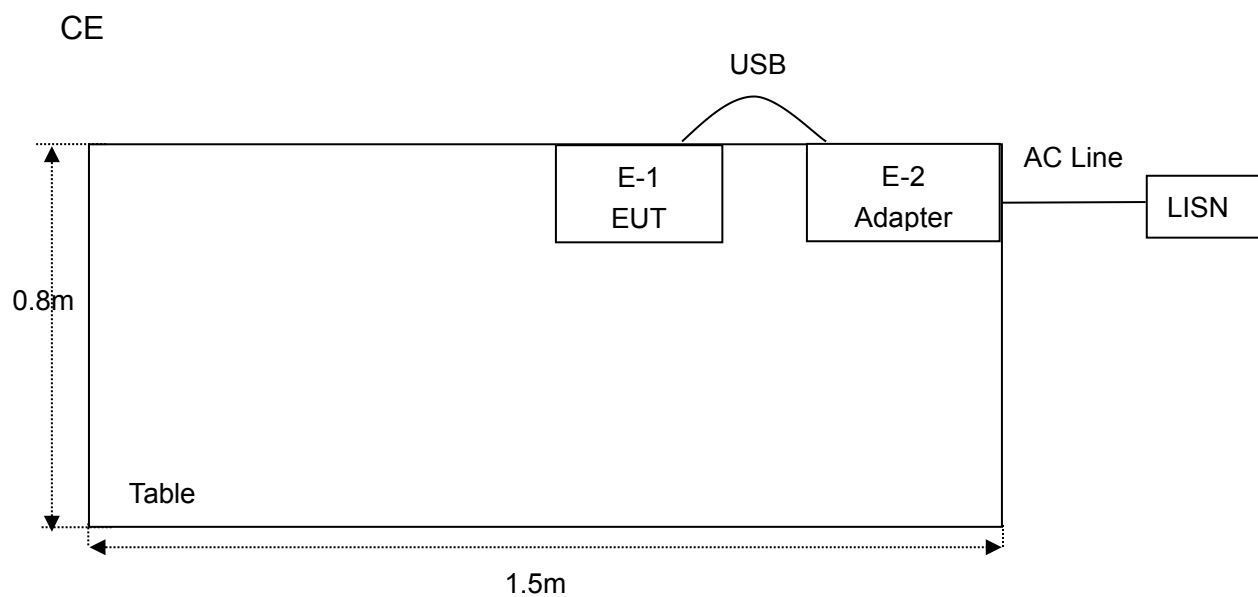



2.5. Test Equipment List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2021
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2021
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2021
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2021

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2021
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2021
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2021
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2021
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2021
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2021
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2021
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2021
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2021

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 21, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 21, 2021

2.6. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

2.7. Description of Test Facility

Precise Testing & Certification Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

3. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)	Occupy Bandwidth	PASS
15.407(a)(1)(ii)	Maximum Conducted Output Power	PASS
15.407(a)(1)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS


4. Conducted Emission Test

4.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

4.2. Test Setup

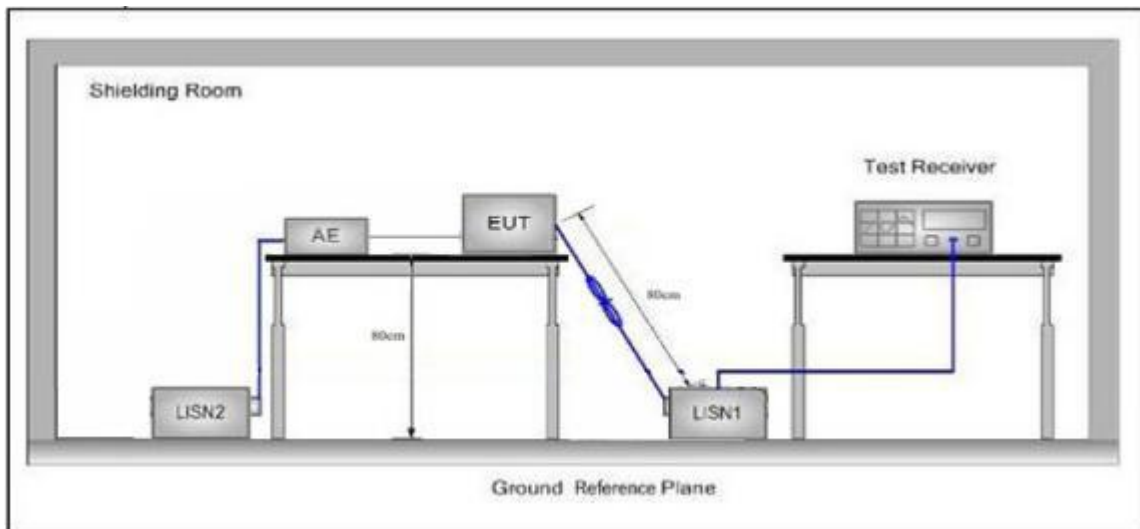

4.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

4.4. Test Data

Note: During the test, pre-scan 120Vac/60Hz and 240Vac/60Hz of the Power supply, found 120Vac/60Hz was worse case mode, the report only reflects the worst mode.

Conducted Emission Test Data


Operating Condition: 802.11n(HT40) CH38
Test Specification: AC 120V
Comment: Live Line
Tem.: 23.5°C Hum.: 55%

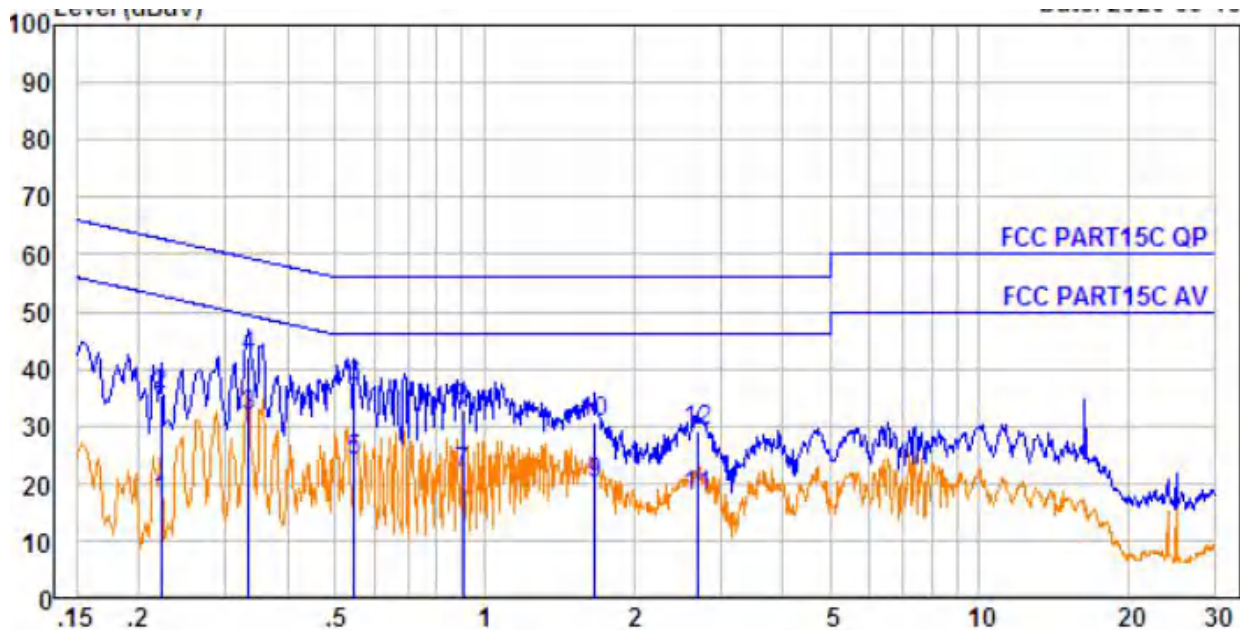

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.222	0.30	9.59	6.96	16.85	52.74	-35.89	Average
2.	0.222	0.30	9.59	25.70	35.59	62.74	-27.15	QP
3.	0.334	0.38	9.60	21.87	31.85	49.35	-17.50	Average
4.	0.334	0.38	9.60	31.94	41.92	59.35	-17.43	QP
5.	0.546	0.43	9.61	13.78	23.82	46.00	-22.18	Average
6.	0.546	0.43	9.61	26.92	36.96	56.00	-19.04	QP
7.	0.904	0.45	9.61	11.63	21.69	46.00	-24.31	Average
8.	0.904	0.45	9.61	22.65	32.71	56.00	-23.29	QP
9.	1.671	0.47	9.61	9.69	19.77	46.00	-26.23	Average
10.	1.671	0.47	9.61	20.68	30.76	56.00	-25.24	QP
11.	2.692	0.47	9.62	7.52	17.61	46.00	-28.39	Average
12.	2.692	0.47	9.62	18.89	28.98	56.00	-27.02	QP

Conducted Emission Test Data

Operating Condition: 802.11n(HT40) CH38
Test Specification: AC 120V
Comment: Neutral Line
Tem.: 23.5°C Hum.: 55%

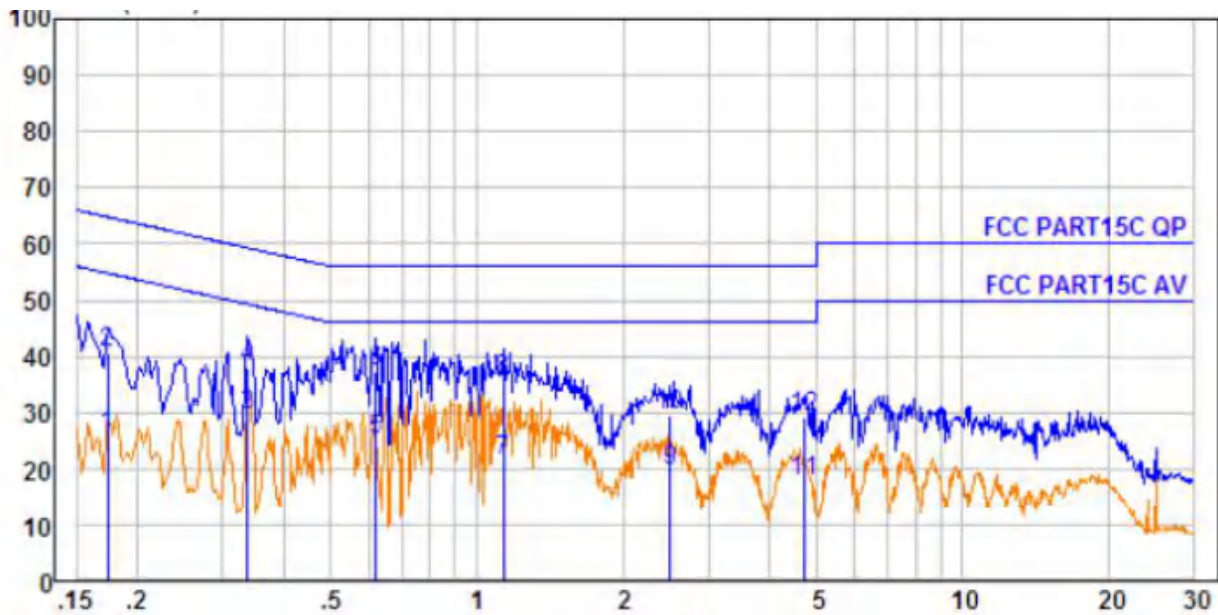

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.174	0.24	9.60	15.90	25.74	54.77	-29.03	Average
2.	0.174	0.24	9.60	30.80	40.64	64.77	-24.13	QP
3.	0.337	0.38	9.62	19.58	29.58	49.27	-19.69	Average
4.	0.337	0.38	9.62	28.09	38.09	59.27	-21.18	QP
5.	0.621	0.44	9.64	14.95	25.03	46.00	-20.97	Average
6.	0.621	0.44	9.64	27.26	37.34	56.00	-18.66	QP
7.	1.135	0.46	9.64	11.27	21.37	46.00	-24.63	Average
8.	1.135	0.46	9.64	25.71	35.81	56.00	-20.19	QP
9.	2.500	0.47	9.65	9.51	19.63	46.00	-26.37	Average
10.	2.500	0.47	9.65	19.46	29.58	56.00	-26.42	QP
11.	4.721	0.49	9.70	7.49	17.68	46.00	-28.32	Average
12.	4.721	0.49	9.70	18.79	28.98	56.00	-27.02	QP

5. Radiation Spurious Emission and Band Edge

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = -27 \text{ dBm}$.

5.2. Test Setup

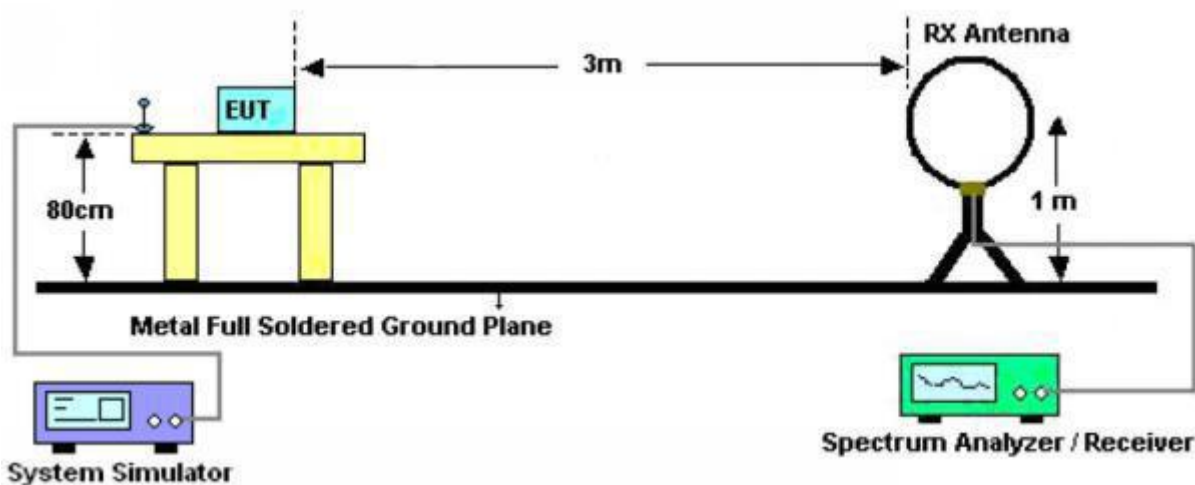


Figure 1. Below 30MHz

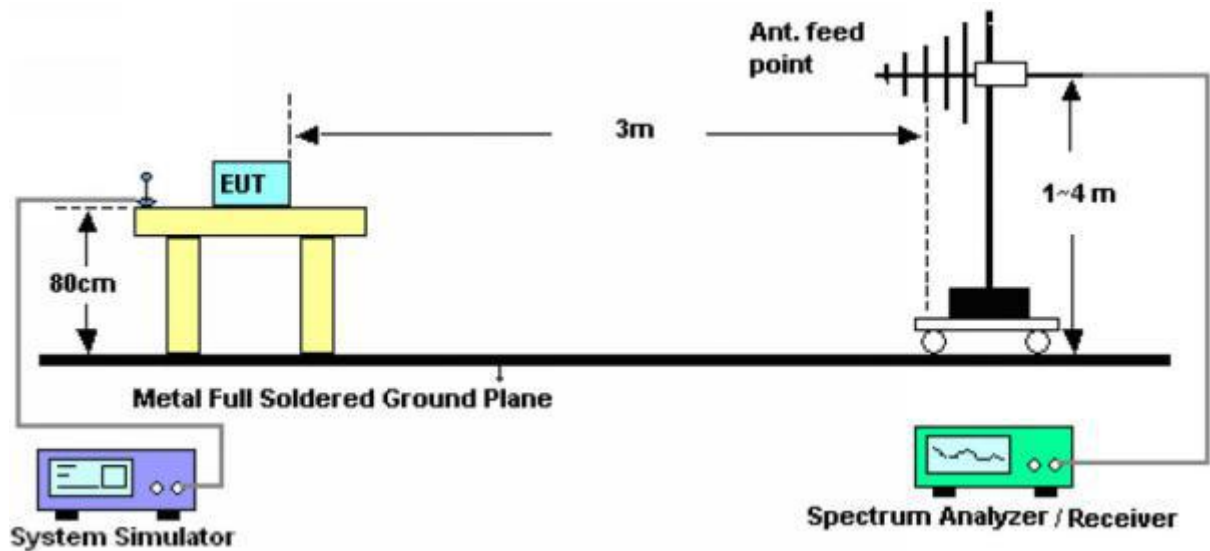


Figure 2. 30MHz to 1GHz

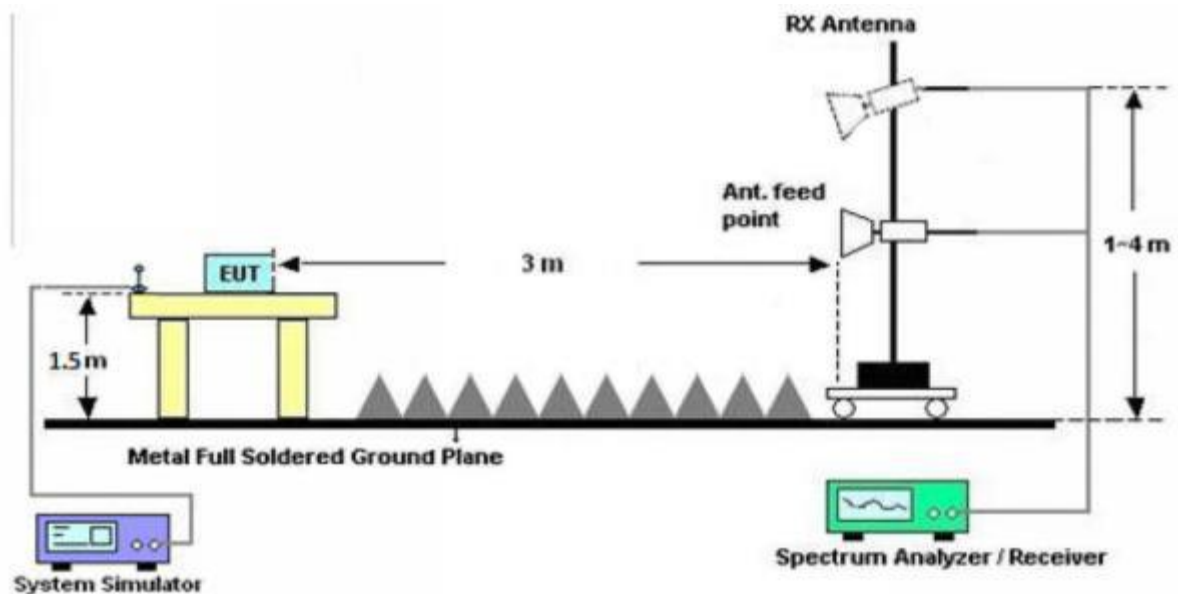


Figure 3. Above 1 GHz

5.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of

emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

5.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found MIMO mode is the worst case and only the worst case is recorded in the report.


Test Results (30~1000MHz)

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 23.2°C/50%RH

Test Mode: TX Mode

Power Source: AC 120V

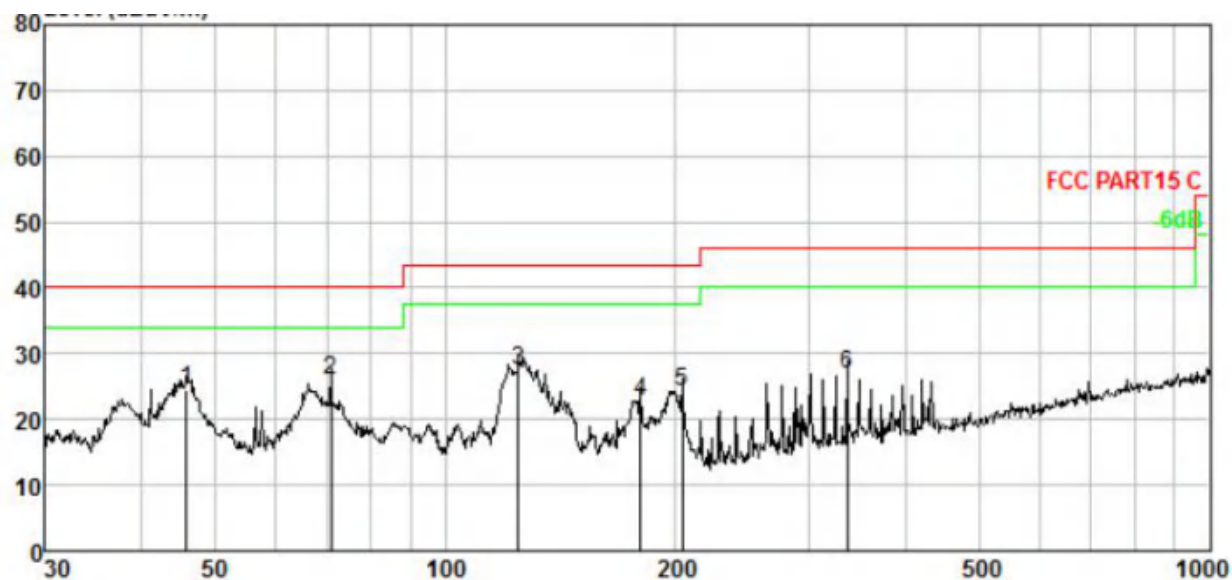

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	45.855	1.93	12.26	40.17	29.92	24.44	40.00	-15.56	QP
2.	70.832	2.68	9.98	43.16	29.96	25.86	40.00	-14.14	QP
3.	124.569	3.65	12.32	41.61	30.01	27.57	43.50	-15.93	QP
4.	180.017	4.28	12.50	35.97	30.03	22.72	43.50	-20.78	QP
5.	204.238	4.50	11.14	38.57	30.05	24.16	43.50	-19.34	QP
6.	336.035	5.36	14.08	37.94	30.47	26.91	46.00	-19.09	QP


Test Results (30~1000MHz)

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 23.2°C/50%RH

Test Mode: TX Mode

Power Source: AC 120V

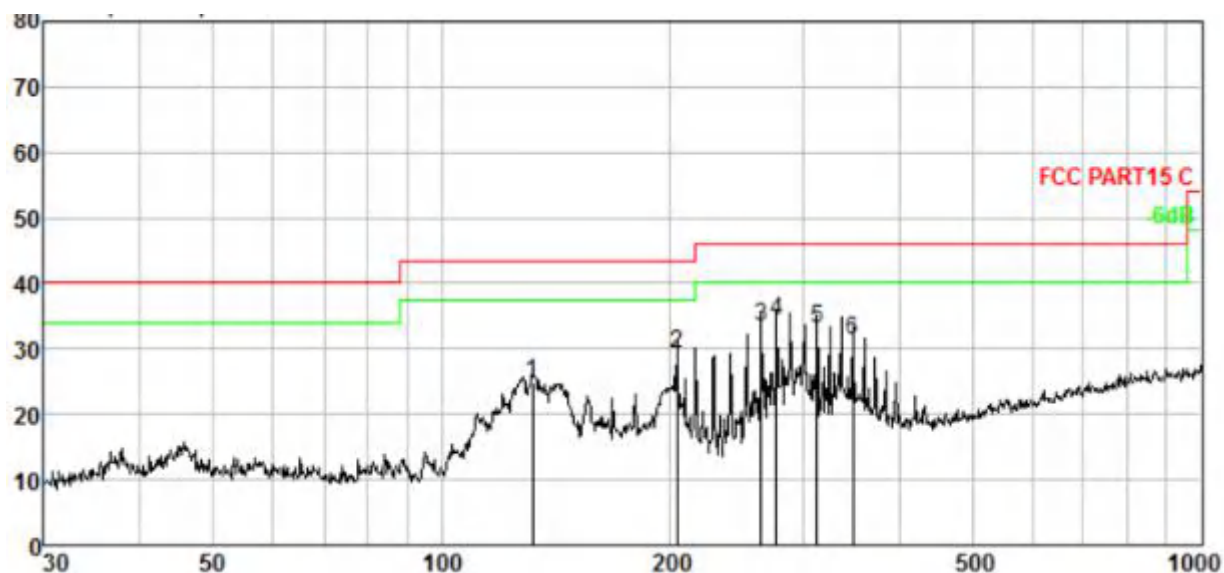

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	131.758	3.75	12.79	38.22	30.01	24.75	43.50	-18.75	QP
2.	204.238	4.50	11.14	43.74	30.05	29.33	43.50	-14.17	QP
3.	263.819	4.94	12.71	45.99	30.23	33.41	46.00	-12.59	QP
4.	276.124	5.02	12.88	46.47	30.26	34.11	46.00	-11.89	QP
5.	312.179	5.23	13.51	44.82	30.37	33.19	46.00	-12.81	QP
6.	348.027	5.42	14.36	42.01	30.52	31.27	46.00	-14.73	QP



Test Results (Above 1000MHz)

ANT A:

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.73	32.29	4.10	28.45	48.67	68.20	-19.53	V
15570.00	34.50	35.99	6.22	27.83	48.88	68.20	-19.32	V
10380.00	39.33	32.29	4.10	28.45	47.27	68.20	-20.93	H
15570.00	34.21	35.99	6.22	27.83	48.59	68.20	-19.61	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.78	32.29	4.10	28.45	37.72	54.00	-16.28	V
15570.00	23.35	35.99	6.22	27.83	37.73	54.00	-16.27	V
10380.00	28.85	32.29	4.10	28.45	36.79	54.00	-17.21	H
15570.00	22.79	35.99	6.22	27.83	37.17	54.00	-16.83	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.79	32.29	4.10	28.45	48.73	68.20	-19.47	V
15570.00	34.53	35.99	6.22	27.83	48.91	68.20	-19.29	V
10380.00	39.38	32.29	4.10	28.45	47.32	68.20	-20.88	H
15570.00	34.24	35.99	6.22	27.83	48.62	68.20	-19.58	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.83	32.29	4.10	28.45	37.77	54.00	-16.23	V
15570.00	23.39	35.99	6.22	27.83	37.77	54.00	-16.23	V
10380.00	28.89	32.29	4.10	28.45	36.83	54.00	-17.17	H
15570.00	22.81	35.99	6.22	27.83	37.19	54.00	-16.81	H

Remark:

- During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11n(HT40) mode is worse case , the report only record this mode.
- Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.01	27.39	2.77	34.01	48.16	74.00	-25.84	H
5350.00	61.15	27.42	2.78	34.01	57.34	74.00	-16.66	H
5150.00	53.72	27.39	2.77	34.01	49.87	74.00	-24.13	V
5350.00	63.04	27.42	2.78	34.01	59.23	74.00	-14.77	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.67	27.39	2.77	34.01	34.82	54.00	-19.18	H
5350.00	47.00	27.42	2.78	34.01	43.19	54.00	-10.81	H
5150.00	40.52	27.39	2.77	34.01	36.67	54.00	-17.33	V
5350.00	48.15	27.42	2.78	34.01	44.34	54.00	-9.66	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.06	27.39	2.77	34.01	48.21	74.00	-25.79	H
5350.00	61.21	27.42	2.78	34.01	57.40	74.00	-16.60	H
5150.00	53.77	27.39	2.77	34.01	49.92	74.00	-24.08	V
5350.00	63.12	27.42	2.78	34.01	59.31	74.00	-14.69	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.70	27.39	2.77	34.01	34.85	54.00	-19.15	H
5350.00	47.04	27.42	2.78	34.01	43.23	54.00	-10.77	H
5150.00	40.56	27.39	2.77	34.01	36.71	54.00	-17.29	V
5350.00	48.20	27.42	2.78	34.01	44.39	54.00	-9.61	V



Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.16	27.39	2.77	34.01	48.31	74.00	-25.69	H
5350.00	61.34	27.42	2.78	34.01	57.53	74.00	-16.47	H
5150.00	53.88	27.39	2.77	34.01	50.03	74.00	-23.97	V
5350.00	63.28	27.42	2.78	34.01	59.47	74.00	-14.53	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.77	27.39	2.77	34.01	34.92	54.00	-19.08	H
5350.00	47.12	27.42	2.78	34.01	43.31	54.00	-10.69	H
5150.00	40.63	27.39	2.77	34.01	36.78	54.00	-17.22	V
5350.00	48.29	27.42	2.78	34.01	44.48	54.00	-9.52	V


Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.13	27.39	2.77	34.01	48.28	74.00	-25.72	H
5350.00	61.31	27.42	2.78	34.01	57.50	74.00	-16.50	H
5150.00	53.85	27.39	2.77	34.01	50.00	74.00	-24.00	V
5350.00	63.24	27.42	2.78	34.01	59.43	74.00	-14.57	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.76	27.39	2.77	34.01	34.91	54.00	-19.09	H
5350.00	47.10	27.42	2.78	34.01	43.29	54.00	-10.71	H
5150.00	40.61	27.39	2.77	34.01	36.76	54.00	-17.24	V
5350.00	48.26	27.42	2.78	34.01	44.45	54.00	-9.55	V

Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.21	27.39	2.77	34.01	48.36	74.00	-25.64	H
5350.00	61.41	27.42	2.78	34.01	57.60	74.00	-16.40	H
5150.00	53.93	27.39	2.77	34.01	50.08	74.00	-23.92	V
5350.00	63.35	27.42	2.78	34.01	59.54	74.00	-14.46	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.81	27.39	2.77	34.01	34.96	54.00	-19.04	H
5350.00	47.16	27.42	2.78	34.01	43.35	54.00	-10.65	H
5150.00	40.67	27.39	2.77	34.01	36.82	54.00	-17.18	V
5350.00	48.33	27.42	2.78	34.01	44.52	54.00	-9.48	V


Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.03	27.39	2.77	34.01	48.18	74.00	-25.82	H
5350.00	61.18	27.42	2.78	34.01	57.37	74.00	-16.63	H
5150.00	53.74	27.39	2.77	34.01	49.89	74.00	-24.11	V
5350.00	63.08	27.42	2.78	34.01	59.27	74.00	-14.73	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.68	27.39	2.77	34.01	34.83	54.00	-19.17	H
5350.00	47.02	27.42	2.78	34.01	43.21	54.00	-10.79	H
5150.00	40.53	27.39	2.77	34.01	36.68	54.00	-17.32	V
5350.00	48.17	27.42	2.78	34.01	44.36	54.00	-9.64	V




For conducted test:

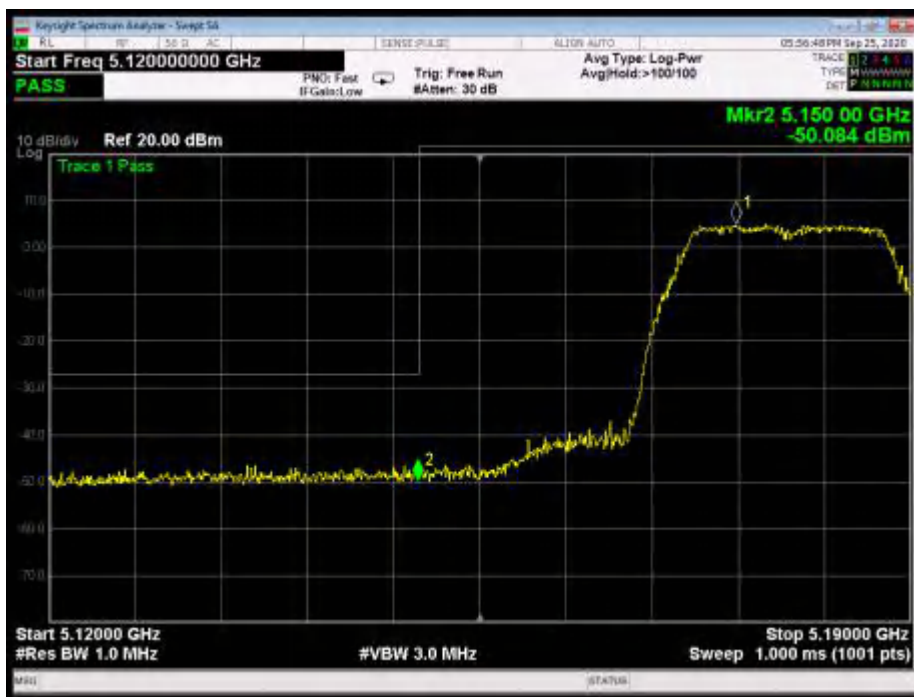


802.11a: Band Edge, Left Side

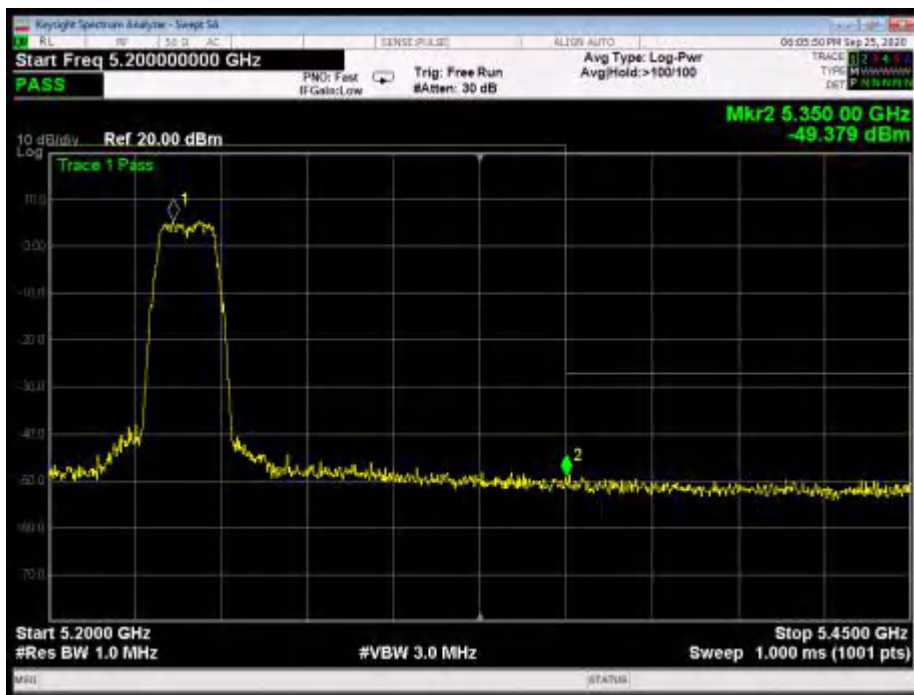


802.11a: Band Edge, Right Side

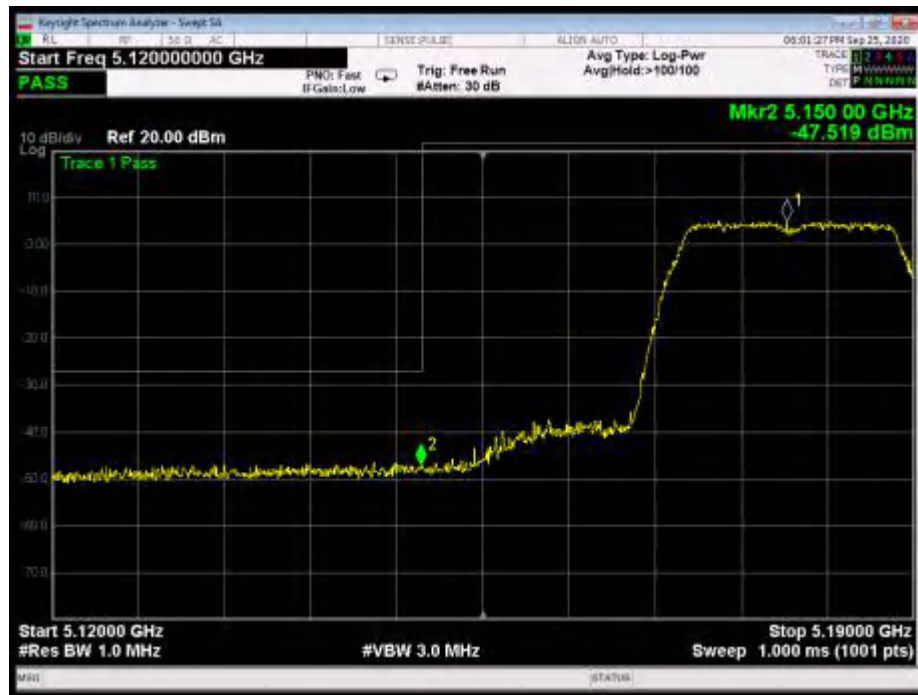


802.11n(20): Band Edge, Left Side

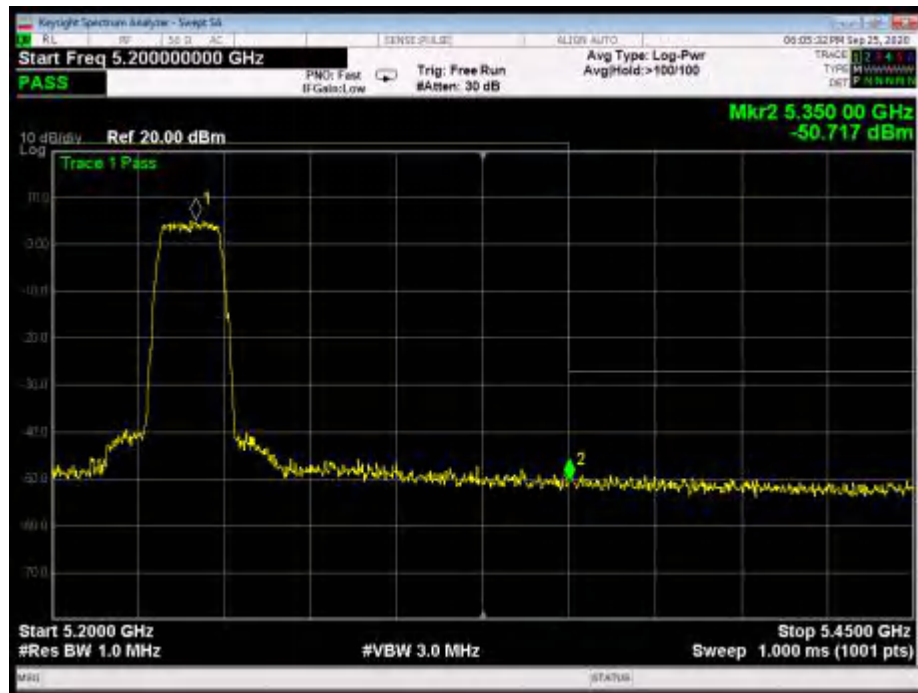


802.11n(20): Band Edge, Right Side

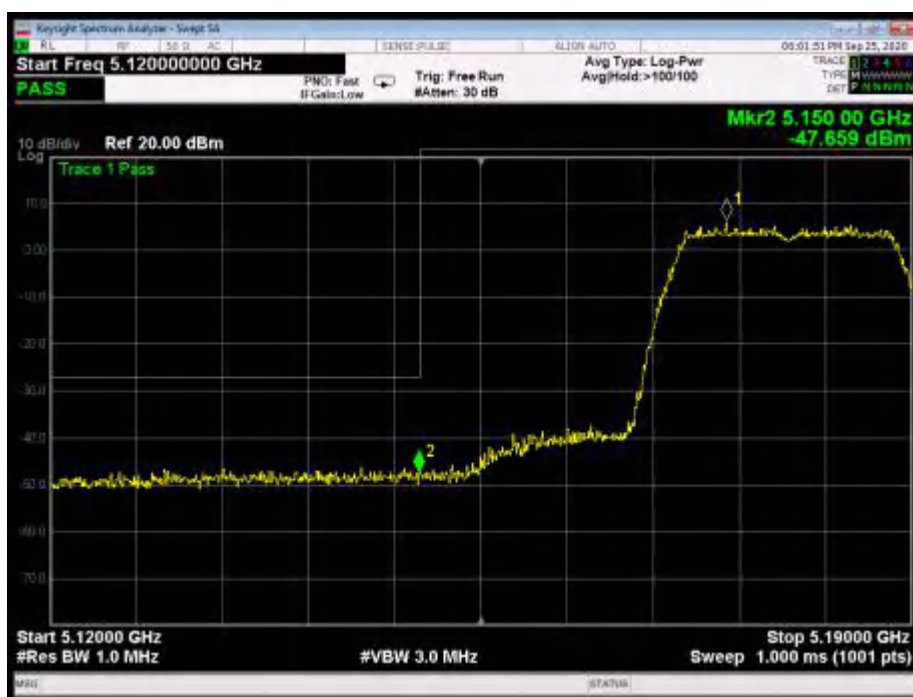


802.11ac(20): Band Edge, Left Side

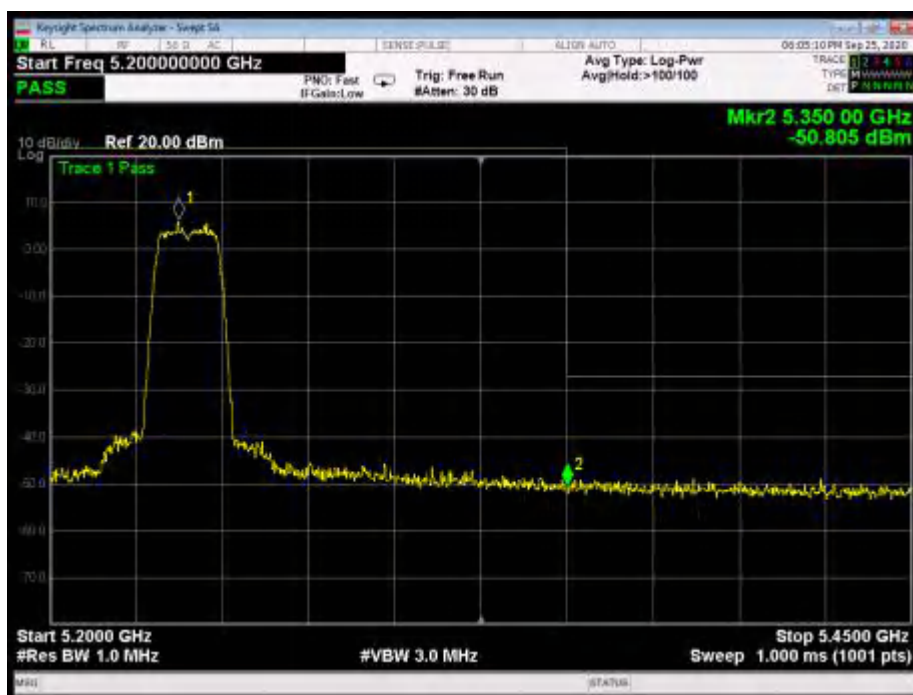


802.11ac(20): Band Edge, Right Side

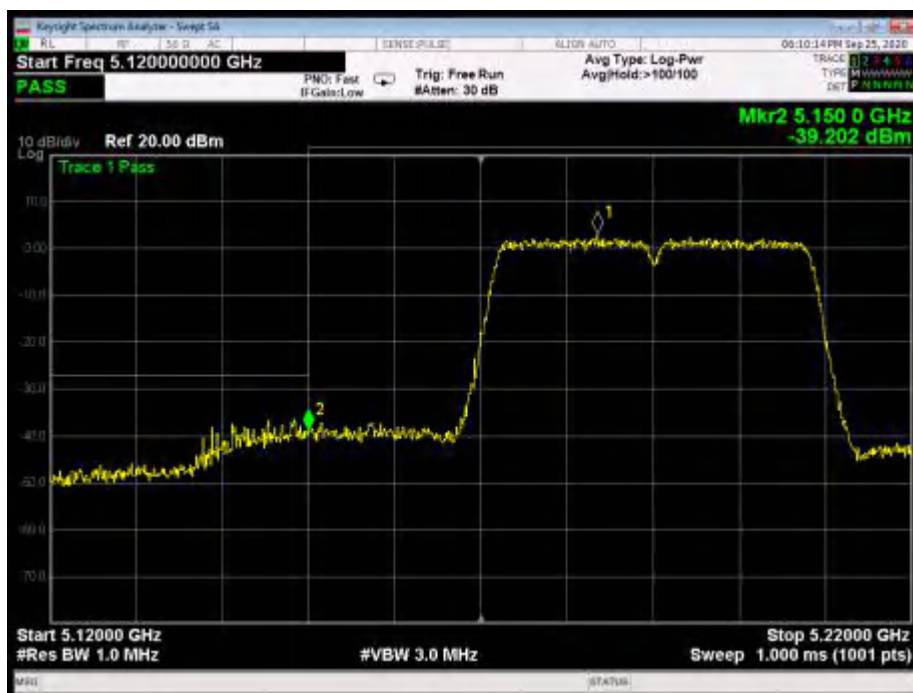


802.11n(40): Band Edge, Left Side

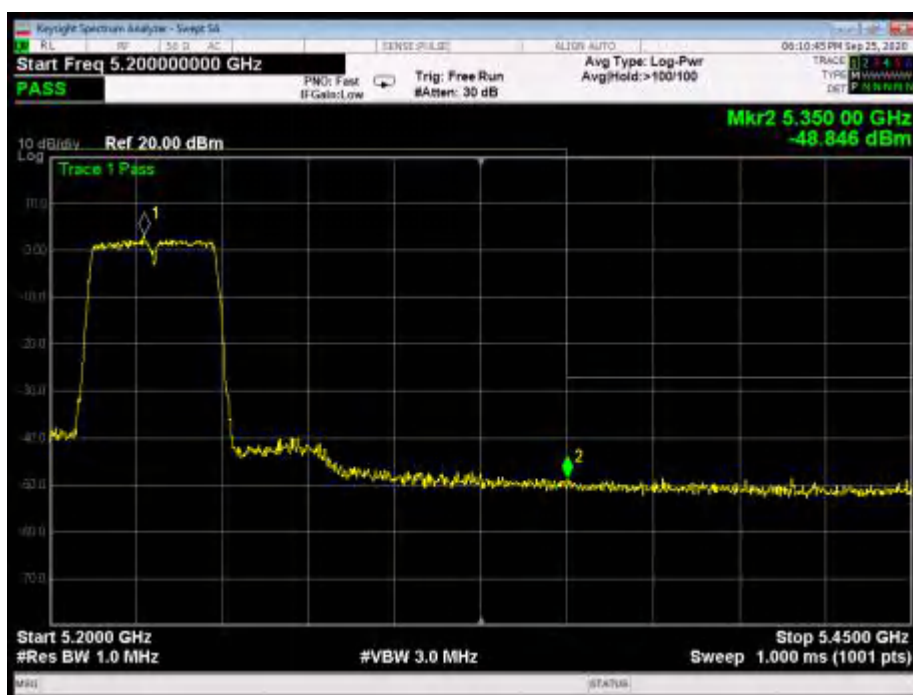


802.11n(40): Band Edge, Right Side

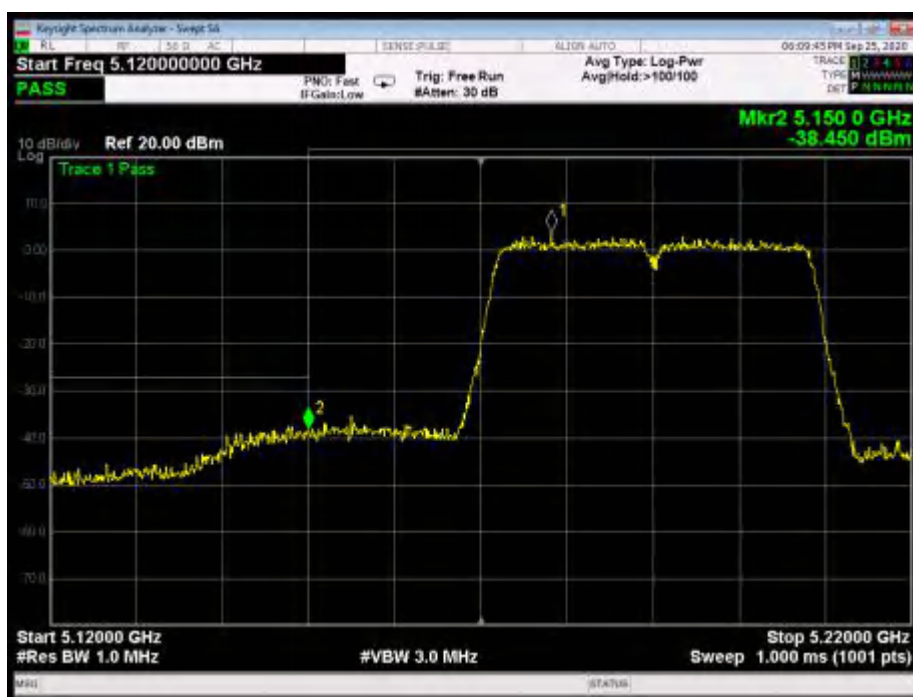


802.11ac(40): Band Edge, Left Side

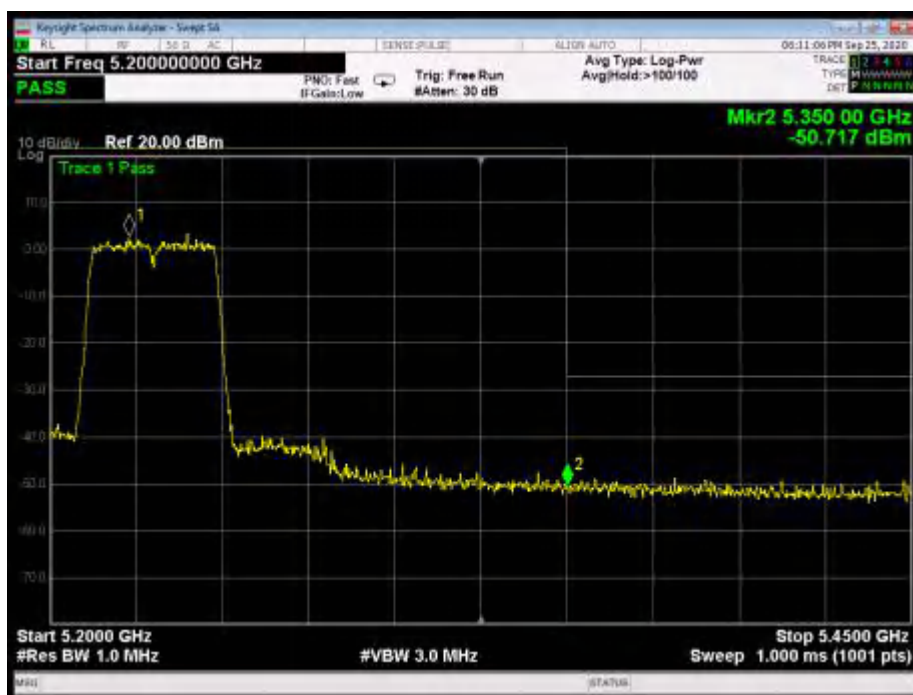

802.11ac(40): Band Edge, Right Side

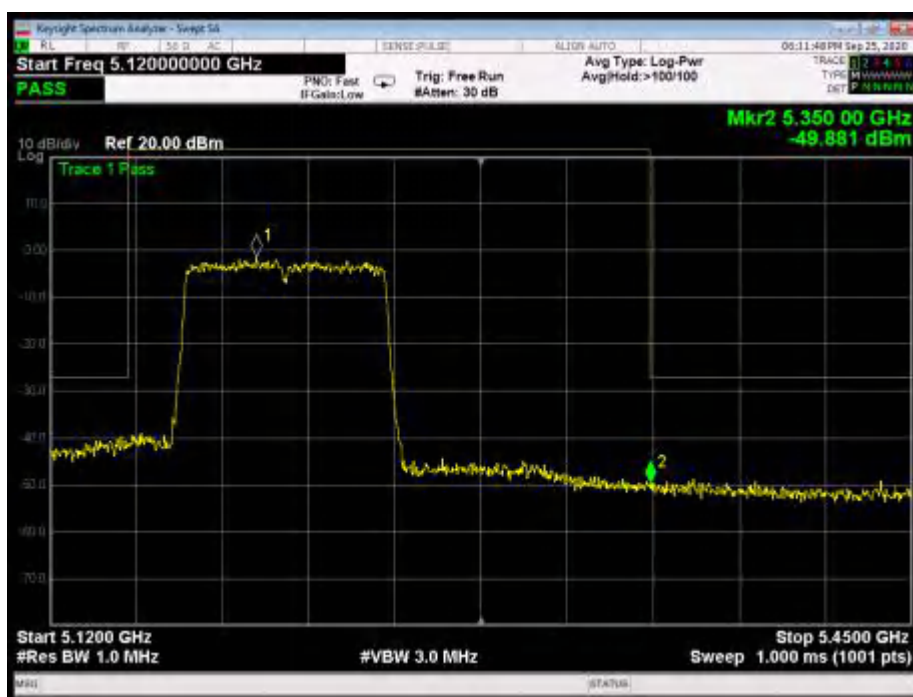

802.11ac(80): Band Edge

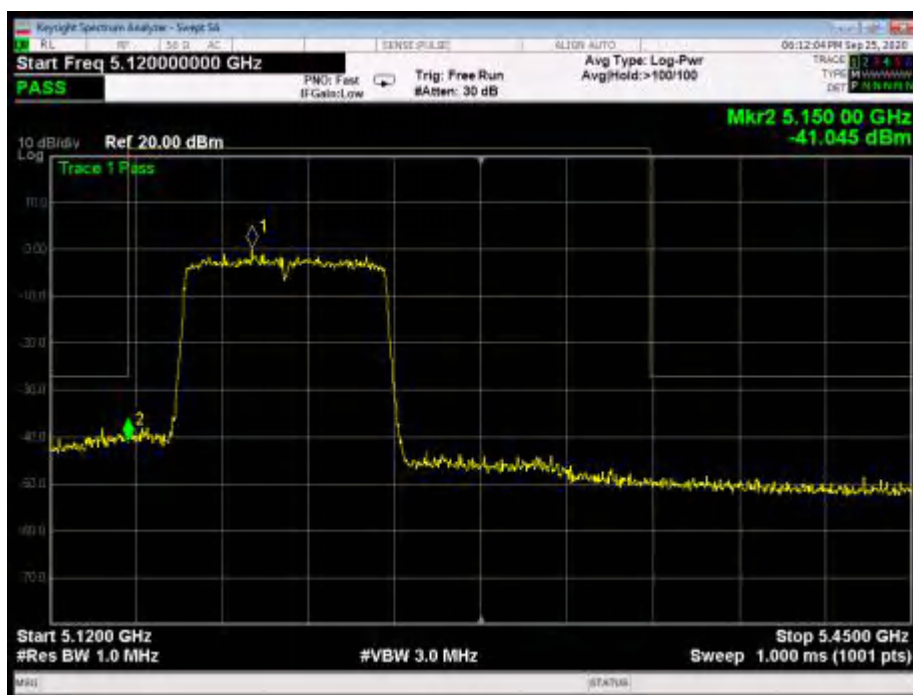

802.11ac(80): Band Edge

**Test Results (Above 1000MHz)****ANT B:**

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.03	32.29	4.10	28.45	48.97	68.20	-19.23	V
15570.00	34.68	35.99	6.22	27.83	49.06	68.20	-19.14	V
10380.00	39.58	32.29	4.10	28.45	47.52	68.20	-20.68	H
15570.00	34.37	35.99	6.22	27.83	48.75	68.20	-19.45	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.05	32.29	4.10	28.45	37.99	54.00	-16.01	V
15570.00	23.53	35.99	6.22	27.83	37.91	54.00	-16.09	V
10380.00	29.08	32.29	4.10	28.45	37.02	54.00	-16.98	H
15570.00	22.94	35.99	6.22	27.83	37.32	54.00	-16.68	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.53	32.29	4.10	28.45	49.47	68.20	-18.73	V
15570.00	35.00	35.99	6.22	27.83	49.38	68.20	-18.82	V
10380.00	40.01	32.29	4.10	28.45	47.95	68.20	-20.25	H
15570.00	34.65	35.99	6.22	27.83	49.03	68.20	-19.17	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.52	32.29	4.10	28.45	38.46	54.00	-15.54	V
15570.00	23.84	35.99	6.22	27.83	38.22	54.00	-15.78	V
10380.00	29.48	32.29	4.10	28.45	37.42	54.00	-16.58	H
15570.00	23.21	35.99	6.22	27.83	37.59	54.00	-16.41	H



Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.26	32.29	4.10	28.45	49.20	68.20	-19.00	V
15570.00	34.83	35.99	6.22	27.83	49.21	68.20	-18.99	V
10380.00	39.78	32.29	4.10	28.45	47.72	68.20	-20.48	H
15570.00	34.50	35.99	6.22	27.83	48.88	68.20	-19.32	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.27	32.29	4.10	28.45	38.21	54.00	-15.79	V
15570.00	23.68	35.99	6.22	27.83	38.06	54.00	-15.94	V
10380.00	29.27	32.29	4.10	28.45	37.21	54.00	-16.79	H
15570.00	23.07	35.99	6.22	27.83	37.45	54.00	-16.55	H

Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11ac(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.26	27.39	2.77	34.01	48.41	74.00	-25.59	H
5350.00	61.47	27.42	2.78	34.01	57.66	74.00	-16.34	H
5150.00	53.98	27.39	2.77	34.01	50.13	74.00	-23.87	V
5350.00	63.43	27.42	2.78	34.01	59.62	74.00	-14.38	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.84	27.39	2.77	34.01	34.99	54.00	-19.01	H
5350.00	47.20	27.42	2.78	34.01	43.39	54.00	-10.61	H
5150.00	40.71	27.39	2.77	34.01	36.86	54.00	-17.14	V
5350.00	48.37	27.42	2.78	34.01	44.56	54.00	-9.44	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.38	27.39	2.77	34.01	48.53	74.00	-25.47	H
5350.00	61.63	27.42	2.78	34.01	57.82	74.00	-16.18	H
5150.00	54.11	27.39	2.77	34.01	50.26	74.00	-23.74	V
5350.00	63.63	27.42	2.78	34.01	59.82	74.00	-14.18	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.93	27.39	2.77	34.01	35.08	54.00	-18.92	H
5350.00	47.30	27.42	2.78	34.01	43.49	54.00	-10.51	H
5150.00	40.81	27.39	2.77	34.01	36.96	54.00	-17.04	V
5350.00	48.48	27.42	2.78	34.01	44.67	54.00	-9.33	V



Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.50	27.39	2.77	34.01	48.65	74.00	-25.35	H
5350.00	61.80	27.42	2.78	34.01	57.99	74.00	-16.01	H
5150.00	54.24	27.39	2.77	34.01	50.39	74.00	-23.61	V
5350.00	63.82	27.42	2.78	34.01	60.01	74.00	-13.99	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.02	27.39	2.77	34.01	35.17	54.00	-18.83	H
5350.00	47.40	27.42	2.78	34.01	43.59	54.00	-10.41	H
5150.00	40.90	27.39	2.77	34.01	37.05	54.00	-16.95	V
5350.00	48.59	27.42	2.78	34.01	44.78	54.00	-9.22	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	51.52	27.39	2.77	34.01	47.67	74.00	-26.33	H
5350.00	60.49	27.42	2.78	34.01	56.68	74.00	-17.32	H
5150.00	53.20	27.39	2.77	34.01	49.35	74.00	-24.65	V
5350.00	62.26	27.42	2.78	34.01	58.45	74.00	-15.55	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.32	27.39	2.77	34.01	34.47	54.00	-19.53	H
5350.00	46.60	27.42	2.78	34.01	42.79	54.00	-11.21	H
5150.00	40.13	27.39	2.77	34.01	36.28	54.00	-17.72	V
5350.00	47.72	27.42	2.78	34.01	43.91	54.00	-10.09	V




Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	51.28	27.39	2.77	34.01	47.43	74.00	-26.57	H
5350.00	60.17	27.42	2.78	34.01	56.36	74.00	-17.64	H
5150.00	52.94	27.39	2.77	34.01	49.09	74.00	-24.91	V
5350.00	61.87	27.42	2.78	34.01	58.06	74.00	-15.94	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.15	27.39	2.77	34.01	34.30	54.00	-19.70	H
5350.00	46.40	27.42	2.78	34.01	42.59	54.00	-11.41	H
5150.00	39.94	27.39	2.77	34.01	36.09	54.00	-17.91	V
5350.00	47.50	27.42	2.78	34.01	43.69	54.00	-10.31	V


Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.45	27.39	2.77	34.01	48.60	74.00	-25.40	H
5350.00	61.73	27.42	2.78	34.01	57.92	74.00	-16.08	H
5150.00	54.19	27.39	2.77	34.01	50.34	74.00	-23.66	V
5350.00	63.75	27.42	2.78	34.01	59.94	74.00	-14.06	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.98	27.39	2.77	34.01	35.13	54.00	-18.87	H
5350.00	47.36	27.42	2.78	34.01	43.55	54.00	-10.45	H
5150.00	40.87	27.39	2.77	34.01	37.02	54.00	-16.98	V
5350.00	48.55	27.42	2.78	34.01	44.74	54.00	-9.26	V




For conducted test:

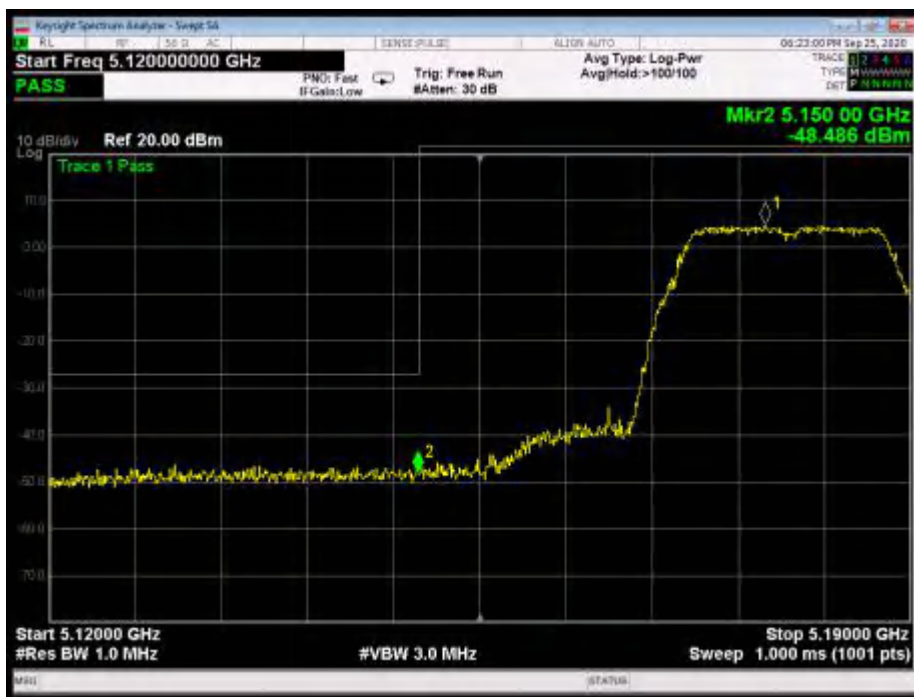


802.11a: Band Edge, Left Side

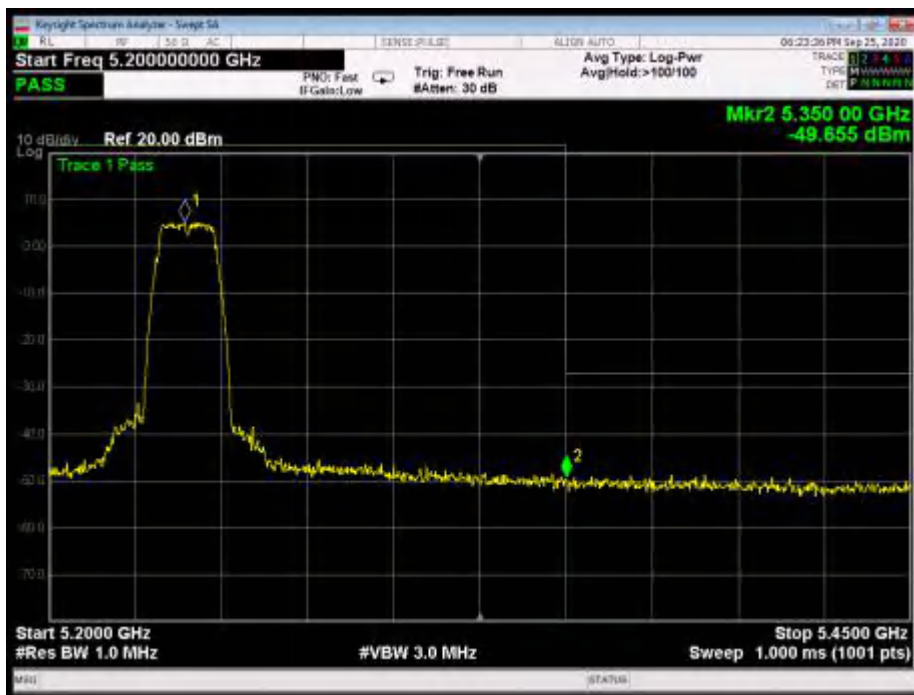


802.11a: Band Edge, Right Side

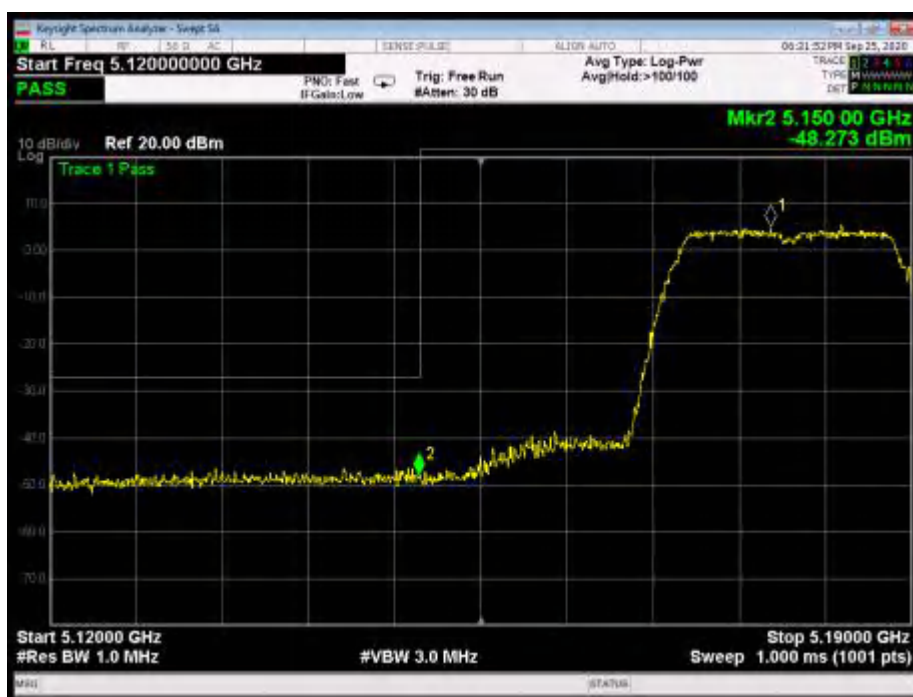


802.11n(20): Band Edge, Left Side

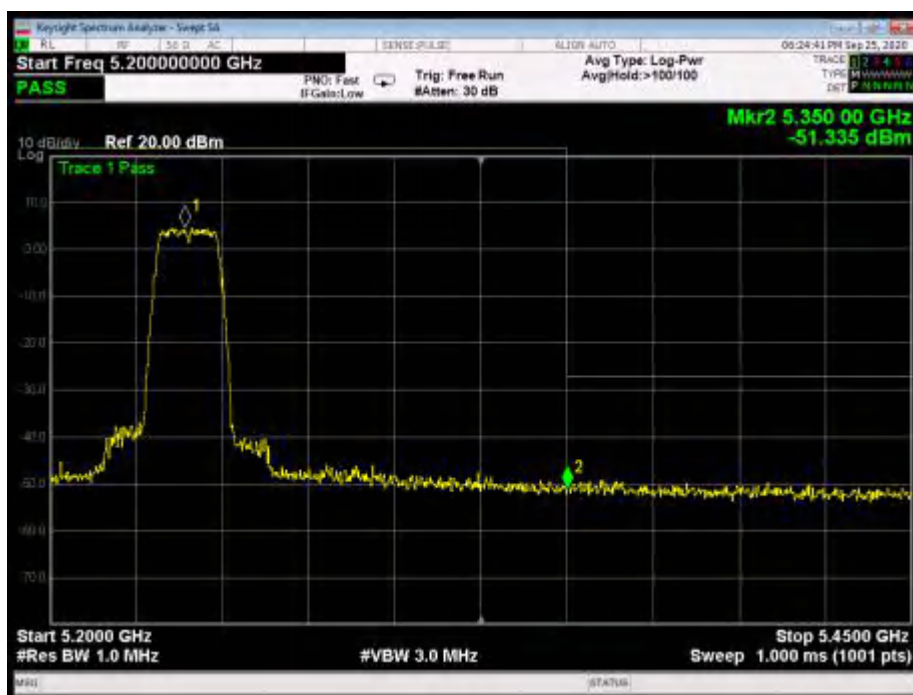


802.11n(20): Band Edge, Right Side

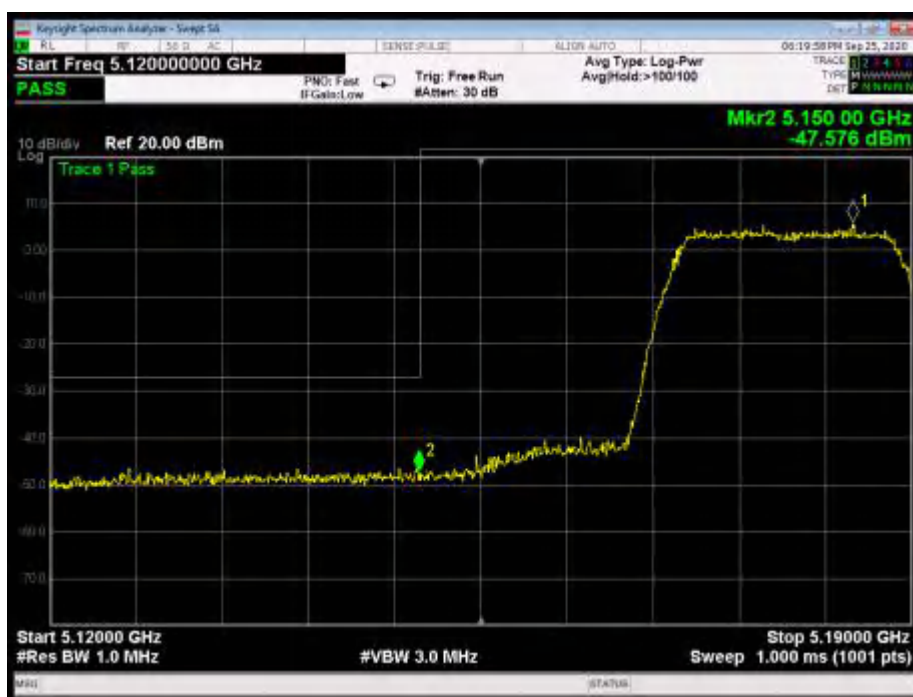

802.11ac(20): Band Edge, Left Side

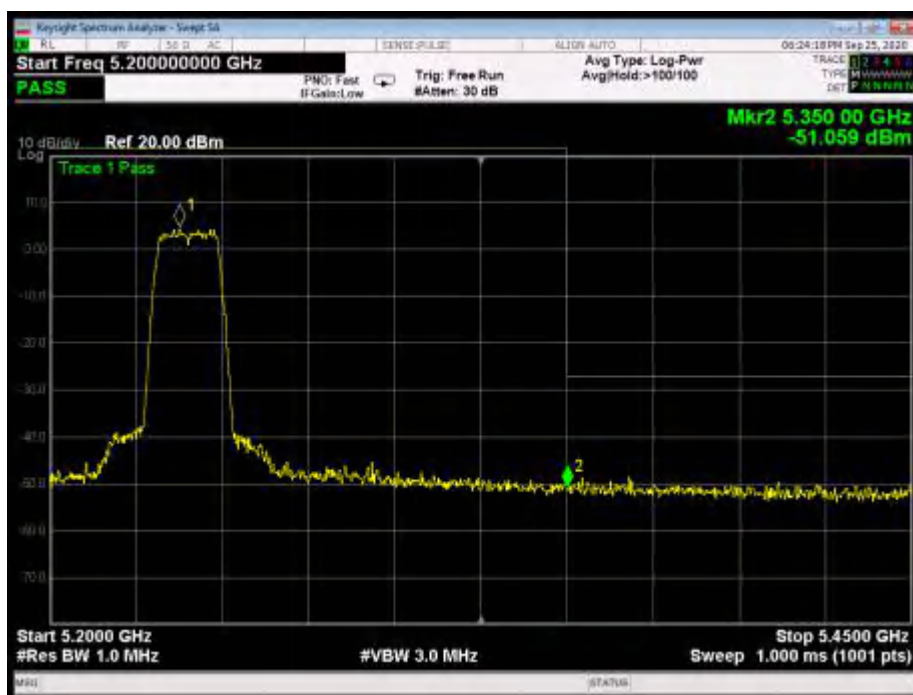

802.11ac(20): Band Edge, Right Side

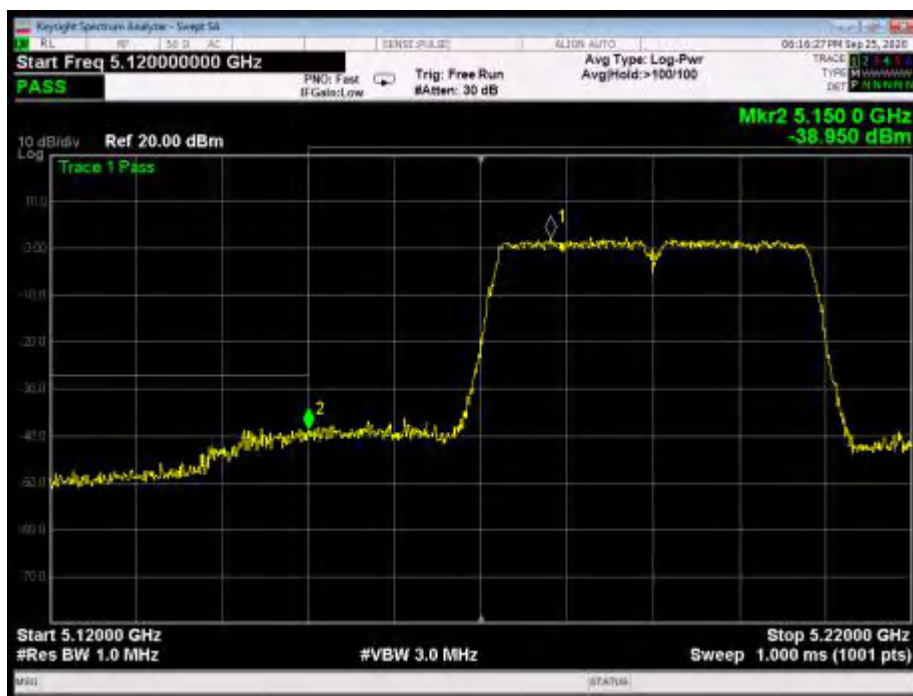


802.11n(40): Band Edge, Left Side



802.11n(40): Band Edge, Right Side




802.11ac(40): Band Edge, Left Side

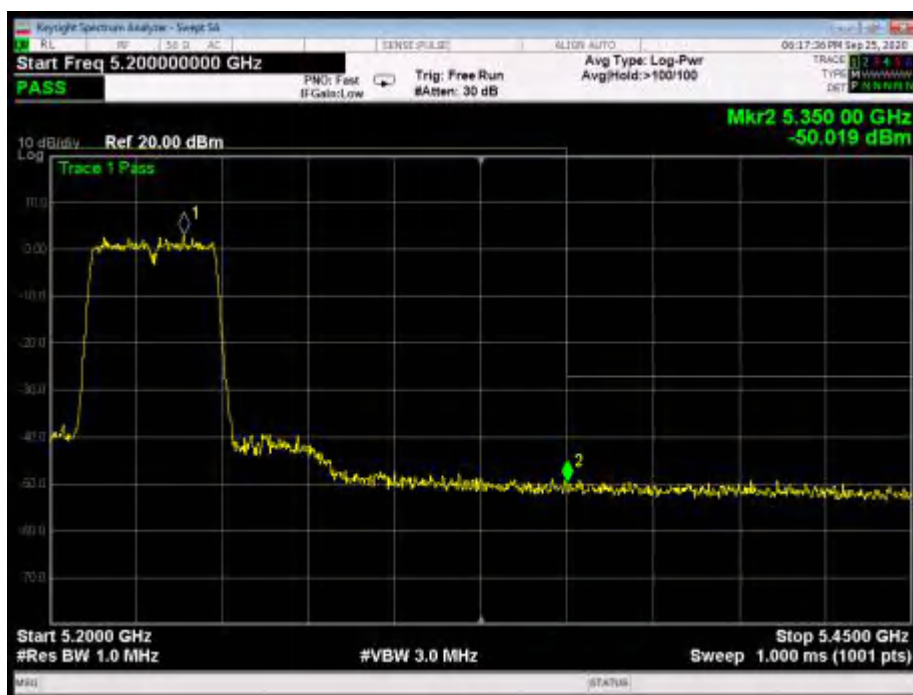

802.11ac(40): Band Edge, Right Side



802.11ac(80): Band Edge

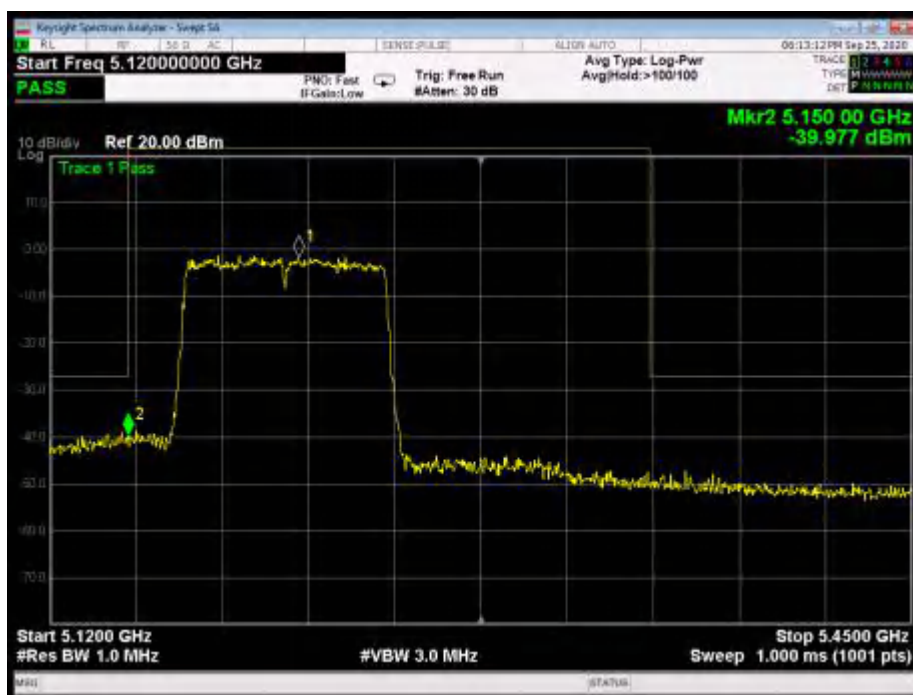

802.11ac(80): Band Edge



Test Results (Above 1000MHz)

ANT C:

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.43	32.29	4.10	28.45	49.37	68.20	-18.83	V
15570.00	34.94	35.99	6.22	27.83	49.32	68.20	-18.88	V
10380.00	39.92	32.29	4.10	28.45	47.86	68.20	-20.34	H
15570.00	34.59	35.99	6.22	27.83	48.97	68.20	-19.23	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.42	32.29	4.10	28.45	38.36	54.00	-15.64	V
15570.00	23.78	35.99	6.22	27.83	38.16	54.00	-15.84	V
10380.00	29.40	32.29	4.10	28.45	37.34	54.00	-16.66	H
15570.00	23.16	35.99	6.22	27.83	37.54	54.00	-16.46	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.29	32.35	4.12	28.44	48.32	68.20	-19.88	V
15570.00	34.88	36.08	6.30	27.74	49.52	68.20	-18.68	V
10380.00	40.62	32.35	4.12	28.44	48.65	68.20	-19.55	H
15570.00	33.45	36.08	6.30	27.74	48.09	68.20	-20.11	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.07	32.35	4.12	28.44	39.10	54.00	-14.90	V
15570.00	23.18	36.08	6.30	27.74	37.82	54.00	-16.18	V
10380.00	30.68	32.35	4.12	28.44	38.71	54.00	-15.29	H
15570.00	22.52	36.08	6.30	27.74	37.16	54.00	-16.84	H



Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	46.50	32.41	4.14	28.42	54.63	68.20	-13.57	V
15690.00	35.99	36.15	6.36	27.68	50.82	68.20	-17.38	V
10460.00	45.55	32.41	4.14	28.42	53.68	68.20	-14.52	H
15690.00	34.76	36.15	6.36	27.68	49.59	68.20	-18.61	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	37.28	32.41	4.14	28.42	45.41	54.00	-8.59	V
15690.00	25.87	36.15	6.36	27.68	40.70	54.00	-13.30	V
10460.00	35.83	32.41	4.14	28.42	43.96	54.00	-10.04	H
15690.00	24.12	36.15	6.36	27.68	38.95	54.00	-15.05	H

Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11ac(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.72	27.39	2.77	34.01	48.87	74.00	-25.13	H
5350.00	62.09	27.42	2.78	34.01	58.28	74.00	-15.72	H
5150.00	54.48	27.39	2.77	34.01	50.63	74.00	-23.37	V
5350.00	64.18	27.42	2.78	34.01	60.37	74.00	-13.63	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.17	27.39	2.77	34.01	35.32	54.00	-18.68	H
5350.00	47.58	27.42	2.78	34.01	43.77	54.00	-10.23	H
5150.00	41.08	27.39	2.77	34.01	37.23	54.00	-16.77	V
5350.00	48.79	27.42	2.78	34.01	44.98	54.00	-9.02	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.82	27.39	2.77	34.01	48.97	74.00	-25.03	H
5350.00	62.22	27.42	2.78	34.01	58.41	74.00	-15.59	H
5150.00	54.58	27.39	2.77	34.01	50.73	74.00	-23.27	V
5350.00	64.33	27.42	2.78	34.01	60.52	74.00	-13.48	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.24	27.39	2.77	34.01	35.39	54.00	-18.61	H
5350.00	47.66	27.42	2.78	34.01	43.85	54.00	-10.15	H
5150.00	41.16	27.39	2.77	34.01	37.31	54.00	-16.69	V
5350.00	48.88	27.42	2.78	34.01	45.07	54.00	-8.93	V



Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.96	27.39	2.77	34.01	49.11	74.00	-24.89	H
5350.00	62.42	27.42	2.78	34.01	58.61	74.00	-15.39	H
5150.00	54.74	27.39	2.77	34.01	50.89	74.00	-23.11	V
5350.00	64.57	27.42	2.78	34.01	60.76	74.00	-13.24	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.35	27.39	2.77	34.01	35.50	54.00	-18.50	H
5350.00	47.78	27.42	2.78	34.01	43.97	54.00	-10.03	H
5150.00	41.27	27.39	2.77	34.01	37.42	54.00	-16.58	V
5350.00	49.01	27.42	2.78	34.01	45.20	54.00	-8.80	V


Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	53.04	27.39	2.77	34.01	49.19	74.00	-24.81	H
5350.00	62.51	27.42	2.78	34.01	58.70	74.00	-15.30	H
5150.00	54.82	27.39	2.77	34.01	50.97	74.00	-23.03	V
5350.00	64.69	27.42	2.78	34.01	60.88	74.00	-13.12	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.40	27.39	2.77	34.01	35.55	54.00	-18.45	H
5350.00	47.84	27.42	2.78	34.01	44.03	54.00	-9.97	H
5150.00	41.33	27.39	2.77	34.01	37.48	54.00	-16.52	V
5350.00	49.07	27.42	2.78	34.01	45.26	54.00	-8.74	V




Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	53.11	27.39	2.77	34.01	49.26	74.00	-24.74	H
5350.00	62.61	27.42	2.78	34.01	58.80	74.00	-15.20	H
5150.00	54.89	27.39	2.77	34.01	51.04	74.00	-22.96	V
5350.00	64.80	27.42	2.78	34.01	60.99	74.00	-13.01	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.45	27.39	2.77	34.01	35.60	54.00	-18.40	H
5350.00	47.90	27.42	2.78	34.01	44.09	54.00	-9.91	H
5150.00	41.39	27.39	2.77	34.01	37.54	54.00	-16.46	V
5350.00	49.14	27.42	2.78	34.01	45.33	54.00	-8.67	V

Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.84	27.39	2.77	34.01	48.99	74.00	-25.01	H
5350.00	62.25	27.42	2.78	34.01	58.44	74.00	-15.56	H
5150.00	54.61	27.39	2.77	34.01	50.76	74.00	-23.24	V
5350.00	64.37	27.42	2.78	34.01	60.56	74.00	-13.44	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.26	27.39	2.77	34.01	35.41	54.00	-18.59	H
5350.00	47.68	27.42	2.78	34.01	43.87	54.00	-10.13	H
5150.00	41.17	27.39	2.77	34.01	37.32	54.00	-16.68	V
5350.00	48.90	27.42	2.78	34.01	45.09	54.00	-8.91	V


For conducted test:

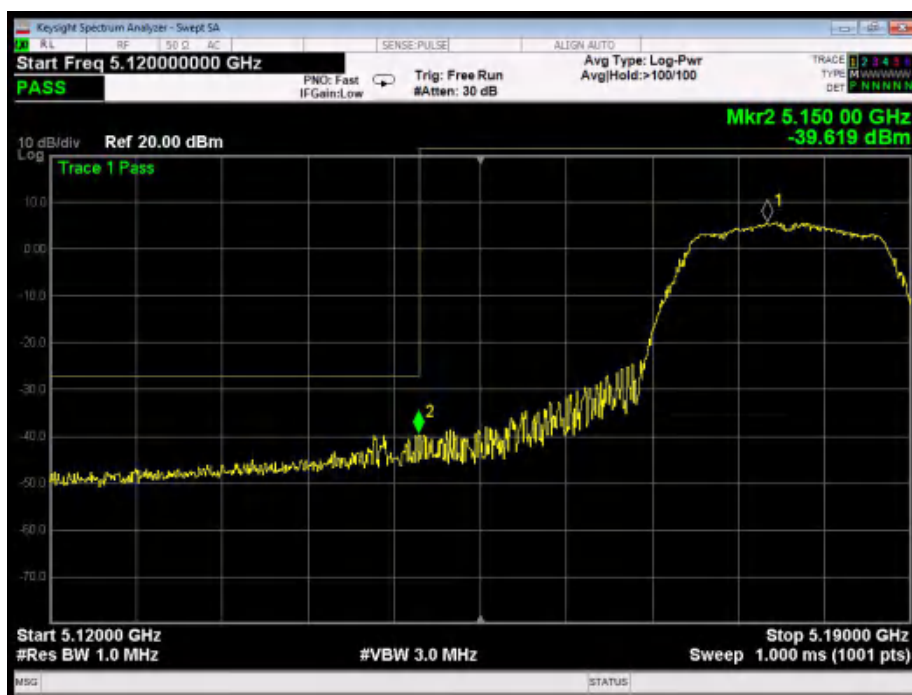


802.11a: Band Edge, Left Side

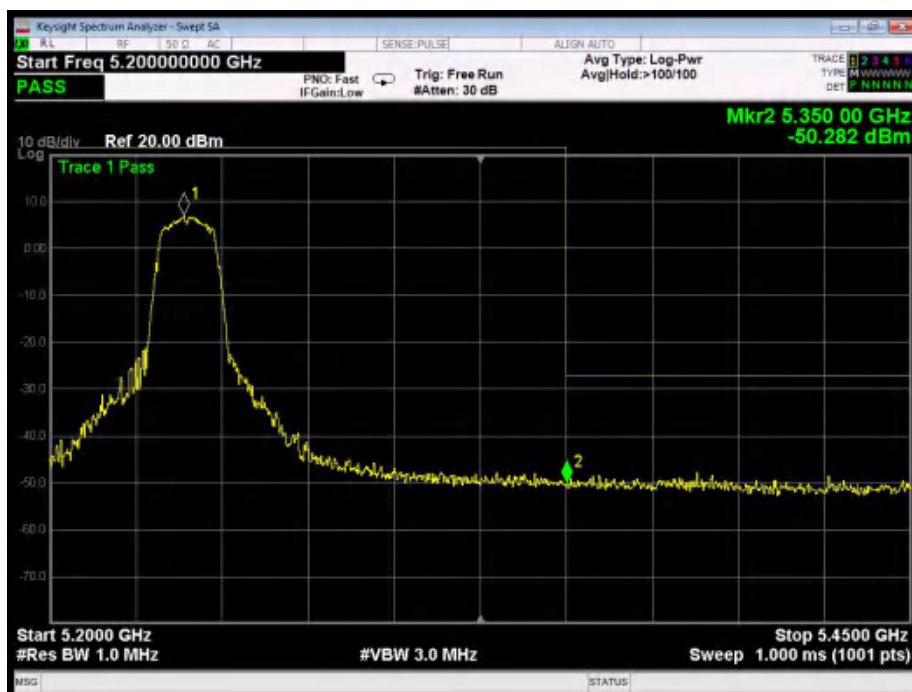


802.11a: Band Edge, Right Side

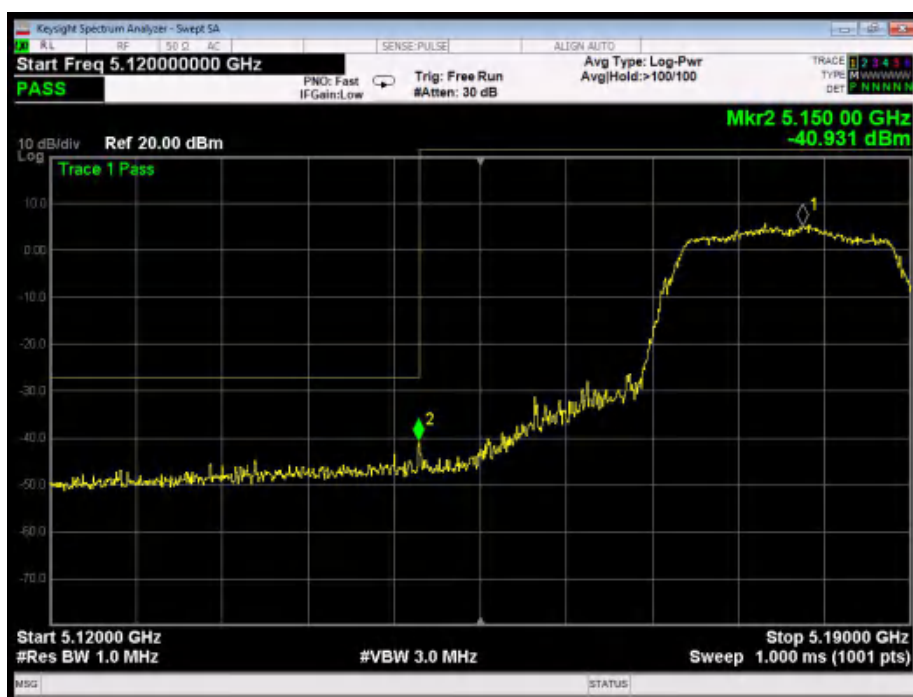


802.11n(20): Band Edge, Left Side

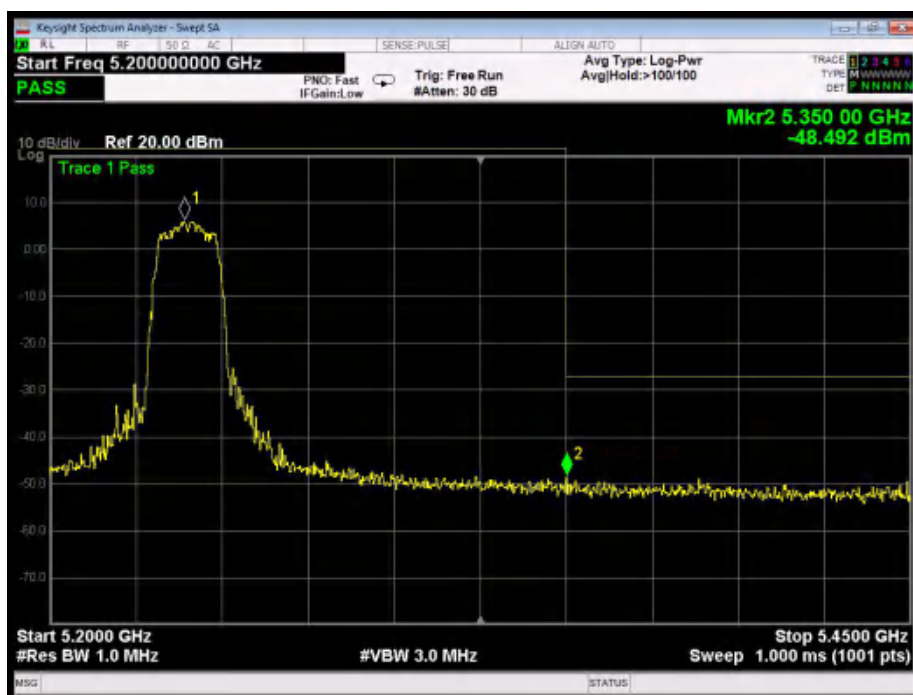

802.11n(20): Band Edge, Right Side

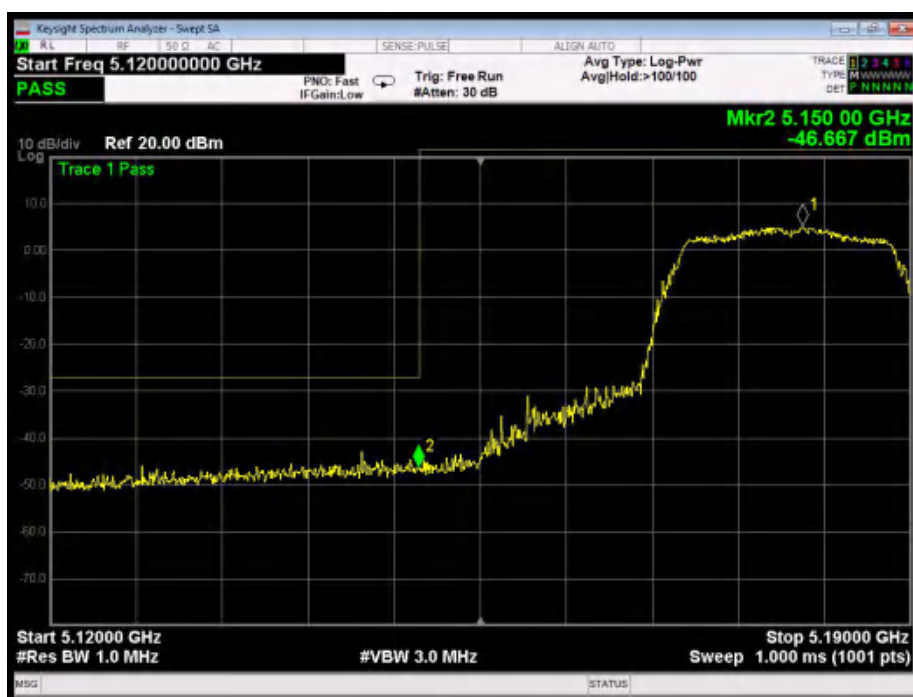


802.11ac(20): Band Edge, Left Side

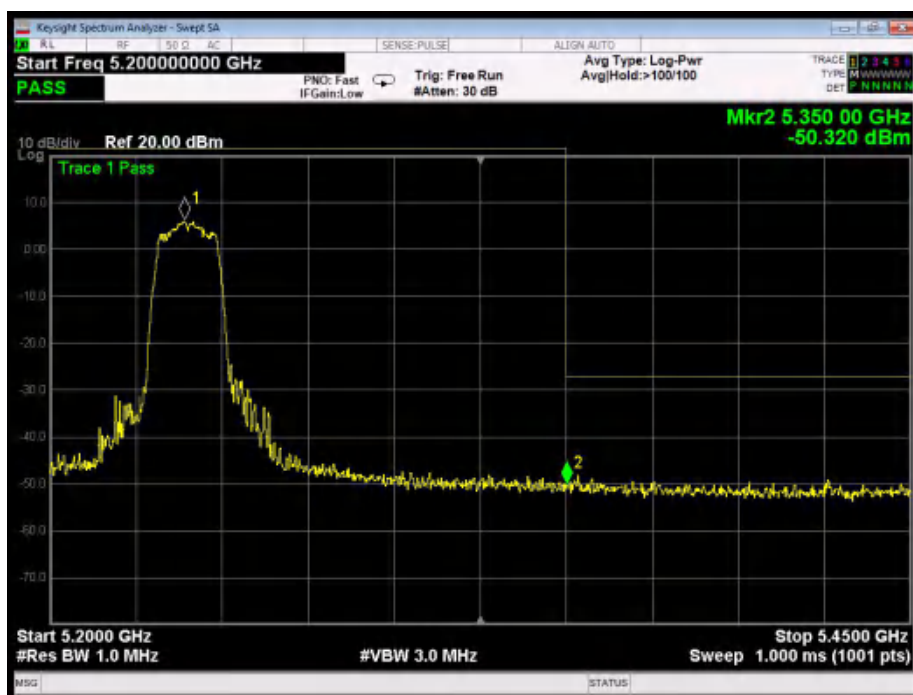


802.11ac(20): Band Edge, Right Side




802.11n(40): Band Edge, Left Side

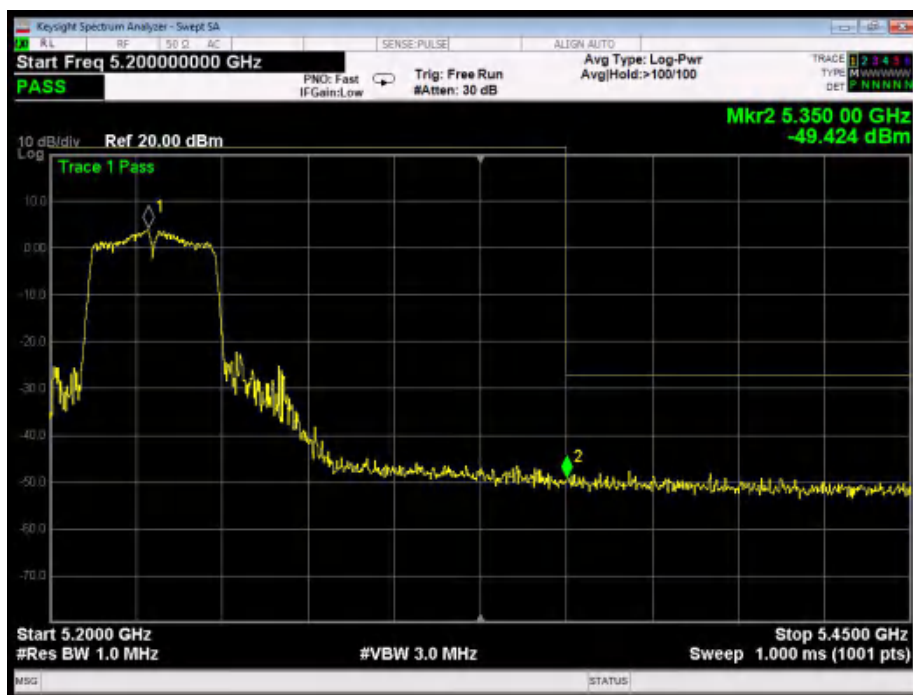


802.11n(40): Band Edge, Right Side

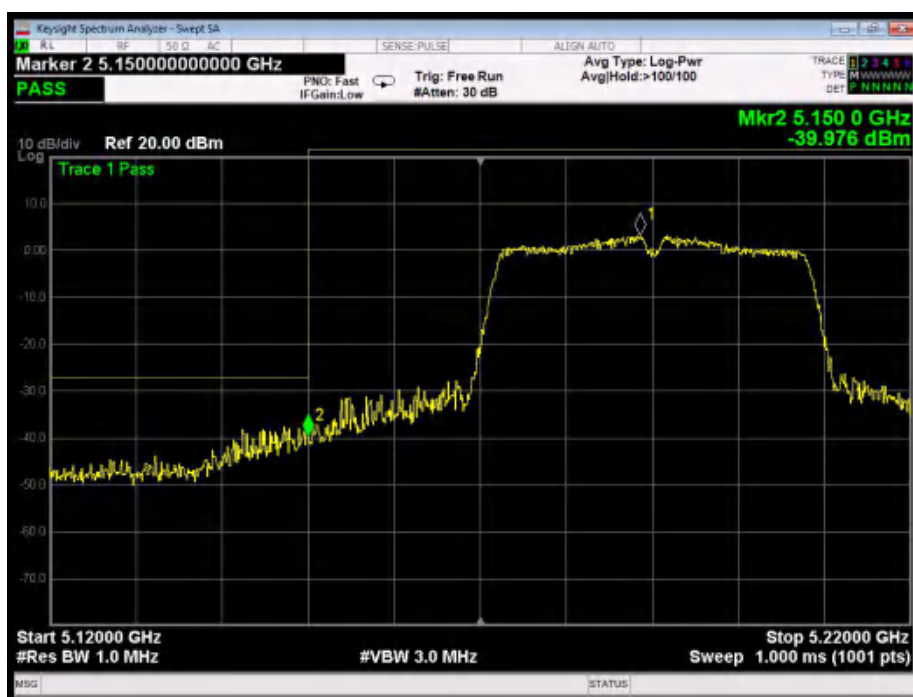


802.11ac(40): Band Edge, Left Side

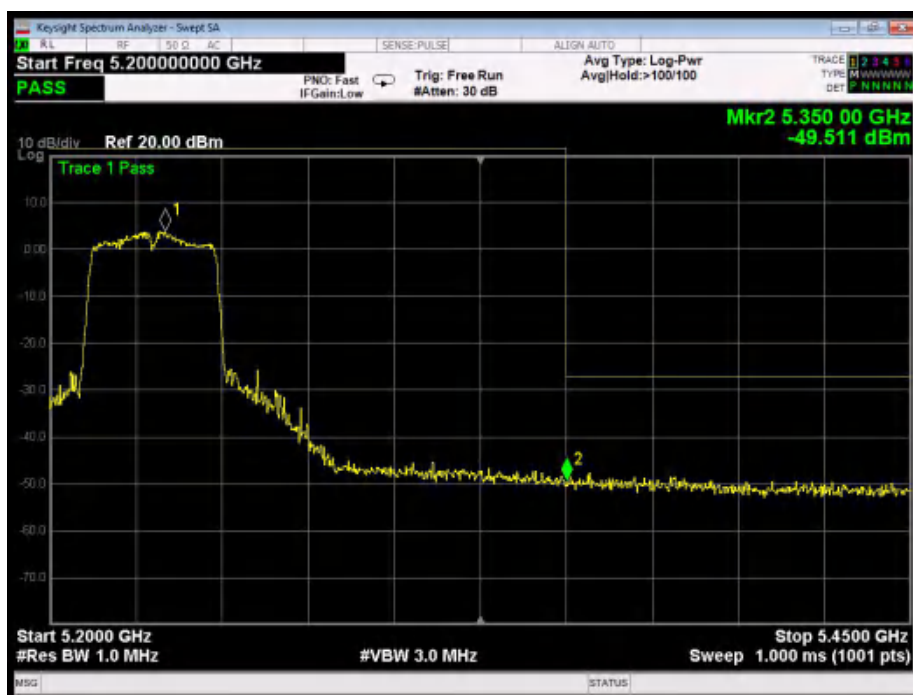

802.11ac(40): Band Edge, Right Side

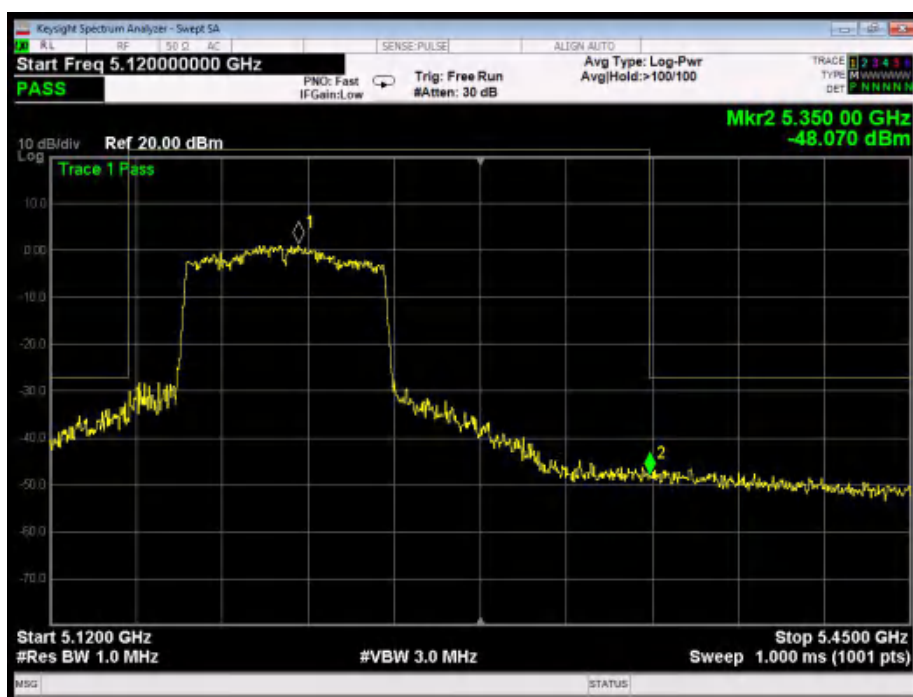

802.11ac(80): Band Edge

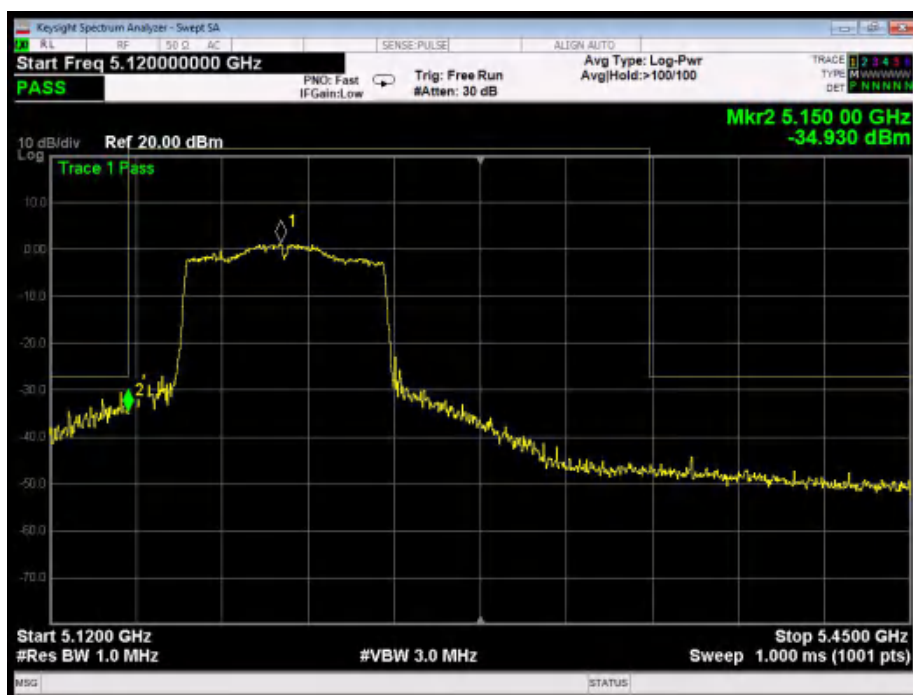

802.11ac(80): Band Edge



Test Results (Above 1000MHz)

ANT D:

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.55	32.29	4.10	28.45	49.49	68.20	-18.71	V
15570.00	35.02	35.99	6.22	27.83	49.40	68.20	-18.80	V
10380.00	40.03	32.29	4.10	28.45	47.97	68.20	-20.23	H
15570.00	34.66	35.99	6.22	27.83	49.04	68.20	-19.16	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.54	32.29	4.10	28.45	38.48	54.00	-15.52	V
15570.00	23.86	35.99	6.22	27.83	38.24	54.00	-15.76	V
10380.00	29.50	32.29	4.10	28.45	37.44	54.00	-16.56	H
15570.00	23.23	35.99	6.22	27.83	37.61	54.00	-16.39	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.39	32.35	4.12	28.44	48.42	68.20	-19.78	V
15570.00	34.95	36.08	6.30	27.74	49.59	68.20	-18.61	V
10380.00	40.71	32.35	4.12	28.44	48.74	68.20	-19.46	H
15570.00	33.51	36.08	6.30	27.74	48.15	68.20	-20.05	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.16	32.35	4.12	28.44	39.19	54.00	-14.81	V
15570.00	23.24	36.08	6.30	27.74	37.88	54.00	-16.12	V
10380.00	30.77	32.35	4.12	28.44	38.80	54.00	-15.20	H
15570.00	22.58	36.08	6.30	27.74	37.22	54.00	-16.78	H



Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.39	32.35	4.12	28.44	48.42	68.20	-19.78	V
15570.00	34.95	36.08	6.30	27.74	49.59	68.20	-18.61	V
10380.00	40.71	32.35	4.12	28.44	48.74	68.20	-19.46	H
15570.00	33.51	36.08	6.30	27.74	48.15	68.20	-20.05	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.16	32.35	4.12	28.44	39.19	54.00	-14.81	V
15570.00	23.24	36.08	6.30	27.74	37.88	54.00	-16.12	V
10380.00	30.77	32.35	4.12	28.44	38.80	54.00	-15.20	H
15570.00	22.58	36.08	6.30	27.74	37.22	54.00	-16.78	H

Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11ac(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.90	27.39	2.77	34.01	49.05	74.00	-24.95	H
5350.00	62.34	27.42	2.78	34.01	58.53	74.00	-15.47	H
5150.00	54.67	27.39	2.77	34.01	50.82	74.00	-23.18	V
5350.00	64.47	27.42	2.78	34.01	60.66	74.00	-13.34	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.30	27.39	2.77	34.01	35.45	54.00	-18.55	H
5350.00	47.74	27.42	2.78	34.01	43.93	54.00	-10.07	H
5150.00	41.22	27.39	2.77	34.01	37.37	54.00	-16.63	V
5350.00	48.96	27.42	2.78	34.01	45.15	54.00	-8.85	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	53.29	27.39	2.77	34.01	49.44	74.00	-24.56	H
5350.00	62.86	27.42	2.78	34.01	59.05	74.00	-14.95	H
5150.00	55.09	27.39	2.77	34.01	51.24	74.00	-22.76	V
5350.00	65.10	27.42	2.78	34.01	61.29	74.00	-12.71	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.58	27.39	2.77	34.01	35.73	54.00	-18.27	H
5350.00	48.06	27.42	2.78	34.01	44.25	54.00	-9.75	H
5150.00	41.53	27.39	2.77	34.01	37.68	54.00	-16.32	V
5350.00	49.31	27.42	2.78	34.01	45.50	54.00	-8.50	V



Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	53.48	27.39	2.77	34.01	49.63	74.00	-24.37	H
5350.00	63.10	27.42	2.78	34.01	59.29	74.00	-14.71	H
5150.00	55.29	27.39	2.77	34.01	51.44	74.00	-22.56	V
5350.00	65.39	27.42	2.78	34.01	61.58	74.00	-12.42	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.71	27.39	2.77	34.01	35.86	54.00	-18.14	H
5350.00	48.20	27.42	2.78	34.01	44.39	54.00	-9.61	H
5150.00	41.68	27.39	2.77	34.01	37.83	54.00	-16.17	V
5350.00	49.47	27.42	2.78	34.01	45.66	54.00	-8.34	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	53.53	27.39	2.77	34.01	49.68	74.00	-24.32	H
5350.00	63.17	27.42	2.78	34.01	59.36	74.00	-14.64	H
5150.00	55.34	27.39	2.77	34.01	51.49	74.00	-22.51	V
5350.00	65.48	27.42	2.78	34.01	61.67	74.00	-12.33	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.75	27.39	2.77	34.01	35.90	54.00	-18.10	H
5350.00	48.25	27.42	2.78	34.01	44.44	54.00	-9.56	H
5150.00	41.72	27.39	2.77	34.01	37.87	54.00	-16.13	V
5350.00	49.52	27.42	2.78	34.01	45.71	54.00	-8.29	V



Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	53.69	27.39	2.77	34.01	49.84	74.00	-24.16	H
5350.00	63.38	27.42	2.78	34.01	59.57	74.00	-14.43	H
5150.00	55.51	27.39	2.77	34.01	51.66	74.00	-22.34	V
5350.00	65.73	27.42	2.78	34.01	61.92	74.00	-12.08	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.86	27.39	2.77	34.01	36.01	54.00	-17.99	H
5350.00	48.38	27.42	2.78	34.01	44.57	54.00	-9.43	H
5150.00	41.84	27.39	2.77	34.01	37.99	54.00	-16.01	V
5350.00	49.66	27.42	2.78	34.01	45.85	54.00	-8.15	V

Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	53.72	27.39	2.77	34.01	49.87	74.00	-24.13	H
5350.00	63.43	27.42	2.78	34.01	59.62	74.00	-14.38	H
5150.00	55.55	27.39	2.77	34.01	51.70	74.00	-22.30	V
5350.00	65.78	27.42	2.78	34.01	61.97	74.00	-12.03	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	39.88	27.39	2.77	34.01	36.03	54.00	-17.97	H
5350.00	48.40	27.42	2.78	34.01	44.59	54.00	-9.41	H
5150.00	41.87	27.39	2.77	34.01	38.02	54.00	-15.98	V
5350.00	49.69	27.42	2.78	34.01	45.88	54.00	-8.12	V


For conducted test:



802.11a: Band Edge, Left Side




802.11a: Band Edge, Right Side

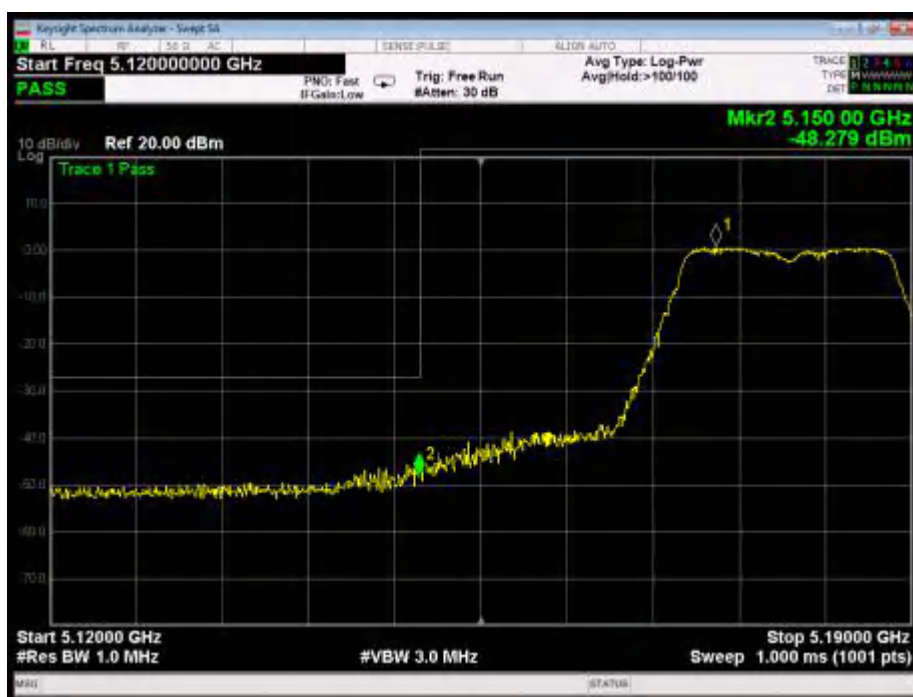


802.11n(20): Band Edge, Left Side




802.11n(20): Band Edge, Right Side

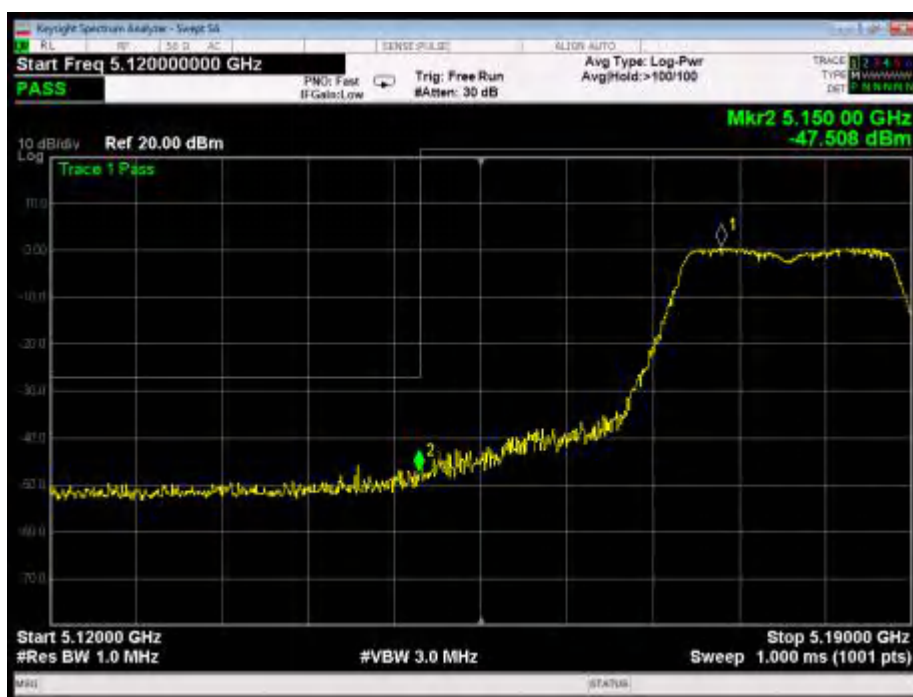

802.11ac(20): Band Edge, Left Side

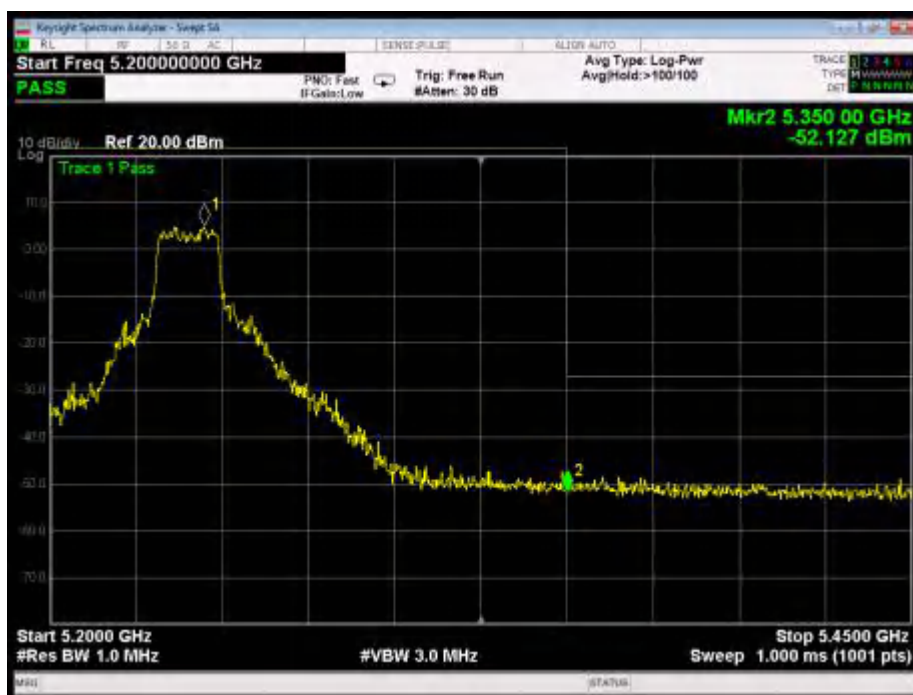


802.11ac(20): Band Edge, Right Side

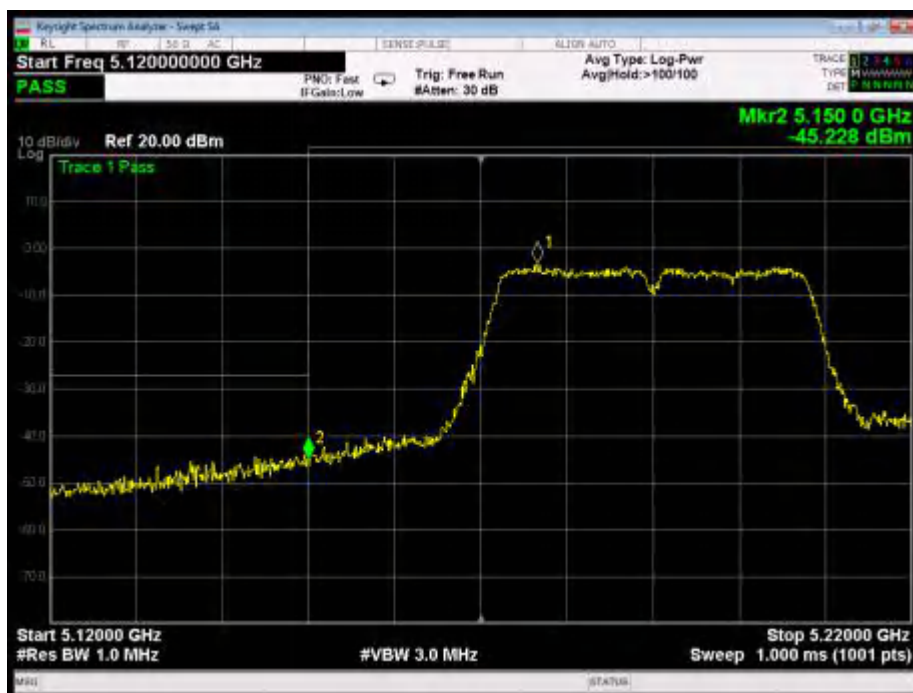

802.11n(40): Band Edge, Left Side




802.11n(40): Band Edge, Right Side

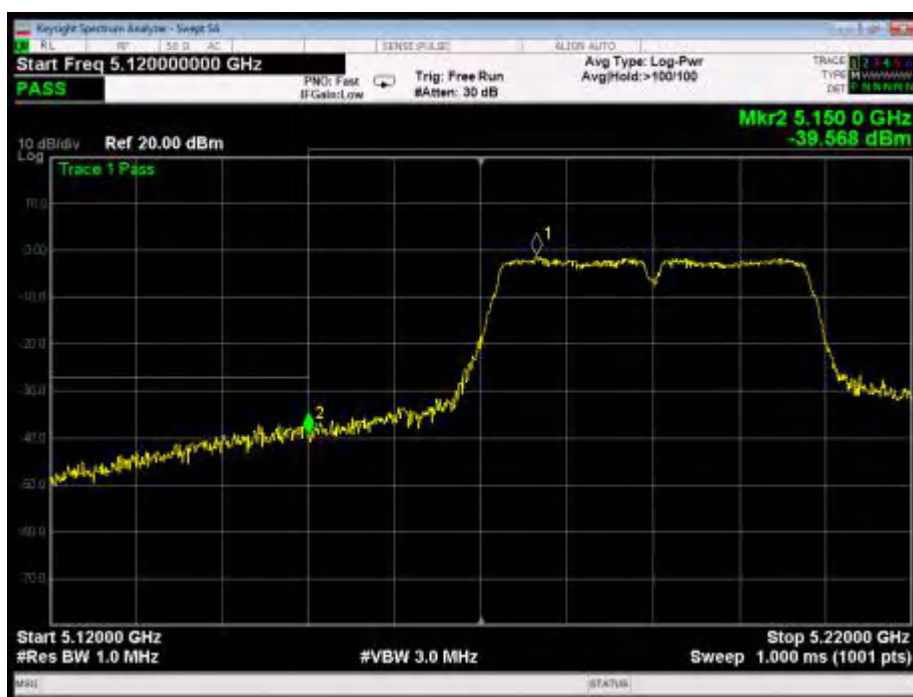


802.11ac(40): Band Edge, Left Side



802.11ac(40): Band Edge, Right Side

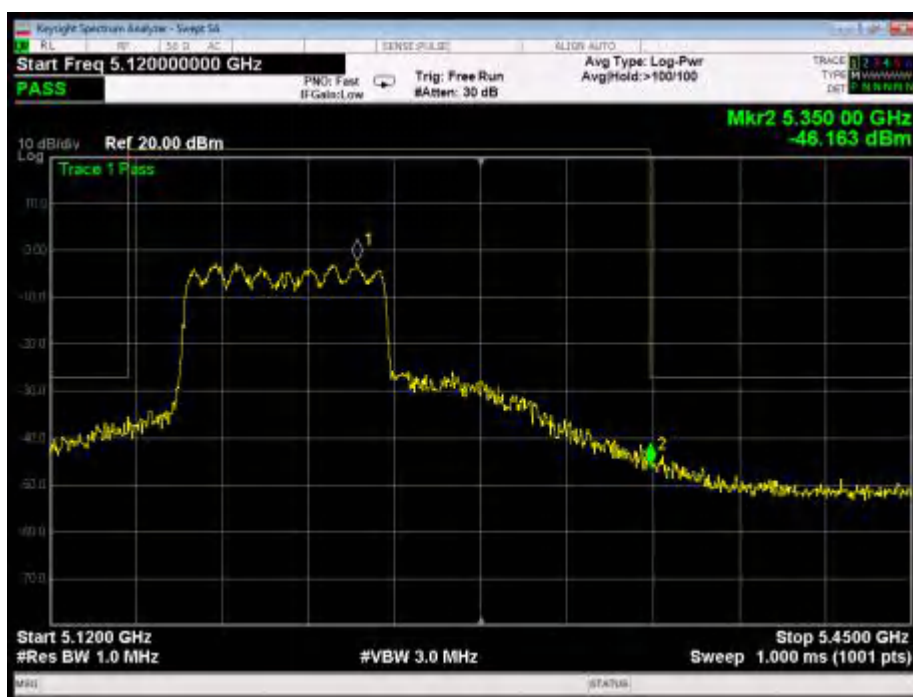

802.11ac(80): Band Edge

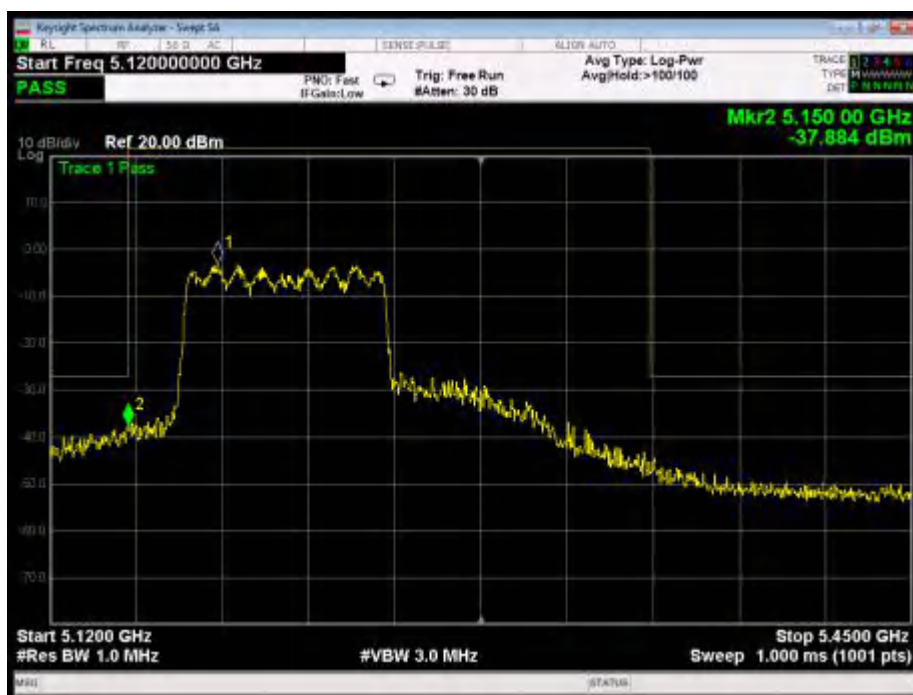

802.11ac(80): Band Edge



Test Results (Above 1000MHz)

ANT A+B+C+D

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.81	32.35	4.12	28.44	48.84	68.20	-19.36	V
15570.00	35.21	36.08	6.30	27.74	49.85	68.20	-18.35	V
10380.00	41.06	32.35	4.12	28.44	49.09	68.20	-19.11	H
15570.00	33.74	36.08	6.30	27.74	48.38	68.20	-19.82	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.55	32.35	4.12	28.44	39.58	54.00	-14.42	V
15570.00	23.50	36.08	6.30	27.74	38.14	54.00	-15.86	V
10380.00	31.10	32.35	4.12	28.44	39.13	54.00	-14.87	H
15570.00	22.80	36.08	6.30	27.74	37.44	54.00	-16.56	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	42.32	32.29	4.10	28.45	50.26	68.20	-17.94	V
15570.00	35.50	35.99	6.22	27.83	49.88	68.20	-18.32	V
10380.00	40.68	32.29	4.10	28.45	48.62	68.20	-19.58	H
15570.00	35.09	35.99	6.22	27.83	49.47	68.20	-18.73	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.25	32.29	4.10	28.45	39.19	54.00	-14.81	V
15570.00	24.32	35.99	6.22	27.83	38.70	54.00	-15.30	V



10380.00	30.11	32.29	4.10	28.45	38.05	54.00	-15.95	H
15570.00	23.64	35.99	6.22	27.83	38.02	54.00	-15.98	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.03	32.35	4.12	28.44	49.06	68.20	-19.14	V
15570.00	35.35	36.08	6.30	27.74	49.99	68.20	-18.21	V
10380.00	41.25	32.35	4.12	28.44	49.28	68.20	-18.92	H
15570.00	33.86	36.08	6.30	27.74	48.50	68.20	-19.70	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.75	32.35	4.12	28.44	39.78	54.00	-14.22	V
15570.00	23.63	36.08	6.30	27.74	38.27	54.00	-15.73	V
10380.00	31.27	32.35	4.12	28.44	39.30	54.00	-14.70	H
15570.00	22.92	36.08	6.30	27.74	37.56	54.00	-16.44	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	42.45	32.29	4.10	28.45	50.39	68.20	-17.81	V
15570.00	35.58	35.99	6.22	27.83	49.96	68.20	-18.24	V
10380.00	40.79	32.29	4.10	28.45	48.73	68.20	-19.47	H
15570.00	35.16	35.99	6.22	27.83	49.54	68.20	-18.66	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.37	32.29	4.10	28.45	39.31	54.00	-14.69	V
15570.00	24.40	35.99	6.22	27.83	38.78	54.00	-15.22	V



10380.00	30.21	32.29	4.10	28.45	38.15	54.00	-15.85	H
15570.00	23.71	35.99	6.22	27.83	38.09	54.00	-15.91	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.14	32.35	4.12	28.44	49.17	68.20	-19.03	V
15570.00	35.42	36.08	6.30	27.74	50.06	68.20	-18.14	V
10380.00	41.34	32.35	4.12	28.44	49.37	68.20	-18.83	H
15570.00	33.92	36.08	6.30	27.74	48.56	68.20	-19.64	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.85	32.35	4.12	28.44	39.88	54.00	-14.12	V
15570.00	23.70	36.08	6.30	27.74	38.34	54.00	-15.66	V
10380.00	31.36	32.35	4.12	28.44	39.39	54.00	-14.61	H
15570.00	22.98	36.08	6.30	27.74	37.62	54.00	-16.38	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	42.51	32.29	4.10	28.45	50.45	68.20	-17.75	V
15570.00	35.62	35.99	6.22	27.83	50.00	68.20	-18.20	V
10380.00	40.83	32.29	4.10	28.45	48.77	68.20	-19.43	H
15570.00	35.19	35.99	6.22	27.83	49.57	68.20	-18.63	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.42	32.29	4.10	28.45	39.36	54.00	-14.64	V
15570.00	24.44	35.99	6.22	27.83	38.82	54.00	-15.18	V



10380.00	30.25	32.29	4.10	28.45	38.19	54.00	-15.81	H
15570.00	23.74	35.99	6.22	27.83	38.12	54.00	-15.88	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.18	32.35	4.12	28.44	49.21	68.20	-18.99	V
15570.00	35.45	36.08	6.30	27.74	50.09	68.20	-18.11	V
10380.00	41.38	32.35	4.12	28.44	49.41	68.20	-18.79	H
15570.00	33.94	36.08	6.30	27.74	48.58	68.20	-19.62	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.89	32.35	4.12	28.44	39.92	54.00	-14.08	V
15570.00	23.72	36.08	6.30	27.74	38.36	54.00	-15.64	V
10380.00	31.39	32.35	4.12	28.44	39.42	54.00	-14.58	H
15570.00	23.00	36.08	6.30	27.74	37.64	54.00	-16.36	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	39.15	32.29	4.10	28.45	47.09	68.20	-21.11	V
15570.00	33.49	35.99	6.22	27.83	47.87	68.20	-20.33	V
10380.00	37.99	32.29	4.10	28.45	45.93	68.20	-22.27	H
15570.00	33.33	35.99	6.22	27.83	47.71	68.20	-20.49	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	28.32	32.29	4.10	28.45	36.26	54.00	-17.74	V
15570.00	22.39	35.99	6.22	27.83	36.77	54.00	-17.23	V



10380.00	27.59	32.29	4.10	28.45	35.53	54.00	-18.47	H
15570.00	21.93	35.99	6.22	27.83	36.31	54.00	-17.69	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	38.40	32.35	4.12	28.44	46.43	68.20	-21.77	V
15570.00	33.69	36.08	6.30	27.74	48.33	68.20	-19.87	V
10380.00	39.03	32.35	4.12	28.44	47.06	68.20	-21.14	H
15570.00	32.41	36.08	6.30	27.74	47.05	68.20	-21.15	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.33	32.35	4.12	28.44	37.36	54.00	-16.64	V
15570.00	22.03	36.08	6.30	27.74	36.67	54.00	-17.33	V
10380.00	29.19	32.35	4.12	28.44	37.22	54.00	-16.78	H
15570.00	21.51	36.08	6.30	27.74	36.15	54.00	-17.85	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	39.68	32.29	4.10	28.45	47.62	68.20	-20.58	V
15570.00	33.83	35.99	6.22	27.83	48.21	68.20	-19.99	V
10380.00	38.44	32.29	4.10	28.45	46.38	68.20	-21.82	H
15570.00	33.63	35.99	6.22	27.83	48.01	68.20	-20.19	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	28.81	32.29	4.10	28.45	36.75	54.00	-17.25	V
15570.00	22.71	35.99	6.22	27.83	37.09	54.00	-16.91	V
10380.00	28.01	32.29	4.10	28.45	35.95	54.00	-18.05	H



15570.00	22.22	35.99	6.22	27.83	36.60	54.00	-17.40	H
----------	-------	-------	------	-------	-------	-------	--------	---

Test mode:	IEEE 802.11ac(HT80)	Test channel:	
------------	---------------------	---------------	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	38.84	32.35	4.12	28.44	46.87	68.20	-21.33	V
15570.00	33.97	36.08	6.30	27.74	48.61	68.20	-19.59	V
10380.00	39.40	32.35	4.12	28.44	47.43	68.20	-20.77	H
15570.00	32.65	36.08	6.30	27.74	47.29	68.20	-20.91	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.73	32.35	4.12	28.44	37.76	54.00	-16.24	V
15570.00	22.29	36.08	6.30	27.74	36.93	54.00	-17.07	V
10380.00	29.54	32.35	4.12	28.44	37.57	54.00	-16.43	H
15570.00	21.74	36.08	6.30	27.74	36.38	54.00	-17.62	H

Note:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Radiated Band Edge:

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.35	27.39	2.77	34.01	50.50	74.00	-23.50	H
5350.00	64.27	27.42	2.78	34.01	60.46	74.00	-13.54	H
5150.00	56.23	27.39	2.77	34.01	52.38	74.00	-21.62	V
5350.00	66.80	27.42	2.78	34.01	62.99	74.00	-11.01	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.34	27.39	2.77	34.01	36.49	54.00	-17.51	H
5350.00	48.92	27.42	2.78	34.01	45.11	54.00	-8.89	H
5150.00	42.37	27.39	2.77	34.01	38.52	54.00	-15.48	V
5350.00	50.26	27.42	2.78	34.01	46.45	54.00	-7.55	V

Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.26	27.39	2.77	34.01	50.41	74.00	-23.59	H
5350.00	64.14	27.42	2.78	34.01	60.33	74.00	-13.67	H
5150.00	56.12	27.39	2.77	34.01	52.27	74.00	-21.73	V
5350.00	66.64	27.42	2.78	34.01	62.83	74.00	-11.17	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.27	27.39	2.77	34.01	36.42	54.00	-17.58	H
5350.00	48.84	27.42	2.78	34.01	45.03	54.00	-8.97	H
5150.00	42.30	27.39	2.77	34.01	38.45	54.00	-15.55	V
5350.00	50.17	27.42	2.78	34.01	46.36	54.00	-7.64	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.40	27.39	2.77	34.01	50.55	74.00	-23.45	H
5350.00	64.34	27.42	2.78	34.01	60.53	74.00	-13.47	H
5150.00	56.28	27.39	2.77	34.01	52.43	74.00	-21.57	V
5350.00	66.88	27.42	2.78	34.01	63.07	74.00	-10.93	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.37	27.39	2.77	34.01	36.52	54.00	-17.48	H
5350.00	48.96	27.42	2.78	34.01	45.15	54.00	-8.85	H
5150.00	42.41	27.39	2.77	34.01	38.56	54.00	-15.44	V
5350.00	50.30	27.42	2.78	34.01	46.49	54.00	-7.51	V

Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.45	27.39	2.77	34.01	50.60	74.00	-23.40	H
5350.00	64.40	27.42	2.78	34.01	60.59	74.00	-13.41	H
5150.00	56.33	27.39	2.77	34.01	52.48	74.00	-21.52	V
5350.00	66.96	27.42	2.78	34.01	63.15	74.00	-10.85	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.41	27.39	2.77	34.01	36.56	54.00	-17.44	H
5350.00	49.00	27.42	2.78	34.01	45.19	54.00	-8.81	H
5150.00	42.45	27.39	2.77	34.01	38.60	54.00	-15.40	V
5350.00	50.34	27.42	2.78	34.01	46.53	54.00	-7.47	V




Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.60	27.39	2.77	34.01	50.75	74.00	-23.25	H
5350.00	64.60	27.42	2.78	34.01	60.79	74.00	-13.21	H
5150.00	56.49	27.39	2.77	34.01	52.64	74.00	-21.36	V
5350.00	67.19	27.42	2.78	34.01	63.38	74.00	-10.62	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.51	27.39	2.77	34.01	36.66	54.00	-17.34	H
5350.00	49.12	27.42	2.78	34.01	45.31	54.00	-8.69	H
5150.00	42.57	27.39	2.77	34.01	38.72	54.00	-15.28	V
5350.00	50.47	27.42	2.78	34.01	46.66	54.00	-7.34	V

6. Maximum Peak Output Power Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)(1)(ii)
Test Limit	30dBm

6.2. Test Setup



6.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

6.4. Test Data

Test Item	:	Max. peak output power	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 12V 1.5A	Temperature	:	24℃
Test Result	:	PASS	Humidity	:	55%RH

ANT A:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5180	15.13	30	PASS
	5200	15.81	30	PASS
	5240	15.67	30	PASS
802.11n20	5180	14.60	30	PASS
	5200	14.73	30	PASS
	5240	14.86	30	PASS
802.11ac20	5180	14.92	30	PASS
	5200	15.08	30	PASS
	5240	14.84	30	PASS
802.11n40	5190	15.84	30	PASS
	5230	15.69	30	PASS
802.11ac40	5190	15.55	30	PASS
	5230	15.28	30	PASS
802.11ac80	5210	15.41	30	PASS



ANT B:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5180	15.86	30	PASS
	5200	15.27	30	PASS
	5240	15.77	30	PASS
802.11n20	5180	15.21	30	PASS
	5200	15.54	30	PASS
	5240	15.82	30	PASS
802.11ac20	5180	14.85	30	PASS
	5200	14.05	30	PASS
	5240	14.87	30	PASS
802.11n40	5190	16.12	30	PASS
	5230	15.90	30	PASS
802.11ac40	5190	15.95	30	PASS
	5230	15.45	30	PASS
802.11ac80	5210	15.26	30	PASS



ANT C:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5180	14.33	30	PASS
	5200	14.50	30	PASS
	5240	15.30	30	PASS
802.11n20	5180	15.39	30	PASS
	5200	15.04	30	PASS
	5240	15.06	30	PASS
802.11ac20	5180	14.95	30	PASS
	5200	14.94	30	PASS
	5240	15.77	30	PASS
802.11n40	5190	14.76	30	PASS
	5230	15.58	30	PASS
802.11ac40	5190	15.84	30	PASS
	5230	16.42	30	PASS
802.11ac80	5210	15.97	30	PASS

ANT D:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5180	13.569	30	PASS
	5200	11.87	30	PASS
	5240	14.06	30	PASS
802.11n20	5180	12.60	30	PASS
	5200	10.69	30	PASS
	5240	11.32	30	PASS
802.11ac20	5180	12.46	30	PASS
	5200	11.48	30	PASS
	5240	11.43	30	PASS
802.11n40	5190	12.31	30	PASS
	5230	12.82	30	PASS
802.11ac40	5190	12.18	30	PASS
	5230	12.37	30	PASS
802.11ac80	5210	13.07	30	PASS



ANT A+B+C+D


Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11n20	5180	20.60	24.55	PASS
	5200	20.38	24.55	PASS
	5240	20.59	24.55	PASS
802.11ac20	5180	20.43	24.55	PASS
	5200	20.12	24.55	PASS
	5240	20.52	24.55	PASS
802.11n40	5190	21.01	24.55	PASS
	5230	21.18	24.55	PASS
802.11ac40	5190	21.14	24.55	PASS
	5230	21.14	24.55	PASS
802.11ac80	5210	21.08	24.55	PASS

7. Occupy Bandwidth Test

7.1. Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)
---------------	------------------------------------

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
26 dB & 99% bandwidth
RBW = approximately 1% of the emission bandwidth;
Set the VBW > RBW;
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.



7.4. Test Data

Test Item : 99%&26dB BW
Test Voltage : DC 12V 1.5A
Test Result : PASS


Test Mode : CH Low ~ CH High
Temperature : 24℃
Humidity : 55%RH

ANT A:


Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5180	21.55	16.882
	5200	21.30	16.899
	5240	21.47	16.898
802.11n20	5180	21.58	17.947
	5200	21.60	17.966
	5240	21.96	18.018
802.11ac20	5180	21.68	17.912
	5200	21.61	17.903
	5240	21.74	17.925
802.11n40	5190	40.13	36.326
	5230	40.36	36.339
802.11ac40	5190	40.16	36.369
	5230	39.65	36.404
802.11ac80	5210	81.61	75.911




26dB & 99% Bandwidth

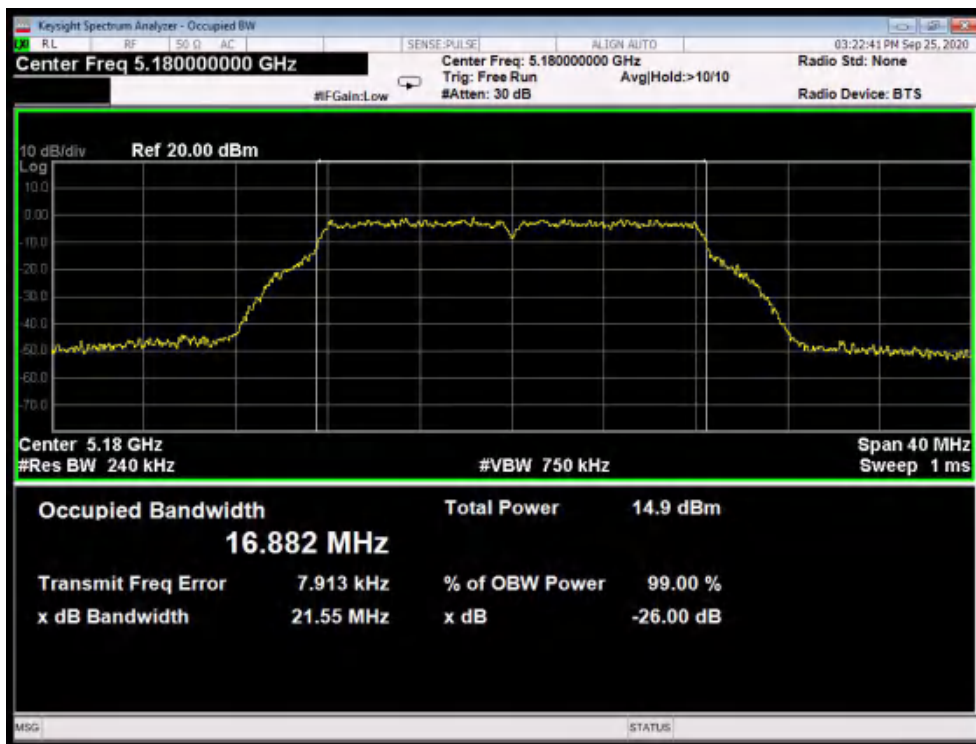


Test Mode: 802.11a--Low

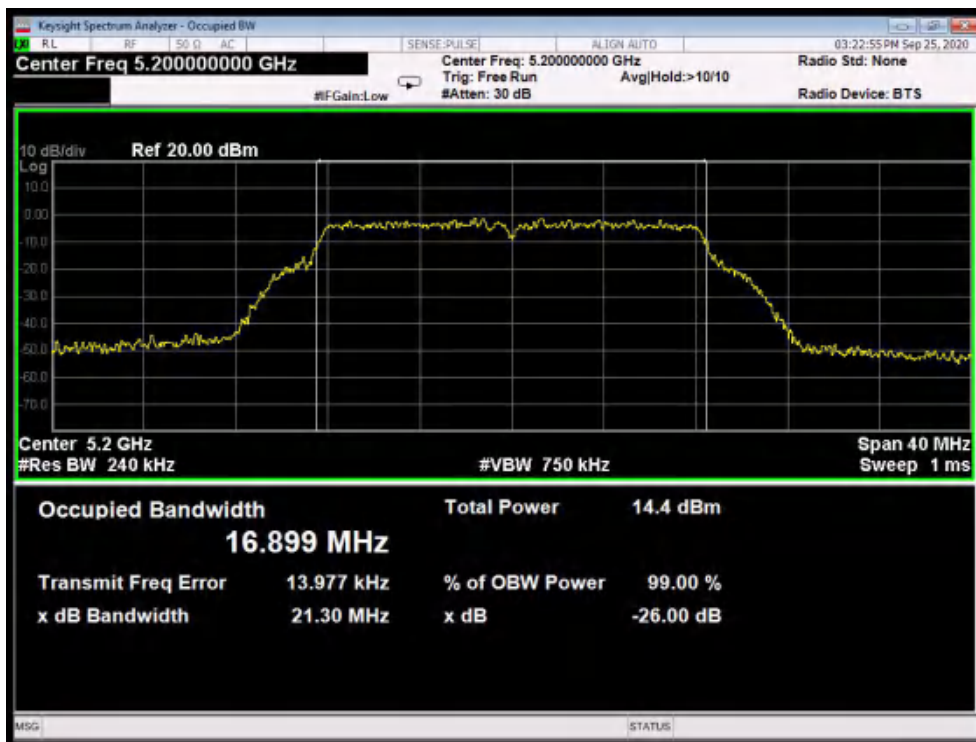


Test Mode: 802.11a---Middle

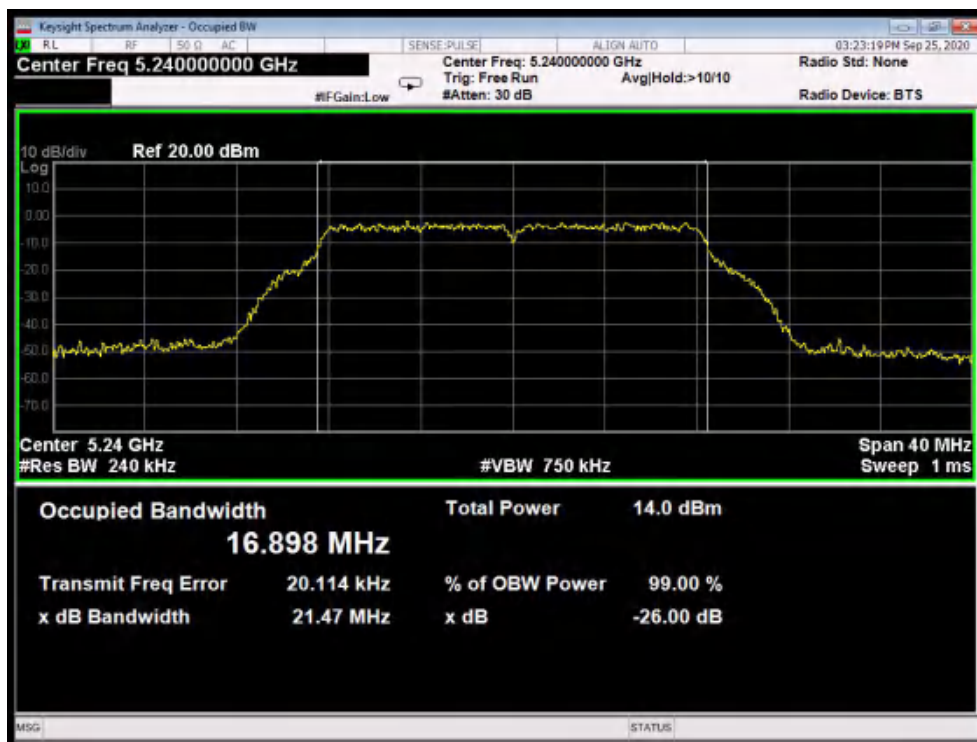


Test Mode: 802.11a---High

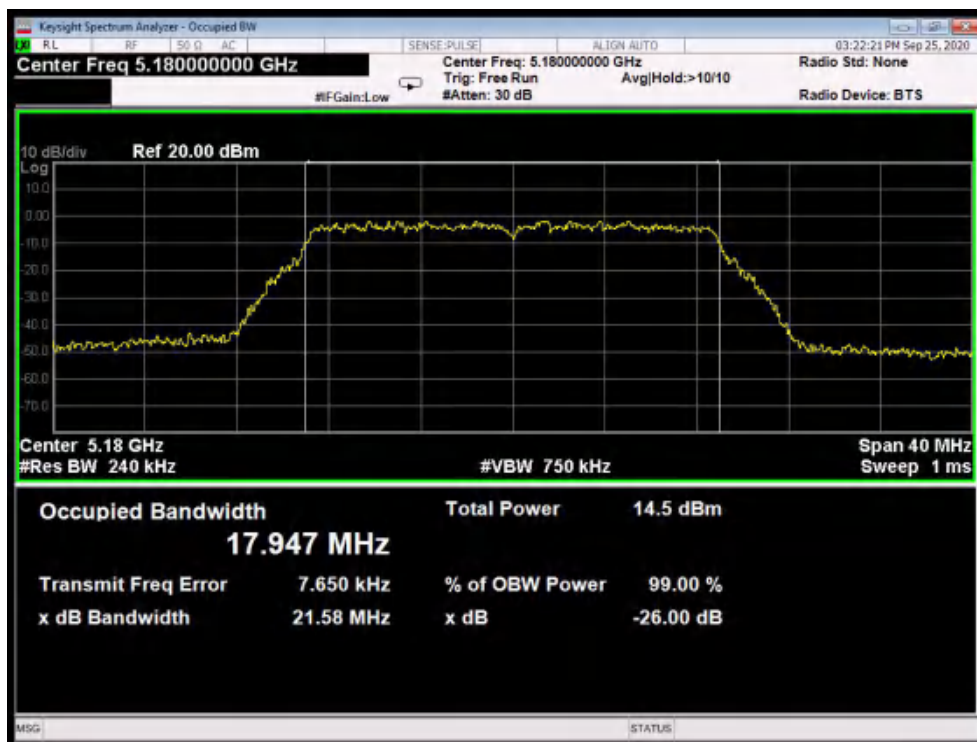


Test Mode: 802.11n20---Low

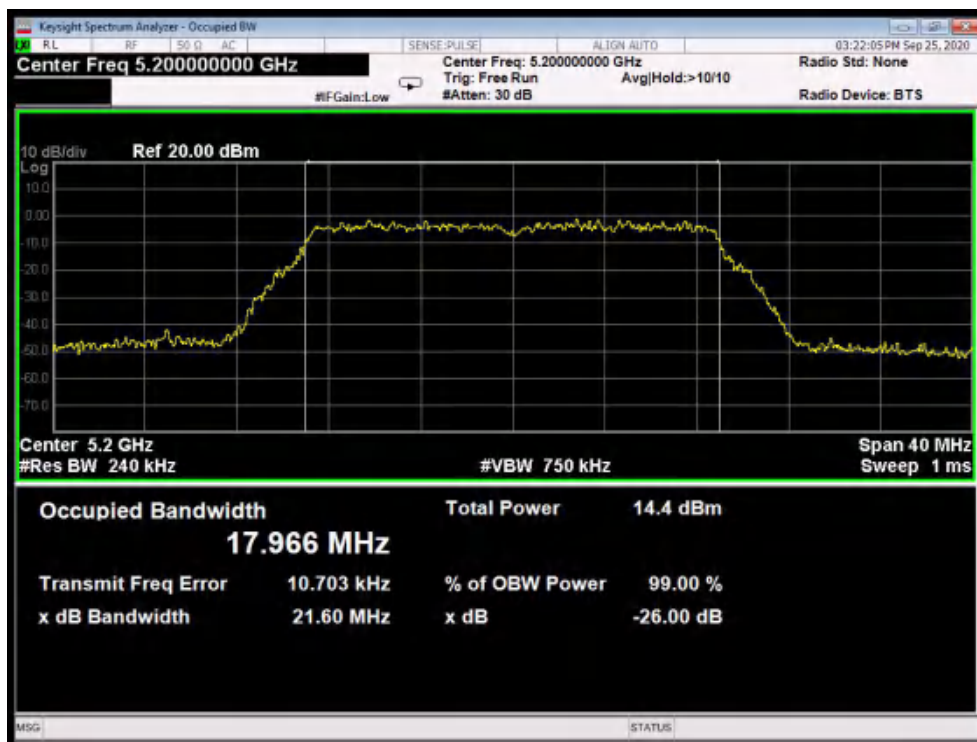


Test Mode: 802.11n20---Middle

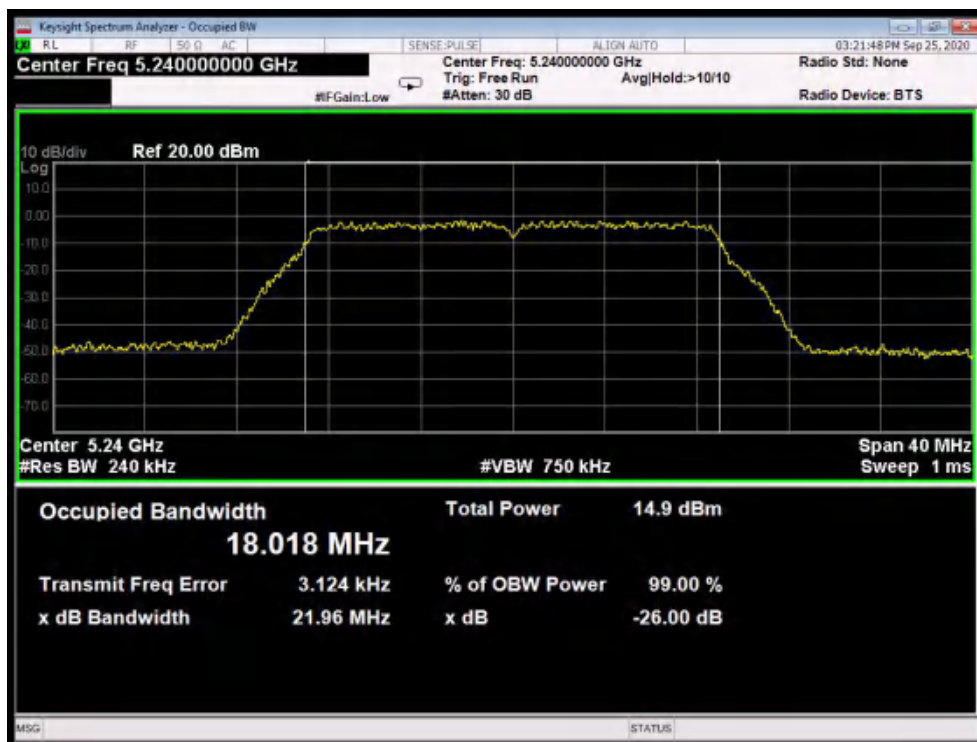


Test Mode: 802.11n20---High

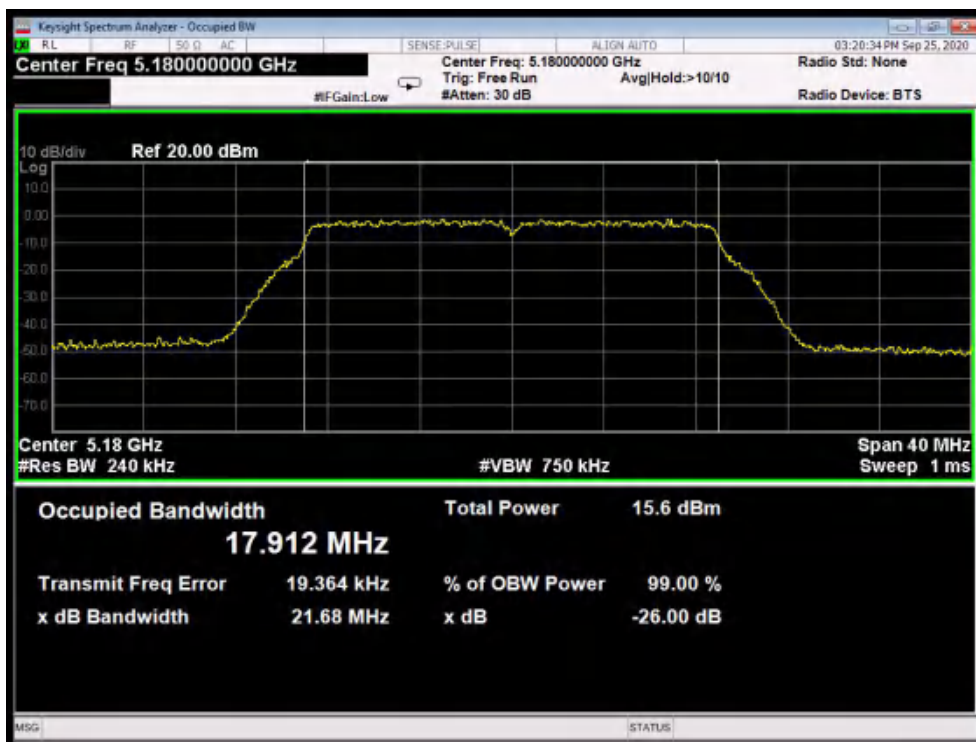


Test Mode: 802.11ac20--Low

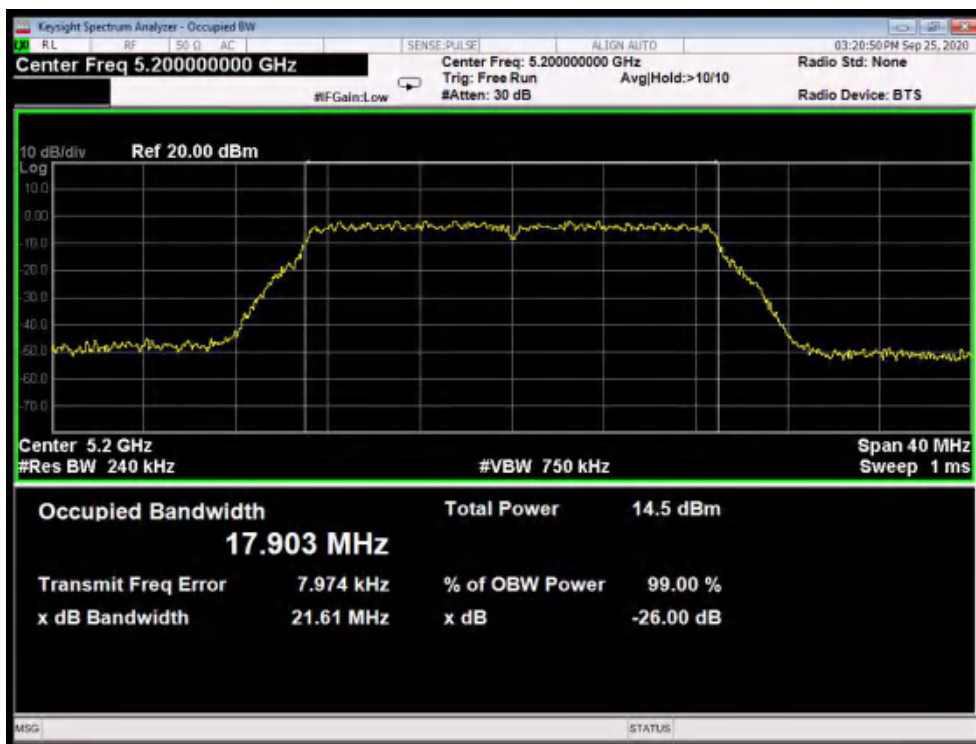


Test Mode: 802.11ac20---Middle

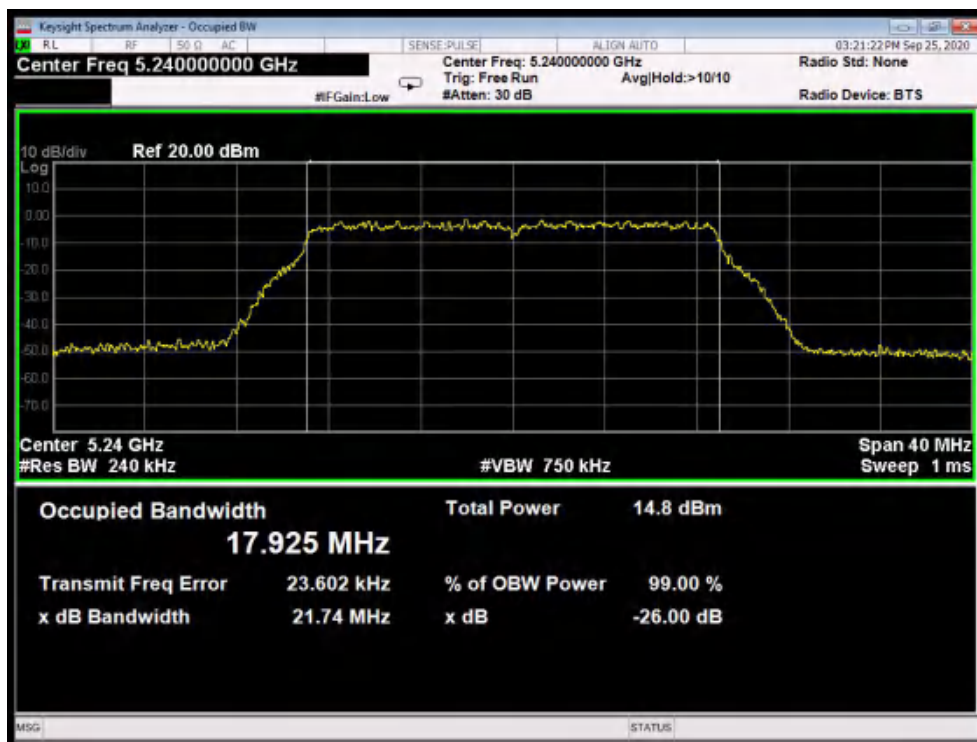


Test Mode: 802.11ac20---High

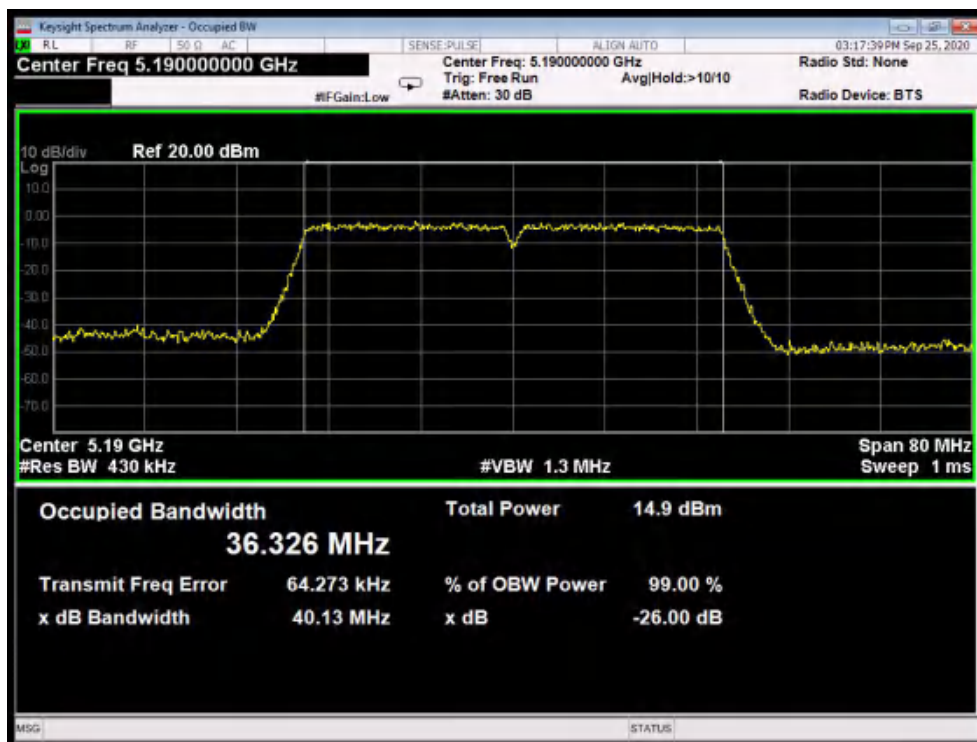


Test Mode: 802.11n40---Low

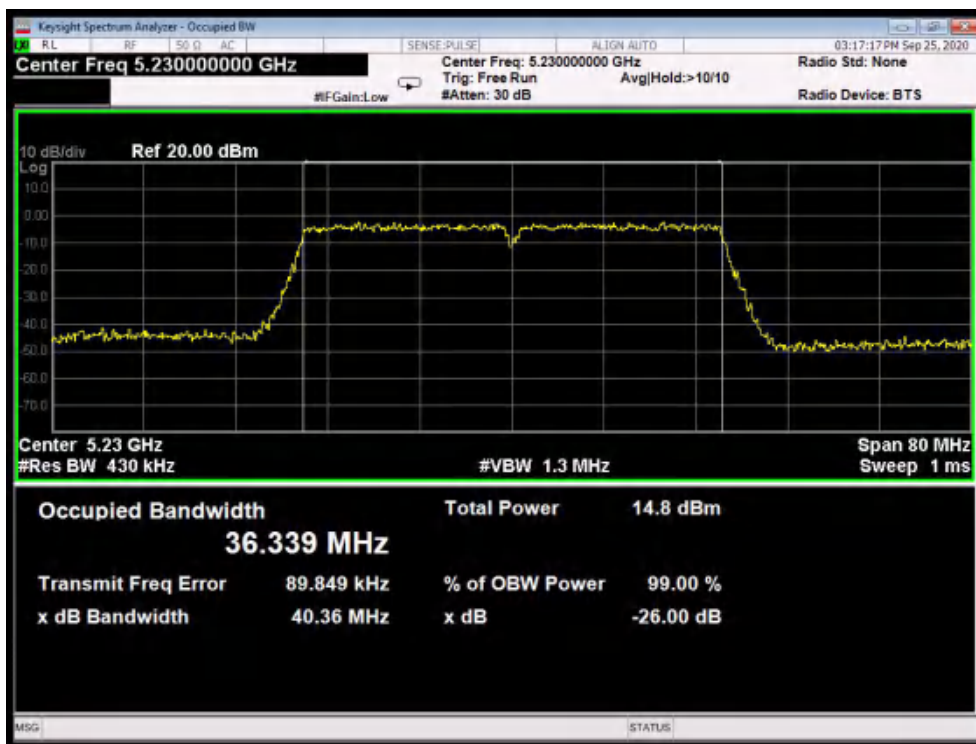


Test Mode: 802.11n40---High

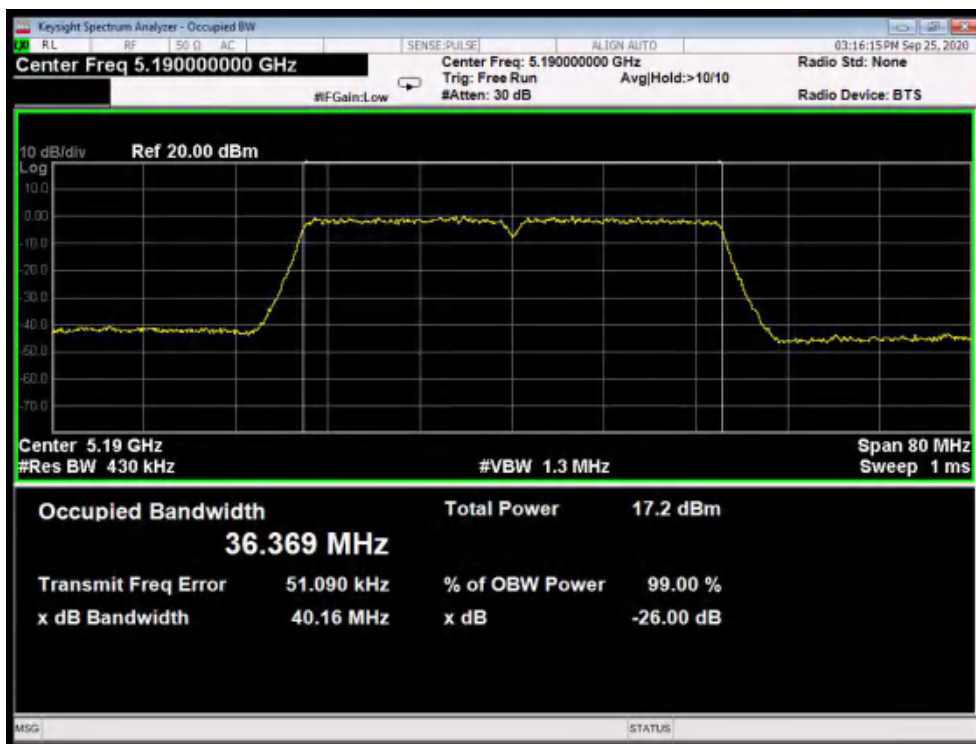

Test Mode: 802.11ac40---Low

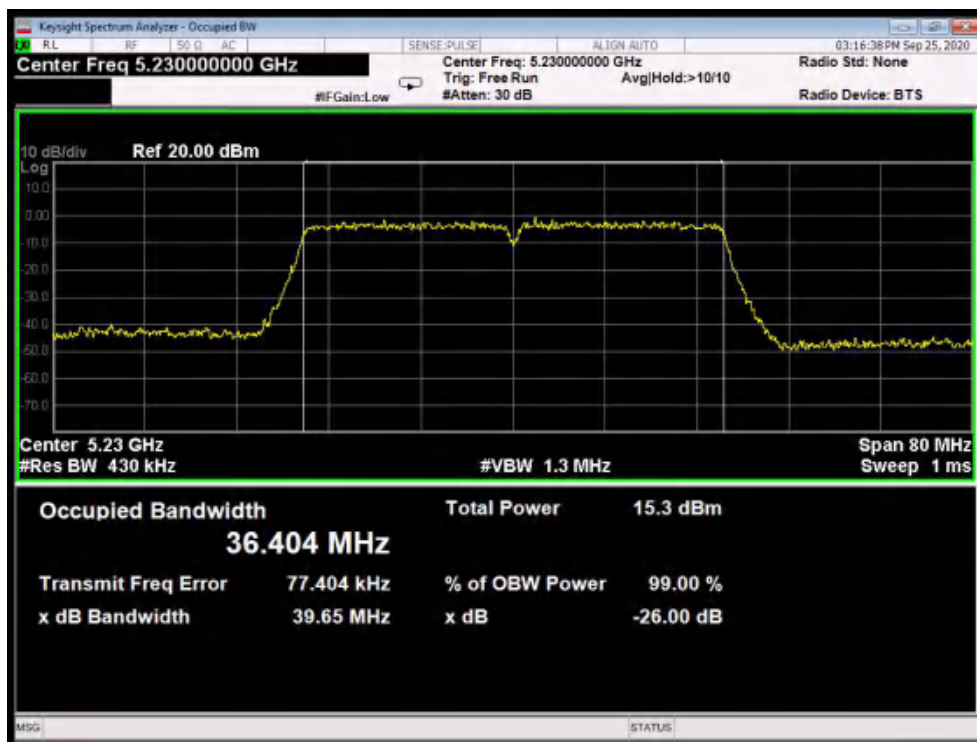

Test Mode: 802.11ac40---High

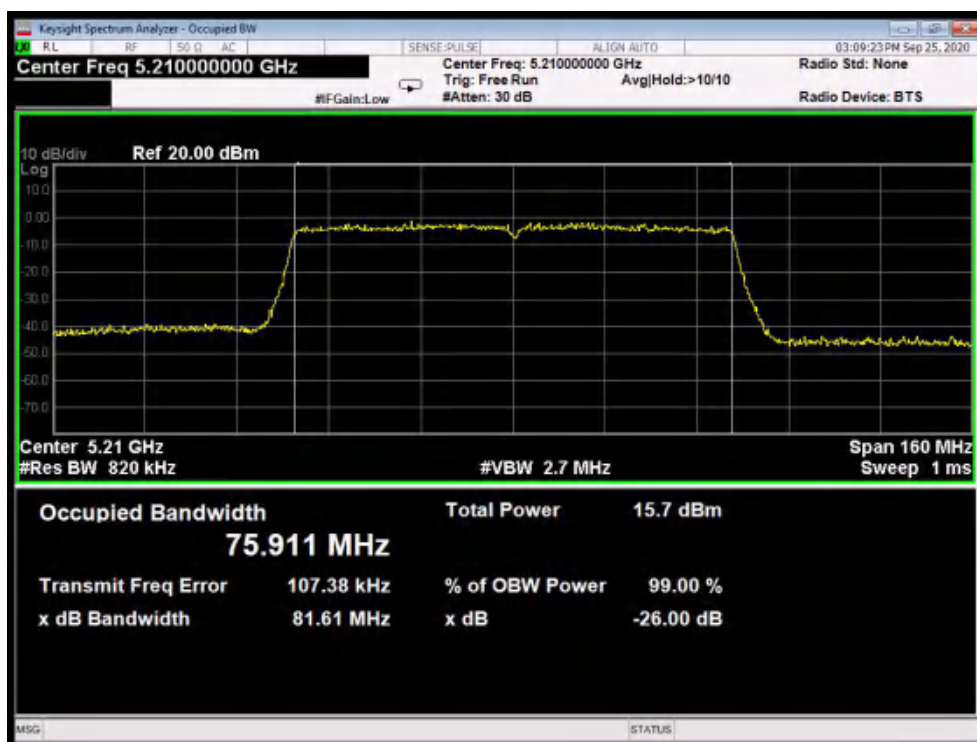


Test Mode: 802.11ac80

**ANT B:**


Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5180	21.59	16.908
	5200	21.42	16.863
	5240	21.74	16.916
802.11n20	5180	21.88	18.000
	5200	21.51	17.874
	5240	21.61	18.012
802.11ac20	5180	21.71	17.898
	5200	21.55	17.897
	5240	21.53	17.866
802.11n40	5190	40.05	36.346
	5230	39.87	36.395
802.11ac40	5190	40.10	36.363
	5230	39.50	36.395
802.11ac80	5210	81.43	75.869




26dB & 99% Bandwidth

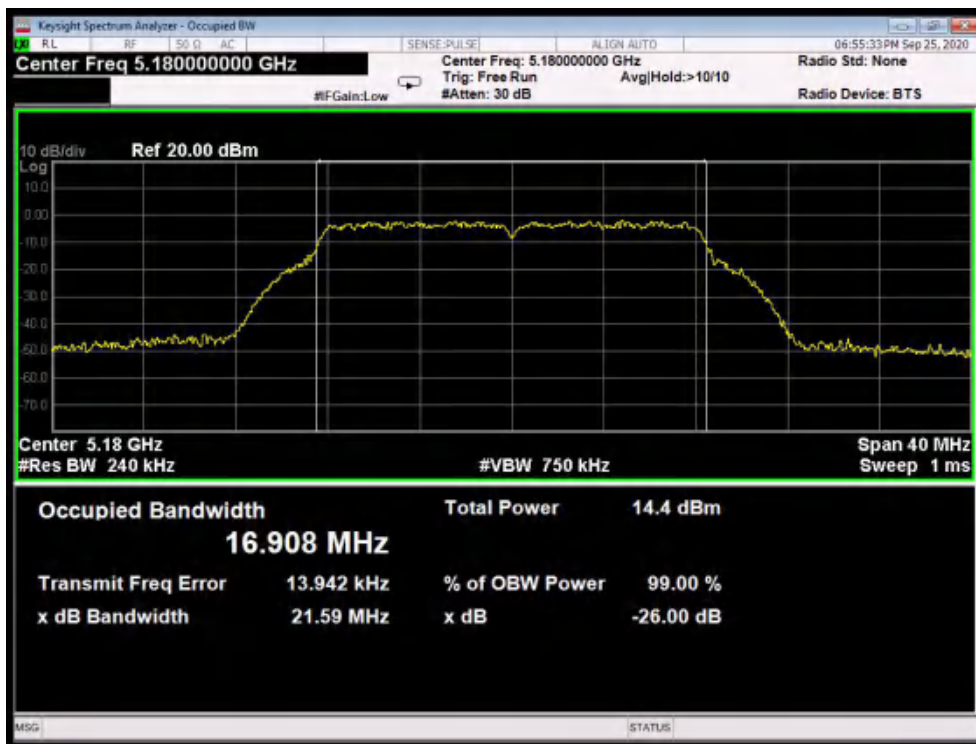


Test Mode: 802.11a--Low

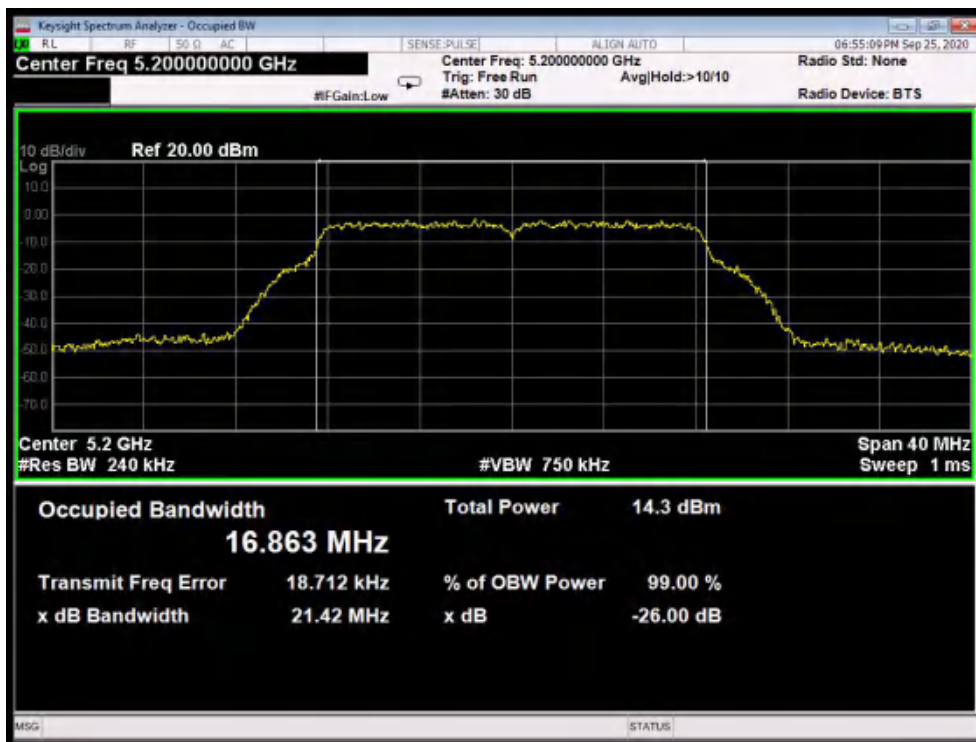


Test Mode: 802.11a---Middle

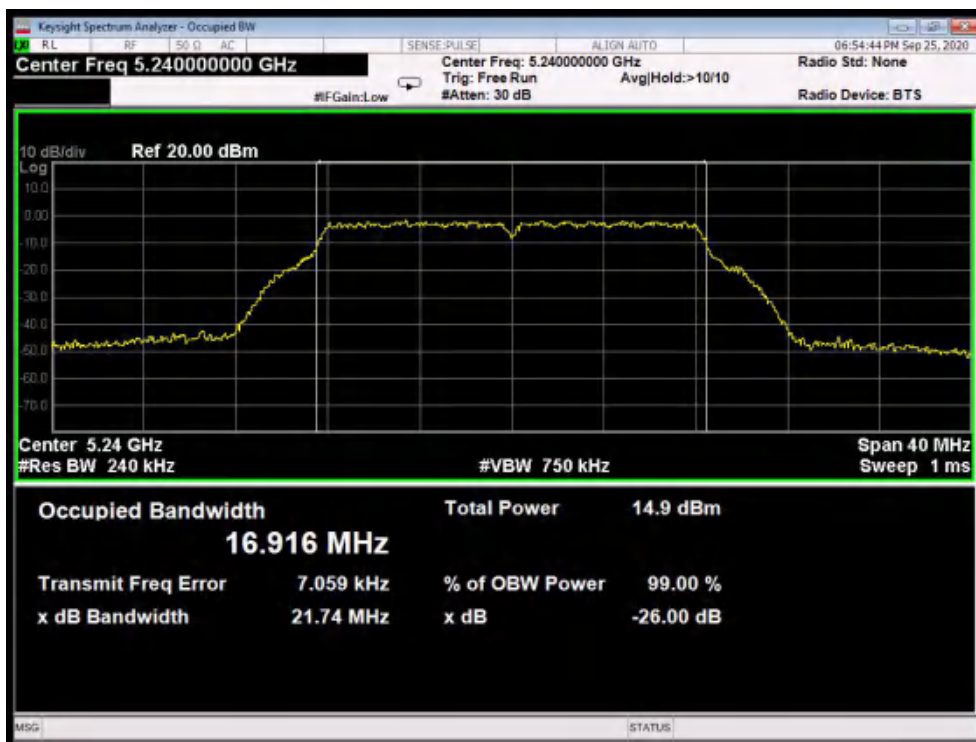


Test Mode: 802.11a---High

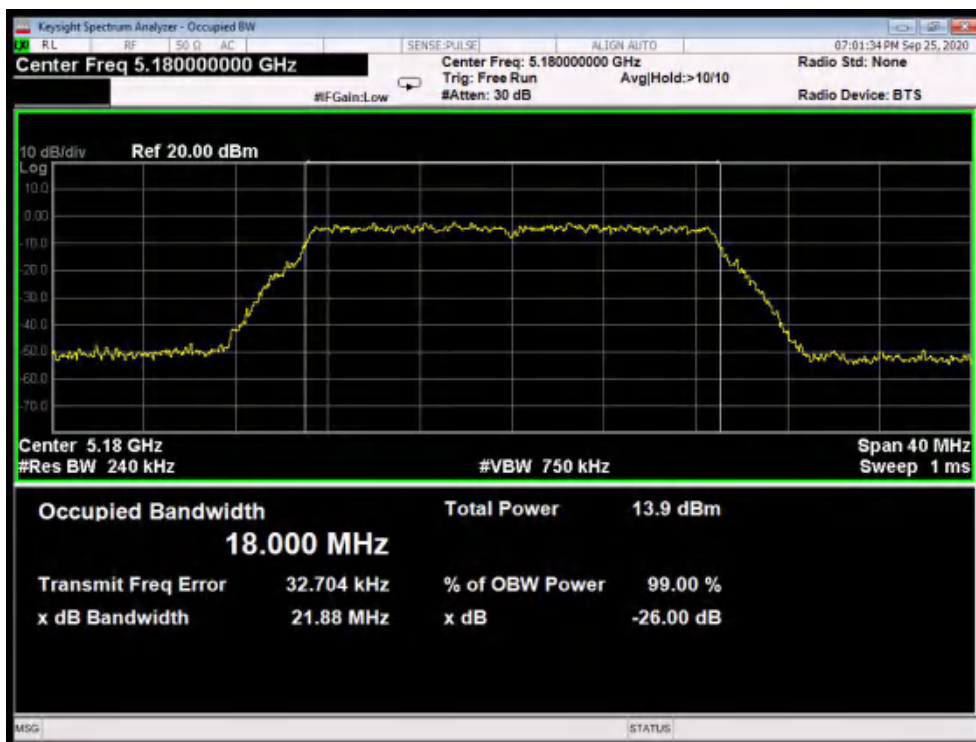


Test Mode: 802.11n20---Low

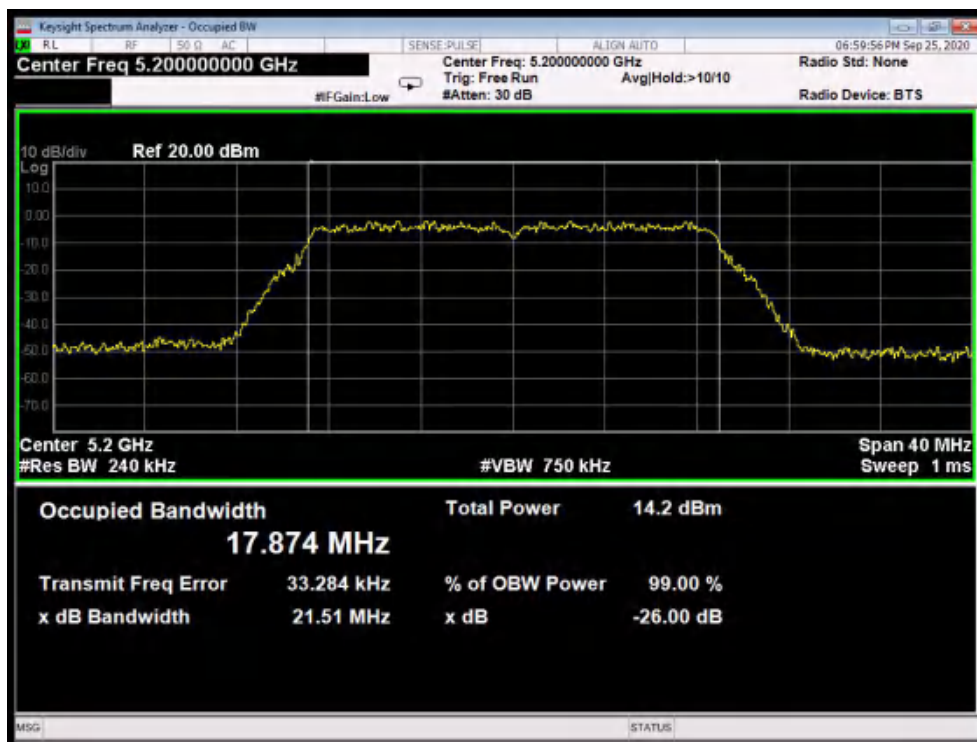


Test Mode: 802.11n20---Middle

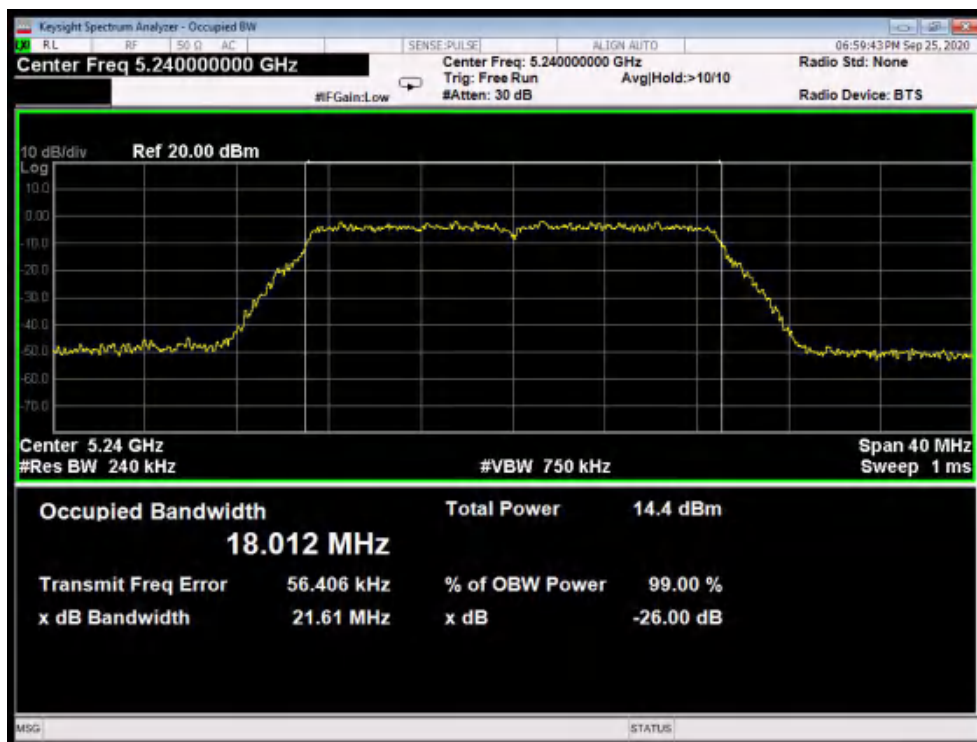


Test Mode: 802.11n20---High

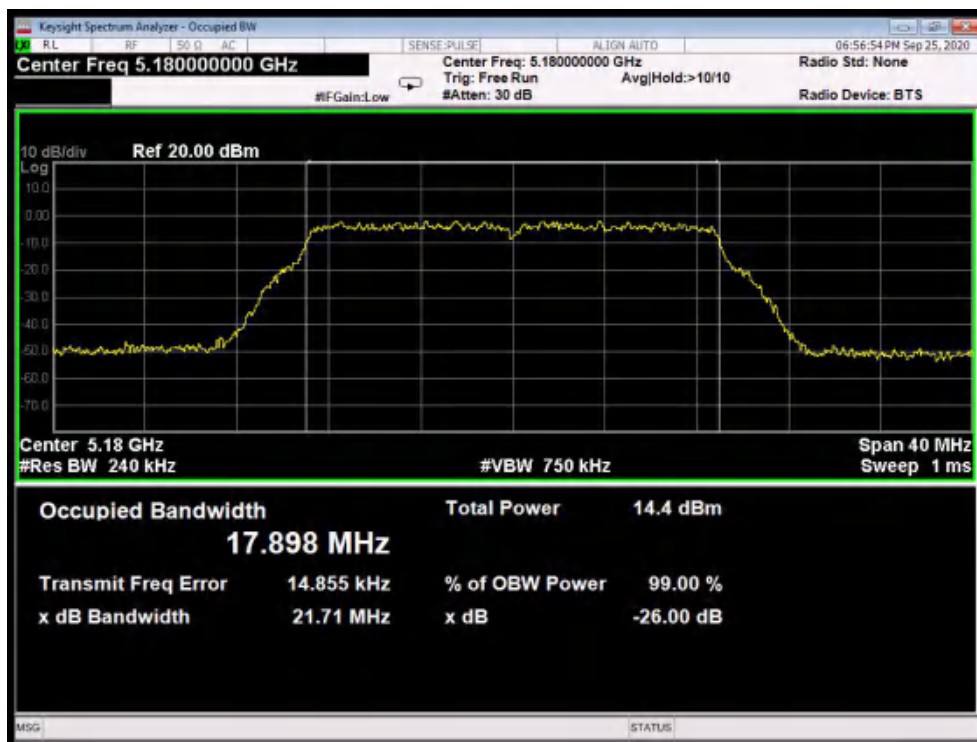


Test Mode: 802.11ac20--Low

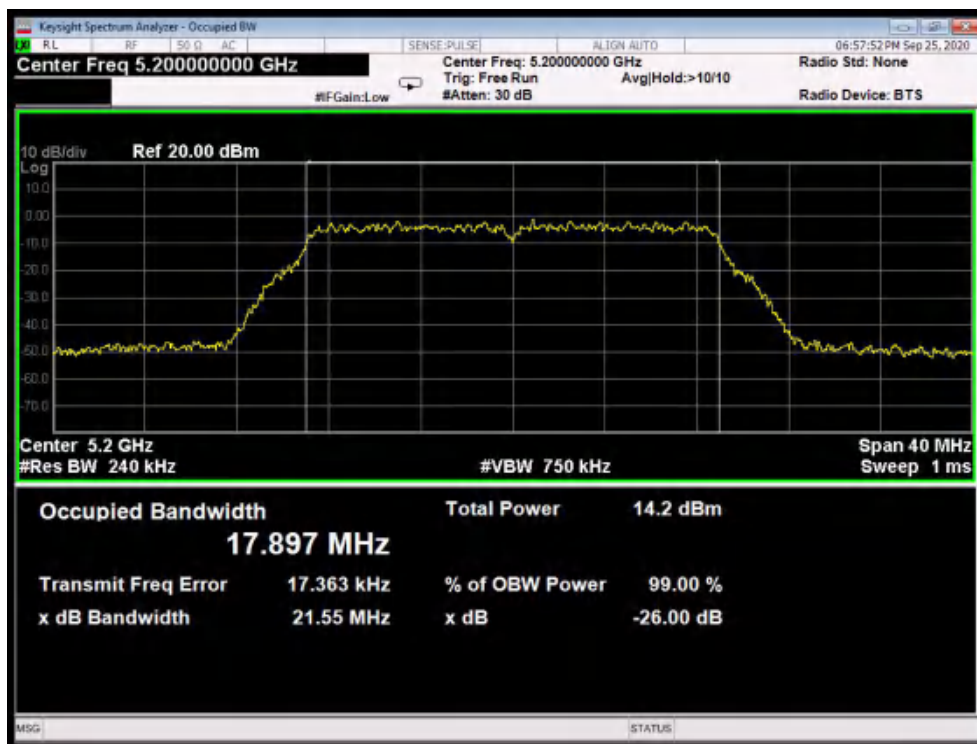


Test Mode: 802.11ac20---Middle

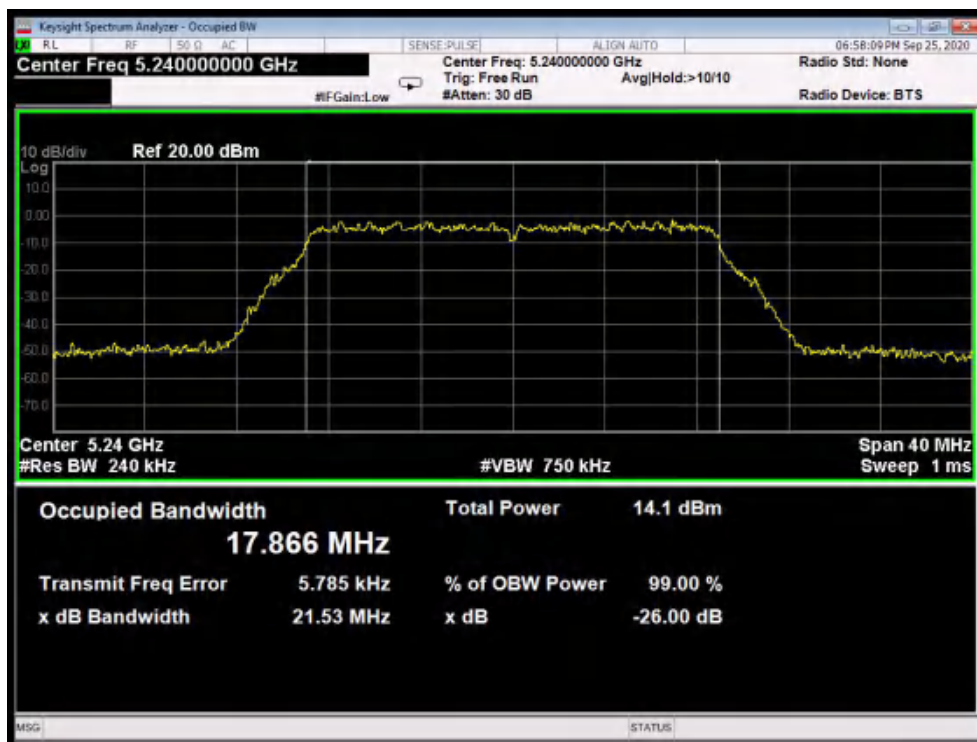


Test Mode: 802.11ac20---High

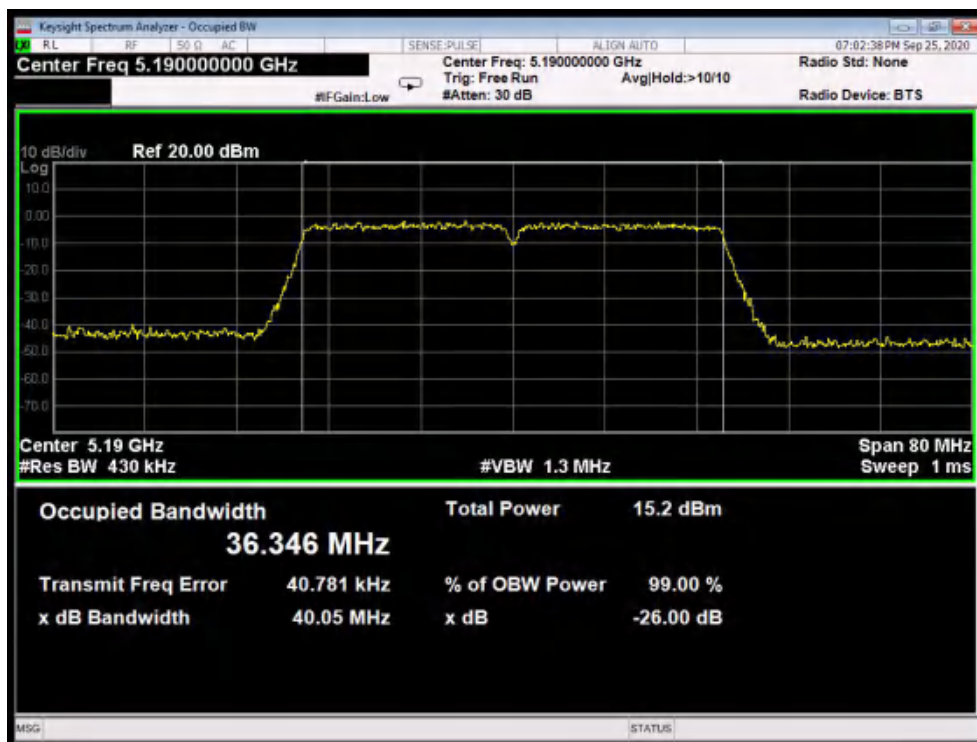


Test Mode: 802.11n40---Low

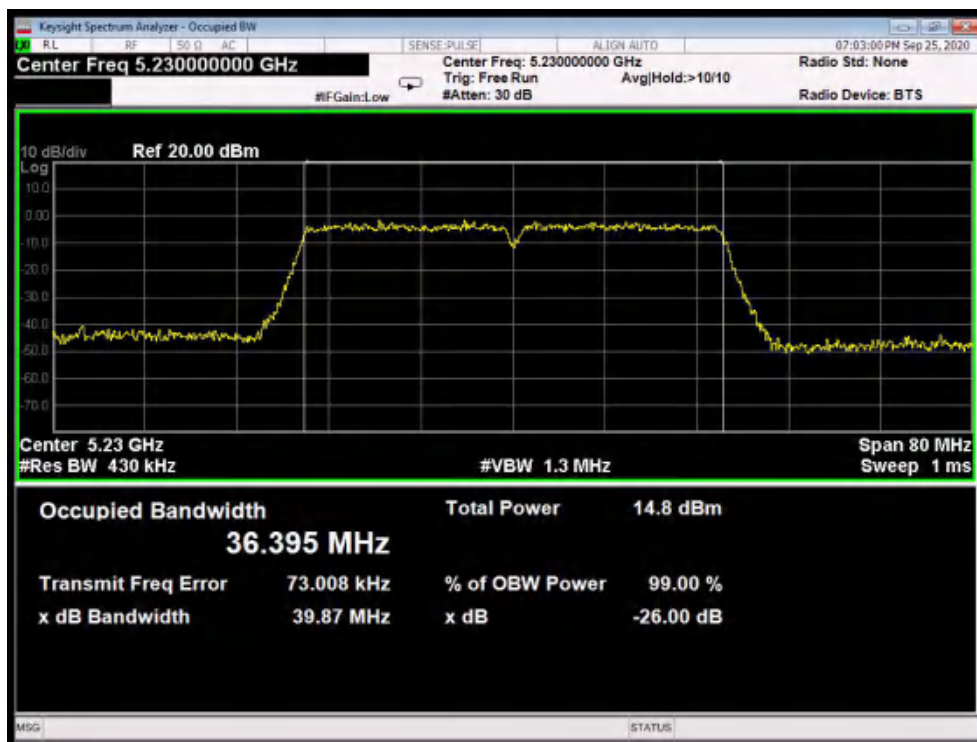


Test Mode: 802.11n40---High

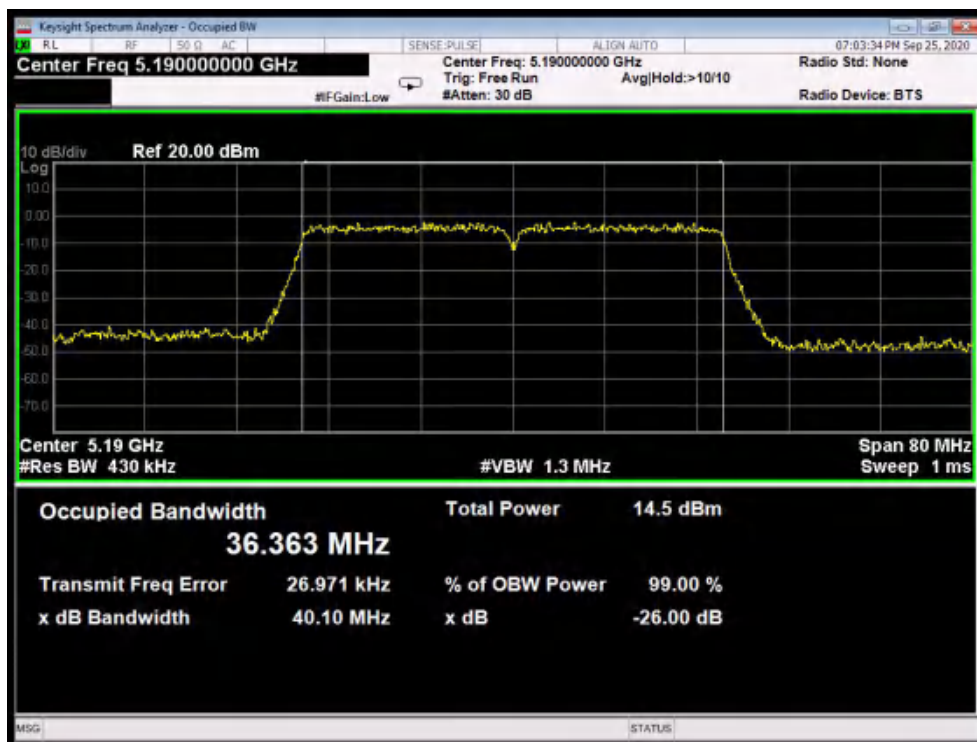

Test Mode: 802.11ac40---Low

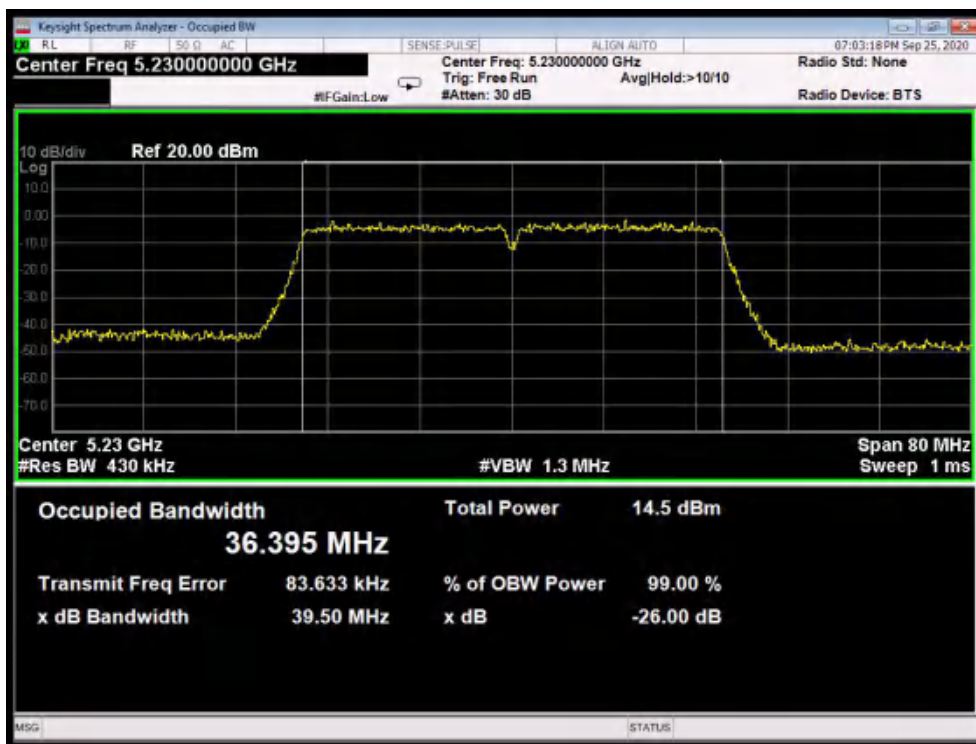

Test Mode: 802.11ac40---High

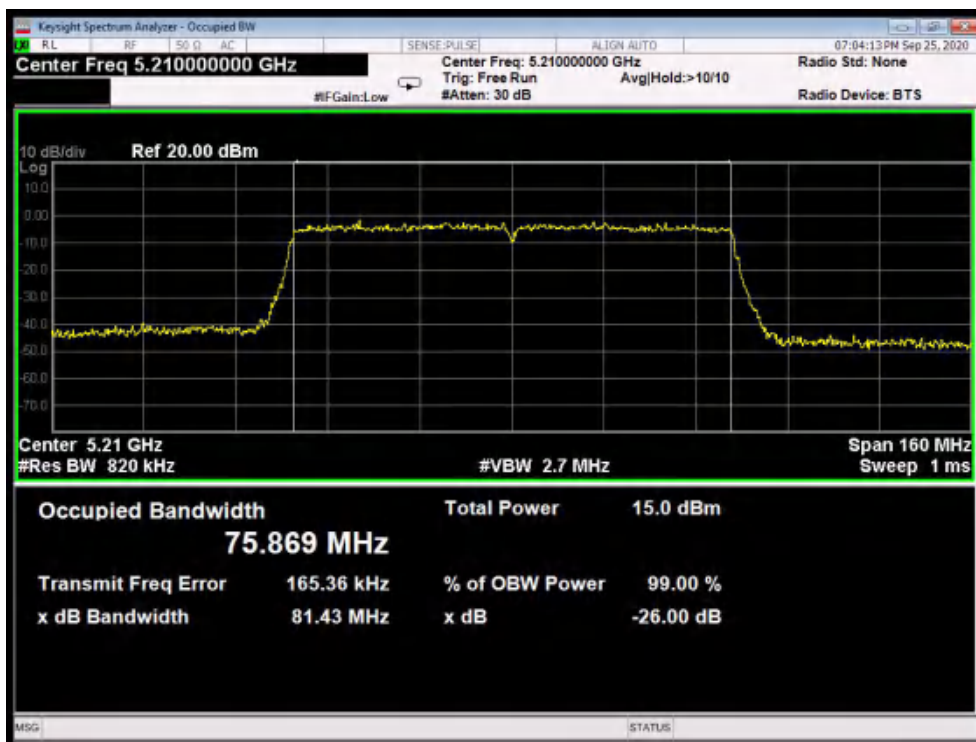


Test Mode: 802.11ac80


**ANT C:**

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5180	21.76	16.834
	5200	21.28	16.800
	5240	21.44	16.805
802.11n20	5180	22.50	18.020
	5200	21.86	17.888
	5240	21.70	17.936
802.11ac20	5180	23.86	17.883
	5200	21.63	17.897
	5240	22.14	17.898
802.11n40	5190	39.86	36.292
	5230	39.52	36.228
802.11ac40	5190	39.37	36.225
	5230	39.92	36.266
802.11ac80	5210	81.17	75.602


26dB & 99% Bandwidth

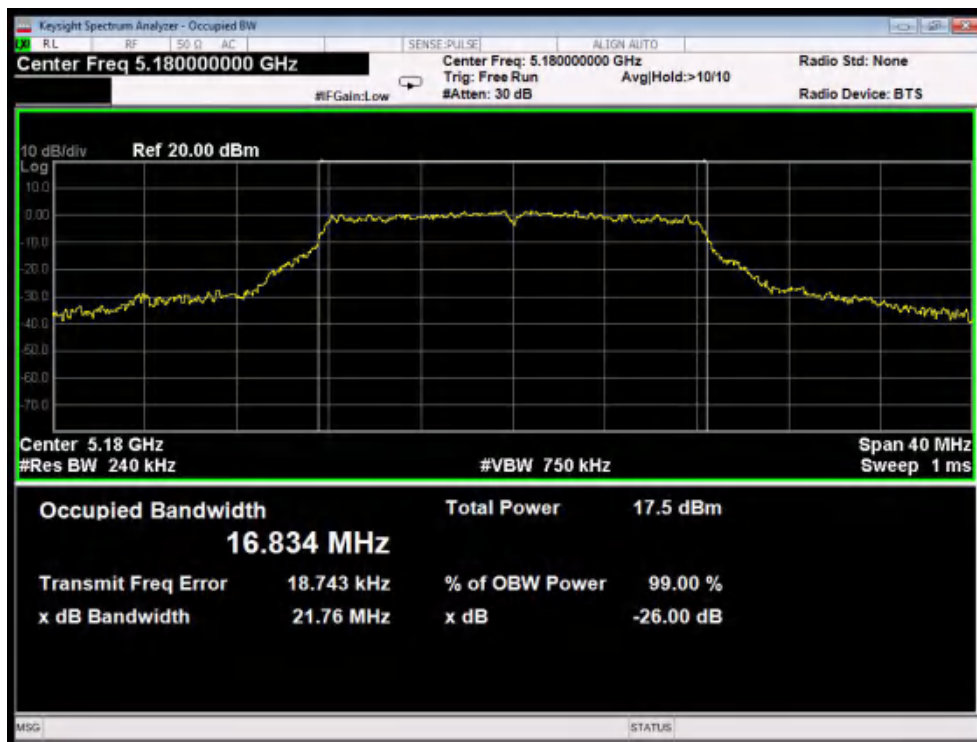


Test Mode: 802.11a--Low

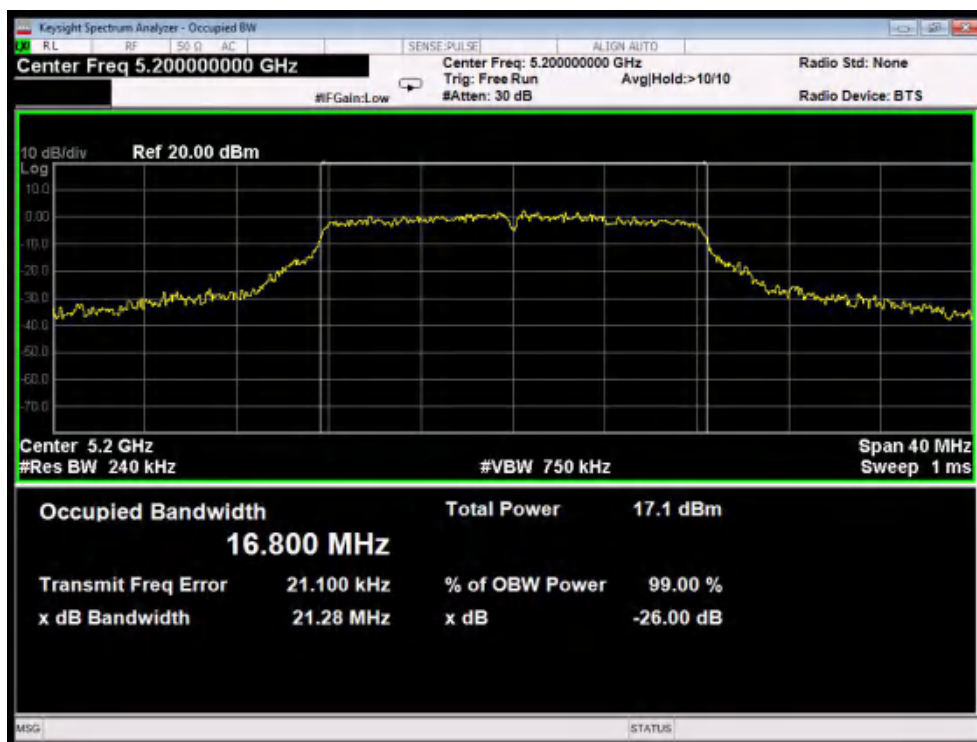


Test Mode: 802.11a---Middle

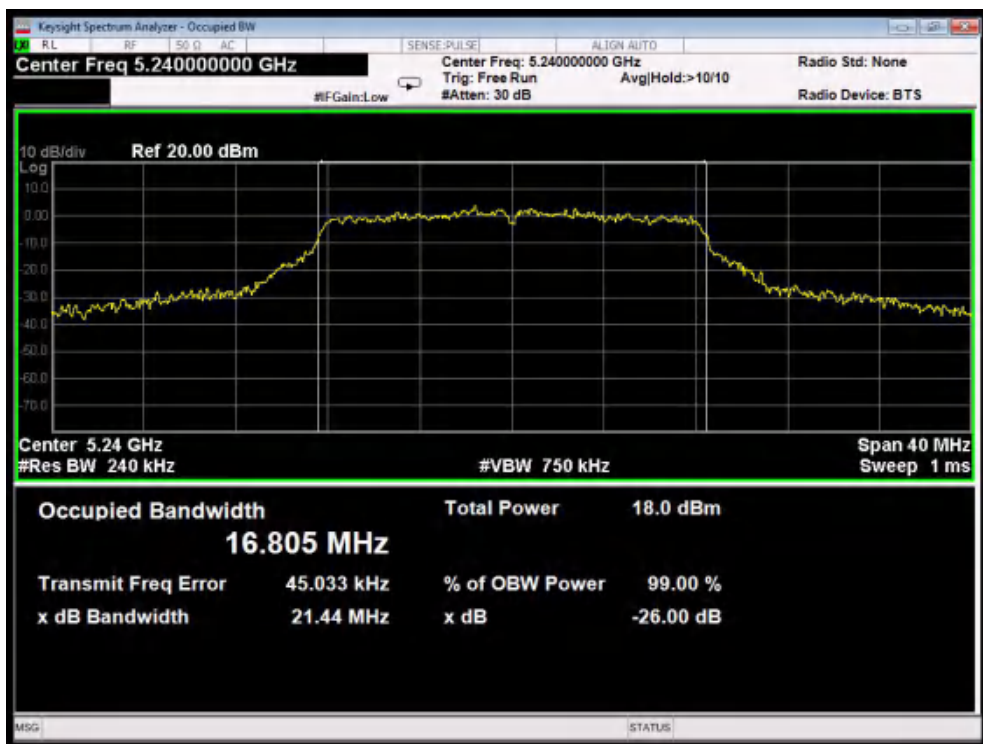


Test Mode: 802.11a---High

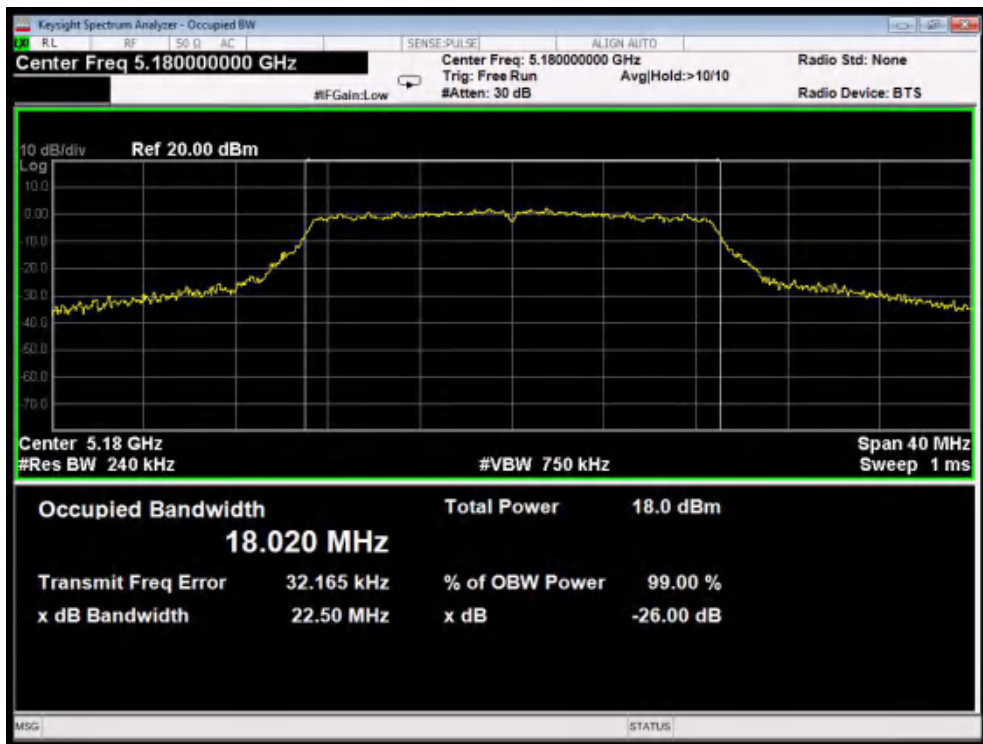


Test Mode: 802.11n20---Low

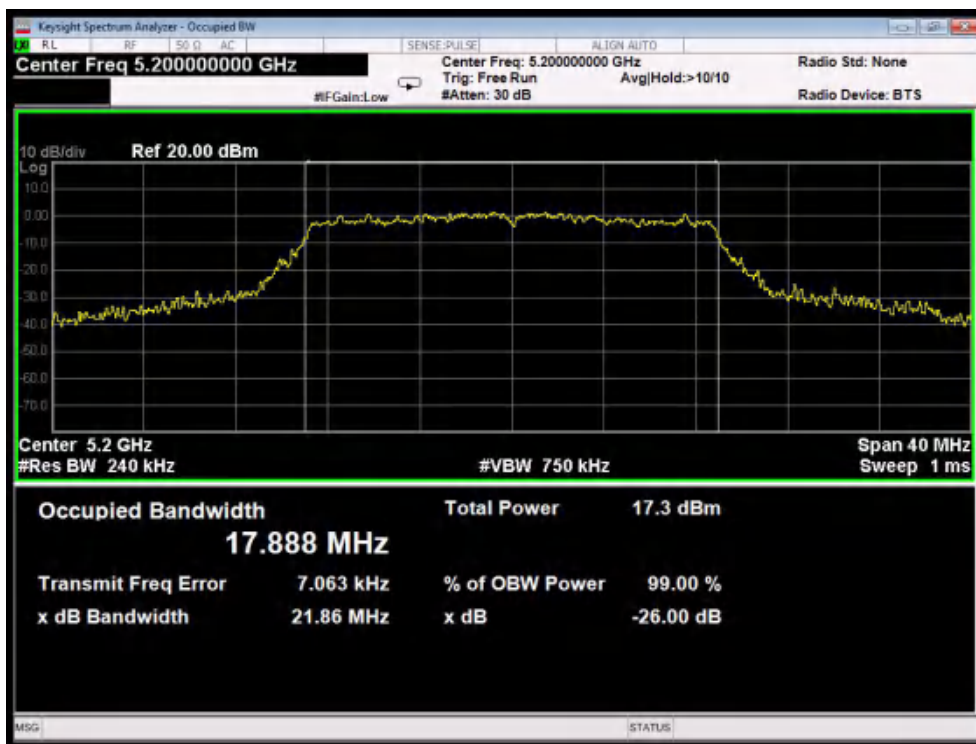


Test Mode: 802.11n20---Middle

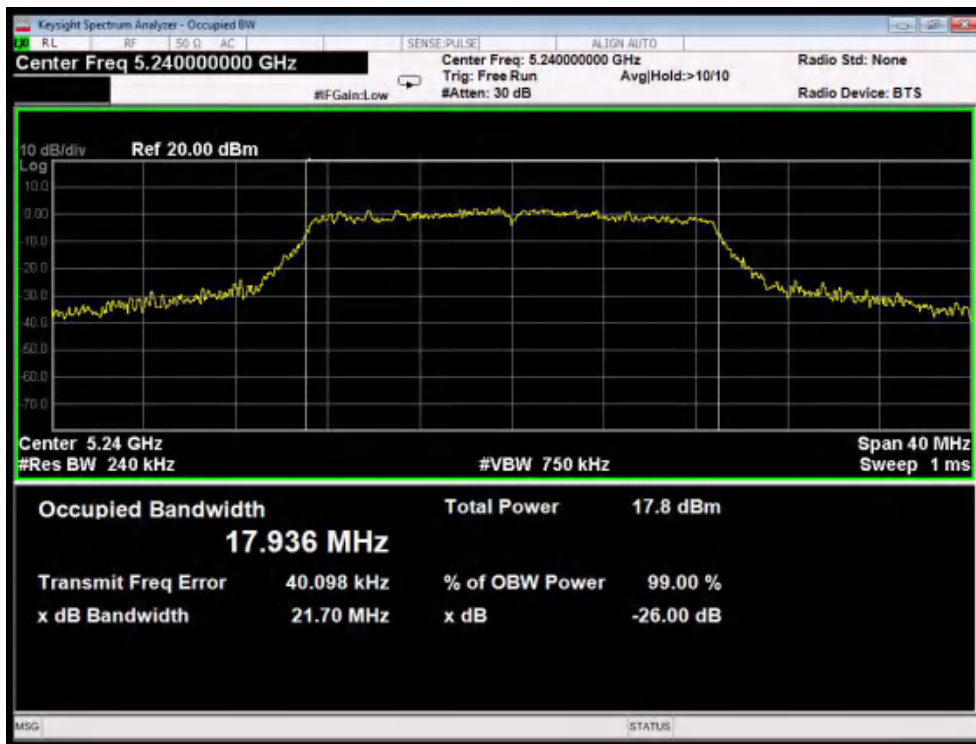


Test Mode: 802.11n20---High

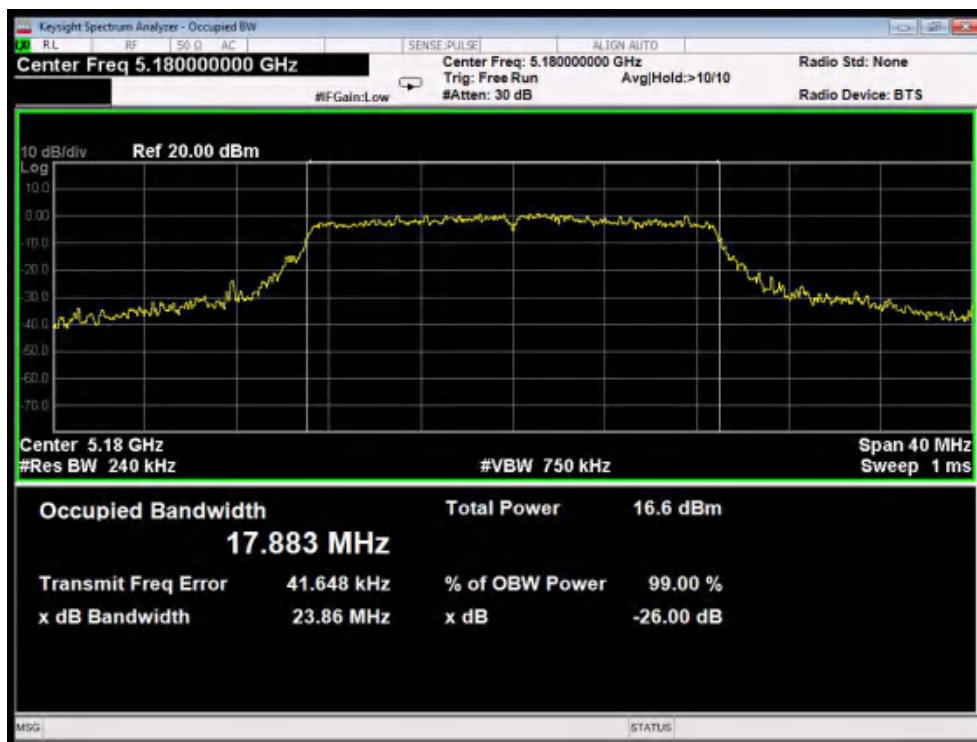


Test Mode: 802.11ac20--Low

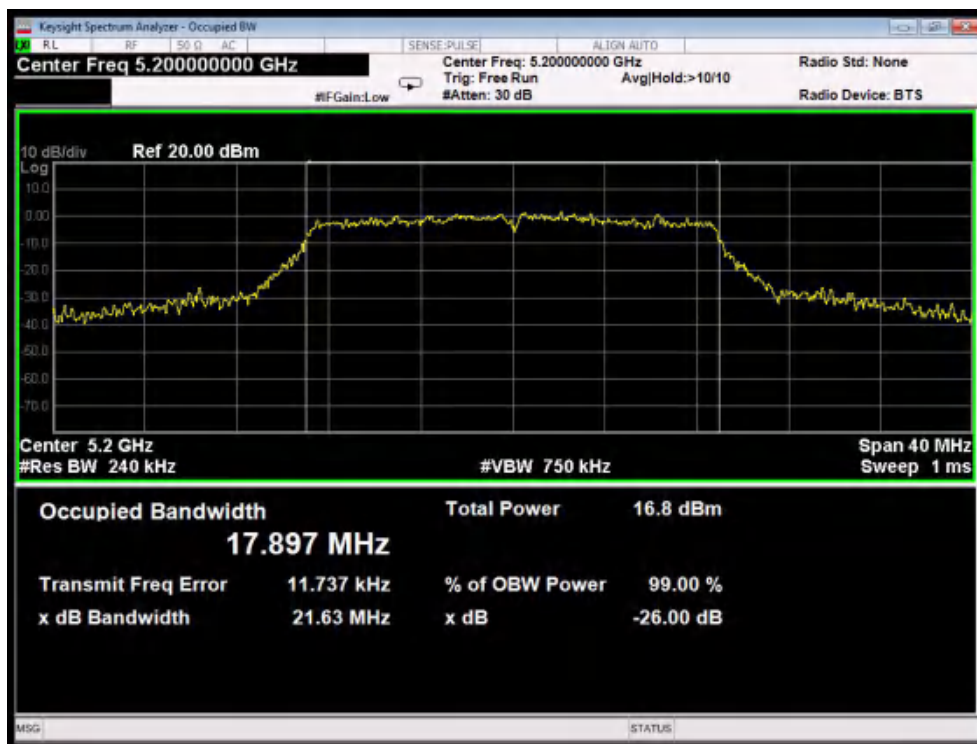


Test Mode: 802.11ac20---Middle

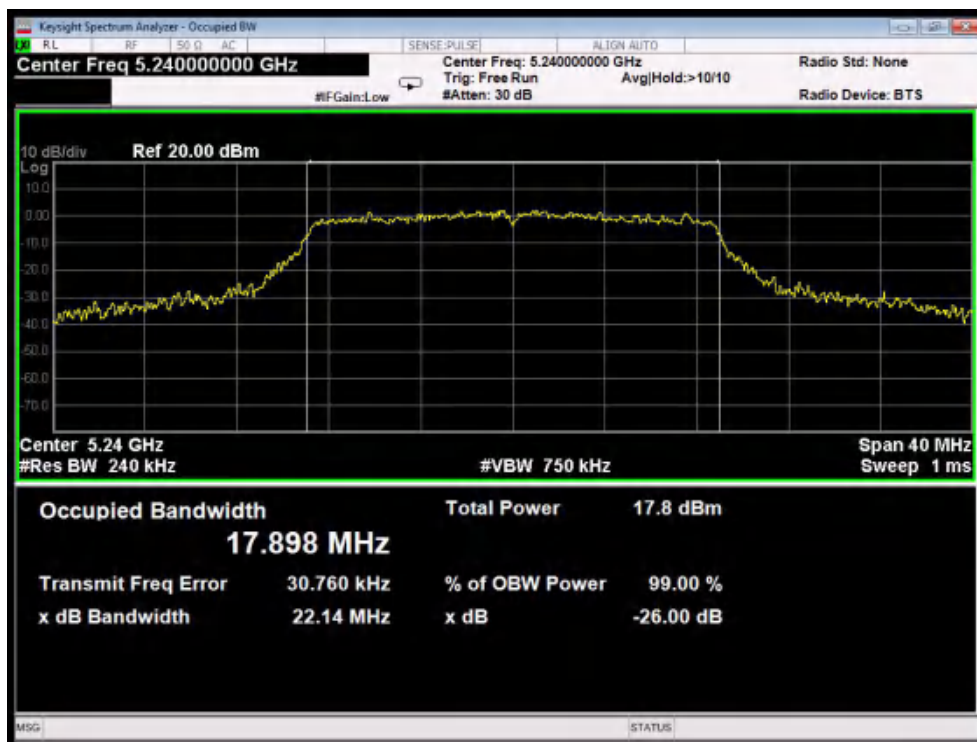


Test Mode: 802.11ac20---High

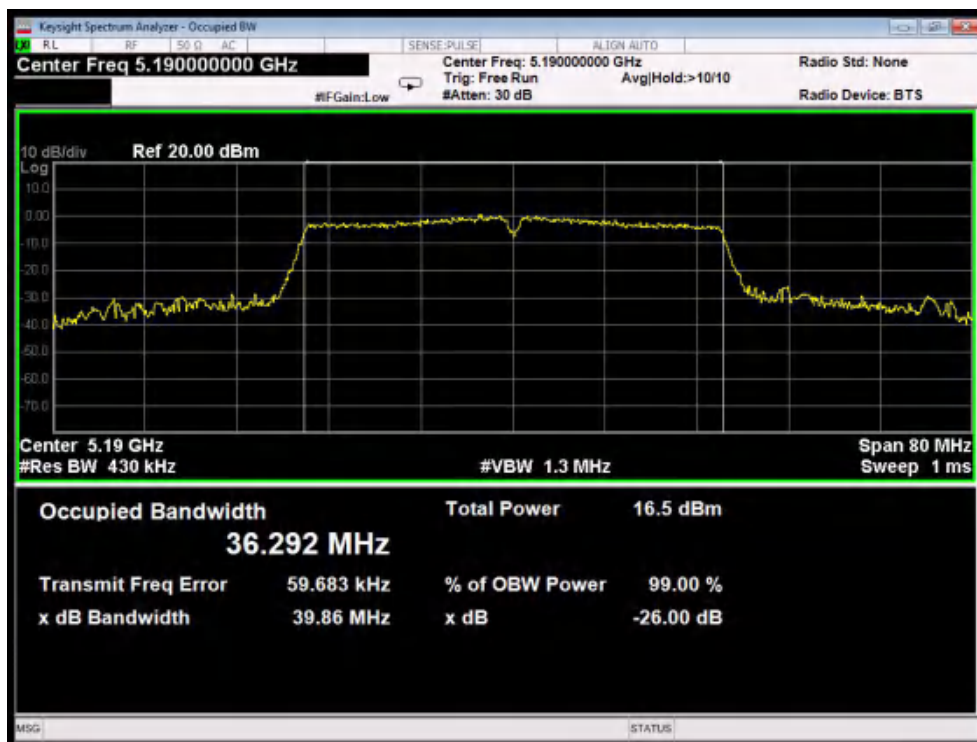


Test Mode: 802.11n40---Low

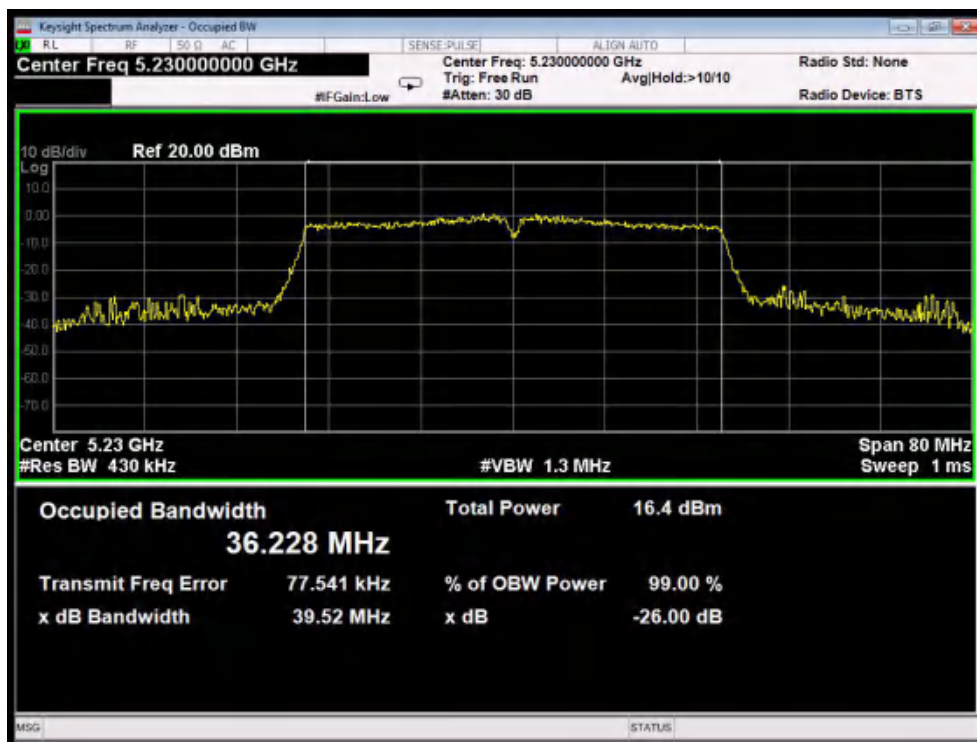


Test Mode: 802.11n40---High

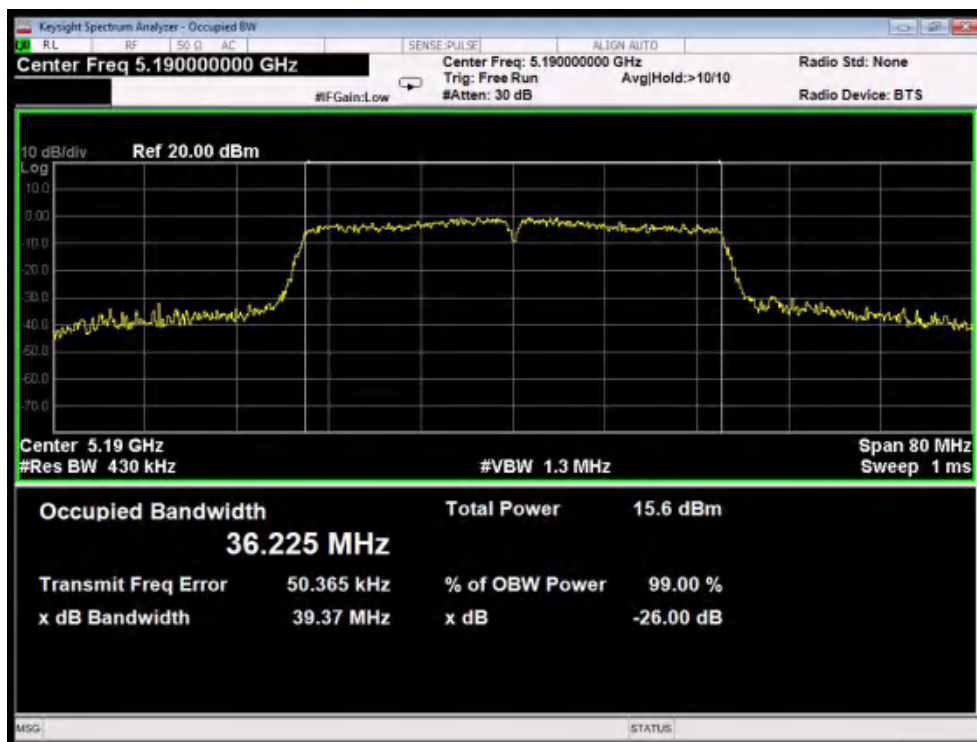

Test Mode: 802.11ac40---Low

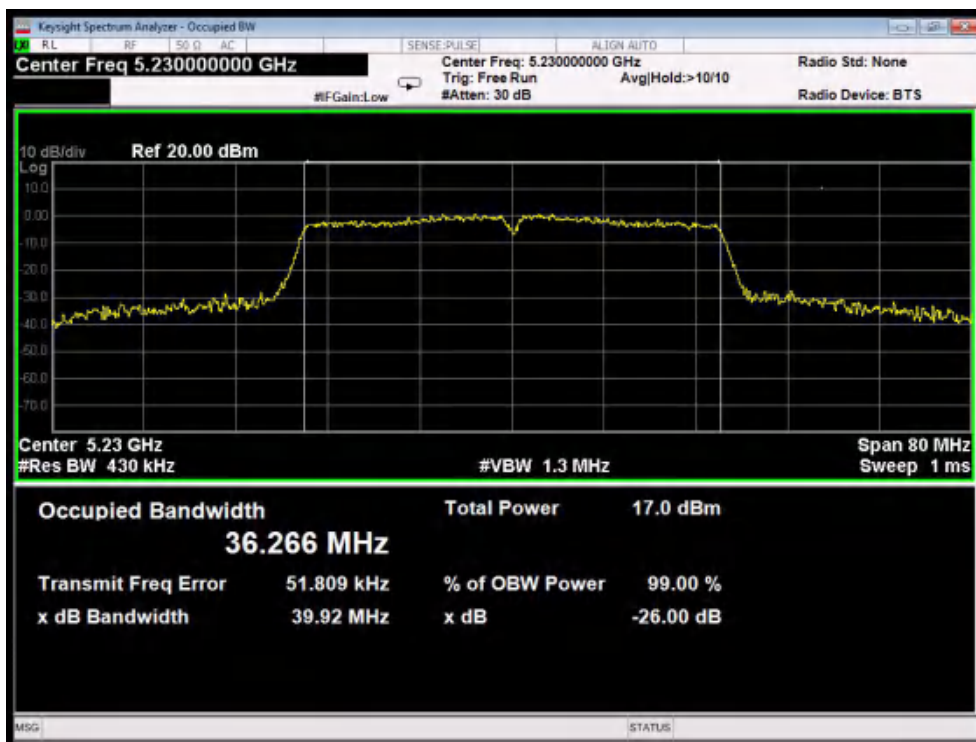

Test Mode: 802.11ac40---High

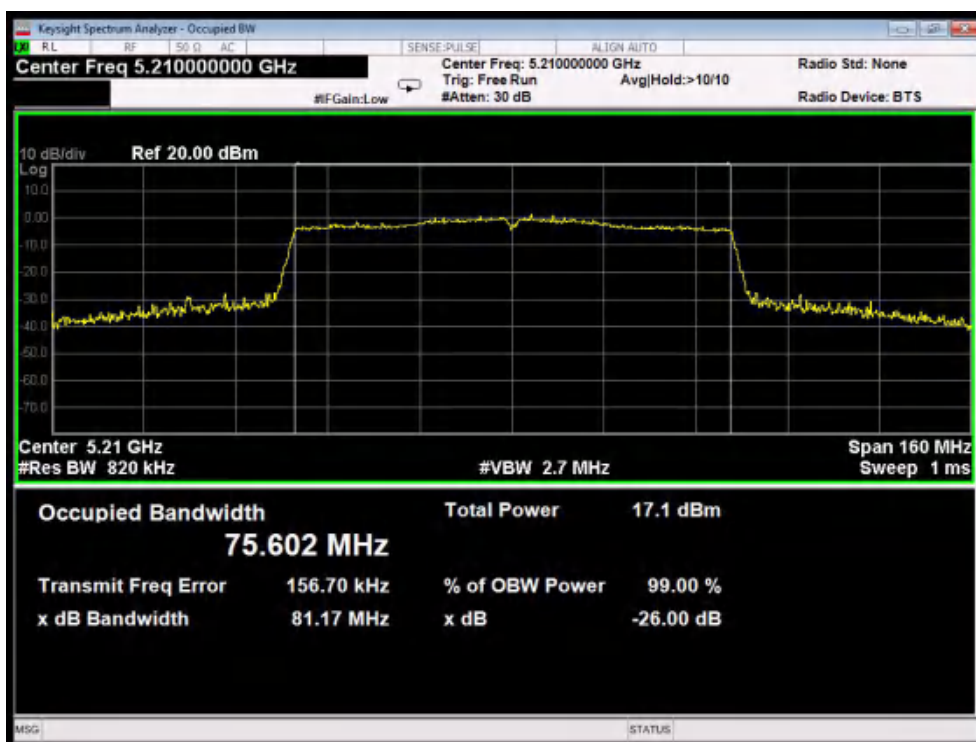


Test Mode: 802.11ac80


**ANT D`:**

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5180	21.26	16.699
	5200	25.14	16.770
	5240	21.28	16.662
802.11n20	5180	21.31	17.777
	5200	22.44	17.842
	5240	22.96	17.902
802.11ac20	5180	23.26	17.872
	5200	21.77	17.819
	5240	21.90	17.826
802.11n40	5190	73.66	36.635
	5230	69.23	37.190
802.11ac40	5190	49.10	36.921
	5230	69.12	37.383
802.11ac80	5210	104.3	75.789


26dB & 99% Bandwidth

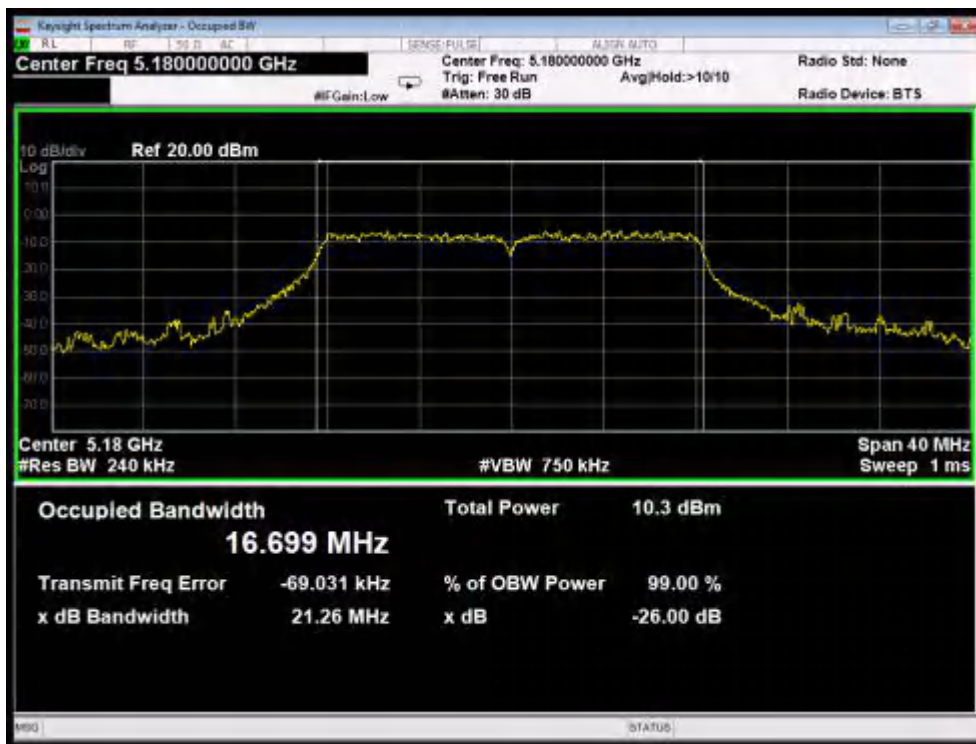


Test Mode: 802.11a--Low

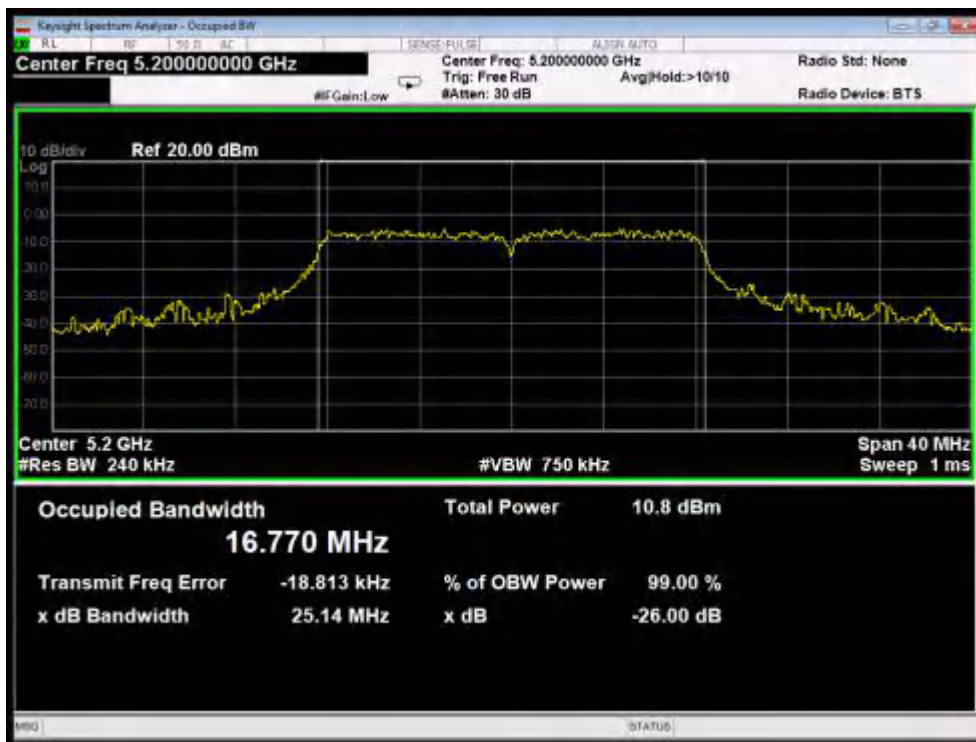


Test Mode: 802.11a---Middle

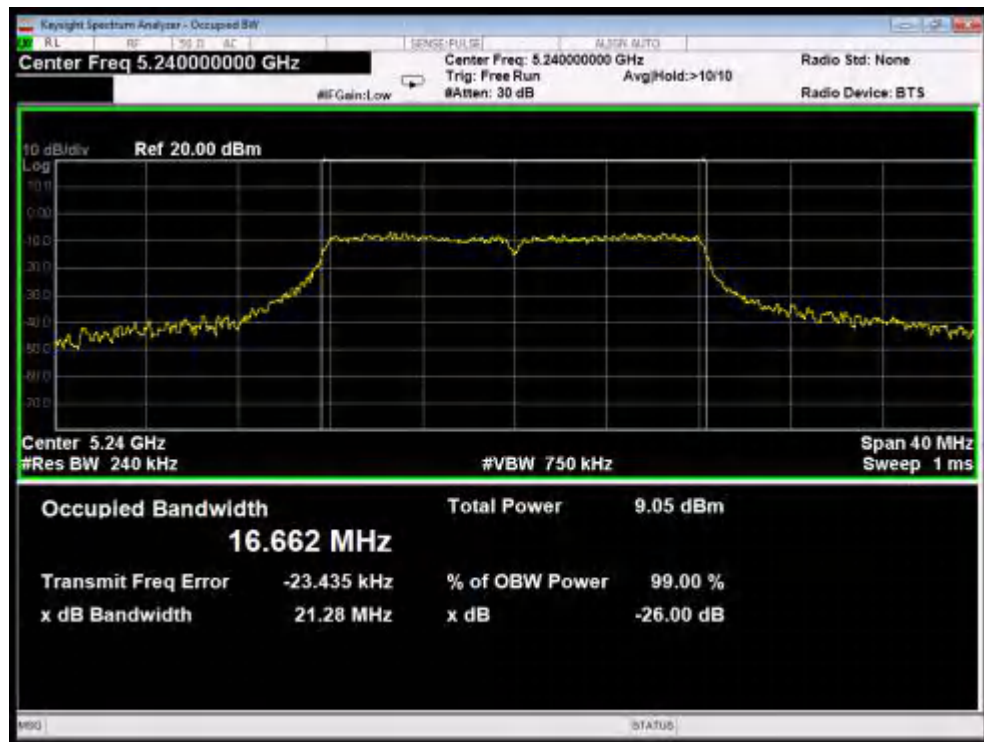


Test Mode: 802.11a---High

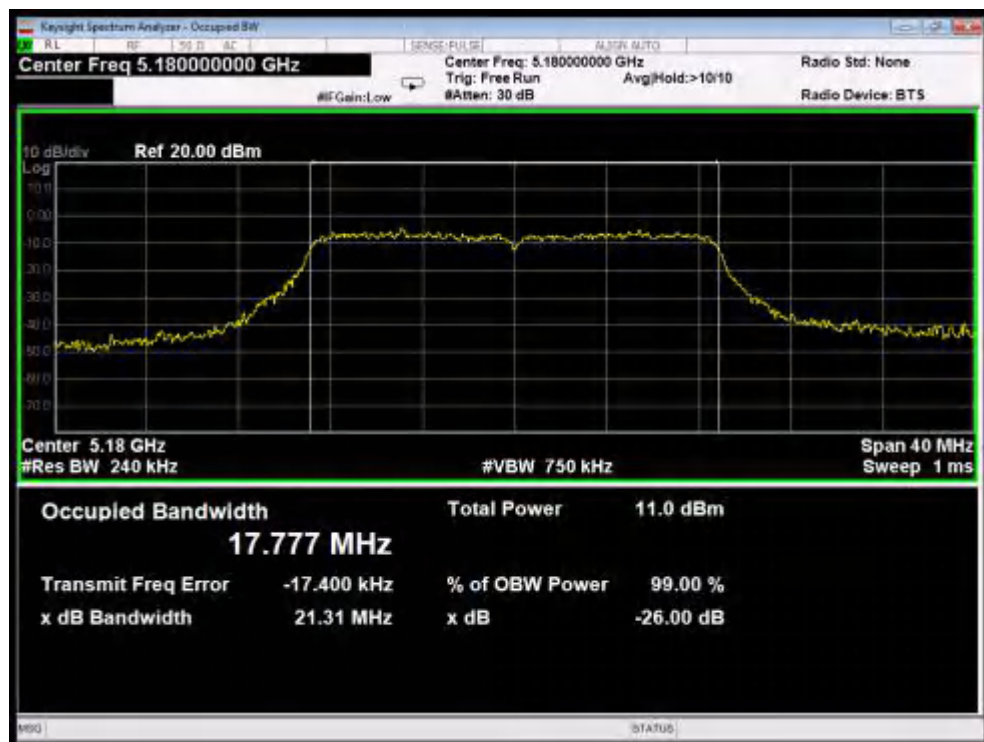


Test Mode: 802.11n20---Low

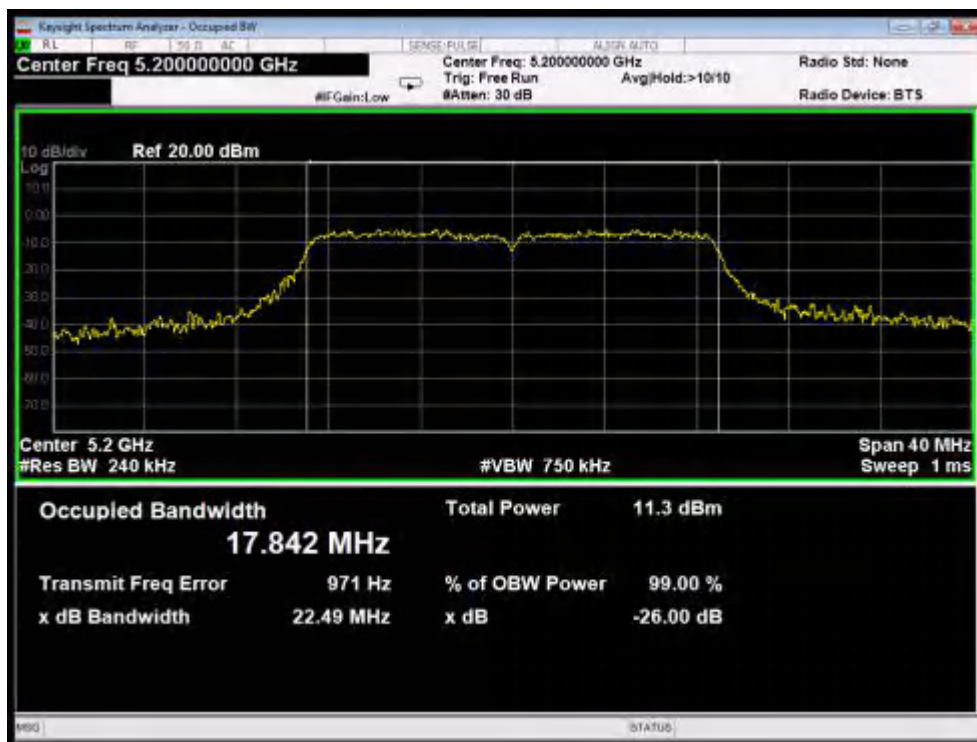


Test Mode: 802.11n20---Middle

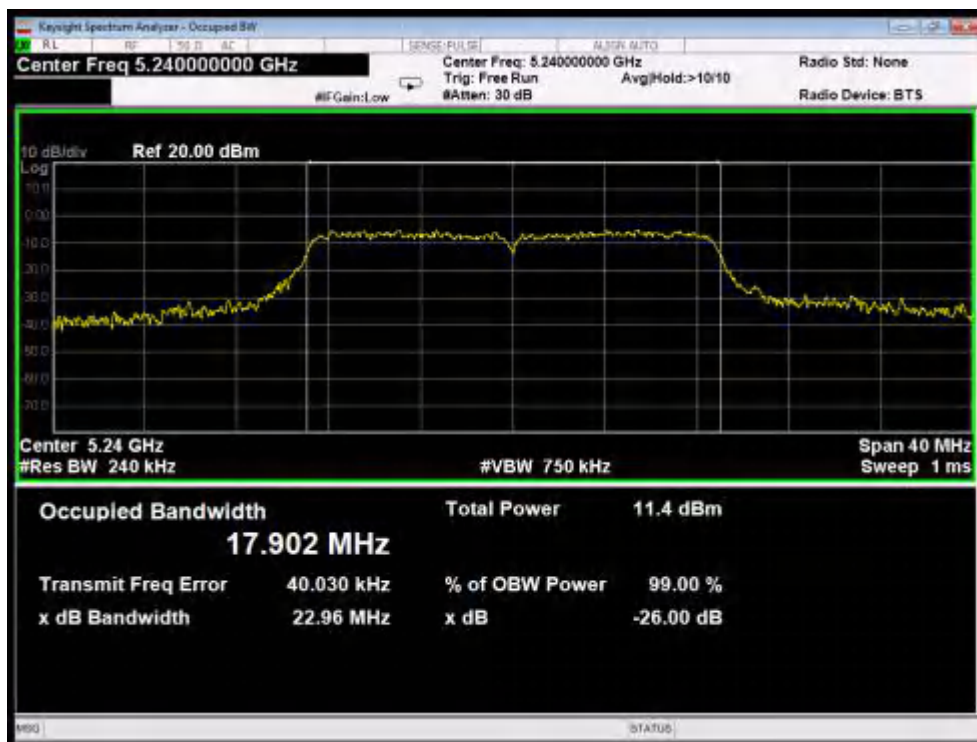


Test Mode: 802.11n20---High

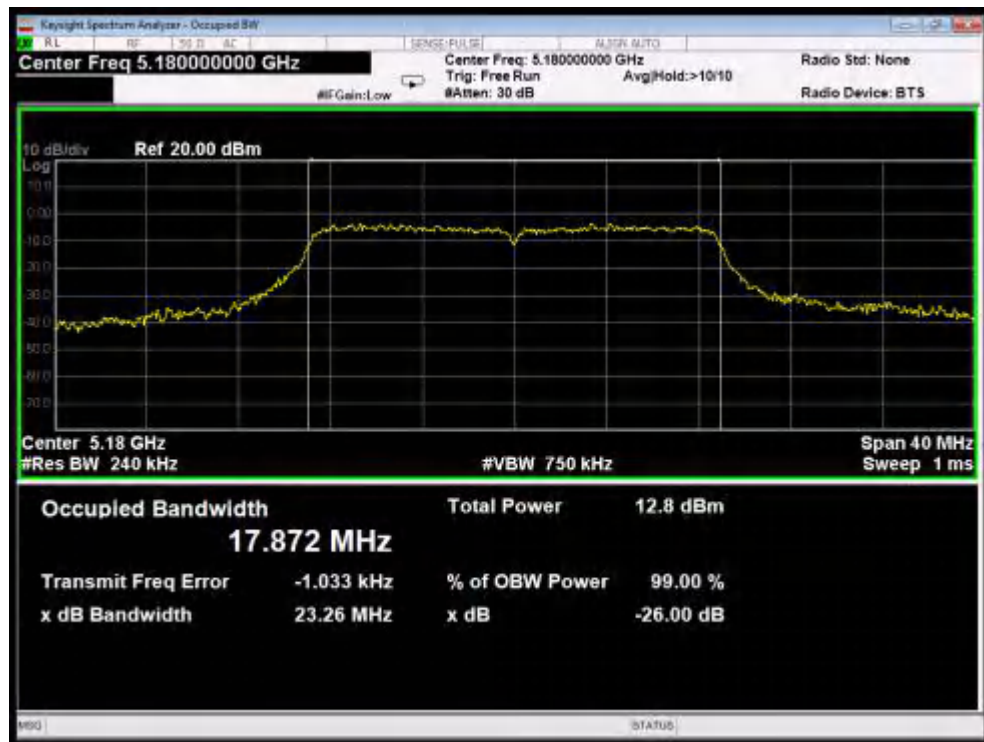


Test Mode: 802.11ac20--Low

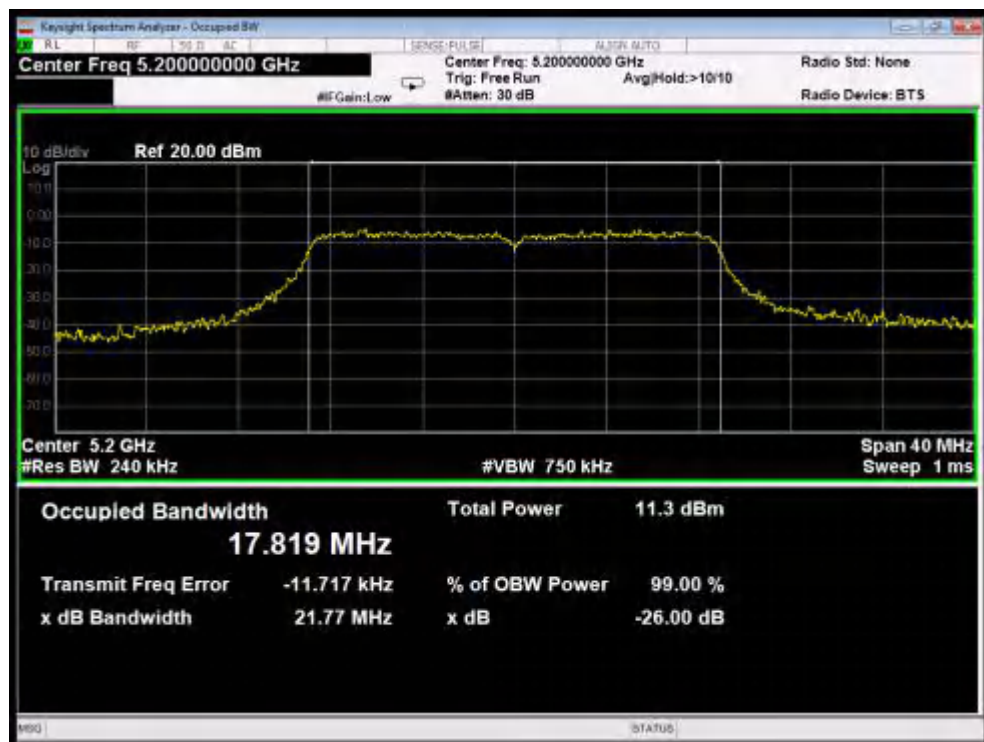


Test Mode: 802.11ac20---Middle

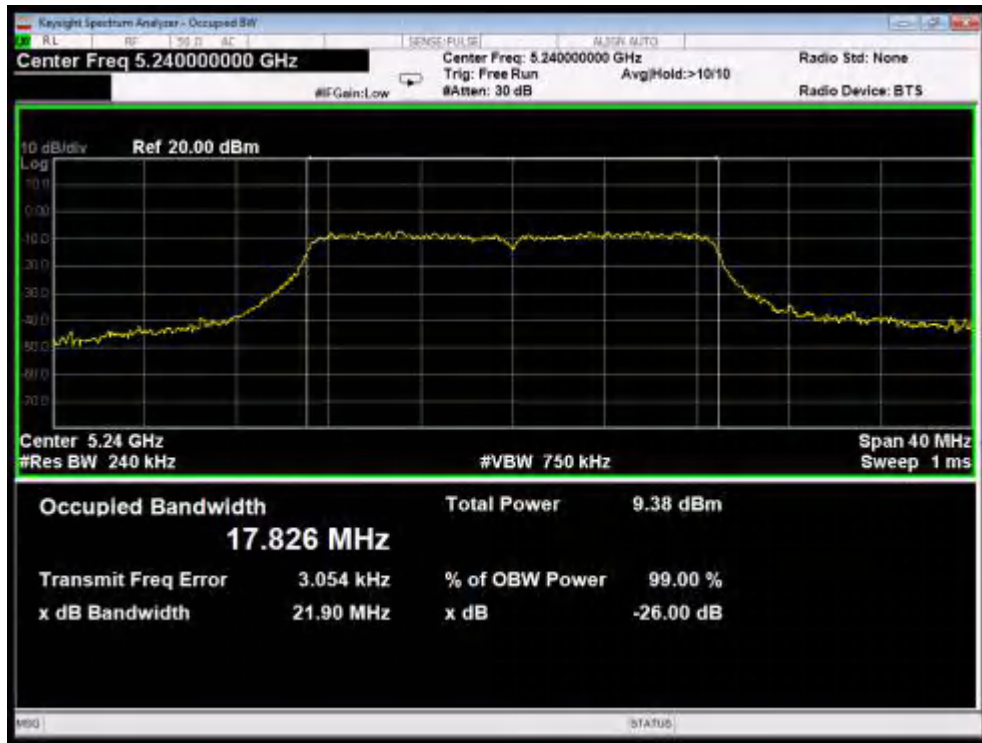


Test Mode: 802.11ac20---High

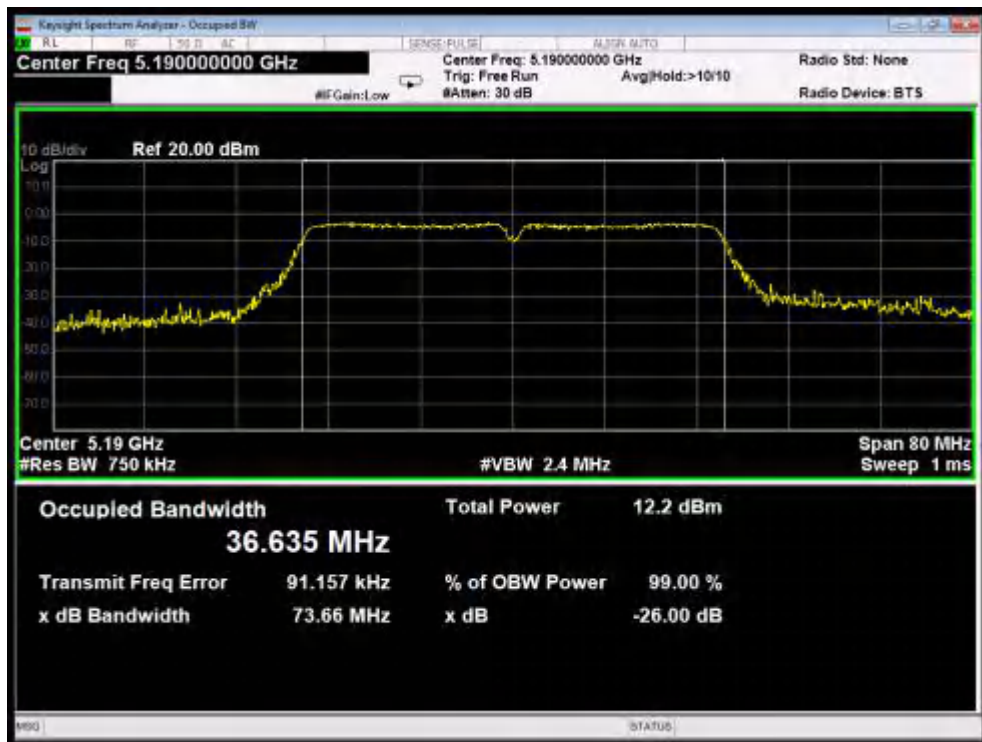


Test Mode: 802.11n40---Low

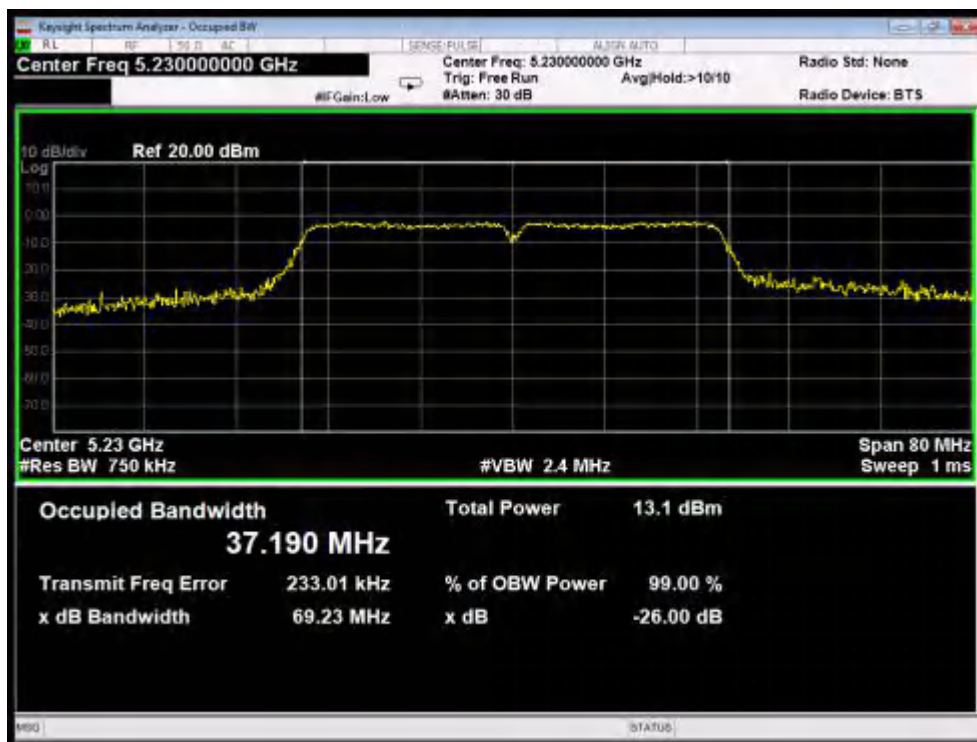


Test Mode: 802.11n40---High

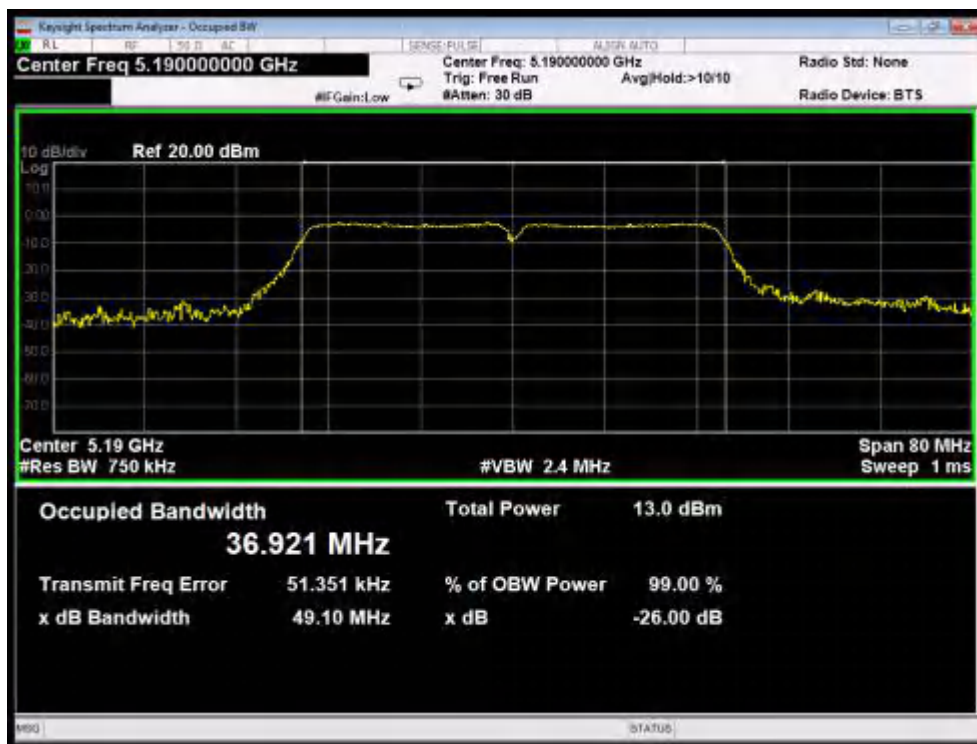

Test Mode: 802.11ac40---Low

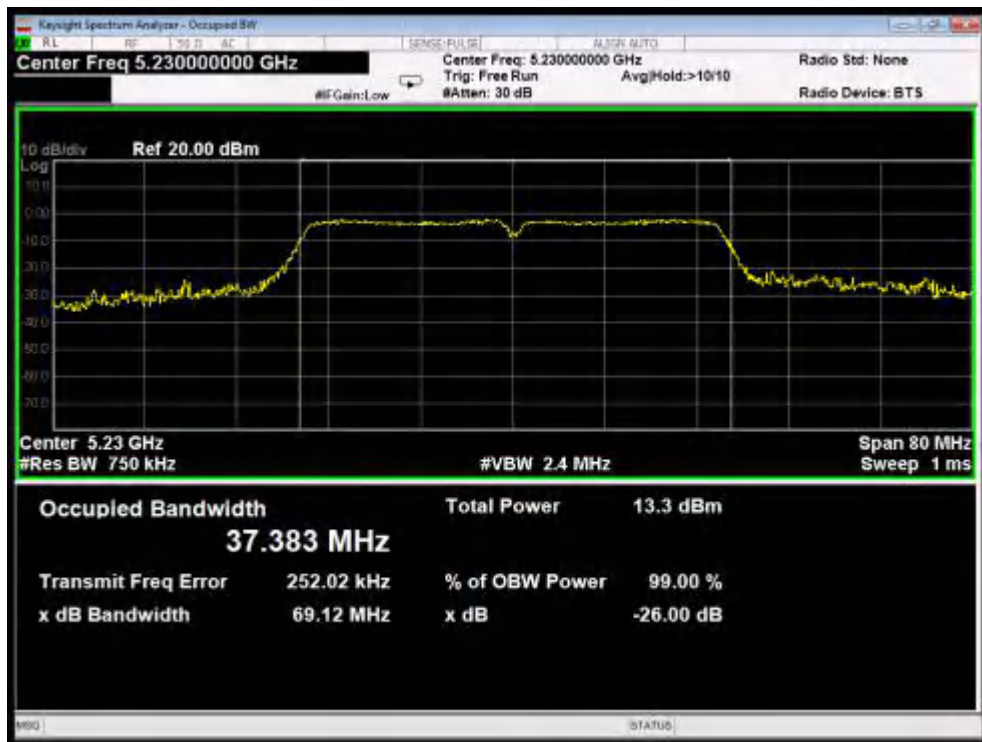

Test Mode: 802.11ac40---High

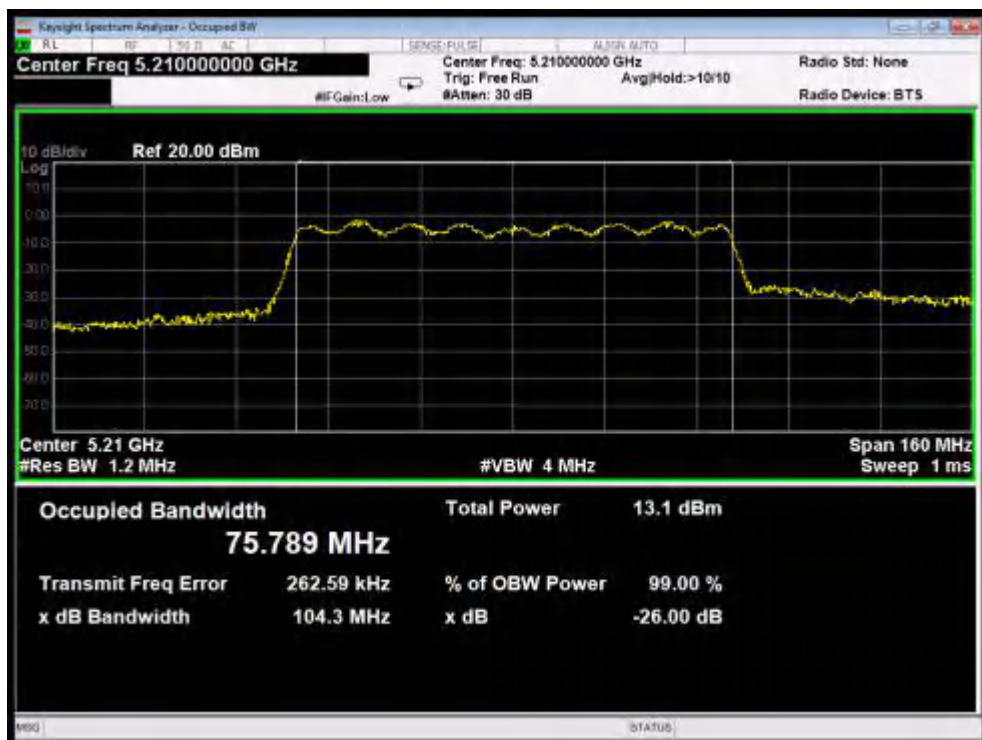


Test Mode: 802.11ac80

8. Power Spectral Density Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (1)
Test Limit	17 dBm/MHz

8.2. Test Setup



8.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;
3. Set VBW $\geq$ 3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;



8.4. Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 12V 1.5A	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH

ANT A:

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11a	5180	1.871	17	PASS
	5200	2.037	17	PASS
	5240	1.843	17	PASS
802.11n20	5180	2.058	17	PASS
	5200	1.621	17	PASS
	5240	2.424	17	PASS
802.11ac20	5180	3.102	17	PASS
	5200	2.116	17	PASS
	5240	1.674	17	PASS
802.11n40	5190	-0.625	17	PASS
	5230	-0.580	17	PASS
802.11ac40	5190	0.851	17	PASS
	5230	0.405	17	PASS
802.11ac80	5210	-3.616	17	PASS


ANT B:

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11a	5180	2.283	17	PASS
	5200	2.333	17	PASS
	5240	2.588	17	PASS
802.11n20	5180	1.955	17	PASS
	5200	1.793	17	PASS
	5240	2.593	17	PASS
802.11ac20	5180	2.903	17	PASS
	5200	2.253	17	PASS
	5240	3.171	17	PASS
802.11n40	5190	-0.456	17	PASS
	5230	-0.403	17	PASS
802.11ac40	5190	1.242	17	PASS
	5230	-0.167	17	PASS
802.11ac80	5210	-3.108	17	PASS

ANT C:

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11a	5180	1.437	17	PASS
	5200	2.447	17	PASS
	5240	2.593	17	PASS
802.11n20	5180	2.383	17	PASS
	5200	2.506	17	PASS
	5240	3.315	17	PASS
802.11ac20	5180	2.953	17	PASS
	5200	2.410	17	PASS
	5240	4.001	17	PASS
802.11n40	5190	-0.791	17	PASS
	5230	0.094	17	PASS
802.11ac40	5190	0.600	17	PASS



	5230	0.623	17	PASS
802.11ac80	5210	-2.381	17	PASS

ANT D:

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11a	5180	-1.180	17	PASS
	5200	-0.094	17	PASS
	5240	-2.513	17	PASS
802.11n20	5180	-2.134	17	PASS
	5200	-1.510	17	PASS
	5240	-1.927	17	PASS
802.11ac20	5180	-1.060	17	PASS
	5200	-2.039	17	PASS
	5240	-2.055	17	PASS
802.11n40	5190	-2.058	17	PASS
	5230	-3.868	17	PASS
802.11ac40	5190	-4.147	17	PASS
	5230	-4.036	17	PASS
802.11ac80	5210	-5.433	17	PASS


**ANT A+B+C+D**

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11n20	5180	7.48	11.55	PASS
	5200	7.32	11.55	PASS
	5240	7.77	11.55	PASS
802.11ac20	5180	8.40	11.55	PASS
	5200	7.71	11.55	PASS
	5240	7.72	11.55	PASS
802.11n40	5190	6.90	11.55	PASS
	5230	4.81	11.55	PASS
802.11ac40	5190	5.97	11.55	PASS
	5230	5.57	11.55	PASS
802.11ac80	5210	3.74	11.55	PASS

ANT A



Test Mode: 802.11a--Low

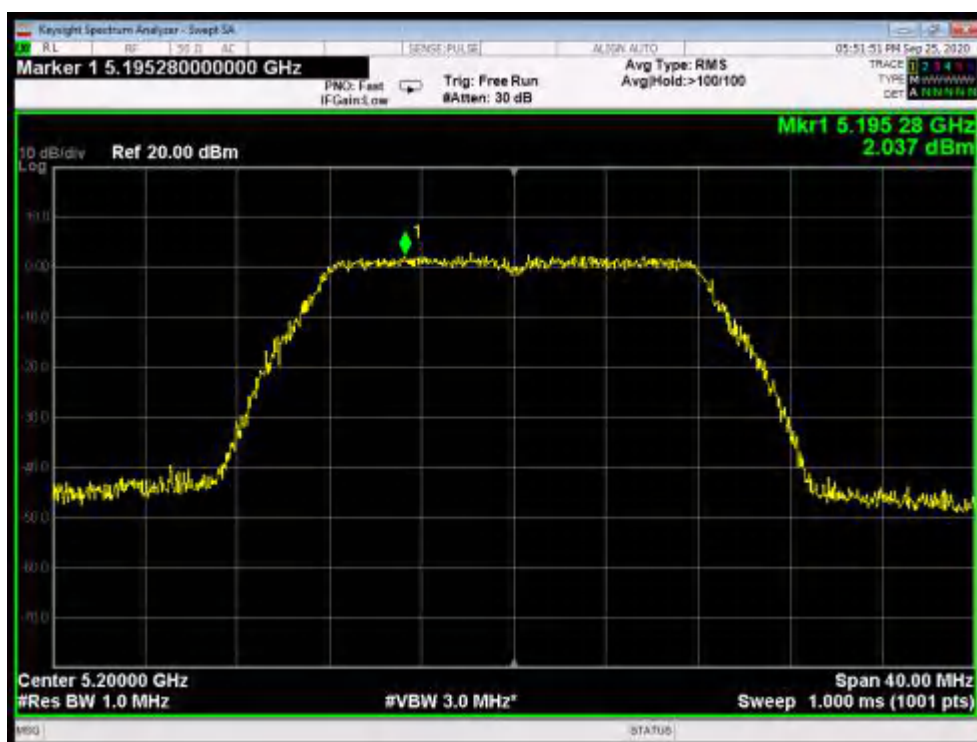


Test Mode: 802.11a---Middle



Test Mode: 802.11a---High



Test Mode: 802.11n20---Low

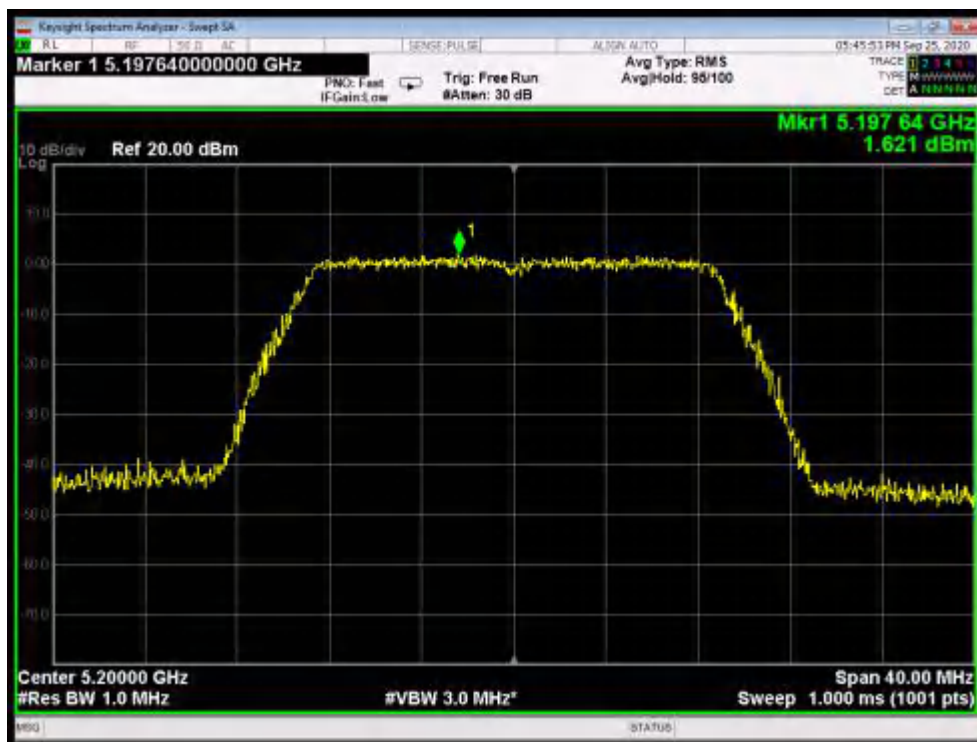

Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High



Test Mode: 802.11ac20--Low




Test Mode: 802.11ac20---Middle



Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low

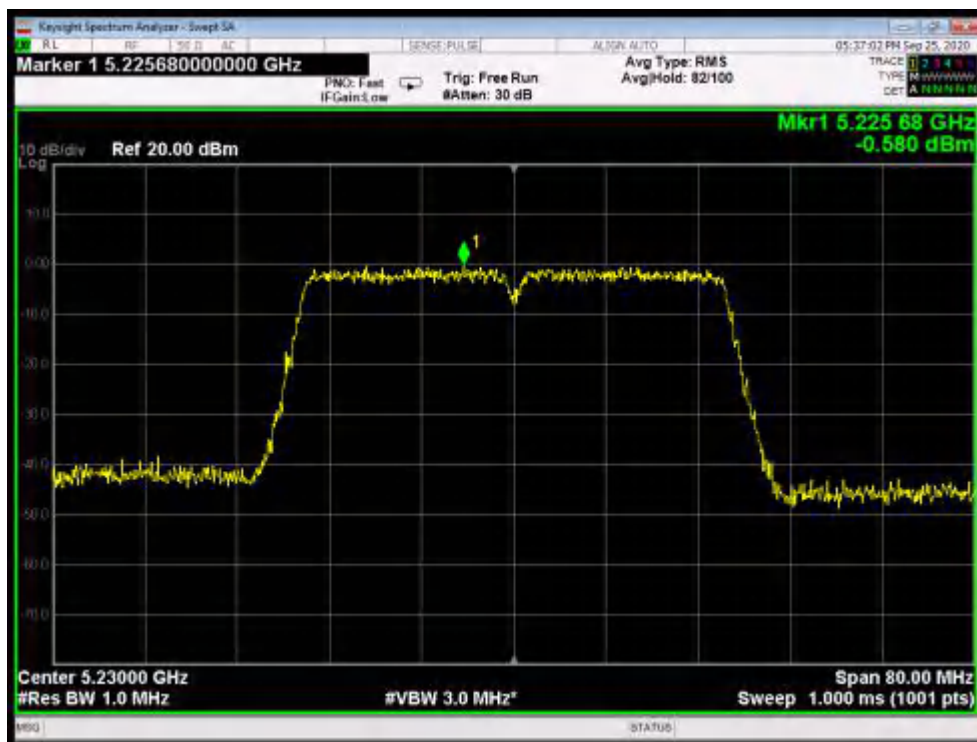


Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low




Test Mode: 802.11ac40---High

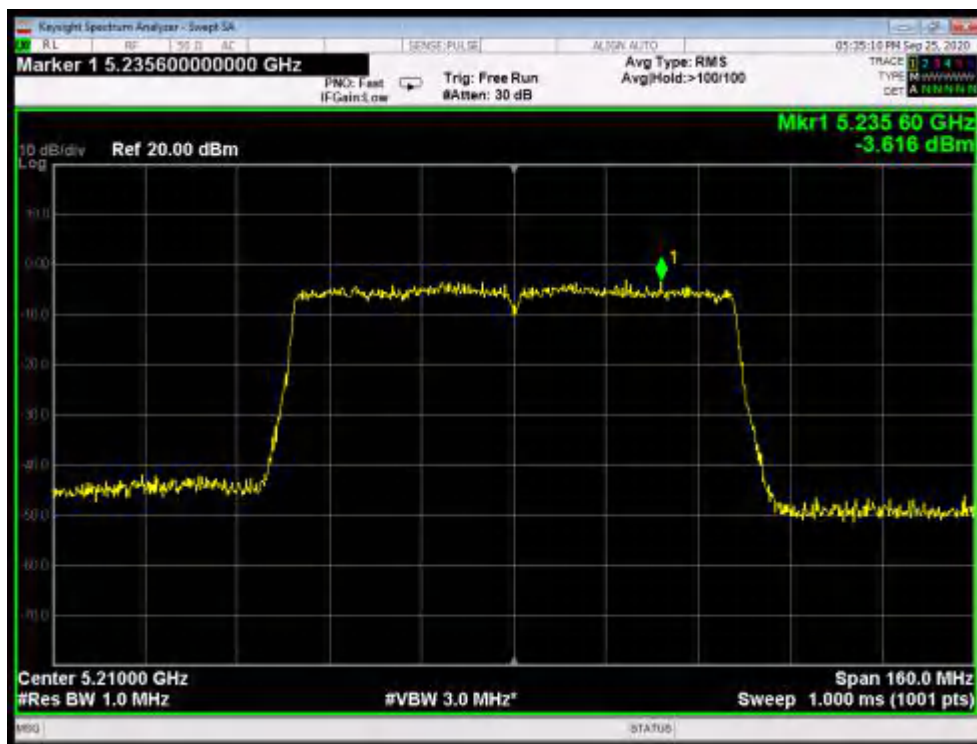


Test Mode: 802.11ac80


ANT B

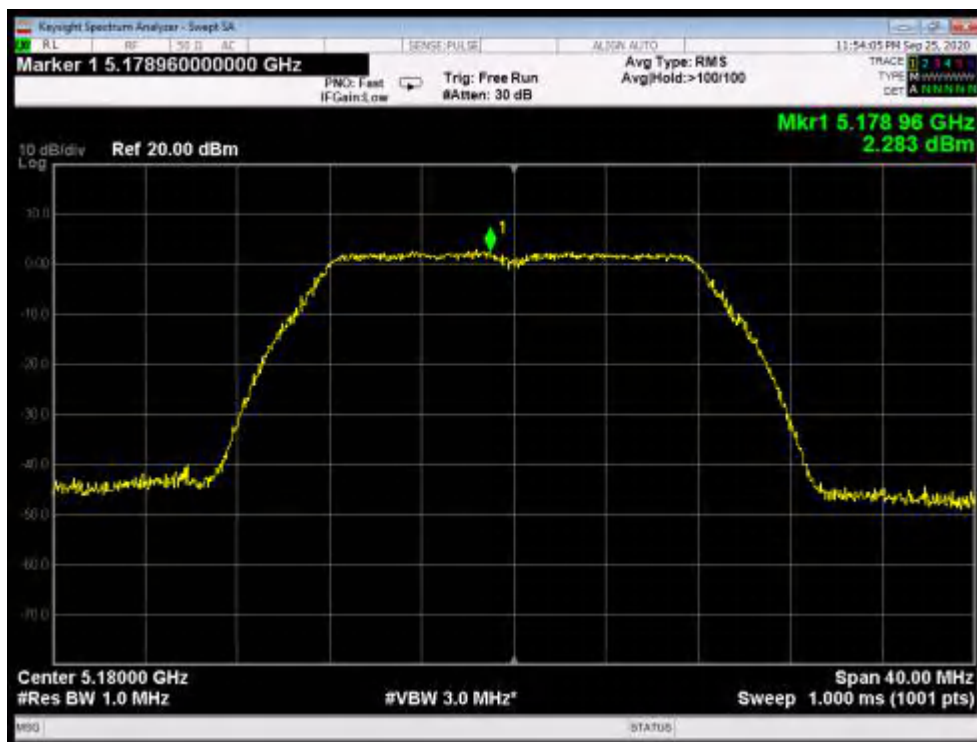


Test Mode: 802.11a--Low

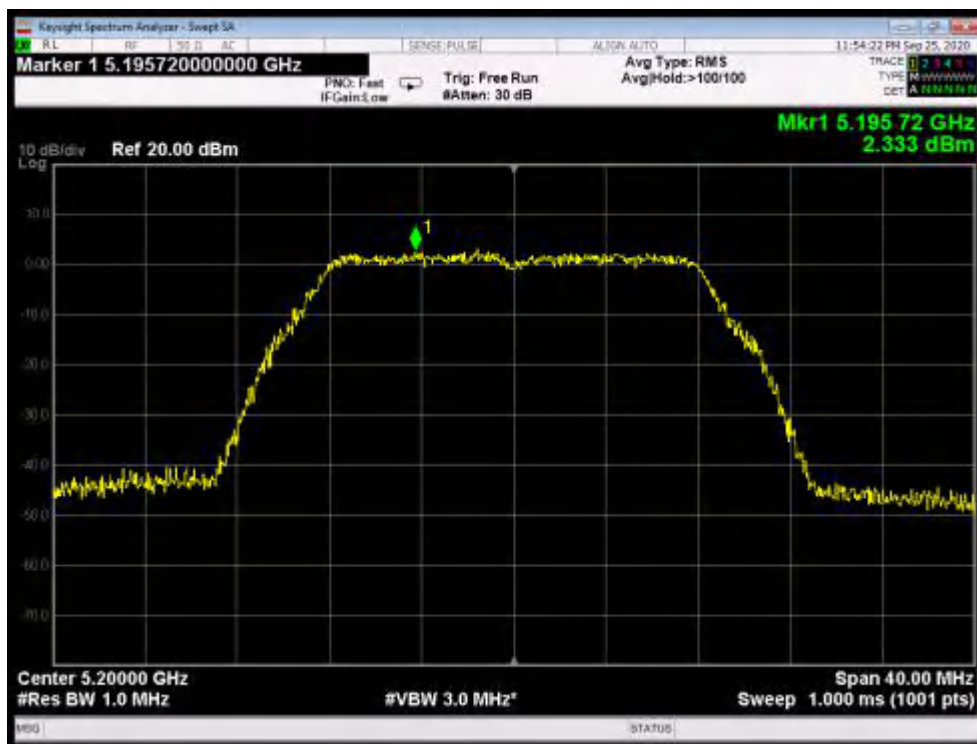


Test Mode: 802.11a---Middle

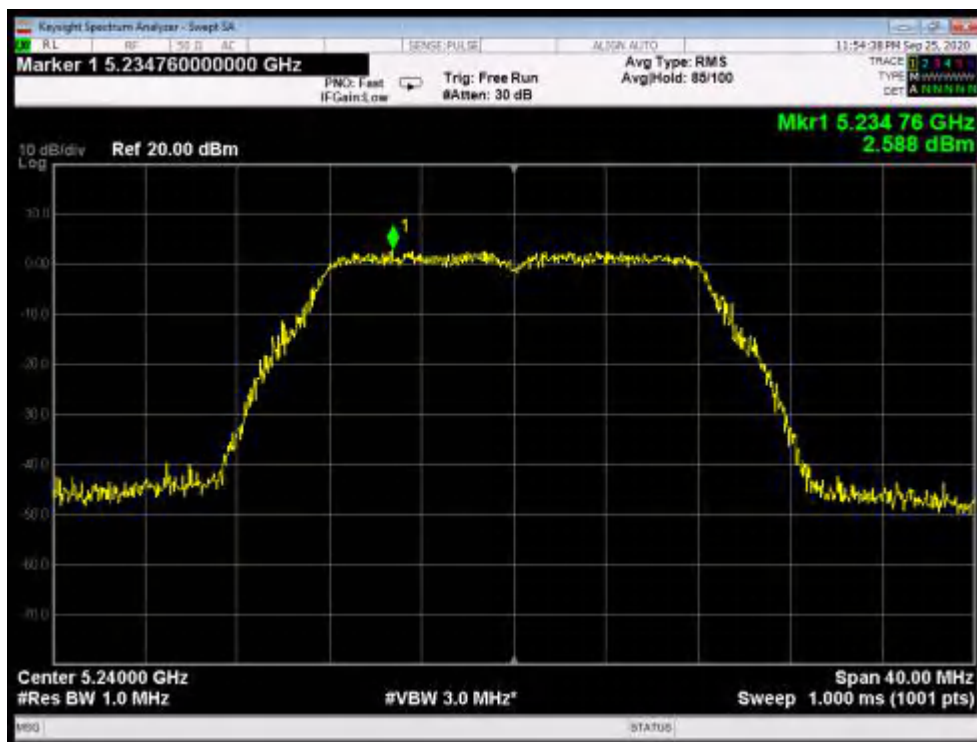


Test Mode: 802.11a---High

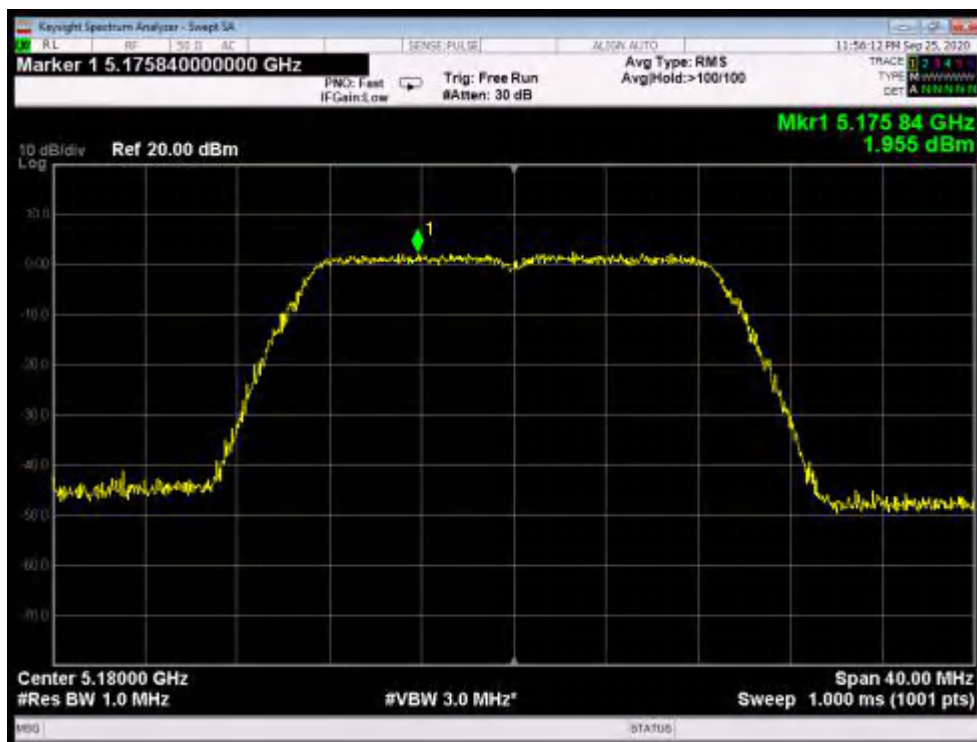


Test Mode: 802.11n20---Low

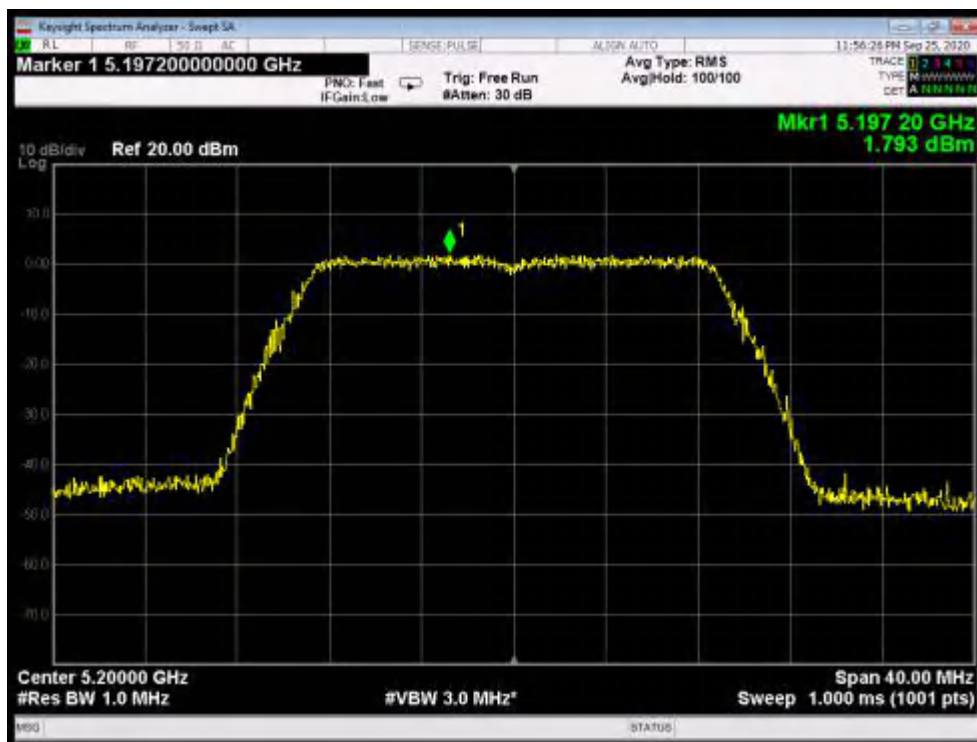


Test Mode: 802.11n20---Middle

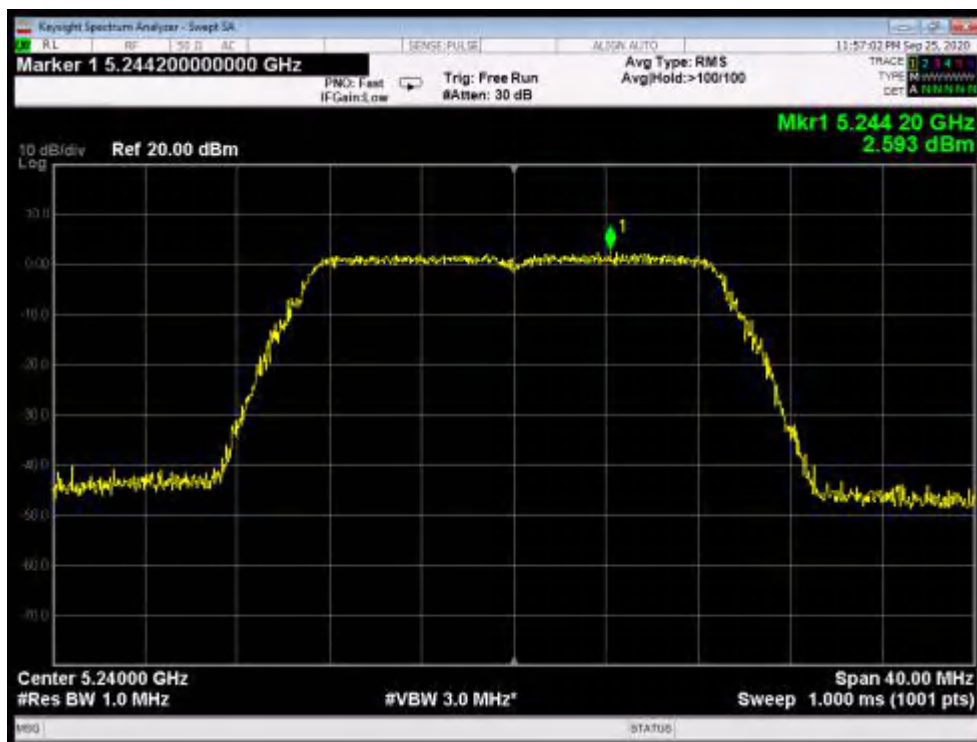



Test Mode: 802.11n20---High

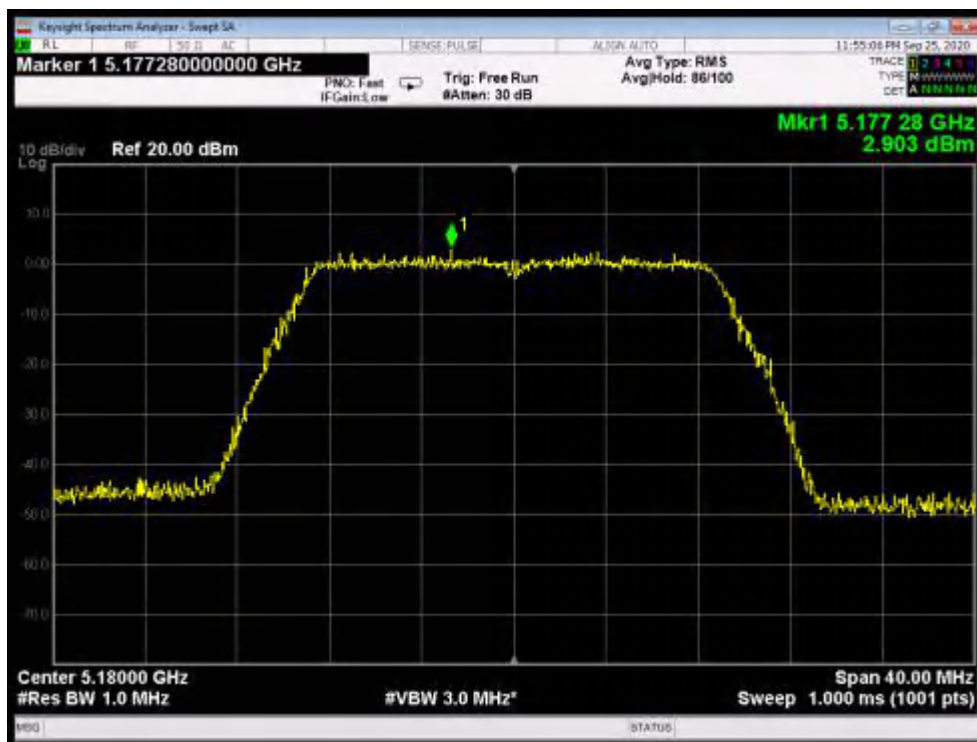


Test Mode: 802.11ac20--Low

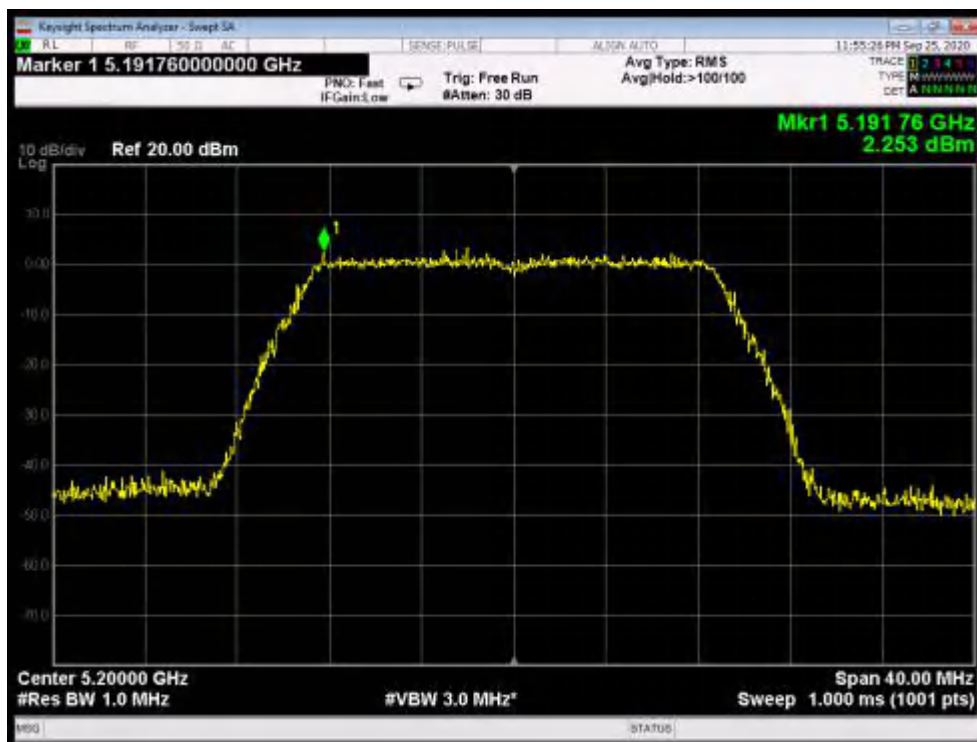


Test Mode: 802.11ac20---Middle

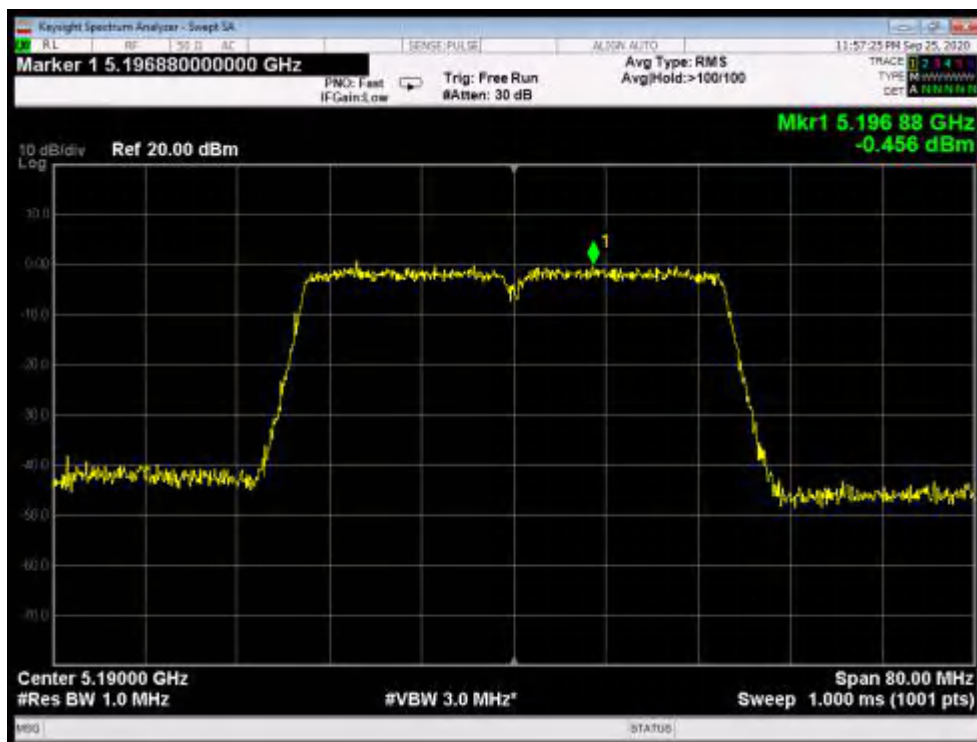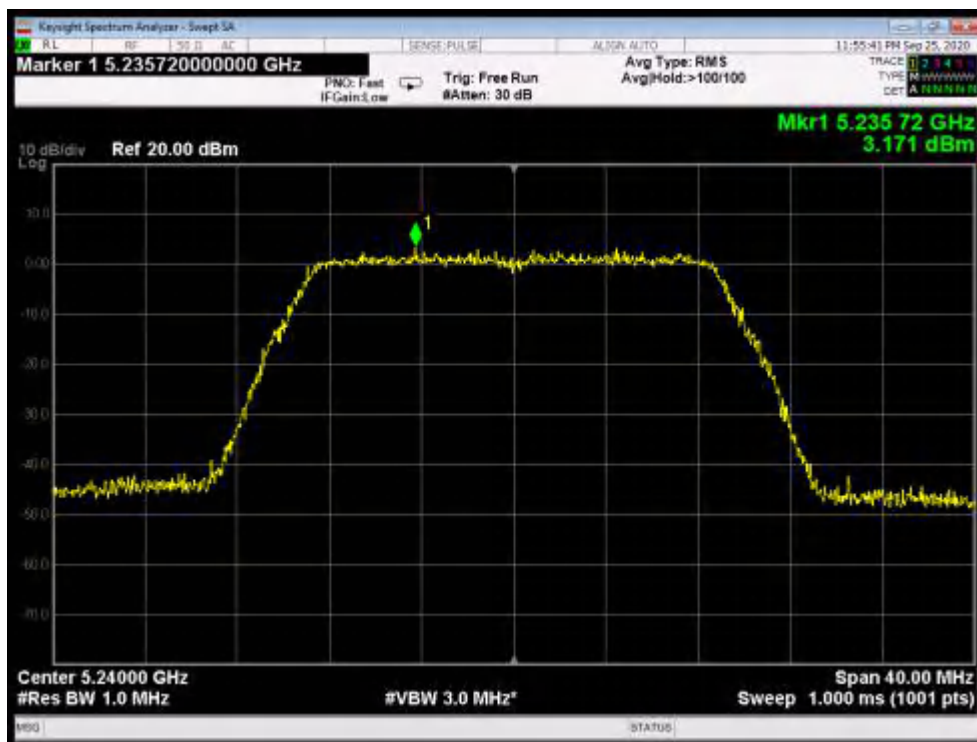


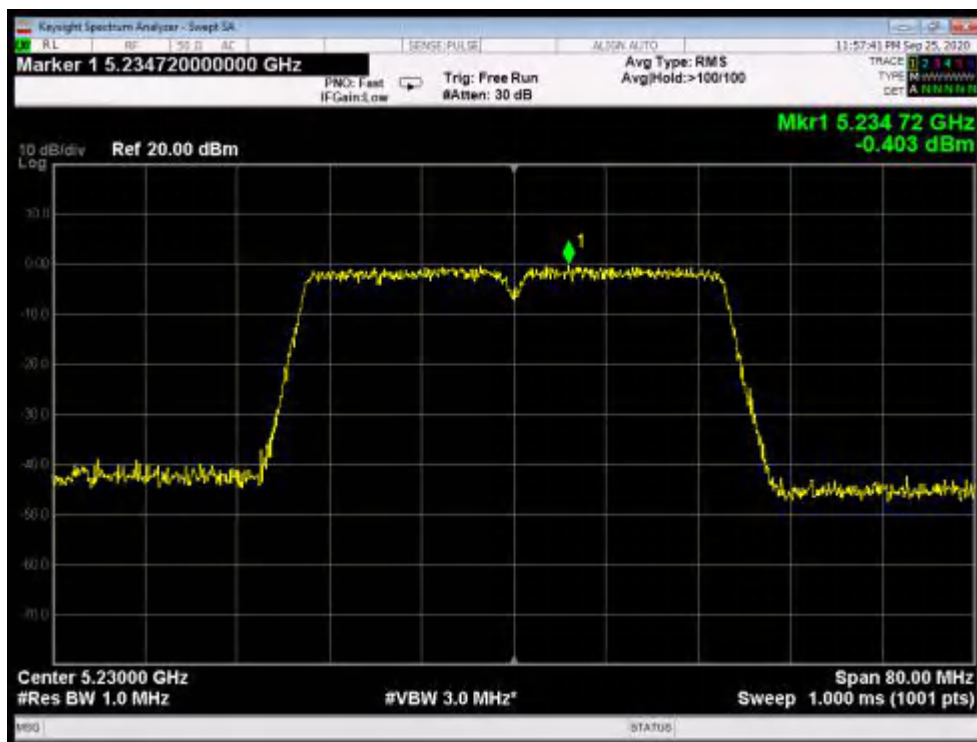


Test Mode: 802.11n40---High

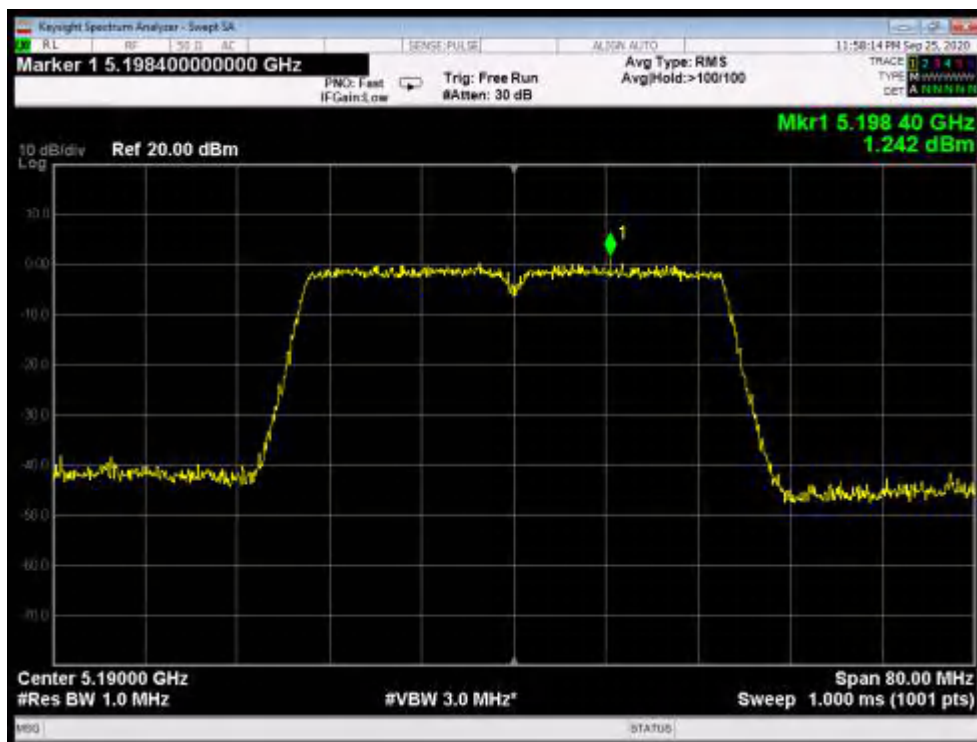

Test Mode: 802.11ac40---Low

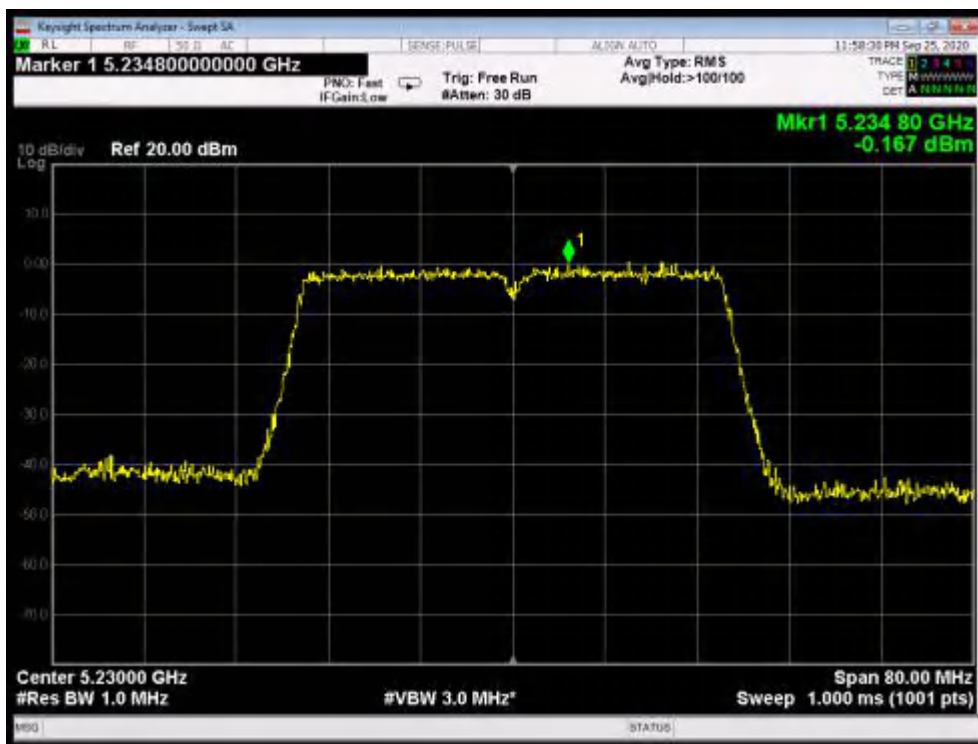


Test Mode: 802.11ac40---High

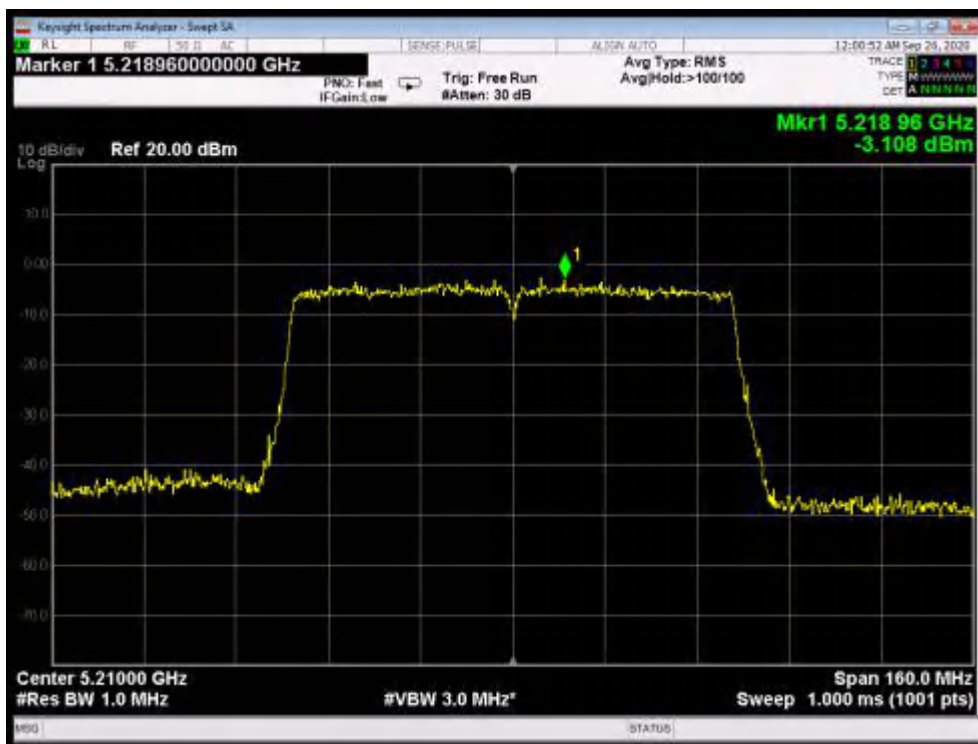


Test Mode: 802.11ac80


ANT C

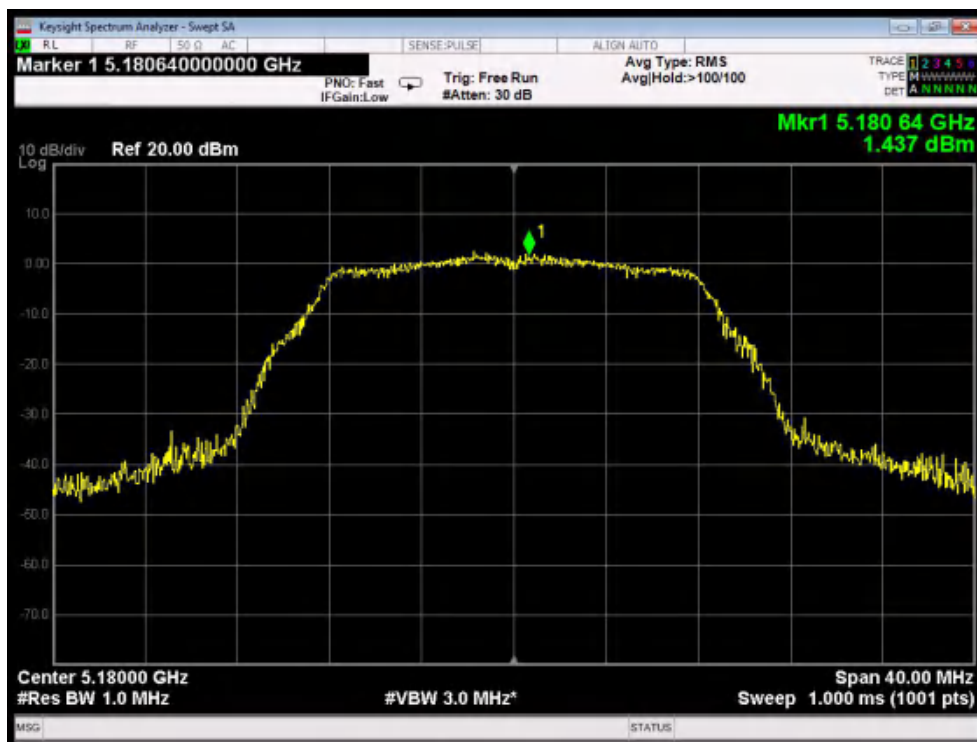


Test Mode: 802.11a--Low

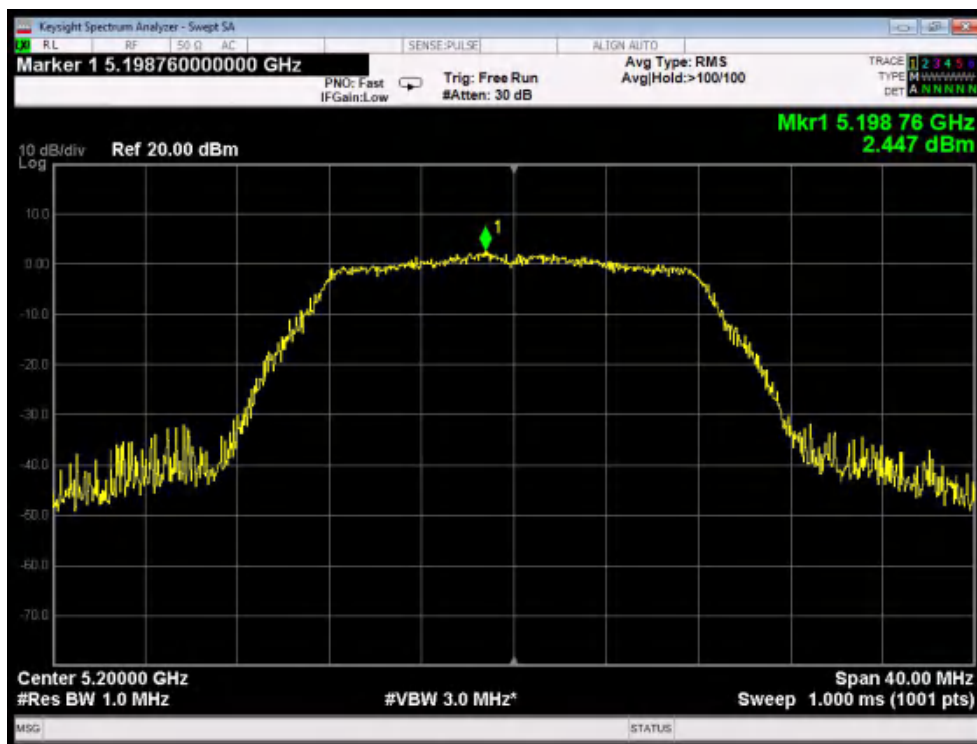


Test Mode: 802.11a---Middle

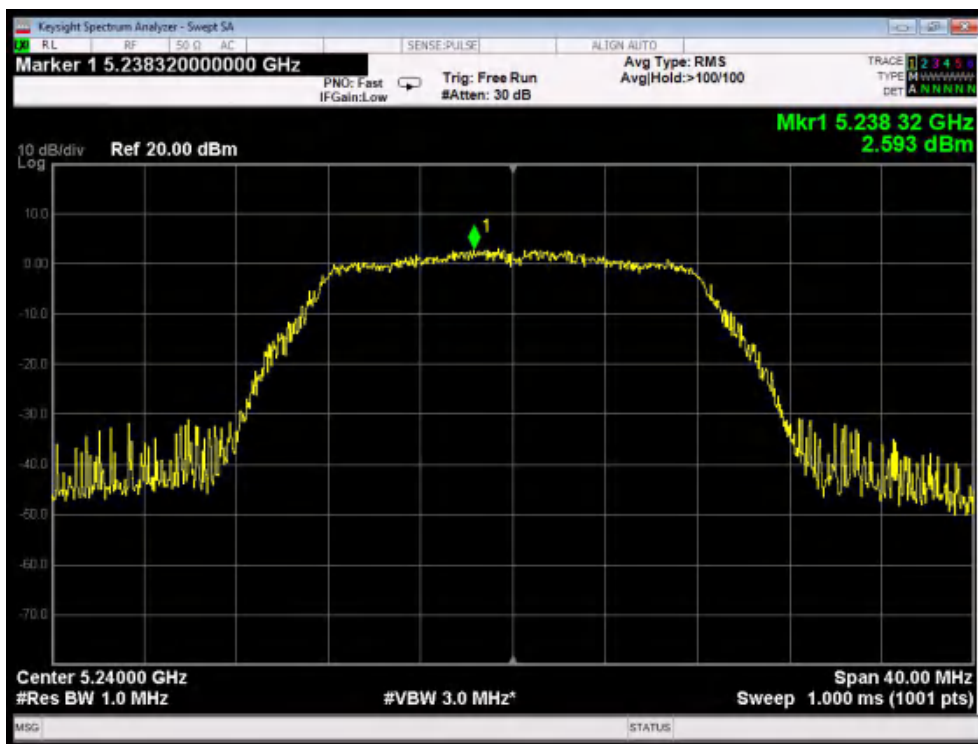


Test Mode: 802.11a---High

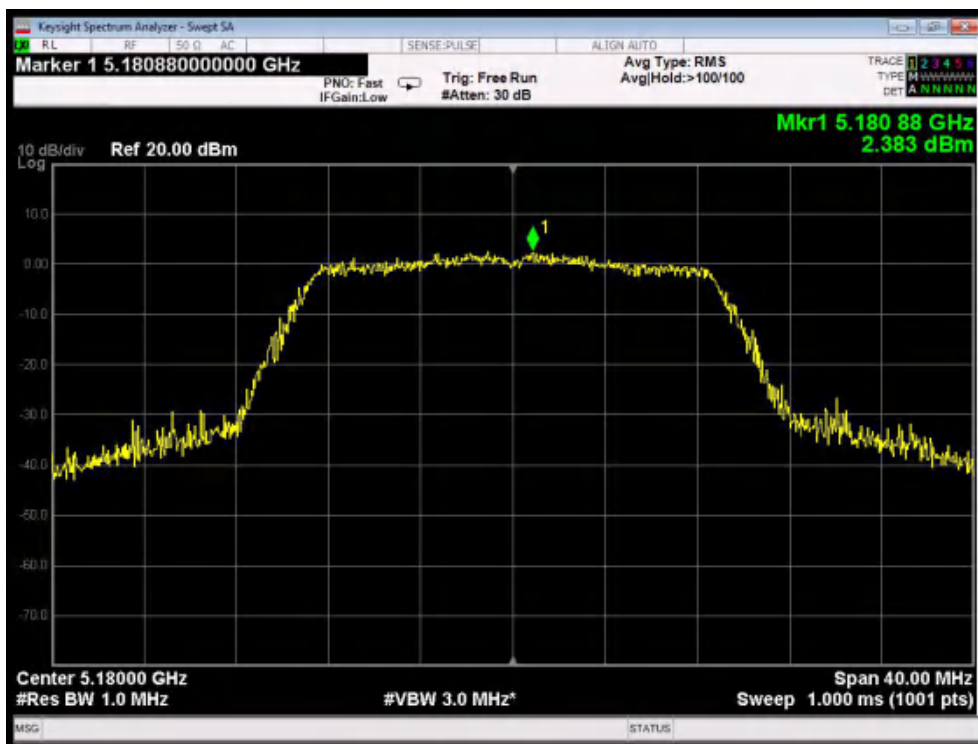


Test Mode: 802.11n20---Low

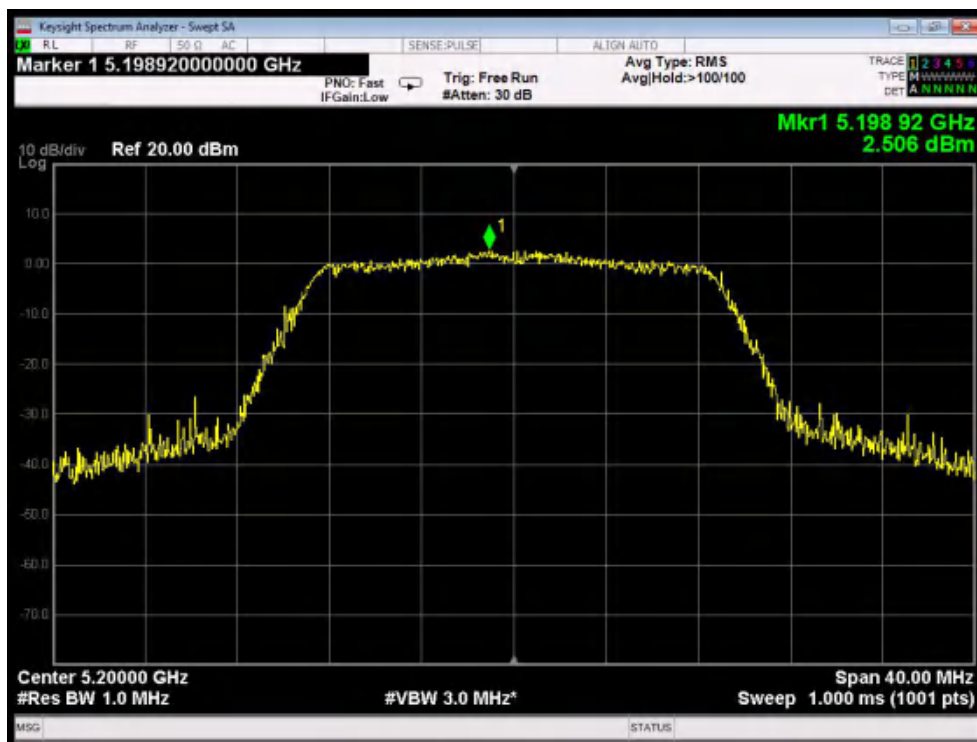


Test Mode: 802.11n20---Middle

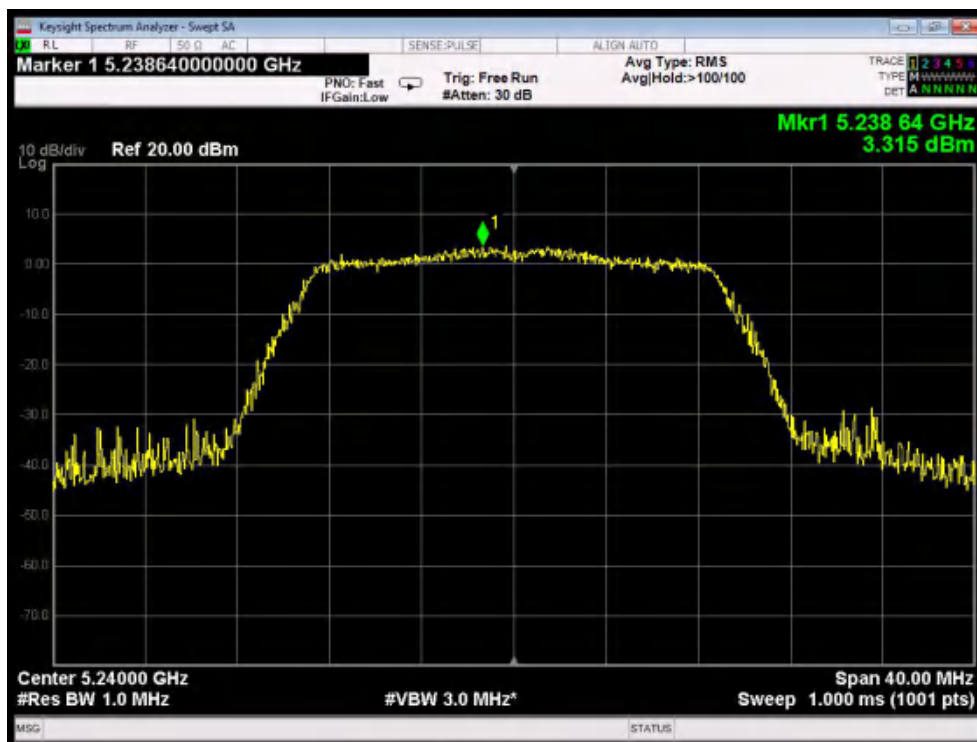


Test Mode: 802.11n20---High

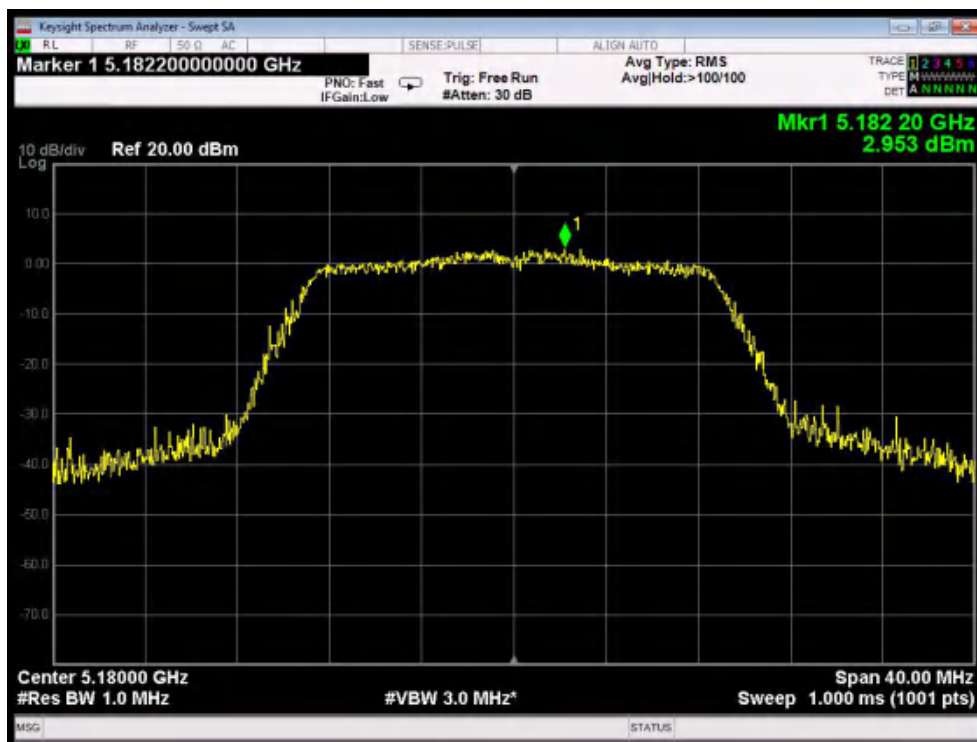


Test Mode: 802.11ac20--Low

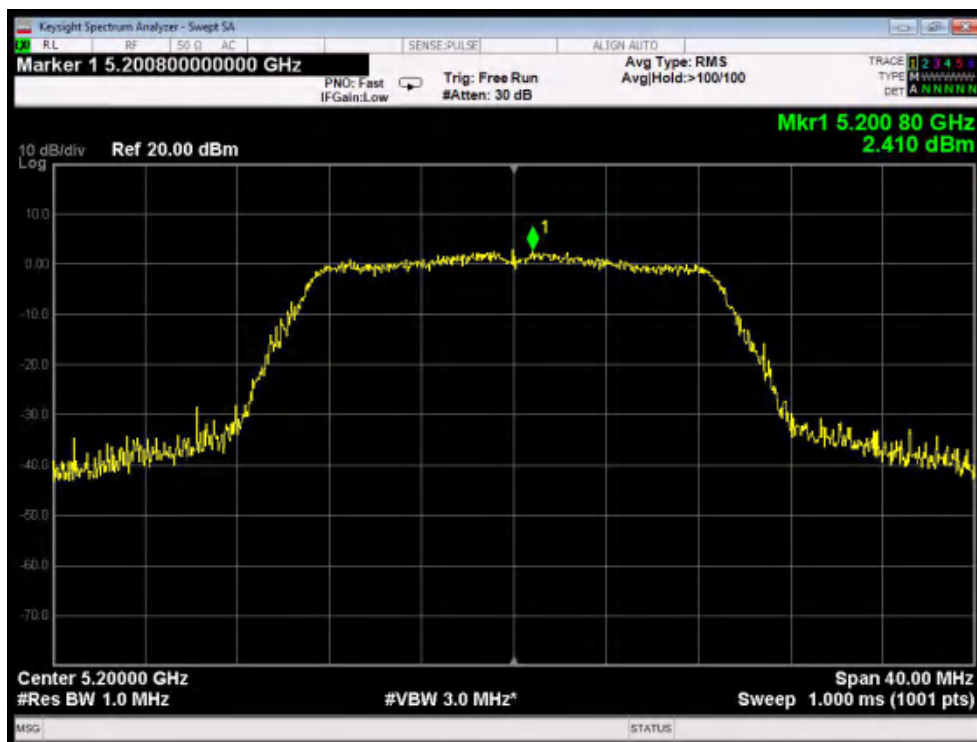


Test Mode: 802.11ac20---Middle

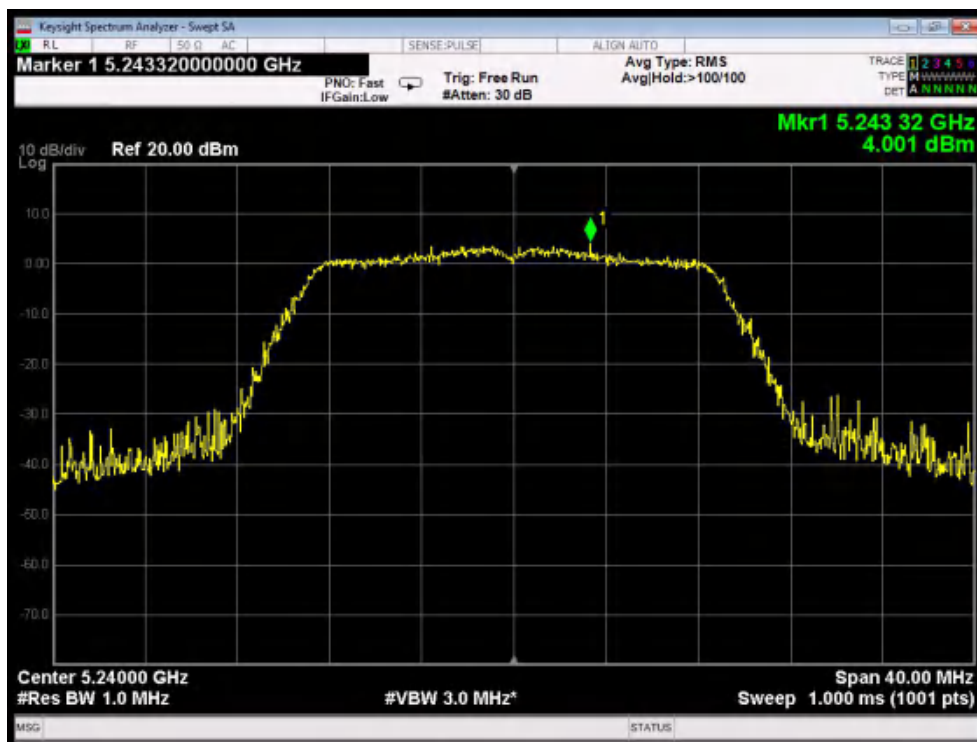


Test Mode: 802.11ac20---High

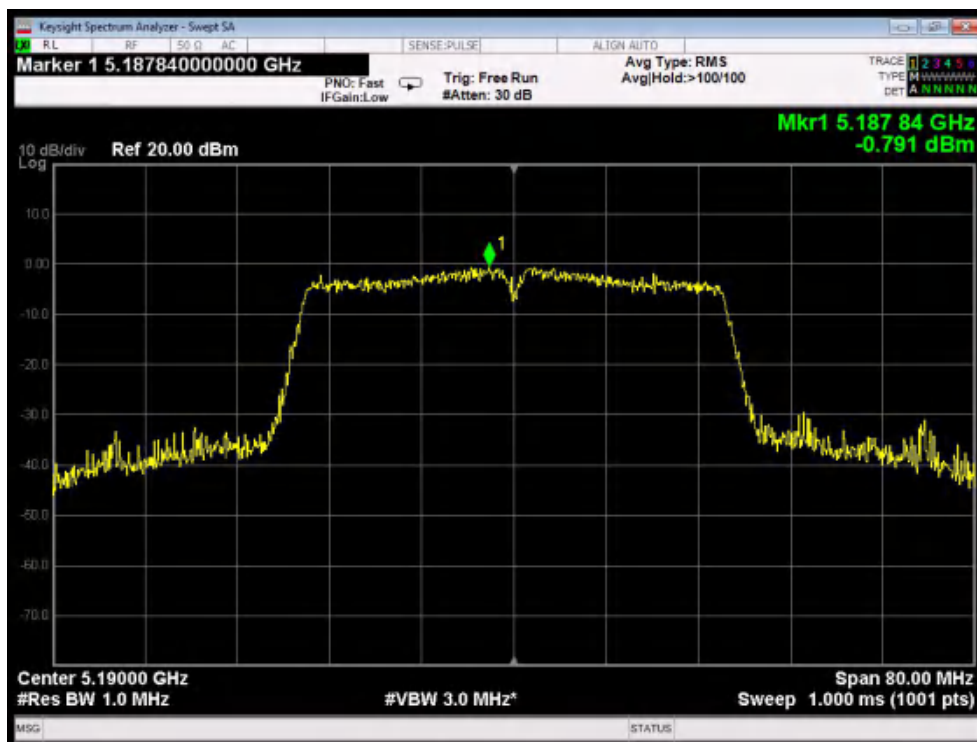


Test Mode: 802.11n40---Low

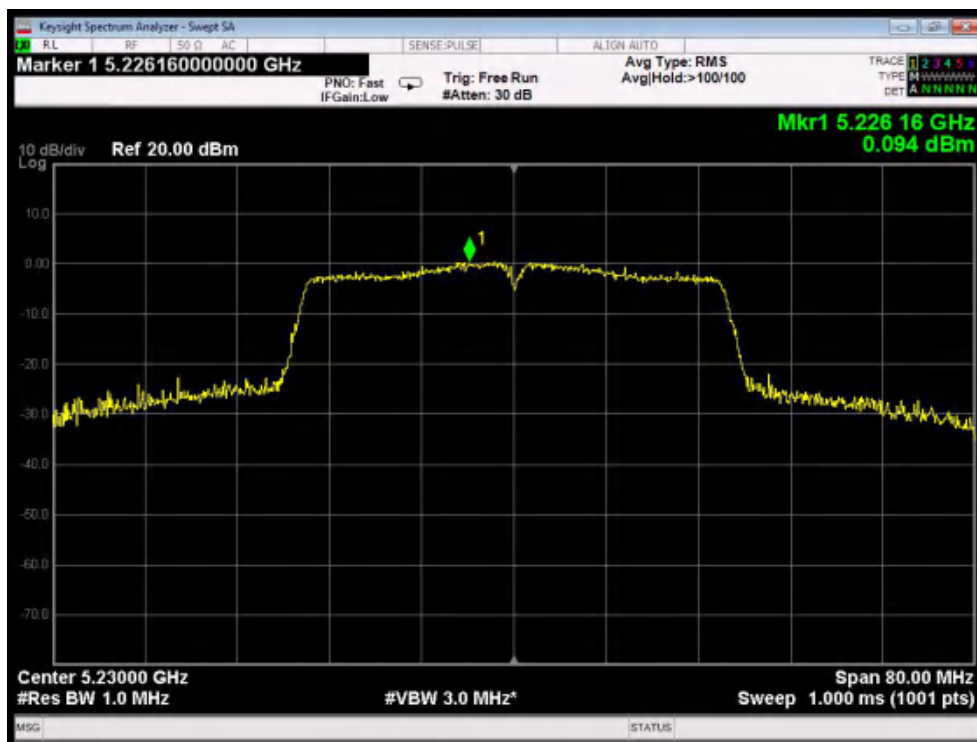


Test Mode: 802.11n40---High

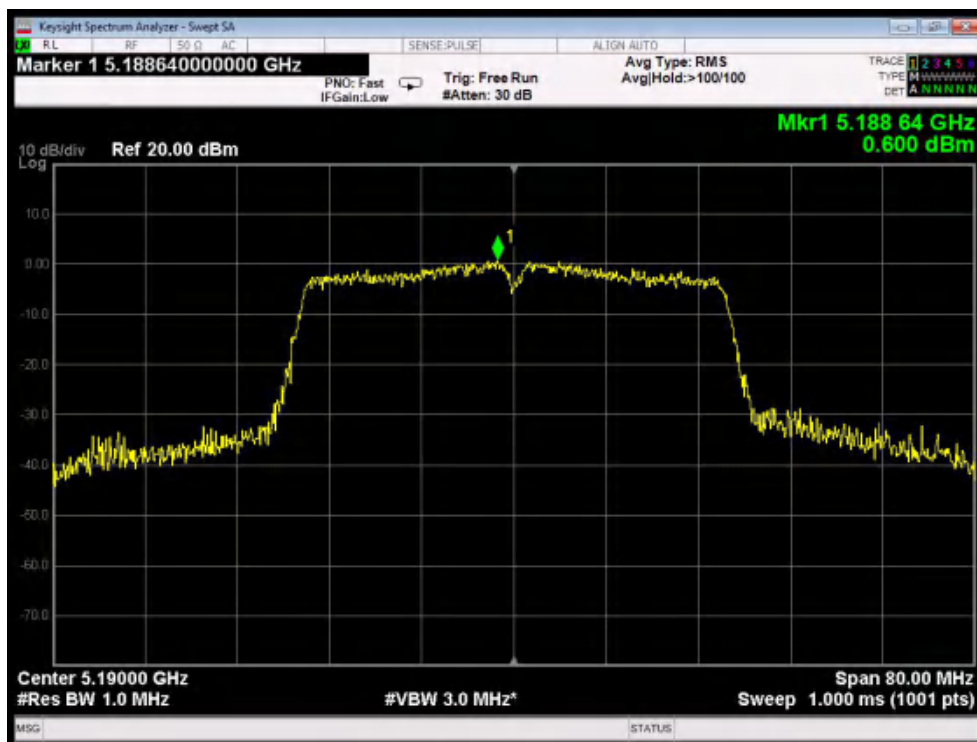

Test Mode: 802.11ac40---Low

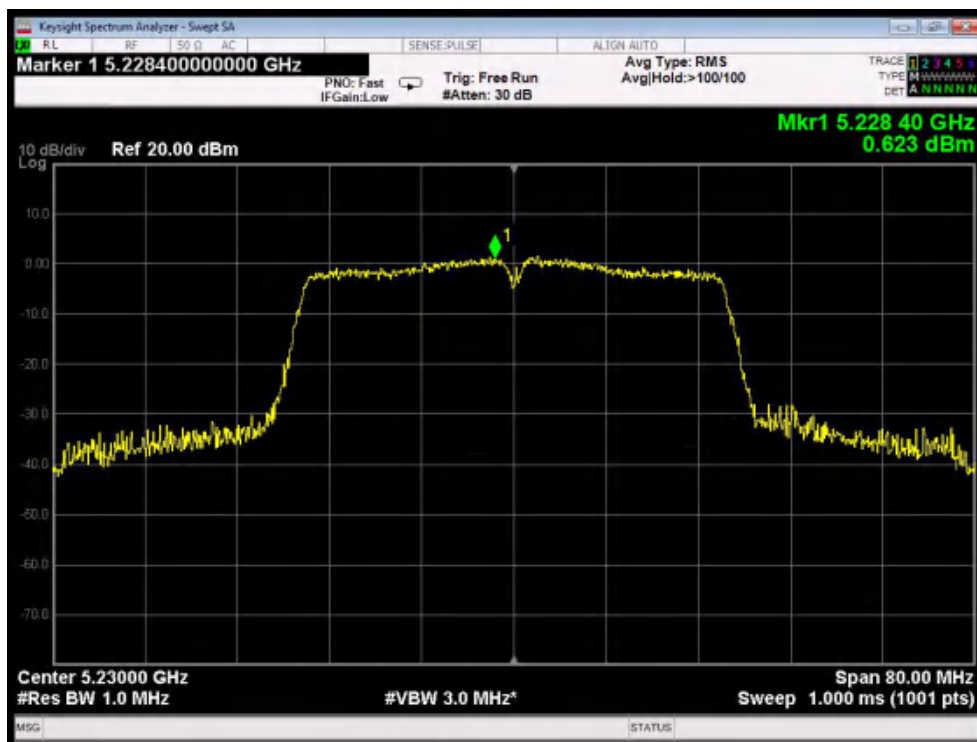


Test Mode: 802.11ac40---High

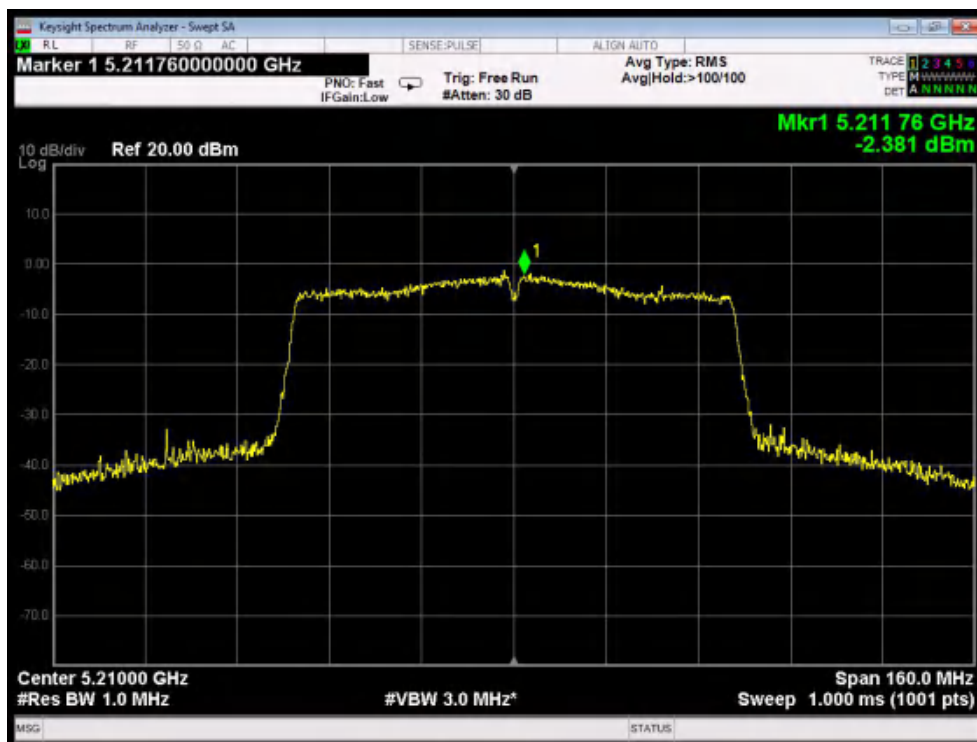


Test Mode: 802.11ac80


ANT D

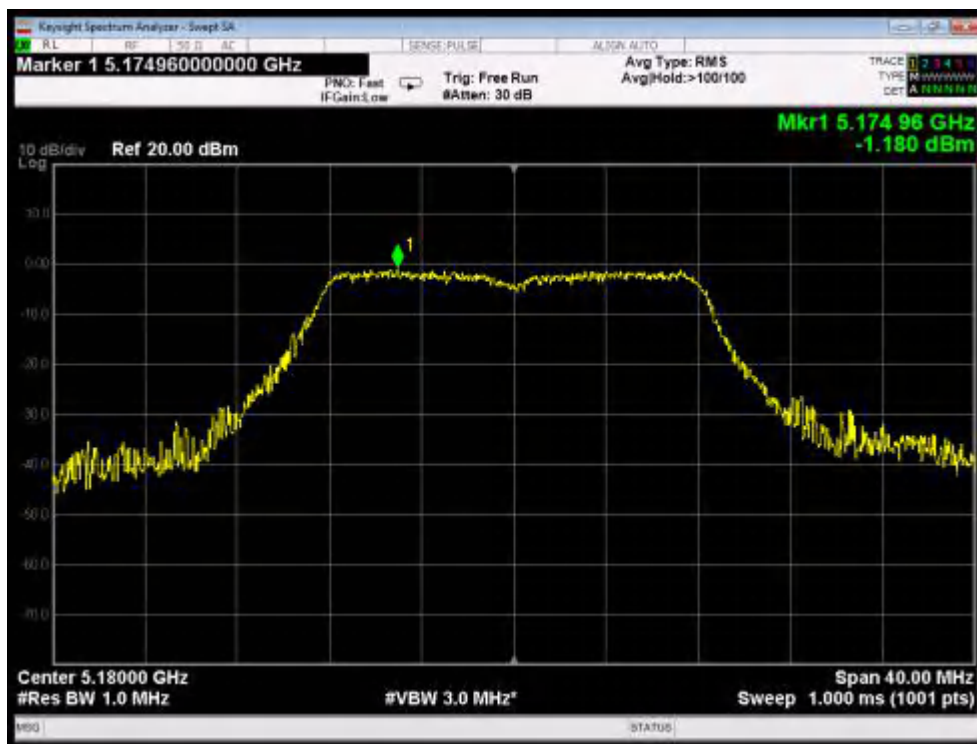


Test Mode: 802.11a--Low

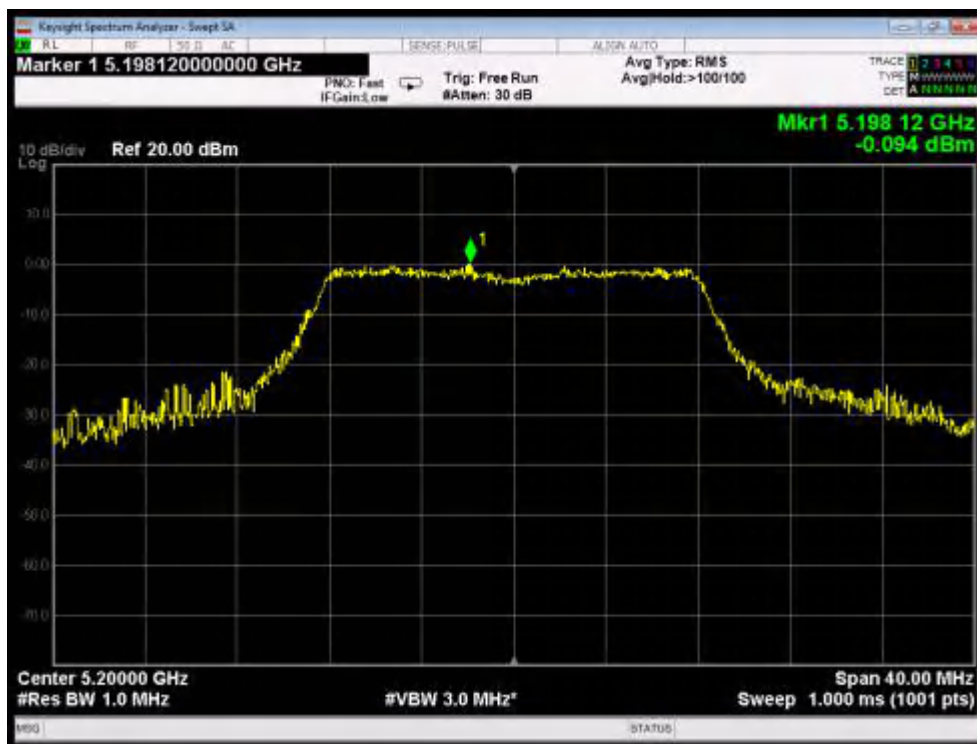


Test Mode: 802.11a---Middle

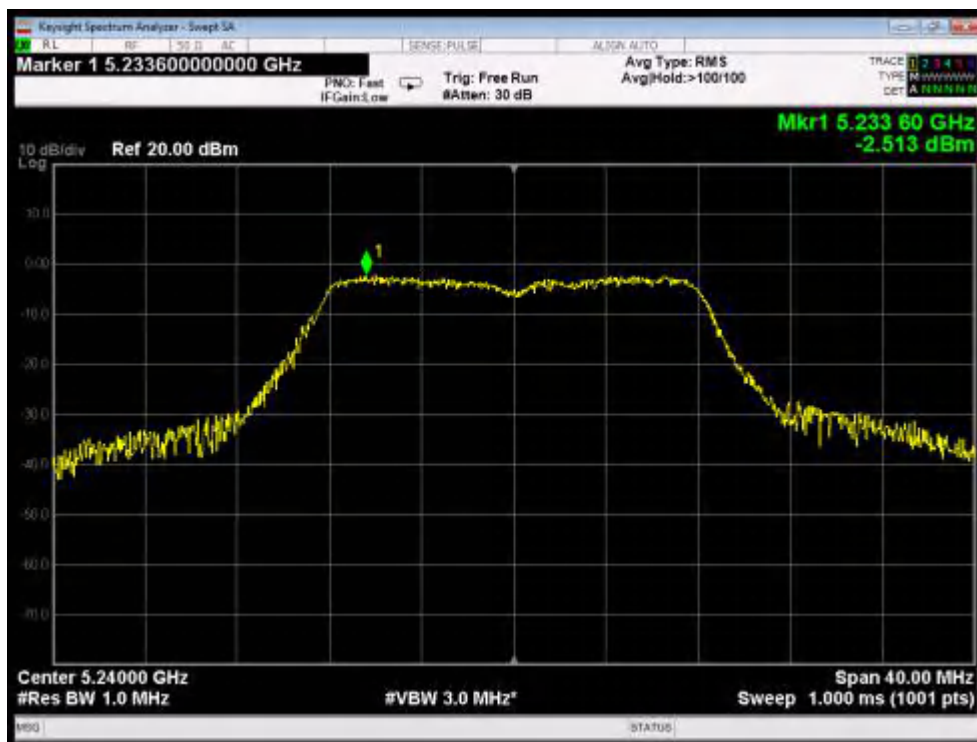


Test Mode: 802.11a---High

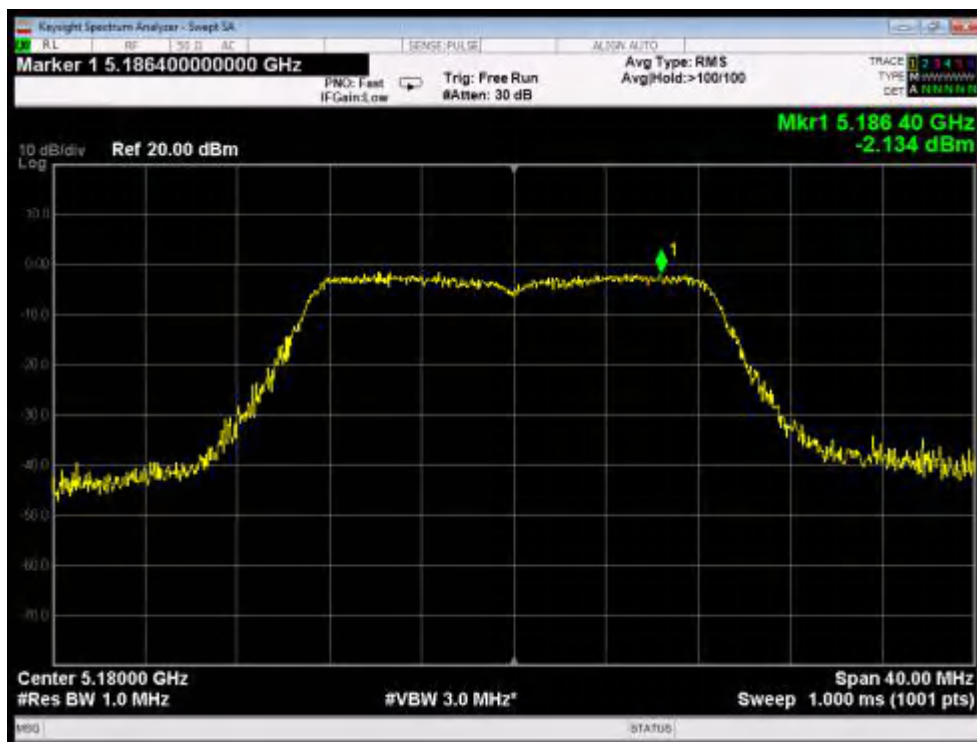


Test Mode: 802.11n20---Low

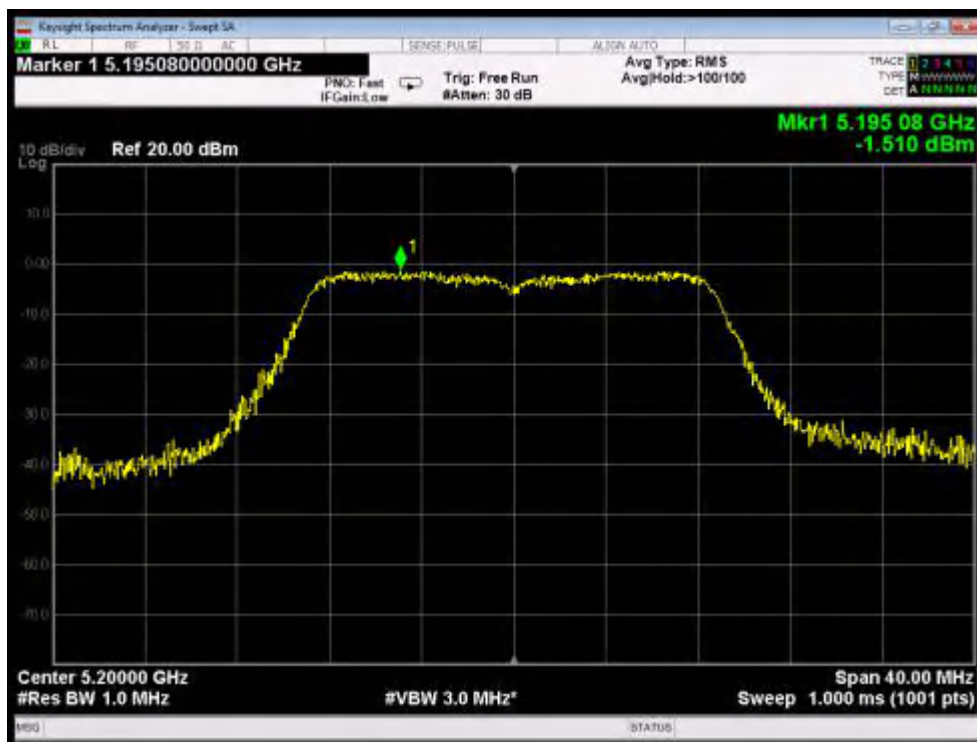


Test Mode: 802.11n20---Middle

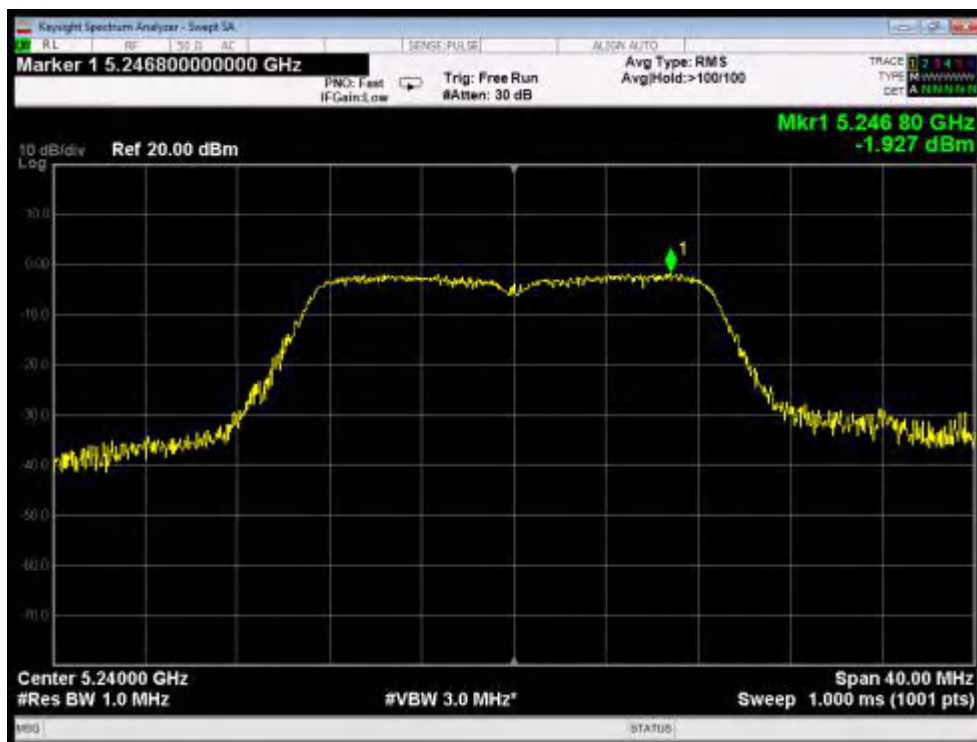


Test Mode: 802.11n20---High

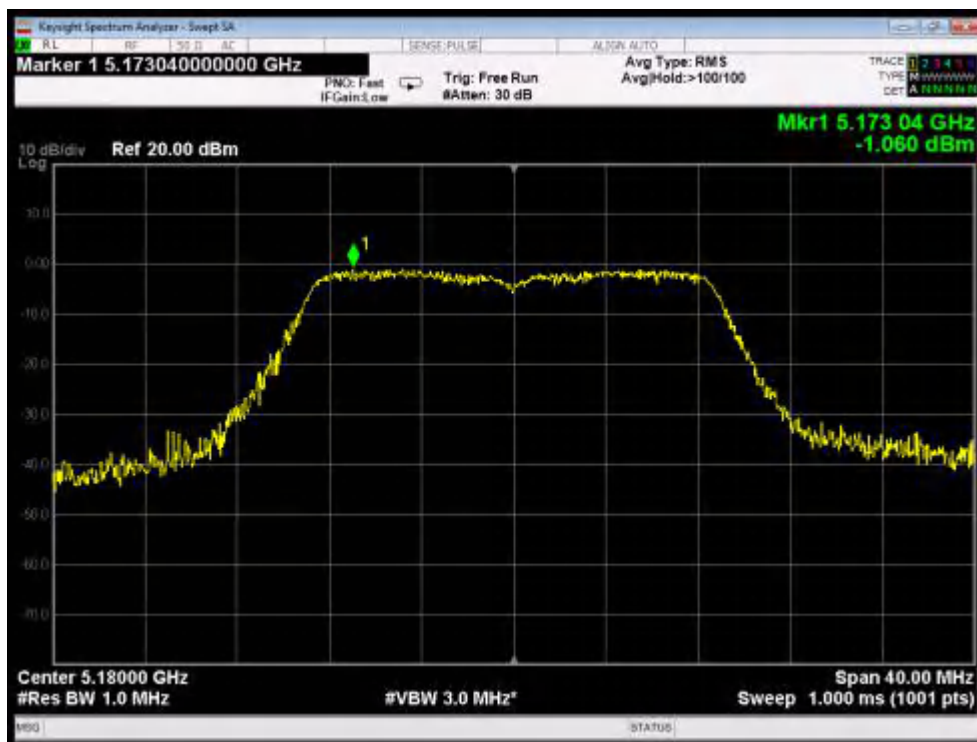


Test Mode: 802.11ac20--Low

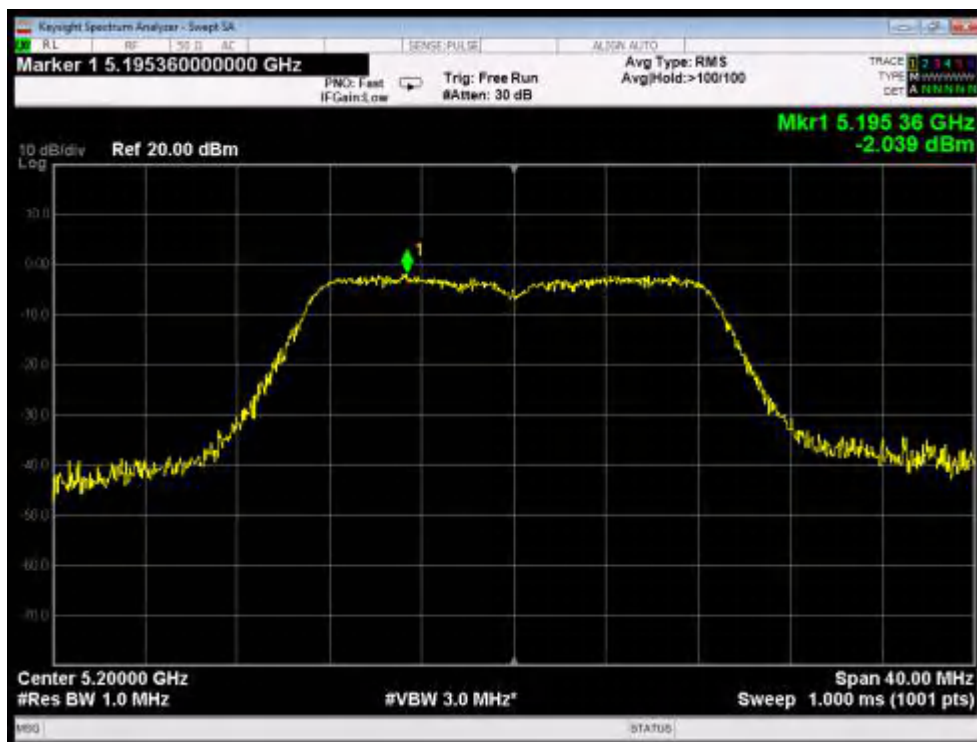


Test Mode: 802.11ac20---Middle

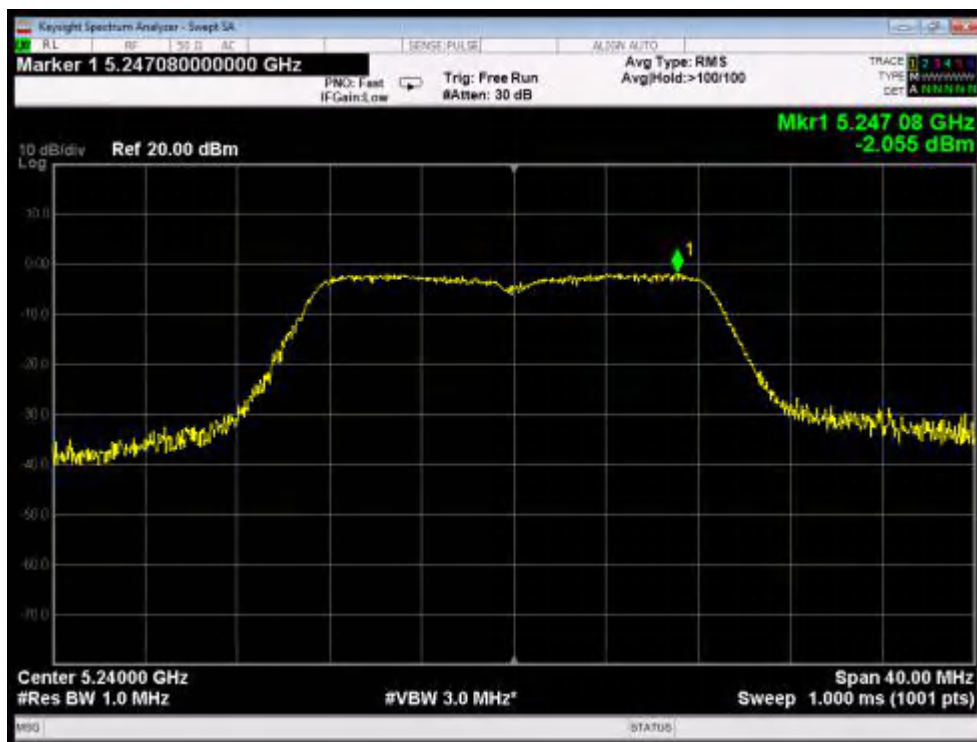


Test Mode: 802.11ac20---High

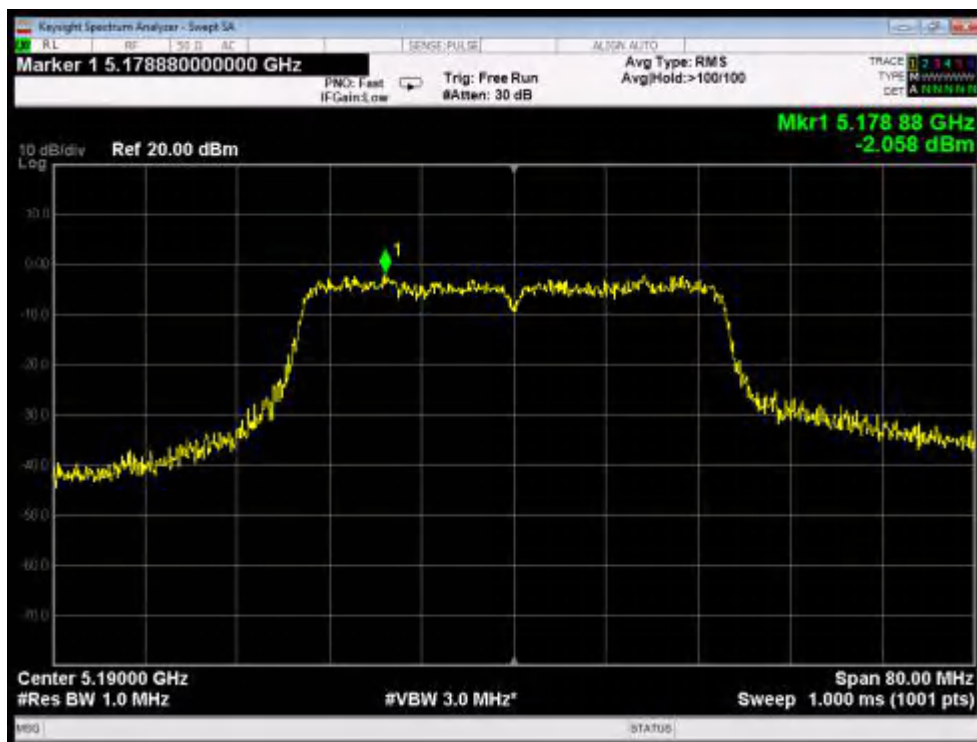


Test Mode: 802.11n40---Low

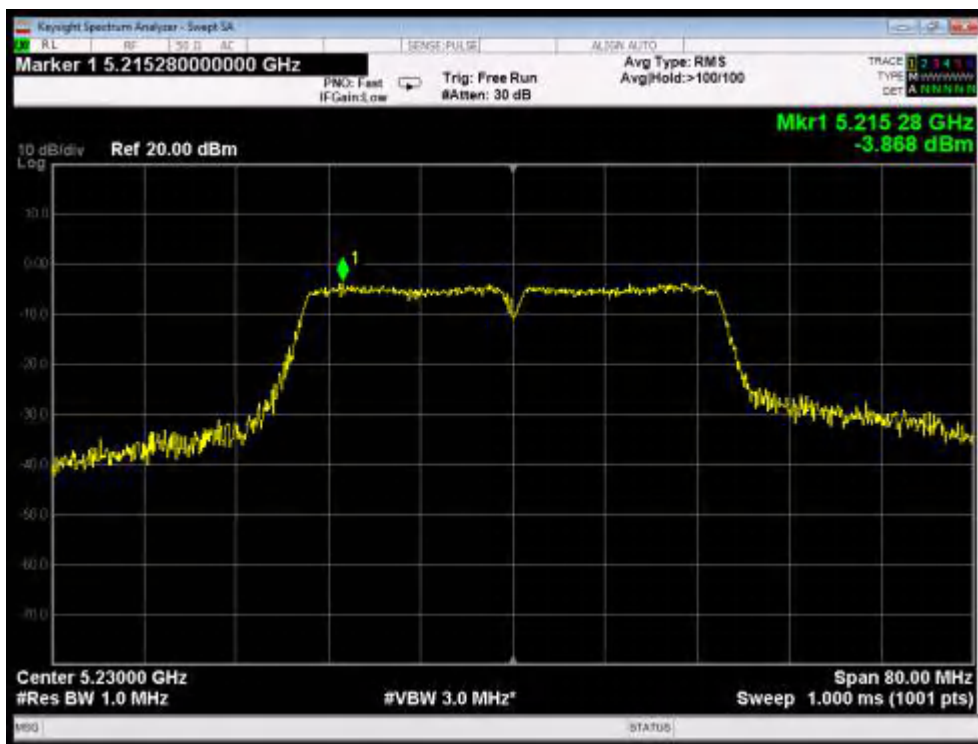


Test Mode: 802.11n40---High

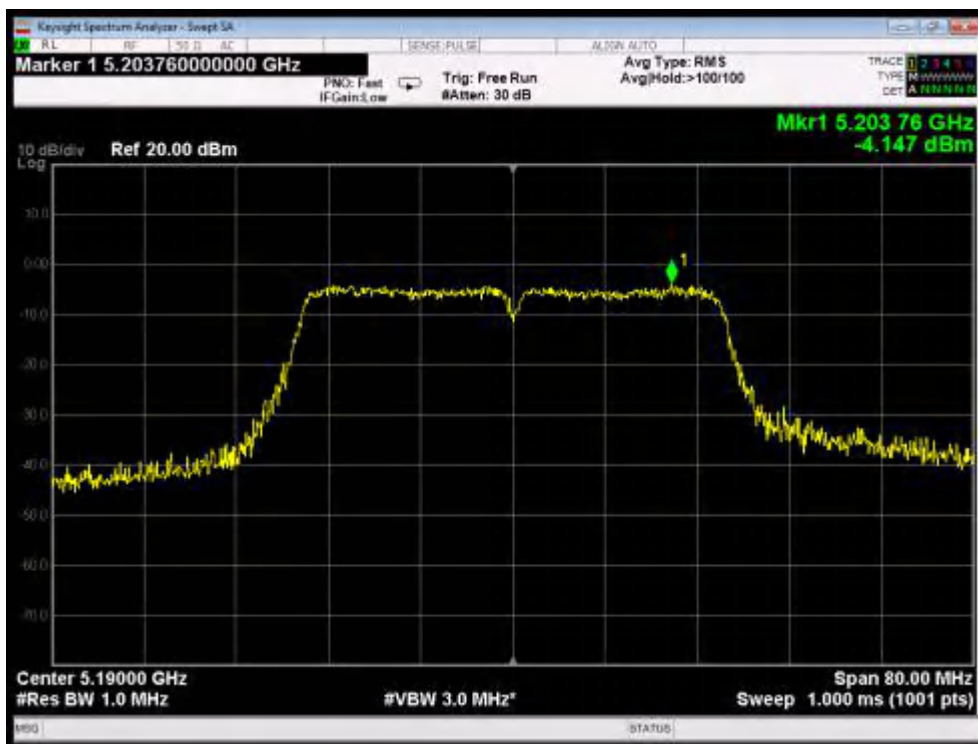

Test Mode: 802.11ac40---Low

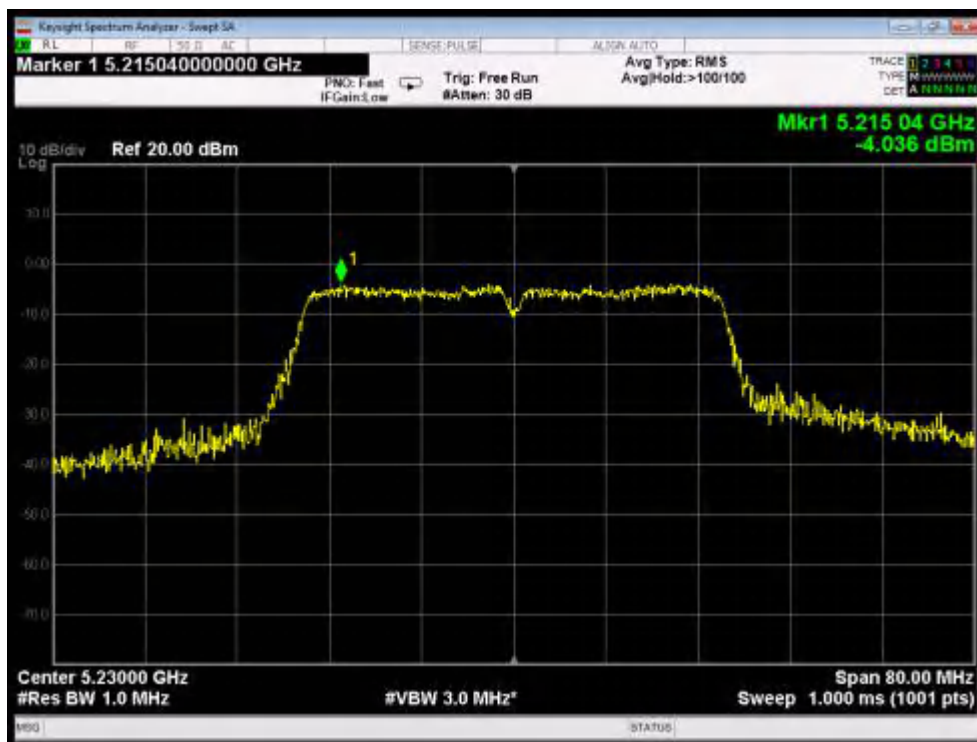

Test Mode: 802.11ac40---High

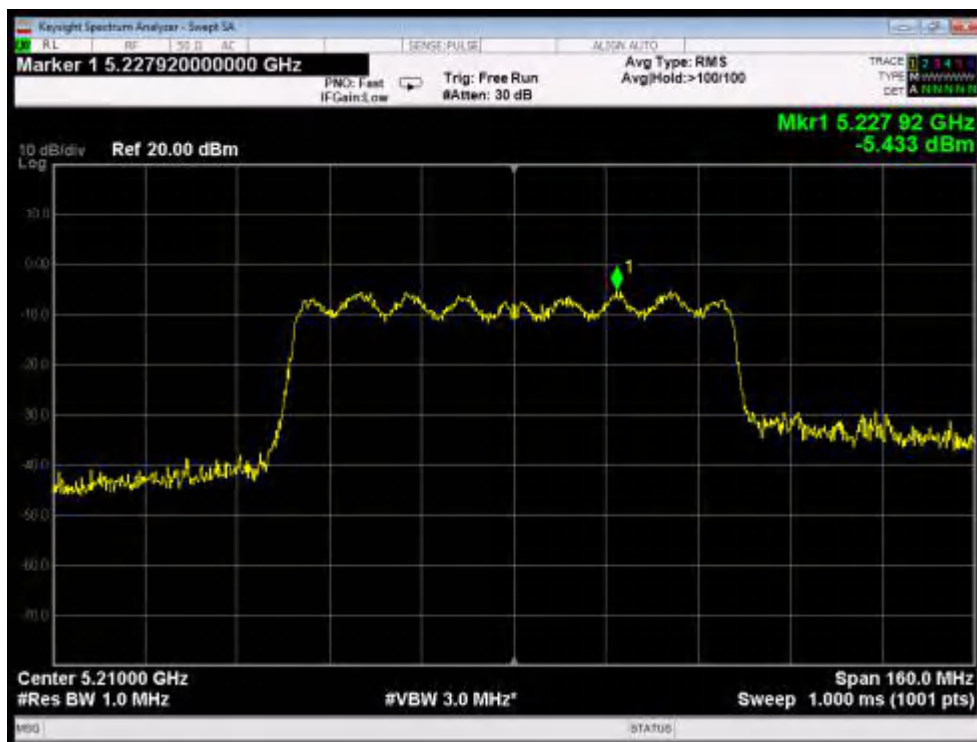

Test Mode: 802.11ac80


9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

9.2. Antenna Connected Construction

The antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is 5.43 dBi. It complies with the standard requirement.

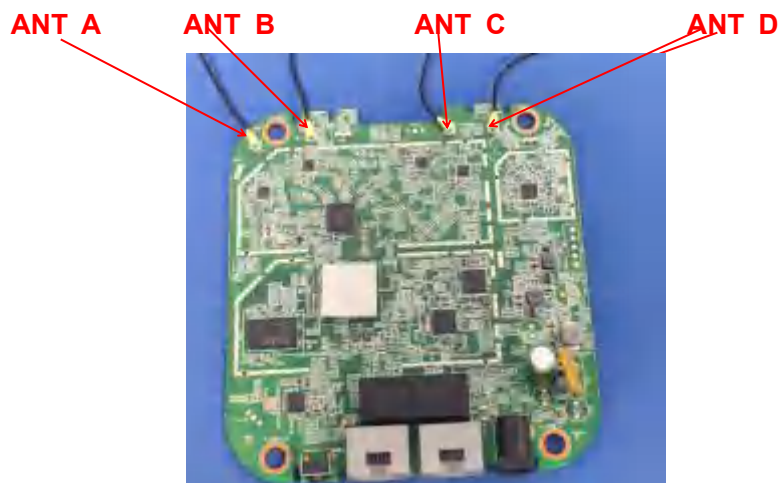

10. APPENDIX I -- PHOTOGRAPH

Reference to the test report PTC19102401802E-FC01

----- End of Report -----