




Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	-2.36	-14.54	14.29
2410	-1.47	-13.62	13.67
2420	-3.29	15.33	14.38
2430	-1.59	-14.67	14.88
2440	1.06	-10.26	16.37
2450	1.50	-9.95	17.22
2460	-3.47	-14.86	13.11
2470	-4.18	-14.79	12.95
2480	-2.36	-14.78	13.68
2490	-0.48	-11.63	15.93
2500	0.59	-10.38	16.03
5000	-3.65	-12.40	5.75
5050	-2.11	-10.72	8.47
5100	-0.56	-8.99	12.63
5150	0.62	-7.40	18.18
5200	-0.80	-7.98	15.94
5250	-3.87	-10.01	9.97
5300	-6.57	-11.93	6.41
5350	-7.47	-13.19	4.79
5400	-8.13	-13.81	4.16
5450	-8.55	-14.53	3.52
5500	-8.55	-14.93	3.21
5550	-7.96	-14.65	3.43
5600	-7.56	-14.27	3.74
5650	-7.61	-14.03	3.96
5700	-6.40	-13.55	4.41
5750	-4.17	-12.61	5.48
5800	-2.97	-12.09	6.18
5850	-2.85	-12.44	5.70
5900	-2.99	-13.03	4.98
5950	-2.89	-13.21	4.77
6000	-3.37	-13.50	4.47

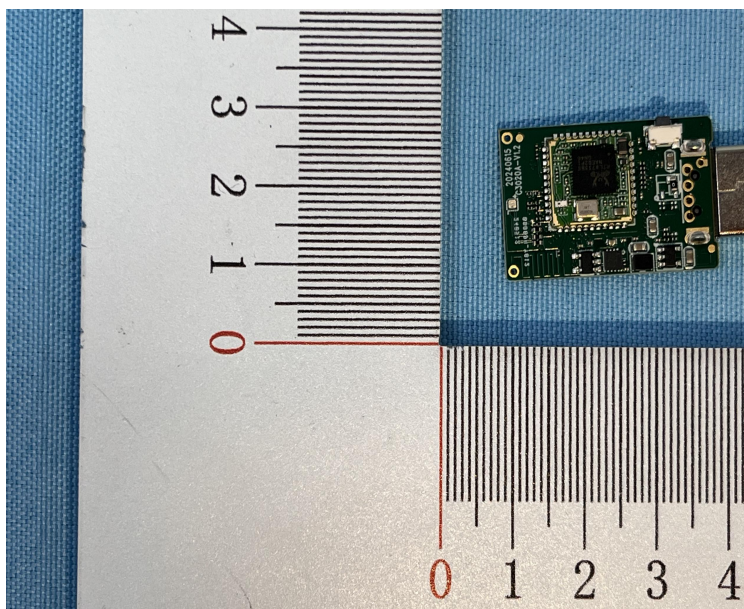


Freq (MHz) 2450

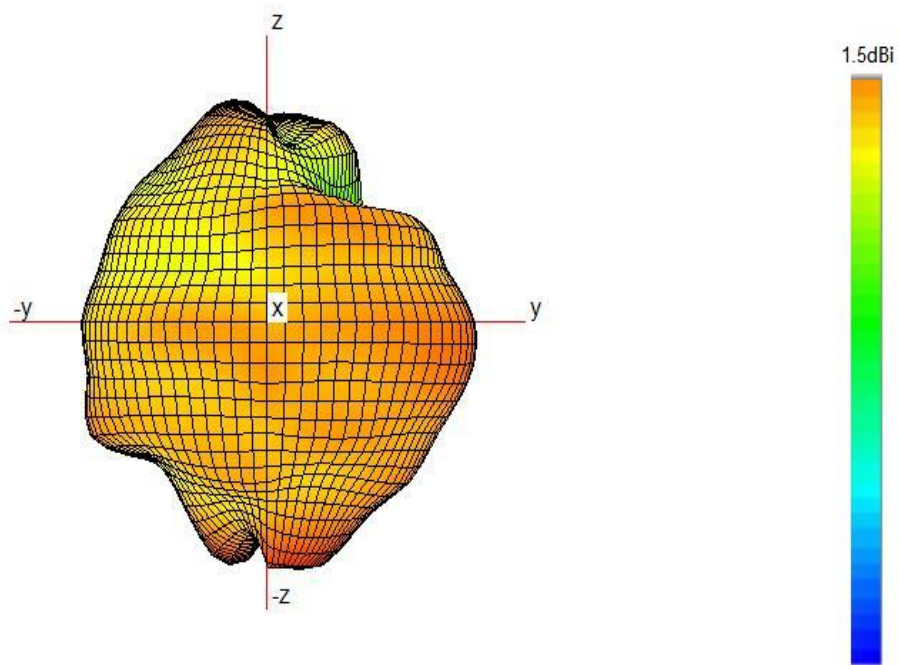

Freq (MHz) 5150

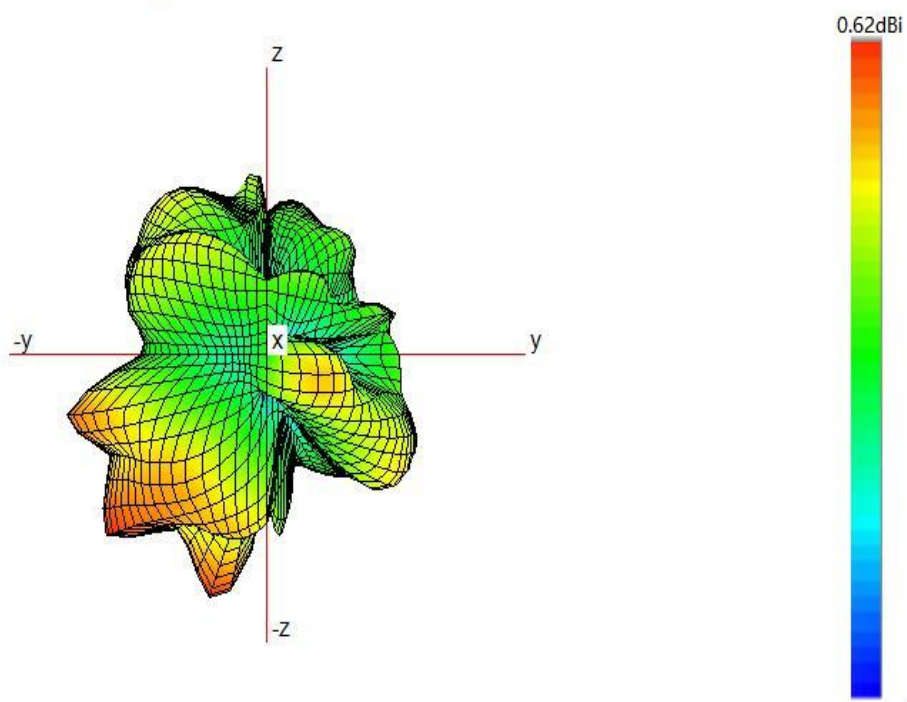

Freq (MHz) 5850

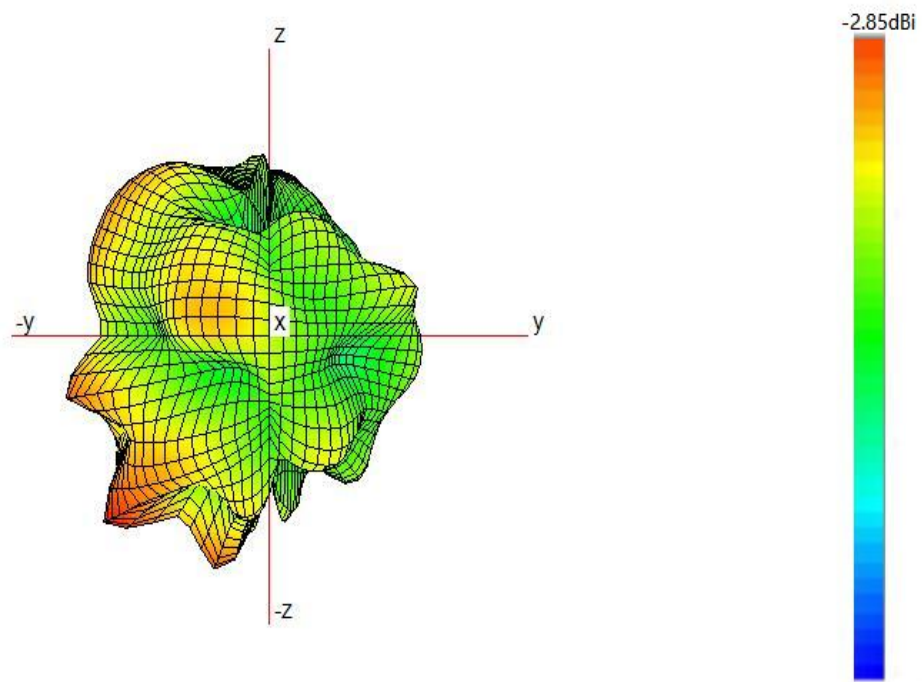

Manufacturer: Shenzhen Trolink Technology Co., Ltd.
Address: 201, Building B, Shi Street, Chashu Industrial Area 4th Building, Bao'an
Airport 505, Gushusanwei Street, Bao'an District, Shenzhen, China
Model No. : TAB08