

Test Report No.:
FCC2022-0038-RF2

RF Test Report

EUT : **IoT Display**
MODEL : **DS7610-915M**
BRAND NAME : **Milesight**
APPLICANT : **Xiamen Milesight IoT Co., Ltd.**
CLASSIFICATION OF TEST : **N/A**


CVC Testing Technology Co., Ltd.



CVC Testing Technology Co., Ltd.

Test Report No.: FCC2022-0038-RF2

Page 2 of 34

Applicant		Name: Xiamen Milesight IoT Co., Ltd.	
		Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China	
Manufacturer		Name: Xiamen Milesight IoT Co., Ltd.	
		Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China	
Equipment Under Test		Name: IoT Display Model/Type: DS7610-915M Additional Models/Types: See Section 2.2 Brand: Milesight Serial NO.: N/A Sampe NO.: 4-1	
Date of Receipt.	2022.07.11	Date of Testing	2022.07.11~2022.12.06
Test Specification		Test Result	
FCC Part 15, Subpart C, Section 15.247		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Issue Date: 2022.12.10	
Tested by:  Xu ZhenFei Name Signature		Reviewed by:  Liu YongHai Name Signature	Approved by:  Chen HuaWen Name Signature
Other Aspects: NONE.			
Abbreviations: OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	7
2 GENERAL INFORMATION	8
2.1 GENERAL PRODUCT INFORMATION	8
2.2 ADDITIONAL MODELS/TYPES	9
2.3 OTHER INFORMATION	9
2.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
2.6 DESCRIPTION OF SUPPORT UNITS	12
3 TEST TYPES AND RESULTS	13
3.1 CONDUCTED EMISSION	13
3.1.1 LIMITS	13
3.1.1 MEASUREMENT PROCEDURE	13
3.1.2 TEST SETUP	13
3.1.3 TEST RESULTS	14
3.2 RADIATED EMISSION AND RESTRICTED BANDS MEASUREMENTS	16
3.2.1 LIMIT	16
3.2.2 MEASUREMENT PROCEDURE	16
3.2.3 TEST SETUP	17
3.2.4 TEST RESULTS	19
3.3 6DB BANDWIDTH MEASUREMENT	24
3.3.1 LIMITS	24
3.3.2 MEASUREMENT PROCEDURE	24
3.3.3 TEST SETUP	24
3.3.4 TEST RESULT	25
3.4 CONDUCTED OUTPUT POWER	26
3.4.1 LIMITS	26
3.4.2 MEASUREMENT PROCEDURE	26
3.4.3 TEST SETUP	26
3.4.4 TEST RESULT	27
3.5 POWER SPECTRAL DENSITY MEASUREMENT	28
3.5.1 LIMITS	28
3.5.2 MEASUREMENT PROCEDURE	28
3.5.3 TEST SETUP	28
3.5.4 TEST RESULT	29
3.6 OUT OF BAND EMISSION AND BAND EDGE MEASUREMENTS	30
3.6.1 LIMITS	30
3.6.2 MEASUREMENT PROCEDURE	30
3.6.3 TEST SETUP	30
3.6.4 TEST RESULT	31
4 PHOTOGRAPHS OF TEST SETUP	33



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2022-0038-RF2	Original release	2022.12.10



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15 Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC Part 15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
FCC Part 15.247(d) FCC Part 15.209	Radiated Emission and Restricted bands Measurements	PASS	Meet the requirement of limit.
FCC Part 15.247(d)	Out of band Emission and Band edge measurements	PASS	Meet the requirement of limit.
FCC Part 15.247(a)(2)	6dB Bandwidth Measurement	PASS	Meet the requirement of limit.
FCC Part 15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
FCC Part 15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
FCC Part 15.203 FCC Part 15.247(b)	Antenna Requirement	PASS	Meet the requirement of limit.



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
WIFI & Bluetooth Test System 1					/
Communication Shielded Room 2	4m*3m*3m	CRTDSWKSR 44301	VGDS-0700	CRT	2024/04/24
Bluetooth system integration	/	/	-	Tonscend	/
Spectrum Analyzer	FSV40	101580	DZ-000238-3	R&S	2023/06/05
Comprehensive Test Instrument	CMW270	100304	DZ-000240-1	R&S	2023/12/06
Analog Signal Generator	SMB100A	181858	DZ-000238-2	R&S	2023/06/05
Vector Signal Generator	SGT100A	111661	DZ-000238-1	R&S	2023/06/05
RF Radio Frequency Switch	JS0806-2	19H9080187	'	Tonscend	2023/06/06
Programmable DC Power Supply	E3644A	MY58036222	DZ-000178	KEYSIGHT	2023/04/21
Radiation Spurious Test System					/
3m Semi-Anechoic Chamber	FACT-4	ST08035	WKNA-0024	ETS	2024/12/12
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2023/03/02
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2023/03/02
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWARZBECK	2023/06/25
Waveguide Horn Antenna	HF906	360306/008	EM-000093	R&S	2023/03/04
Waveguide Horn Antenna	BBHA9170	00949	DZ-000209-2	SCHWARZBECK	2023/07/31
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2023/06/05
5G Bandstop Filters	WRCJV12-4900-5100-5900-6100-50EE	851770	DZ-000186	WI	2023/12/06
Comprehensive tester	CMW500	159000	DZ-000240-2	R&S	2023/12/06
Conducted emission					/
EMI Test Receiver	ESCI	100857	WKNB-0081	R&S	2023-12-08
EMI Test Receiver	ESR3	102394	VG DY-0705	R&S	2023-03-04
LISN	NSLK 8127	8127644	VG DY-0150	SCHWARZBECK	2023-09-04
LISN	NSLK 8128	8128-316	VG DY-0149	SCHWARZBECK	2023-09-04
LISN	NSLK 8129	8129-268	EM-000388	SCHWARZBECK	2023-03-03
Plus Limiter (#1)	VTSD 9561 F-N	00515	VG DY-0808	SCHWARZBECK	2023-03-04
Plus Limiter (#2)	VTSD 9561	9561-F017	VG DY-0152	SCHWARZBECK	2024-09-04
Impedance Stabilization Network	ISN T800	27095	WKNE-0195	TESEQ	2023-09-04
Impedance Stabilization Network	NTFM8158	8158-0092	VG DY-0356	SCHWARZBECK	2023-06-07
ImpedanceStabilizationNetwork	NTFM8131	#184	EM-000498	SCHWARZBECK	2023-06-07
Voltage Probe	TK9420	9420-499	VG DY-0128	SCHWARZBECK	2023-03-04
Power Divider	4901.17.B	22643830	DB-0016	HUBER+SUHNER	2023-09-01
Video Signal Generator	GV-798+	151064920001	VGDS-0215	PROMAX	2023-05-30
Audio Signal Generator	GAG-810	EK871591	EM-000309	GW	2023-12-08
Shielding Room(#1)	GP1A	001	WKNF-0001	LEINING	2024-08-08
Shielding Room(#2)	GP1A	002	WKNF-0006	LEINING	2024-08-08
Current probe	EZ-17	0816.2063.02	EM-000567	R&S	2023-01-16



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	ITEM	FREQUENCY	UNCERTAINTY
1	Conducted emissions	9kHz~30MHz	±2.66dB
2	Radiated emissions	9KHz ~ 30MHz	±0.769dB
		30MHz ~ 1GMHz	±0.877dB
		1GHz ~ 18GHz	±0.777dB
		18GHz ~ 40GHz	±1.315dB

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology Co., Ltd.

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663 Tel: 020-32293888

FAX: 020-32293889 E-mail: office@cvc.org.cn

Test Firm Registration Number: 937273

CN Number: 26239 Wireless Test Site Registration Number : CN0103



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	IoT Display
BRAND	Milesight
MODEL	DS7610-915M
ADDITIONAL MODEL	See Section 2.2
FCC ID	2AYHY-DS7610
POWER SUPPLY	1. DC 5V from USB host unit 2. DC 56V from POE 3. DC 12V from Adapter
MODULATION TYPE	Chirp Spread Spectrum
OPERATING FREQUENCY	DTS 500kHz, 903MHz~927.5MHz
NUMBER OF CHANNEL	16
PEAK OUTPUT POWER	16.47dBm (Maximum)
ANTENNA TYPE (Remark 3)	PCB Antenna, -10.6dBi Gain
HARDWARE VERSION:	UD00-00-V1.2
SOFTWARE VERSION:	72.0.0.5-r1
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A
Remark: - For more detailed features description, please refer to the manufacturer's specifications or the User's Manual. - For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report. - Please refer to the antenna report. - EUT photo refer to the report (Report NO.: FCC2022-0038-E). - The EUT have SISO function, provides 1 completed transmitter and 1 receiver.	



2.2 ADDITIONAL MODELS/TYPES

Models	
1	DS7610-9M
2	NH7610-915M
3	NH7610-9M
Note: The only differences are silk-screen 、 trade name and model no. for trading purpose.	

2.3 OTHER INFORMATION

Operating frequency of each channel

LORA DR8					
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	903	6	912.6	12	925.7
1	904.6	7	914.2	13	926.3
2	906.2	8	923.3	14	926.9
3	907.8	9	923.9	15	927.5
4	909.4	10	924.5	--	--
5	911.0	11	925.1	--	--

Note: The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefor only the data of the test channels were recorded in this report.



2.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Lora Link

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
A	Lora Link

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0	FHSS	DR8

For the test results, only the worst case was shown in test report.



RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0,7,15	FHSS	DR8

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0,7,15	FHSS	DR8

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	25.2deg. C, 55%RH	DC 12V from Adapter	Li JiaLing
RE≥1G	25.2deg. C, 55%RH	DC 12V from Adapter	Li JiaLing
PLC	25.6deg. C, 54%RH	DC 12V from Adapter	Li JiaLing
APCM	24.9deg. C, 58%RH	DC 5V from USB host unit	Liu ShiWei



2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, Subpart C. Section 15.247
KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards

2.6 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	N/A	N/A	N/A	N/A	N/A		
Support Cable							
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION

3.1.1 Limits

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107) and ICES-003 (Class A: section 6.1)

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
 NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 NOTE: 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.


3.1.1 Measurement procedure

The basic test procedure was in accordance with ANSI C63.4:2014 (section 7).

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.


Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.


3.1.2 Test setup

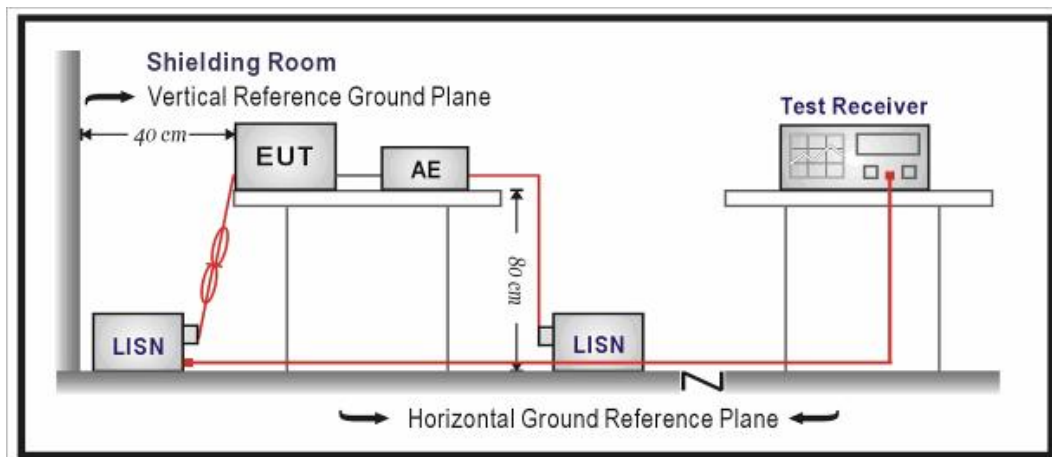

3.1.3 Test Results

CONDUCTED WORST-CASE DATA:

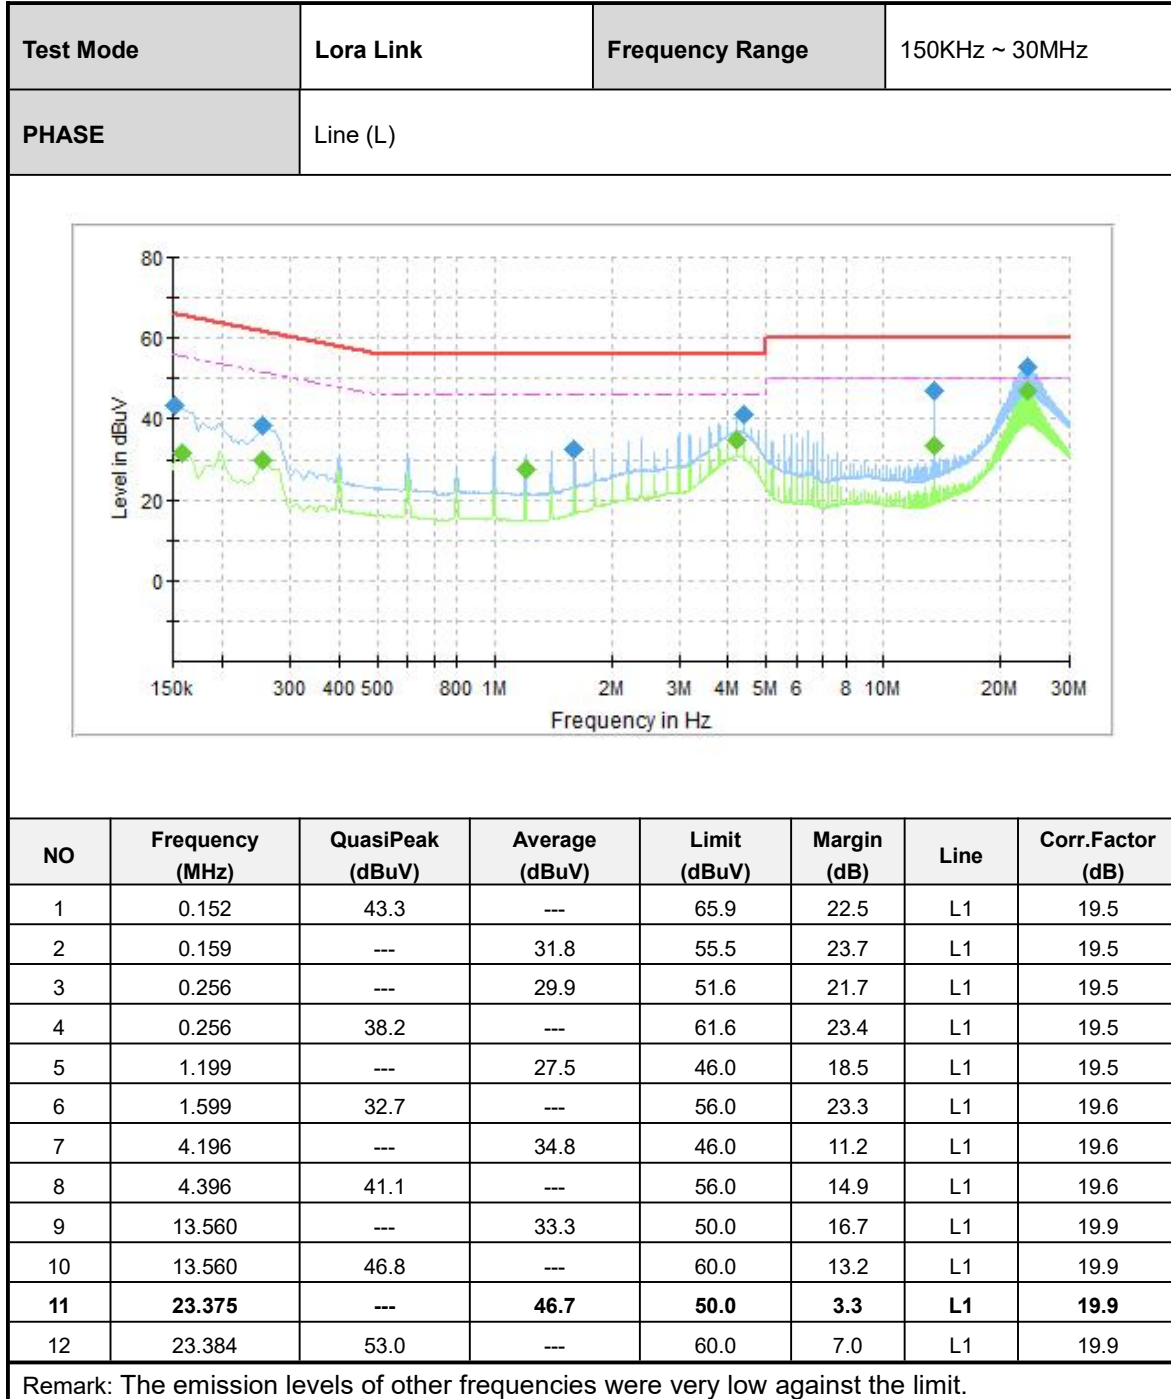

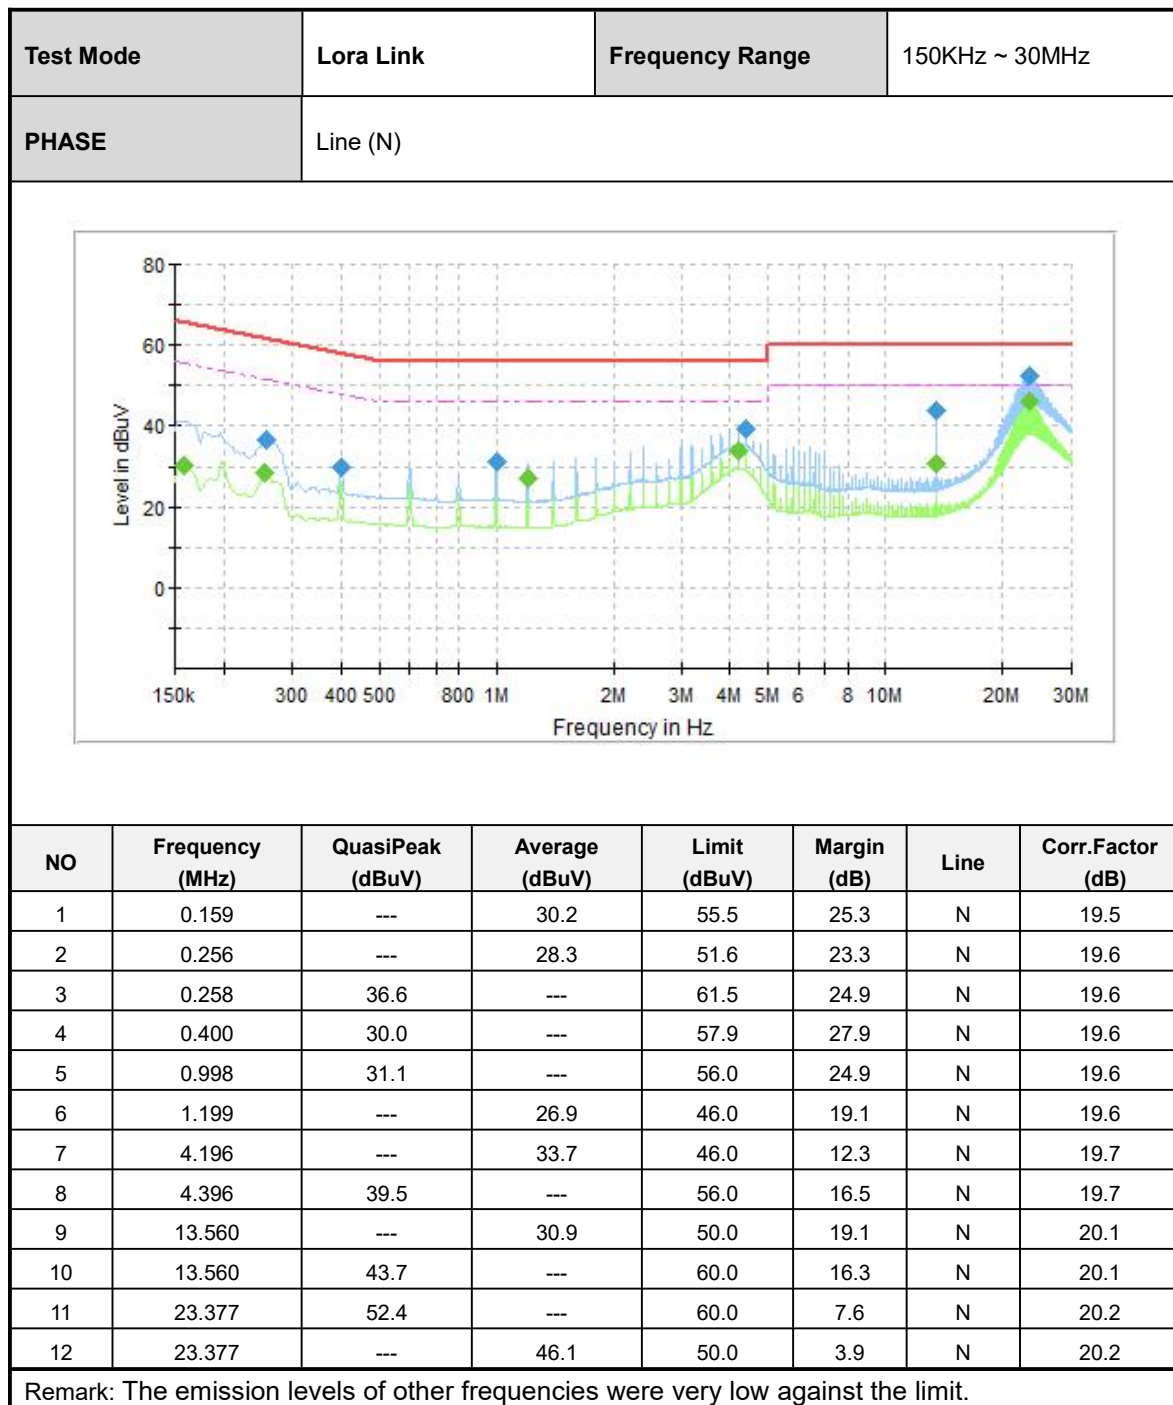



3.2 RADIATED EMISSION AND RESTRICTED BANDS MEASUREMENTS

3.2.1 Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.2.2 Measurement procedure


- The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.2.3 Test setup


Below 30MHz Test Setup:

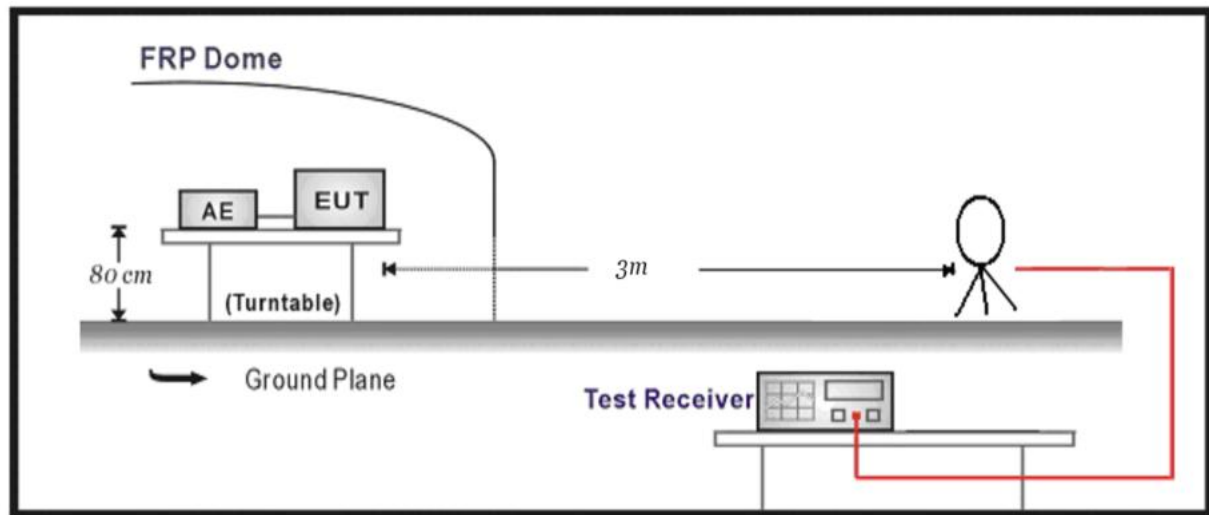

Below 1GHz Test Setup:

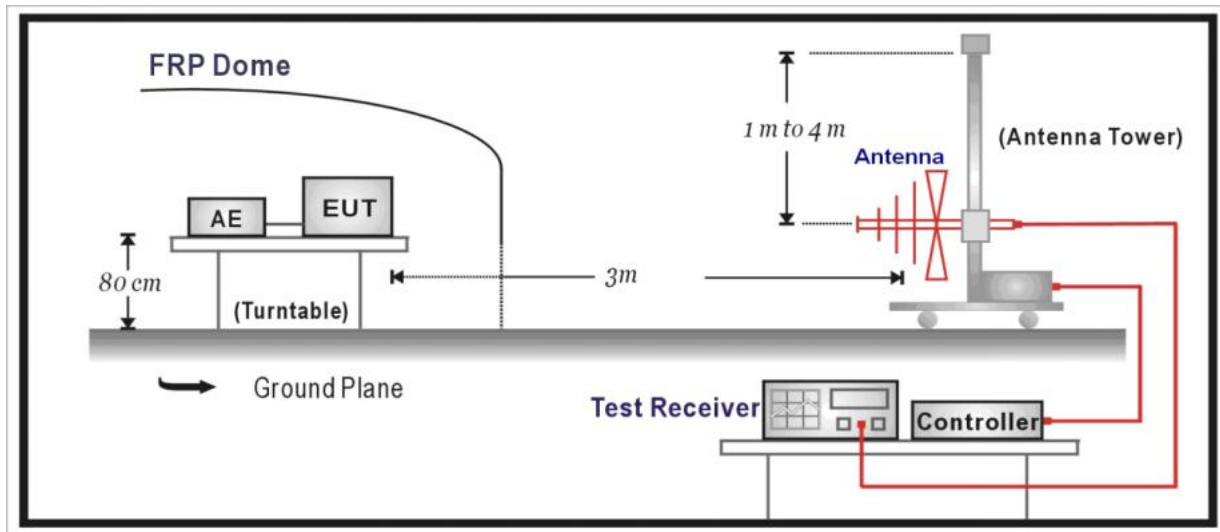


Above 1GHz Test Setup:

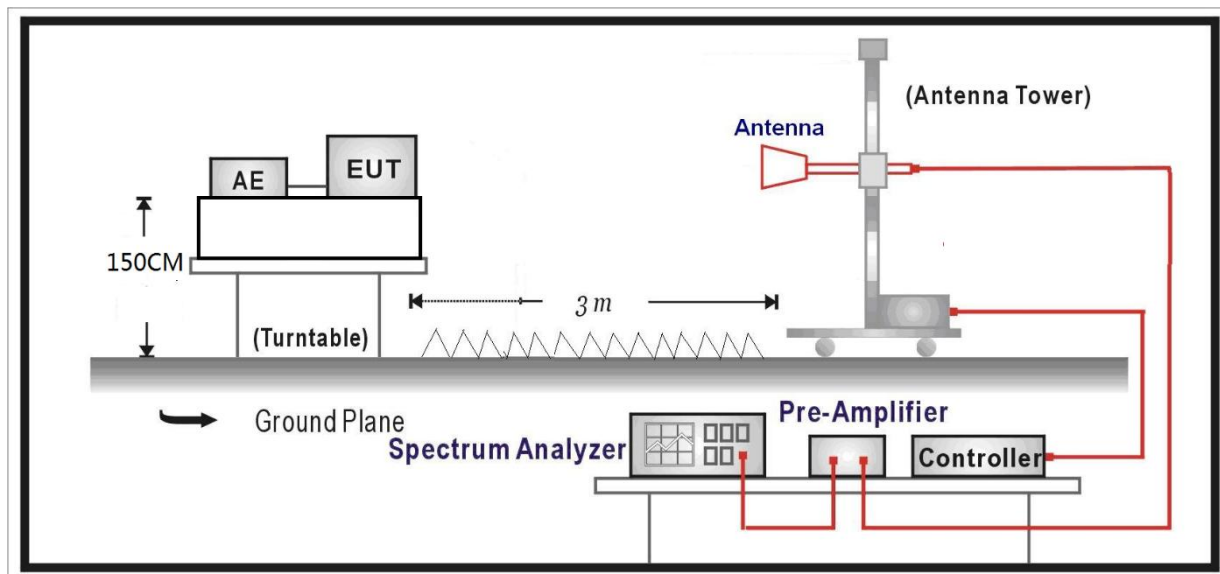




3.2.4 Test results

BELOW 1GHz WORST-CASE DATA:

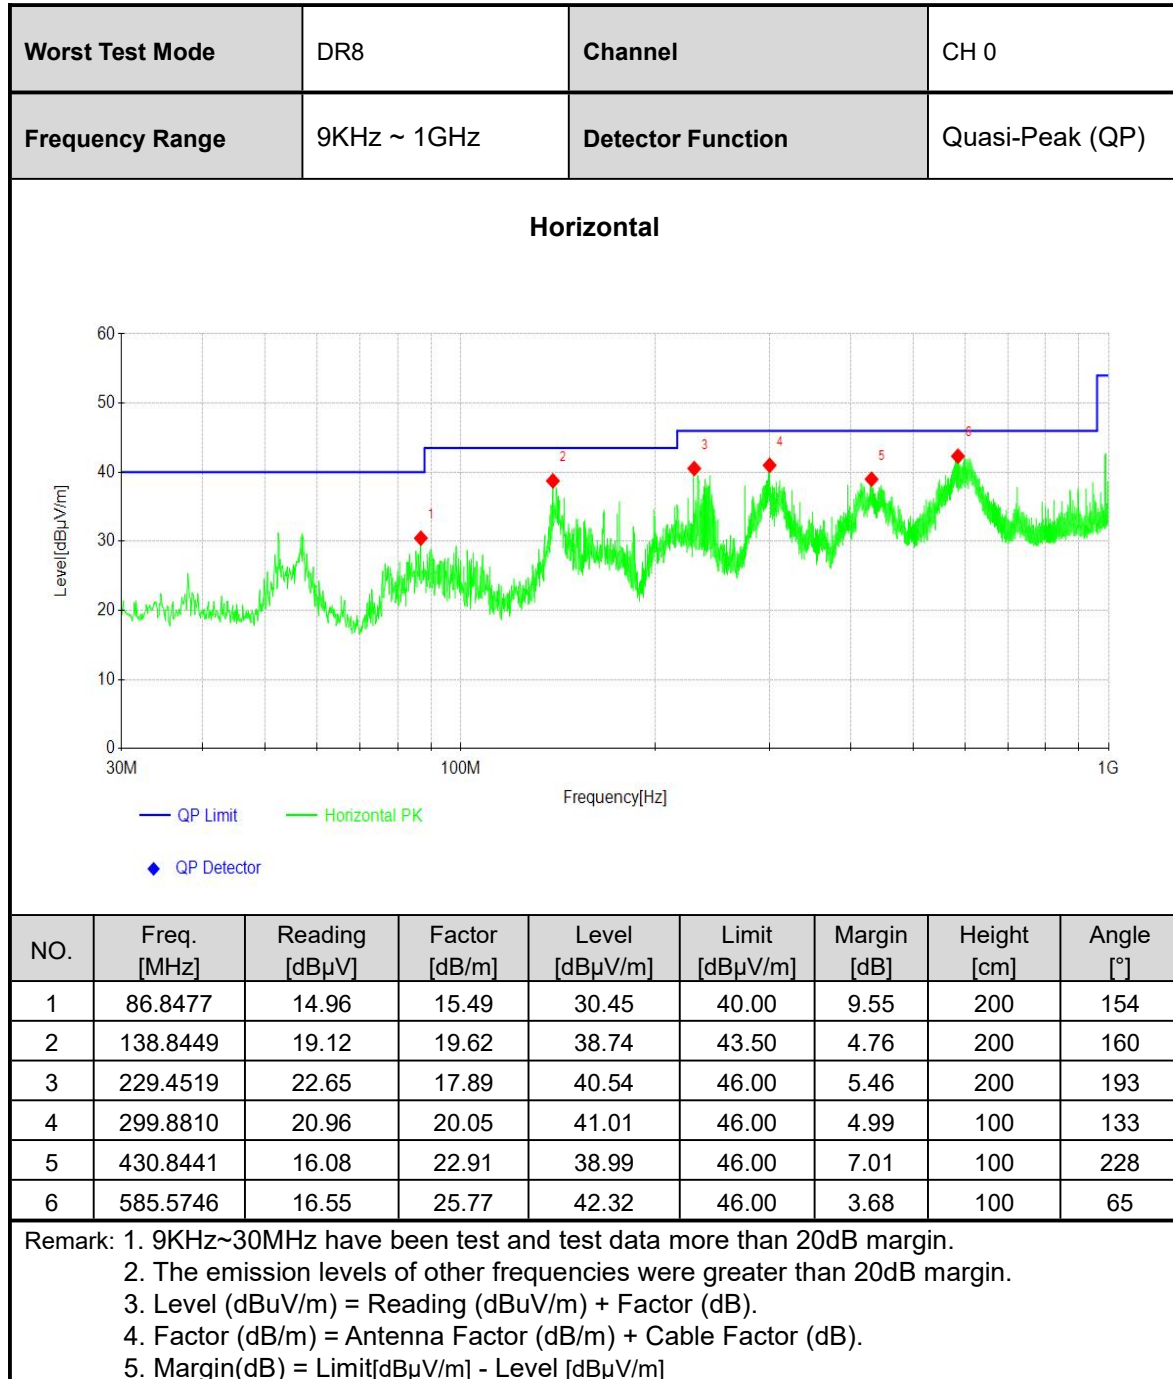

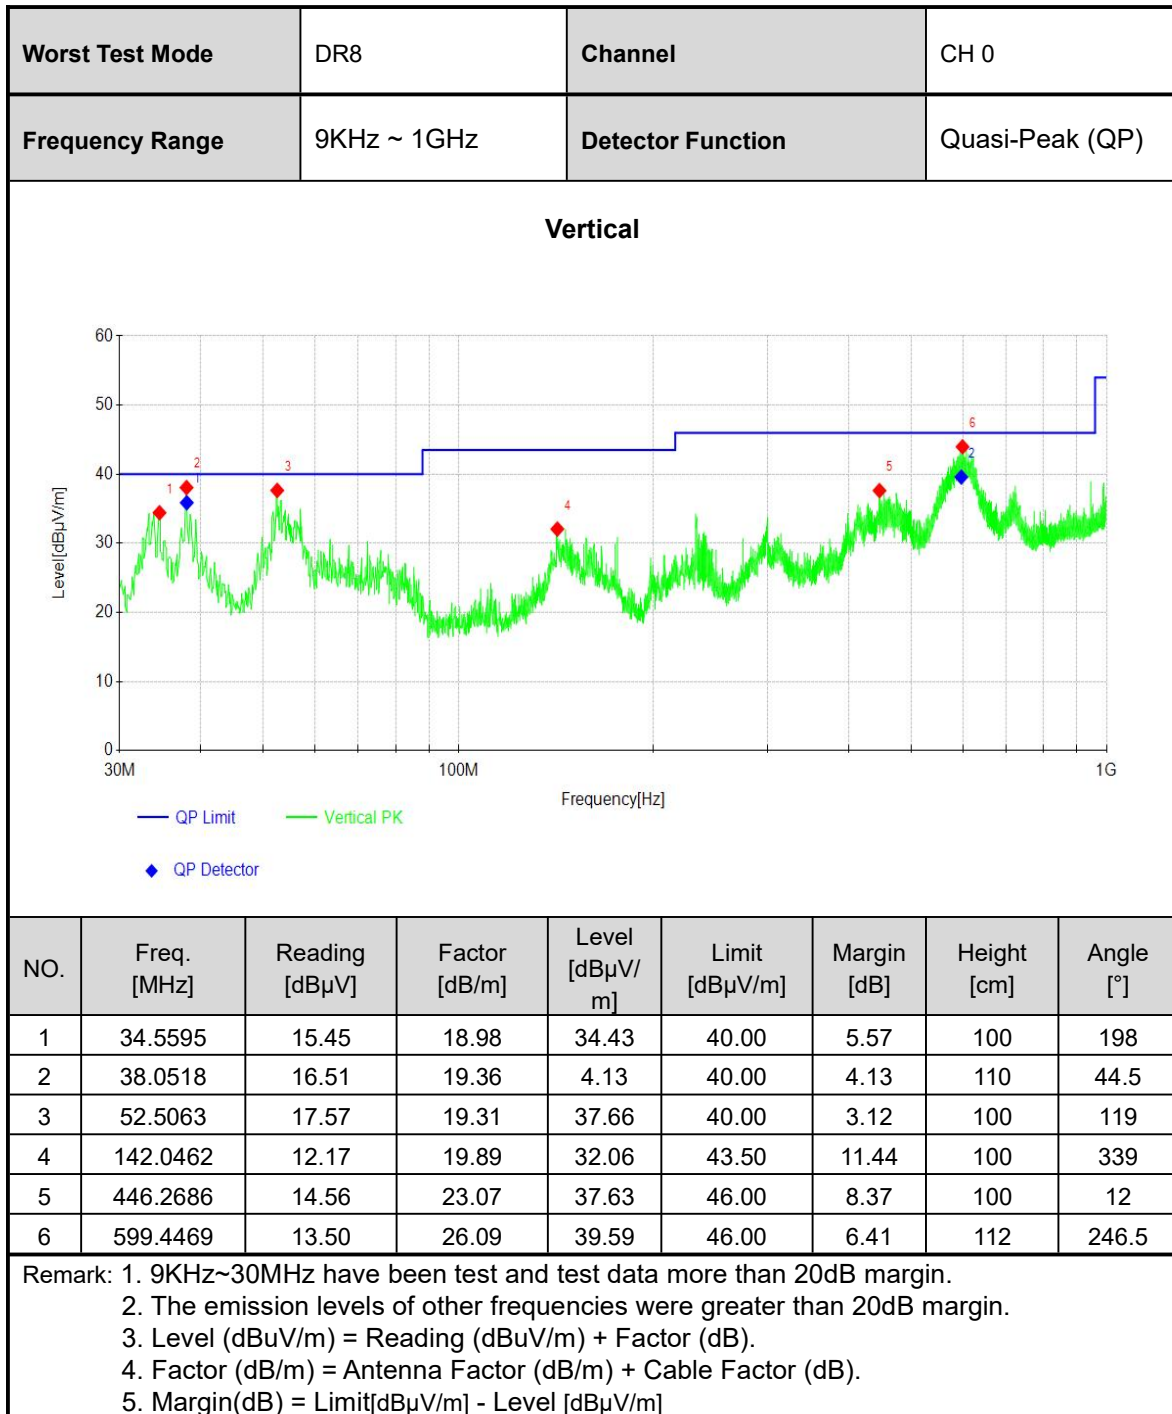



ABOVE 1GHz DATA

Channel		CH 0		Frequency		903MHz			
Frequency Range		1GHz~9.3G		Detector Function		PK/AV			
Horizontal									
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	1806.0000	45.27	7.74	53.01	74.00	20.99	129	47	PK
2	1806.0000	38.57	7.74	46.31	54.00	7.69	172	47	AV
3	2709.0000	35.68	11.23	46.91	54.00	7.09	119	8	AV
4	2709.0000	43.38	11.23	54.61	74.00	19.39	216	321	PK
5	3612.0000	43.41	14.88	58.29	74.00	15.71	215	268	PK
6	3612.0000	35.31	14.88	50.19	54.00	3.81	240	167	AV
Vertical									
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	1806.0000	45.64	7.74	53.38	74.00	20.62	121	321	PK
2	1806.0000	38.08	7.74	45.82	54.00	8.18	214	215	AV
3	2709.0000	36.01	11.23	47.24	54.00	6.76	286	174	AV
4	2709.0000	44.37	11.23	55.60	74.00	18.40	143	148	PK
5	3612.0000	42.81	14.88	57.69	74.00	16.31	258	134	PK
6	3612.0000	35.46	14.88	50.34	54.00	3.66	270	0	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



Channel		CH 7		Frequency		914.2MHz			
Frequency Range		1GHz~9.3G		Detector Function		PK/AV			
Horizontal									
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	1828.4000	46.71	7.85	54.56	74.00	19.44	130	135	PK
2	1828.4000	39.89	7.85	47.74	54.00	6.26	278	334	AV
3	2742.6000	35.80	12.12	47.92	54.00	6.08	163	359	AV
4	2742.6000	43.81	12.12	55.93	74.00	18.07	114	235	PK
5	3656.8000	42.63	15.14	57.77	74.00	16.23	229	14	PK
6	3656.8000	35.07	15.14	50.21	54.00	3.79	294	8	AV
Vertical									
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	1828.4000	44.78	7.85	52.63	74.00	21.37	156	148	PK
2	1828.4000	39.50	7.85	47.35	54.00	6.65	269	148	AV
3	2742.6000	35.97	12.12	48.09	54.00	5.91	198	314	AV
4	2742.6000	43.57	12.12	55.69	74.00	18.31	136	241	PK
5	3656.8000	43.02	15.14	58.16	74.00	15.84	271	354	PK
6	3656.8000	34.85	15.14	49.99	54.00	4.01	251	359	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



Channel		CH 15		Frequency		927.5MHz			
Frequency Range		1GHz~9.3G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	1855.0000	45.36	8.05	53.41	74.00	20.59	234	102	PK
2	1855.0000	38.92	8.05	46.97	54.00	7.03	121	2	AV
3	2782.5000	35.79	11.24	47.03	54.00	6.97	287	248	AV
4	2782.5000	43.88	11.24	55.12	74.00	18.88	308	130	PK
5	3710.0000	44.32	15.34	59.66	74.00	14.34	282	5	PK
6	3710.0000	35.17	15.34	50.51	54.00	3.49	126	102	AV
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	1855.0000	46.18	8.05	54.23	74.00	19.77	293	134	PK
2	1855.0000	38.35	8.05	46.40	54.00	7.60	133	134	AV
3	2782.5000	36.67	11.24	47.91	54.00	6.09	140	241	AV
4	2782.5000	43.43	11.24	54.67	74.00	19.33	232	220	PK
5	3710.0000	42.96	15.34	58.30	74.00	15.70	161	41	PK
6	3710.0000	35.59	15.34	50.93	54.00	3.07	297	335	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



3.3 6dB BANDWIDTH MEASUREMENT


3.3.1 Limits

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 Measurement procedure

- Set resolution bandwidth (RBW) = 100KHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3.3.3 Test setup

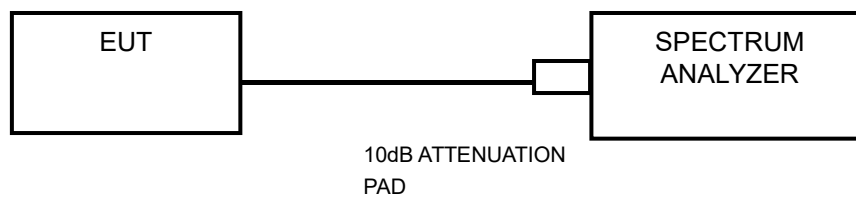



3.3.4 Test result

Mode	Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)
DR8	0	903.0	639	≥500
	7	914.2	639	≥500
	15	927.5	640	≥500

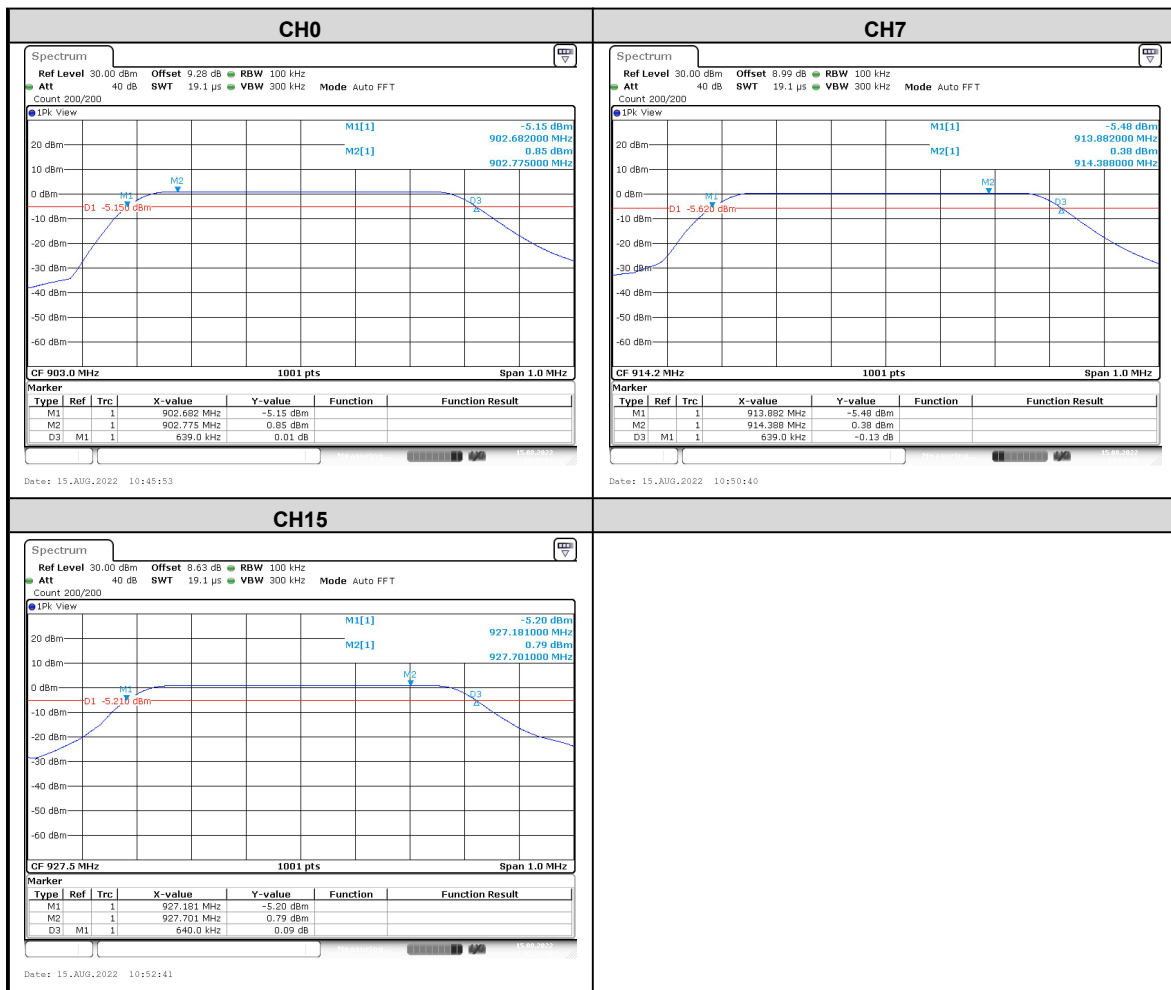



3.4 CONDUCTED OUTPUT POWER


3.4.1 Limits

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

3.4.2 Measurement procedure

- A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

3.4.3 Test setup

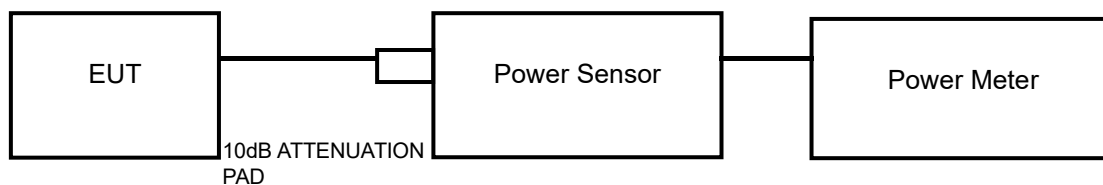



3.4.4 Test result

PEAK OUTPUT POWER

GFSK

CHANNEL	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (mW)	Verdict
0	903.0	16.47	44.36	1000	PASS
7	914.2	15.88	38.73	1000	PASS
15	927.5	16.44	44.06	1000	PASS

AVERAGE OUTPUT POWER(For reference)

CHANNEL	Channel Frequency (MHz)	Average Power (dBm)	Average Power (mW)	Average Power Limit (mW)	Verdict
0	903.0	0.31	1.07	1000	PASS
7	914.2	0.28	1.06	1000	PASS
15	927.5	0.33	1.08	1000	PASS



3.5 POWER SPECTRAL DENSITY MEASUREMENT


3.5.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 Measurement procedure

- Set instrument center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set RBW to: 3KHz
- Set VBW $\geq 3 \times$ RBW.
- Detector = peak
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Use the peak marker function to determine the maximum amplitude level.

3.5.3 Test setup

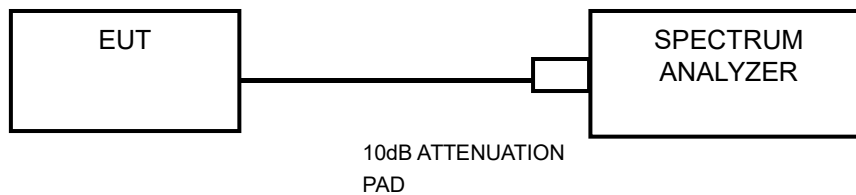




3.5.4 Test result

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD(dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
0	903.0	-4.00	8	PASS
7	914.2	-4.44	8	PASS
15	927.5	-6.01	8	PASS

Test Plot:

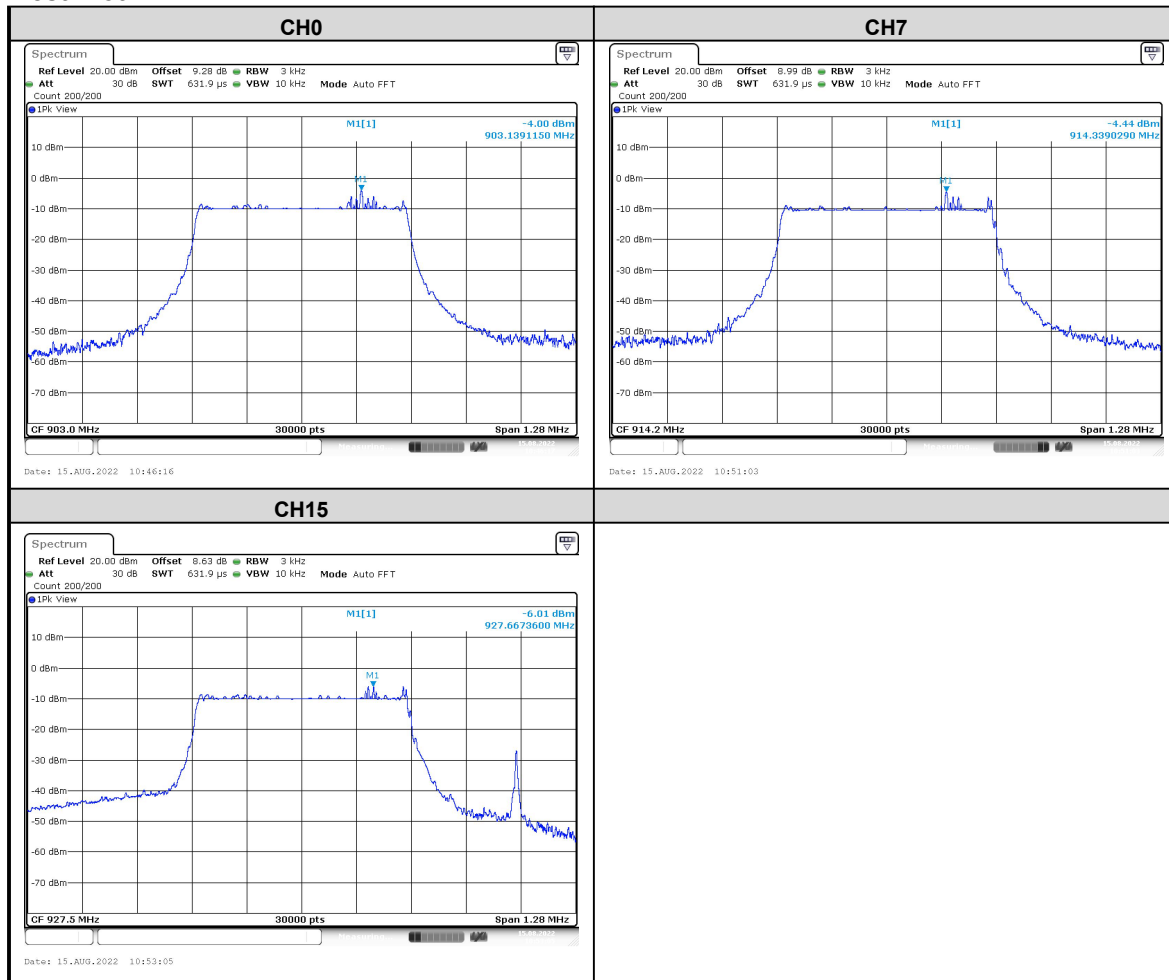



3.6 OUT OF BAND EMISSION AND BAND EDGE MEASUREMENTS

3.6.1 Limits

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 Measurement procedure


Measurement Procedure -Reference Level

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHzband segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Set span to encompass the spectrum to be examined
- Detector = peak.
- Trace Mode = max hold.
- Sweep = auto couple.


3.6.3 Test setup

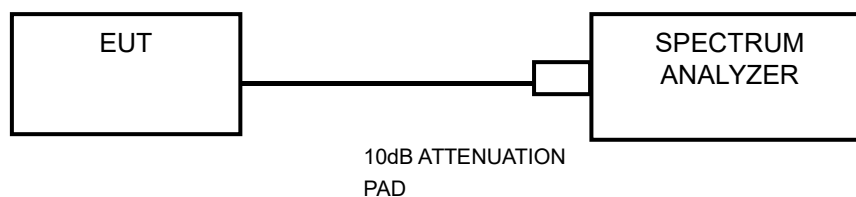




3.6.4 Test result

The spectrum plots are attached on the following images.

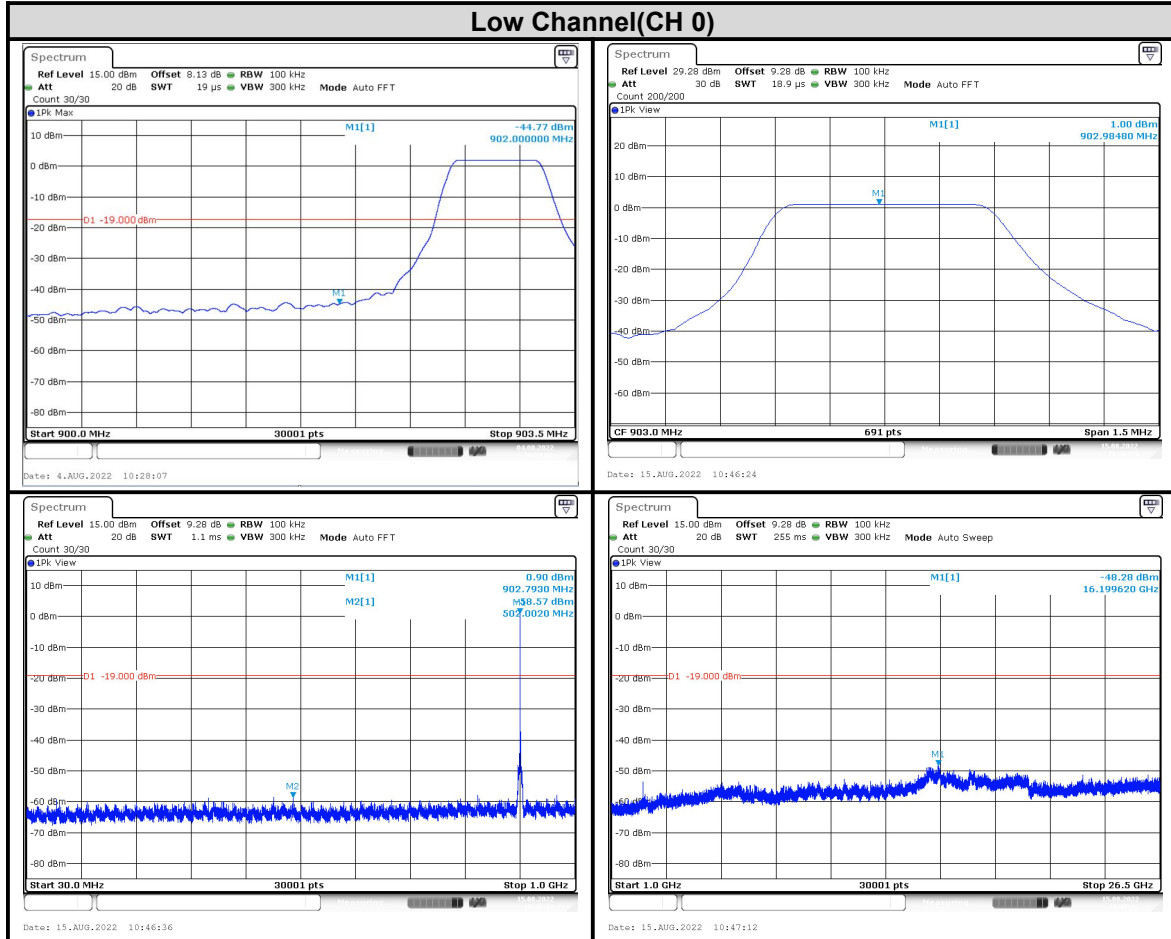

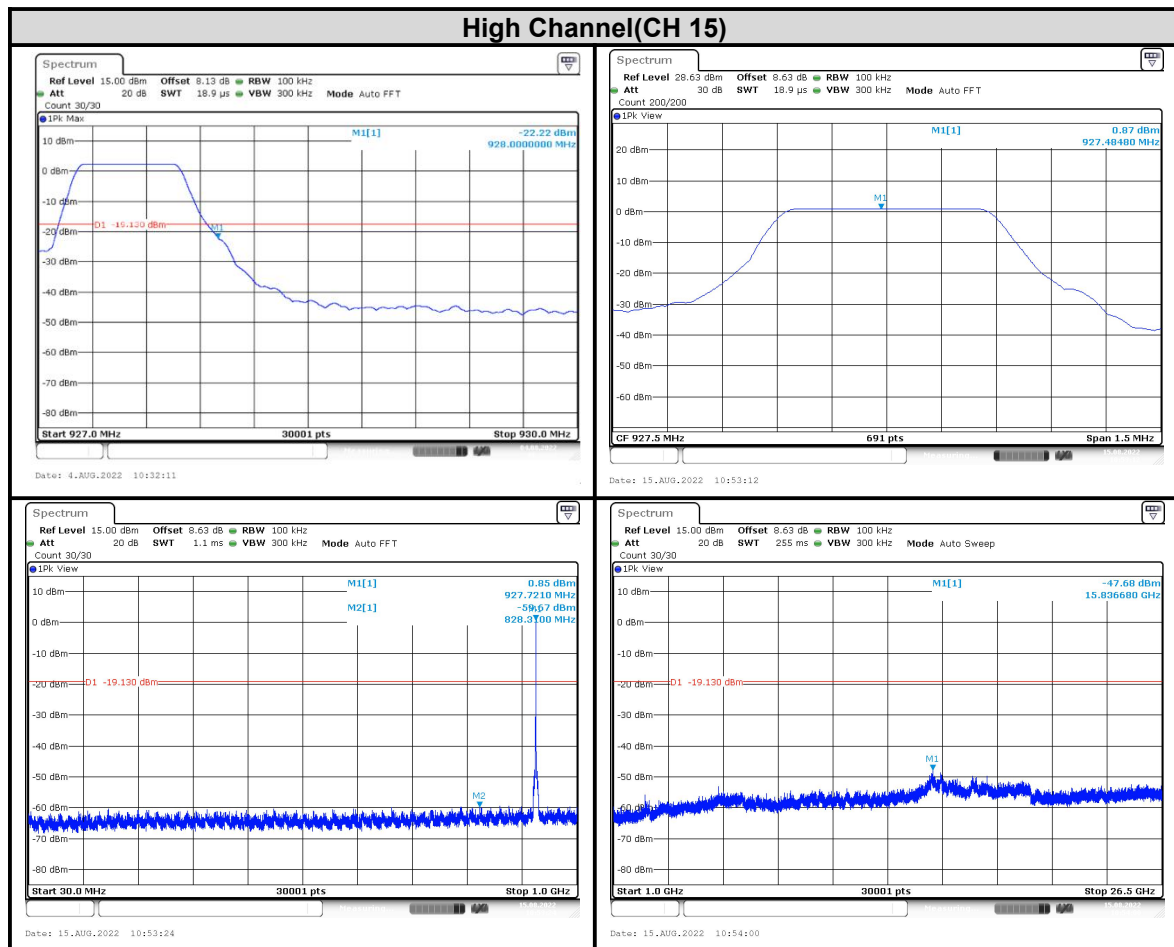



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).



Important

- (1) The test report is valid with the official seal of the laboratory and the signatures of Test engineer, Author and Reviewer simultaneously.
- (2) The test report is invalid if altered.
- (3) Any photocopies or part photocopies in the test report are forbidden without the written permission from the laboratory.
- (4) Objections to the test report must be submitted to the laboratory within 15 days.
- (5) Generally, commission test is responsible for the tested samples only.

Address of the laboratory:

CVC Testing Technology Co., Ltd.

Address: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, China

Post Code: 510663

Tel: 020-32293888

FAX: 020-32293889

E-mail: office@cvc.org.cn