

RF TEST REPORT

Report No.: 20230517G05337X-W2

Product Name: LoRa Controller

Model No.: UC501-915M, NC501-915M, UC501-9M, NC501-9M, UC502-915M, NC502-915M, UC502-9M, NC502-9M

FCC ID: 2AYHY-UC50XV3

Applicant: Xiamen Milesight IoT Co., Ltd.

Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China

Dates of Testing: 05/29/2023 - 06/16/2023

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 42 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Test Report

Product.....: LoRa Controller

Trade Name: Milesight

Brand Name: Milesight

Applicant.....: Xiamen Milesight IoT Co., Ltd.

Applicant Address.....: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China


Manufacturer.....: Xiamen Milesight IoT Co., Ltd.

Manufacturer Address.....: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China

Test Standards.....: 47 CFR Part 15 Subpart C 15.247
ANSI C63.10-2013

Test Result.....: Pass


Tested by



2023.06.19

Chuiwang Zhang, Test Engineer

Reviewed by



2023.06.19

Chris You, Senior Engineer

Approved by



2023.06.19

Yang Fan, Manager

TABLE OF CONTENTS

RF TEST REPORT	1
TABLE OF CONTENTS	3
1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Test Standards and Results	6
1.3. Carrier Frequency and channel List	7
1.4. Test environment and mode	8
1.5. Table for Supporting Units	8
1.6. EUT Operation Test Setup	8
1.7. Facilities and Accreditations	9
2. TEST REQUIREMENTS	10
2.1. Antenna requirement	10
2.2. Maximum Conducted Output Power	11
2.3. 6dB and 99% Bandwidth	14
2.4. Power spectral density (PSD)	18
2.5. Conducted Band Edges and Spurious Emissions	21
2.6. Radiated Band Edge and Spurious Emission	25
2.7. AC Power Line Conducted Emission	39
3. LIST OF MEASURING EQUIPMENT	41
4. UNCERTAINTY OF EVALUATION	42

Change History		
Issue	Date	Reason for change
1.0	2023.06.19	First edition

1. General Information

1.1. EUT Description

Product Name	LoRa Controller		
Frequency Range	LoRaWAN: 902MHz~928MHz		
Channel Number	903.0~914.2MHz: 8 923.2~927.5MHz: 8		
Data Rate	SF12, SF11, SF10, SF9, SF8, SF7, SF6, SF5		
Modulation Type	LoRa		
Antenna Type	Internal Antenna External Antenna 1 External Antenna 2		
Antenna Gain	Internal Antenna: 2.82dBi (Reference Antenna Report) External Antenna 1: 1.0dBi (Reference Antenna Report) External Antenna 2: 5.06dbi (Reference Antenna Report)		
Power supply	501: (Refer to note 2)	Solar powered(6V, 1.7W) + 2*(3.6V, 2550mAh) Chargeable battery + 5~24 V _{DC}	
	502: (Refer to note 2)	3*(3.6V, 9000mAh) Replaceable Li-SoCl ₂ battery + 5~24V _{DC}	

Note 1: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: Model:UC501-915M, NC501-915M, UC501-9M, NC501-9M, UC502-915M, NC502-915M, UC502-9M, NC502-9M have the same software, PCB board, electromagnetic emissions and electromagnetic compatibility characteristics. The only difference between the models is that some function devices paste or not paste. The below table show differences:

Model	PN	External LoRa antenna	Power Support	Other differences
UC501-915M, NC501-915M, UC501-9M, NC501-9M	×	×	Solar powered(6V, 1.7W) + 2*2550mAh	Model Name
UC501-915M, NC501-915M, UC501-9M, NC501-9M	EA	√	Chargeable battery + 5~24 V _{DC}	
UC502-915M, NC502-915M, UC502-9M, NC502-9M	×	×	3*9000mAh Replaceable Li-SoCl ₂ battery + 5~24V _{DC}	Model Name
UC502-915M, NC502-915M, UC502-9M, NC502-9M	EA	√		

Note: √: Paste; ×: Not paste; EA: External Antenna.

1.2. Test Standards and Results

The purpose of the report is to conduct testing according to the following FCC certification standards:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurement on Digital Transmission Systems, Frequency Hopping Spread Spectrum Systems, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203 15.247(b)(4)	Antenna Requirement	PASS
2	15.247(b)(3)	Peak Conducted Output Power	PASS
3	15.247(a)(2)	6dB and 99% Bandwidth	PASS
4	15.247(d)	Conducted Band Edges and Spurious Emission	PASS
5	15.247(e)	Power spectral density (PSD)	PASS
6	15.207	AC Power Line Conducted Emission	N/A ^{Note 3}
7	15.209 15.205 15.247(d)	Radiated Band Edges and Spurious Emission	PASS

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB 558074 D01 15.247 Meas Guidance v05r02.

Note 3: Not applicable, EUT is battery powered equipment.

1.3. Carrier Frequency and channel List

LoRaWAN_903.0~914.2MHz					
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	903.0	3	907.8	6	912.6
1	904.6	4	909.4	7	914.2
2	906.2	5	911.0	/	/

Note 1: $F(\text{MHz}) = 903.0 + 1.6 * n$ ($0 \leq n \leq 7$).

Note 2: Channel 0, 3 and 7 selected for LoRaWAN as Lowest, Middle and Highest channel.

LoRaWAN_923.3~927.5MHz					
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	923.3	3	925.1	6	926.9
1	923.9	4	925.7	7	927.5
2	924.5	5	926.3	/	/

Note 1: $F(\text{MHz}) = 923.3 + 0.6 * n$ ($0 \leq n \leq 7$).

Note 2: Channel 0, 3 and 7 selected for LoRaWAN as Lowest, Middle and Highest channel.

1.4. Test environment and mode

During the measurement, the environmental conditions were within the listed ranges:

Operating Environment	
Temperature	15°C - 35°C
Humidity	30% -60%
Atmospheric Pressure	86kPa-106kPa
Test mode:	
Continuously transmitting mode	Keep the EUT in continuous transmitting with modulation

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Modulation Type	Channel
Peak Conducted Output Power Power Spectral Density 6dB and 99% Bandwidth Conducted and Spurious Emission Radiated and Spurious Emission	LoRa	L, M, H
Conducted Band Edge	LoRa	L, H

1.5. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
1	Laptop	HP	TPN-Q221	HP	5CD14347QB	FCC DOC

1.6. EUT Operation Test Setup

For RF test items, an engineering test program was provided and enable to make EUT transmitting.

1.7. Facilities and Accreditations

FCC-Registration No.: 406086

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Jun. 30th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Jun. 30th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

2. Test Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

And according to FCC 47 CFR Section 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

And according to FCC 47 CFR Section 15.247(b)(4): The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2.1.2. Antenna Information

Antenna Category: Internal Antenna and External Antenna.

1. The internal antenna is permanently connected to the EUT, can't be removed.
2. External antennas are installed by professionals, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

Antenna General Information:

No.	EUT	Operating frequency range	Ant. Type	Ant. Gain
1	LoRa Controller	902-928MHz	Internal Antenna	2.82dBi
			External Antenna 1	1.0dBi
			External Antenna 2	5.06dBi

2.1.3. Result: Comply

Please refer to the EUT photos.

2.2. Maximum Conducted Output Power


2.2.1. Limit of Peak Output Power

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

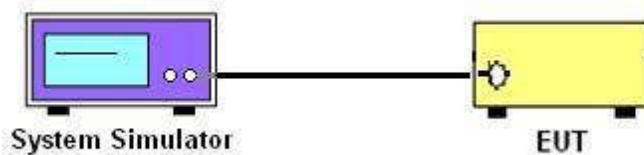

2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.9.1.1.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:

RBW \geq DTS bandwidth / VBW \geq 3*RBW / Sweep time: Auto couple / Detector mode: Peak / Trace mode: Max hold / Allow trace to fully stabilize / Use peak marker function to determine the peak amplitude level.

5. Record the measurement results in the test report.

2.2.5. Test Result of Peak Output Power

LoRaWAN_903.0~914.2MHz			
Test Frequency	Conducted Power(dBm)	Limit(dBm)	Result
903.0	10.696	30	Pass
907.8	10.626		Pass
914.2	10.546		Pass

LoRaWAN_923.3~927.5MHz			
Test Frequency	Conducted Power(dBm)	Limit(dBm)	Result
923.3	10.451	30	Pass
925.1	10.451		Pass
927.5	10.448		Pass

Output Power: 903.0MHz



Output Power: 923.3MHz



Output Power: 907.8MHz



Output Power: 925.1MHz



Output Power: 914.2MHz



Output Power: 927.5MHz



2.3. 6dB and 99% Bandwidth


2.3.1. Limit of 6dB and 99% Bandwidth

The minimum 6 dB Occupied bandwidth shall be at least 500 kHz.

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

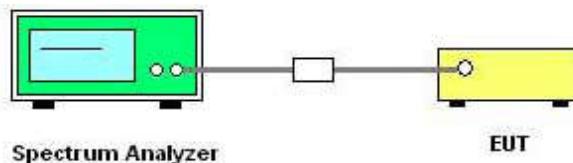

2.3.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.8.1 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the spectrum analyzer “Channel Bandwidth” function to easurement the 6dB EBW and 99% OBW.
RBW: 100kHz / VBW: 300kHz / Detector: Peak / Trace mode: Max hold / Sweep time: Auto couple / Allow trace to fully stabilize.
5. For 6dB EBW Use the following spectrum analyzer settings:
Set RBW = 1% to 5% of the OBW, VBW $\geq 3 \times$ RBW, Span = 1.5 times to 5.0 times the OBW.
6. For 99% OBW Use the following spectrum analyzer settings:
Set RBW = 1% to 5% of the OBW, VBW $\geq 3 \times$ RBW, Span = 1.5 times to 5.0 times the OBW.
7. Record the measurement results in the test report.


2.3.5. Test Results of 6dB and 99% Bandwidth


LoRaWAN_903.0~914.2MHz			
Test Frequency	6dB EBW(kHz)	Limit(dBm)	Result
903.0	631.0	≥ 500	Pass
907.8	626.8		Pass
914.2	627.8		Pass

LoRaWAN_903.0~914.2MHz			
Test Frequency	99% OBW(kHz)	Limit(dBm)	Result
903.0	501.12	N/A	Pass
907.8	501.91		Pass
914.2	501.30		Pass

LoRaWAN_923.3~927.5MHz			
Test Frequency	6dB EBW(kHz)	Limit(dBm)	Result
923.3	629.8	≥ 500	Pass
925.1	633.2		Pass
927.5	627.4		Pass

LoRaWAN_923.3~927.5MHz			
Test Frequency	99% OBW(kHz)	Limit(dBm)	Result
923.3	502.61	N/A	Pass
925.1	504.41		Pass
927.5	501.69		Pass

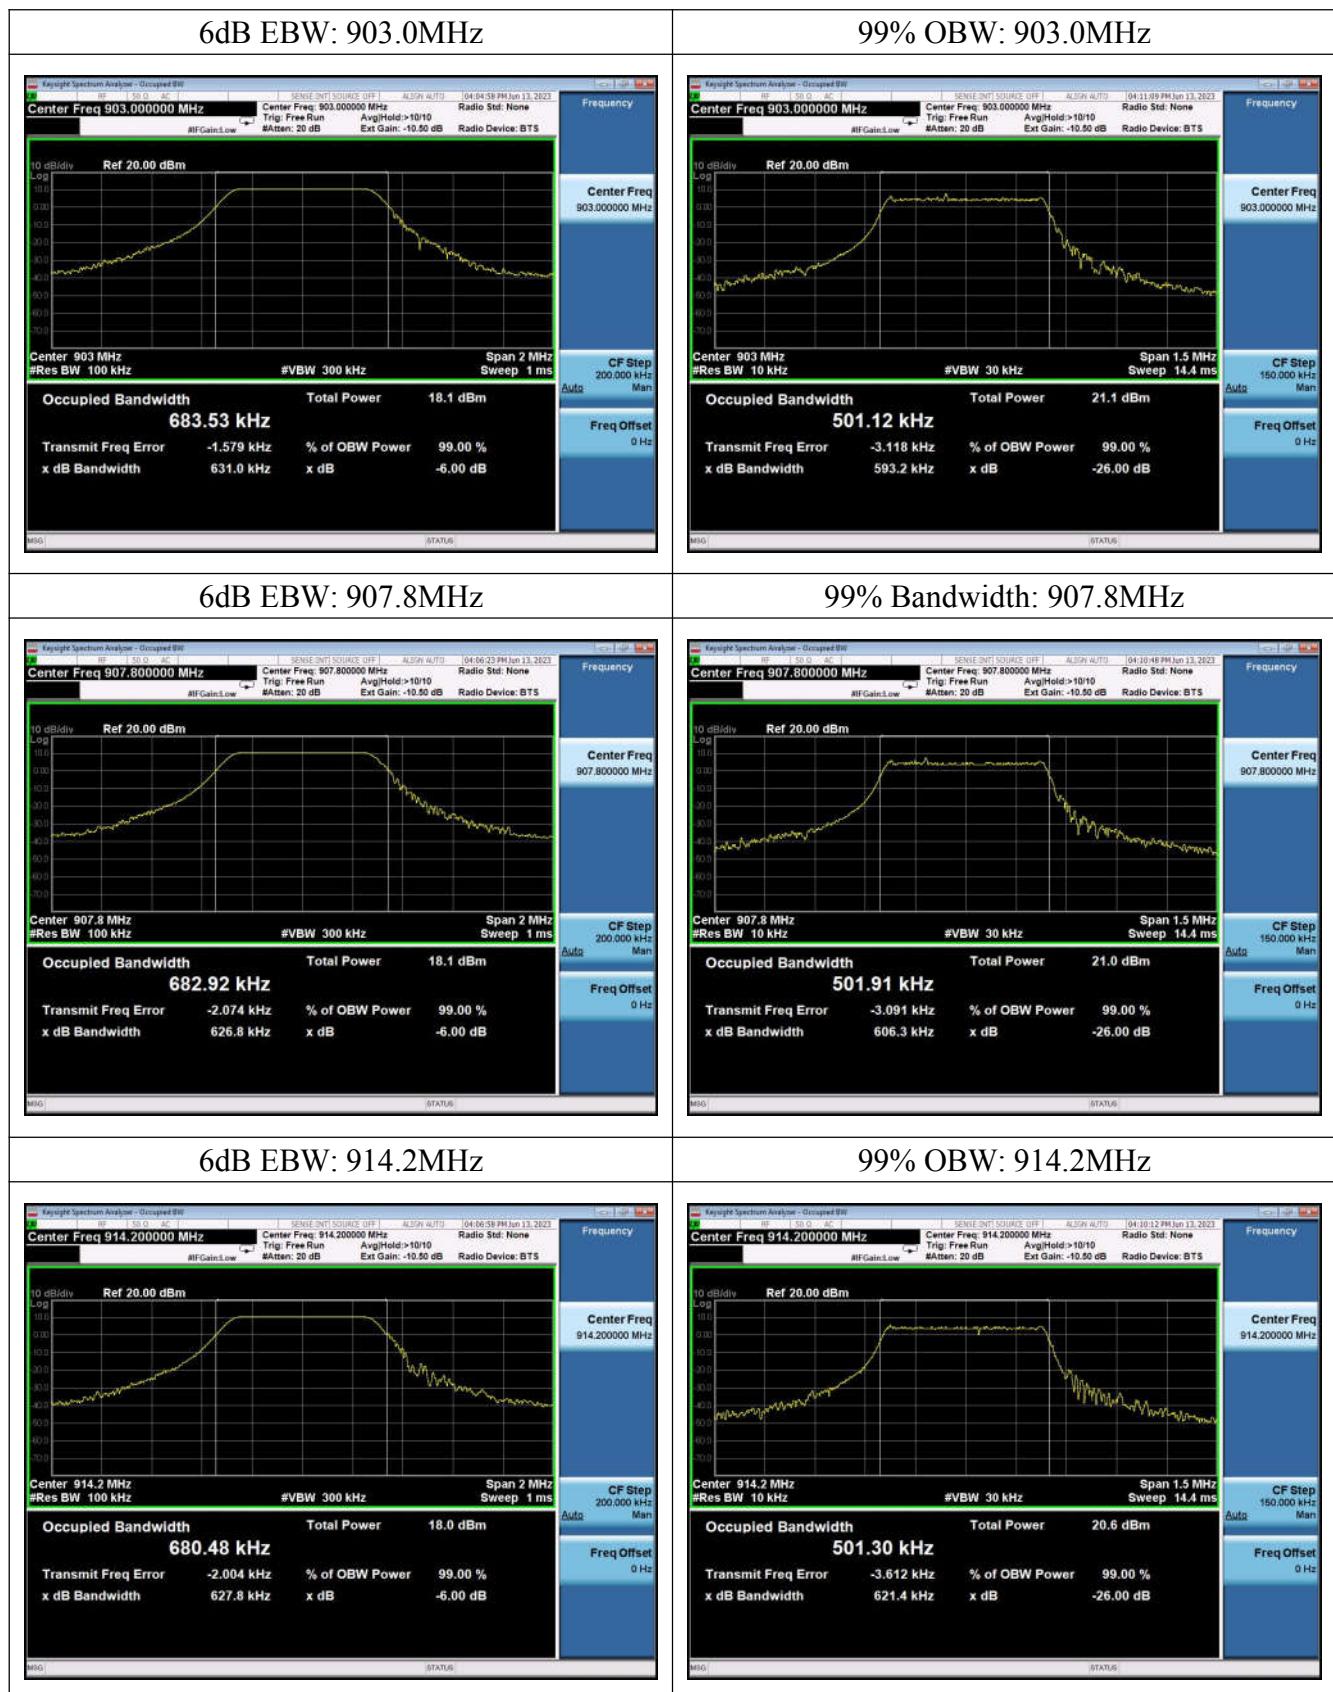

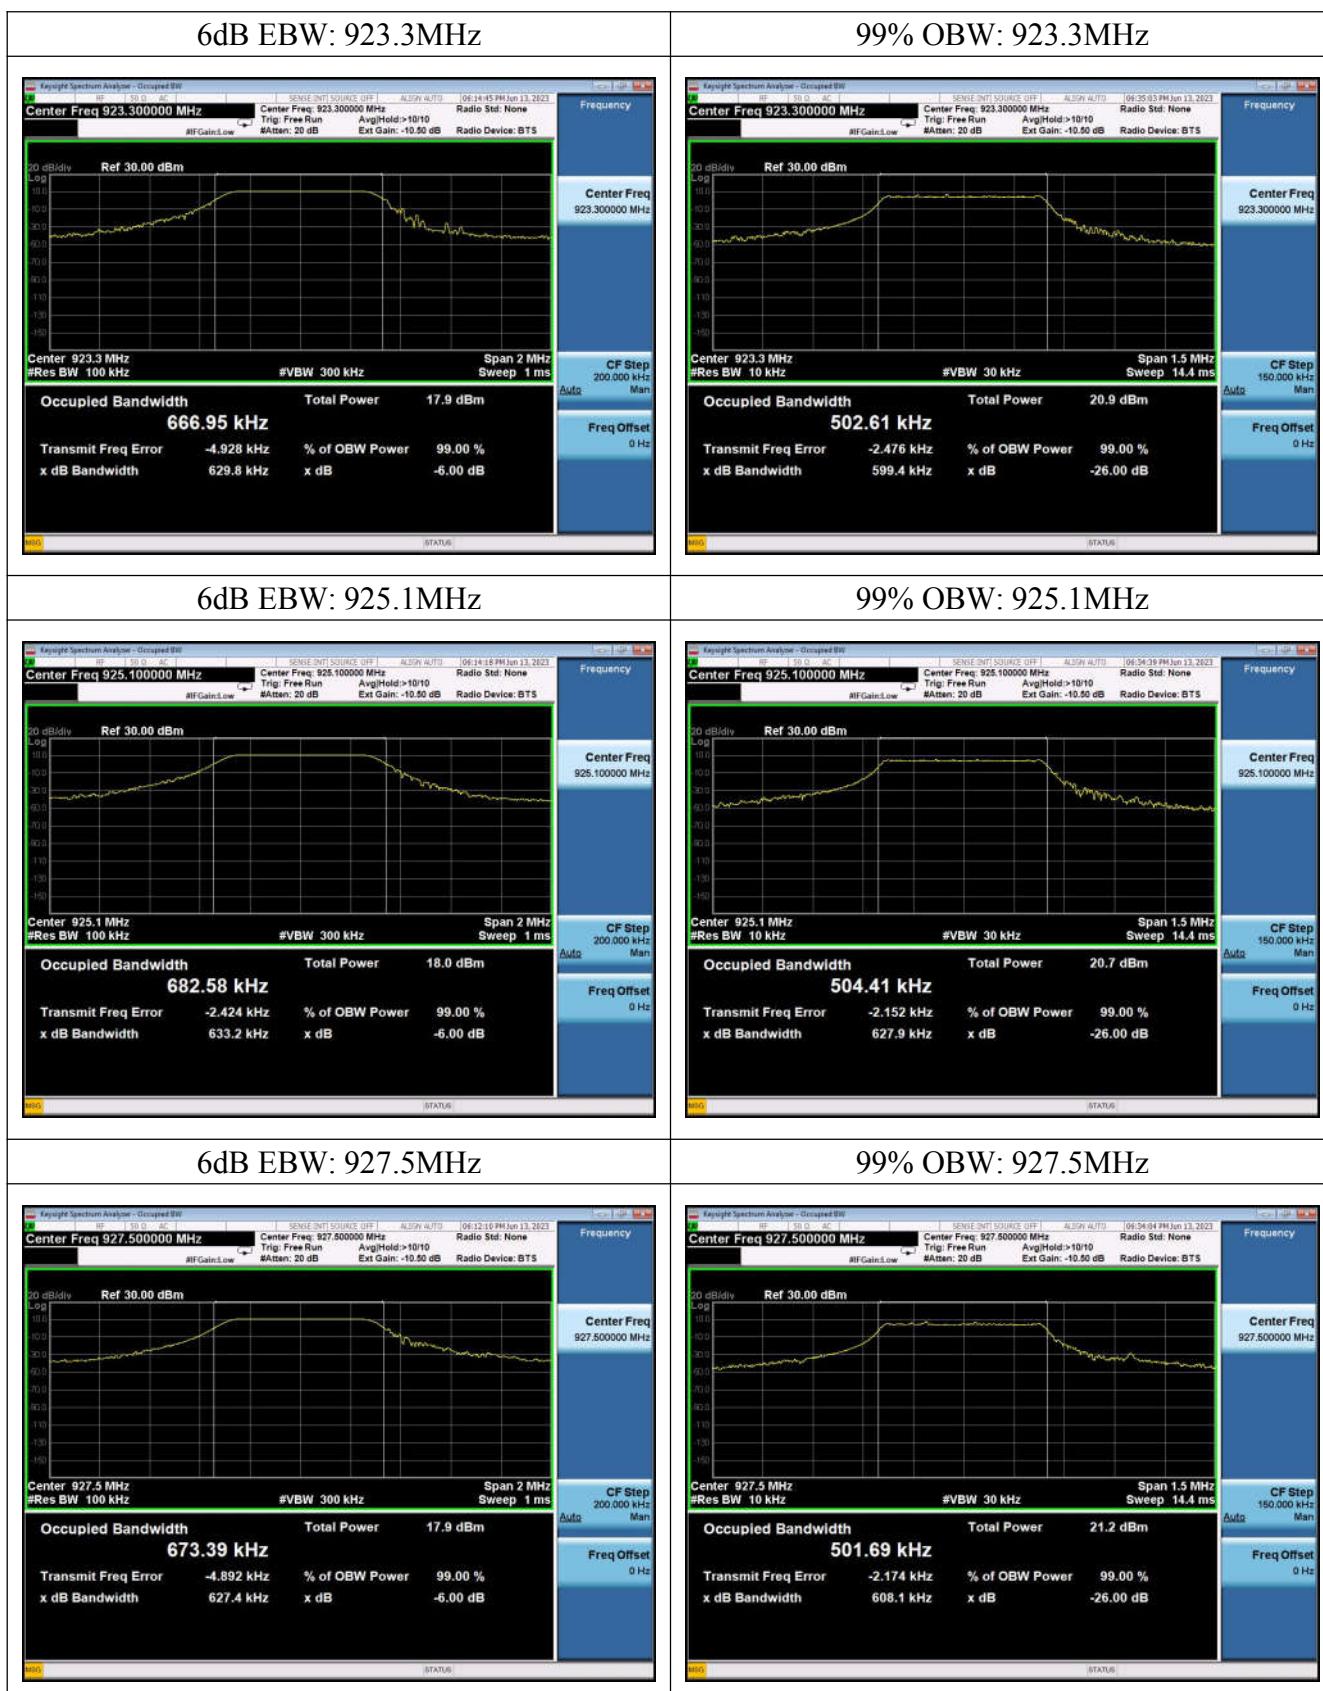

2.4. Power spectral density (PSD)


2.4.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Setup

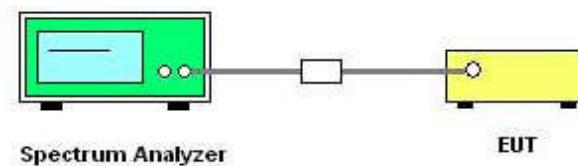

2.4.4. Test Procedures


1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.10.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
Set instrument center frequency to DTS channel center frequency / Set the span to 1.5 times the DTS bandwidth / RBW: 3kHz / VBW: 10kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum power level.
5. Record the measurement results in the test report.

2.4.5. Test Results of Power spectral density


LoRaWAN_903.0~914.2MHz			
Test Frequency	PSD(dBm/3kHz)	Limit(dBm/3kHz)	Result
903.0	0.219	8	Pass
907.8	0.774		Pass
914.2	0.619		Pass

LoRaWAN_923.3~927.5MHz			
Test Frequency	PSD(dBm/3kHz)	Limit(dBm/3kHz)	Result
923.3	-0.116	8	Pass
925.1	0.773		Pass
927.5	0.471		Pass


Power spectral density: 903.0MHz

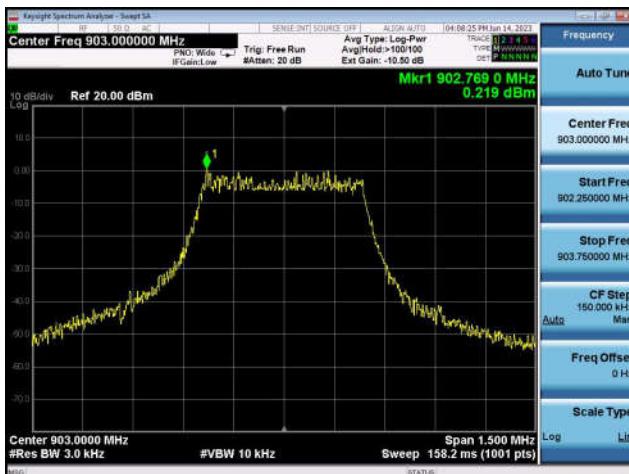


Power spectral density: 923.3MHz

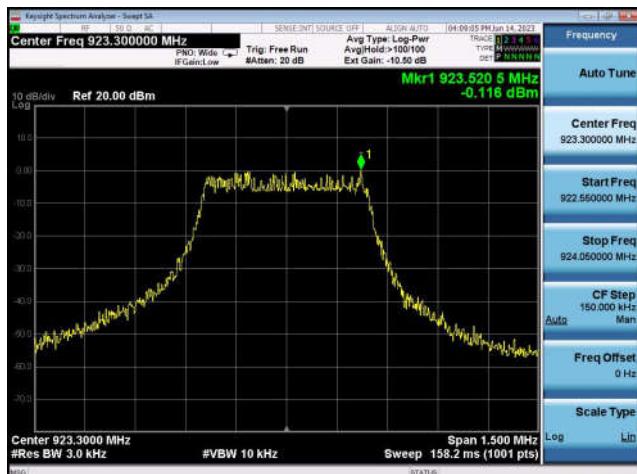


Power spectral density: 907.8MHz

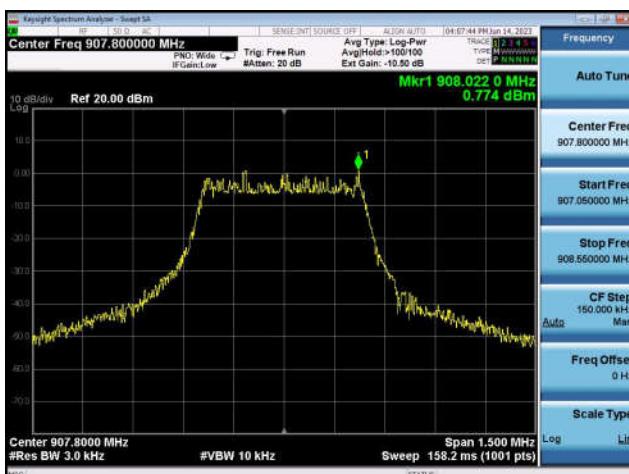


Power spectral density: 925.1MHz

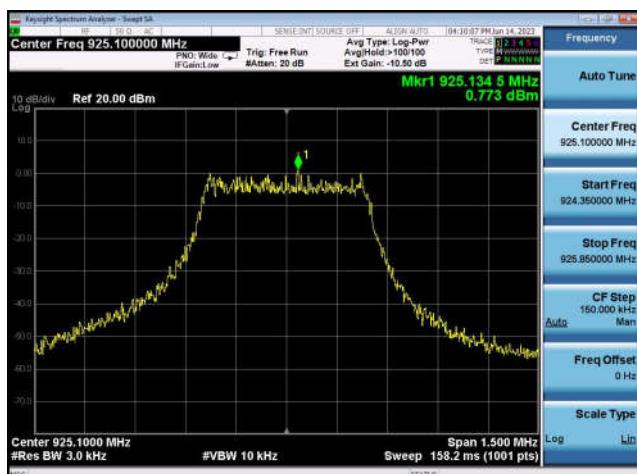

Power spectral density: 914.2MHz

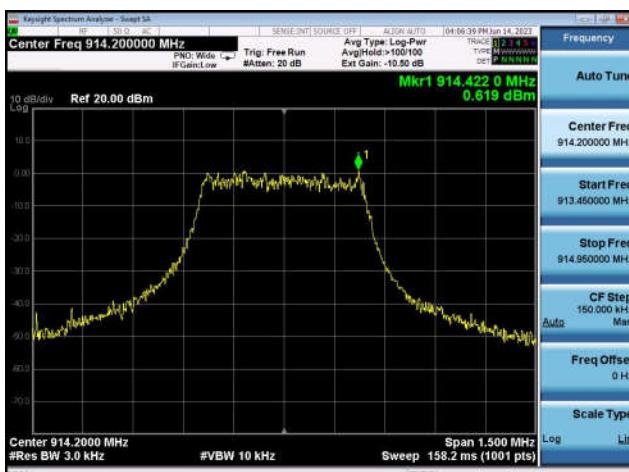

Power spectral density: 927.5MHz

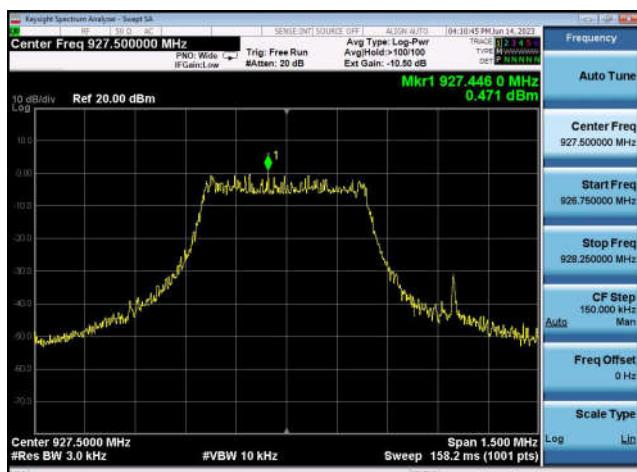

2.5. Conducted Band Edges and Spurious Emissions


2.5.1. Limit of Conducted Band Edges and Spurious Emissions

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

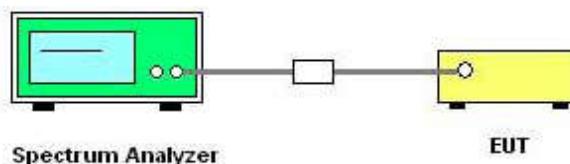

2.5.4. Test Procedure

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.11 and 11.13.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:



Reference level measurement: Set spectrum analyzer center frequency to DTS channel center frequency / Set the span to ≥ 1.5 times the DTS bandwidth / RBW: 100kHz / VBW: 300kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum PSD level and attenuate it by 20dB.

Emission level measurement: Set the center frequency and span to encompass frequency range to be measured / RBW: 100kHz / VBW: 300kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum amplitude level.


5. Record the measurement results in the test report.

2.5.5. Test Results of Conducted Band Edges and Spurious Emissions


LoRaWAN_903.0~914.2MHz:

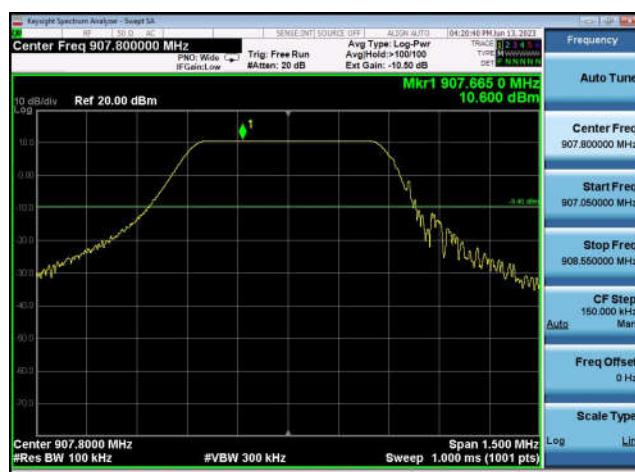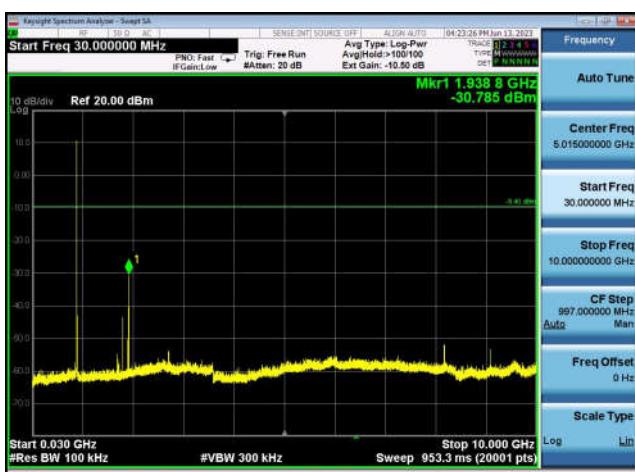Referecy Level: 903.0MHz	Conducted Spurious Emission: 903.0MHz
	
Referecy Level: 907.8MHz	Conducted Spurious Emission: 907.8MHz
	
Referecy Level: 914.2MHz	Conducted Spurious Emission: 914.2MHz
	

Conducted Band Edge: 903.0MHz

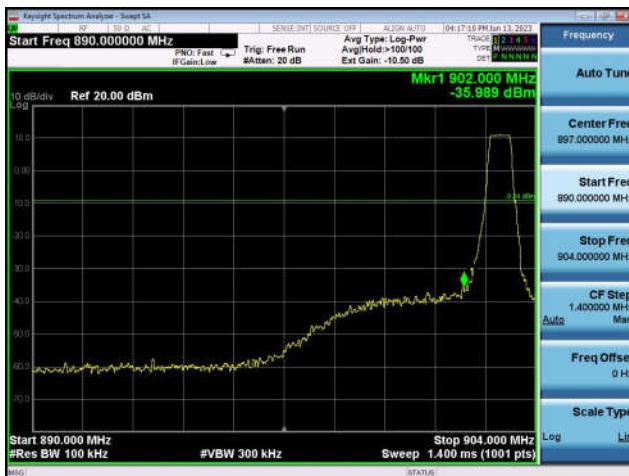


Conducted Band Edge: 914.2MHz

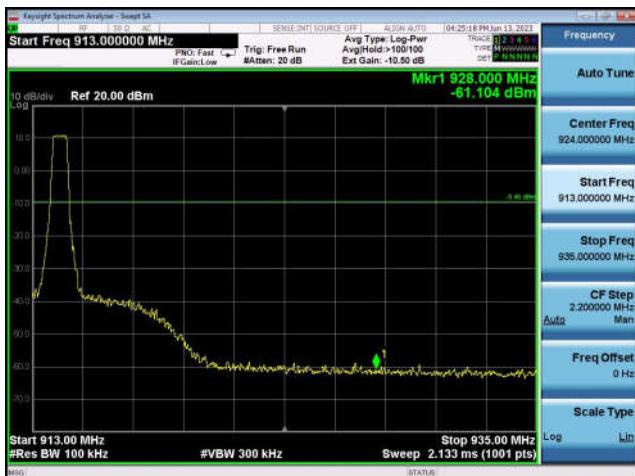


LoRaWAN_923.3~927.5MHz:


Referecy Level: 923.3MHz

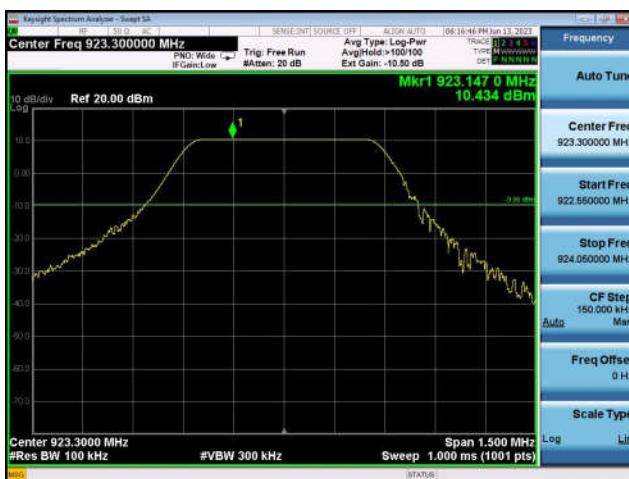


Conducted Spurious Emission: 923.3MHz

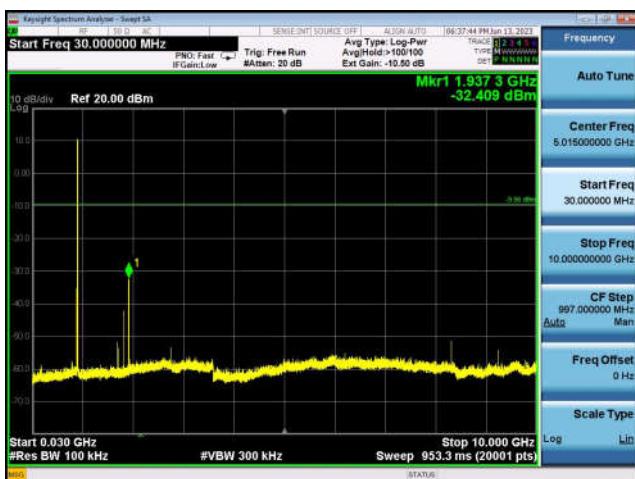

Referecy Level: 925.1MHz

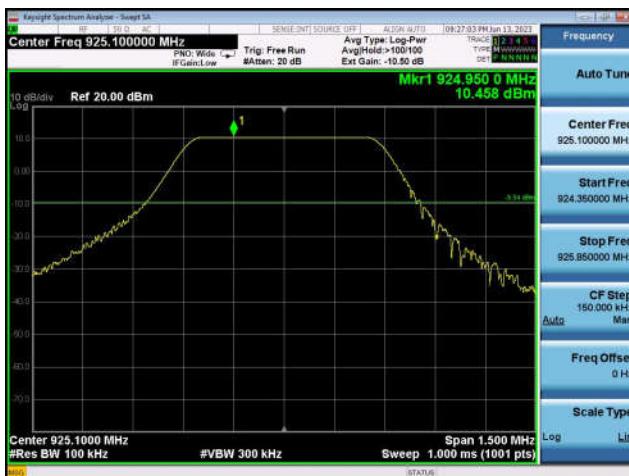

Conducted Spurious Emission: 925.1MHz

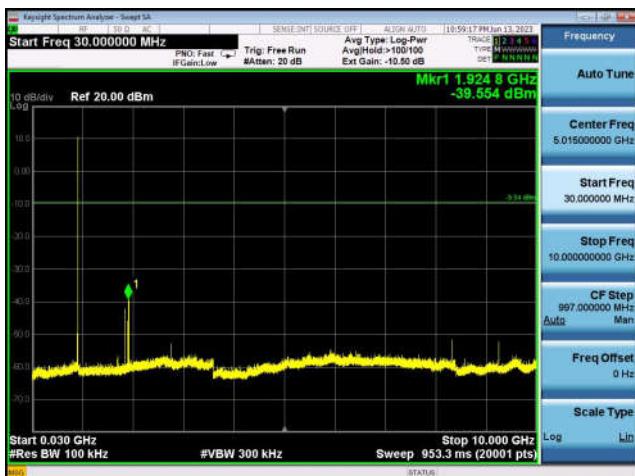

Referecy Level: 927.5MHz



Conducted Spurious Emission: 927.5MHz



Conducted Band Edge: 923.3MHz



Conducted Band Edge: 927.5MHz



2.6. Radiated Band Edge and Spurious Emission

2.6.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level. If the transmitter uses an RMS average conducted power limit, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

§15.209(a) Radiated emission limits:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Restricted bands of operation refer to §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41	/	/	/

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


²Above 38.6.

2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup


For radiated emissions from 9 kHz to 30 MHz

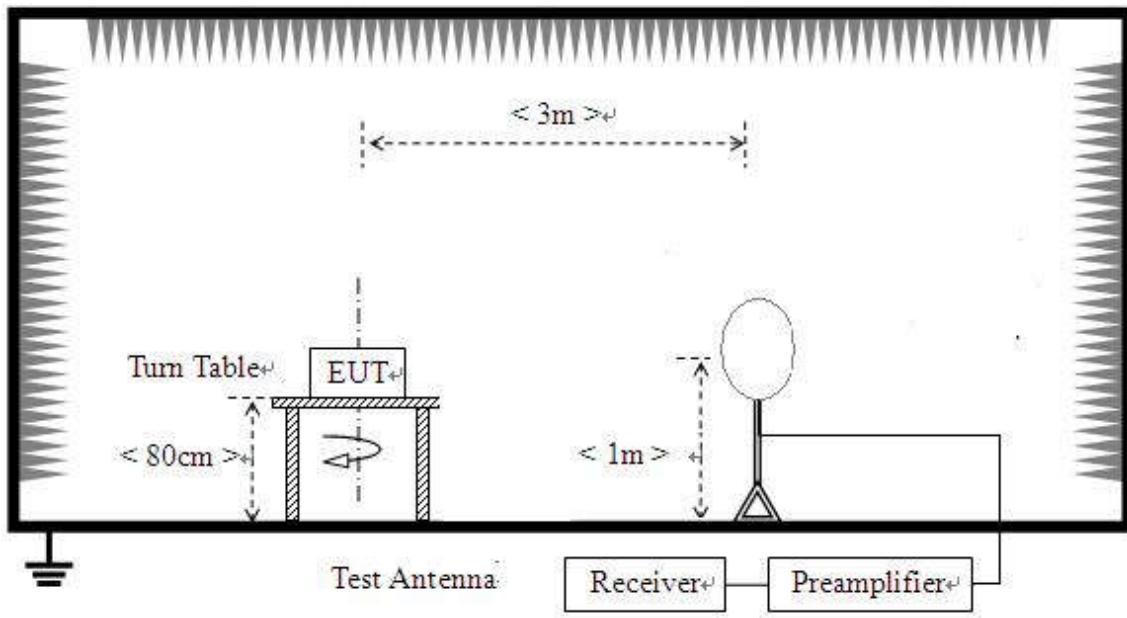

For radiated emissions from 30MHz to 1GHz

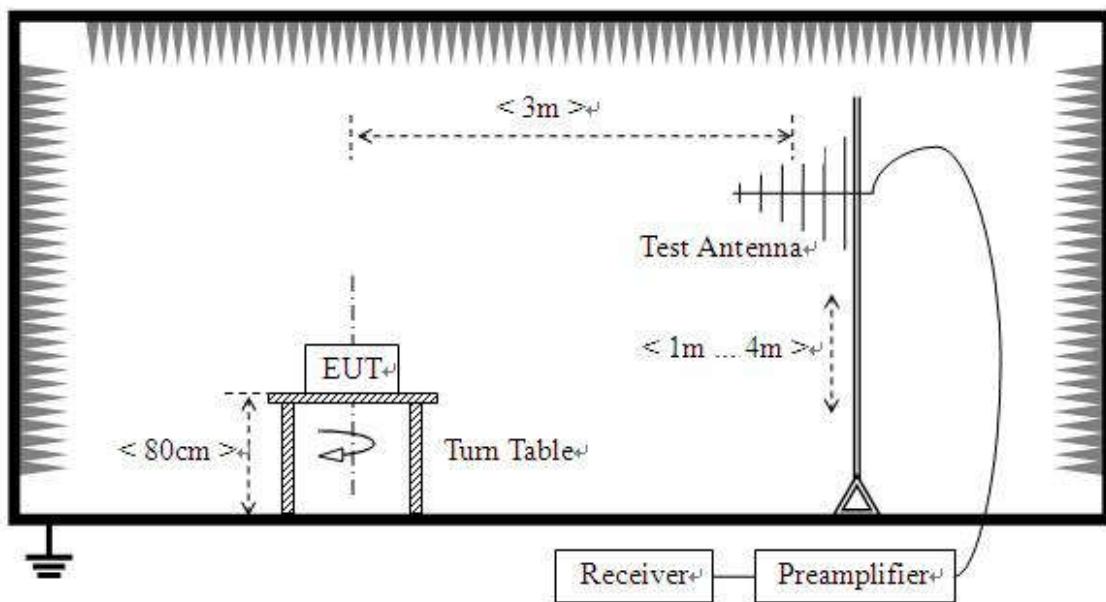

For radiated emissions above 1GHz

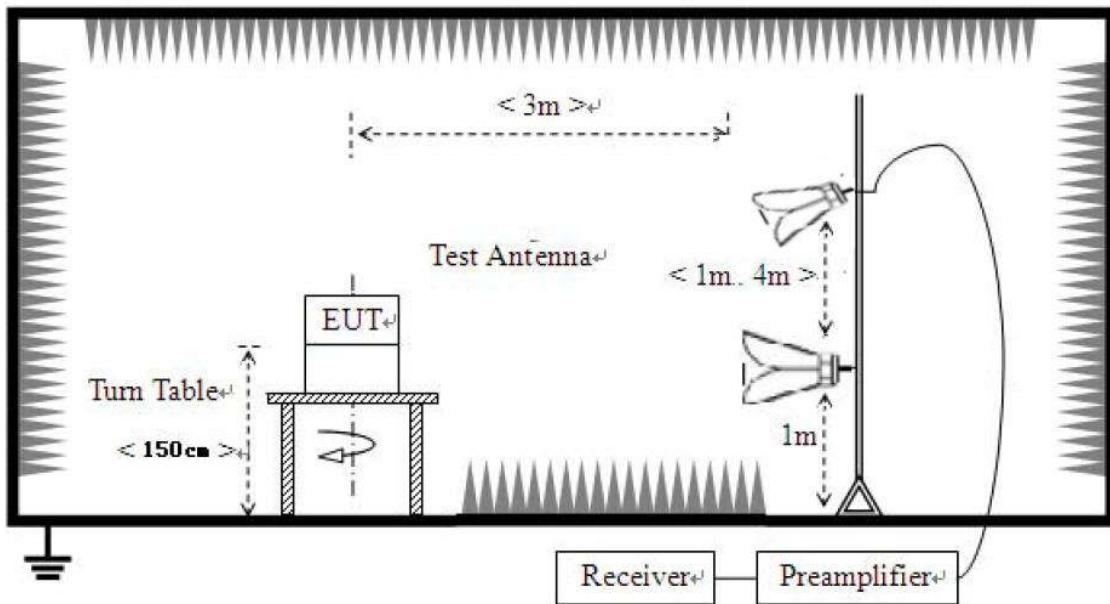

2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8m for below 1GHz and 1.5m for above 1GHz above the ground at a 3 meters semi-anechoic chamber.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then

reported in a data sheet.

7. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

2.6.5. Test Results of Radiated Band Edge and Spurious Emission


Note 1: For 9 kHz to 30MHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note 2: For 30MHz to 1GHz, All of the EUT Configure mode were tested and found 903.0MHz channel is the worst mode, the worst case is recorded in this report.

Note 3: For 1GHz to 10GHz, All of the EUT Configure mode were tested and found 903.0MHz and 927.5MHz channel is the worst mode, the worst case is recorded in this report.

Note 4: Antenna height and turntable angle are the worst positions, the worst case is recorded in this report.


Note 5: Three antennas have been tested and External Antenna 2 was found to be the worst, the worst case is recorded in this report.

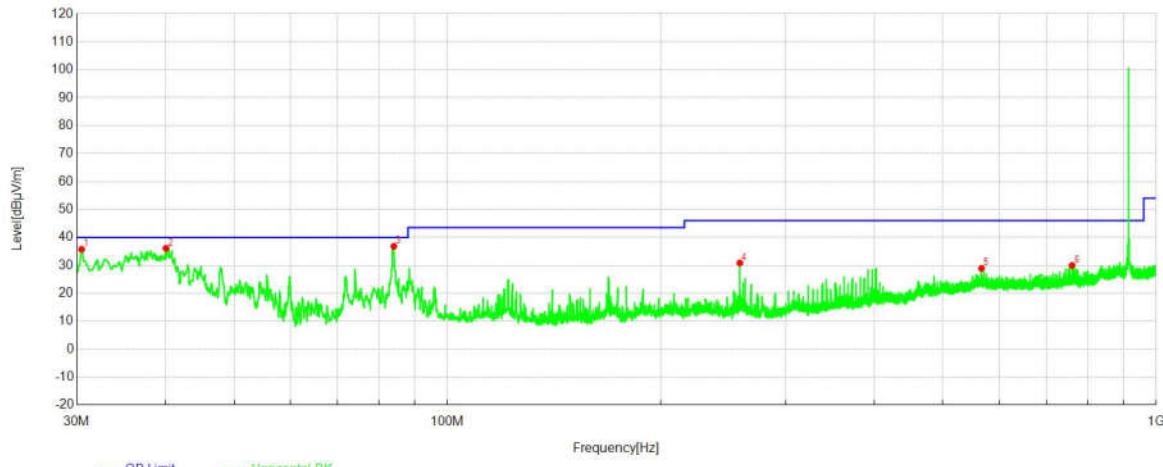For 30MHz to 1000MHz


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Height [cm]	Angle [°]	Polarity
1	30.49	35.75	19.04	40.00	4.25	100	300	Horizontal
2	40.09	36.09	14.91	40.00	3.91	100	30	Horizontal
3	84.03	36.81	10.16	40.00	3.19	100	90	Horizontal
4	258.55	30.86	12.08	46.00	15.14	100	210	Horizontal
5	566.85	28.91	20.43	46.00	17.09	100	280	Horizontal
6	760.77	29.95	23.06	46.00	16.05	100	80	Horizontal

Test Result: Pass
Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

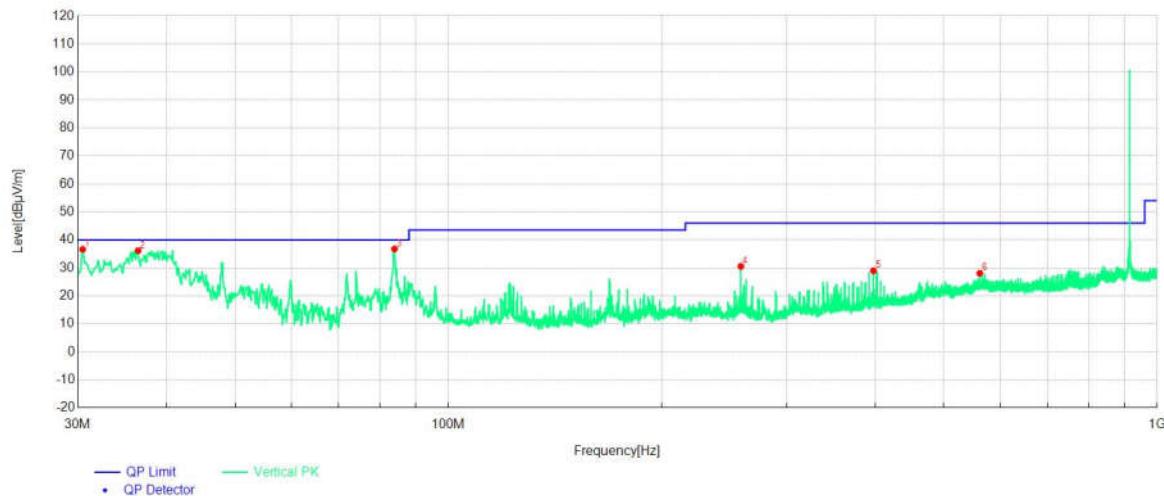

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Height [cm]	Angle [°]	Polarity
1	30.49	36.60	19.04	40.00	3.40	100	300	Vertical
2	36.50	36.15	16.46	40.00	3.85	100	20	Vertical
3	83.94	36.74	10.16	40.00	3.26	100	90	Vertical
4	258.55	30.54	12.08	46.00	15.46	100	300	Vertical
5	397.76	28.97	16.59	46.00	17.03	100	300	Vertical
6	561.90	28.07	20.34	46.00	17.93	100	260	Vertical


Test Result: Pass

Remark:


1. Emission Level(dB μ V/m) = Raw Value(dB μ V) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

Restricted-band band-edge: 608MHz~614MHz

LoRa_903.0MHz: Horizontal

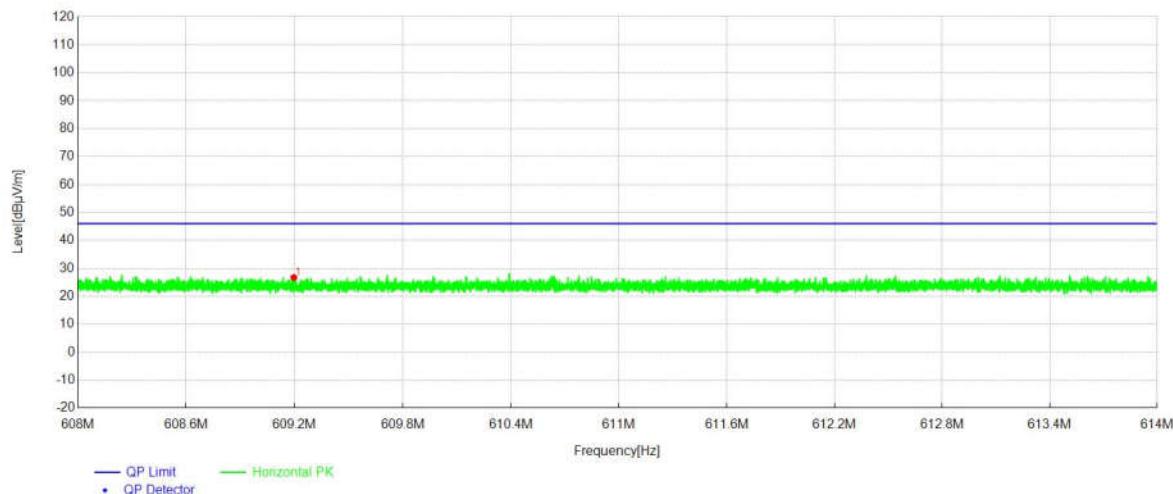

LoRa_903.0MHz: Vertical


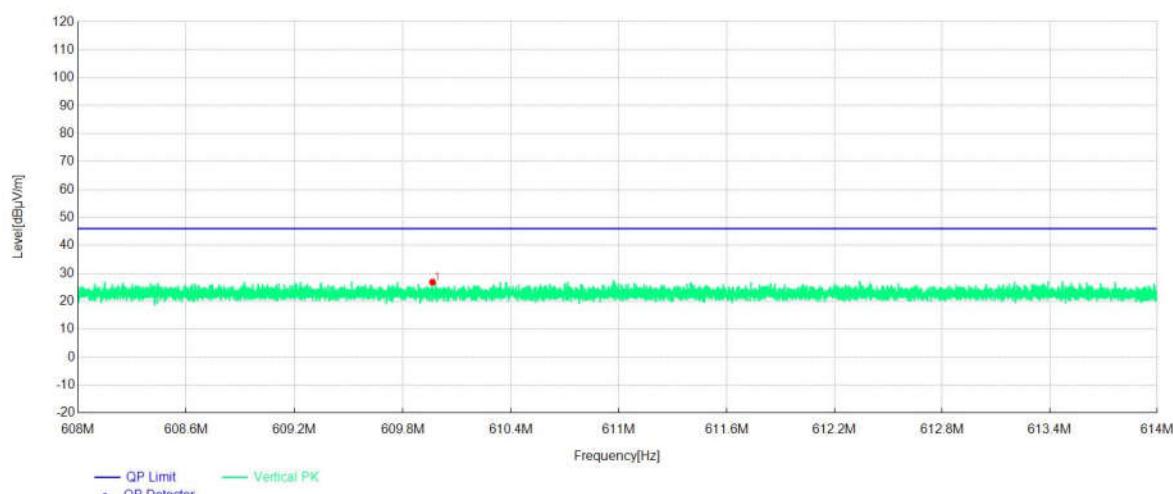


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Height [cm]	Angle [°]	Polarity
1	609.20	26.70	20.70	46.00	19.30	100	180	Horizontal
2	609.97	26.84	20.70	46.00	19.16	100	50	Vertical

Test Result: Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

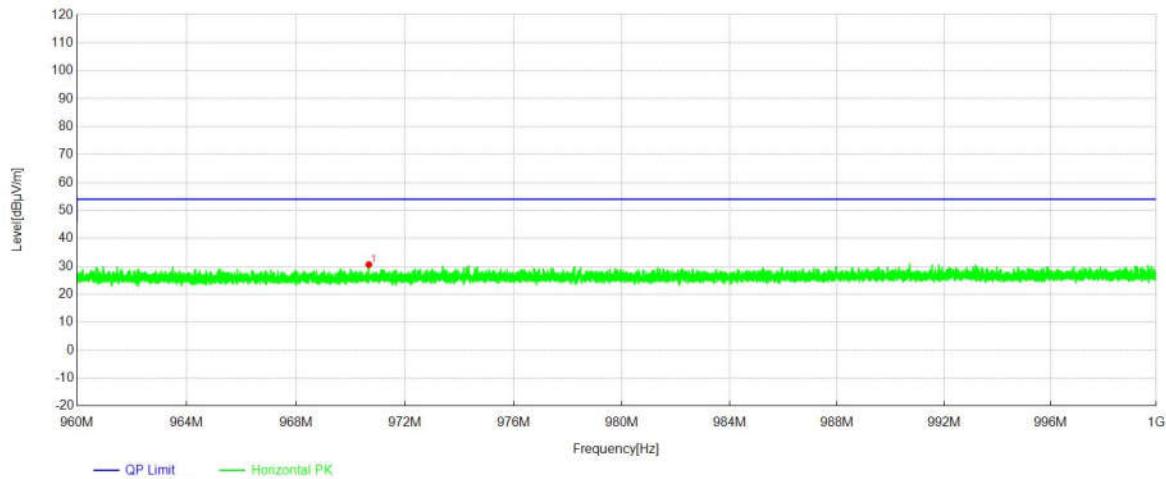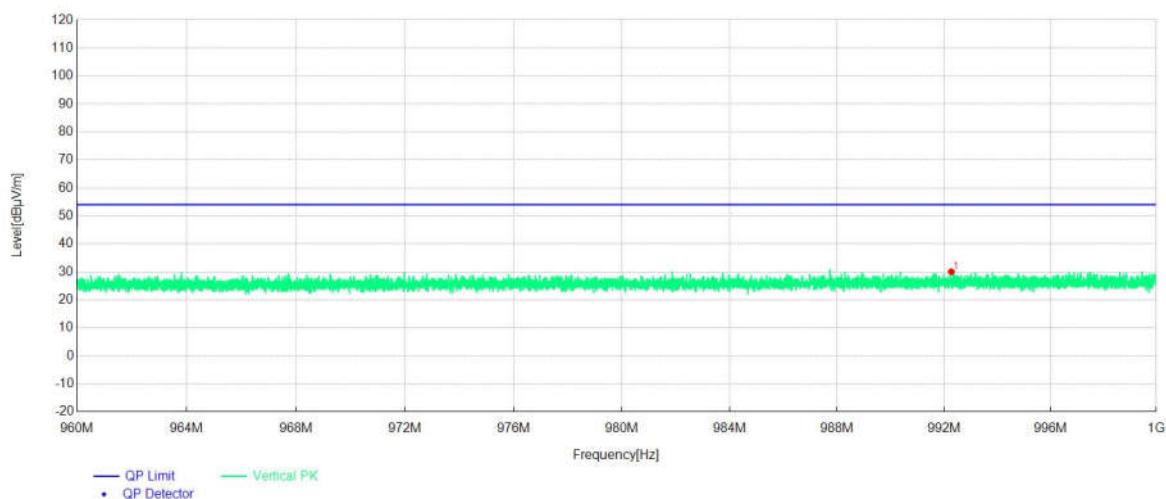Restricted-band band-edge: 960MHz~1000MHz
LoRa_927.5MHz: Horizontal

LoRa_927.5MHz: Vertical


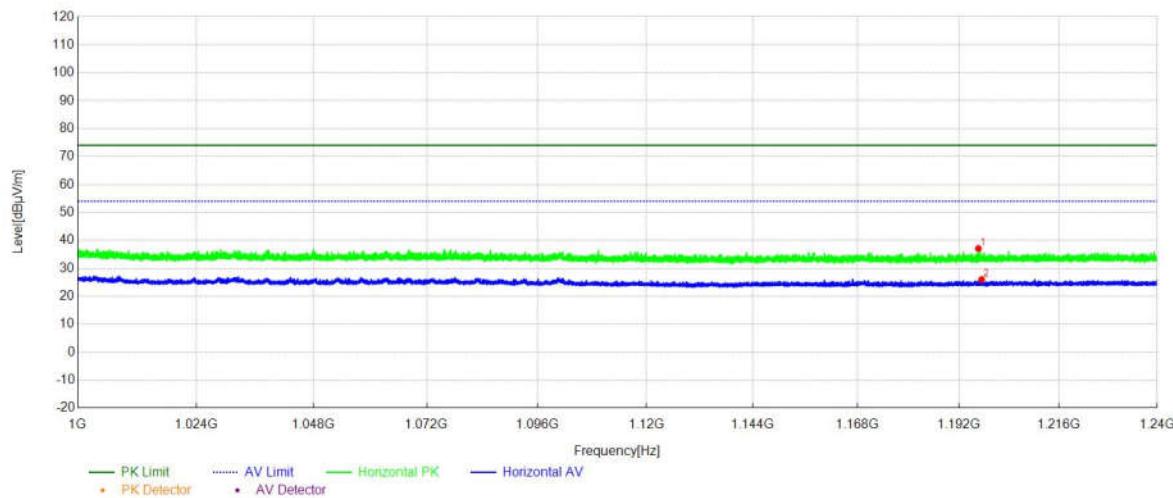
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Height [cm]	Angle [°]	Polarity
1	970.66	30.62	25.46	54.00	23.38	100	0	Horizontal
2	992.28	30.03	25.81	54.00	23.97	100	4	Vertical

Test Result: Pass
Remark:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

Restricted-band band-edge: 1000MHz~1240MHz

LoRa_927.5MHz: Horizontal



LoRa_927.5MHz: Vertical

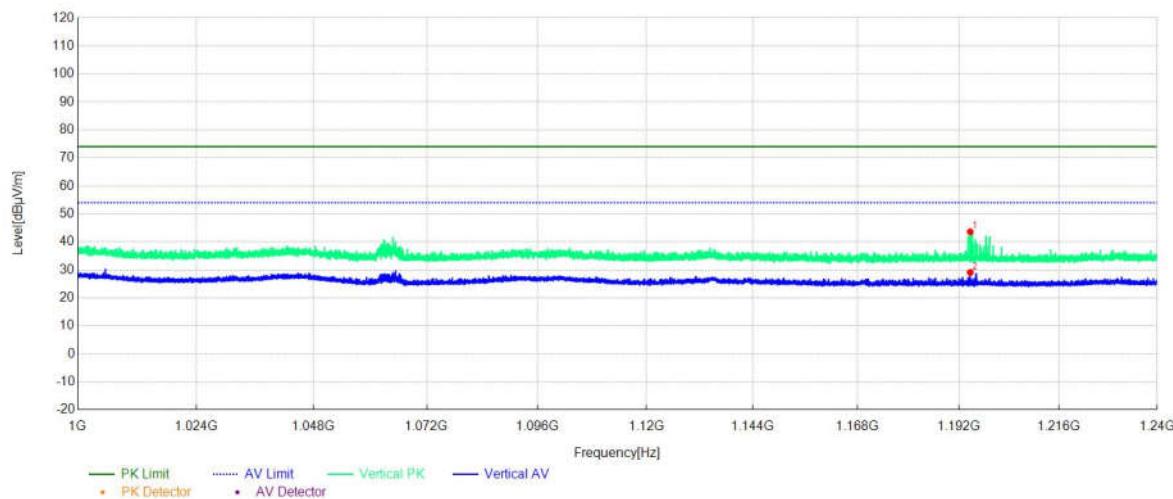


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin[dB μ V/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1196.58	37.09	-13.17	74.00	36.91	PK	150	330	Horizontal
2	1197.35	25.99	-13.17	54.00	28.01	AV	150	350	Horizontal
3	1194.64	43.59	-13.15	74.00	30.41	PK	150	210	Vertical
4	1194.64	29.06	-13.15	54.00	24.94	AV	150	210	Vertical

Test Result: Pass

Remark:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

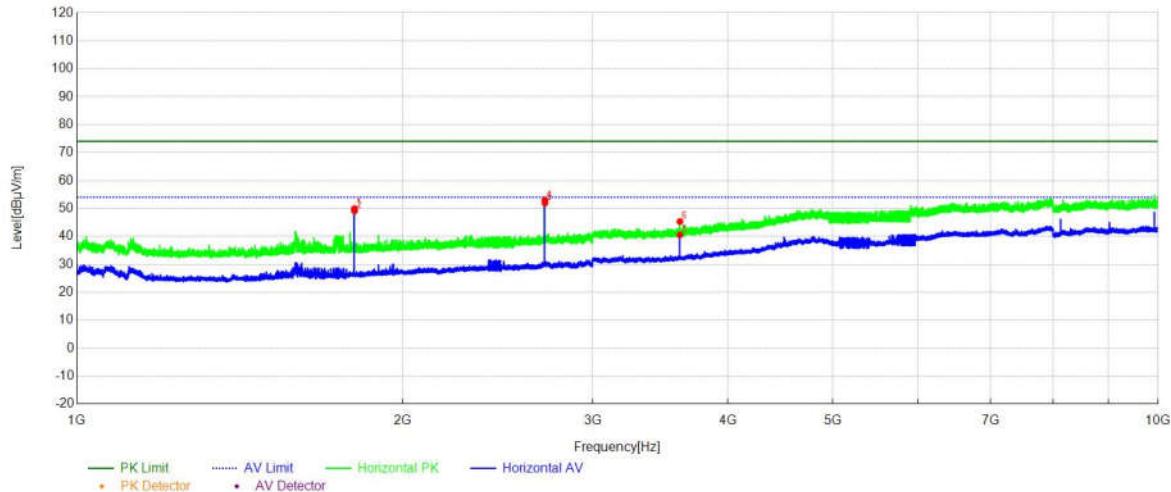For 1GHz to 10GHz:
LoRa_903.0MHz


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1805.6	49.94	-11.42	74.00	24.06	PK	150	297	Horizontal
2	1806.2	49.07	-11.43	54.00	4.93	AV	150	289	Horizontal
3	2709.3	52.95	-7.97	74.00	21.05	PK	150	289	Horizontal
4	2709.3	51.91	-7.97	54.00	2.09	AV	150	289	Horizontal
5	3611.16	40.53	-5.15	54.00	13.47	AV	150	314	Horizontal
6	3611.51	45.34	-5.14	74.00	28.66	PK	150	97	Horizontal

Test Result: Pass
Remark:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

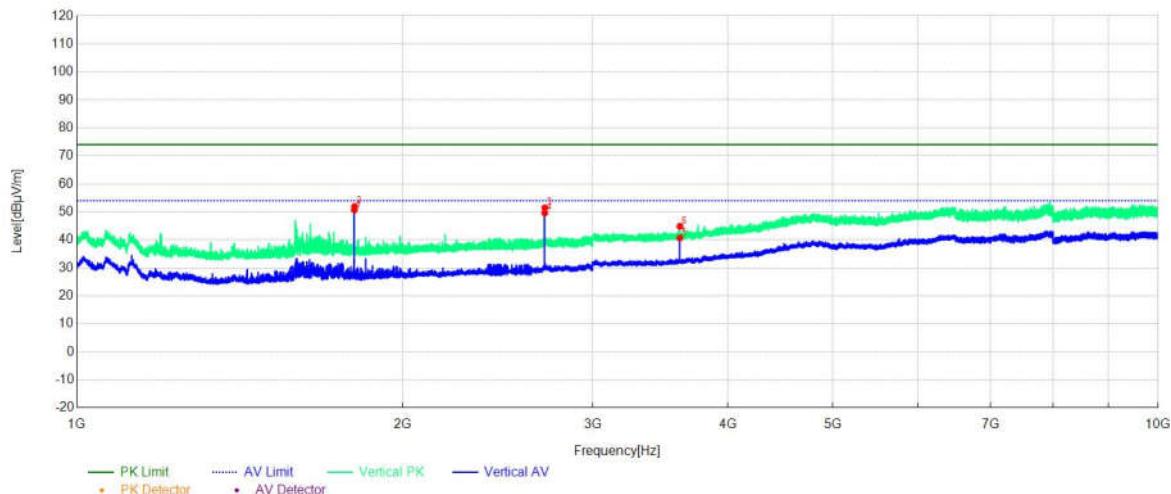LoRa_903.0MHz


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1805.8	50.69	-11.42	54.00	3.31	AV	150	151	Vertical
2	1806.2	51.94	-11.43	74.00	22.06	PK	150	112	Vertical
3	2708.3	49.59	-7.98	54.00	4.41	AV	150	326	Vertical
4	2708.3	51.42	-7.98	74.00	22.58	PK	150	326	Vertical
5	3611.16	40.68	-5.15	54.00	13.32	AV	150	322	Vertical
6	3611.51	44.85	-5.14	74.00	29.15	PK	150	322	Vertical

Test Result: Pass
Remark:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

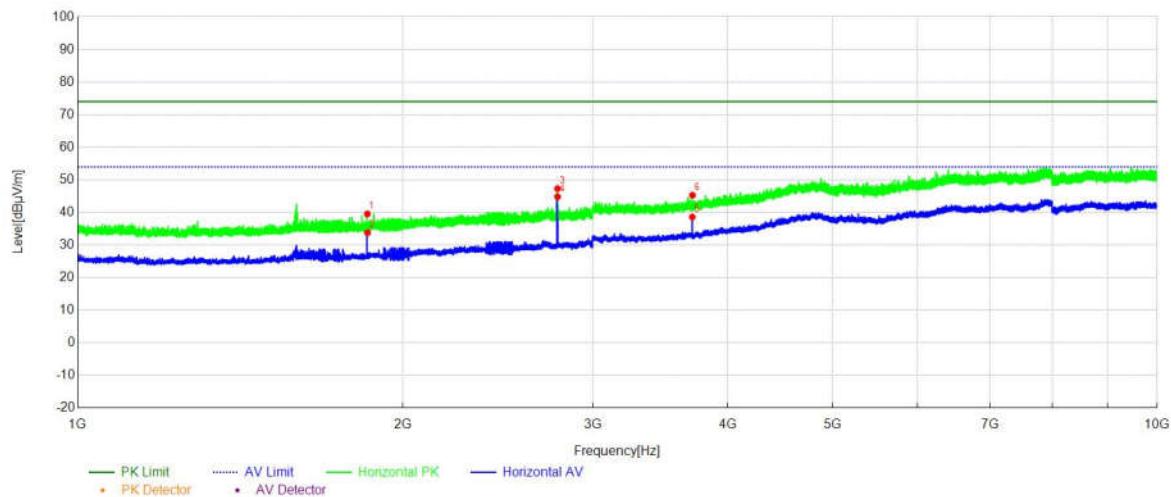LoRa_927.5MHz


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1854.4	39.53	-11.27	74.00	34.47	PK	150	280	Horizontal
2	1855.4	33.77	-11.27	54.00	20.23	AV	150	320	Horizontal
3	2782.7	47.32	-7.82	74.00	26.68	PK	150	10	Horizontal
4	2782.7	44.81	-7.82	54.00	9.19	AV	150	10	Horizontal
5	3709.5	38.61	-4.71	54.00	15.39	AV	150	210	Horizontal
6	3710.5	45.28	-4.71	74.00	28.72	PK	150	50	Horizontal

Test Result: Pass
Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

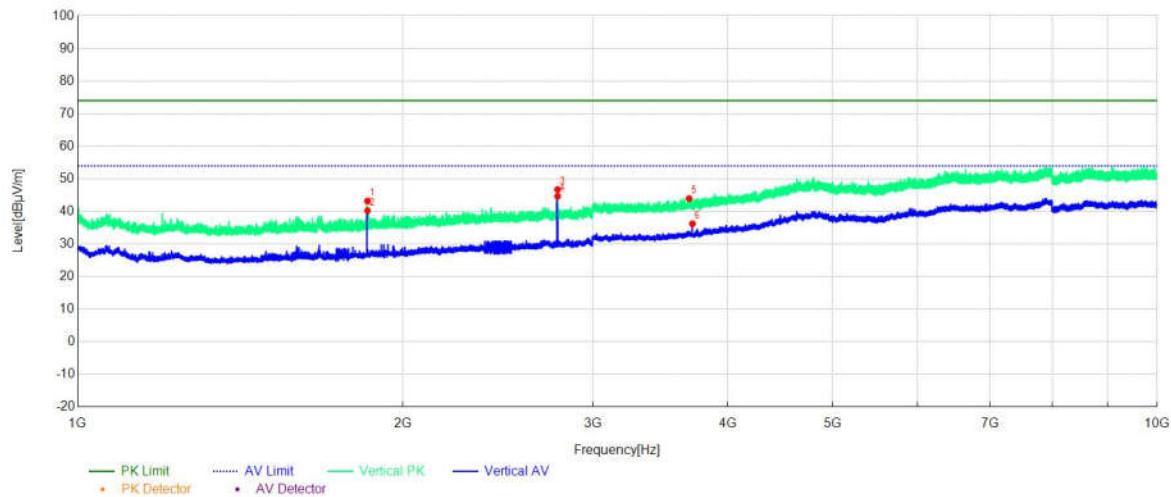LoRa_927.5MHz


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB μ V/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1855.2	43.18	-11.27	74.00	30.82	PK	150	320	Vertical
2	1855.2	40.27	-11.27	54.00	13.73	AV	150	340	Vertical
3	2783.1	46.72	-7.82	74.00	27.28	PK	150	10	Vertical
4	2783.1	44.66	-7.82	54.00	9.34	AV	150	10	Vertical
5	3684.3	43.94	-4.81	74.00	30.06	PK	150	310	Vertical
6	3710.5	36.22	-4.71	54.00	17.78	AV	150	80	Vertical

Test Result: Pass
Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

2.7. AC Power Line Conducted Emission

2.7.1. Limit of AC Power Line Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3. Test Setup

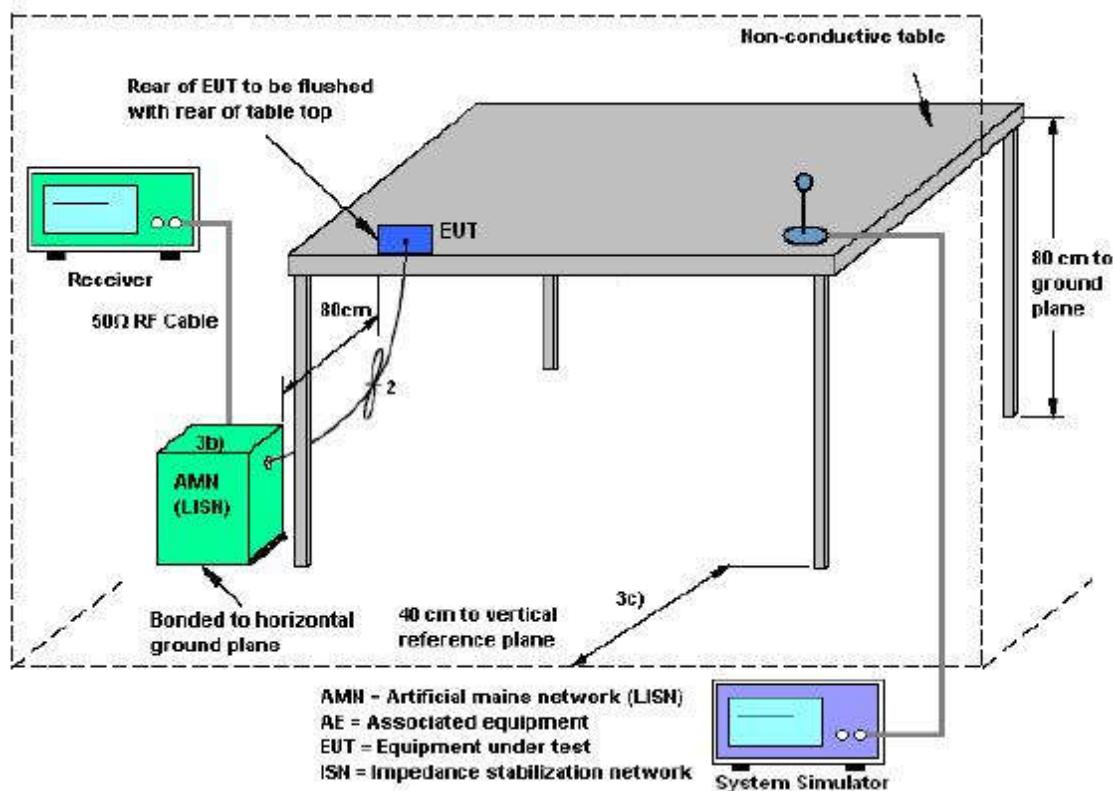

2.7.4. Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.7.5. Test Results of Conducted Emission

Note: Not applicable, EUT is battery powered equipment.

3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2022.07.21	2023.07.20
2	5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
3	Loop Antenna	Schwarz beck	HFH2-Z2	A0304220	2022.05.02	2025.05.01
4	Broadband antenna (30MHz~1GHz)	R&S	HL562	A0304224	2020.06.19	2023.06.18
5	EMI Horn Ant. (1-18G)	ETC	1209	A150402241	2021.01.02	2024.01.01
6	Horn antenna (18GHz~26.5GHz)	AR	AT4510	A0804450	2020.06.19	2023.06.18
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2022.12.13	2023.12.12
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2022.12.13	2023.12.12
9	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2023.02.20	2024.02.19
10	Test Receiver	KEYSIGHT	N9038A	A141202036	2022.07.21	2023.07.20
11	LISN	ROHDE&SCHWARZ	ENV216	A140701847	2022.07.21	2023.07.20
12	Cable	MATCHING PAD	W7	/	2022.07.21	2023.07.20

4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Power Line Conducted Emission Measurement (150KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (9KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	3.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	3.91dB
---	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	4.5dB
---	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	4.9dB
---	-------

Uncertainty of RF Conducted Measurement (9KHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2U _c (y))	1.3dB
---	-------

END OF REPORT