



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Xiamen Milesight IoT Co., Ltd.

Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China

FCC ID: 2AYHY-UC51XV3

Product Name: Solenoid Valve Controller

Standard(s): 47 CFR Part 15, Subpart C(15.247)

ANSI C63.10-2013

KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230310619-00A

Date Of Issue: 2023/6/28

Reviewed By: Julie Tan

Title: RF Engineer

Julie Tan

Approved By: Sun Zhong

Title: Manager

Sun Zhong

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	16
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	17
3.2.4 Test Procedure	17
3.2.5 Corrected Amplitude & Margin Calculation.....	17
3.3 20 DB BANDWIDTH.....	18
3.3.1 Applicable Standard.....	18
3.3.2 EUT Setup.....	18
3.3.3 Test Procedure	18
3.4 CHANNEL SEPARATION	20
3.4.1 Applicable Standard.....	20
3.4.2 EUT Setup.....	20
3.4.3 Test Procedure	20
3.5 NUMBER OF HOPPING FREQUENCY	21
3.5.1 Applicable Standard.....	21
3.5.2 EUT Setup.....	21
3.5.3 Test Procedure	21
3.6 TIME OF OCCUPANCY (DWELL TIME)	22
3.6.1 Applicable Standard.....	22
3.6.2 EUT Setup.....	22
3.6.3 Test Procedure	22

3.7 MAXIMUM CONDUCTED OUTPUT POWER.....	24
3.7.1 Applicable Standard.....	24
3.7.2 EUT Setup.....	24
3.7.3 Test Procedure	24
3.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	25
3.8.1 Applicable Standard.....	25
3.8.2 EUT Setup.....	25
3.8.3 Test Procedure	25
3.9 ANTENNA REQUIREMENT.....	26
3.9.1 Applicable Standard.....	26
3.9.2 Judgment.....	26
4. TEST DATA AND RESULTS	27
4.1 AC LINE CONDUCTED EMISSIONS.....	27
4.2 RADIATION SPURIOUS EMISSIONS.....	28
4.3 20 DB EMISSION BANDWIDTH:	47
4.4 CHANNEL SEPARATION:	49
4.5 NUMBER OF HOPPING FREQUENCY:	51
4.6 TIME OF OCCUPANCY (DWELL TIME):.....	53
4.7 MAXIMUM CONDUCTED OUTPUT POWER:	55
4.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:	57
5. RF EXPOSURE EVALUATION	60
5.1 APPLICABLE STANDARD.....	60
5. 2 PROCEDURE.....	60
5.3 MEASUREMENT RESULT	60

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230310619-00A	Original Report	2023/6/28

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Solenoid Valve Controller
EUT Model:	UC511-DI-915M
Multiple Model:	NC511-DI-915M, UC511-DI-9M, NC511-DI-9M, UC512-DI-915M, NC512-DI-915M, UC512-DI-9M, NC512-DI-9M
Operation Frequency:	902.3-927.6 MHz
Maximum Peak Output Power (Conducted):	16.51 dBm
Modulation Type:	CSS
Rated Input Voltage:	DC 3.6V from battery
Serial Number:	22VV_1 (For RF Conducted Test: UC511-DI-915M+PN:EA) 22VV_2 (For RF Radiated Test: UC511-DI-915M+PN:EA) 22VV_5 (For RF Radiated Test: UC511-DI-915M) 22VV_4 (For RF Radiated Test: UC512-DI-915M+PN:EA) 22VV_6 (For RF Radiated Test: UC512-DI-915M)
EUT Received Date:	2023/3/9
EUT Received Status:	Good
Note: The Multiple models are electrically identical with test model, please refer to the declaration letter for more detail, which was provided by manufacturer.	

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	65	915.2
2	902.5	66	915.4
...	...	...	...
...	...	...	...
...	...	126	927.4
63	914.7	127	927.6
64	914.9	/	/
Per section 15.31(m), the below frequencies were performed the test as below:			
Test Channel		Frequency (MHz)	
Lowest		902.3	
Middle		914.9	
Highest		927.6	

Antenna Information Detail▲:
For internal antenna

Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
M.gear.	PCB	50	902-928MHz	2.82 dBi
The Method of §15.203 Compliance: ☒ Antenna must be permanently attached to the unit. ☐ Antenna must use a unique type of connector to attach to the EUT. ☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

For External Antenna:

Antenna	Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
External antenna 1	Foshan Sanshui Yachuang Communication Co. LTD	Monopole	50	902-928MHz	5 dBi
External antenna 2	Wavelink	Monopole	50	902-928MHz	0.49 dBi
The Method of §15.203 Compliance: ☐ Antenna must be permanently attached to the unit. ☐ Antenna must use a unique type of connector to attach to the EUT. ☒ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.					
Note: the maximum gain antenna was used for tested.					

Accessory Information:

NO.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	Certification_Tools		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
Lora-FHSS	0	0	0

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Xiamen Milesight IoT Co., Ltd.	Solar Panel	Unknown	22VV_9
Xiamen Milesight IoT Co., Ltd.	Solenoid Valve	Unknown	22VV_10
Xiamen Milesight IoT Co., Ltd.	Solenoid Valve	Unknown	22VV_11

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Signal Cable	Yes	No	0.5	Solar Panel	EUT
Signal Cable	Yes	No	2	Solenoid Valve	EUT
Signal Cable	Yes	No	2	Solenoid Valve	EUT

1.2.4 Block Diagram of Test Setup


Radiated spurious emissions
UC511-DI-915M+PN:EA

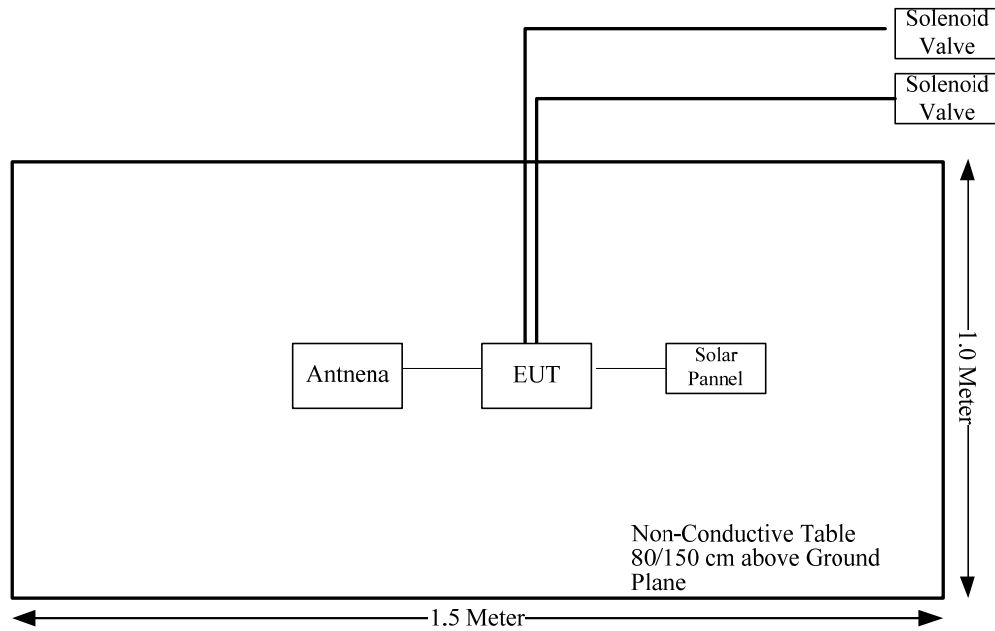

UC512-DI-915M+PN:EA

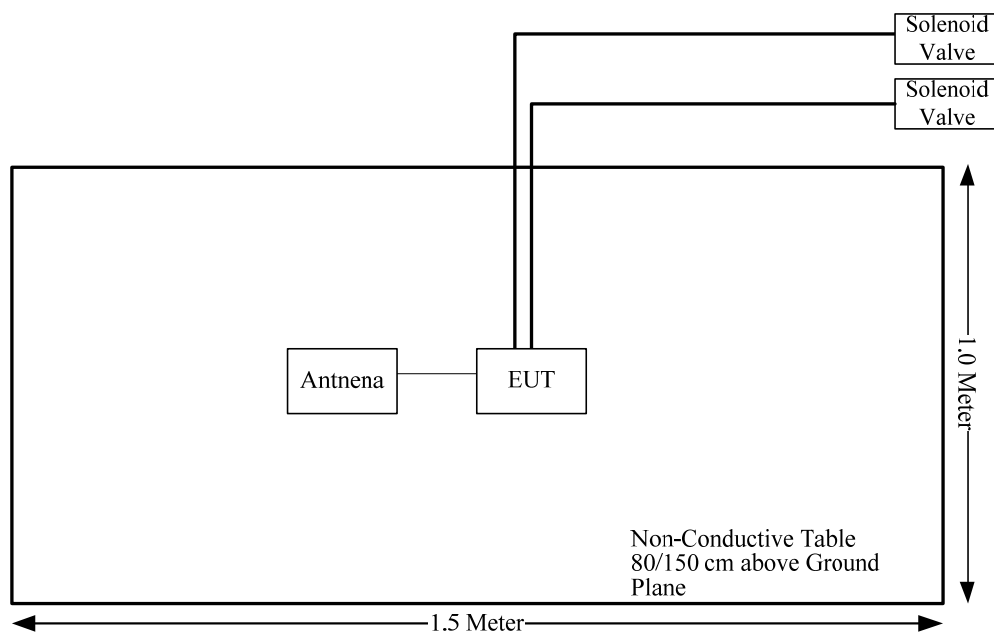

UC511-DI-915M & UC512-DI-915M:

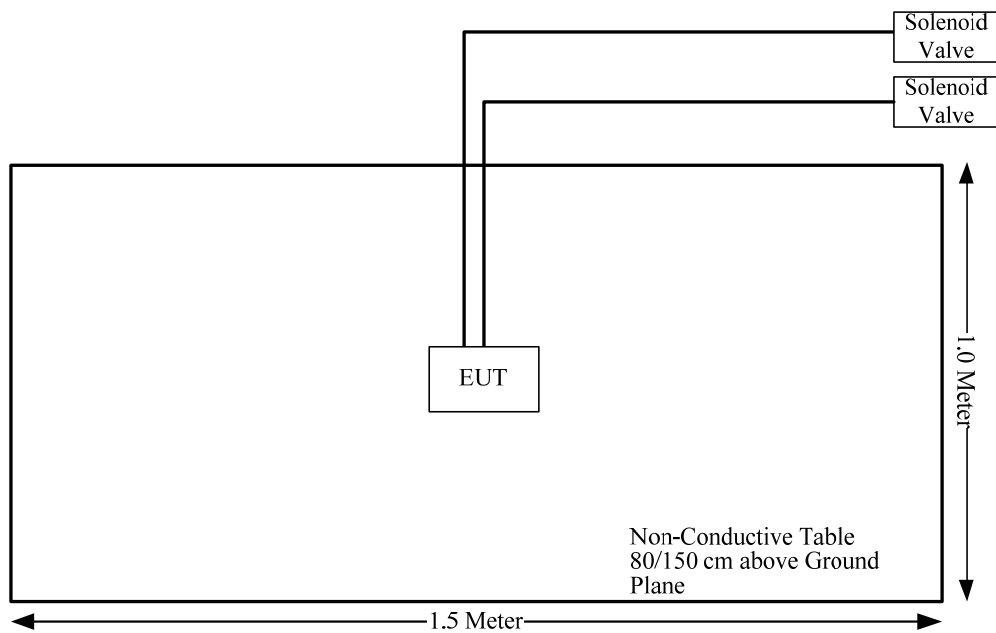

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC line conducted emissions	Not applicable
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious emissions	Compliant
FCC §15.247(a)(1)	20 dB bandwidth	Compliant
FCC §15.247(a)(1)	Channel separation	Compliant
FCC §15.247(a)(1)(i)	Number of hopping Frequency	Compliant
FCC §15.247(a)(1)(i)	Time of occupancy (dwell time)	Compliant
FCC §15.247(b)(2)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	Band edges	Compliant
FCC §15.203	Antenna requirement	Compliant
FCC§15.247 (i) & §1.1307 & §2.1091	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

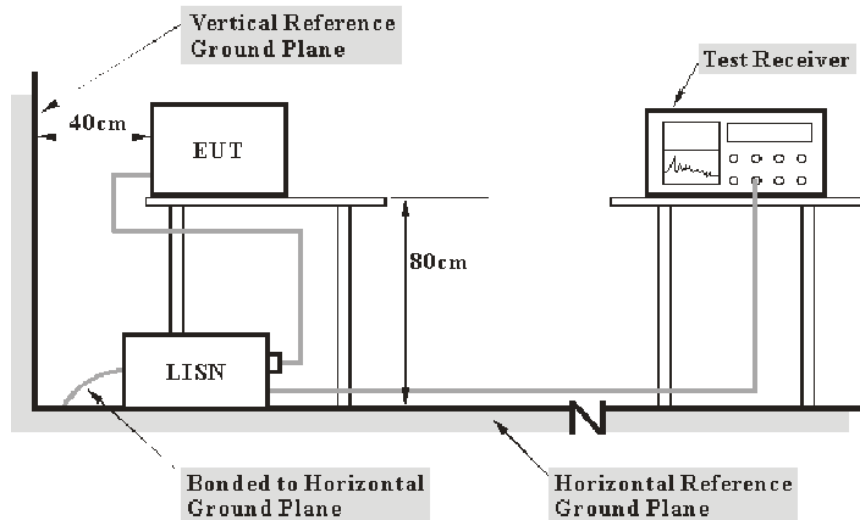

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

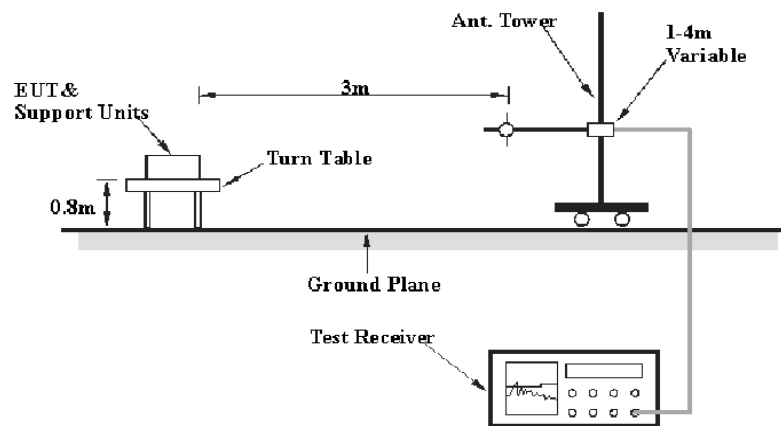

Above 1GHz:

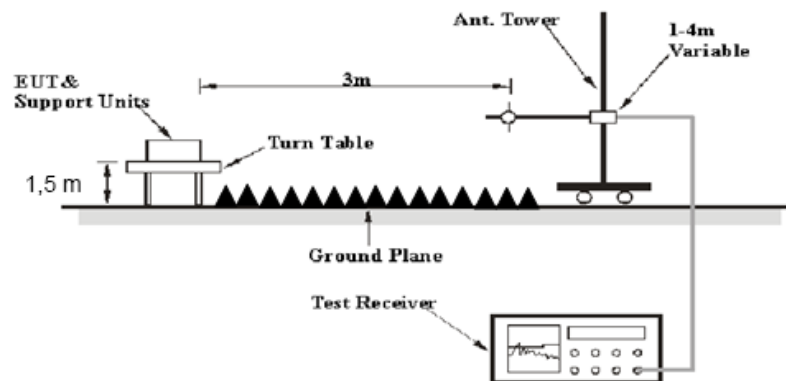

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.3.2 EUT Setup

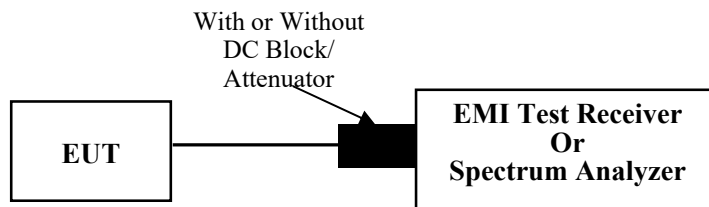

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.4 Channel Separation

3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.4.2 EUT Setup

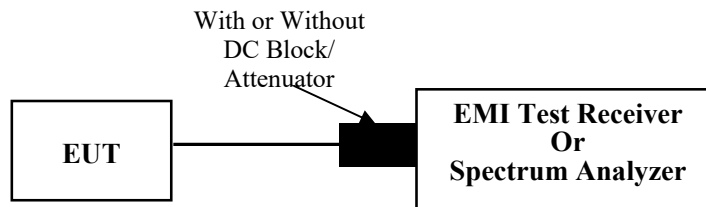

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) $\geq$ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


3.5 Number Of Hopping Frequency

3.5.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.5.2 EUT Setup

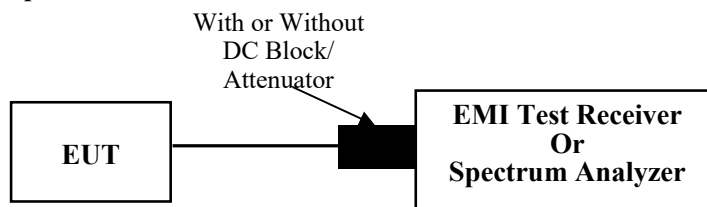

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW $\geq$ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.


3.6 Time Of Occupancy (Dwell Time)

3.6.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.6.2 EUT Setup

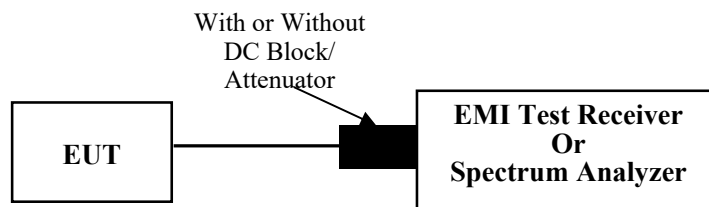

3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & \text{(Number of hops in the period specified in the requirements)} = \\ & \text{(number of hops on spectrum analyzer)} \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.


3.7 Maximum Conducted Output Power

3.7.1 Applicable Standard

FCC §15.247 (b)(2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

3.7.2 EUT Setup

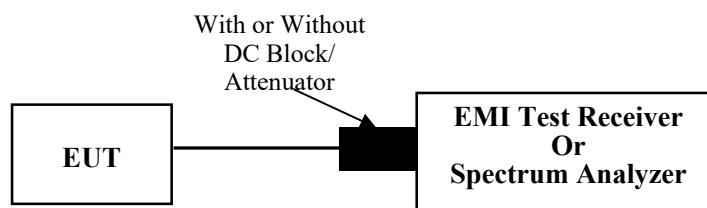

3.7.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.


3.8 100 kHz Bandwidth of Frequency Band Edge

3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.8.2 EUT Setup

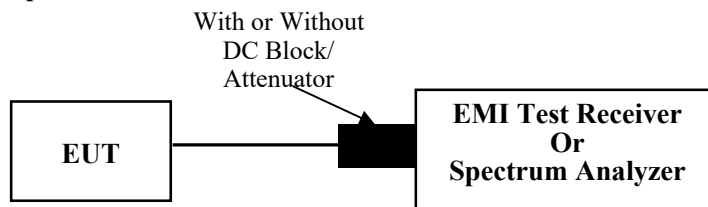

3.8.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.6

For band-edge measurements, use the band-edge procedure in 6.10. Band-edge measurements shall be tested both on single channels, and with the EUT hopping.

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery.

4.2 Radiation Spurious Emissions

Serial Number:	22VV_2 , 22VV_5, 22VV_4, 22VV_6	Test Date:	2023/05/07~2023/06/27
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Vic Du, Tao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22~26.2	Relative Humidity: (%)	48~58	ATM Pressure: (kPa)	100.6~100.9
----------------------	---------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
Audix	Test Software	E3	201021 (V9)	N/A	N/A

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.

1) 30MHz-1GHz(Low channel was the worst)
UC511-DI-915M+PN:EA


Test Mode: Transmitting
Polarization: horizontal
Note:

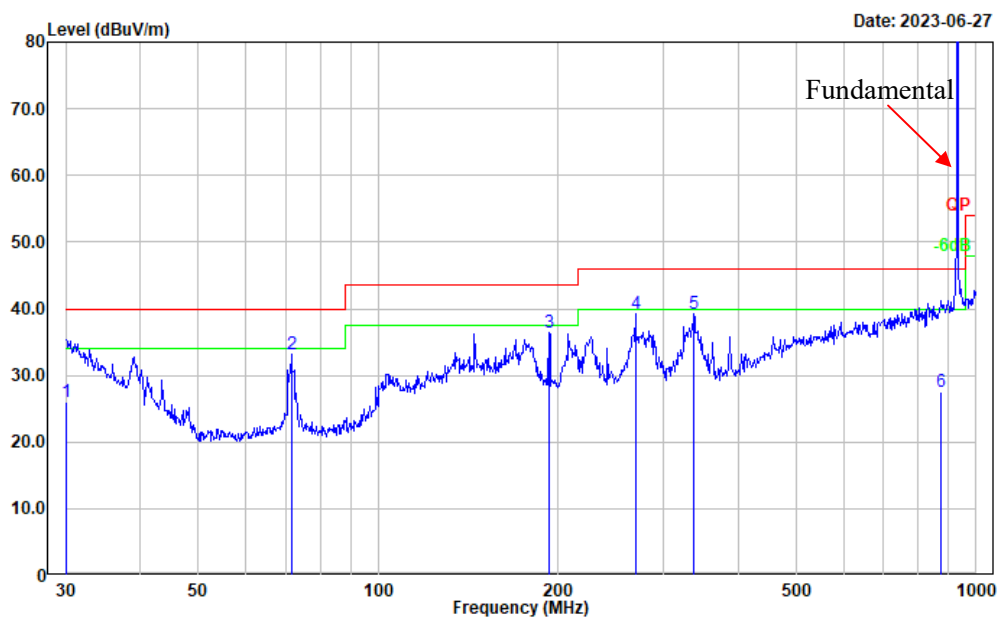

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	-1.89	27.80	25.91	40.00	14.09	QP
2	71.581	18.36	14.83	33.19	40.00	6.81	Peak
3	193.095	18.09	18.39	36.48	43.50	7.02	Peak
4	269.428	19.95	19.32	39.27	46.00	6.73	Peak
5	337.216	18.07	21.18	39.25	46.00	6.75	Peak
6	875.247	-2.02	29.61	27.59	46.00	18.41	QP

Test Mode: Transmitting
Polarization: vertical
Note:


Date: 2023-06-27

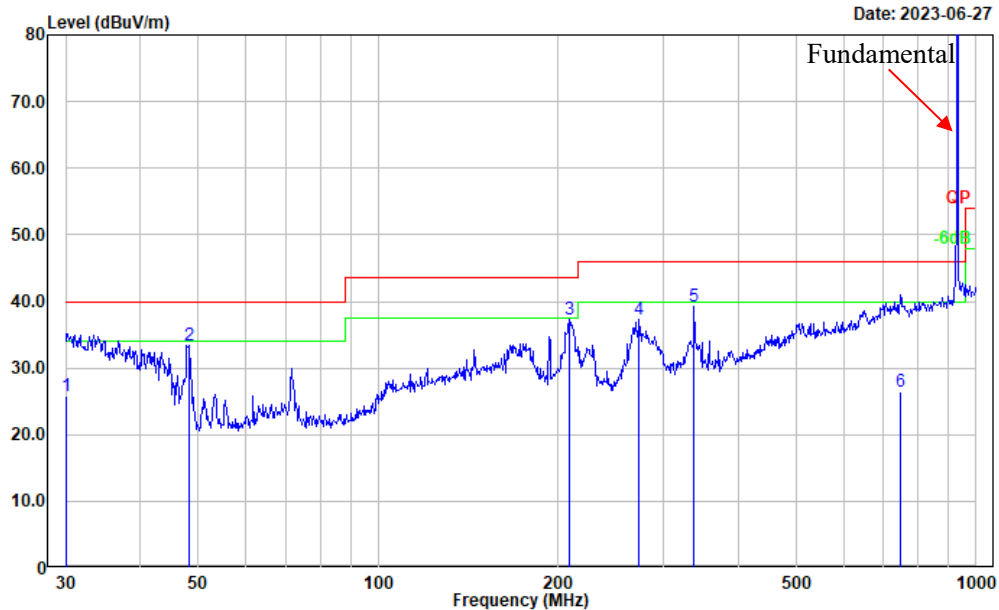

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	-2.09	27.88	25.79	40.00	14.21	QP
2	48.163	18.05	15.37	33.42	40.00	6.58	Peak
3	208.580	18.28	18.92	37.20	43.50	6.30	Peak
4	273.234	17.74	19.49	37.23	46.00	8.77	Peak
5	337.216	17.96	21.18	39.14	46.00	6.86	Peak
6	747.483	-1.90	28.30	26.40	46.00	19.60	QP


UC511-DI-915M

Test Mode: Transmitting
Polarization: horizontal
Note:

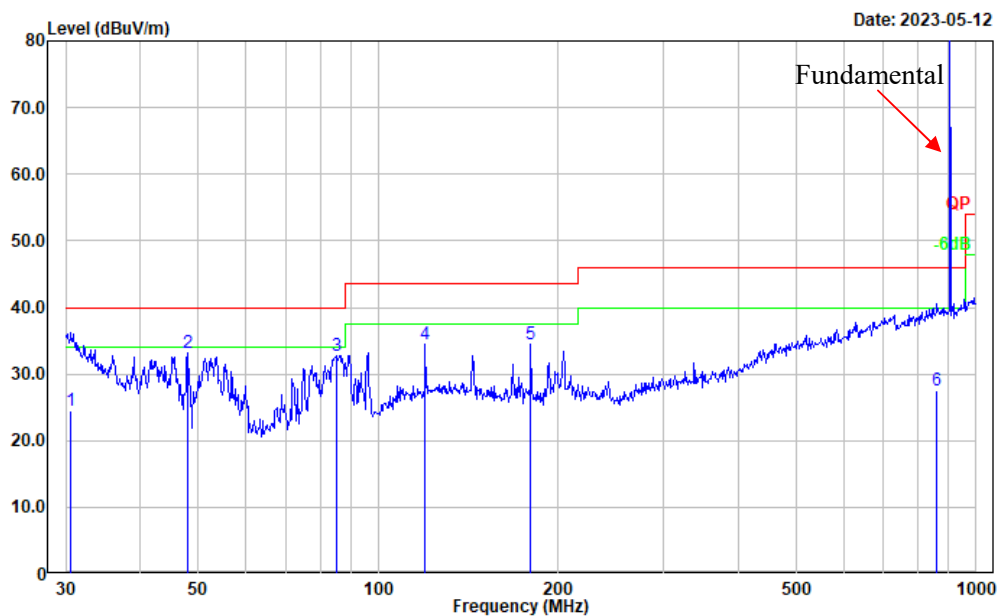

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	-2.78	27.38	24.60	40.00	15.40	QP
2	47.994	17.75	15.47	33.22	40.00	6.78	Peak
3	84.999	18.45	14.30	32.75	40.00	7.25	Peak
4	119.856	14.44	19.98	34.42	43.50	9.08	Peak
5	180.017	16.62	17.85	34.47	43.50	9.03	Peak
6	860.035	-2.00	29.59	27.59	46.00	18.41	QP


Test Mode: Transmitting
Polarization: vertical
Note:

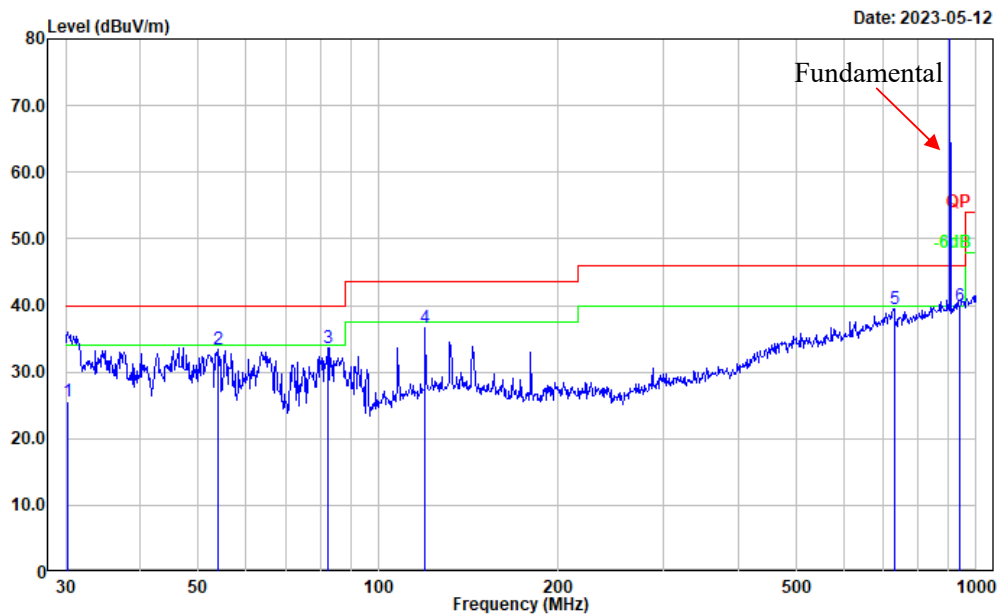

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.211	-2.22	27.72	25.50	40.00	14.50	QP
2	53.882	19.22	14.24	33.46	40.00	6.54	Peak
3	82.359	19.40	14.16	33.56	40.00	6.44	Peak
4	119.856	16.56	19.98	36.54	43.50	6.96	Peak
5	729.358	11.41	28.14	39.55	46.00	6.45	Peak
6	938.833	9.92	30.05	39.97	46.00	6.03	Peak


UC512-DI-915M+PN:EA

Test Mode: Transmitting
Polarization: horizontal
Note:

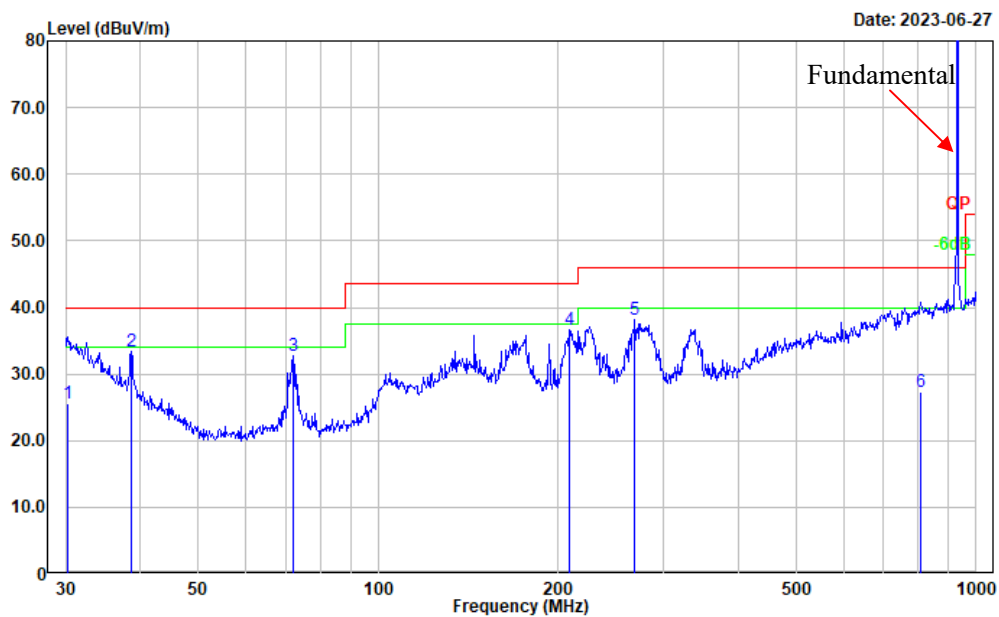

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	-2.08	27.63	25.55	40.00	14.45	QP
2	38.616	12.16	21.26	33.42	40.00	6.58	Peak
3	72.084	18.06	14.78	32.84	40.00	7.16	Peak
4	208.580	17.67	18.92	36.59	43.50	6.91	Peak
5	268.485	18.98	19.28	38.26	46.00	7.74	Peak
6	807.429	-1.80	29.02	27.22	46.00	18.78	QP


Test Mode: Transmitting
Polarization: vertical
Note:

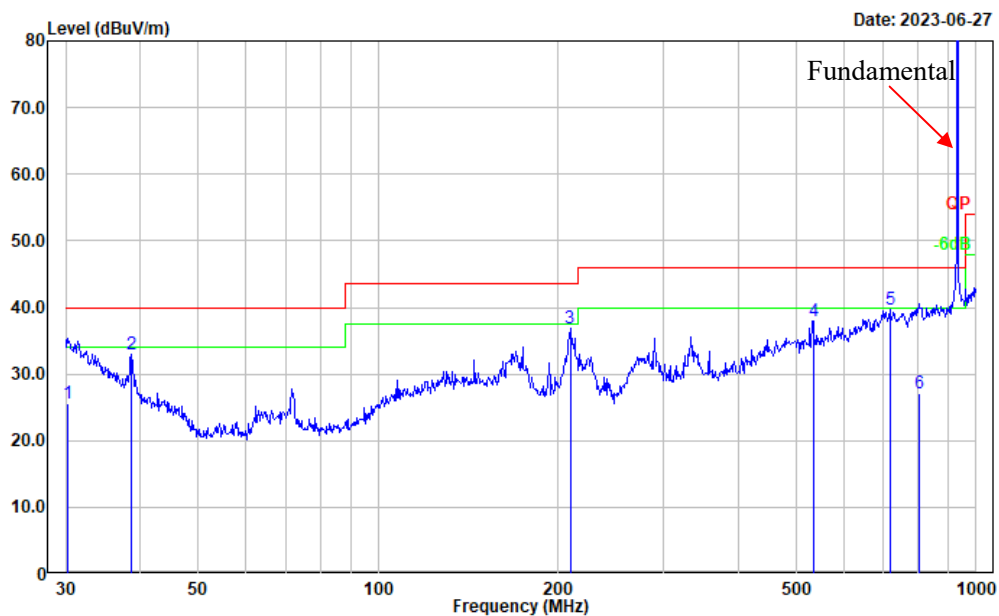

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	-2.17	27.72	25.55	40.00	14.45	QP
2	38.616	11.80	21.26	33.06	40.00	6.94	Peak
3	209.313	17.91	18.90	36.81	43.50	6.69	Peak
4	533.832	12.47	25.40	37.87	46.00	8.13	Peak
5	716.682	11.57	28.00	39.57	46.00	6.43	Peak
6	801.786	-1.96	29.01	27.05	46.00	18.95	QP


UC512-DI-915M

Test Mode: Transmitting
Polarization: horizontal
Note:

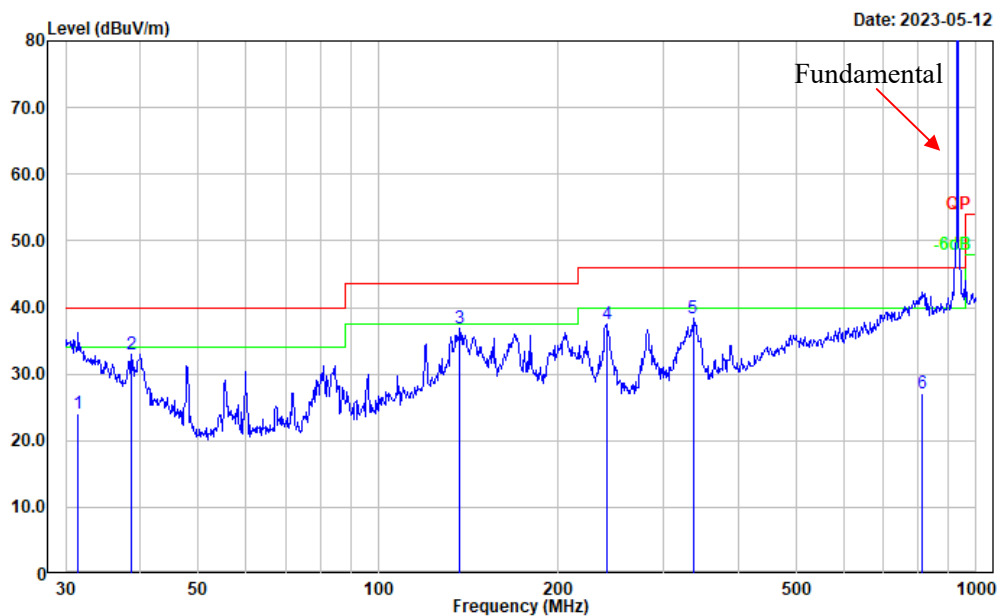

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.510	-2.57	26.73	24.16	40.00	15.84	QP
2	38.616	11.76	21.26	33.02	40.00	6.98	Peak
3	136.939	17.02	19.81	36.83	43.50	6.67	Peak
4	240.830	19.03	18.38	37.41	46.00	8.59	Peak
5	336.035	17.30	21.15	38.45	46.00	7.55	Peak
6	813.112	-1.97	29.12	27.15	46.00	18.85	QP

Test Mode: Transmitting
Polarization: vertical
Note:

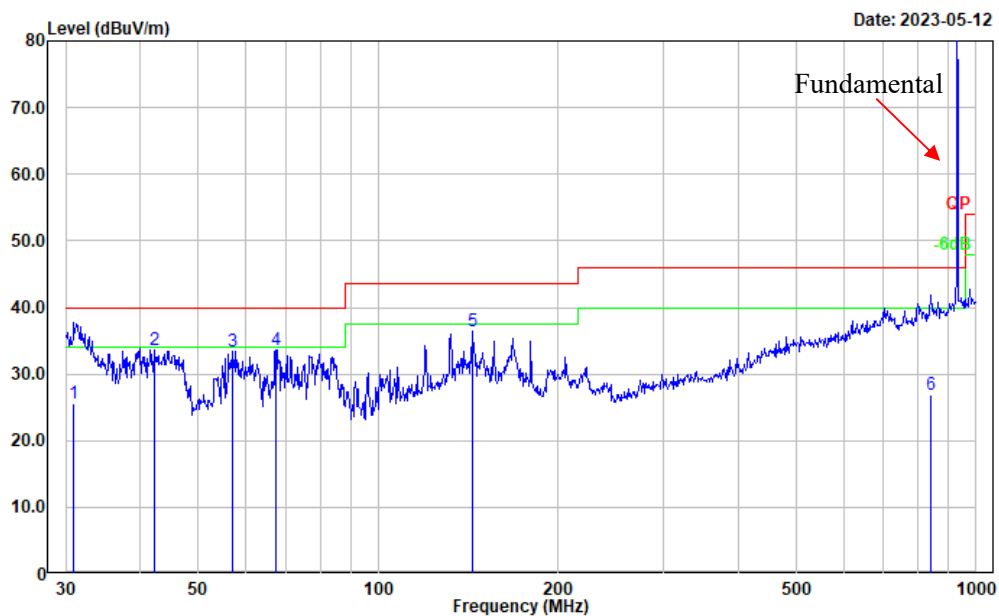

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.962	-1.50	27.13	25.63	40.00	14.37	QP
2	42.154	14.71	18.95	33.66	40.00	6.34	Peak
3	57.191	19.31	14.16	33.47	40.00	6.53	Peak
4	67.438	18.91	14.74	33.65	40.00	6.35	Peak
5	143.830	16.79	19.53	36.32	43.50	7.18	Peak
6	839.182	-2.47	29.33	26.86	46.00	19.14	QP

2) Band edge and 1-10GHz:**UC511-DI-915M+PN:EA(Worst model for external antenna)**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 902.3 MHz							
902.30	86.16	QP	H	29.46	115.62	N/A	N/A
902.30	81.87	QP	V	29.46	111.33	N/A	N/A
902.00	38.03	QP	H	29.46	67.49	95.62	28.13
1804.600	53.83	PK	H	1.31	55.14	74.00	18.86
1804.600	45.72	AV	H	1.31	47.03	54.00	6.97
1804.600	60.98	PK	V	1.31	62.29	74.00	11.71
1804.600	52.45	AV	V	1.31	53.76	54.00	0.24
2706.900	48.74	PK	H	4.75	53.49	74.00	20.51
2706.900	40.66	AV	H	4.75	45.41	54.00	8.59
2706.900	49.20	PK	V	4.75	53.95	74.00	20.05
2706.900	41.46	AV	V	4.75	46.21	54.00	7.79
3609.200	44.13	PK	H	7.99	52.12	74.00	21.88
3609.200	36.47	AV	H	7.99	44.46	54.00	9.54
3609.200	45.78	PK	V	7.99	53.77	74.00	20.23
3609.200	37.55	AV	V	7.99	45.54	54.00	8.46
4511.500	40.93	PK	H	10.04	50.97	74.00	23.03
4511.500	32.19	AV	H	10.04	42.23	54.00	11.77
4511.500	43.57	PK	V	10.04	53.61	74.00	20.39
4511.500	35.23	AV	V	10.04	45.27	54.00	8.73
5413.800	35.46	PK	H	12.34	47.80	74.00	26.20
5413.800	27.48	AV	H	12.34	39.82	54.00	14.18
5413.800	39.12	PK	V	12.34	51.46	74.00	22.54
5413.800	31.79	AV	V	12.34	44.13	54.00	9.87
6316.100	39.96	PK	H	13.37	53.33	74.00	20.67
6316.100	31.66	AV	H	13.37	45.03	54.00	8.97
6316.100	42.60	PK	V	13.37	55.97	74.00	18.03
6316.100	34.61	AV	V	13.37	47.98	54.00	6.02
7218.400	40.30	PK	H	14.31	54.61	74.00	19.39
7218.400	32.50	AV	H	14.31	46.81	54.00	7.19
7218.400	47.76	PK	V	14.31	62.07	74.00	11.93
7218.400	39.33	AV	V	14.31	53.64	54.00	0.36
8120.700	39.32	PK	H	16.13	55.45	74.00	18.55
8120.700	31.28	AV	H	16.13	47.41	54.00	6.59
8120.700	40.28	PK	V	16.13	56.41	74.00	17.59
8120.700	32.43	AV	V	16.13	48.56	54.00	5.44
9023.000	34.12	PK	H	17.67	51.79	74.00	22.21
9023.000	25.77	AV	H	17.67	43.44	54.00	10.56
9023.000	35.13	PK	V	17.67	52.80	74.00	21.20
9023.000	26.44	AV	V	17.67	44.11	54.00	9.89

Middle Channel: 914.9 MHz							
914.90	85.93	QP	H	29.62	115.55	N/A	N/A
914.90	82.25	QP	V	29.62	111.87	N/A	N/A
1829.800	56.26	PK	H	1.43	57.69	74.00	16.31
1829.800	48.88	AV	H	1.43	50.31	54.00	3.69
1829.800	56.59	PK	V	1.43	58.02	74.00	15.98
1829.800	48.91	AV	V	1.43	50.34	54.00	3.66
2744.700	47.20	PK	H	4.91	52.11	74.00	21.89
2744.700	39.73	AV	H	4.91	44.64	54.00	9.36
2744.700	50.32	PK	V	4.91	55.23	74.00	18.77
2744.700	42.37	AV	V	4.91	47.28	54.00	6.72
3659.600	39.23	PK	H	8.12	47.35	74.00	26.65
3659.600	31.66	AV	H	8.12	39.78	54.00	14.22
3659.600	41.69	PK	V	8.12	49.81	74.00	24.19
3659.600	33.23	AV	V	8.12	41.35	54.00	12.65
4574.500	34.02	PK	H	10.26	44.28	74.00	29.72
4574.500	25.48	AV	H	10.26	35.74	54.00	18.26
4574.500	34.91	PK	V	10.26	45.17	74.00	28.83
4574.500	26.44	AV	V	10.26	36.70	54.00	17.30
5489.400	37.36	PK	H	12.48	49.84	74.00	24.16
5489.400	29.47	AV	H	12.48	41.95	54.00	12.05
5489.400	39.58	PK	V	12.48	52.06	74.00	21.94
5489.400	31.59	AV	V	12.48	44.07	54.00	9.93
6404.300	36.47	PK	H	13.54	50.01	74.00	23.99
6404.300	28.41	AV	H	13.54	41.95	54.00	12.05
6404.300	37.28	PK	V	13.54	50.82	74.00	23.18
6404.300	29.67	AV	V	13.54	43.21	54.00	10.79
7319.200	38.64	PK	H	14.80	53.44	74.00	20.56
7319.200	30.81	AV	H	14.80	45.61	54.00	8.39
7319.200	43.65	PK	V	14.80	58.45	74.00	15.55
7319.200	35.42	AV	V	14.80	50.22	54.00	3.78
8234.100	33.78	PK	H	16.28	50.06	74.00	23.94
8234.100	25.37	AV	H	16.28	41.65	54.00	12.35
8234.100	33.89	PK	V	16.28	50.17	74.00	23.83
8234.100	25.88	AV	V	16.28	42.16	54.00	11.84
9149.000	33.66	PK	H	18.05	51.71	74.00	22.29
9149.000	25.48	AV	H	18.05	43.53	54.00	10.47
9149.000	33.78	PK	V	18.05	51.83	74.00	22.17
9149.000	26.37	AV	V	18.05	44.42	54.00	9.58


High Channel: 927.6 MHz							
927.60	86.73	QP	H	29.70	116.43	N/A	N/A
927.60	83.88	QP	V	29.70	113.58	N/A	N/A
928.00	56.62	QP	H	29.70	86.32	96.43	10.11
1855.200	58.85	PK	H	1.57	60.42	74.00	13.58
1855.200	50.48	AV	H	1.57	52.05	54.00	1.95
1855.200	59.13	PK	V	1.57	60.70	74.00	13.30
1855.200	51.66	AV	V	1.57	53.23	54.00	0.77
2782.800	49.40	PK	H	5.04	54.44	74.00	19.56
2782.800	41.67	AV	H	5.04	46.71	54.00	7.29
2782.800	51.18	PK	V	5.04	56.22	74.00	17.78
2782.800	43.74	AV	V	5.04	48.78	54.00	5.22
3710.400	37.21	PK	H	8.38	45.59	74.00	28.41
3710.400	29.79	AV	H	8.38	38.17	54.00	15.83
3710.400	37.68	PK	V	8.38	46.06	74.00	27.94
3710.400	29.88	AV	V	8.38	38.26	54.00	15.74
4638.000	38.57	PK	H	10.45	49.02	74.00	24.98
4638.000	30.67	AV	H	10.45	41.12	54.00	12.88
4638.000	40.28	PK	V	10.45	50.73	74.00	23.27
4638.000	32.34	AV	V	10.45	42.79	54.00	11.21
5565.600	36.65	PK	H	12.64	49.29	74.00	24.71
5565.600	28.88	AV	H	12.64	41.52	54.00	12.48
5565.600	39.40	PK	V	12.64	52.04	74.00	21.96
5565.600	31.60	AV	V	12.64	44.24	54.00	9.76
6493.200	37.02	PK	H	13.46	50.48	74.00	23.52
6493.200	29.37	AV	H	13.46	42.83	54.00	11.17
6493.200	39.09	PK	V	13.46	52.55	74.00	21.45
6493.200	31.27	AV	V	13.46	44.73	54.00	9.27
7420.800	41.31	PK	H	15.10	56.41	74.00	17.59
7420.800	33.41	AV	H	15.10	48.51	54.00	5.49
7420.800	43.57	PK	V	15.10	58.67	74.00	15.33
7420.800	35.48	AV	V	15.10	50.58	54.00	3.42
8348.400	41.24	PK	H	16.48	57.72	74.00	16.28
8348.400	33.53	AV	H	16.48	50.01	54.00	3.99
8348.400	42.76	PK	V	16.48	59.24	74.00	14.76
8348.400	34.58	AV	V	16.48	51.06	54.00	2.94
9276.000	34.12	PK	H	18.27	52.39	74.00	21.61
9276.000	22.06	AV	H	18.27	40.33	54.00	13.67
9276.000	34.23	PK	V	18.27	52.50	74.00	21.50
9276.000	25.68	AV	V	18.27	43.95	54.00	10.05


UC511-DI-915M(Worst model for internal antenna):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 902.3 MHz							
902.30	83.84	QP	H	29.46	113.30	N/A	N/A
902.30	75.33	QP	V	29.46	104.79	N/A	N/A
902.00	35.80	QP	H	29.46	65.26	93.30	28.04
1804.600	45.20	PK	H	1.31	46.51	74.00	27.49
1804.600	37.66	AV	H	1.31	38.97	54.00	15.03
1804.600	41.30	PK	V	1.31	42.61	74.00	31.39
1804.600	33.59	AV	V	1.31	34.90	54.00	19.10
2706.900	40.10	PK	H	4.75	44.85	74.00	29.15
2706.900	32.85	AV	H	4.75	37.60	54.00	16.40
2706.900	36.23	PK	V	4.75	40.98	74.00	33.02
2706.900	28.41	AV	V	4.75	33.16	54.00	20.84
3609.200	37.25	PK	H	7.99	45.24	74.00	28.76
3609.200	29.61	AV	H	7.99	37.60	54.00	16.40
3609.200	38.79	PK	V	7.99	46.78	74.00	27.22
3609.200	30.37	AV	V	7.99	38.36	54.00	15.64
4511.500	35.89	PK	H	10.04	45.93	74.00	28.07
4511.500	27.69	AV	H	10.04	37.73	54.00	16.27
4511.500	35.10	PK	V	10.04	45.14	74.00	28.86
4511.500	27.61	AV	V	10.04	37.65	54.00	16.35
5413.800	35.00	PK	H	12.34	47.34	74.00	26.66
5413.800	27.88	AV	H	12.34	40.22	54.00	13.78
5413.800	35.16	PK	V	12.34	47.50	74.00	26.50
5413.800	27.55	AV	V	12.34	39.89	54.00	14.11
6316.100	34.57	PK	H	13.37	47.94	74.00	26.06
6316.100	26.31	AV	H	13.37	39.68	54.00	14.32
6316.100	36.44	PK	V	13.37	49.81	74.00	24.19
6316.100	28.34	AV	V	13.37	41.71	54.00	12.29
7218.400	42.03	PK	H	14.31	56.34	74.00	17.66
7218.400	34.62	AV	H	14.31	48.93	54.00	5.07
7218.400	46.47	PK	V	14.31	60.78	74.00	13.22
7218.400	38.36	AV	V	14.31	52.67	54.00	1.33
8120.700	43.74	PK	H	16.13	59.87	74.00	14.13
8120.700	35.70	AV	H	16.13	51.83	54.00	2.17
8120.700	45.98	PK	V	16.13	62.11	74.00	11.89
8120.700	37.63	AV	V	16.13	53.76	54.00	0.24
9023.000	34.55	PK	H	17.67	52.22	74.00	21.78
9023.000	26.84	AV	H	17.67	44.51	54.00	9.49
9023.000	35.16	PK	V	17.67	52.83	74.00	21.17
9023.000	27.61	AV	V	17.67	45.28	54.00	8.72
Middle Channel: 914.9 MHz							
914.90	85.59	QP	H	29.62	115.21	N/A	N/A
914.90	75.63	QP	V	29.62	105.25	N/A	N/A
1829.800	44.51	PK	H	1.43	45.94	74.00	28.06
1829.800	36.85	AV	H	1.43	38.28	54.00	15.72
1829.800	43.75	PK	V	1.43	45.18	74.00	28.82
1829.800	35.66	AV	V	1.43	37.09	54.00	16.91
2744.700	38.74	PK	H	4.91	43.65	74.00	30.35
2744.700	29.67	AV	H	4.91	34.58	54.00	19.42
2744.700	39.19	PK	V	4.91	44.10	74.00	29.90


2744.700	31.47	AV	V	4.91	36.38	54.00	17.62
3659.600	38.46	PK	H	8.12	46.58	74.00	27.42
3659.600	30.28	AV	H	8.12	38.40	54.00	15.60
3659.600	39.50	PK	V	8.12	47.62	74.00	26.38
3659.600	31.36	AV	V	8.12	39.48	54.00	14.52
4574.500	37.71	PK	H	10.26	47.97	74.00	26.03
4574.500	29.49	AV	H	10.26	39.75	54.00	14.25
4574.500	36.31	PK	V	10.26	46.57	74.00	27.43
4574.500	28.48	AV	V	10.26	38.74	54.00	15.26
5489.400	35.89	PK	H	12.48	48.37	74.00	25.63
5489.400	27.79	AV	H	12.48	40.27	54.00	13.73
5489.400	36.82	PK	V	12.48	49.30	74.00	24.70
5489.400	28.67	AV	V	12.48	41.15	54.00	12.85
6404.300	37.43	PK	H	13.54	50.97	74.00	23.03
6404.300	29.68	AV	H	13.54	43.22	54.00	10.78
6404.300	39.76	PK	V	13.54	53.30	74.00	20.70
6404.300	31.73	AV	V	13.54	45.27	54.00	8.73
7319.200	47.44	PK	H	14.80	62.24	74.00	11.76
7319.200	38.89	AV	H	14.80	53.69	54.00	0.31
7319.200	47.84	PK	V	14.80	62.64	74.00	11.36
7319.200	38.89	AV	V	14.80	53.69	54.00	0.31
8234.100	45.97	PK	H	16.28	62.25	74.00	11.75
8234.100	37.28	AV	H	16.28	53.56	54.00	0.44
8234.100	46.97	PK	V	16.28	63.25	74.00	10.75
8234.100	37.44	AV	V	16.28	53.72	54.00	0.28
9149.000	35.48	PK	H	18.05	53.53	74.00	20.47
9149.000	27.69	AV	H	18.05	45.74	54.00	8.26
9149.000	37.10	PK	V	18.05	55.15	74.00	18.85
9149.000	29.77	AV	V	18.05	47.82	54.00	6.18
High Channel: 927.6 MHz							
927.60	86.82	QP	H	29.70	116.52	N/A	N/A
927.60	77.79	QP	V	29.70	107.49	N/A	N/A
928.00	54.69	QP	H	29.70	84.39	96.52	12.13
1855.200	49.32	PK	H	1.57	50.89	74.00	23.11
1855.200	41.33	AV	H	1.57	42.90	54.00	11.10
1855.200	44.10	PK	V	1.57	45.67	74.00	28.33
1855.200	36.47	AV	V	1.57	38.04	54.00	15.96
2782.800	39.08	PK	H	5.04	44.12	74.00	29.88
2782.800	31.69	AV	H	5.04	36.73	54.00	17.27
2782.800	39.74	PK	V	5.04	44.78	74.00	29.22
2782.800	31.25	AV	V	5.04	36.29	54.00	17.71
3710.400	39.17	PK	H	8.38	47.55	74.00	26.45
3710.400	31.66	AV	H	8.38	40.04	54.00	13.96
3710.400	39.47	PK	V	8.38	47.85	74.00	26.15
3710.400	31.42	AV	V	8.38	39.80	54.00	14.20
4638.000	37.91	PK	H	10.45	48.36	74.00	25.64
4638.000	29.87	AV	H	10.45	40.32	54.00	13.68
4638.000	38.31	PK	V	10.45	48.76	74.00	25.24
4638.000	30.44	AV	V	10.45	40.89	54.00	13.11
5565.600	37.05	PK	H	12.64	49.69	74.00	24.31
5565.600	29.47	AV	H	12.64	42.11	54.00	11.89
5565.600	37.13	PK	V	12.64	49.77	74.00	24.23
5565.600	29.53	AV	V	12.64	42.17	54.00	11.83
6493.200	36.30	PK	H	13.46	49.76	74.00	24.24
6493.200	28.43	AV	H	13.46	41.89	54.00	12.11


6493.200	41.18	PK	V	13.46	54.64	74.00	19.36
6493.200	33.81	AV	V	13.46	47.27	54.00	6.73
7420.800	46.83	PK	H	15.10	61.93	74.00	12.07
7420.800	38.55	AV	H	15.10	53.65	54.00	0.35
7420.800	45.97	PK	V	15.10	61.07	74.00	12.93
7420.800	38.60	AV	V	15.10	53.70	54.00	0.30
8348.400	45.78	PK	H	16.48	62.26	74.00	11.74
8348.400	37.23	AV	H	16.48	53.71	54.00	0.29
8348.400	46.19	PK	V	16.48	62.67	74.00	11.33
8348.400	37.20	AV	V	16.48	53.68	54.00	0.32
9276.000	37.84	PK	H	18.27	56.11	74.00	17.89
9276.000	29.31	AV	H	18.27	47.58	54.00	6.42
9276.000	39.15	PK	V	18.27	57.42	74.00	16.58
9276.000	31.34	AV	V	18.27	49.61	54.00	4.39

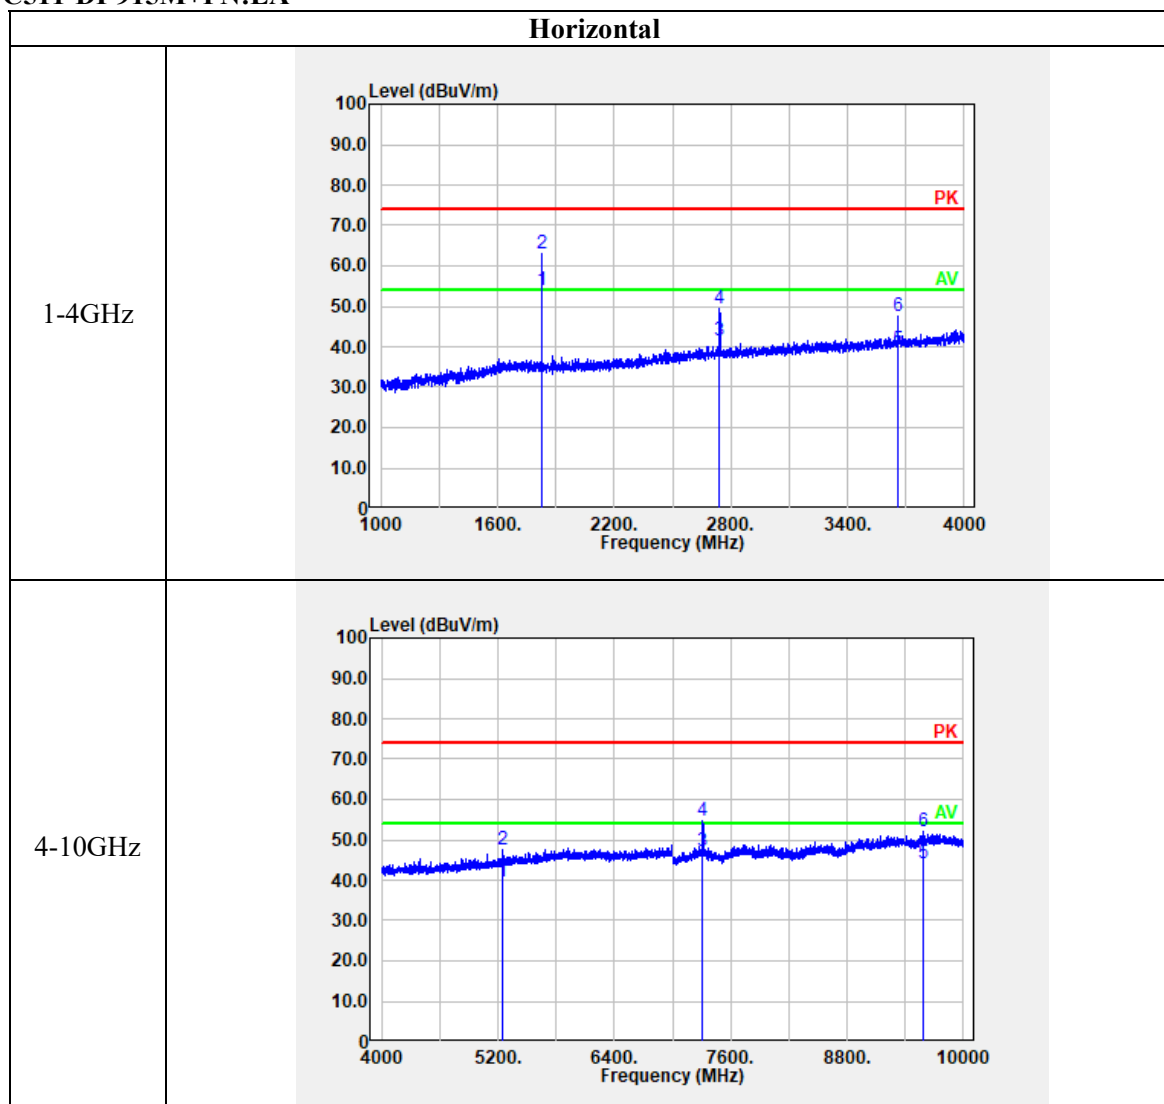Worst Test plots (Low channel was the worst)
UC511-DI-915M+PN:EA

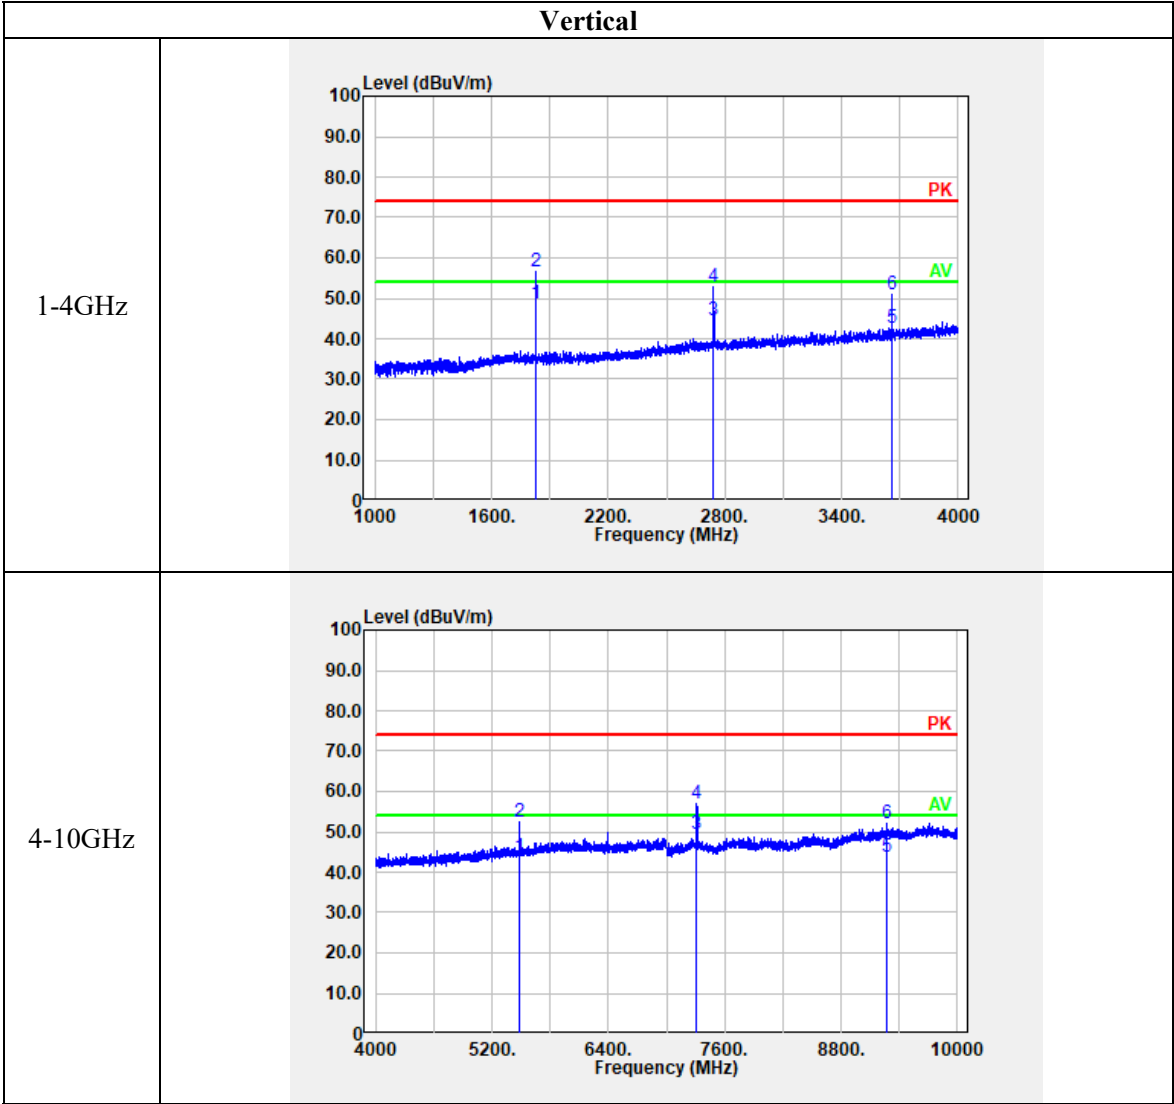

UC511-DI-915M:

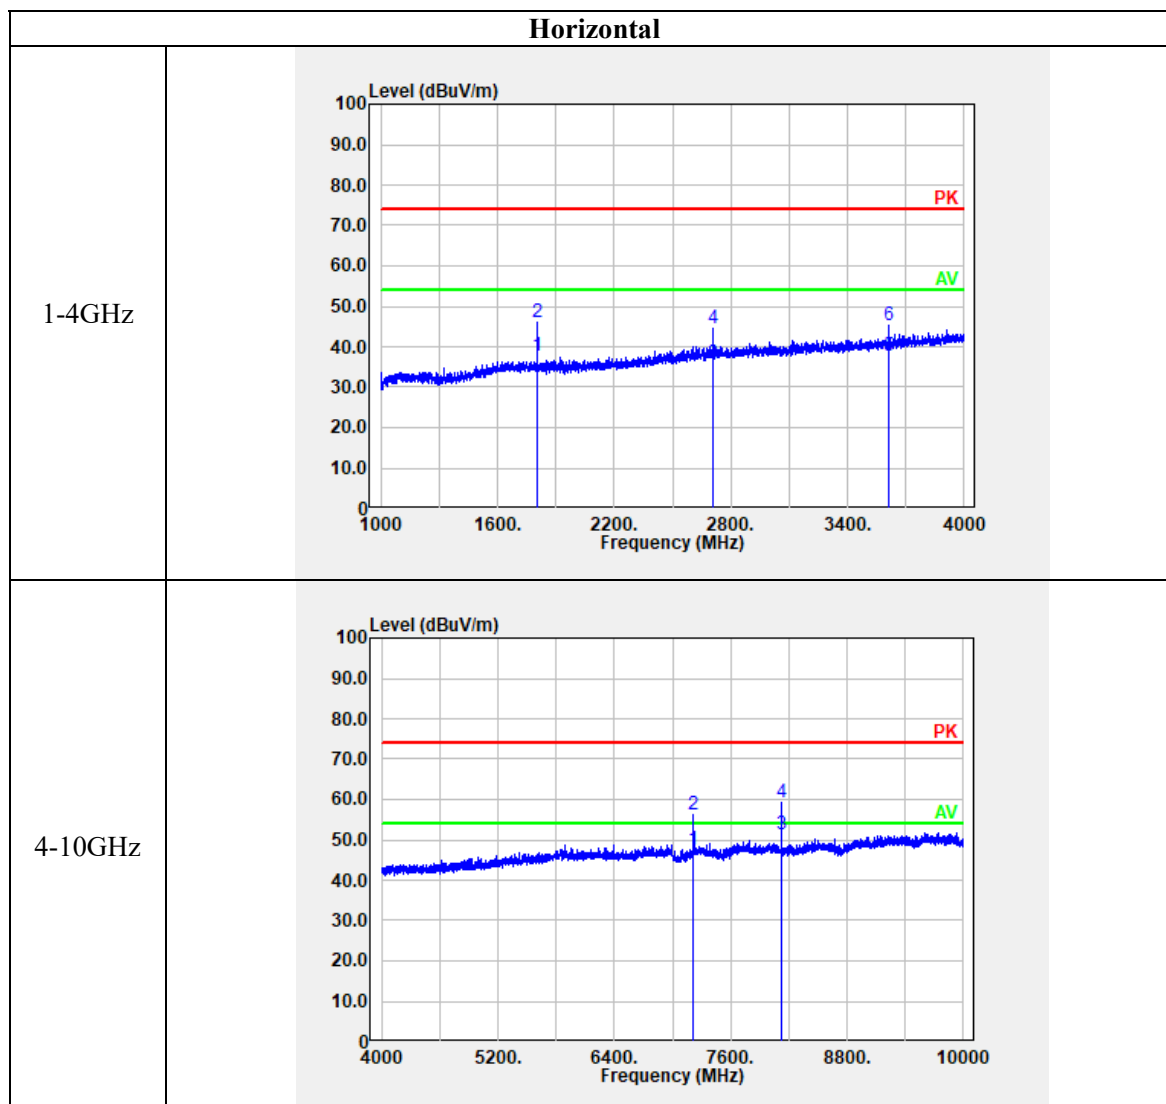

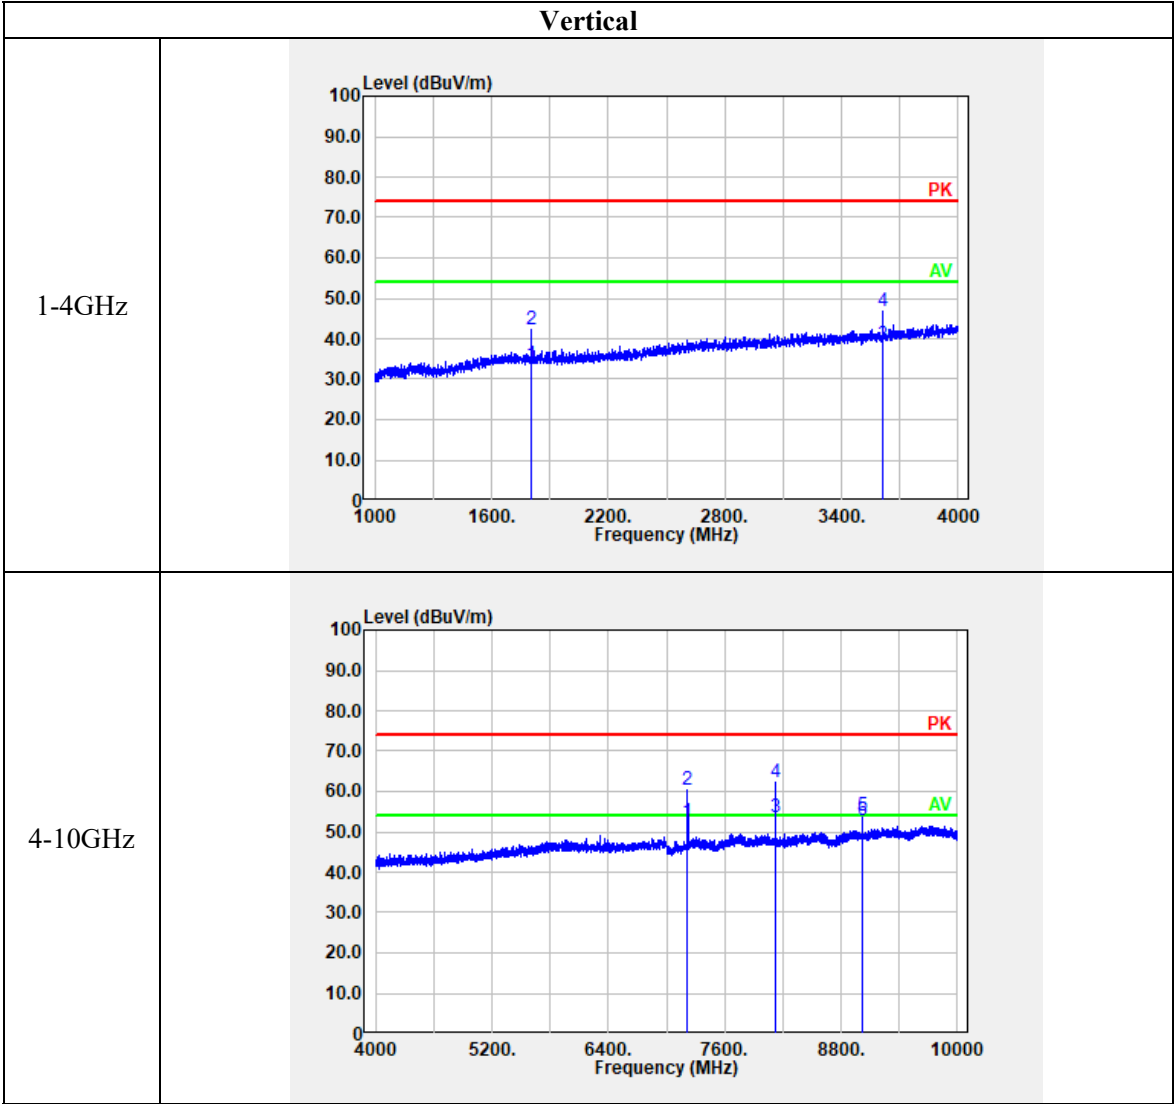

4.3 20 dB Emission Bandwidth:

Serial Number:	22VV_1	Test Date:	2023/05/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/03/31	2024/03/30
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)
Lowest	902.3	0.137	<0.25
Middle	914.9	0.136	<0.25
Highest	927.6	0.136	<0.25


20 dB Bandwidth

Lowest Channel

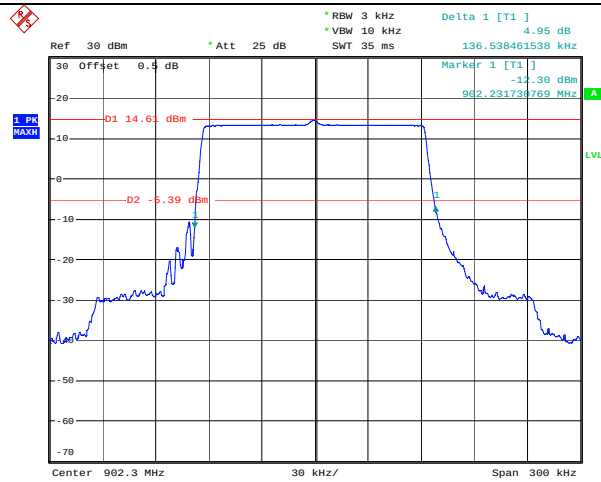


Date: 29 MAY 2023 09:07:25

Middle Channel

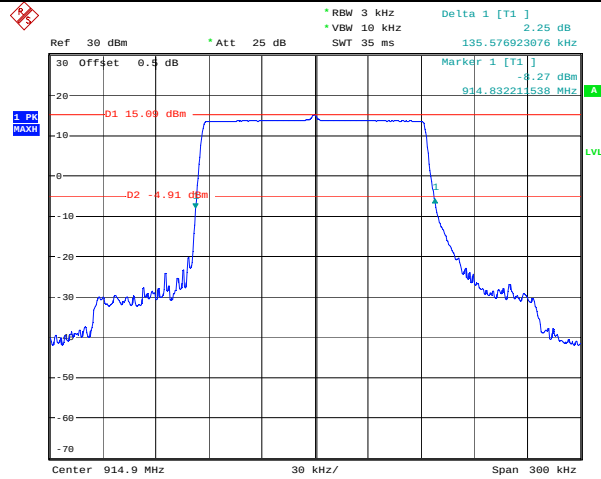

Date: 29 MAY 2023 08:52:41

Highest Channel

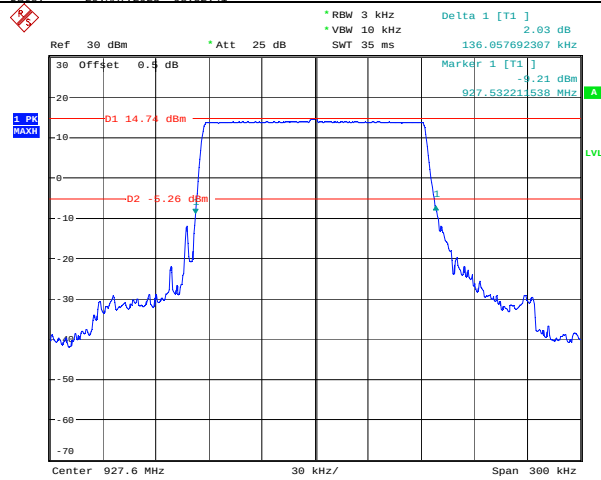

Date: 29 MAY 2023 09:11:28

4.4 Channel Separation:

Serial Number:	22VV_1	Test Date:	2023/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/03/31	2024/03/30
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
Lowest	902.3	0.171	0.137
Middle	914.9	0.289	0.136
Highest	927.6	0.194	0.136


Channel Separation

Lowest Channel

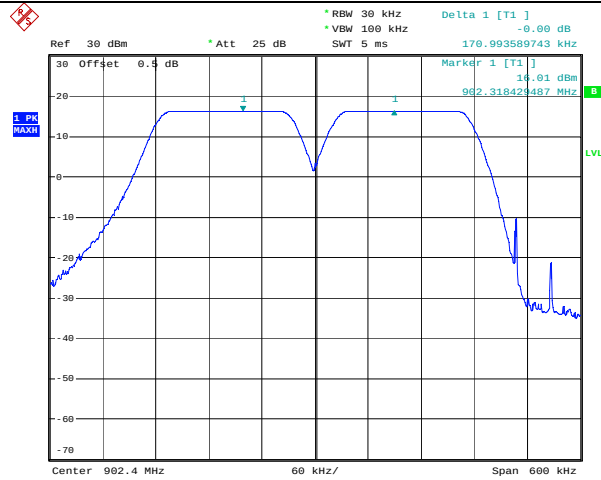


Date: 28.APR.2023 10:09:38

Middle Channel

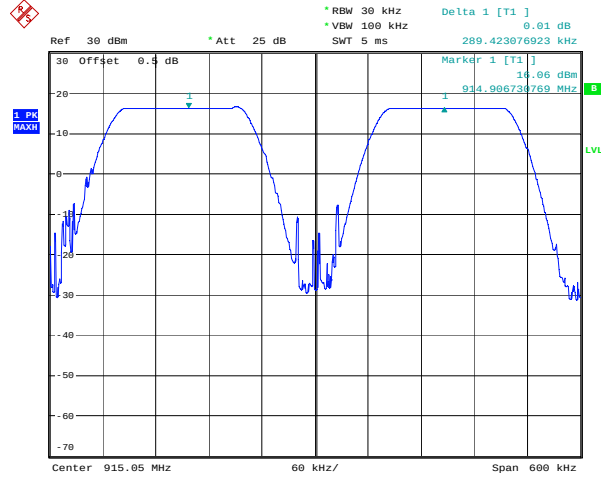

Date: 28.APR.2023 10:59:09

Highest Channel

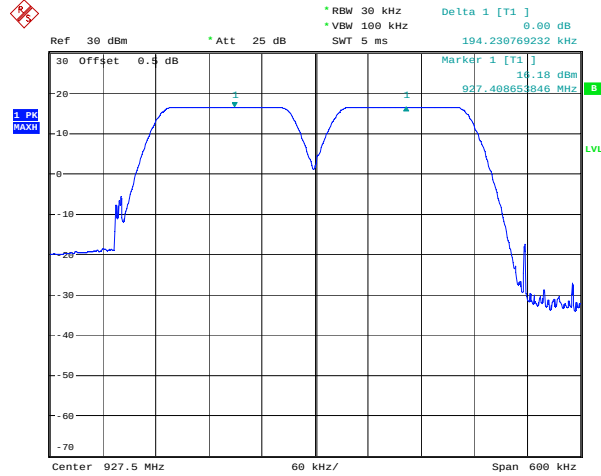

Date: 28.APR.2023 11:03:39

4.5 Number Of Hopping Frequency:

Serial Number:	22VV_1	Test Date:	2023/06/02-2023/06/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.4-28.2	Relative Humidity: (%)	66-70	ATM Pressure: (kPa)	100.3-100.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/03/31	2024/03/30
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Frequency Range (MHz)	Number of Hopping Channel	Limits
902-928	127	≥ 50

Number Of Hopping Frequency

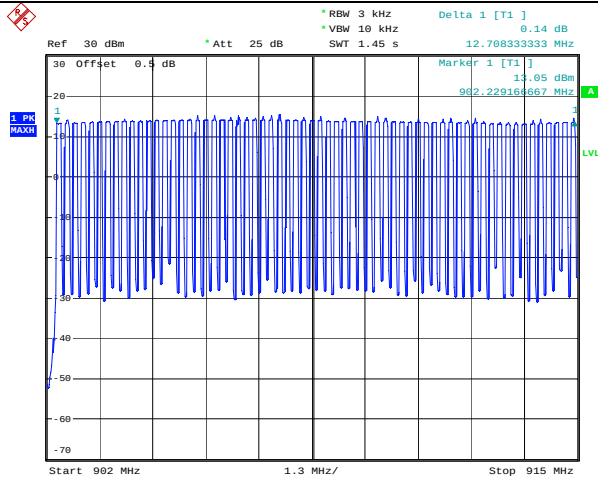902-915
MHz

Date: 2 JUN 2023 12:55:48

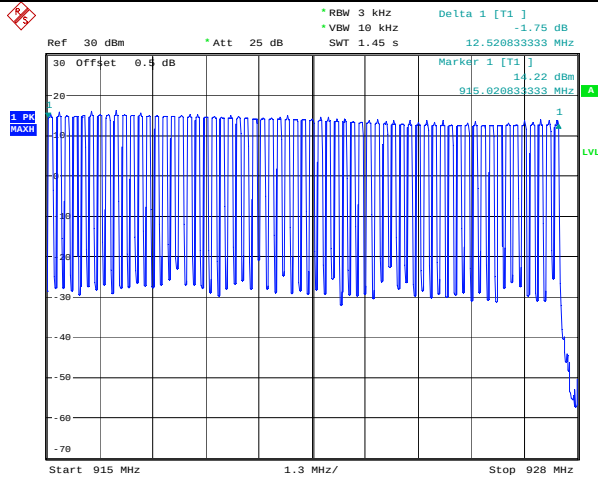915-928
MHz

Date: 12 JUN 2023 23:58:39

4.6 Time Of Occupancy (Dwell Time):

Serial Number:	22VV_1	Test Date:	2023/06/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/03/31	2024/03/30
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers in Observation time	Dwell Time (s)	Limit (s)
914.9	250.481	20	1	0.250	0.400
Note: Observation time= 20s					

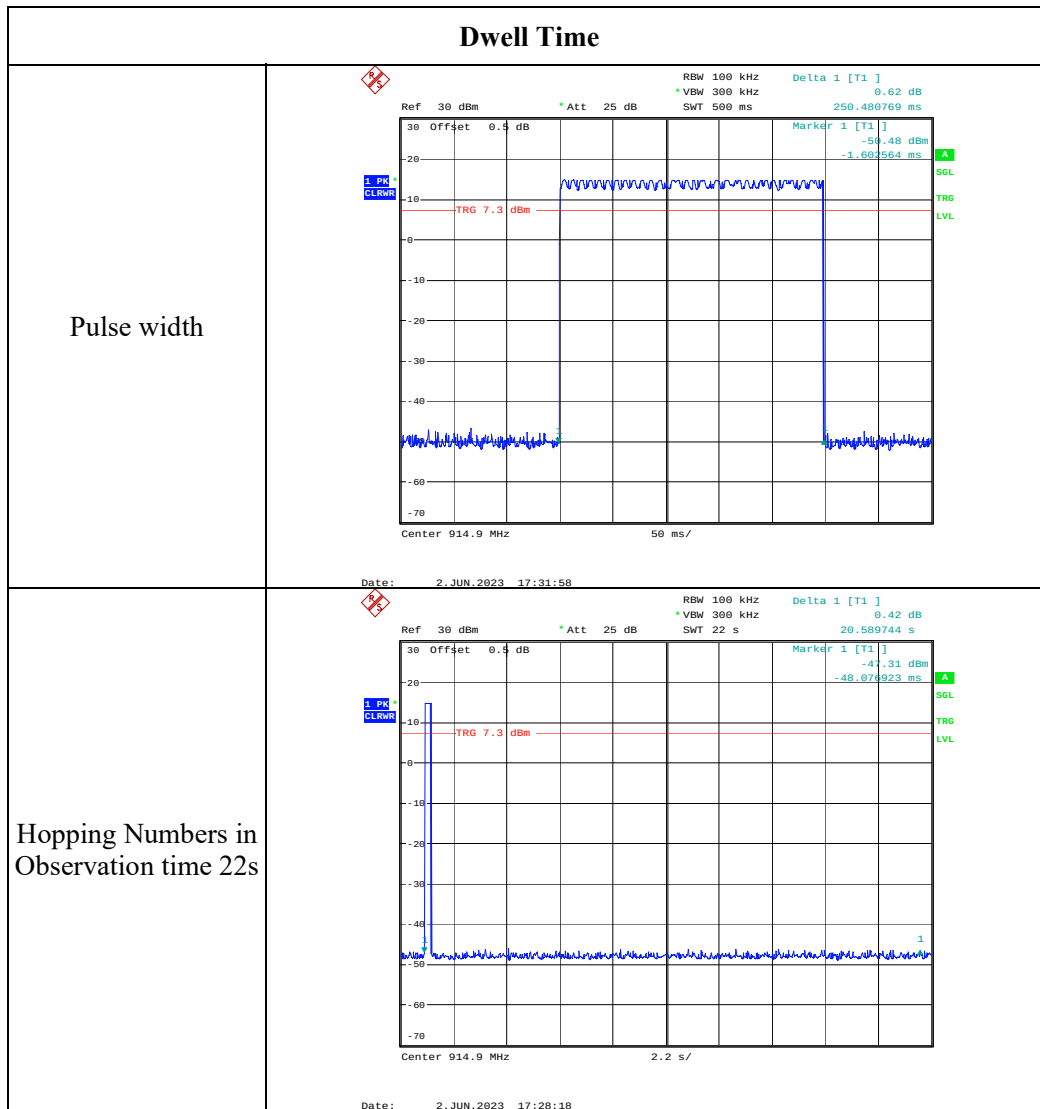

4.7 Maximum Conducted Output Power:

Serial Number:	22VV_1	Test Date:	2023/04/28~2023/05/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.8~25.9	Relative Humidity: (%)	57~59	ATM Pressure: (kPa)	100.2~100.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/03/31	2024/03/30
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
Lowest	902.3	16.51	30
Middle	914.9	16.16	30
Highest	927.6	16.32	30


Maximum Conducted Output Power

Lowest Channel

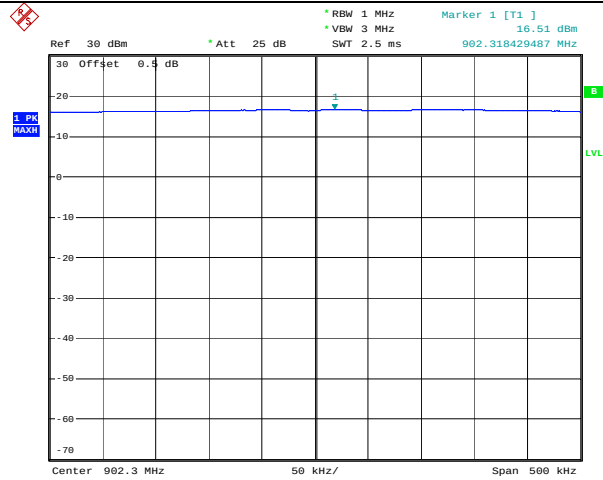


Date: 28.APR.2023 09:58:53

Middle Channel

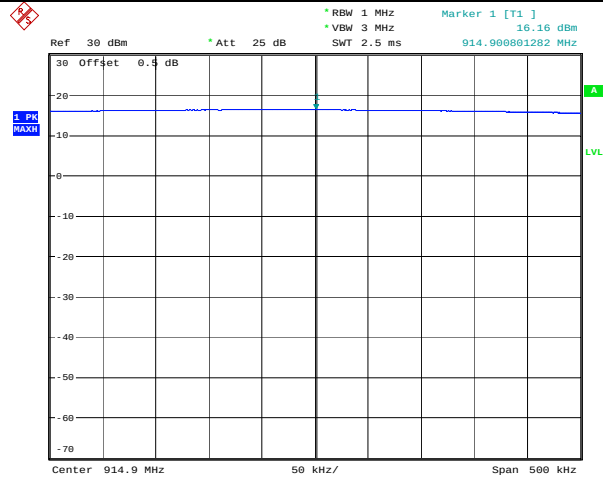

Date: 29.MAY.2023 08:39:17

Highest Channel

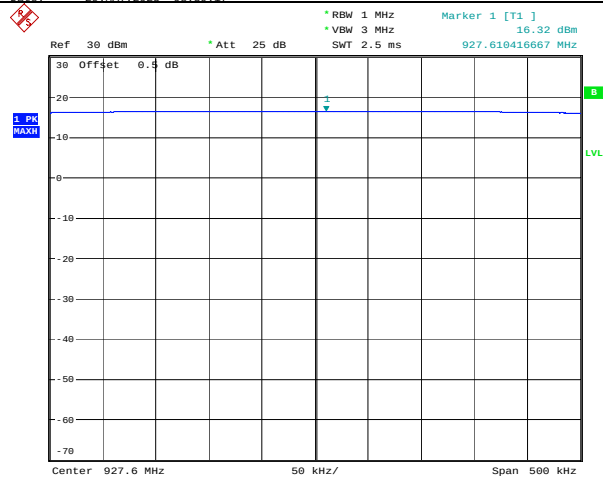

Date: 28.APR.2023 11:01:00

4.8 100 kHz Bandwidth of Frequency Band Edge:

Serial Number:	22VV_1	Test Date:	2023/05/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Panda sun	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/03/31	2024/03/30
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

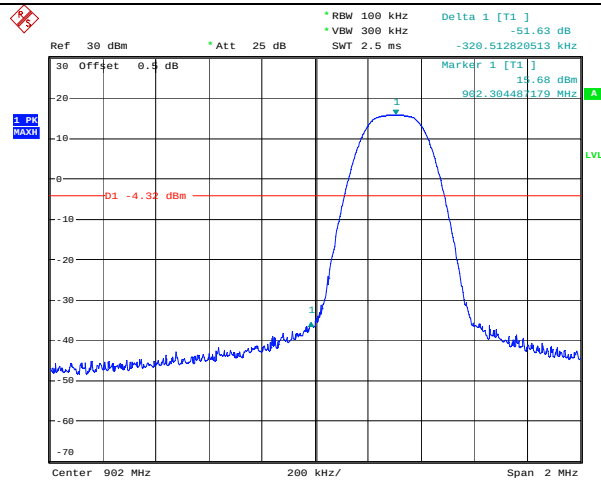100 kHz Bandwidth of Frequency Band Edge-Single Mode**Band Edge,
Left Side**


Date: 29.MAY.2023 09:44:09

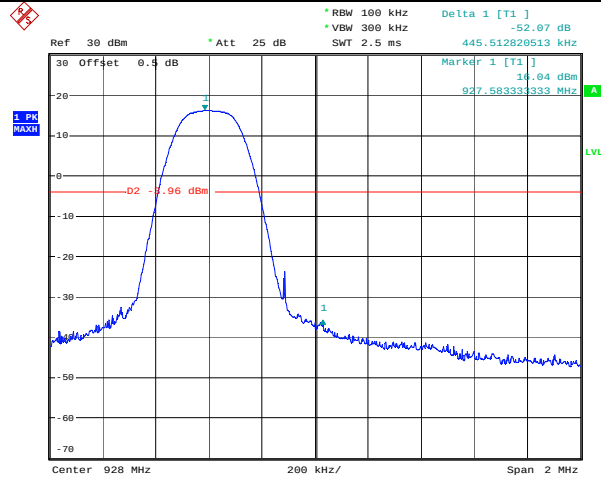**Band Edge,
Right Side**

Date: 29.MAY.2023 09:28:55

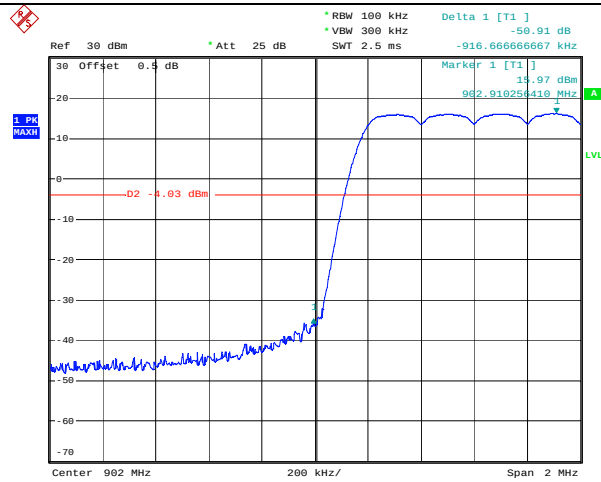100 kHz Bandwidth of Frequency Band Edge-Hopping Mode**Band Edge,
Left Side**

Date: 29.MAY.2023 09:35:16

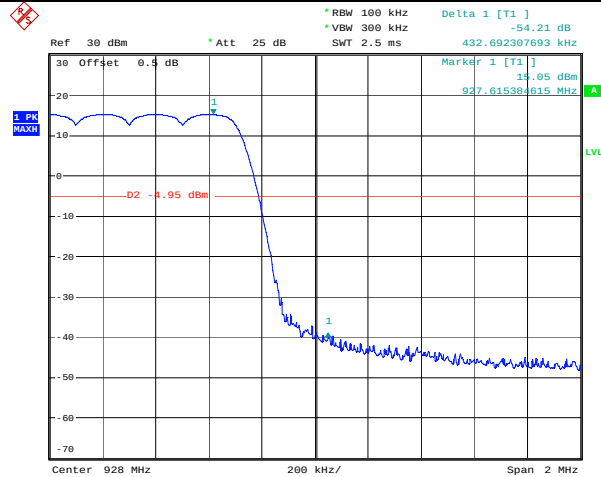**Band Edge,
Right Side**

Date: 29.MAY.2023 09:41:00

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

FCC §15.247 (i) and subpart §1.1307

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

5.2 Procedure

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

5.3 Measurement Result

Operation Modes	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP (dBm)	MPE-Based Exemption
				(mW)	(dBm)				
Lora-FHSS	902.3-927.6	51.50	200	475	26.77	17.0	5.0	19.85	Compliant
Lora-DTS	903.0-926.9	51.54	200	475	26.76	21.0	5.0	23.85	Compliant

Note: the Lora-FHSS and Lora-DTS can't transmit simultenuously. The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

Result: The device compliant the MPE-Based Exemption at 20cm distances.

===== END OF REPORT =====