



No.:
FCCSZ2025-0038-RF2

TEST REPORT

FCC ID : 2AYHY-VS321



NAME OF SAMPLE : Wireless AI Occupancy Sensor

APPLICANT : Xiamen Milesight IoT Co., Ltd.

CLASSIFICATION OF TEST : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: Xiamen Milesight IoT Co., Ltd. Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China	
Manufacturer		Name: Xiamen Milesight IoT Co., Ltd. Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China	
Equipment Under Test		Name: Wireless AI Occupancy Sensor Model/Type: VS321-915M Additional Model/Type: See Section 2.2 Brand: Milesight Serial No.: N/A Sample No.: 202504288769-1	
Date of Receipt.	Apr. 29, 2025	Date of Testing	Apr. 29, 2025~Jul.16, 2025
Test Specification		Test Result	
FCC Part 15, Subpart C, Section 15.247		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied.	
		Seal of CVC Issue Date: Jul. 16, 2025	
Compiled by:  Liang Jiatong Name Signature	Reviewed by:  Mo Xianbiao Name Signature	Approved by:  Dong Sanbi Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed		Fail = failed	N/A= not applicable
EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 TEST LOCATION	5
1.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.3 MEASUREMENT UNCERTAINTY	8
2 GENERAL INFORMATION	9
2.1 GENERAL PRODUCT INFORMATION	9
2.2 ADDITIONAL MODEL/TYPE	9
2.3 DESCRIPTION OF ACCESSORIES	10
2.4 CHANNEL FREQUENCY	11
2.5 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
2.7 DESCRIPTION OF SUPPORT UNITS	13
3 TEST TYPES AND RESULTS	14
3.1 RADIATED EMISSION AND BANDEdge MEASUREMENT	14
3.2 6dB BANDWIDTH MEASUREMENT	22
3.3 CONDUCTED OUTPUT POWER	24
3.4 POWER SPECTRAL DENSITY MEASUREMENT	26
3.5 OUT OF BAND EMISSION MEASUREMENT	28
3.6 ANTENNA REQUIREMENT	31
4 PHOTOGRAPHS OF TEST SETUP	32
5 PHOTOGRAPHS OF THE EUT	33



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2025-0038-RF2	Original release	Jul.16, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Not Applicable
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Meet the requirement of limit.

1.1 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab of CVC Testing Technology (Shenzhen) Co., Ltd.

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



1.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Antenna Port Conducted Test(BT/WIFI)						
Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal.Day	Cal. Due
Spectrum Analyzer	R&S	FSV 30	CS03000 2	1 year	2025/04/23	2026/04/22
Spectrum Analyzer	R&S	FSV 40	101009	1 year	2025/05/22	2026/05/21
Analog signal Generator	R&S	SMB 100A	CS03000 15	1 year	2025/04/23	2026/04/22
Vector signal Generator	R&S	SGT 100A	CS03000 17	1 year	2025/04/23	2026/04/22
RF control unit (Bluetooth/Wi-Fi) power meter	Tonscend	JS0806-2-8CH	CS03000 23	1 year	2025/04/23	2026/04/22
RF control unit(DTV)	Tonscend	JS0806-1	CS03000 24	1 year	2025/04/23	2026/04/22
DC power supply	R&S	HMC8041-G	CS03000 26	1 year	2025/04/23	2026/04/22
#3Shielding room	MORI	443	CS03000 09	3 year	2023/05/17	2026/05/16
Digital multimeter	FLUKE	18B+	CS02000 56	1 year	2025/05/22	2026/05/21
10db attenuator	JUNKE	SMA-10-18-N	2503127 43	1 year	2025/06/06	2026/06/05
Power splitter	Anritsu	K240CPOWERDIVIDER	012334	1 year	2025/06/06	2026/06/05
Temperature and humidity meter	UNI-T	A10T	C193561 457	1 year	2025/04/29	2026/04/28
Conducted emission						
EMI Test Receiver	R&S	ESR3	CS03000 01	1 year	2024/05/25	2025/05/24
Voltage probe	SCHWARZBEC K	CVP9222C	CS02000 02-2	1 year	2025/04/29	2026/04/28
Voltage probe	R&S	EZ-17	CS02000 02-3	1 year	2025/04/23	2026/04/22
ISN network	R&S	ENY81	CS02000 15	1 year	2025/04/23	2026/04/22
ISN network	R&S	ENY81Cat6	CS02000 16	1 year	2025/04/23	2026/04/22
Artificial Power Network (three-phase)	SCHWARZBEC K	NNLK&8129RC	CS02000 37	1 year	2025/04/23	2026/04/22
Temperature and humidity meter	UNI-T	A10T	C193561 430	1 year	2025/04/29	2026/04/28
limiter (10 dB)	Rohde&Schwarz	ESH3-Z2	102824	1 year	2024/05/16	2025/05/15
RE Test - 3M Chamber(Below 1GHz)						
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2025/05/22	2026/05/21
Loop antenna (8.3k~30MHz)	Rohde&Schwarz	HFH2-Z2E	100951	1 year	2024/06/04	2025/06/03
Antenna(30MHz~1000 MHz)	SCHWARZBEC K	VULB 9168	1132	1 year	2025/02/28	2026/02/27
3m anechoic chamber	MORI	966	N/A	1 year	2025/05/19	2026/05/18



Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100298	1 year	2025/04/23	2026/04/22
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2025/04/23	2026/04/22
#1 control room	MORI	433	/	3 year	2023/05/17	2026/05/16
Temperature and humidity meter	/	C193561473	C193561473	1 year	2025/04/29	2026/04/28
Radiation Spurious						
Spectrum Analyzer	R&S	FSV 40	CS030001	1 year	2025/04/23	2026/04/22
Spectrum Analyzer	R&S	FSVA 3044	CS030004	1 year	2025/05/23	2026/05/22
EMI Test Receiver	R&S	ESR3	CS0300005	1 year	2025/05/22	2026/05/21
Horn antenna(1GHz-18GHz)	ETS-Lindgren	3117	CS0300007	1 year	2025/03/29	2026/03/28
Horn antenna(18GHz-40GHz)	STEATITE	QMS-00880	CS0300008	1 year	2025/03/22	2026/03/21
Automatic control unit(RSE)	R&S	OSP220	CS0300019	1 year	2024/07/03	2025/07/02
Filter group(RSE-BT/WiFi)	R&S	WiFi/BT Variant 1	CS0300020	1 year	2025/04/23	2026/04/22
Filter group(RSE-Cellular)	R&S	Cellular Variant 1	CS0300021	1 year	2025/04/23	2026/04/22
Preamplifier(1GHz-18GHz)	R&S	SCU18F	CS0300031-1	1 year	2025/04/23	2026/04/22
Preamplifier(1GHz-18GHz)	R&S	SCU-18F	CS0300031	1 year	2025/04/23	2026/04/22
Comprehensive Test Instrument	R&S	CMW 500	CS0300033	1 year	2025/05/25	2026/05/24
Antenna(30MHz~1001MHz)	SCHWARZBEC K	VULB9168	CS0200006	1 year	2025/01/23	2026/01/22
Preamplifier(1GHz-18GHz)	R&S	SCU-01F	CS0200042	1 year	2025/04/23	2026/04/22
Preamplifier(18GHz-40GHz)	R&S	SCU40A	CS0200045	1 year	2025/04/23	2026/04/22
Attenuator	boyang	BY--N-2W-5dB	/	1 year	2025/01/23	2026/01/22
Temperature and humidity meter	yuhuaze	/	WK0001	1 year	2025/04/29	2026/04/28
#2 control room	MORI	433	CS0300028	3 year	2023/05/17	2026/05/16
3m anechoic chamber	MORI	966	CS0300011	3 year	2023/05/17	2026/05/16

1.3 MEASUREMENT UNCERTAINTY


Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	Measurement Uncertainty
1	Conducted emission test	+/-2.7 dB
2	Radiated emission 9kHz-30MHz	+/-5.6 dB
3	Radiated emission 30MHz-1GHz	+/-4.6 dB
4	Radiated emission 1GHz-18GHz	+/-4.4 dB
5	Radiated emission 18GHz-40GHz	+/-5.1 dB
6	RF power	+/-0.9 dB
7	Power Spectral Density	+/-0.8 dB
8	Conducted spurious emissions	+/-2.7 dB
9	Transmission Time	+/-0.27%
10	Occupied Bandwidth	+/-1.86%

Remark: 95% Confidence Levels, k=2.

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed.

The measurement uncertainty is mentioned in this test report, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong.

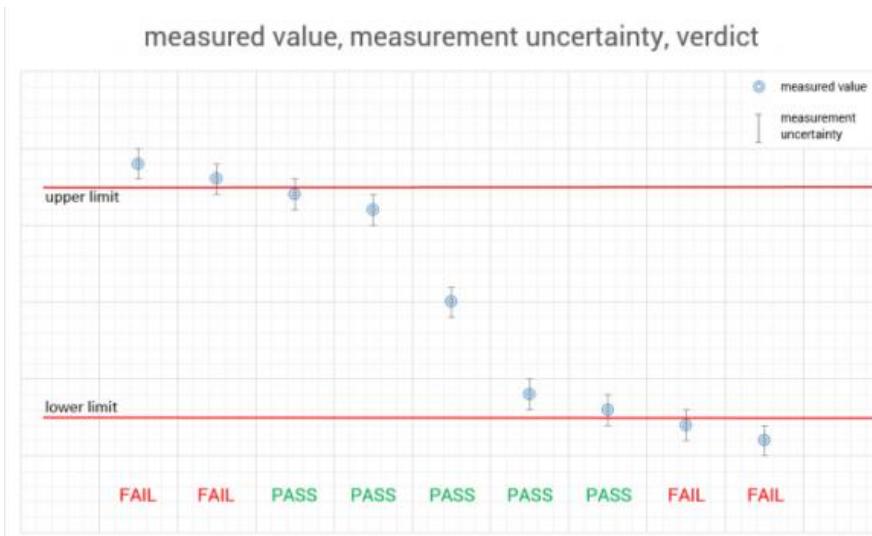



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Wireless AI Occupancy Sensor
BRAND	Milesight
MODEL	VS321-915M
ADDITIONAL MODEL	See Section 2.2
POWER SUPPLY (Remark 6)	DC 3.6V(4*3.6V ER14505 LITHIUM BATTERY AA SIZE)
MODULATION TYPE	Chirp Spread Spectrum
OPERATING FREQUENCY	DTS 500kHz, 903MHz ~ 927.5MHz
NUMBER OF CHANNEL	16
PEAK OUTPUT POWER	10.84dBm (Maximum)
ANTENNA TYPE (Remark 4/5)	PCB Antenna, with -3.45dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A
FIXED-FREQUENCY SOFTWARE	certificationTools.exe(V20230112),power level: default

Remark:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document for detailed product photo. (Report NO.: FCCSZ2025-0038-EUT)
4. Please refer to the antenna report.
5. Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
6. The product supplies power to parallel circuits.

2.2 ADDITIONAL MODEL/TYPE

Main Model No.	Serial Model No.	Difference
VS321-915M	NF321-915M,VS321-868M,NF321-868M,VS321,NF321	1.only differences are the model no and appearance silkprint



2.3 DESCRIPTION OF ACCESSORIES

BATTERY	
Brand	RAMWAY
Model No.:	ER14505 LITHIUM BATTERY
Size	AA
Output:	3.6V
Number	4



2.4 CHANNEL FREQUENCY

Operation Frequency Each of Channel					
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	903	6	912.6	12	925.7
1	904.6	7	914.2	13	926.3
2	906.2	8	923.3	14	926.9
3	907.8	9	923.9	15	927.5
4	909.4	10	924.5	--	--
5	911.0	11	925.1	--	--

Note: The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefor only the data of the test channels were recorded in this report.

2.5 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	LORA Link

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0	FHSS	DR8

For the test results, only the worst case was shown in test report.



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 15	0,7,15	FHSS	DR8

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	25.2deg. C, 55%RH	DC 3.6V	Wang Zhiming
RE≥1G	25.2deg. C, 55%RH	DC 3.6V	Wang Zhiming
PLC	25.2deg. C, 55%RH	DC 3.6V	Wang Zhiming
APCM	--	--	--



2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, Subpart C. Section 15.247

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards

2.7 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment					
NO	Description	Brand	Model No.	Serial Number	Supplied by
1	Laptop	DELL	Notebook 14	N/A	Lab
Support Cable					
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)
1	N/A	N/A	N/A	N/A	N/A



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 Measurement procedure


- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.1.3 Test setup


Below 30MHz Test Setup:

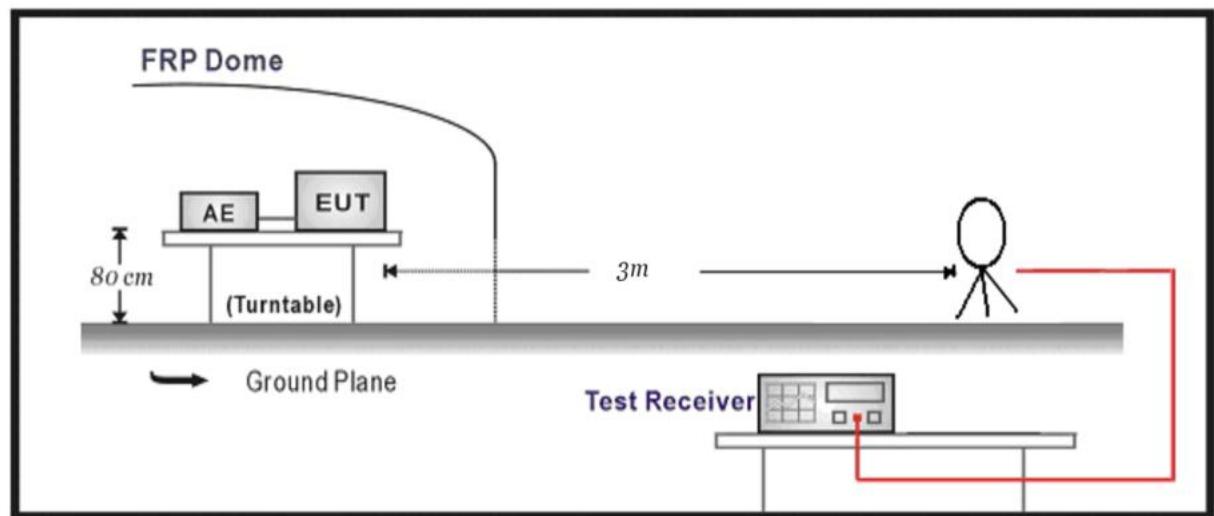

Below 1GHz Test Setup:

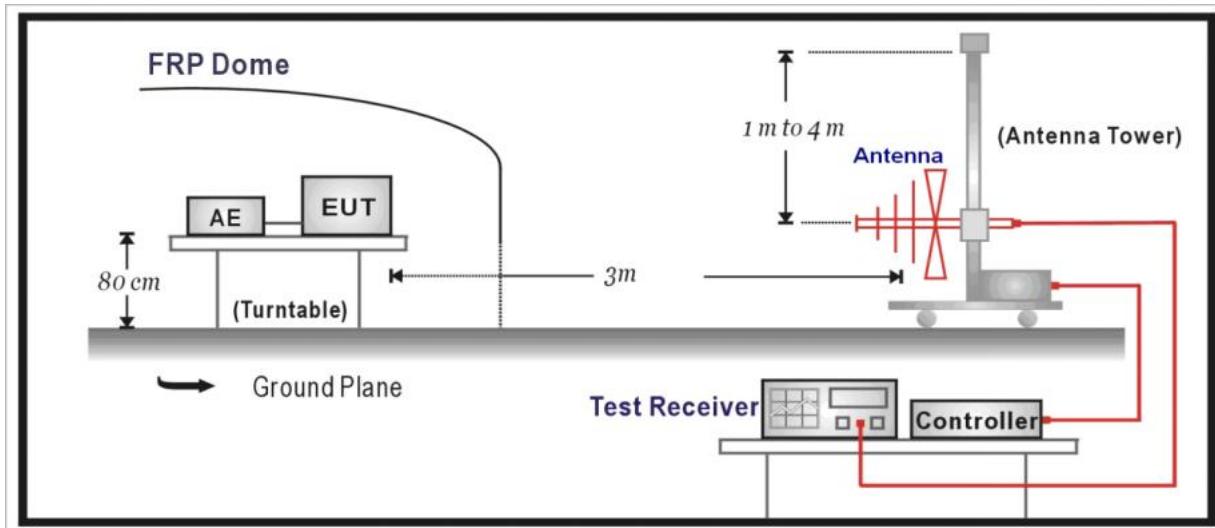

Above 1GHz Test Setup:

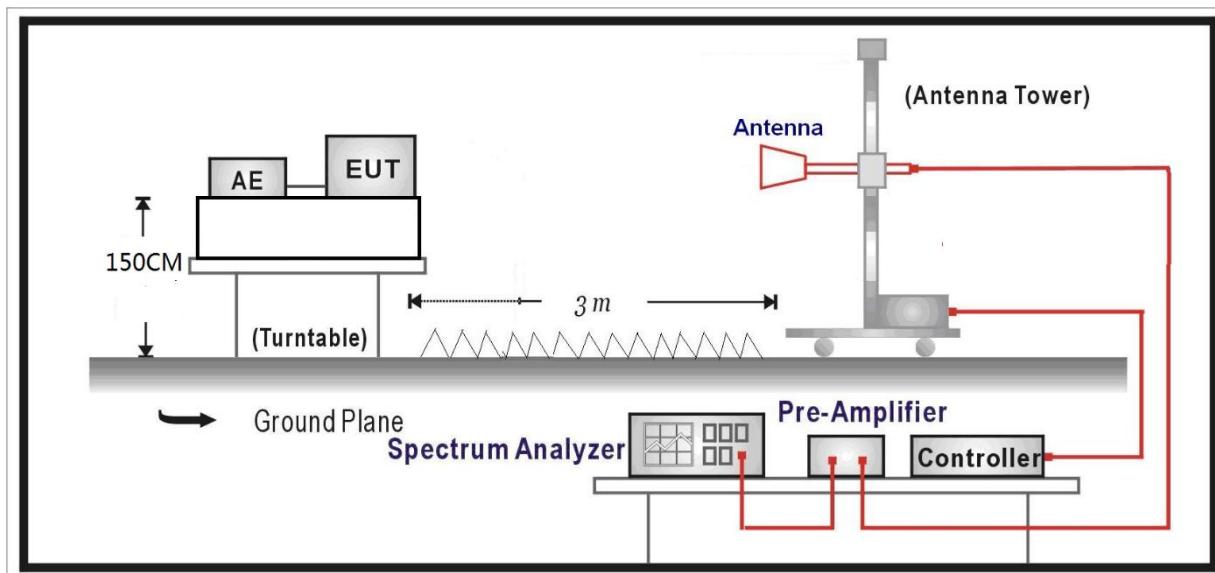


3.1.4 Test results

BELOW 1GHz WORST-CASE DATA

Test Mode:	LORA Link	Frequency Range	30-1000MHz
Detector Function	Quasi-Peak(QP)		

Horizontal

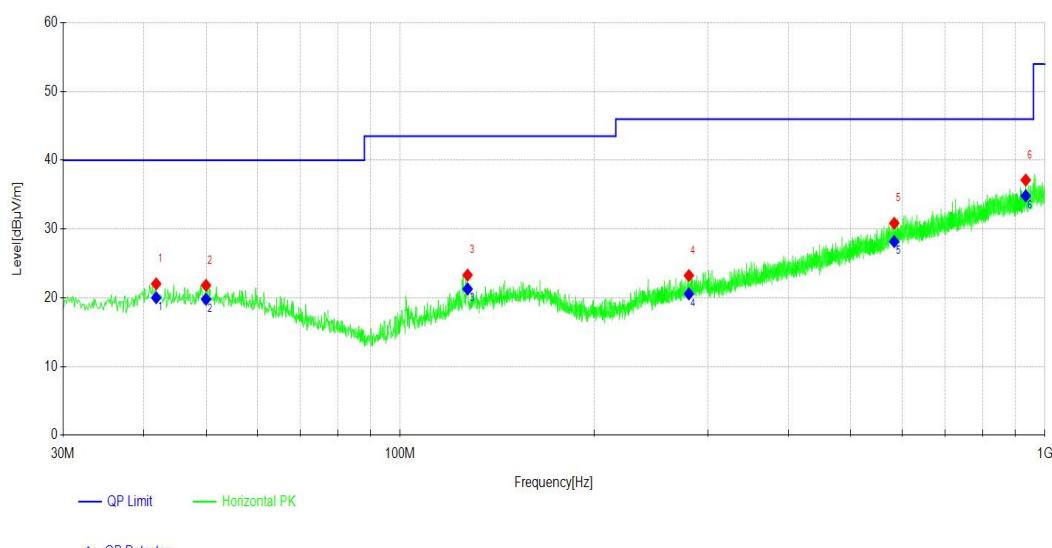


NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]
1	41.835	19.71	20.00	40.00	20.00	100	2
2	49.984	20.30	19.79	40.00	20.21	100	2
3	127.204	18.83	21.28	43.50	22.22	100	2
4	280.382	20.38	20.57	46.00	25.43	100	2
5	583.731	26.93	28.18	46.00	17.82	100	170
6	933.548	31.96	34.82	46.00	11.18	100	161

Remark: 1. The emission levels of 9k - 30MHz were greater than 20dB margin.

2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]

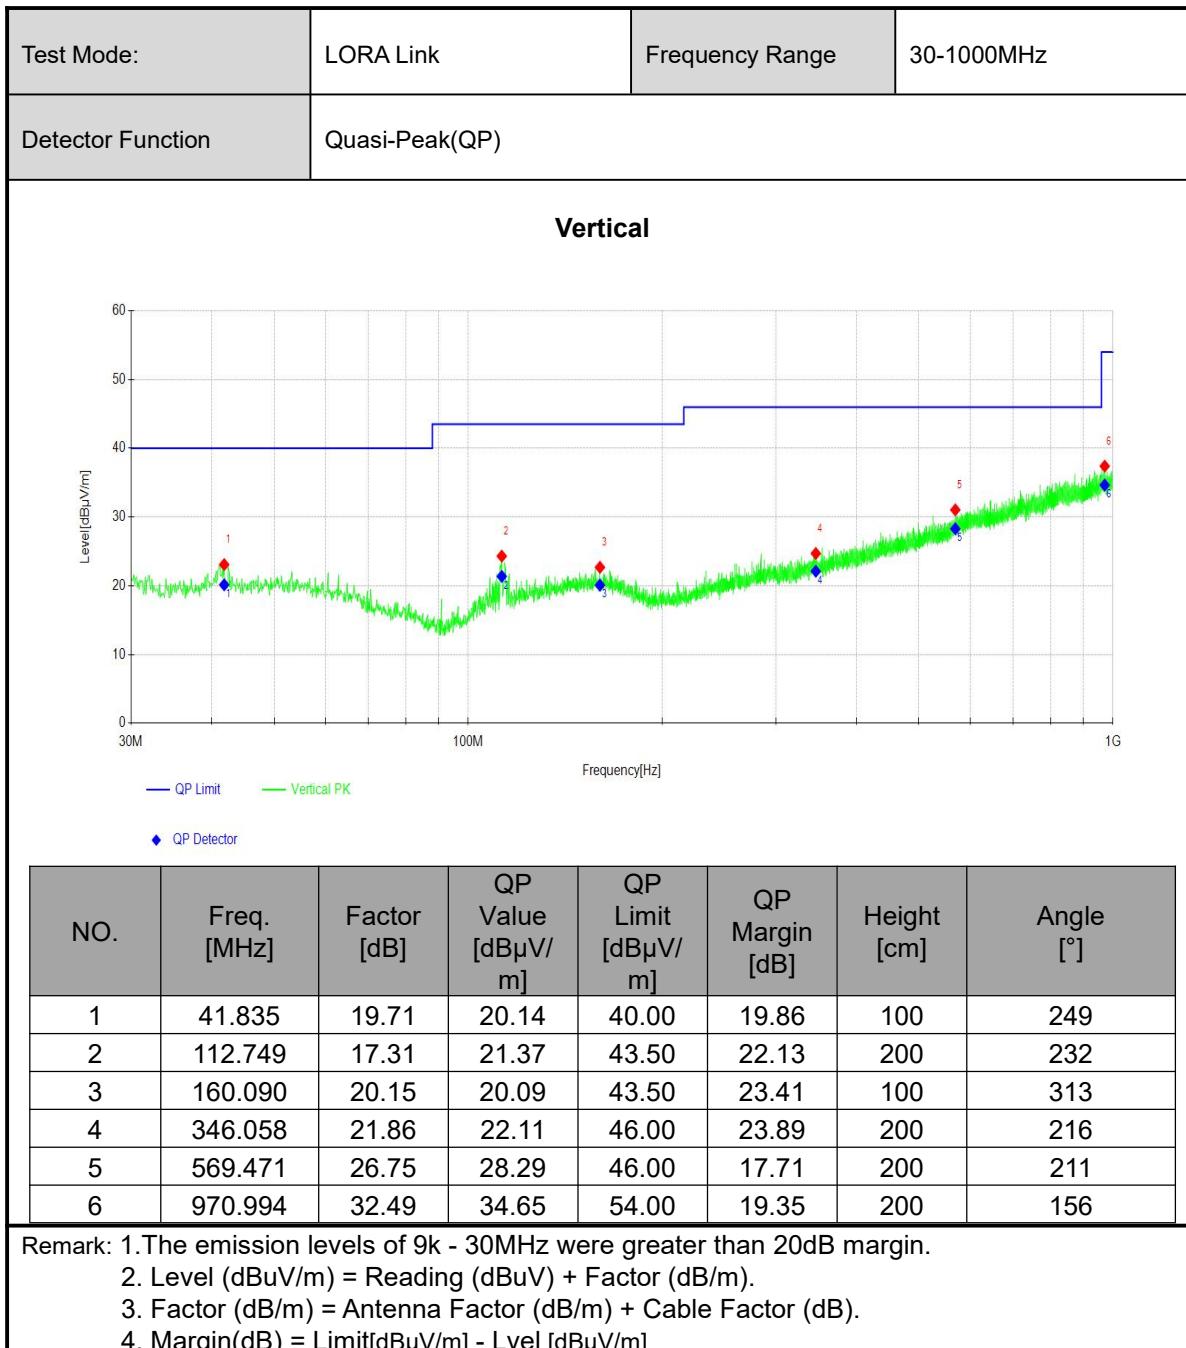



ABOVE 1GHz DATA

Channel	CH 0	Frequency	903MHz				
Frequency Range	1GHz~9.3G	Detector Function	PK/AV				
Horizontal							
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
1	1806.00	49.73	5.48	55.21	74.00	18.79	PK
2	1806.00	46.91	5.48	52.39	54.00	1.61	AV
3	2709.00	43.99	9.96	53.95	74.00	20.05	PK
4	2709.00	35.91	9.96	45.87	54.00	8.13	AV
5	3612.00	42.02	6.60	48.62	74.00	25.38	PK
6	3612.00	34.63	6.60	41.23	54.00	12.77	AV
Vertical							
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
1	1806.00	42.98	5.48	48.46	54.00	5.54	AV
2	1806.00	47.21	5.48	52.69	74.00	21.31	PK
3	2709.00	34.91	9.96	44.87	54.00	9.13	PK
4	2709.00	43.18	9.96	53.14	74.00	20.86	AV
5	3612.00	44.05	6.60	50.65	74.00	23.35	AV
6	3612.00	34.26	6.60	40.86	54.00	13.14	PK

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dB μ V/m) = Reading (dB μ V/m) + Factor (dB).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]



Channel	CH 7		Frequency	914.2MHz			
Frequency Range	1GHz~9.3G		Detector Function	PK/AV			
Horizontal							
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
1	1828.40	43.53	5.72	49.25	54.00	4.75	PK
2	1828.40	46.59	5.72	52.31	74.00	21.69	AV
3	2742.60	43.73	11.00	54.73	74.00	19.27	AV
4	2742.60	35.00	11.00	46.00	54.00	8.00	PK
5	3656.80	34.48	6.32	40.80	54.00	13.20	AV
6	3656.80	42.71	6.32	49.03	74.00	24.97	PK
Vertical							
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
1	1828.40	48.23	5.72	53.95	74.00	20.05	PK
2	1828.40	44.20	5.72	49.92	54.00	4.08	AV
3	2742.60	43.59	11.00	54.59	74.00	19.41	AV
4	2742.60	35.42	11.00	46.42	54.00	7.58	PK
5	3656.80	42.27	6.32	48.59	74.00	25.41	PK
6	3656.80	34.86	6.32	41.18	54.00	12.82	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dB μ V/m) = Reading (dB μ V/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]							



Channel	CH 15		Frequency	927.5MHz			
Frequency Range	1GHz~9.3G		Detector Function	PK/AV			
Horizontal							
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
1	1855.00	47.95	6.02	53.97	74.00	20.03	PK
2	1855.00	44.11	6.02	50.13	54.00	3.87	AV
3	2782.50	35.79	10.20	45.99	54.00	8.01	AV
4	2782.50	43.93	10.20	54.13	74.00	19.87	PK
5	3710.00	44.63	6.89	51.52	74.00	22.48	AV
6	3710.00	35.31	6.89	42.20	54.00	11.80	PK
Vertical							
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
1	1855.00	46.85	6.02	52.87	74.00	21.13	PK
2	1855.00	44.02	6.02	50.04	54.00	3.96	AV
3	2782.50	35.14	10.20	45.34	54.00	8.66	PK
4	2782.50	43.38	10.20	53.58	74.00	20.42	AV
5	3710.00	42.76	6.89	49.65	74.00	24.35	AV
6	3710.00	34.80	6.89	41.69	54.00	12.31	PK
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dB μ V/m) = Reading (dB μ V/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]							

3.2 6dB BANDWIDTH MEASUREMENT


3.2.1 Limits

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.2.2 Measurement procedure

- a. Set resolution bandwidth (RBW) = 100KHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3.2.3 Test setup

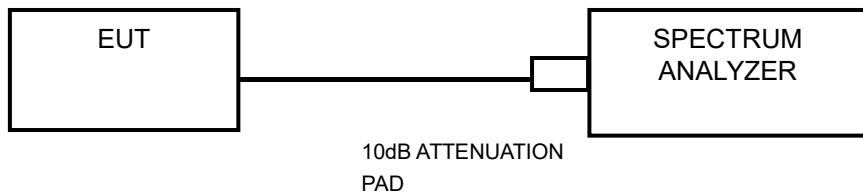



3.2.4 Test result

Mode	Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)
DR8	0	903.0	638	≥500
	7	914.2	638	≥500
	15	927.5	639	≥500

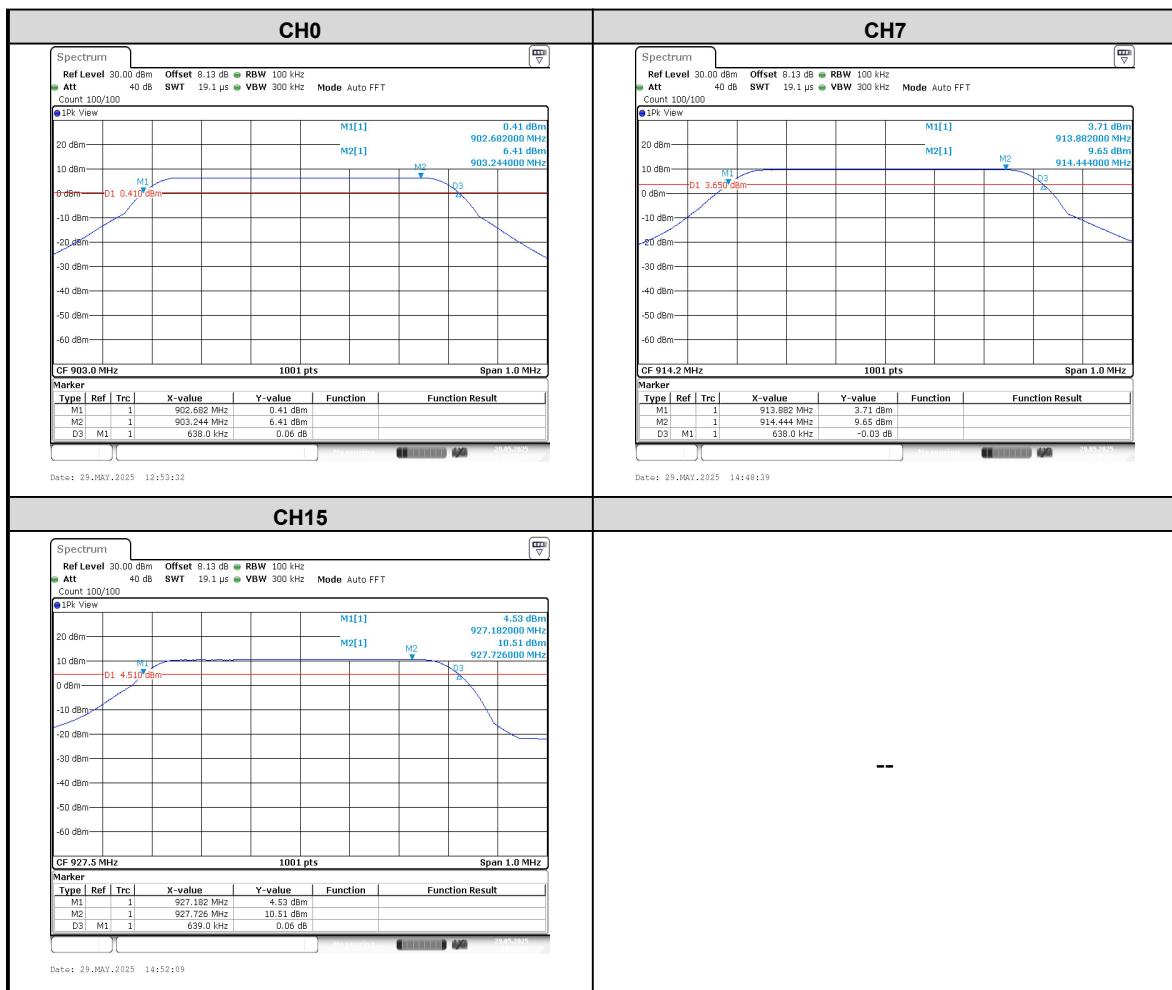

3.3 CONDUCTED OUTPUT POWER


3.3.1 Limits

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

3.3.2 Measurement procedure

- a. A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- b. An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

3.3.3 Test setup

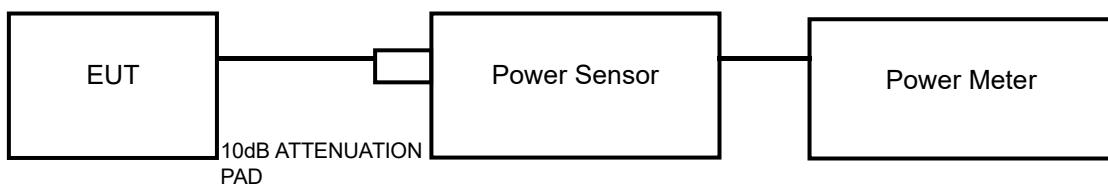



3.3.4 Test result

PEAK OUTPUT POWER

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (mW)	Verdict
0	903.0	10.22	10.52	1000	PASS
7	914.2	10.04	10.09	1000	PASS
15	927.5	10.84	12.13	1000	PASS

AVERAGE OUTPUT POWER

Mode	Channel Frequency (MHz)	Average Power (dBm)	Average Power (mW)	Average Power Limit (mW)	Verdict
0	903.0	8.52	7.11	1000	PASS
7	914.2	7.36	0.54	1000	PASS
15	927.5	7.40	0.48	1000	PASS

3.4 POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.




3.4.2 Measurement procedure

- a. Set instrument center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set RBW to: 3KHz
- d. Set VBW $\geq 3 \times$ RBW.
- e. Detector = peak
- f. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g. Sweep time = auto couple.
- h. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test setup



3.4.4 Test result

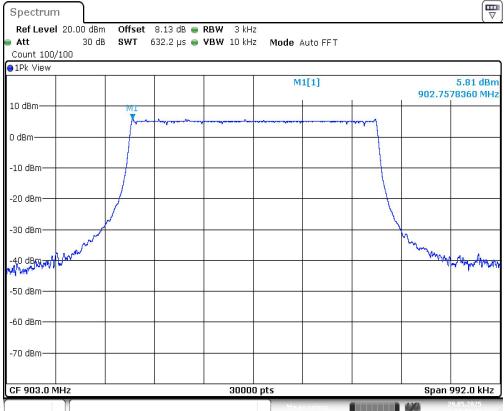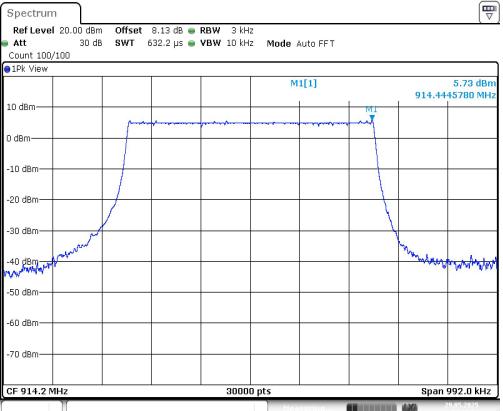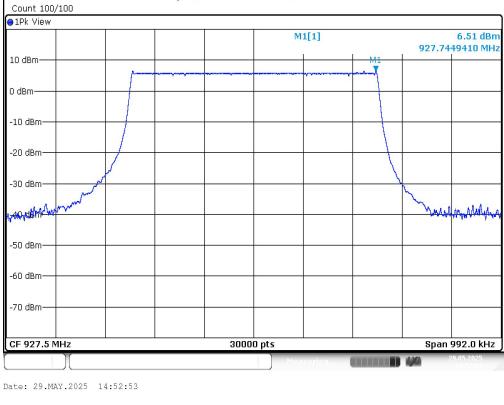Channel	Channel Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
0	903.0	5.81	8	PASS
7	914.2	5.73	8	PASS
15	927.5	6.51	8	PASS
CH0			CH63	
 <p>Ref Level 20.00 dBm Offset 8.13 dB BW 3 kHz Att 30 dB SWT 632.2 μs VBW 10 kHz Mode Auto FFT Count 100/100</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 903.0 MHz 30000 pts Span 992.0 kHz</p>			 <p>Ref Level 20.00 dBm Offset 8.13 dB BW 3 kHz Att 30 dB SWT 632.2 μs VBW 10 kHz Mode Auto FFT Count 100/100</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 914.2 MHz 30000 pts Span 992.0 kHz</p>	
CH127			--	
 <p>Ref Level 20.00 dBm Offset 8.13 dB BW 3 kHz Att 30 dB SWT 632.2 μs VBW 10 kHz Mode Auto FFT Count 100/100</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 927.5 MHz 30000 pts Span 992.0 kHz</p>			--	

3.5 OUT OF BAND EMISSION MEASUREMENT

3.5.1 Limits

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.5.2 Measurement procedure

Measurement Procedure -Reference Level

- a. Set the RBW = 100 kHz.
- b. Set the VBW \geq 300 kHz.
- c. Detector = peak.
- d. Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHzband segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

- a. Set RBW = 100 kHz.
- b. Set VBW \geq 300 kHz.
- c. Set span to encompass the spectrum to be examined
- d. Detector = peak.
- e. Trace Mode = max hold.
- f. Sweep = auto couple.


3.5.3 Test setup




3.5.4 Test result

The spectrum plots are attached on the following images.

DR8

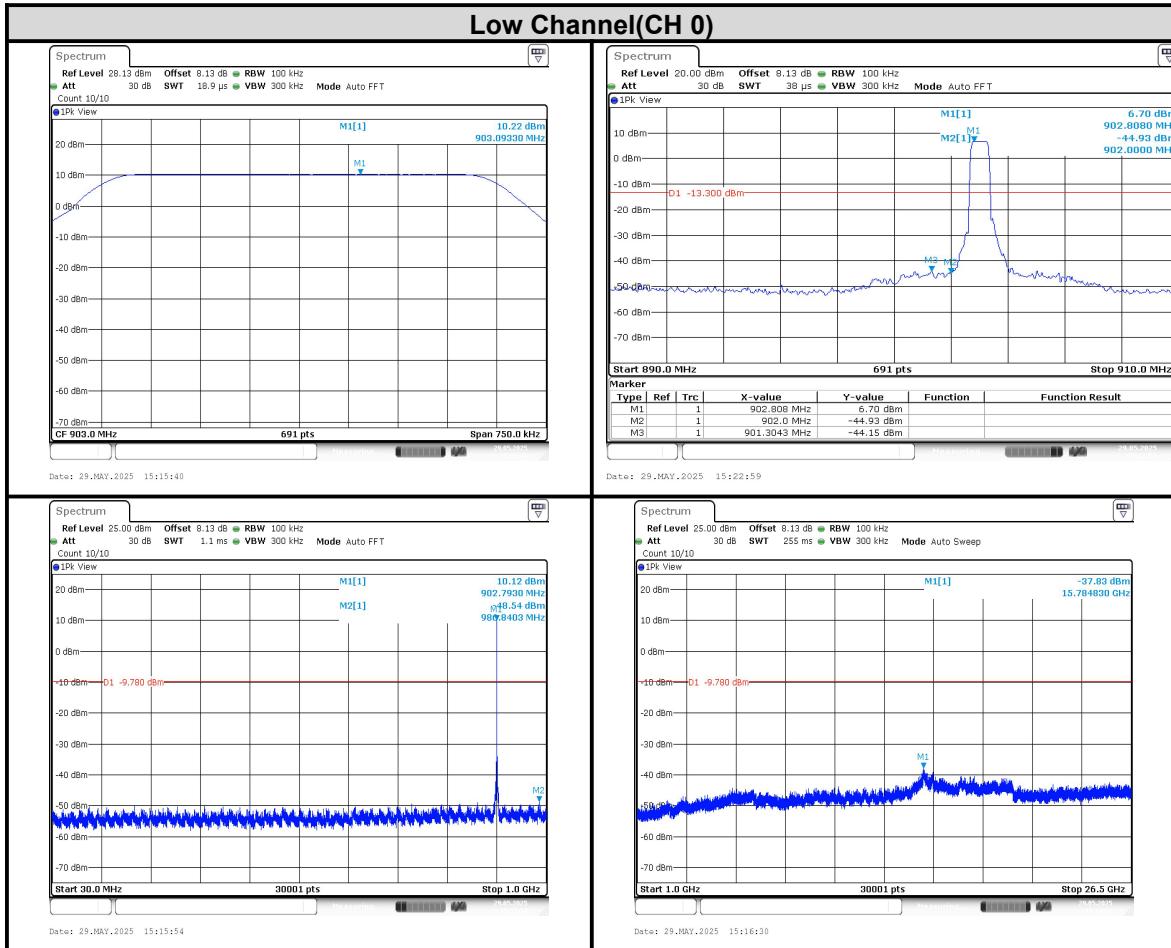

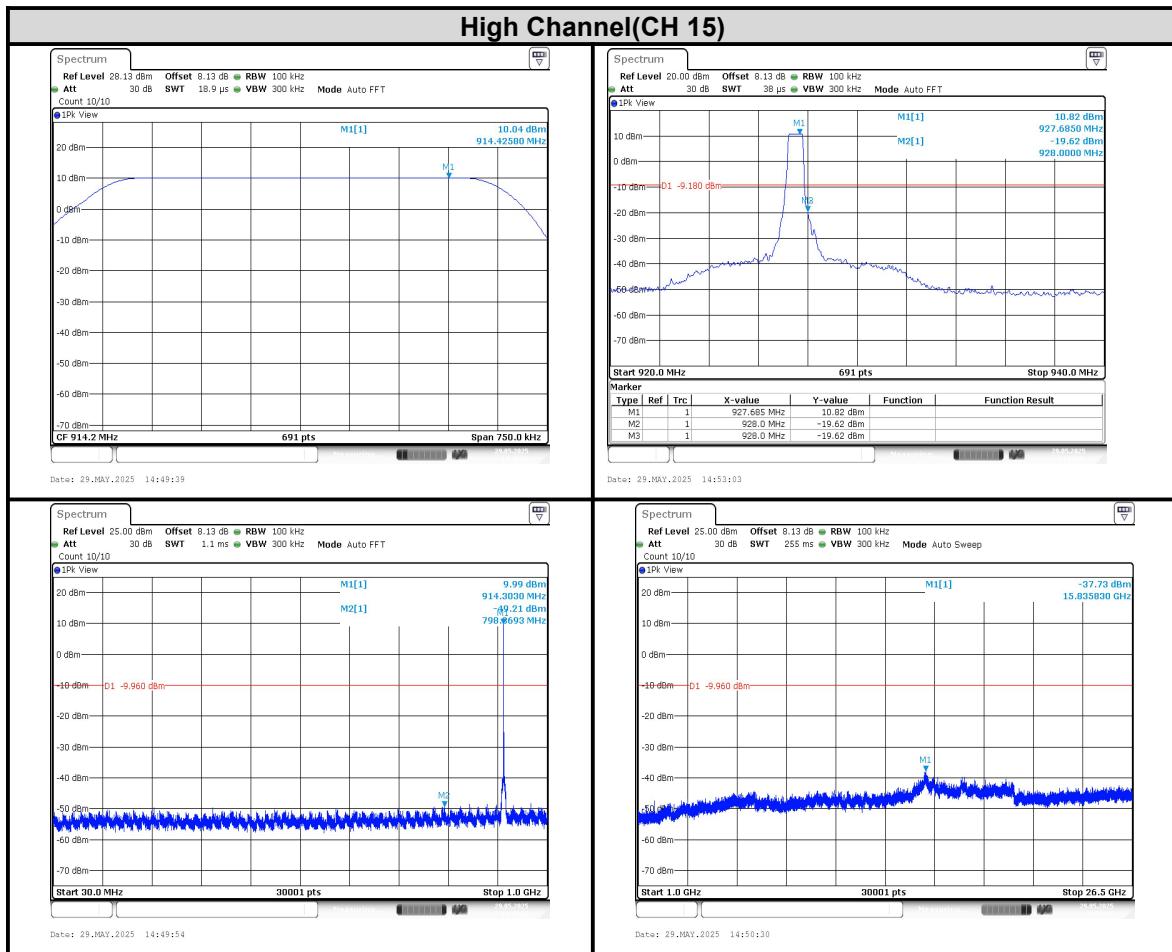



3.6 ANTENNA REQUIREMENT

3.6.1 Limits Of Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b) , if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device

3.6.3 Antenna Gain

The maximum peak gain of the transmit antenna is -3.45 dBi.



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos and Internal Photos report).

----- End of the Report -----



Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>