



# QUICK START GUIDE

## RADAR FALL DETECTION SENSOR


VS373



## 1. Packing List

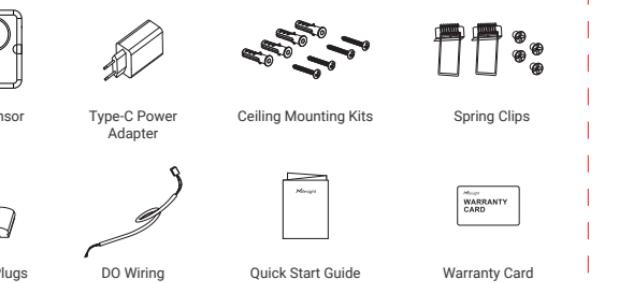

## 2. Hardware Introduction

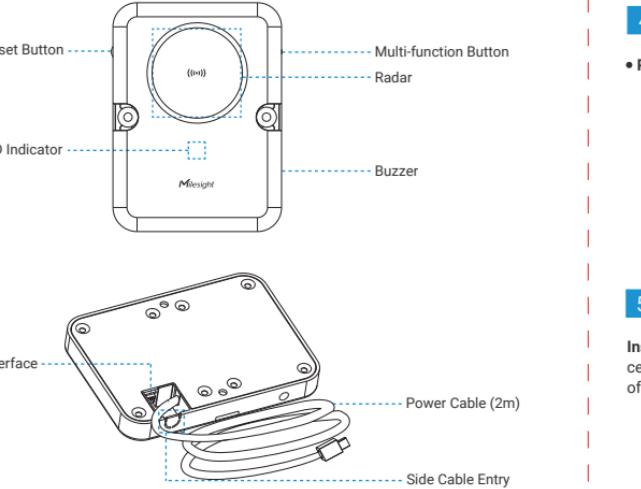

## 3. Button Description

Function	Action & Description	LED Indicator
Turn On/Off Wi-Fi	Short press the Multi-function button for once	Wi-Fi On: Light On
		Wi-Fi Off: Blink Slowly
Turn On Radar	Radar Initializing	Blink Quickly
Reset to Factory Default	Press and hold the reset button for 10 seconds	Blink Quickly
Fall Alarm	Fall event occurred	Blink Quickly
Stop Alarm	Press and hold the reset button for 6~9 seconds	Light On or Blink Slowly
Device abnormality	Radar anomaly; WiFi anomaly	Light On


## 4. Power Supply

- Powered by Type-C Power Adapter (5V, 3A)




## 5. Installation

**Installation Location:** For optimal installation, place the device on the ceiling at the center of the room. The long side of the device should align with the longer dimension of the room, while the short side should align with the shorter dimension of the room.

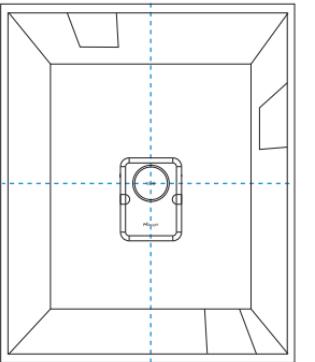


Step 2:



**Note:** If the DO wiring is going to be used, please connect the DO wiring to the device, then pass through the side wire hole.

Step 3:

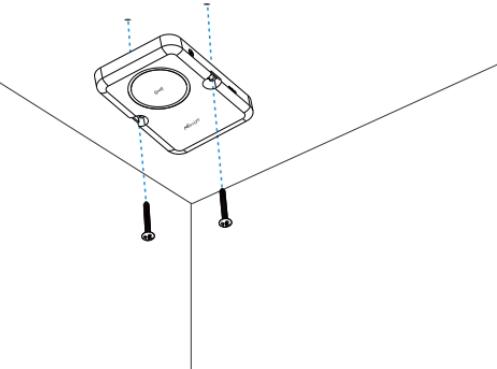


**Note:** If you need to hide the power cord into the ceiling, drill another wire hole.




Quick Start Guide

**Step 4:**

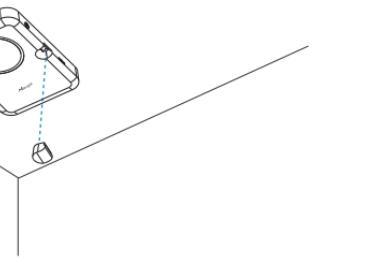


**Cutout Mount**


**Step 1:**

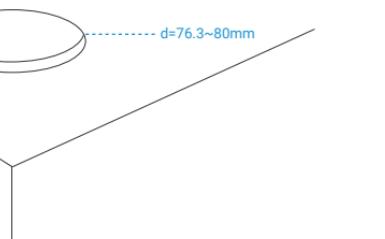

**Step 2:**


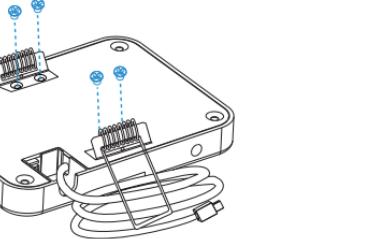


**Step 3:**




**Note:** If the DO wiring is going to be used, please connect the DO wiring to the device, then pass through the side wire hole.

**Step 4:**

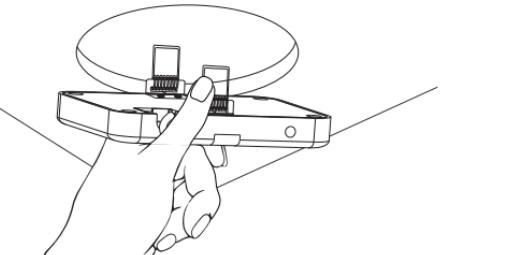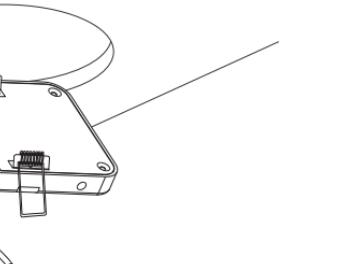

**Step 5:**

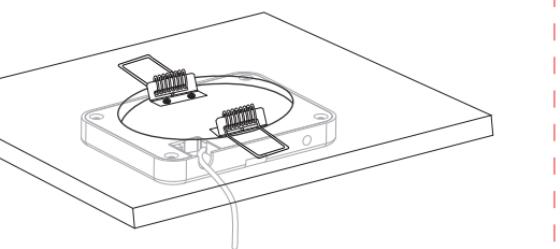

**Installation Note:**

- Ensure the installation location of the device is flat and stable to avoid tilting or instability.
- Avoid installing the device near ceiling fans or chandeliers.
- Minimize the accumulation of cabinets or clutter within the device's detection range, and avoid the presence of large metal surfaces, mirrors, or other reflective objects nearby.
- The room size, installation height, and detection height should be accurately measured using tools such as a rangefinder or tape measure before setting.

**6. Access the Web GUI**

VS373 provides user-friendly web GUI for configuration access via Wi-Fi. The default settings are as below:

Wi-Fi SSID: **Fall Detection\_XXXXXX** (can be found on the device label)

Wi-Fi IP: **192.168.1.1**

Enable the Wireless Network Connection on your computer, search for corresponding Wi-Fi SSID to connect it, then type 192.168.1.1 to access the web GUI.

Username: **admin**

Password: **pwd123456**

**7. FCC Statement**

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator& your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.