



Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; ; Channel:middle

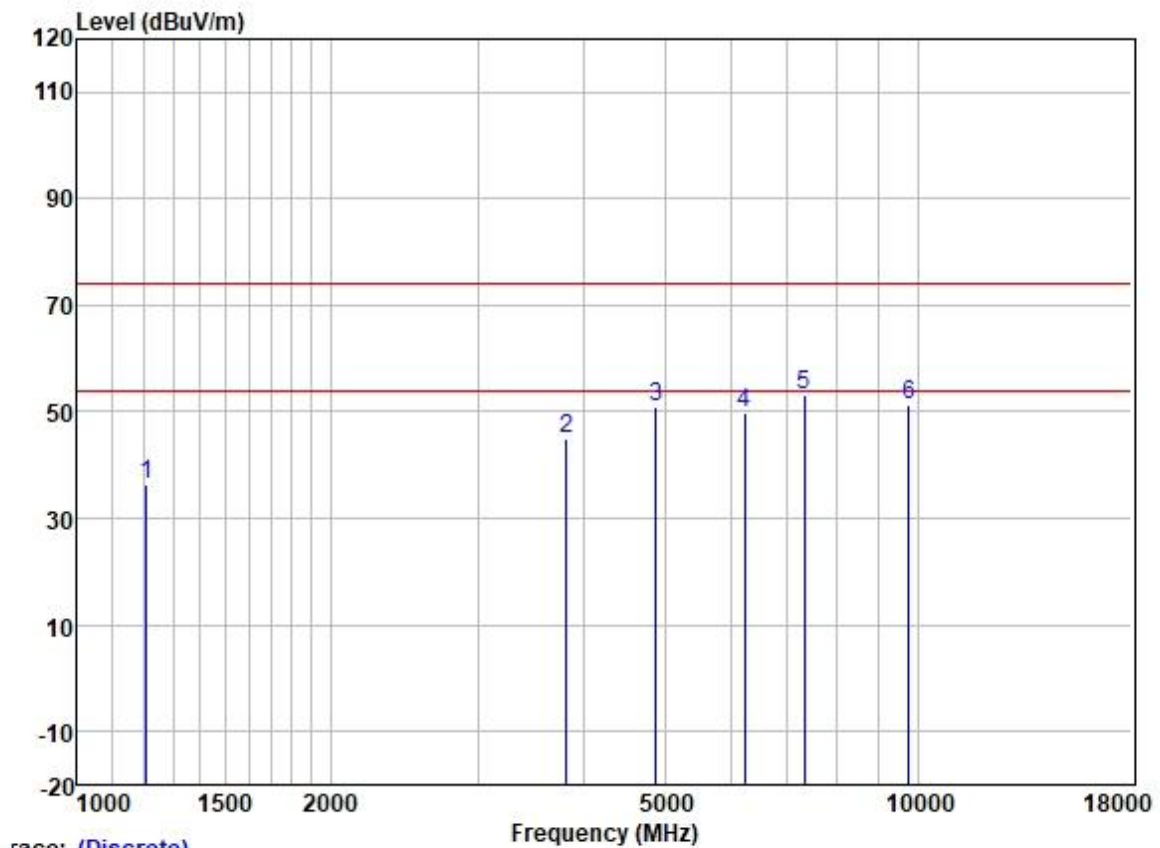


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1208.795	47.54	24.74	2.33	38.39	36.22	74.00	-37.78	HORIZONTAL Peak
2	3818.771	47.59	29.57	4.60	36.84	44.92	74.00	-29.08	HORIZONTAL Peak
3	4880.000	50.58	31.54	5.50	36.84	50.78	74.00	-23.22	HORIZONTAL Peak
4	6220.503	47.73	33.03	6.06	36.94	49.88	74.00	-24.12	HORIZONTAL Peak
5	7320.000	48.60	36.00	6.13	37.43	53.30	74.00	-20.70	HORIZONTAL Peak
6	9760.000	43.19	38.50	7.02	37.41	51.30	74.00	-22.70	HORIZONTAL Peak

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; ; Channel:middle

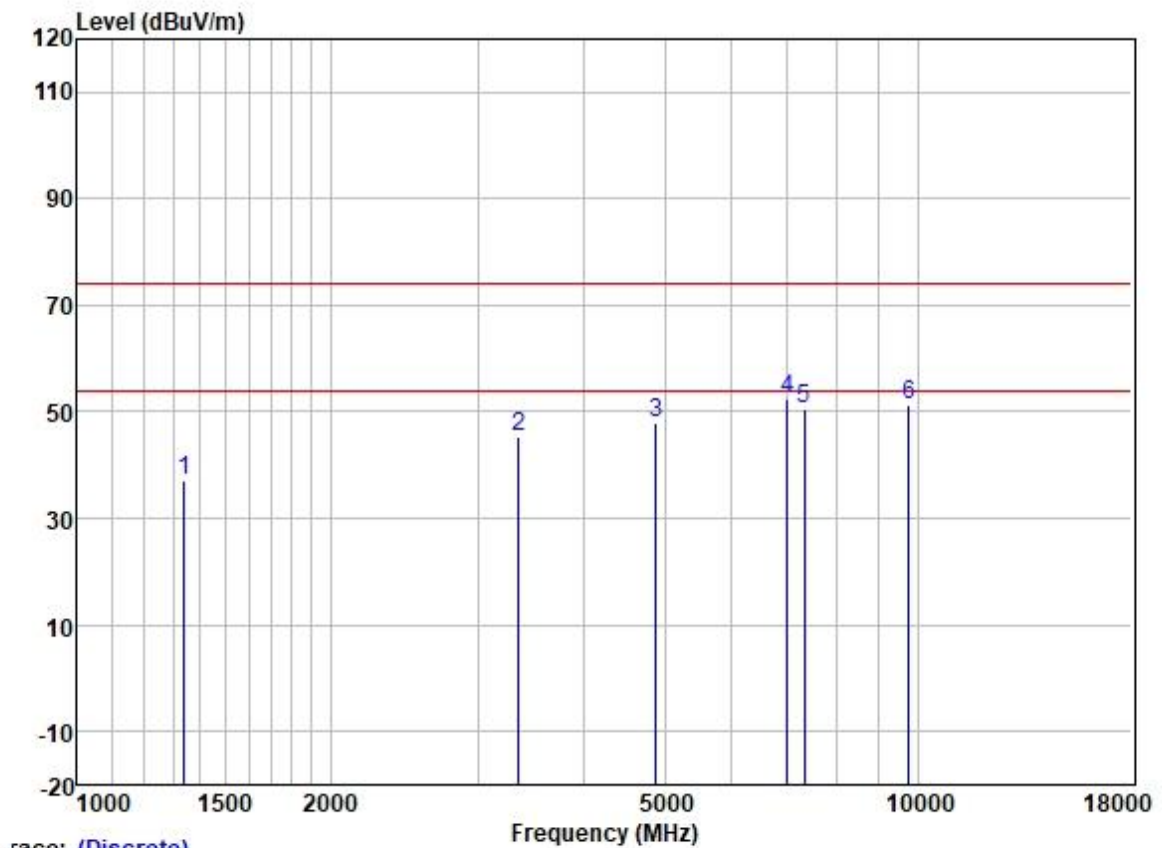


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1341.058	47.67	25.30	2.60	38.27	37.30	74.00	-36.70	VERTICAL	Peak
2	3347.925	49.44	28.80	4.08	37.01	45.31	74.00	-28.69	VERTICAL	Peak
3	4880.000	47.66	31.54	5.50	36.84	47.86	74.00	-26.14	VERTICAL	Peak
4	6998.869	48.86	35.00	5.81	37.25	52.42	74.00	-21.58	VERTICAL	Peak
5	7320.000	46.02	36.00	6.13	37.43	50.72	74.00	-23.28	VERTICAL	Peak
6	9760.000	43.16	38.50	7.02	37.41	51.27	74.00	-22.73	VERTICAL	Peak

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

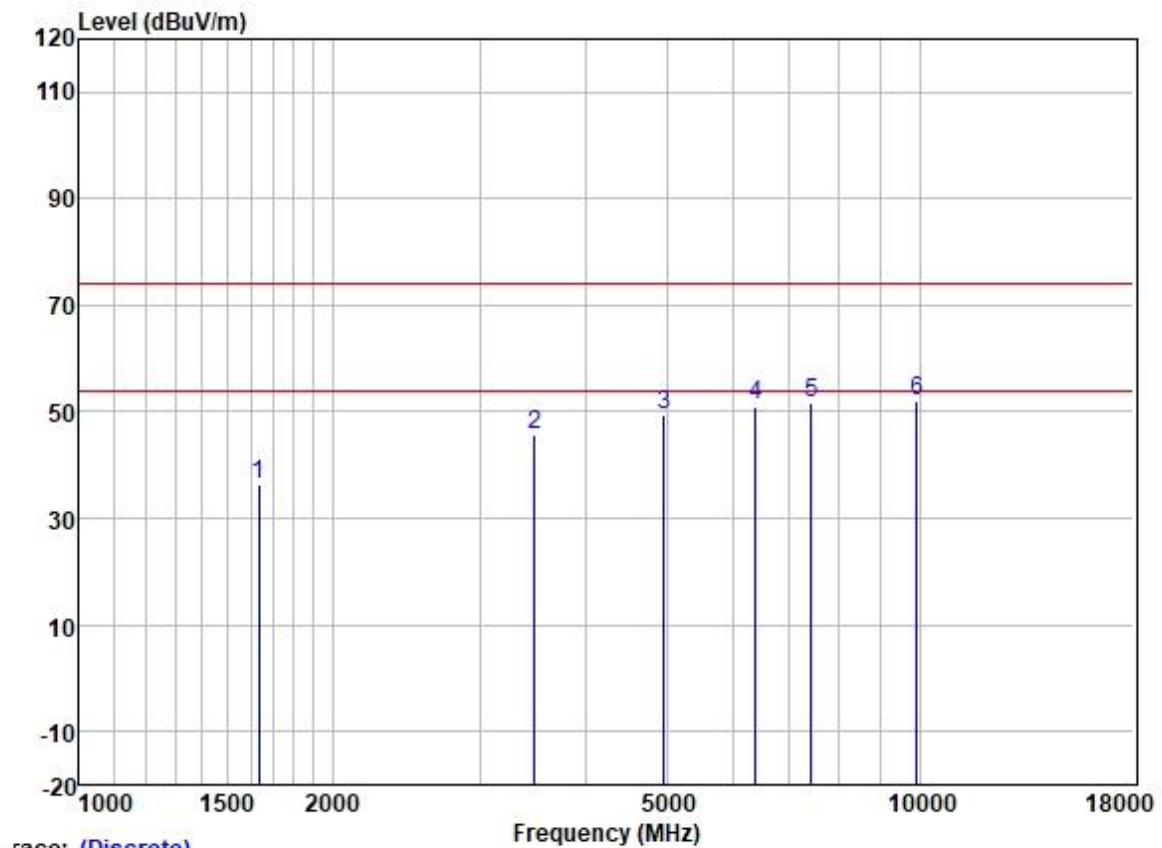

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1636.216	45.87	25.62	2.80	37.95	36.34	74.00	-37.66	HORIZONTAL Peak
2	3482.680	49.34	28.89	4.27	36.95	45.55	74.00	-28.45	HORIZONTAL Peak
3	4960.000	48.95	31.65	5.65	36.84	49.41	74.00	-24.59	HORIZONTAL Peak
4	6379.292	48.51	33.68	5.91	36.98	51.12	74.00	-22.88	HORIZONTAL Peak
5	7440.000	46.58	36.27	6.22	37.47	51.60	74.00	-22.40	HORIZONTAL Peak
6	9920.000	44.01	38.65	6.96	37.40	52.22	74.00	-21.78	HORIZONTAL Peak


Test Mode: 01; Polarity: Vertical; Modulation:GFSK; ; Channel:High

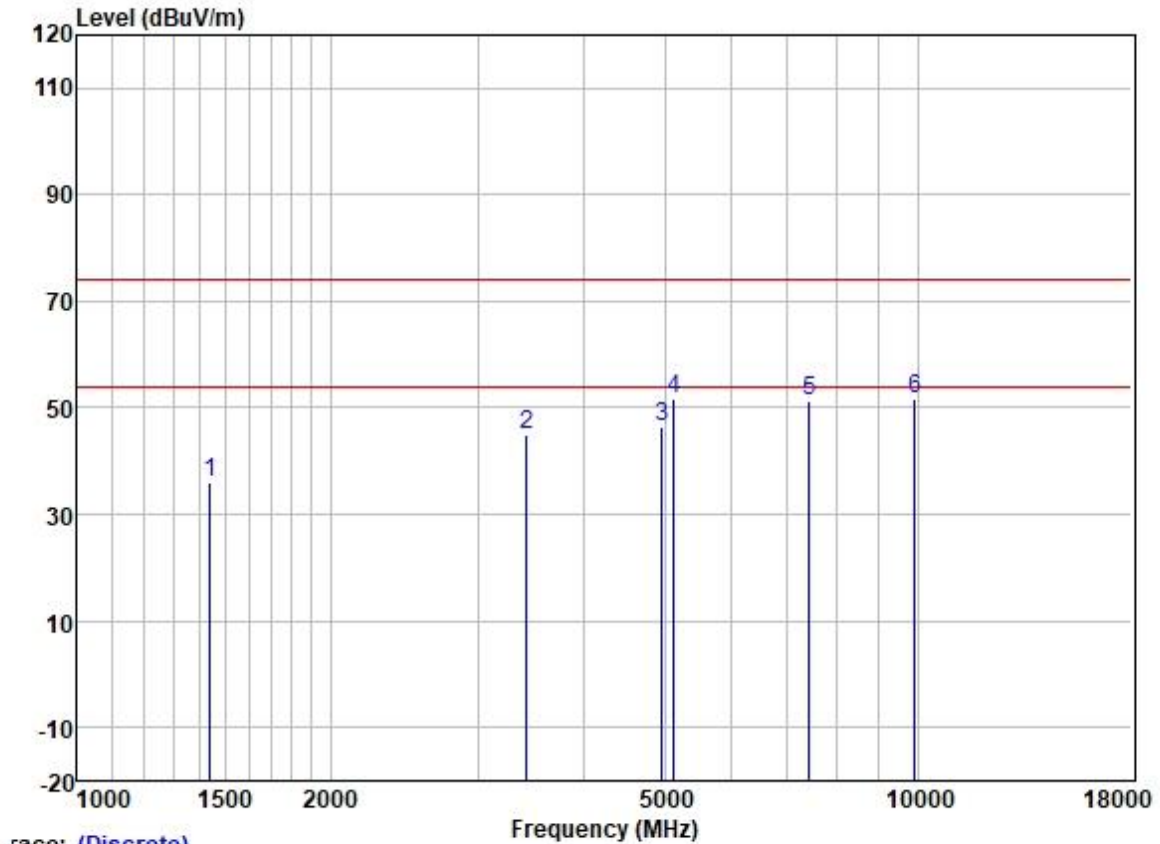

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1438.199	45.92	25.44	2.68	38.17	35.87	74.00	-38.13	VERTICAL	Peak
2	3422.509	48.94	28.86	4.15	36.97	44.98	74.00	-29.02	VERTICAL	Peak
3	4960.000	46.13	31.65	5.65	36.84	46.59	74.00	-27.41	VERTICAL	Peak
4	5129.381	51.23	31.72	5.63	36.86	51.72	74.00	-22.28	VERTICAL	Peak
5	7440.000	46.14	36.27	6.22	37.47	51.16	74.00	-22.84	VERTICAL	Peak
6	9920.000	43.32	38.65	6.96	37.40	51.53	74.00	-22.47	VERTICAL	Peak


500Kbps

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low

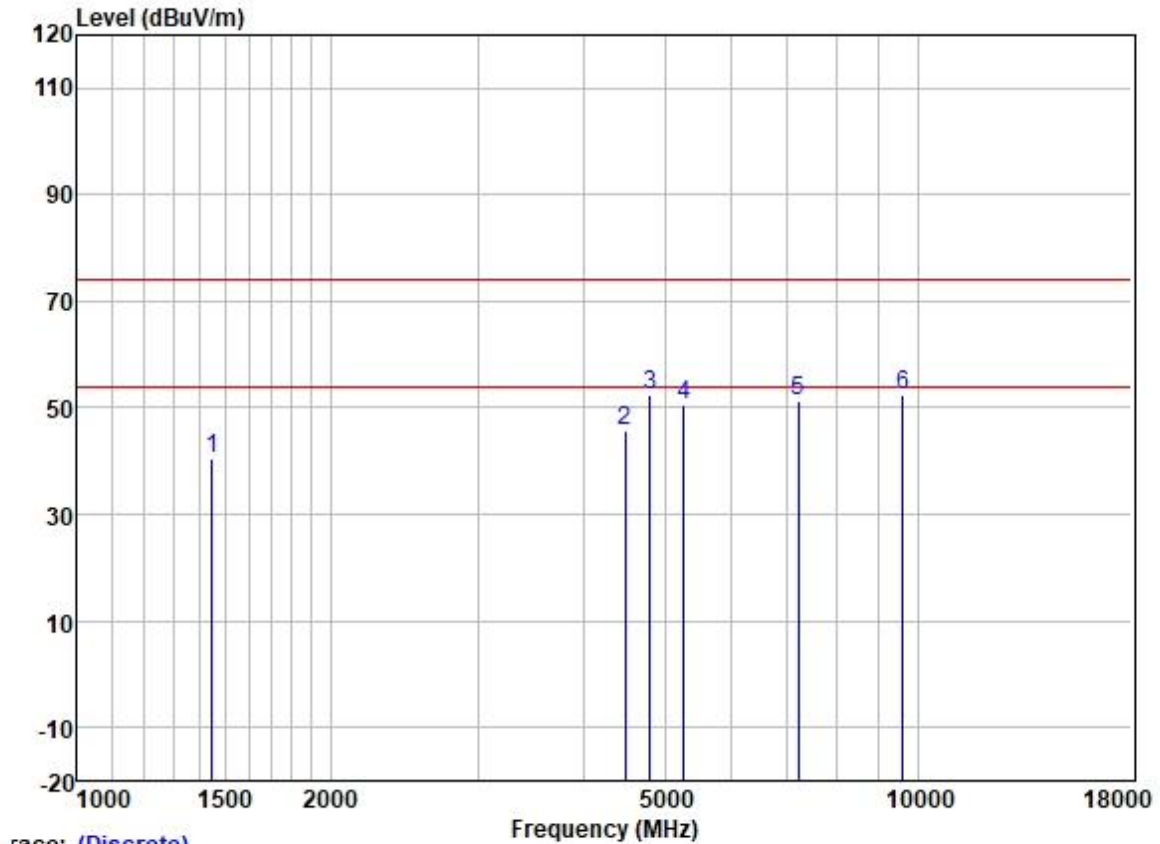

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1448.602	50.32	25.45	2.70	38.17	40.30	74.00	-33.70	HORIZONTAL	Peak
2	4486.967	46.84	30.78	4.99	36.81	45.80	74.00	-28.20	HORIZONTAL	Peak
3	4804.000	52.25	31.42	5.40	36.83	52.24	74.00	-21.76	HORIZONTAL	Peak
4	5270.959	49.75	31.75	5.80	36.87	50.43	74.00	-23.57	HORIZONTAL	Peak
5	7206.000	47.31	35.54	5.98	37.38	51.45	74.00	-22.55	HORIZONTAL	Peak
6	9608.000	44.42	38.37	7.07	37.42	52.44	74.00	-21.56	HORIZONTAL	Peak


Test Mode: 02; Polarity: Vertical; Modulation:GFSK; ; Channel:Low

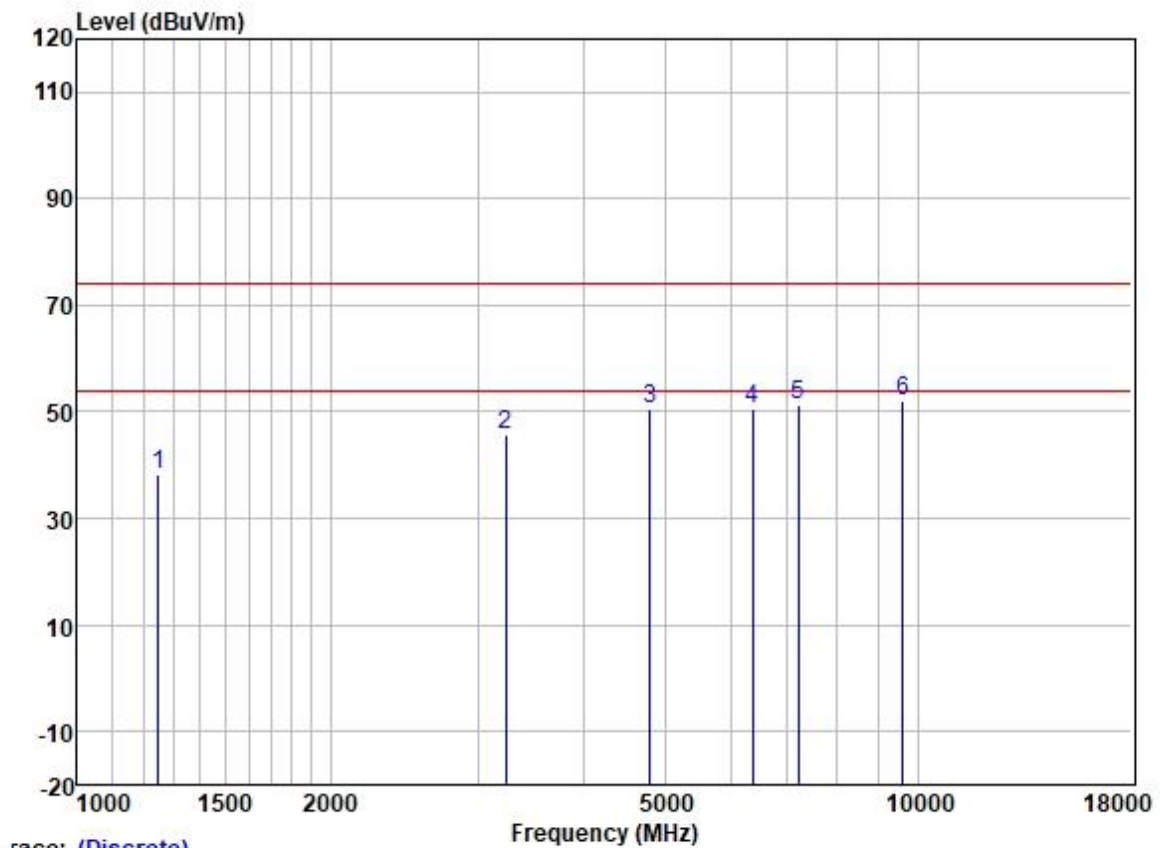

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1250.315	49.16	25.02	2.34	38.35	38.17	74.00	-35.83	VERTICAL Peak
2	3237.449	50.21	28.65	4.02	37.07	45.81	74.00	-28.19	VERTICAL Peak
3	4804.000	50.44	31.42	5.40	36.83	50.43	74.00	-23.57	VERTICAL Peak
4	6363.116	47.92	33.63	5.92	36.98	50.49	74.00	-23.51	VERTICAL Peak
5	7206.000	47.16	35.54	5.98	37.38	51.30	74.00	-22.70	VERTICAL Peak
6	9608.000	43.85	38.37	7.07	37.42	51.87	74.00	-22.13	VERTICAL Peak


Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; ; Channel:middle

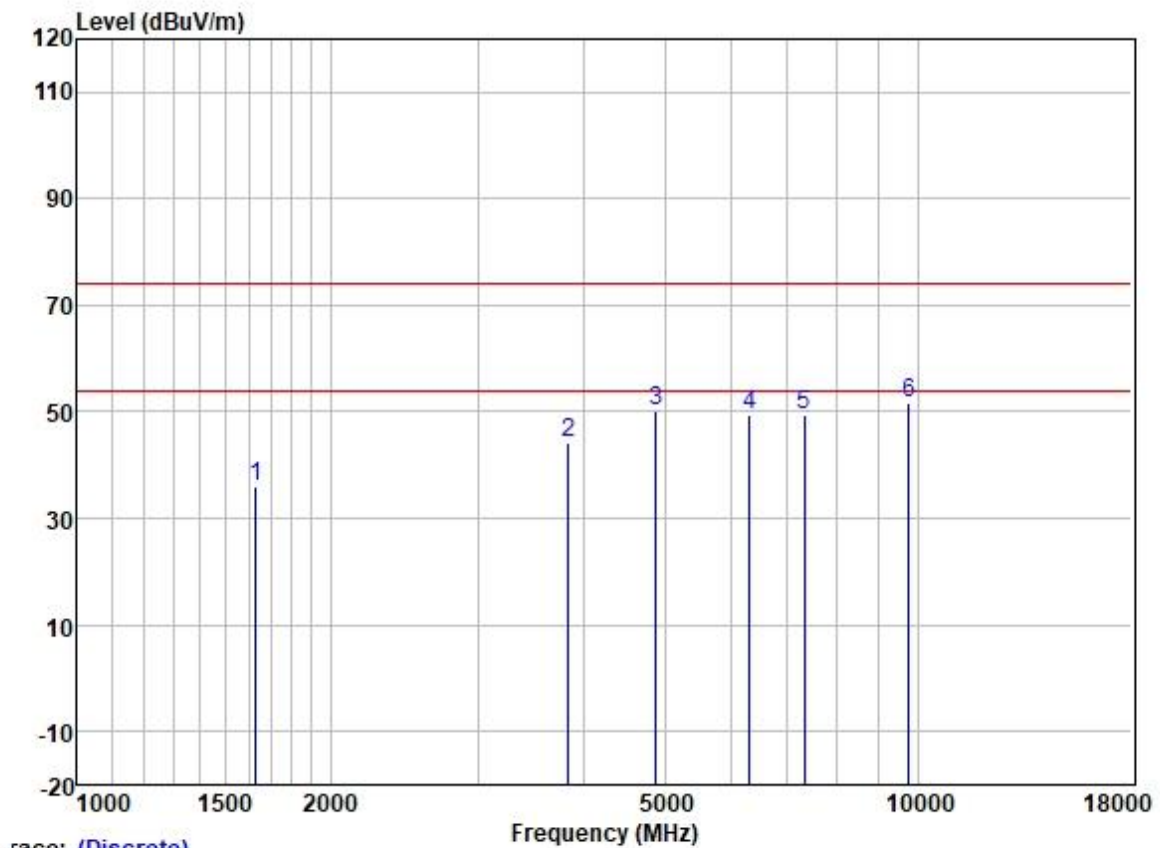

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1629.449	45.56	25.61	2.80	37.95	36.02	74.00	-37.98	HORIZONTAL	Peak
2	3838.853	46.81	29.59	4.60	36.84	44.16	74.00	-29.84	HORIZONTAL	Peak
3	4880.000	50.17	31.54	5.50	36.84	50.37	74.00	-23.63	HORIZONTAL	Peak
4	6312.504	47.02	33.44	5.97	36.97	49.46	74.00	-24.54	HORIZONTAL	Peak
5	7320.000	44.70	36.00	6.13	37.43	49.40	74.00	-24.60	HORIZONTAL	Peak
6	9760.000	43.72	38.50	7.02	37.41	51.83	74.00	-22.17	HORIZONTAL	Peak

Test Mode: 02; Polarity: Vertical; Modulation:GFSK; ; Channel:middle

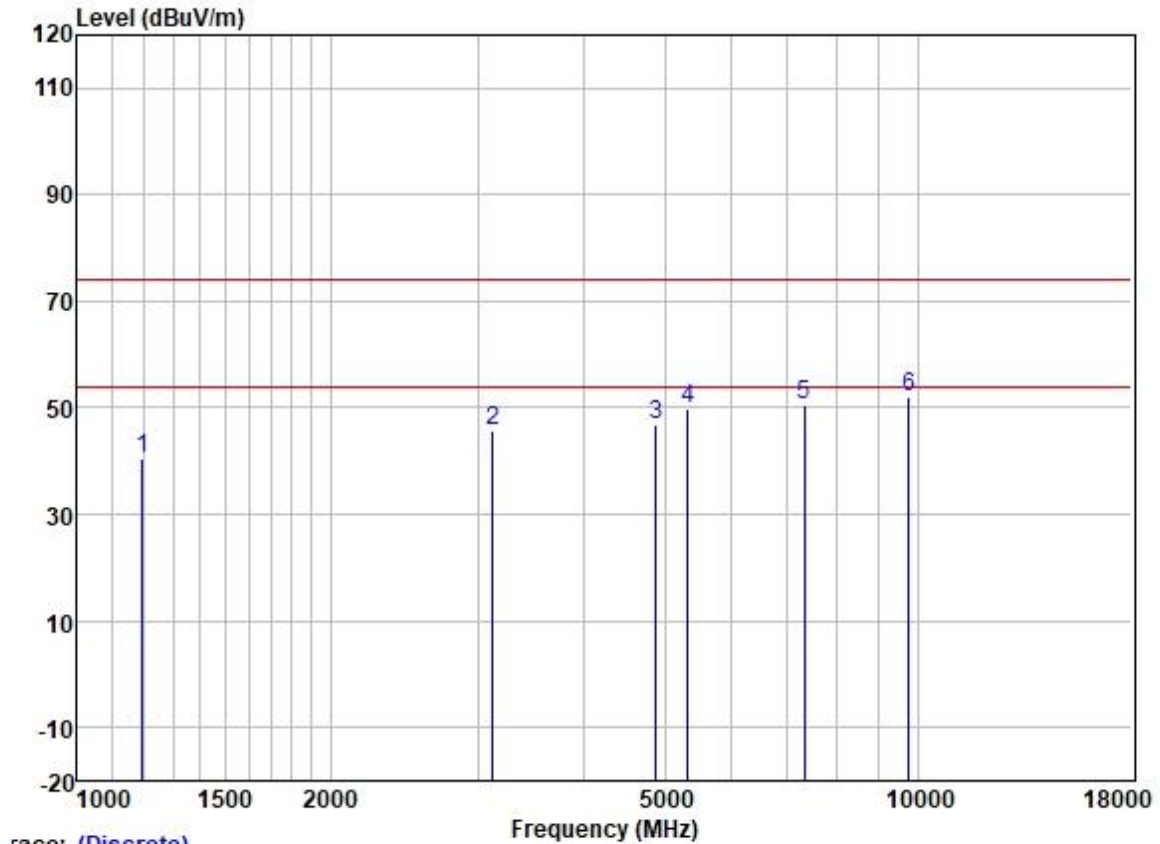


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1194.736	52.01	24.67	2.35	38.39	40.64	74.00	-33.36	VERTICAL	Peak
2	3121.212	50.24	28.50	3.94	37.14	45.54	74.00	-28.46	VERTICAL	Peak
3	4880.000	46.69	31.54	5.50	36.84	46.89	74.00	-27.11	VERTICAL	Peak
4	5323.705	48.88	31.77	6.07	36.88	49.84	74.00	-24.16	VERTICAL	Peak
5	7320.000	45.85	36.00	6.13	37.43	50.55	74.00	-23.45	VERTICAL	Peak
6	9760.000	44.04	38.50	7.02	37.41	52.15	74.00	-21.85	VERTICAL	Peak

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

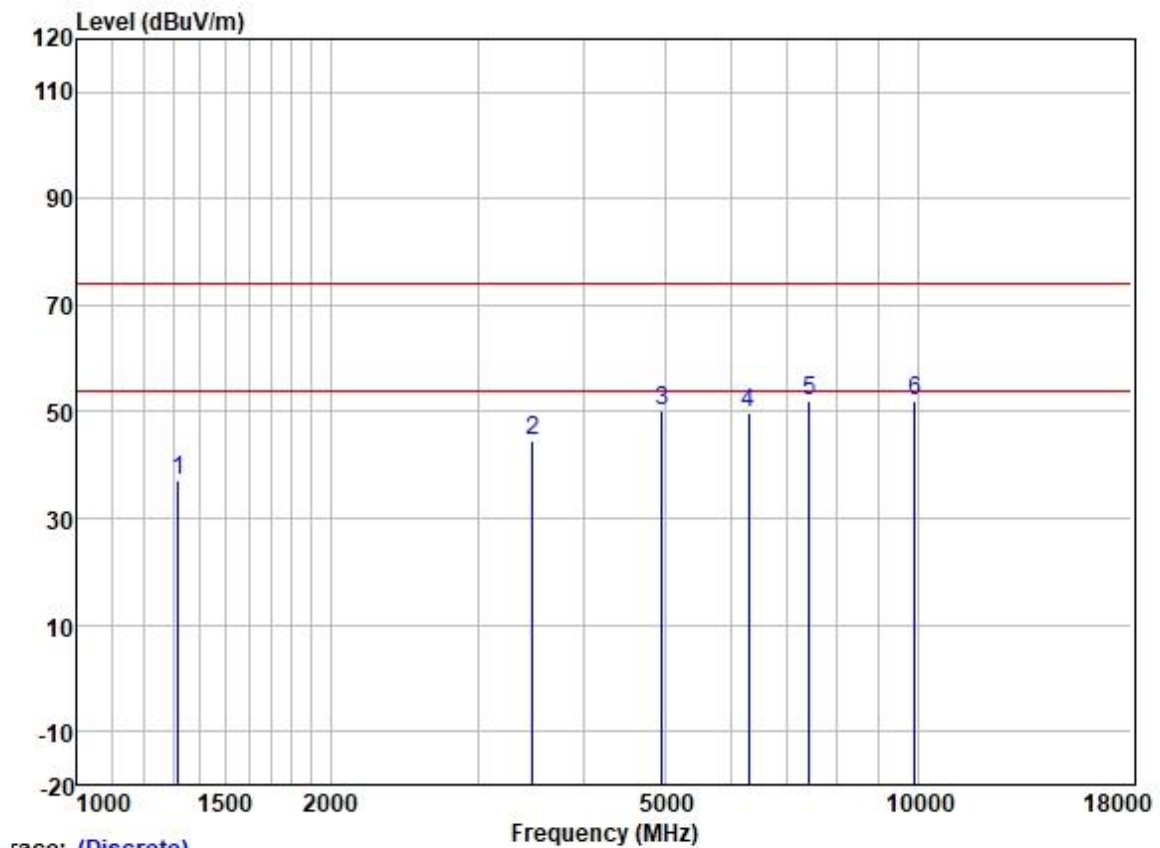

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1320.228	47.43	25.25	2.60	38.29	36.99	74.00	-37.01	HORIZONTAL Peak
2	3482.442	48.19	28.89	4.27	36.95	44.40	74.00	-29.60	HORIZONTAL Peak
3	4960.000	49.67	31.65	5.65	36.84	50.13	74.00	-23.87	HORIZONTAL Peak
4	6290.882	47.50	33.37	5.98	36.96	49.89	74.00	-24.11	HORIZONTAL Peak
5	7440.000	47.06	36.27	6.22	37.47	52.08	74.00	-21.92	HORIZONTAL Peak
6	9920.000	43.93	38.65	6.96	37.40	52.14	74.00	-21.86	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:GFSK; ; Channel:High

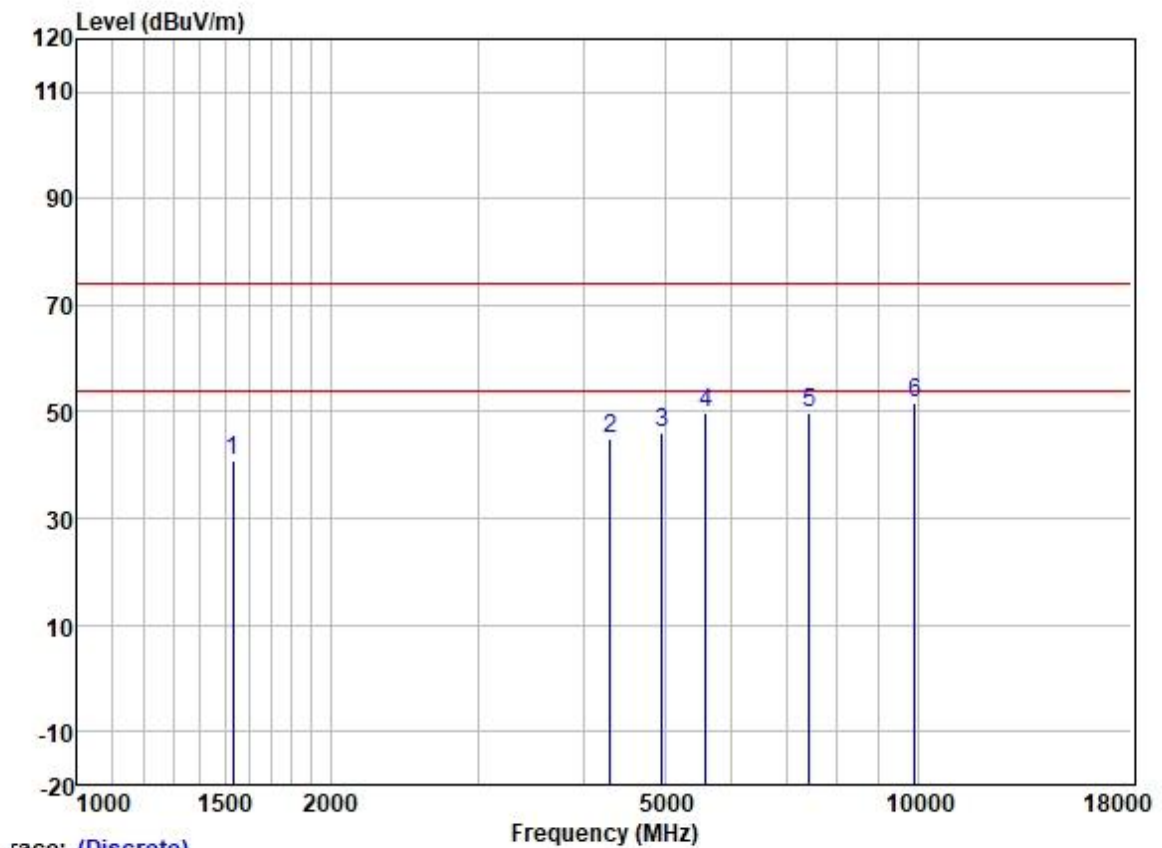

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1533.351	50.49	25.52	2.80	38.07	40.74	74.00	-33.26	VERTICAL	Peak
2	4309.818	46.67	30.48	4.65	36.81	44.99	74.00	-29.01	VERTICAL	Peak
3	4960.000	45.76	31.65	5.65	36.84	46.22	74.00	-27.78	VERTICAL	Peak
4	5591.699	48.67	31.89	6.30	36.89	49.97	74.00	-24.03	VERTICAL	Peak
5	7440.000	44.66	36.27	6.22	37.47	49.68	74.00	-24.32	VERTICAL	Peak
6	9920.000	43.58	38.65	6.96	37.40	51.79	74.00	-22.21	VERTICAL	Peak


125Kbps

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low

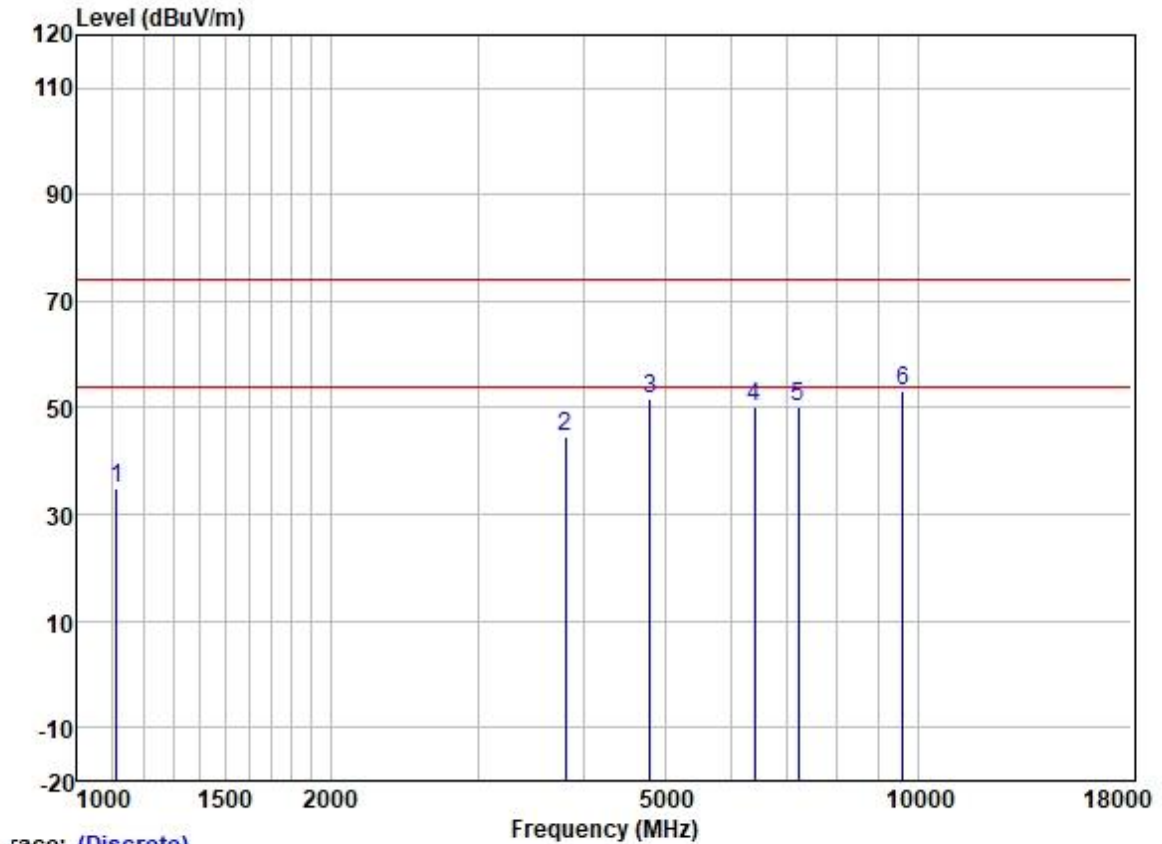


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1114.382	46.84	24.39	2.26	38.43	35.06	74.00	-38.94	HORIZONTAL Peak
2	3812.911	47.33	29.55	4.60	36.84	44.64	74.00	-29.36	HORIZONTAL Peak
3	4804.000	51.74	31.42	5.40	36.83	51.73	74.00	-22.27	HORIZONTAL Peak
4	6387.022	47.45	33.74	5.90	36.98	50.11	74.00	-23.89	HORIZONTAL Peak
5	7206.000	45.96	35.54	5.98	37.38	50.10	74.00	-23.90	HORIZONTAL Peak
6	9608.000	45.06	38.37	7.07	37.42	53.08	74.00	-20.92	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; ; Channel:Low

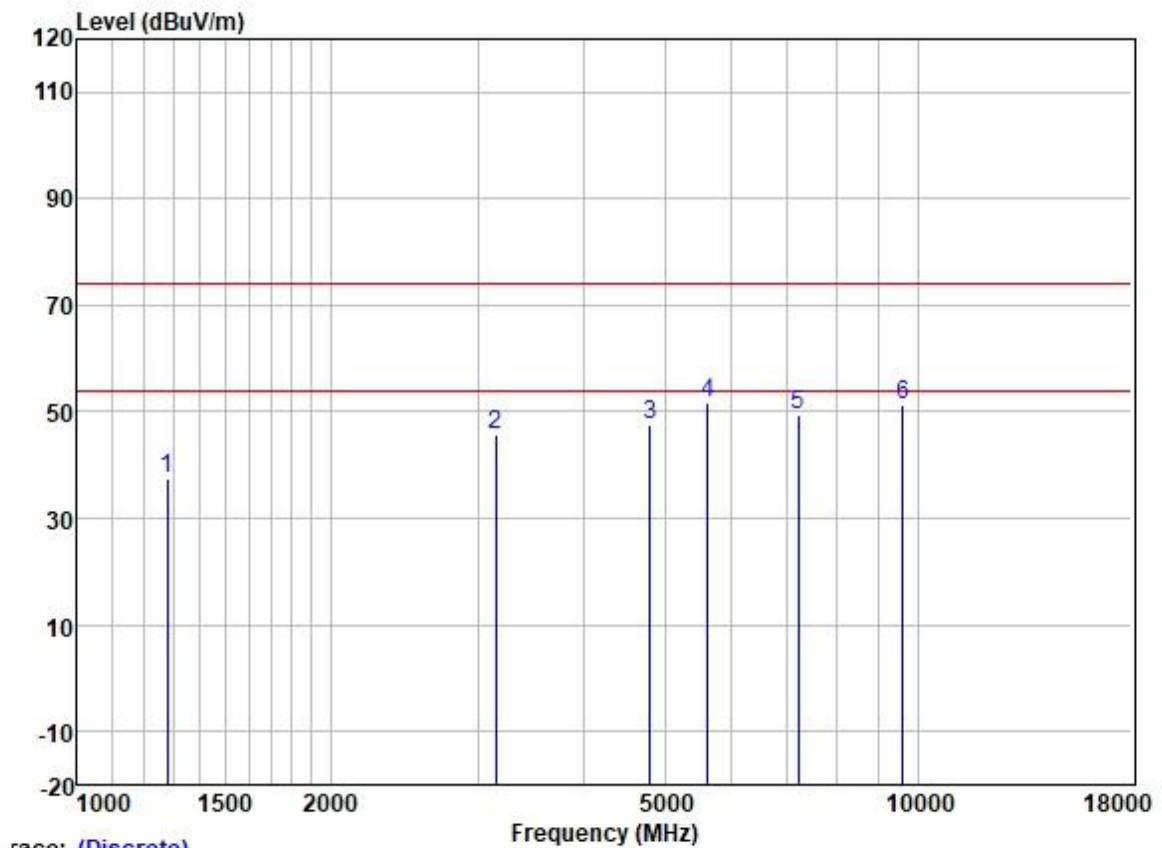

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1280.566	48.14	25.15	2.52	38.33	37.48	74.00	-36.52	VERTICAL	Peak
2	3145.114	50.52	28.51	3.95	37.12	45.86	74.00	-28.14	VERTICAL	Peak
3	4804.000	47.52	31.42	5.40	36.83	47.51	74.00	-26.49	VERTICAL	Peak
4	5625.769	50.20	31.93	6.33	36.89	51.57	74.00	-22.43	VERTICAL	Peak
5	7206.000	45.15	35.54	5.98	37.38	49.29	74.00	-24.71	VERTICAL	Peak
6	9608.000	43.31	38.37	7.07	37.42	51.33	74.00	-22.67	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; ; Channel:middle

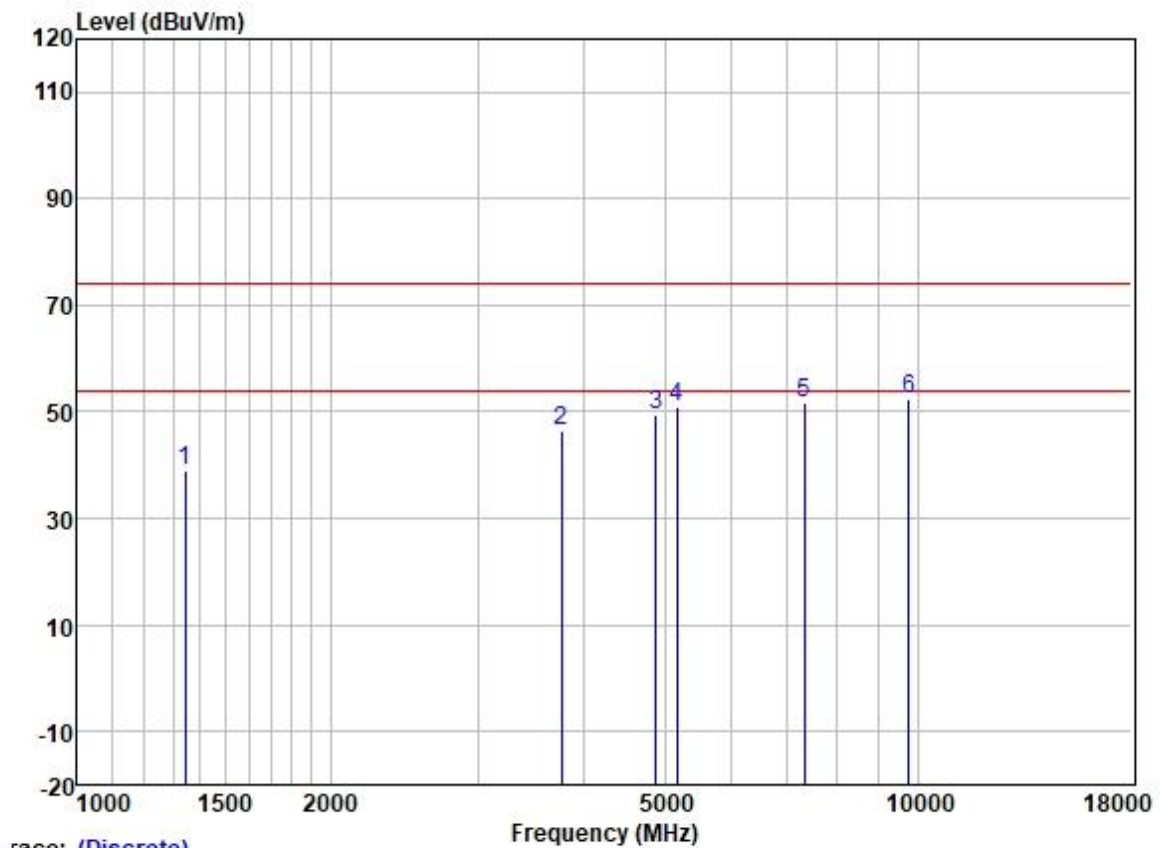

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1345.069	49.32	25.31	2.60	38.27	38.96	74.00	-35.04	HORIZONTAL Peak
2	3770.907	49.28	29.45	4.59	36.86	46.46	74.00	-27.54	HORIZONTAL Peak
3	4880.000	49.06	31.54	5.50	36.84	49.26	74.00	-24.74	HORIZONTAL Peak
4	5164.152	50.46	31.73	5.61	36.87	50.93	74.00	-23.07	HORIZONTAL Peak
5	7320.000	47.14	36.00	6.13	37.43	51.84	74.00	-22.16	HORIZONTAL Peak
6	9760.000	44.13	38.50	7.02	37.41	52.24	74.00	-21.76	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; ; Channel:middle

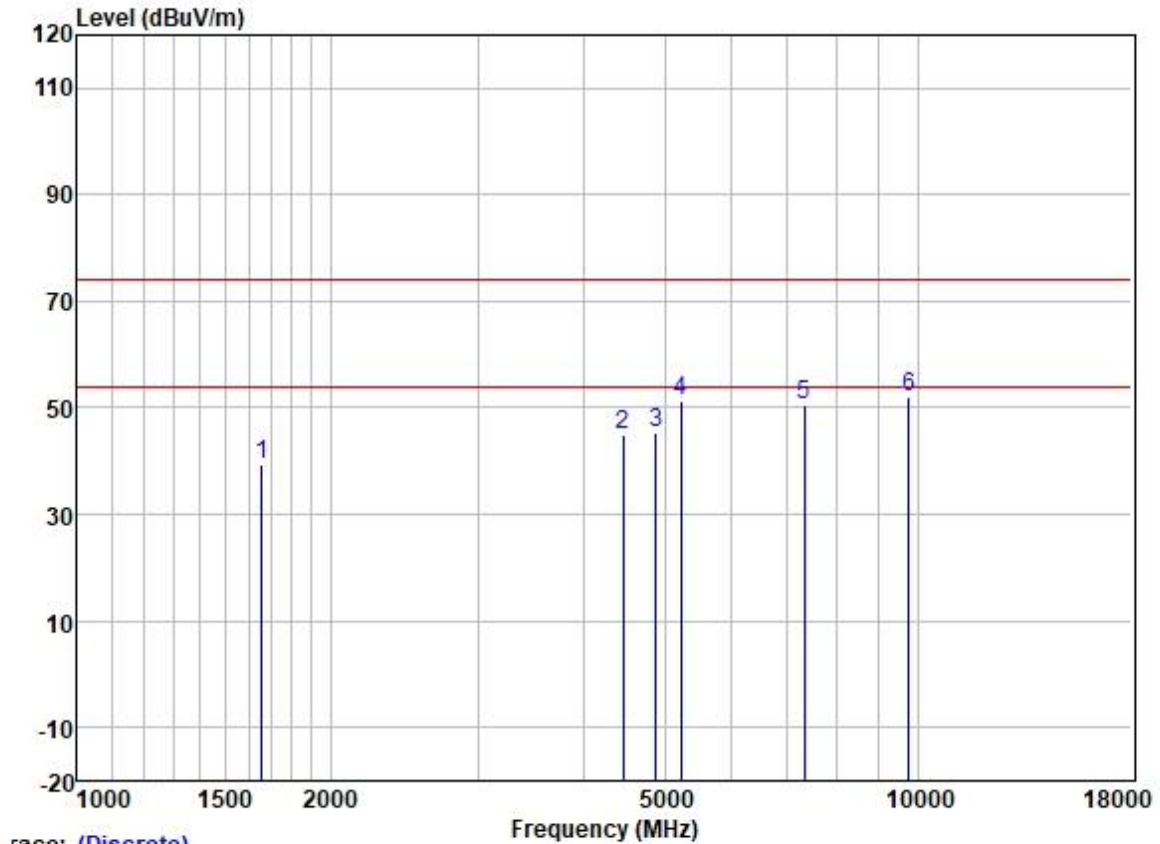


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1659.490	48.76	25.65	2.80	37.93	39.28	74.00	-34.72	VERTICAL	Peak
2	4458.810	46.23	30.75	4.88	36.81	45.05	74.00	-28.95	VERTICAL	Peak
3	4880.000	45.15	31.54	5.50	36.84	45.35	74.00	-28.65	VERTICAL	Peak
4	5232.767	50.56	31.75	5.74	36.87	51.18	74.00	-22.82	VERTICAL	Peak
5	7320.000	45.73	36.00	6.13	37.43	50.43	74.00	-23.57	VERTICAL	Peak
6	9760.000	44.06	38.50	7.02	37.41	52.17	74.00	-21.83	VERTICAL	Peak

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

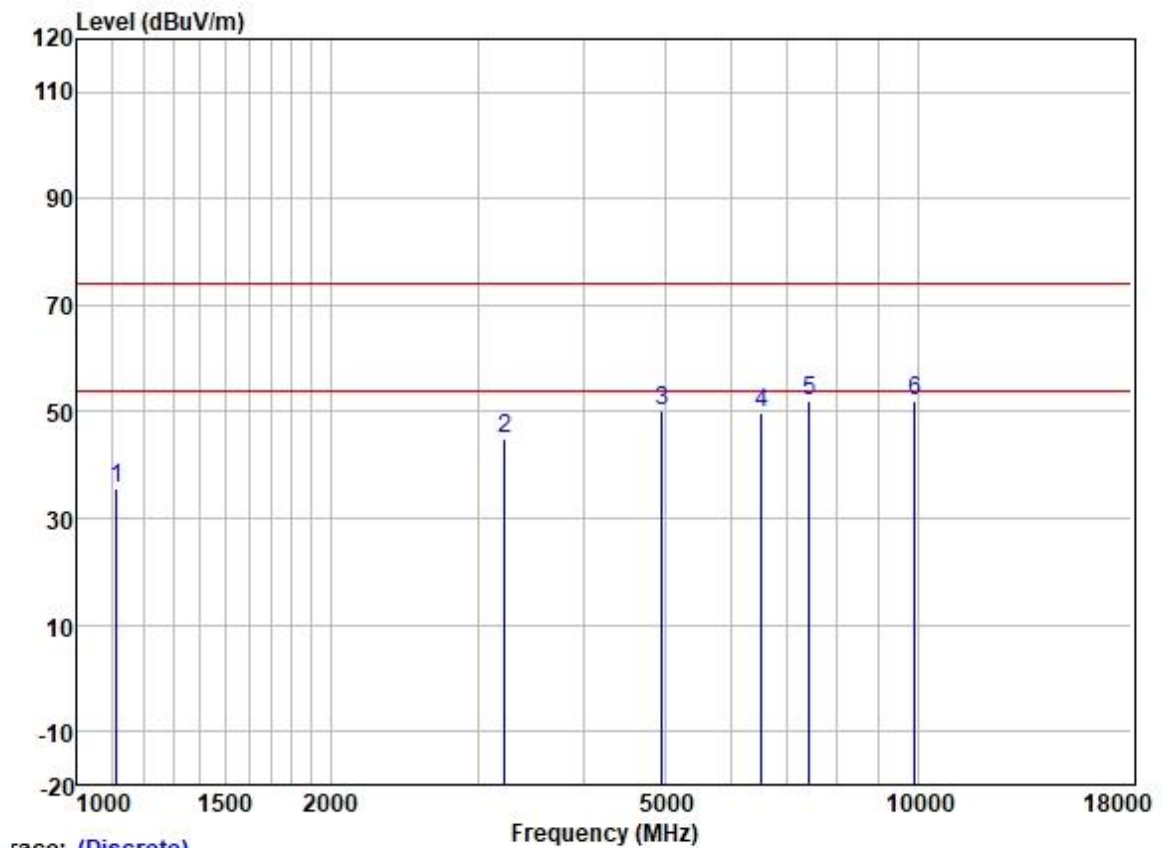

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1114.688	47.23	24.40	2.25	38.43	35.45	74.00	-38.55	HORIZONTAL	Peak
2	3225.059	49.47	28.63	4.01	37.07	45.04	74.00	-28.96	HORIZONTAL	Peak
3	4960.000	49.57	31.65	5.65	36.84	50.03	74.00	-23.97	HORIZONTAL	Peak
4	6524.408	46.88	34.03	5.84	37.02	49.73	74.00	-24.27	HORIZONTAL	Peak
5	7440.000	47.13	36.27	6.22	37.47	52.15	74.00	-21.85	HORIZONTAL	Peak
6	9920.000	43.73	38.65	6.96	37.40	51.94	74.00	-22.06	HORIZONTAL	Peak

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; ; Channel:High

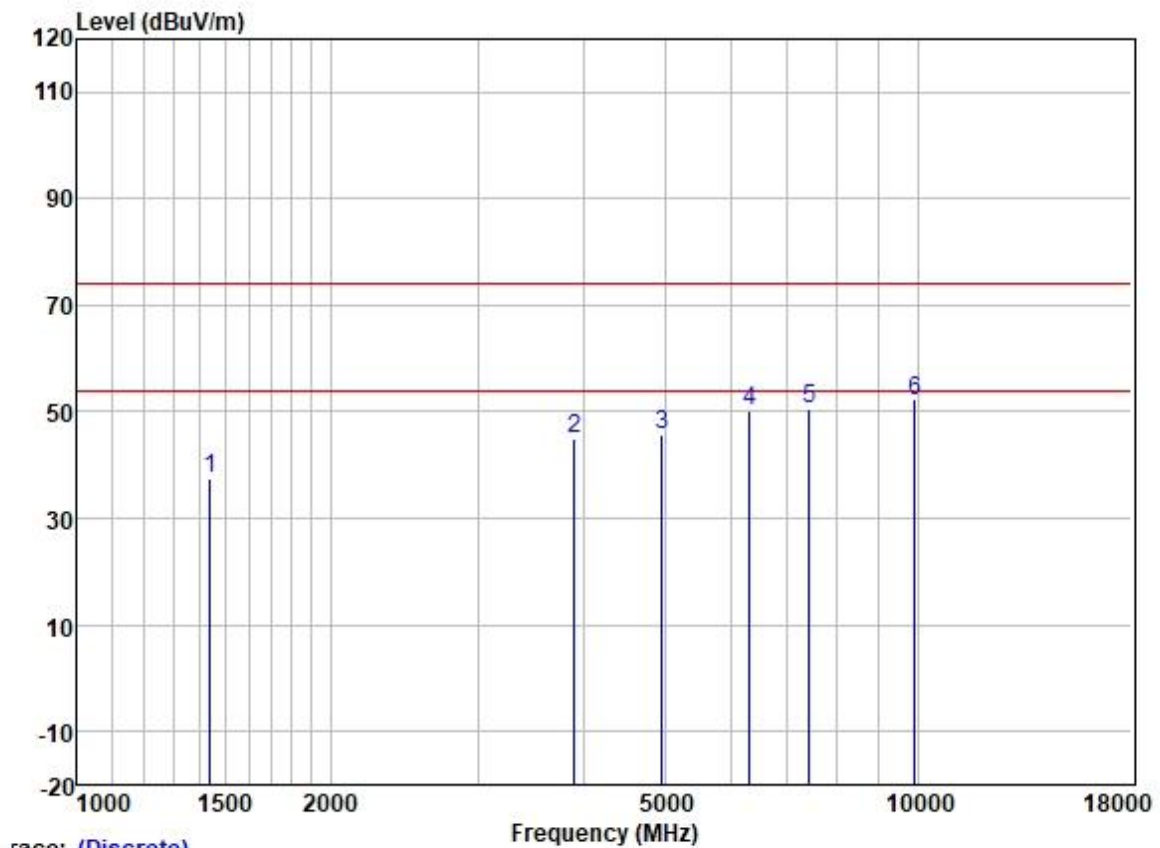

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1440.703	47.40	25.44	2.68	38.17	37.35	74.00	-36.65	VERTICAL	Peak
2	3898.815	47.66	29.69	4.60	36.82	45.13	74.00	-28.87	VERTICAL	Peak
3	4960.000	45.22	31.65	5.65	36.84	45.68	74.00	-28.32	VERTICAL	Peak
4	6303.931	47.87	33.44	5.97	36.96	50.32	74.00	-23.68	VERTICAL	Peak
5	7440.000	45.47	36.27	6.22	37.47	50.49	74.00	-23.51	VERTICAL	Peak
6	9920.000	44.03	38.65	6.96	37.40	52.24	74.00	-21.76	VERTICAL	Peak

8 Test Setup Photo

Refer to Appendix –SetupPhotos for GZCR2203000256AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for GZCR2203000256AT

10 Appendix

1. Duty Cycle

1.1 Test Result

Test Mode	Channel Frequency(MHz)	TX Type	ANT No.	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
BLE 1Mbps	2402	SISO	1	0.392	0.625	62.72	2.03
			2	0.392	0.625	62.72	2.03
	2440	SISO	1	0.392	0.625	62.72	2.03
			2	0.393	0.626	62.78	2.02
	2480	SISO	1	0.393	0.626	62.78	2.02
			2	0.392	0.625	62.72	2.03
BLE 2Mbps	2402	SISO	1	0.206	0.625	32.96	4.82
			2	0.207	0.625	33.12	4.80
	2440	SISO	1	0.207	0.625	33.12	4.80
			2	0.207	0.626	33.07	4.81
	2480	SISO	1	0.207	0.626	33.07	4.81
			2	0.206	0.625	32.96	4.82
BLE Coded S2 500Kbps	2402	SISO	1	1.057	1.842	57.38	2.41
			2	1.076	1.876	57.36	2.41
	2440	SISO	1	1.057	1.841	57.41	2.41
			2	1.076	1.876	57.36	2.41
	2480	SISO	1	1.059	1.843	57.46	2.41
			2	1.057	1.841	57.41	2.41
BLE Coded S8 125Kbps	2402	SISO	1	3.104	3.748	82.82	0.82
			2	3.104	3.751	82.75	0.82
	2440	SISO	1	3.104	3.750	82.77	0.82
			2	3.104	3.752	82.73	0.82
	2480	SISO	1	3.104	3.752	82.73	0.82
			2	3.103	3.750	82.75	0.82

1.2 Test Graph







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Laboratory



No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

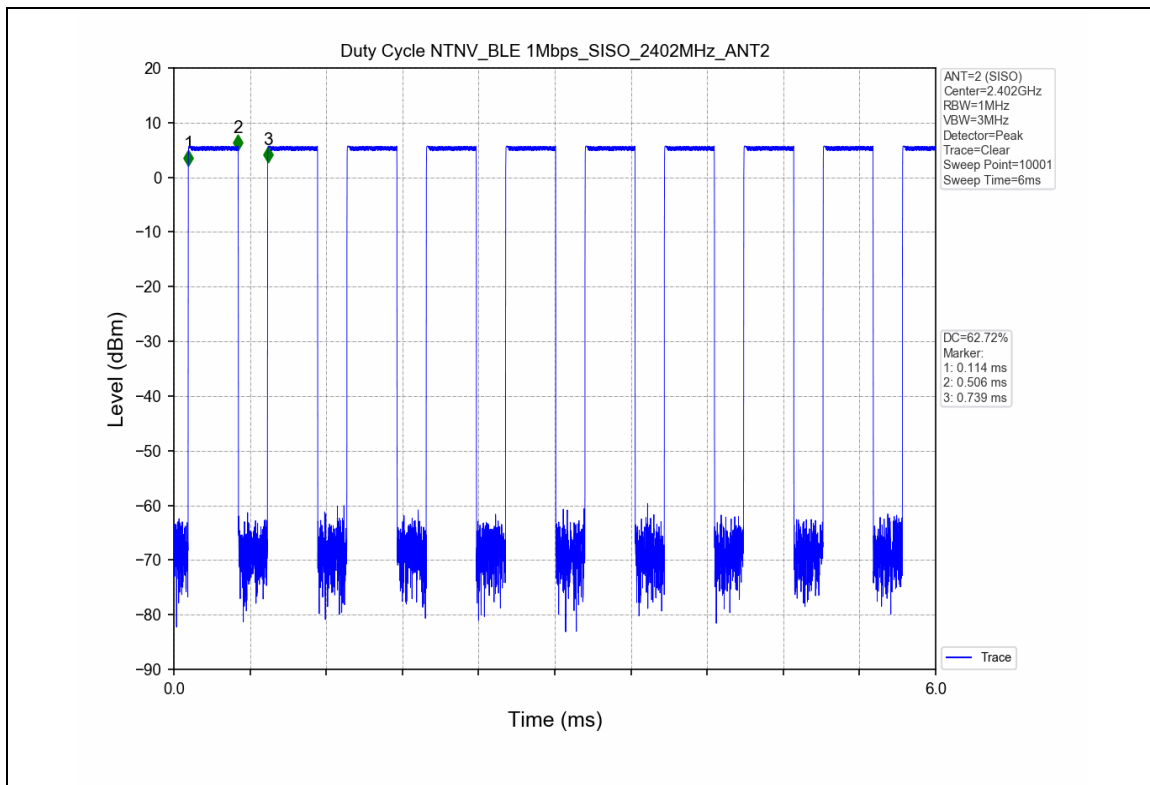
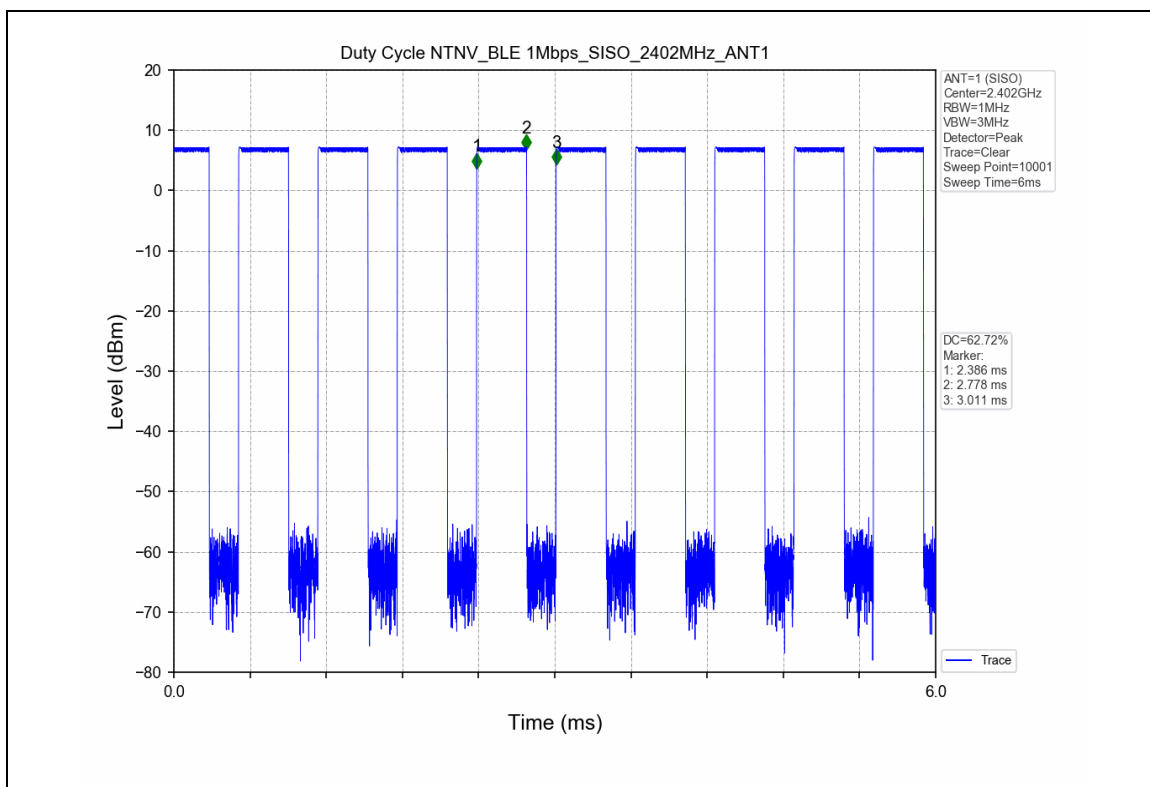


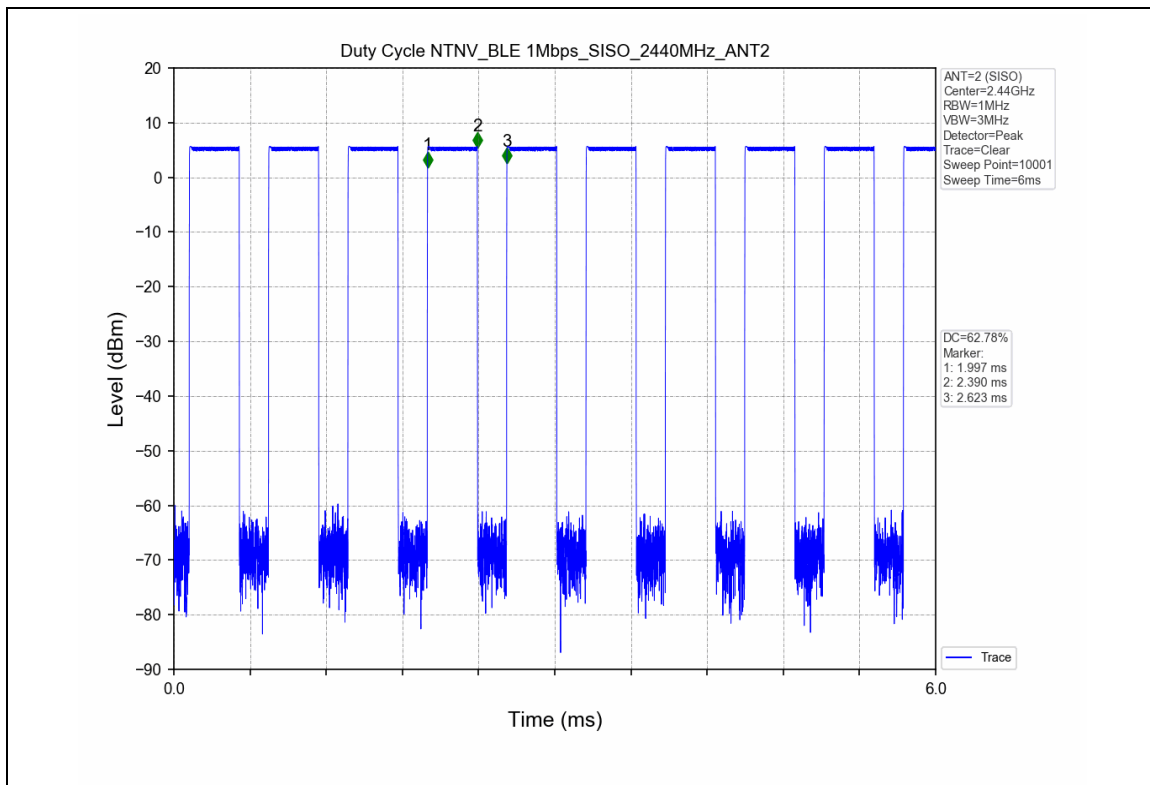
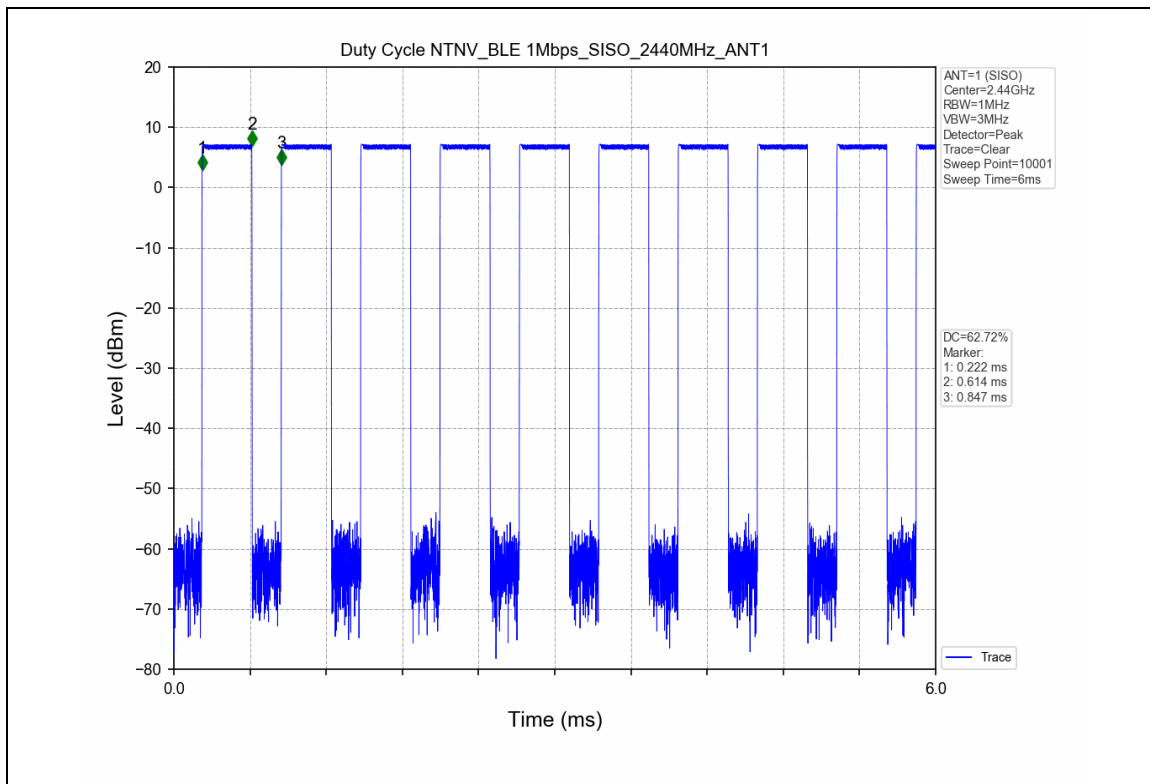


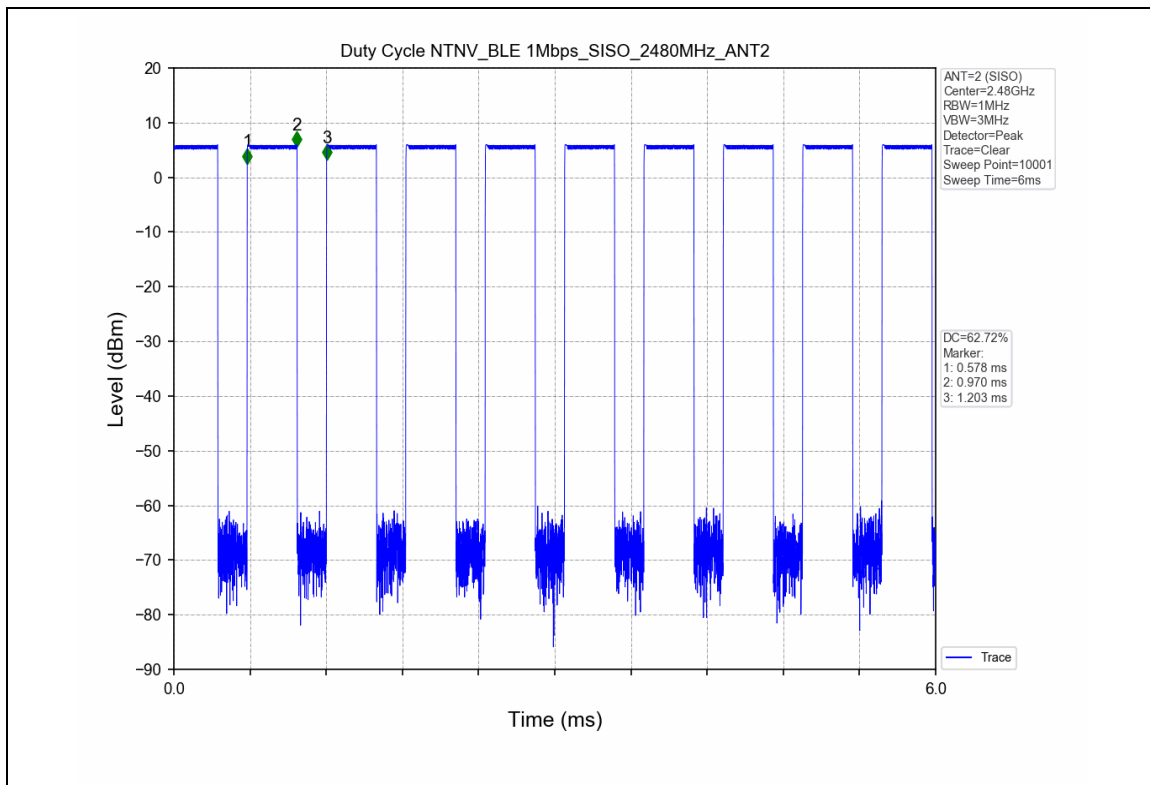
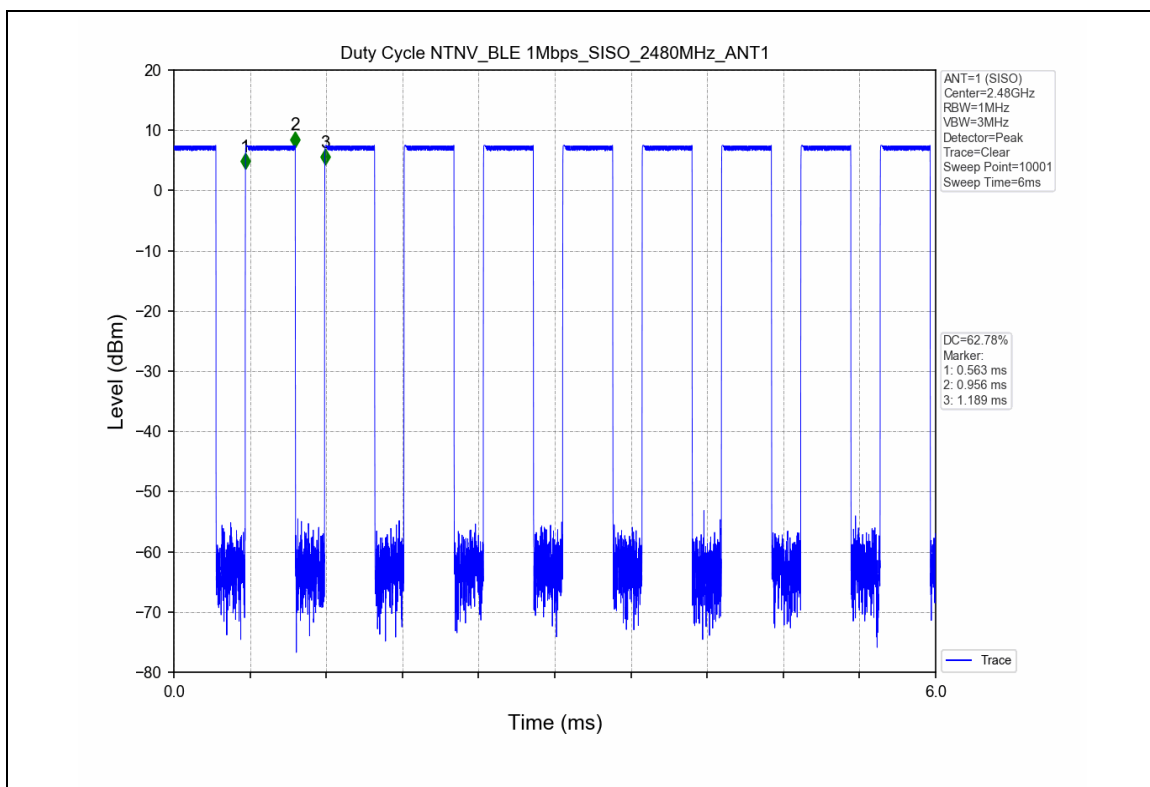


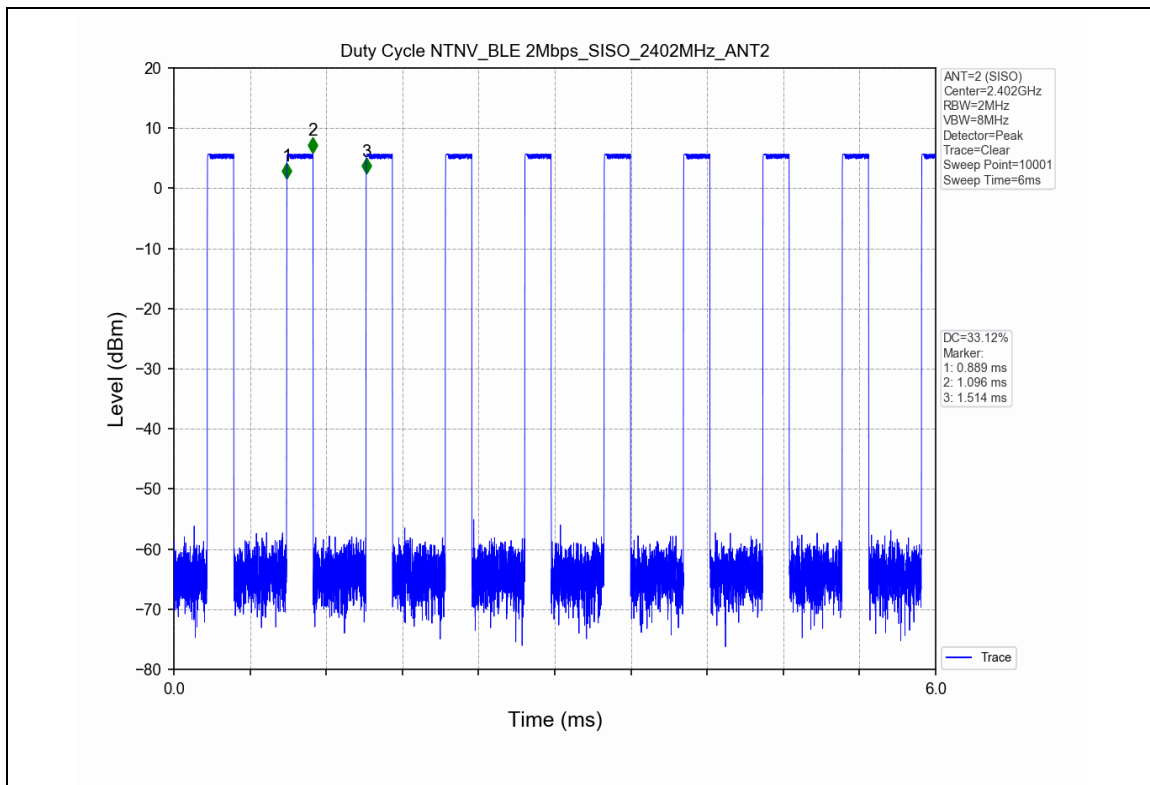
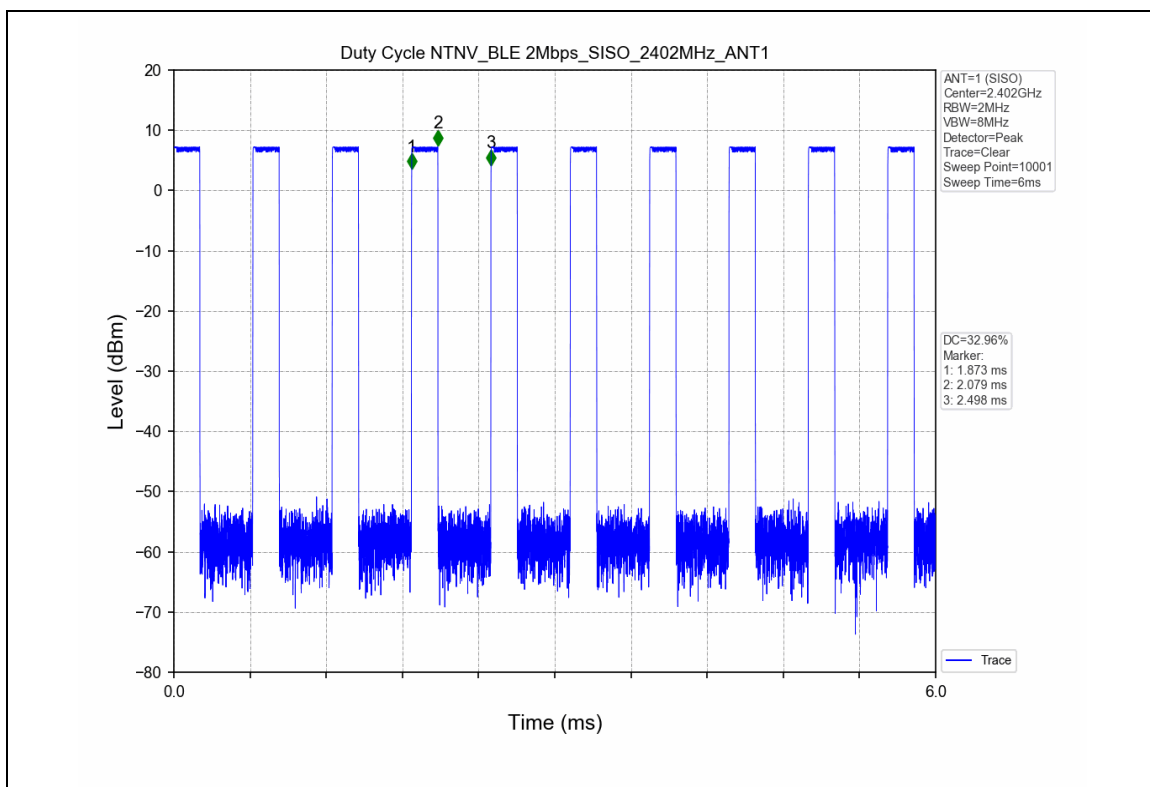


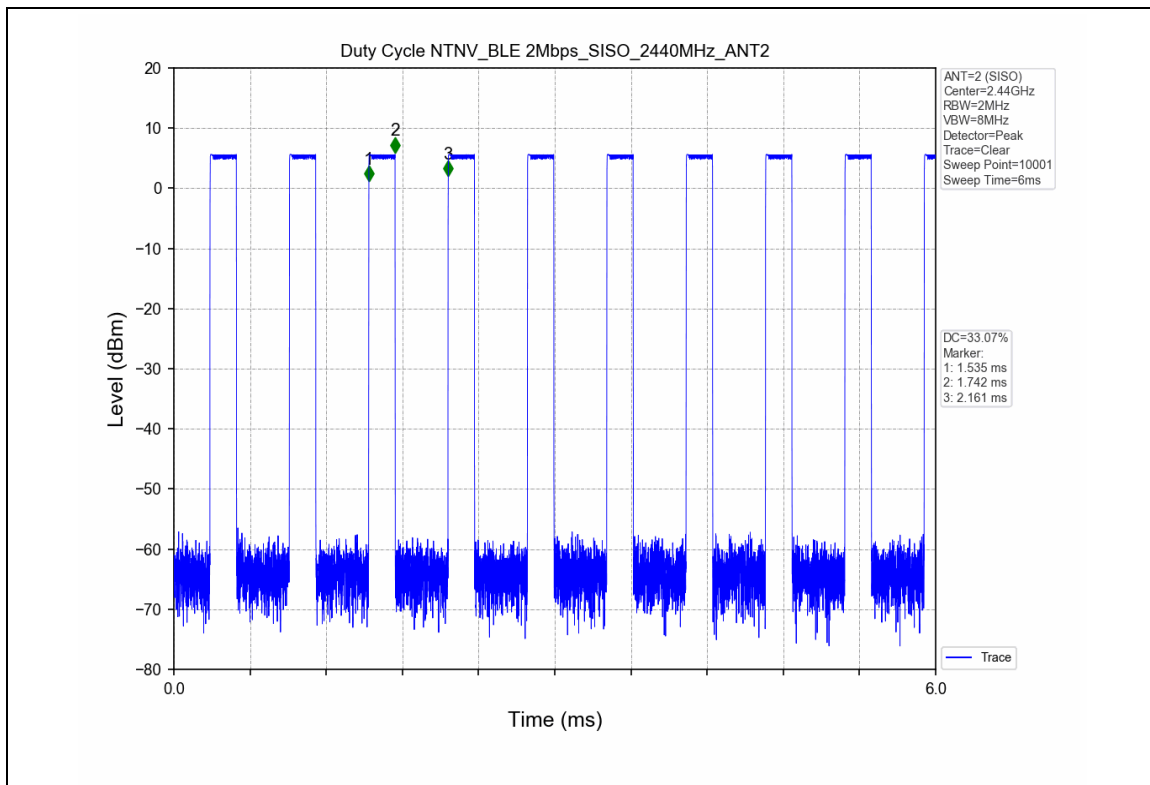
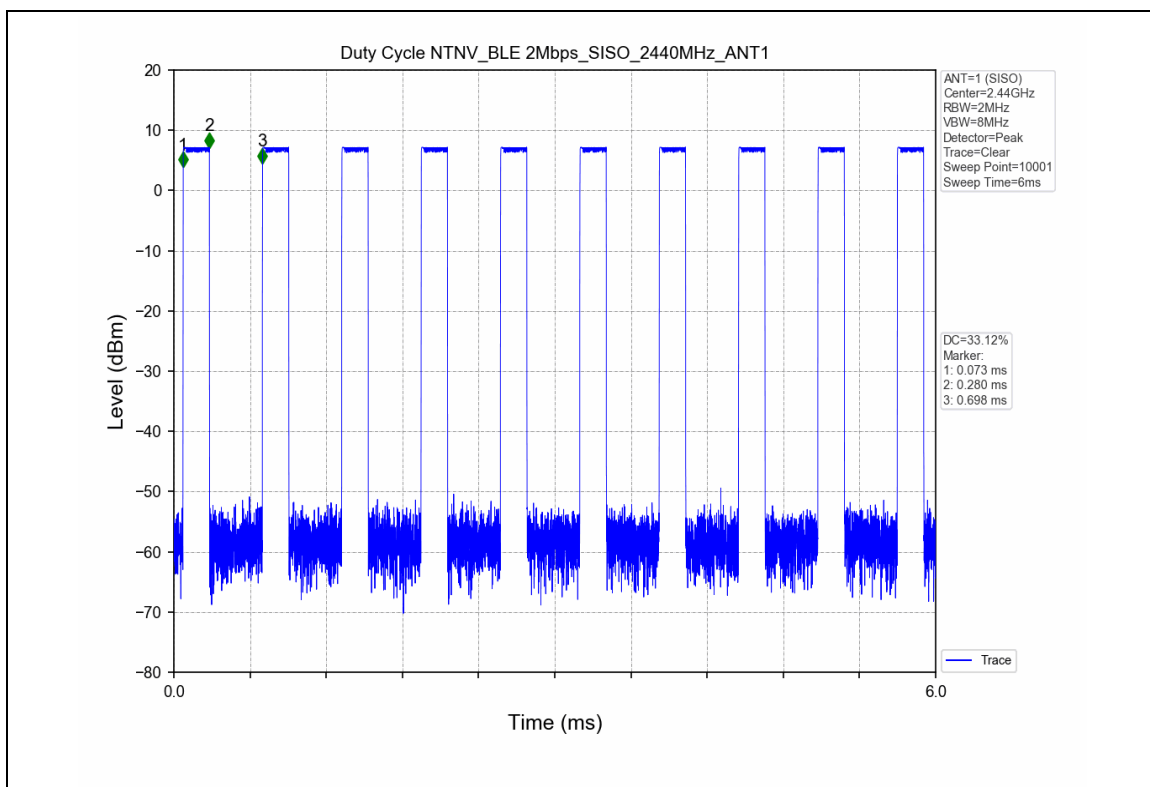


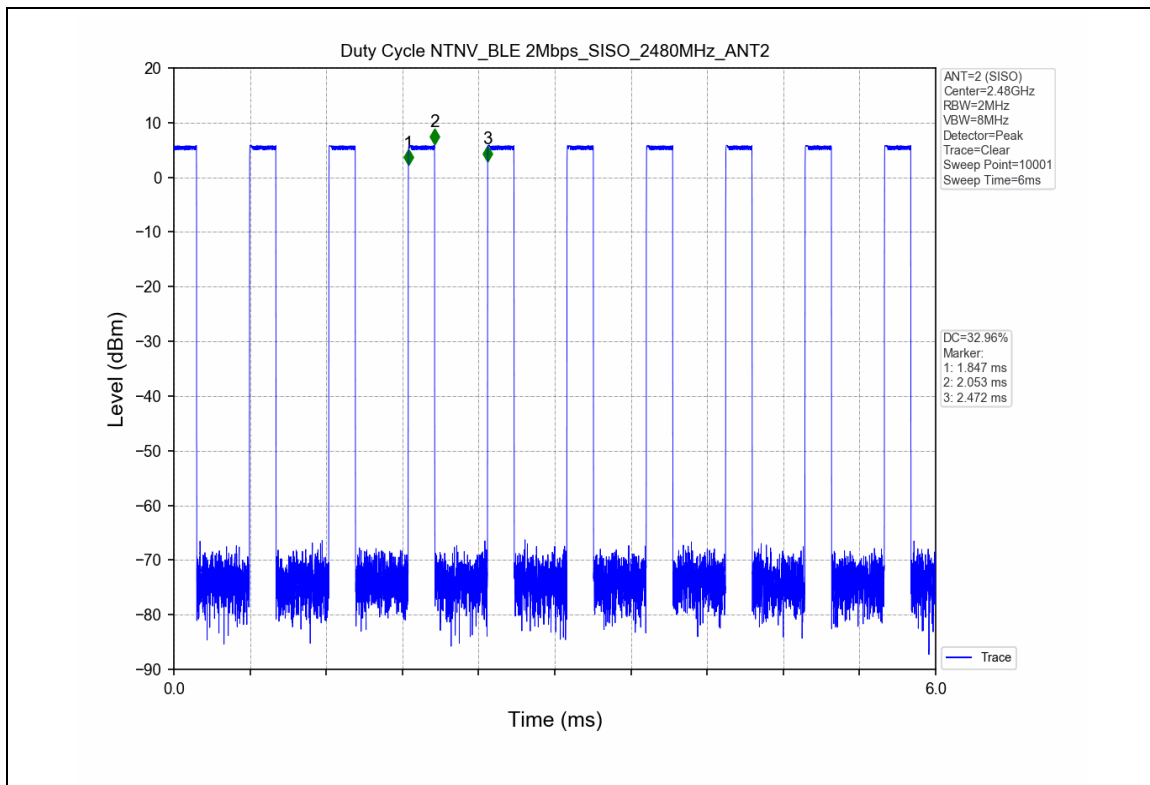
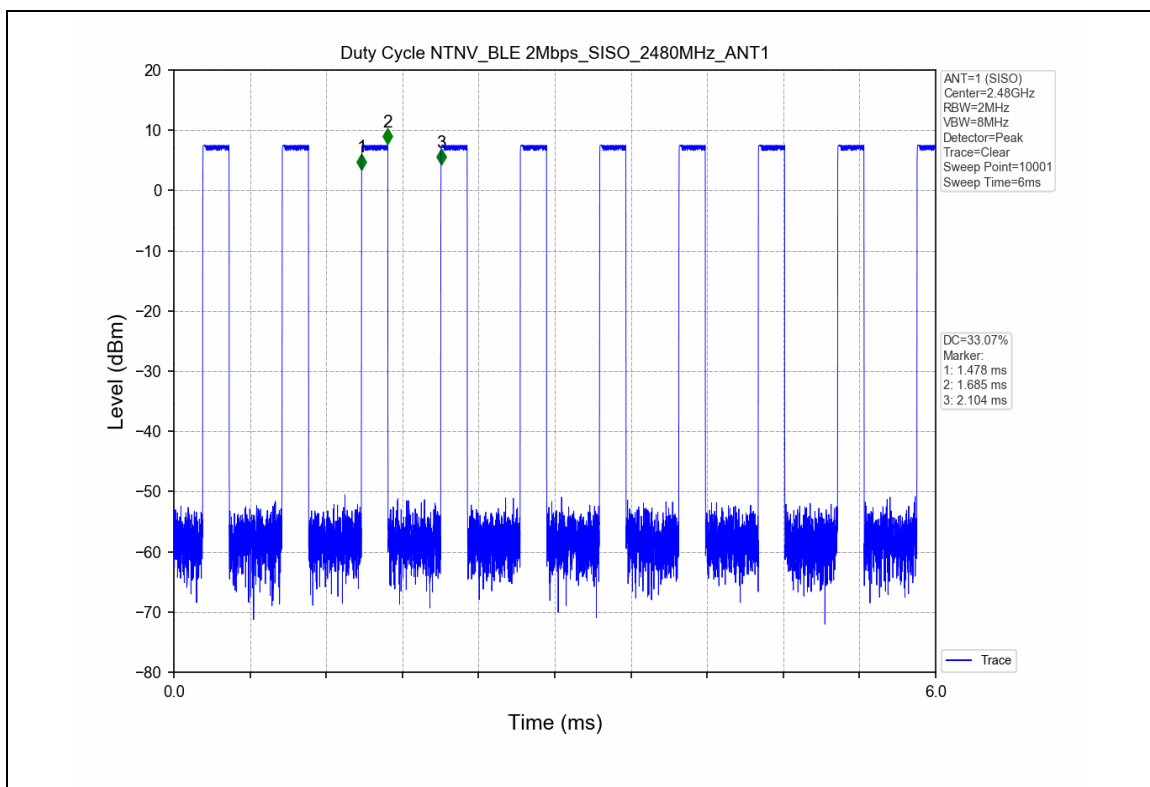


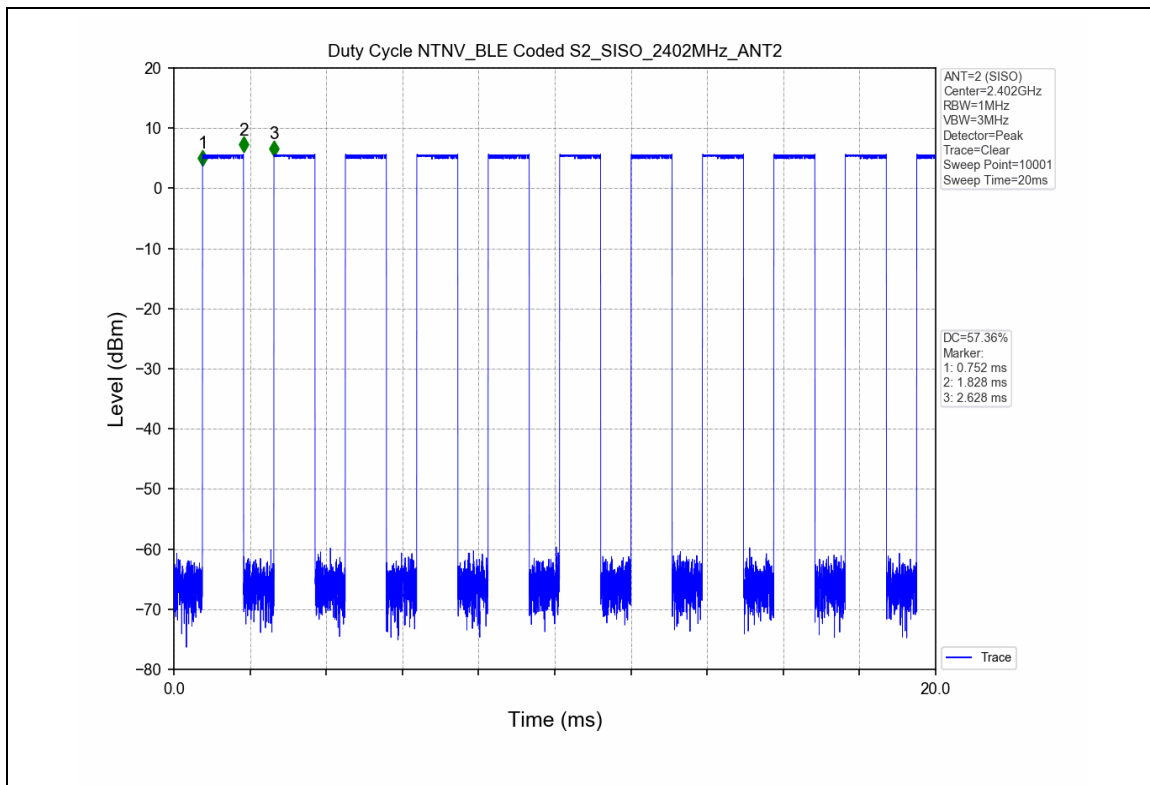
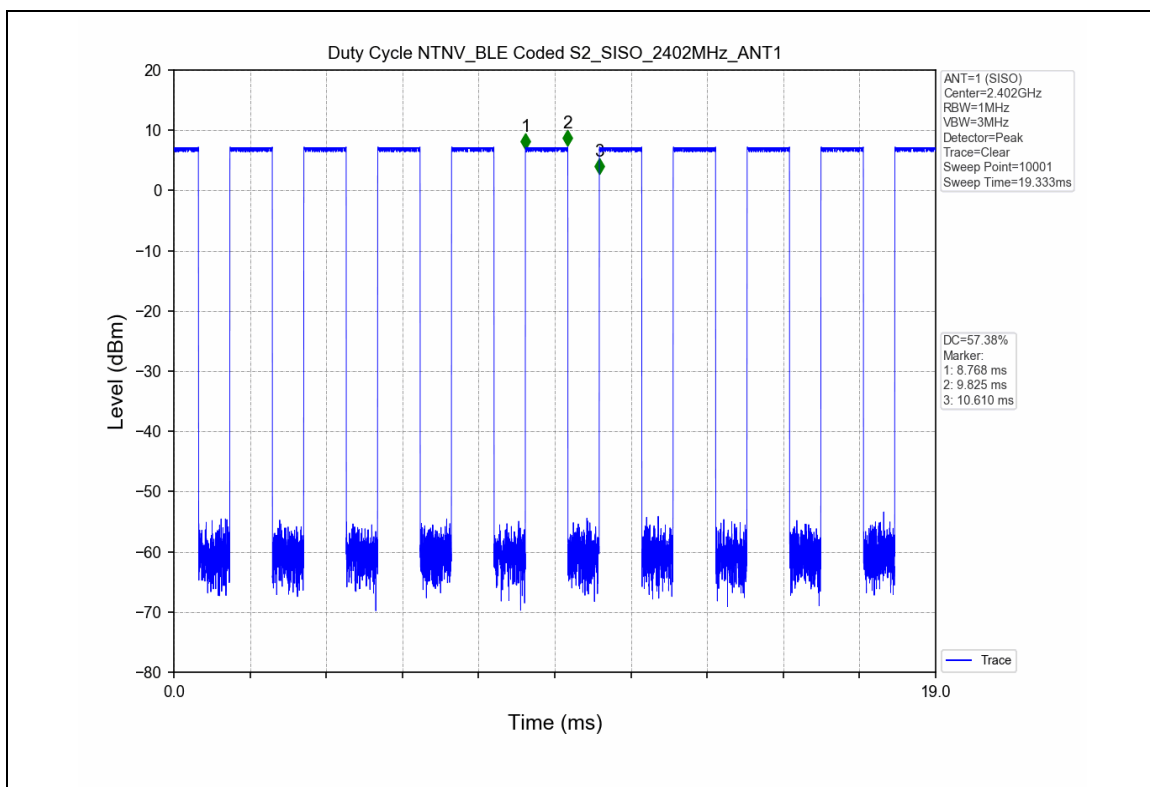


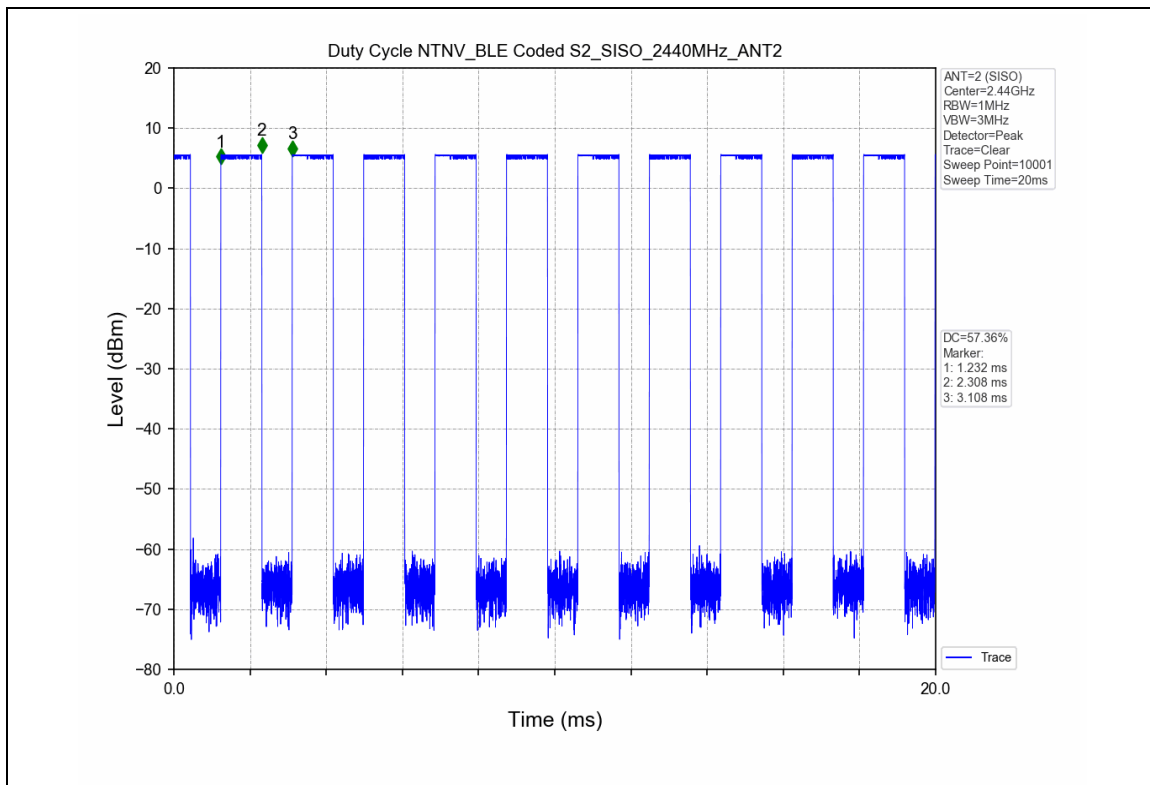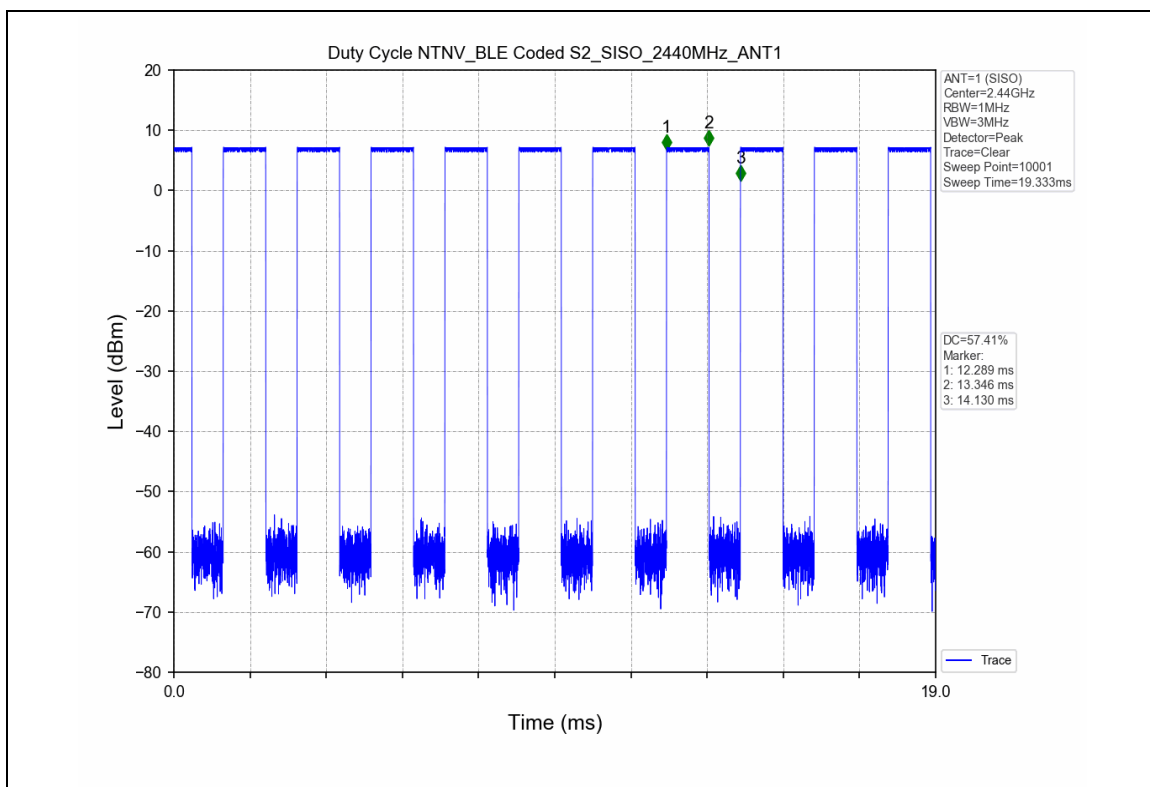

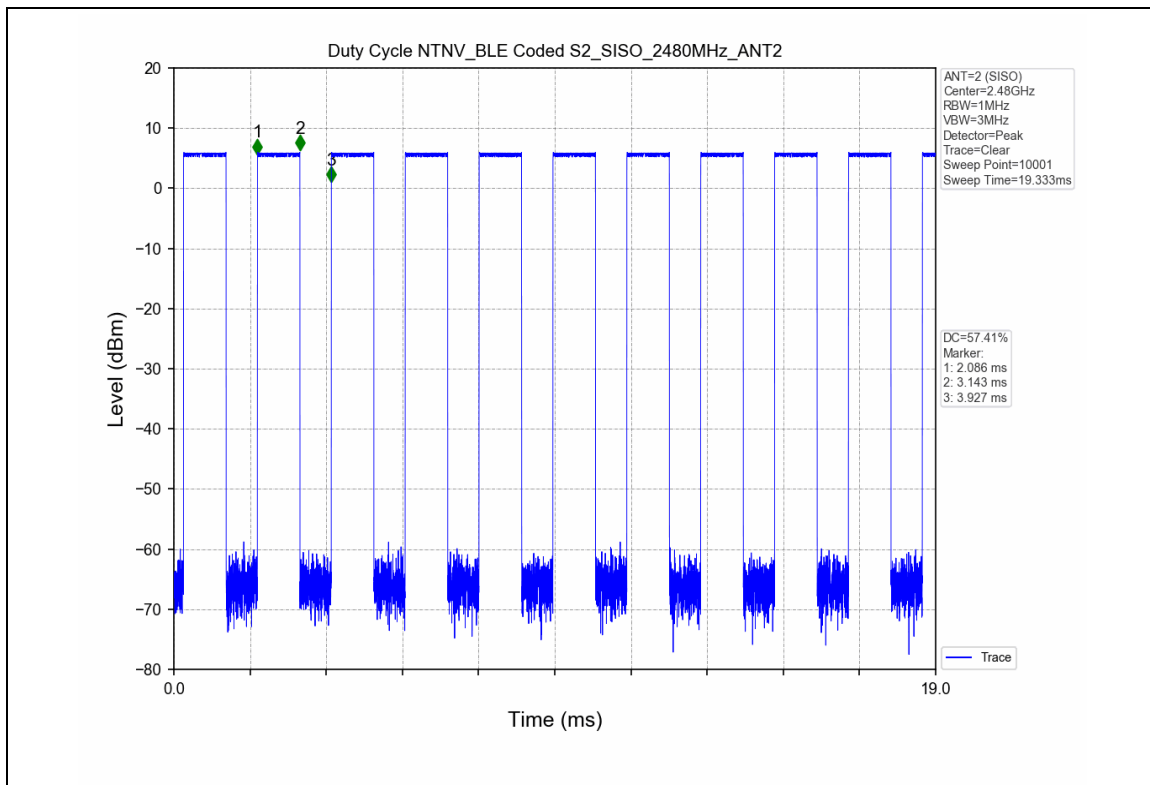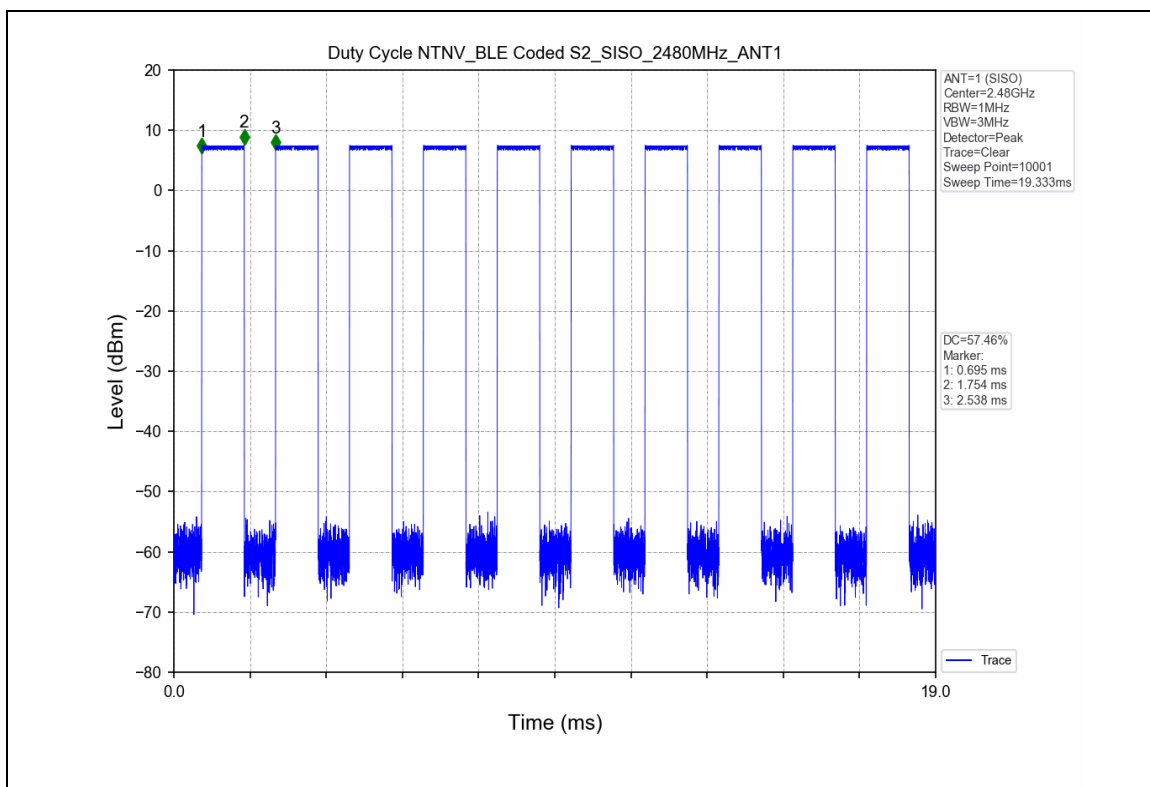

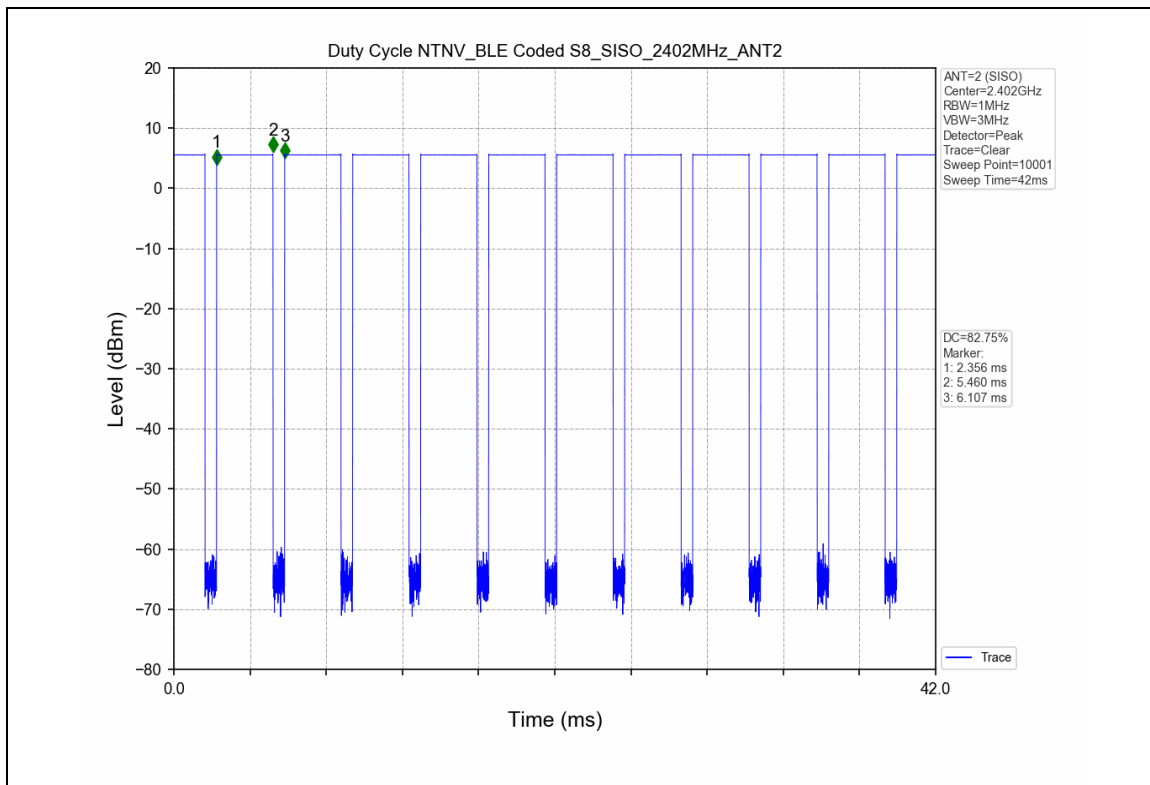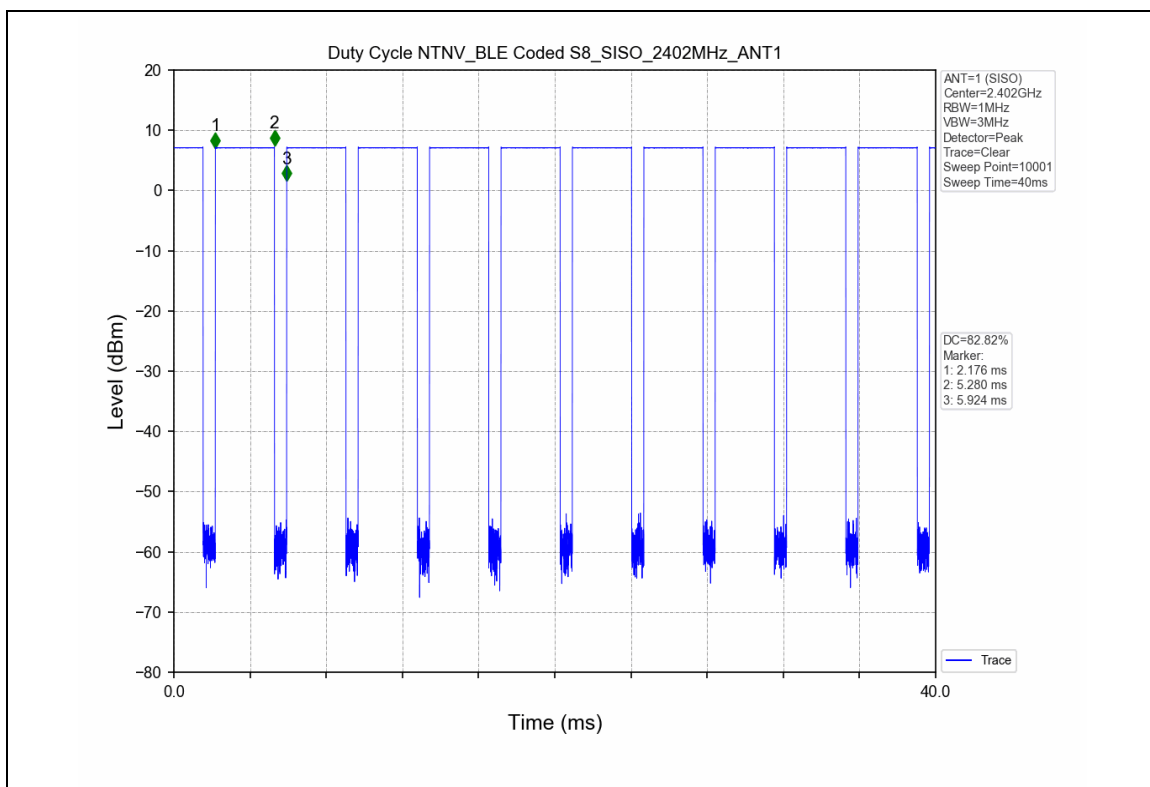

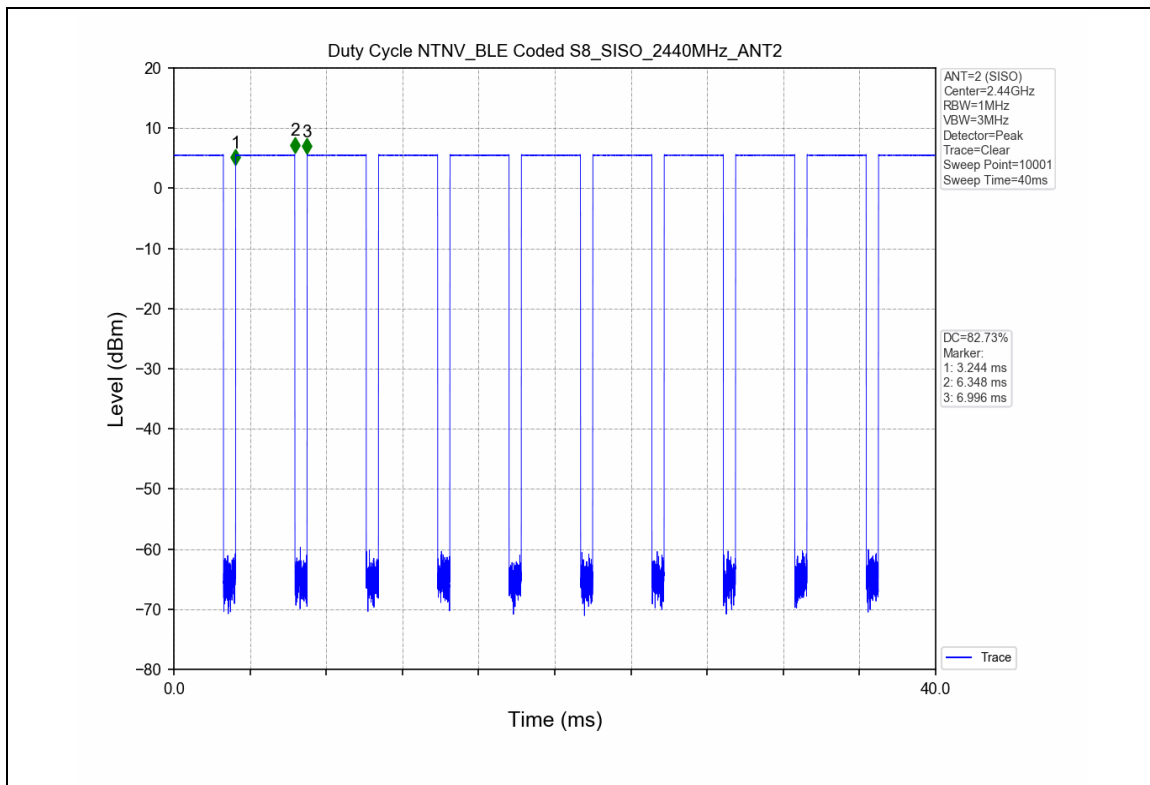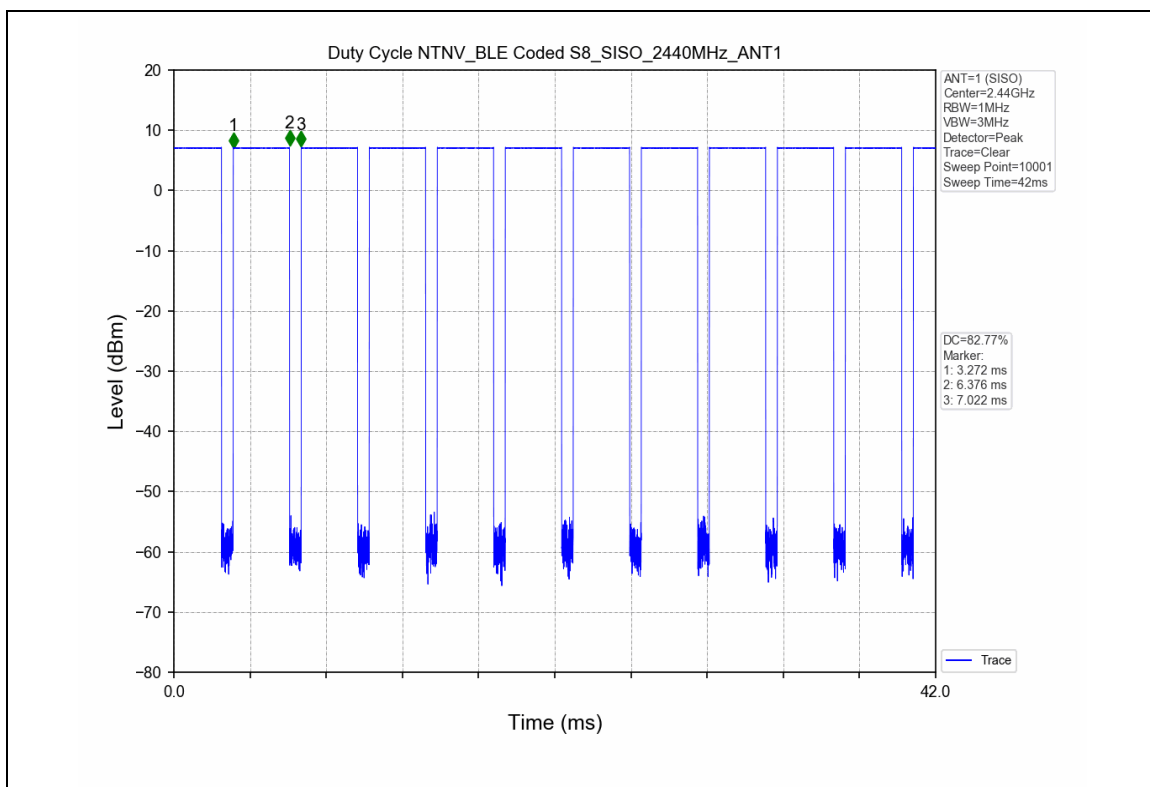

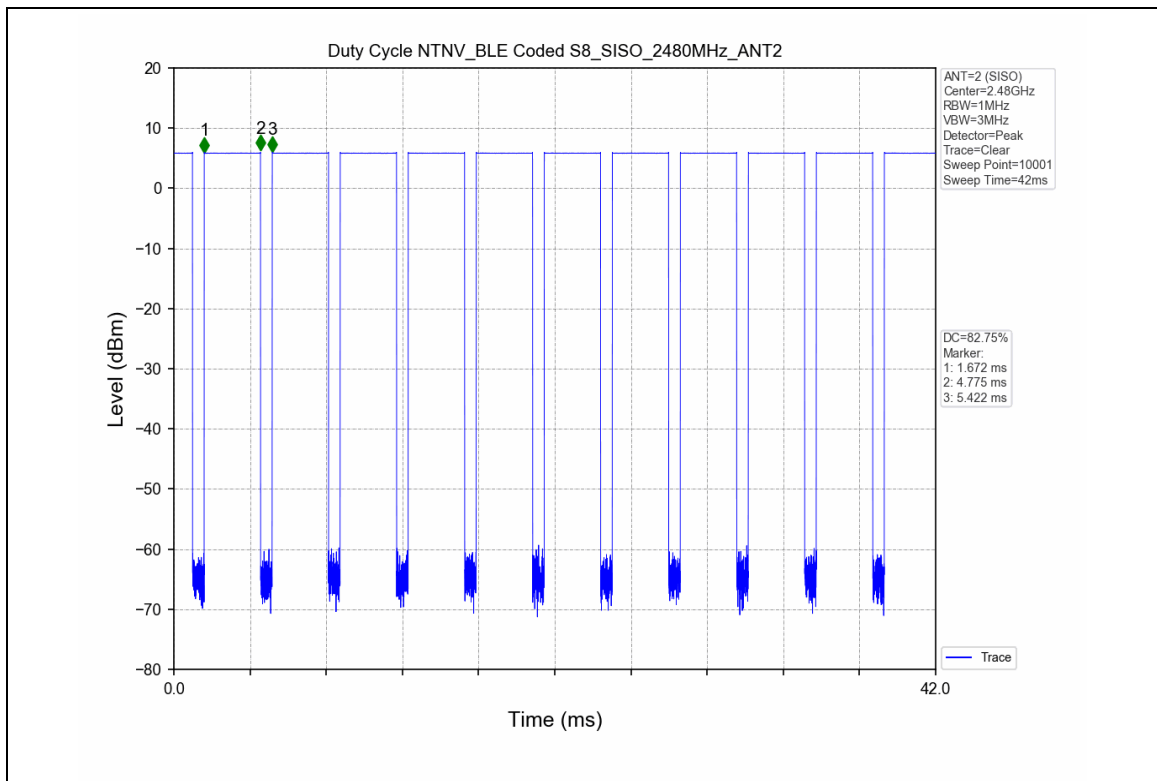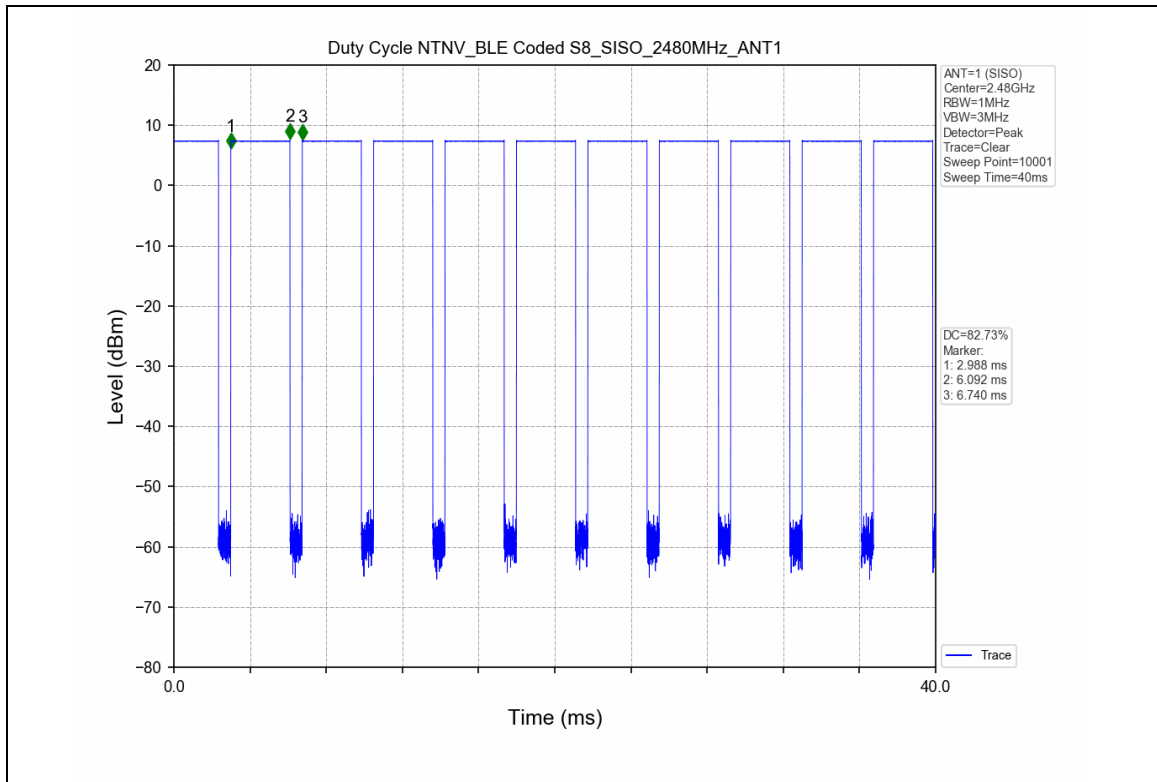

2. Minimum 6dB Bandwidth



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2.1 Test Result

Test Mode	Frequency (MHz)	TX Type	ANT No.	6dB Bandwidth	Verdict
				Test Result (MHz)	
BLE 1Mbps	2402	SISO	1	0.701	PASS
			2	0.700	PASS
	2440	SISO	1	0.684	PASS
			2	0.699	PASS
	2480	SISO	1	0.694	PASS
			2	0.699	PASS
BLE 2Mbps	2402	SISO	1	1.141	PASS
			2	1.135	PASS
	2440	SISO	1	1.131	PASS
			2	1.134	PASS
	2480	SISO	1	1.137	PASS
			2	1.137	PASS
BLE Coded S2 500Kbps	2402	SISO	1	0.689	PASS
			2	0.706	PASS
	2440	SISO	1	0.699	PASS
			2	0.695	PASS
	2480	SISO	1	0.700	PASS
			2	0.704	PASS
BLE Coded S8 125Kbps	2402	SISO	1	0.611	PASS
			2	0.609	PASS
	2440	SISO	1	0.608	PASS
			2	0.609	PASS
	2480	SISO	1	0.610	PASS
			2	0.607	PASS

Test Mode	Frequency (MHz)	TX Type	ANT No.	99% Occupied Bandwidth	
				Test Result (MHz)	
BLE 1Mbps	2402	SISO	1	1.051	Only for Report Use
			2	1.052	Only for Report Use
	2440	SISO	1	1.053	Only for Report Use
			2	1.052	Only for Report Use
	2480	SISO	1	1.055	Only for Report Use
			2	1.055	Only for Report Use
BLE 2Mbps	2402	SISO	1	2.066	Only for Report Use
			2	2.070	Only for Report Use
	2440	SISO	1	2.067	Only for Report Use
			2	2.065	Only for Report Use
	2480	SISO	1	2.074	Only for Report Use
			2	2.072	Only for Report Use




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



BLE Coded S2 500Kbps	2402	SISO	1	1.033	Only for Report Use
			2	1.035	Only for Report Use
	2440	SISO	1	1.035	Only for Report Use
			2	1.036	Only for Report Use
	2480	SISO	1	1.037	Only for Report Use
			2	1.039	Only for Report Use
BLE Coded S8 125Kbps	2402	SISO	1	1.069	Only for Report Use
			2	1.067	Only for Report Use
	2440	SISO	1	1.074	Only for Report Use
			2	1.073	Only for Report Use
	2480	SISO	1	1.078	Only for Report Use
			2	1.079	Only for Report Use



2.2 Test Graph - 6dB Bandwidth


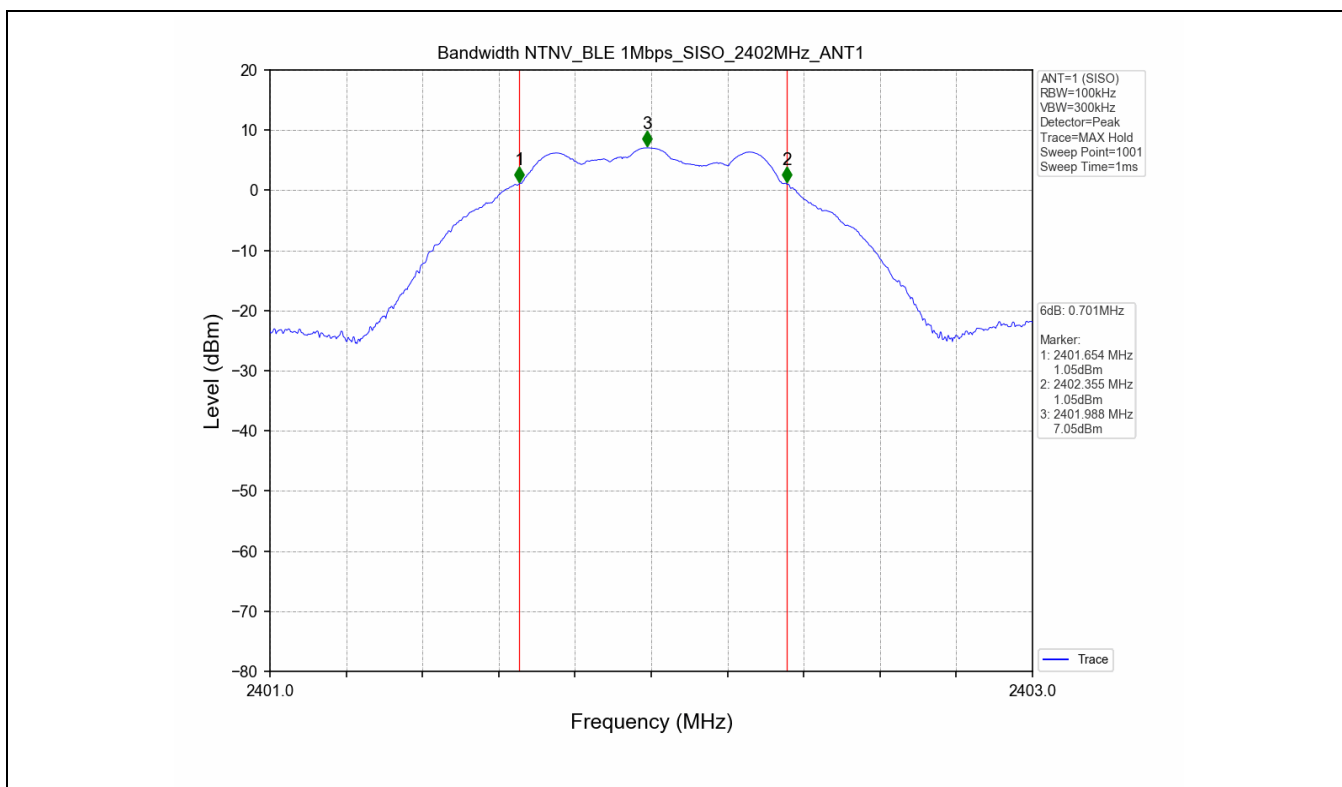


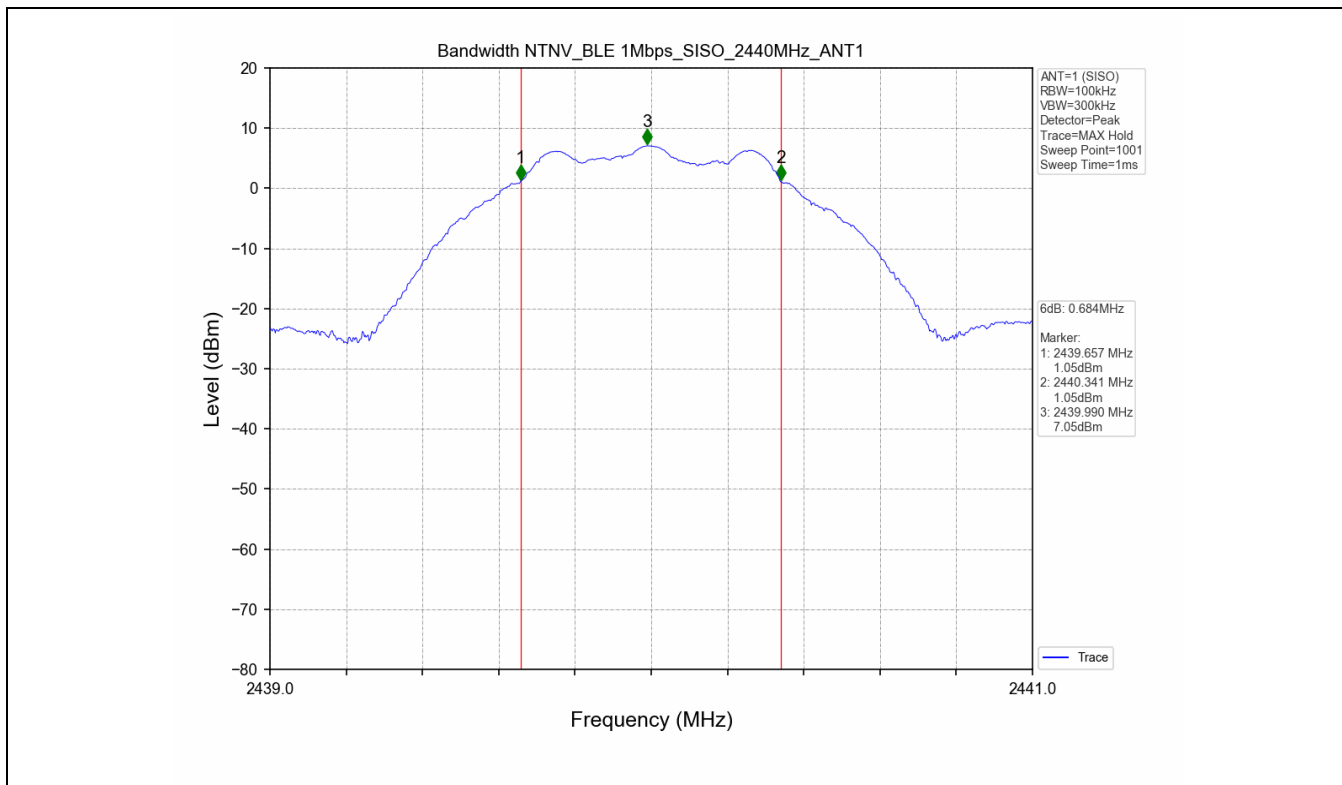
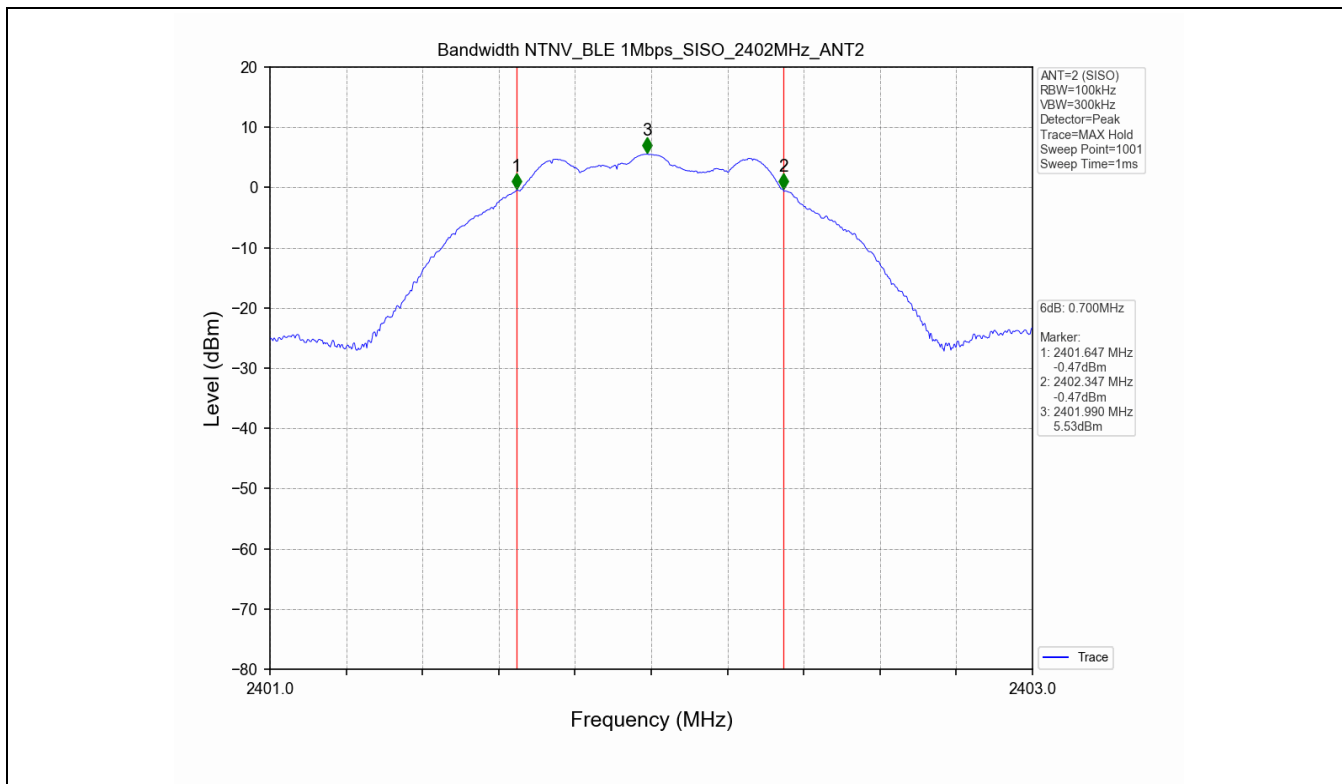


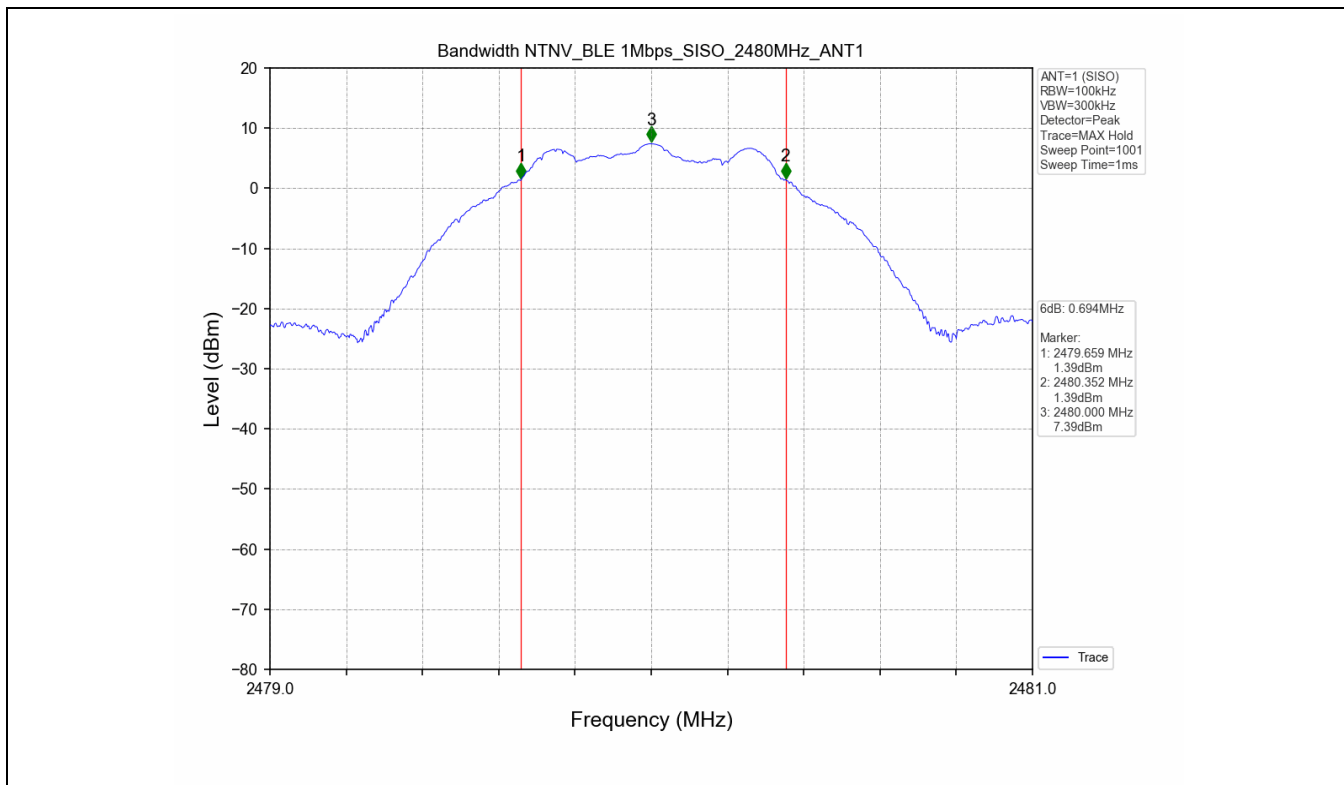
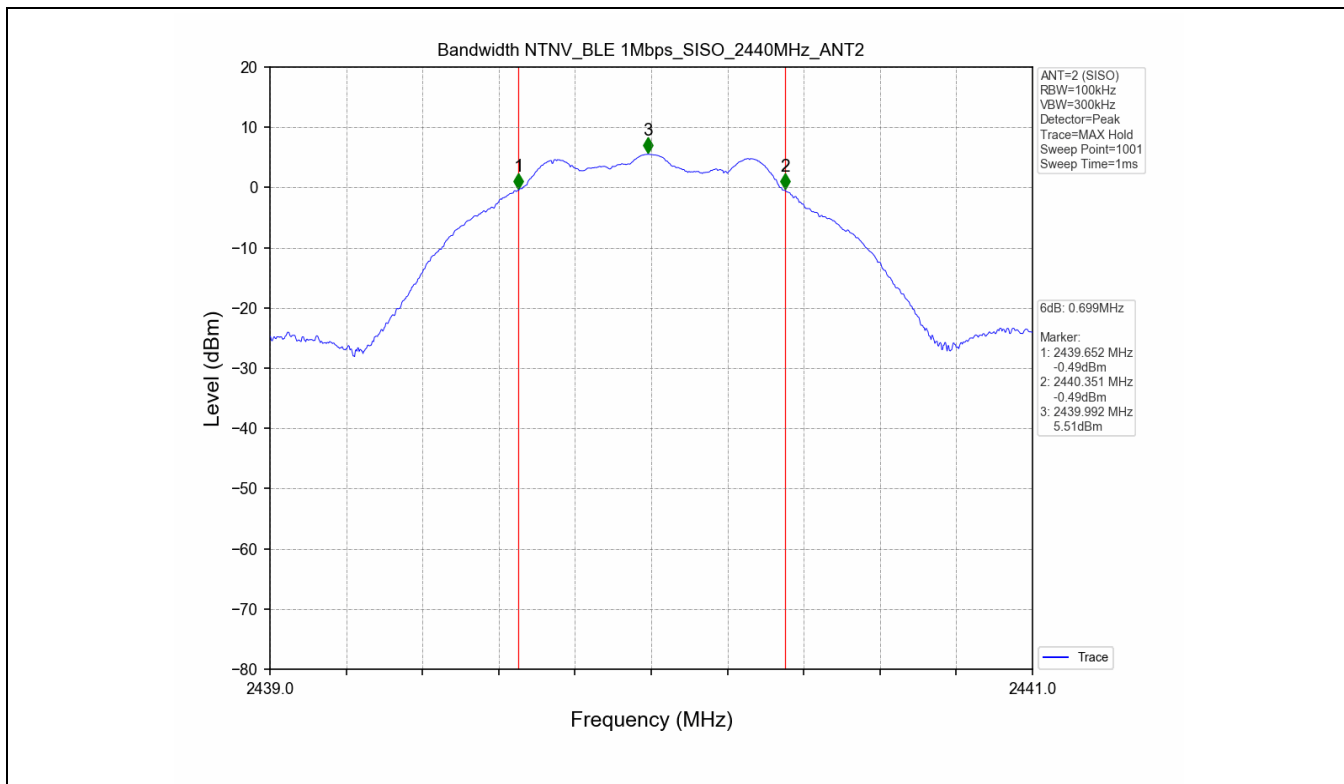


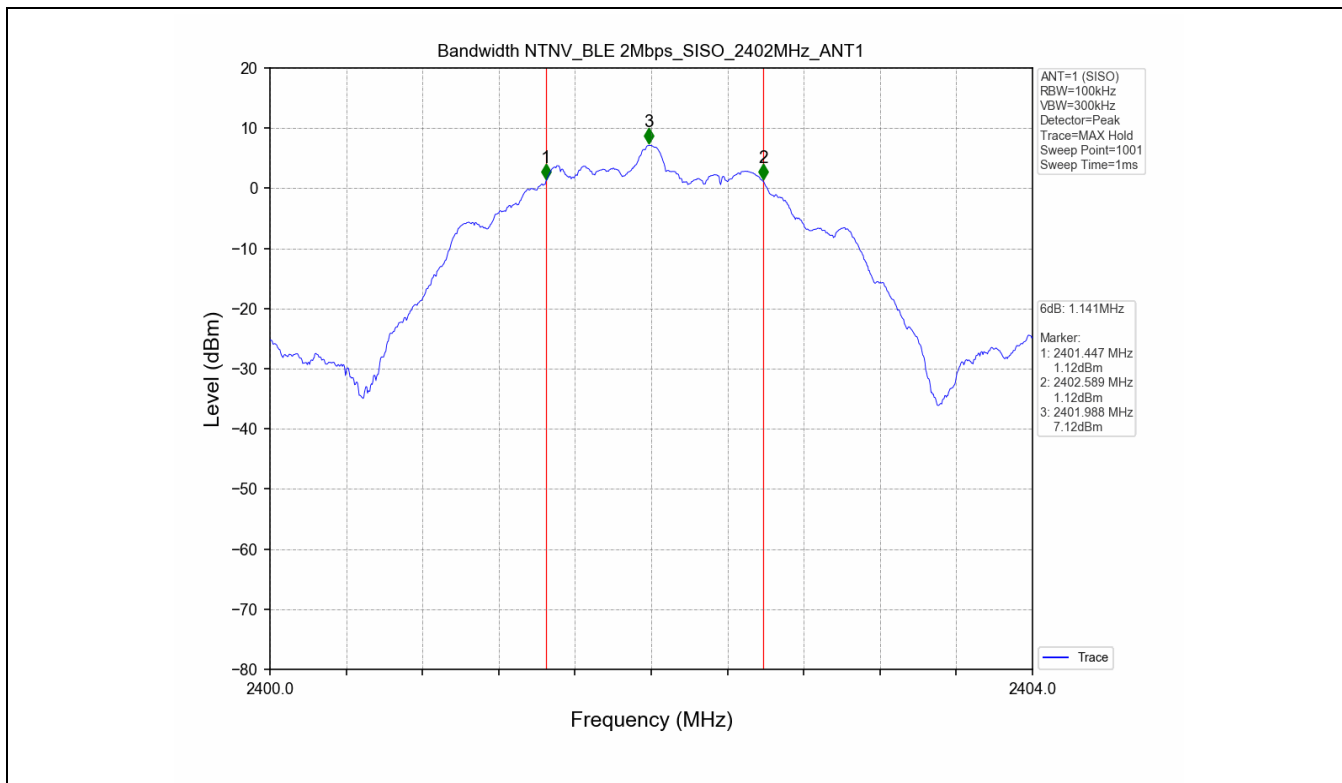
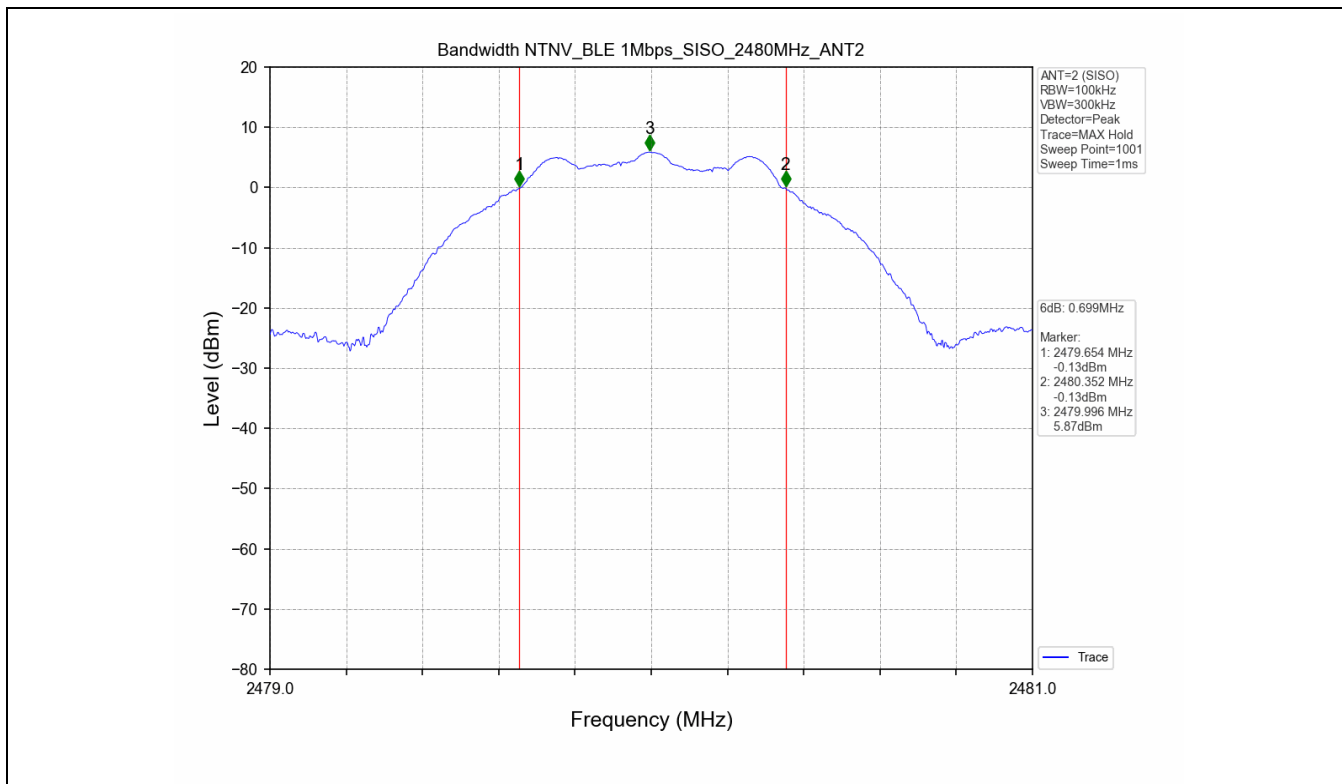


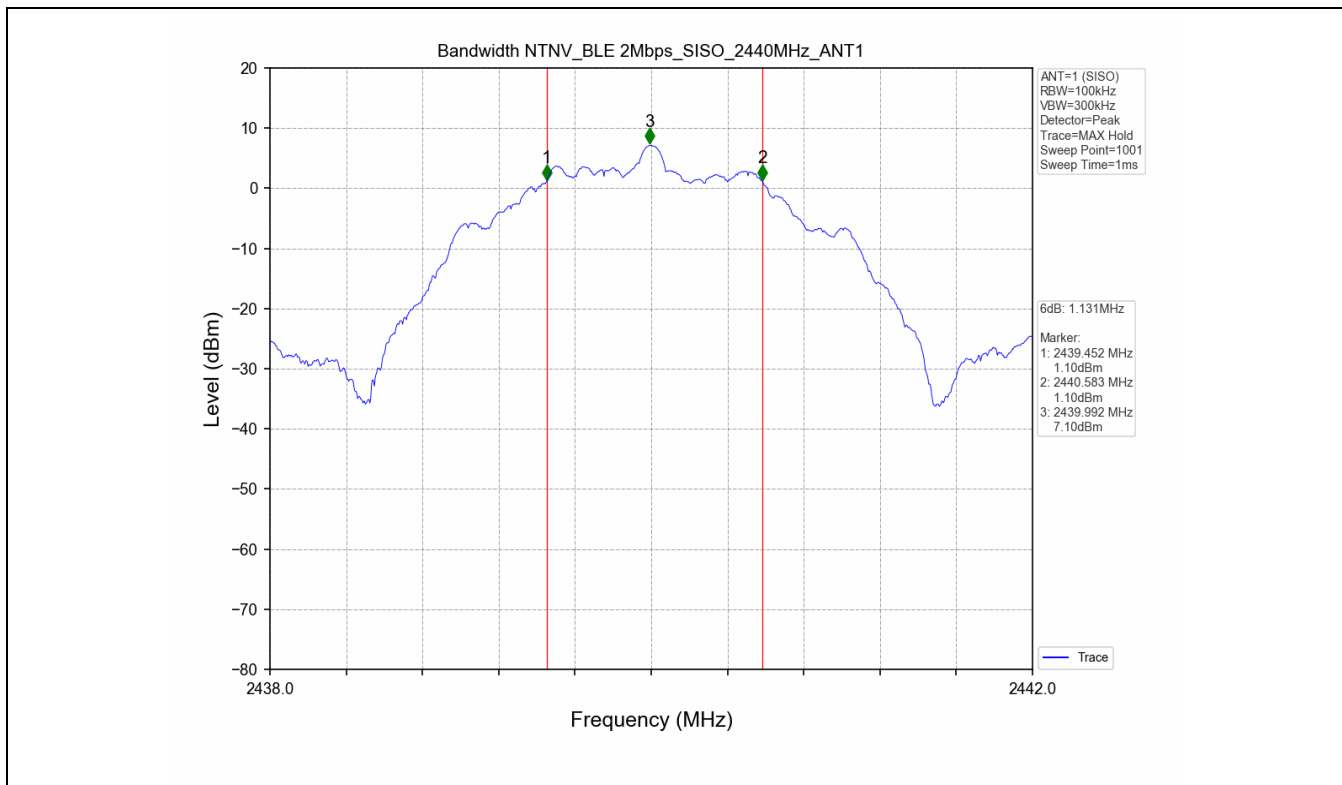
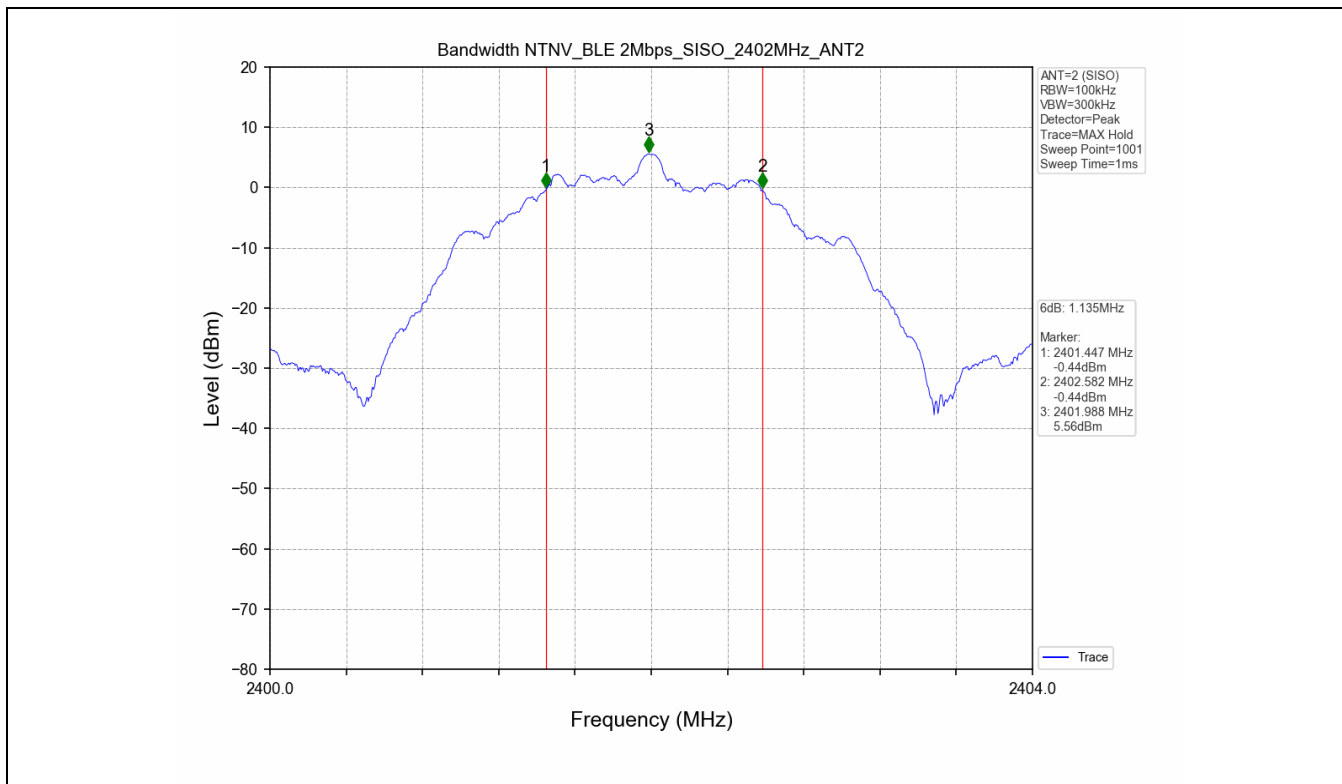


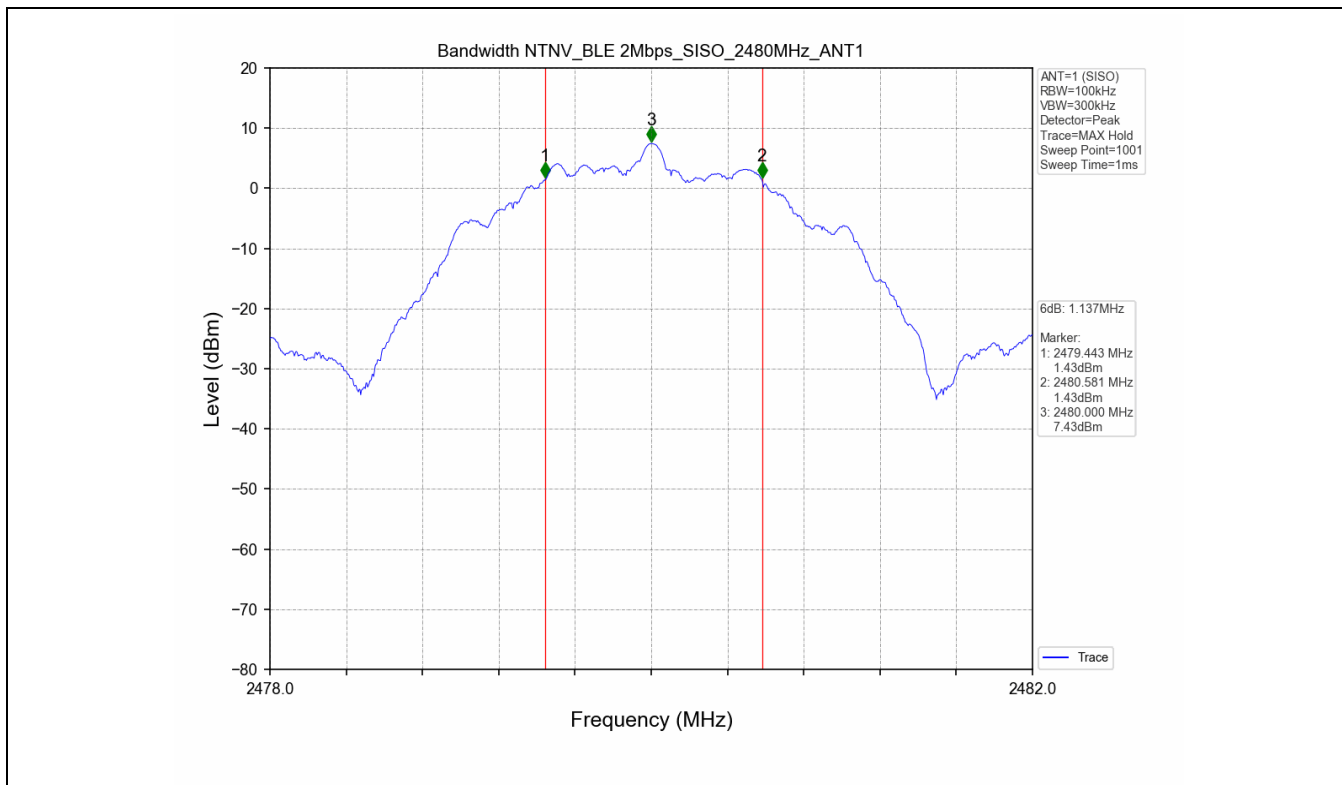
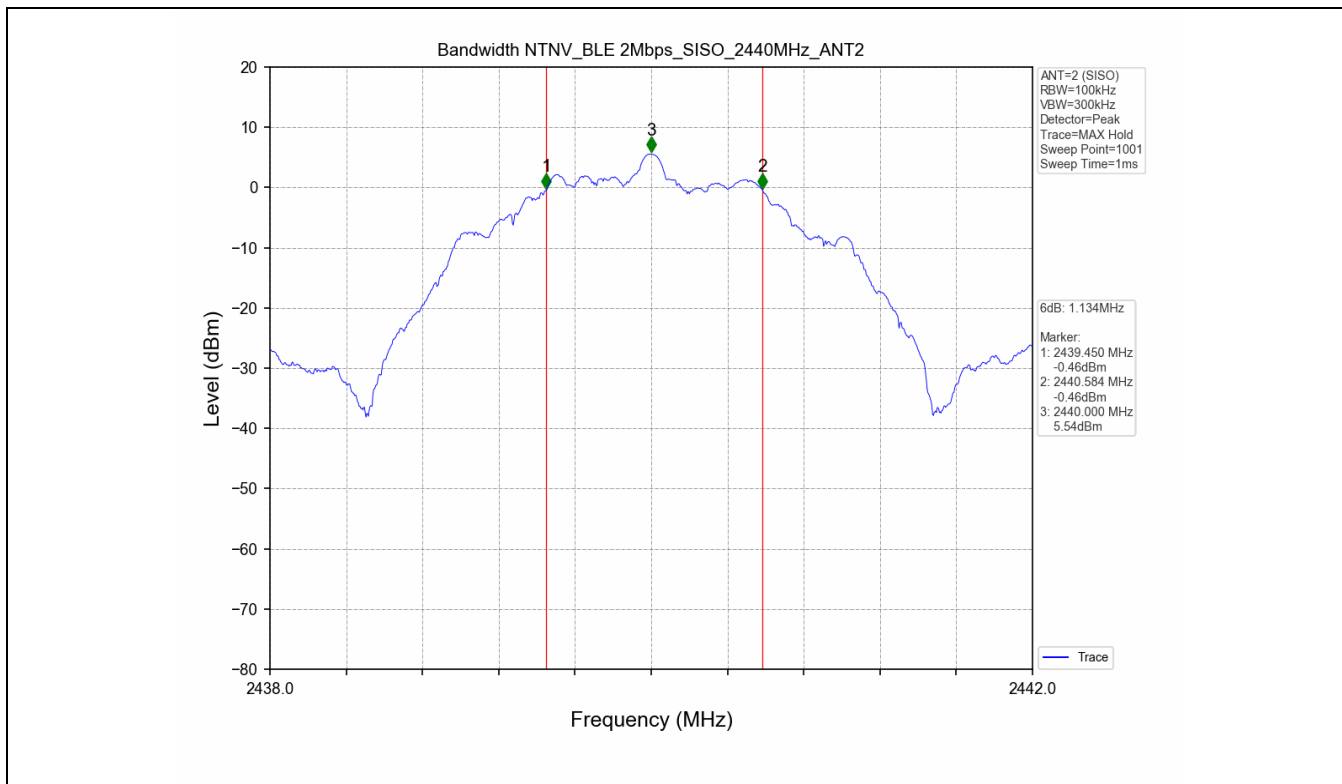


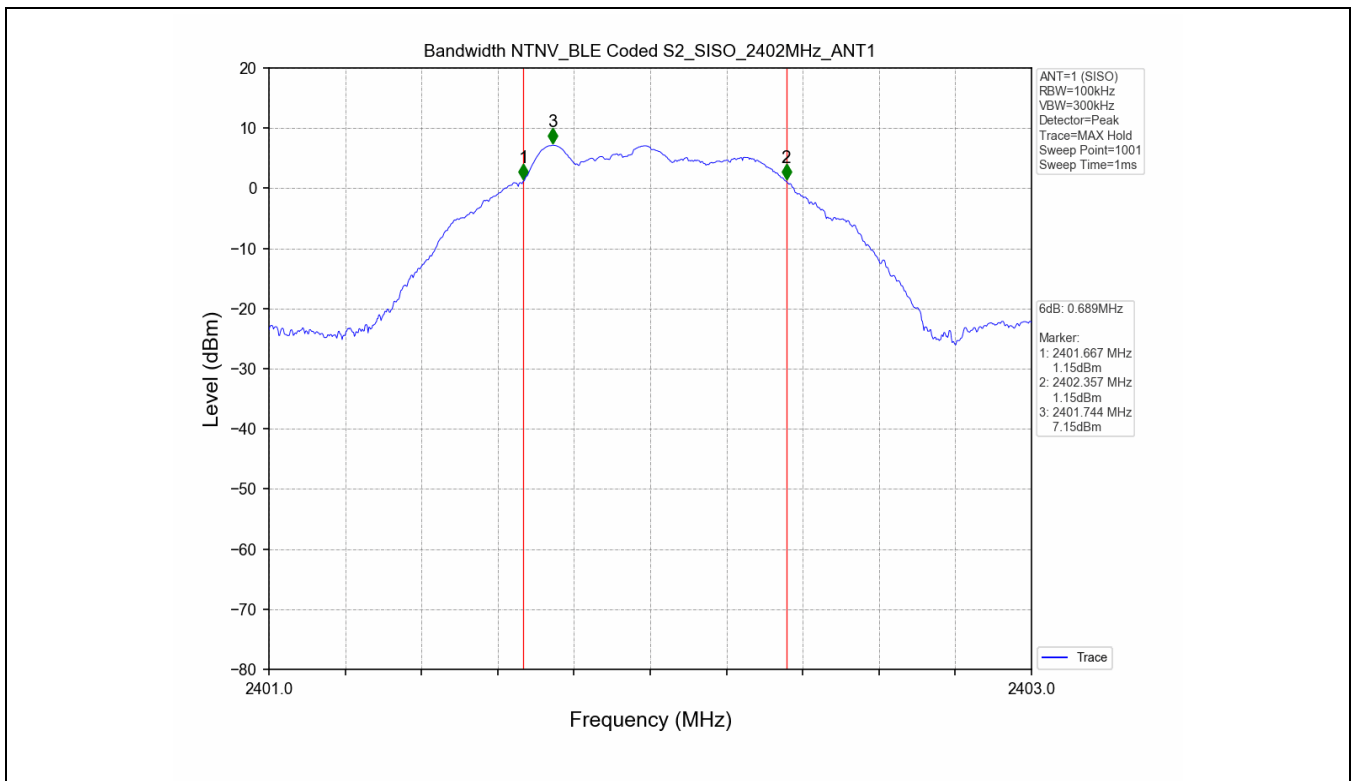
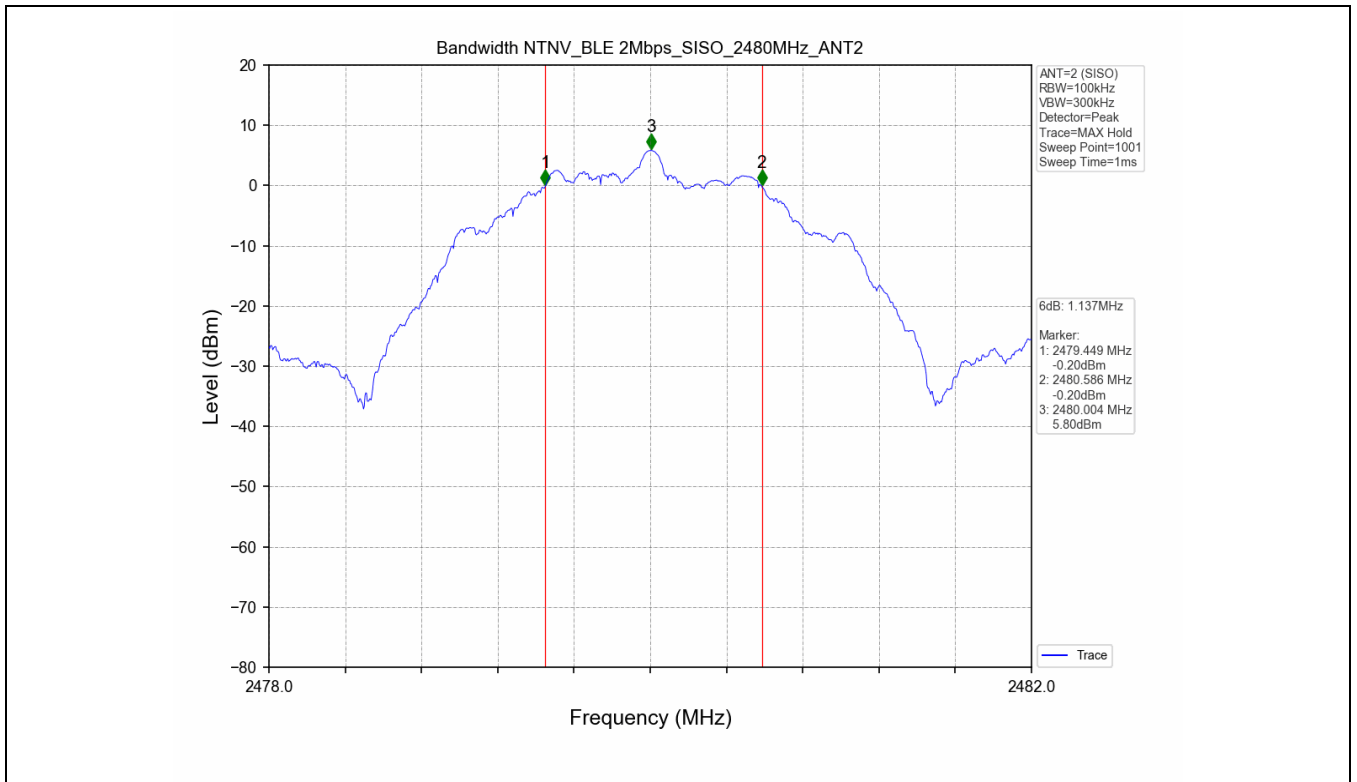


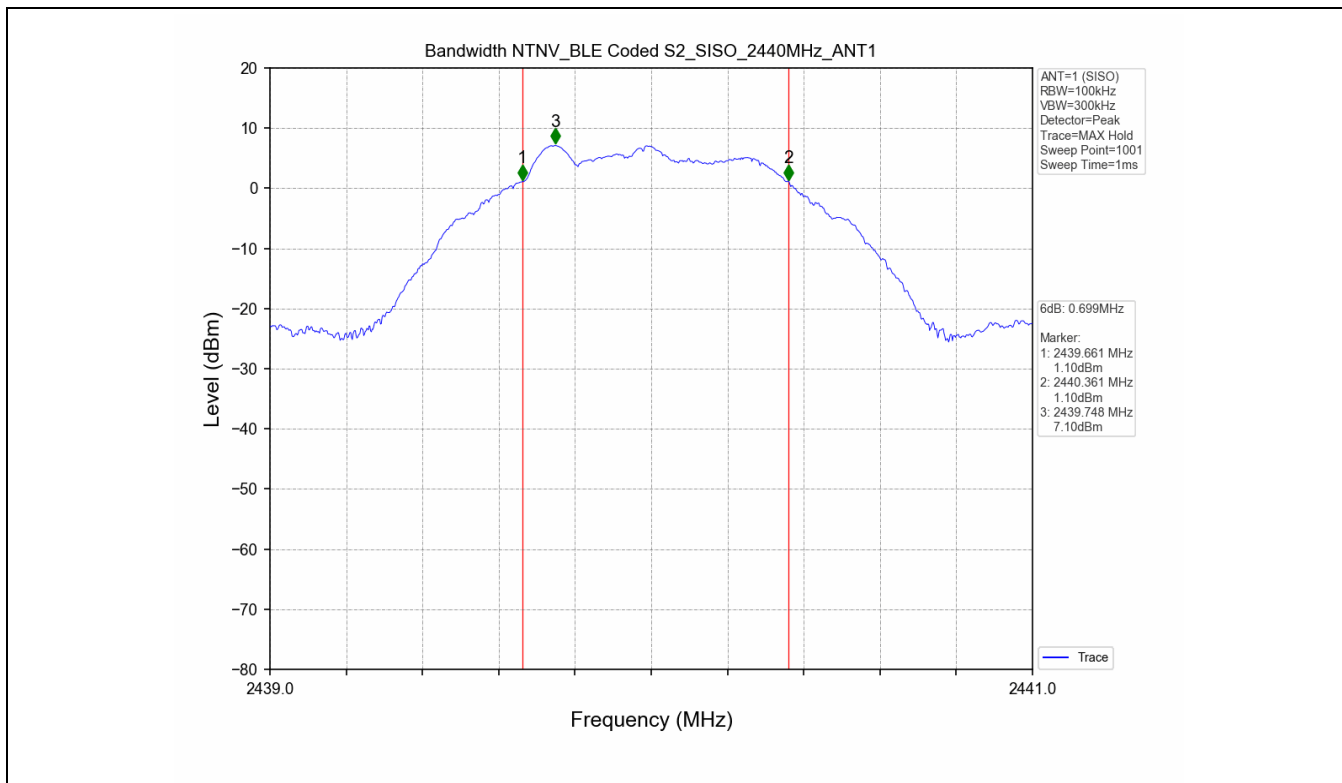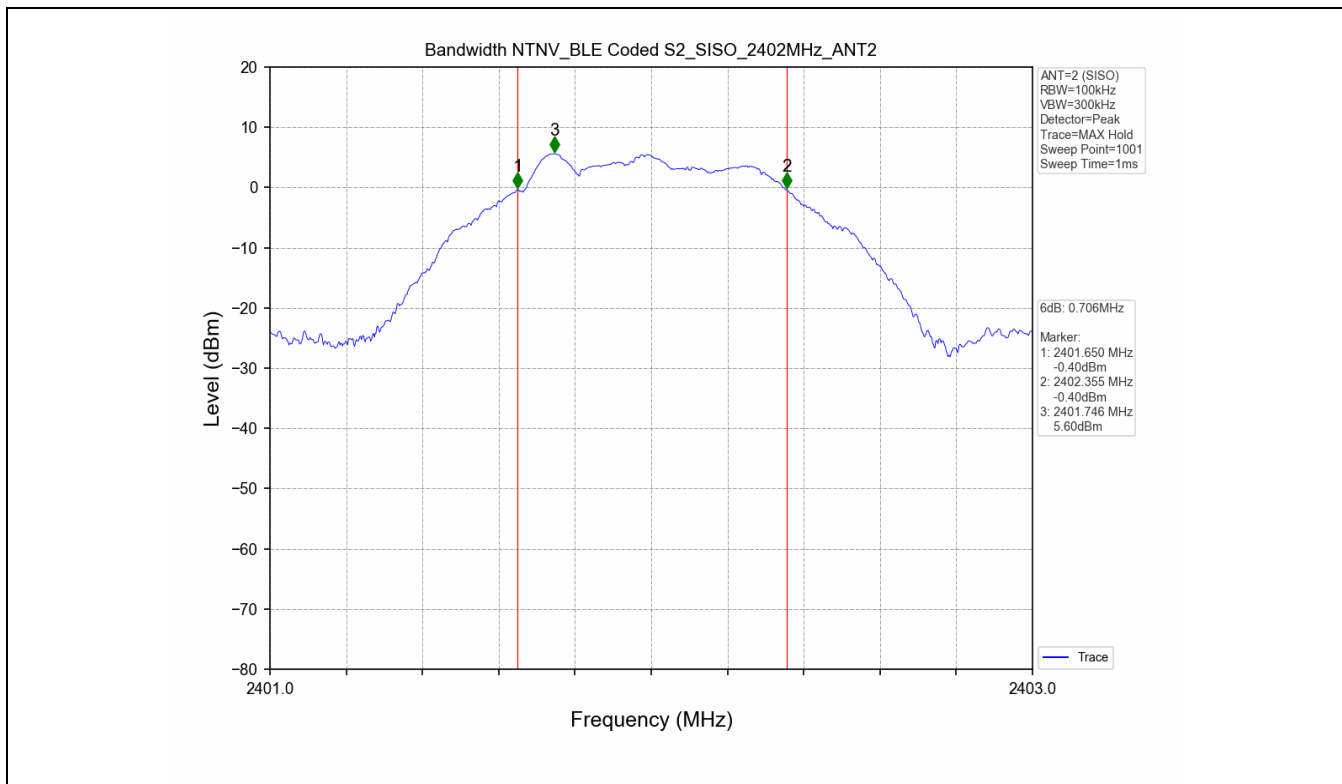


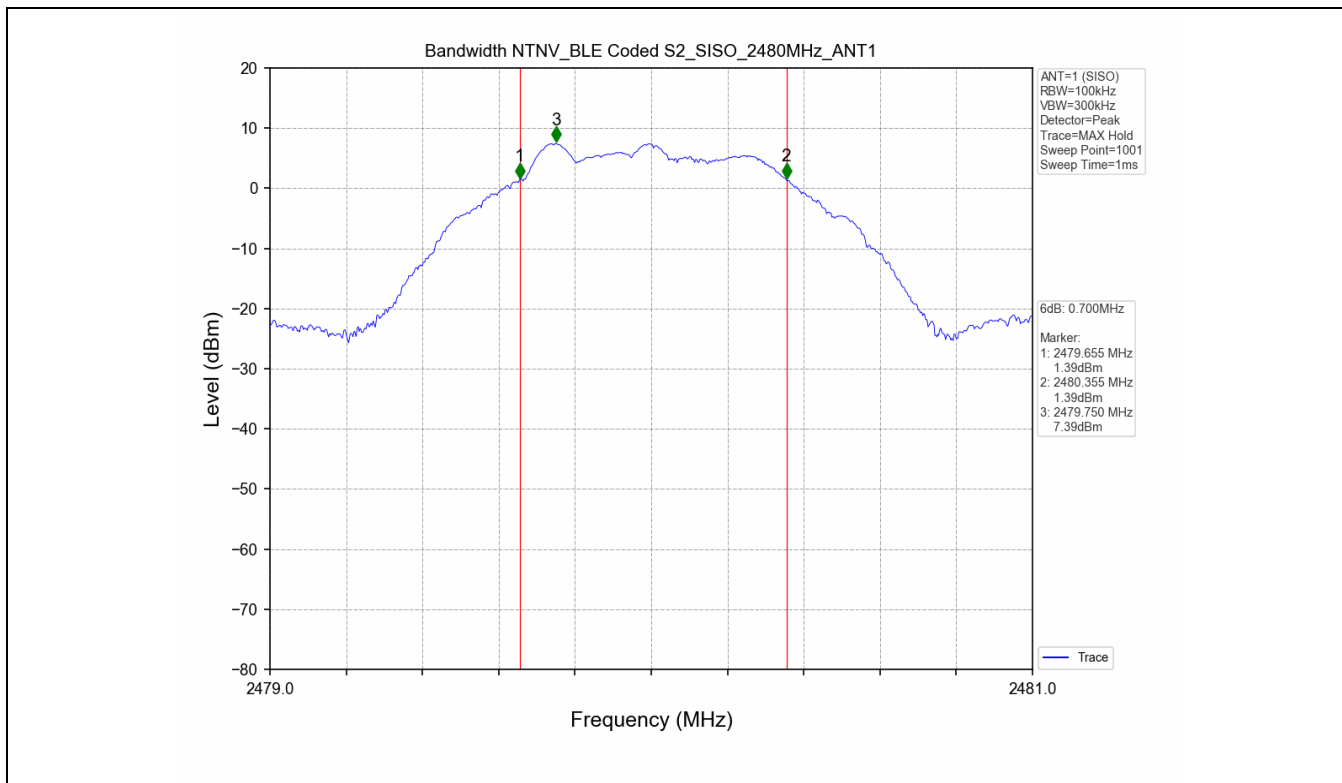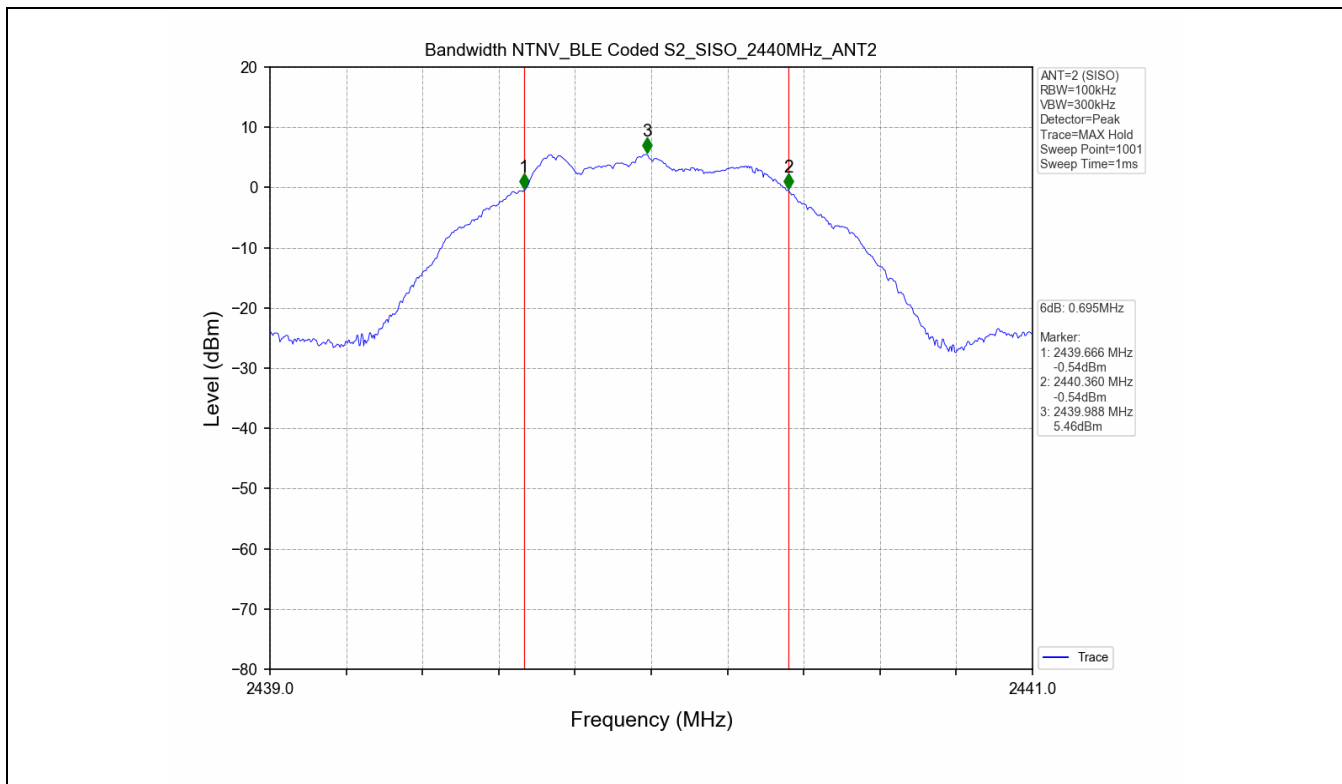

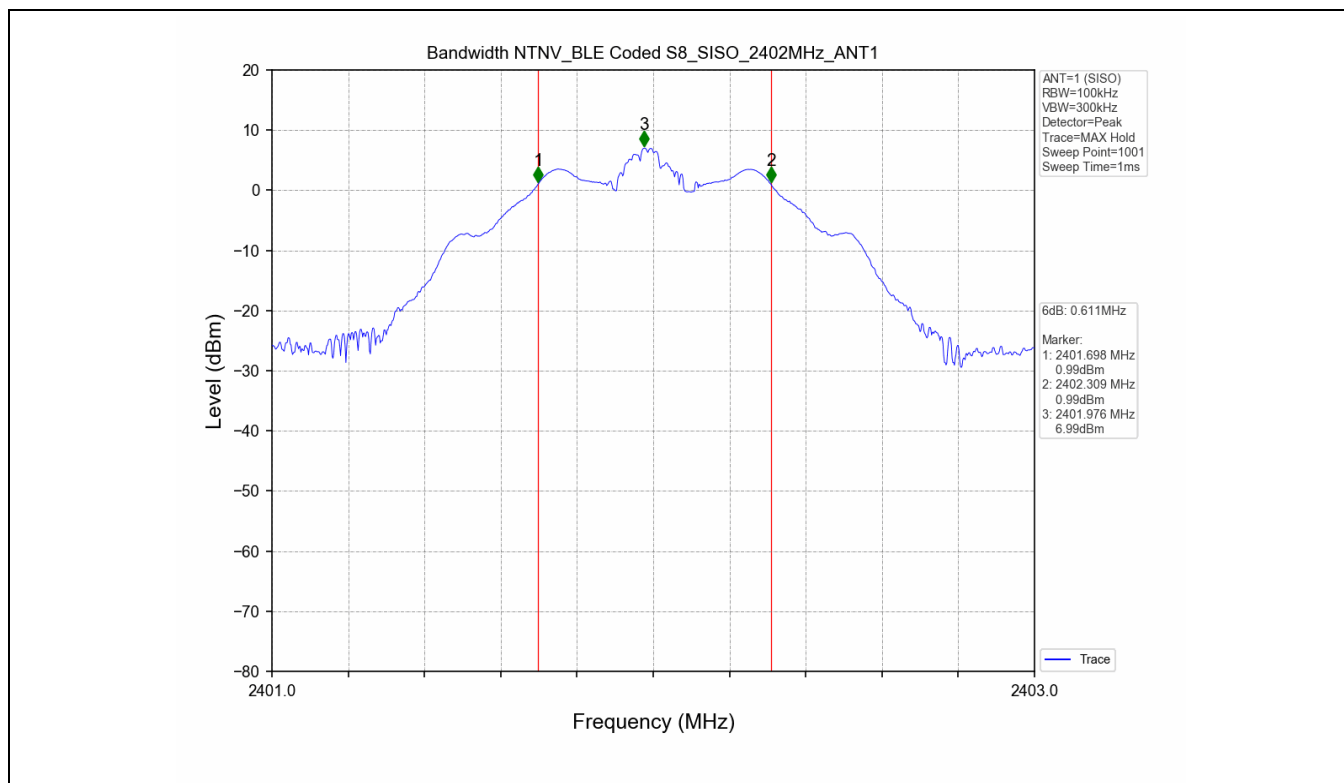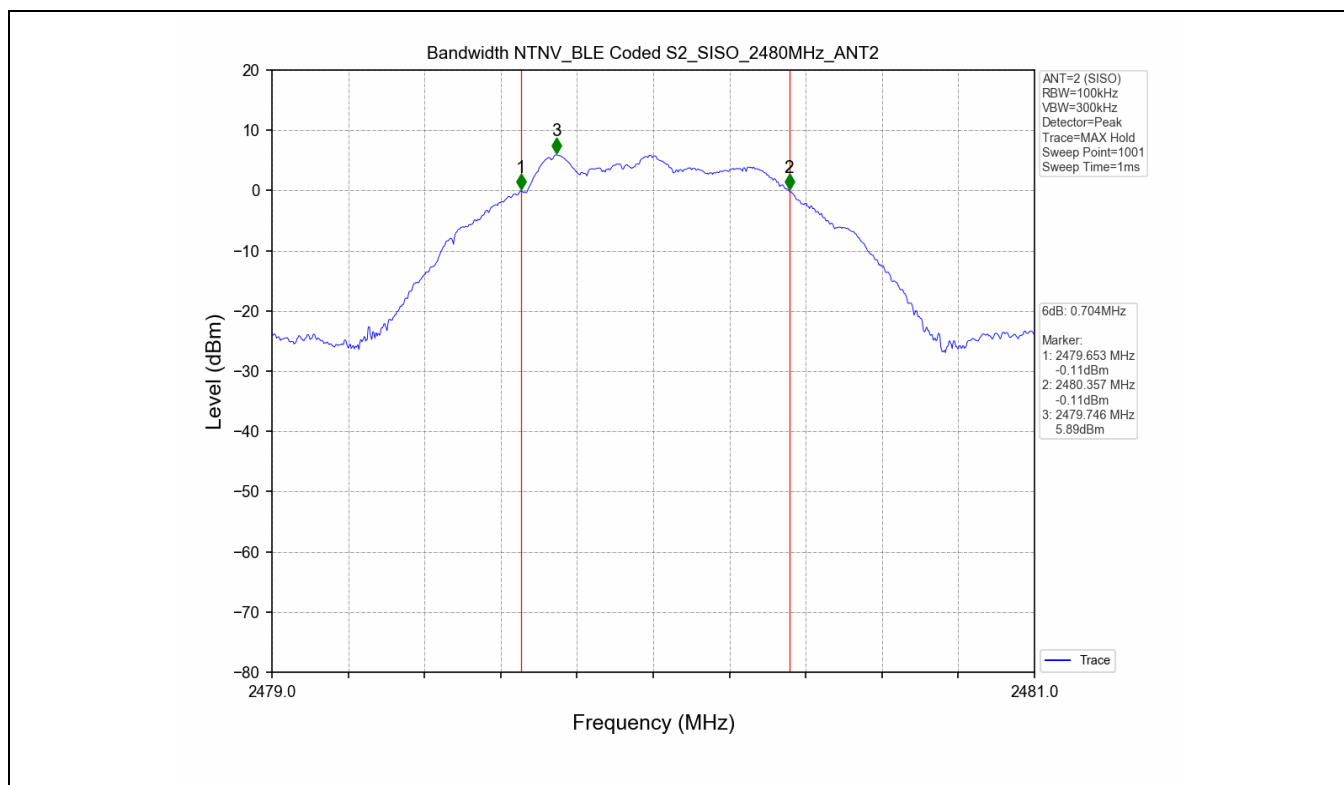


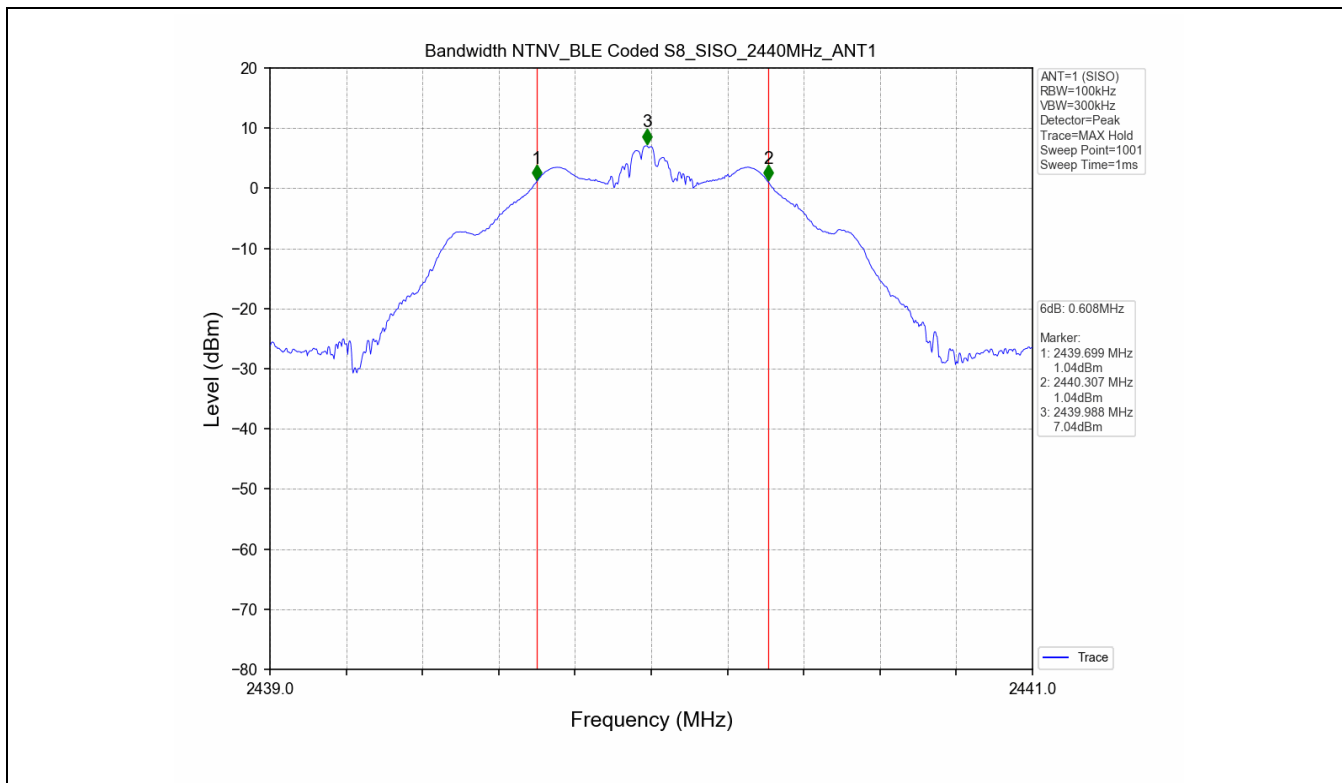
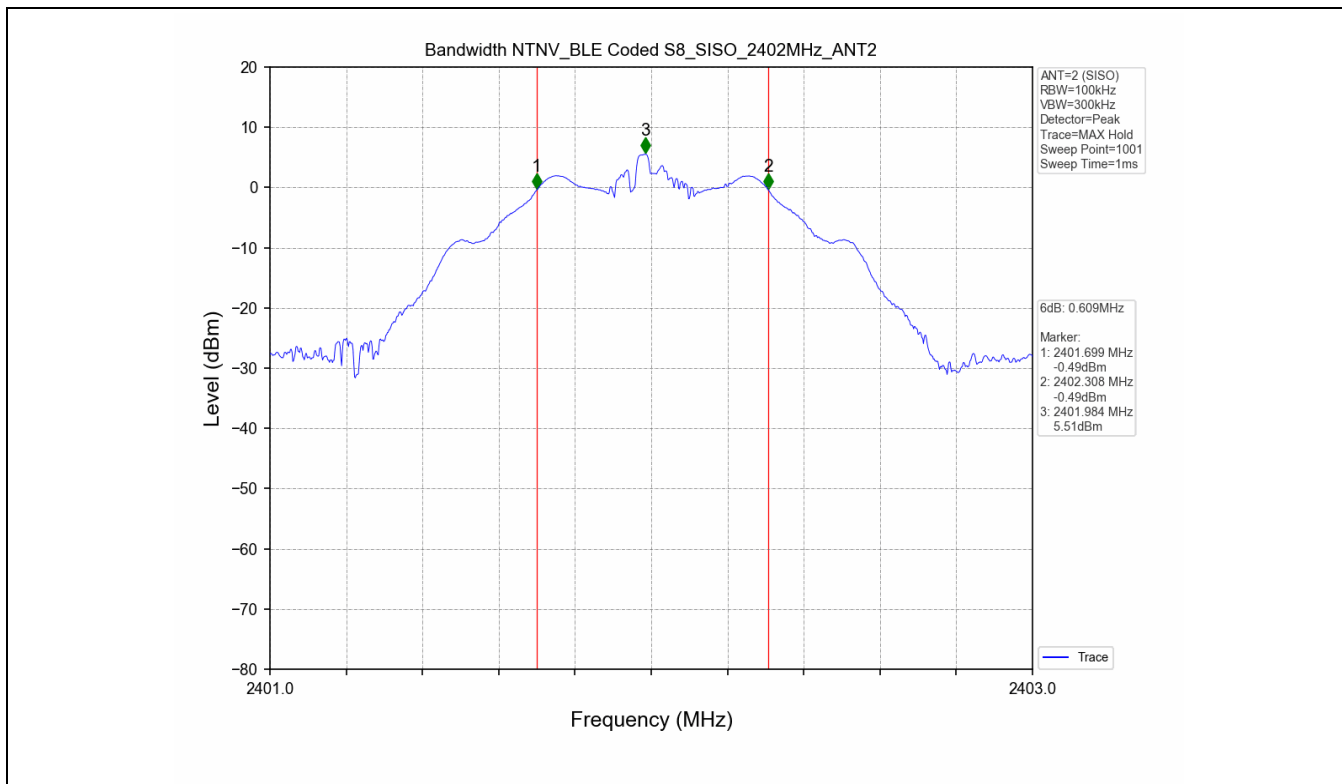


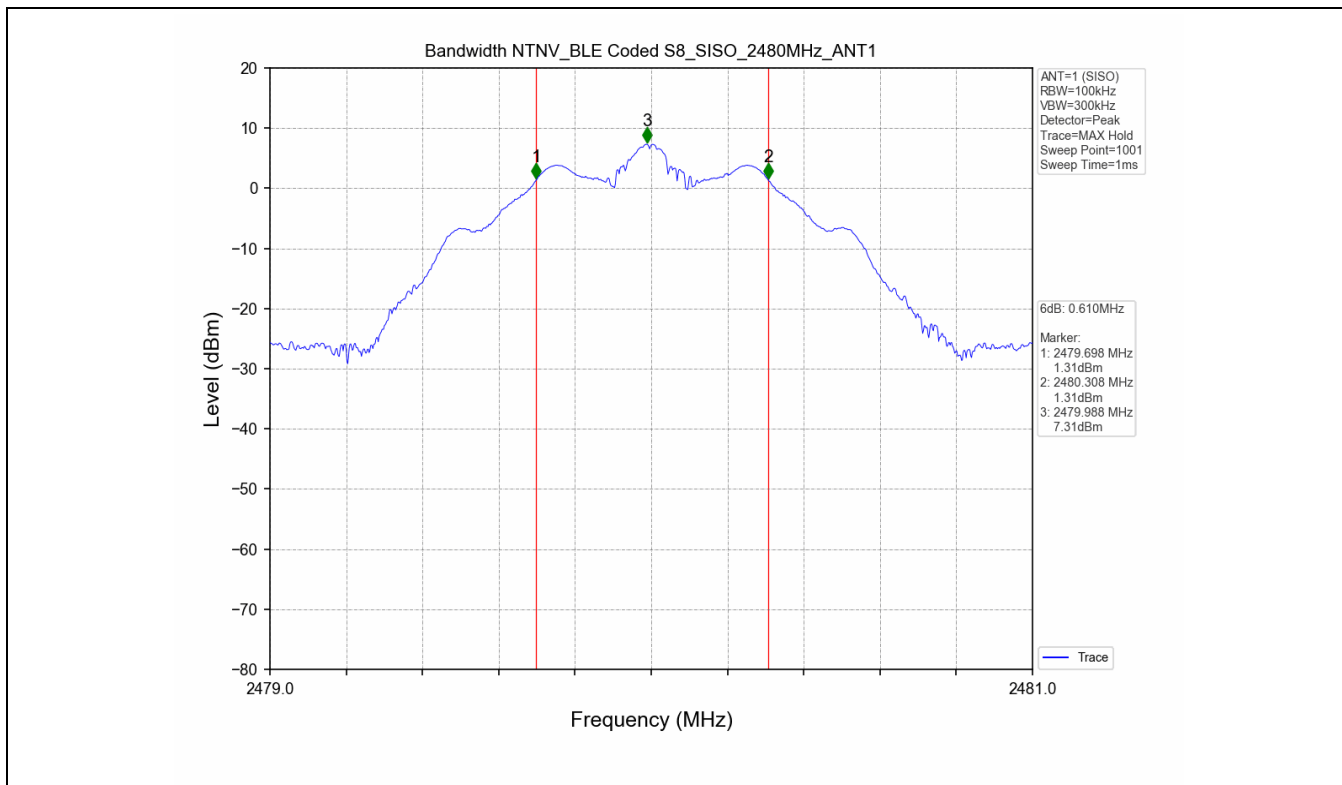
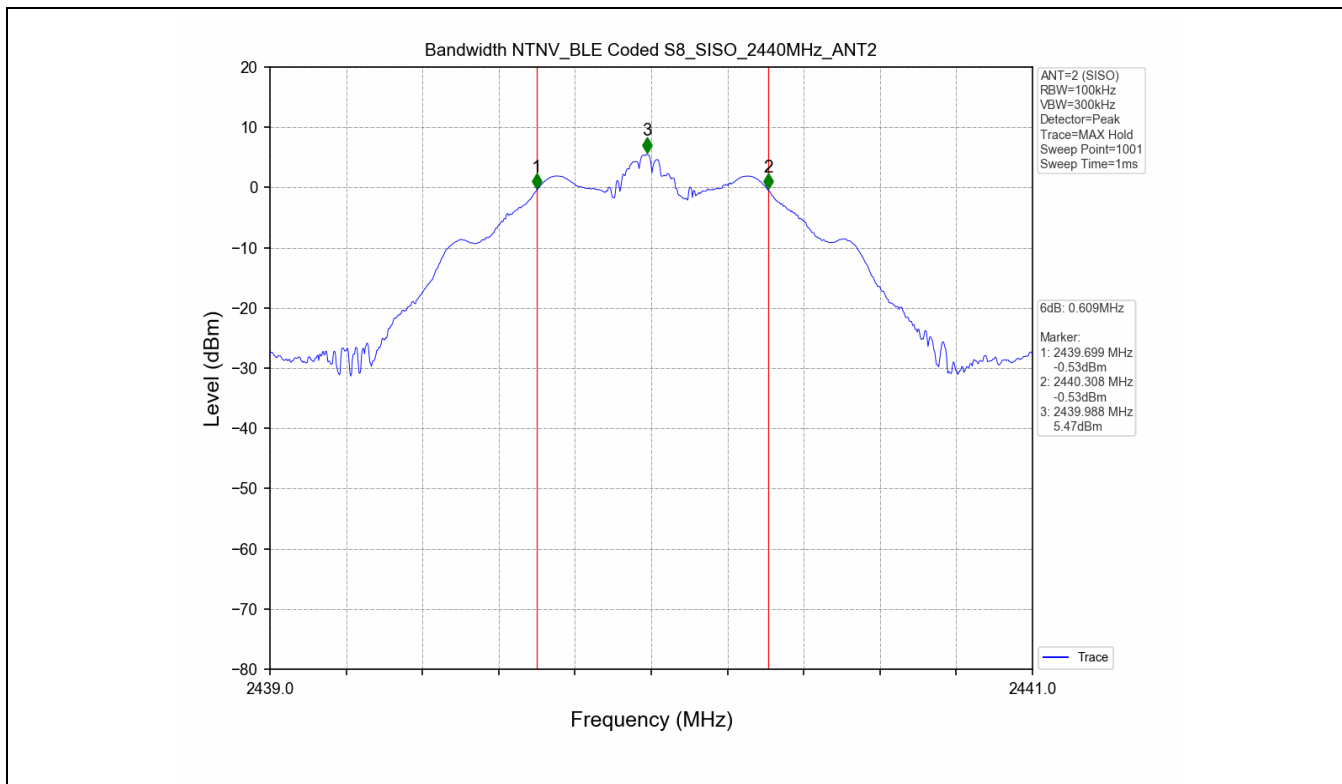



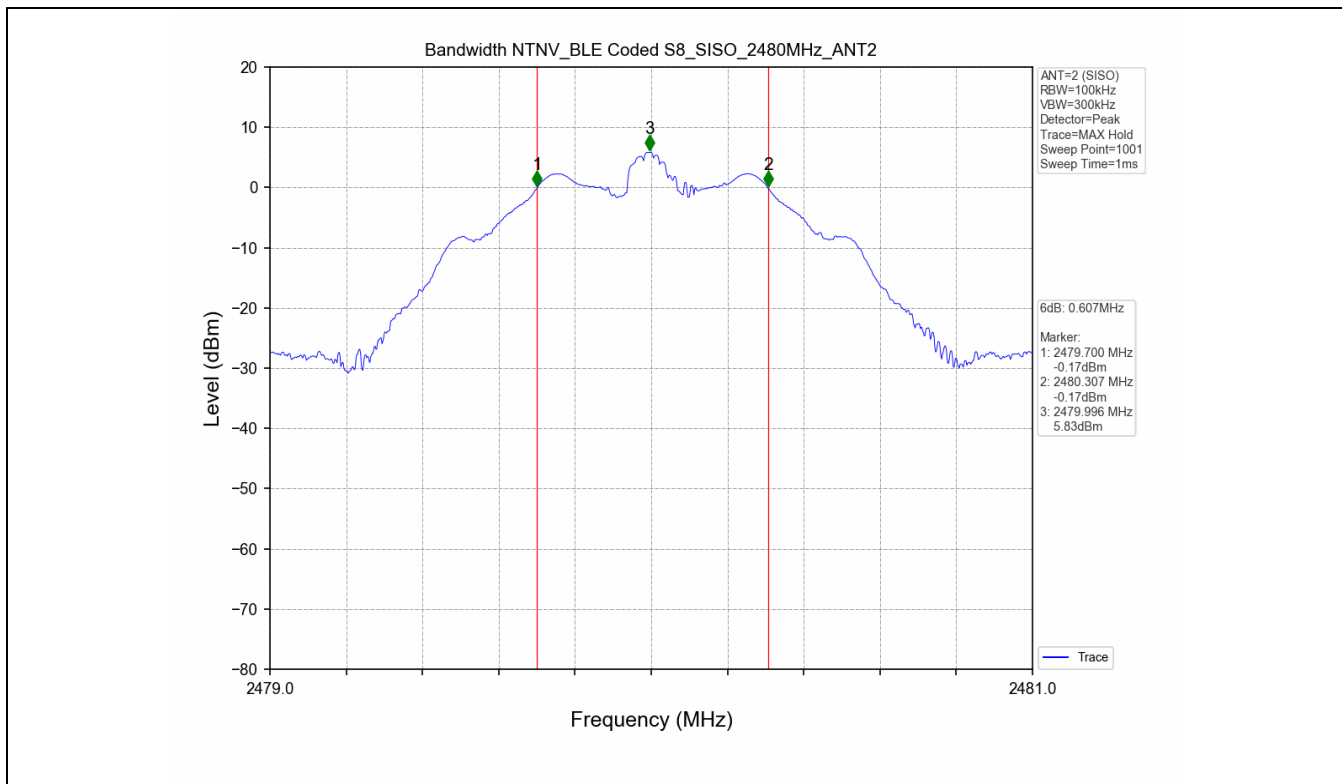




2.3 Test Graph - 99% Occupied Bandwidth


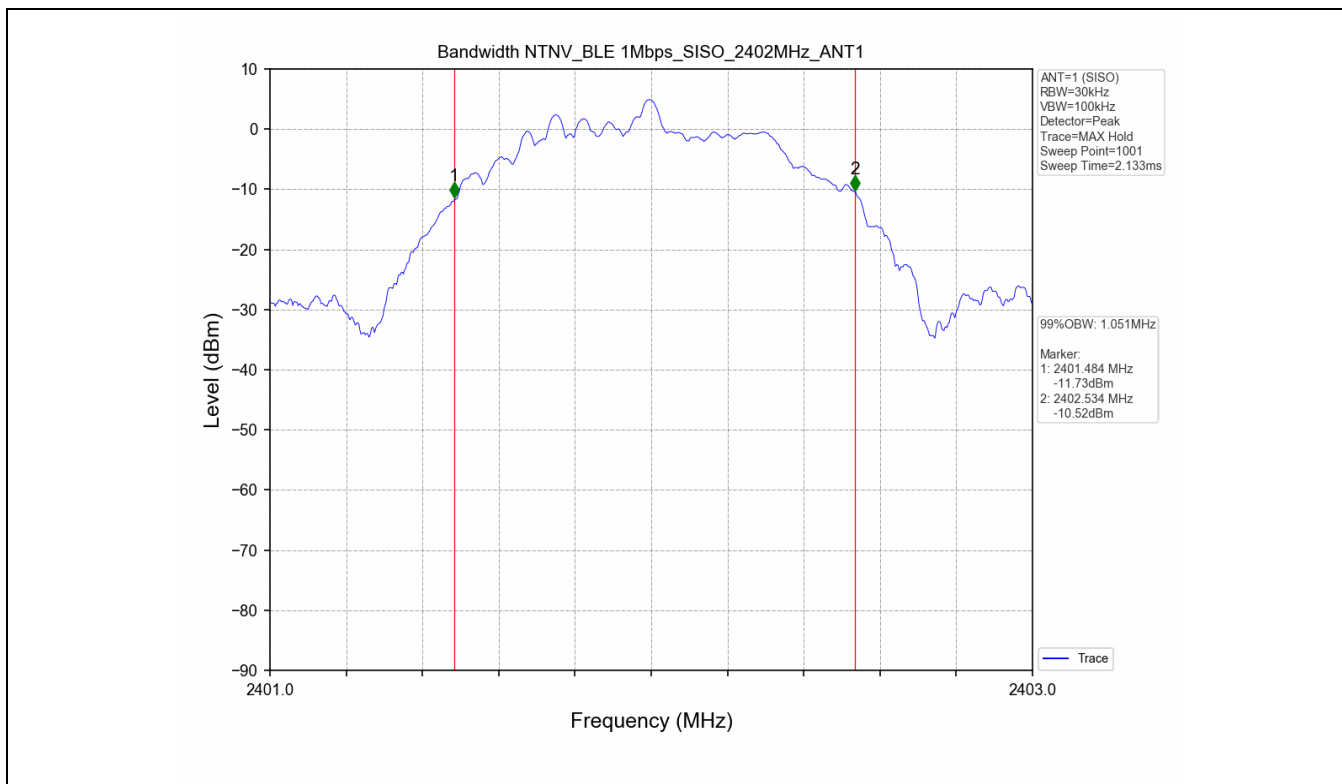


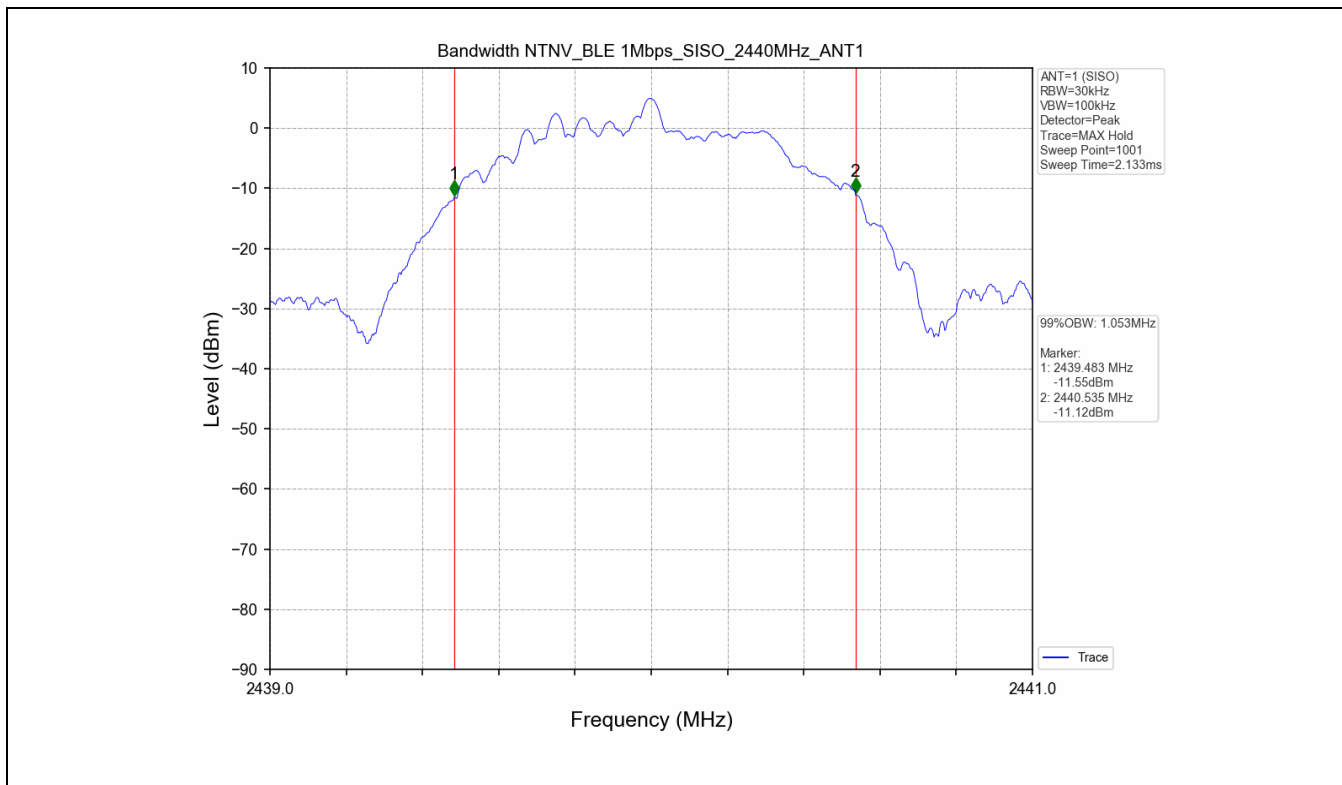
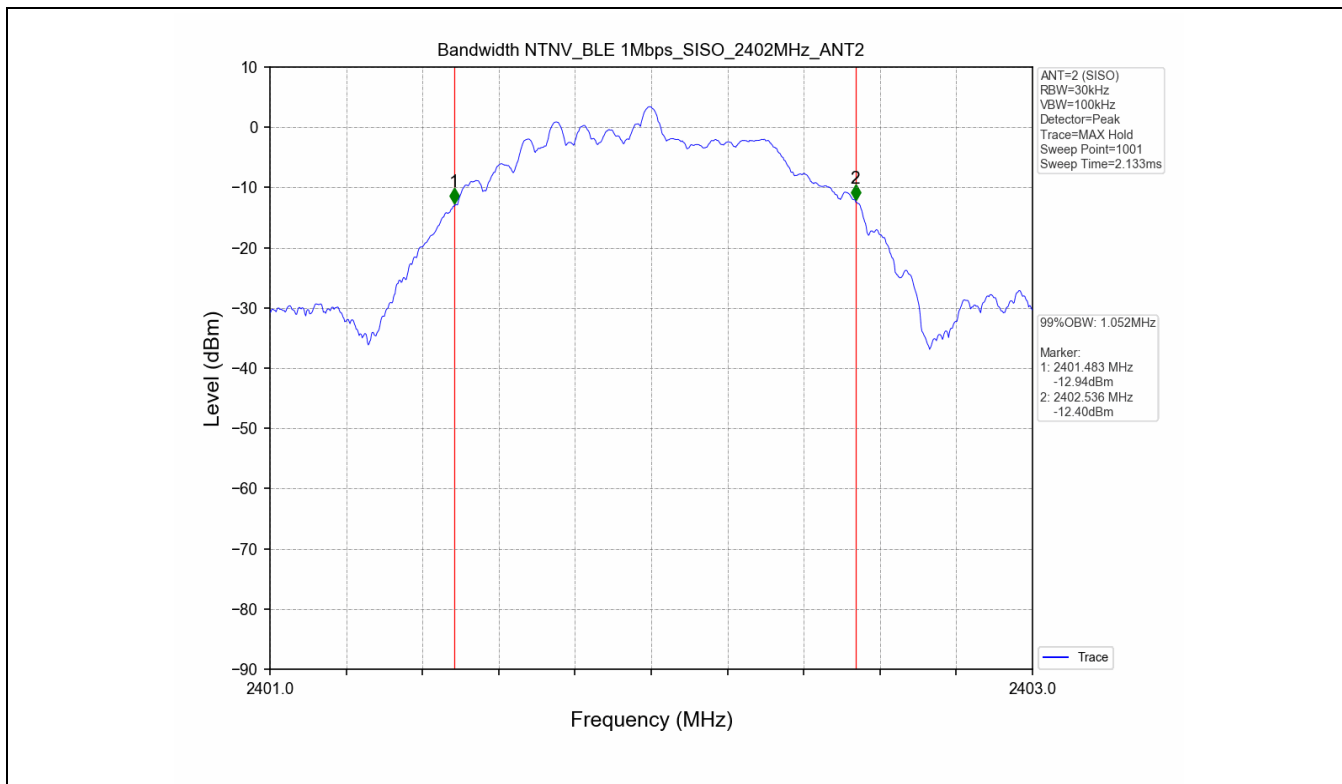


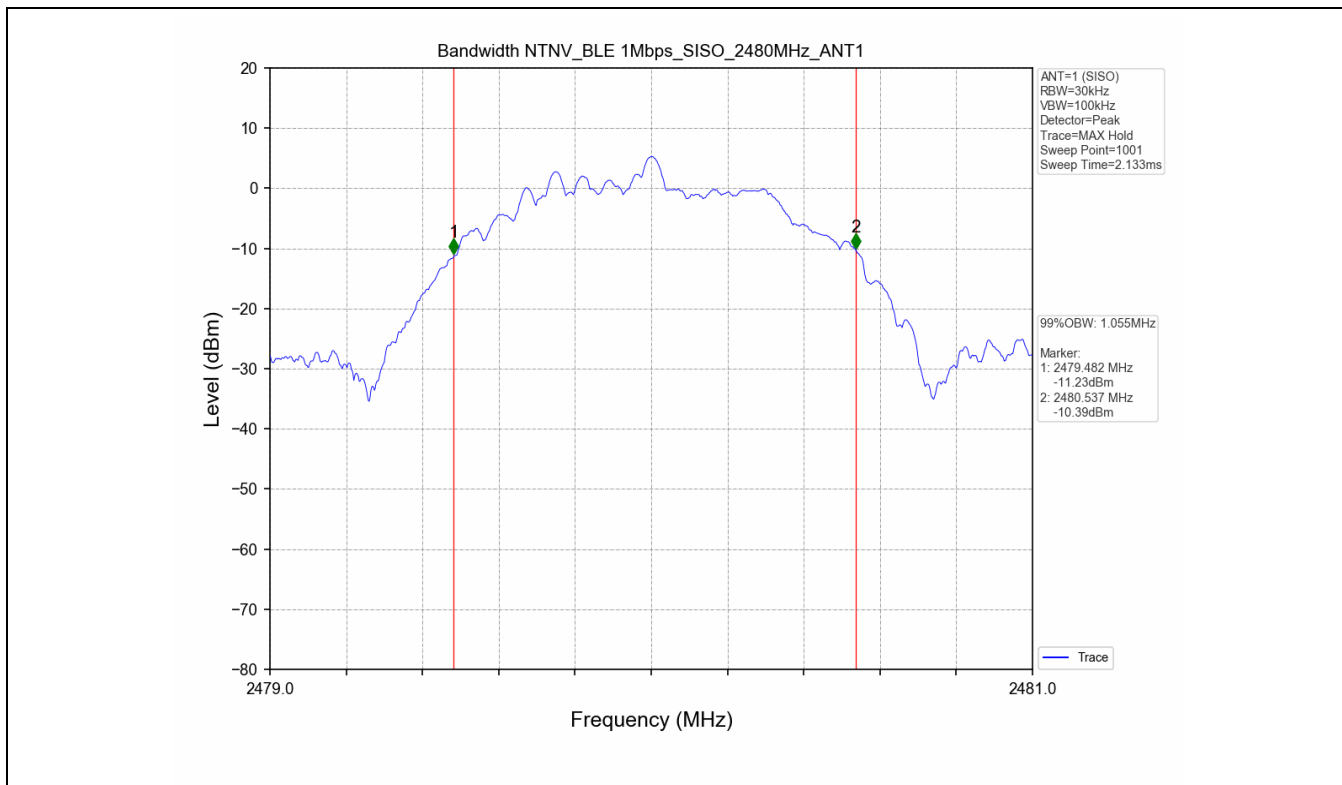
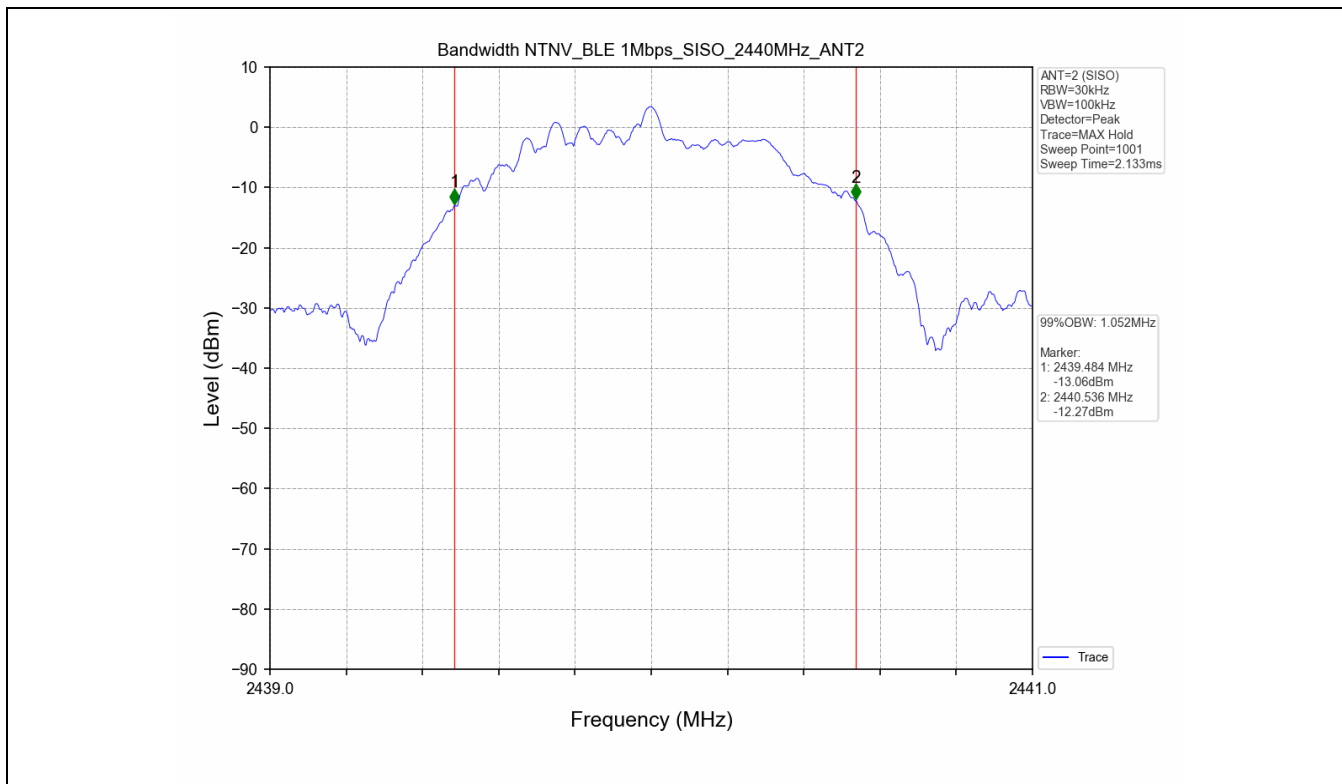


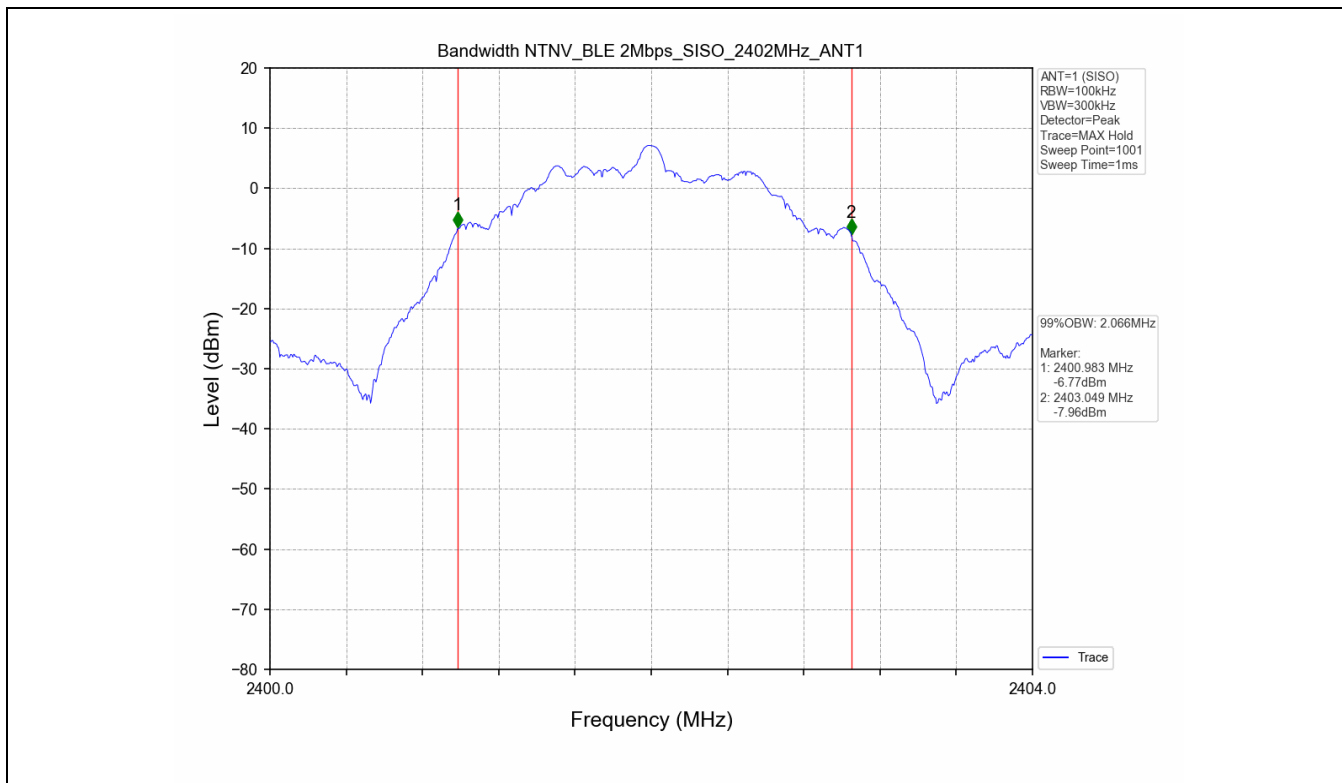
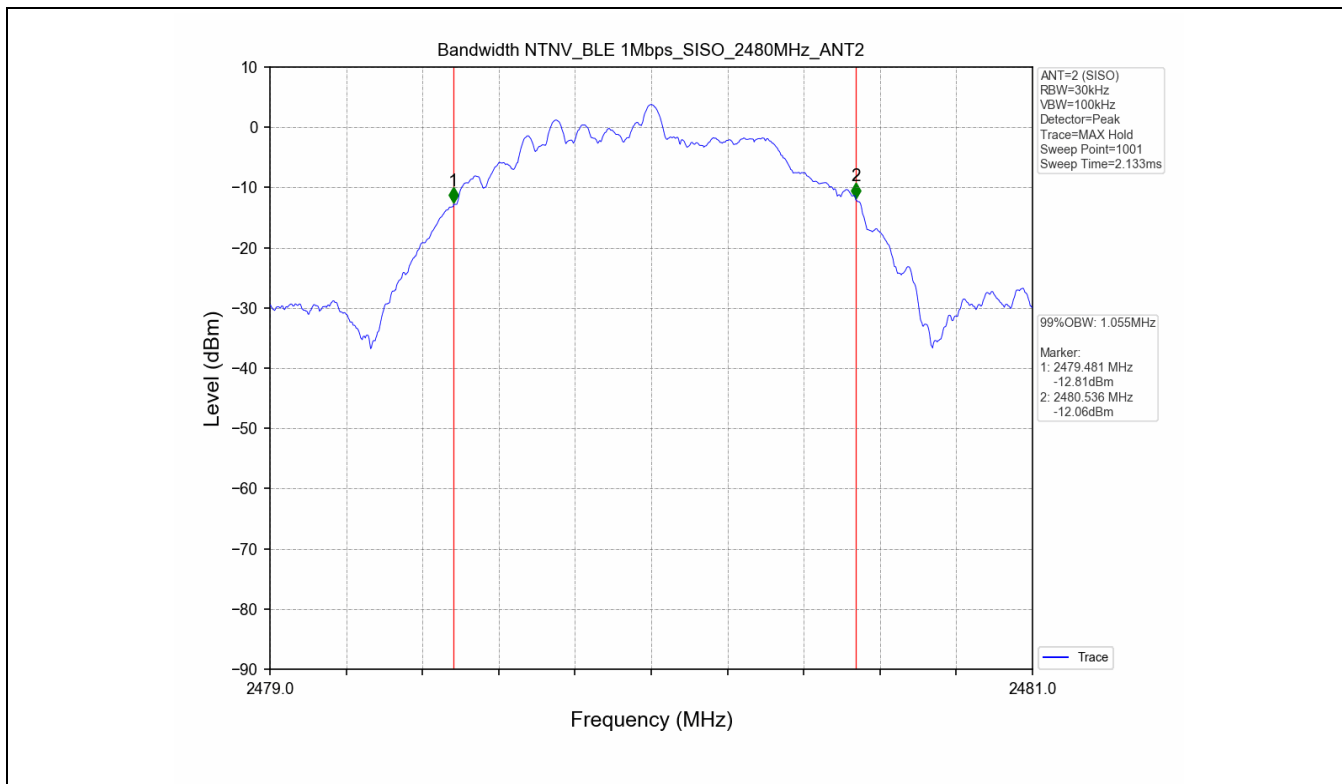


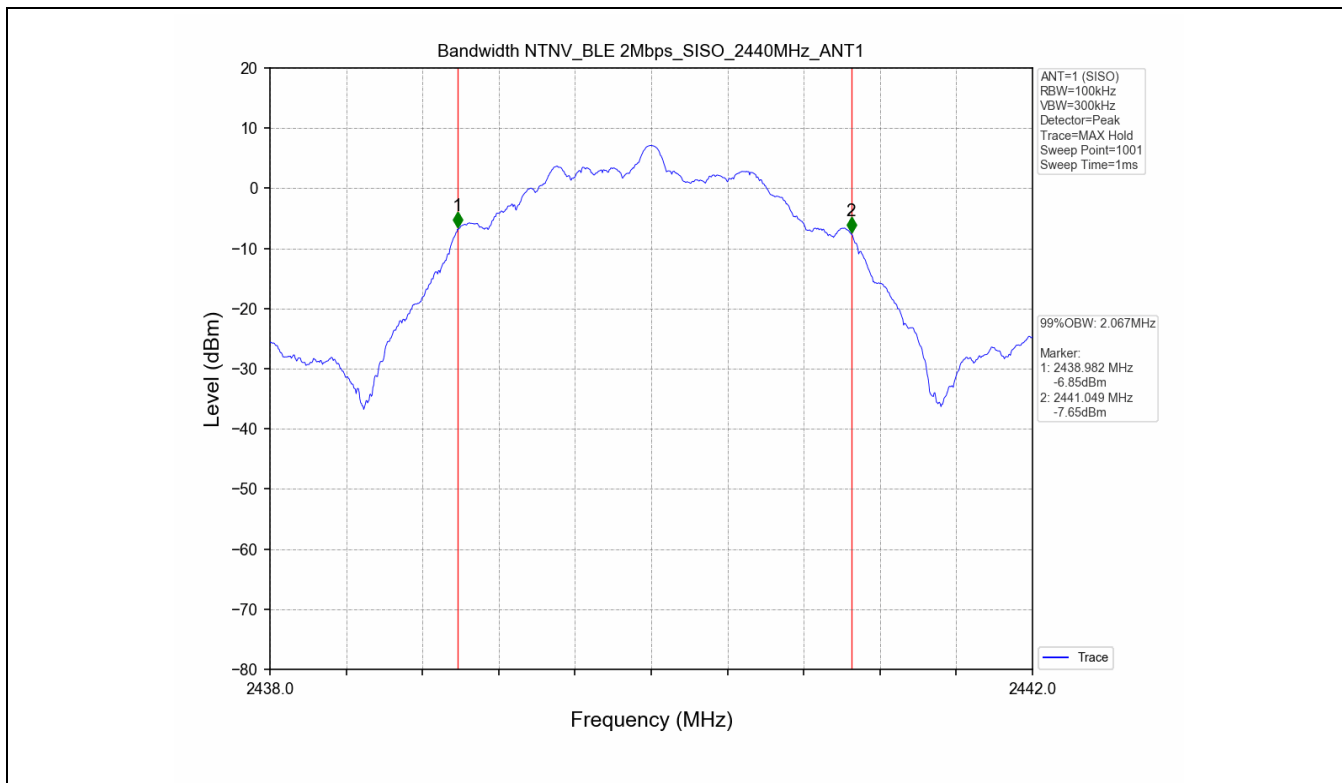
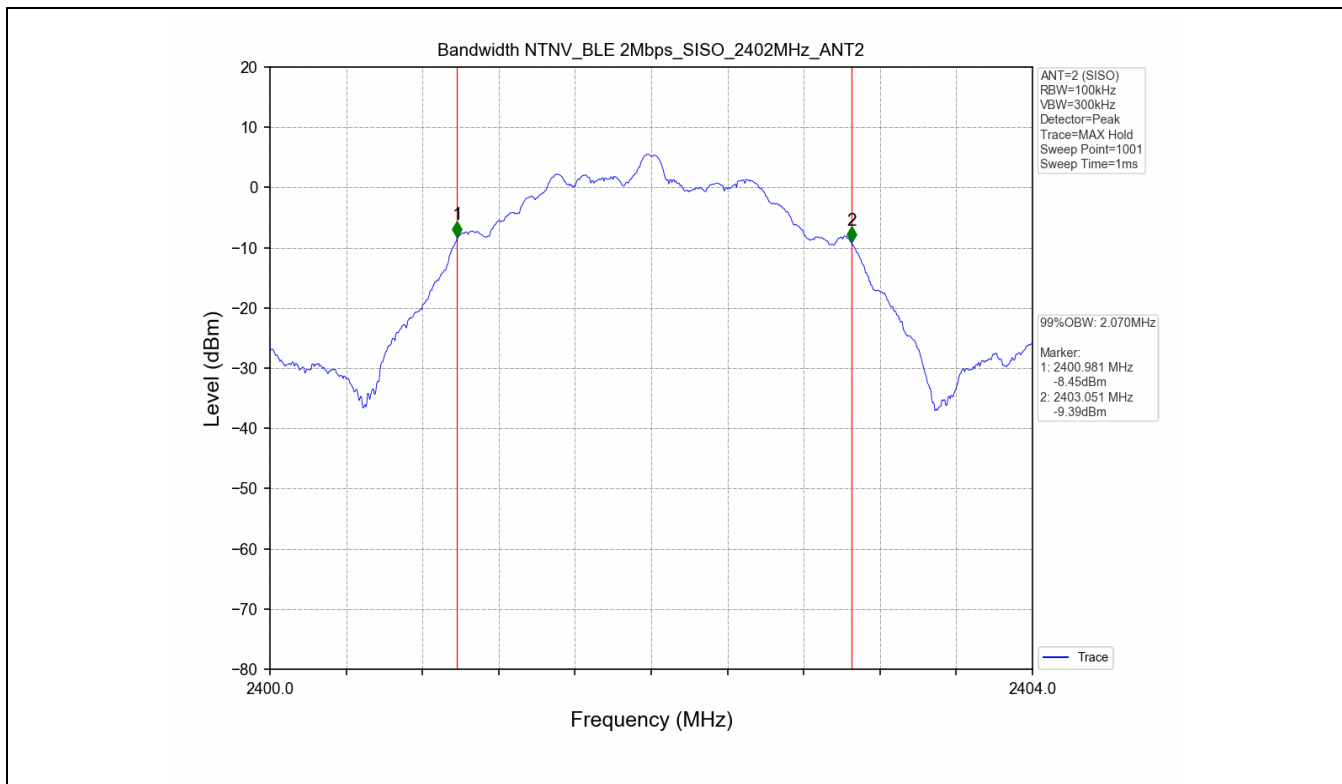


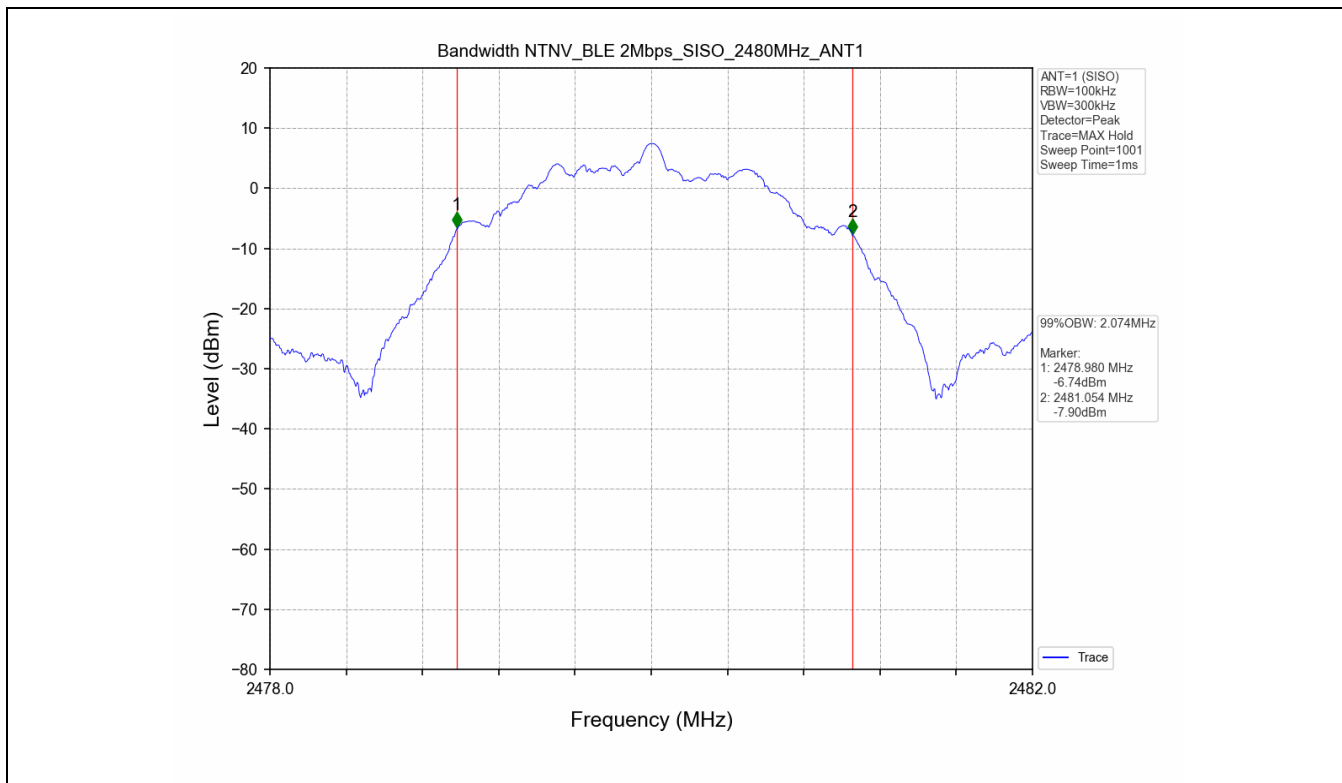
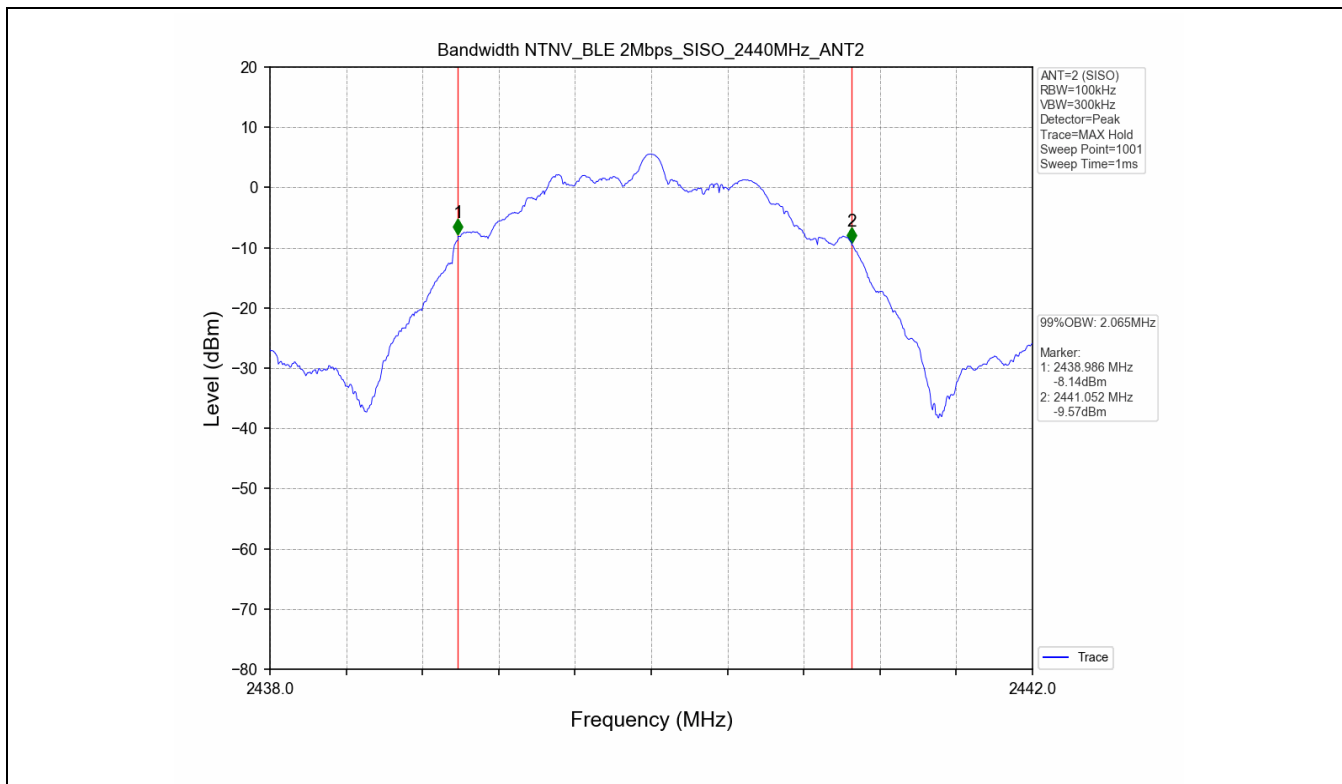


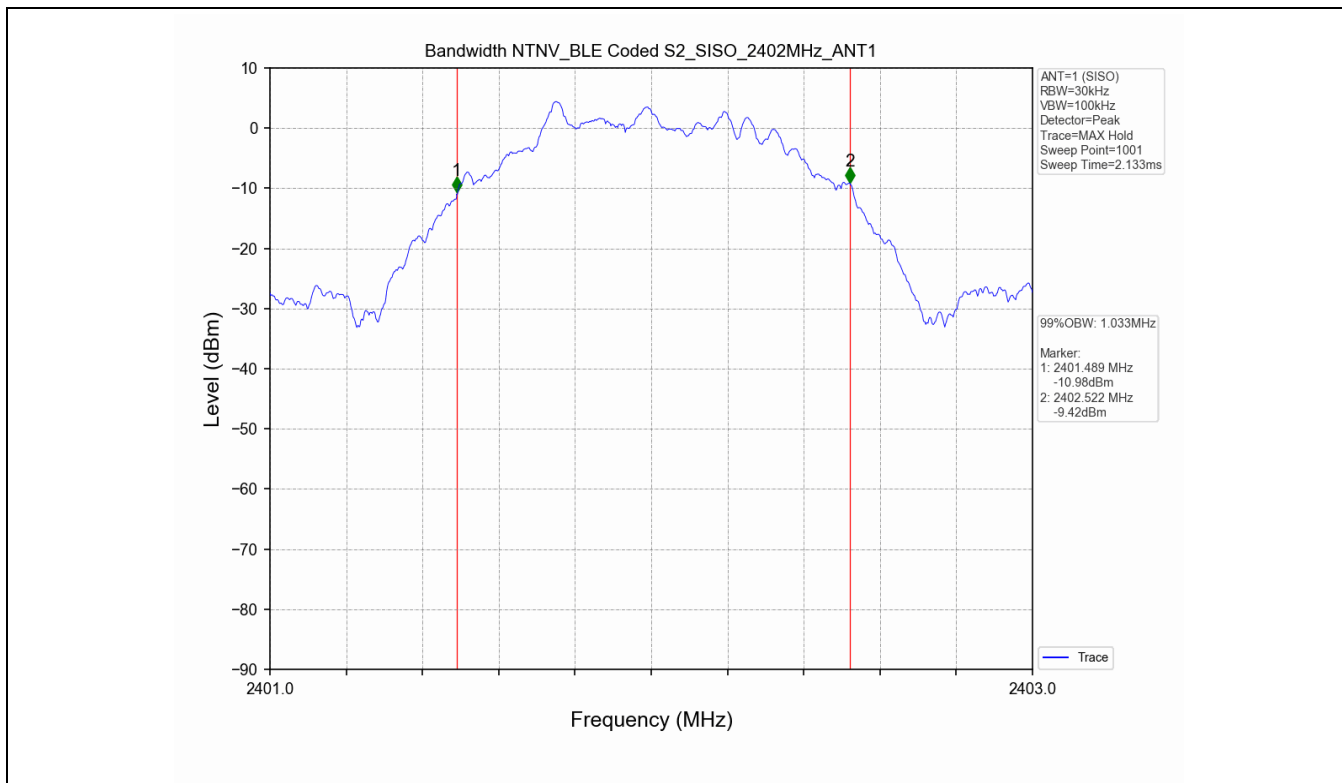
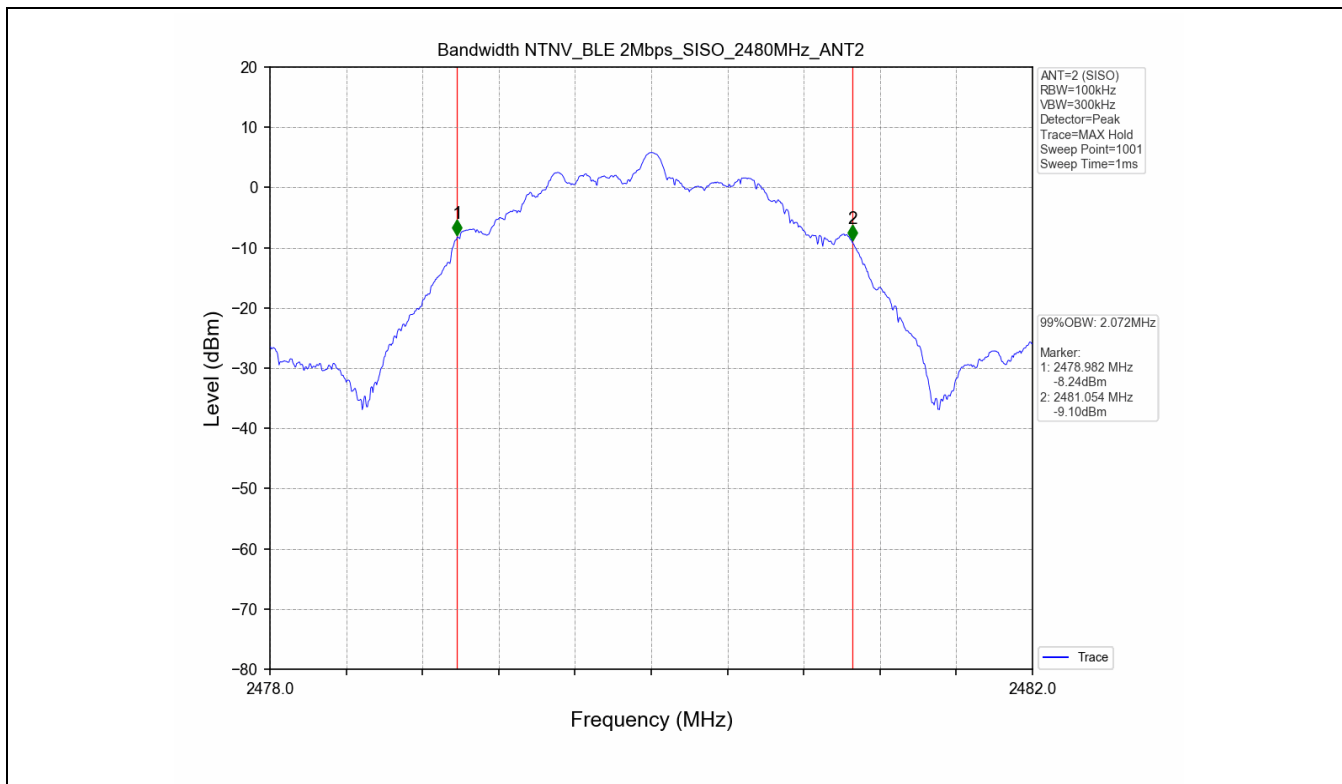


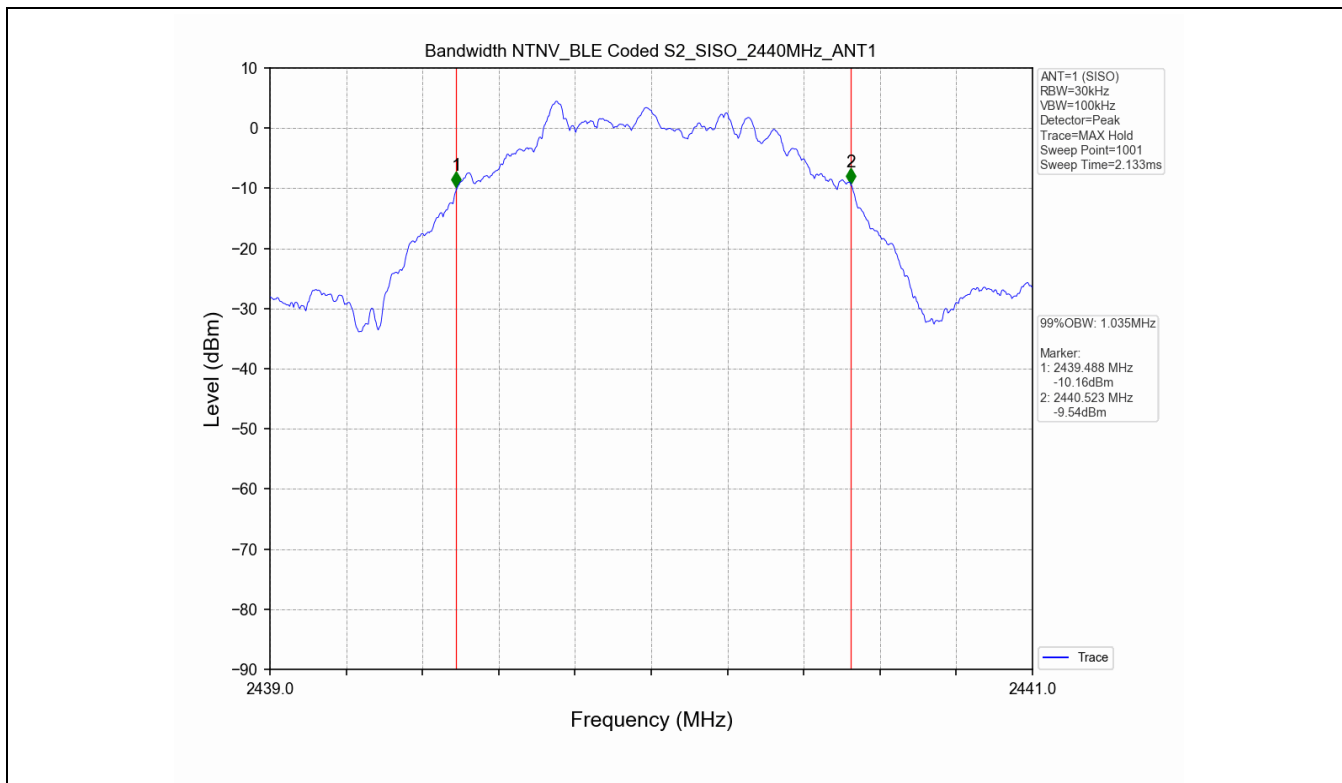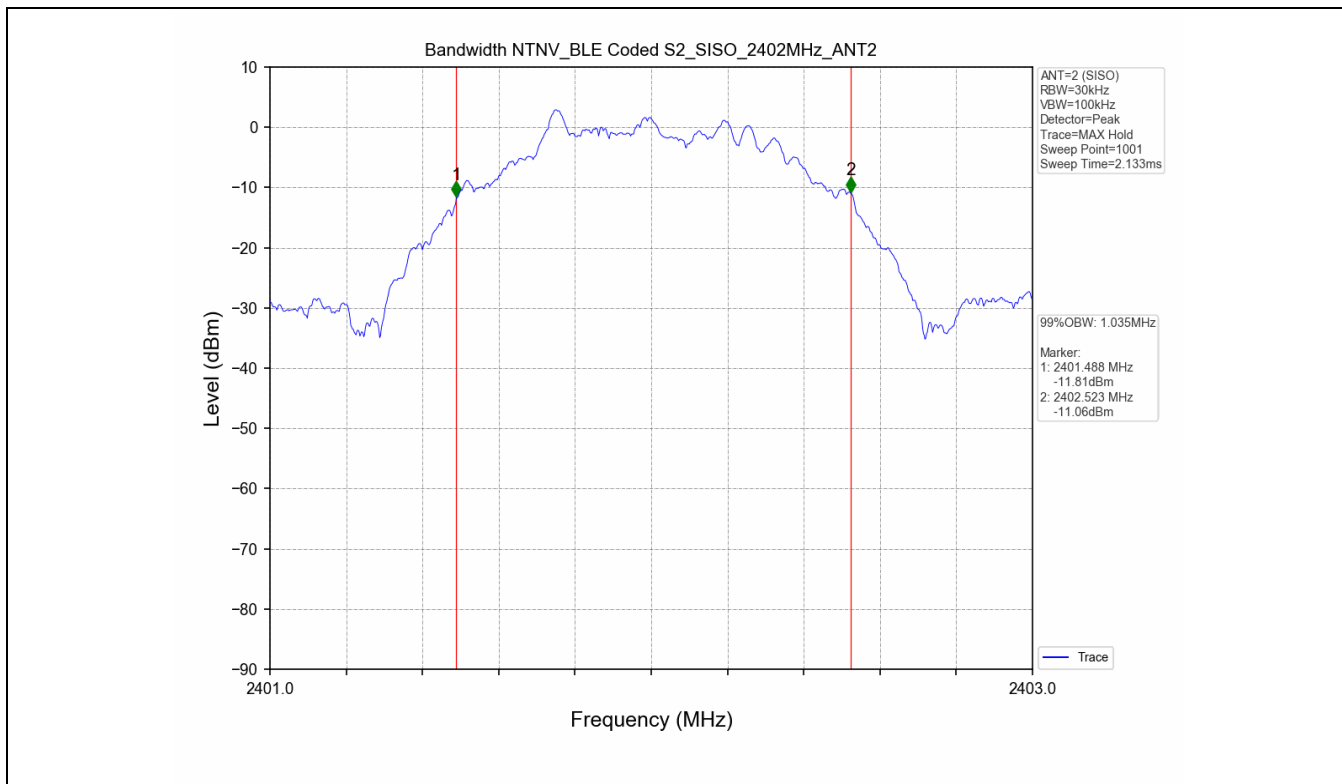


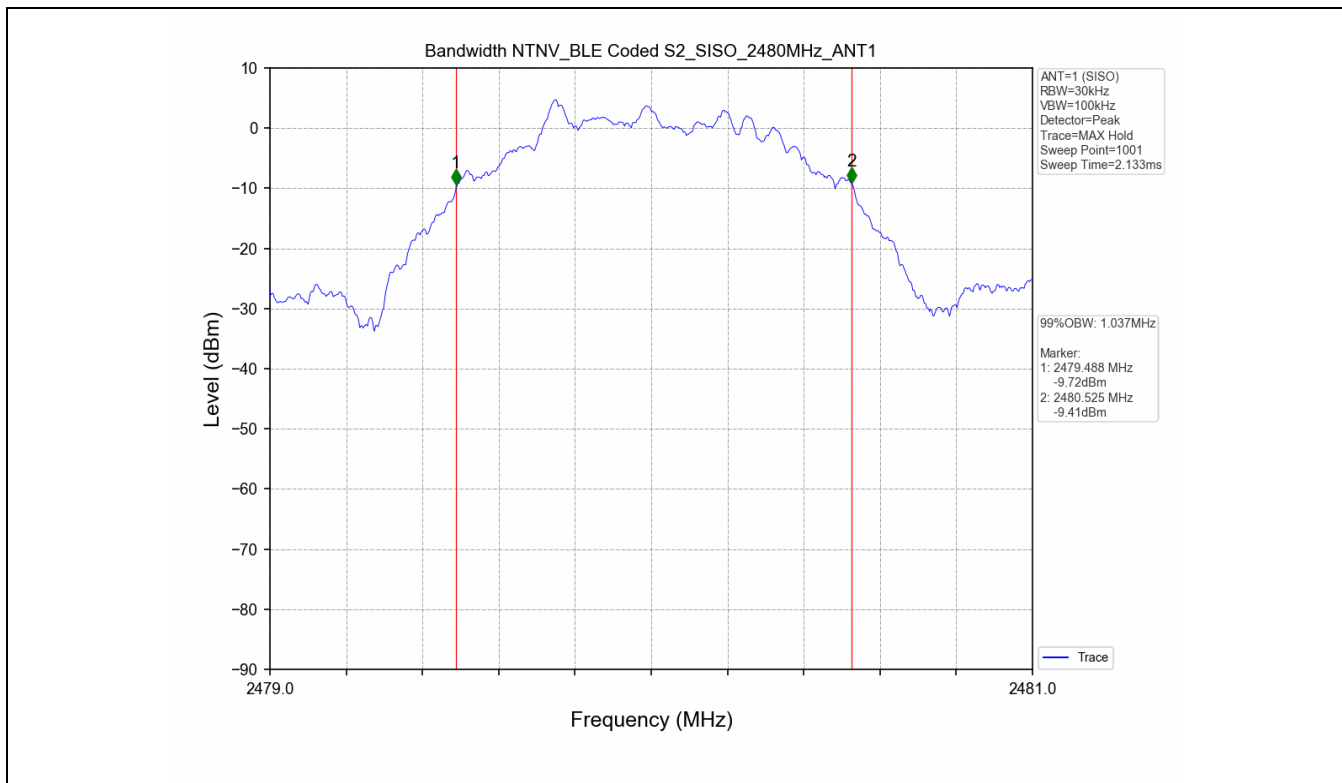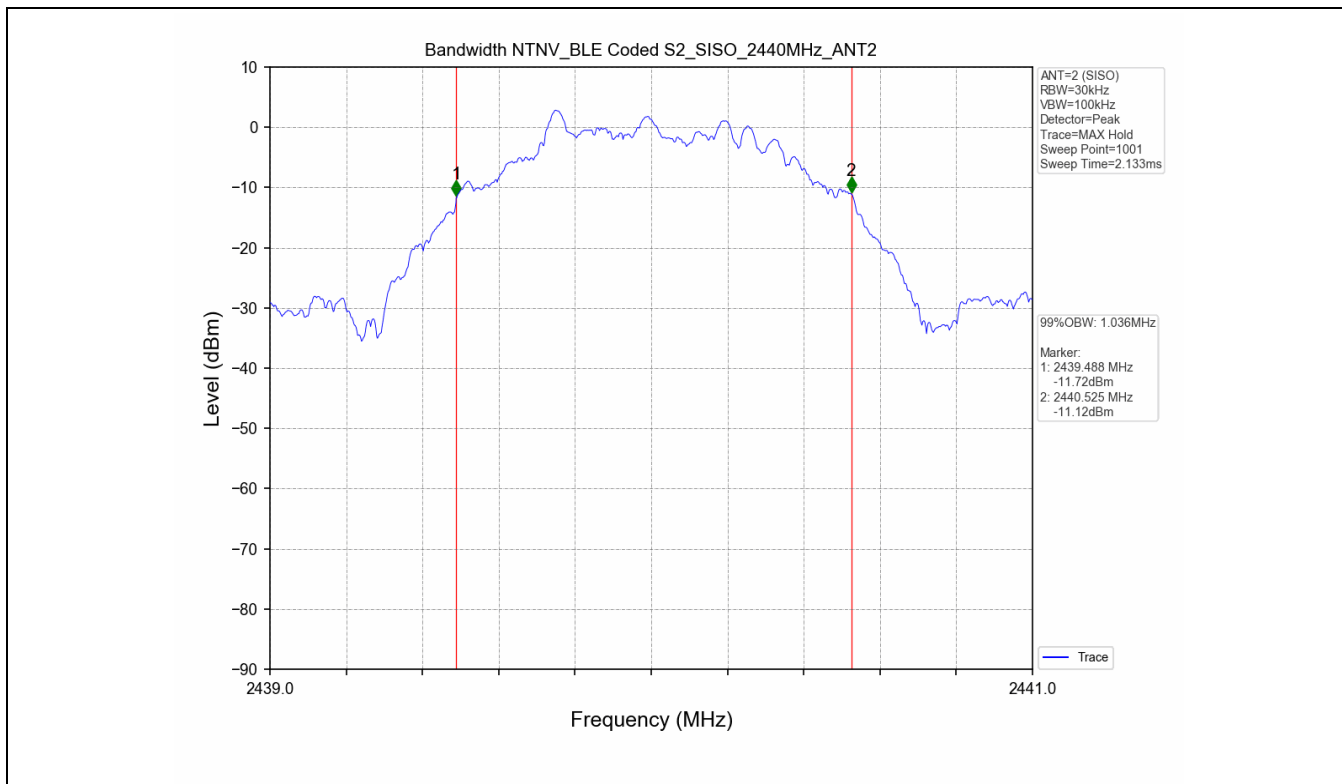

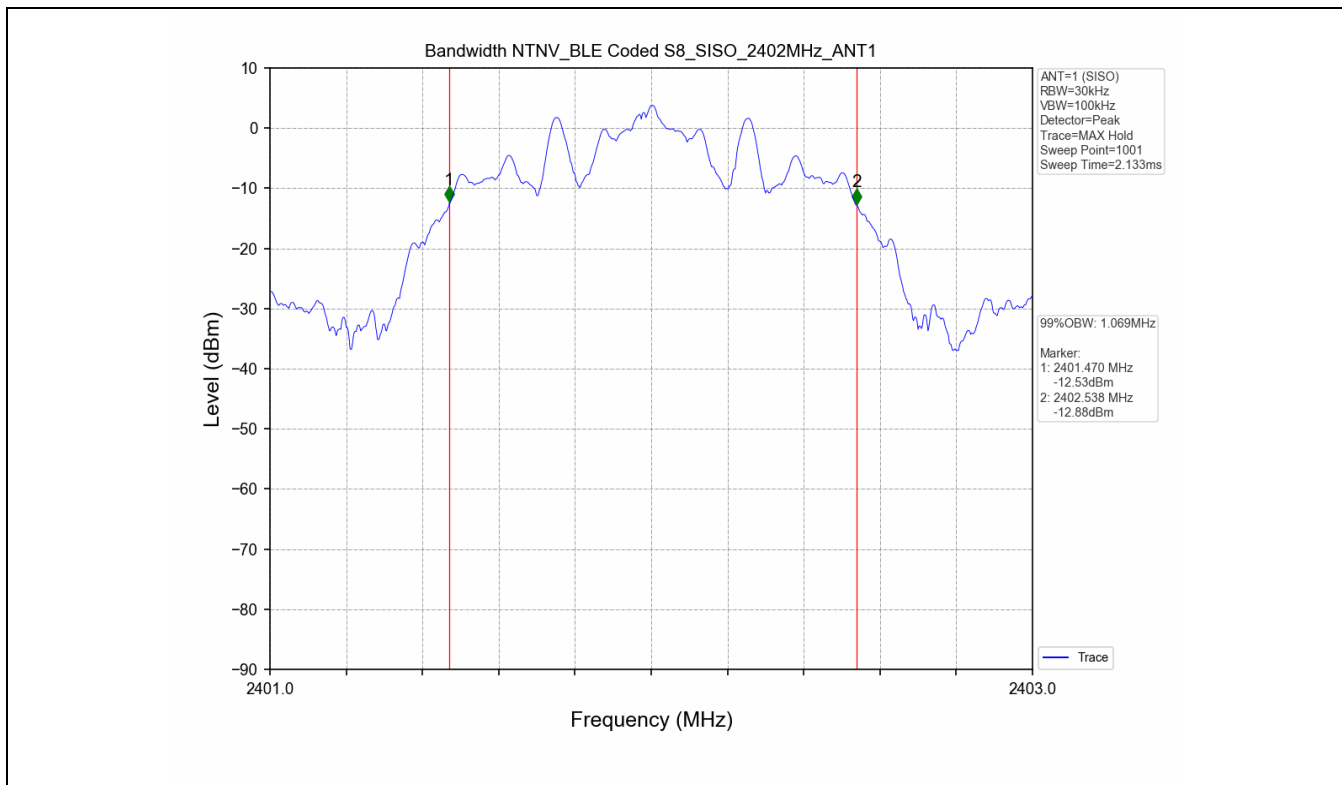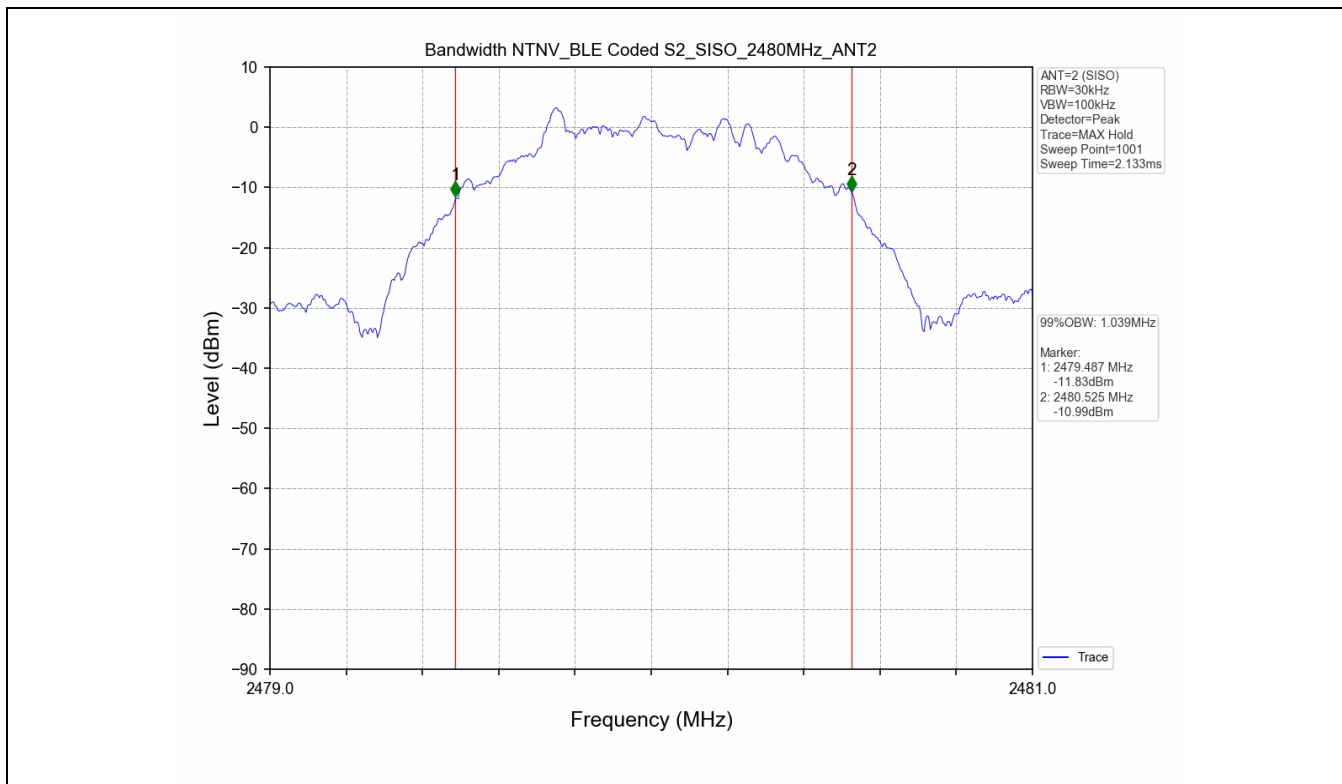

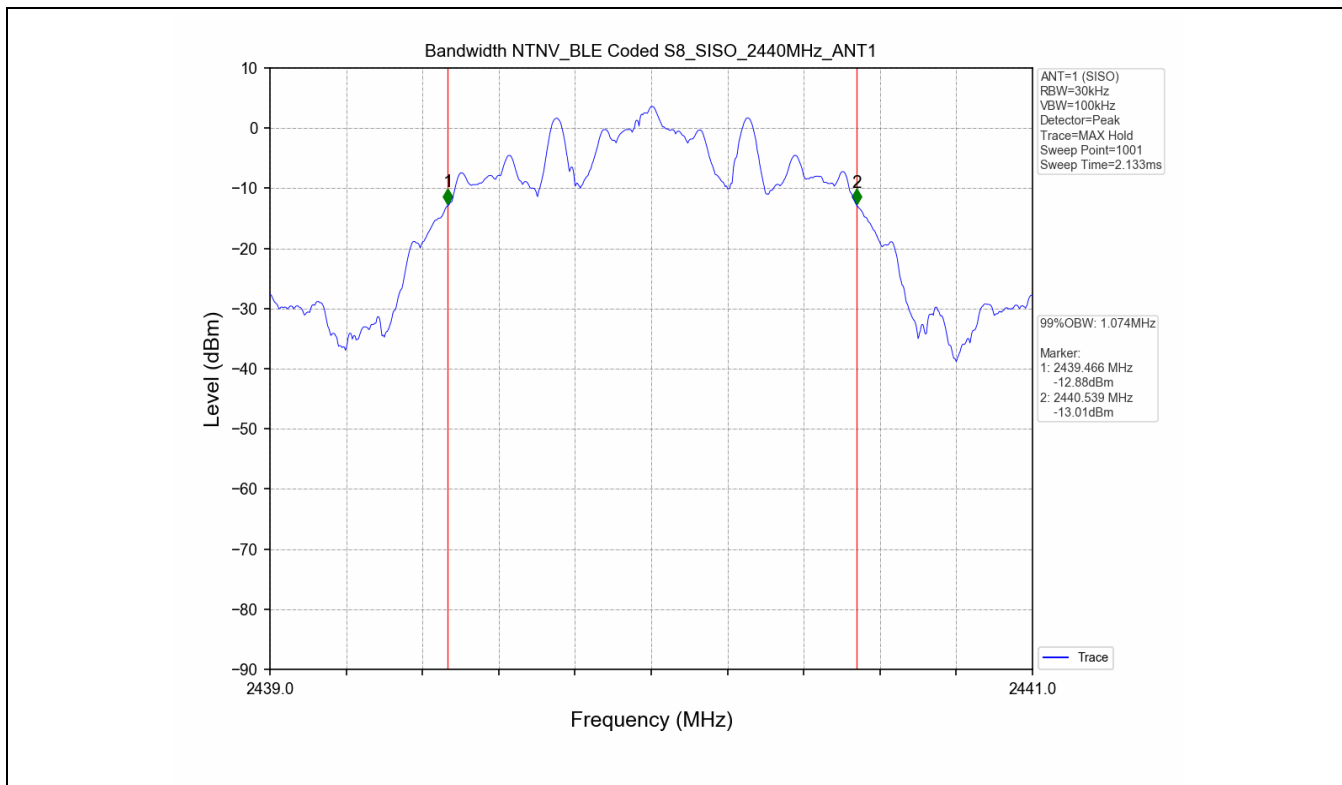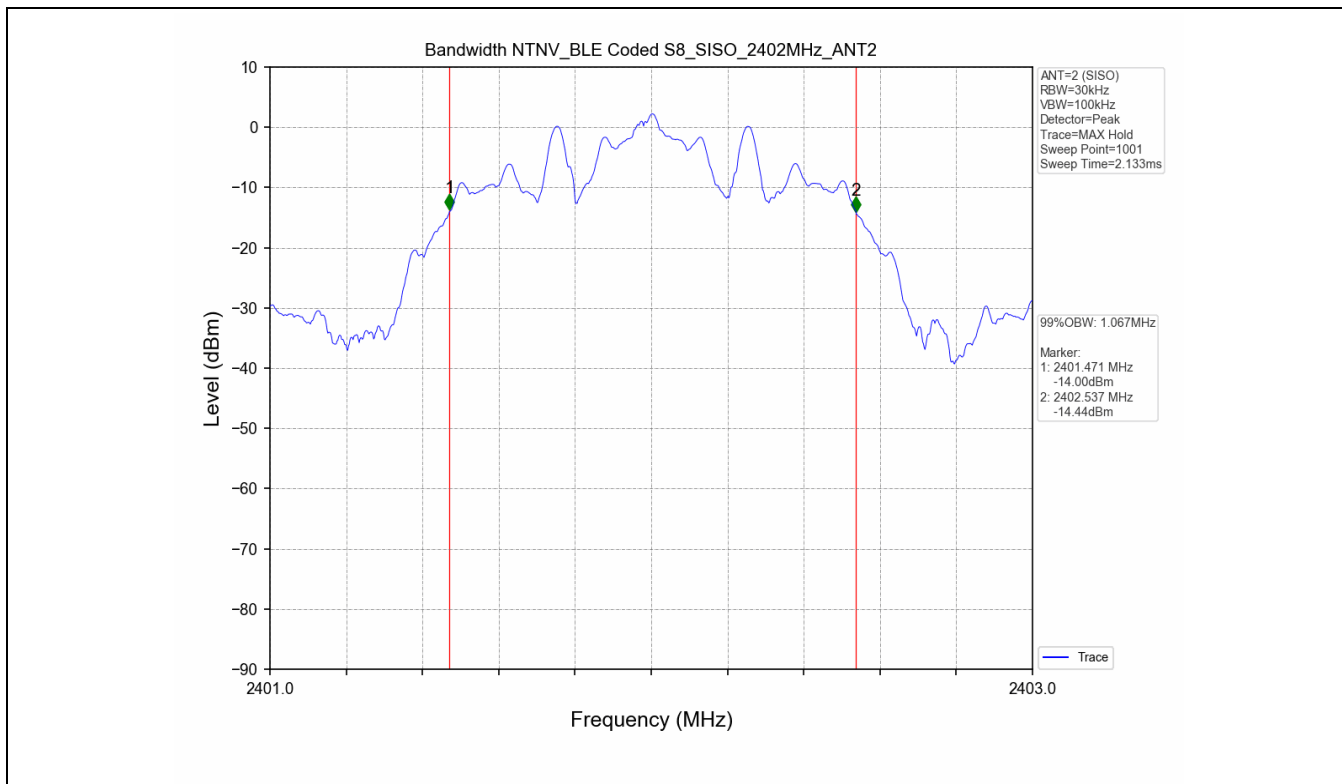

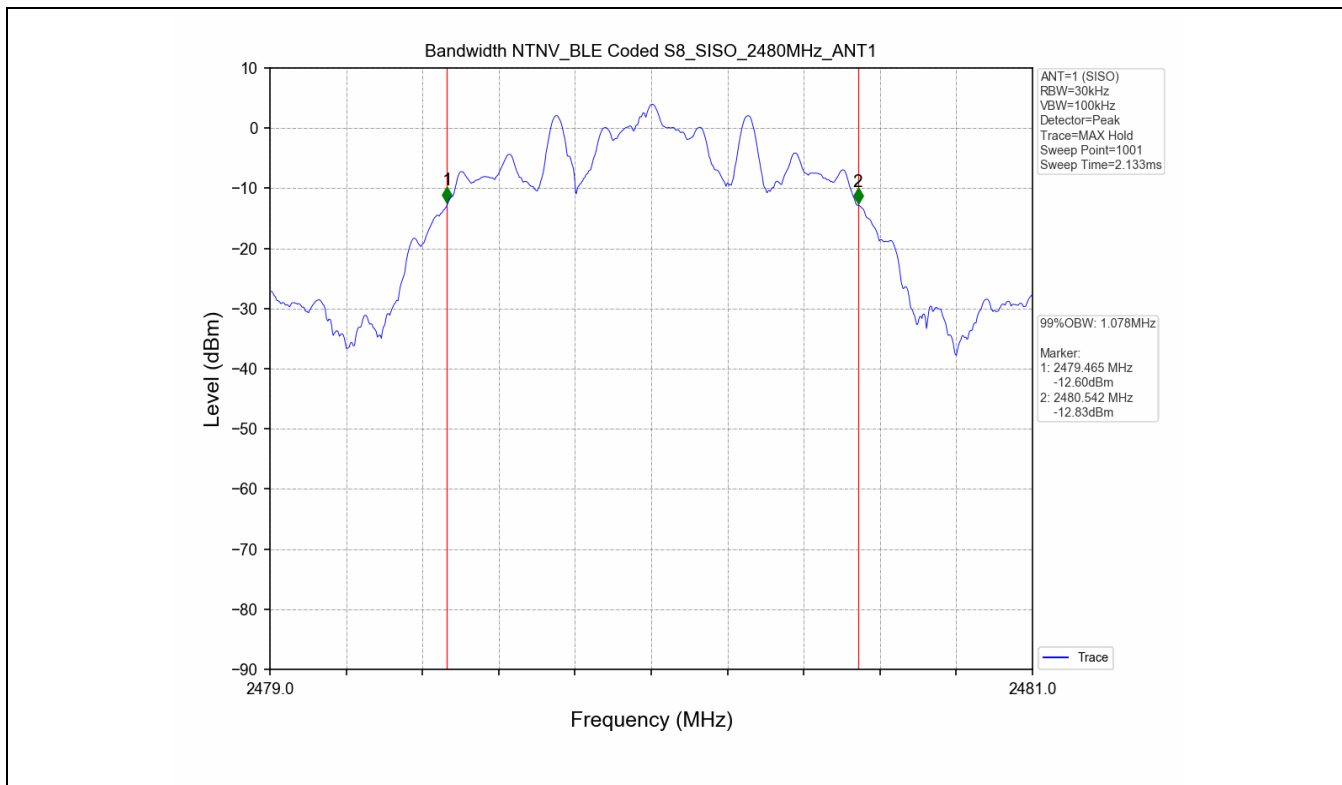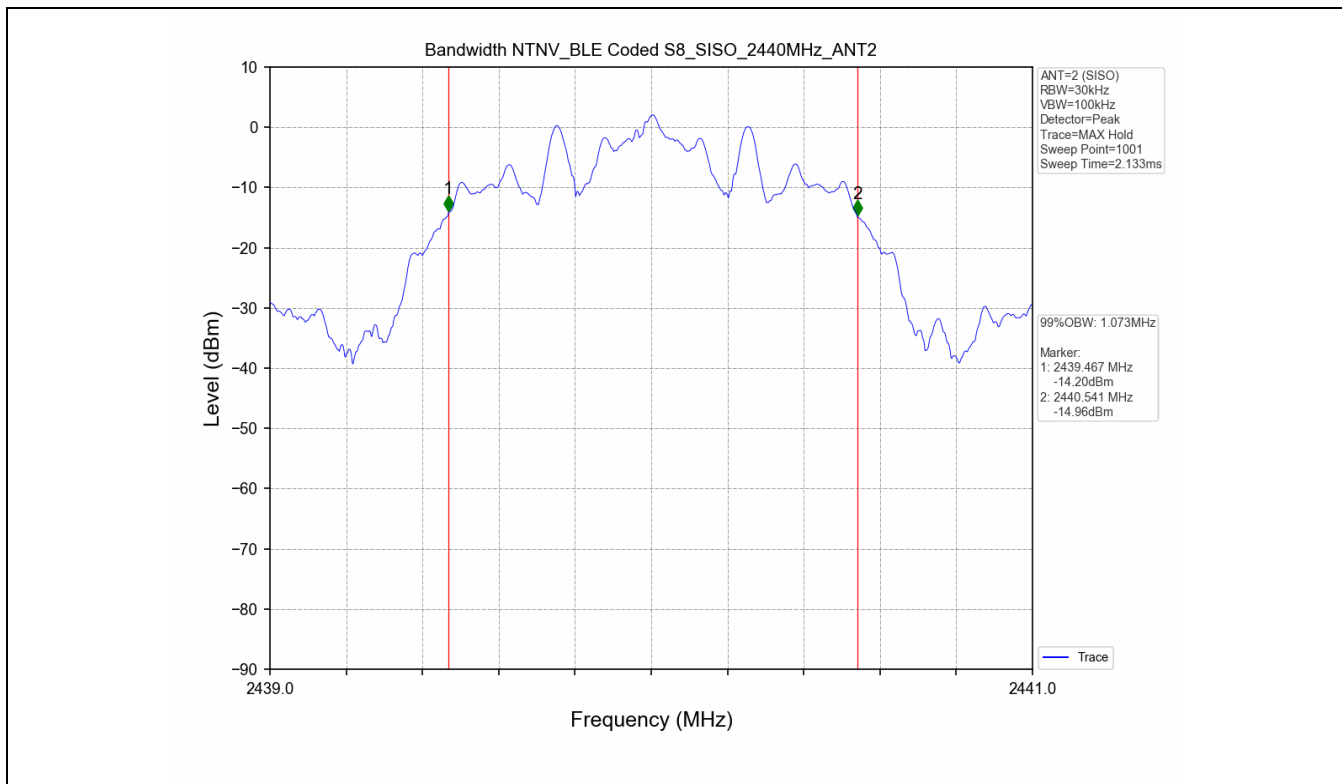

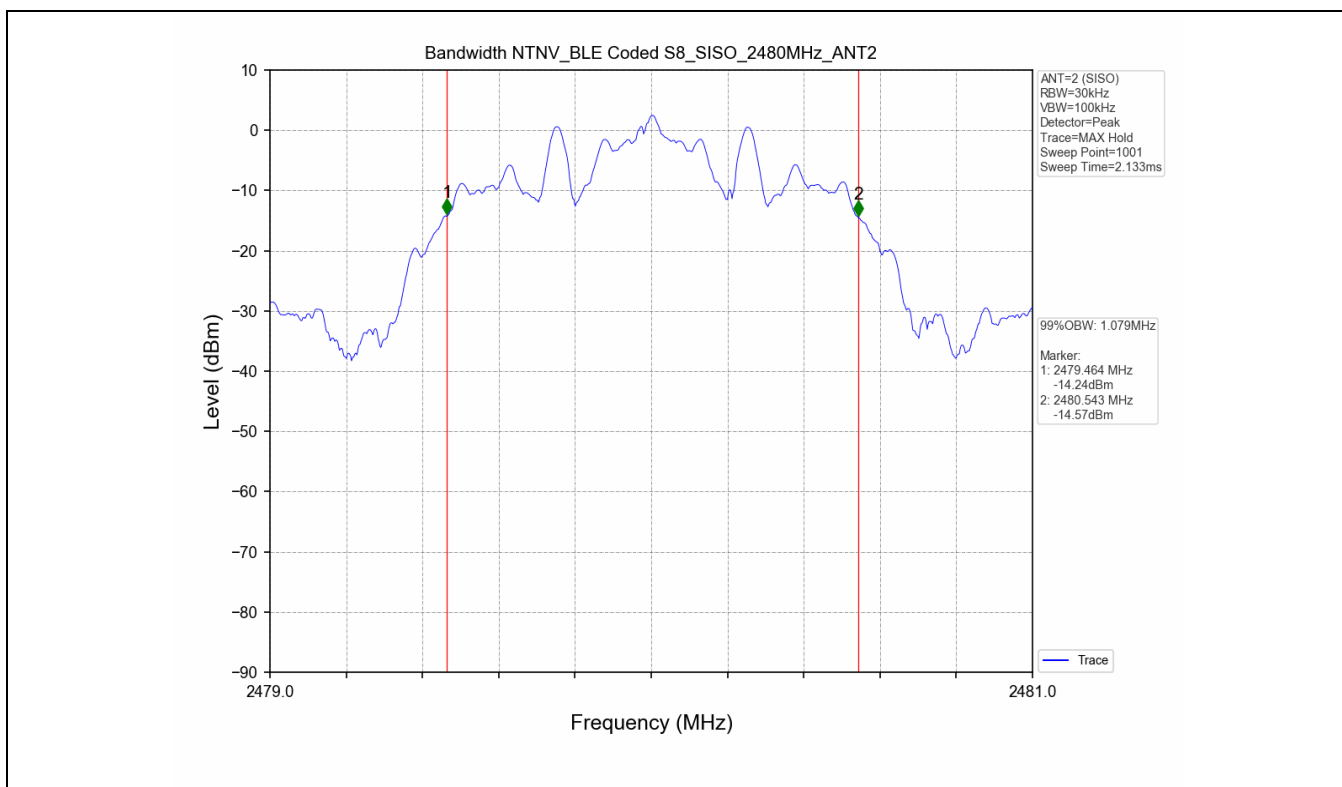

3. Conducted Peak Output Power

3.1 Test Result

Test Mode	Frequency (MHz)	Tx Type	Measured Peak Output Power (dBm)		Limits (dBm)	Verdict
			Ant 1	Ant 2		
BLE 1Mbps	2402	SISO	7.24	5.73	30	PASS
	2440	SISO	7.20	5.68	30	PASS
	2480	SISO	7.52	6.01	30	PASS
BLE 2Mbps	2402	SISO	7.26	5.72	30	PASS
	2440	SISO	7.21	5.66	30	PASS
	2480	SISO	7.54	5.89	30	PASS
BLE Coded S2 500Kbps	2402	SISO	7.24	5.70	30	PASS
	2440	SISO	7.21	5.65	30	PASS
	2480	SISO	7.53	6.00	30	PASS
BLE Coded S8 125Kbps	2402	SISO	7.25	5.70	30	PASS
	2440	SISO	7.21	5.65	30	PASS
	2480	SISO	7.53	6.00	30	PASS

4. Power Spectral Density (PSD)

4.1 Test Result

Test Mode	Frequency (MHz)	Tx Type	Maximum Power Spectral Density (dBm/3KHz)		Limits (dBm/3kHz)	Verdict
			Ant 1	Ant 2		
BLE 1Mbps	2402	SISO	-7.29	-8.90	≤8	PASS
	2440	SISO	-7.49	-9.05	≤8	PASS
	2480	SISO	-7.51	-8.99	≤8	PASS
BLE 2Mbps	2402	SISO	-9.99	-11.55	≤8	PASS
	2440	SISO	-10.15	-11.96	≤8	PASS
	2480	SISO	-10.04	-11.54	≤8	PASS
BLE Coded S2 500Kbps	2402	SISO	1.02	-0.58	≤8	PASS
	2440	SISO	1.01	-0.54	≤8	PASS
	2480	SISO	1.41	-0.17	≤8	PASS
BLE Coded S8 125Kbps	2402	SISO	1.18	-0.40	≤8	PASS
	2440	SISO	1.18	-0.44	≤8	PASS
	2480	SISO	1.50	-0.05	≤8	PASS

4.2 Test Graph

