

EXPOSURE REPORT

FCC ID: 2AYLH-UDL0856-SLV

Date of issue: Jan. 05, 2021

Report Number: MTi201211004-03E2-R1

Sample Description: LED DESK LAMP

Model(s): UDL0856-SLV, UPL0124, UDLV0201A-PTR-DS, UDL1056-WHT-DS,
UDL0656-EXP, UDLV0101A-PTR, UDLV0201A

Applicant: Ningbo Fortek Electronics Co., LTD

Address: NO.76 Dongfeng Road Dongjiao Development Zone, Fenghua,
Ningbo, Zhejiang, China.

Date of Test: Dec. 15, 2020 - Dec. 29, 2020

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

This test report is the revision of the test report MTi201211004-03E2, the original report is invalid.

Tel: (86-755) 88850135

Fax: (86-755) 88850136

Web: <http://www.mtitest.com>

E-mail: mti@51mti.com

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.

Test Result Certification

Applicant's name:	Ningbo Fortek Electronics Co., LTD
Address:	NO.76 Dongfeng Road Dongjiao Development Zone, Fenghua, Ningbo, Zhejiang, China.
Manufacture's name:	Ningbo Fortek Electronics Co., LTD
Address:	NO.76 Dongfeng Road Dongjiao Development Zone, Fenghua, Ningbo, Zhejiang, China.
Product name:	LED DESK LAMP
Trademark:	ULTRABRITE
Model name:	UDL0856-SLV, UPL0124, UDLV0201A-PTR-DS, UDL1056-WHT-DS, UDL0656-EXP, UDLV0101A-PTR, UDLV0201A
Standard:	FCC CFR 47 PART 1 , 1.1310
RF Exposure Procedures:	KDB 680106 D01 RF Exposure Wireless Charging App v03

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested by:



Danny Xu

Dec. 29, 2020

Reviewed by:



Leo Su

Jan. 05, 2021

Approved by:



Tom Xue

Jan. 05, 2021

1 General Information

1.1 Description of EUT

Product name:	LED DESK LAMP
Brand name:	ULTRABRITE
Model name:	UDL0856-SLV
Series model:	UPL0124, UDLV0201A-PTR-DS, UDL1056-WHT-DS, UDL0656-EXP, UDLV0101A-PTR, UDLV0201A
Deference in serial model:	All the model are the same circuit and RF module, except the color.
Operation frequency:	115–205 kHz
Operational mode:	Wireless charging
Modulation type:	ASK
Antenna type:	Coil Antenna
Power source:	DC 12V from adapter AC 120V/60Hz
Battery:	N/A
Adapter information:	MODEL NO: RSS1001-180120-W2-E-P INPUT:100-240V~50/60Hz 0.6A OUTPUT:12.0V 1.5A

1.2 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
Mobile phone	S9+	/	SAMSUNG
Load	/	/	/

1.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

Radiated emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree



Humidity	$\pm 5 \%$
----------	------------

2 Testing site

Test Site	Shenzhen Microtest Co., Ltd
Test Site Location	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China.
FCC Registration No.:	448573



3 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E115	Electric and Magnetic Field Probe - Analyzer	Narda Safety Test Solutions GmbH	EHP-200A	/	2020/11/12	2021/11/11

4 Test Results

4.4 Maximum permissible exposure

4.4.1 Limit

Frequency range(MHz)	Electric field strength(V/m)	Magnetic field strength(A/m)	Power density(mW/cm ²)	Averaging time(minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0 6	6
300-1500			f/300	6
1500-100000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100000			1	30
f = frequency in MHz * = Plane-wave equivalent power density				

4.4.2 Test Procedures

E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the device and 20 cm above the top surface of the primary/client pair.

These measurements should be repeated for three different client battery levels, 1%, 50%, and 99%.


Record the test results.

KDB 680106 D01 RF Exposure Wireless Charging App v03:

- (1) Power transfer frequency is less than 1MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Note: The device is in compliance with KDB 680106 D01 RF Exposure Wireless Charging App v03 6 conditions.

4.4.3 Test Setup

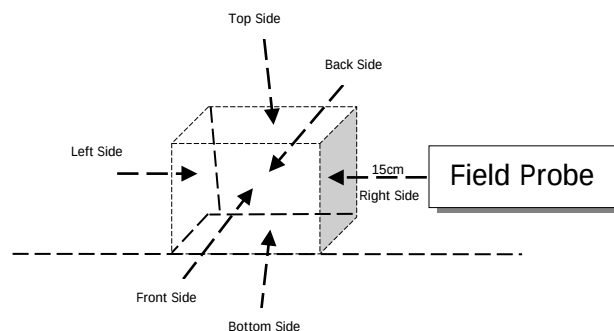



4.4.4 Test Result


Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<1%	Top	20	0.42	0.0116
<1%	Bottom	15	0.40	0.0113
<1%	Left	15	0.42	0.0112
<1%	Right	15	0.42	0.0108
<1%	Front	15	0.41	0.0105
<1%	Back	15	0.41	0.0112
Limit			614	1.63
Margin Limit (%)			0.069%	7.12%

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<50%	Top	20	0.41	0.0119
<50%	Bottom	15	0.40	0.0115
<50%	Left	15	0.41	0.0113
<50%	Right	15	0.41	0.0108
<50%	Front	15	0.41	0.0110
<50%	Back	15	0.42	0.0112
Limit			614	1.63
Margin Limit (%)			0.069%	7.30%

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<99%	Top	20	0.43	0.0120
<99%	Bottom	15	0.41	0.0109
<99%	Left	15	0.40	0.0107
<99%	Right	15	0.41	0.0105
<99%	Front	15	0.42	0.0111
<99%	Back	15	0.41	0.0106
Limit			614	1.63
Margin Limit (%)			0.070%	7.36%



4.4.5 MPE Setup photo

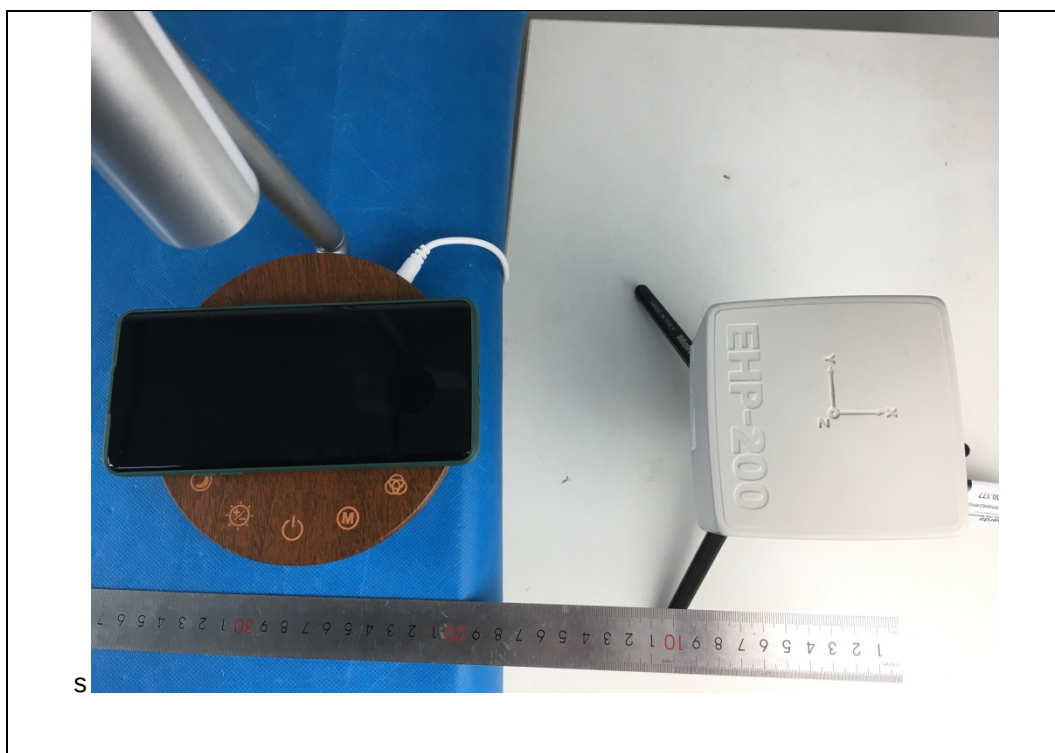

----END OF REPORT----